



FCC&IC Radio Test Report

FCC ID: QT7TSBBDTQ112

IC: 11515A-TSBBDTQ112

This report concerns (check one): Original Grant Class II Change

Issued Date : Feb. 25, 2014
Project No. : 1402C005
Equipment : Canvio AERO Mobile
Model Name for FCC : DTQ112; DTQ1XX
Model Name for IC : DTQ112
Applicant : Power7 Technology(Dongguan) Co.,Ltd
Address : No. 28 Binjiang St. Shishuikou Village,
Qiaotou Town, Dongguan City,
Guangdong Province P.R.China

Tested by: Neutron Engineering Inc. EMC Laboratory
Date of Receipt: Feb. 10, 2014
Date of Test: Feb. 10, 2014 ~ Feb. 21, 2014

Testing Engineer : _____
(David Mao)

Technical Manager : _____
(Leo Hung)

Authorized Signatory : _____
(Steven Lu)

Neutron Engineering Inc.

No.3,Jinshagang 1st Road, ShiXia,
Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	14
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 TEST PROCEDURE	20
4.2.3 DEVIATION FROM TEST STANDARD	20
4.2.4 TEST SETUP	21
4.2.5 EUT OPERATING CONDITIONS	22
4.2.6 EUT TEST CONDITIONS	22
4.2.7 TEST RESULTS (9K~ 30MHZ)	23
4.2.8 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	24
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	31
5 . BANDWIDTH TEST	64
5.1 APPLIED PROCEDURES	64
5.1.1 TEST PROCEDURE	64
5.1.2 DEVIATION FROM STANDARD	64
5.1.3 TEST SETUP	64
5.1.4 EUT OPERATION CONDITIONS	64
5.1.5 EUT TEST CONDITIONS	64
5.1.6 TEST RESULTS	65



Table of Contents	Page
6 . MAXIMUM OUTPUT POWER TEST	73
6.1 APPLIED PROCEDURES / LIMIT	73
6.1.1 TEST PROCEDURE	73
6.1.2 DEVIATION FROM STANDARD	73
6.1.3 TEST SETUP	73
6.1.4 EUT OPERATION CONDITIONS	73
6.1.5 EUT TEST CONDITIONS	73
6.1.6 TEST RESULTS	74
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	75
7.1 APPLIED PROCEDURES / LIMIT	75
7.1.1 TEST PROCEDURE	75
7.1.2 DEVIATION FROM STANDARD	75
7.1.3 TEST SETUP	75
7.1.4 EUT OPERATION CONDITIONS	75
7.1.5 EUT TEST CONDITIONS	75
7.1.6 TEST RESULTS	76
8 . POWER SPECTRAL DENSITY TEST	96
8.1 APPLIED PROCEDURES / LIMIT	96
8.1.1 TEST PROCEDURE	96
8.1.2 DEVIATION FROM STANDARD	96
8.1.3 TEST SETUP	96
8.1.4 EUT OPERATION CONDITIONS	96
8.1.5 EUT TEST CONDITIONS	96
8.1.6 TEST RESULTS	97
9 . MEASUREMENT INSTRUMENTS LIST	105
10 . EUT TEST PHOTO	107



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FICP-1-1402C005	Original Issue.	Feb. 25, 2014



1. CERTIFICATION

Equipment : Canvio AERO Mobile
Brand Name : Toshiba Corporation
Model Name : DTQ112; DTQ1XX
Applicant : Power7 Technology(Dongguan) Co.,Ltd
Manufacturer : Power7 Technology(Dongguan) Co.,Ltd
Address : No. 28 Binjiang St. Shishuikou Village, Qiaotou Town, Dongguan City,
Guangdong Province P.R.China
Factory : Power7 Technology(Dongguan) Co.,Ltd
Address : No. 28 Binjiang St. Shishuikou Village, Qiaotou Town, Dongguan City,
Guangdong Province P.R.China
Date of Test : Feb. 10, 2014 ~ Feb. 21, 2014
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart C(15.247) / ANSI C63.4-2009
Canada RSS-210:2010
RSS-GEN Issue 3, Dec 2010

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FICP-1-1402C005) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C Canada RSS-210:2010; RSS-GEN Issue 3, Dec 2010					
Standard(s)		Section	Test Item	Judgment	Remark
FCC	IC				
15.207		RSS-GEN 7.2.2	Conducted Emission	PASS	
15.247(d)		RSS-210 Annex 8 (A8.5)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)		RSS-210 Annex 8 (A8.2(a))	6dB Bandwidth	PASS	
15.247(b)(3)		RSS-210 Annex 8 (A8.4(4))	Peak Output Power	PASS	
15.247(e)		RSS-210 Annex 8 (A8.2(b))	Power Spectral Density	PASS	
15.203		-	Antenna Requirement	PASS	
15.209/15.205		RSS-210 Annex 8 (A8.5)	Transmitter Radiated Emissions	PASS	
-		RSS-Gen 7.2.3	Receiver Radiated Emissions	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r01 (Measurement Guidelines of DTS)



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

Neutron's test firm number for FCC: 319330

Neutron's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Canvio AERO Mobile	
Brand Name	Toshiba Corporation	
Model Name for FCCC	DTQ112; DTQ1XX	
Model Name for IC	DTQ112	
Model Difference	DTQ112 stands for 120G capacity and DTQ1XX can be any capacity	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 150 Mbps
	Output Power (Max.)	802.11b: 19.46 dBm 802.11g: 24.65 dBm 802.11n(20MHz): 24.44 dBm 802.11n(40MHz): 24.65 dBm
Power Source	#1 DC voltage supplied from AC/DC adapter; Chargeable plug Brand/Model: APD/ WA-10K05R #2 DC voltage supplied from built in rechargeable Li-ion Battery Pack Brand/Model: TOSHIBA/ SS01A	
Power Rating	#1 I/P: AC 100-240V~50-60Hz 0.3A O/P: DC 5V 2A #2 Rated: DC 3.8V 3100mAh 11.8Wh	
Connecting I/O Port(s)	Please refer to the User's Manual Support USB3.0/USB2.0 mobile storage, SSD Modle:THNSNJ128GMCT	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. CH 01 – CH 11 for 802.11b, 802.11g, 802.11n(20MHz)
 CH 03 – CH 09 for 802.11n(40MHz)

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	JOHANSON TECHNOLOGY	2450AT18A100	Integral	N/A	0.5	



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
 802.11g mode: OFDM (6Mbps)
 802.11n HT20 mode : BPSK (6.5Mbps)
 802.11n HT40 mode : BPSK (13.5Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) The EUT was pre-tested on positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN


Test software version	MT7620QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b DSSS	6	5	5
IEEE 802.11g OFDM	2	2	3

Test software version	MT7620QA		
Frequency (MHz)	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n (20MHz)	3	2	3
Frequency (MHz)	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n (40MHz)	5	5	2




3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted TX Mode:

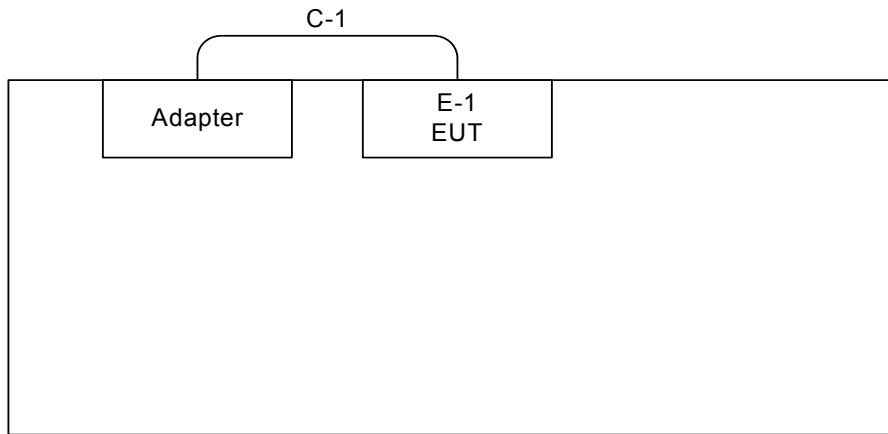

Control Room

Radiated TX Mode:

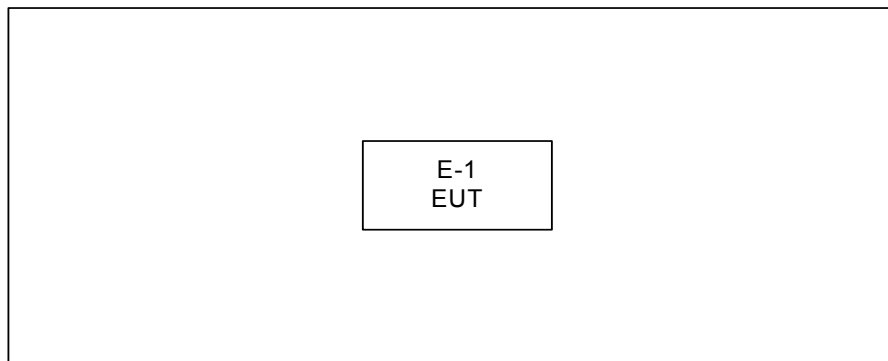



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	1.5m	USB Cable



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

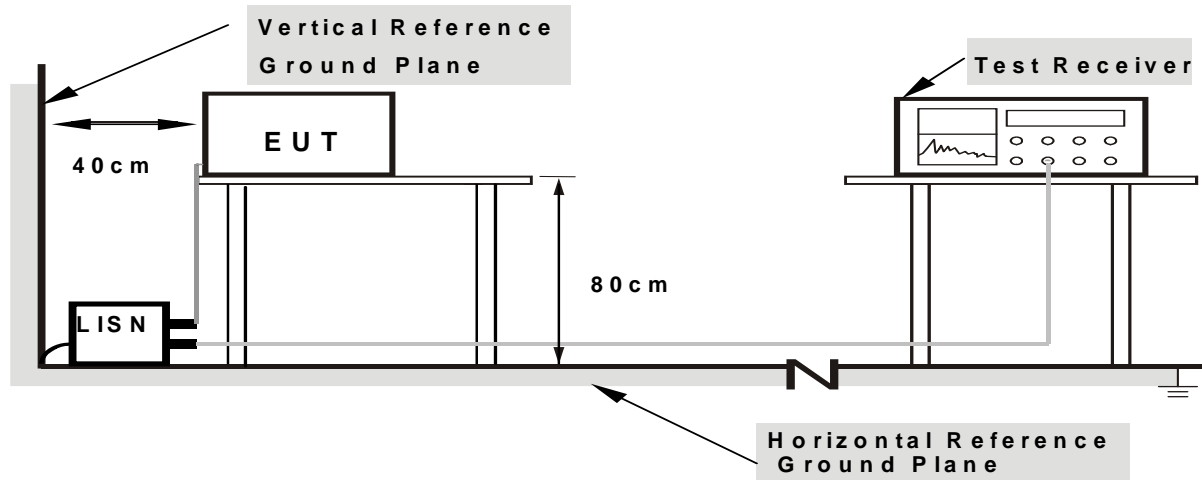

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 29°C
 Relative Humidity: 48%
 Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS


Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.



Test Mode :	TX	Test date:	Feb. 14, 2014
-------------	----	------------	---------------

Line

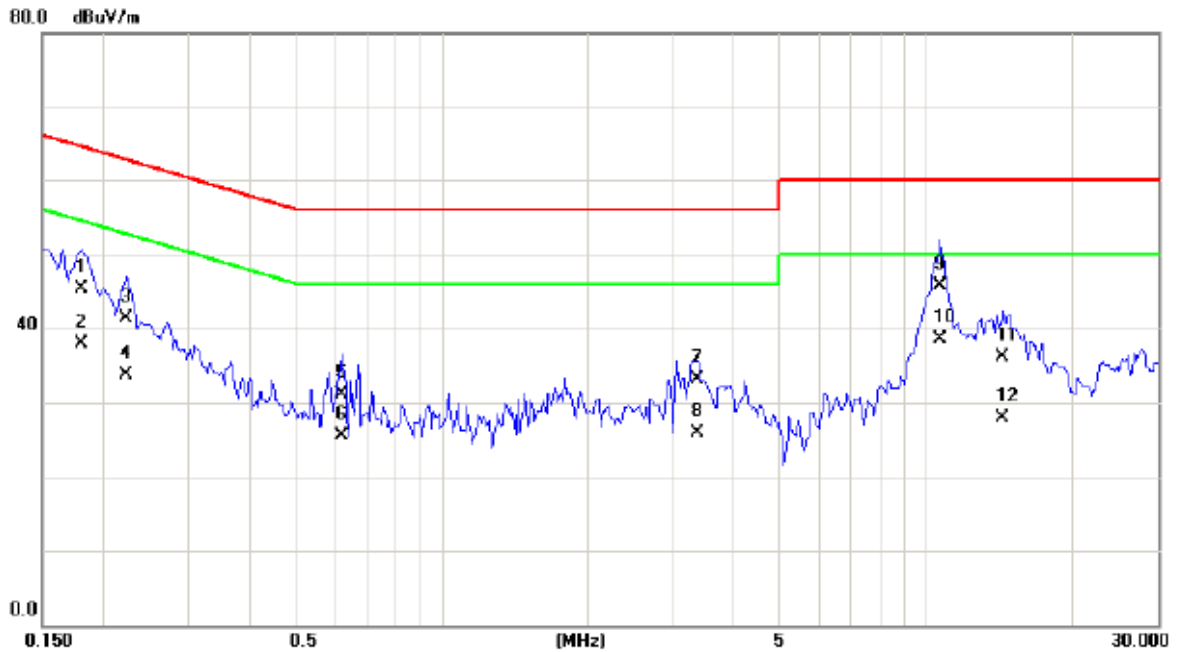


No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.1812	35.60	9.65	45.25	64.43	-19.18	QP	
2		0.1812	28.30	9.65	37.95	54.43	-16.48	AVG	
3		0.2242	31.60	9.65	41.25	62.66	-21.41	QP	
4		0.2242	24.10	9.65	33.75	52.66	-18.91	AVG	
5		0.6227	21.30	9.71	31.01	56.00	-24.99	QP	
6		0.6227	15.70	9.71	25.41	46.00	-20.59	AVG	
7		3.3711	23.20	9.88	33.08	56.00	-22.92	QP	
8		3.3711	16.10	9.88	25.98	46.00	-20.02	AVG	
9		10.6367	35.60	10.11	45.71	60.00	-14.29	QP	
10	*	10.6367	28.40	10.11	38.51	50.00	-11.49	AVG	
11		14.3790	25.80	10.30	36.10	60.00	-23.90	QP	
12		14.3790	17.60	10.30	27.90	50.00	-22.10	AVG	



Test Mode :	TX	Test date:	Feb. 14, 2014
-------------	----	------------	---------------

Neutral

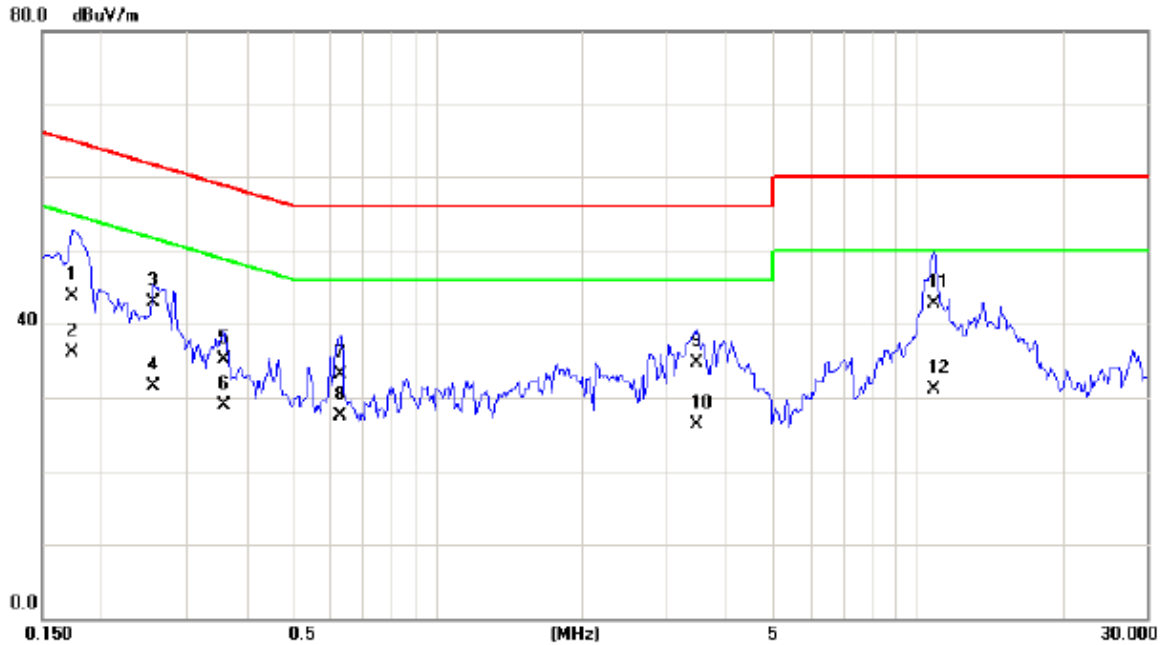

No. Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	0.1734	34.10	9.70	43.80	64.80	-21.00	QP	
2	0.1734	26.50	9.70	36.20	54.80	-18.60	AVG	
3	0.2555	33.20	9.72	42.92	61.58	-18.66	QP	
4	0.2555	21.80	9.72	31.52	51.58	-20.06	AVG	
5	0.3608	25.30	9.73	35.03	58.71	-23.68	QP	
6	0.3608	19.10	9.73	28.83	48.71	-19.88	AVG	
7	0.6305	23.40	9.75	33.15	56.00	-22.85	QP	
8	0.6305	17.80	9.75	27.55	46.00	-18.45	AVG	
9	3.4648	24.90	9.90	34.80	56.00	-21.20	QP	
10	3.4648	16.50	9.90	26.40	46.00	-19.60	AVG	
11 *	10.8008	32.40	10.23	42.63	60.00	-17.37	QP	
12	10.8008	20.90	10.23	31.13	50.00	-18.87	AVG	



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) & RSS-210 section 2.2& Annex 8 (A8.5), then the 15.209(a)& RSS-Gen limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector



4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

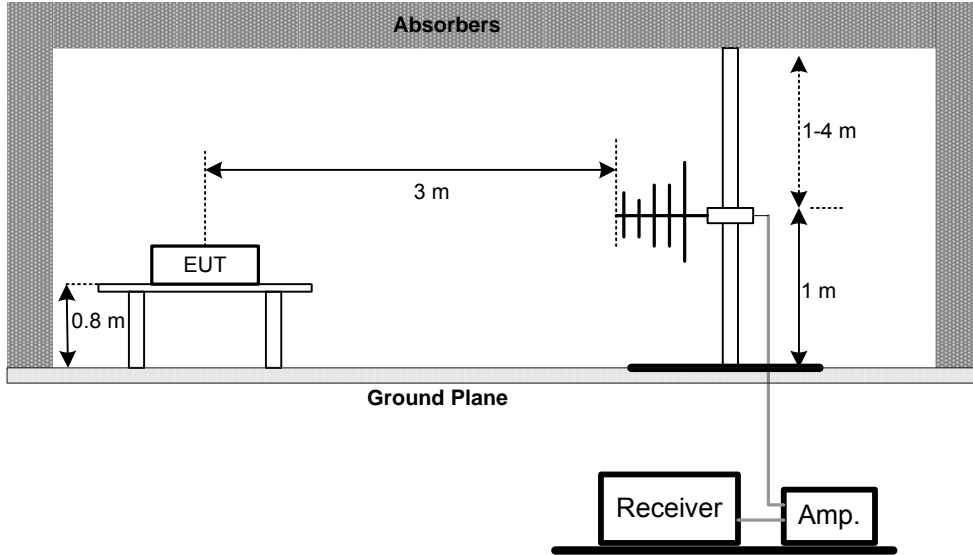

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

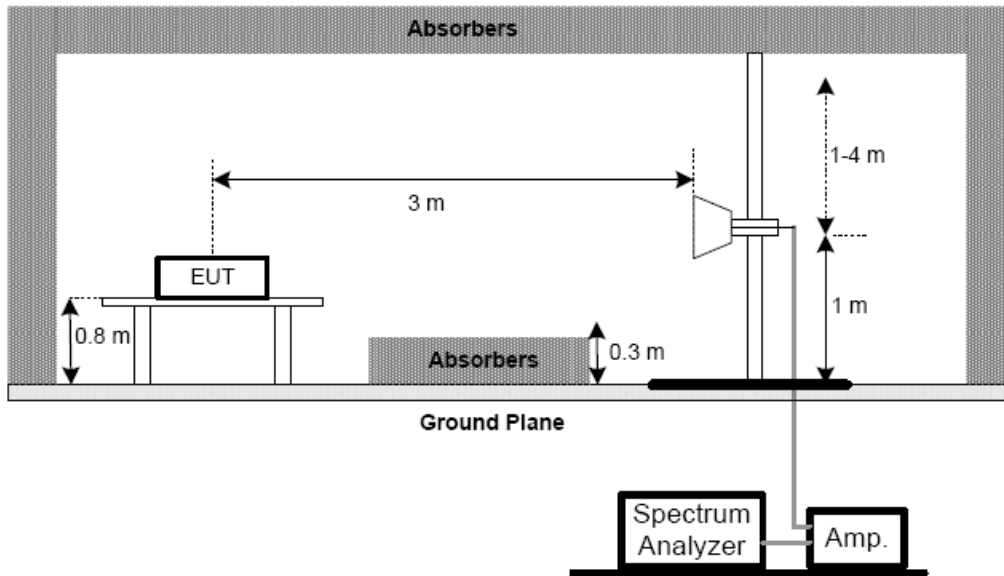

(C) For radiated emissions below 30MHz

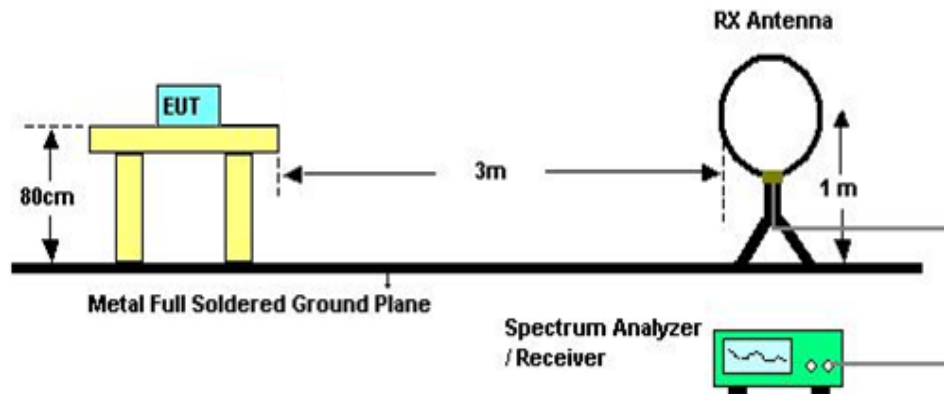

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 29°C

Relative Humidity: 48%

Test Voltage: DC 3.8V



4.2.7 TEST RESULTS (9K~ 30MHZ)

Test Mode :	TX Mode 2412MHz	Test date:	Feb. 17, 2014
-------------	-----------------	------------	---------------

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.00935	0°	16.86	23.27	40.13	128.19	-88.06	AV
0.00937	0°	19.52	23.27	42.79	148.19	-105.40	PK
0.0143	0°	18.89	23.27	42.16	124.50	-82.34	AV
0.0145	0°	20.54	23.27	43.81	144.50	-100.69	PK
0.0246	0°	16.19	24.01	40.20	119.79	-79.59	AV
0.0248	0°	19.75	24.01	43.76	139.79	-96.03	PK
0.0334	0°	18.16	23.45	41.61	117.13	-75.52	AV
0.0336	0°	20.41	23.45	43.86	137.13	-93.27	PK
0.422	0°	18.64	19.99	38.63	95.10	-56.47	AVG
0.425	0°	21.91	19.99	41.90	115.10	-73.20	PK
1.526	0°	18.82	19.55	38.37	63.93	-25.56	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.00924	90°	18.03	24.30	42.33	128.29	-85.96	AVG
0.00926	90°	20.46	24.30	44.76	148.29	-103.53	PK
0.0234	90°	17.55	24.08	41.63	120.22	-78.59	AVG
0.0237	90°	20.33	24.08	44.41	140.22	-95.81	PK
0.0315	90°	18.43	23.57	42.00	117.64	-75.64	AVG
0.0318	90°	20.67	23.57	44.24	137.64	-93.40	PK
0.0426	90°	17.85	22.87	40.72	115.02	-74.30	AVG
0.0427	90°	20.39	22.87	43.26	135.02	-91.76	PK
0.235	90°	17.45	20.43	37.88	100.18	-62.30	AVG
0.238	90°	20.72	20.43	41.15	120.18	-79.03	PK
1.677	90°	18.63	19.53	38.16	63.11	-24.95	QP

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.



4.2.8 TEST RESULTS (BETWEEN 30 – 1000 MHZ)


Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.



Test Mode :	TX B MODE CHANNEL 01	Test date:	Feb. 17, 2014
-------------	----------------------	------------	---------------

Vertical

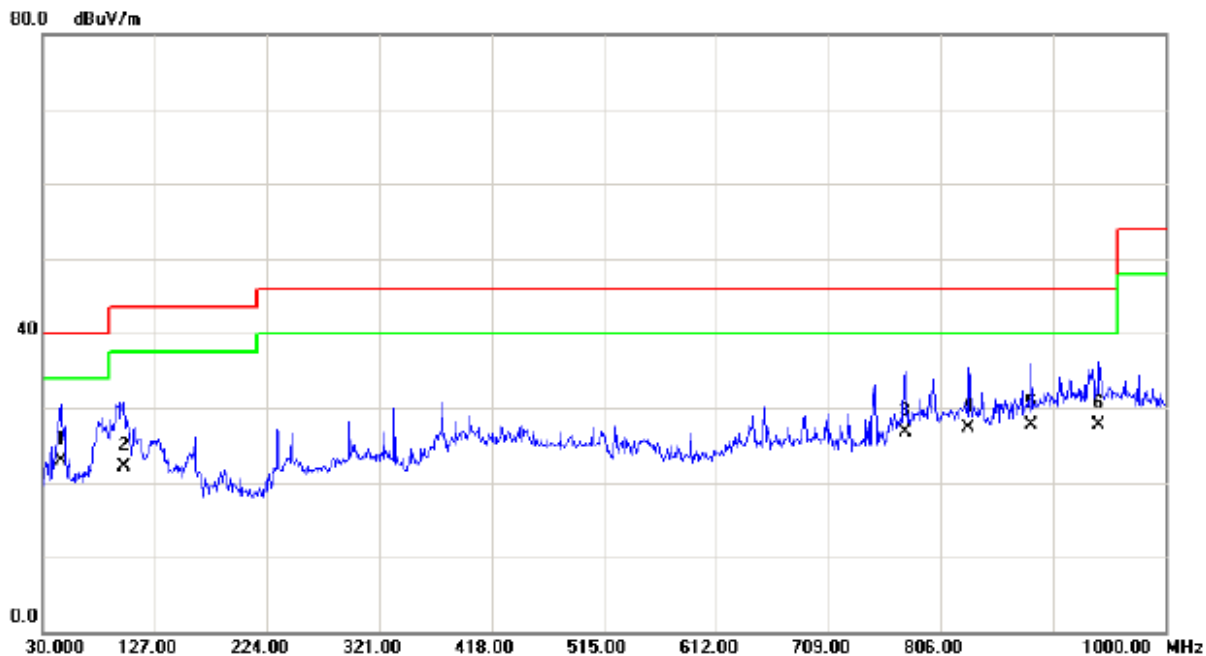


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	45.5200	37.13	-14.13	23.00	40.00	-17.00	QP	
2		100.8100	38.12	-16.10	22.02	43.50	-21.48	QP	
3		774.9600	30.68	-4.01	26.67	46.00	-19.33	QP	
4		830.2500	30.73	-3.44	27.29	46.00	-18.71	QP	
5		884.5700	29.73	-2.01	27.72	46.00	-18.28	QP	
6		942.7700	28.36	-0.64	27.72	46.00	-18.28	QP	



Test Mode :	TX B MODE CHANNEL 01	Test date:	Feb. 17, 2014
-------------	----------------------	------------	---------------

Horizontal

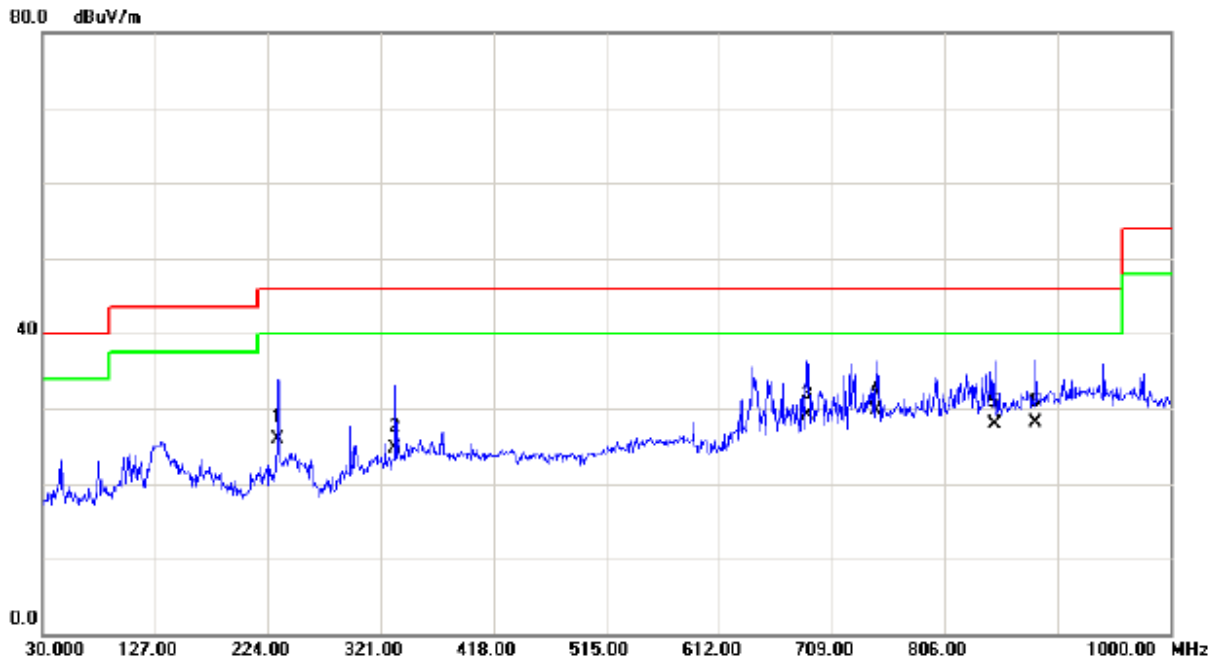


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		232.7300	40.56	-14.57	25.99	46.00	-20.01	QP	
2		333.6100	36.17	-11.40	24.77	46.00	-21.23	QP	
3		687.6600	34.12	-4.99	29.13	46.00	-16.87	QP	
4	*	746.8300	34.56	-4.90	29.66	46.00	-16.34	QP	
5		848.6800	31.64	-3.66	27.98	46.00	-18.02	QP	
6		884.5700	30.13	-2.01	28.12	46.00	-17.88	QP	



Test Mode : TX B MODE CHANNEL 06 Test date: Feb. 17, 2014

Vertical

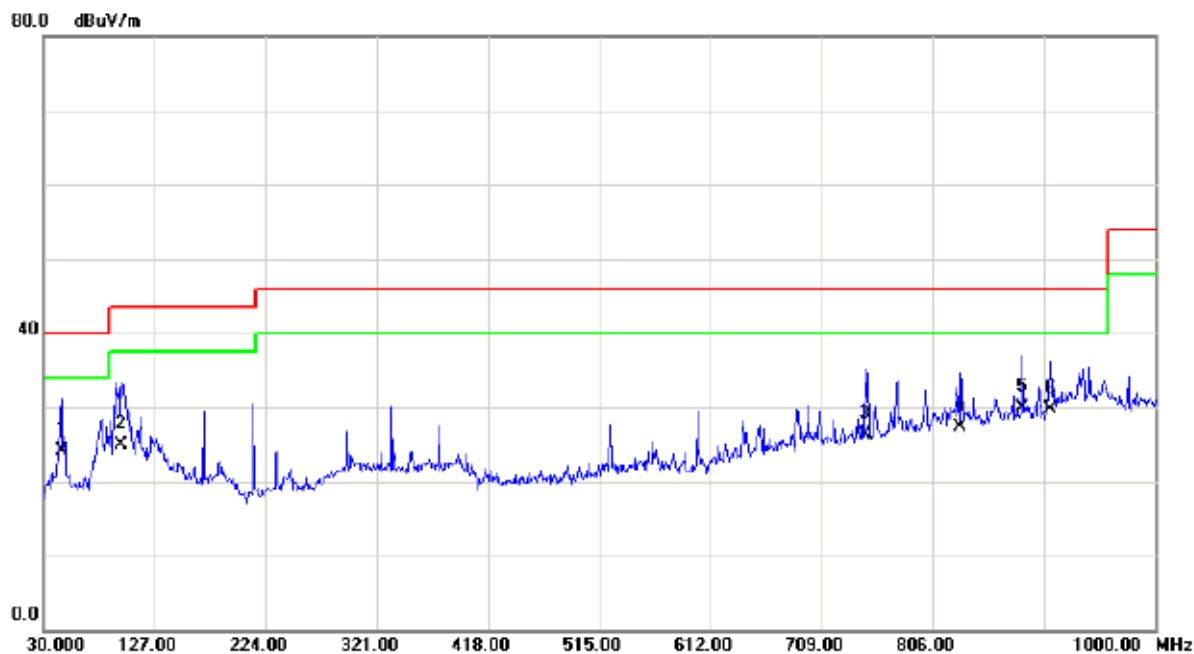


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	45.5200	38.21	-14.13	24.08	40.00	-15.92	QP	
2		97.9000	41.56	-16.66	24.90	43.50	-18.60	QP	
3		746.8300	31.25	-4.90	26.35	46.00	-19.65	QP	
4		830.2500	30.74	-3.44	27.30	46.00	-18.70	QP	
5		884.5700	31.97	-2.01	29.96	46.00	-16.04	QP	
6		908.8200	30.76	-1.14	29.62	46.00	-16.38	QP	



Test Mode :	TX B MODE CHANNEL 06	Test date:	Feb. 17, 2014
-------------	----------------------	------------	---------------

Horizontal

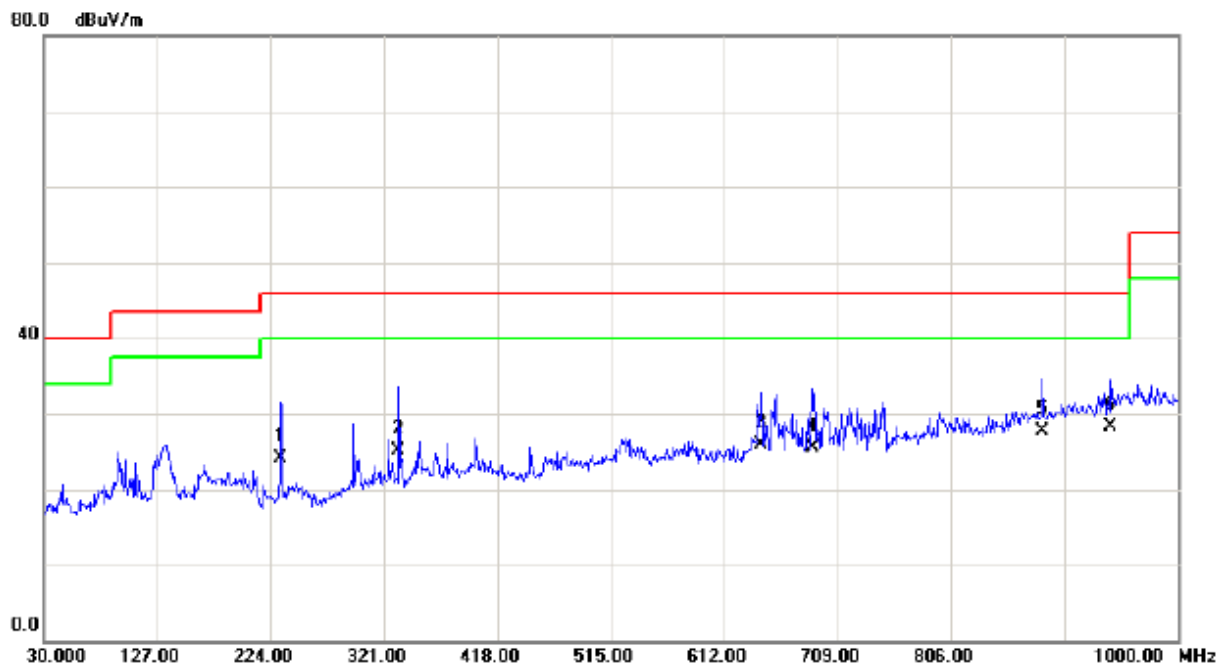


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		232.7300	38.64	-14.57	24.07	46.00	-21.93	QP	
2		333.6100	36.41	-11.40	25.01	46.00	-20.99	QP	
3		644.0100	31.73	-5.87	25.86	46.00	-20.14	QP	
4		687.6600	30.53	-4.99	25.54	46.00	-20.46	QP	
5		884.5700	29.63	-2.01	27.62	46.00	-18.38	QP	
6	*	942.7700	28.91	-0.64	28.27	46.00	-17.73	QP	



Test Mode :	TX B MODE CHANNEL 11	Test date:	Feb. 17, 2014
-------------	----------------------	------------	---------------

Vertical

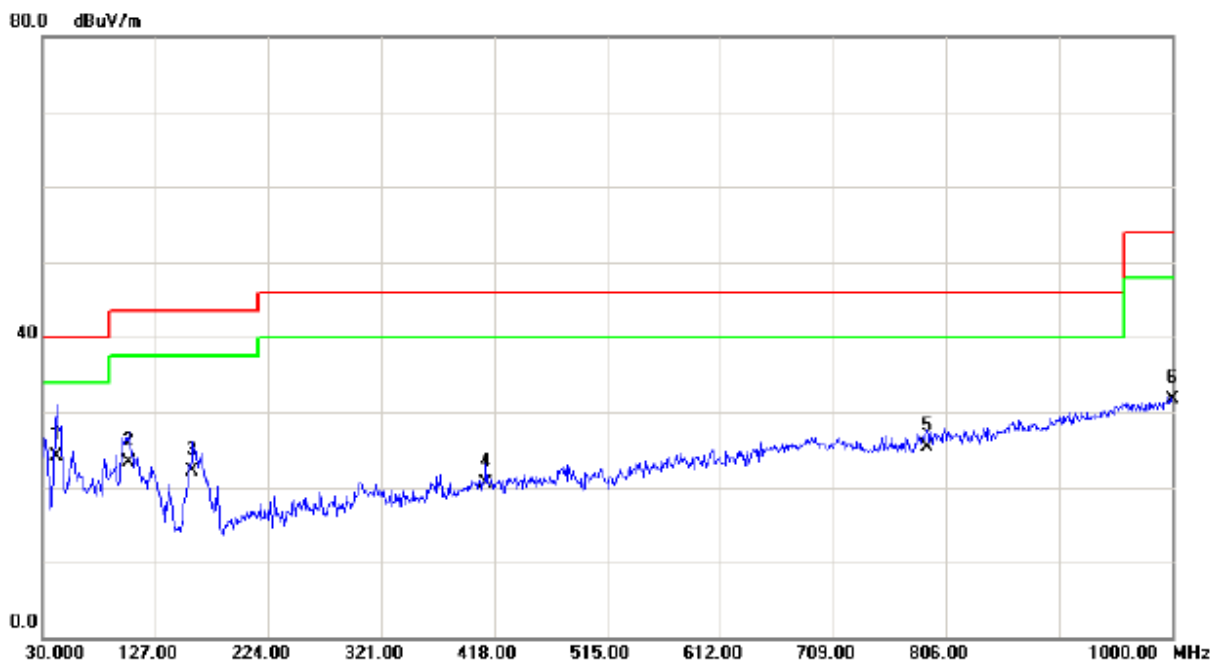


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	41.6400	38.64	-14.51	24.13	40.00	-15.87	QP	
2		104.6900	38.75	-15.52	23.23	43.50	-20.27	QP	
3		159.0100	35.74	-13.66	22.08	43.50	-21.42	QP	
4		411.2100	30.17	-9.66	20.51	46.00	-25.49	QP	
5		789.5100	28.76	-3.49	25.27	46.00	-20.73	QP	
6		1000.000	31.44	0.26	31.70	54.00	-22.30	QP	



Test Mode :	TX B MODE CHANNEL 11	Test date:	Feb. 17, 2014
-------------	----------------------	------------	---------------

Horizontal

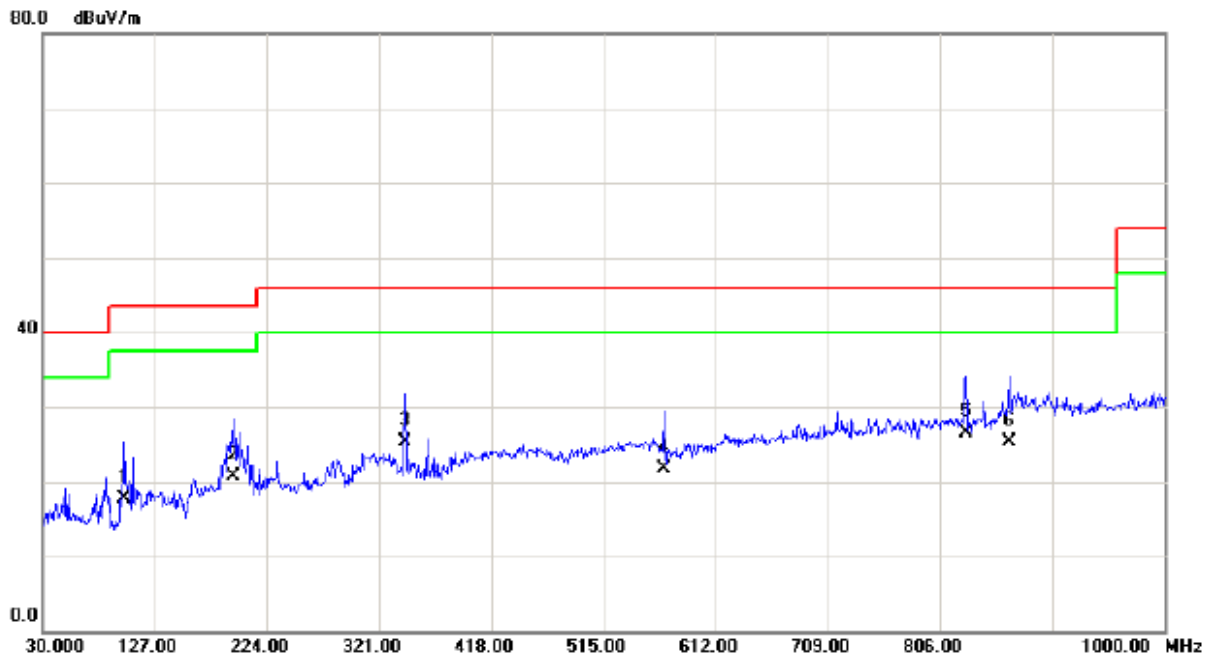

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		100.8100	33.72	-16.10	17.62	43.50	-25.88	QP	
2		194.9000	35.41	-14.75	20.66	43.50	-22.84	QP	
3		343.3100	36.71	-11.44	25.27	46.00	-20.73	QP	
4		567.3800	29.43	-7.81	21.62	46.00	-24.38	QP	
5	*	828.3100	29.86	-3.43	26.43	46.00	-19.57	QP	
6		866.1400	28.11	-2.89	25.22	46.00	-20.78	QP	



4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



Test Mode :	TX B MODE 2412MHz	Test date:	Feb. 16, 2014
-------------	-------------------	------------	---------------

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2390.00	V	23.23	13.62	28.82	52.05	42.44	74.00	54.00	X/E
2413.80	V	70.19	68.09	28.86	99.05	96.95			X/F
4823.92	V	48.89	40.04	-2.23	46.66	37.81	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2390.00	H	22.95	13.33	28.82	51.77	42.15	74.00	54.00	X/E
2412.90	H	66.16	64.19	28.86	95.02	93.05			X/F
4823.99	H	49.78	39.71	-2.23	47.55	37.48	74.00	54.00	X/H

Test Mode :	TX B MODE 2437MHz	Test date:	Feb. 16, 2014
-------------	-------------------	------------	---------------

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2435.20	V	69.00	67.13	28.90	97.90	96.03			X/F
4874.09	V	48.91	39.60	-2.11	46.80	37.49	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2435.20	H	65.01	63.06	28.90	93.91	91.96			X/F
4873.93	H	47.82	39.38	-2.11	45.71	37.27	74.00	54.00	X/H



Test Mode :	TX B MODE 2462MHz	Test date:	Feb. 16, 2014
-------------	-------------------	------------	---------------


Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2460.20	V	66.75	64.91	28.94	95.69	93.85			X/F
2483.50	V	23.21	13.36	28.97	52.18	42.33	74.00	54.00	X/E
4923.87	V	46.95	39.22	-1.99	44.96	37.23	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2460.20	H	63.87	61.83	28.93	92.80	90.76			X/F
2483.50	H	22.37	13.19	28.97	51.34	42.16	74.00	54.00	X/E
4924.00	H	49.12	39.10	-1.99	47.13	37.11	74.00	54.00	X/H




TX CH01 (Above 1000 MHz, Vertical)

110.0 dBuV/m


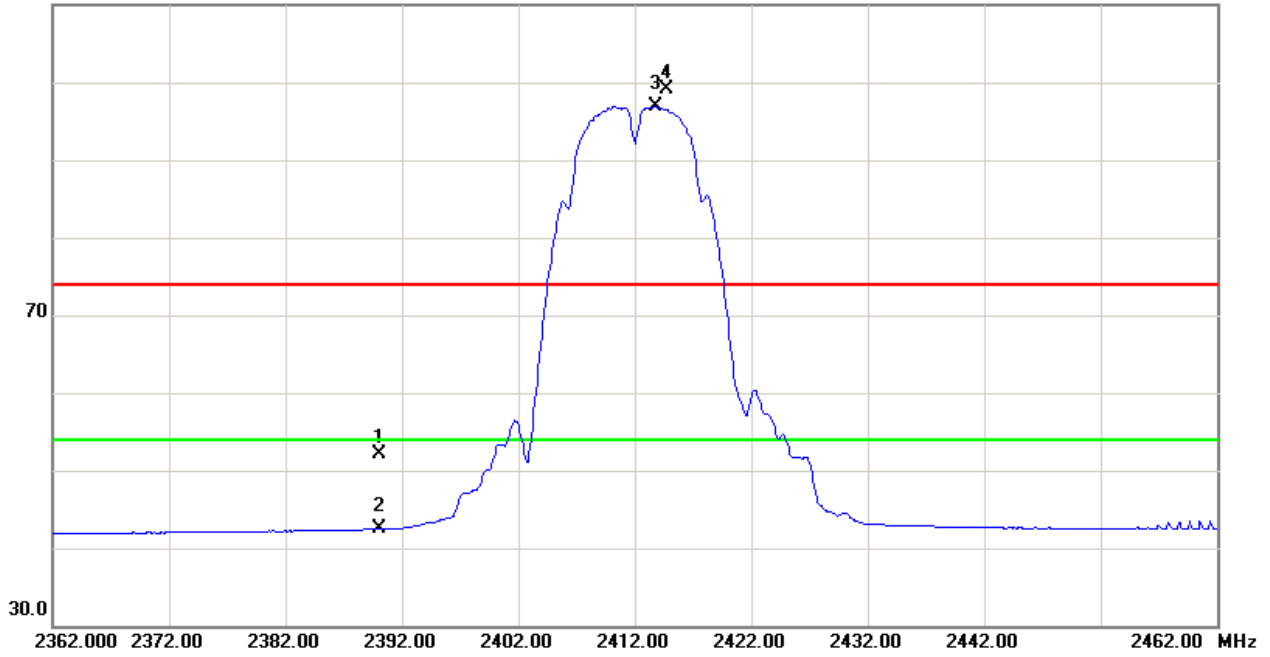


80.0 dBuV/m

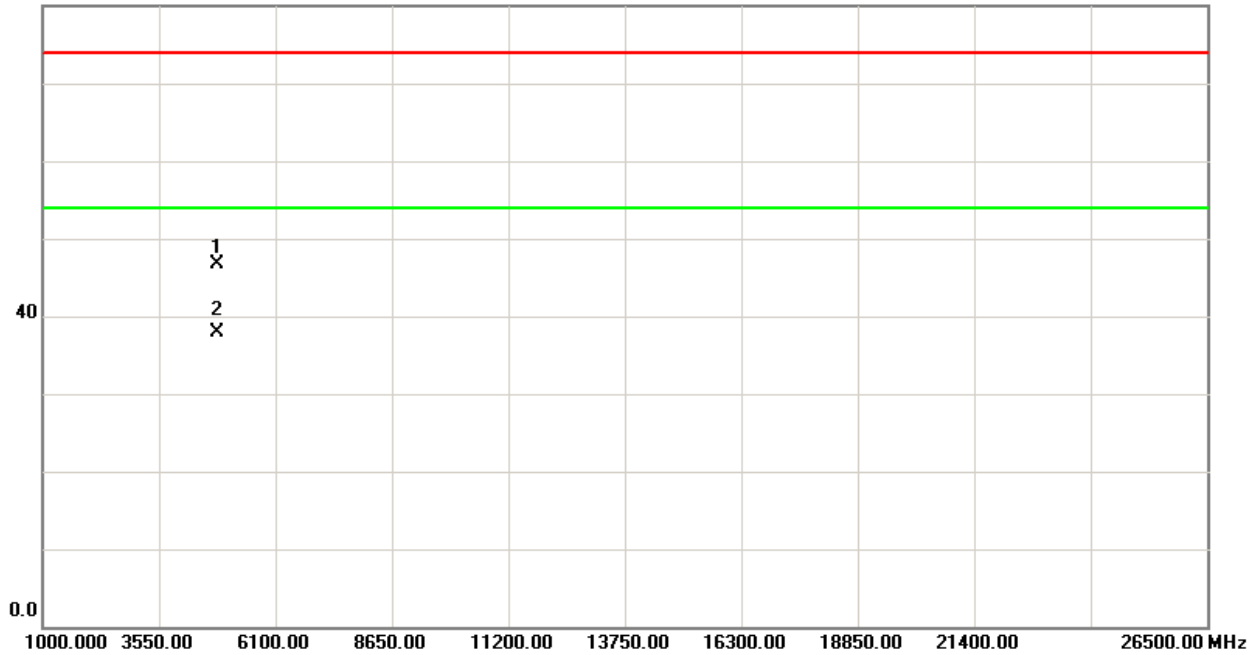





TX CH01 (Above 1000 MHz, Horizontal)

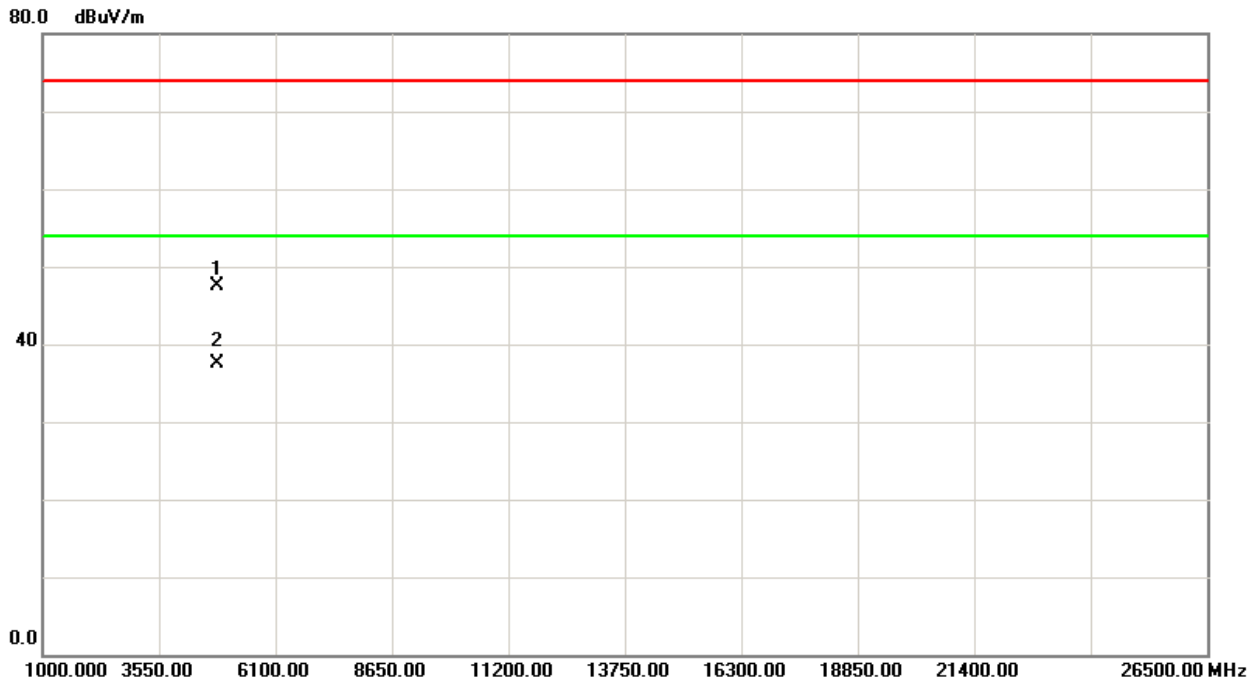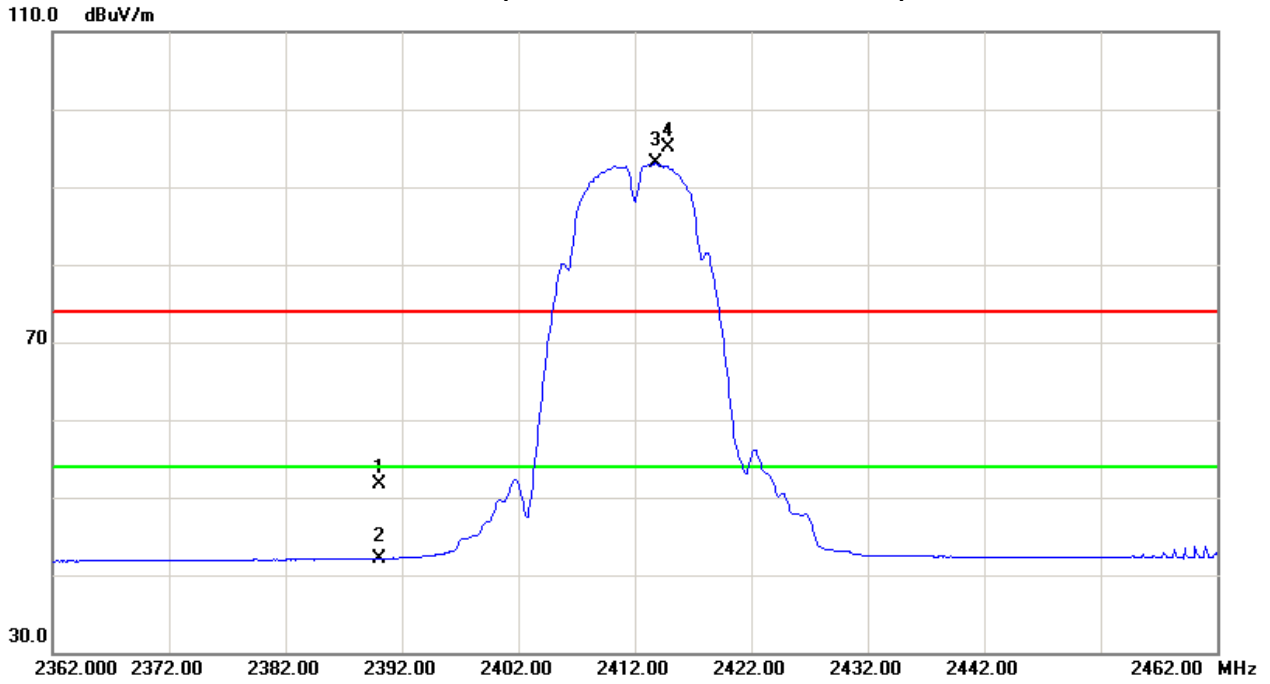





TX CH06 (Above 1000 MHz, Vertical)

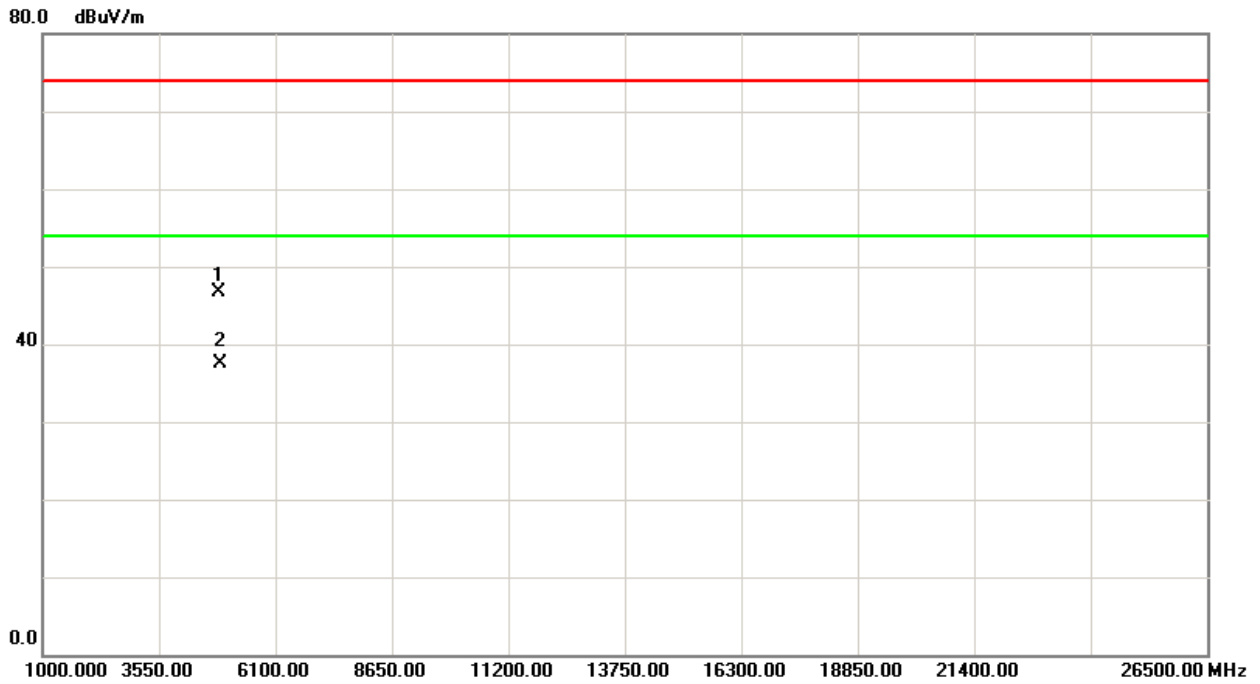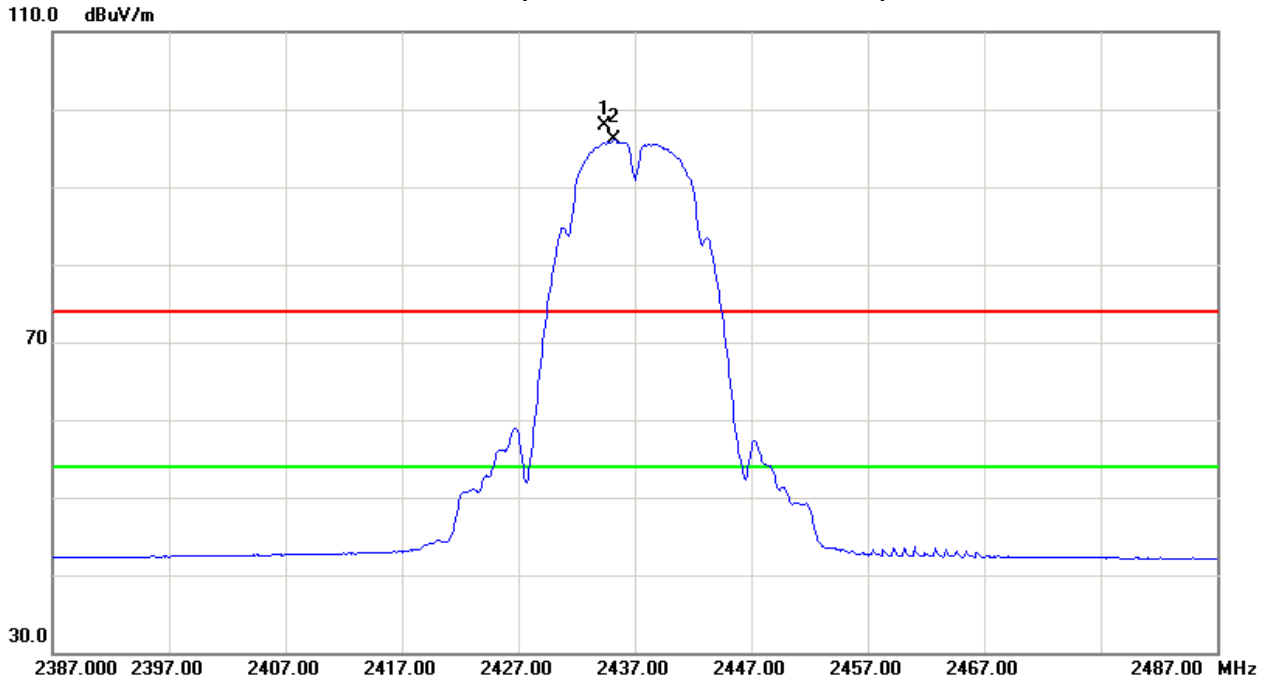





TX CH06 (Above 1000 MHz, Horizontal)

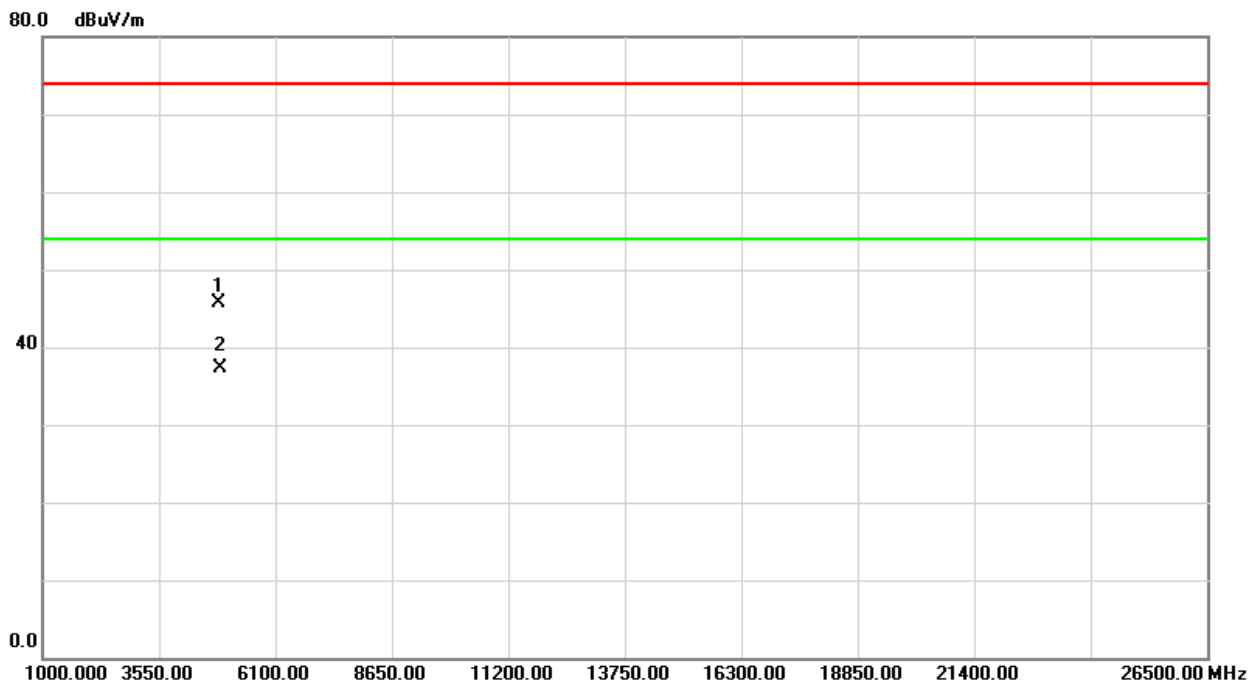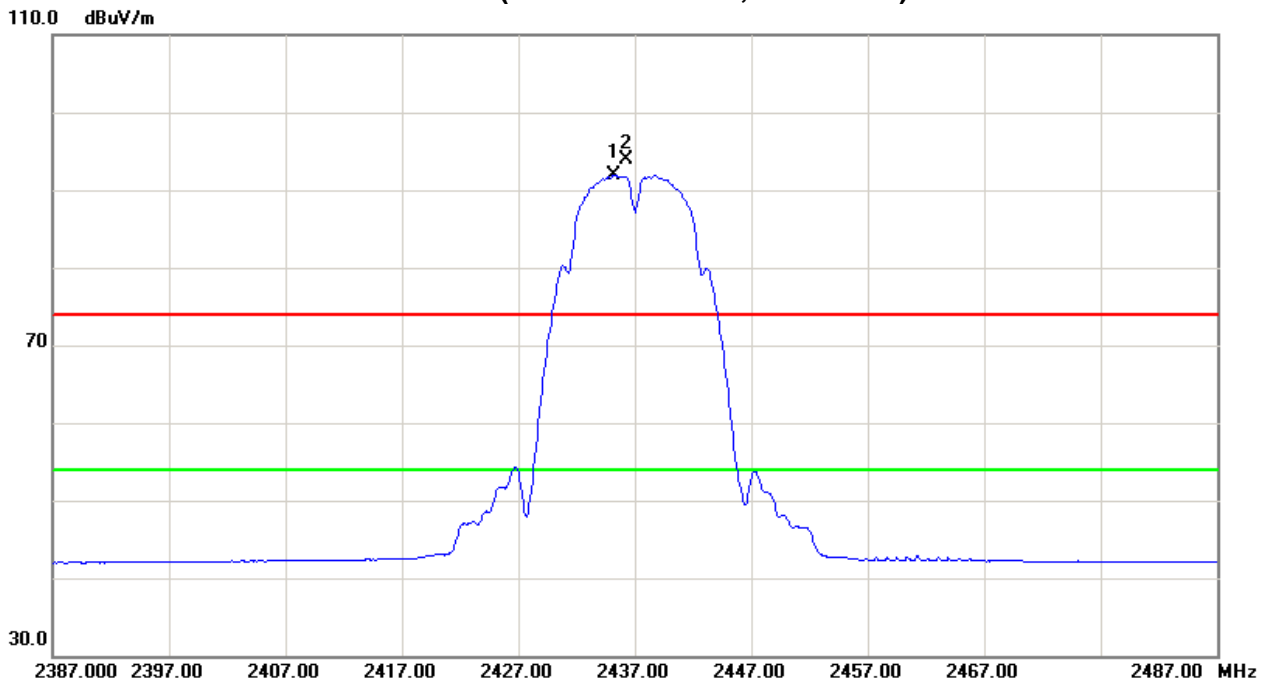





TX CH11 (Above 1000 MHz, Vertical)

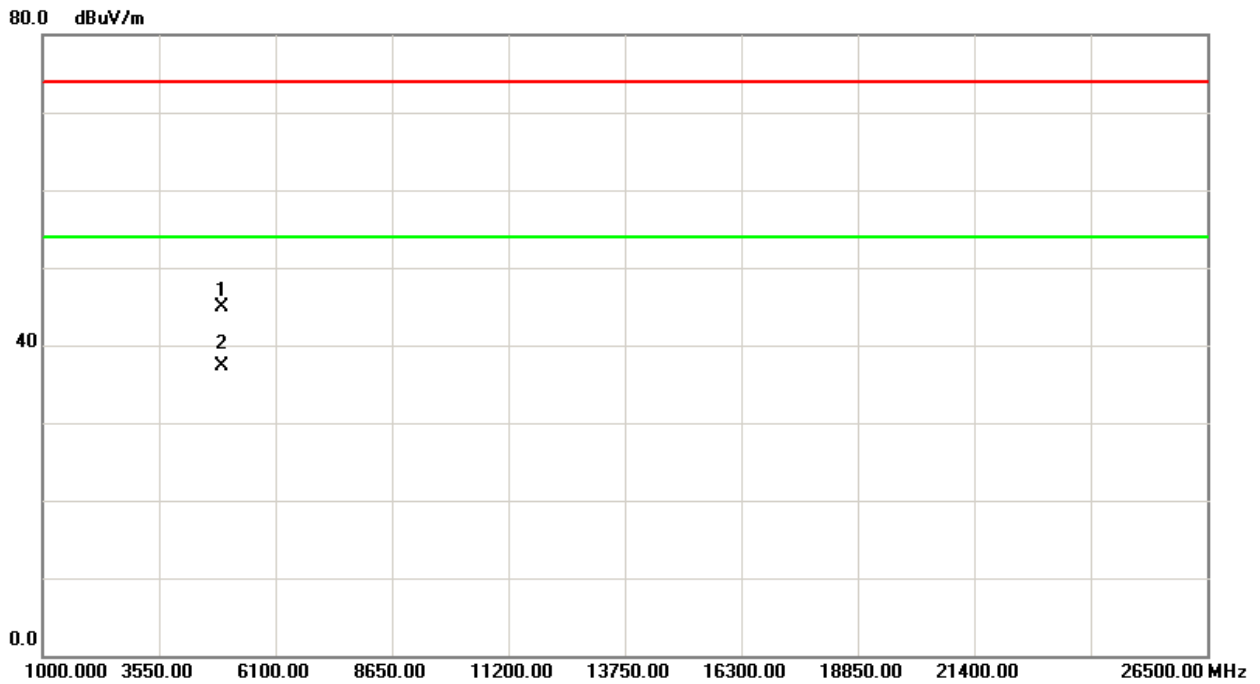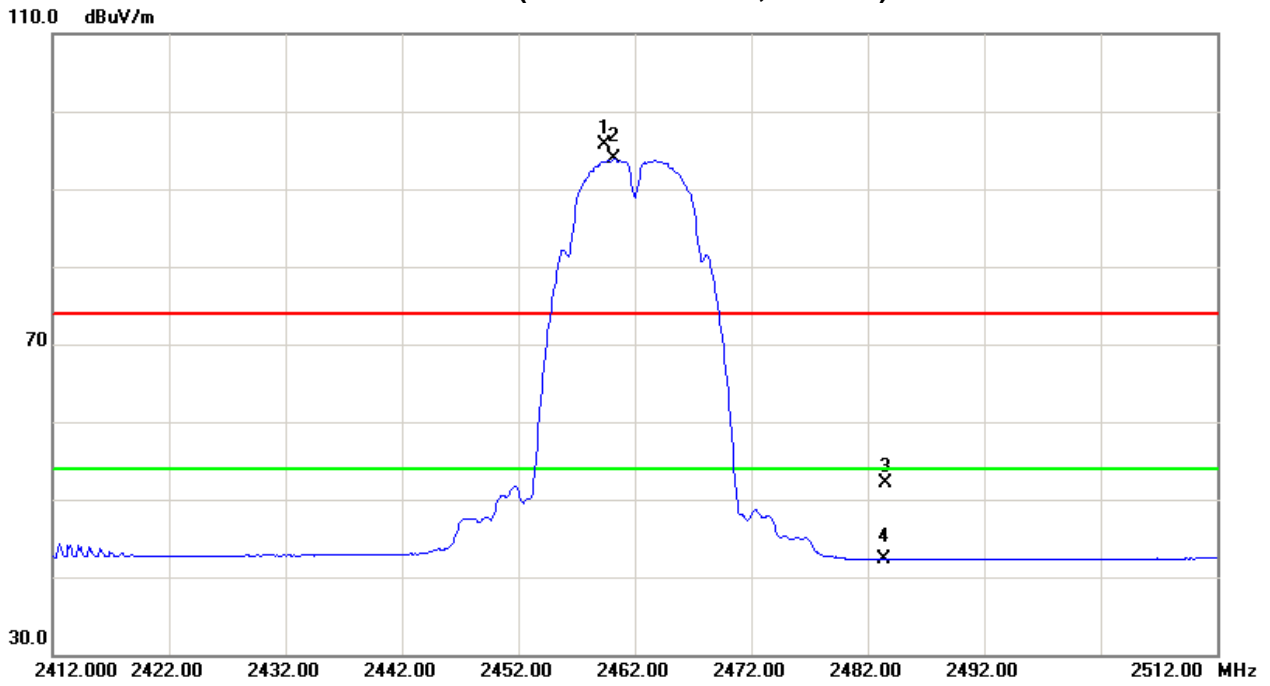



TX CH11 (Above 1000 MHz, Horizontal)

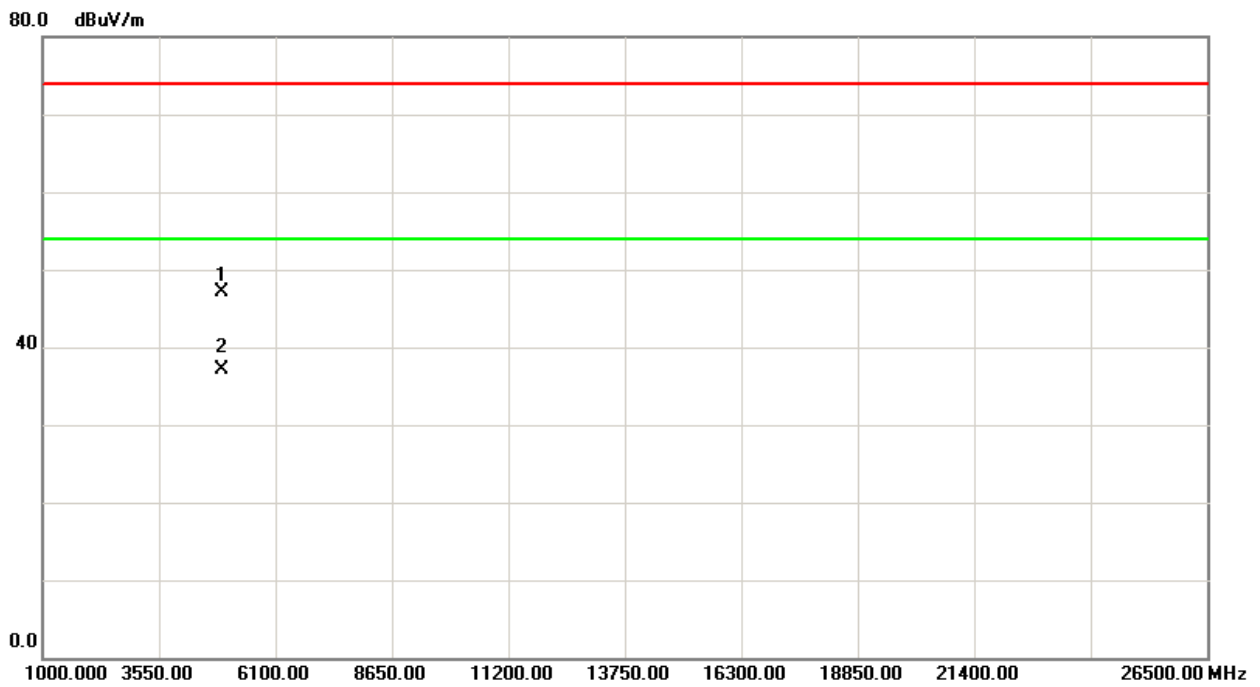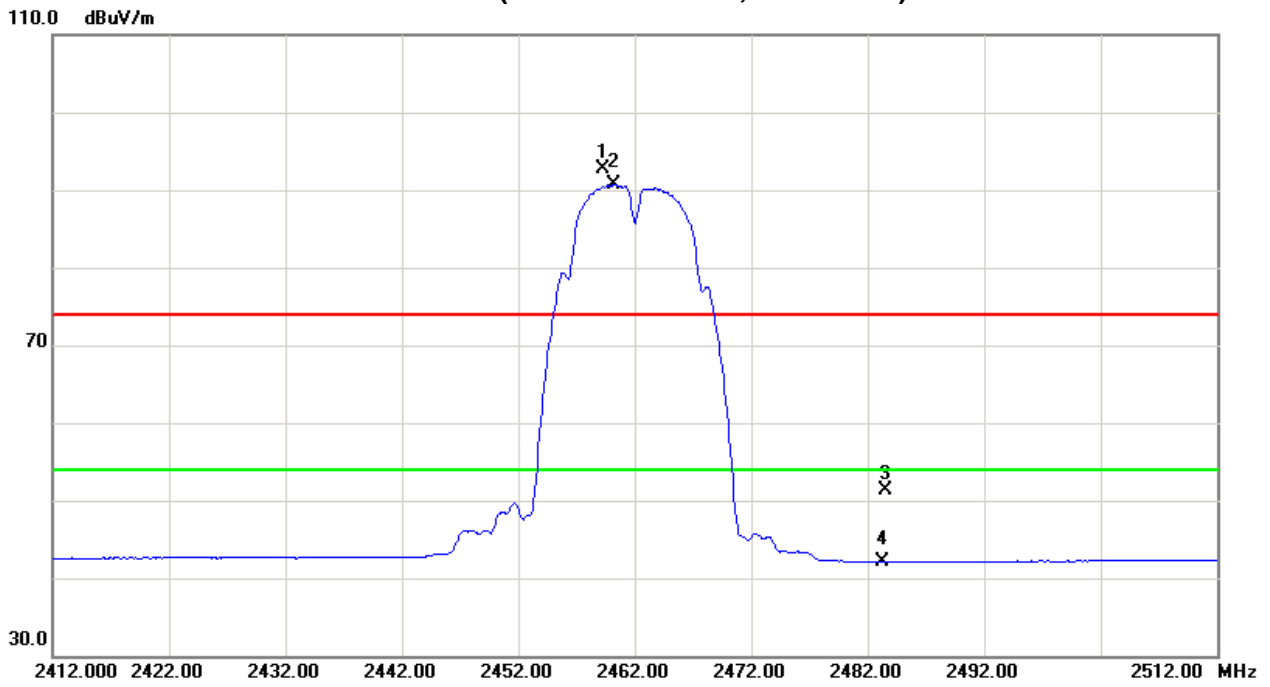



Test Mode :	TX G MODE 2412MHz	Test date:	Feb. 16, 2014
-------------	-------------------	------------	---------------

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	27.17	6.63	28.82	55.99	35.45	74.00	54.00	X/E
2407.20	V	67.69	58.59	28.85	96.54	87.44			X/F
4823.85	V	50.81	39.15	-2.23	48.58	36.92	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	30.87	17.04	28.82	59.69	45.86	74.00	54.00	X/E
2407.30	H	67.72	58.62	28.85	96.57	87.47			X/F
4823.85	H	49.16	40.14	-2.23	46.93	37.91	74.00	54.00	X/H

Test Mode :	TX G MODE 2437MHz	Test date:	Feb. 16, 2014
-------------	-------------------	------------	---------------

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2432.10	V	66.88	57.93	28.89	95.77	86.82			X/F
4873.93	V	46.23	39.36	6.58	52.81	45.94	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2440.00	H	64.78	56.48	28.89	93.67	85.37			X/F
4873.99	H	46.15	39.33	6.60	52.75	45.93	74.00	54.00	X/H





Test Mode :	TX G MODE 2462MHz	Test date:	Feb. 16, 2014
-------------	-------------------	------------	---------------

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2457.20	V	65.15	55.95	28.93	94.08	84.88			X/F
2483.50	V	23.36	13.62	28.97	52.33	42.59	74.00	54.00	X/E
4924.03	V	47.14	39.21	6.72	53.86	45.93	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2457.10	H	64.28	55.07	28.93	93.21	84.00			X/F
2483.50	H	23.33	13.68	28.97	52.30	42.65	74.00	54.00	X/E
4923.95	H	46.81	39.17	6.74	53.55	45.91	74.00	54.00	X/H





TX CH01 (Above 1000 MHz, Vertical)

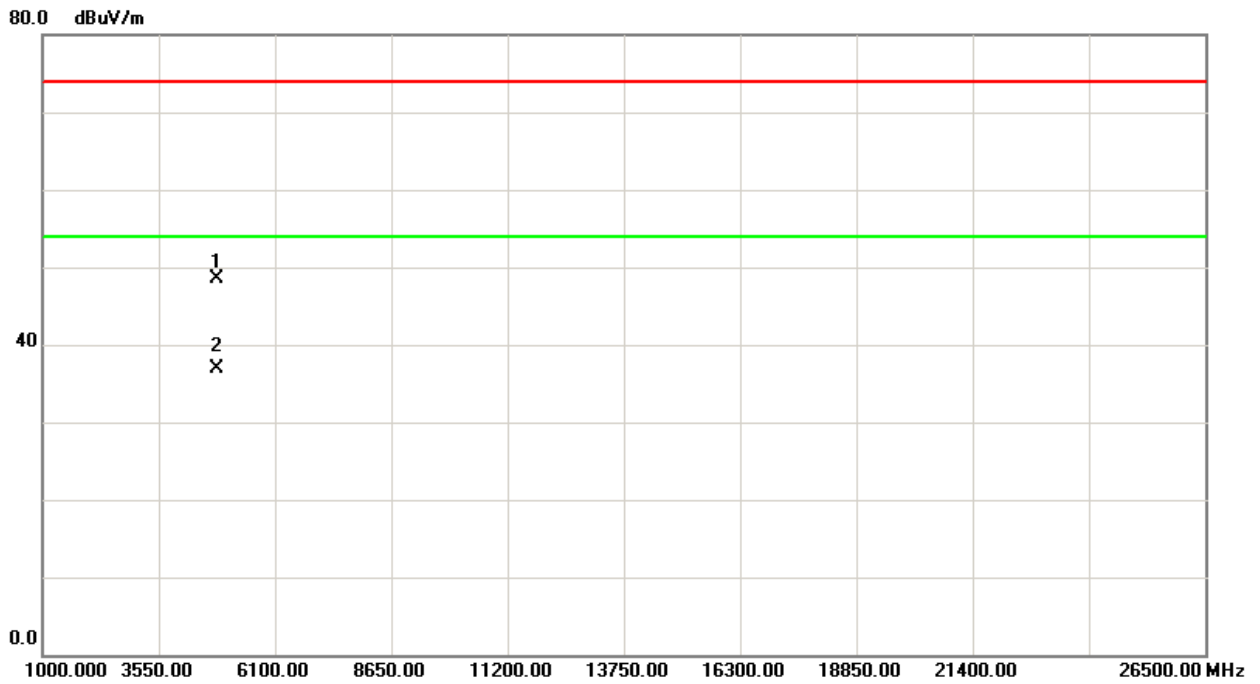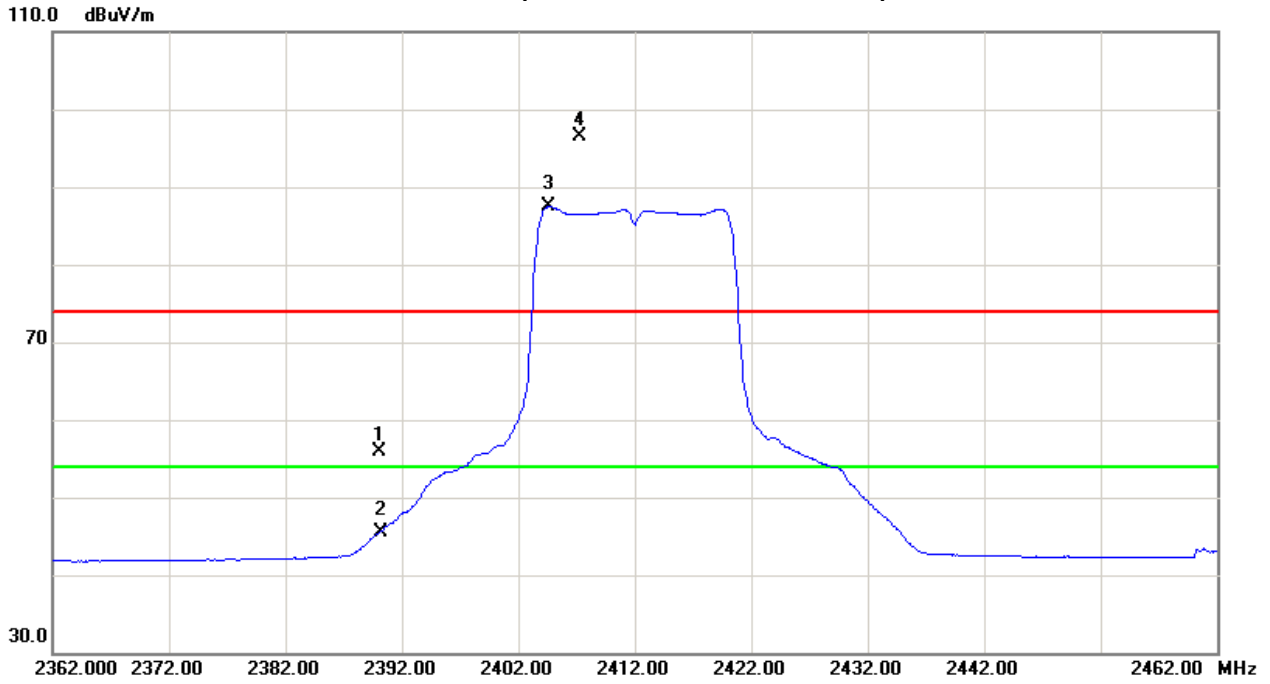





TX CH01 (Above 1000 MHz, Horizontal)

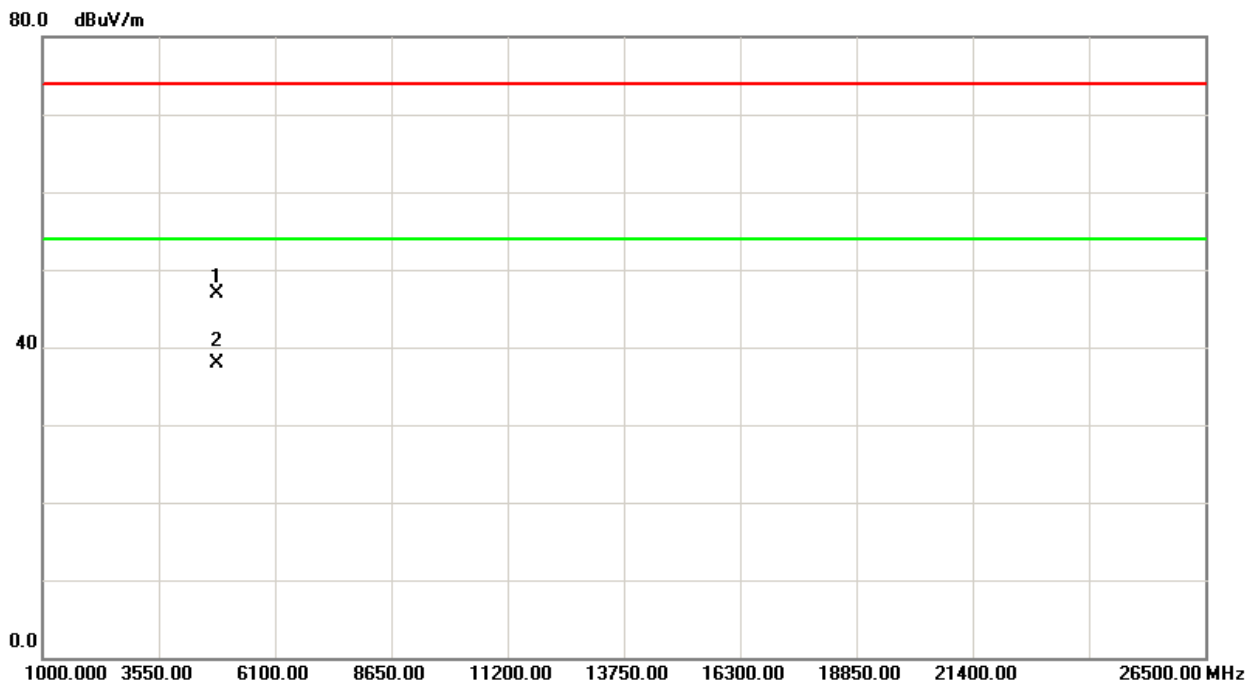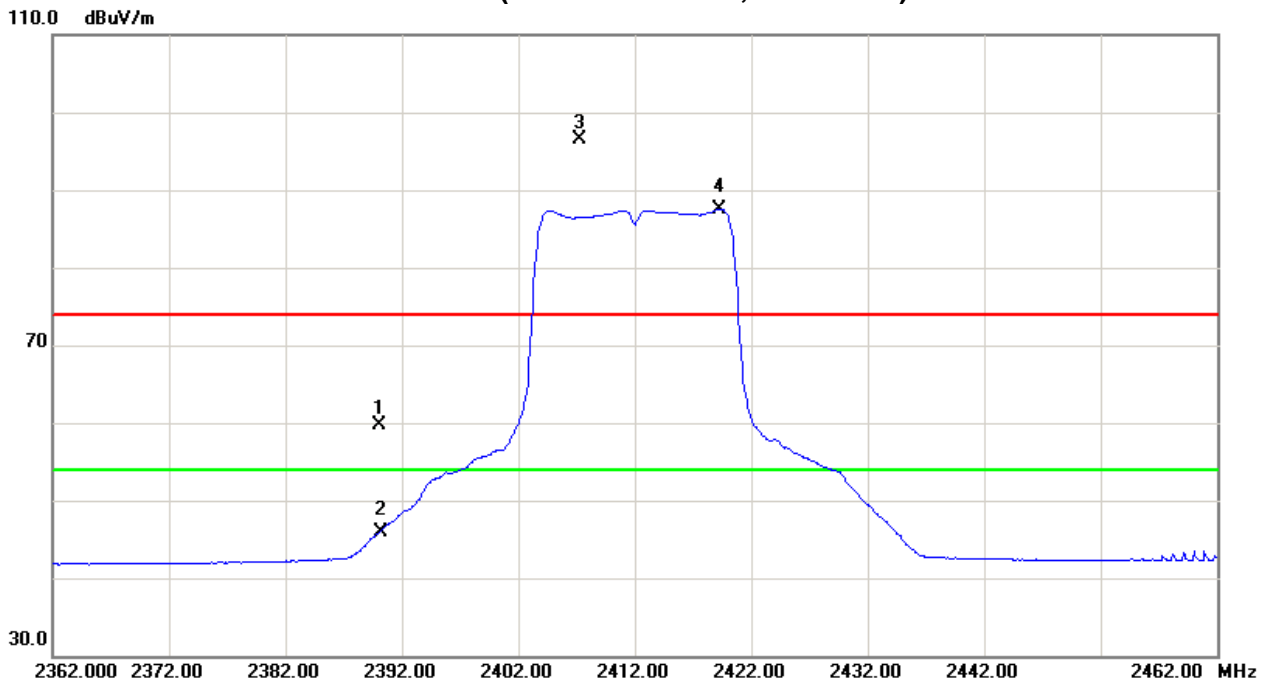





TX CH06 (Above 1000 MHz, Vertical)

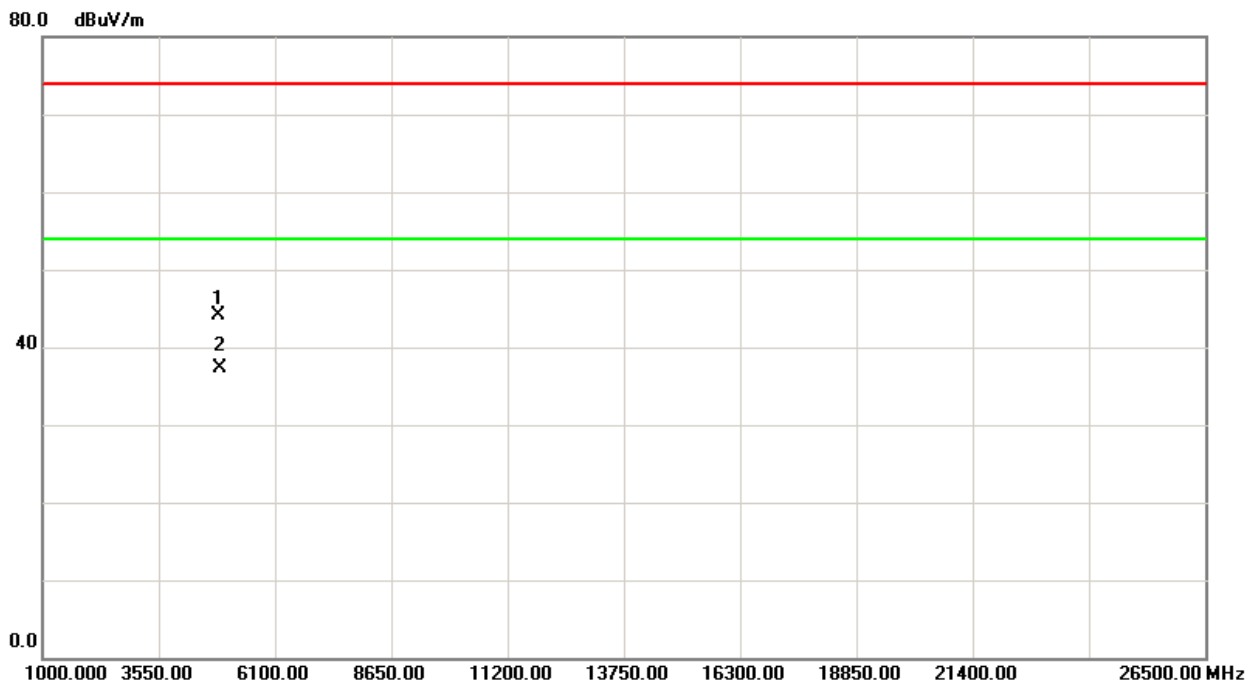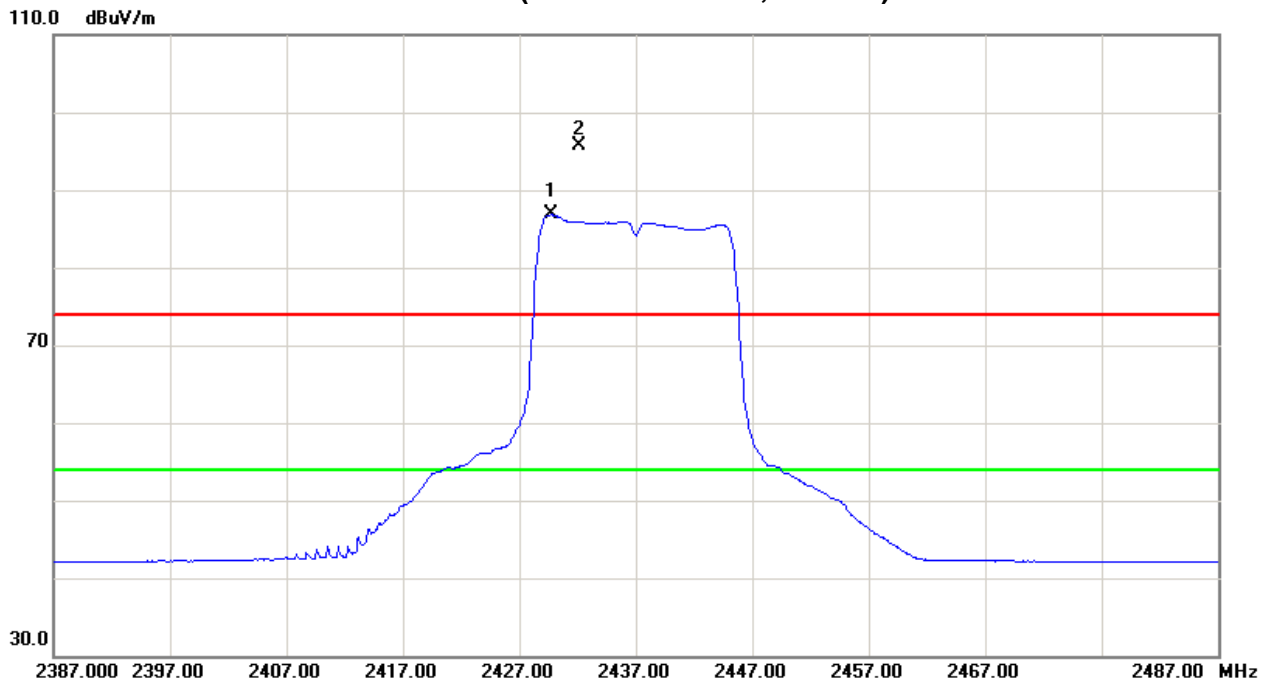





TX CH06 (Above 1000 MHz, Horizontal)

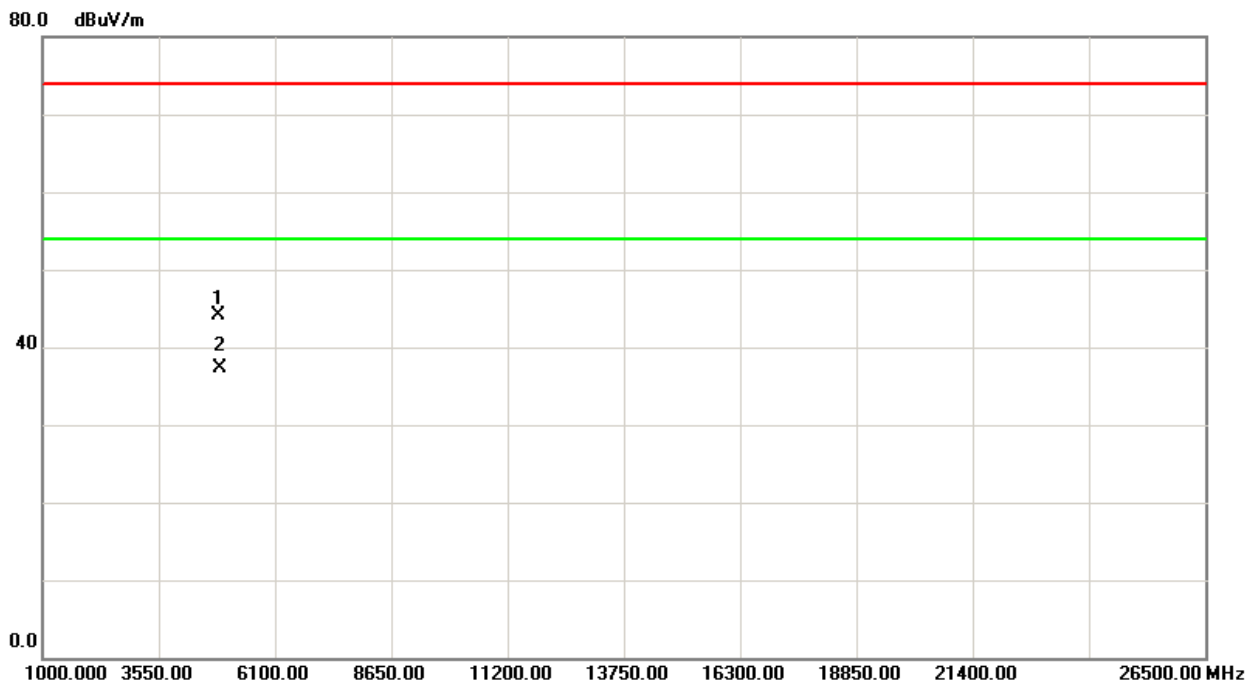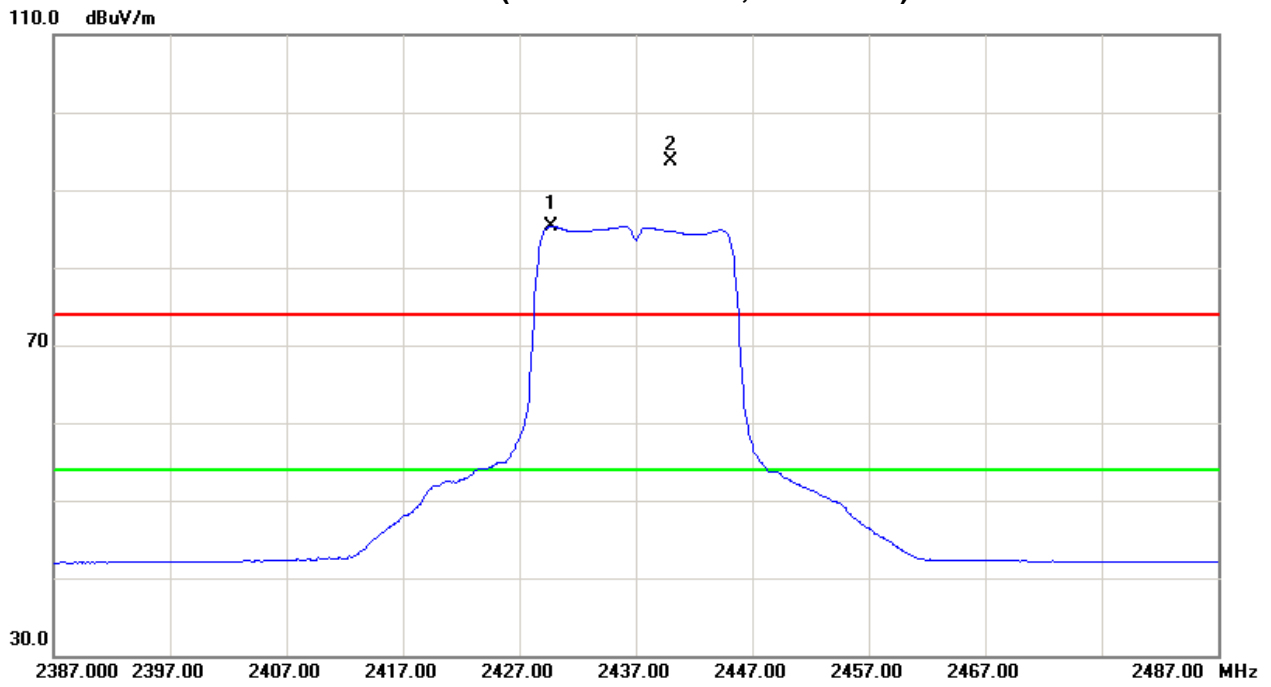





TX CH11 (Above 1000 MHz, Vertical)

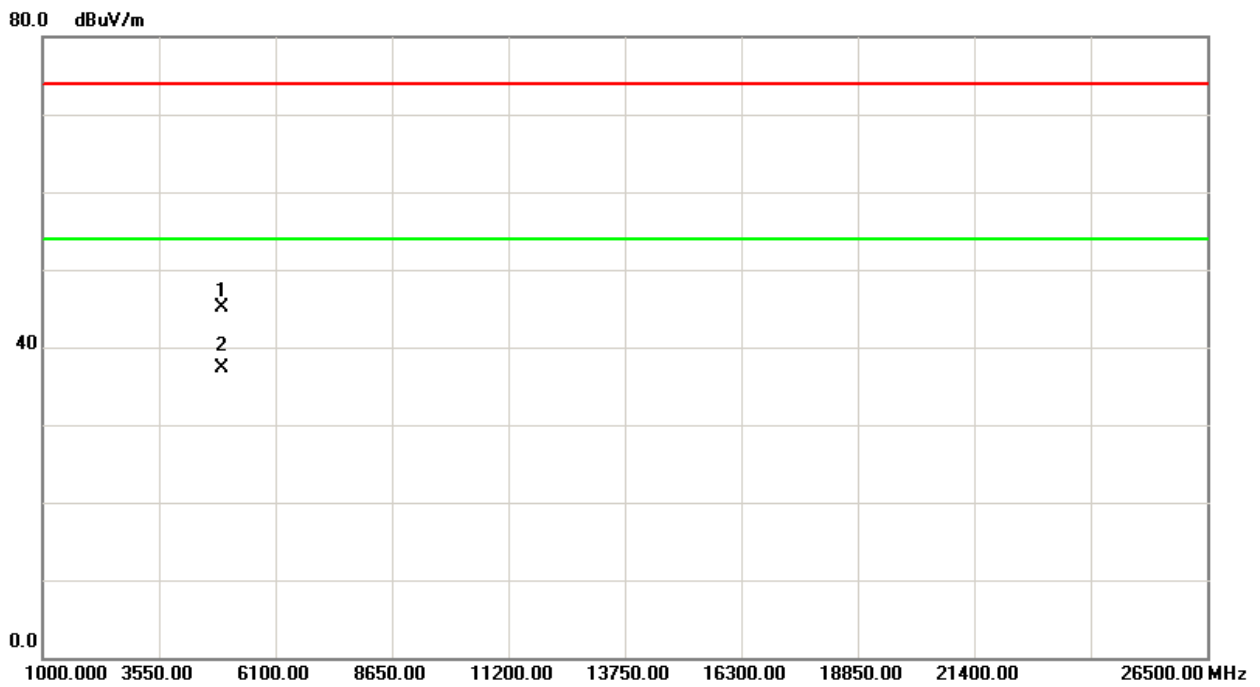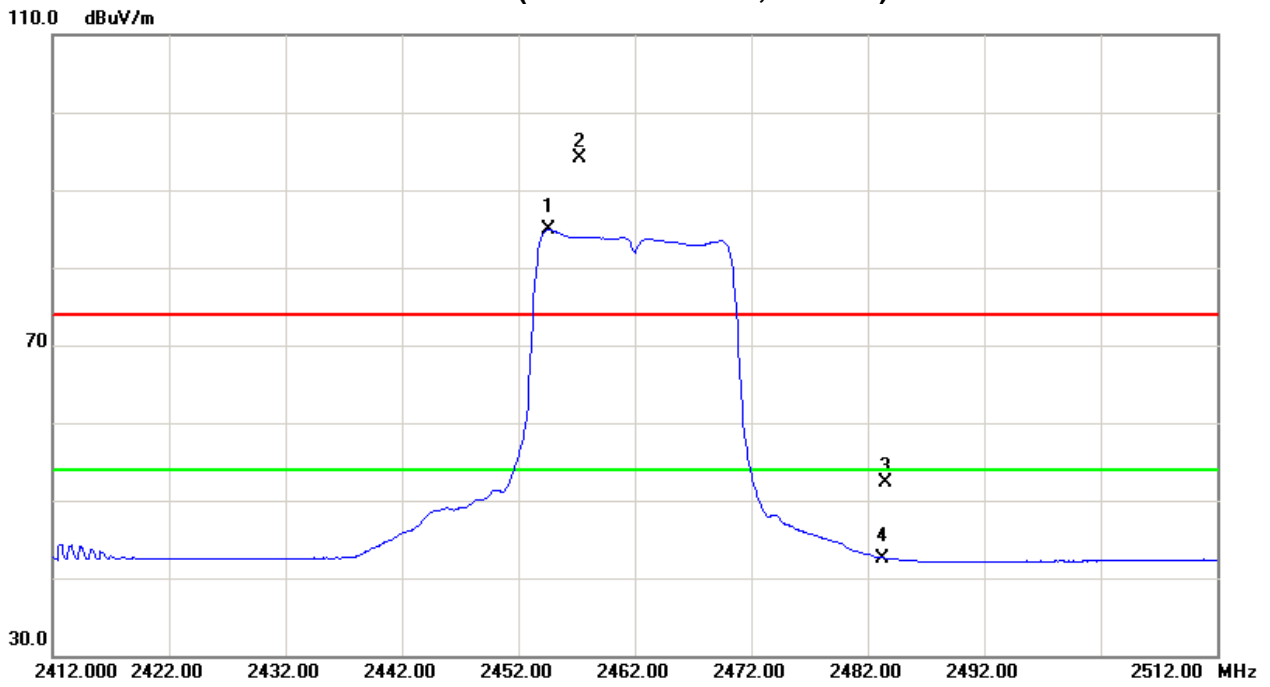



TX CH11 (Above 1000 MHz, Horizontal)

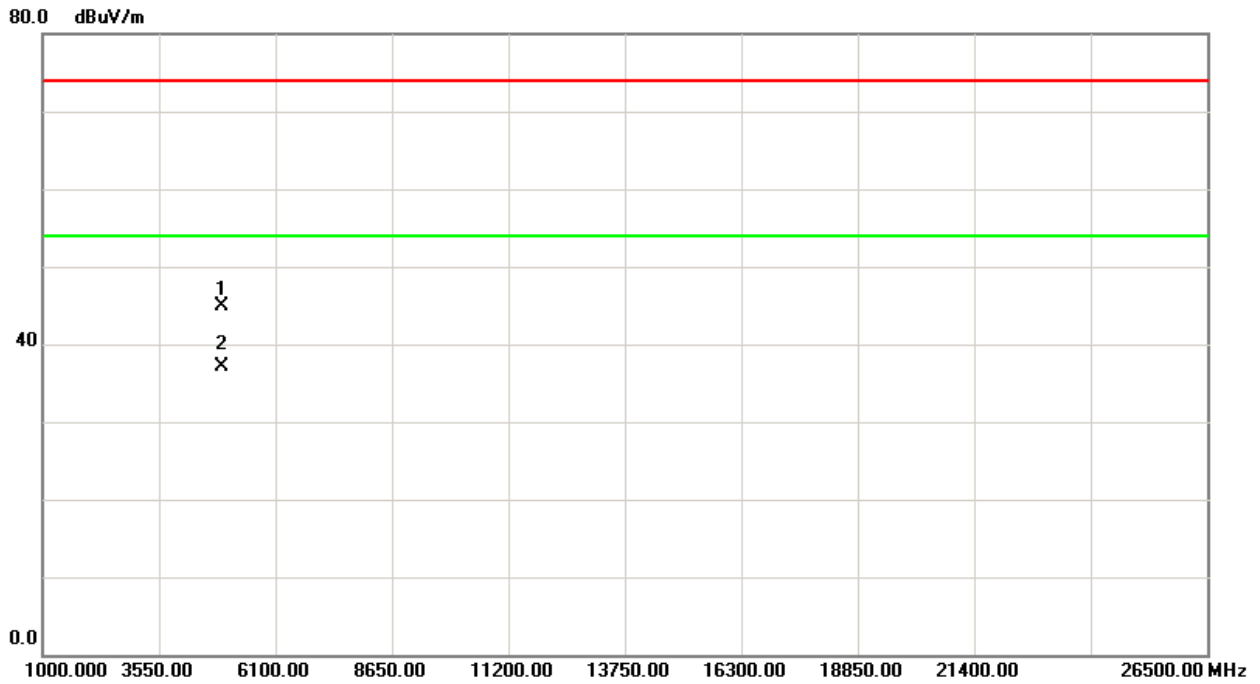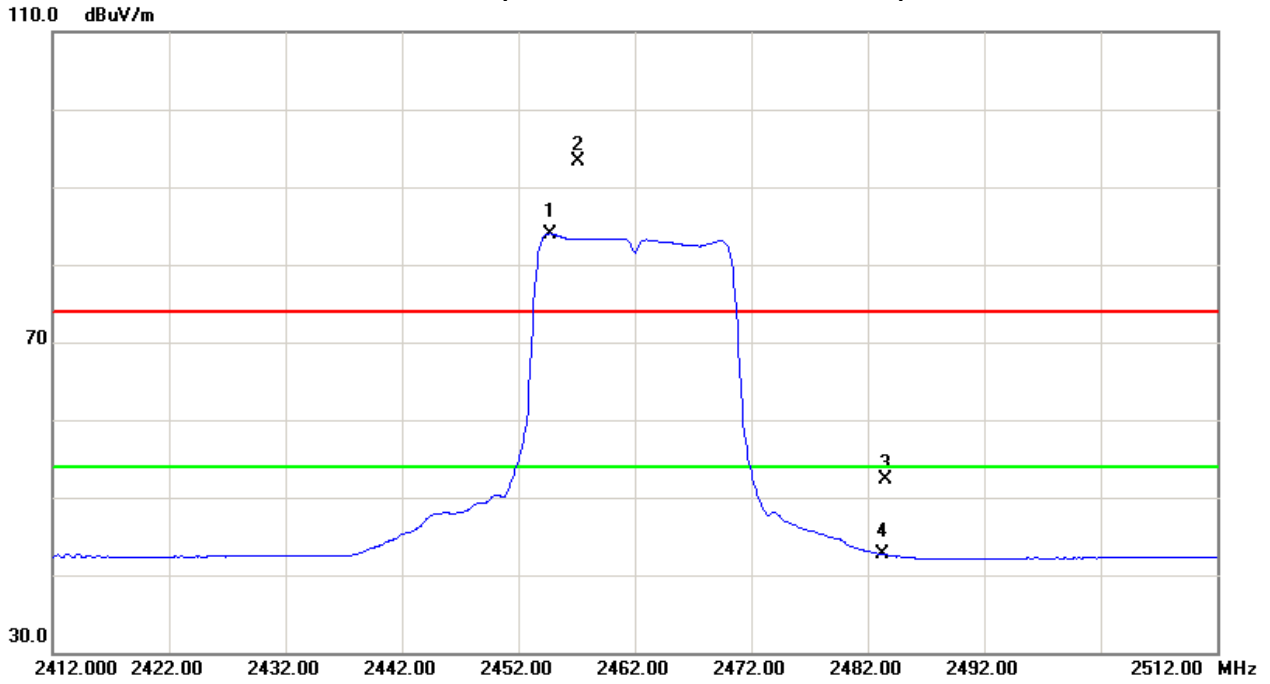



Neutron Engineering Inc.

Test Mode :	TX N-20M MODE 2412MHZ	Test date:	Feb. 16, 2014
-------------	-----------------------	------------	---------------

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2390.00	V	34.25	19.03	28.82	63.07	47.85	74.00	54.00	X/E
2414.90	V	70.91	61.97	28.87	99.78	90.84			X/F
4823.85	V	48.93	39.72	-2.23	46.70	37.49	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2390.00	H	31.36	18.93	28.82	60.18	47.75	74.00	54.00	X/E
2419.10	H	66.97	58.10	28.87	95.84	86.97			X/F
4823.85	H	49.17	39.43	-2.23	46.94	37.20	74.00	54.00	X/H

Test Mode :	TX N-20M MODE 2437MHZ	Test date:	Feb. 16, 2014
-------------	-----------------------	------------	---------------

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2429.90	V	70.40	62.44	28.89	99.29	91.33			X/F
4874.85	V	48.24	39.74	-2.11	46.13	37.63	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2429.90	H	65.92	57.40	28.29	94.21	85.69			X/F
4874.85	H	49.37	39.38	-2.11	47.26	37.27	74.00	54.00	X/H



Neutron Engineering Inc.

Test Mode :	TX N-20M MODE 2462MHz	Test date:	Feb. 16, 2014
-------------	-----------------------	------------	---------------


Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2455.20	V	63.18	54.22	28.93	92.11	83.15			X/F
2483.50	V	24.73	14.15	28.97	53.70	43.12	74.00	54.00	X/E
4924.87	V	48.71	38.94	-1.99	46.72	36.95	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2455.10	H	64.58	55.54	28.93	93.51	84.47			X/F
2483.50	H	25.96	14.59	28.97	54.93	43.56	74.00	54.00	X/E
4924.84	H	49.34	39.34	-1.99	47.35	37.35	74.00	54.00	X/H




TX CH01 (Above 1000 MHz, Vertical)

110.0 dBuV/m


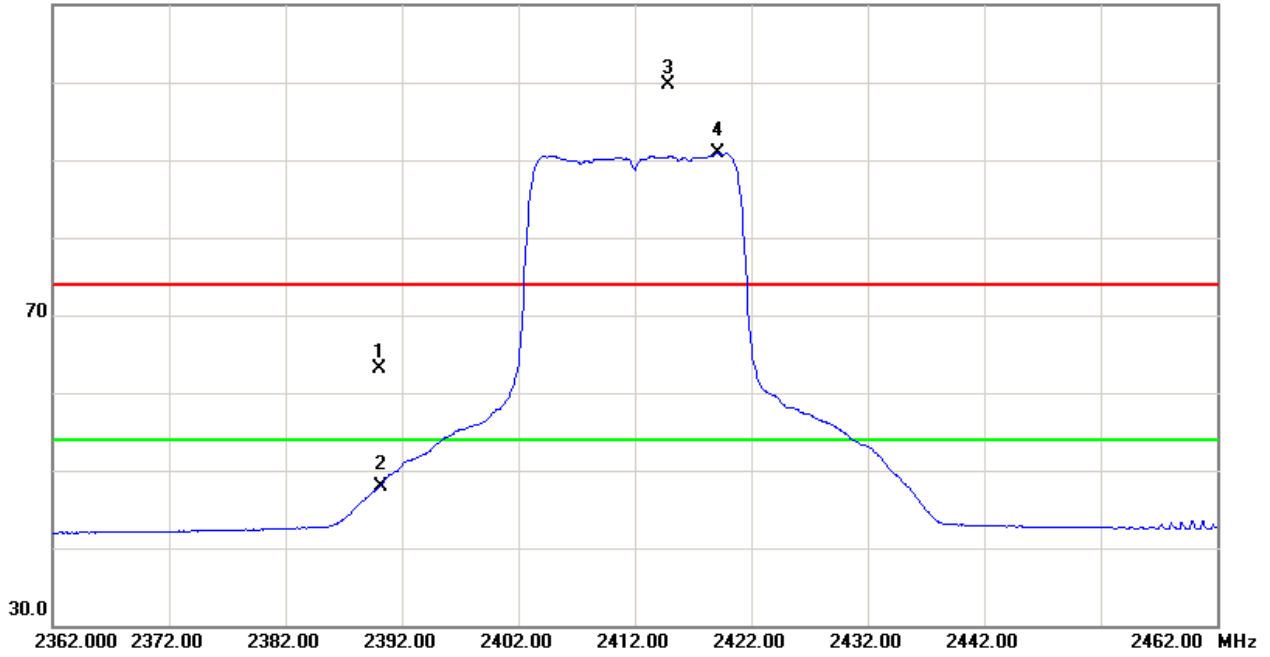


80.0 dBuV/m

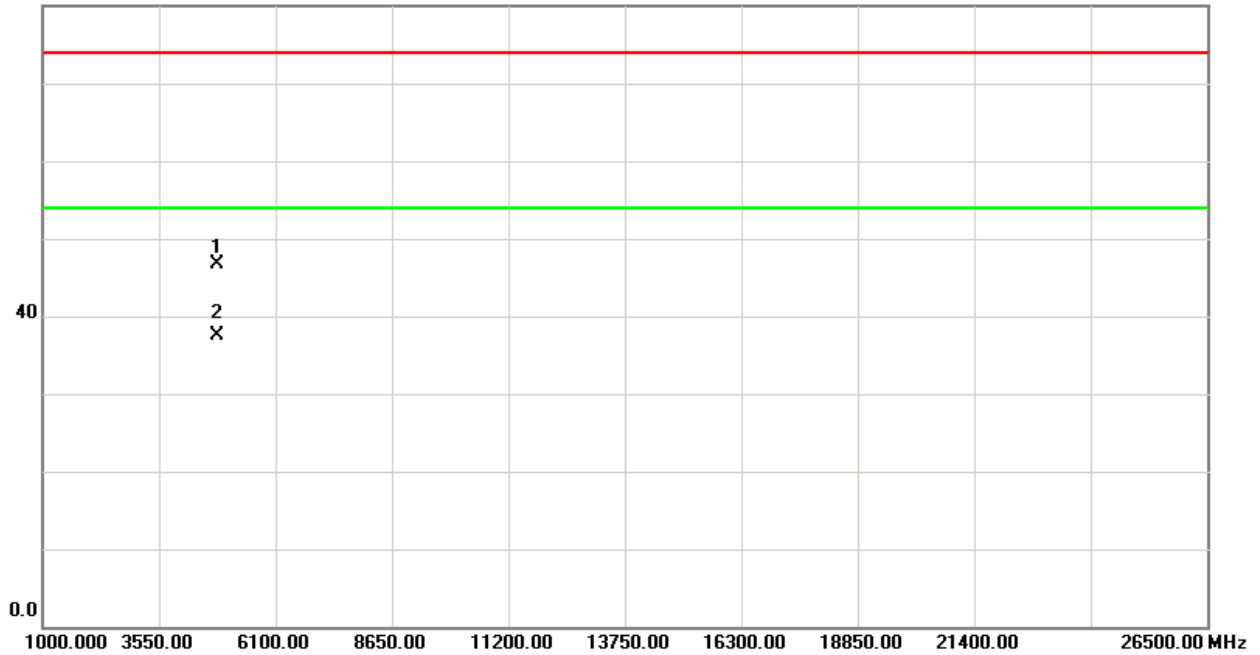





TX CH01 (Above 1000 MHz, Horizontal)

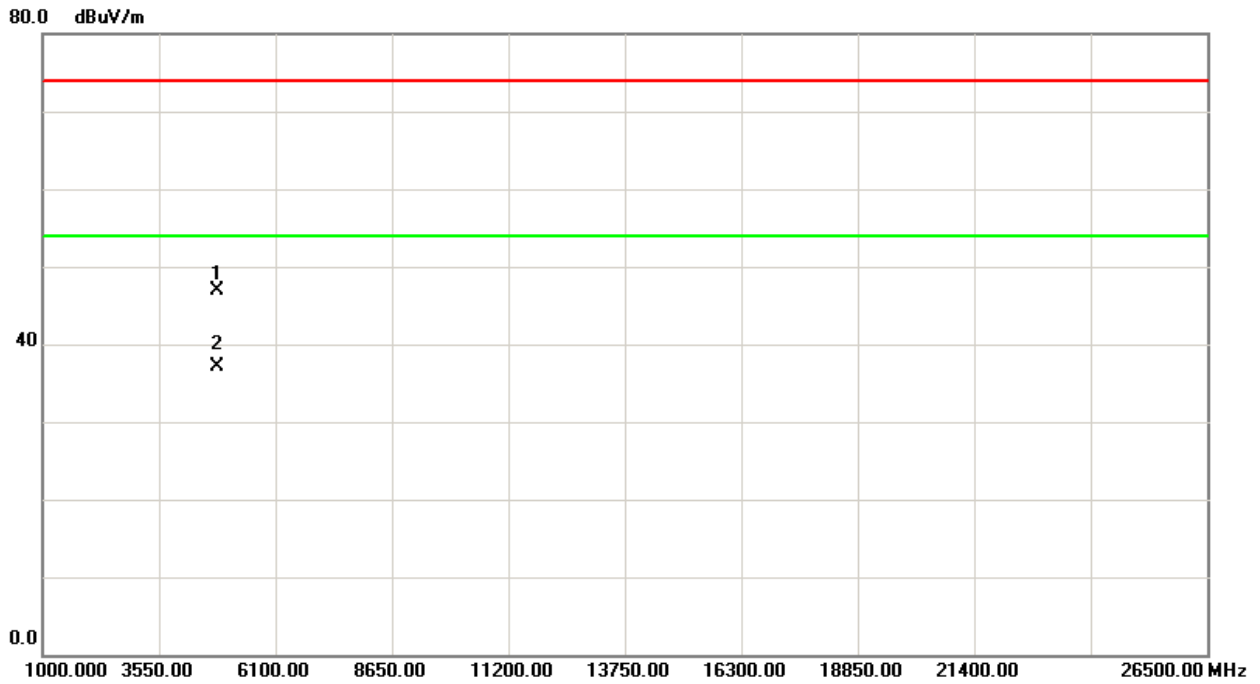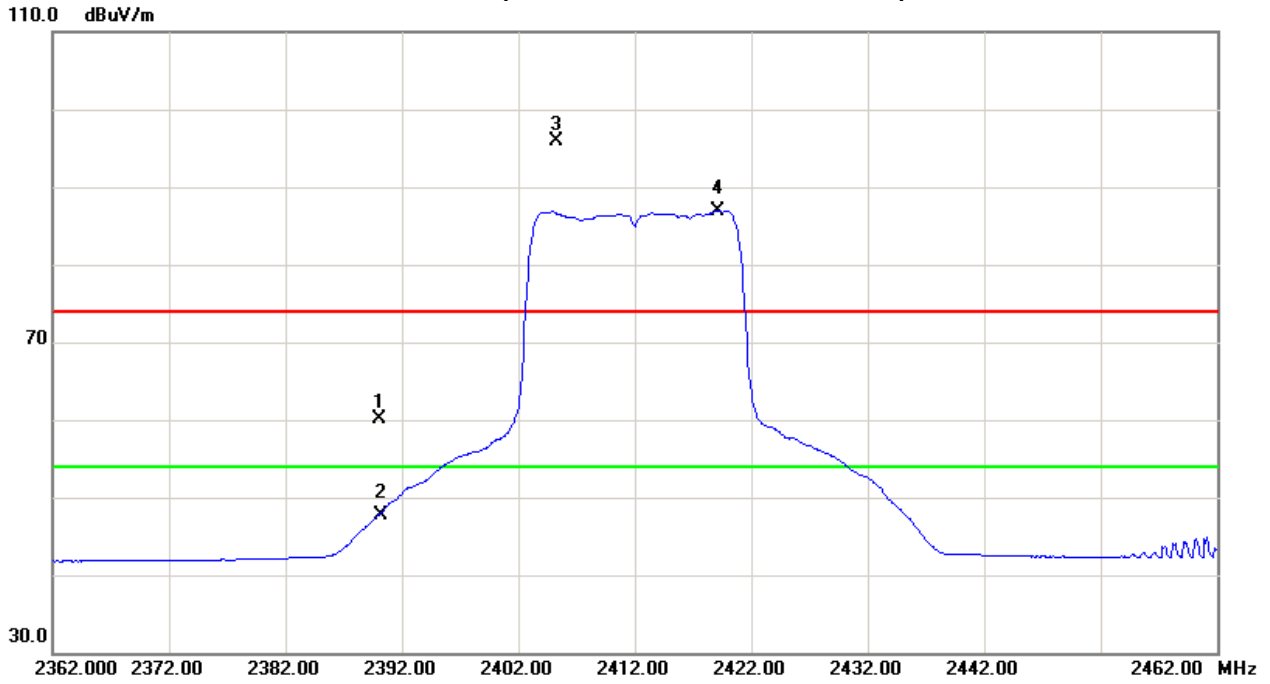




TX CH06 (Above 1000 MHz, Vertical)

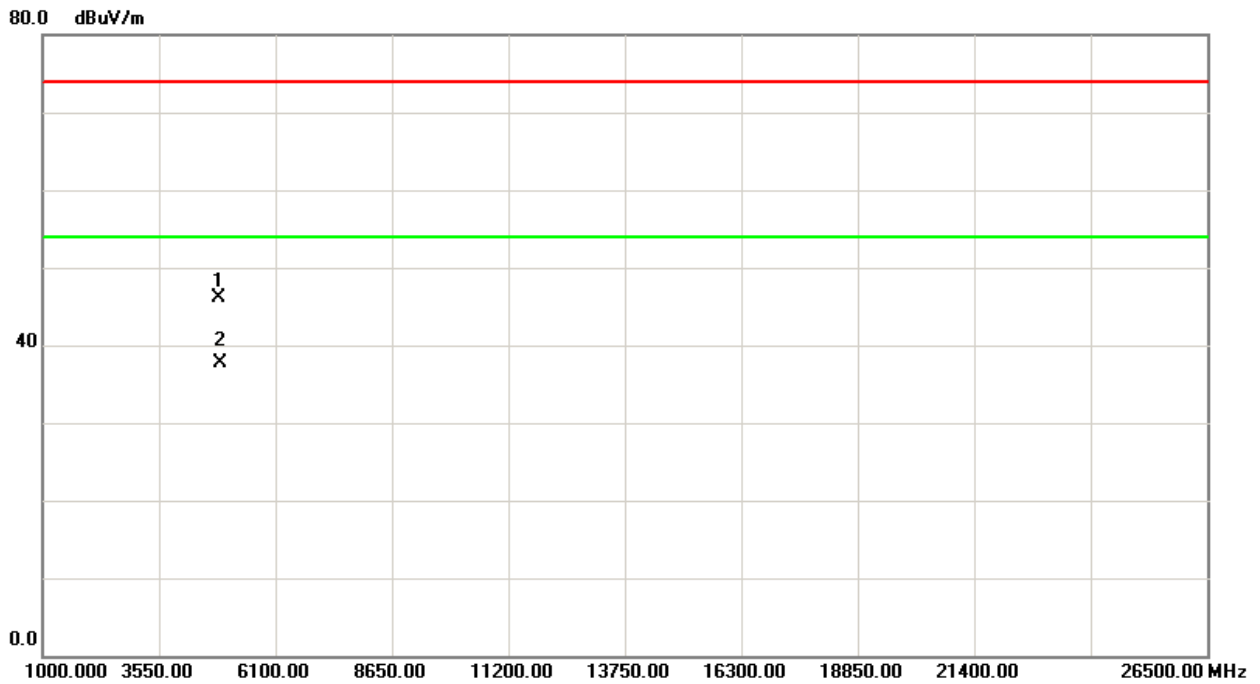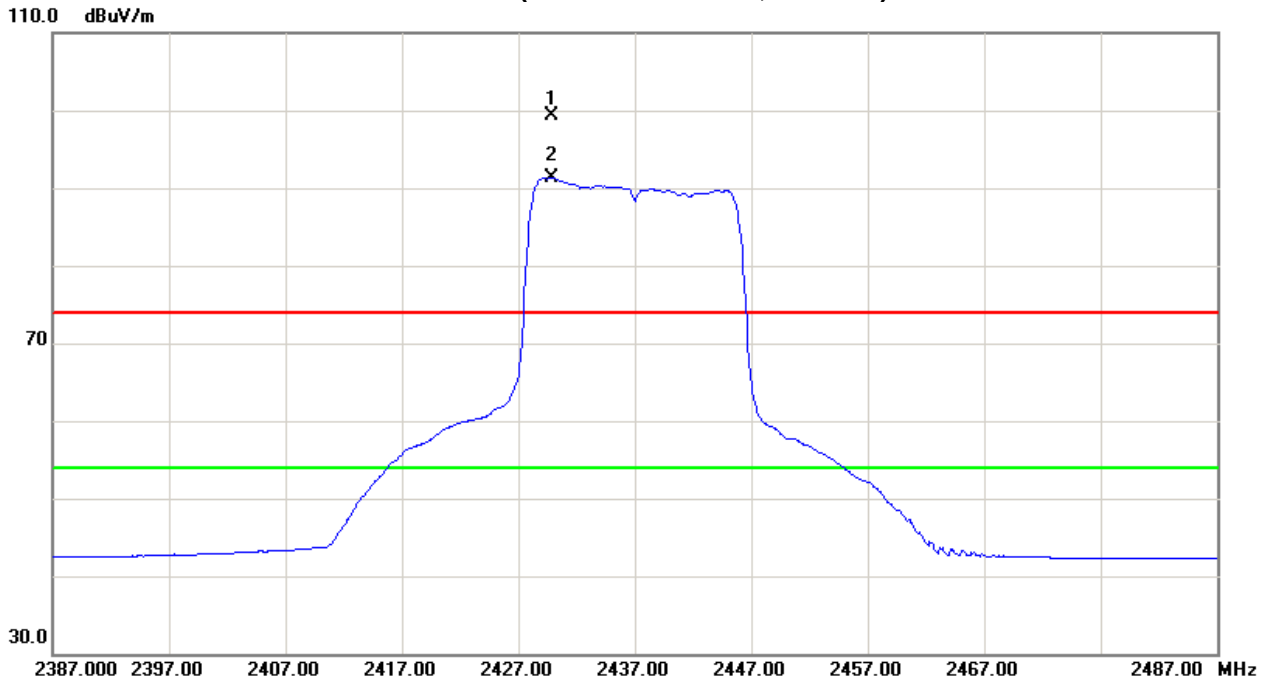




TX CH06 (Above 1000 MHz, Horizontal)

110.0 dBuV/m

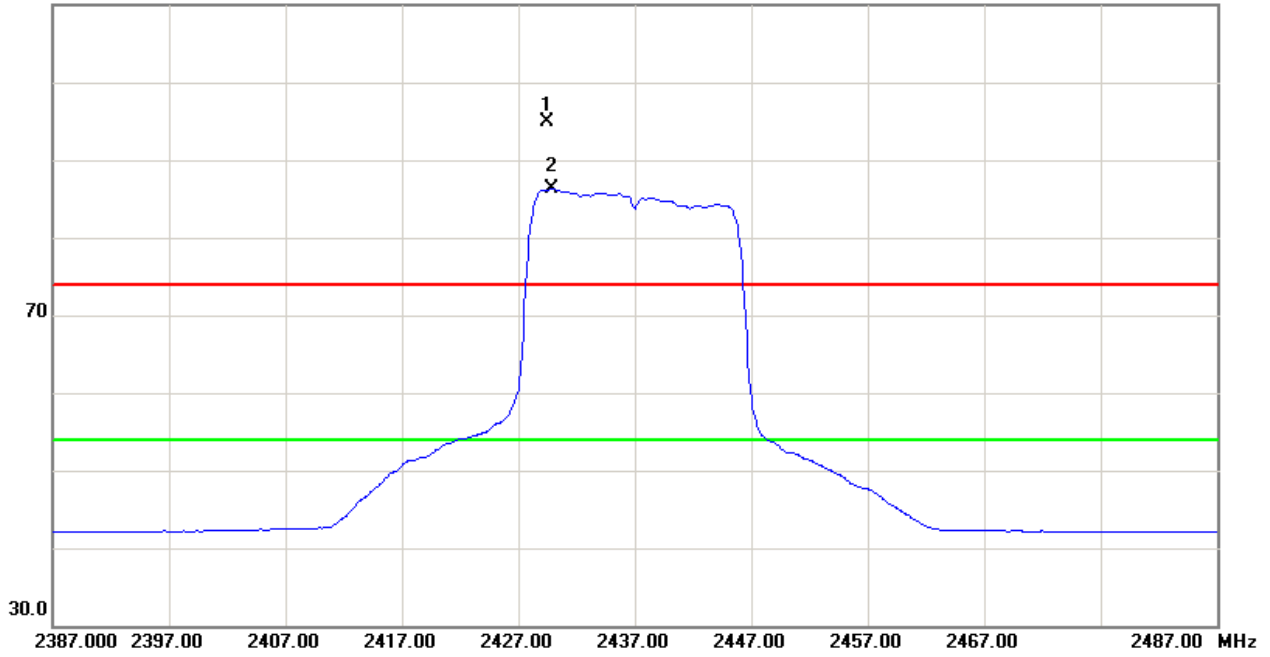


80.0 dBuV/m

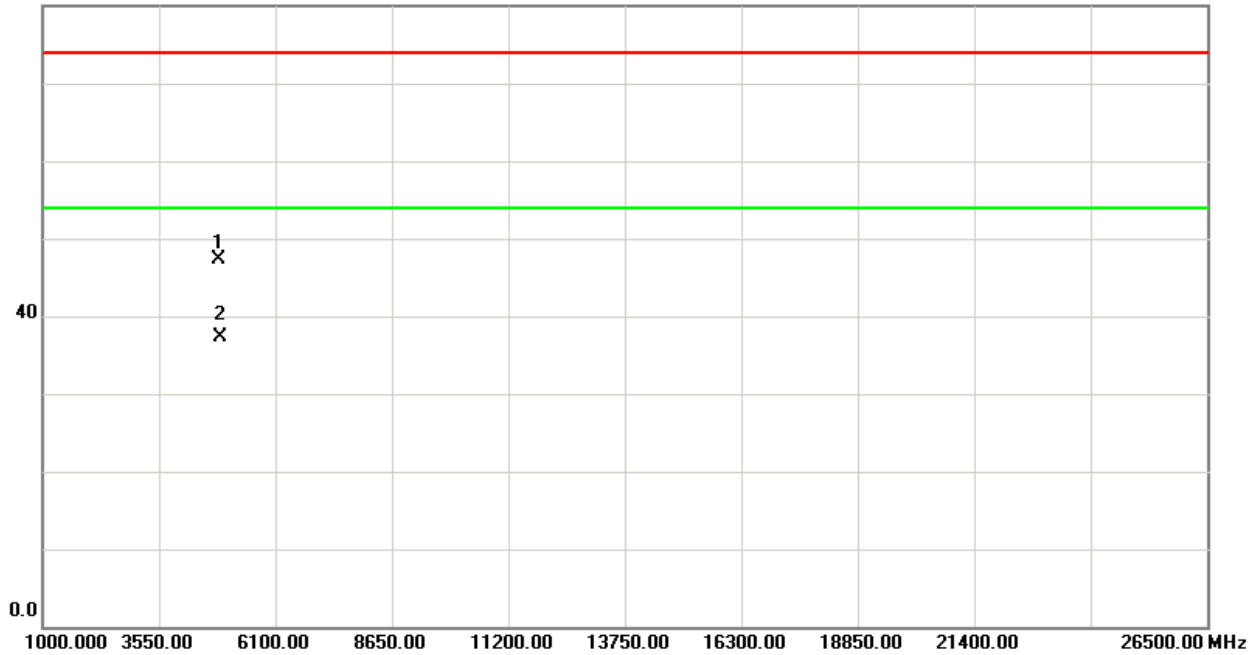




TX CH11 (Above 1000 MHz, Vertical)

110.0 dBuV/m


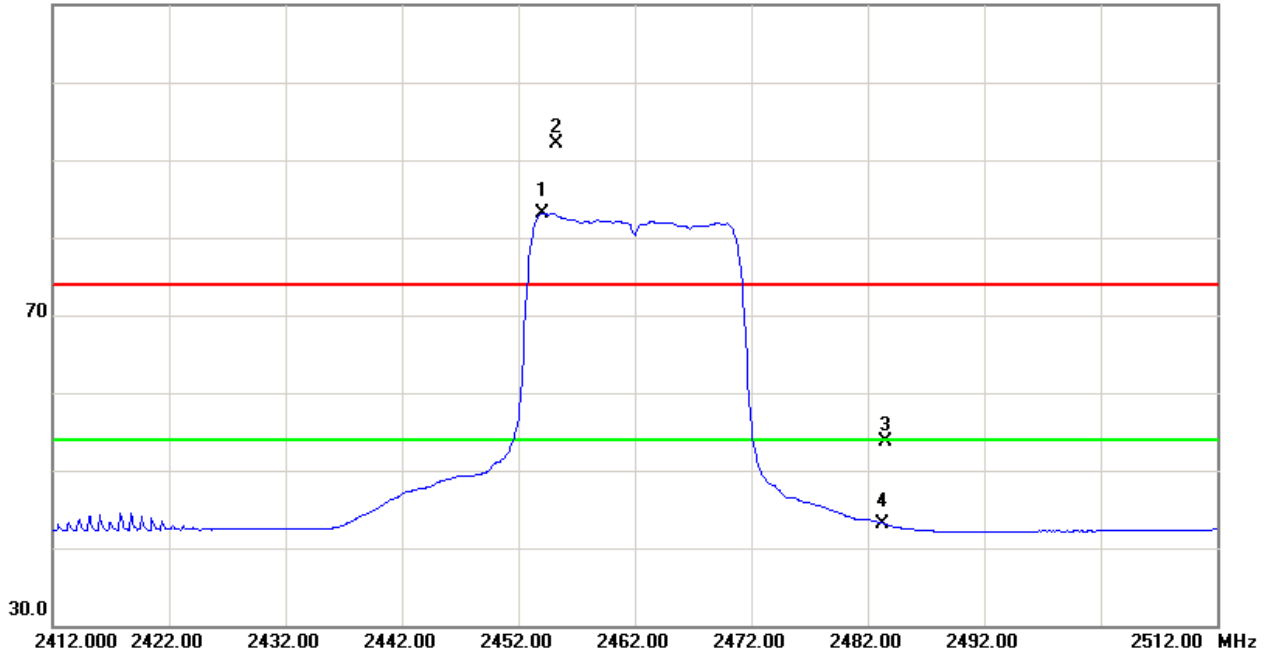


80.0 dBuV/m

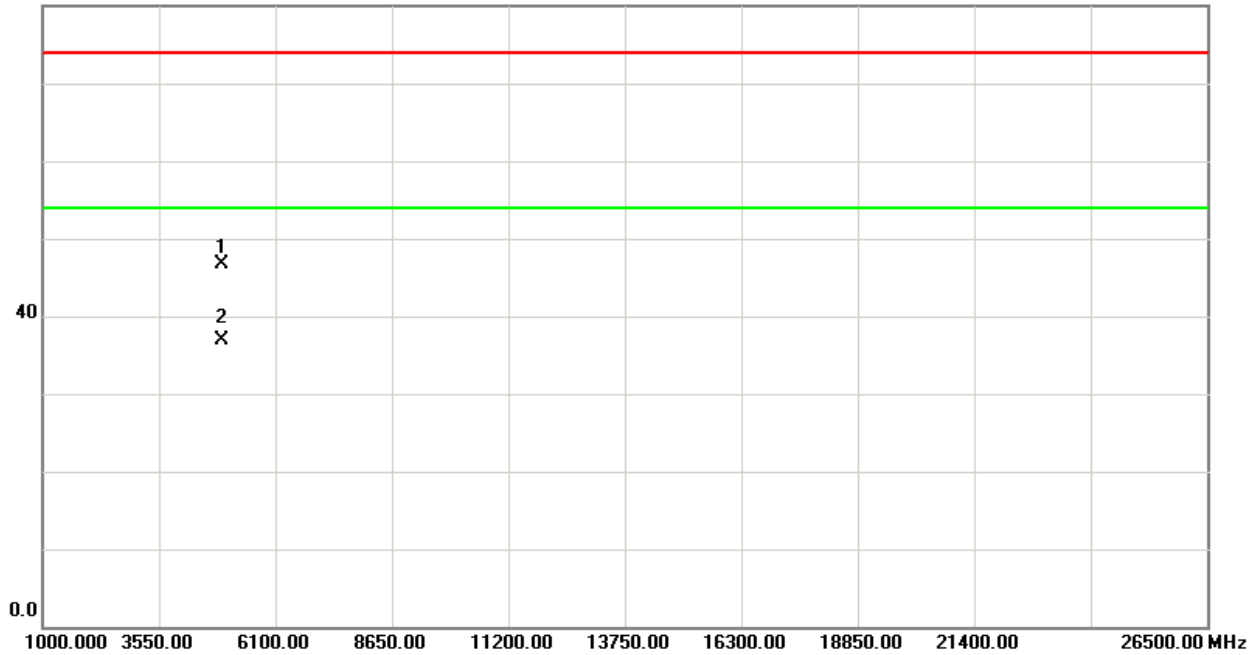



TX CH11 (Above 1000 MHz, Horizontal)

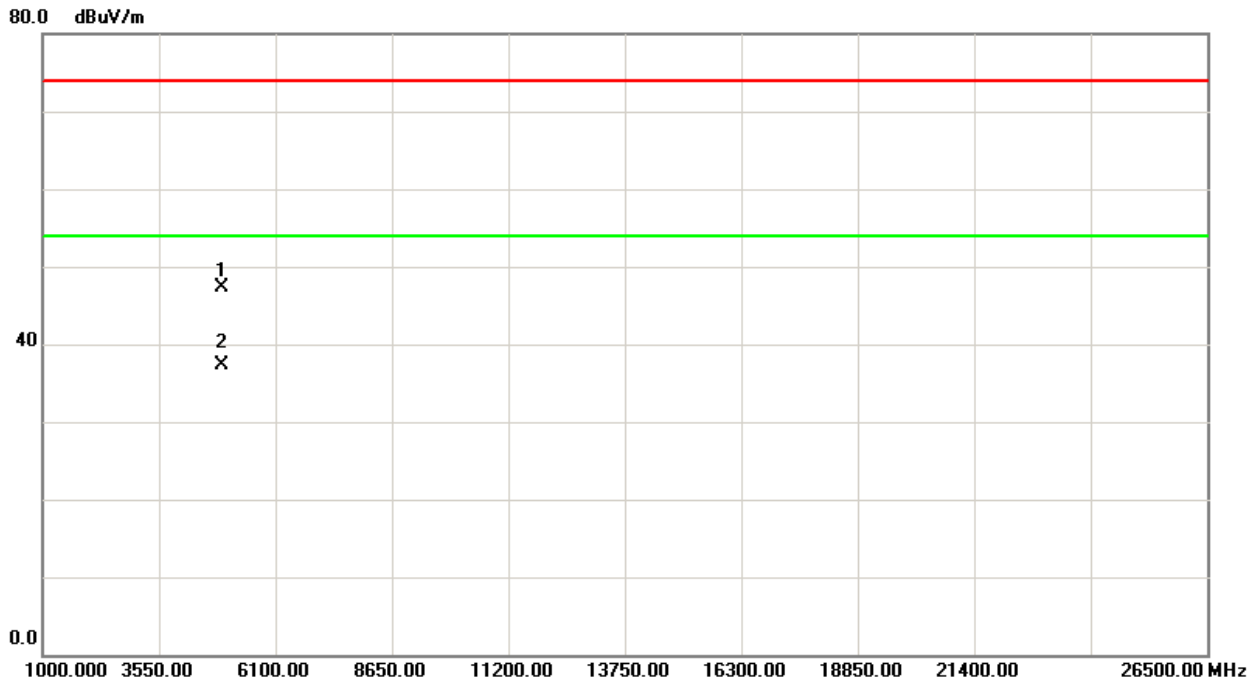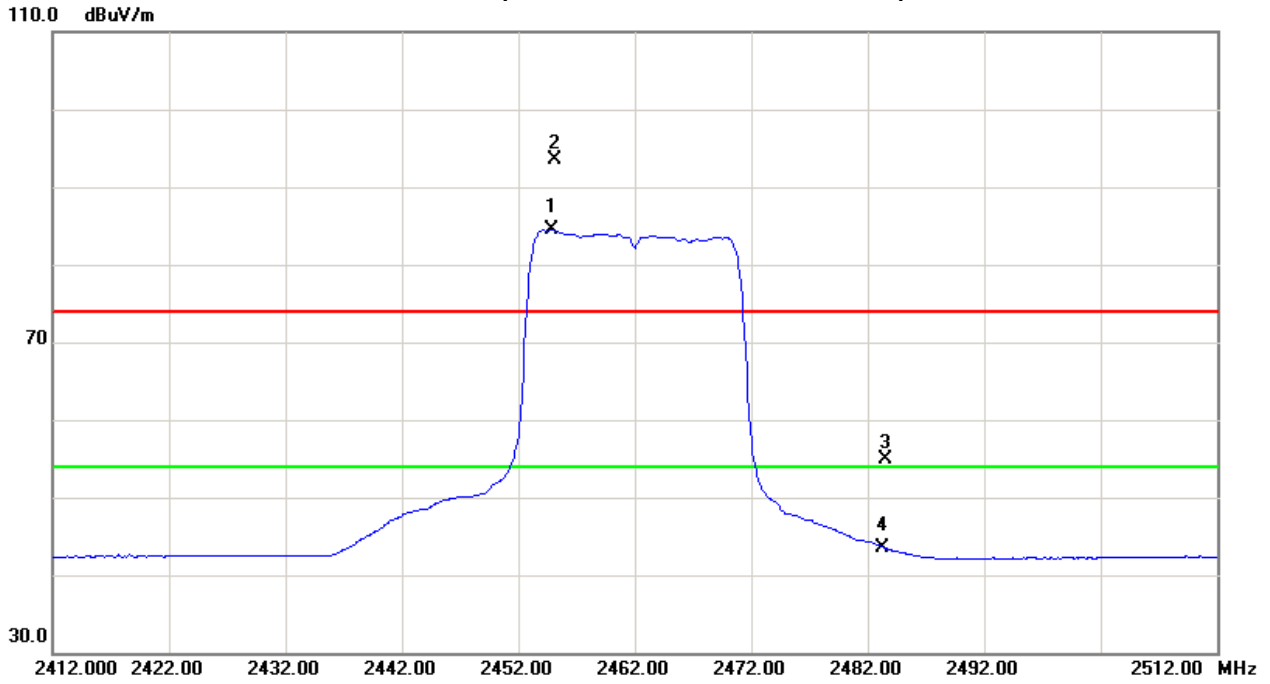



Test Mode :	TX N-40M MODE 2422MHZ	Test date:	Feb. 16, 2014
-------------	-----------------------	------------	---------------

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2390.00	V	34.70	21.80	28.82	63.52	50.62	74.00	54.00	X/E
2416.60	V	67.63	57.44	28.87	96.50	86.31			X/F
4843.87	V	49.79	39.86	-2.17	47.62	37.69	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2390.00	H	32.09	18.20	28.82	60.91	47.02	74.00	54.00	X/E
2414.80	H	60.31	52.48	28.87	89.18	81.35			X/F
4843.89	H	49.57	39.86	-2.17	47.40	37.69	74.00	54.00	X/H

Test Mode :	TX N-40M MODE 2437MHZ	Test date:	Feb. 16, 2014
-------------	-----------------------	------------	---------------

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2420.40	V	68.59	59.41	28.87	97.46	88.28			X/F
4874.87	V	48.57	38.60	-2.11	46.46	36.49	74.00	54.00	X/H

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)		Ant./CF CF(dB)	Act. (dBuV/m)		Limit (dBuV/m)		Note
		Peak	AV		Peak	AV	Peak	AV	
2420.40	H	63.94	54.69	28.87	92.81	83.56			X/F
4874.87	H	49.54	39.58	6.58	56.12	46.16	74.00	54.00	X/H



Neutron Engineering Inc.



Test Mode :	TX N-40M MODE 2452MHz	Test date:	Feb. 16, 2014
-------------	-----------------------	------------	---------------

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2435.60	V	67.57	58.36	28.90	96.47	87.26			X/F
2483.50	V	30.43	19.02	28.97	59.40	47.99	74.00	54.00	X/E
4904.88	V	48.58	38.53	-2.03	46.55	36.50	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2435.00	H	62.87	53.01	28.90	91.77	81.91			X/F
2483.50	H	27.52	15.78	28.97	56.49	44.75	74.00	54.00	X/E
4904.88	H	49.47	39.47	-2.03	47.44	37.44	74.00	54.00	X/H





TX CH03 (Above 1000 MHz, Vertical)

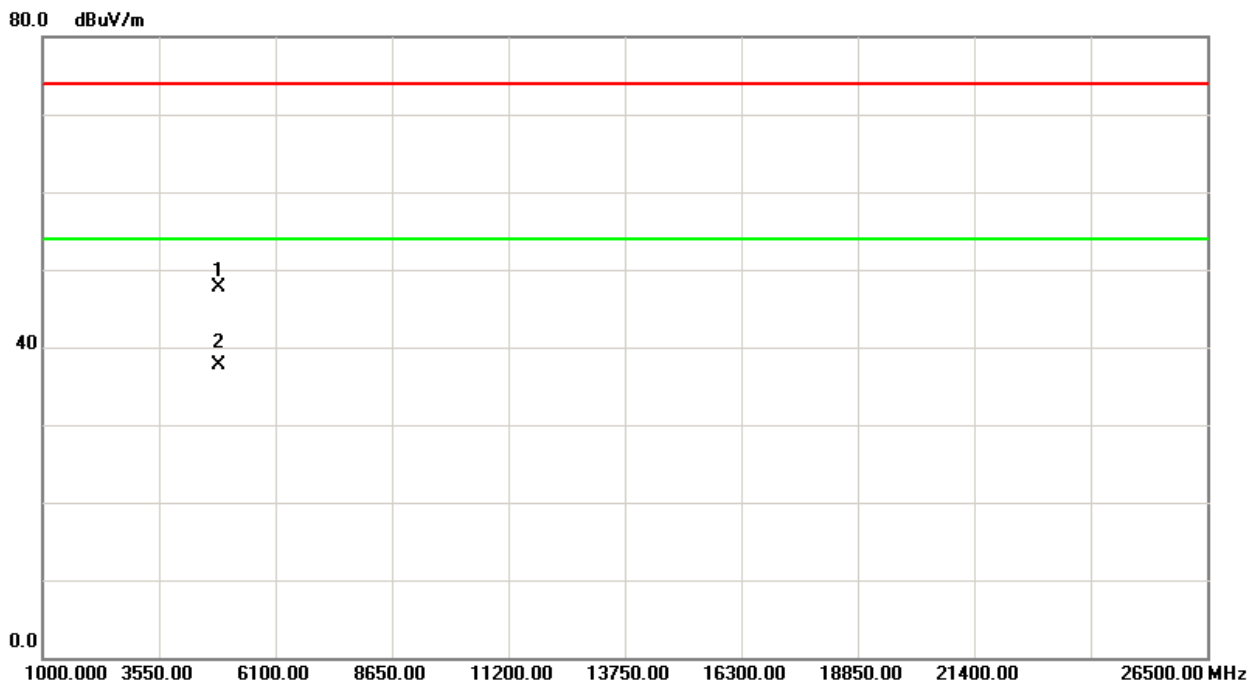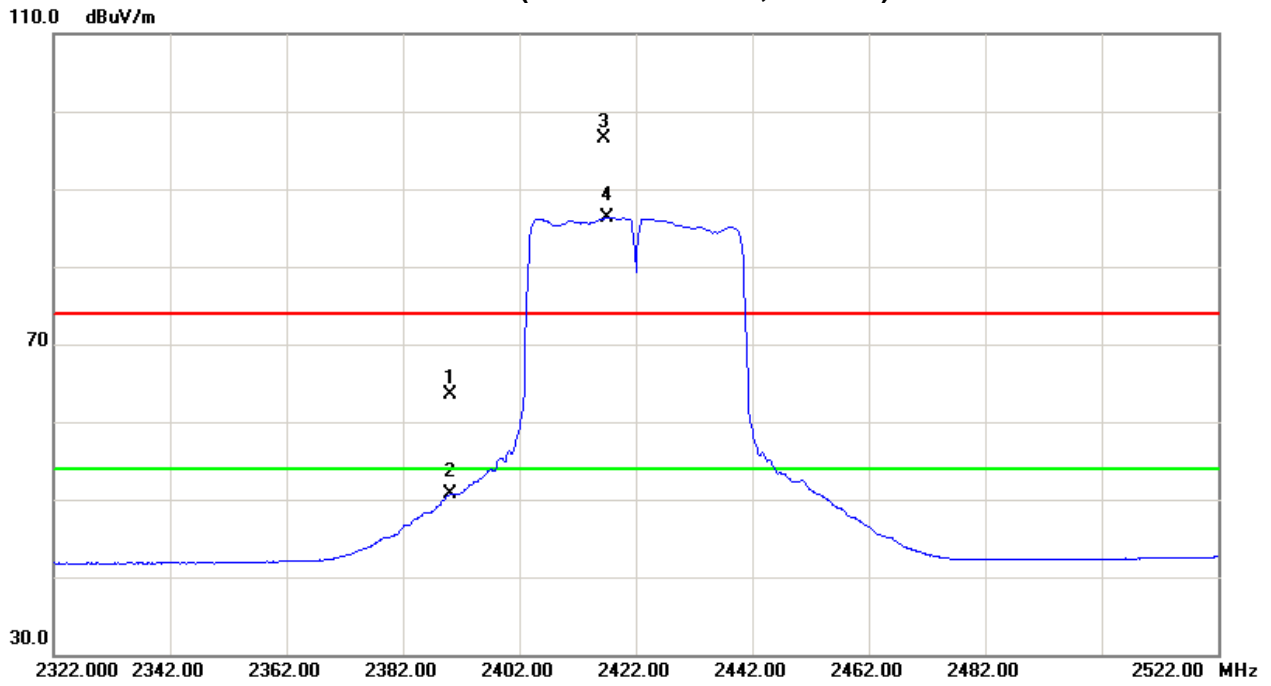





TX CH03 (Above 1000 MHz, Horizontal)

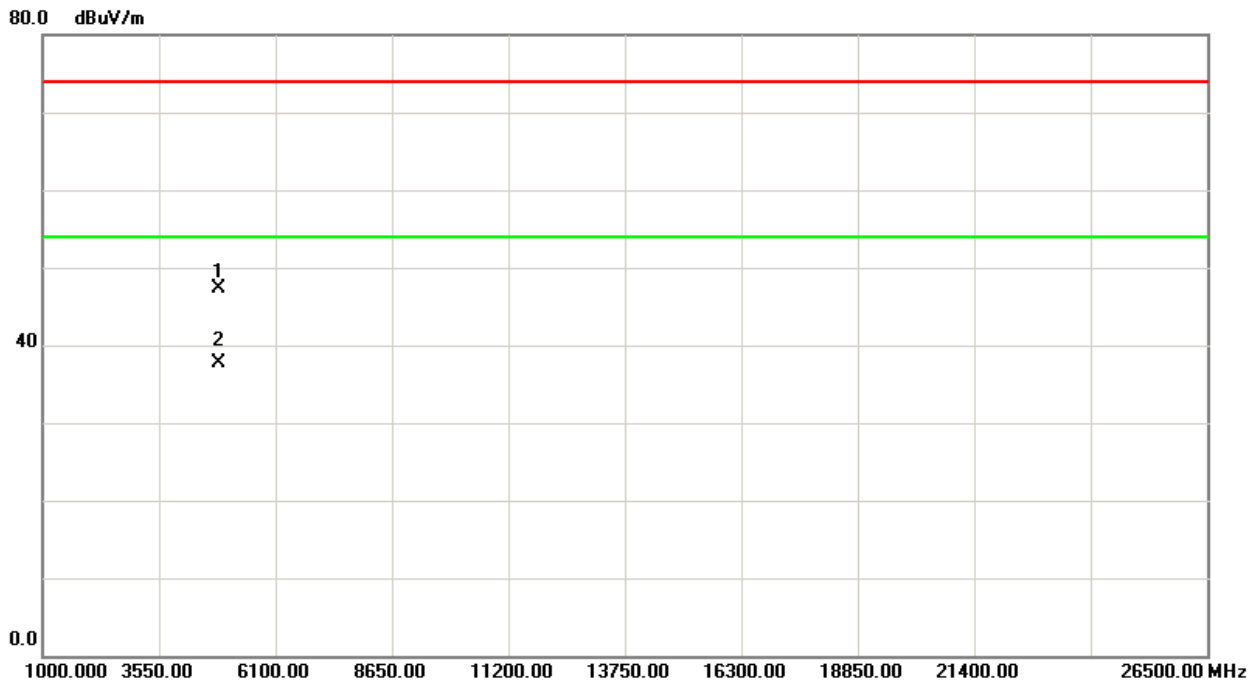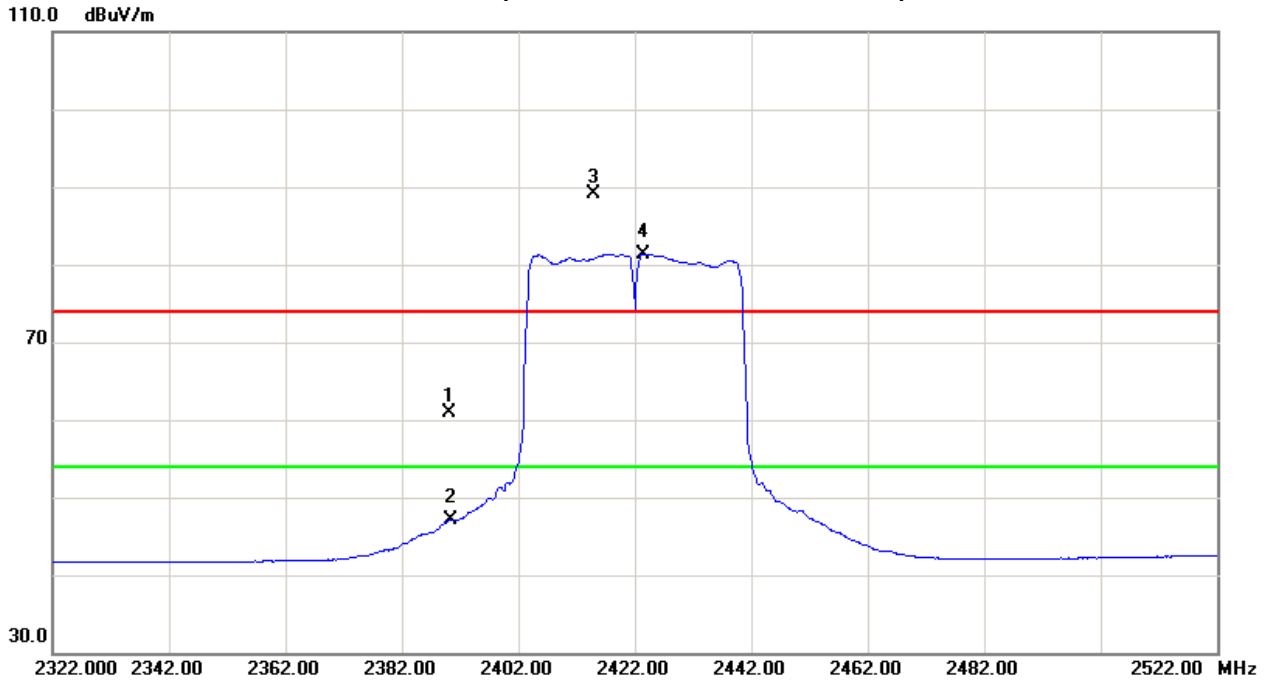




TX CH06 (Above 1000 MHz, Vertical)

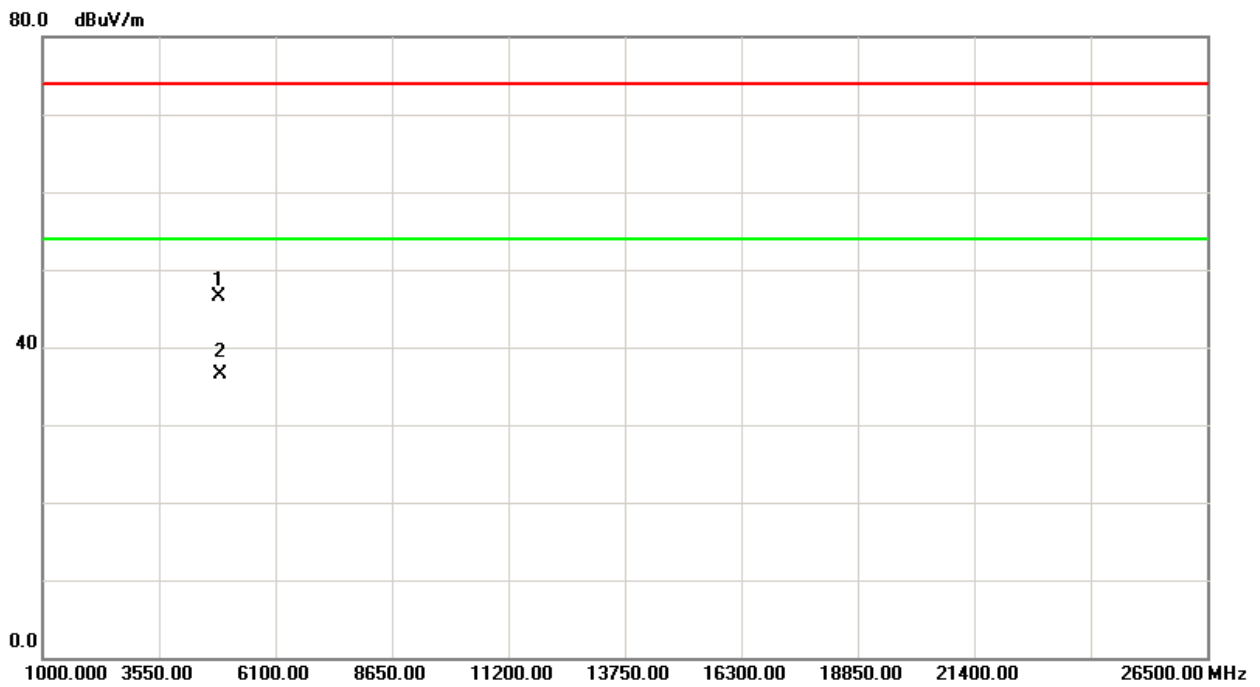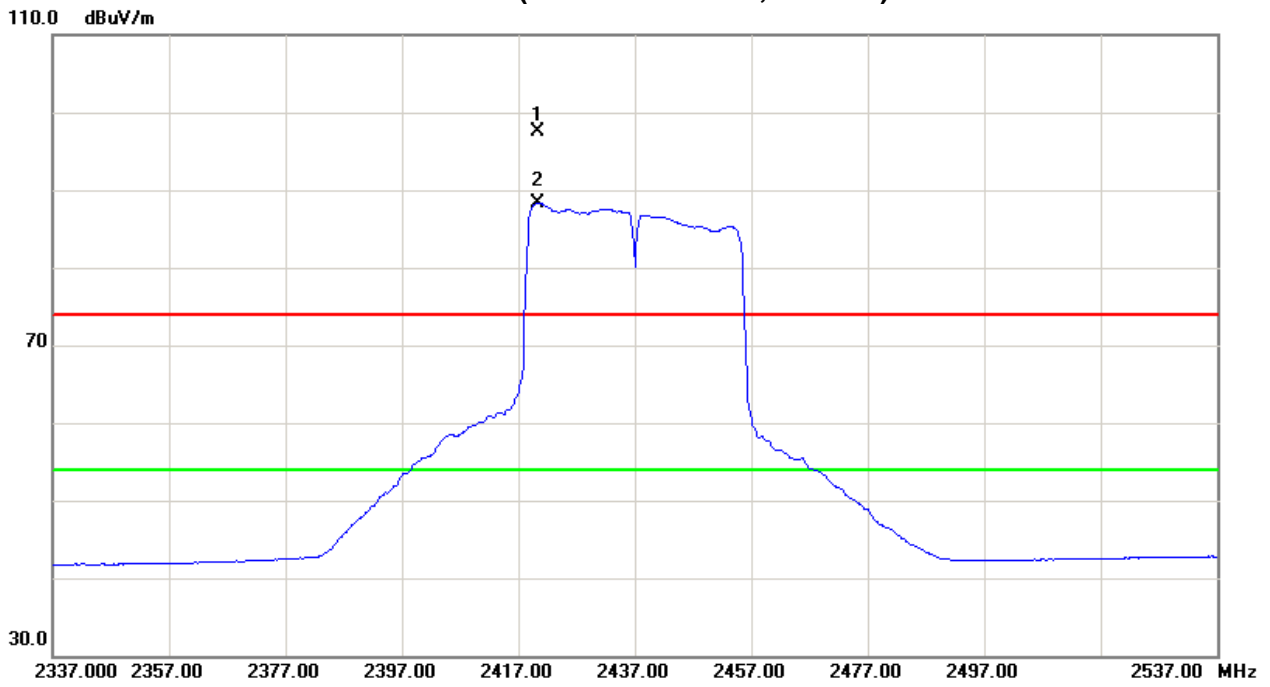




TX CH06 (Above 1000 MHz, Horizontal)

110.0 dBuV/m


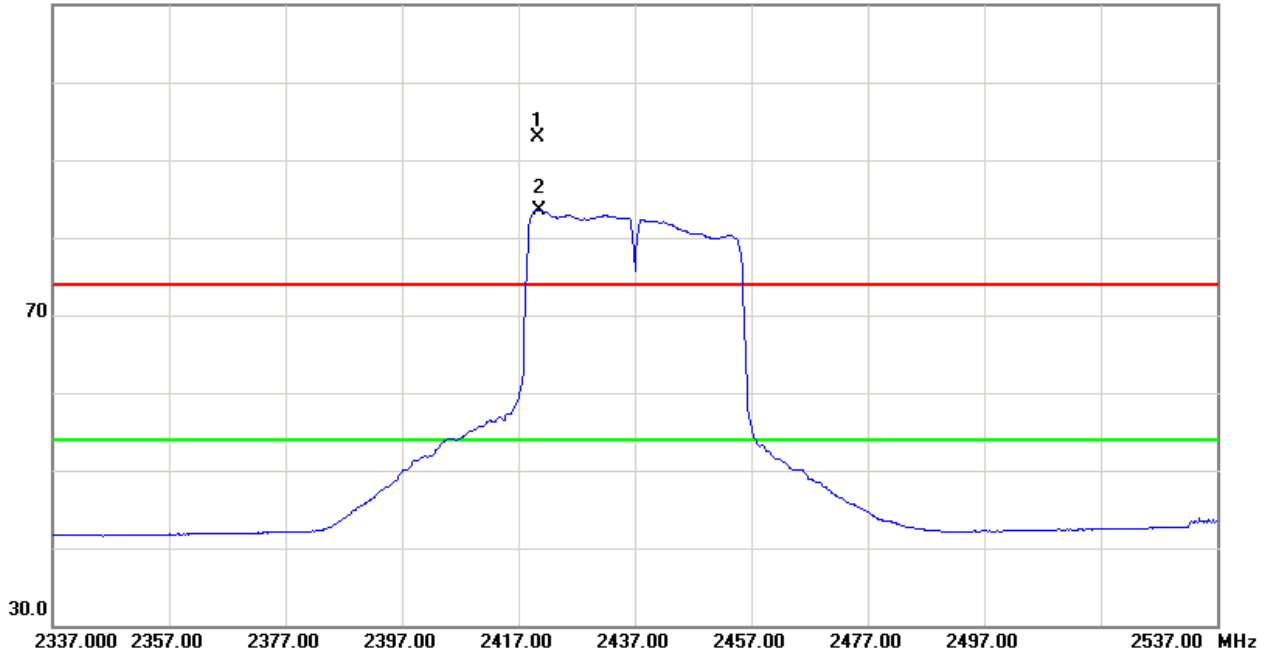


80.0 dBuV/m

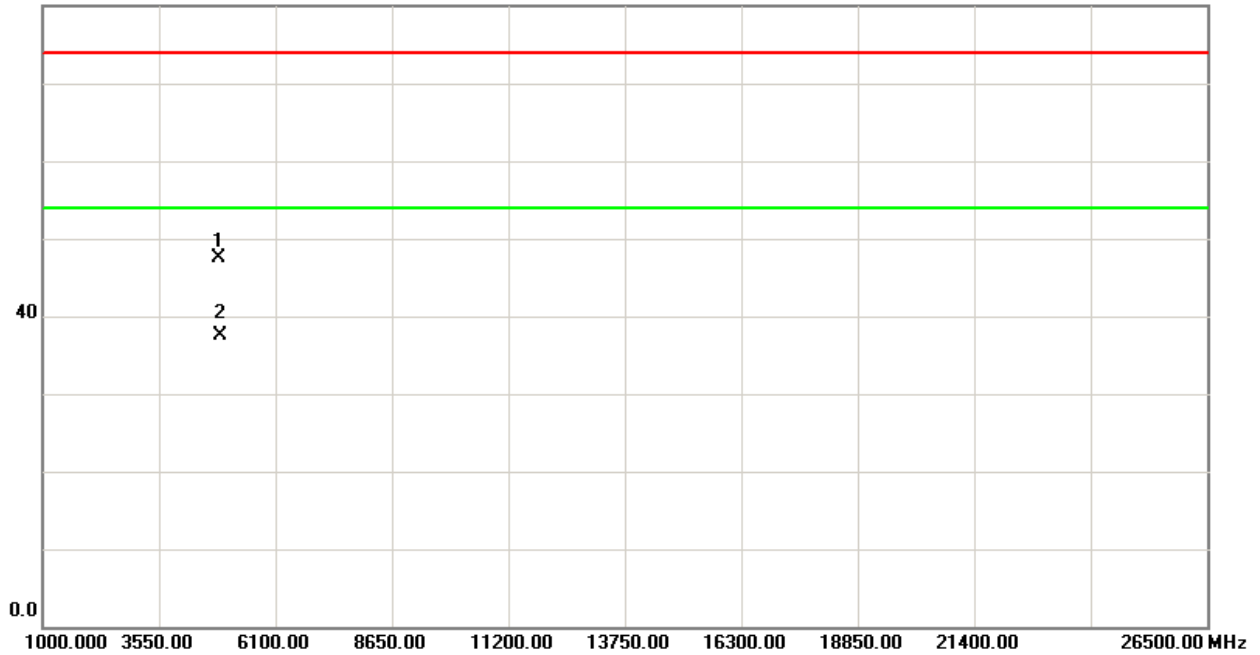





TX CH09 (Above 1000 MHz, Vertical)

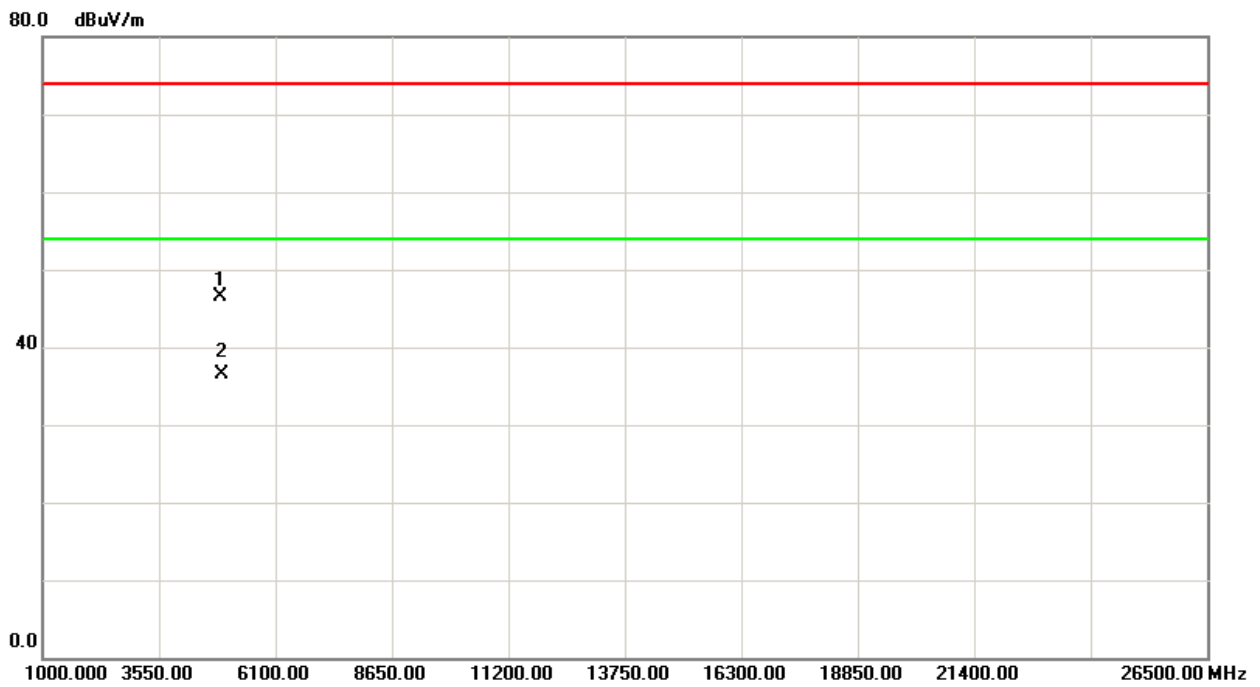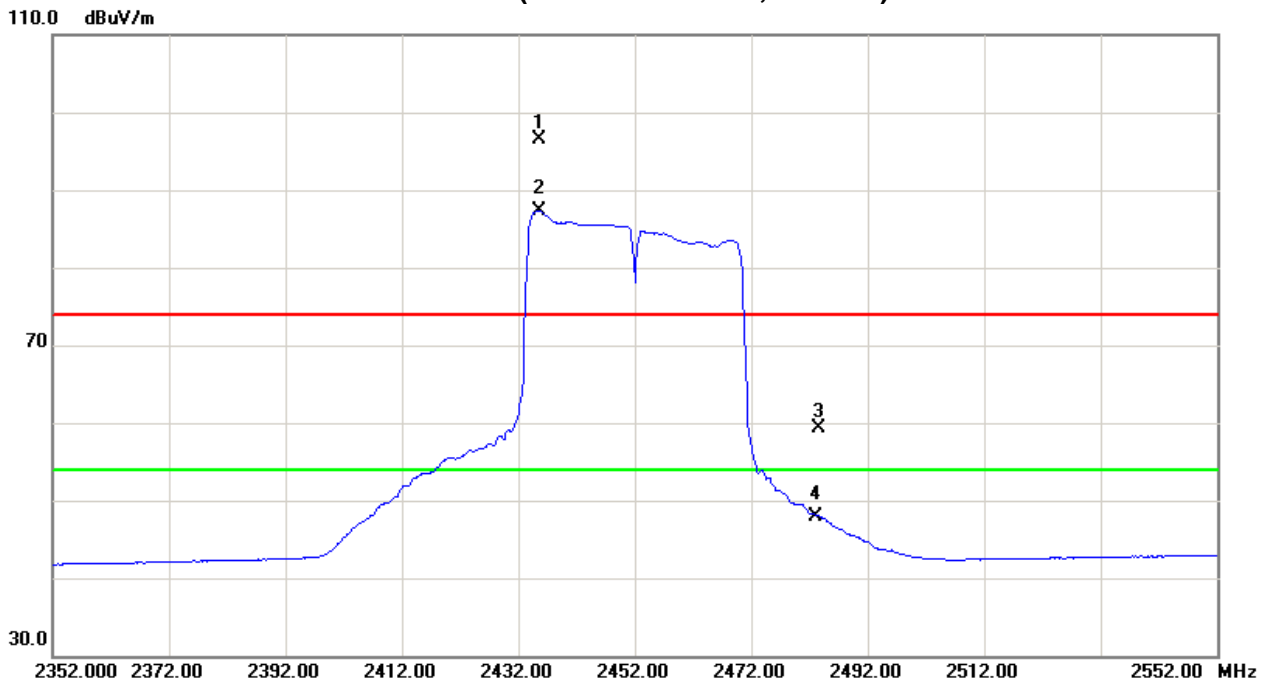



TX CH09 (Above 1000 MHz, Horizontal)

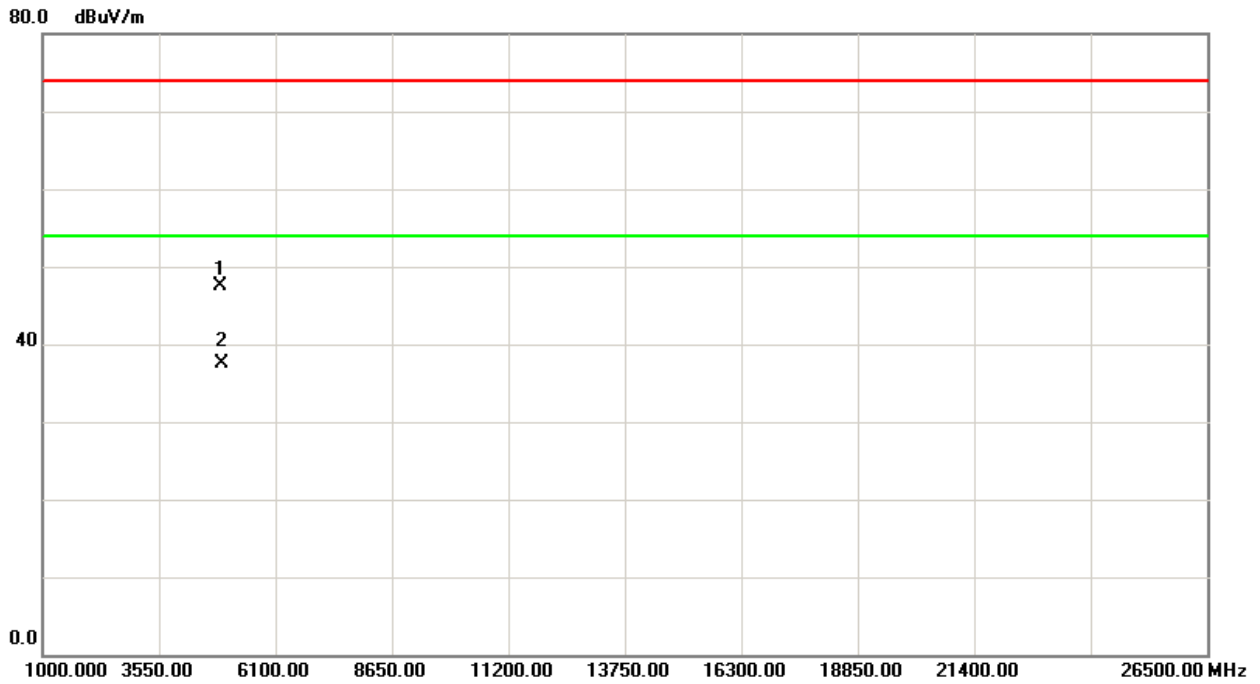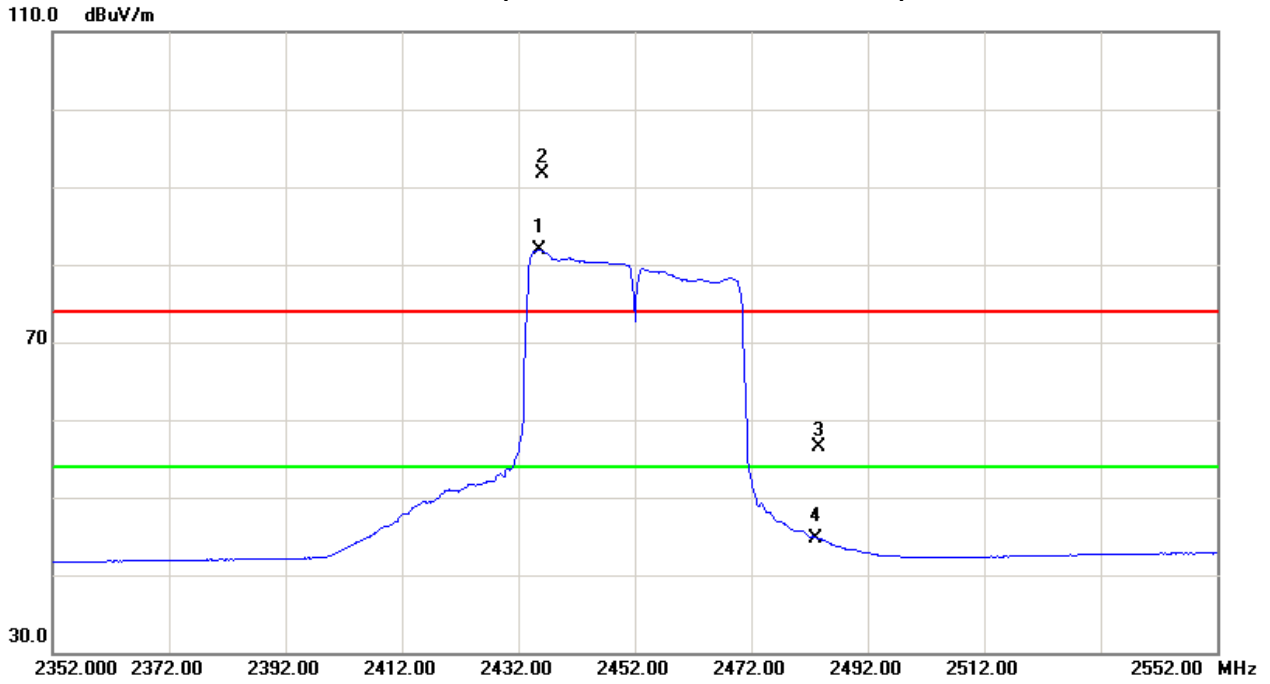



5. BANDWIDTH TEST

5.1 Applied procedures

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2) RSS-GEN section 4.6.1 RSS-210 Annex 8 (A8.2(a))	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS


Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3.8V





5.1.6 TEST RESULTS

Test date:	Feb. 13, 2014
------------	---------------

Test Mode : TX B Mode				
Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
CH01	2412	10.02	12.30	PASS
CH06	2437	9.98	12.26	PASS
CH11	2462	9.98	12.30	PASS

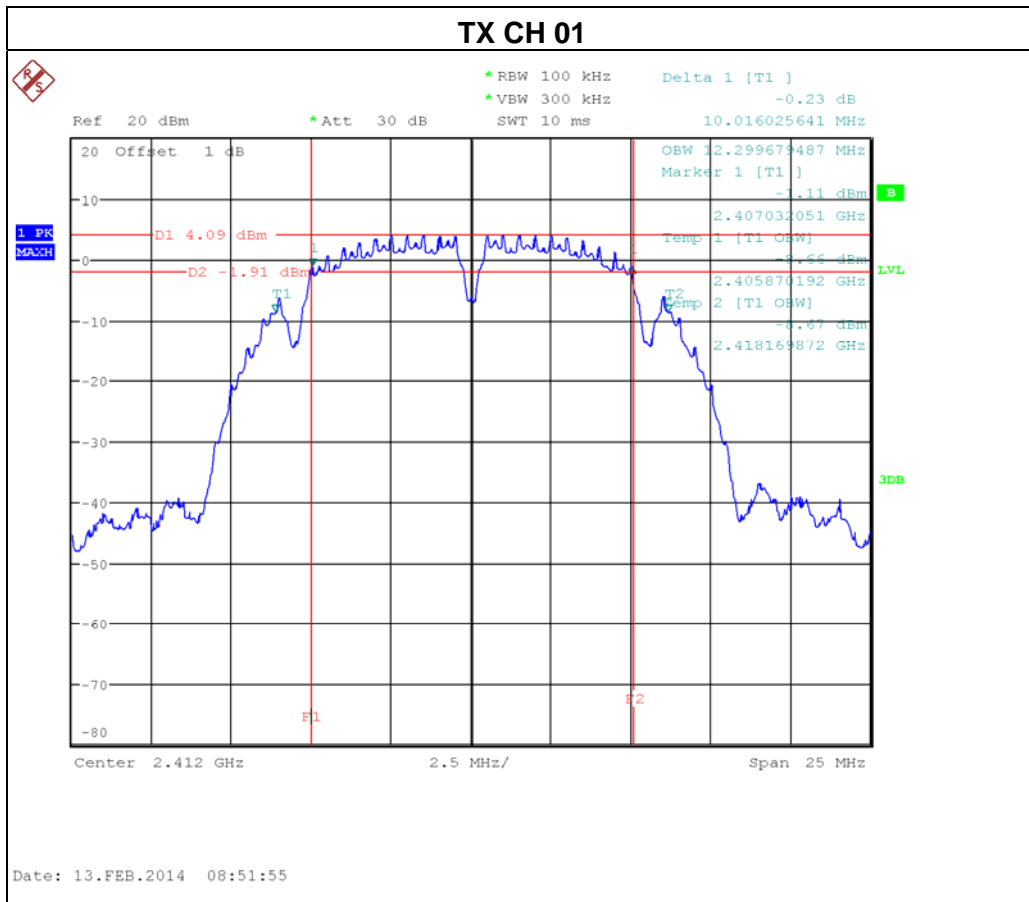


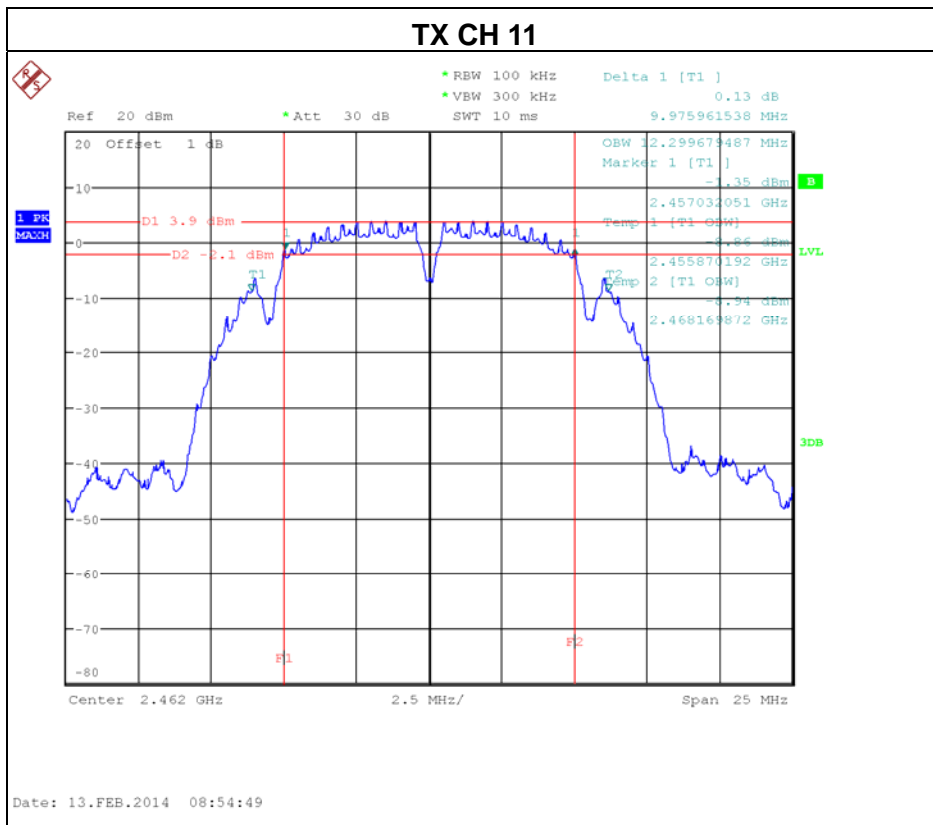
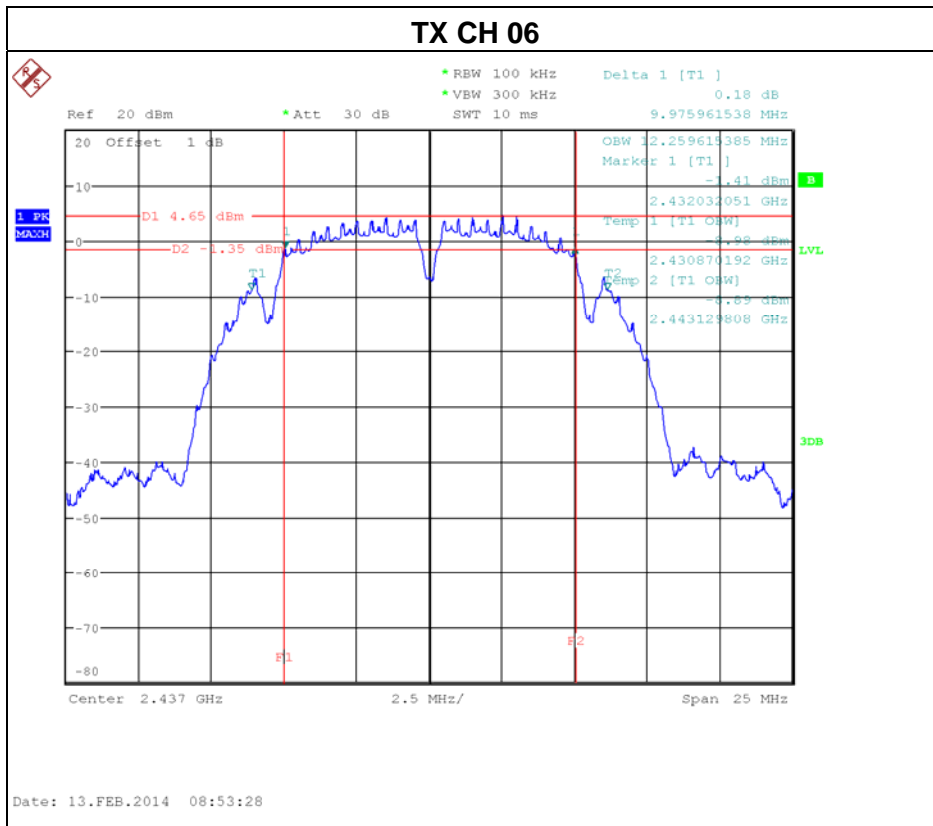




Test date: Feb. 13, 2014

Test Mode: TX G Mode				
Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
CH01	2412	16.31	16.51	PASS
CH06	2437	16.35	16.51	PASS
CH11	2462	16.35	16.51	PASS

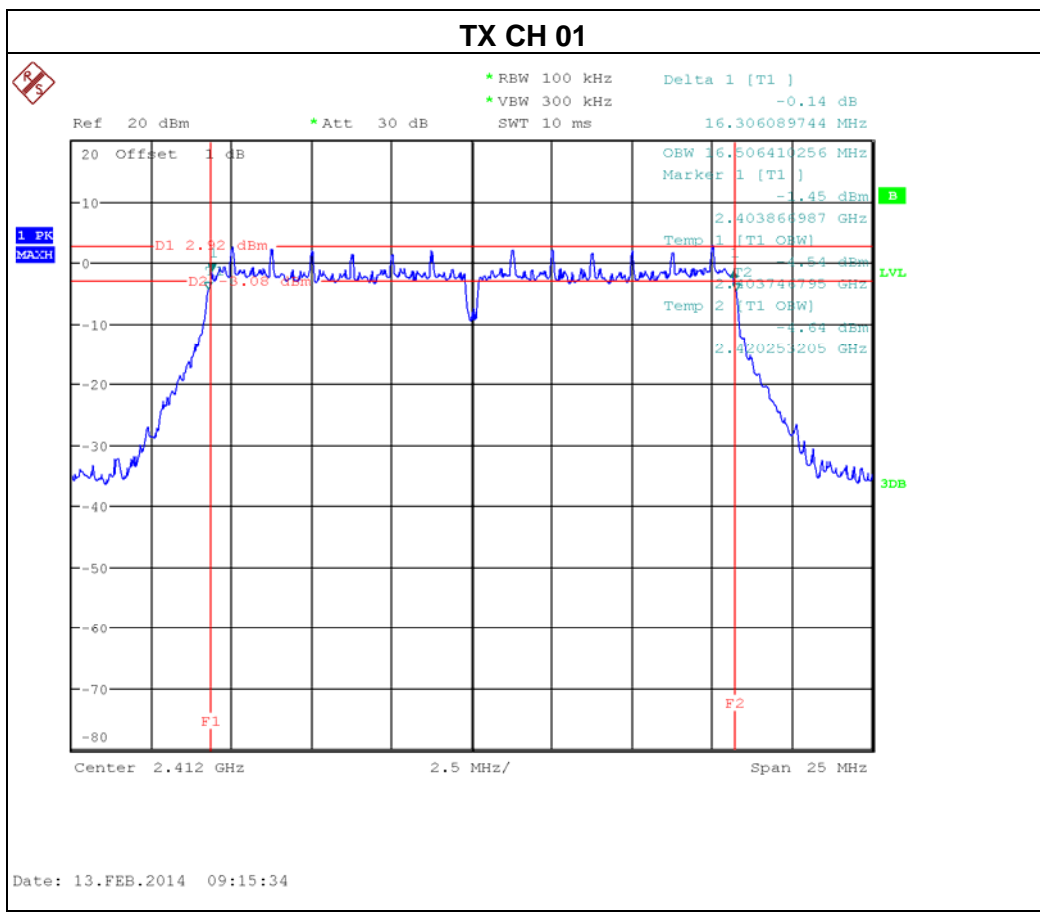


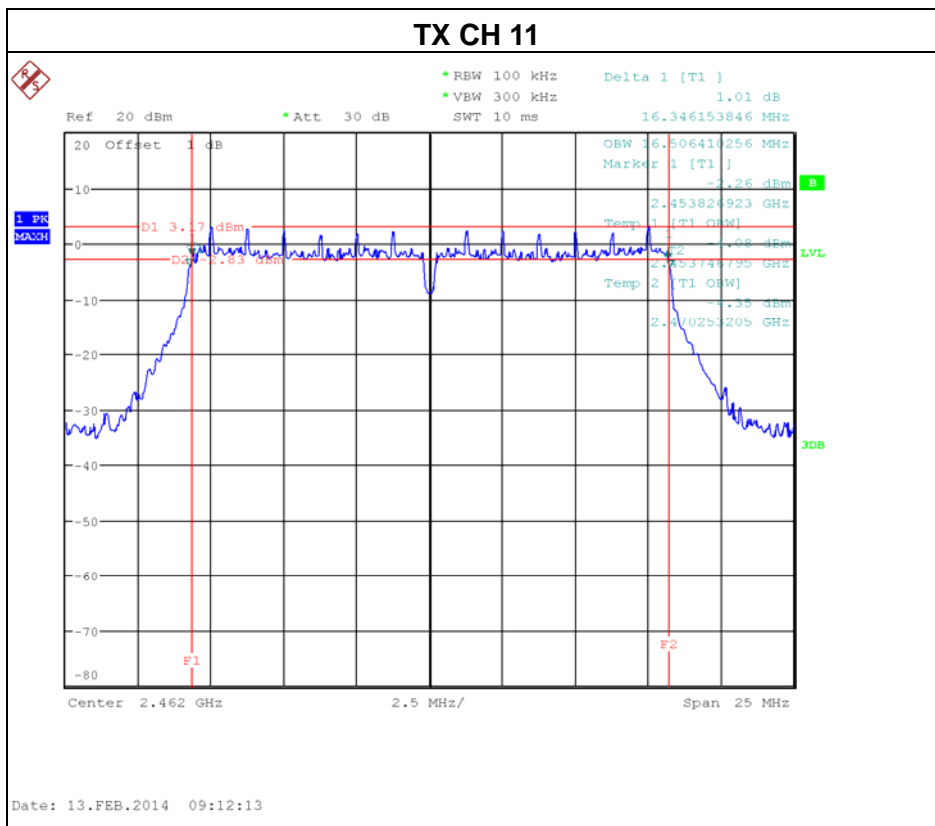
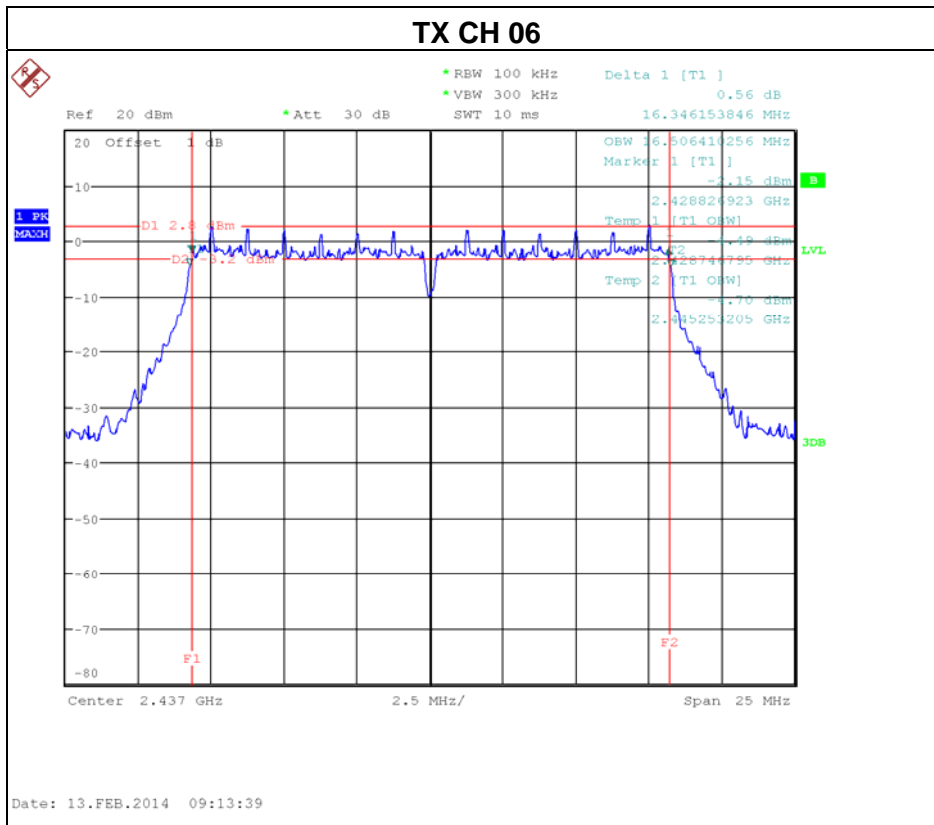




Test date:	Feb. 13, 2014
------------	---------------

Test Mode : TX N-20MHz Mode				
Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
CH01	2412	17.23	17.63	PASS
CH06	2437	17.15	17.54	PASS
CH11	2462	17.07	17.59	PASS

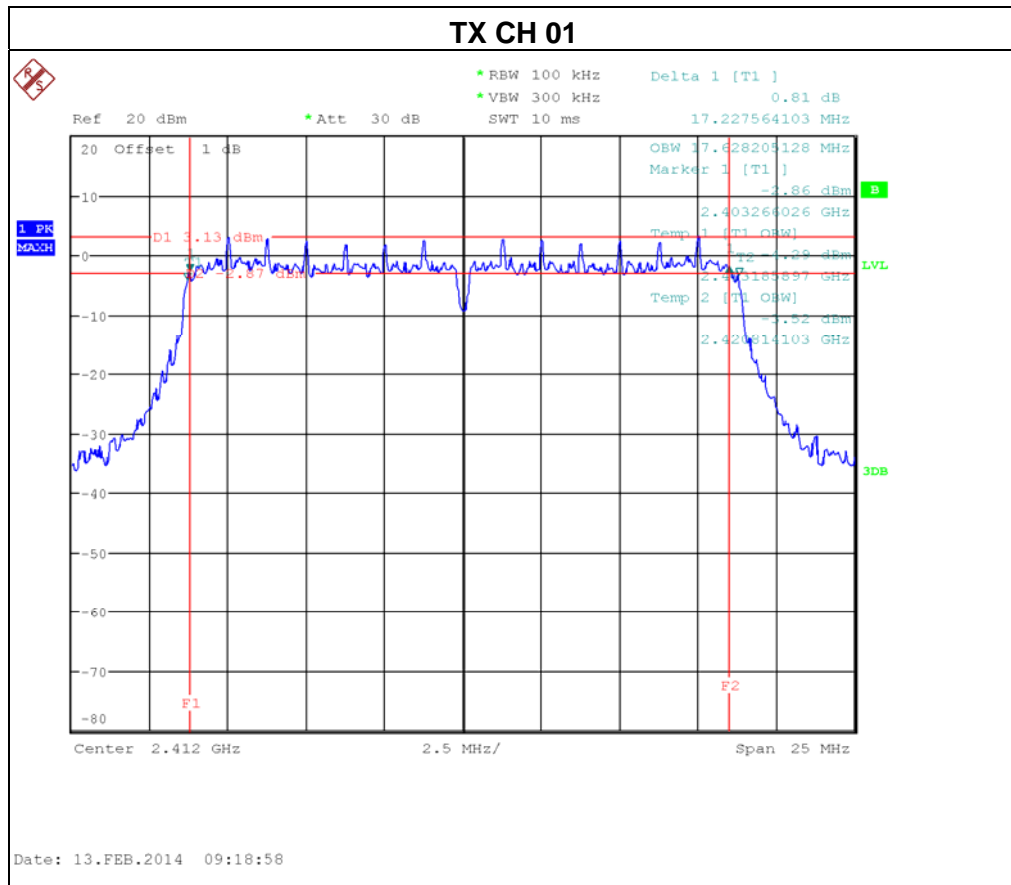


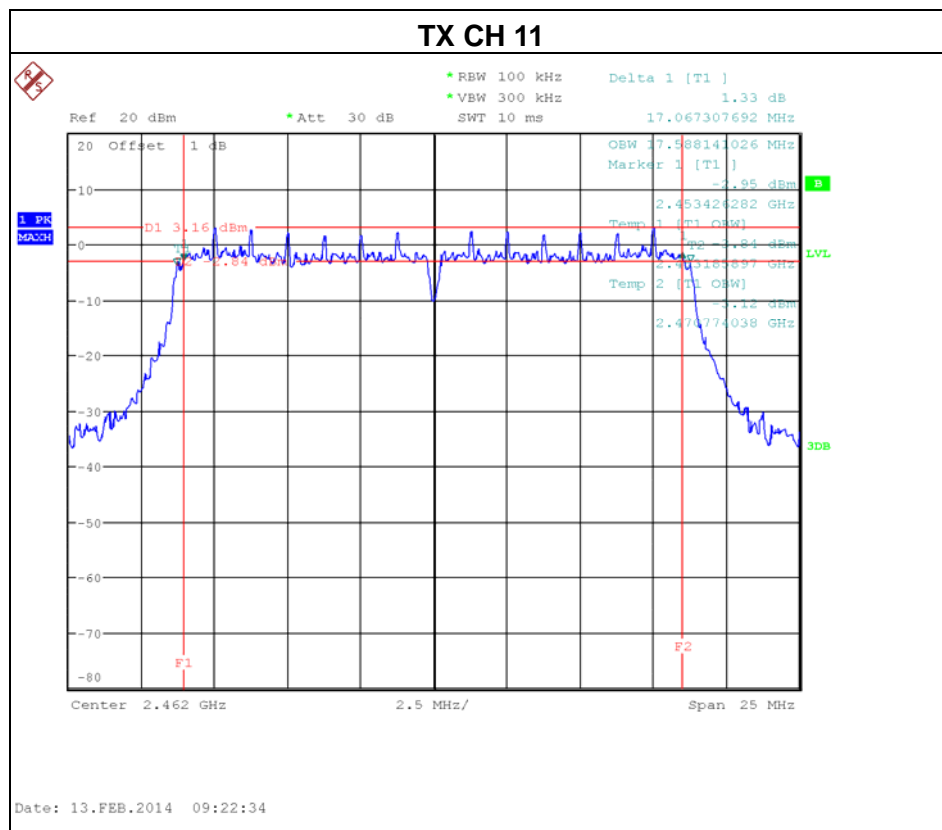
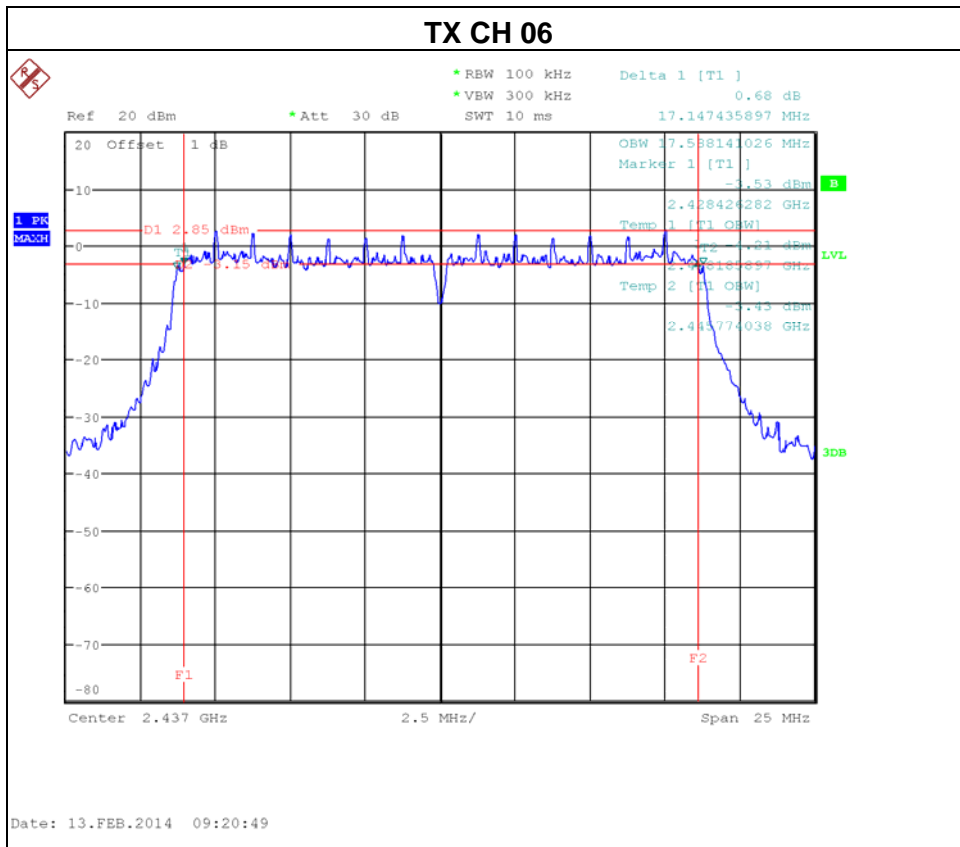




Test date: Feb. 13, 2014

Test Mode : TX N-40MHz Mode				
Test Channel	Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
CH03	2422	35.96	36.40	PASS
CH06	2437	35.87	36.23	PASS
CH09	2452	35.70	36.23	PASS

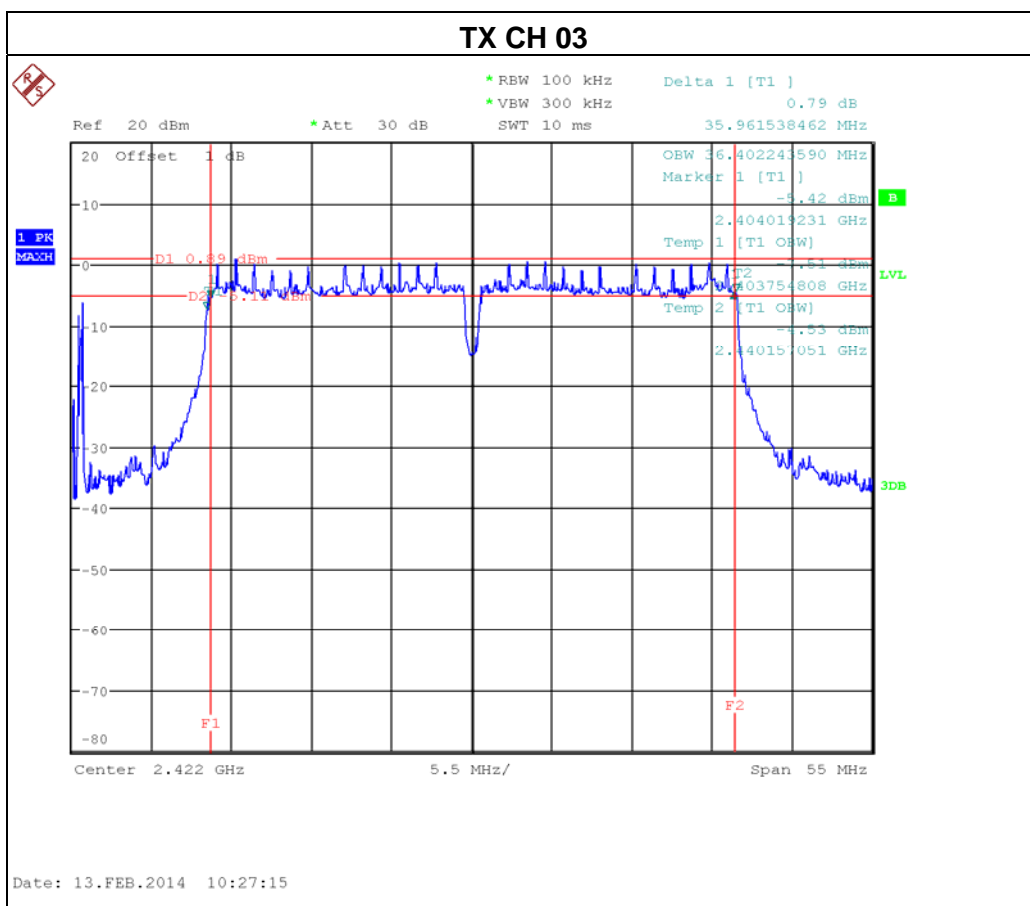

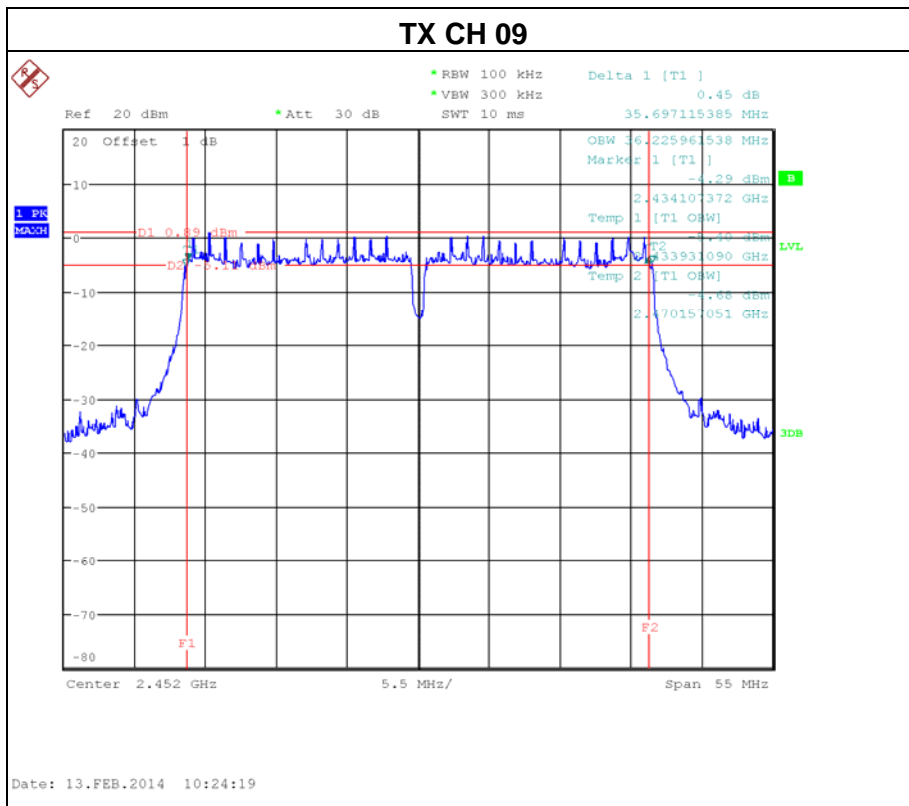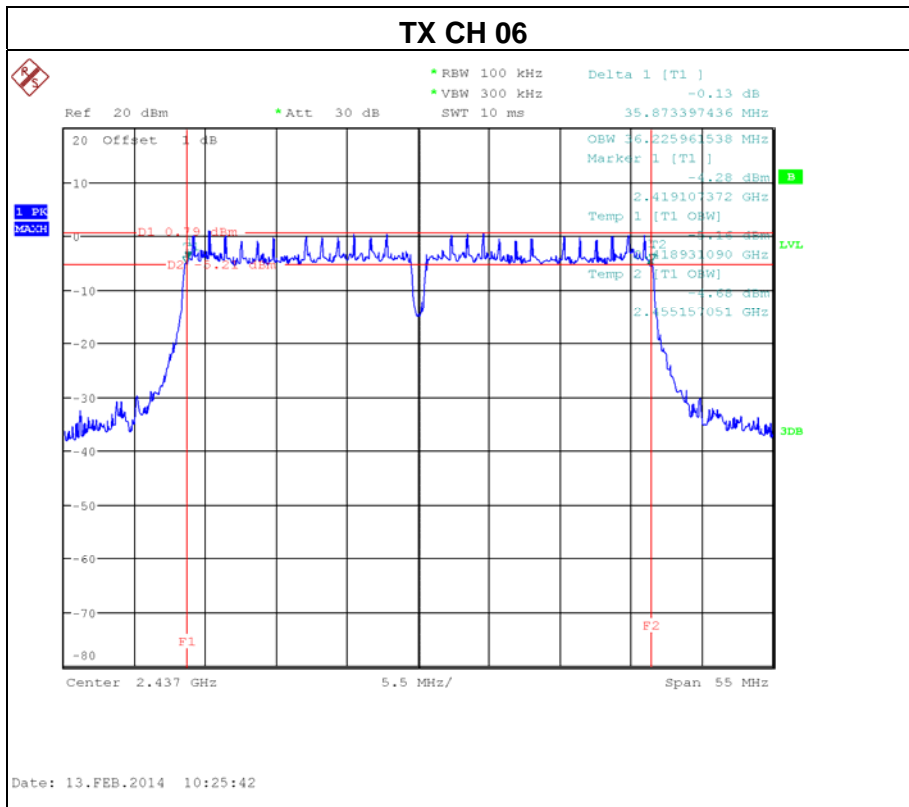



6. MAXIMUM OUTPUT POWER TEST

6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C/ RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS-210 Annex 8.4(4)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.3 of FCC KDB 558074 D01 DTS Meas Guidance v03r01.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing. Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3.8V



6.1.6 TEST RESULTS

Test date:	Feb. 13, 2014
------------	---------------

Test Mode : TX B Mode				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	19.44	30	1
CH06	2437	19.37	30	1
CH11	2462	19.46	30	1

Test Mode : TX G Mode				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	24.65	30	1
CH06	2437	24.59	30	1
CH11	2462	24.63	30	1

Test Mode : TX N-20M Mode				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	24.44	30	1
CH06	2437	24.21	30	1
CH11	2462	24.25	30	1

Test Mode : TX N-40M Mode				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH03	2422	24.65	30	1
CH06	2437	24.61	30	1
CH09	2452	24.44	30	1



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 Applied procedures / limit

20dB in any 100 KHz bandwidth outside the operating frequency band, In case the emission fall within the restricted band specified on 15.205(a) & RSS-210 section 2.2& Annex 8 (A8.5), then the 15.209(a) & RSS-GEN limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



7.1.5 EUT TEST CONDITIONS



Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3.8V







7.1.6 TEST RESULTS

Test Mode :	TX B Mode	Test date:	Feb. 13, 2014
-------------	-----------	------------	---------------

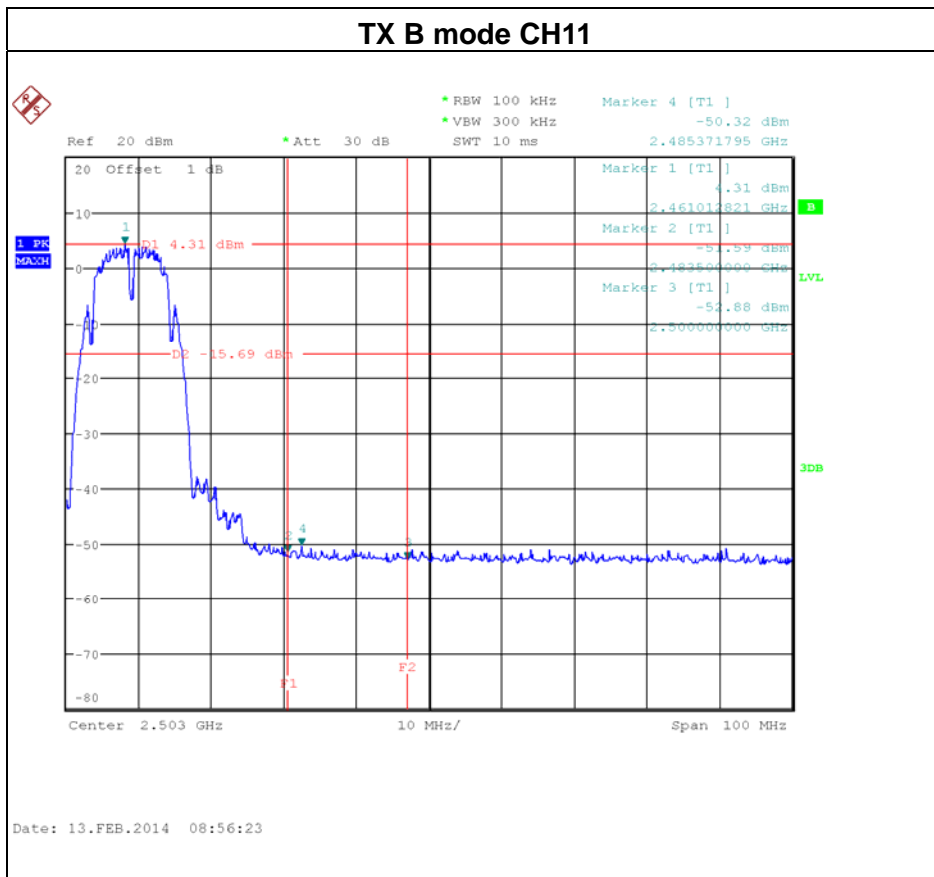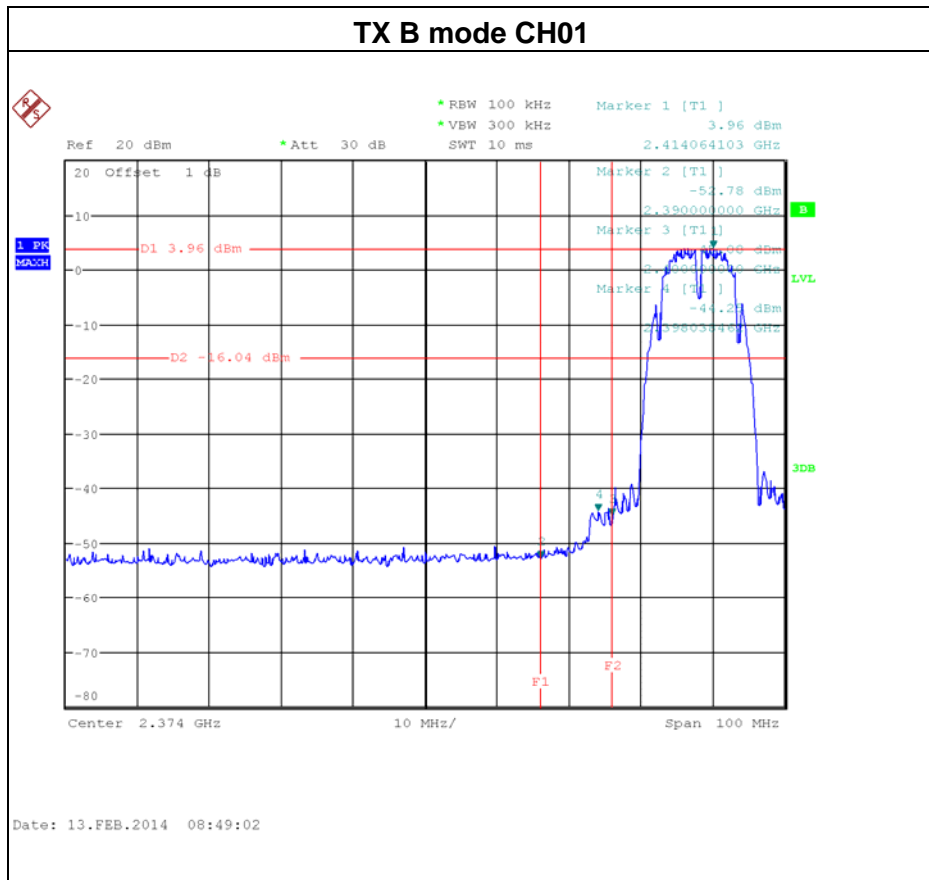

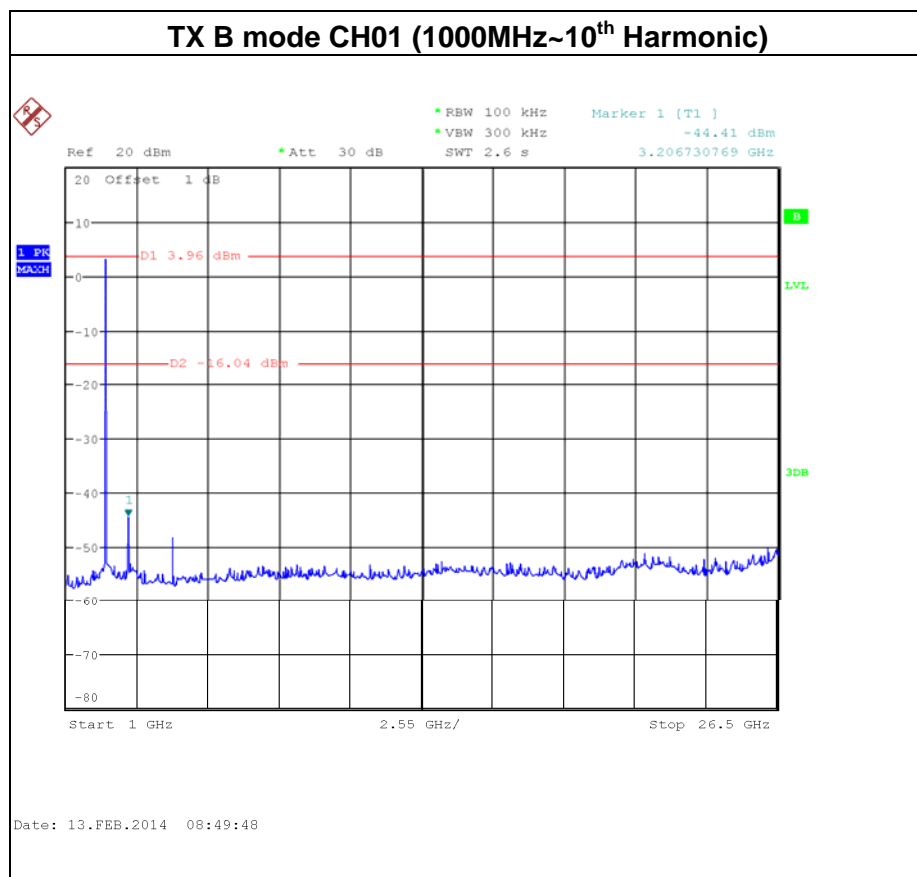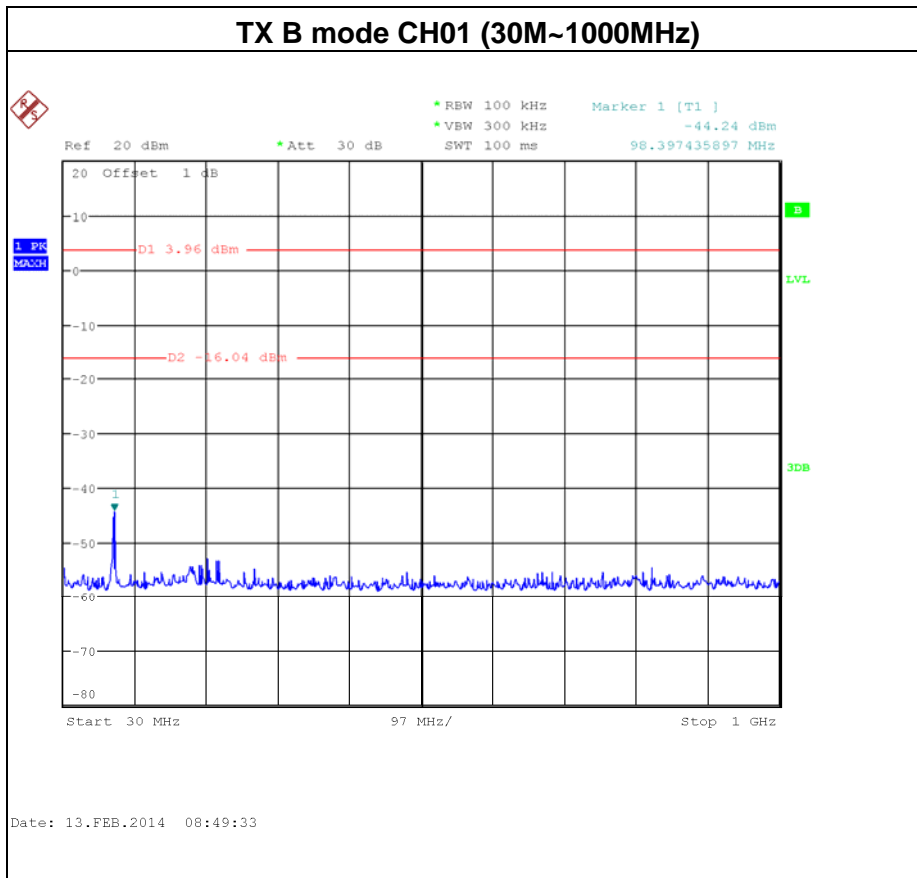

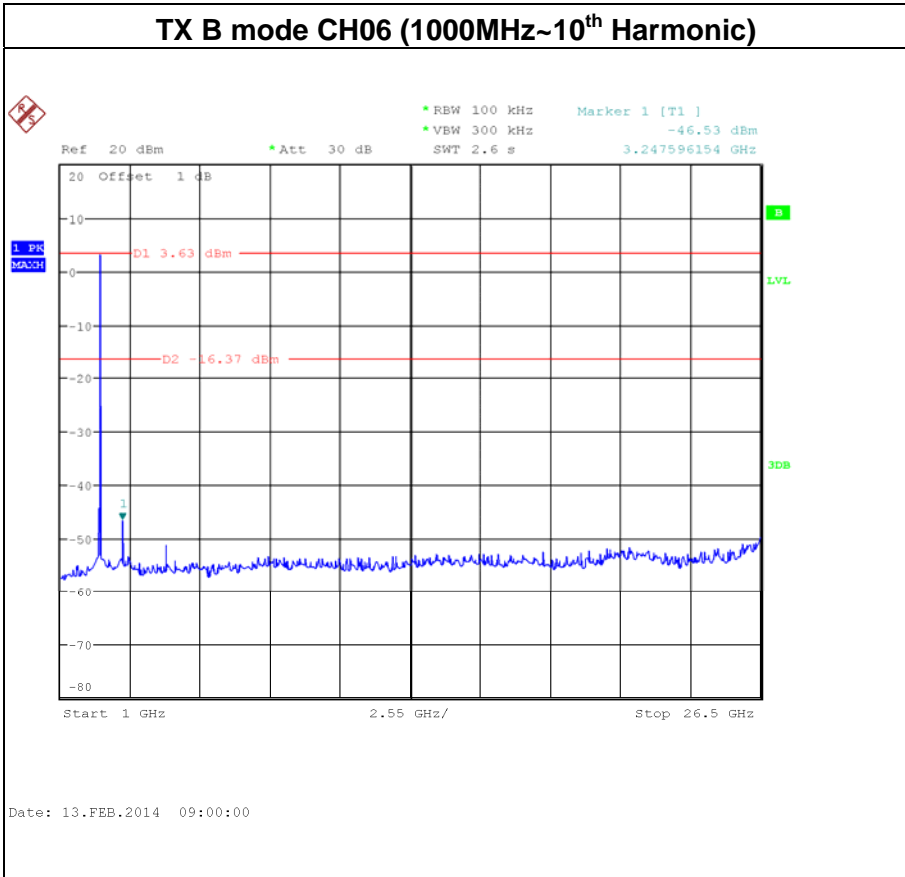
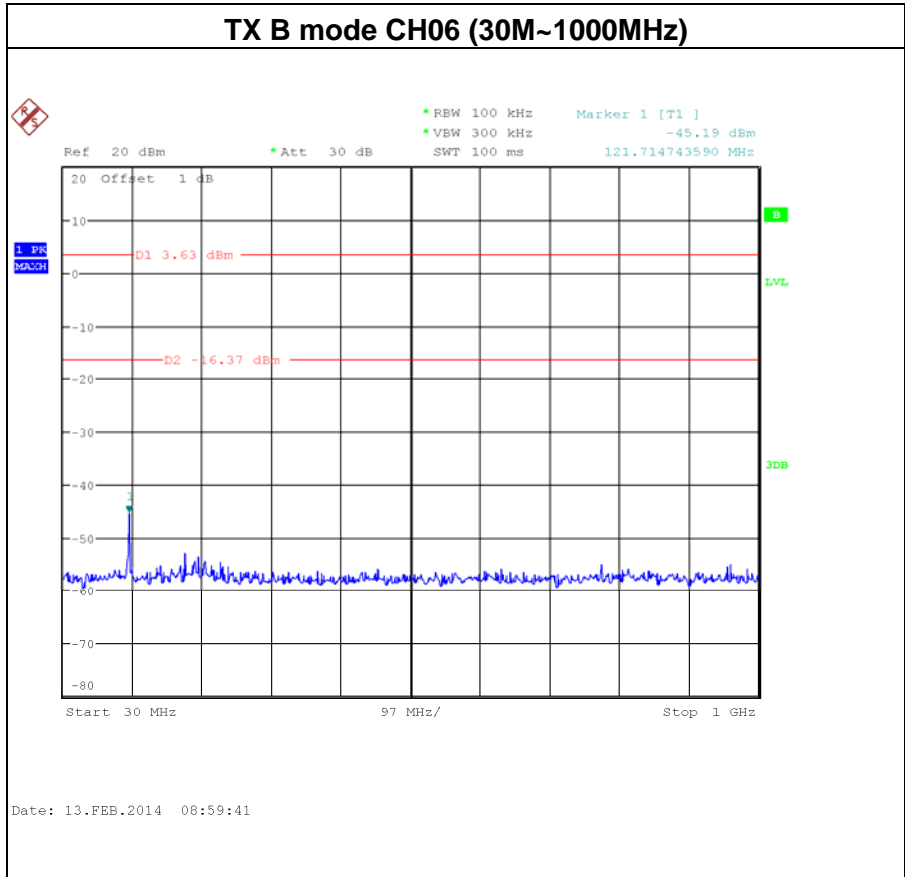


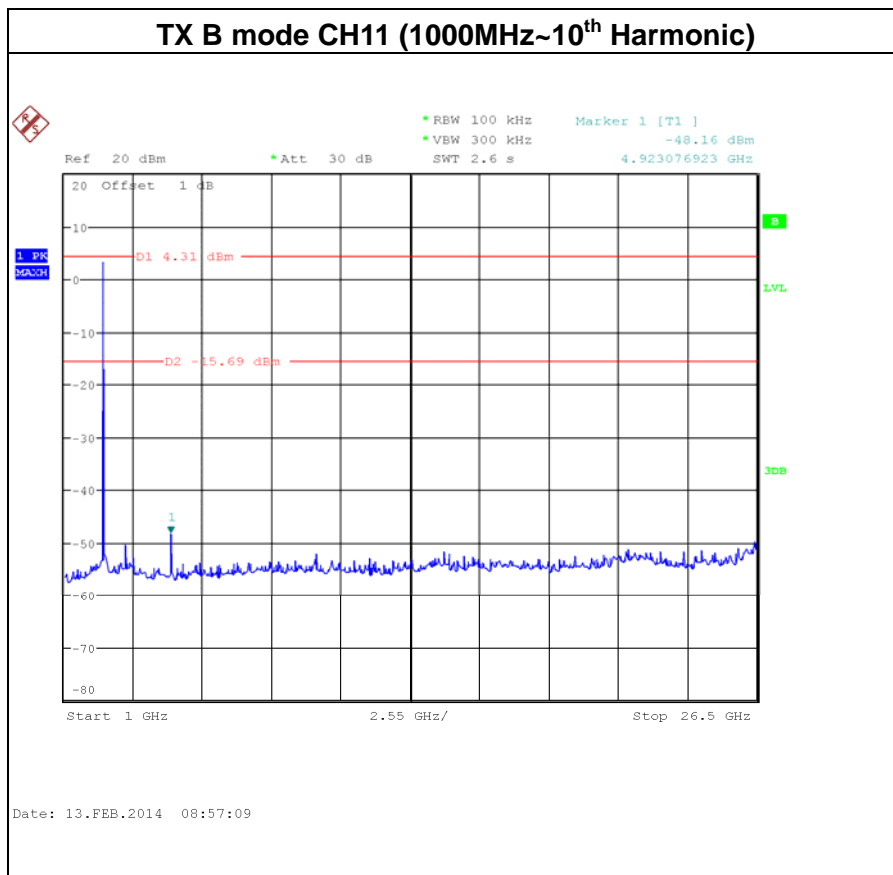
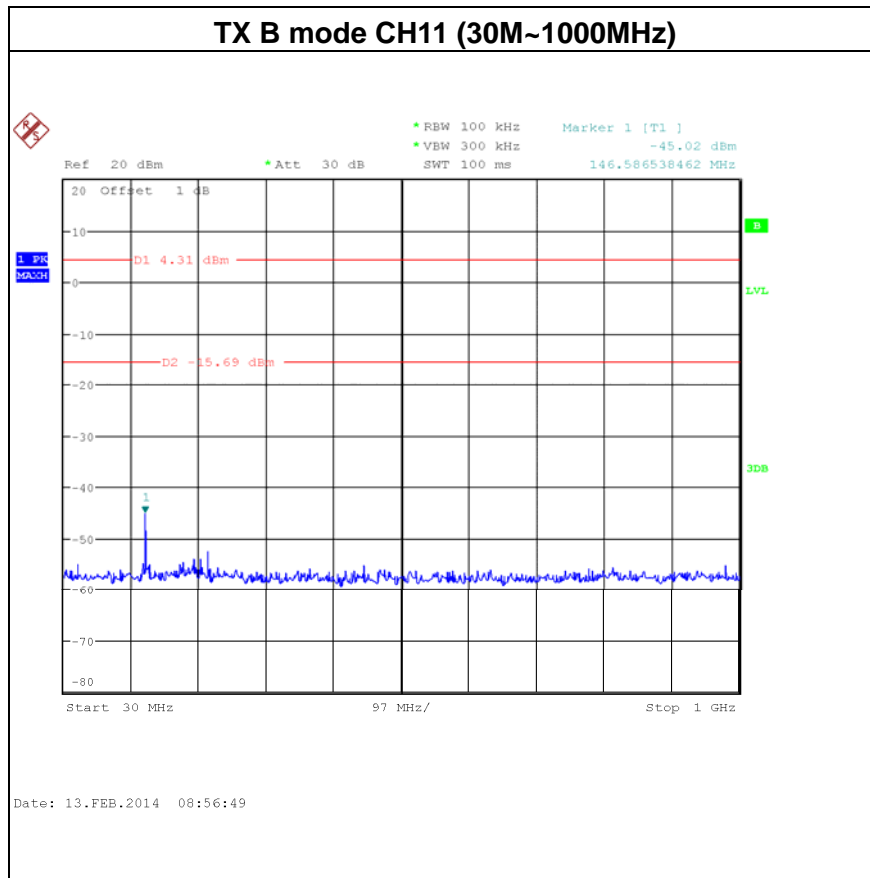








Neutron Engineering Inc.

Test Mode :	TX G Mode	Test date:	Feb. 13, 2014
-------------	-----------	------------	---------------

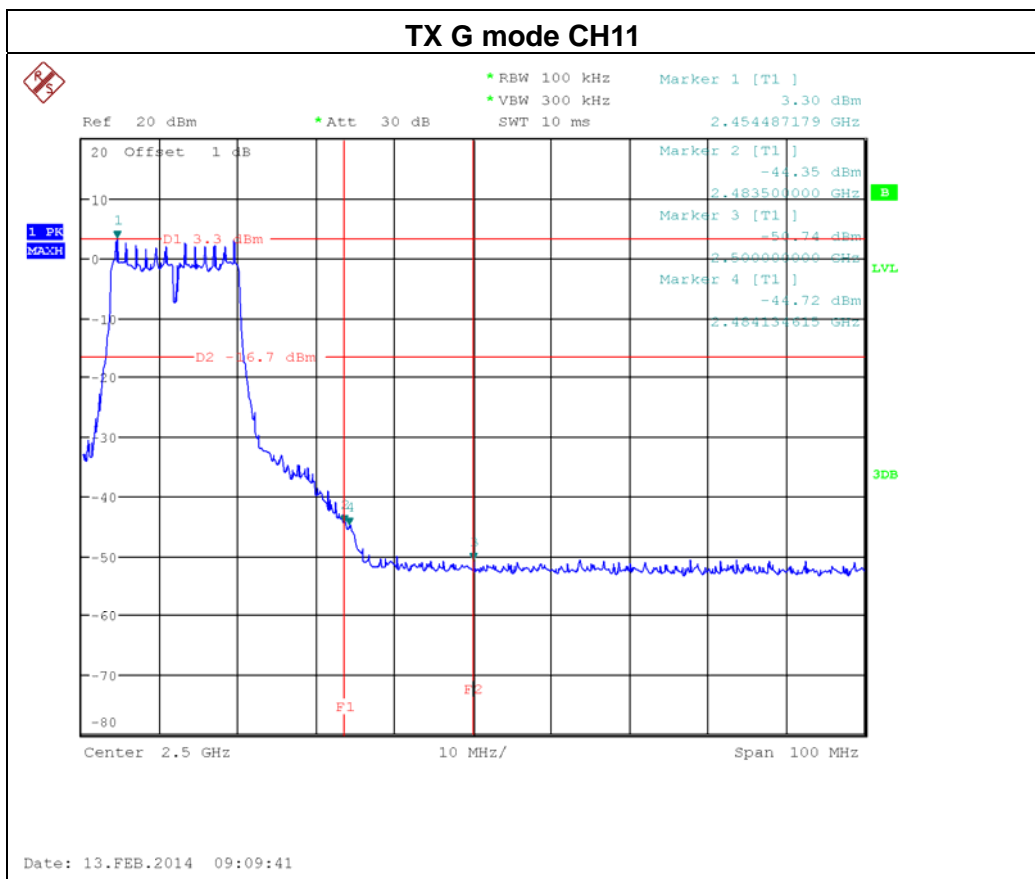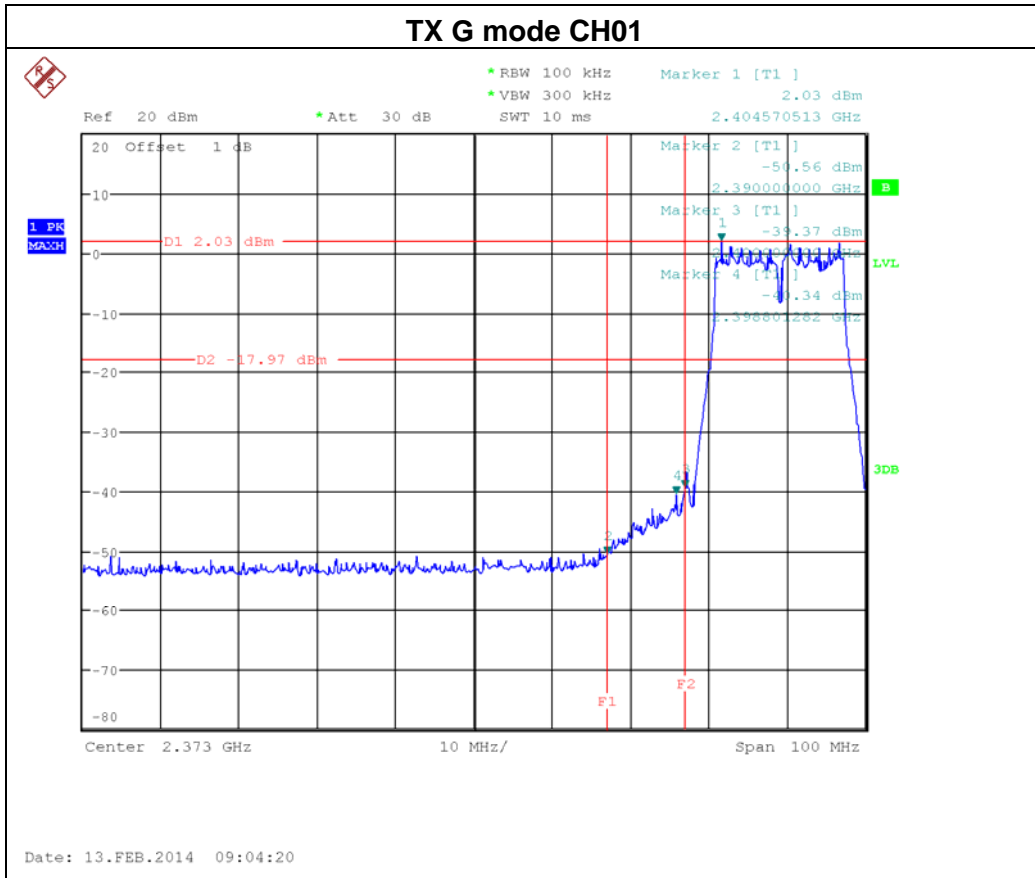

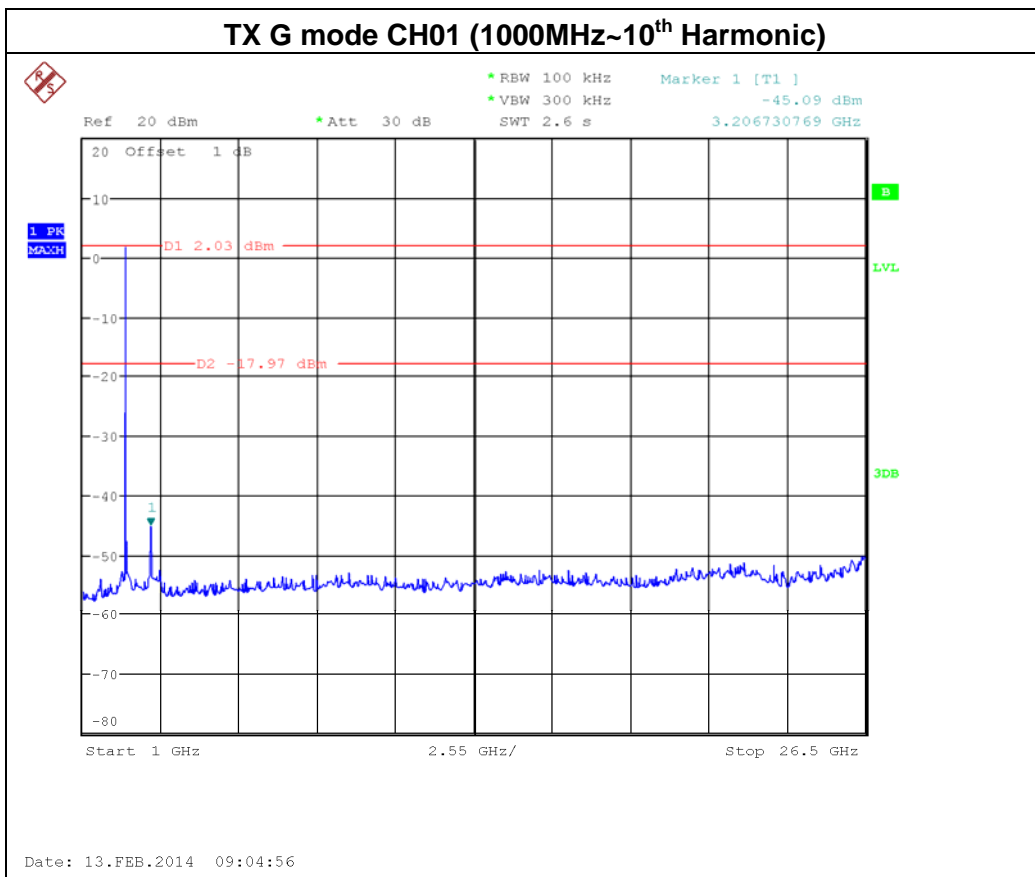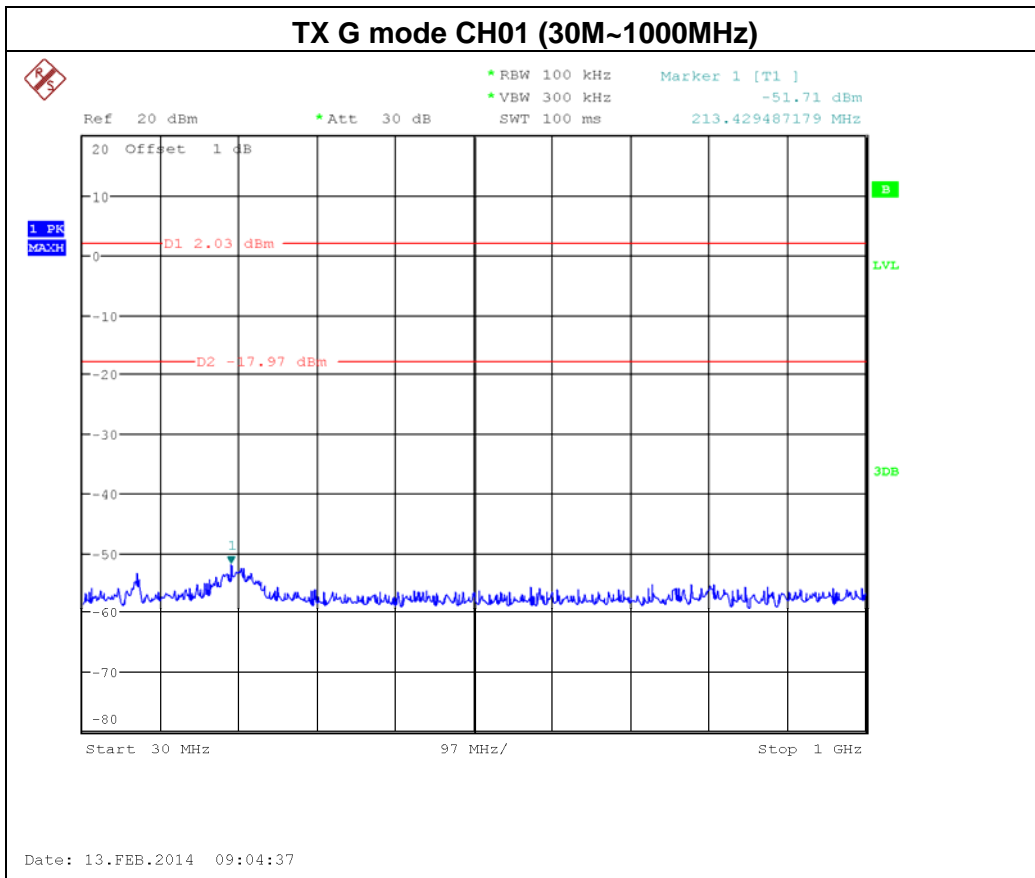

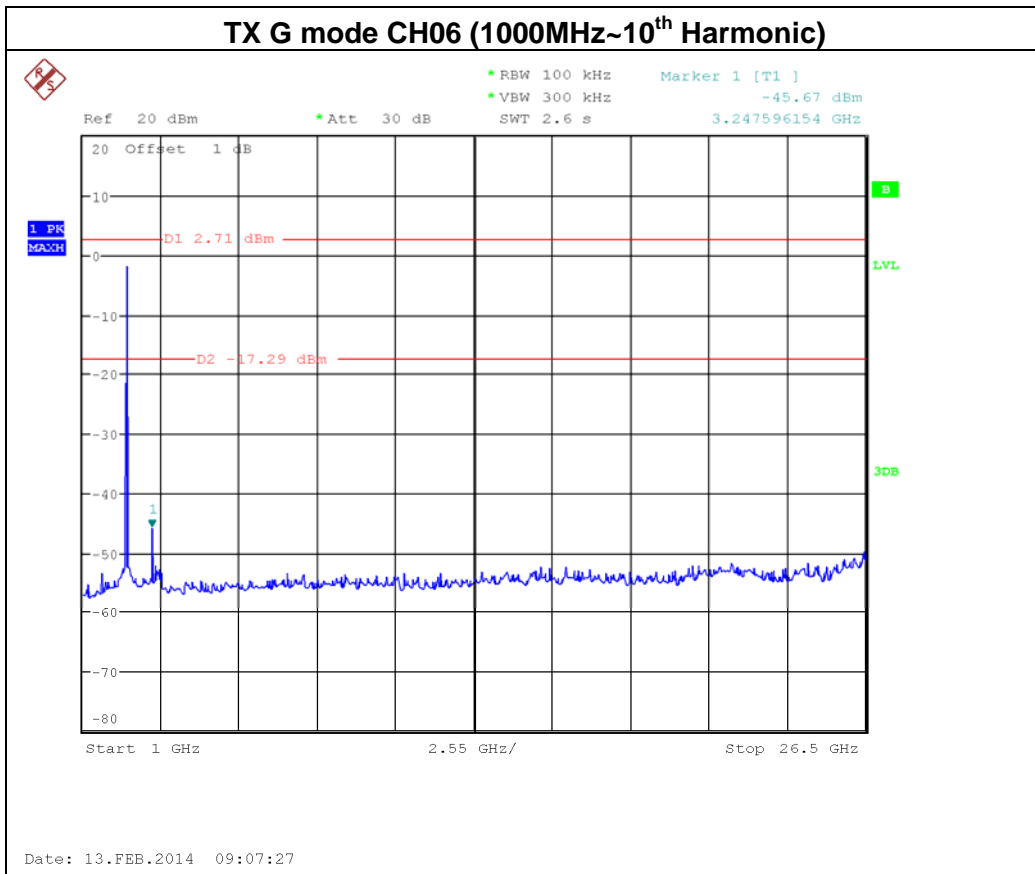
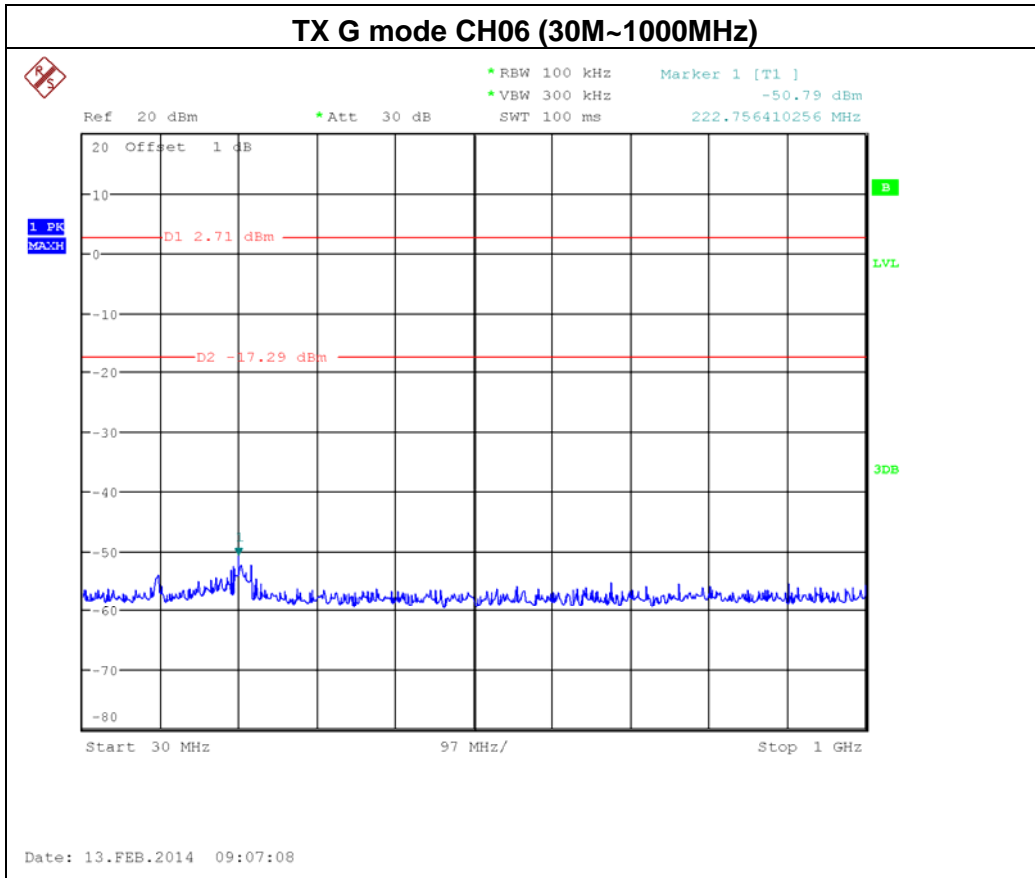


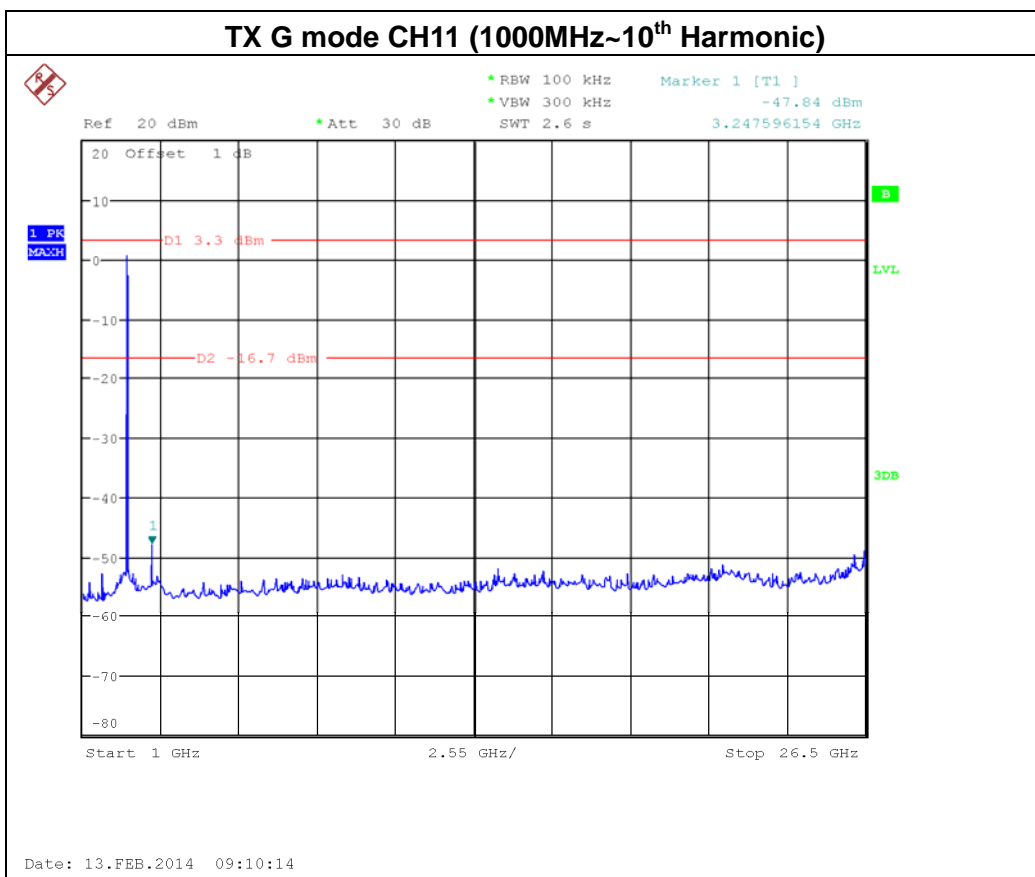
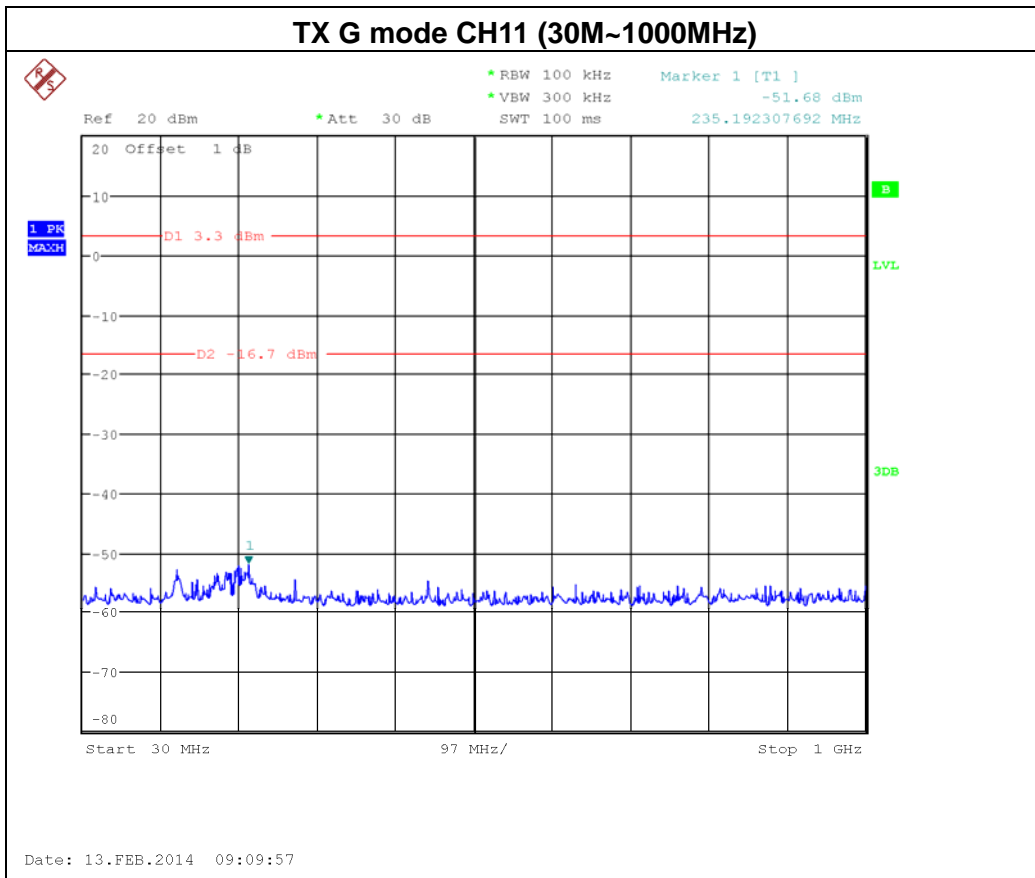








Neutron Engineering Inc.

Test Mode :	TX N-20M Mode	Test date:	Feb. 13, 2014
-------------	---------------	------------	---------------

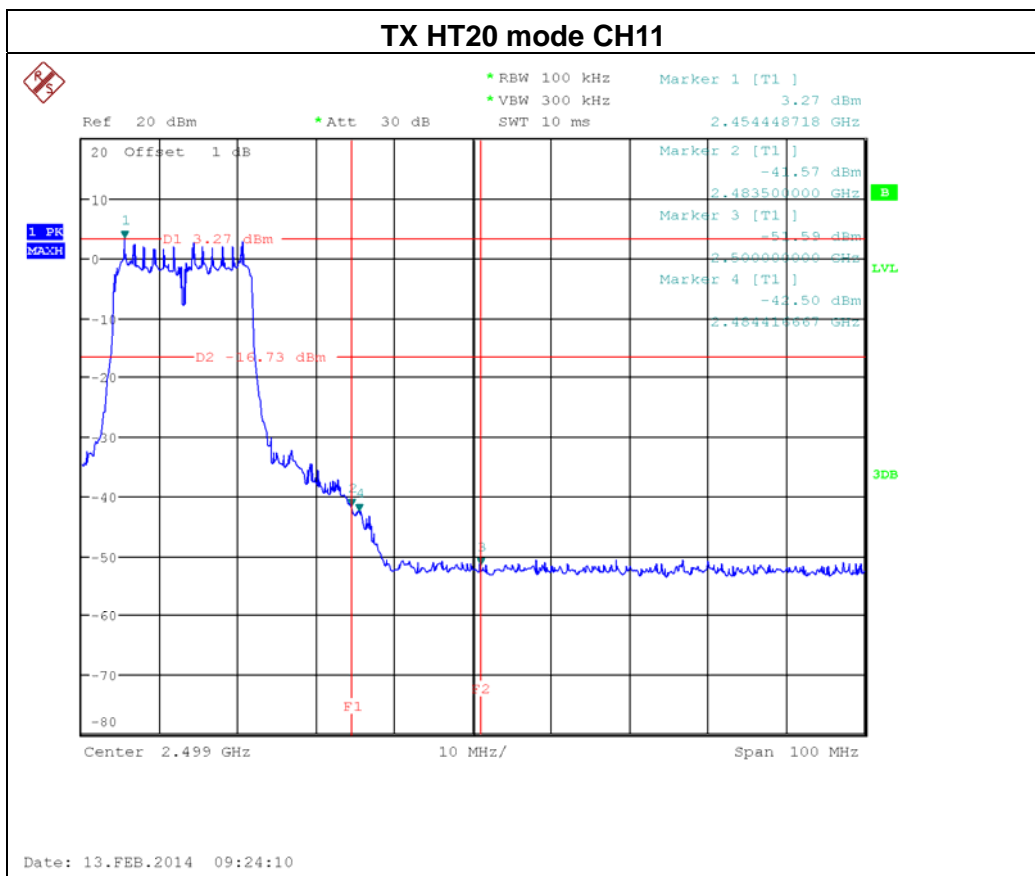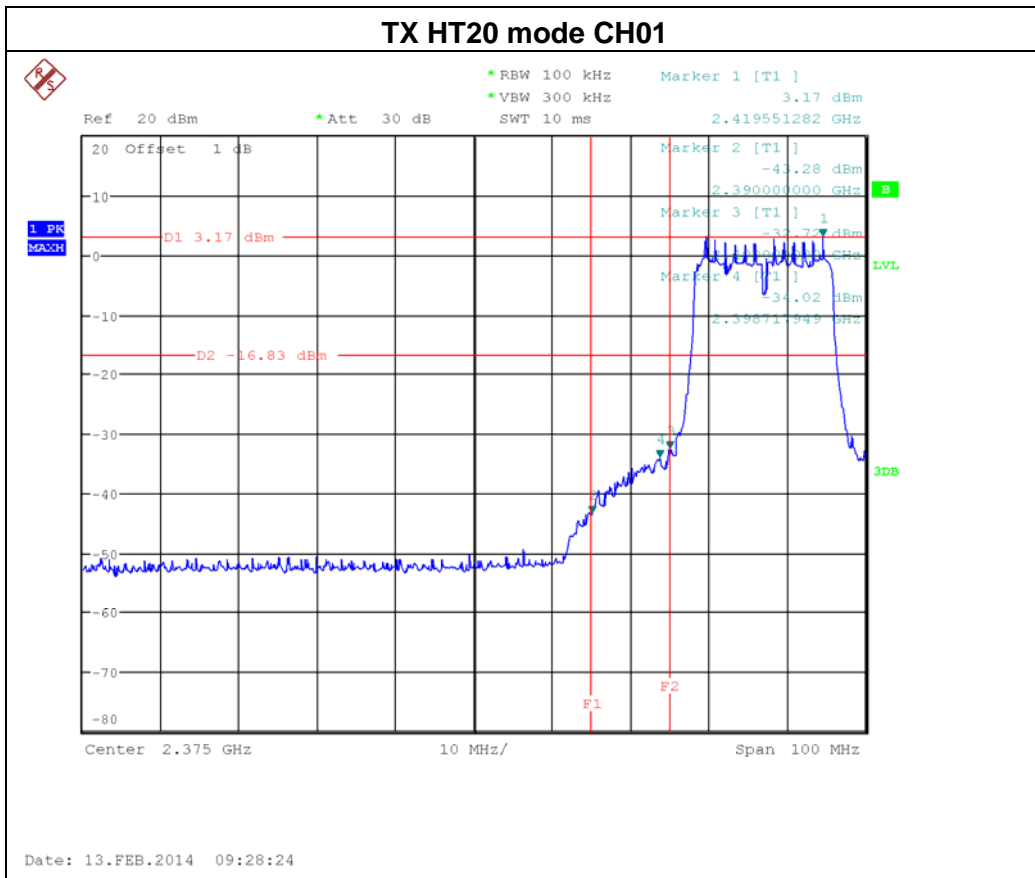

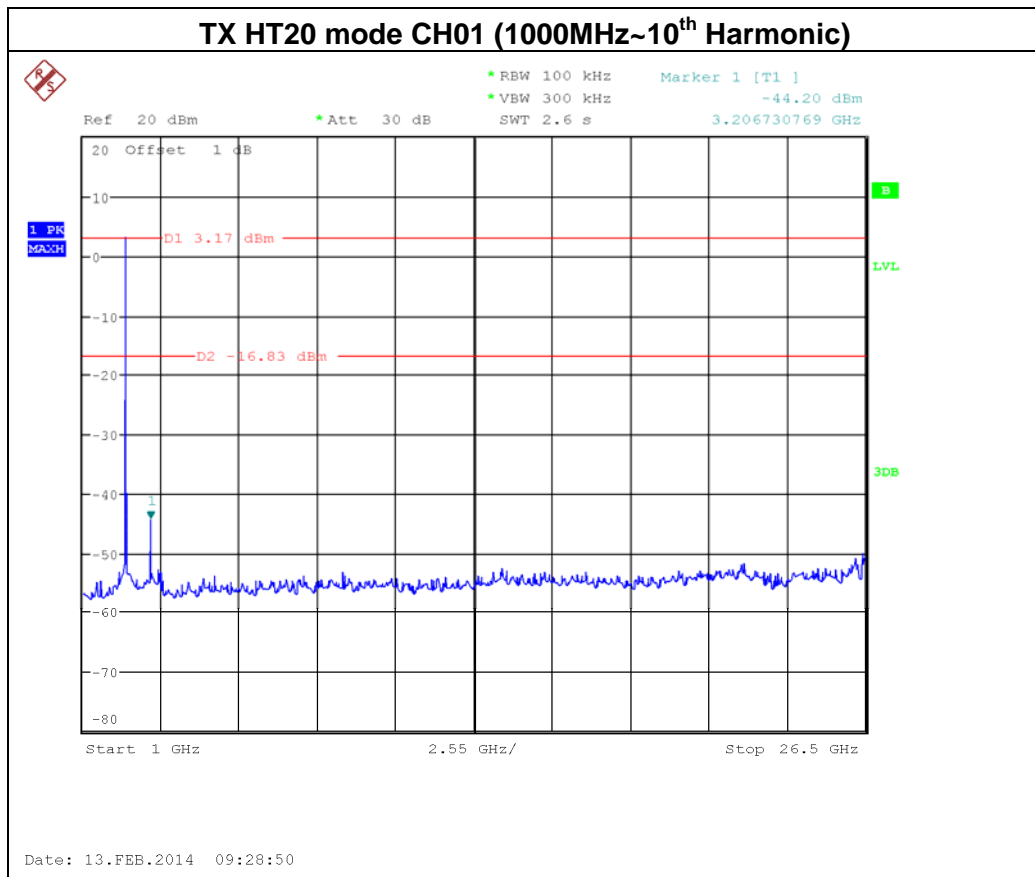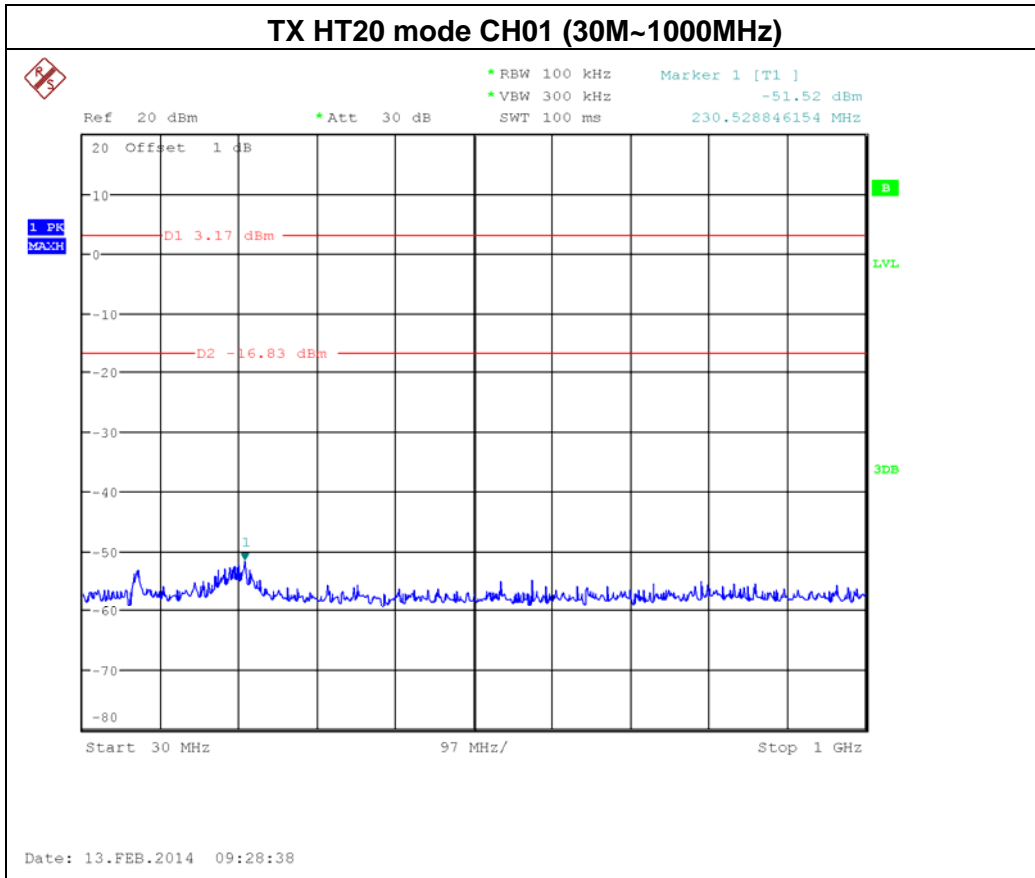

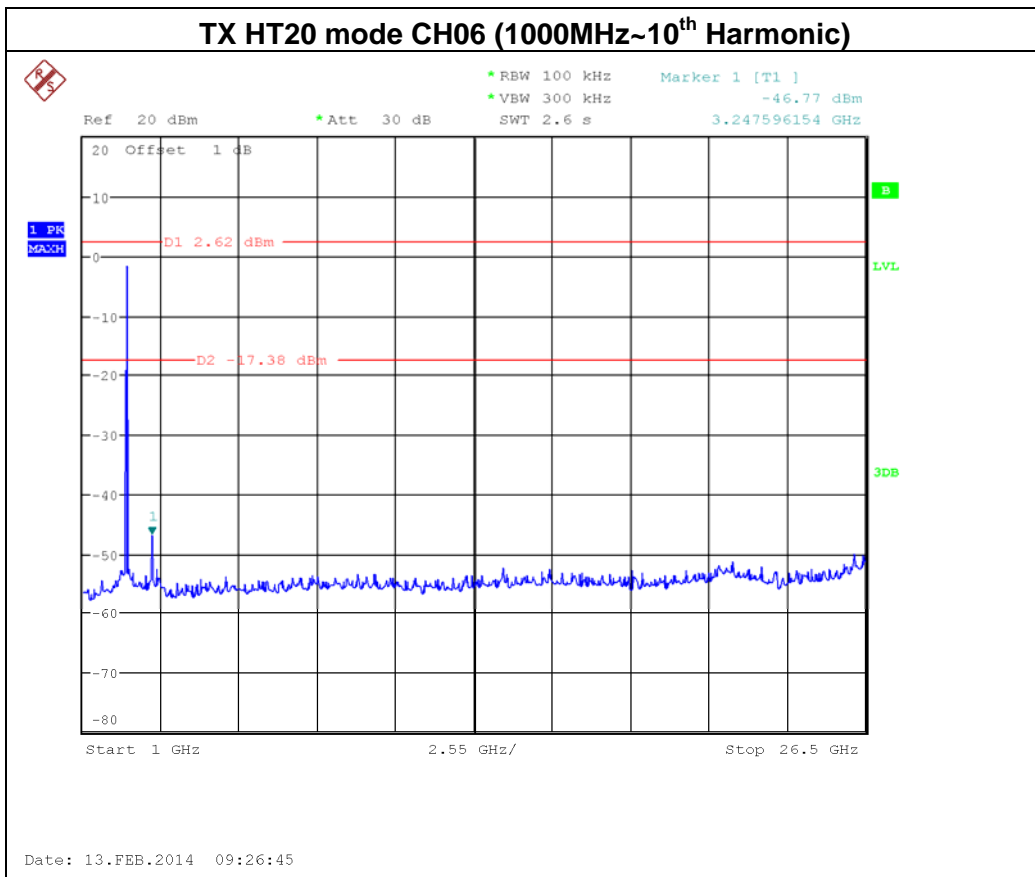
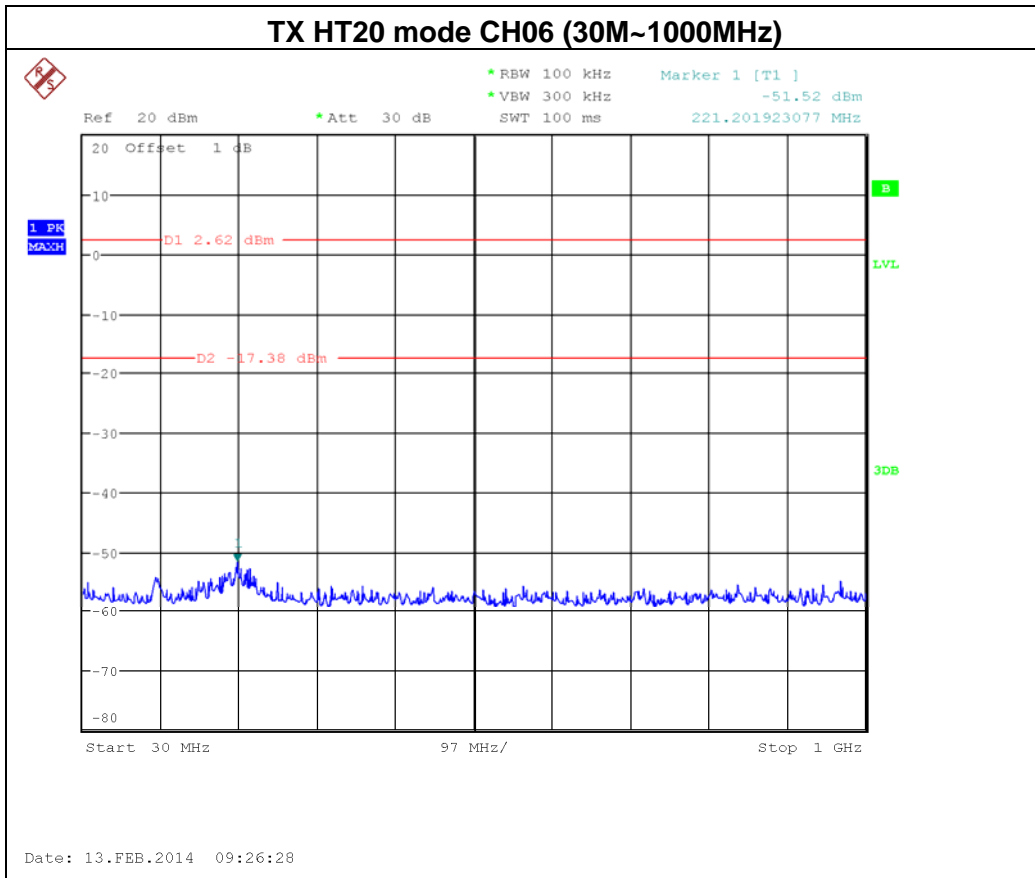


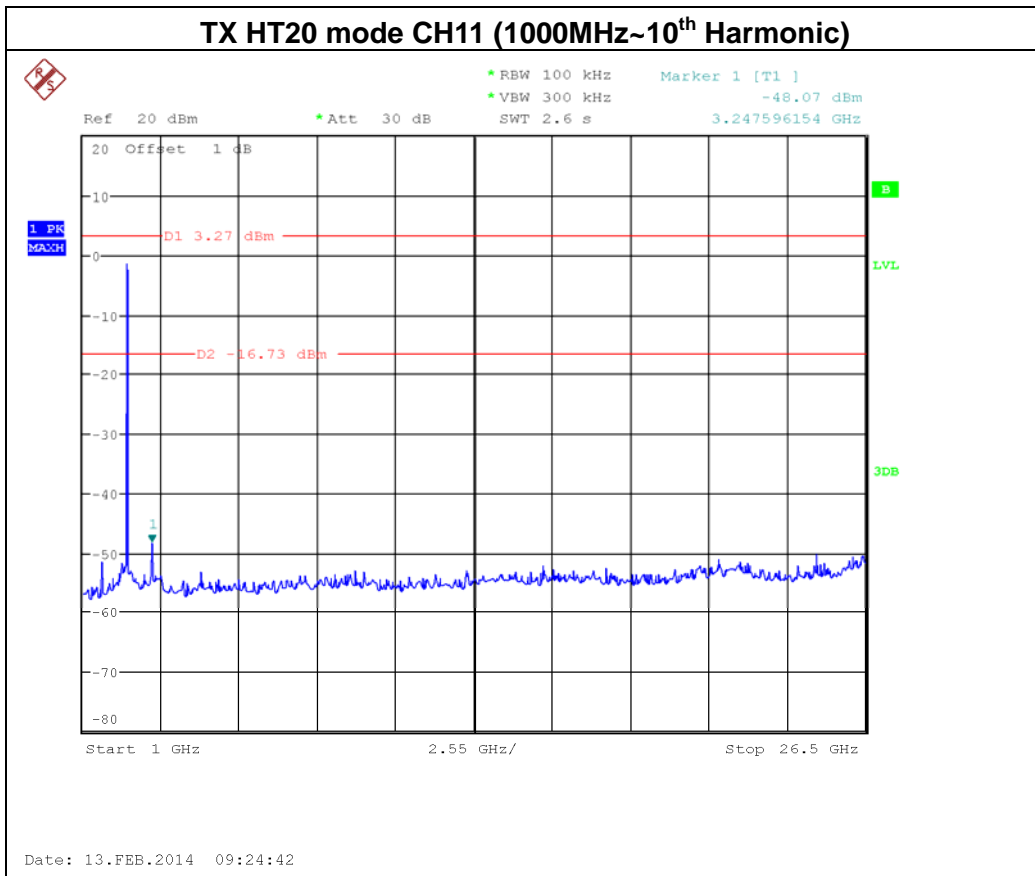
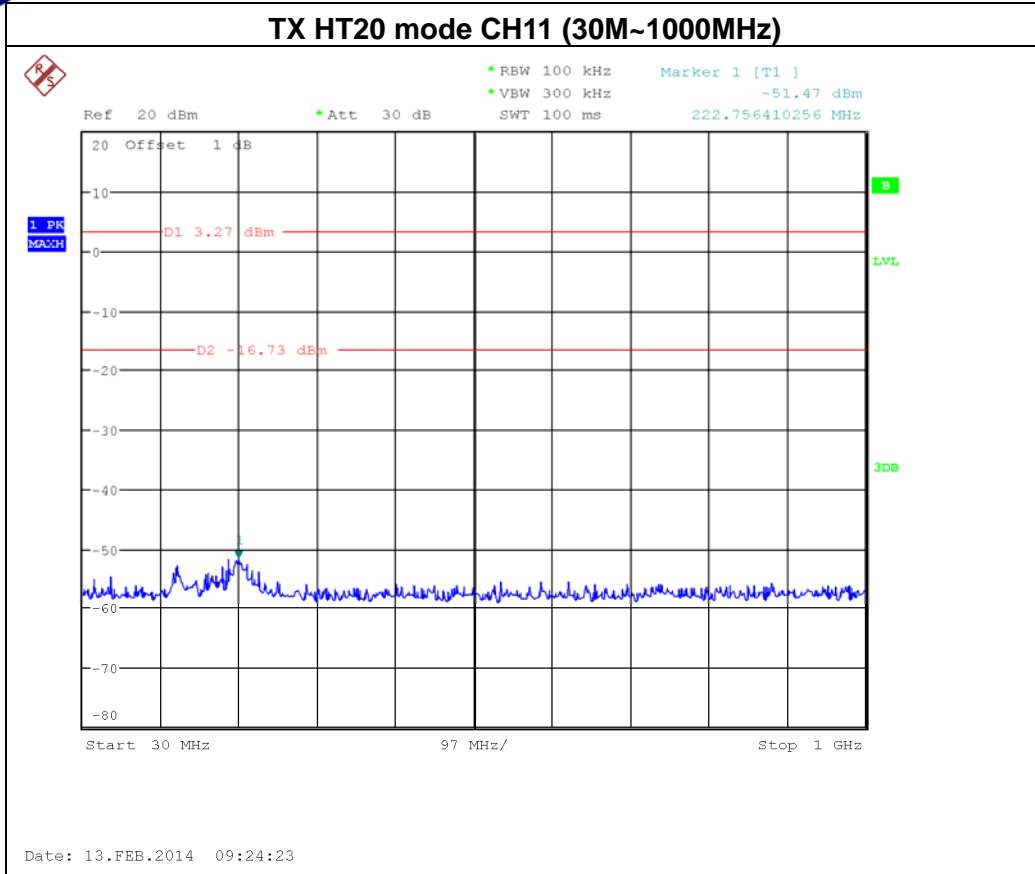








Neutron Engineering Inc.

Test Mode :	TX N-40M Mode	Test date:	Feb. 13, 2014
-------------	---------------	------------	---------------

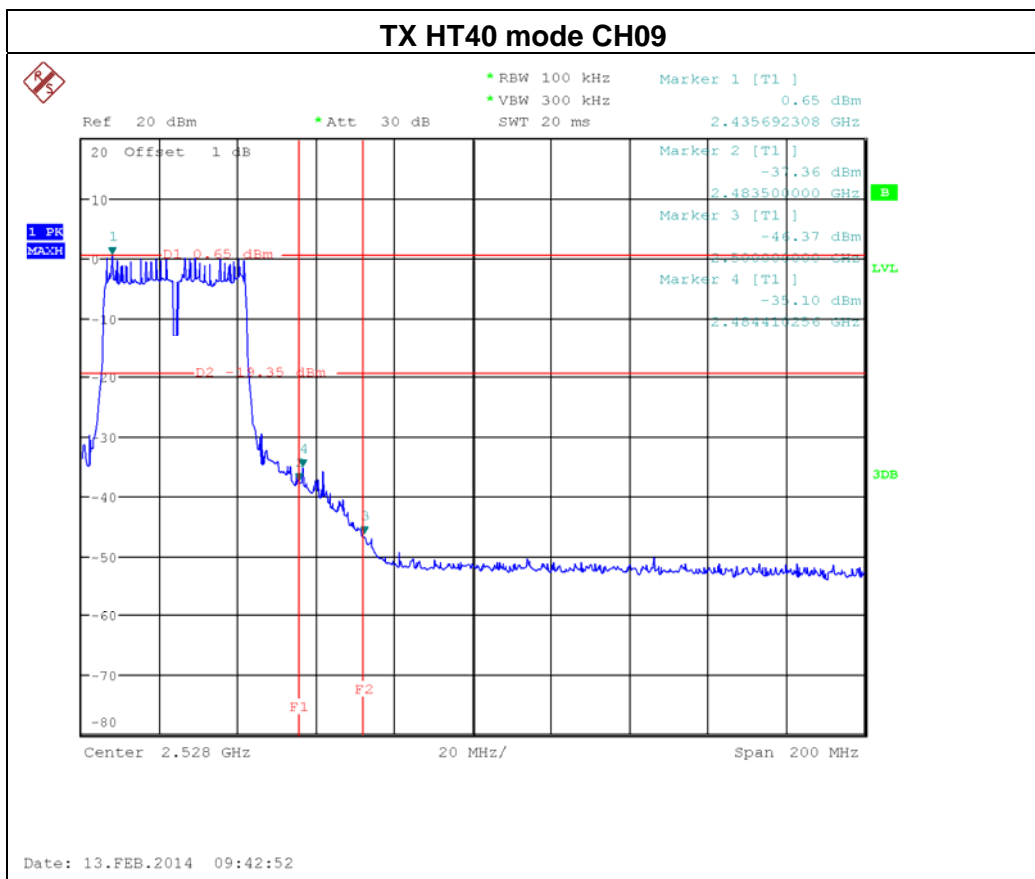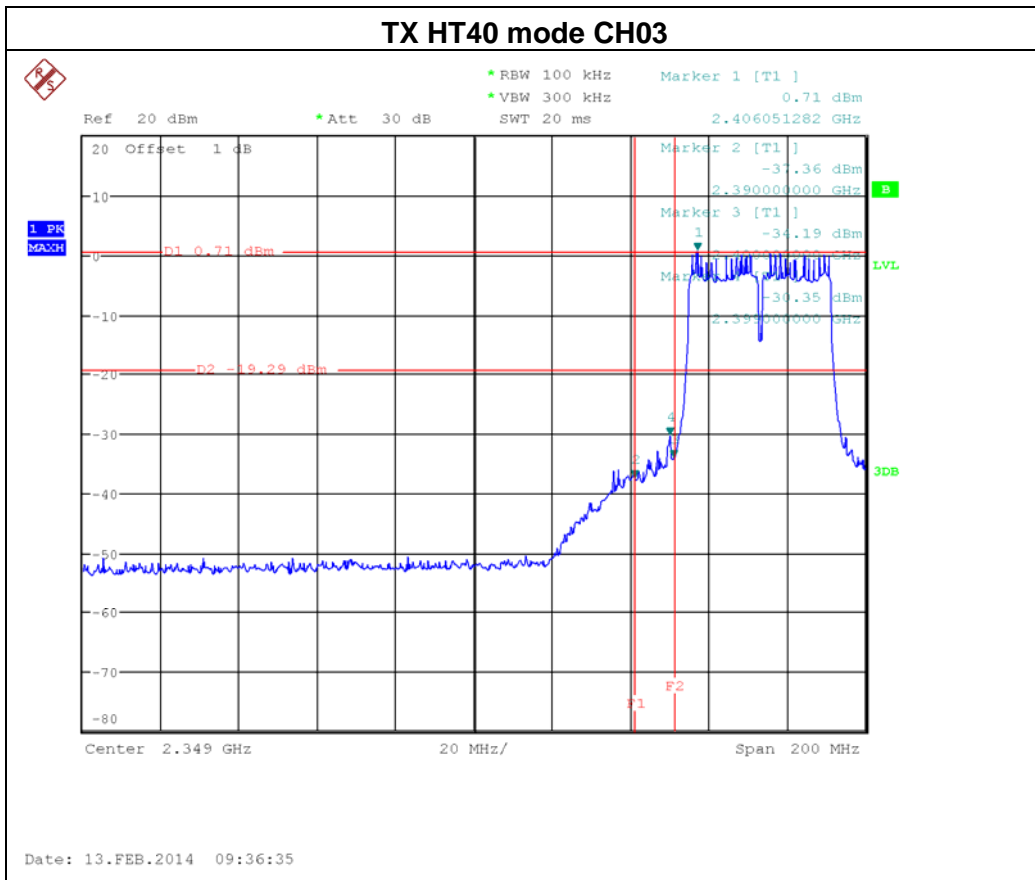

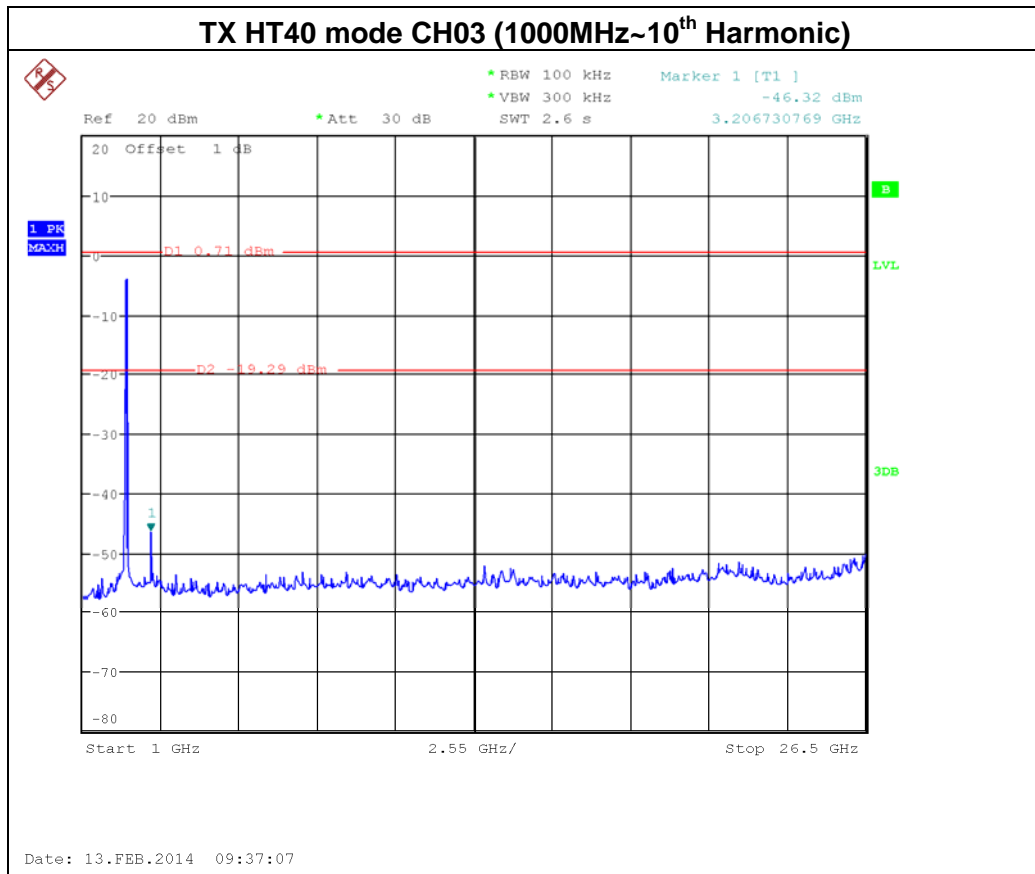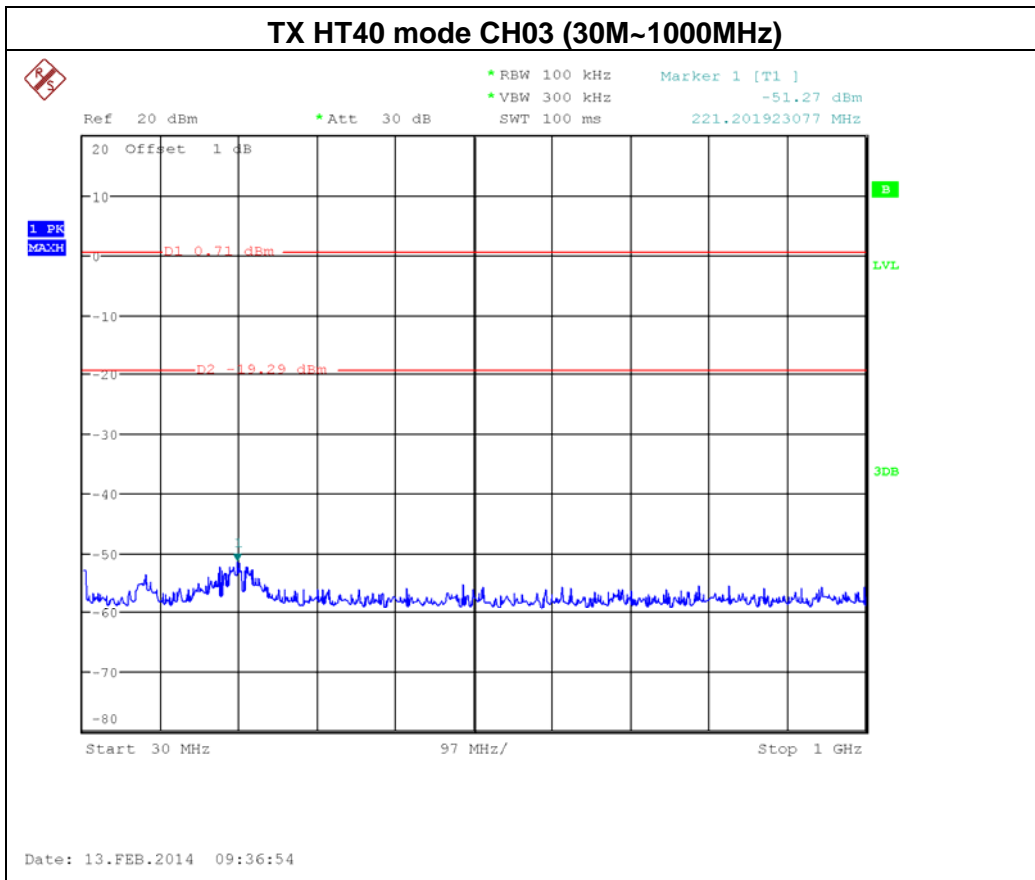

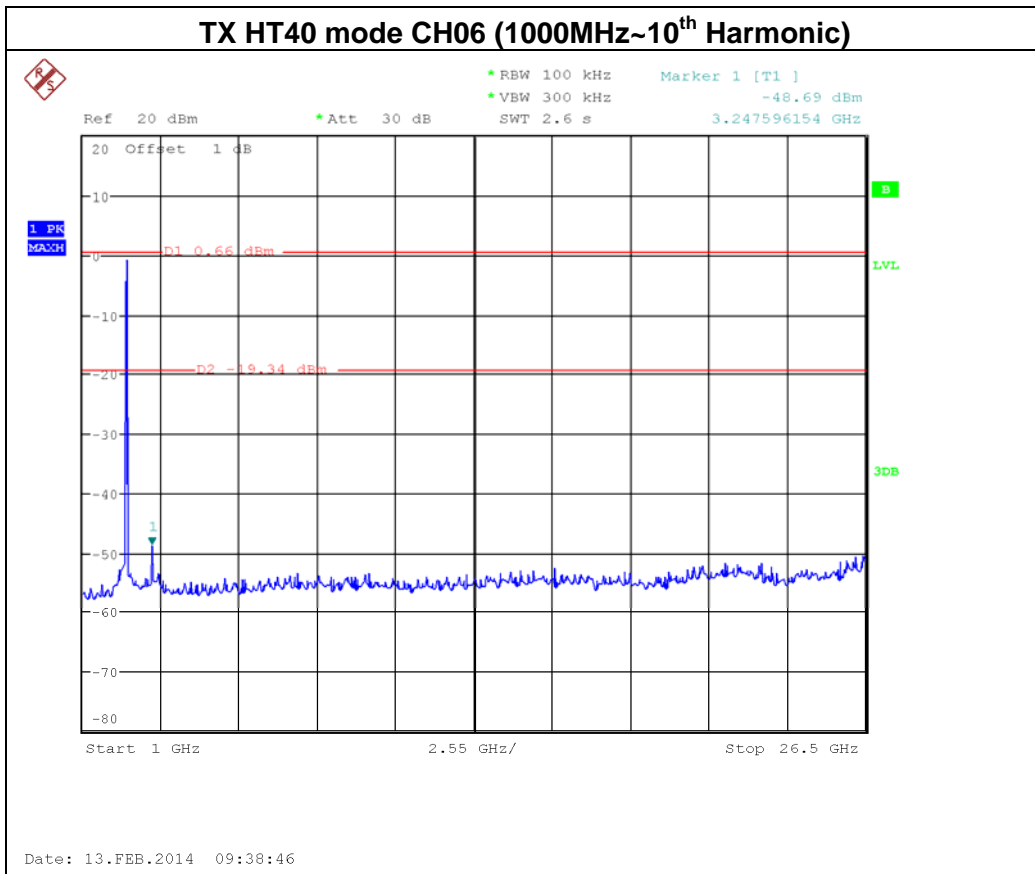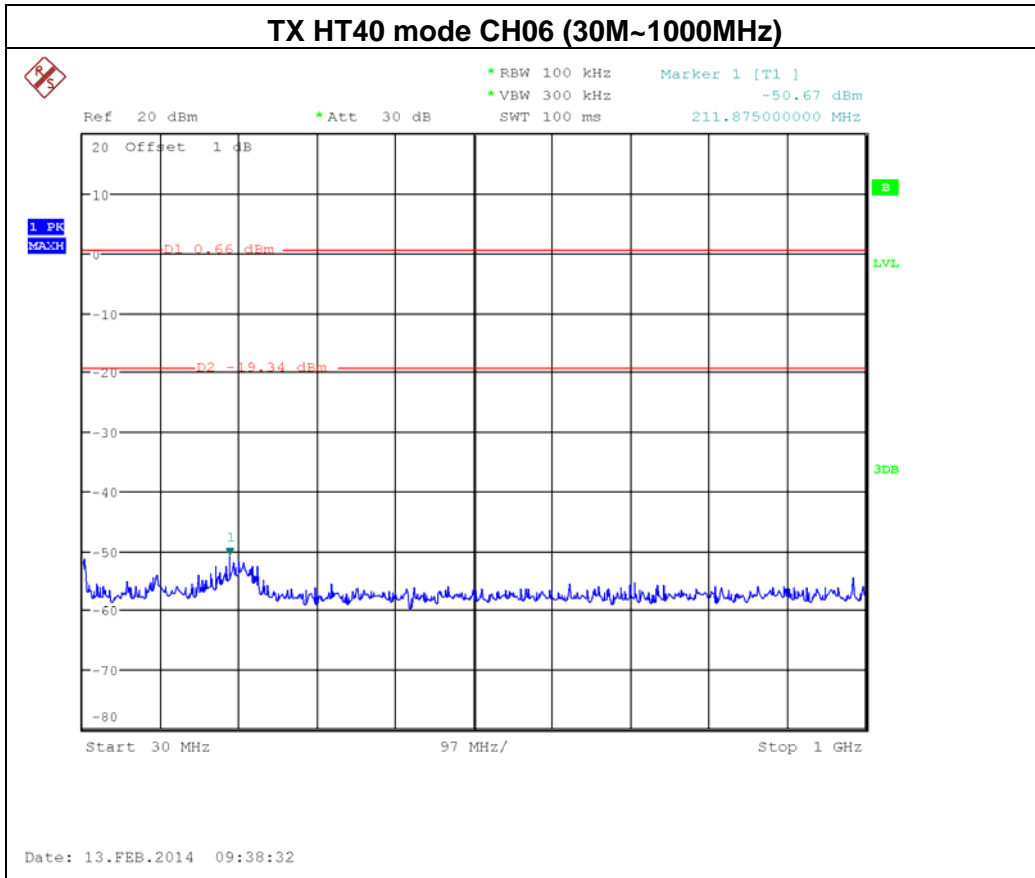

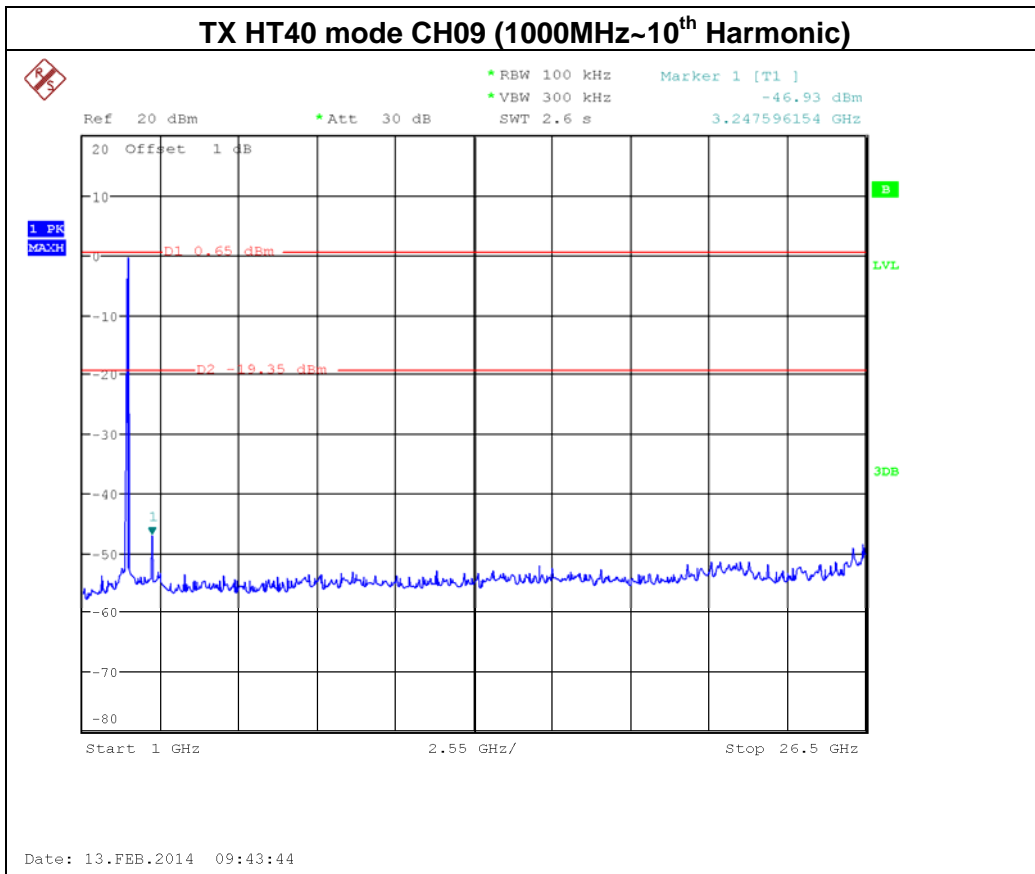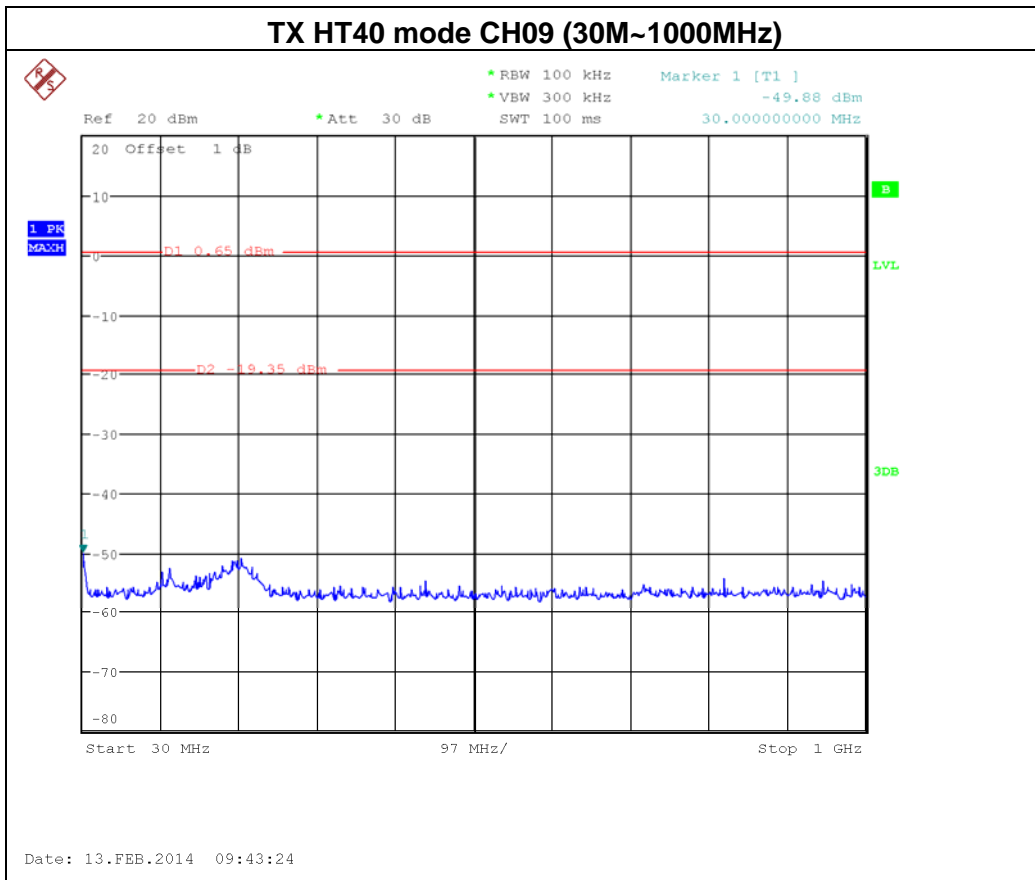



8. POWER SPECTRAL DENSITY TEST

8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C / RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e) RSS-210 Annex 8(A8.2(b))	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS


Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3.8V





8.1.6 TEST RESULTS

Test date:	Feb. 13, 2014
------------	---------------

Test Mode :TX B Mode			
Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH01	2412	-11.82	8
CH06	2437	-13.22	8
CH11	2462	-11.17	8

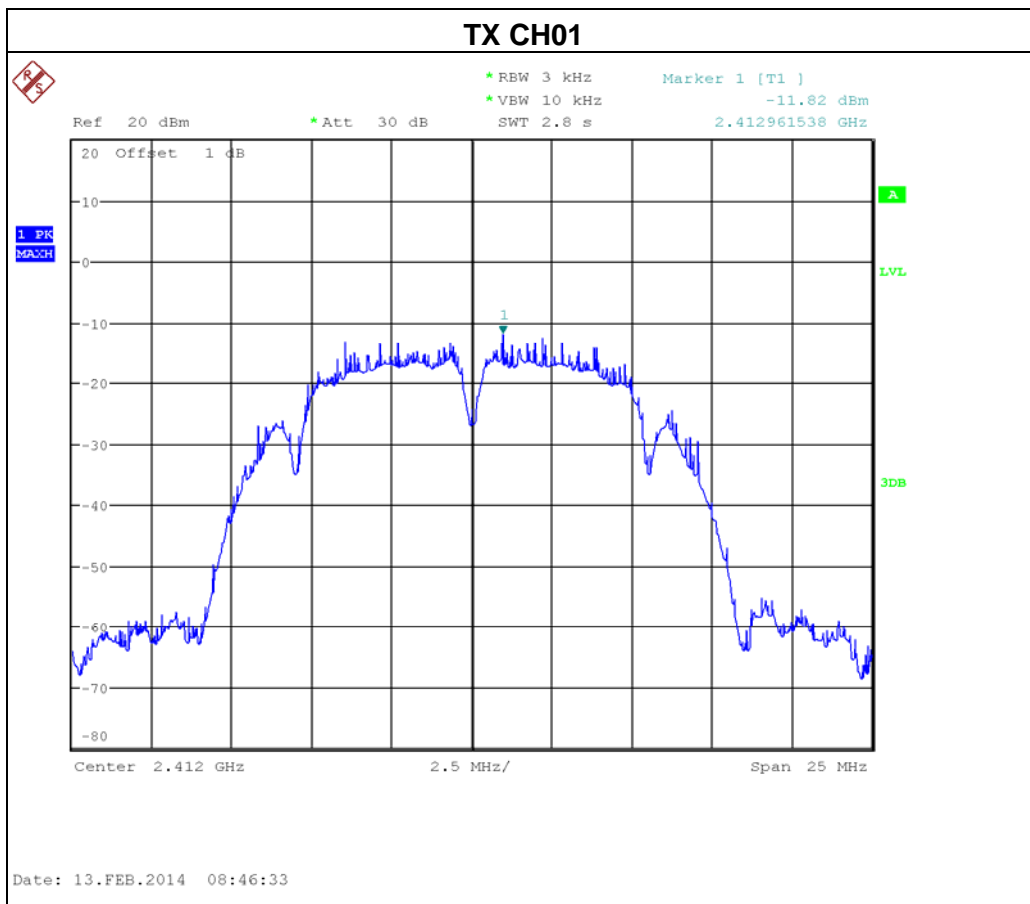

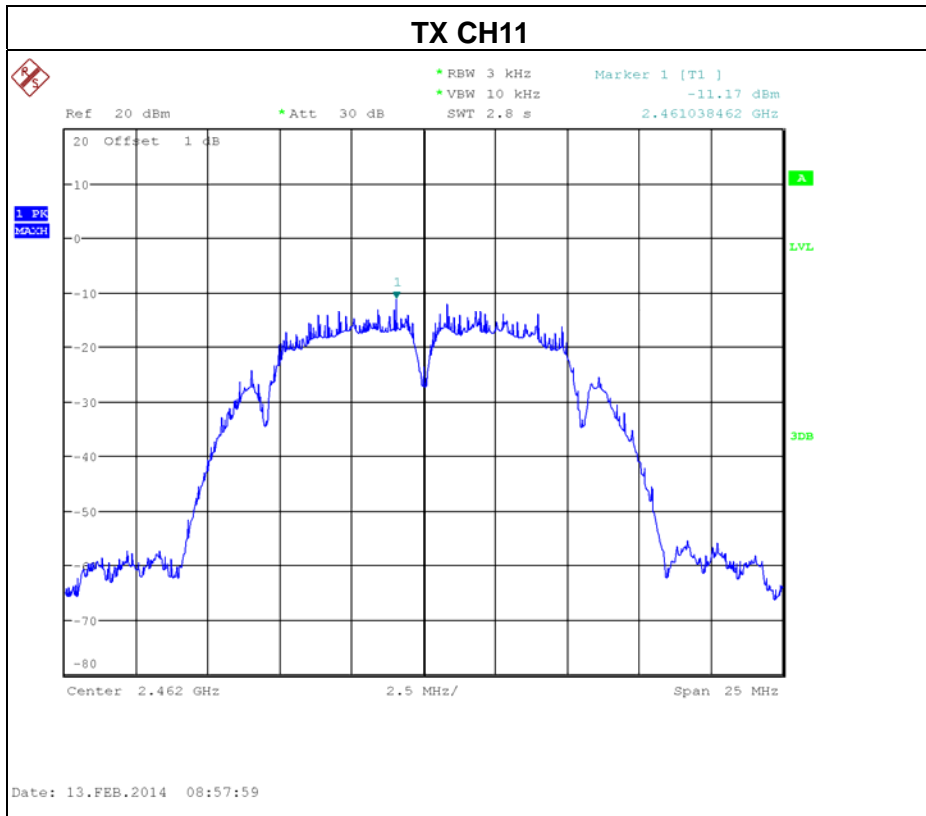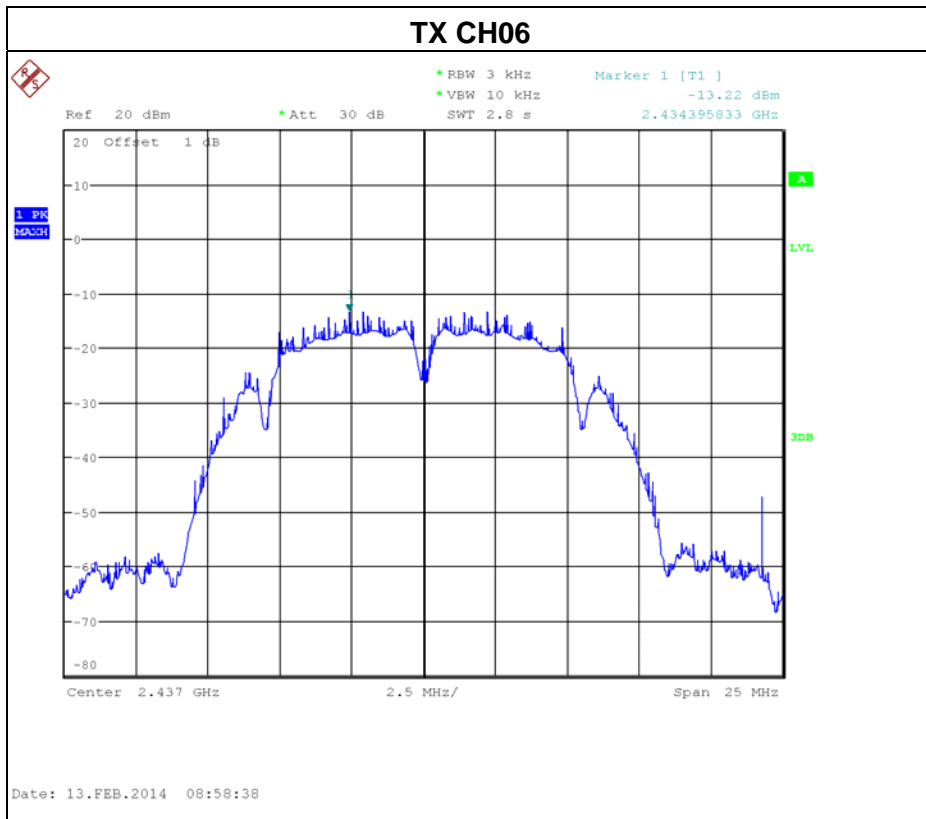






Test date:	Feb. 13, 2014
------------	---------------

Test Mode :TX G Mode

Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH01	2412	-14.94	8
CH06	2437	-14.96	8
CH11	2462	-13.48	8

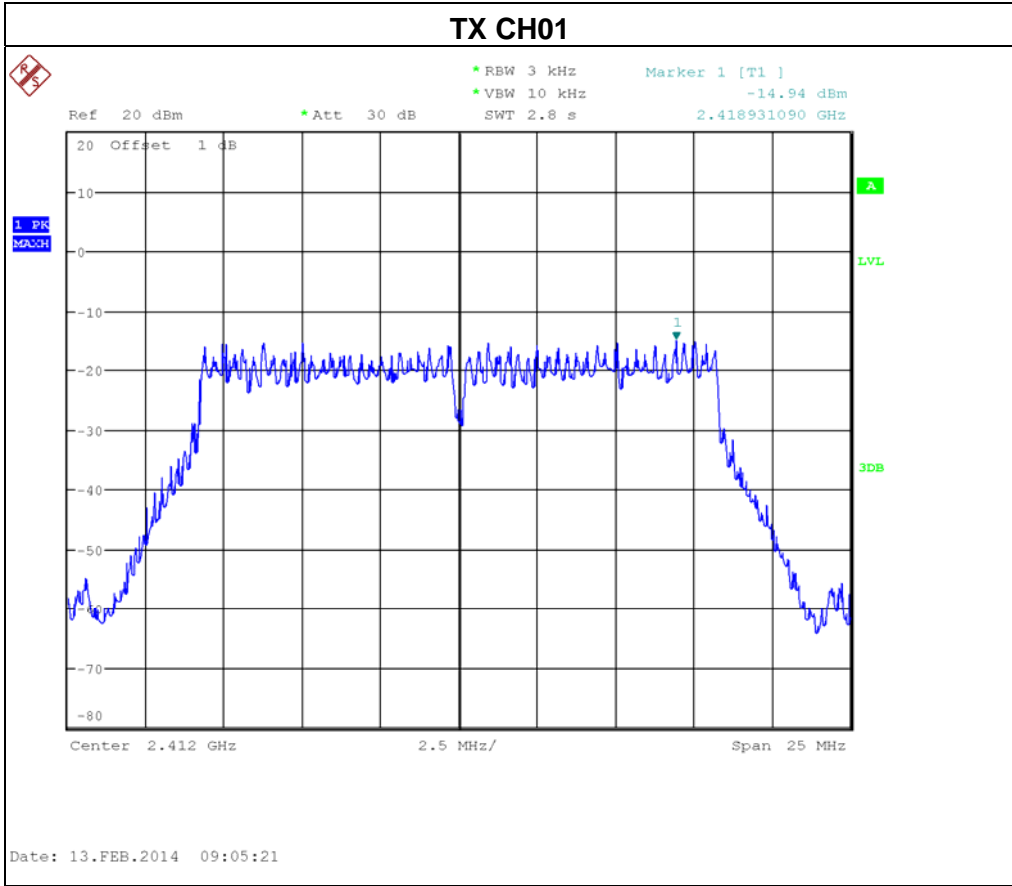

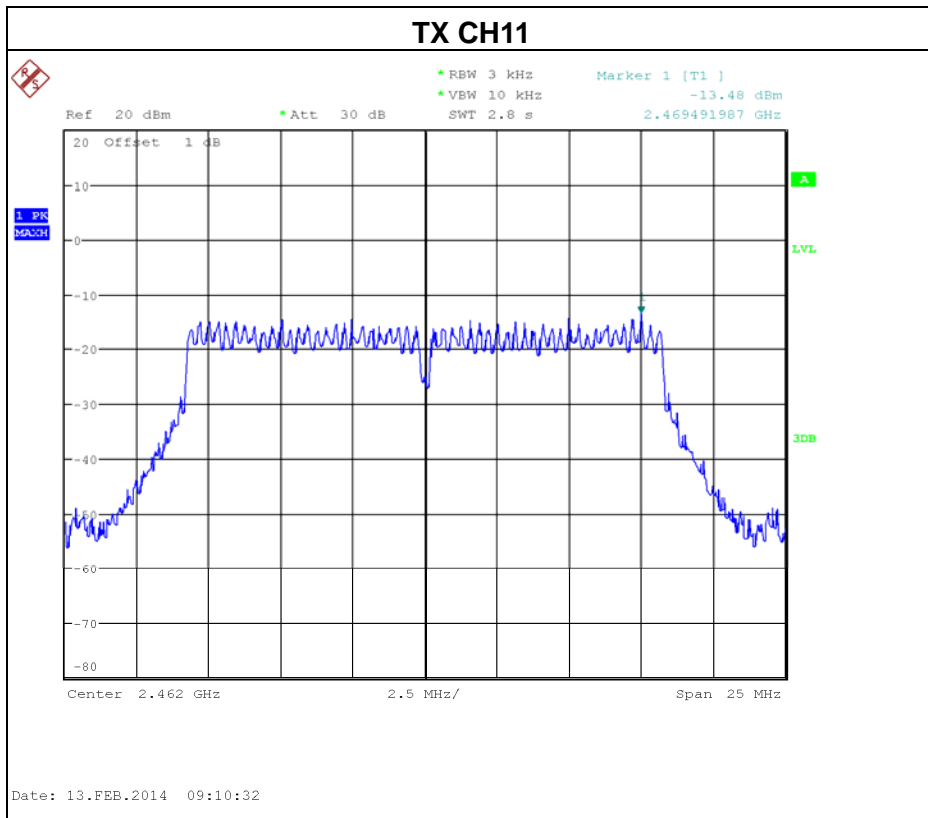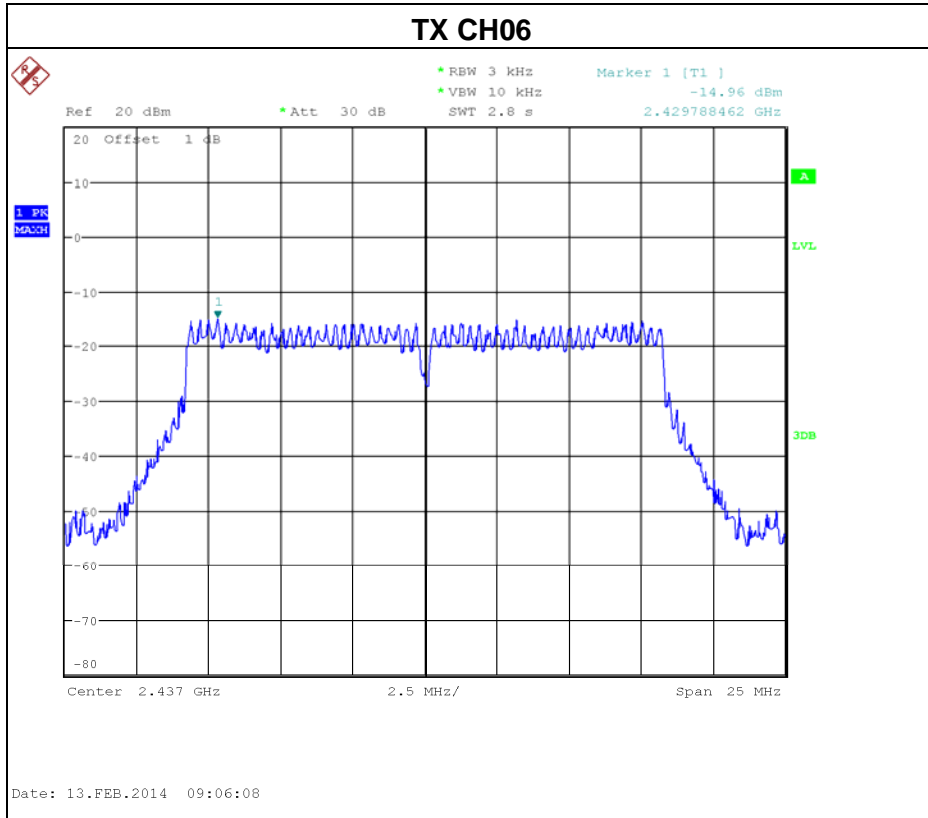






Test date:

Feb. 13, 2014

Test Mode : TX N-20M Mode

Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH01	2412	-13.58	8
CH06	2437	-13.67	8
CH11	2462	-13.57	8

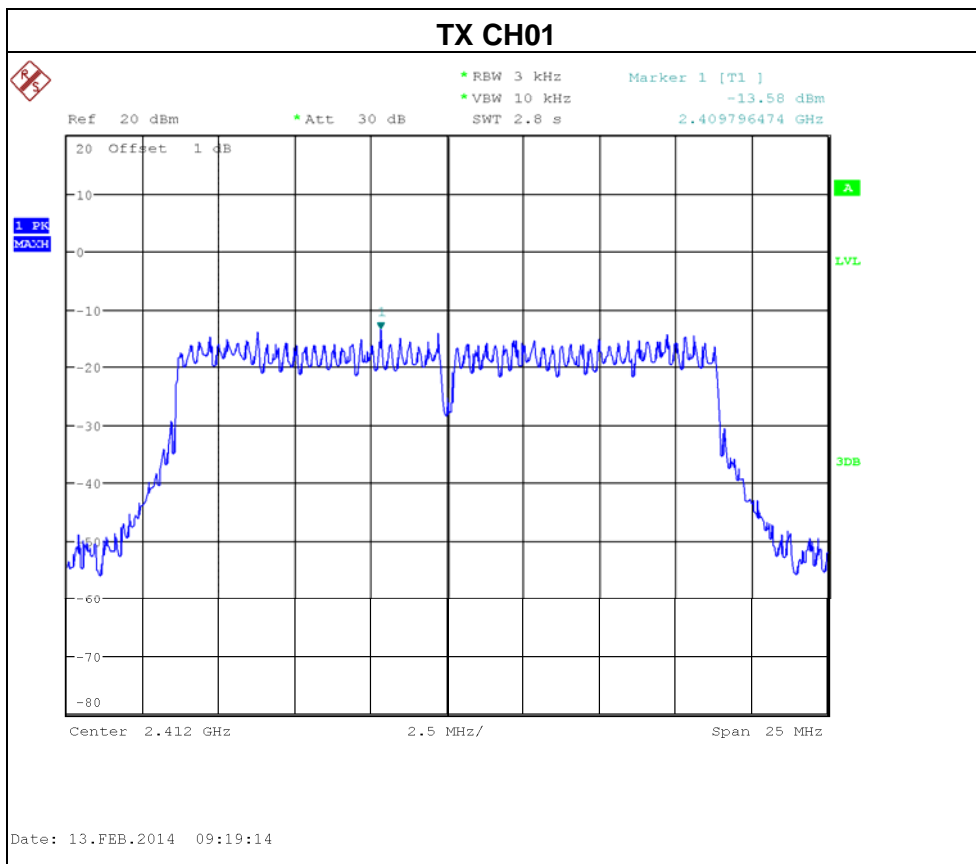

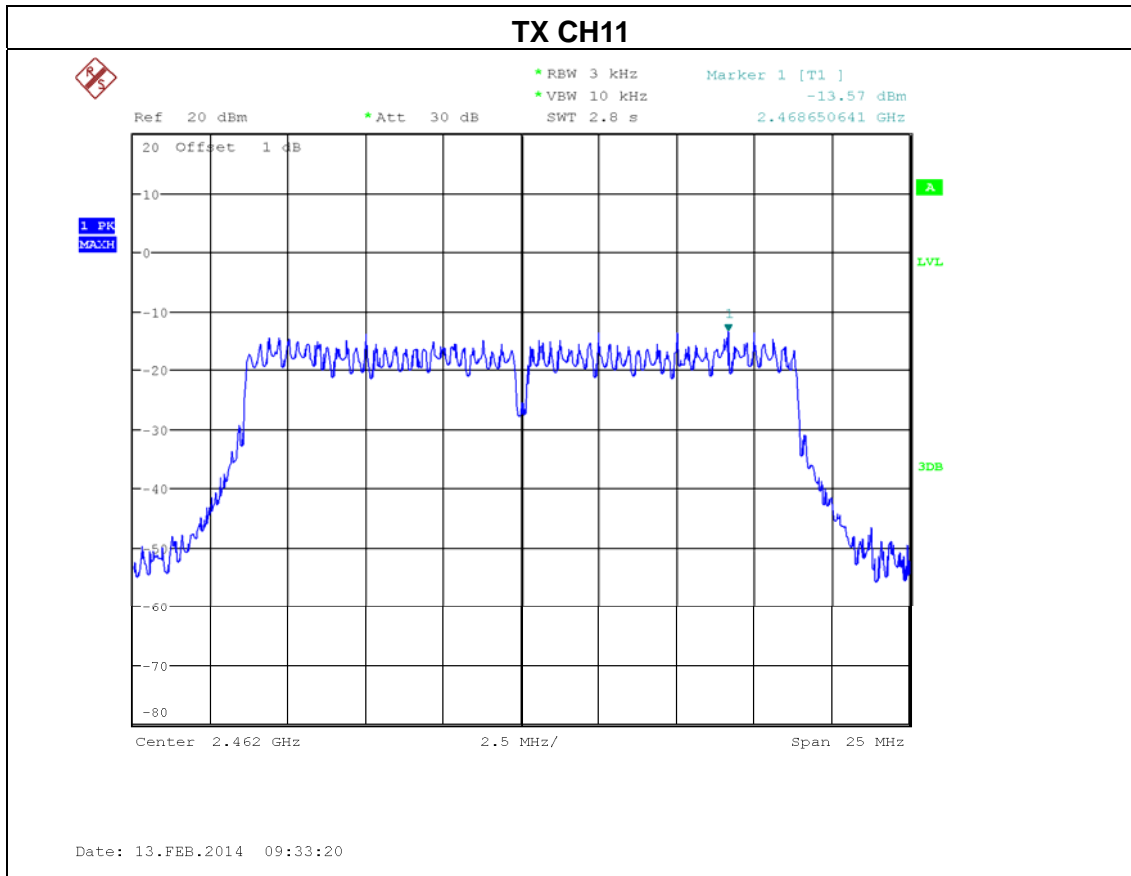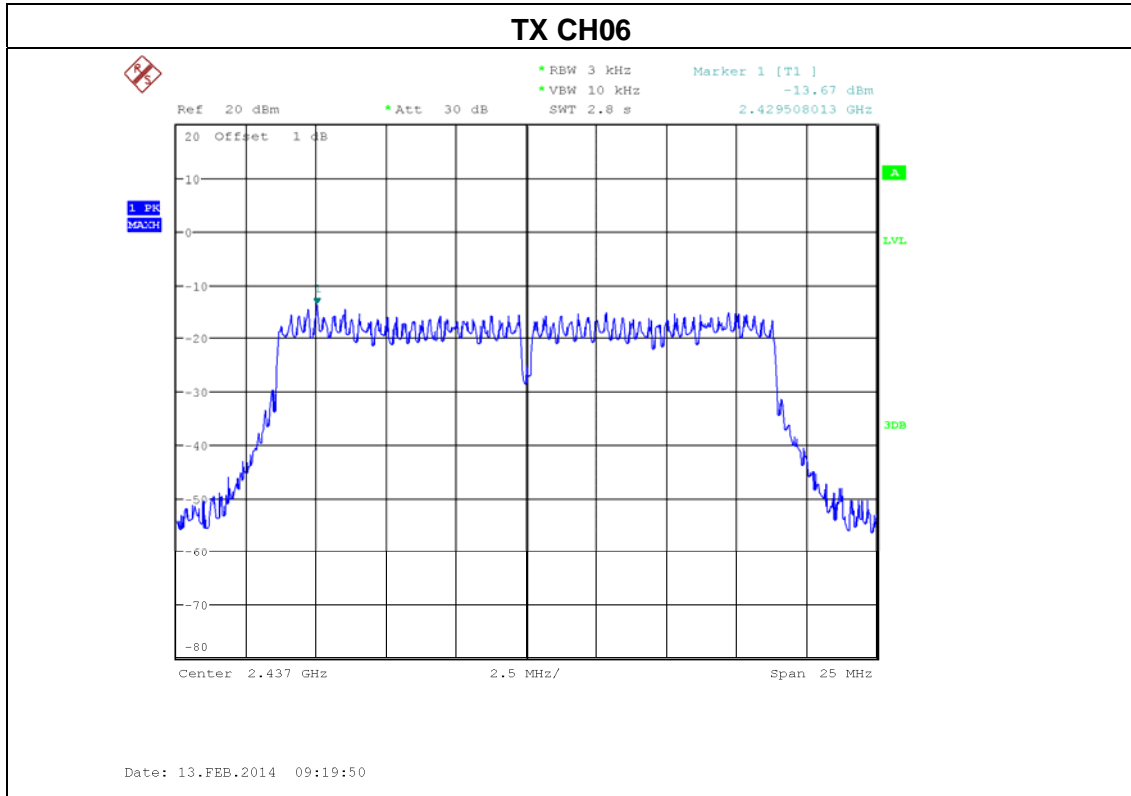






Test date: Feb. 13, 2014

Test Mode : TX N-40M Mode

Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH03	2422	-14.91	8
CH06	2437	-15.99	8
CH09	2452	-16.43	8

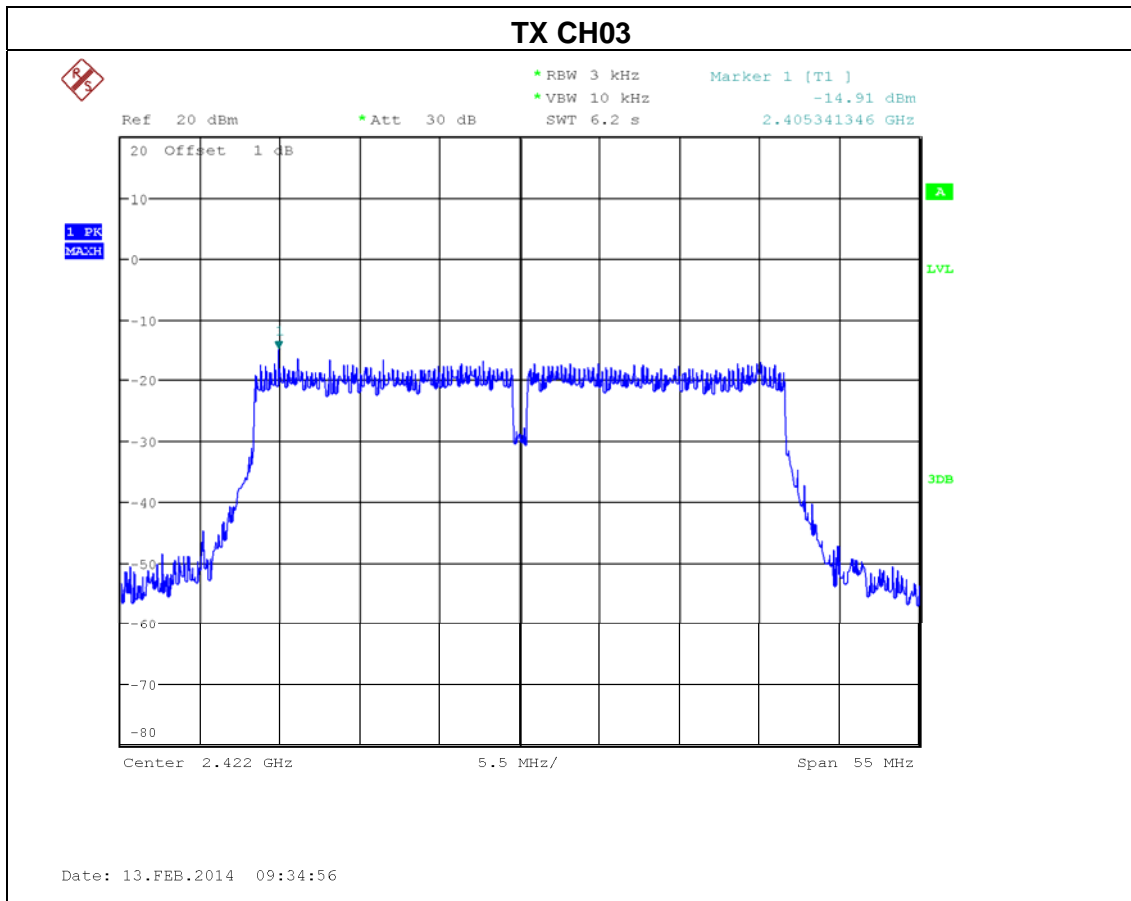

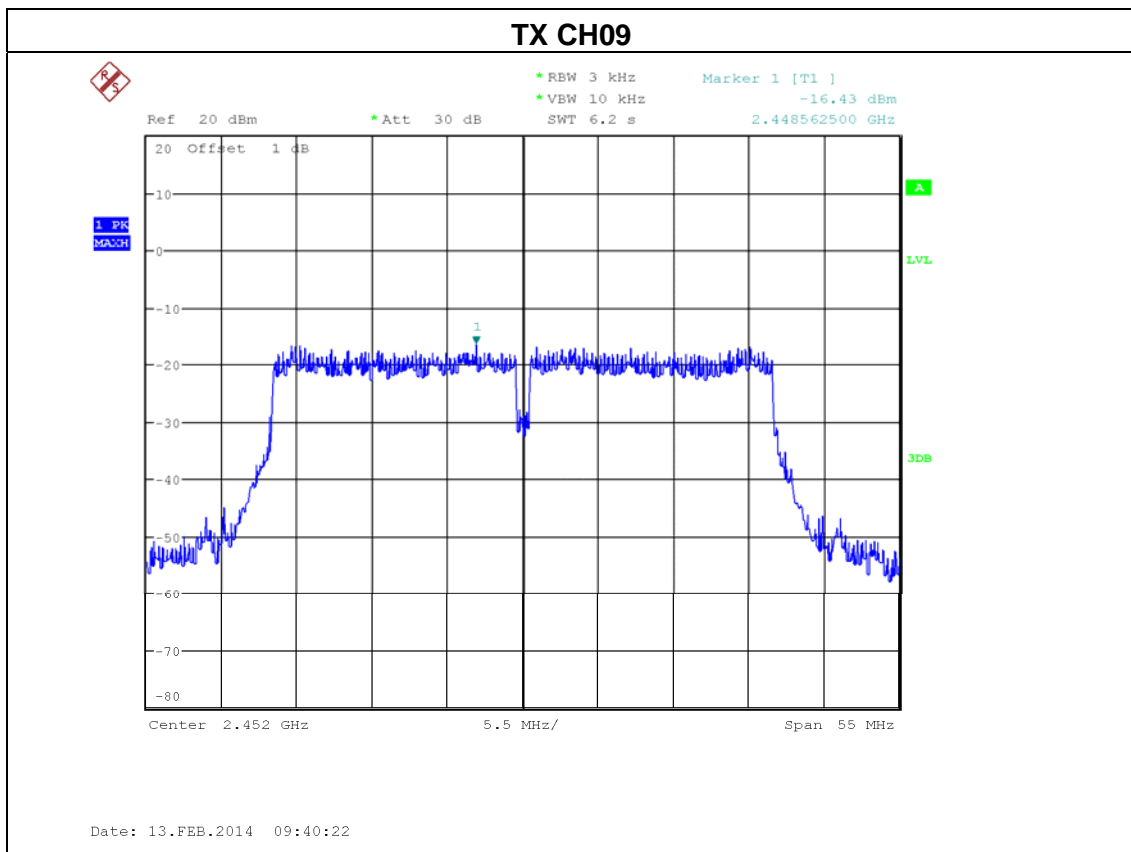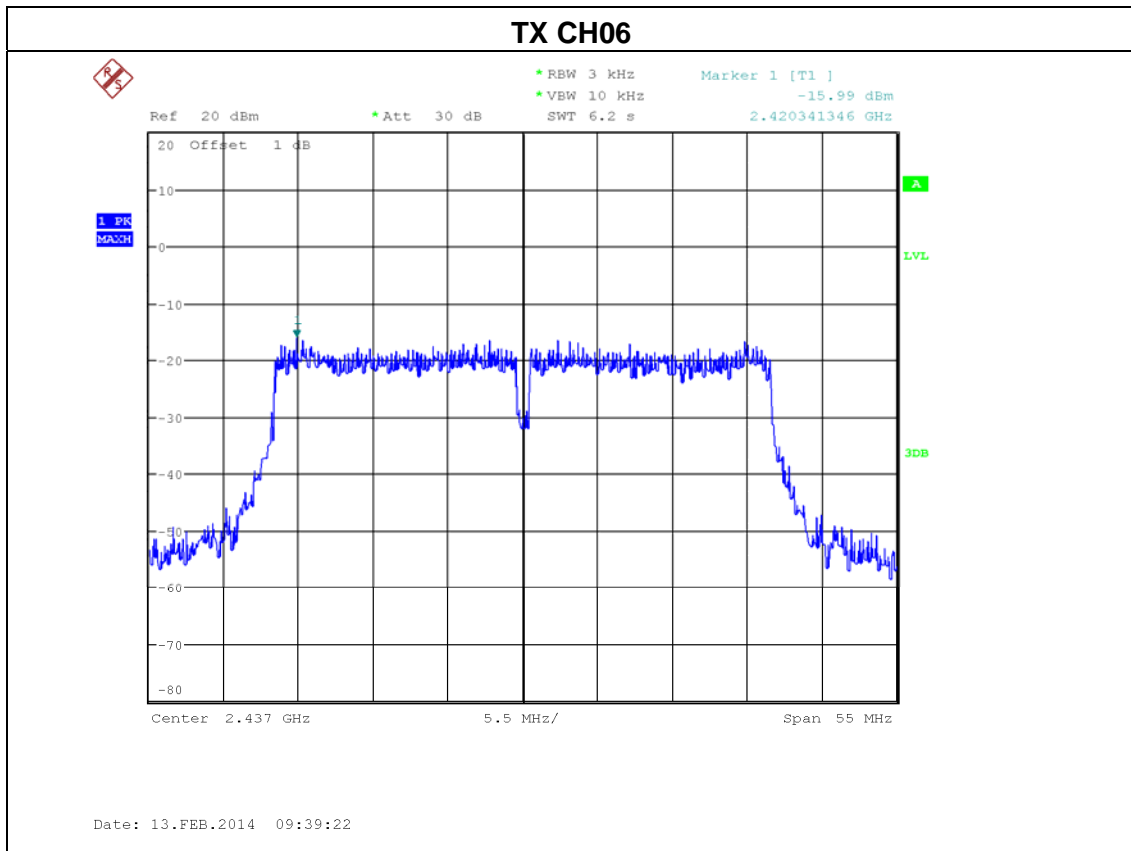



9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov.09.2014
3	Test Cable	N/A	C_17	N/A	Mar.15, 2014
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Apr. 25, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Apr. 25, 2014
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Apr. 25, 2014
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014
7	Spectrum	Agilent	E4408B	US39240143	Nov. 09.2014
8	Test Cable	HUBER+SUHNER	C-45	N/A	Apr. 30, 2014
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 22, 2014

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09.2014

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Apr. 25, 2014
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Apr. 25, 2014



Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09.2014

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09.2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.



10. EUT TEST PHOTO

Conducted Measurement Photos





**Radiated Measurement Photos
9K~30MHz**



**Radiated Measurement Photos
30~1000MHz**



**Radiated Measurement Photos
Above 1000MHz**

