


REV. AD 0MCA1820



20°C

50N

PR APPD 262 TC

NYLON C

13

14

15

16

17

18

19

20

21

6

7

8

84

83

82

81

80

79

78


77

76

75

74

73

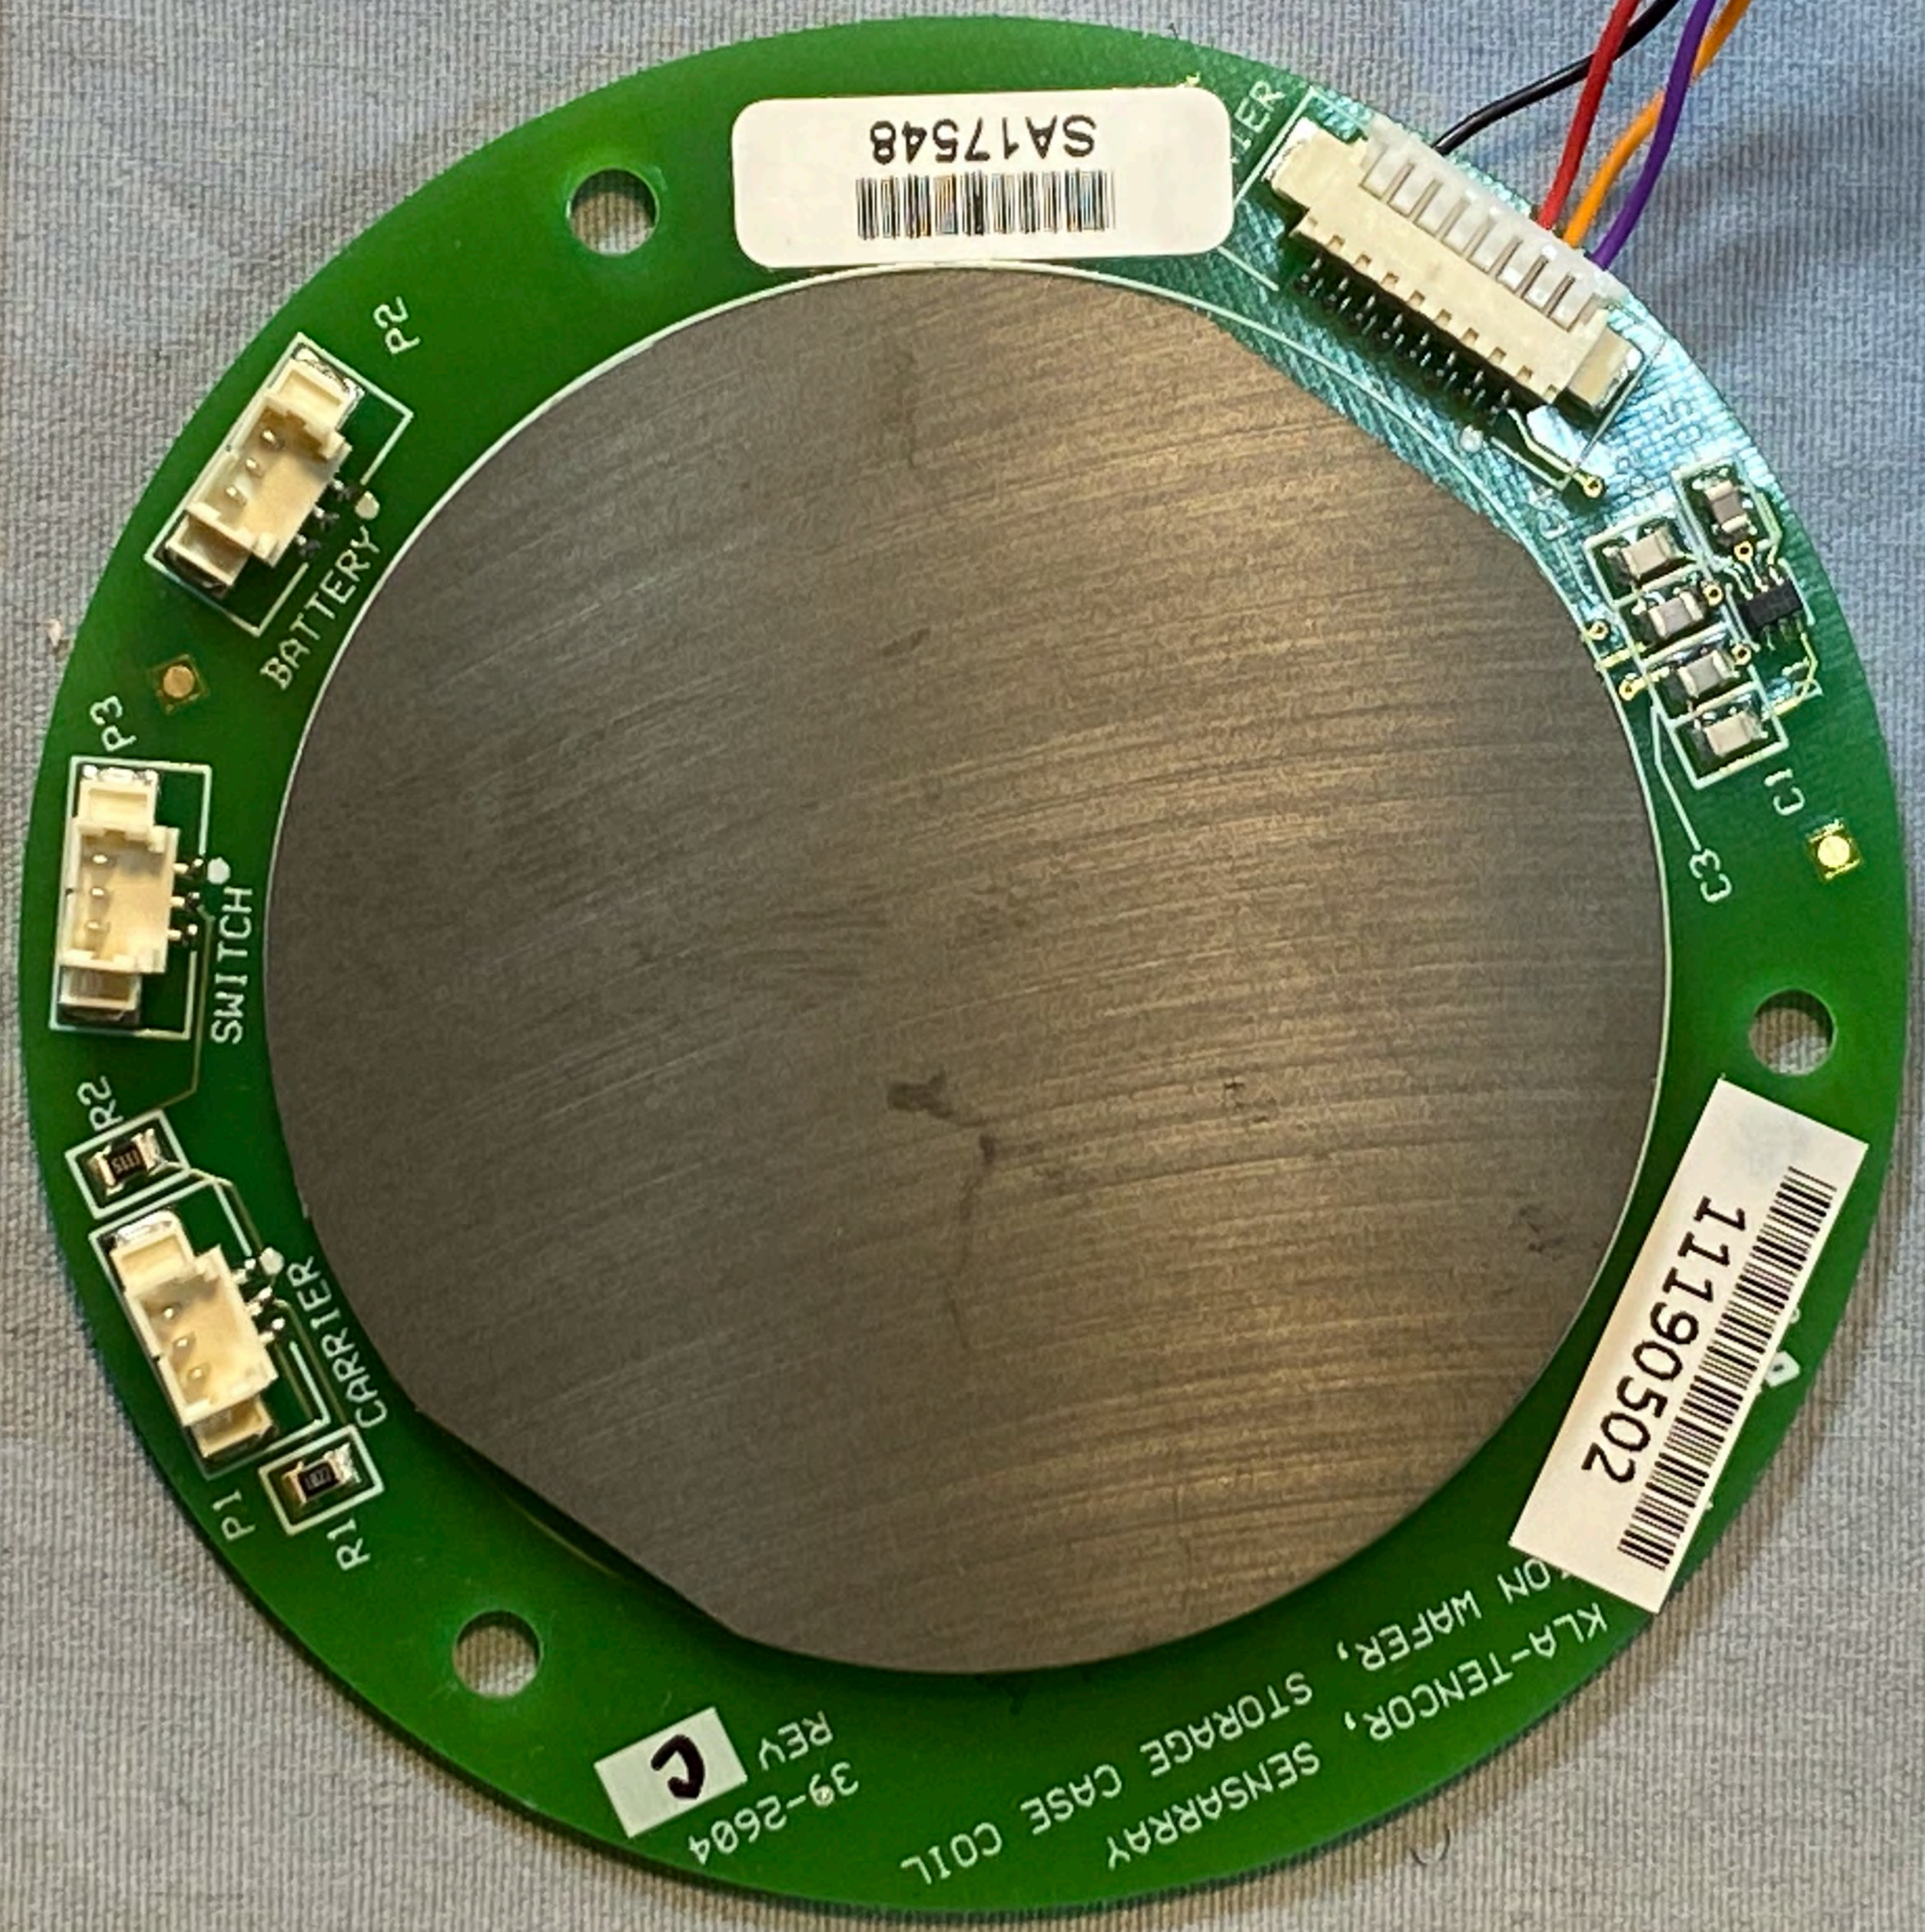

39-2604
REV C

KLA-TENCOR, SENSORARRAY
STORAGE CASE COIL
ON WAFER,

11190502

SA17548

PR APPD 262

50N

20°C

Model No.: **CS-NP60FU**

① Part No.: NP-60, CGA-S301

Rating: 3.7VDC = 1050mAh / 3.89Wh

Lithium-ion Battery Pack



⚠ **CAUTION** | WARRANTY VOID IF LABEL IS REMOVED

- DO NOT ATTEMPT TO DISASSEMBLE, OPEN OR SERVICE THE BATTERY PACK.
- REPLACE ONLY WITH THE BATTERY PACK DESIGNATED FOR THIS PRODUCT.
- DO NOT CRUSH, PUNCTURE, SHORT EXTERNAL CONTACTS OR DISPOSE OF IN FIRE OR WATER.
- DO NOT STORE ABOVE 60°C (140°F).

ATTENTION!


NEW BATTERY PACK MUST BE FULLY CHARGED BEFORE USE.

TO REDUCE RISK OF FIRE OR BURNS

READ INSTRUCTIONS IN OPERATING GUIDE BEFORE USING THE BATTERY.

Limited Charge Voltage: 4.2V±0.05V Standard: GB 31241-2014

Manufacture by: ShenZhen HENZENS Technology Co., Limited

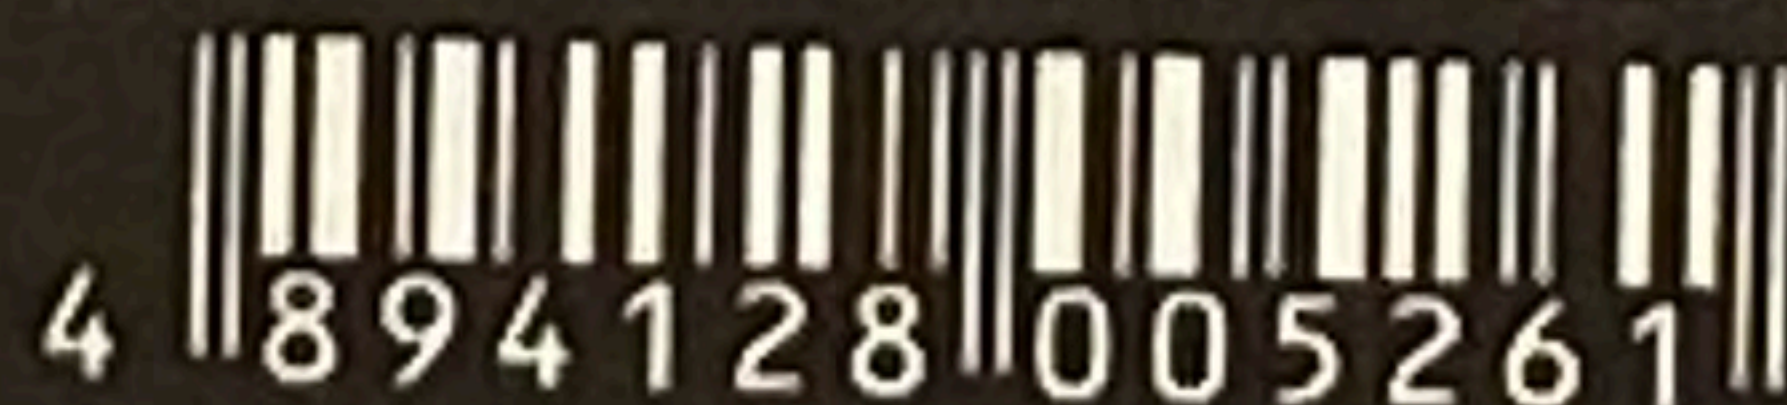

4 894128 005261

