



SAR Compliance Test Report

Test report no.:	DTX12466-EN	Date of report:	October 28, 2004
Template version:	2	Number of pages:	18
Testing laboratory:	TCC Copenhagen Nokia Danmark A/S Frederikskaej DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01	Client:	Nokia Danmark A/S Frederikskaej DK-1790 Copenhagen V Denmark Tel. +45 33 29 29 29 Fax. +45 33 29 20 01
Responsible test engineer:	Leif Funch Klysner	Product contact person:	Anders Sv. Nielsen
Measurements made by:	Leif Funch Klysner		
Tested device:	RM-14		
FCC ID:	QTKRM-14	IC:	661AD-RM14
Supplement reports:	-		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Copenhagen.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:	October 28, 2004		
For the contents:			

A handwritten signature in black ink, appearing to read "Leif Funch Klysner".

Leif Funch Klysner
Test Engineer

CONTENTS

1. SUMMARY OF SAR TEST REPORT.....	3
1.1 TEST DETAILS.....	3
1.2 MAXIMUM RESULTS.....	3
1.2.1 Head Configuration.....	3
1.2.2 Body Worn Configuration.....	3
1.2.3 Maximum Drift	3
1.2.4 Measurement Uncertainty	3
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	4
2.1 PICTURE OF THE DEVICE.....	4
2.2 DESCRIPTION OF THE ANTENNA.....	4
3. TEST CONDITIONS	4
3.1 TEMPERATURE AND HUMIDITY.....	4
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER	5
4. DESCRIPTION OF THE TEST EQUIPMENT	5
4.1 MEASUREMENT SYSTEM AND COMPONENTS	5
4.1.1 Isotropic E-field Probe 1429.....	6
4.2 PHANTOMS	7
4.3 SIMULATING LIQUIDS	7
4.3.1 Liquid Recipes.....	7
4.3.2 Verification of the System.....	8
4.3.3 Tissue Simulants used in the Measurements.....	9
5. DESCRIPTION OF THE TEST PROCEDURE	10
5.1 DEVICE HOLDER.....	10
5.2 TEST POSITIONS.....	11
5.2.1 Against Phantom Head.....	11
5.2.2 Body Worn Configuration	12
5.3 SCAN PROCEDURES.....	12
5.4 SAR AVERAGING METHODS.....	12
6. MEASUREMENT UNCERTAINTY.....	13
7. RESULTS	14
APPENDIX A: VALIDATION SCANS	15
APPENDIX B: MEASUREMENT SCANS.....	16
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	17
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	18

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	October 13, 2004 – October 15, 2004
SN, HW and SW numbers of tested device	004400/53/161886/4 HW: 0400 SW: 03.04 DUT#234725
Batteries used in testing	Fixed Battery, BL-8N
Headsets used in testing	HS-14, DUT#234767
Other accessories used in testing	-
State of sample	Prototype unit
Notes	

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f(MHz)	EIRP	Position	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
GSM1900	810 / 1909.8	31.78 dBm	Left, Cheek + BT Active	1.6 W/kg	0.71 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f(MHz)	EIRP	Separation distance	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
GPRS1900	512 / 1710.2	29.73 dBm	1.5 cm	1.6 W/kg	0.75 W/kg	PASSED

1.2.3 Maximum Drift

Maximum drift during measurements	-0.23 dB
-----------------------------------	----------

1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%	± 29.8 %
--------------------------------	----------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population/uncontrolled

Modes and Bands of Operation	GSM 1900	GPRS (GSM)	BT
Modulation Mode	GMSK	GMSK	GFSK
Duty Cycle	1/8	1/8 or 2/8	
Transmitter Frequency Range (MHz)	1850.2 - 1909.8	1850.2 - 1909.8	2400.0 - 2483.5

Outside of USA and Canada, the transmitter of the device is capable of operating also in GSM900/GSM1800, which are not part of this filing.

2.1 Picture of the Device



Closed Mode



Open Mode

2.2 Description of the Antenna

The device has an internal patch antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Period of measurement (dd.mm.yyyy):	13.10.2004 – 15.10.2004
Ambient temperature (°C):	22 ±1
Ambient humidity (RH %):	45 ±10

SAR Report

Type: RM-14

DTX12466-EN

Applicant: Nokia Corporation

Copyright © 2004 TCC Copenhagen

3.2 Test Signal, Frequencies, and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The power output was measured by a separate test laboratory on the same unit as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY 4 software version 4.3, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'worst-case extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE3	501	12 months	01/2005
DAE3	573	12 months	09/2005
E-field Probe ET3DV6R	1429	12 months	01/2005
Dipole Validation Kit, D1900V2	5d026	24 months	02/2005

Additional test equipment used in testing:



Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	SMIQ03B	826046/034	36 months	02/2007
Amplifier	ZHL-42W	E012903	-	-
Power Meter	NRVD	840297/008	24 months	11/2005
Power Sensor	NRV-Z51	100184	24 months	11/2005
Call Tester	4400M	0411216	-	-
Call Tester	CMU200	105900	-	-
Vector Network Analyzer	AT8753ES	MY40001091	12 months	08/2005
Dielectric Probe Kit	HP85070B	US33020403	-	-

4.1.1 Isotropic E-field Probe 1429

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	Not available
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both validation testing and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

Validation tests were performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Simulating Liquids

Recommended values for the dielectric parameters of the simulating liquids are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using liquids whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the liquid was 15.0 ± 0.5 cm measured from the ear reference point during validation and device measurements.

4.3.1 Liquid Recipes

The following recipes were used for Head and Body liquids:

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 Verification of the System

The manufacturer calibrates the probes annually. Dielectric parameters of the simulating liquids were measured every day using the dielectric probe kit and the network analyser. A SAR measurement was made following the determination of the dielectric parameters of the liquids, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The validation results (dielectric parameters and SAR values) are given in the table below.

System verification, head tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
1900	Reference result	10.4	38.6	1.46	N/A
	± 10% window	9.36 – 11.44			
	October 13, 2004	9.37	38.2	1.46	21.4
	October 14, 2004	9.39	38.1	1.46	21.3

System verification, body tissue simulant

f [MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
1900	Reference result	10.6	51.2	1.59	N/A
	± 10% window	9.54 – 11.66			
	October 15, 2004	10.3	50.7	1.62	21.0

Plots of the Verification scans are given in Appendix A.

4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
1880	Recommended value	40.0	1.40	N/A
	$\pm 5\%$ window	38.0 – 42.0	1.33 – 1.47	
	October 13, 2004	38.2	1.43	21.4
	October 14, 2004	38.2	1.44	21.3

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
1880	Recommended value	53.3	1.52	N/A
	$\pm 5\%$ window	50.6 – 56.0	1.44 – 1.60	
	October 15, 2004	50.7	1.60	21.0

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".



Photo of the device in “Closed cheek” position



Photo of the device in “Closed tilt” position



Photo of the device in “Open cheek” position



Photo of the device in “Open tilt” position

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo belowcm using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gave higher results.



Photo of the device positioned for Body SAR measurement. The spacer was removed for the tests.

5.3 Scan Procedures

First coarse scans were used for determination of the field distribution. Next a cube scan, 7x7x7 points covering a volume of 30x30x30mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the coarse scan and again at the end of the cube scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the cube scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the cube scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	c_i	$c_i \cdot u_i$ (%)	v_i
Measurement System							
Probe Calibration	E2.1	± 5.8	N	1	1	± 5.8	∞
Axial Isotropy	E2.2	± 4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Hemispherical Isotropy	E2.2	± 9.6	R	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary Effect	E2.3	± 8.3	R	$\sqrt{3}$	1	± 4.8	∞
Linearity	E2.4	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	E2.5	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	E2.6	± 1.0	N	1	1	± 1.0	∞
Response Time	E2.7	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	E2.8	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Conditions - Noise	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Conditions - Reflections	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	± 0.4	R	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	± 2.9	R	$\sqrt{3}$	1	± 1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	± 3.9	R	$\sqrt{3}$	1	± 2.3	∞
Test sample Related							
Test Sample Positioning	E4.2.1	± 6.0	N	1	1	± 6.0	11
Device Holder Uncertainty	E4.1.1	± 5.0	N	1	1	± 5.0	7
Output Power Variation - SAR drift measurement	6.6.3	± 10.0	R	$\sqrt{3}$	1	± 5.8	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid Conductivity Target - tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid Conductivity - measurement uncertainty	E3.3	± 5.5	N	1	0.64	± 3.5	5
Liquid Permittivity Target tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid Permittivity - measurement uncertainty	E3.3	± 2.9	N	1	0.6	± 1.7	5
Combined Standard Uncertainty				RSS		± 14.9	206
Coverage Factor for 95%				k=2			
Expanded Standard Uncertainty						± 29.8	

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

GSM1900 Head SAR results

Position			SAR, averaged over 1g (W/kg)		
			Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level		30.74 dBm	29.68 dBm	31.78 dBm	
Left	Cheek	Open	0.65	0.62	0.70
		Closed		0.42	
	Tilt	Open		0.21	
		Closed		0.26	
Right	Cheek	Open		0.60	
		Closed		0.41	
	Tilt	Open		0.20	
		Closed		0.27	
Highest SAR value measurement in this band repeated with BT active					0.71

The measured Body SAR values for the test device are tabulated below:

GPRS1900 Body SAR results

Body-worn location setup		SAR, averaged over 1g (W/kg)		
		Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
Power level		29.73 dBm	29.27 dBm	32.01 dBm
Without headset	Closed	0.75	0.66	0.70
Headset HS-14	Closed	0.66	0.60	0.62
Highest SAR value measurement in this mode repeated with BT active	Closed	0.72		

Plots of the Measurement scans are given in Appendix B.



T117 (EN ISO/IEC 17025)

APPENDIX A: VALIDATION SCANS

See the following pages.

TCC

Copenhagen

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026

Communication System: Continuous Wave; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Medium temperature: 21.4 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 10.6 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.37 mW/g; SAR(10 g) = 4.91 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

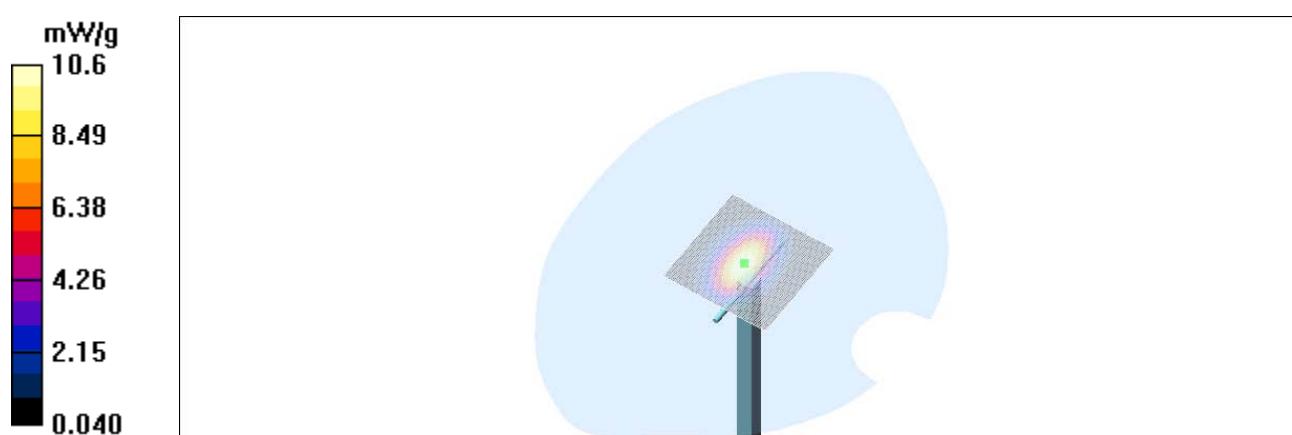

TCC

Copenhagen

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026

Communication System: Continuous Wave; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Medium temperature: 21.3 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 10.7 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.9 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.39 mW/g; SAR(10 g) = 4.94 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

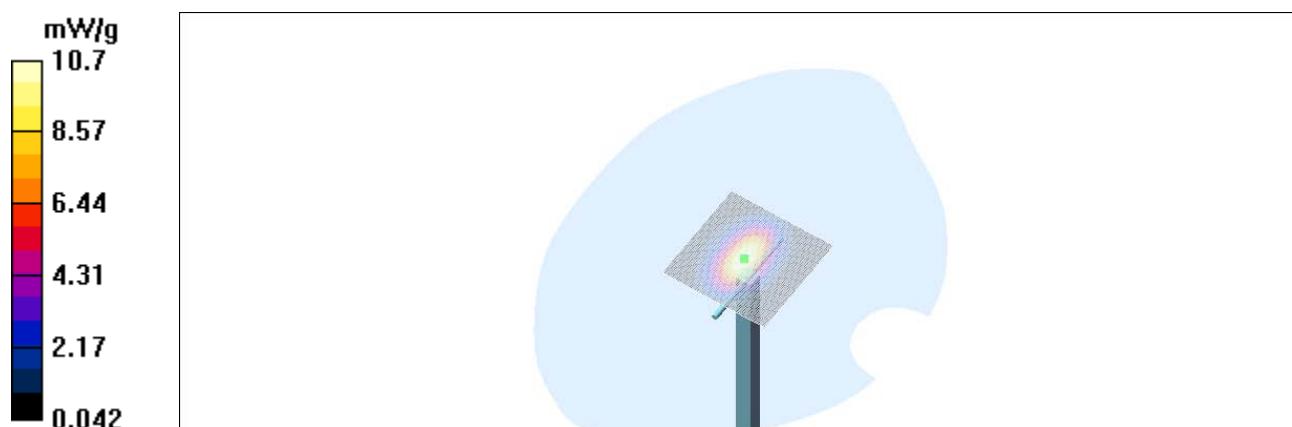

TCC

Copenhagen

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d026

Communication System: Continuous Wave; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Body 1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.62$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³ Medium temperature: 21.0 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429; ConvF(4.33, 4.33, 4.33); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.9 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.4 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.38 mW/g

Maximum value of SAR (measured) = 11.7 mW/g





T117 (EN ISO/IEC 17025)

APPENDIX B: MEASUREMENT SCANS

See the following pages.

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.47$

mho/m ; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$ Medium temperature: 21.3 °C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position - High - Open/Area Scan (41x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.754 mW/g

Touch position - High - Open/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 12.8 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.696 mW/g; SAR(10 g) = 0.364 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.744 mW/g

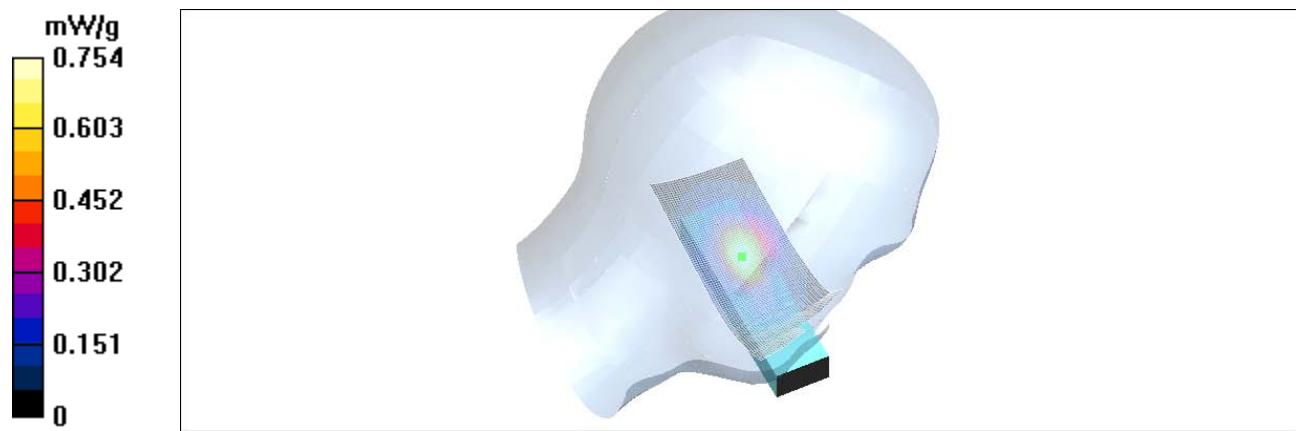

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Medium temperature: 21.4 °C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position - Middle - Closed/Area Scan (41x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.439 mW/g

Touch position - Middle - Closed/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.8 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.417 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.453 mW/g

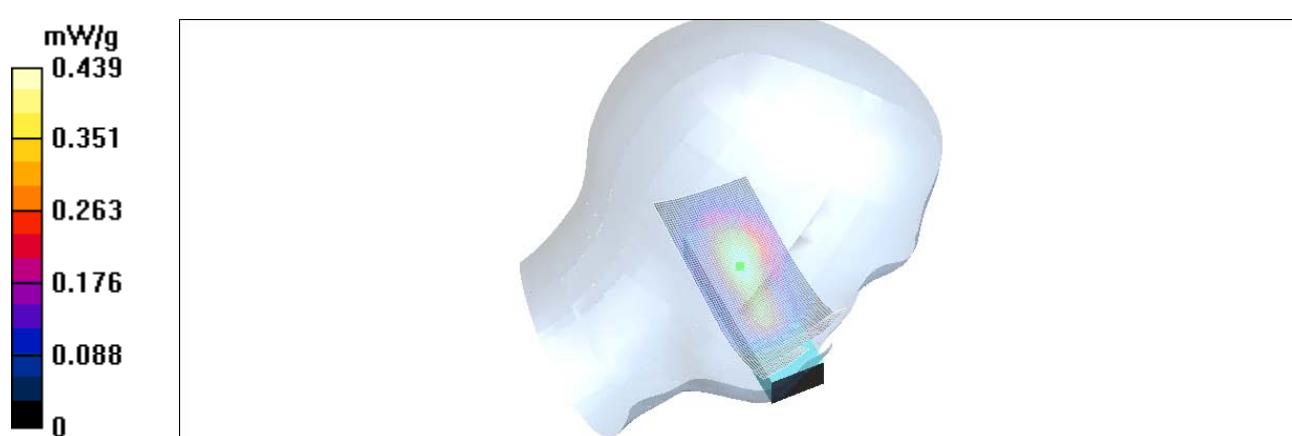

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.2$; ρ

$= 1000$ kg/m³ Medium temperature: 21.4 °C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Tilt position - Middle - Open/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.226 mW/g


Tilt position - Middle - Open/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

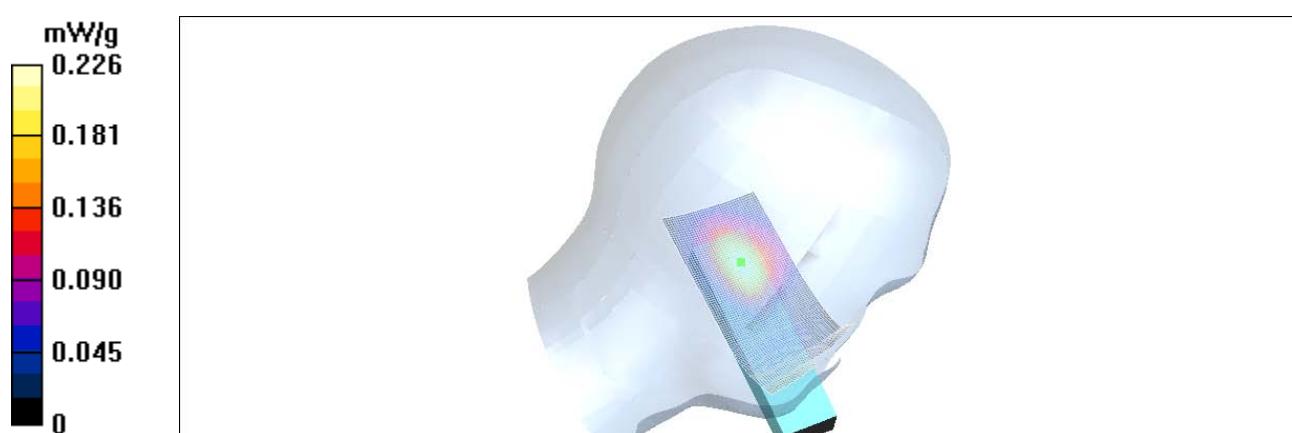

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.2$; ρ

$= 1000$ kg/m³ Medium temperature: 21.4 °C

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Tilt position - Middle - Closed/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.275 mW/g

Tilt position - Middle - Closed/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.542 W/kg

SAR(1 g) = 0.258 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.276 mW/g



TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.2$; ρ

$= 1000$ kg/m 3 Medium temperature: 21.3 °C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position - Middle - Open/Area Scan (41x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.652 mW/g

Touch position - Middle - Open/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement

grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.6 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.601 mW/g; SAR(10 g) = 0.324 mW/g

Maximum value of SAR (measured) = 0.653 mW/g



TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.2$; ρ

$= 1000$ kg/m³ Medium temperature: 21.3 °C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position - Middle - Closed/Area Scan (41x101x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.432 mW/g

Touch position - Middle - Closed/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.2 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 0.446 mW/g

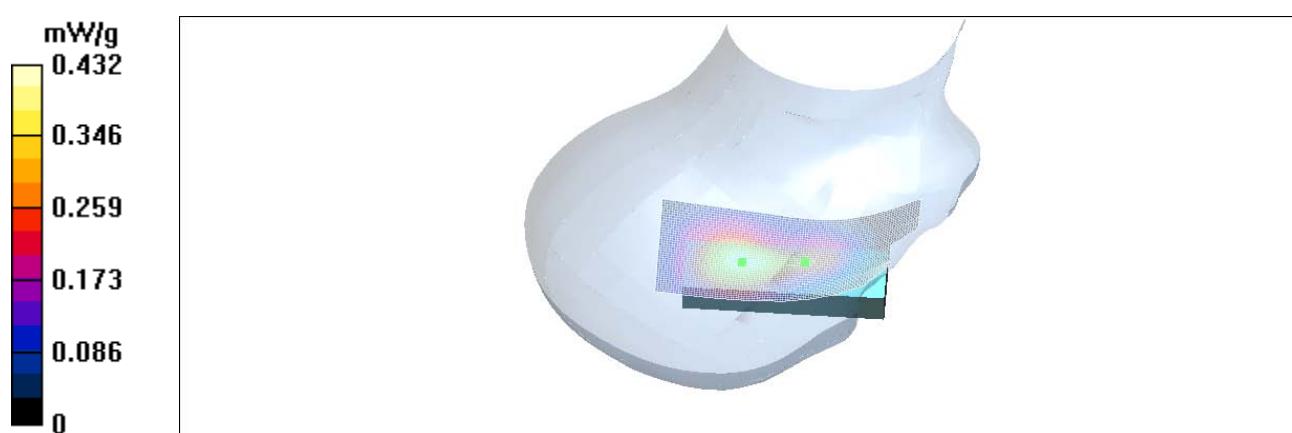

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.2$; ρ

$= 1000$ kg/m³ Medium temperature: 21.3 °C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Tilt position - Middle - Open/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.204 mW/g


Tilt position - Middle - Open/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.207 mW/g

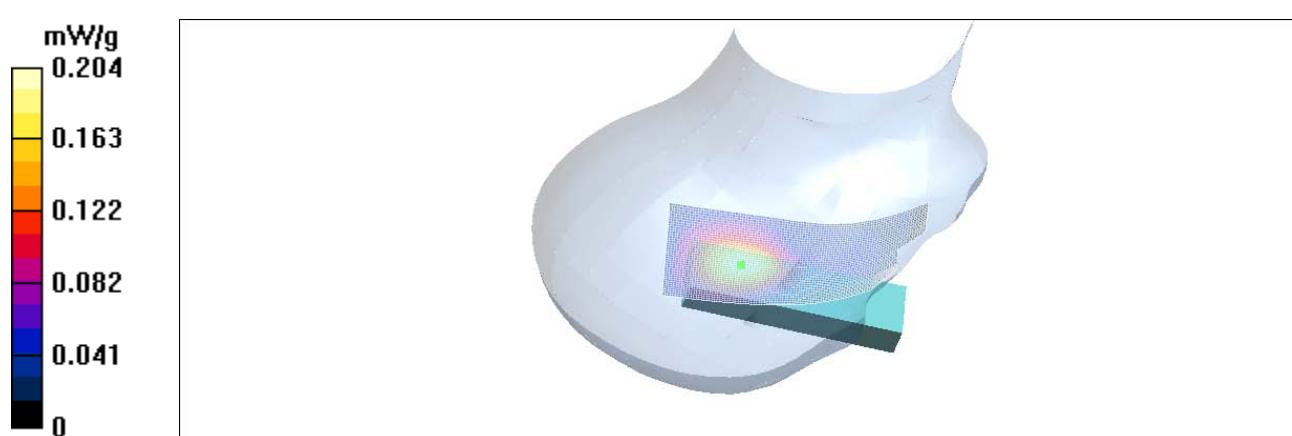

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.2$; ρ

$= 1000$ kg/m³ Medium temperature: 21.3 °C

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Tilt position - Middle - Closed/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.264 mW/g


Tilt position - Middle - Closed/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.294 mW/g

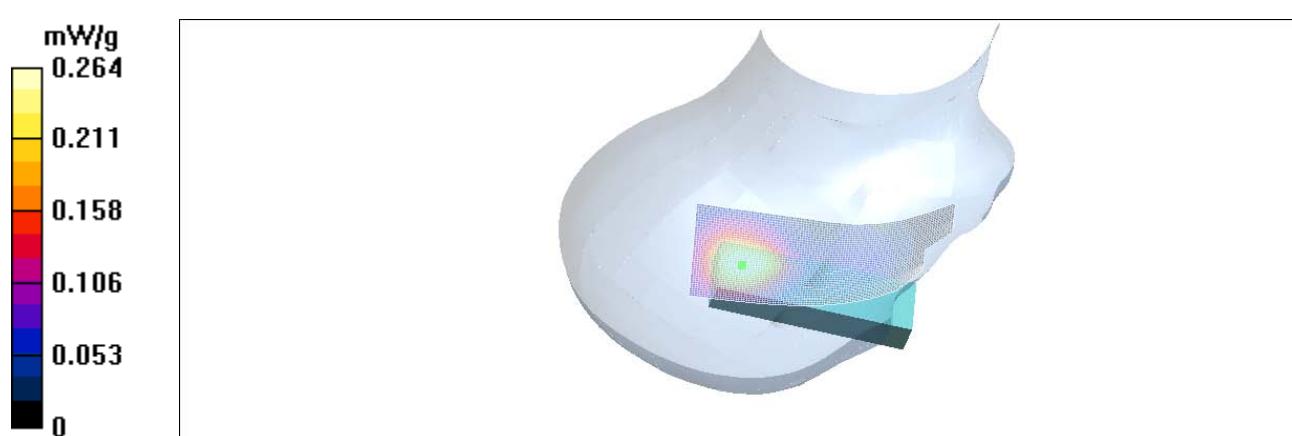

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: Head 1900 Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³ Medium temperature: 21.3 °C
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.87, 4.87, 4.87); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High Band; Type: QD000P40CB; Serial: TP-1301
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Touch position - High - Open - BT Active/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.775 mW/g

Touch position - High - Open - BT Active/Zoom Scan (7x7x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 12.8 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.368 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.757 mW/g

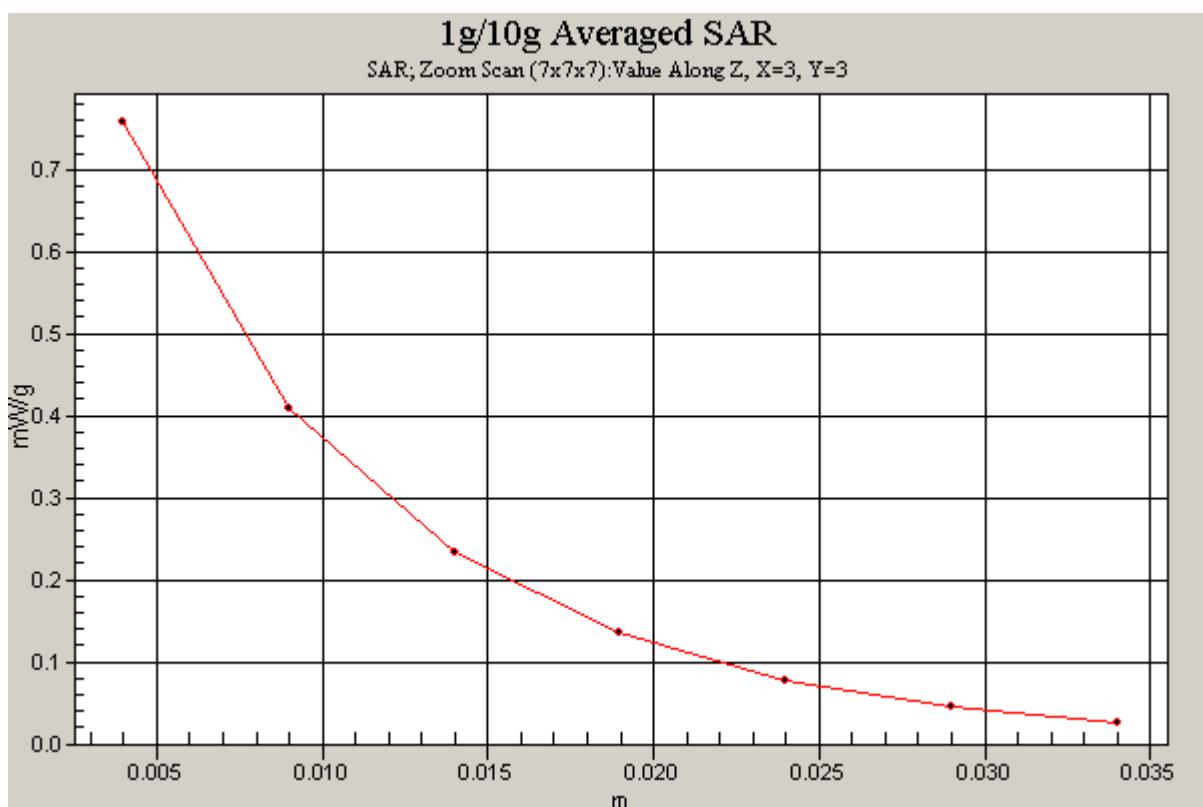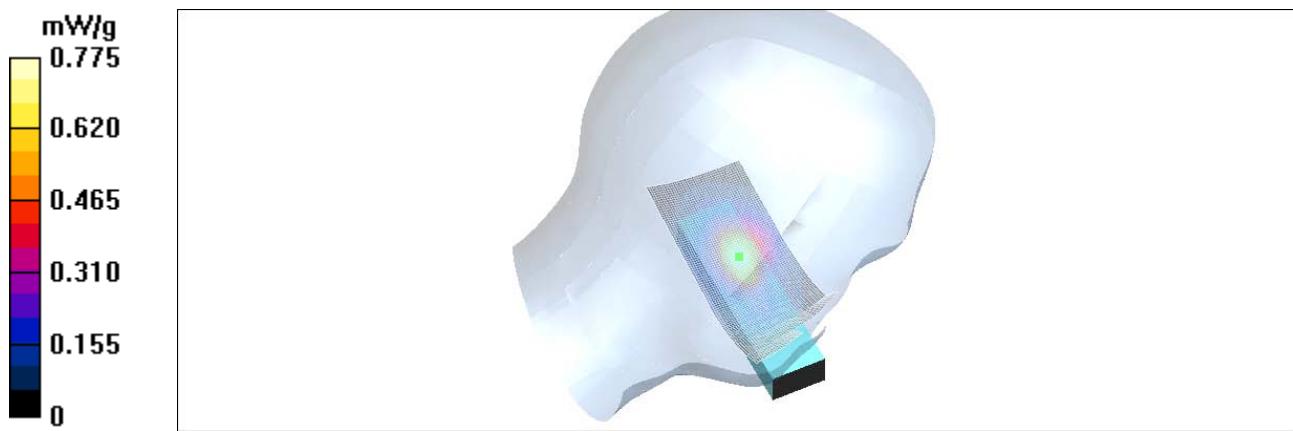

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: 1900 - GPRS - Dual Slot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Body 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³ Medium temperature: 21.0 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.33, 4.33, 4.33); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body - Low - No Accessory/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.862 mW/g

Body - Low - No Accessory/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 20.7 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.754 mW/g; SAR(10 g) = 0.446 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.785 mW/g

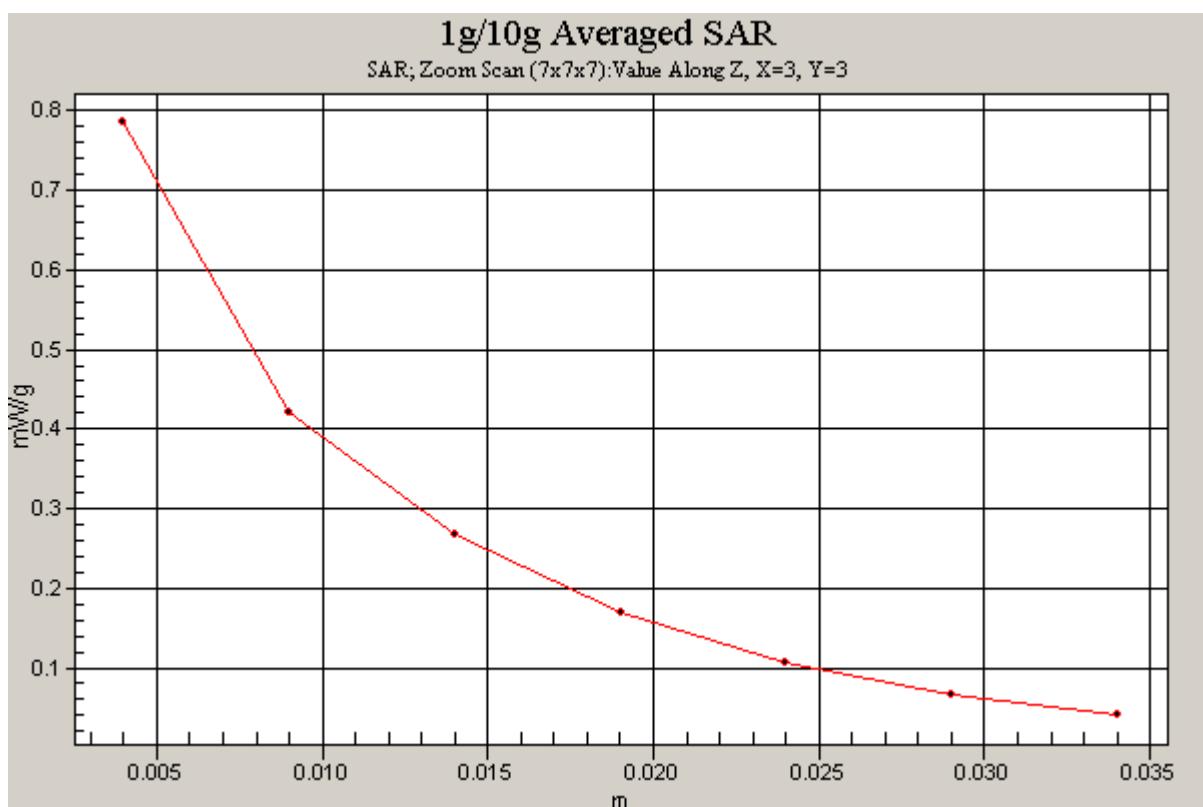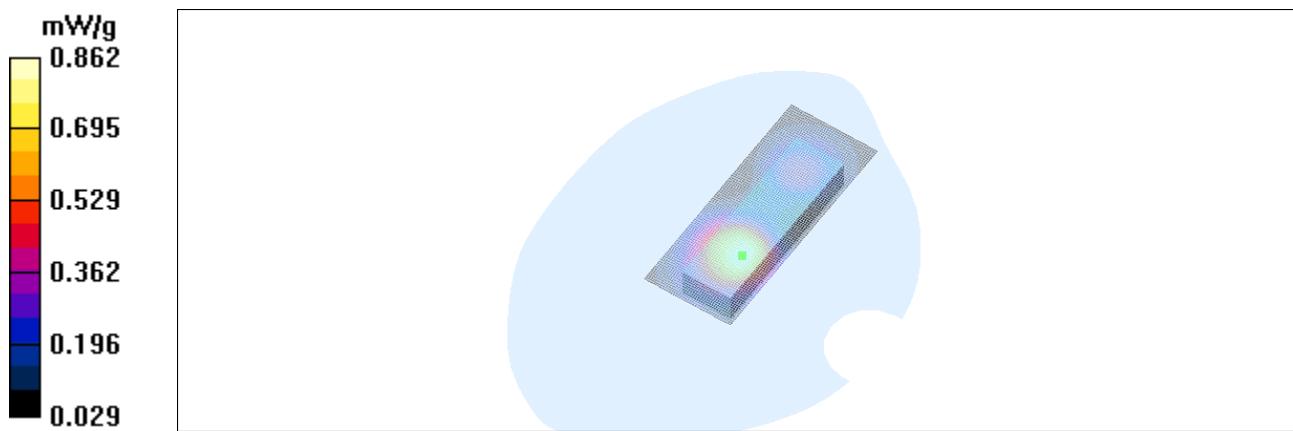

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: 1900 - GPRS - Dual Slot; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium: Body 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 50.7$; $\rho =$

1000 kg/m 3 Medium temperature: 21.0 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.33, 4.33, 4.33); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body - Middle - No Accessory/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.705 mW/g

Body - Middle - No Accessory/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 19.1 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.660 mW/g; SAR(10 g) = 0.388 mW/g

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.684 mW/g

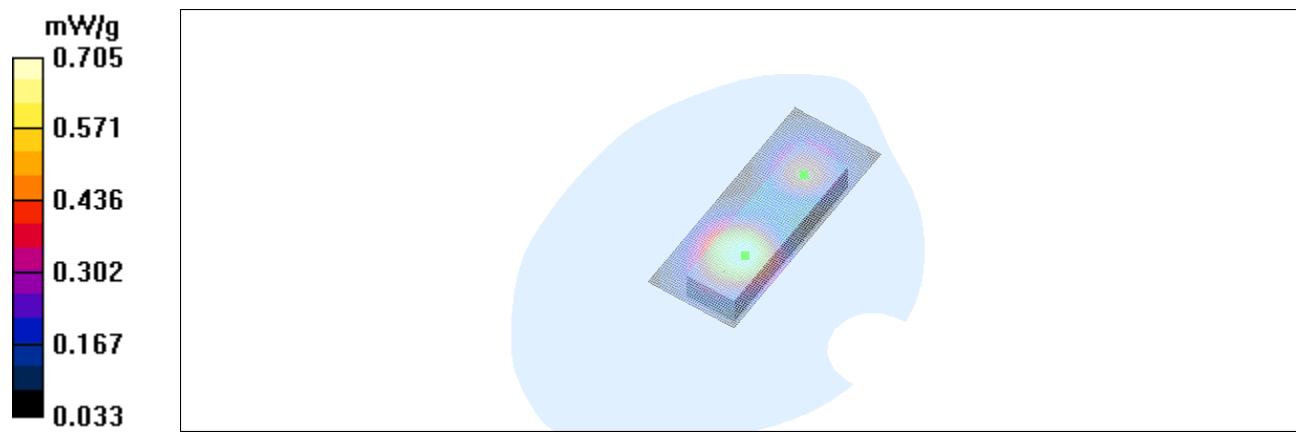

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: 1900 - GPRS - Dual Slot; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: Body 1900 Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.63$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³ Medium temperature: 21.0 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.33, 4.33, 4.33); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body - High - No Accessory/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.759 mW/g

Body - High - No Accessory/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.412 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.730 mW/g

Body - High - No Accessory/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 19.8 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.349 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.627 mW/g

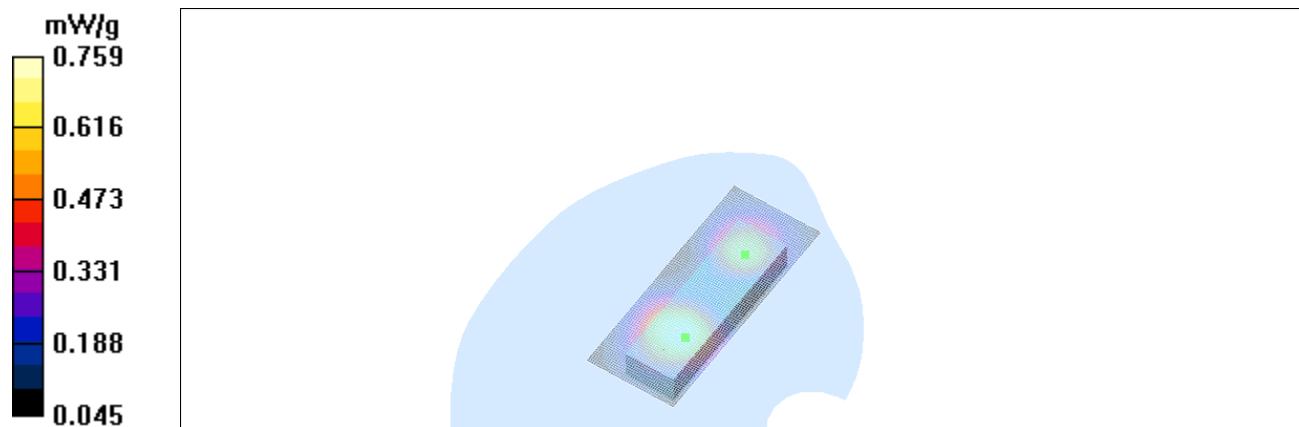

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: 1900 - GPRS - Dual Slot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Body 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³ Medium temperature: 21.0 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.33, 4.33, 4.33); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body - Low + HS-14/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.717 mW/g

Body - Low + HS-14/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.1 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.390 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.687 mW/g

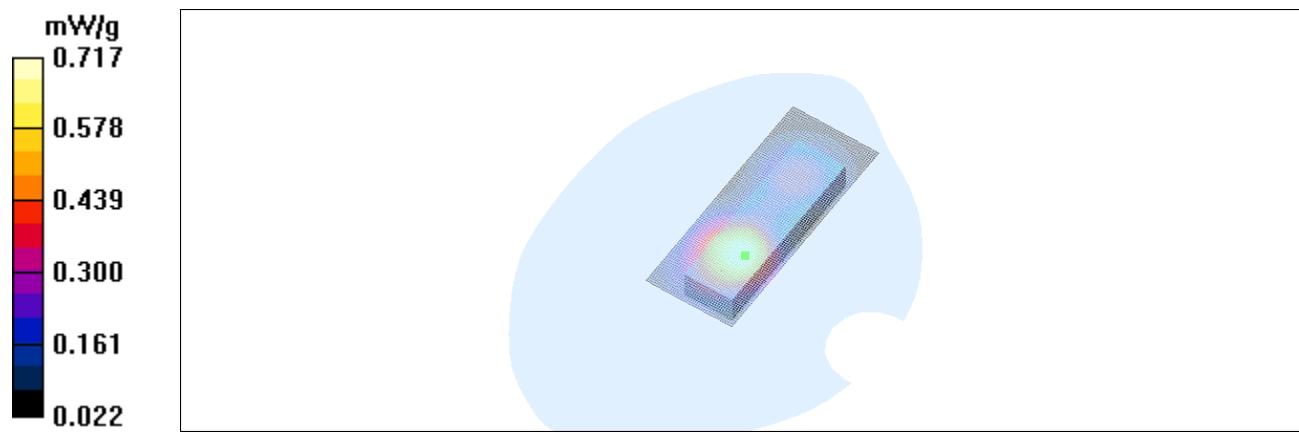

TCC

Copenhagen

DUT: 234725; Type: RM-14; Serial: 004400/53/161886/4

Communication System: 1900 - GPRS - Dual Slot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: Body 1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³ Medium temperature: 21.0 °C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1429 - WCE; ConvF(4.33, 4.33, 4.33); Calibrated: 21.01.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn573; Calibrated: 24.09.2004
- Phantom: SAM High band; Type: Twin Phantom; Serial: TP-1274
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body - Low - No Accessory - BT Active/Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.782 mW/g

Body - Low - No Accessory - BT Active/Zoom Scan (7x7x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20 V/m; Power Drift = -0.1 dB


Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 0.715 mW/g; SAR(10 g) = 0.424 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.

Maximum value of SAR (measured) = 0.738 mW/g

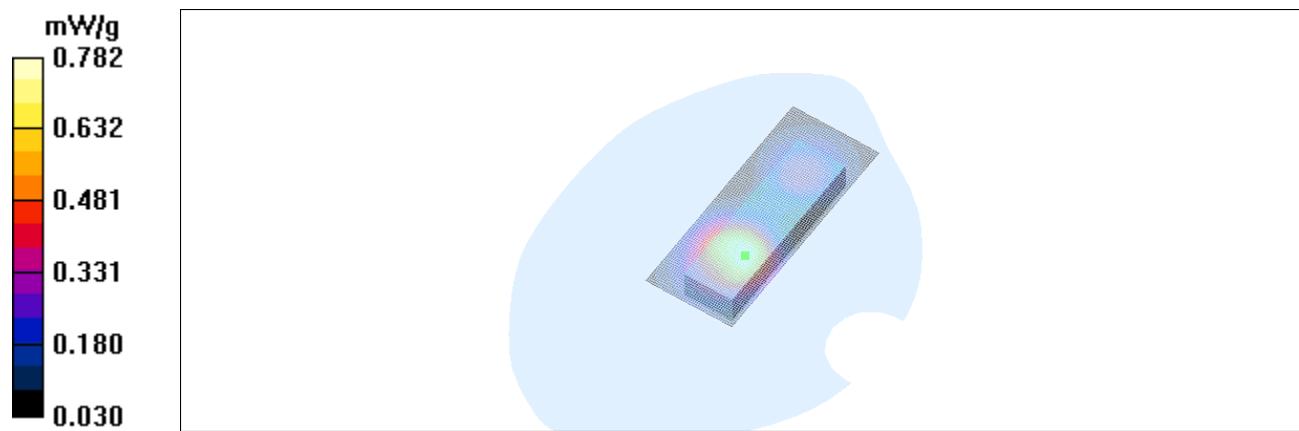



T117 (EN ISO/IEC 17025)

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

See the following pages.

17556
3/2-04
3
Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **Nokia DK**

CALIBRATION CERTIFICATE

Object(s) **ET3DV6R - SN:1429**

Calibration procedure(s) **QA CAL-01.v2**
Calibration procedure for dosimetric E-field probes

Calibration date: **January 21, 2004**



Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)


Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS, No. 251-0340)	Apr-04
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05

Calibrated by:	Name	Function	Signature
	Nico Vetterli	Technician	
Approved by:	Katja Pokovic	Laboratory Director	

Date issued: January 22, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Conversion Factor Assessment

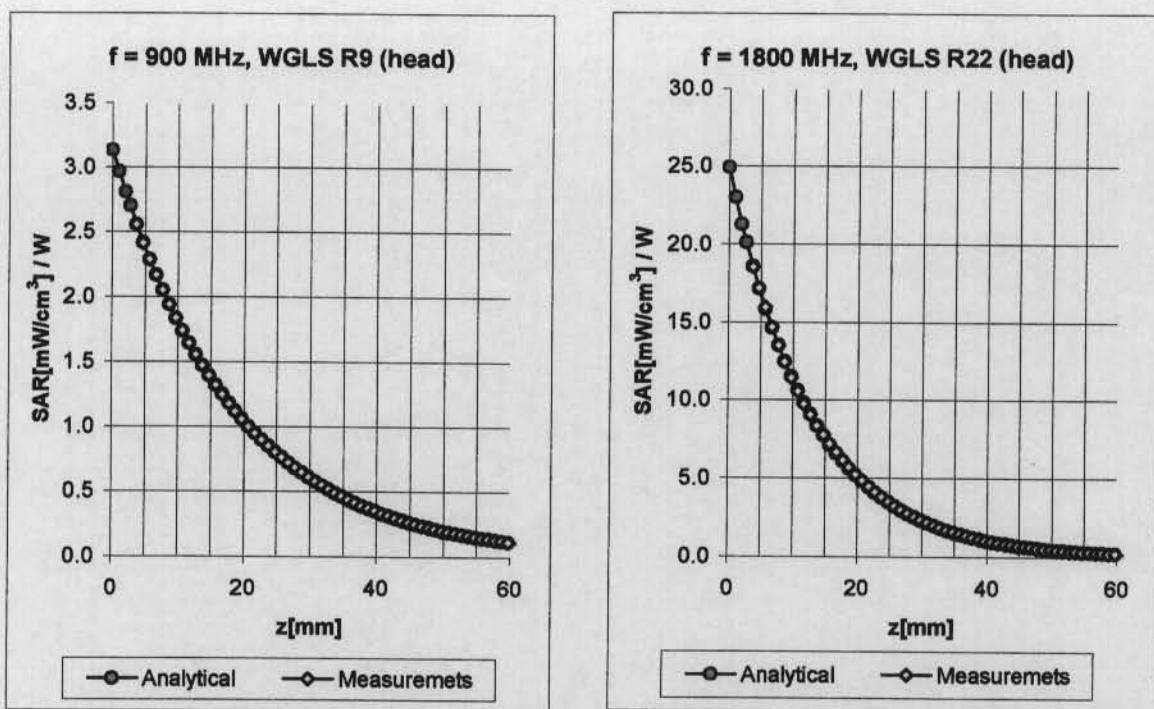

f [MHz]	Validity [MHz] ^B	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
900	800-1000	Head	$41.5 \pm 5\%$	$0.97 \pm 5\%$	0.51	1.96	6.09	$\pm 11.3\% \text{ (k=2)}$
1800	1710-1910	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.47	2.60	4.87	$\pm 11.7\% \text{ (k=2)}$
900	800-1000	Body	$55.0 \pm 5\%$	$1.05 \pm 5\%$	0.48	2.10	5.91	$\pm 11.3\% \text{ (k=2)}$
1800	1710-1910	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.55	2.70	4.33	$\pm 11.7\% \text{ (k=2)}$

^B The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.



T117 (EN ISO/IEC 17025)

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)


See the following pages.

18307
Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

Nokia Danmark A/S

CALIBRATION CERTIFICATE

Object(s)	D1900V2 - SN: 5d026																										
Calibration procedure(s)	QA CAL-05.v2 Calibration procedure for dipole validation kits																										
Calibration date:	February 26, 2003																										
Condition of the calibrated item	In Tolerance (according to the specific calibration document)																										
<p>This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"><thead><tr><th>Model Type</th><th>ID #</th><th>Cal Date</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>RF generator R&S SML-03</td><td>100698</td><td>27-Mar-2002</td><td>In house check: Mar-05</td></tr><tr><td>Power sensor HP 8481A</td><td>MY41092317</td><td>18-Oct-02</td><td>Oct-04</td></tr><tr><td>Power sensor HP 8481A</td><td>US37292783</td><td>30-Oct-02</td><td>Oct-03</td></tr><tr><td>Power meter EPM E442</td><td>GB37480704</td><td>30-Oct-02</td><td>Oct-03</td></tr><tr><td>Network Analyzer HP 8753E</td><td>US38432426</td><td>3-May-00</td><td>In house check: May 03</td></tr></tbody></table>				Model Type	ID #	Cal Date	Scheduled Calibration	RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05	Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04	Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03	Power meter EPM E442	GB37480704	30-Oct-02	Oct-03	Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03
Model Type	ID #	Cal Date	Scheduled Calibration																								
RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05																								
Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04																								
Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03																								
Power meter EPM E442	GB37480704	30-Oct-02	Oct-03																								
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03																								
Calibrated by:	Name Katja Pökkönen	Function Laboratory Director	Signature 																								
Approved by:	Name Niels Kuster	Function Quality Manager																									
Date issued: February 26, 2003																											
<p>This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.</p>																											

Date/Time: 02/26/03 17:17:26

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN5d026_SN1507_HSL1900_260203.da4

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d026
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz; ($\sigma = 1.46 \text{ mho/m}$, $\epsilon_r = 38.6$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 25; Postprocessing SW: SEMCAD, V1.6 Build 105

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.2 V/m

Peak SAR = 18.6 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.31 mW/g

Power Drift = 0.04 dB

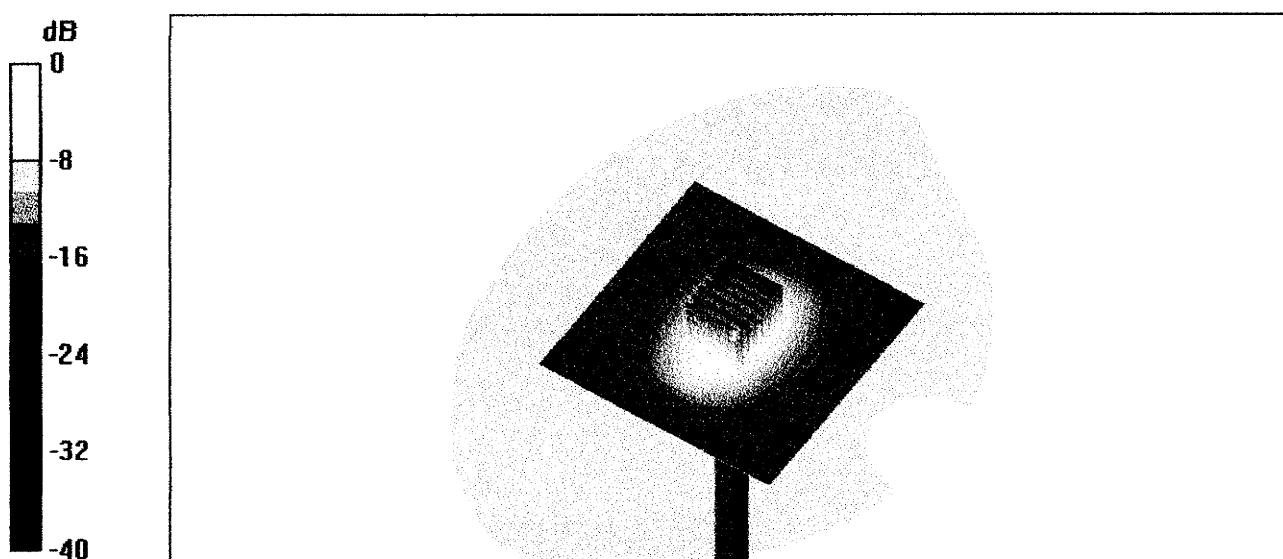


Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

Nokia Danmark A/S

CALIBRATION CERTIFICATE

Object(s)	D1900V2 - SN: 5d026		
Calibration procedure(s)	QA CAL-05.v2 Calibration procedure for dipole validation kits		
Calibration date:	April 8, 2003		
Condition of the calibrated item	In Tolerance (according to the specific calibration document)		
<p>This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p>			
Model Type	ID #	Cal Date	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02	Oct-03
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03
Calibrated by:	Name Judith Mueller	Function Technician	Signature
Approved by:	Katja Pokovic	Laboratory Director	
Date issued: April 12, 2003			
<p>This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.</p>			

Date/Time: 04/08/03 13:41:14

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN5d026_SN1507_M1900_080403.da4

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d026
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz; ($\sigma = 1.59 \text{ mho/m}$, $\epsilon_r = 51.2$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.8, 4.8, 4.8); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.2 V/m

Peak SAR = 18.6 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.51 mW/g

Power Drift = 0.09 dB

