


## GSM 1900 Test Report for RM-14

|                                                         |                                                                                                                                                                                                                                                                                                                                                   |                                   |                                                                                                               |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Test Report no.:</b>                                 | DTX10440-EN                                                                                                                                                                                                                                                                                                                                       | <b>Date of Report:</b>            | 11/05/04                                                                                                      |
| <b>Number of pages:</b>                                 | 21                                                                                                                                                                                                                                                                                                                                                | <b>Customer's Contact person:</b> | Anders S. Nielsen                                                                                             |
|                                                         |                                                                                                                                                                                                                                                                                                                                                   | <b>Responsible Test engineer:</b> | Ruben Hansen                                                                                                  |
| <b>Testing laboratory:</b>                              | TCC Copenhagen<br>Nokia Danmark A/S<br>Frederikskaj<br>DK-1790 Copenhagen V<br>Denmark<br>Tel. +45 33 29 29 29<br>Fax. +45 33 29 20 01<br>FCC Reg. # 99059, June 2003<br>IC File # 4820, January 2004<br>IC File # 4820-1, February 2004                                                                                                          | <b>Client:</b>                    | Nokia Corporation<br>Frederikskaj<br>1790 COPENHAGEN V<br>DENMARK<br>Tel. +45 33 292929<br>Fax. +45 33 292934 |
| <b>Tested devices/ accessories:</b>                     | Phone: RM-14 with Battery: BL- 8N                                                                                                                                                                                                                                                                                                                 |                                   |                                                                                                               |
| <b>Supplement reports:</b>                              |                                                                                                                                                                                                                                                                                                                                                   |                                   |                                                                                                               |
| <b>Testing has been carried out in accordance with:</b> | The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 24 and IC standard RSS-133.                                                                                                                                                                                           |                                   |                                                                                                               |
| <b>Documentation:</b>                                   | The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Copenhagen.                                                                                         |                                   |                                                                                                               |
| <b>Test Results:</b>                                    | The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document                                                                                                                                                                                       |                                   |                                                                                                               |
| <b>Date and signatures for the contents:</b>            | <div style="display: flex; justify-content: space-between;"> <div></div> <div>11/05/04</div> </div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div></div> <div> <br/> <b>Ruben Hansen</b><br/> Team Leader </div> </div> |                                   |                                                                                                               |

## CONTENTS

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>1. Summary of test results</b>                    | <b>4</b>  |
| <b>2. EUT Information</b>                            | <b>4</b>  |
| 2.1. EUT description                                 | 4         |
| <b>3. EUT Test Setup</b>                             | <b>4</b>  |
| <b>4. Applicable Standards</b>                       | <b>5</b>  |
| <b>5. 99% occupied bandwidth</b>                     | <b>6</b>  |
| 5.1. Test setup                                      | 6         |
| 5.2. EUT operation mode                              | 6         |
| 5.3. Results                                         | 6         |
| 5.4. Screen shot                                     | 7         |
| <b>6. Bandedge compliance</b>                        | <b>8</b>  |
| 6.1. Test setup                                      | 8         |
| 6.2. Test method                                     | 8         |
| 6.3. EUT operation mode                              | 9         |
| 6.4. Limit                                           | 9         |
| 6.5. Results GSM/GPRS                                | 9         |
| 6.6. Screen shots                                    | 9         |
| 6.7. Results E-GPRS                                  | 11        |
| 6.8. Screen shots                                    | 12        |
| <b>7. Spurious radiated emission</b>                 | <b>14</b> |
| 7.1. Test setup                                      | 14        |
| 7.2. Test method                                     | 14        |
| 7.3. EUT operation mode                              | 15        |
| 7.4. Limit                                           | 15        |
| 7.5. Results                                         | 15        |
| <b>8. Frequency stability, temperature variation</b> | <b>17</b> |
| 8.1. Test setup                                      | 17        |
| 8.2. EUT operation mode                              | 17        |
| 8.3. Limit                                           | 17        |
| 8.4. Test method                                     | 17        |
| 8.5. Results                                         | 18        |
| <b>9. Frequency stability, voltage variation</b>     | <b>19</b> |
| 9.1. Test setup                                      | 19        |
| 9.2. EUT operation mode                              | 19        |
| 9.3. Limit                                           | 19        |

---

|            |                              |           |
|------------|------------------------------|-----------|
| 9.4.       | Test method .....            | 19        |
| 9.5.       | Results .....                | 19        |
| <b>10.</b> | <b>Test equipment.....</b>   | <b>20</b> |
| 10.1.      | Conducted measurements ..... | 20        |
| 10.2.      | Radiated measurements .....  | 20        |

## 1. Summary of test results

| Section in CFR 47          | Section in RSS-133 |                                            | Result |
|----------------------------|--------------------|--------------------------------------------|--------|
| §2.1046 (a)                | 6.2                | Conducted RF output                        | NA     |
| §24.232 (b)                | 6.2                | Radiated RF output                         | -      |
| §2.1049 (h)                | 5.6                | 99% occupied bandwidth                     | X      |
| §24.238 (a)                | 6.3                | Bandedge compliance                        | PASS   |
| §24.238 (a), §2.1051       | 6.3                | Spurious emissions at antenna terminals    | NA     |
| §24.238 (a), §2.1053       | 6.3                | Radiated spurious emissions                | PASS   |
| §24.235, §2.1055 (a)(1)(b) | 7                  | Frequency stability, temperature variation | PASS   |
| §24.235, §2.1055 (d)(1)(2) | 7                  | Frequency stability, voltage variation     | PASS   |

PASS Pass

FAIL Fail

X Measured, but there is no applicable performance criteria

NA Not Applicable

- Not Measured

## 2. EUT Information

| Product | Type  | SN                             | HW   | MV  | SW     | DUT    |
|---------|-------|--------------------------------|------|-----|--------|--------|
| Phone   | RM-14 | 004400/53/161721/3             | 0400 |     | 3.02.1 | 234622 |
| Battery | BL-8N | 0670468392066<br>L172010800836 |      |     |        | 234623 |
| Phone   | RM-14 | 004400/53/161739/5             | 0400 |     | 3.02.1 | 234657 |
| Headset | HS-14 | 0106                           | 0.1  | 0.4 |        | 234367 |

### 2.1. EUT description

The EUT is a triple band (900MHz/1800MHz/1900MHz) GSM mobile phone with E-GPRS (EDGE), radio and camera.

The EUT was not modified during the tests.

## 3. EUT Test Setup

For each test the EUT was exercised to find the worst case of operation modes and device configuration.

The test setup photographs are in Appendix A to this Test Report

---

## 4. Applicable Standards


The tests were performed in guidance of CFR 47, part 24 and part 2, ANSI/TIA/EIA-603-A and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.

## 5. 99% occupied bandwidth

|                              |                                    |                 |                     |
|------------------------------|------------------------------------|-----------------|---------------------|
| EUT                          | RM-14 dut 234622, BL-8n dut 234623 |                 |                     |
| Accessories                  | None                               |                 |                     |
| Temp, Humidity, Air Pressure | 21.6 / 21.0 °C                     | 47.0 / 42.0 RH% | 1008.1 / 1011.3mbar |
| Date of measurement          | 09-20-2004 / 11-05-2004            |                 |                     |
| FCC rule part                | §2.1049 (h)                        |                 |                     |
| RSS-133 section              | 5.6                                |                 |                     |
| Measured by                  | Jan Engelbrechtsen                 |                 |                     |

### 5.1. Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

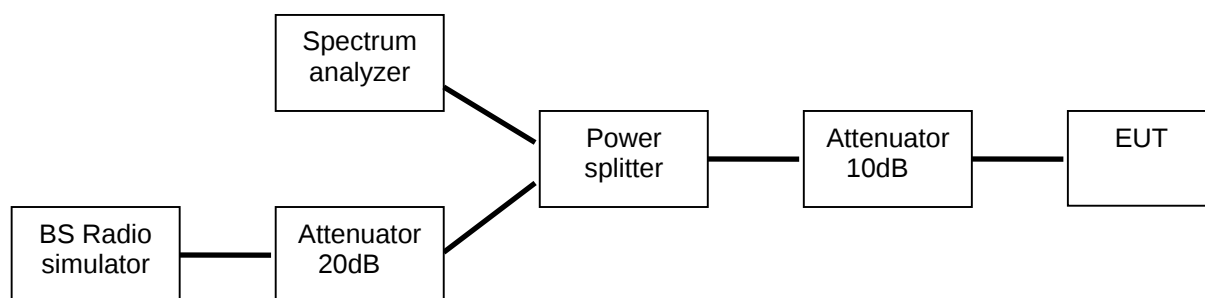

### 5.2. EUT operation mode


|                           |                                 |
|---------------------------|---------------------------------|
| EUT operation mode, GSM   | TX on, 1 time slot transmission |
| EUT operation mode, EGPRS | TX on, 2 time slot transmission |
| EUT channel               | 661 GSM and EGPRS               |
| EUT TX power level        | Maximum                         |

### 5.3. Results

The 99% occupied bandwidth was measured using the in-built function of the spectrum analyzer.


| EUT Channel | 99% occupied bandwidth [kHz] |
|-------------|------------------------------|
| 661, GSM    | 240.0                        |
| 661, EGPRS  | 240.0                        |

## 5.4. Screen shot

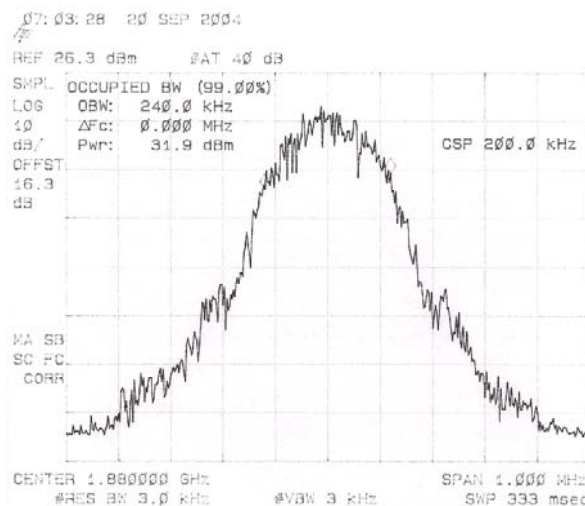

RBW: 3 KHz, VBW: 3KHz

Picture 4. 99% occupied bandwidth, channel 661, GSM

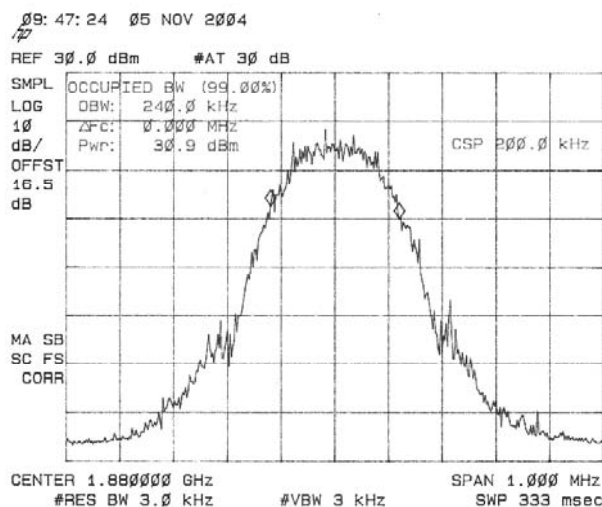

RBW: 3 KHz, VBW: 3KHz


Picture 5. 99% occupied bandwidth, channel 661, EGPRS

## 6. Bandedge compliance

|                              |                             |          |           |
|------------------------------|-----------------------------|----------|-----------|
| EUT                          | RM-14 dut#234657 with BL-8N |          |           |
| Accessories                  | None.                       |          |           |
| Temp, Humidity, Air Pressure | 20.5 °C                     | 48.5 RH% | 1016 mbar |
| Date of measurement          | Nov. 4 <sup>th</sup> 2004   |          |           |
| FCC rule part                | §24.238 (a)                 |          |           |
| RSS-133 section              | 6.3                         |          |           |
| Measured by                  | Jesper Nielsen              |          |           |
| Result                       | Passed                      |          |           |

### 6.1. Test setup

The EUT was set on a non-conductive turntable in a semi anechoic chamber. In the corner of the chamber there was a communication antenna, which was connected to the BS simulator located outside the chamber. The radiated power from the EUT was measured with an antenna fixed to a antenna tower. The tower and turn table were remotely controlled to turn the EUT and change the antenna polarization. The measured signal was routed from the measuring antenna to the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

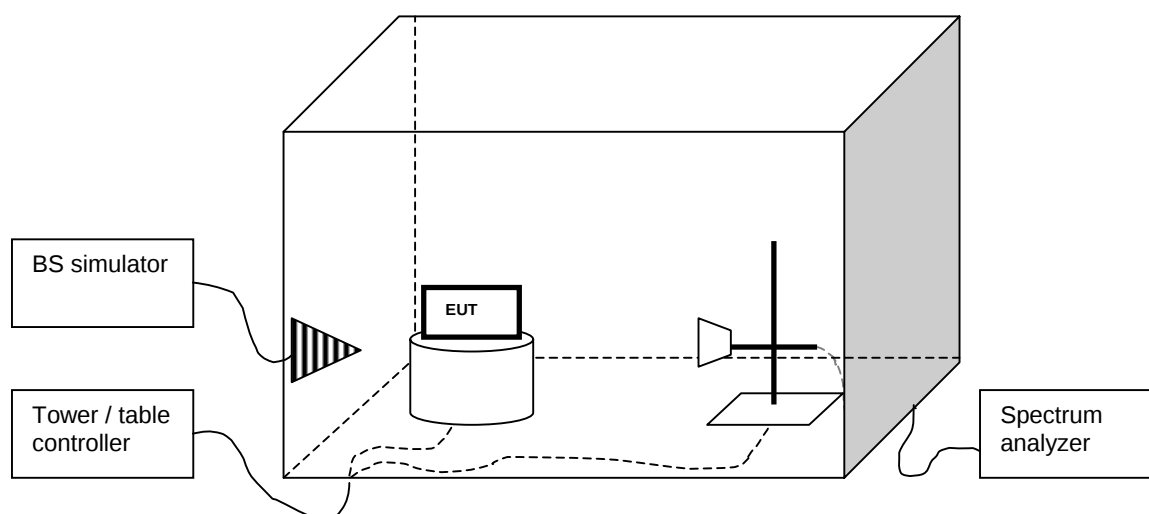

### 6.2. Test method

- The EUT and antenna was adjusted to the position/polarity that created the maximum radiated power.
- The maximum radiated power was used as an calibration offset for the spectrum analyzer.
- A screendump of the measurement with a marker set to the highest peak outside the band edge was recorded.

### 6.3. EUT operation mode

|                    | GSM/GPRS                                     | E-GPRS                                    |
|--------------------|----------------------------------------------|-------------------------------------------|
| EUT operation mode | TX on, 1 time slot transmission,<br>GSM/GPRS | TX on, 2 time slot transmission,<br>EGPRS |
| EUT channel        | 512 and 810                                  | 512 and 810                               |
| EUT TX power level | 0 (Max.)                                     | 0 (Max.)                                  |


### 6.4. Limit

| Frequency [MHz] | Level [dBm] |
|-----------------|-------------|
| <1850 or 1910<  | -13         |

### 6.5. Results GSM/GPRS


| EUT Channel | Level [dBm] |
|-------------|-------------|
| 512         | -14.85      |
| 810         | -14.52      |

### 6.6. Screen shots

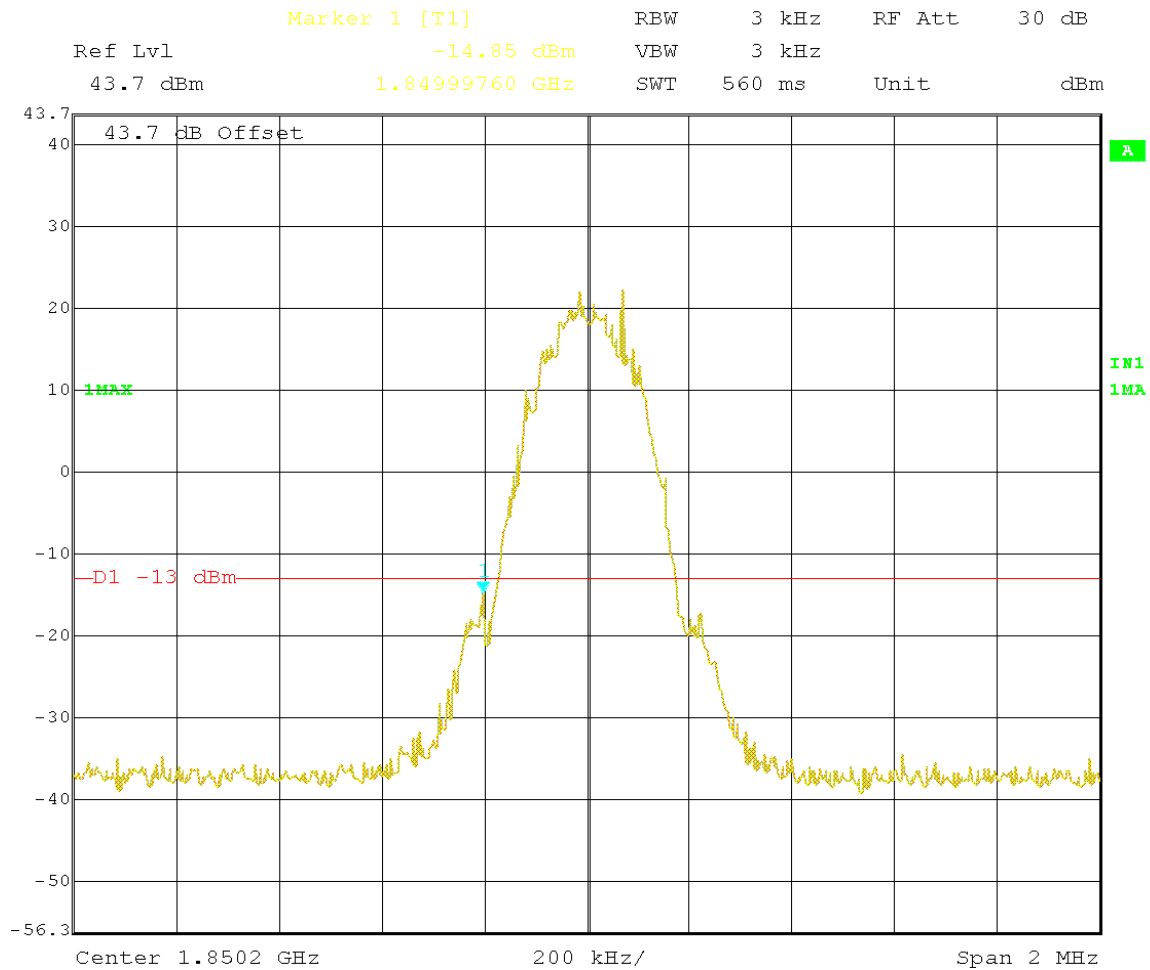

Date: 4.NOV.2004 19:27:08

Picture 5. Lower bandedge GSM/GPRS, channel 512, RBw 3KHz VBw 3KHz

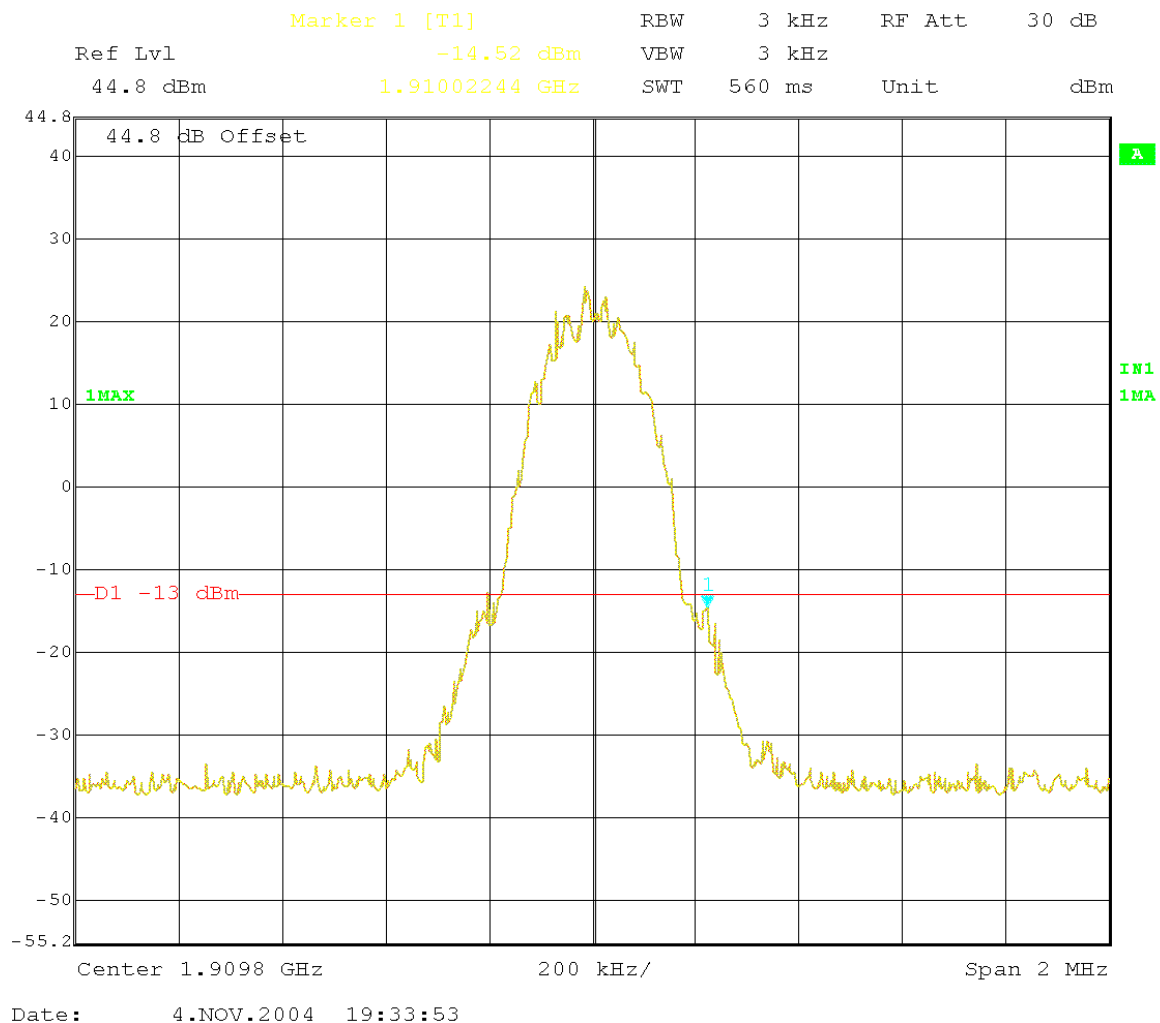


Picture 6. Upper bandedge GSM/GPRS, channel 810, RBw 3KHz VBw 3KHz


## 6.7. Results E-GPRS

| EUT Channel | Level [dBm] |
|-------------|-------------|
| 512         | -16.38      |
| 810         | -17.77      |

## 6.8. Screen shots

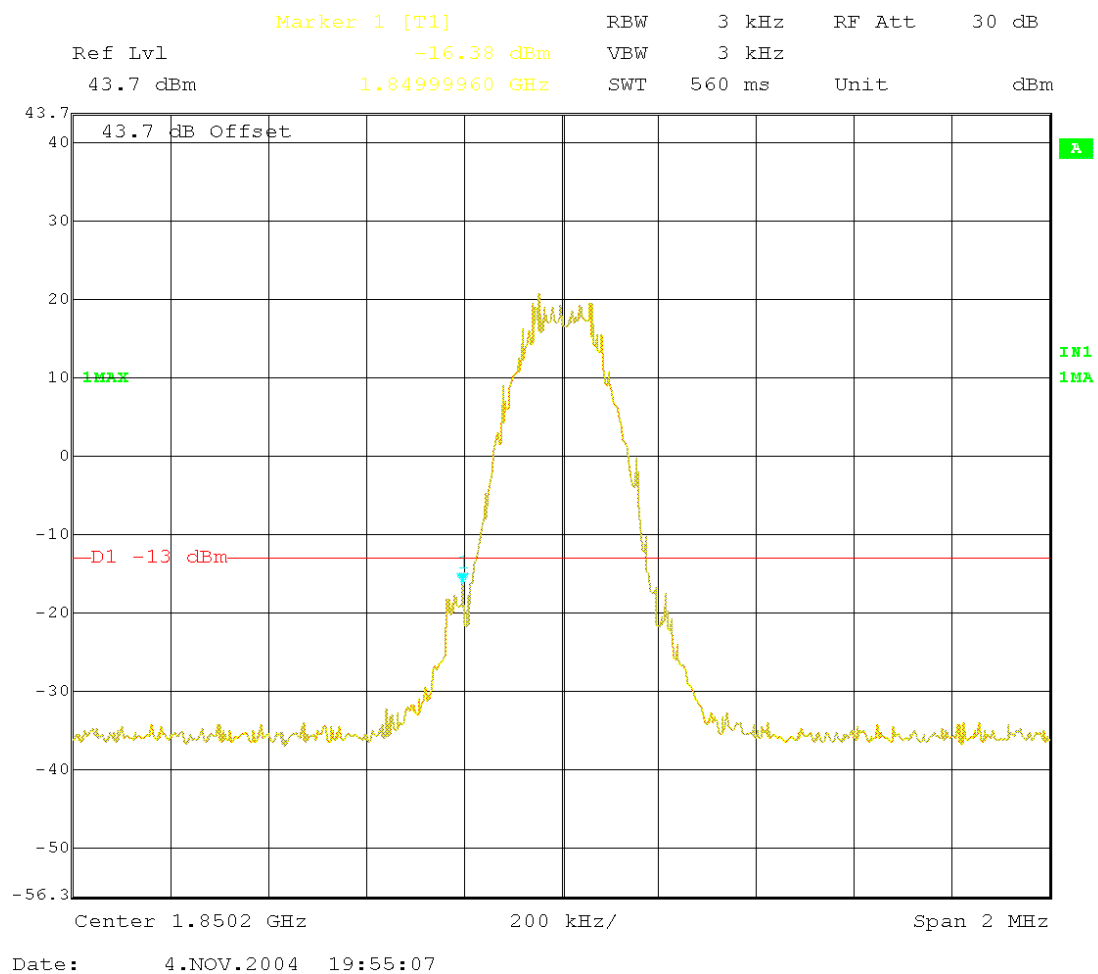

Picture 7. Lower bandedge E-GPRS, channel 512, RBw 3KHz VBw 3KHz

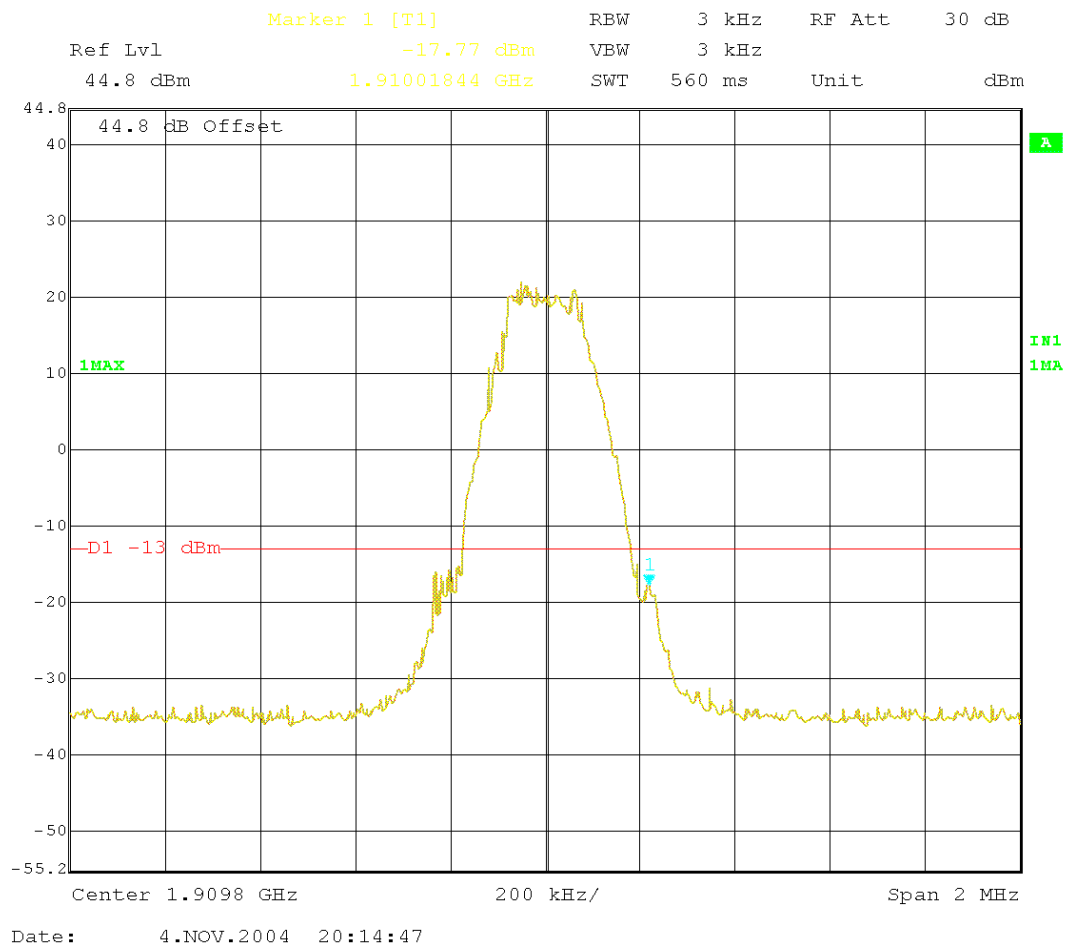


Picture 8. Upper bandedge E-GPRS, channel 810, RBw 3KHz VBw 3KHz

## 7. Spurious radiated emission

|                              |                             |         |             |
|------------------------------|-----------------------------|---------|-------------|
| EUT                          | RM-14 dut#234657 with BL-8N |         |             |
| Accessories                  | HS-14 dut#234367            |         |             |
| Temp, Humidity, Air Pressure | 21.0°C                      | 45.0%RH | 1013.0 mbar |
| Date of measurement          | Oct. 7 <sup>th</sup> 2004   |         |             |
| FCC rule part                | §24.238 (a), §2.1053        |         |             |
| RSS-133 section              | 6.3                         |         |             |
| Measured by                  | Jesper Nielsen              |         |             |
| Result                       | <b>Passed</b>               |         |             |

### 7.1. Test setup

A set of LP/HP/BS filters was used to prevent overloading the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done manually.

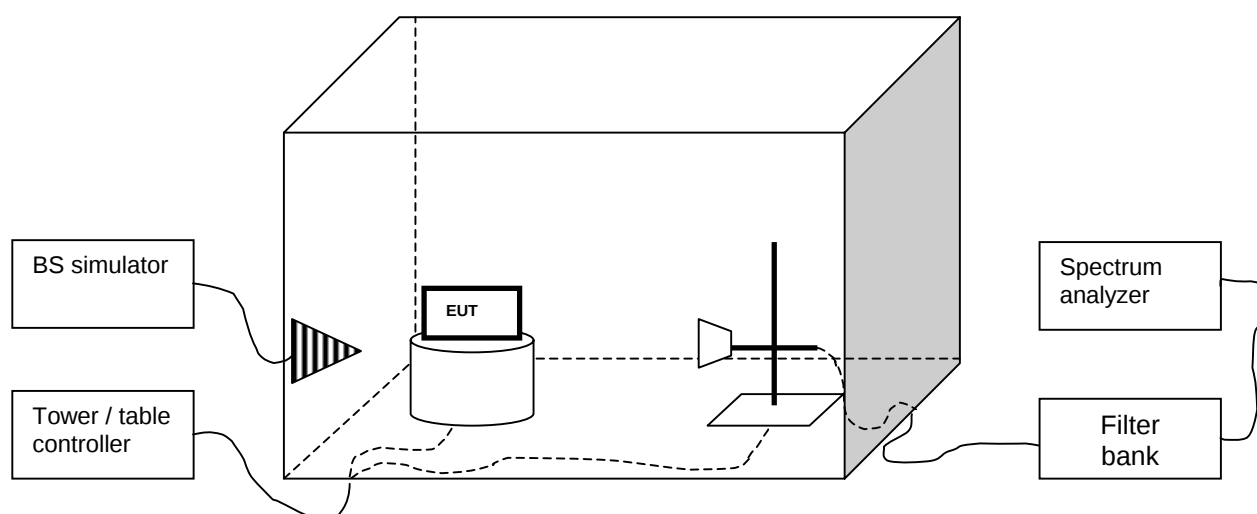

### 7.2. Test method

- The emissions were searched and maximized by moving the turn table and measuring antenna and manipulating the EUT.
- All suspicious frequencies with emission levels were recorded.
- The EUT was replaced with a substituting antenna.
- For each frequency recorded, the substituting antenna was fed with the power (from signal generator) giving the same reading as in (b). These power levels were reported.

### 7.3. EUT operation mode

|                    | GSM/GPRS                                     | E-GPRS                                    |
|--------------------|----------------------------------------------|-------------------------------------------|
| EUT operation mode | TX on, 1 time slot transmission,<br>GSM/GPRS | TX on, 2 time slot transmission,<br>EGPRS |
| EUT channel        | 661                                          | 661                                       |
| EUT TX power level | 0 (Max.)                                     | 0 (Max)                                   |

### 7.4. Limit

| Frequency [MHz] | Level [dBm] |
|-----------------|-------------|
| 30 – 19100      | -13         |

### 7.5. Results

The formula below was used to calculate the EIRP of the spurious emissions. If there were no emissions closer than 20dB below the limit line, then the emission levels were documented only at the transmitter's mid-channel harmonics.

$$P_{Emission[dBm]} = P_{SubstTX[dBm]} - L_{Cable[dB]} + G_{Antenna[dBi]}$$

where the variables are as follows:

|                      |                                                                             |
|----------------------|-----------------------------------------------------------------------------|
| $P_{Measured[dBm]}$  | Measured emission level (from step b in 7.2)                                |
| $P_{Subst\_TX[dBm]}$ | Signal generator power (from step d in 7.2) fed to the substituting antenna |
| $L_{Cable[dB]}$      | Loss of the cable between antenna and signal generator (from step d in 7.2) |
| $G_{Antenna[dBi]}$   | Gain of the substitutive antenna over isotropic radiator                    |

Emission levels, channel 661, GSM

| Frequency [MHz] | P <sub>Measured</sub> [dBm] | P <sub>Subst TX</sub> [dBm] | L <sub>Cable</sub> [dB] | G <sub>Antenna</sub> [dBi] | P <sub>Emission</sub> [dBm] |
|-----------------|-----------------------------|-----------------------------|-------------------------|----------------------------|-----------------------------|
| 3760,00         | -46.26                      | -36.0                       | 8.73                    | 15.80                      | -28.93                      |
| 5640,00         | -56.79                      | -44.5                       | 11.53                   | 18.03                      | -38.00                      |

Emission levels, channel 661, EGPRS


| Frequency [MHz] | P <sub>Measured</sub> [dBm] | P <sub>Subst TX</sub> [dBm] | L <sub>Cable</sub> [dB] | G <sub>Antenna</sub> [dBi] | P <sub>Emission</sub> [dBm] |
|-----------------|-----------------------------|-----------------------------|-------------------------|----------------------------|-----------------------------|
| 3760,00         | -48.60                      | -38.34                      | 8.73                    | 15.80                      | -31.27                      |
| 5640,00         | -58.88                      | -46.59                      | 11.53                   | 18.03                      | -40.09                      |

## 8. Frequency stability, temperature variation

|                              |                                    |          |             |
|------------------------------|------------------------------------|----------|-------------|
| EUT                          | RM-14 dut 234622, BL-8n dut 234623 |          |             |
| Accessories                  | none                               |          |             |
| Temp, Humidity, Air Pressure | 21.6 °C                            | 47.0 RH% | 1008.1 mbar |
| Date of measurement          | 09-20-2004                         |          |             |
| FCC rule part                | §24.235, §2.1055 (a)(1)(b)         |          |             |
| RSS-133 section              | 7                                  |          |             |
| Measured by                  | Jan Engelbrechtsen                 |          |             |
| Result                       | Passed                             |          |             |

### 8.1. Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

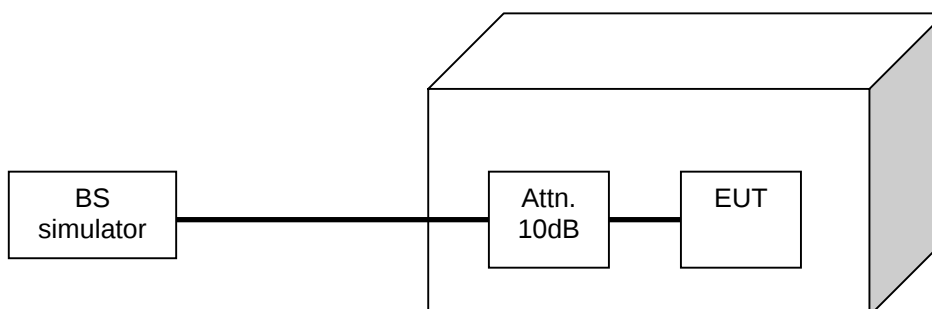

### 8.2. EUT operation mode

|                    |                                 |
|--------------------|---------------------------------|
| EUT operation mode | TX on, 1 time slot transmission |
| EUT channel        | 661                             |
| EUT TX power level | Maximum                         |

### 8.3. Limit

|                           |
|---------------------------|
| Frequency deviation [ppm] |
| ± 2.5                     |

### 8.4. Test method

- a) The EUT was placed in the chamber

- b) The climate chamber temperature was set to the maximum value (50°C) and the temperature was allowed to stabilize for 45 minutes
- c) The EUT was set to transmit.
- d) The transmit frequency error was measured after 1 minute
- e) The call was released
- f) Temperature decreased 10 °C and allowed to stabilize for 45 minutes after set temperature was reached
- g) The steps c – f were repeated

## 8.5. Results

| Temperature [°C] | Deviation [Hz] | Deviation [ppm] |
|------------------|----------------|-----------------|
| +50              | -23.05         | -0.012          |
| +40              | -26.75         | -0.014          |
| +30              | -23.3          | -0.012          |
| +20              | -13.05         | -0.007          |
| +10              | -19.62         | -0.01           |
| 0                | -12.96         | -0.007          |
| -10              | -20.94         | -0.011          |
| -20              | -9.79          | -0.005          |
| -30              | -19.79         | -0.01           |

Table 15. Frequency deviation, temperature variation

## 9. Frequency stability, voltage variation

|                              |                            |          |              |
|------------------------------|----------------------------|----------|--------------|
| EUT                          | RM-14 dut 234622           |          |              |
| Accessories                  | Battery eliminator BTD-8   |          |              |
| Temp, Humidity, Air Pressure | 21.6 °C                    | 47.0 RH% | 10028.1 mbar |
| Date of measurement          | 09-20-2004                 |          |              |
| FCC rule part                | §24.235, §2.1055 (d)(1)(2) |          |              |
| RSS-133 section              | 7                          |          |              |
| Measured by                  | Jan Engelbrechtsen         |          |              |
| Result                       | Passed                     |          |              |

### 9.1. Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.



### 9.2. EUT operation mode

|                    |                                 |
|--------------------|---------------------------------|
| EUT operation mode | TX on, 1 time slot transmission |
| EUT channel        | 661                             |
| EUT TX power level | Maximum                         |

### 9.3. Limit

|                           |
|---------------------------|
| Frequency deviation [ppm] |
| ± 2.5                     |

### 9.4. Test method

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

### 9.5. Results

| Level                 | Voltage [V] | Deviation [Hz] | Deviation [ppm] |
|-----------------------|-------------|----------------|-----------------|
| Nominal               | 3.9         | -20            | 0.01            |
| Battery cut-off point | 2.33        | -21            | 0.01            |

Table 16. Frequency deviation, voltage variation

## 10. Test equipment

Each test equipment is calibrated once a year, except antennas which are calibrated every second year.

### 10.1. Conducted measurements

| Equipment # | Equipment                         | Type     | Serial # | Manufacturer     |
|-------------|-----------------------------------|----------|----------|------------------|
| 13357       | Signal Generator                  | SMP 02   |          | Rohde & Schwarz  |
| 13302       | Spectrum Analyzer                 | 8596E    |          | Hewlet Packard   |
| 13524       | BS Simulator                      | CMD-55   |          | Rohde & Schwartz |
| 17277       | Multimeter                        | 34401A   |          | Agilent          |
| 15761       | DC Power Supply                   | E3632A   |          | Hewlet Packard   |
| 13371       | Temperature chamber               | 2800     |          | Thermotron       |
| -           | RF Attenuator                     | 23-10-34 |          | Weinchel         |
| -           | Power Divider                     | -        |          | Suhner           |
| 17796       | BS Simulator                      | 4400M    |          | Wavetek          |
| -           | Antenna Mast                      | -        |          | Deisel           |
| 14900       | Antenna Mast Controller           | HD-100   |          | Deisel           |
| 15191       | Turn Table                        | G-800SDX |          | Yaesu            |
| 13668       | Antenna                           | CBL6112A |          | Chase            |
| 13935       | Two Line Artificial Mains Network | ESH-3-Z5 |          | Rohde & Schwarz  |
| 13666       | EMI Test Receiver                 | ESPC     |          | Rohde & Schwarz  |
|             |                                   |          |          |                  |

### 10.2. Radiated measurements

| Equipment # | Equipment                                   | Type           | Serial #   | Manufacturer  |
|-------------|---------------------------------------------|----------------|------------|---------------|
| 14993       | EMI Test Receiver 9KHz-2750MHz              | ESCS30         | 847124/001 | Rohde&Schwarz |
| 15191       | Turntable Contoller Unit                    | G-800SDX       | ONO10000   | YAESU         |
| 14900       | Antenna Controller                          | HD100          | 100\552    | HD GmbH       |
| 18792       | Multi Device Controller                     | 2090           | 1606       | ETS-EMCO      |
| 13829       | Turntable Controller                        | 4630-100       | 100/510    | Comtest       |
| 14963       | RF Preamplifier 100MHz-4GHz (Metal Chassis) | AFS3-00100400  | 571131     | Miteq/NMP Cph |
| 13668       | BiLog Antenna 30-2000MHz                    | BiLog-CBL6112A | 2259       | Chase         |

|       |                                                    |                            |            |                           |
|-------|----------------------------------------------------|----------------------------|------------|---------------------------|
| 18861 | EMI Test Receiver<br>20Hz-26,5GHz                  | ESI                        | 833362/004 | Rohde&Schwarz             |
| 12679 | Dual Log Periodic<br>Antenna 1-26.5 GHz            | HL025                      | -----      | Rohde&Schwarz             |
| 18860 | Ultra Broadband<br>Antenna Ultralog 30-<br>3000MHz | HL562                      | 100154     | Rohde&Schwarz             |
| 18773 | Shielded Chamber                                   | RFD-100                    | 2420       | ETS-Lindgren              |
| 18774 | Shielded Chamber                                   | RFSD-F/A-100               | 2425       | ETS-Lindgren              |
| 18324 | High Pass Filter<br>3GHz SMA f Conn                | WHJS3000-10SS              | 1          | Wainwright                |
| 14114 | Highpass Filter<br>1000MHz-4500MHz                 | WHK1000-12SS               | 1          | Wainwright                |
| 13918 | Highpass Filter<br>2000-4000MHz<br>50OHM SMA Conn  | WHKS2000-10SS              |            | Wainwright<br>Instruments |
| 13937 | Ultra Stable Notch<br>Filter 902,4MHz              | WRCA902.4-0.2/40-<br>6SS   |            | Wainwright<br>Instruments |
| 13936 | Ultra Stable Notch<br>Filter 1747,5MHz             | WRCD1747.5-<br>0.2/40-10SS |            | Wainwright<br>Instruments |
| 16633 | Ultra Stable Notch<br>Filter 1880,0MHz             | WRCD1880.0-<br>0.2/40-10SS |            | Wainwright<br>Instruments |