

FCC Part 22/24 Compliance Test Report

Test Report no.:	Tre_FCC_0521_01.doc	Date of Report:	6.6.2005
Number of pages:	17	Customer's Contact person:	Alison Kingston
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Client:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-33 / Battery BL-5X, Headset HS-15, AC-charger ACP-12, Dummy battery SF-29R		
FCC ID:	PPIRM-33	IC:	661U-RM33
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	16.5.2005
Testing completed	27.5.2005
The customer's contact person	Alison Kingston
Test Plan referred to	\\satcc01nmp\TCC_Salo\Projects\RM-33\testplans\EMC\TCC\RM-33_EMC_Test_Plan.xls
Notes	-
Document name	T:\Projects\RM-33\results\emc\FCC\Tre_FCC_0521_01.doc

1.1. EUT and Accessory Information

The EUT is a triple band (GSM850/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-33	004400641731177	0551	-	3.13	40257
GSM phone	RM-33	004400641731102	0551	-	3.13	40258
Battery	BL-5X	-	-	-	-	40260
Headset	HS-15	0485	0.2	0.7	-	40262
AC-Charger	ACP-12	-	-	-	-	40263
Dummy battery	SF-29R	-	-	-	-	40273

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4, 6.4	Radiated RF output power	NP
§2.1049(h)	4.2	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3, 6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.3, 6.3	Frequency stability, voltage variation	PASSED

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	NP
§24.232(b)	6.2	Radiated RF output power	NP
§2.1049(h)	5.6	99 % occupied bandwidth	PASSED
§24.238(a)	6.3	Band edge compliance	PASSED
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.3	Spurious radiated emissions	PASSED
§2.1055(a)	7	Frequency stability, temperature variation	PASSED
§2.1055(d)	7	Frequency stability, voltage variation	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-132 4.2, RSS-133 5.6)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 850 Test results	5
2.4. GSM 1900 Test results	6
3. Band edge compliance (FCC §22.917(a), 24.238(a), RSS-132 4.5, RSS-133 6.3)	7
3.1. Test setup	7
3.2. Test method and limit	7
3.3. GSM 850 Test results	8
3.4. GSM 1900 Test results	9
4. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.3)	12
4.1. Test setup	12
4.2. Test method and limit	12
4.3. GSM 850 Test results	13
4.4. GSM 1900 Test results	13
5. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-132 4.3, 6.3, RSS-133 7)	14
5.1. Test setup	14
5.2. Test method and limit	14
5.3. GSM 850 Test results	15
5.4. GSM 1900 Test results	15
6. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, 6.3, RSS-133 7) ...	16
6.1. Test setup	16
6.2. Test method and limit	16
6.3. GSM 850 Test results	16
6.4. GSM 1900 Test results	16
7. Test Equipment.....	17
7.1. Conducted measurements	17
7.2. Radiated measurements	17

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-132 4.2, RSS-133 5.6)

EUT with DUT number	RM-33: DUT 40258
Accessories with DUT numbers	BL-5X: DUT 40259
Operation Voltage V / Hz	-
Result	Passed
Remarks	-
Temp °C / Humidity RH % / Air Pressure kPa	21.5/40/101.7
Date of measurements	26.5.2005
Measured by	Jan-Erik Lilja

2.1. Test setup

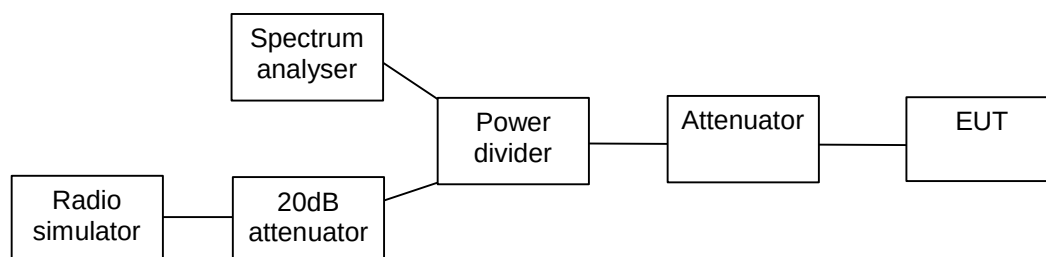


2.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-132 and RSS-133.

2.3. GSM 850 Test results


Operation mode (TX on)	99% occupied bandwidth / kHz
GSM	240.385
EGPRS	235.577

GSM mode, channel 190

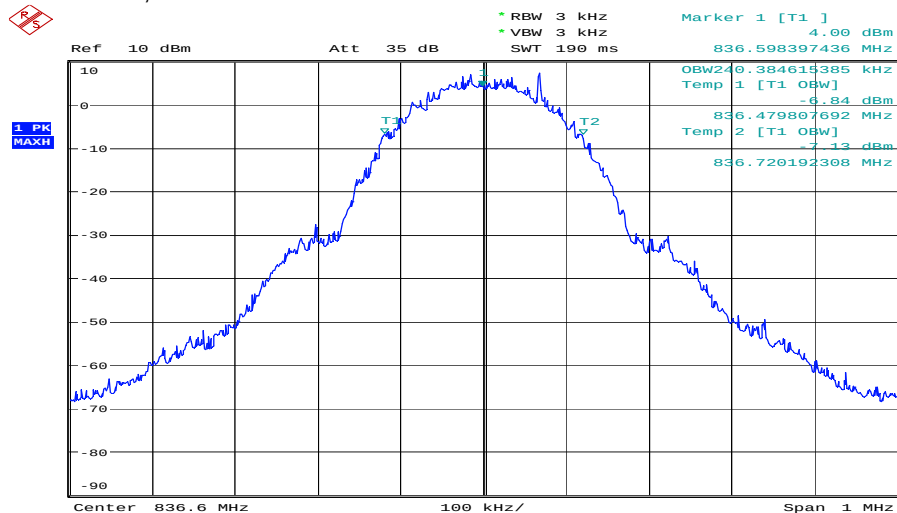

Date: 30.MAY.2005 12:26:20

EGPRS mode, channel 190

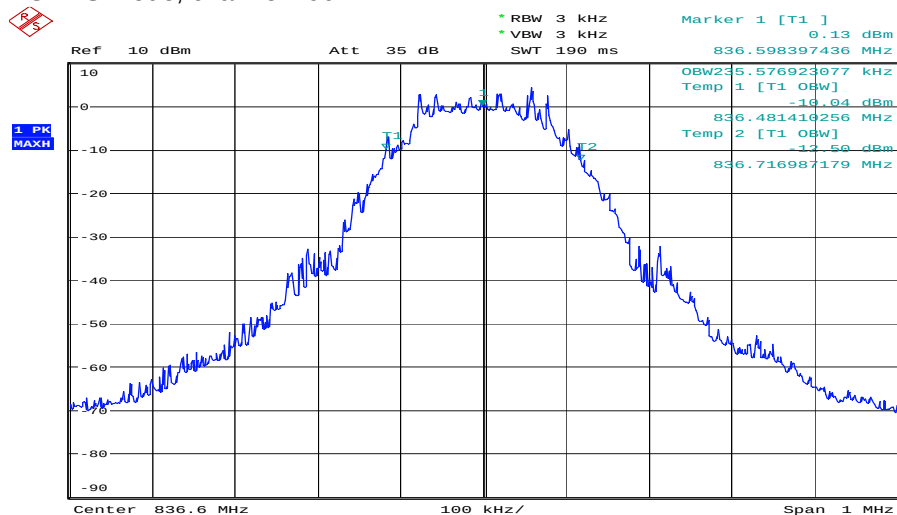


Date: 30.MAY.2005 12:36:21

2.4. GSM 1900 Test results


Operation mode (TX on)	99% occupied bandwidth / kHz
GSM	241.987
EGPRS	240.385

GSM mode, channel 661

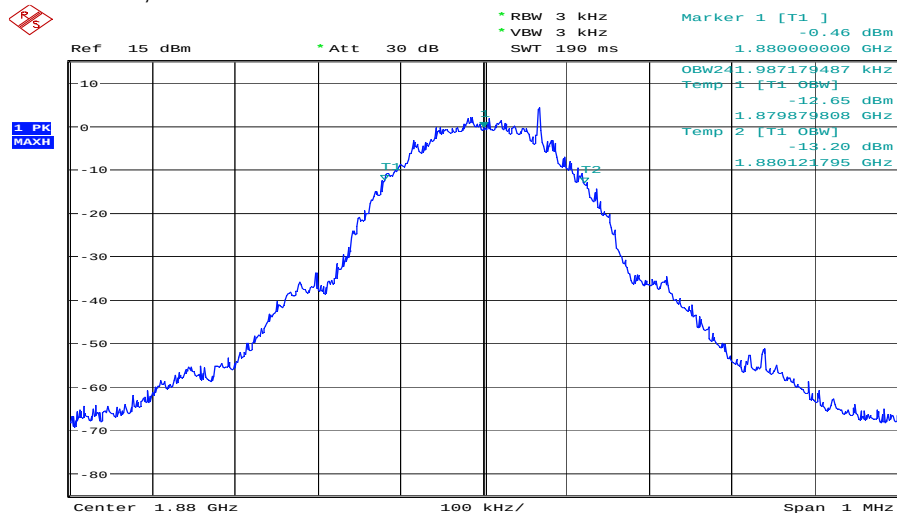

Date: 30.MAY.2005 12:41:32

EGPRS mode, channel 661

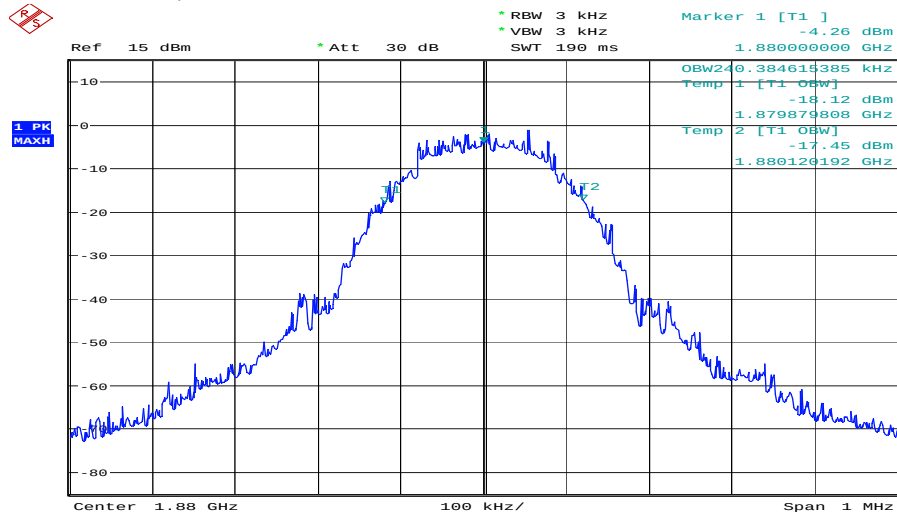


Date: 30.MAY.2005 12:48:00

3. Band edge compliance (FCC §22.917(a), 24.238(a), RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-33 DUT 40257
Accessories with DUT numbers	BL-5X DUT 40260, HS-15 DUT 40262, ACP-12 DUT 40263
Operation Voltage V / Hz	115 / 60
Result	PASS
Remarks	-
Temp °C / Humidity RH % / Air Pressure kPa	21 / 45 / 101.2
Date of measurements	24.5.2005
Measured by	Jari Jantunen

3.1. Test setup

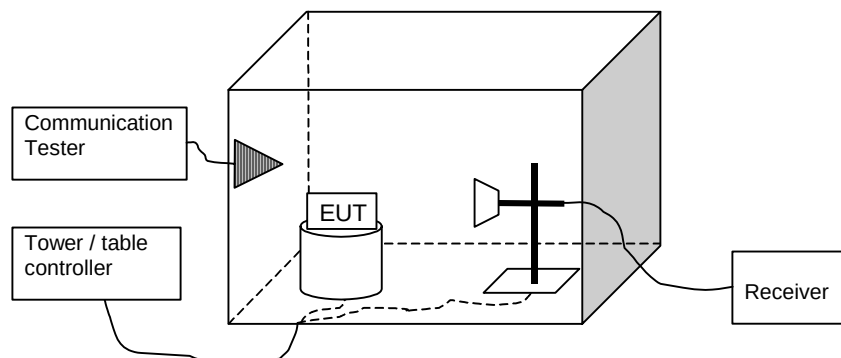

3.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-132 and RSS-133.


Limits for band edge compliance measurements

Operation band	Frequency range / MHz	Limit / dBm
GSM 850	Below 824 and above 849	-13
GSM 1900	Below 1850 and above 1910	-13


3.3. GSM 850 Test results

Operation mode (TX on)	Channel	Level / dBm
GSM	128	-13.15
GSM	251	-15.19
EGPRS	128	-20.27
EGPRS	251	-24.94


GSM mode, channel 128 (Peak detector, RBW: 3 kHz)

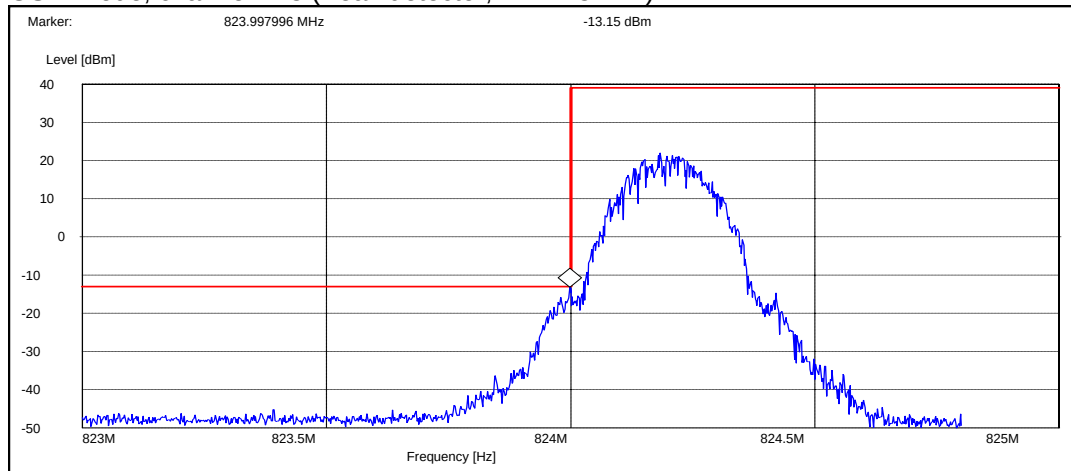


GSM mode, channel 251 (Peak detector, RBW: 3 kHz)

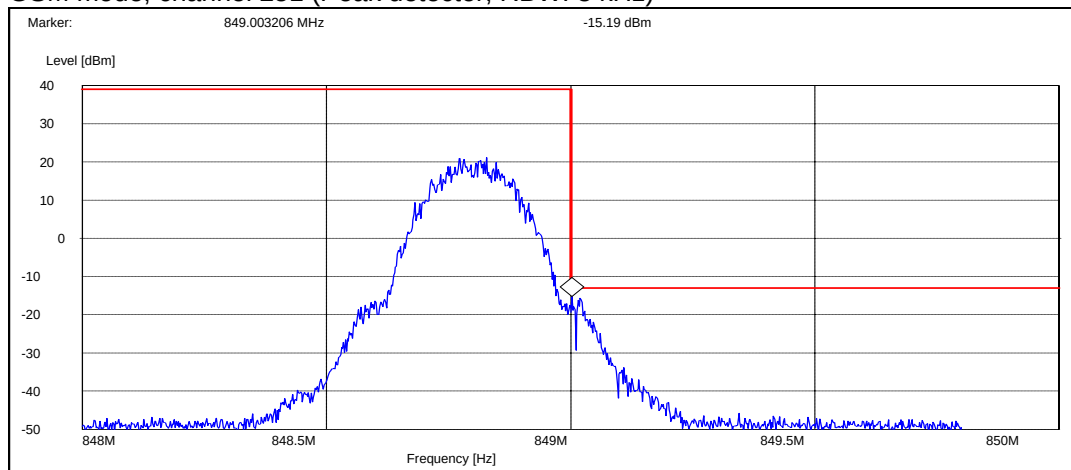

EGPRS mode, channel 128 (Peak detector, RBW: 3 kHz)

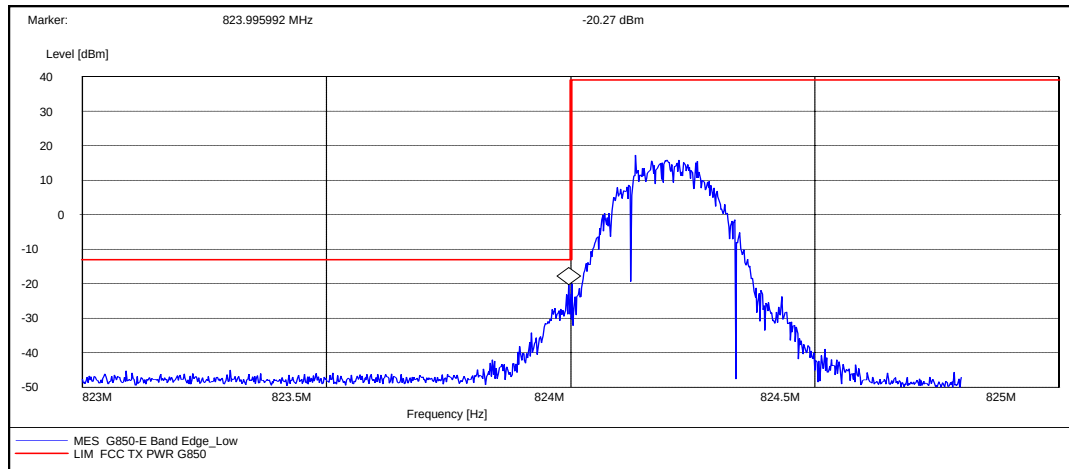


EGPRS mode, channel 251 (Peak detector, RBW: 3 kHz)

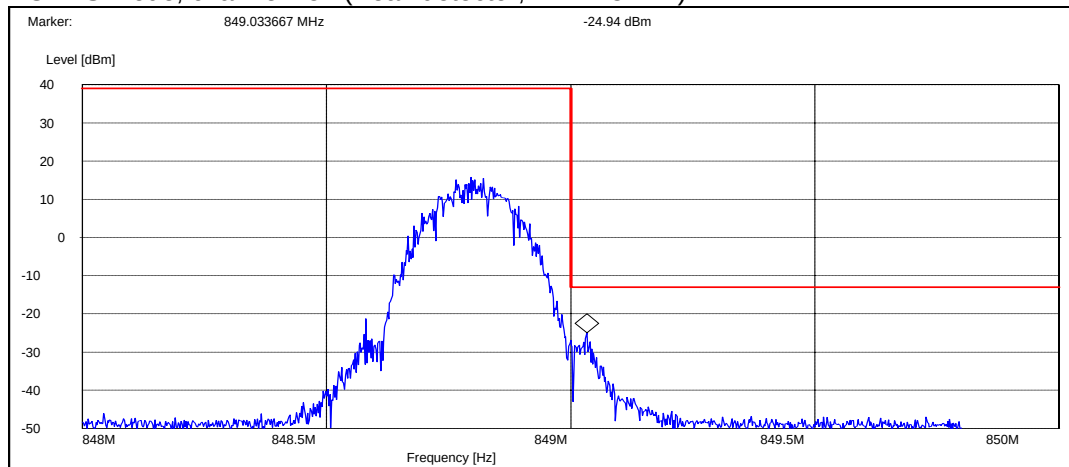


3.4. GSM 1900 Test results

Operation mode (TX on)	Channel	Level / dBm
GSM	512	-13.45
GSM	810	-13.06
EGPRS	512	-22.11
EGPRS	810	-21.23


GSM mode, channel 512 (Peak detector, RBW: 3 kHz)

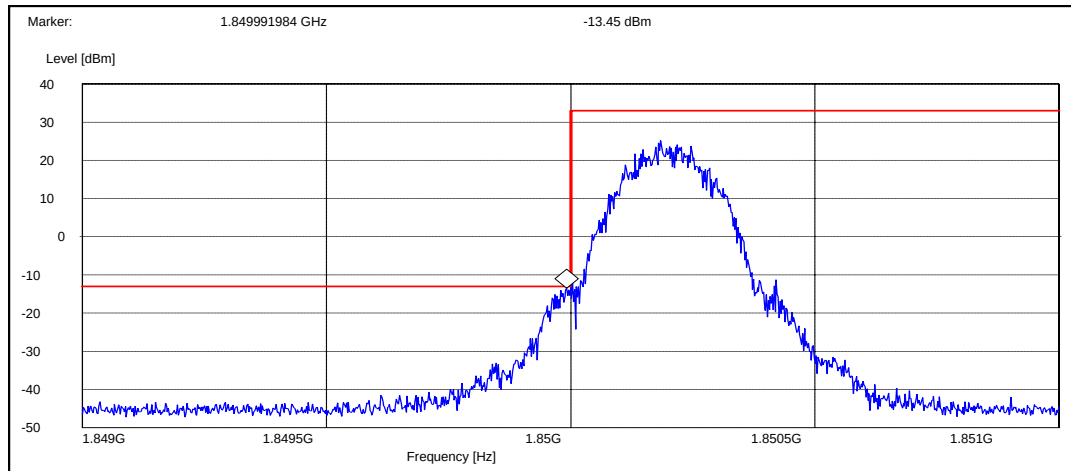


GSM mode, channel 810 (Peak detector, RBW: 3 kHz)

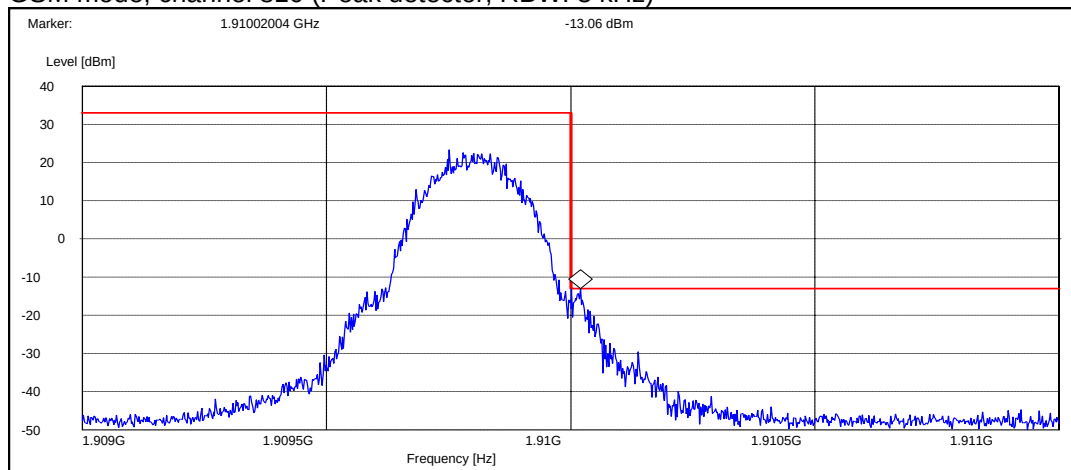

EGPRS mode, channel 512 (Peak detector, RBW: 3 kHz)

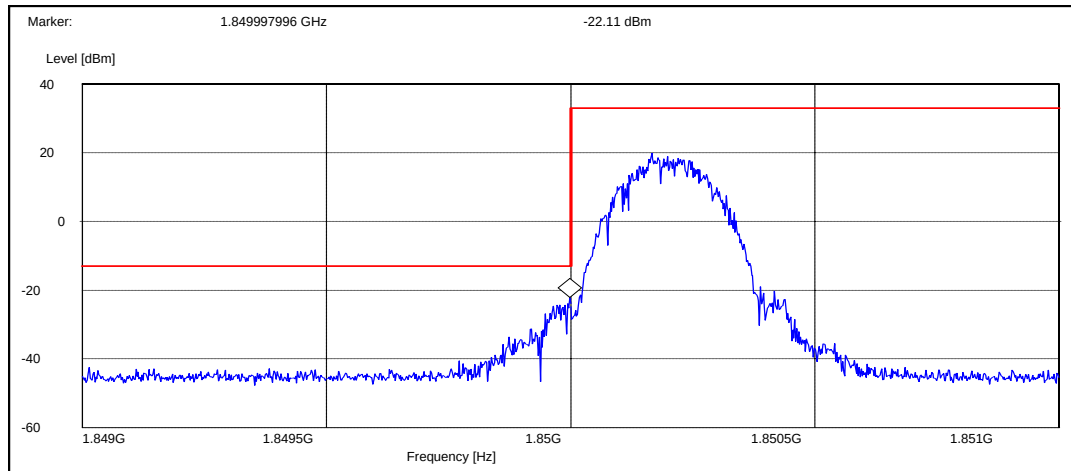


EGPRS mode, channel 810 (Peak detector, RBW: 3 kHz)

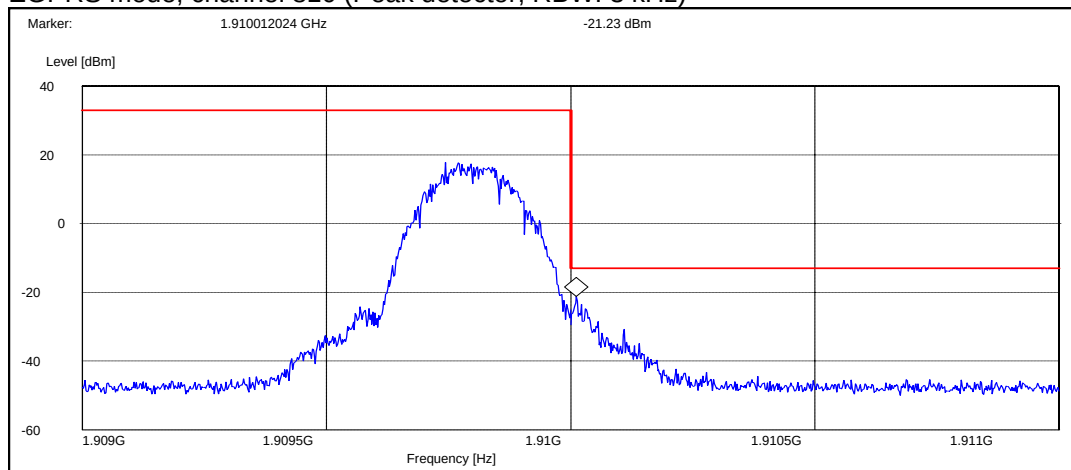

4. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-33 DUT 40257
Accessories with DUT numbers	BL-5X DUT 40260, HS-15 DUT 40262, ACP-12 DUT 40263
Operation Voltage V / Hz	115 / 60
Result	PASS
Remarks	-
Temp °C / Humidity RH % / Air Pressure kPa	21 / 45 / 101.2
Date of measurements	24.5.2005
Measured by	Jari Jantunen

4.1. Test setup

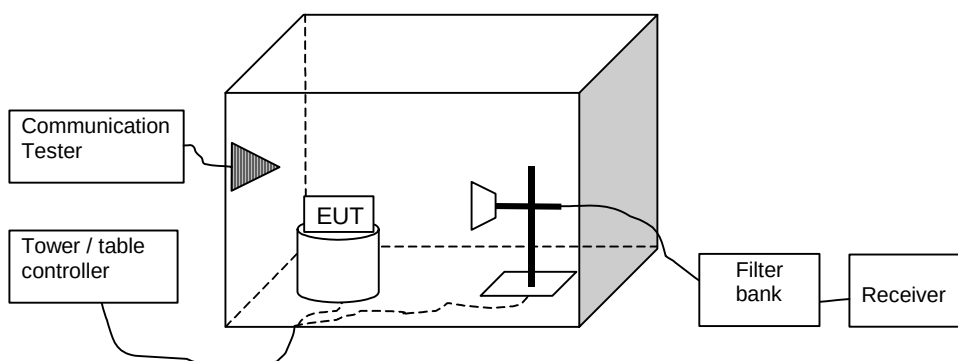

4.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.
The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.
The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.
The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{CORRECTIONS}$$

Where P_{MEAS} is receiver reading in dBm and $A_{CORRECTIONS}$ is combined correction factor including cable loss, preamplifier gain and substitution correction ($A_{CORRECTIONS} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range / MHz	Limit / dBm
GSM 850	30 - 8500	-13
GSM 1900	30 - 18000	-13

4.3. GSM 850 Test results

GSM mode, channel 190

Frequency / MHz	Level / dBm	Level / μ W	$A_{CORRECTION}$ / dB	Polarisation	Slide	Result
1673.143287	-37.10	0.19498	- 4.60	HORIZONTAL	closed	PASS
2509.820641	-39.20	0.12023	1.60	HORIZONTAL	open	PASS

EGPRS mode, channel 190

Frequency / MHz	Level / dBm	Level / μ W	$A_{CORRECTION}$ / dB	Polarisation	Slide	Result
1673.143287	-42.10	0.06166	- 4.60	HORIZONTAL	closed	PASS
2509.820641	-43.30	0.04677	1.60	VERTICAL	open	PASS
3344.697395	-59.30	0.00117	3.60	HORIZONTAL	closed	PASS

4.4. GSM 1900 Test results

GSM mode, channel 661

Frequency / MHz	Level / dBm	Level / μ W	$A_{CORRECTION}$ / dB	Polarisation	Slide	Result
3760.023046	-34.90	0.32359	8.30	VERTICAL	open	PASS
5639.778557	-35.00	0.31623	10.90	HORIZONTAL	open	PASS
7520.542084	-40.30	0.09333	14.20	HORIZONTAL	open	PASS

EGPRS mode, channel 661


Frequency / MHz	Level / dBm	Level / μ W	$A_{CORRECTION}$ / dB	Polarisation	Slide	Result
3760.023046	-40.10	0.09772	8.30	VERTICAL	closed	PASS
5640.282565	-44.30	0.03715	10.60	VERTICAL	open	PASS

7520.042084	-47.40	0.01820	14.20	HORIZONTAL	closed	PASS
-------------	--------	---------	-------	------------	--------	------

5. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-132 4.3, 6.3, RSS-133 7)

EUT with DUT number	RM-33: DUT 40258
Accessories with DUT numbers	BL-5X: DUT 40259
Operation Voltage V / Hz	-
Result	Passed
Remarks	-
Temp °C / Humidity RH % / Air Pressure kPa	22/40/100.4-101.0
Date of measurements	26-27.5.2005
Measured by	Jan-Erik Lilja

5.1. Test setup

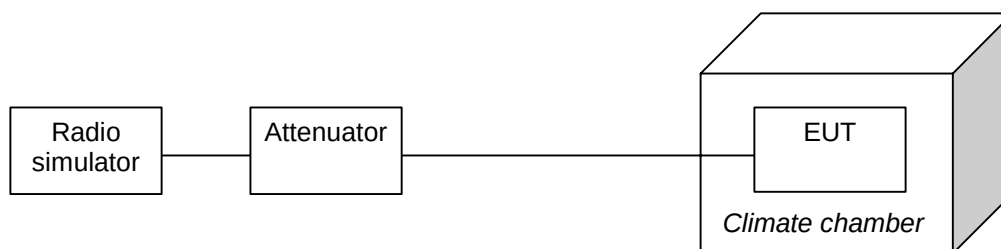

5.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

- The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
- The EUT is placed in the chamber.
- The EUT is set in idle mode for 45 minutes.
- The EUT is set to transmit.
- The transmit frequency error was measured immediately.
- The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation / ppm
± 2.5

5.3. GSM 850 Test results

GSM mode, channel 190

Temperature / °C	Deviation / Hz	Deviation / ppm
50	-29	-0.0347
40	-30	-0.0359
30	-30	-0.0359
20	-30	-0.0359
10	-32	-0.0383
0	-35	-0.0418
-10	-32	-0.0383
-20	-34	-0.0406
-30	-39	-0.0466

5.4. GSM 1900 Test results


GSM mode, channel 661

Temperature / °C	Deviation / Hz	Deviation / ppm
50	-37	-0.0197
40	-37	-0.0197
30	-38	-0.0202
20	-41	-0.0218
10	-37	-0.0197
0	-41	-0.0218
-10	-41	-0.0218
-20	-38	-0.0202
-30	-39	-0.0207

6. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, 6.3, RSS-133 7)

EUT with DUT number	RM-33: DUT 40258
Accessories with DUT numbers	SF-29R: DUT 40273
Operation Voltage V / Hz	-
Result	Passed
Remarks	
Temp °C / Humidity RH % / Air Pressure kPa	22/40/101.0
Date of measurements	27.5.2005
Measured by	Jan-Erik Lilja

6.1. Test setup



6.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation / ppm
± 2.5

6.3. GSM 850 Test results

GSM mode, channel 190

Voltage level / V	Deviation / Hz	Deviation / ppm
Nominal / 3.9	-33	-0.0394
Battery cut-off point / 3.3	-32	-0.0383

6.4. GSM 1900 Test results

GSM mode, channel 661

Voltage level / V	Deviation / Hz	Deviation / ppm
Nominal / 3.9	-36	-0.0191
Battery cut-off point / 3.3	-34	-0.0181

7. Test Equipment

7.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	15C,22/24
TM37678	Radio communication tester	CMU-200	R&S	15C,22/24
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	15C,22/24
TM22901	Step attenuator 110dB	8496A	Agilent	15C,22/24
TM37499	Power splitter	11667A	Agilent	15C,22/24
	Temperature chamber	VT4002	Vötsch	15C,22/24
TM38112	DC power supply	6632A	Agilent	15C,22/24
TM38111	Multimeter	34401A	Agilent	15C,22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C
TM37773	Radio communication tester	CMU-200	R&S	15B,15C
TM38631	Signal generator	83640L	Agilent	15B,15C
TM38114	DC power supply	6632A	Agilent	15B,15C
TM22835	Multimeter	87	Fluke	15B,15C
TM30600	Pulse Limiter	ESH3-Z2	R&S	15B,15C
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15B,15C
TM30636	LISN 50 µH	L2-16/	PMM	15B,15C

7.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	15B,15C, 22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C, 22/24
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	15B,15C, 22/24
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	15B,15C, 22/24
TM37516	Biconilog antenna	HL562	R&S	15B,15C, 22/24
TM26496	Double ridged waveguide antenna	3115	EMCO	15B,15C, 22/24
TM39158	Horn antenna	3116	EMCO	15B,15C, 22/24
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	15B,15C, 22/24
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	15B,15C, 22/24
TM38631	Signal generator	83640L	Agilent	15B,15C, 22/24
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	15B,15C, 22/24
	High pass filter	WHK2010-10SS	Trilithic	15B,15C, 22/24
	Low pass filter	WLK1750-10SS	Trilithic	15B,15C, 22/24
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	15B,15C, 22/24
TM26500	Turntable	DS412	Deisel	15B,15C, 22/24
TM38842	Antenna mast controller	2090	EMCO	15B,15C, 22/24
TM38843	Antenna mast	2075	EMCO	15B,15C, 22/24
TM38114	DC power supply	6632A	Agilent	15B,15C, 22/24
TM22835	Multimeter	87	Fluke	15B,15C, 22/24