

FCC Part 15B Compliance Test Report

Test Report no.:	Tre_FCC_0843_04.doc	Date of Report:	12-Nov-2008
Number of pages:	15	Customer's Contact person:	Ole Soerensen
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	Phone RM-368 / Battery BL-5F, AC charger AC-8E, Headset HS-47, Data cable CA-101, Laptop IBM Thinkpad T22, AC adapter 02K6543, Printer HP deskjet 1600CC3540A, Digital camera FUJI DS-7, Serial cable for camera, Parallel cable for printer		
FCC ID:	QTKRM-368	IC:	661AD-RM368
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132 (Issue 2, September 2005), RSS-133 (Issue 4, February 2008), RSS-139 (Issue 1, February 2008) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, Test System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	21-Oct-2008
Testing completed	03-Nov-2008
The customer's contact person	Ole Soerensen
Test Plan referred to	T:\Projects\RM-368\TestPlan_RS\RS_Testplan_RM-368.xls
Notes	-
Document name	T:\Projects\RM-368\EMC\Results\FCC\Tre_FCC_0843_04.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. GSM and WCDMA bands are tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-368	004401102099377	0342	-	su4.00	41677
Battery	BL-5F	-	-	-	-	41680
AC Charger	AC-8E Friwo	3997918034110300844;0675387	0.3	ver 03	-	41672
Headset	HS-47	-	-	-	-	41681
Data cable	CA-101	-	-	-	-	41683
Laptop	IBM Thinkpad T22	555V2PT	-	-	-	40201
AC Adapter	02K6543	-	-	-	-	40202
Printer	HP deskjet 1600CC3540 A	USB8302546	-	-	-	40077
Digital camera	FUJI DS-7	7102516	-	-	-	40076
Serial cable for camera	-	-	-	-	-	40088
Parallel cable for printer	-	-	-	-	-	40087

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (4.6)	Radiated emissions	PASSED

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

WLAN:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)	7
3.1. Test setup	7
3.2. Test method and limit	7
3.3. GSM 850 Test results	8
3.4. GSM 1900 Test results	9
3.5. Bluetooth Test results	12
3.6. WLAN Test results	13
4. Test Equipment.....	15
4.1. Conducted measurements	15
4.2. Radiated measurements	15

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-368 DUT 41677
Accessories with DUT numbers	BL-5F DUT 41680, AC-8E DUT 41672, HS-47 DUT 41681, CA-101 41683, IBM Thinkpad T22 DUT 40201, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, FUJI DS-7 DUT 40076, Serial cable for camera DUT 40088, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 99.4
Date of measurements	29-Oct-2008
Measured by	Jari Jantunen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 850 Test results

RX mode, channel 190 / 881.6 MHz

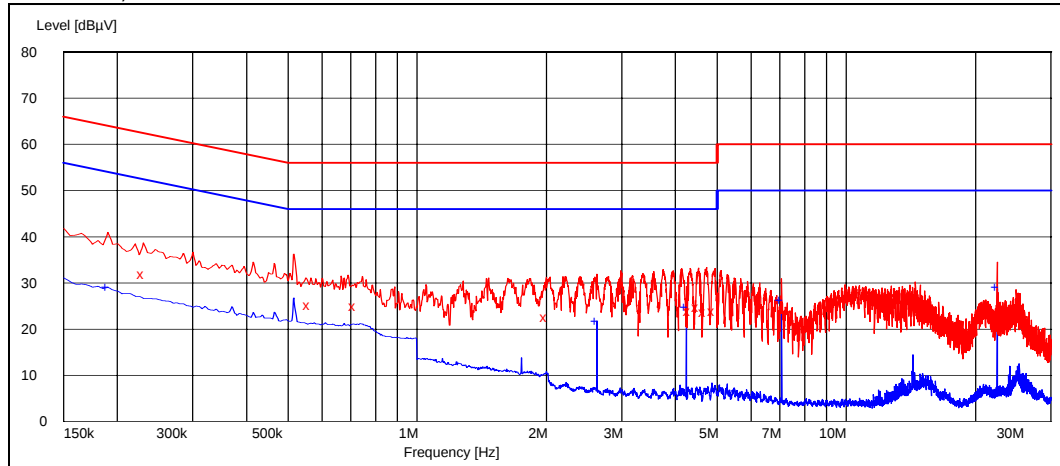

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.230000	32.00	L1	PASSED
0.560000	25.20	L1	PASSED
0.715000	24.90	L1	PASSED
2.000000	22.60	L1	PASSED
4.315000	23.90	L1	PASSED
4.520000	24.70	L1	PASSED
4.685000	23.70	L1	PASSED
4.920000	23.90	L1	PASSED

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.190000	29.10	N	PASSED
2.625000	21.80	L1	PASSED
4.240000	24.70	L1	PASSED
7.065000	26.20	N	PASSED
22.500000	29.20	L1	PASSED

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-368 DUT 41677
Accessories with DUT numbers	BL-5F DUT 41680, AC-8E DUT 41672, HS-47 DUT 41681, CA-101 41683, IBM Thinkpad T22 DUT 40201, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, FUJI DS-7 DUT 40076, Serial cable for camera DUT 40088, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23-24 / 47-48 / 99.4-100.2
Date of measurements	29-Oct 2008 and 03-Nov-2008
Measured by	Jari Jantunen

3.1. Test setup

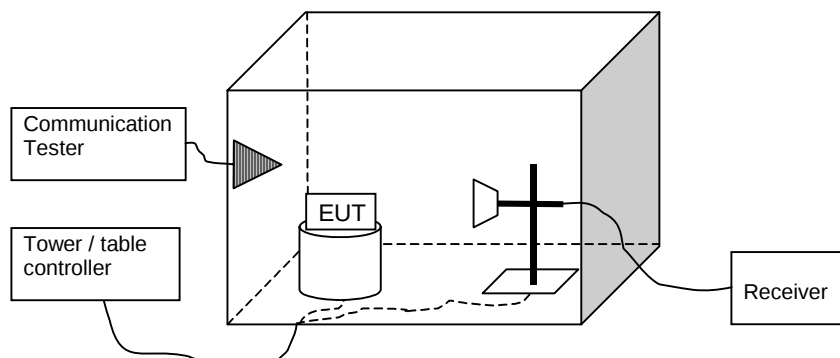

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
3476.800000	38.00	79.43	43.50	-5.5	HORIZONTAL	PASSED
6953.600000	43.80	154.88	42.20	1.6	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
3476.800000	25.30	18.41	30.80	-5.5	HORIZONTAL	PASSED
6953.600000	30.60	33.88	29.00	1.6	VERTICAL	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
31.683367	37.70	76.74	64.00	-26.3	VERTICAL	PASSED
636.172545	17.50	7.50	44.90	-27.4	VERTICAL	PASSED
651.802605	24.50	16.79	51.40	-26.9	VERTICAL	PASSED
696.092786	25.70	19.28	52.10	-26.4	VERTICAL	PASSED
896.191583	30.40	33.11	54.40	-24.0	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
1166.332665	27.20	22.91	48.90	-21.7	VERTICAL	PASSED
1991.983968	30.80	34.67	45.20	-14.4	VERTICAL	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	37.50	74.99	42.90	-5.4	VERTICAL	PASSED
7150.400000	41.90	124.45	39.50	2.4	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	25.10	17.99	30.50	-5.4	HORIZONTAL	PASSED
7150.400000	28.90	27.86	26.50	2.4	VERTICAL	PASSED

3.4. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	39.50	94.41	42.70	-3.2	VERTICAL	PASSED
7720.000000	43.20	144.54	39.70	3.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	26.60	21.38	29.80	-3.2	HORIZONTAL	PASSED
7720.000000	30.00	31.62	26.50	3.5	VERTICAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
31.764329	31.20	36.31	57.60	-26.4	VERTICAL	PASSED
36.692986	18.20	8.13	46.80	-28.6	VERTICAL	PASSED
95.810822	12.30	4.12	47.90	-35.6	VERTICAL	PASSED
99.998998	18.50	8.41	53.80	-35.3	VERTICAL	PASSED
104.889579	17.60	7.59	52.60	-35.0	VERTICAL	PASSED
109.518236	11.80	3.89	46.60	-34.8	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.921844	49.20	288.40	64.00	-14.8	VERTICAL	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	40.70	108.39	43.10	-2.4	VERTICAL	PASSED
7960.000000	43.90	156.68	40.10	3.8	HORIZONTAL	PASSED

Average (RBW: 1 MHz)


Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	27.70	24.27	30.10	-2.4	VERTICAL	PASSED
7960.000000	30.40	33.11	26.60	3.8	VERTICAL	PASSED

4. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-368 DUT 41677
Accessories with DUT numbers	BL-5F DUT 41680, AC-8E DUT 41672, HS-47 DUT 41681
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23-24 / 47-48 / 99.4-100.2
Date of measurements	29-Oct 2008 and 03-Nov-2008
Measured by	Jari Jantunen

4.1. Test setup

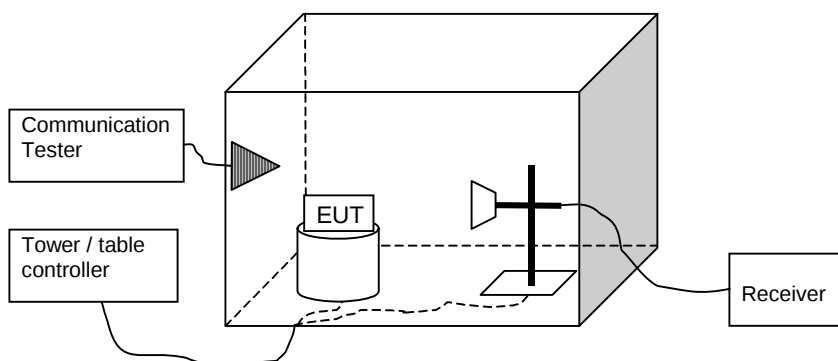

4.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

4.3. Bluetooth + GPS active test results

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
4804.000000	41.00	112.20	42.80	-1.8	VERTICAL	PASSED
7206.000000	50.40	331.13	47.90	2.5	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
4804.000000	28.30	26.00	30.10	-1.8	VERTICAL	PASSED
7206.000000	36.50	66.83	34.00	2.5	VERTICAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
31.983367	38.00	79.43	48.20	-10.2	VERTICAL	PASSED
37.835872	22.10	12.74	36.10	-14.0	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
7325.651303	50.00	316.23	47.10	2.9	VERTICAL	PASSED
7325.653307	50.30	327.34	47.40	2.9	VERTICAL	PASSED
17979.959920	53.80	489.78	34.40	19.4	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
7326.151303	36.00	63.10	33.10	2.9	VERTICAL	PASSED
7326.153307	35.90	62.37	33.00	2.9	VERTICAL	PASSED
17980.959920	40.50	105.93	21.10	19.4	VERTICAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	43.10	142.89	44.70	-1.6	VERTICAL	PASSED
7440.000000	49.00	281.84	45.40	3.6	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	29.60	30.20	31.20	-1.6	VERTICAL	PASSED
7440.000000	35.90	62.37	32.30	3.6	VERTICAL	PASSED

4.4. WLAN Test results

TX mode, channel 1 / 2412 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	38.90	88.10	40.90	-2.0	VERTICAL	PASSED
7236.000000	43.00	141.25	40.40	2.6	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	26.30	20.65	28.30	-2.0	HORIZONTAL	PASSED
7236.000000	29.80	30.90	27.20	2.6	HORIZONTAL	PASSED

RX mode, channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
45.831263	21.10	11.35	54.00	-32.90	VERTICAL	PASSED
52.405210	6.70	2.16	44.20	-37.50	VERTICAL	PASSED
104.208617	16.20	6.46	51.30	-35.10	VERTICAL	PASSED
131.363928	19.20	9.12	53.40	-34.20	HORIZONTAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.000000	39.10	90.16	41.50	-2.40	HORIZONTAL	PASSED
7326.000000	43.40	147.91	40.50	2.90	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.000000	26.40	20.89	28.80	-2.40	HORIZONTAL	PASSED
7326.000000	30.20	32.36	27.30	2.90	HORIZONTAL	PASSED

TX mode, channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	39.80	97.72	42.10	-2.3	HORIZONTAL	PASSED
7386.000000	43.60	151.36	40.20	3.4	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	26.70	21.63	29.00	-2.3	HORIZONTAL	PASSED
7386.000000	30.70	34.28	27.30	3.4	HORIZONTAL	PASSED

Test Equipment

4.5. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

4.6. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B