

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-632_19.docx	Date of Report:	1-Jun-2010
Number of pages:	24	Customer's Contact person:	Xu Shao
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-634 / Battery BL-4D, Headset HS-125 and AC-Charger AC-8E		
FCC ID:	QTKRM-632	IC:	661AD-RM632
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Sami Lehtonen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	15-Apr-2010
Testing completed	03-May-2010
The customer's contact person	Xu Shao
Test Plan referred to	T:\Projects\RM-632\TestPlan\\satcc01nmp\tcc_salo\Projects\RM-632\TestPlan\RS_testplan_RM-632.xls
Notes	-
Document name	FCC15C_RM-632_19.docx

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-632	004401109337812	0200	-	041.007	14679
Battery	BL-4D	4620409514N1017666400670603	-	-	-	14695
Headset	HS-125	06943239443F4108316	-	-	-	14706
AC-Charger	AC-8E	486867946432060220400675387	-	-	-	14696

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (a)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (b)	Power spectral density	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Salo Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4)).....	5
3.1. Test method and limit.....	5
3.2. WLAN Test results	6
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)	9
4.1. Test method and limit.....	9
4.2. WLAN Test results	10
5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	13
5.1. Test method and limit.....	13
5.2. WLAN Test results	14
6. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a)).....	15
6.1. Test method and limit.....	15
6.2. WLAN test results	16
7. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (b)).....	19
7.1. Test method and limit.....	19
7.2. WLAN test results	20
8. Test Equipment	23
8.1. Conducted measurements	23
8.2. Radiated measurements	23

2. Test setups


2.1. Conducted RF test setup

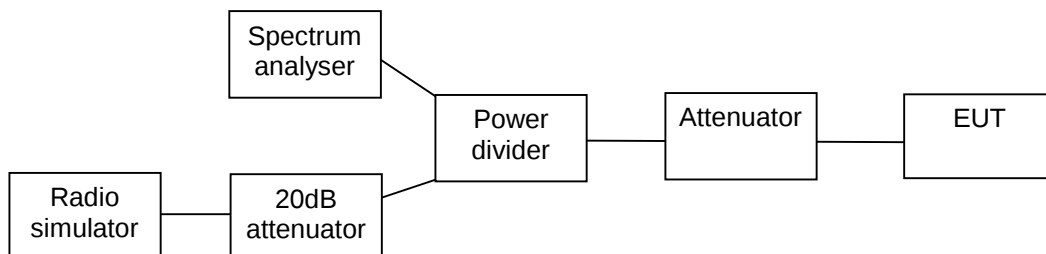

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

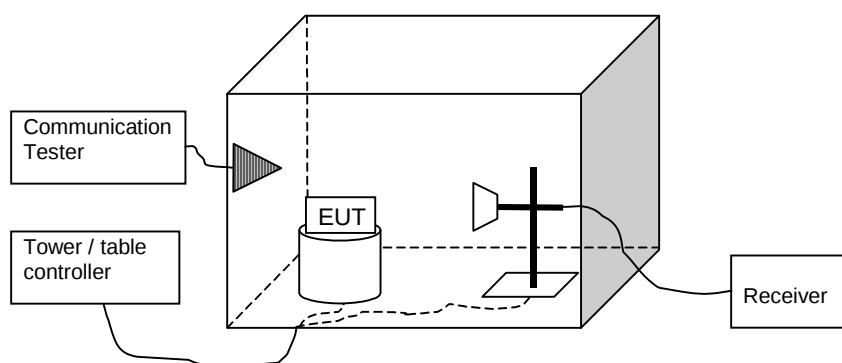

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

3.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. WLAN Test results


3.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [W]	Result
1 / 2412	22.61	0.182	PASSED
7 / 2442	22.66	0.185	PASSED
11 / 2462	22.52	0.179	PASSED


Channel 1 / 2412 MHz

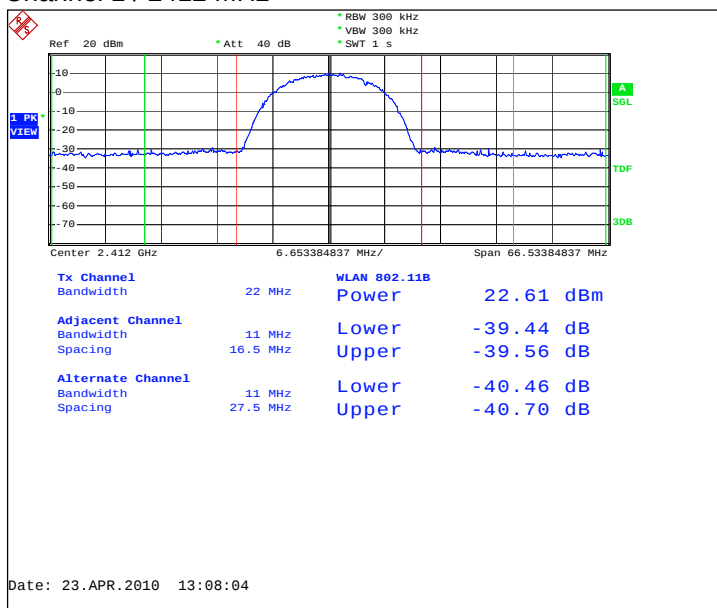

Channel 7 / 2442 MHz

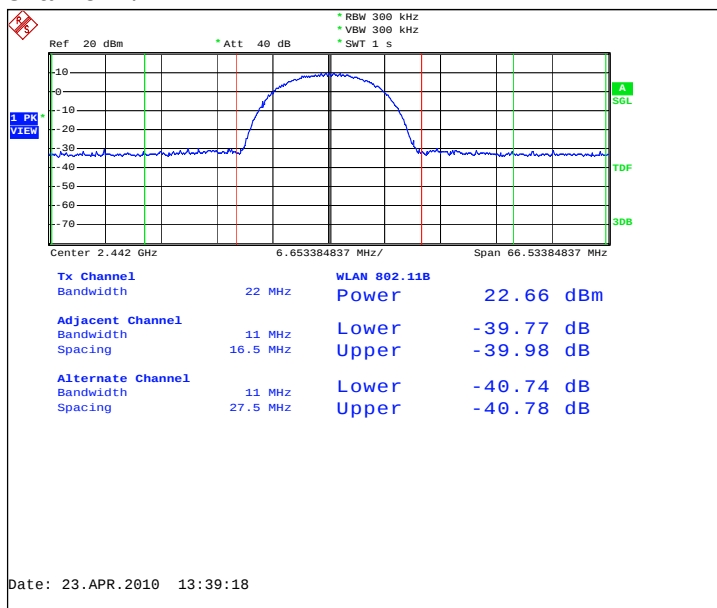


Channel 11 / 2462 MHz

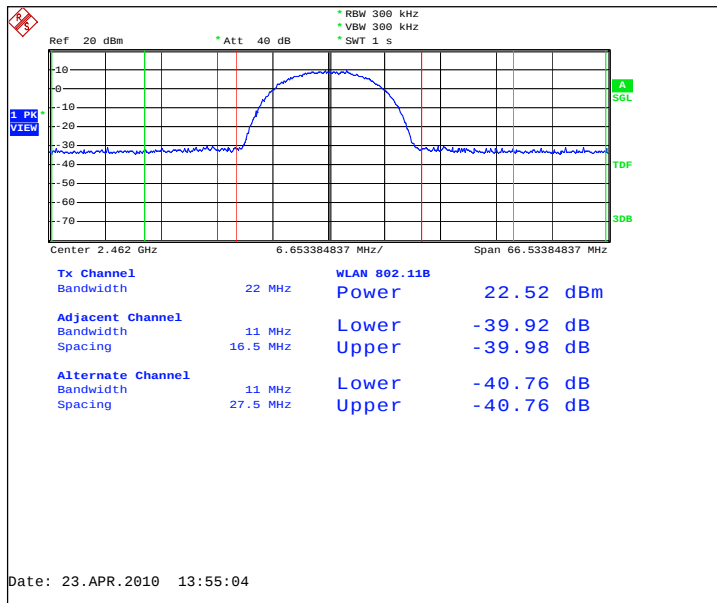


3.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [W]	Result
1 / 2412	20.96	0.125	PASSED
7 / 2442	22.16	0.164	PASSED
11 / 2462	20.85	0.122	PASSED


Channel 1 / 2412 MHz

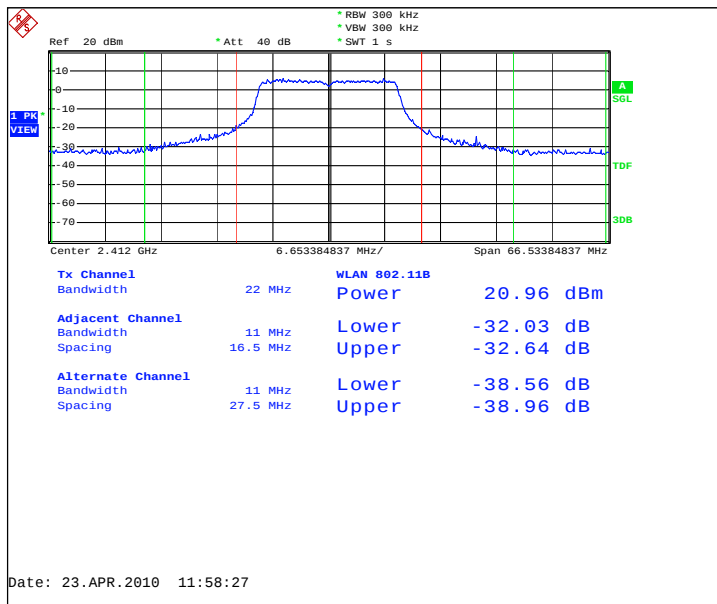

Channel 7 / 2442 MHz

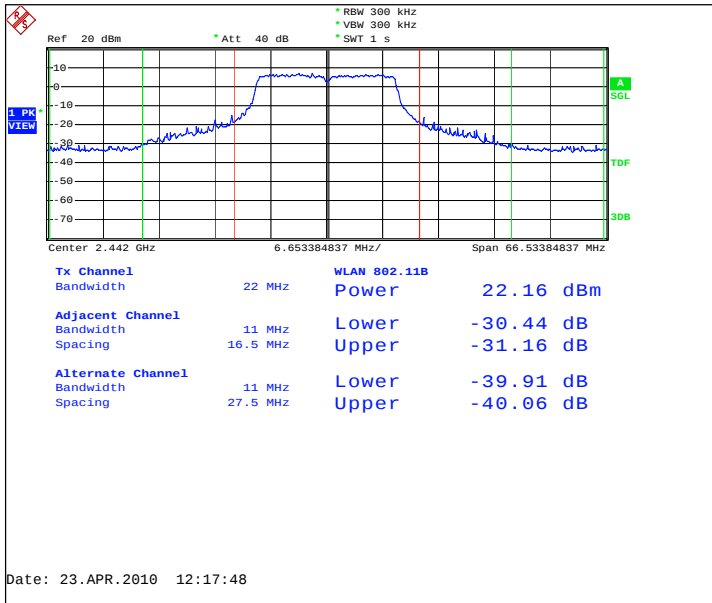

Channel 11 / 2462 MHz

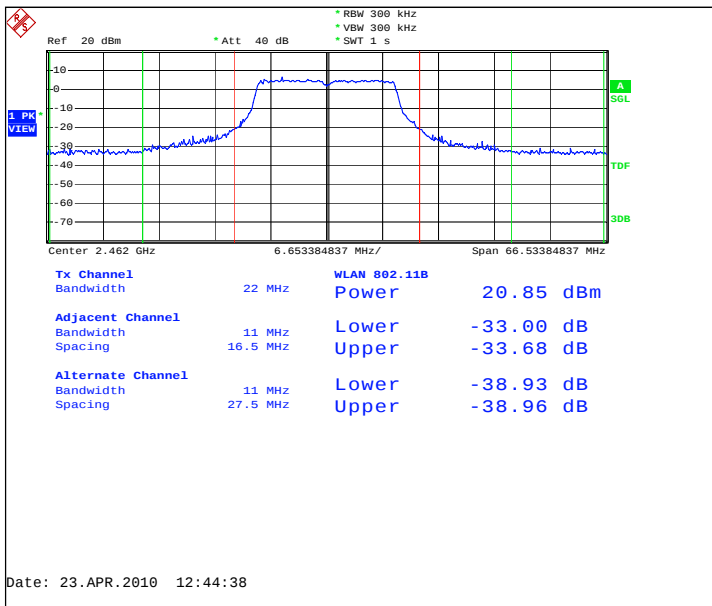

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

4.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. WLAN Test results

4.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

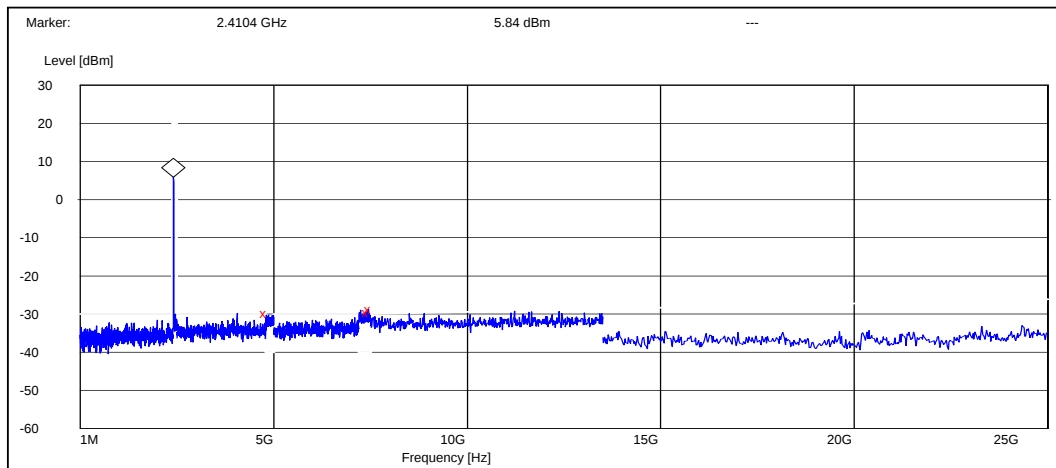

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4807.600000	-35.635453	PASSED
7454.400000	-35.435453	PASSED
7500.000000	-34.535453	PASSED


Channel 7 / 2442 MHz

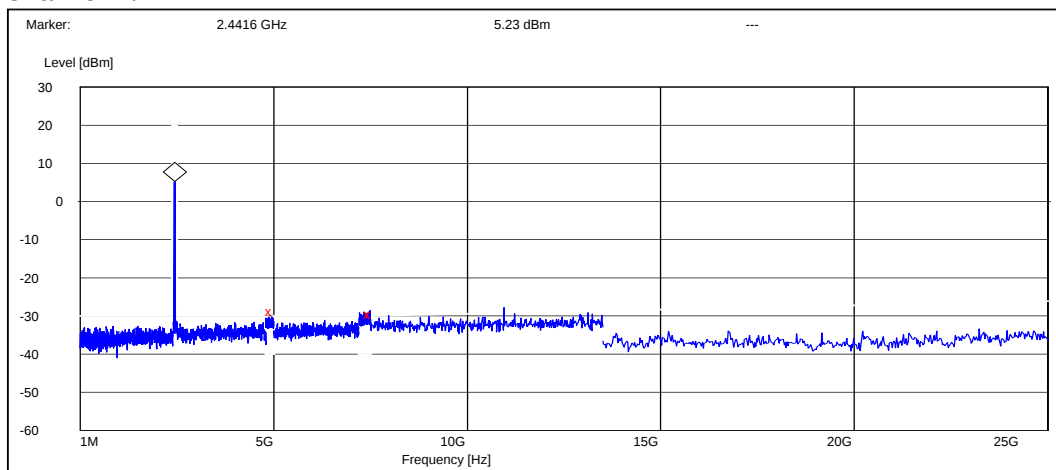

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4955.200000	-33.928920	PASSED
7496.400000	-34.828920	PASSED
7500.000000	-34.728920	PASSED

Channel 11 / 2462 MHz

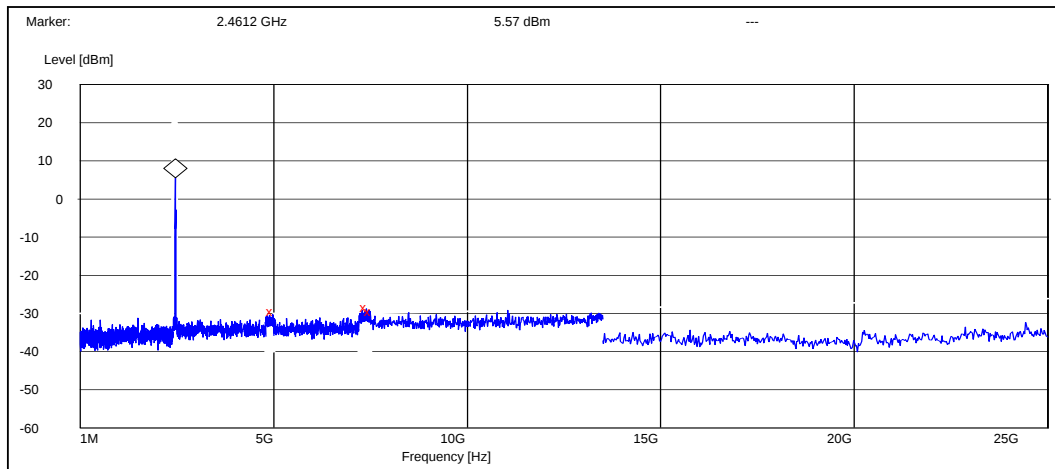


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4976.800000	-35.067222	PASSED
7389.600000	-34.067222	PASSED
7500.000000	-35.067222	PASSED

4.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

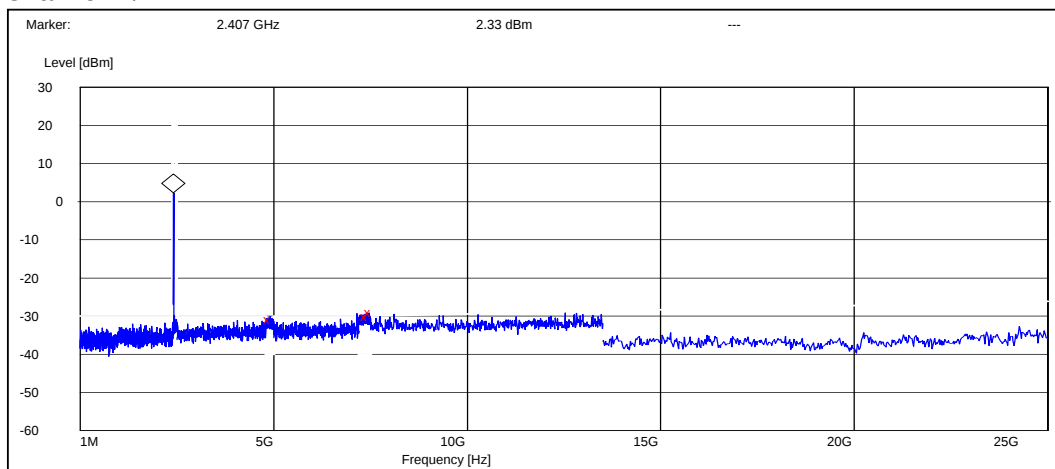

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4901.200000	-33.126697	PASSED
7411.200000	-32.326697	PASSED
7500.000000	-31.226697	PASSED


Channel 7 / 2442 MHz

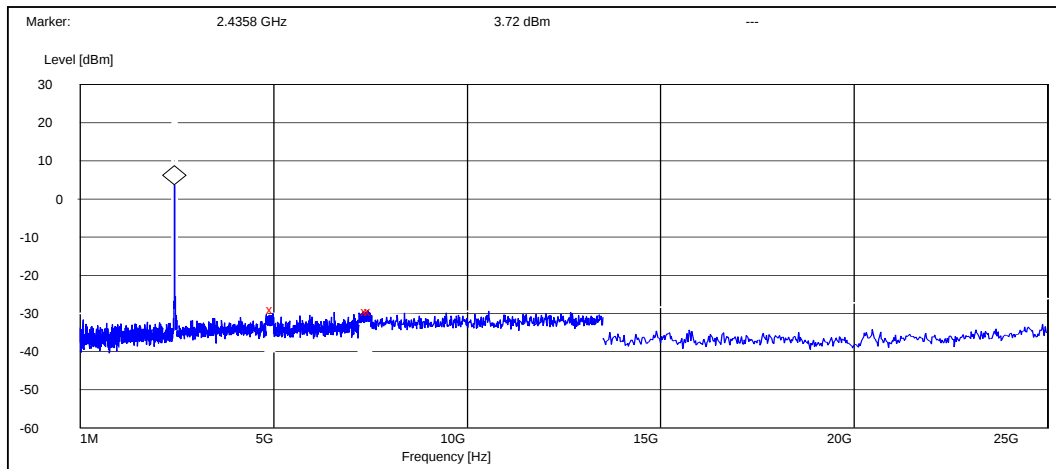

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4976.400000	-32.618185	PASSED
7420.800000	-33.118185	PASSED
7500.000000	-33.118185	PASSED

Channel 11 / 2462 MHz

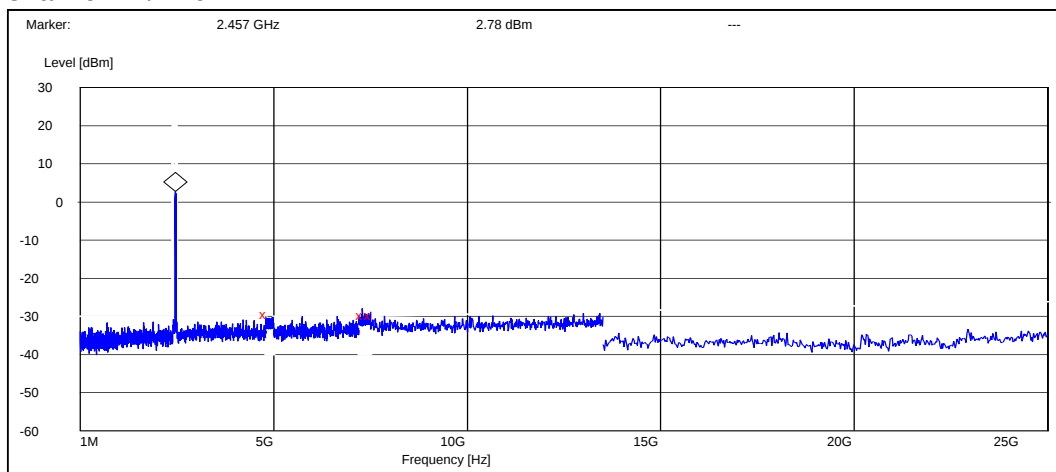

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4803.600000	-32.183469	PASSED
7288.800000	-32.483469	PASSED
7500.000000	-32.583469	PASSED

5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-632, DUT 14679
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	03-May-2010
Measured by	Anni Manninen

5.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.2. WLAN Test results

5.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

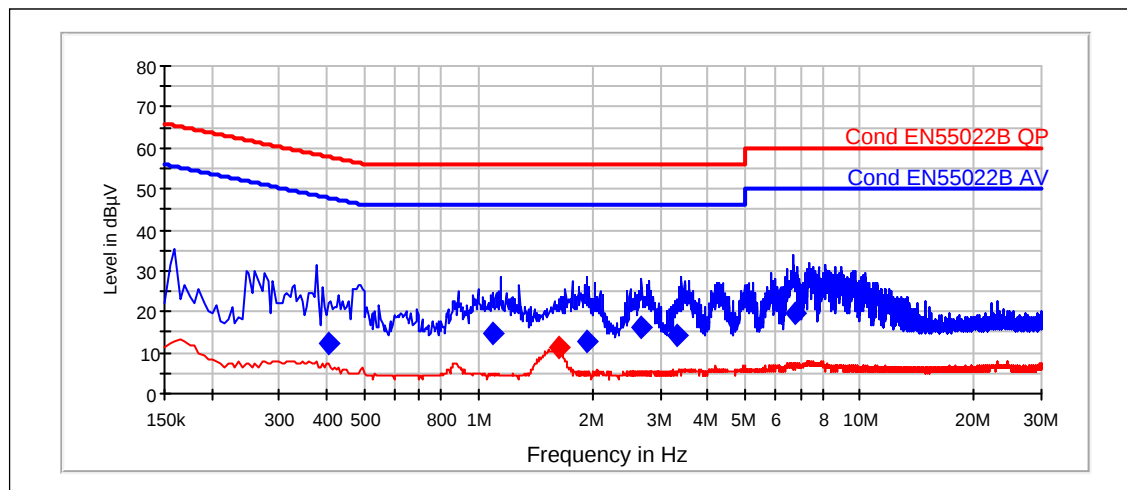

Quasi peak

Frequency [MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
0.405	12.2	15000	9	N	45.55	PASSED
1.085	14.67	15000	9	N	41.3	PASSED
1.92	12.98	15000	9	L1	43	PASSED
2.665	16.28	15000	9	N	39.7	PASSED
3.335	14.3	15000	9	N	41.7	PASSED
6.75	19.81	15000	9	N	40.2	PASSED

Average

Frequency [MHz]	Level [dBμV]	Meas. time[ms]	IF-BW[kHz]	Line	Margin	Result
1.625	11.08	15000	9	N	34.9	PASSED

6. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

6.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

6.2. WLAN test results


6.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1	10900.000	PASSED
7	10800.000	PASSED
11	10900.000	PASSED


Channel 1 / 2412 MHz

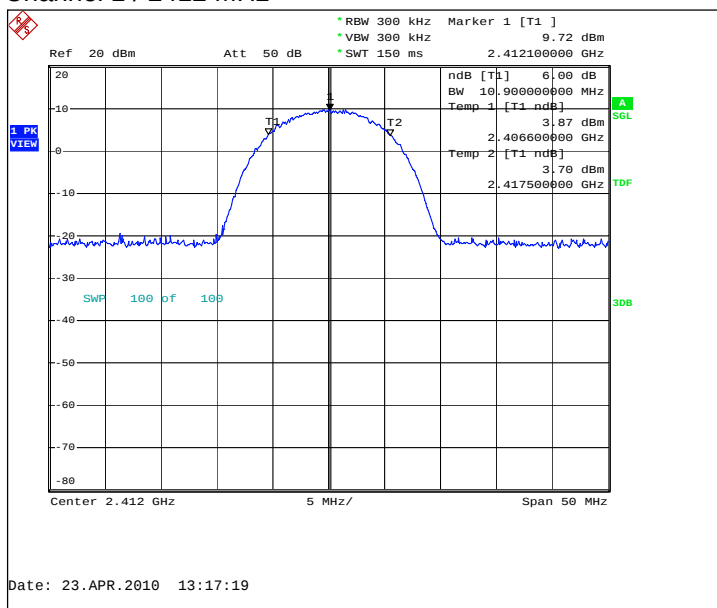

Channel 7 / 2442 MHz

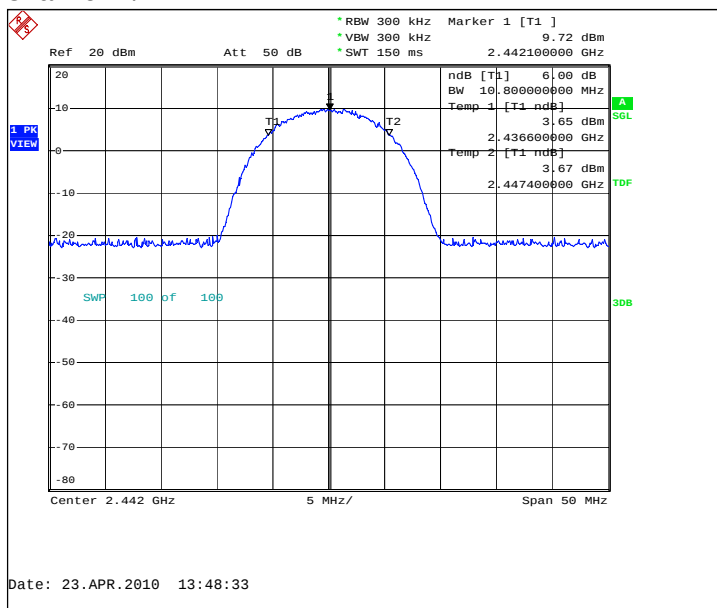


Channel 11 / 2462 MHz

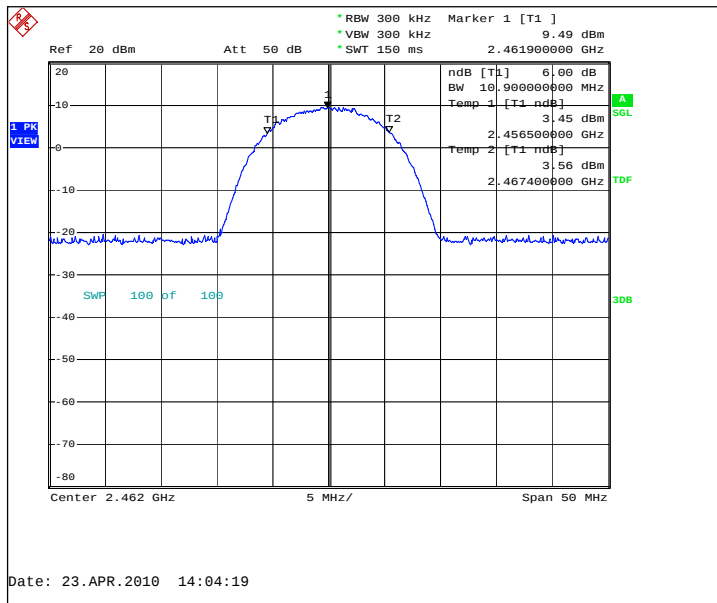


6.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1	16600.000	PASSED
7	16600.000	PASSED
11	16600.000	PASSED


Channel 1 / 2412 MHz

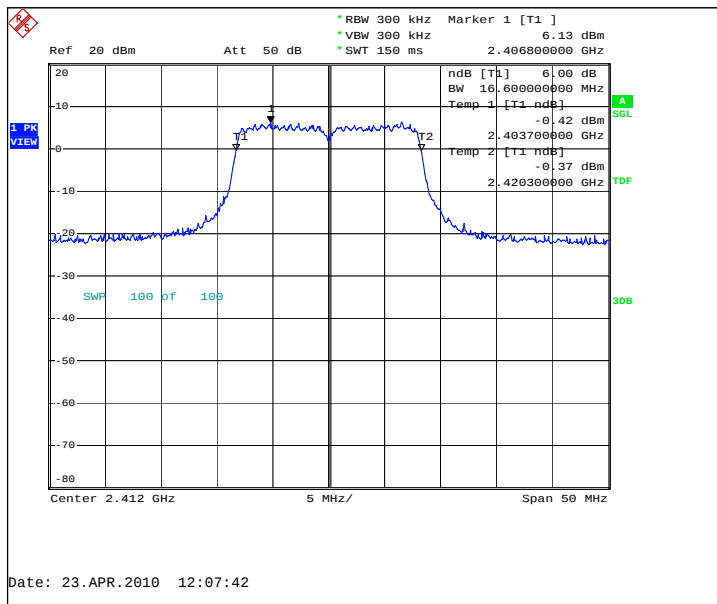

Channel 7 / 2442 MHz

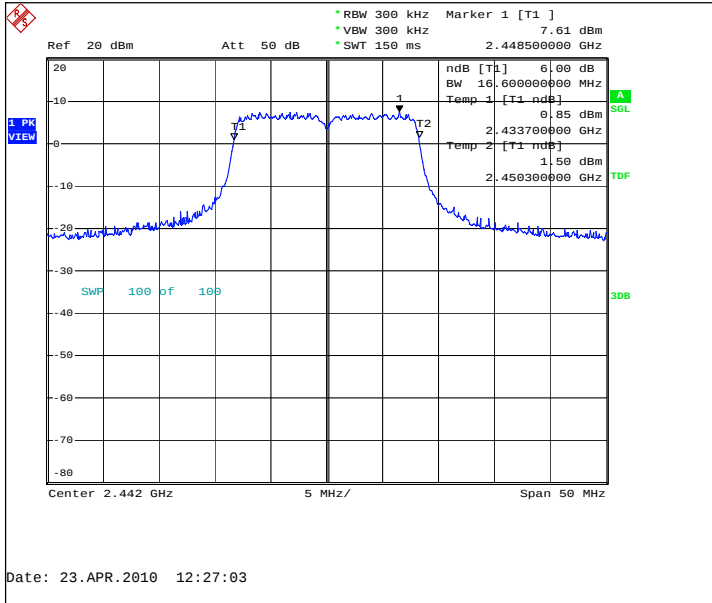

Channel 11 / 2462 MHz

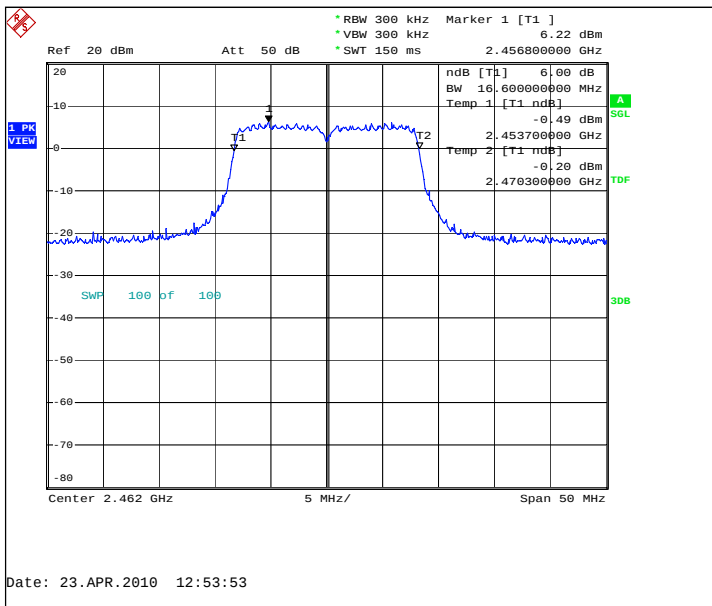

7. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (b))

EUT with DUT number	RM-632, DUT 14694
Accessories with DUT numbers	BL-4D, DUT 14694; HS-125, DUT 14706; AC-8E, DUT 14696
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101
Date of measurements	19-Apr-2010
Measured by	Anni Manninen

7.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
≤ 8

7.2. WLAN test results


7.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	P [dBm]	Result
1 / 2412	-4.05	PASSED
7 / 2442	-4.02	PASSED
11 / 2462	-4.34	PASSED


Channel 1 / 2412 MHz

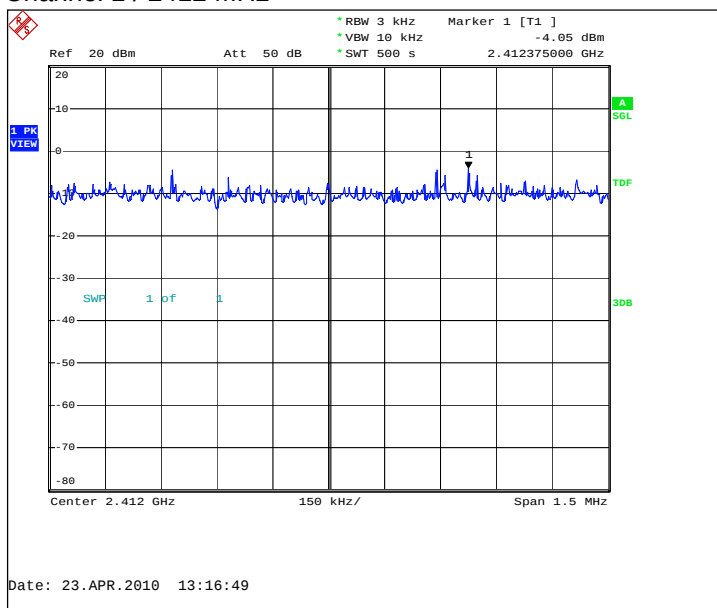

Channel 7 / 2442 MHz

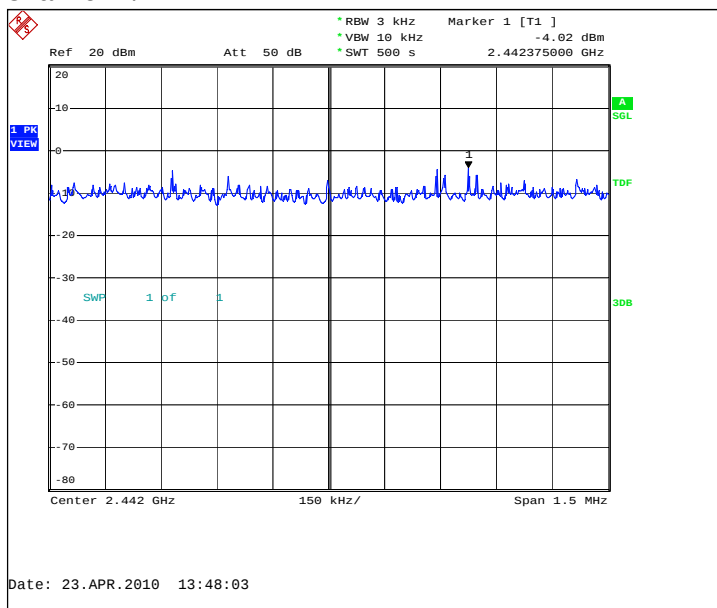


Channel 11 / 2462 MHz

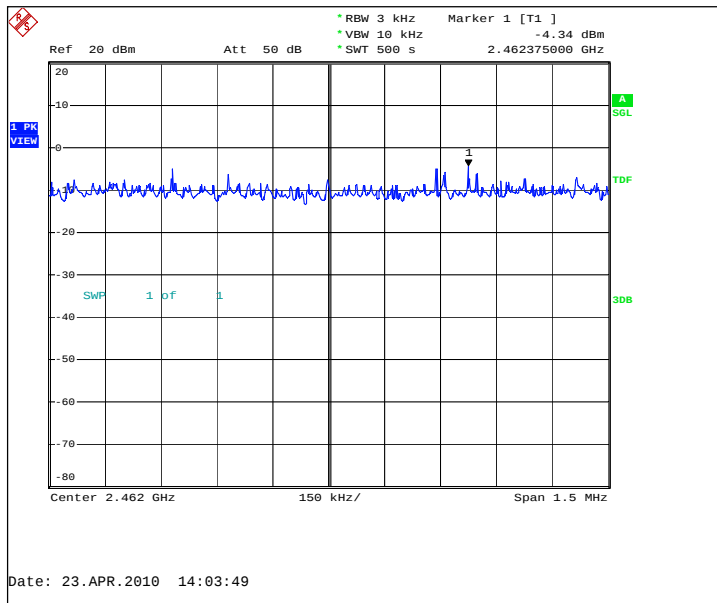

7.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-10.62	PASSED
7 / 2442	-9.87	PASSED
11 / 2462	-11.18	PASSED

Channel 1 / 2412 MHz

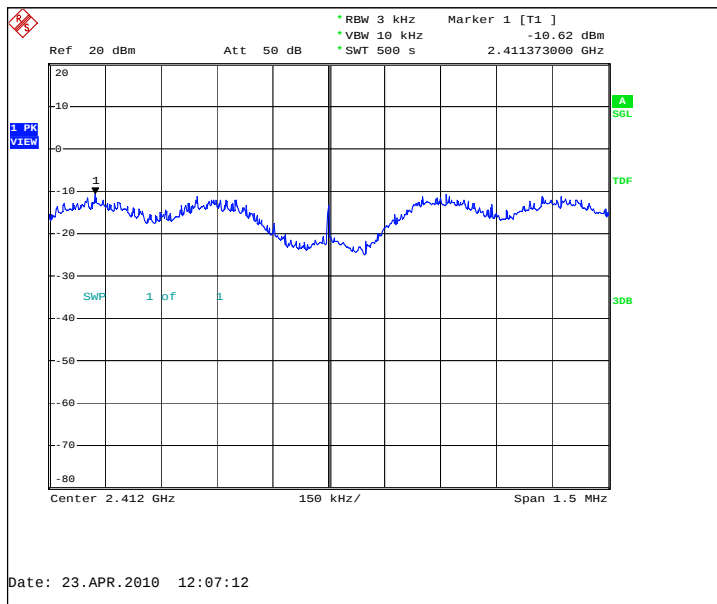

Ref 20 dBm Att 50 dB

RBW 3 kHz VBW 10 kHz SWT 500 s

Marker 1 [T1] -9.87 dBm

2.44164000 GHz

1 PK VIEW

1 dB

Center 2.442 GHz 150 kHz/ Span 1.5 MHz

Ref 20 dBm Att 50 dB

RBW 3 kHz VBW 10 kHz SWT 500 s Marker 1 [T1] -11.18 dBm 2.461646000 GHz

1 PK VIEW

1

SWP 1 dB 1

3dB

Center 2.462 GHz 150 kHz/ Span 1.5 MHz

Date: 23.APR.2010 12:53:23

8. Test Equipment

8.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1916	Communication Tester	CMTA84	R&S	15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1992	Signal Generator	83630B	Agilent	15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2206	Signal Generator	SMX	R&S	15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2390	Directional Coupler	DC2600	AR	-
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6012	CDN	CDN USB/c	Teseq	-
6015	Receiver	ESI	R&S	22/24, 15C, 15B
6016	ESD gun	PESD 1610	HAEFELY	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	23/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	23/24/27, 15C, 15B
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
6045	Power splitter	11667B	Agilent	23/24/27, 15C
6046	Attenuator 10dB	8493C	Agilent	23/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	23/24/27, 15C

8.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1917	Communication Tester	CMTA84	R&S	15B
1984	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1988	Antenna	HL562	R&S	22/24/27, 15C, 15B
1989	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	24
2051	High Pass Filter	4HC1700-1-KK	R&S	22
2109	Power Supply	PL330QMD	Thurlby	22/24/27, 15C, 15B
2116	Controller	EMCO 2090	ETS	22/24/27, 15C, 15B
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2140	Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Antenna	3146	EMCO	22/24/27, 15C
2150	High Pass Filter	F-15041	RLC	22/24/27, 15C
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2348	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
2349	Computer Controller	GS-232B	Yaesu	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	Miteq	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
6017	Antenna	SBA 9113	Schwarzbeck	22 / 24 / 27
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
6037	Data Logger	175-H2	Testo	23/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	23/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	23/24/27, 15C, 15B