

FCC Part 22/24/27 Compliance Test Report

Test Report no.:	FCC22&24&27_RM-750_20.docx	Date of Report:	14-Jul-2011
Number of pages:	10	Customer's Contact person:	Rasmussen Jan
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-750 / Battery BL-4U / AC-Charger AC-8E / Headset WH-102		
FCC ID:	QTKRM-750	IC:	661AD-RM750
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24/27 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Kalle Hannila, Engineer, EMC

1. Summary for FCC Part 22/24/27 Compliance Test Report

Date of receipt	01-Jul-2011
Testing completed	12-Jul-2011
The customer's contact person	Rasmussen Jan
Test Plan referred to	T:\Projects\RM-750\TestPlan\RS_testplan_RM-750.xls
Notes	-
Document name	T:\Projects\RM-750\EMC\FCC22&24&27_RM-750_20.docx

1.1. EUT and Accessory Information

The EUT is a 11-band mobile phone:

GSM850/900/1800/1900/GPRS/EGPRS/Monopole without GND reflector (GSM/WCDMA)

WCDMA I/II(1900)/IV(1700)/V(850)/VIII/HSUPA/HSUPA/Monopole without GND reflector (GSM/WCDMA)

WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-750	004402135201642ö 059F2K1	0200	-	000.094	15737
Battery	BL-4U	4181571074000002058ö0670560	-	-	-	15738
AC-Charger	AC-8E	1103338312100301189ö0675387	-	-	-	15739
Headset	WH-102	06943231113m1R66951	-	-	-	15740

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1900 (Band II):

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

WCDMA 1700 (Band IV):

Section in CFR 47	Section in RSS-GEN or RSS-139	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§27.50(d)(2)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§27.53(g)	6.5	Band edge compliance	NP
§27.53(g), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 22/24/27 Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Spurious radiated emissions	
(FCC §22.917(a), §2.1053, §24.238(a), §2.1053, §27.53(g), §2.1053, RSS-132 4.5, RSS-133 6.5, RSS-139 6.5)	5
2.2. Test method and limit	5
2.3. WCDMA 1900 (Band II) TX Test results	7
2.4. WCDMA 1700 (Band IV) TX Test results	7
2.5. WCDMA 850 (Band V) TX Test results	7
2.6. GSM850 TX Test results	7
2.7. GSM1900 TX Test results	8
3. Test Equipment	9
3.1. Conducted measurements	9
3.2. Radiated measurements	9

2. Spurious radiated emissions

(FCC §22.917(a), §2.1053, §24.238(a), §2.1053, §27.53(g), §2.1053, RSS-132 4.5, RSS-133 6.5, RSS-139 6.5)

EUT with DUT number	RM-750, DUT 15737
Accessories with DUT numbers	BL-4U, DUT 15738 ; AC-8E, DUT 15739 ; WH-102, DUT 15740
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 55 / 107.6
Date of measurements	12-Jul-2011
Measured by	Kalle Hannila

2.1.1 Test Setup

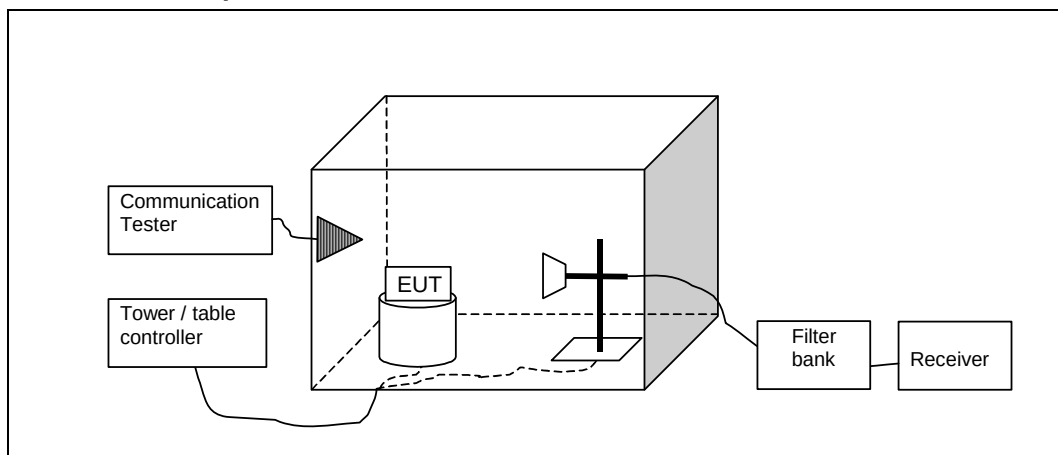

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software. The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\ TX} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + 5^{(10)} G_{SUBST\ TX\ ANT}$$

FCC Part 22/24/27 Compliance Test Report
/ Template Version 15.0

FCC22&24&27_RM-750_20.docx
Copyright © TCC Nokia

TCC Nokia Salo Laboratory
P.O.Box(86)
Joensuunkatu 7H / Kiila 1B
FIN-24101 SALO, FINLAND
Tel. +358 (0) 7180 08000
Fax. +358 (0) 7180 45220

Where A_{SUBST} is the final substitution correction including receive antenna gain. $P_{SUBST\ TX}$ is signal generator level, $P_{SUBST\ RX}$ is receiver level, $L_{SUBST\ CABLES}$ is cable losses including both TX and RX cables and $G_{SUBST\ TX\ ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P[dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1700 / WCDMA 1900	30 - 18000	-13

2.3. WCDMA 1900 (Band II) TX Test results

Channel 9400 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1917.353	-54.38	0.00365	-59.21	4.83	HORIZONTAL	PASSED
3749.86	-57.36	0.00184	-61.09	3.73	VERTICAL	PASSED
3798.076	-56.02	0.0025	-60.84	4.82	HORIZONTAL	PASSED
5648.858	-52	0.00631	-60.73	8.73	HORIZONTAL	PASSED
7557.555	-49.13	0.01222	-61.79	12.66	HORIZONTAL	PASSED
9372.265	-44.79	0.03319	-62.58	17.79	VERTICAL	PASSED

2.4. WCDMA 1700 (Band IV) TX Test results

Channel 1412 / 1732.4 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1714.916	-43.73	0.04236	-47.1	3.37	HORIZONTAL	PASSED
1715	-44.12	0.03873	-47.48	3.36	HORIZONTAL	PASSED
1715	-43.98	0.03999	-47.34	3.36	HORIZONTAL	PASSED
1756.796	-54.34	0.00368	-58.31	3.97	HORIZONTAL	PASSED
1758.735	-54.77	0.00333	-58.8	4.03	HORIZONTAL	PASSED
1758.987	-53.15	0.00484	-57.19	4.04	HORIZONTAL	PASSED

2.5. WCDMA 850 (Band V) TX Test results

Channel 4175 / 835.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
848.6	-47.84	0.01644	-38.99	-8.85	VERTICAL	PASSED
848.621	-47.86	0.01637	-39	-8.86	VERTICAL	PASSED
848.623	-47.47	0.01791	-38.61	-8.86	VERTICAL	PASSED
1686.077	-55.35	0.00292	-58.52	3.17	VERTICAL	PASSED
2481.884	-53.4	0.00457	-58.52	5.12	HORIZONTAL	PASSED
2544.93	-51.71	0.00675	-57.35	5.64	HORIZONTAL	PASSED

2.6. GSM850 TX Test results

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1672.867	-55.53	0.0028	-58.18	2.65	VERTICAL	PASSED
1673.264	-54.26	0.00375	-56.9	2.64	VERTICAL	PASSED
1686.618	-55.54	0.00279	-58.73	3.19	VERTICAL	PASSED
2542.064	-52.57	0.00553	-58.16	5.59	HORIZONTAL	PASSED
2546.733	-52.85	0.00519	-58.42	5.57	HORIZONTAL	PASSED
3346.573	-54.92	0.00322	-56.24	1.32	VERTICAL	PASSED

EGPRS mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1665.812	-55.9	0.00257	-58.2	2.3	VERTICAL	PASSED
1684.729	-55.79	0.00264	-58.88	3.09	VERTICAL	PASSED
1688.477	-55.48	0.00283	-58.74	3.26	VERTICAL	PASSED
2493.768	-52.17	0.00607	-57.55	5.38	HORIZONTAL	PASSED

2515.832	-52.16	0.00608	-57.63	5.47	HORIZONTAL	PASSED
3346.353	-60.52	0.00089	-61.84	1.32	VERTICAL	PASSED

2.7. GSM1900 TX Test results

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
2874.204	-47.46	0.01795	-57.93	10.47	VERTICAL	PASSED
2924.735	-46.85	0.02065	-58.04	11.19	HORIZONTAL	PASSED
7507.615	-48.23	0.01503	-61.55	13.32	HORIZONTAL	PASSED
8773.908	-45.75	0.02661	-62.26	16.51	HORIZONTAL	PASSED
9872.986	-45.47	0.02838	-63.77	18.3	VERTICAL	PASSED
9947.235	-45.65	0.02723	-63.68	18.03	HORIZONTAL	PASSED

EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
2865.607	-46.07	0.02472	-56.58	10.51	VERTICAL	PASSED
2918.262	-45.72	0.02679	-57.27	11.55	HORIZONTAL	PASSED
7504.509	-49.52	0.01117	-62.63	13.11	HORIZONTAL	PASSED
8810.24	-46.17	0.02415	-62.27	16.1	HORIZONTAL	PASSED
9862.585	-44.99	0.0317	-63.43	18.44	VERTICAL	PASSED
9983.347	-45.22	0.03006	-63.68	18.46	HORIZONTAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1916	Communication Tester	CMTA84	R&S	15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1992	Signal Generator	83630B	Agilent	15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2206	Signal Generator	SMX	R&S	15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24/27
2362	Power Supply	NGPX 70/5	R&S	22/24/27
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2390	Directional Coupler	DC2600	AR	-
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6012	CDN	CDN USB/c	Teseq	-
6015	Receiver	ESI	R&S	22/24, 15C, 15B
6016	ESD gun	PESD 1610	HAEFELY	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
6045	Power splitter	11667B	Agilent	22/24/27, 15C
6046	Attenuator 10dB	8493C	Agilent	22/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	22/24/27, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1917	Communication Tester	CMTA84	R&S	15B
1984	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B
1986	GPS Antenna	AMHP10-15R/390	European Antenna	15C, 15B
1988	Antenna	HL562	R&S	22/24/27, 15C, 15B
1989	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2047	Band Reject Filter	WRCC1800/2000-0,2-10SS	Wainwright	24

Eq. No	Equipment	Type	Manufacturer	Used in
2051	High Pass Filter	4HC1700-1-KK	R&S	22
2109	Power Supply	PL330QMD	Thurlby	22/24/27, 15C, 15B
2116	Controller	EMCO 2090	ETS	22/24/27, 15C, 15B
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2140	Antenna	EMCO93110B	EMCO	22/24/27, 15C
2142	Antenna	3146	EMCO	22/24/27, 15C
2150	High Pass Filter	F-15041	RLC	22/24/27, 15C
2156	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2348	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
2349	Computer Controller	GS-232B	Yaesu	22/24/27, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	Miteq	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2366	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
2384	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	22
2388	Bluetooth Tester	CBT	R&S	15B
2389	Signal Generator	SMJ 100A	R&S	15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6009	GPS Antenna	SA-700	Chronos	15C
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	15C
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	15C
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
6017	Antenna	SBA 9113	Schwarzbeck	22 / 24 / 27
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
6037	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B