

**GSM850 test report
for****RH-60**

CONTENTS

1	LABORATORY INFORMATION	3
2	CUSTOMER INFORMATION	3
3	SUMMARY OF TEST RESULTS.....	4
4	EUT INFORMATION.....	5
4.1	EUT description	5
5	EUT TEST SETUPS	5
6	APPLICABLE STANDARDS.....	5
7	99% OCCUPIED BANDWIDTH.....	6
7.1	Test setup	6
7.2	EUT operation mode.....	6
7.3	Results	6
7.4	Screen shots.....	6
8	BANDEDGE COMPLIANCE.....	8
8.1	Test setup	8
8.2	EUT operation mode.....	8
8.3	Limit	8
8.4	Results	9
8.5	Screen shots.....	9
9	SPURIOUS RADIATED EMISSION	11
9.1	Test setup	11
9.2	Test method	11
9.3	EUT operation mode.....	12
9.4	Limit	12
9.5	Results	12
10	FREQUENCY STABILITY, TEMPERATURE VARIATION	13
10.1	Test setup	13
10.2	EUT operation mode.....	13
10.3	Limit	13
10.4	Test method	13
10.5	Results	14
11	FREQUENCY STABILITY, VOLTAGE VARIATION	15
11.1	Test setup	15
11.2	EUT operation mode.....	15
11.3	Limit	15
11.4	Test method	15
11.5	Results	15
12	TEST EQUIPMENT	16
12.1	Conducted measurements	16
12.2	Radiated measurements	16
13	TEST SETUP PHOTOGRAPHS.....	18

1 LABORATORY INFORMATION


Test laboratory:	TCC Tampere Sinitaival 5 FIN-33720 TAMPERE Tel. +358 7180 46800 Fax. +358 7180 46880
FCC registration number: IC file number:	94436 (June 14, 2002) IC 3608 (March 5, 2003)

2 CUSTOMER INFORMATION

Client:	Nokia Corporation Nokia Tower Pacific Century Place 2A Gong Ti Bei Lu Chaoyang District 100027 Beijing China Tel. +861065392828 Fax. +861065393824
Contact person:	Liu Haiping tel: +8610 65392828
Receipt of EUT:	24.6.2004
Date of testing:	1.-6.7.2004
Date of report:	7.7.2004

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 22 and IC standard RSS-132.

Contents approved:

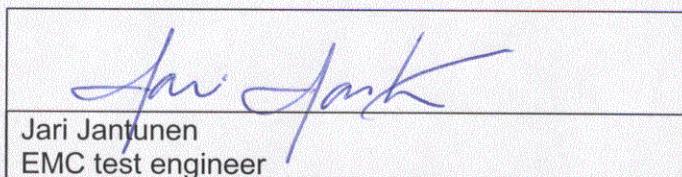

3 SUMMARY OF TEST RESULTS

Section in CFR 47	Section in RSS-132		Result
§2.1046 (a), 22.913 (a)	6.4	Conducted RF output power	-
§22.913 (a)	6.4	Radiated RF output power	-
§2.1049 (h)	4.2	99% occupied bandwidth	PASS
§22.917 (a)	4.5	Bandedge compliance	PASS
§22.917 (a), §2.1051	4.5	Spurious emissions at antenna terminals	-
§22.917 (a), §2.1053	4.5	Spurious radiated emissions	PASS
§2.1055 (a)(1)(b)	6.3	Frequency stability, temperature variation	PASS
§2.1055 (d)(1)(2)	6.3	Frequency stability, voltage variation	PASS

PASS Pass

FAIL Fail

X Measured, but there is no applicable performance criteria

- Not done

4 EUT INFORMATION

The EUT and accessories used in the tests are listed below. Later in this report only EUT numbers are used as reference.

	Device	Type	S/N	EUT number
EUT	GSM Phone	RH-60	001004001742205	40005
	GSM Phone	RH-60	001004001733964	40015
Accessories	Battery	BL-5C	L076311842803	40009
	Battery	BL-5C	L076311842756	40010
	Dummy battery	SF-17D	12.032004/03618	03417

Notes: -

4.1 EUT description

The EUT is a dual band (850 MHz/1900 MHz) GSM mobile phone.

The EUT was not modified during the tests.

5 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.

The test setup photographs are in a separate document as referenced in section 13.

6 APPLICABLE STANDARDS


The tests were performed in guidance of CFR 47 part 22, part 2, ANSI/TIA/EIA-603-A and RSS-132. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.

7 99% OCCUPIED BANDWIDTH

EUT	40015		
Accessories	40010		
Temp, Humidity, Air Pressure	21 °C	44 RH%	1010 mbar
Date of measurement	5.7.2004		
FCC rule part	§2.1049 (h)		
RSS-132 section	4.2		
Measured by	Jari Jantunen		

7.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

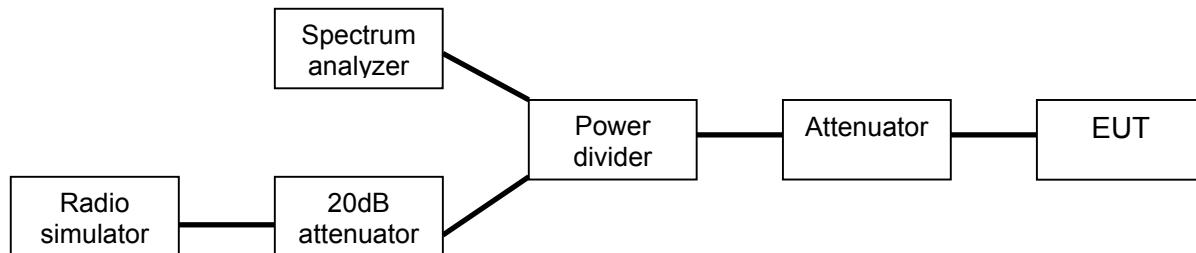

7.2 EUT operation mode


EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 modulation
EUT channel	190
EUT TX power level	5 (33dBm)

7.3 Results

The 99% occupied bandwidth was measured using the in-built function of the spectrum analyzer.

EUT Channel	99% occupied bandwidth [kHz]
190	242.788

7.4 Screen shots

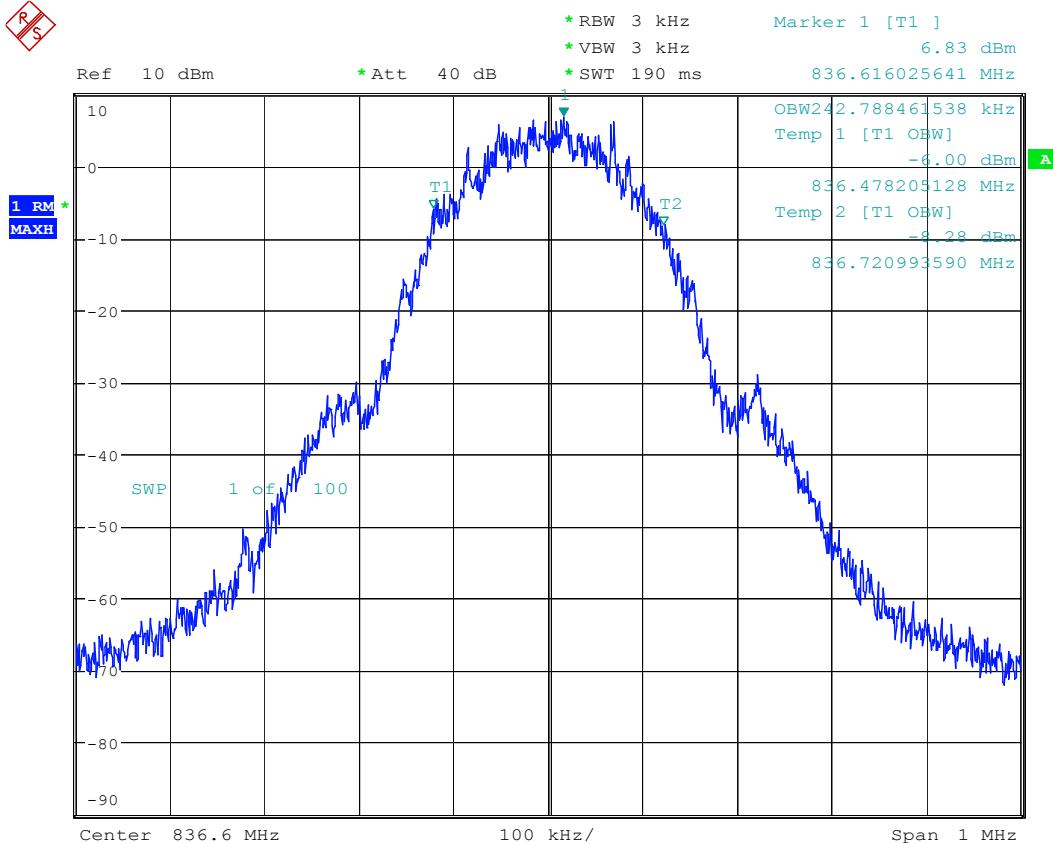RS

Date: 5.JUL.2004 14:14:50


Picture 1 99% occupied bandwidth, channel 190

8 BANDEDGE COMPLIANCE

EUT	40005		
Accessories	40009		
Temp, Humidity, Air Pressure	21 °C	44 RH%	1006 mbar
Date of measurement	2.7.2004		
FCC rule part	§22.917 (a)		
RSS-132 section	4.5		
Measured by	Jari Jantunen		
Result	PASS		

8.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

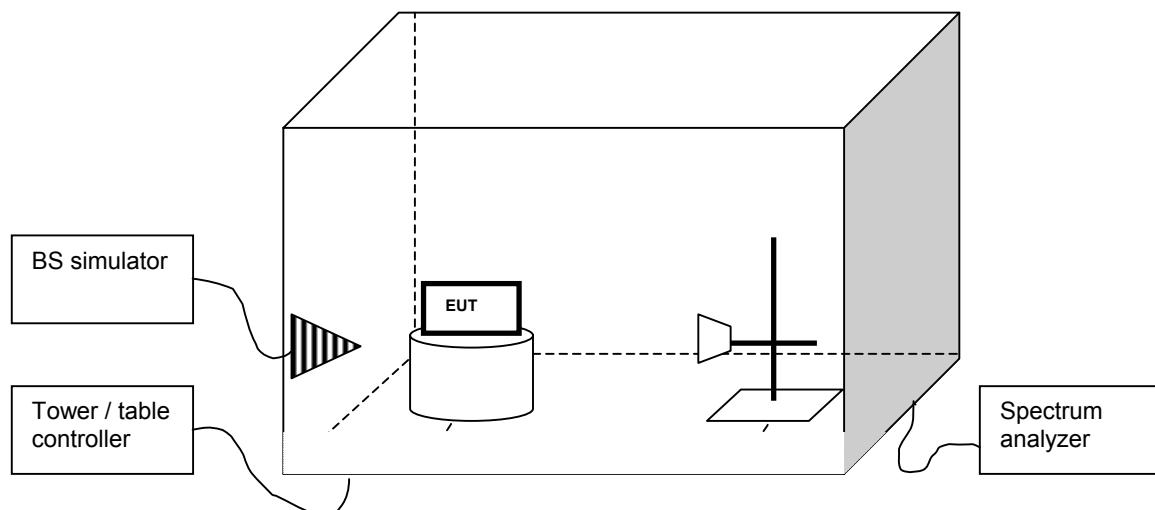

8.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 modulation
EUT channel	See section 8.4
EUT TX power level	5 (+33dBm)

8.3 Limit


Frequency [MHz]	Level [dBm]
<824.0 or 849.0<	-13

8.4 Results

The line in the screen shots is the -13dBm limit line. The results were corrected with measurement path loss set as "offset" in the spectrum analyzer.


EUT Channel	Level [dBm]
128	-15.25
251	-15.12

8.5 Screen shots

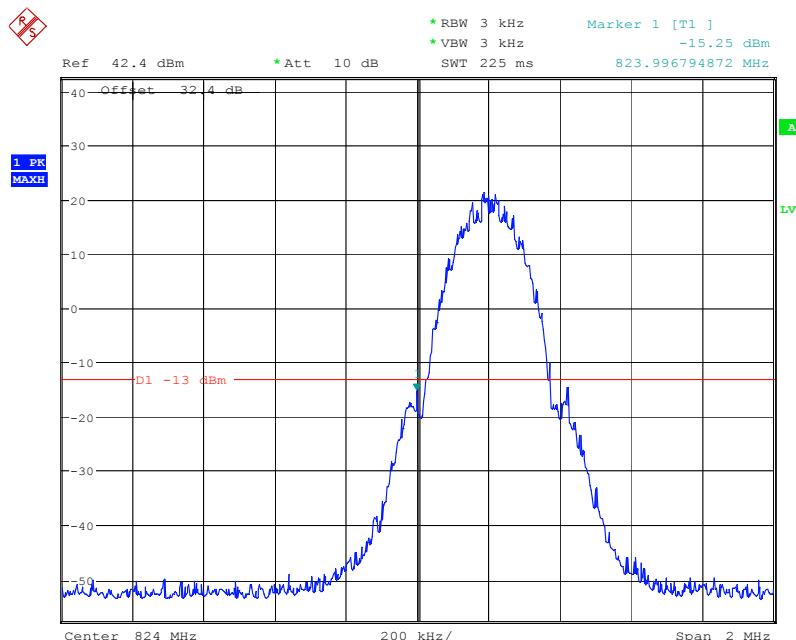

Date: 2.JUL.2004 14:33:18

Picture 2. Lower bandedge, channel 128

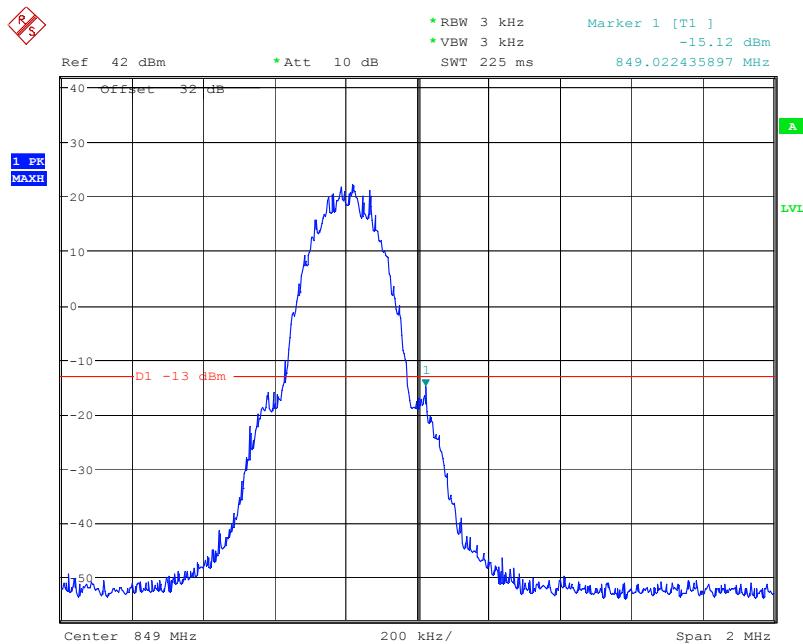

Date: 2.JUL.2004 15:07:33


Picture 3. Upper bandedge, channel 251

9 SPURIOUS RADIATED EMISSION

EUT	40005		
Accessories	40009		
Temp, Humidity, Air Pressure	21 °C	45 RH%	1004 mbar
Date of measurement	1.7.2004		
FCC rule part	§22.917 (a), §2.1053		
RSS-132 section	4.5		
Measured by	Jari Jantunen		
Result	PASS		

9.1 Test setup

A set of LP/HP/BS filters was used to prevent overloading the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where the measurement devices were controlled by a computer.

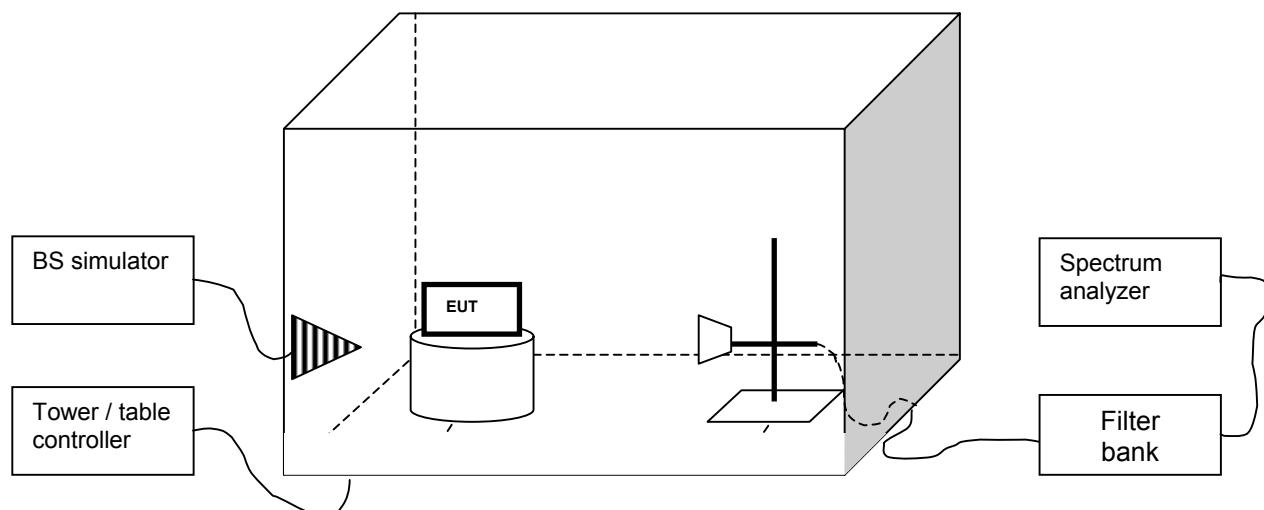

9.2 Test method

- The emissions were searched and maximized by moving the turn table and measuring antenna and manipulating the EUT.
- All suspicious frequencies with emission levels were recorded.
- The EUT was replaced with a substituting antenna.
- For each frequency recorded, the substituting antenna was fed with the power (from signal generator) giving the same reading as in (b). These power levels were reported.

9.3 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 modulation
EUT channel	190
EUT TX power level	5 (33dBm)

9.4 Limit

Frequency [MHz]	Level [dBm]
30 – 8500	-13

9.5 Results

The formula below was used to calculate the EIRP of the spurious emissions. If there were no emissions closer than 20dB below the limit line, then the emission levels were measured at the transmitter's harmonics.

$$P_{Emission[dBm]} = P_{SubstTX[dBm]} - L_{Cable[dB]} + G_{Antenna[dBd]}$$

where the variables are as follows:

$P_{Measured}$ [dBm]	Measured emission level (from step b in 9.2)
P_{Subst_TX} [dBm]	Signal generator power (from step d in 9.2) fed to the substituting antenna
L_{Cable} [dB]	Loss of the cable between antenna and signal generator (from step d in 9.2)
$G_{Antenna}$ [dBd]	Gain of the substitutive antenna over dipole (dBi – 2.15dB)

Table 1 Emission levels, channel 190


Frequency [MHz]	$P_{Measured}$ [dBm]	Correction factor [dB]	$P_{Emission}$ [dBm]
1673.20	-37.53	5.9	-43.43
2509.80	-56.52	-1.7	-54.82
3346.40	-58.79	-7.6	-51.19
4183.00	-58.05	-10.3	-47.75
5019.60	-63.02	-12.9	-50.12
5856.20	-63.47	-13.7	-49.77
6692.80	-60.32	-15.5	-44.82
7529.40	-65.76	-18.2	-47.56
8366.00	-66.87	-19.6	-47.27

10 FREQUENCY STABILITY, TEMPERATURE VARIATION

EUT	40015		
Accessories	40009		
Temp, Humidity, Air Pressure	21 °C	45 RH%	1005 mbar
Date of measurement	6.7.2004		
FCC rule part	§2.1055 (a)(1)(b)		
RSS-132 section	6.3		
Measured by	Jari Jantunen		
Result	PASS		

10.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

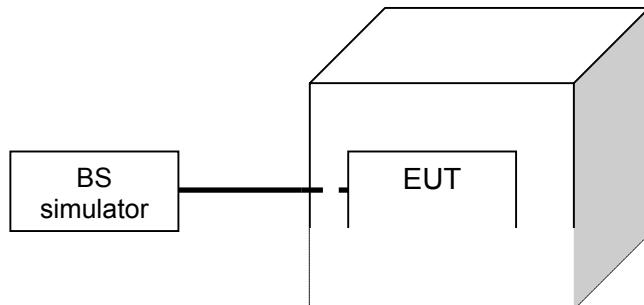

10.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 modulation
EUT channel	190
EUT TX power level	5 (33dBm)

10.3 Limit

Frequency deviation [ppm]
± 2.5

10.4 Test method

- The climate chamber temperature was set to the minimum value and the temperature was allowed to stabilize.
- The EUT was placed in the chamber

-
- c) The EUT was set in idle mode for 45 minutes.
 - d) The EUT was set to transmit.
 - e) The transmit frequency error was measured immediately
 - f) The steps c - e were repeated for each temperature

10.5 Results

Table 2 Frequency deviation, temperature variation

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
-10	18	0.021516
0	14	0.016734
10	20	0.023906
20	22	0.026297
30	26	0.031078
40	27	0.032274
50	29	0.034664

11 FREQUENCY STABILITY, VOLTAGE VARIATION

EUT	40015		
Accessories	03417		
Temp, Humidity, Air Pressure	21 °C	45 RH%	1005 mbar
Date of measurement	6.7.2004		
FCC rule part	§2.1055 (d)(1)(2)		
RSS-132 section	6.3		
Measured by	Jari Jantunen		
Result	PASS		

11.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.



11.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission, PRBS 2E9-1 modulation
EUT channel	190
EUT TX power level	5 (33dBm)

11.3 Limit

Frequency deviation [ppm]
± 2.5

11.4 Test method

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

11.5 Results

Table 3 Frequency deviation, voltage variation

Level	Voltage [V]	Deviation [Hz]	Deviation [ppm]
Nominal	3.7	25	0.029883
Battery cut-off point	3.3	20	0.023906

12 TEST EQUIPMENT

Each test equipment is calibrated once a year.

12.1 Conducted measurements

Equipment	Manufacturer	Model
EMI receiver	Rohde & Schwarz	ESI 40
Radio communication tester	Rohde & Schwarz	CMU-200
Attenuator 10 dB	Huber+Suhner AG	6251.17.A
Step attenuator 110dB	Hewlett-Packard	8496A
Power splitter	Hewlett-Packard	11667A
High pass filter	Trilithic	WHK2010-10SS
Low pass filter	Trilithic	WLK1750-10SS
Tunable notch filter	Wainwright	WRCD1850/1910-0.2/40
Temperature chamber	Vötsch	VT4002
DC power supply	HP	6632A
Multimeter	Fluke	87

12.2 Radiated measurements

Equipment	Manufacturer	Model
3m semi-anechoic chamber	TDK	
EMI receiver	Rohde & Schwarz	ESI 40
Preamplifier	MITEQ	AMF-5D-020180-26-10P
Preamplifier	MITEQ	AMF-4D-10M-3G-25-20P
Dipole antenna	EMCO	3125-870
Dipole antenna	EMCO	3125-1880
Biconilog antenna	Rohde & Schwarz	HL562
Double ridged waveguide antenna	EMCO	3115
Double ridged waveguide antenna	EMCO	3115
Horn antenna	EMCO	3116
Reference dipole set	Schwarzbeck	UHAP/VHAP

Communication antenna	EMC Automation	LPA-8020
Radio communication tester	Rohde & Schwarz	CMU-200
Signal generator	Hewlett-Packard	83640L
Step attenuator 110dB	Hewlett-Packard	8496A
Power splitter	Hewlett-Packard	11667A
High pass filter	Trilithic	WHK2010-10SS
Low pass filter	Trilithic	WLK1750-10SS
Tunable notch filter	Wainwright	WRCD1850/1910-0.2/40
Turntable controller	Deisel	HD-100
Turntable	Deisel	DS412
Antenna mast controller	EMCO	2090
Antenna mast	EMCO	2075
Temperature chamber	Vötsch	VT4002
DC power supply	Hewlett-Packard	6632A
Multimeter	Fluke	87

13 TEST SETUP PHOTOGRAPHS

See "RH-60_test_setup_photographs.doc".