

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-1039_21.docx	Date of Report:	04-Sep-2014
Number of pages:	10	Customer's Contact person:	Hu Helen
Testing laboratory:	TCC Microsoft Tampere Laboratory P.O.Box 403 Visiokatu 3 FIN-33101 TAMPERE, FINLAND Tel. +358 71 800 8000 Fax. +358 71 804 6880	Customer:	Microsoft Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-1039 / Battery BV-T5A / Data Cable CA-190CD / Laptop T40 / AC adapter 02K6543 / Printer HP DeskJet 1600 / Parallel cable for printer -		
FCC ID:	QTLRM-1039	IC:	
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), CISPR 22, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	09-Jul-2014
Testing completed	6.8.2014
The customer's contact person	Hu Helen
Test Plan referred to	T:\Projects\RM-1039\TestPlan\RS_Testplan_RM-1039.xlsm
Notes	-
Document name	Y:\Projects\RM-1039\EMC\Temp\Jan\FCC15B_RM-1039_21.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1039	004402479477972	0241	-	02032.00000.14271.24000	43203
Battery	BV-T5A	417534224c10101093;0670738	Proto V5	-	-	43205
Data Cable	CA-190CD	-	-	-	-	43034
Laptop	T40	99ARTGD	2373-NG3	-	Windows XP sp3	41868
AC adapter	02K6543	-	-	-	-	40202
Printer	HP DeskJet 1600	-	-	-	-	40077
Parallel cable for printer	-	-	-	-	-	40087

1.2. Summary of Test Results

GSM 1900:

Section in CFR 47	Section in RSS-GEN	Name of the test	Result
15.107, a	7.2.4	AC powerline conducted emissions	PASSED
15.109, a	6.1	Radiated emissions	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Microsoft Laboratory.

CONTENTS


1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions (FCC 15.109, a, RSS-GEN, section 6.1).....	4
2.2. Test method and limit	4
2.3. GSM 1900 test results	5
3. AC powerline conducted emissions (FCC §15.107, a, RSS-GEN, section 7.2.4).....	7
3.1. Test Setup	7
3.2. Test method and limit	7
3.3. GSM 1900 Test results	8
4. Test Equipment.....	9
4.1. Conducted measurements	9
4.2. Radiated measurements	9

2. Radiated emissions

(FCC 15.109, a, RSS-GEN, section 6.1)

EUT with DUT number	RM-1039, DUT 43203
Accessories with DUT numbers	BV-T5A, DUT 43205 ; CA-190CD, DUT 43034 ; T40, DUT 41868 ; 02K6543, DUT 40202 ; HP DeskJet 1600, DUT 40077 ; -, DUT 40087
Operation Voltage [V] / [Hz]	115/60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 54 / 98-101
Date of measurements	06-Aug-2014
Measured by	Jan-Erik Lilja

2.1.1 Test setup

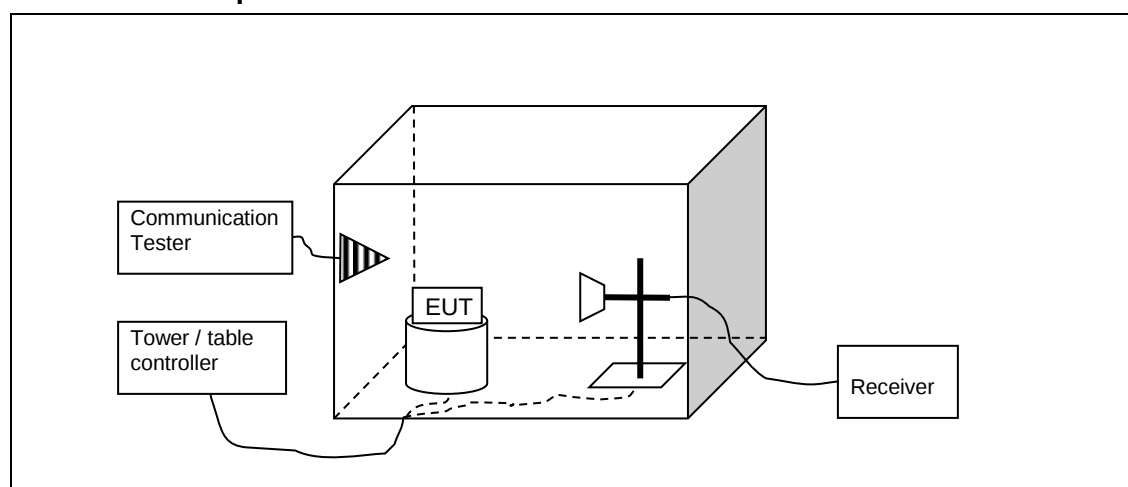

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor. The measurement distance is 3 m. The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported. The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 - 230	40	-	-
230 – 1000	47	-	-
1000 - 3000	-	50	70
Above 3000	-	54	74

2.3. GSM 1900 test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3861.6	37.43	74.388	45.13	-7.7	74	36.57	PASSED
7721.2	45.06	179.061	42.86	2.2	74	28.94	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3861.6	24.62	17.022	32.32	-7.7	54	29.38	PASSED
7721.2	32.47	42.024	30.27	2.2	54	21.53	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
47.996	25.22	18.239	59.52	-34.3	40	14.78	PASSED
87.545	34.48	52.966	70.38	-35.9	40	5.52	PASSED
99.92	23.52	14.997	59.02	-35.5	40	16.48	PASSED
137.011	29.58	30.13	64.48	-34.9	40	10.42	PASSED
143.186	33.43	46.935	68.63	-35.2	40	6.57	PASSED
171.212	28.5	26.607	64.9	-36.4	40	11.5	PASSED
201.667	30.99	35.441	68.49	-37.5	40	9.01	PASSED
222.193	14.79	5.489	51.49	-36.7	40	25.21	PASSED
800.982	34.8	54.954	60.6	-25.8	47	12.2	PASSED
900.761	36.47	66.604	61.17	-24.7	47	10.53	PASSED

RX mode, channel 661 / 1960.0 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
7823.645	46.2	204.174	43.4	2.8	74	27.8	PASSED
7843.283	45.87	196.562	43.07	2.8	74	28.13	PASSED
7846.395	46.8	218.776	44	2.8	74	27.2	PASSED
7855.914	46.3	206.538	43.4	2.9	74	27.7	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
7823.645	33.08	45.082	30.28	2.8	54	20.92	PASSED
7843.283	33.15	45.446	30.35	2.8	54	20.85	PASSED
7846.395	33.22	45.814	30.42	2.8	54	20.78	PASSED
7855.914	33.2	45.709	30.3	2.9	54	20.8	PASSED

RX mode, channel 661 / 1960.0 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3920.8	38.62	85.31	45.92	-7.3	74	35.38	PASSED
7838.2	46.24	205.116	43.44	2.8	74	27.76	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3920.8	25.02	17.824	32.32	-7.3	54	28.98	PASSED
7838.2	33.11	45.238	30.31	2.8	54	20.89	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3979	38.22	81.47	45.22	-7	74	35.78	PASSED
7958.8	46.47	210.62	43.27	3.2	74	27.53	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3979	25	17.783	32	-7	54	29	PASSED
7958.8	33.53	47.479	30.33	3.2	54	20.47	PASSED

3. AC powerline conducted emissions (FCC §15.107, a, RSS-GEN, section 7.2.4)

EUT with DUT number	RM-1039, DUT 43203
Accessories with DUT numbers	BV-T5A, DUT 43205 ; CA-190CD, DUT 43034 ; T40, DUT 41868 ; 02K6543, DUT 40202 ; HP DeskJet 1600, DUT 40077 ; -, DUT 40087
Operation Voltage [V] / [Hz]	115/60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 54 / 98-101
Date of measurements	7.8.2014
Measured by	Jan-Erik Lilja

3.1. Test Setup



3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

3.3. GSM 1900 Test results

Channel 661 / 1880.0 MHz

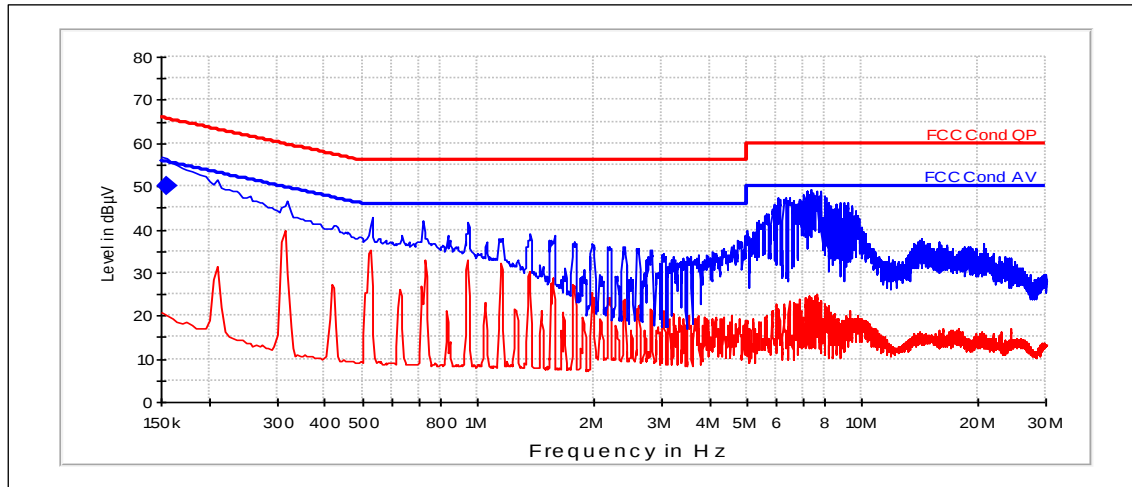

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.155	50.06	N	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C, 15E
TM23007	Oscilloscope	TDS684B	Tektronix	15E
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24/27
2001	Bluetooth tester	CBT	R&S	15C, 15B
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2021	Communication Tester	CMW500	R&S	22/24/27
2022	Communication Tester	CMU200	R&S	22/24/27
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
-	Bluetooth tester	CBT	R&S	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15E, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15E, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15E, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15E, 15B
-	RF system panel	OSP130	R&S	22/24/27, 15C, 15E, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chamber	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15E, 15B
TM38066	High pass filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
2028	High pass filter	WHKX 1.0/15G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27, 15C, 15E
2001	Bluetooth tester	CBT	R&S	15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27
2021	Communication Tester	CMW500	R&S	22/24/27
2025	Antenna	HFH2-Z2	R&S	15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
2052	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B, 15E
-	Antenna	QSH18S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Bluetooth tester	CBT	R&S	15C, 15B