

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-725_02.docx	Date of Report:	29-Apr-2011
Number of pages:	40	Customer's Contact person:	Hu Helen
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-725 / Battery BL-4C / AC-charger AC-3U / Headset WH-102		
FCC ID:	QTLRM-725	IC:	661AB-RM725
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jia Dongsheng, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	02-Apr-2011
Testing completed	28-Apr-2011
The customer's contact person	Hu Helen
Test Plan referred to	T:\Projects\RM-725\TestPlan\RS_testplan_RM-725.xls
Notes	-
Document name	FCC15CBT_RM-725_02.docx

1.1. EUT and Accessory Information

The EUT is a 2-band (GSM900/1800) mobile phone with GPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-725	001004004193463	0204	-	bx104_11w12_1	52138
Phone	RM-725	001004004193372	0204	-	bx104_11w12_1	52140
Battery	BL-4C	0670389382066O40612AW37795	-	-	-	52149
Battery	BL-4C	0670389382066O40612AW37802	-	-	-	52148
AC-charger	AC-3U	4818711012132006452;0675372	-	-	-	52154
Headset	WH-102	0694324048302600286	-	-	-	52158

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	PASSED
15.247(d)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	PASSED
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
2.2. Test method and limit	5
2.3. Bluetooth Test results	6
3. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	9
3.2. Test method and limit	9
3.3. Bluetooth Test results	10
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	18
4.2. Test method and limit	18
4.3. Bluetooth Test results	19
5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	22
5.2. Test method and limit	22
5.3. Bluetooth Test results	24
6. AC powerline conducted emissions FCC §15.207, RSS-GEN 7.2.2	27
6.1. Test Setup	27
6.2. Test method and limit	27
6.3. Bluetooth Test results	28
7. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))	29
7.2. Test method and limit	29
7.3. Bluetooth Test results	30
8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b)).....	33
8.2. Test method and limit	33
8.3. Bluetooth Test results	34
9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	35
9.2. Test method and limit	35
9.3. Bluetooth Test results	36
10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	37
10.2. Test method and limit	37
10.3. Bluetooth test results	38

11.	Test Equipment	40
11.1.	Conducted measurements	40
11.2.	Radiated measurements	40

2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-725, DUT52140
Accessories with DUT numbers	BL-4C, DUT52148; AC-3U, DUT52154; WH-102, DUT52158
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 101.3
Date of measurements	21-Apr-2011
Measured by	Jia Dongsheng

2.1.1 Test Setup

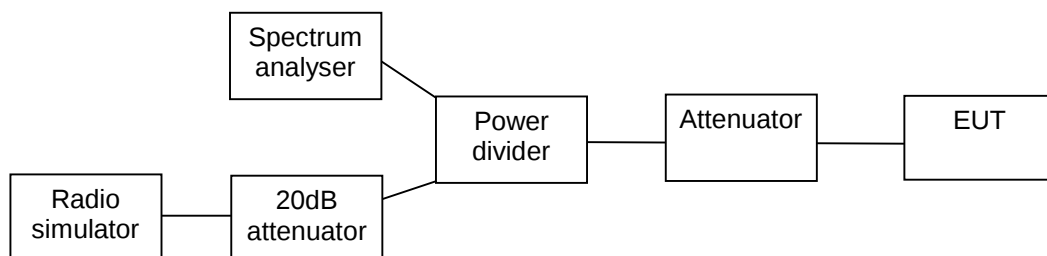

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	5.20	3.311	PASSED
40 / 2442	6.80	4.786	PASSED
78 / 2480	4.90	3.090	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

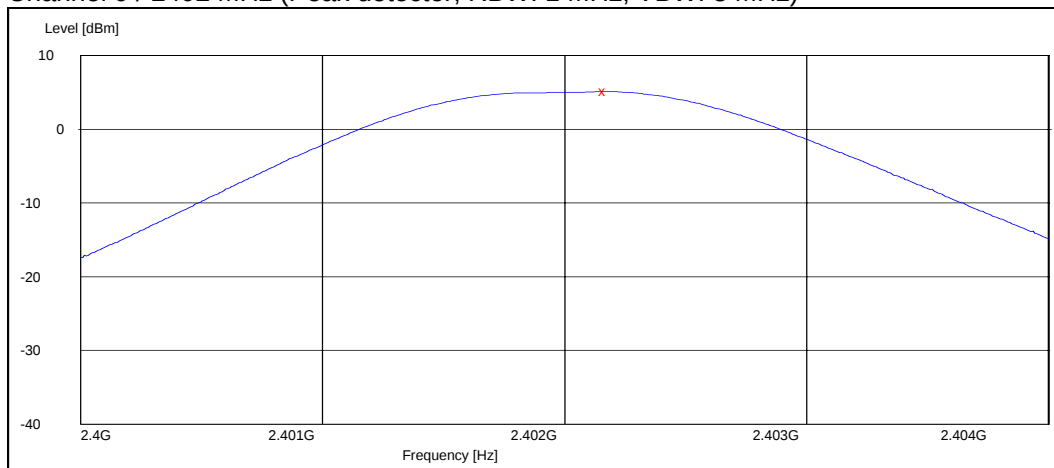

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

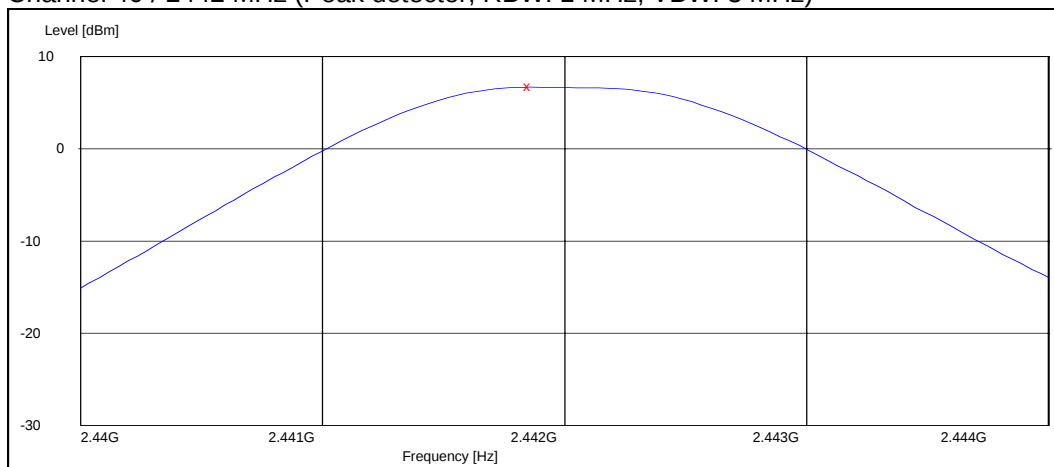


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

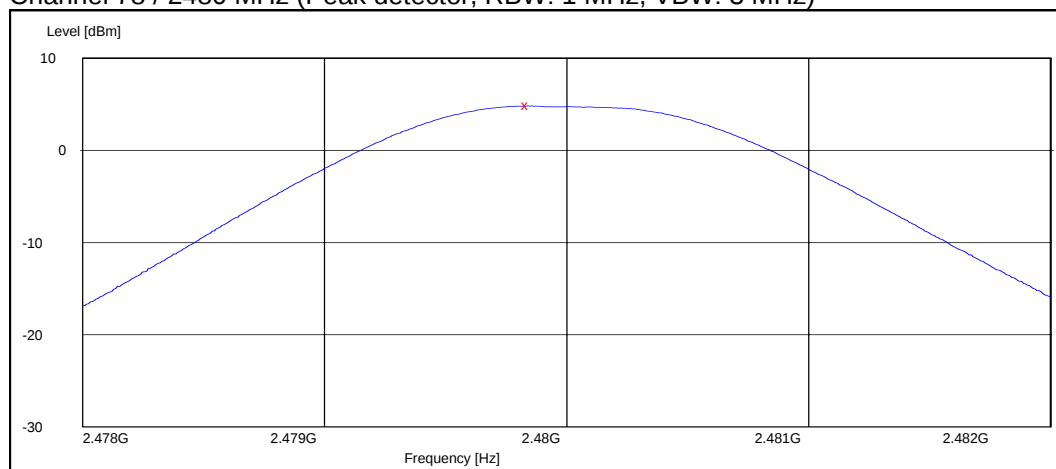


2.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	3.30	2.138	PASSED
40 / 2442	5.20	3.311	PASSED
78 / 2480	2.90	1.950	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

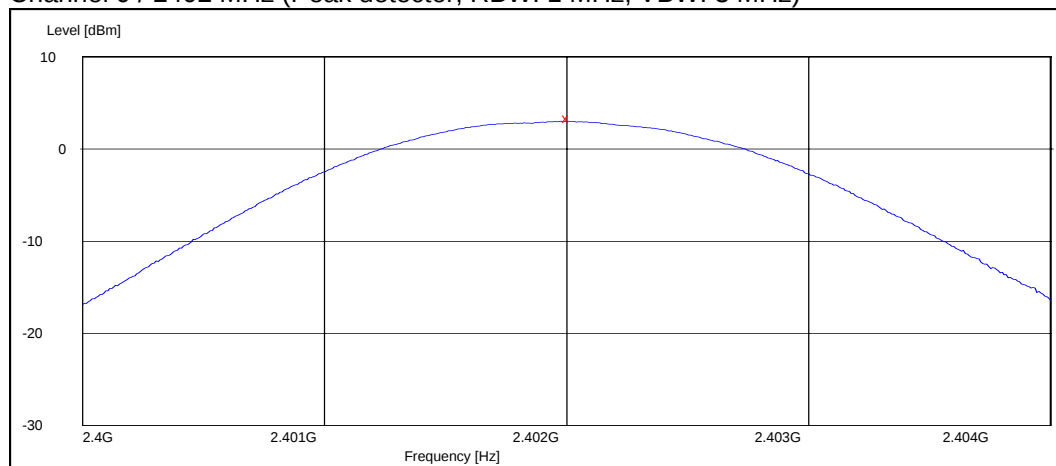

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

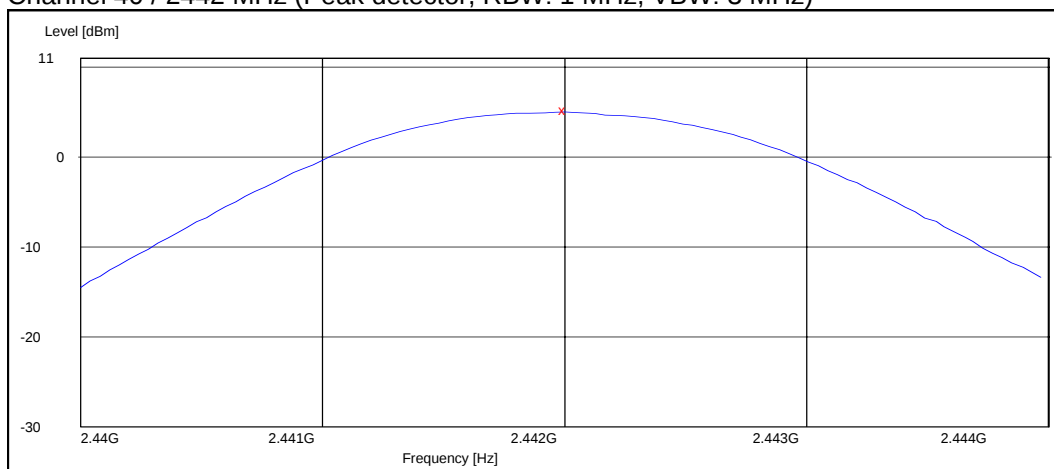


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

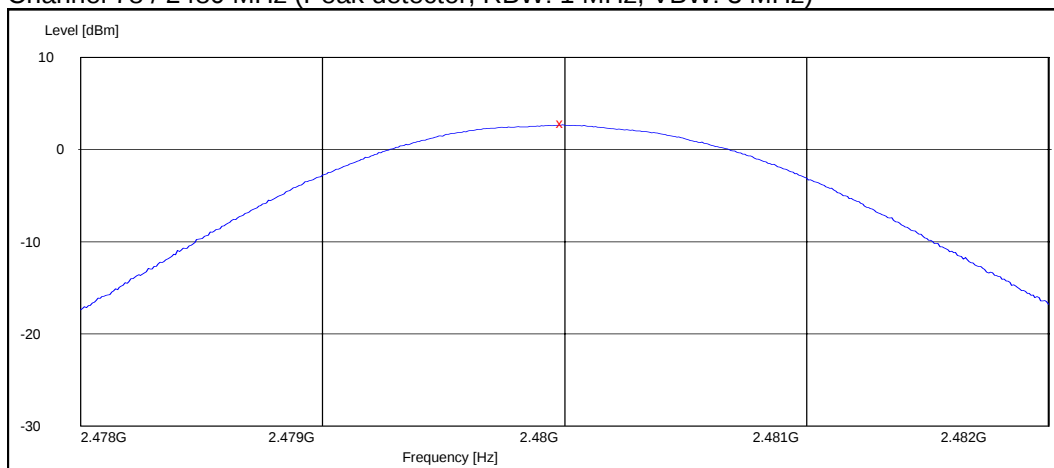

3. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-725, DUT 52138
Accessories with DUT numbers	BL-4C, DUT 52149 ; AC-3U, DUT 52154 ; WH-102, DUT 52158
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 39 / 100.4
Date of measurements	28-Apr-2011
Measured by	Jia Dongsheng

3.1.1 Test Setup

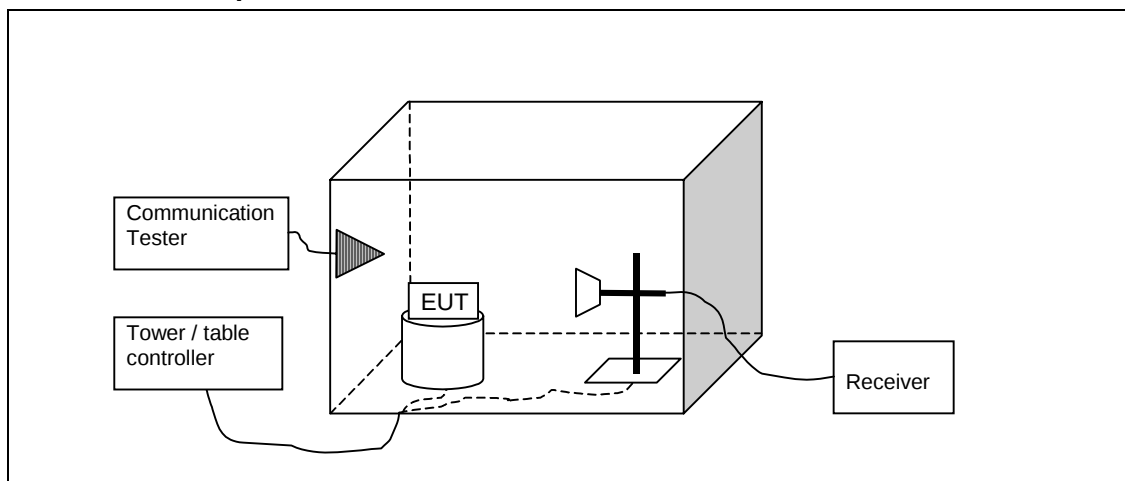

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type

Slide open


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	38.65	85.568	36.8	1.85	PASSED
Hopping on, low end	40.23	102.704	38.38	1.85	PASSED
78 / 2480	50.13	321.181	47.62	2.51	PASSED
Hopping on, high end	50.13	321.181	47.62	2.51	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	50.68	341.897	48.83	1.85	PASSED
Hopping on, low end	51.31	367.578	49.46	1.85	PASSED
78 / 2480	56.82	693.092	54.31	2.51	PASSED
Hopping on, high end	54.91	556.296	52.4	2.51	PASSED


GFSK mode. Channel 0 / 2402 MHz

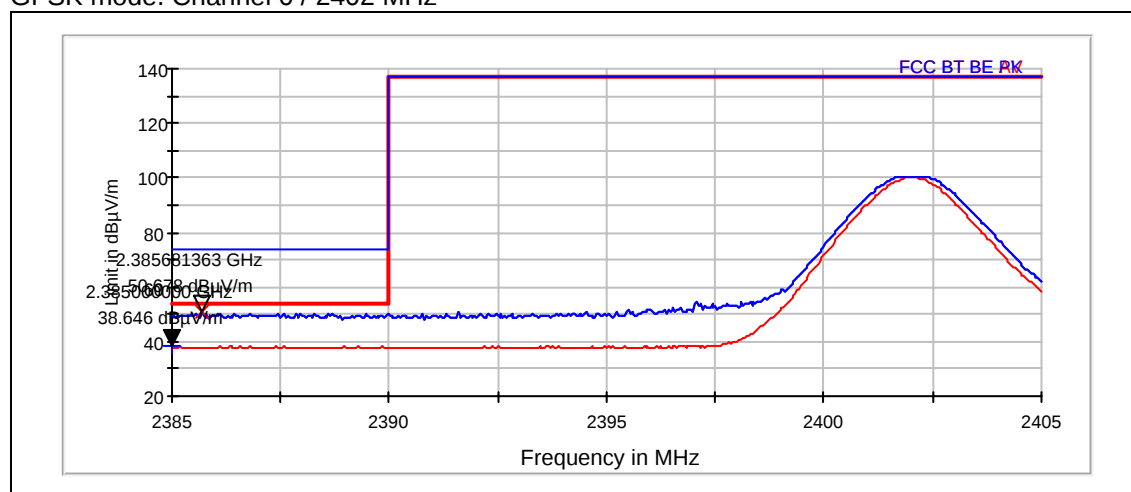


GFSK mode. Hopping on, low end

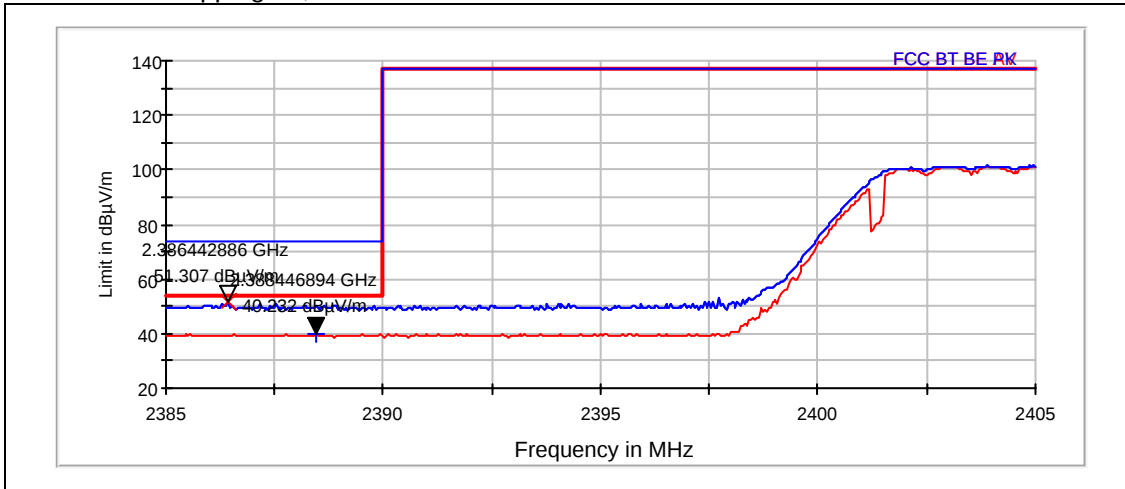

GFSK mode. Channel 78 / 2480 MHz

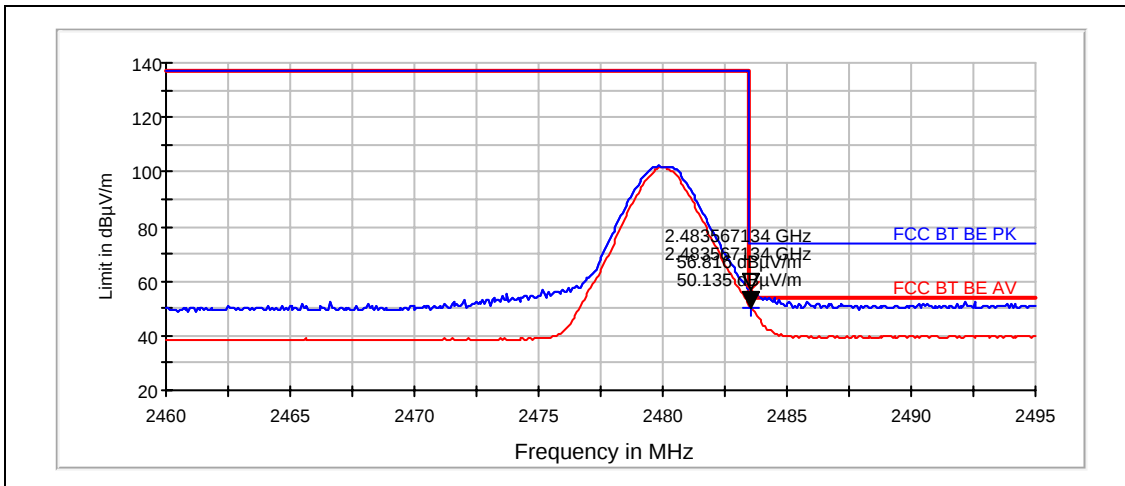

GFSK mode. Hopping on, high end

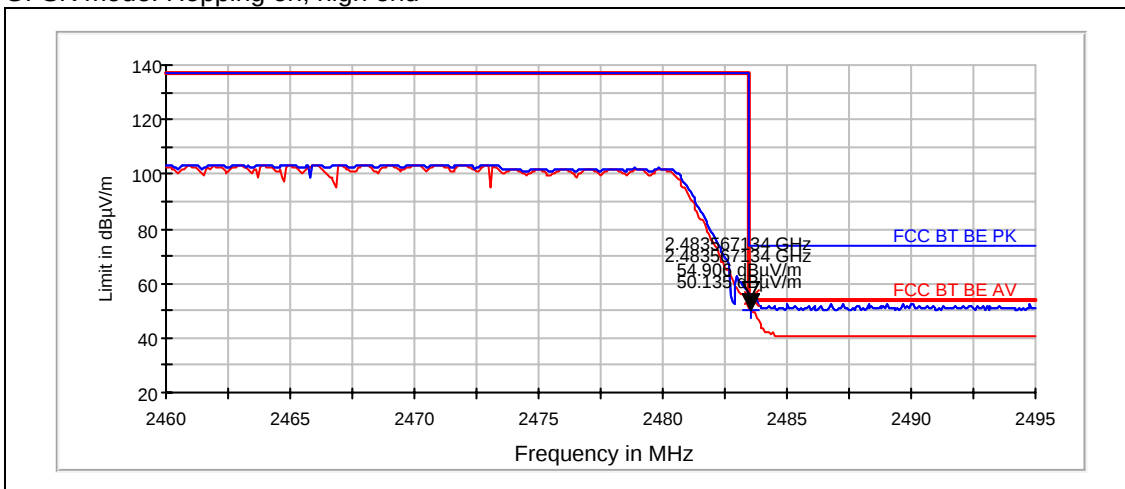

Slide closed


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	38.45	83.691	36.6	1.85	PASSED
Hopping on, low end	39.87	98.502	38.02	1.85	PASSED
78 / 2480	49.73	306.582	47.22	2.51	PASSED
Hopping on, high end	50.71	343.08	48.2	2.51	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	50.57	337.586	48.72	1.85	PASSED
Hopping on, low end	51.12	359.866	49.27	1.85	PASSED
78 / 2480	56.22	647.211	53.71	2.51	PASSED
Hopping on, high end	55.55	599.158	53.04	2.51	PASSED


GFSK mode. Channel 0 / 2402 MHz

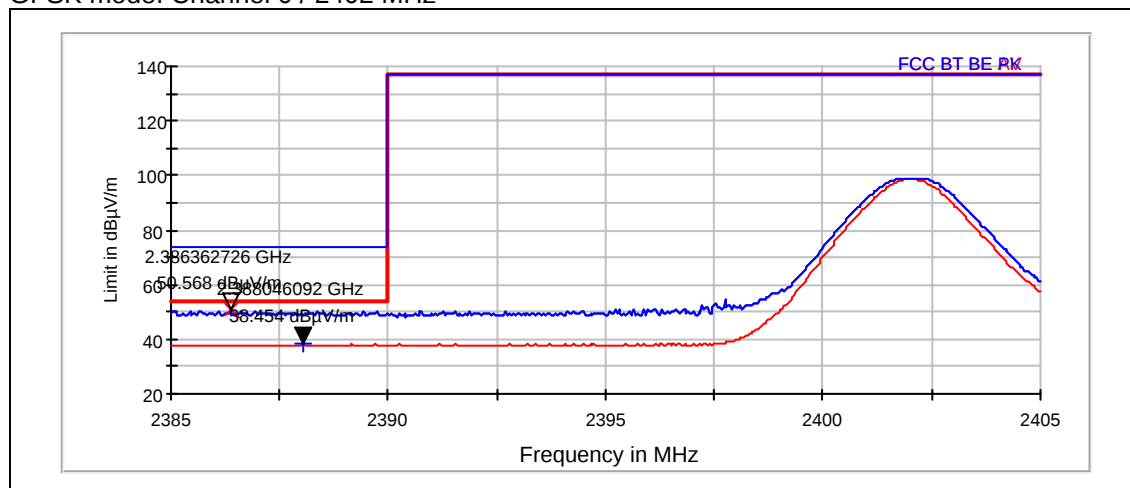


GFSK mode. Hopping on, low end

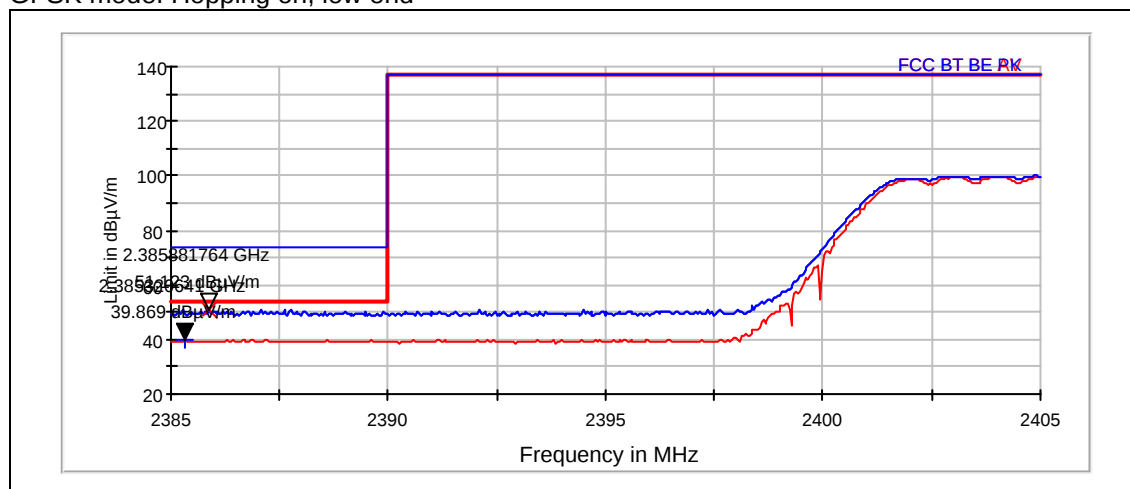

GFSK mode. Channel 78 / 2480 MHz

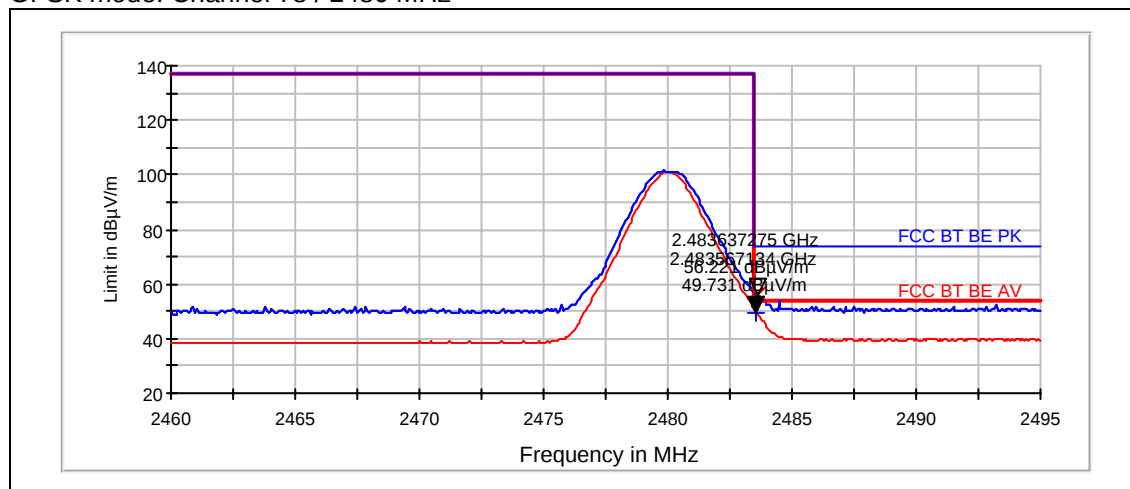

GFSK mode. Hopping on, high end

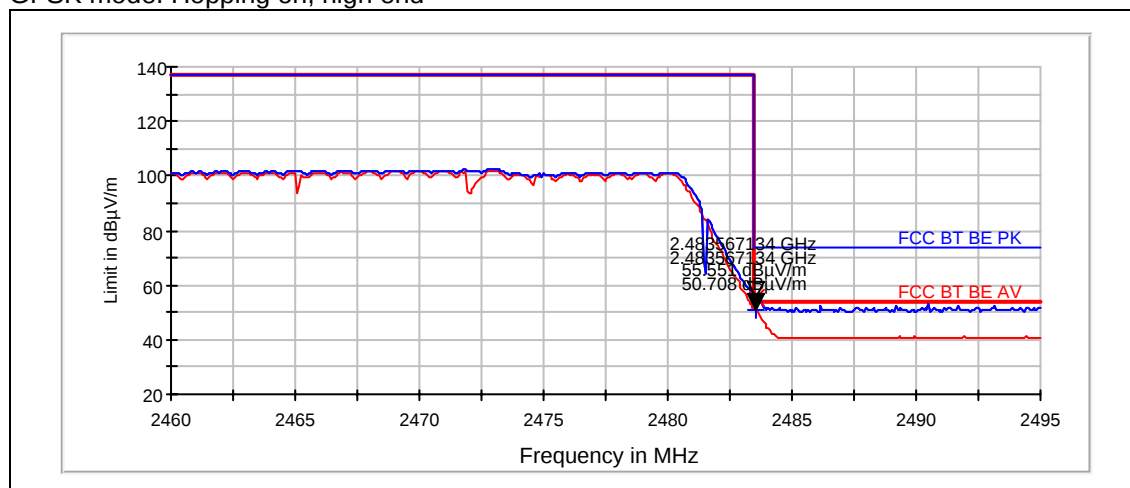

3.3.2 8DPSK modulation, PRBS packet type

Slide open


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	38.6	85.095	36.75	1.85	PASSED
Hopping on, low end	39.87	98.559	38.02	1.85	PASSED
78 / 2480	47.37	233.586	44.86	2.51	PASSED
Hopping on, high end	47.64	240.885	45.13	2.51	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	50.77	345.5	48.92	1.85	PASSED
Hopping on, low end	50.82	347.379	48.97	1.85	PASSED
78 / 2480	55.33	583.92	52.82	2.51	PASSED
Hopping on, high end	53.68	483.008	51.17	2.51	PASSED


8DPSK mode. Channel 0 / 2402 MHz

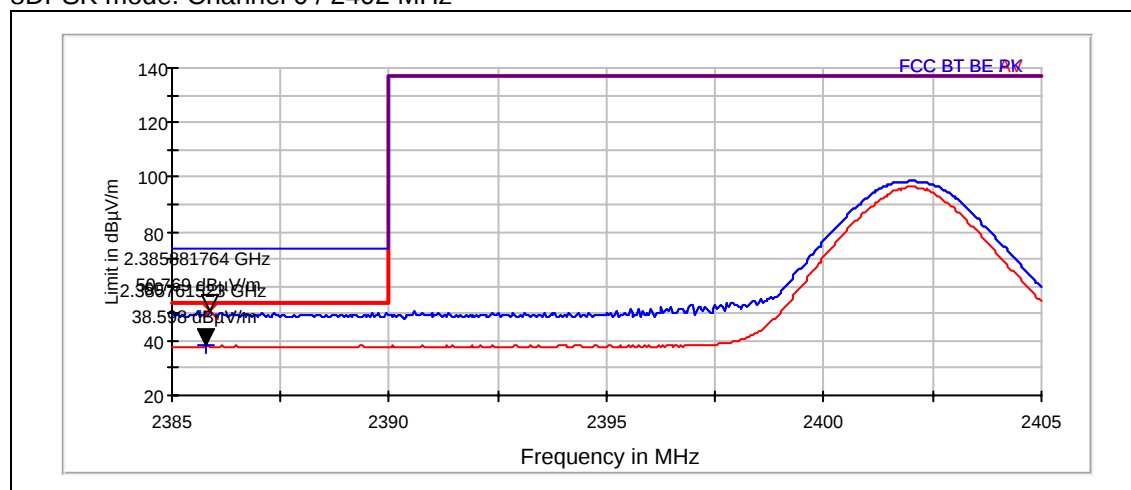


8DPSK mode. Hopping on, low end

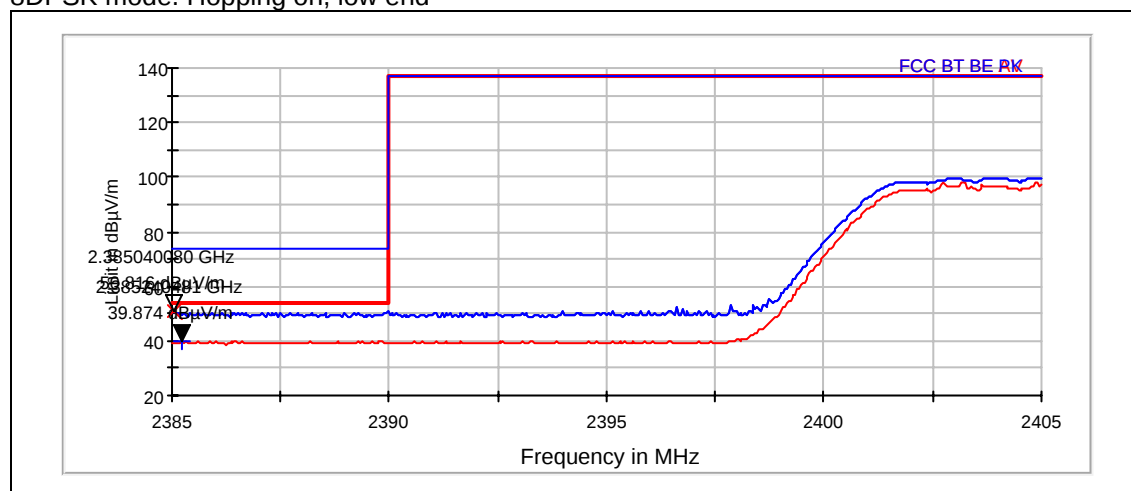

8DPSK mode. Channel 78 / 2480 MHz

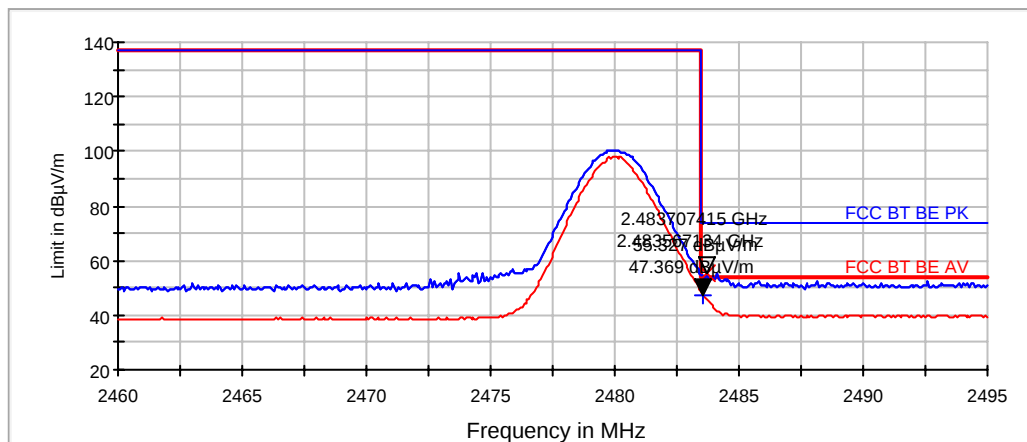

8DPSK mode. Hopping on, high end

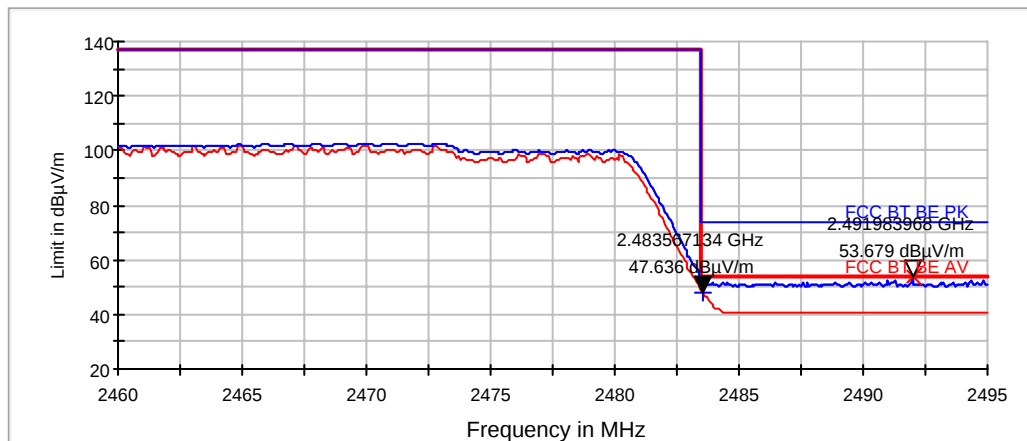

Slide closed


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	38.62	85.318	36.77	1.85	PASSED
Hopping on, low end	39.87	98.559	38.02	1.85	PASSED
78 / 2480	46.81	218.987	44.3	2.51	PASSED
Hopping on, high end	47.37	233.586	44.86	2.51	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	51.26	365.804	49.41	1.85	PASSED
Hopping on, low end	51.41	371.798	49.56	1.85	PASSED
78 / 2480	53.11	452.499	50.6	2.51	PASSED
Hopping on, high end	52.76	434.504	50.25	2.51	PASSED


8DPSK mode. Channel 0 / 2402 MHz

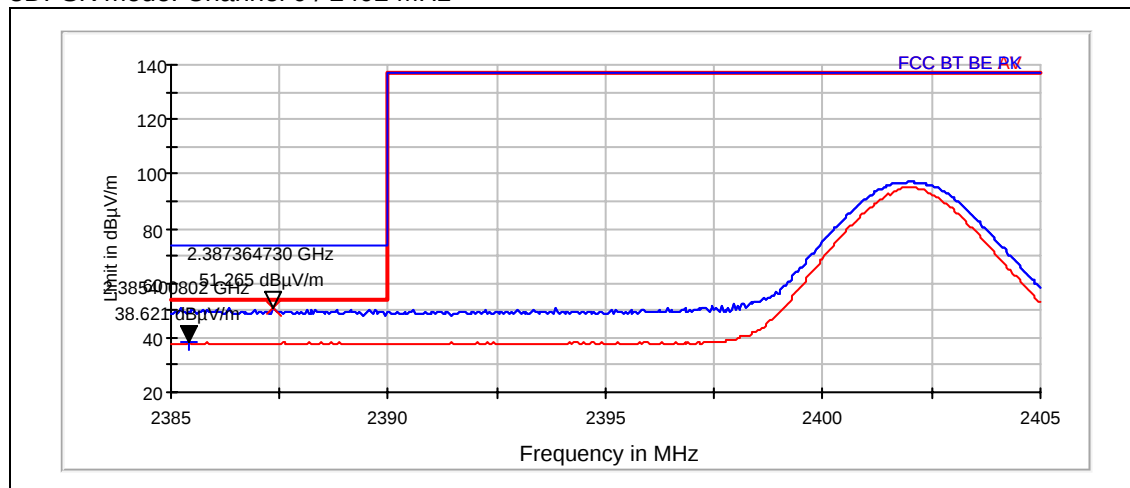


8DPSK mode. Hopping on, low end

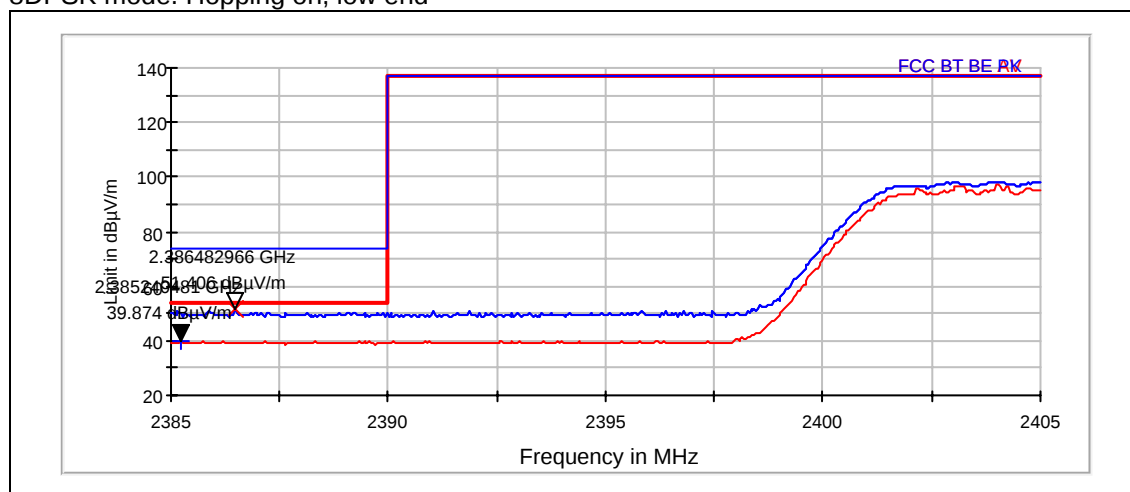

8DPSK mode. Channel 78 / 2480 MHz

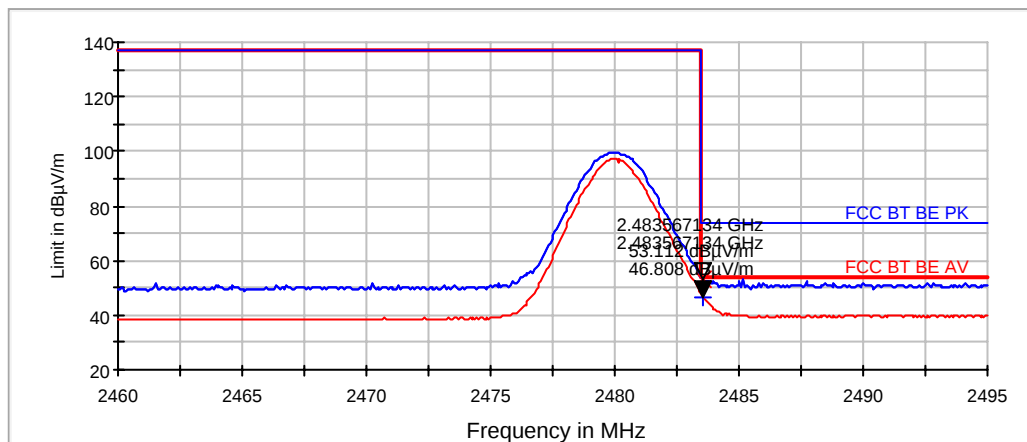


8DPSK mode. Hopping on, high end

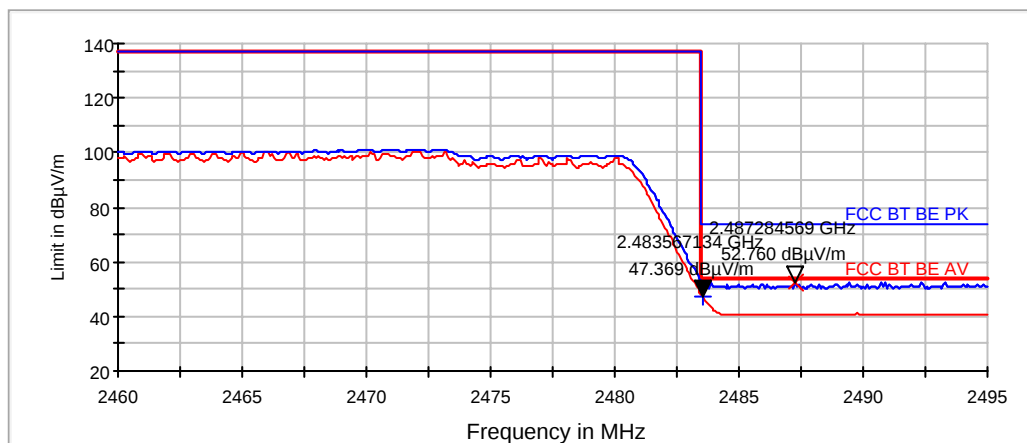

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-725, DUT52140
Accessories with DUT numbers	BL-4C, DUT52148; AC-3U, DUT52154; WH-102, DUT52158
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 101.3
Date of measurements	21-Apr-2011
Measured by	Jia Dongsheng

4.1.1 Test Setup

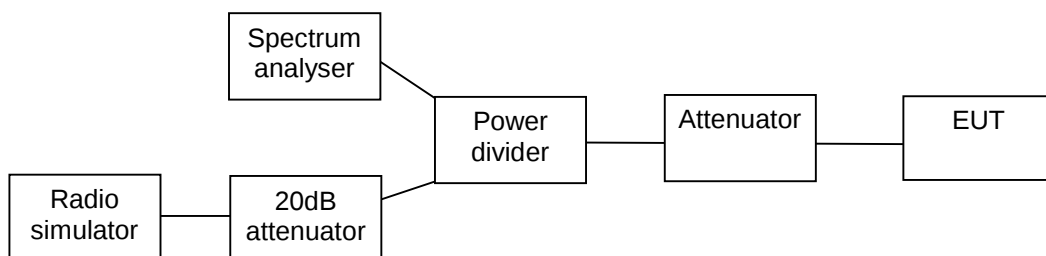

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.3. Bluetooth Test results

4.3.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

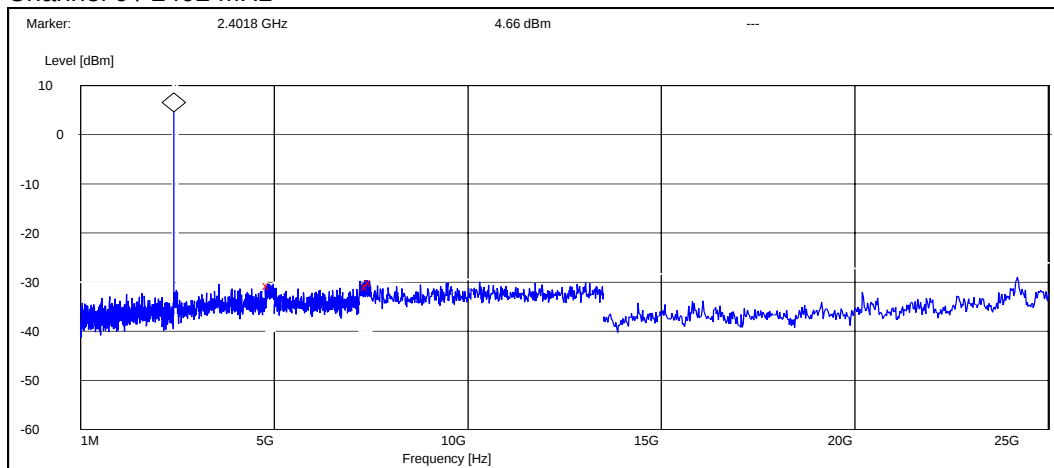

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4869.200000	-35.261768	PASSED
7412.400000	-35.461768	PASSED
7500.000000	-34.761768	PASSED


Channel 40 / 2442 MHz

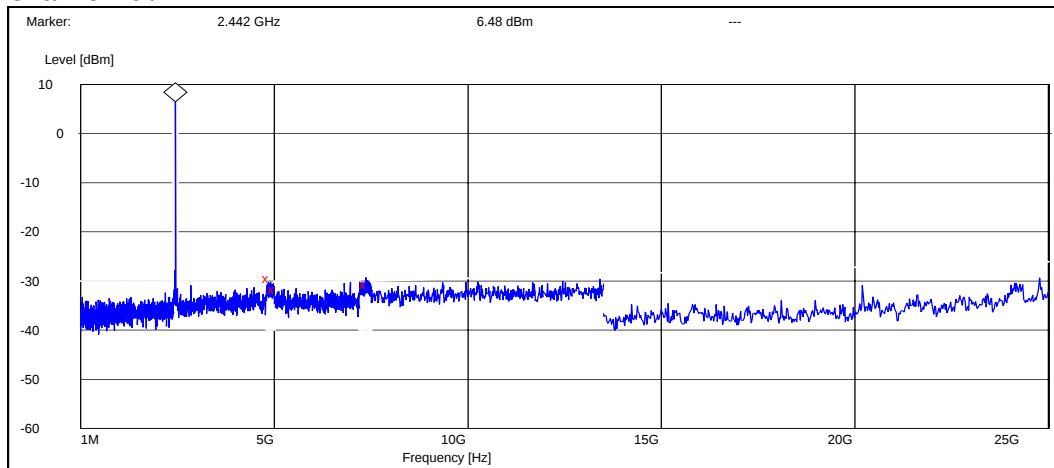

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4855.600000	-35.976738	PASSED
5000.000000	-38.276738	PASSED
7365.000000	-37.176738	PASSED

Channel 78 / 2480 MHz

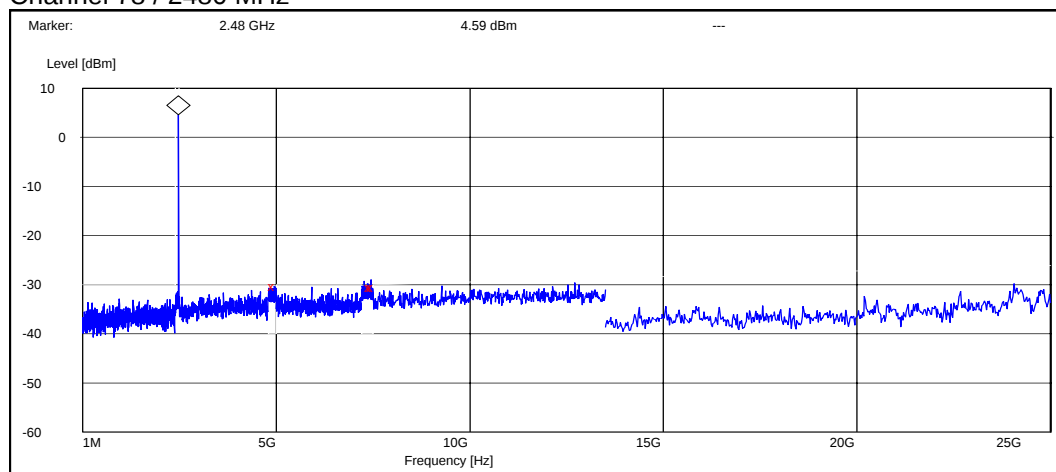


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4946.800000	-34.886935	PASSED
7456.200000	-34.986935	PASSED
7500.000000	-35.186935	PASSED

4.3.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

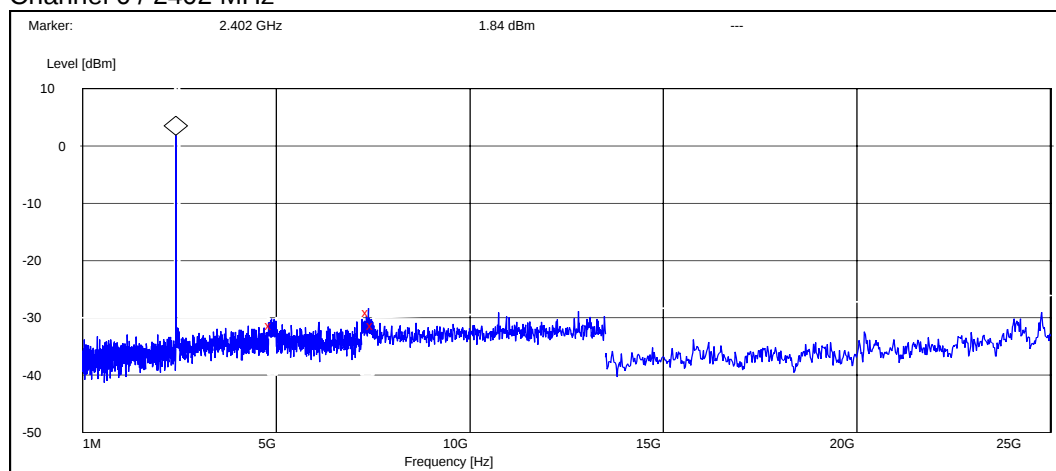

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4876.000000	-33.142581	PASSED
7387.200000	-30.942581	PASSED
7500.000000	-33.242581	PASSED


Channel 40 / 2442 MHz

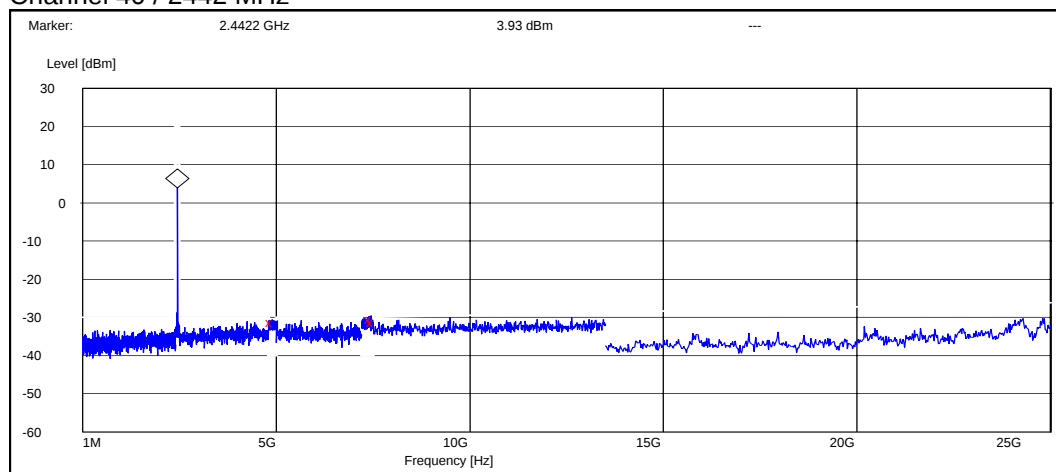

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4896.400000	-35.228589	PASSED
7445.400000	-34.428589	PASSED
7500.000000	-35.228589	PASSED

Channel 78 / 2480 MHz

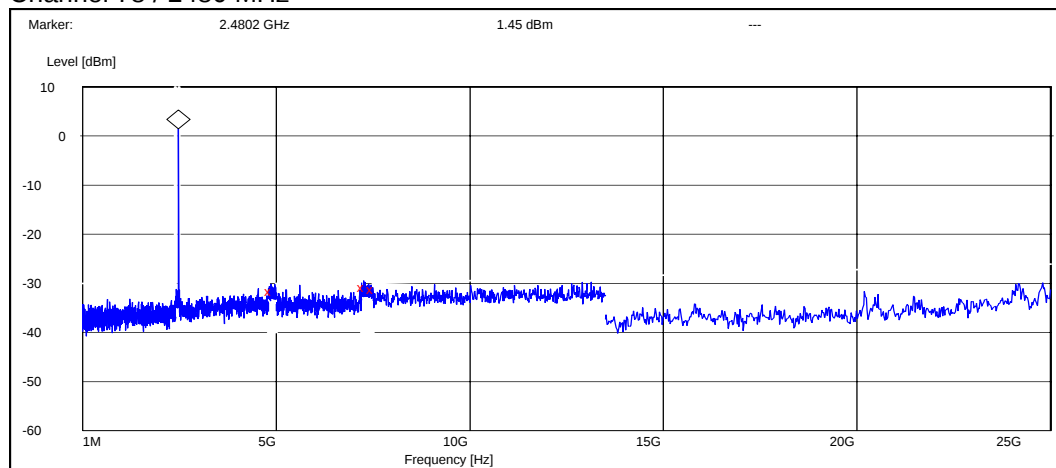


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4870.800000	-33.151854	PASSED
7264.200000	-32.351854	PASSED
7500.000000	-32.651854	PASSED

5. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-725, DUT 52138
Accessories with DUT numbers	BL-4C, DUT 52149 ; AC-3U, DUT 52154 ; WH-102, DUT 52158
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 39 / 100.4
Date of measurements	28-Apr-2011
Measured by	Jia Dongsheng

5.1.1 Test Setup

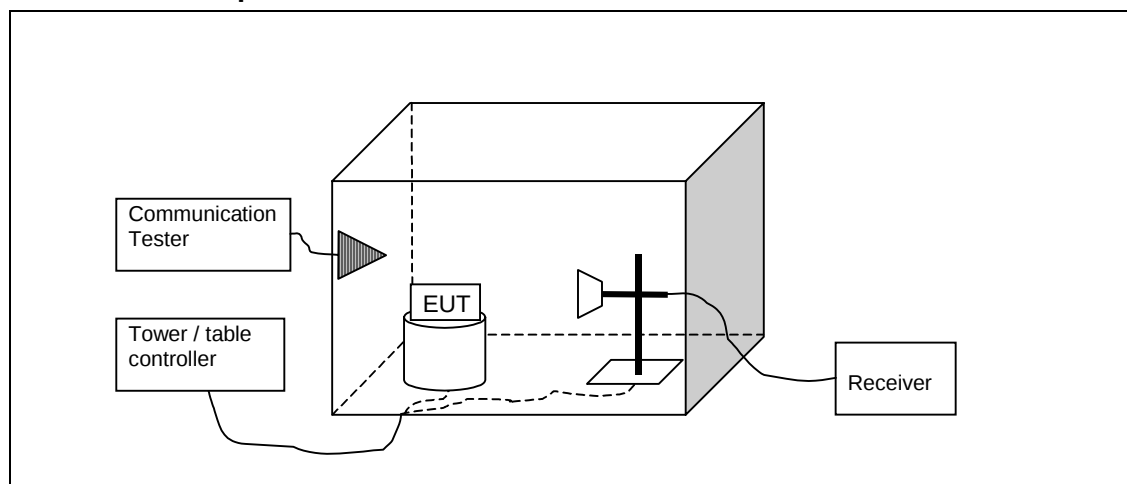

5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 - 216	150	43.5	Quasi peak
216 - 960	200	46	Quasi peak
960 - 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

5.3. Bluetooth Test results

5.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.5	43.33	146.673	43.58	-0.25	HORIZONTAL	PASSED
7206.3	47.64	240.935	42.62	5.02	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.5	29.81	30.921	30.06	-0.25	HORIZONTAL	PASSED
7206.3	33.96	49.906	28.94	5.02	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
47.766	33.34	46.441	47.85	-14.51	VERTICAL	PASSED
47.886	33	44.658	47.58	-14.58	VERTICAL	PASSED
48.205	33.35	46.526	48.12	-14.77	VERTICAL	PASSED
48.226	32.94	44.335	47.72	-14.78	VERTICAL	PASSED
50.493	31.44	37.329	47.47	-16.03	VERTICAL	PASSED
50.923	36.13	64.062	52.32	-16.19	VERTICAL	PASSED
51.122	33.64	48.067	49.91	-16.27	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3904.607	41.62	120.517	43.02	-1.4	VERTICAL	PASSED
3928.358	41.57	119.853	43.02	-1.45	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3904.607	28.38	26.254	29.78	-1.4	VERTICAL	PASSED
3928.358	28.04	25.238	29.49	-1.45	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959	43.1	142.824	43.03	0.07	VERTICAL	PASSED
7439.5	50.04	317.578	44.96	5.08	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959	30.22	32.434	30.15	0.07	VERTICAL	PASSED
7439.5	36.05	63.46	30.97	5.08	VERTICAL	PASSED

5.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4802	42.81	138.197	43.02	-0.21	HORIZONTAL	PASSED
7204.4	46.21	204.338	41.19	5.02	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4802	28.97	28.096	29.18	-0.21	HORIZONTAL	PASSED
7204.4	33.02	44.776	28	5.02	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
47.846	32.03	39.948	46.59	-14.56	VERTICAL	PASSED
48.126	36.43	66.328	51.15	-14.72	VERTICAL	PASSED
48.156	31.72	38.535	46.46	-14.74	VERTICAL	PASSED
50.943	32.47	42	48.67	-16.2	VERTICAL	PASSED
51.081	35.43	59.074	51.69	-16.26	VERTICAL	PASSED
51.233	32.38	41.61	48.7	-16.32	VERTICAL	PASSED
51.282	34.64	53.97	50.97	-16.33	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3904.313	41.62	120.531	43.02	-1.4	HORIZONTAL	PASSED
3926.556	41.46	118.291	42.89	-1.43	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3904.313	28.35	26.155	29.75	-1.4	HORIZONTAL	PASSED
3926.556	28	25.13	29.43	-1.43	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.1	42.89	139.476	42.82	0.07	VERTICAL	PASSED
7441.4	46.47	210.523	41.42	5.05	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.1	30.06	31.838	29.99	0.07	VERTICAL	PASSED
7441.4	33.48	47.228	28.43	5.05	HORIZONTAL	PASSED

6. AC powerline conducted emissions

FCC §15.207, RSS-GEN 7.2.2

EUT with DUT number	RM-725, DUT 52138
Accessories with DUT numbers	BL-4C, DUT 52149 ; AC-3U, DUT 52154 ; WH-102, DUT 52158
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 32 / 100.7
Date of measurements	27-Apr-2011
Measured by	Jia Dongsheng

6.1. Test Setup



6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

6.3. Bluetooth Test results

6.3.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

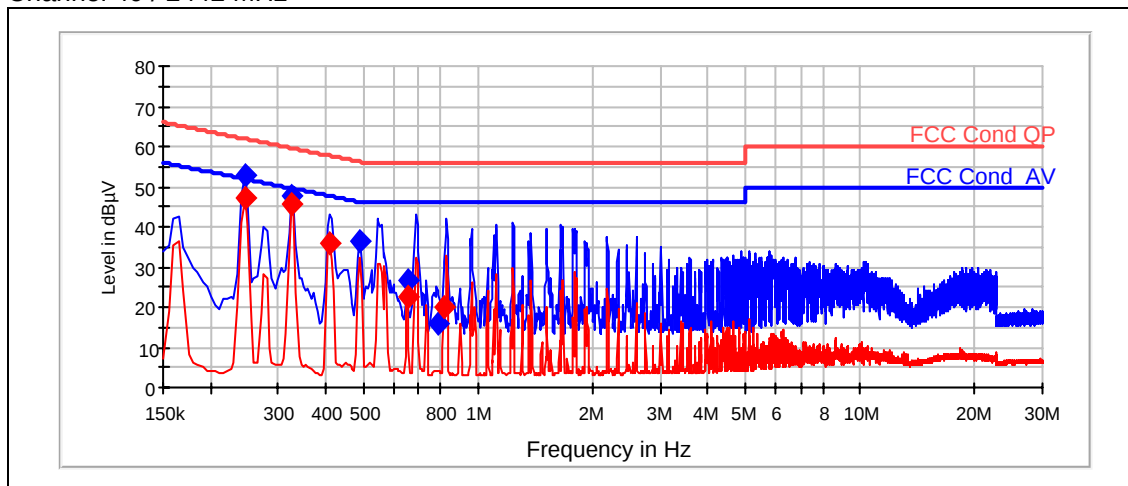

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.245	52.58	N	PASSED
0.325	47.44	N	PASSED
0.49	36.53	N	PASSED
0.655	26.66	N	PASSED
0.785	15.81	L1	PASSED


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.245	47.08	N	PASSED
0.325	45.67	N	PASSED
0.41	36.07	N	PASSED
0.655	22.34	N	PASSED
0.815	19.89	N	PASSED

7. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-725, DUT52140
Accessories with DUT numbers	BL-4C, DUT52148; AC-3U, DUT52154; WH-102, DUT52158
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 101.3
Date of measurements	21-Apr-2011
Measured by	Jia Dongsheng

7.1.1 Test Setup

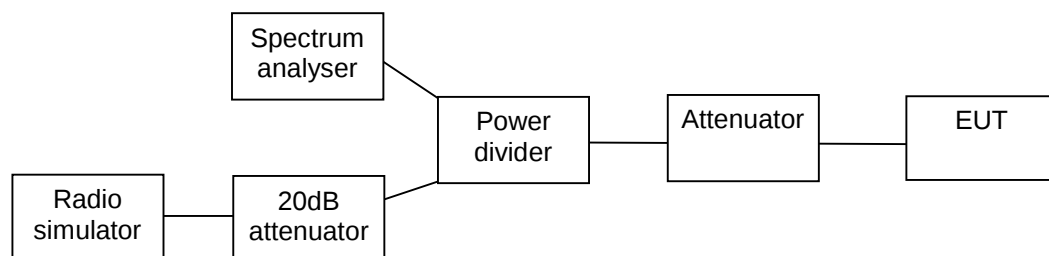

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

7.3. Bluetooth Test results


7.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	808.000	PASSED
40 / 2442	940.000	PASSED
78 / 2480	936.000	PASSED


Channel 0 / 2402 MHz

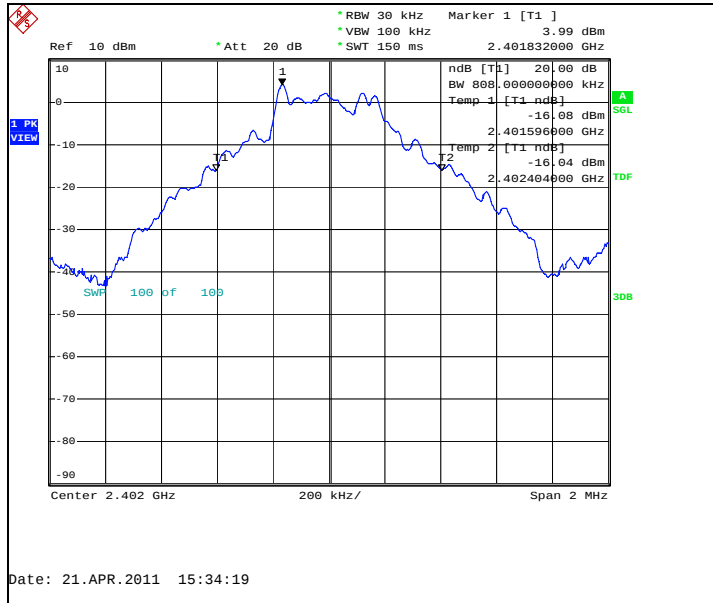

Channel 40 / 2442 MHz

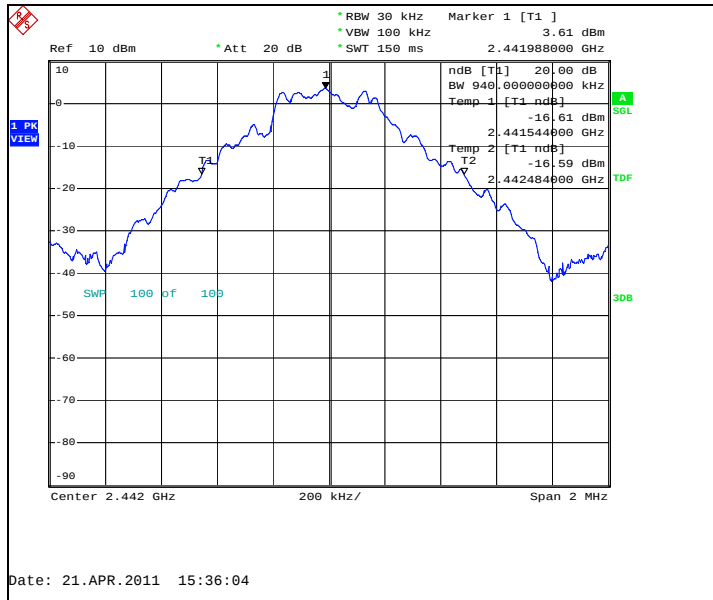


Channel 78 / 2480 MHz

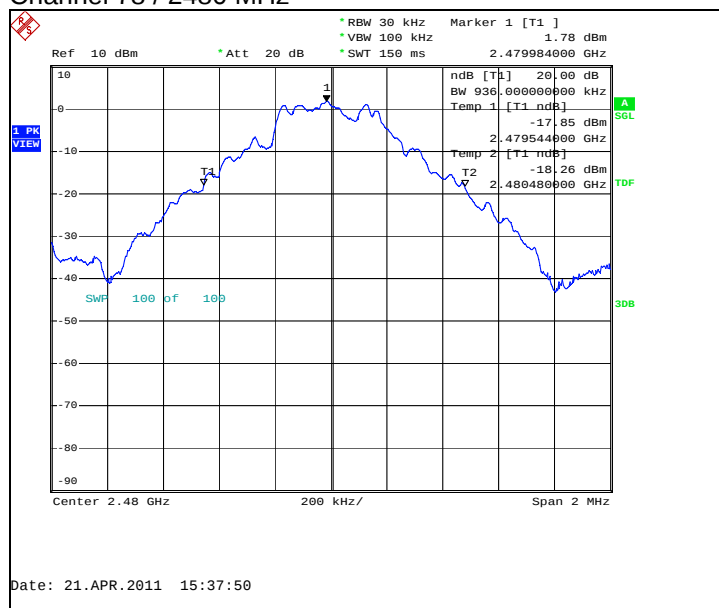


7.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1304.000	PASSED
40 / 2442	1316.000	PASSED
78 / 2480	1304.000	PASSED


Channel 0 / 2402 MHz

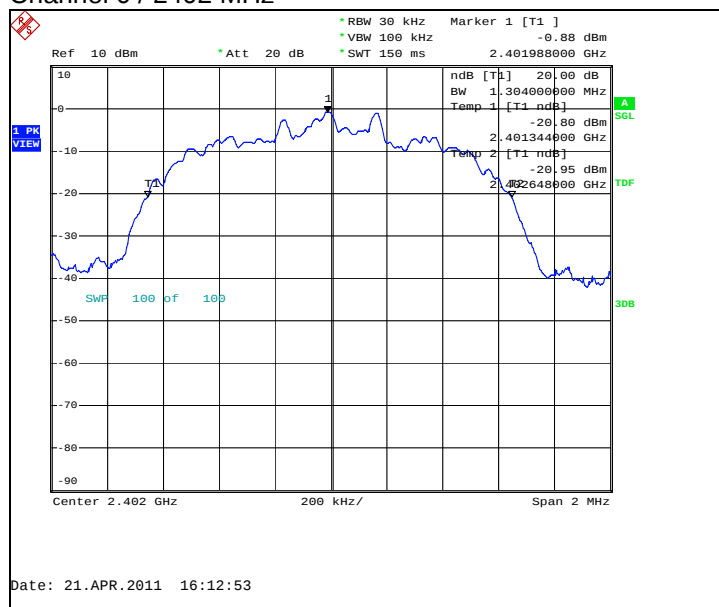

Channel 40 / 2442 MHz

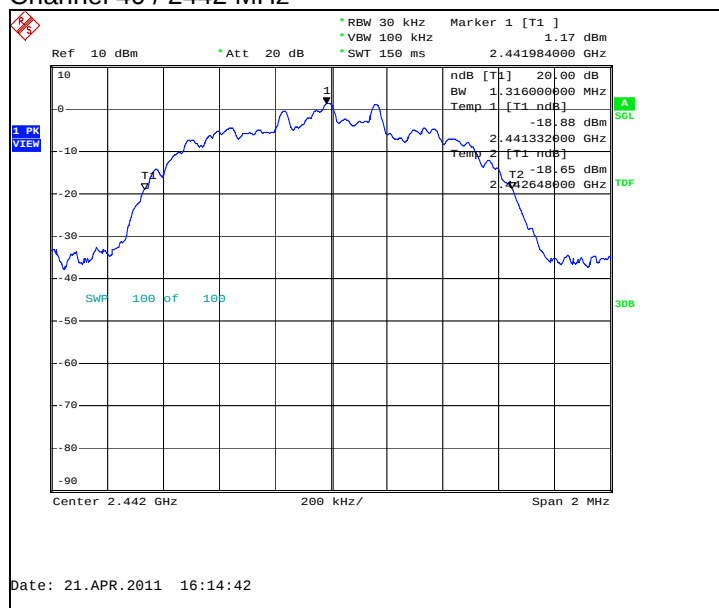


Channel 78 / 2480 MHz

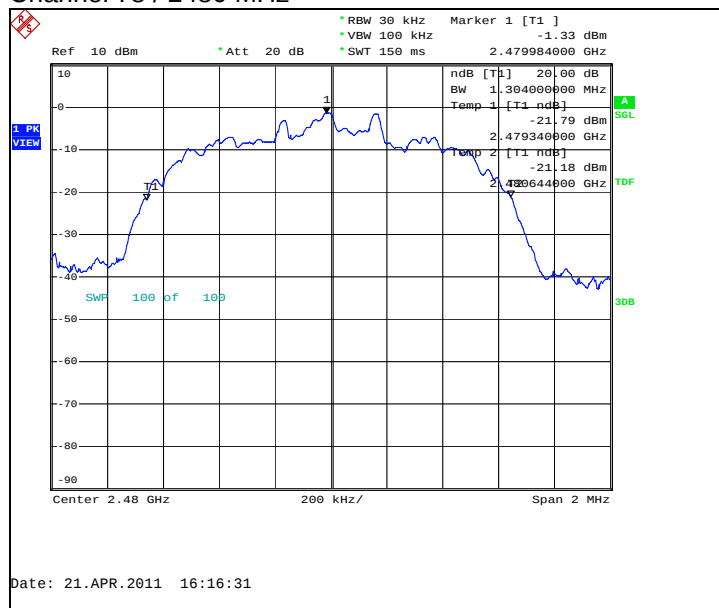

8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-725, DUT52140
Accessories with DUT numbers	BL-4C, DUT52148; AC-3U, DUT52154; WH-102, DUT52158
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 101.3
Date of measurements	21-Apr-2011
Measured by	Jia Dongsheng

8.1.1 Test Setup

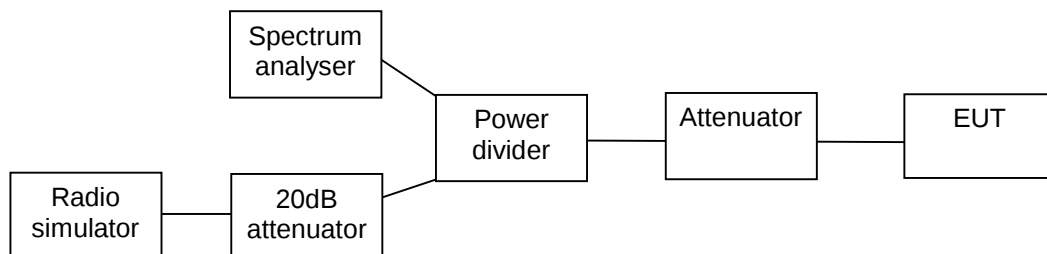

8.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

8.3. Bluetooth Test results

8.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1000	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

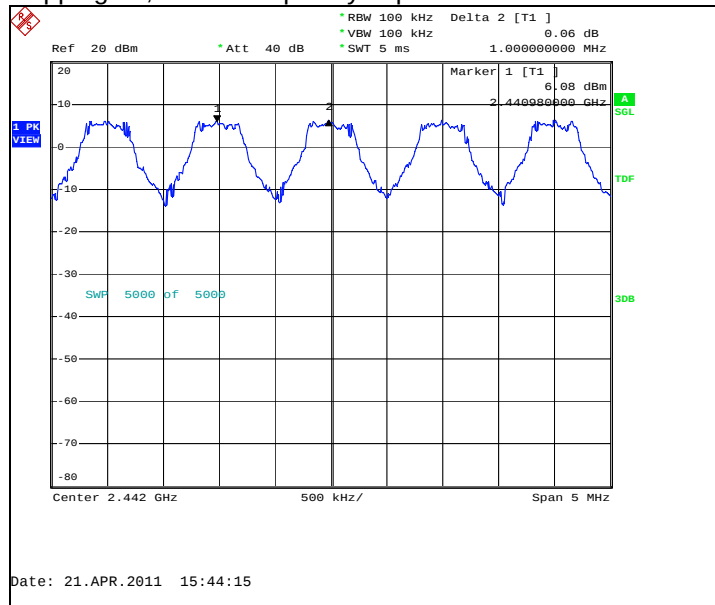

8.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1010	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

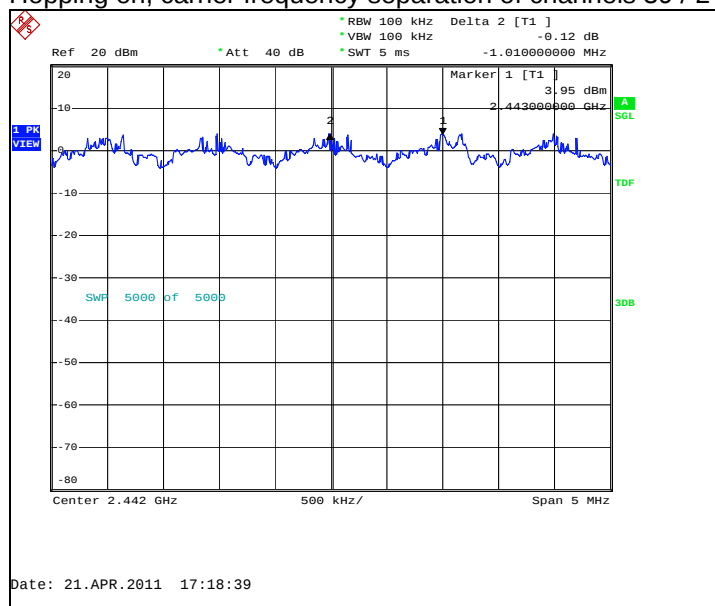

9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-725, DUT52140
Accessories with DUT numbers	BL-4C, DUT52148; AC-3U, DUT52154; WH-102, DUT52158
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 101.3
Date of measurements	21-Apr-2011
Measured by	Jia Dongsheng

9.1.1 Test Setup

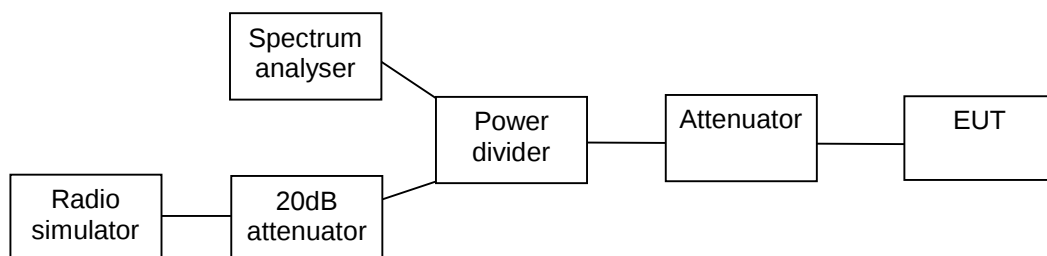

9.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

9.3. Bluetooth Test results

9.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

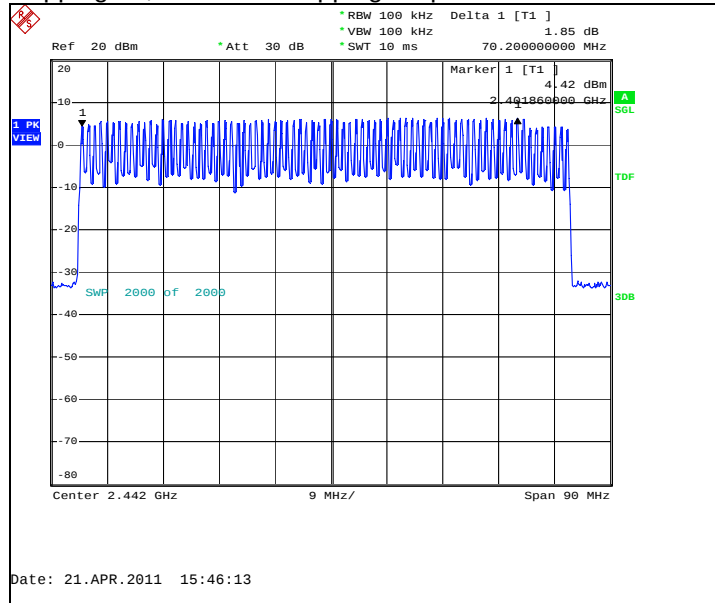

9.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

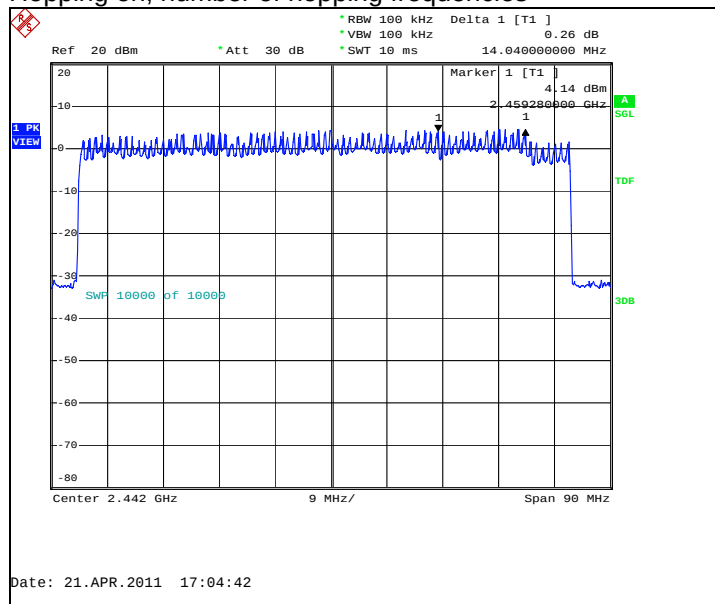

10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-725, DUT52140
Accessories with DUT numbers	BL-4C, DUT52148; AC-3U, DUT52154; WH-102, DUT52158
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 41 / 101.3
Date of measurements	21-Apr-2011
Measured by	Jia Dongsheng

10.1.1 Test Setup

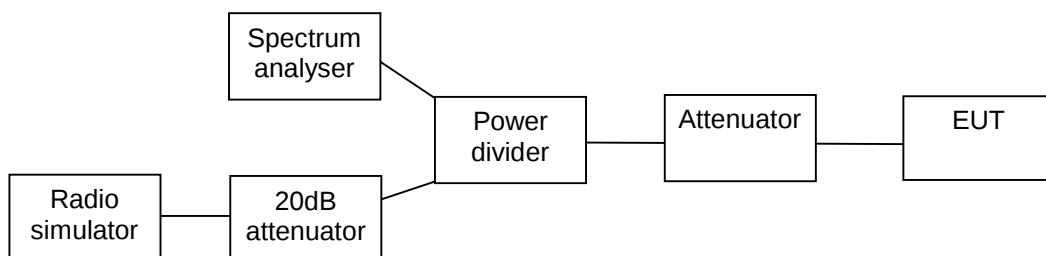

10.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

10.3. Bluetooth test results


10.3.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
92	2,920	0.268640	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

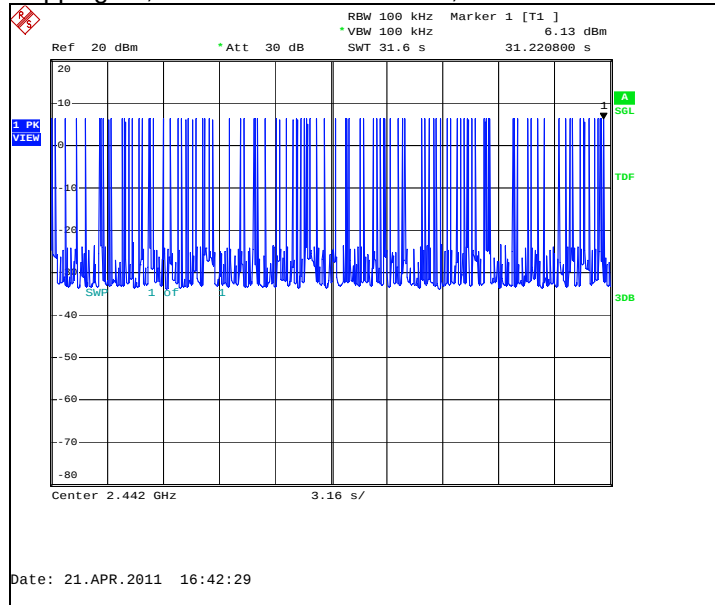


Hopping on, duration of one transmission, channel 40 / 2442 MHz

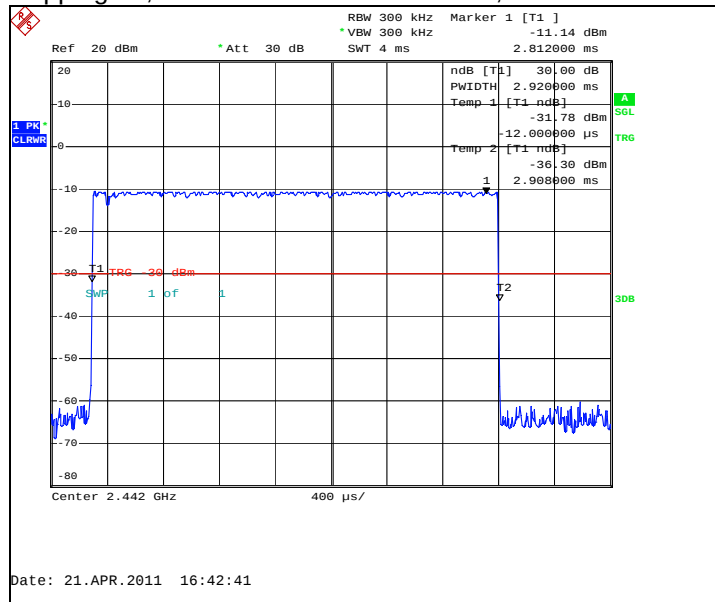


10.3.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
83	2,936	0.243688	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

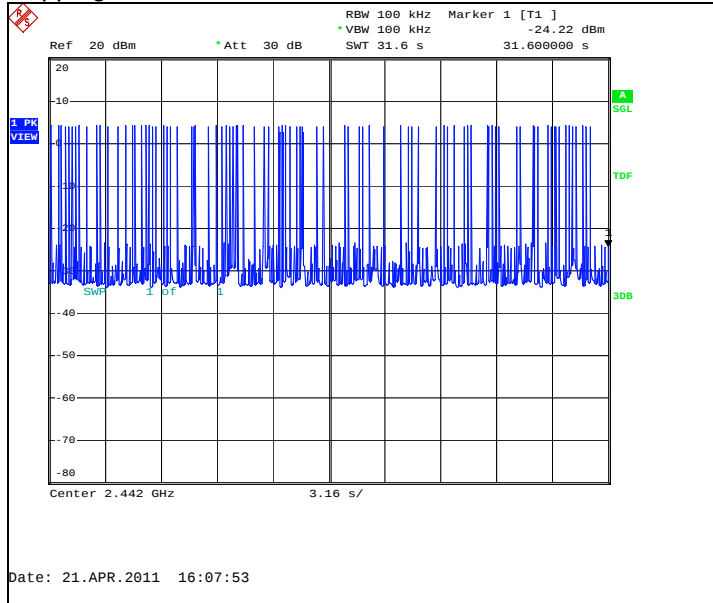

Hopping on, duration of one transmission, channel 40 / 2442 MHz

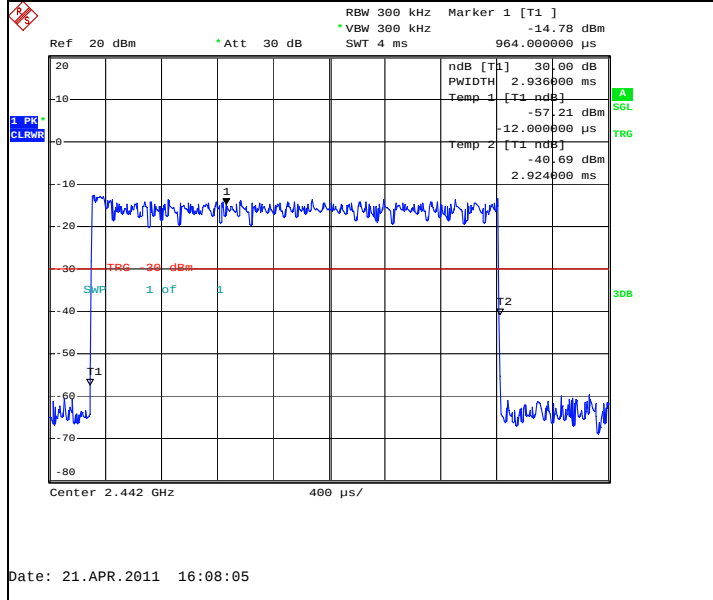

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0079	LISN 50 μ H	ESH3-Z5	R&S	15C,15B
BJPCPT0131	Communication Tester	CMU200	R&S	15C,15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0114	Signal Generator	E8357C	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27,15C,15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C