

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-852_02.docx	Date of Report:	13-Jun-2012
Number of pages:	14	Customer's Contact person:	Zhang Wei
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-852 / Battery BL-4U / AC Charger AC-11E / Headset WH-102		
FCC ID:	QTLRM-852	IC:	661AB-RM852
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Zou Ming, Engineer, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	23-May-2012
Testing completed	05-Jun-2012
The customer's contact person	Zhang Wei
Test Plan referred to	T:\Projects\RM-852\TestPlan\RS_testplan_RM-852.xls
Notes	-
Document name	FCC15CBT_RM-852_02.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-852	SIM1: 004402139216125 SIM2: 004402139216133	0202	-	tnd12w19	52737
Battery	BL-4U	4955402032021202713;0670560	-	-	-	52733
AC Charger	AC-11E	4090491466160502525;0675479	-	-	-	52735
Headset	WH-102	0694323152311D02963	-	-	-	52734

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	NP
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	NP
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5).....	4
2.2. Test method and limit.....	4
2.3. Bluetooth Test results	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	9
3.2. Test method and limit.....	9
3.3. Bluetooth Test results	11
4. Test Equipment.....	14
4.1. Conducted measurements	14
4.2. Radiated measurements	14

2. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-852, DUT 52737
Accessories with DUT numbers	BL-4U, DUT 52733 ; AC-11E, DUT 52735 ; WH-102, DUT 52734
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25/55/100.2
Date of measurements	05-Jun-2012
Measured by	Zou Ming

2.1.1 Test Setup

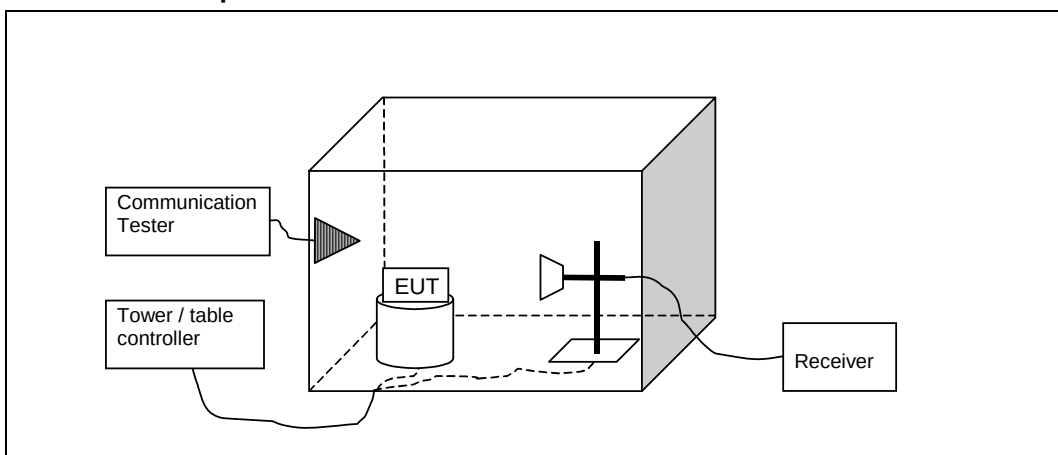

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

2.3. Bluetooth Test results

2.3.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 10 Hz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	44.75	172.875	43.58	1.17	PASSED
Hopping on, low end	44.75	172.875	43.58	1.17	PASSED
78 / 2480	45.77	194.315	43.75	2.02	PASSED
Hopping on, high end	45.77	194.315	43.75	2.02	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	58.5	841.422	57.33	1.17	PASSED
Hopping on, low end	58.7	860.761	57.53	1.17	PASSED
78 / 2480	60.15	1017.049	58.13	2.02	PASSED
Hopping on, high end	60.66	1079.118	58.64	2.02	PASSED


GFSK mode. Channel 0 / 2402 MHz

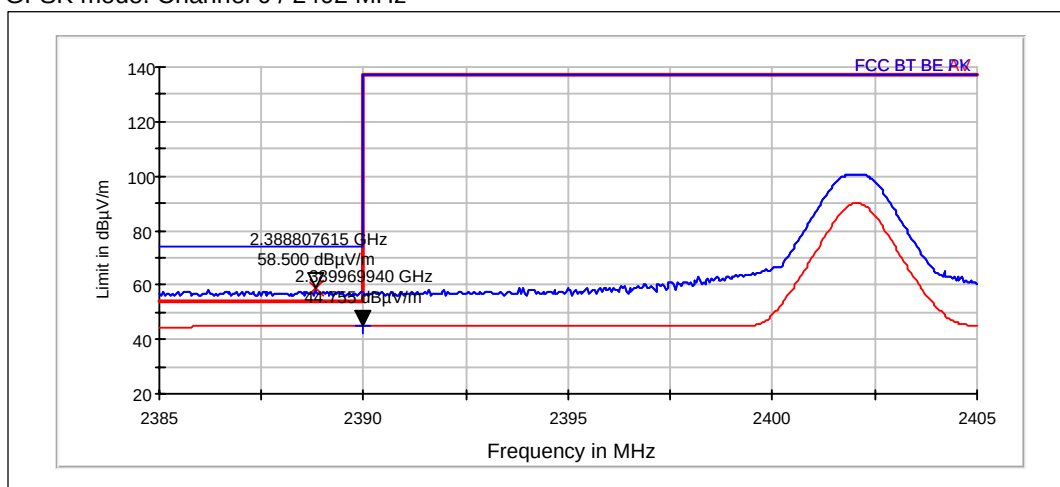


GFSK mode. Hopping on, low end

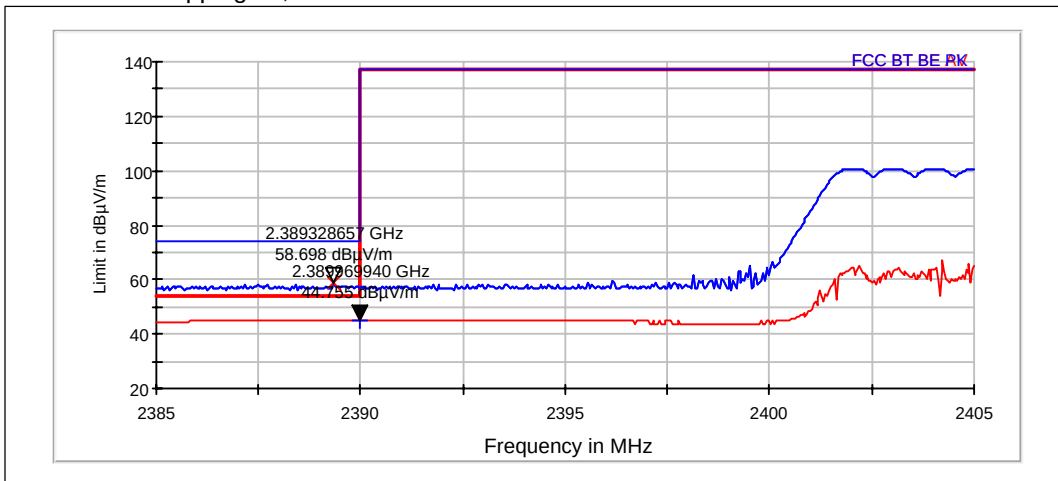

GFSK mode. Channel 78 / 2480 MHz

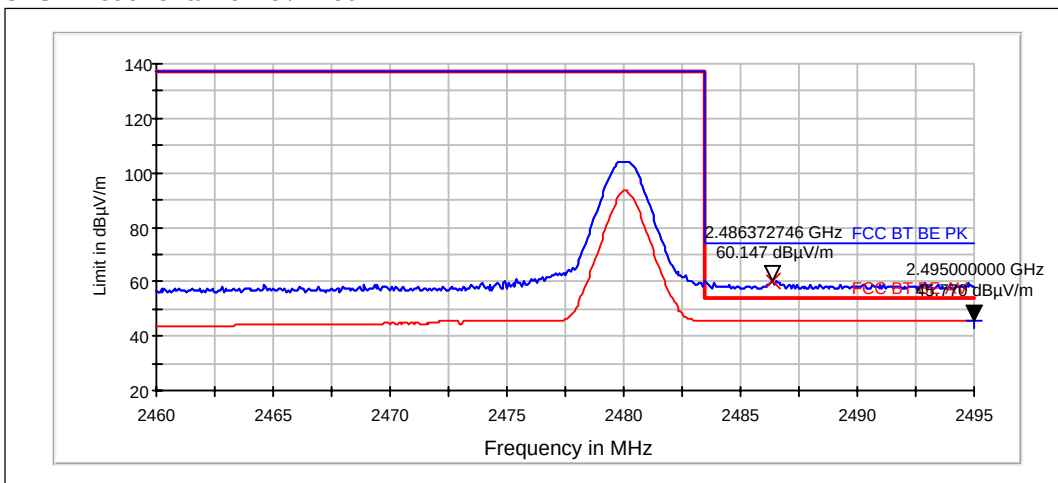

GFSK mode. Hopping on, high end

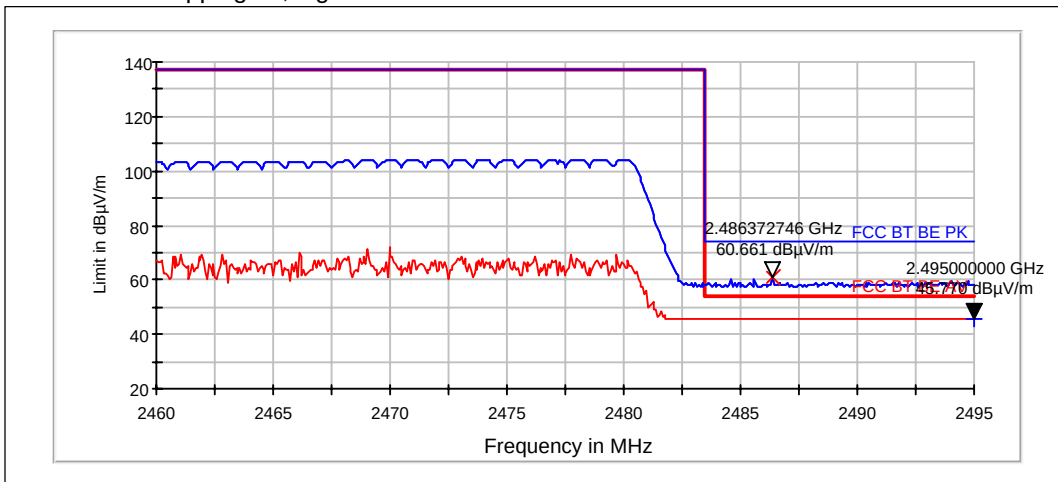

2.3.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 10 Hz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	44.75	172.875	43.58	1.17	PASSED
Hopping on, low end	44.75	172.875	43.58	1.17	PASSED
78 / 2480	46.49	211.064	44.47	2.02	PASSED
Hopping on, high end	45.77	194.315	43.75	2.02	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	59.22	913.707	58.05	1.17	PASSED
Hopping on, low end	58.52	843.15	57.35	1.17	PASSED
78 / 2480	60.51	1060.629	58.49	2.02	PASSED
Hopping on, high end	60.41	1048.388	58.39	2.02	PASSED


8DPSK mode. Channel 0 / 2402 MHz

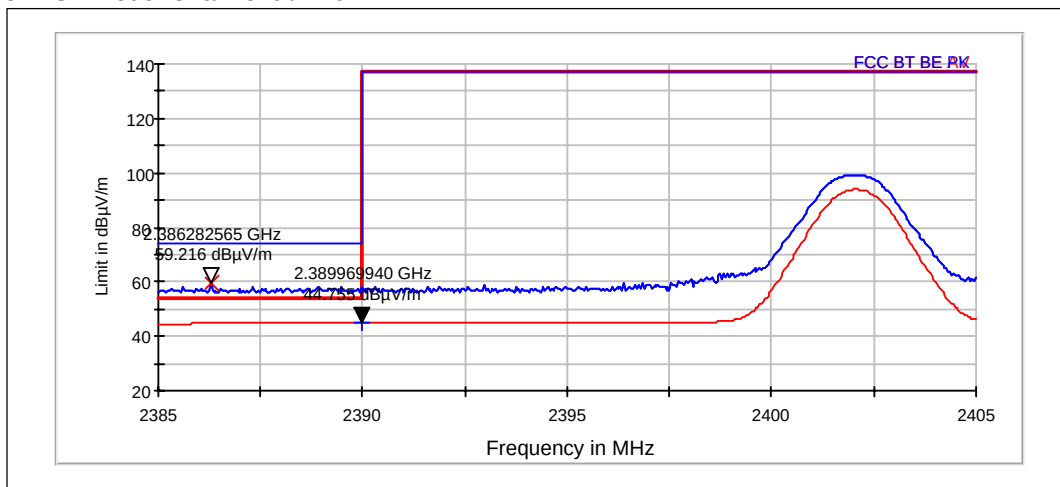


8DPSK mode. Hopping on, low end

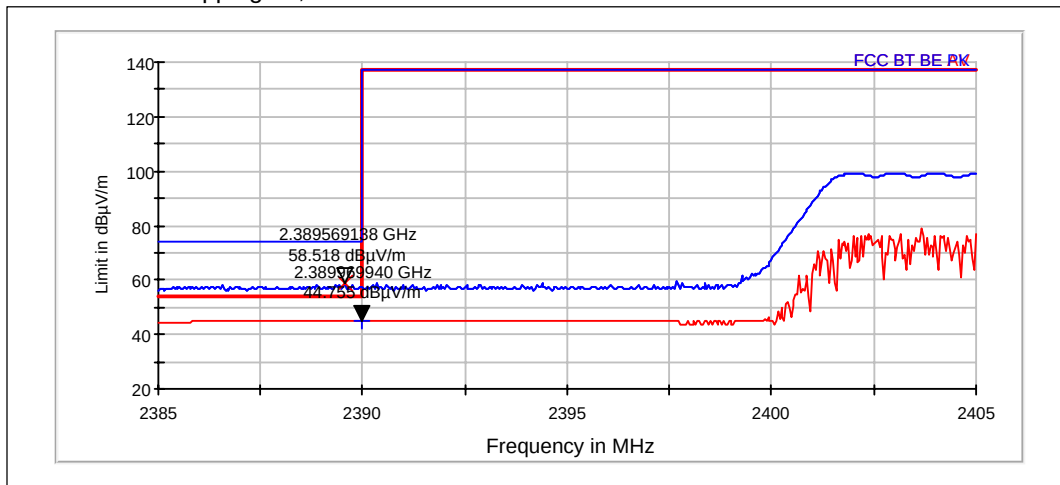

8DPSK mode. Channel 78 / 2480 MHz

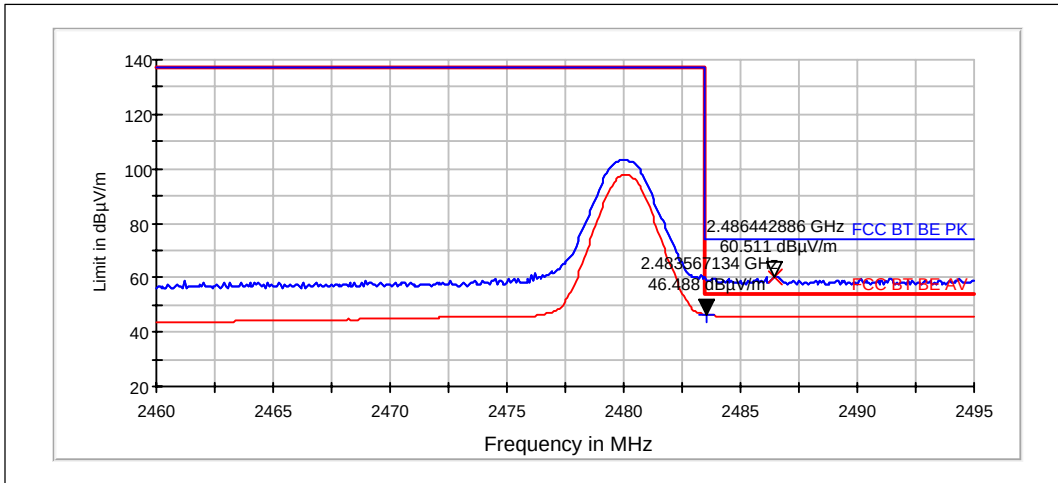


8DPSK mode. Hopping on, high end

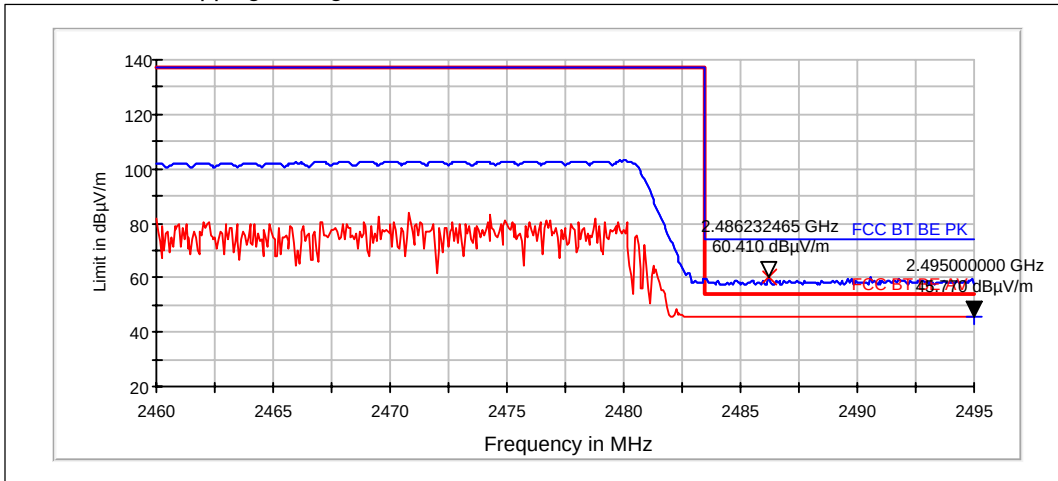

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-852, DUT 52737
Accessories with DUT numbers	BL-4U, DUT 52733 ; AC-11E, DUT 52735 ; WH-102, DUT 52734
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25/55/100.2
Date of measurements	05-Jun-2012
Measured by	Zou Ming

3.1.1 Test Setup

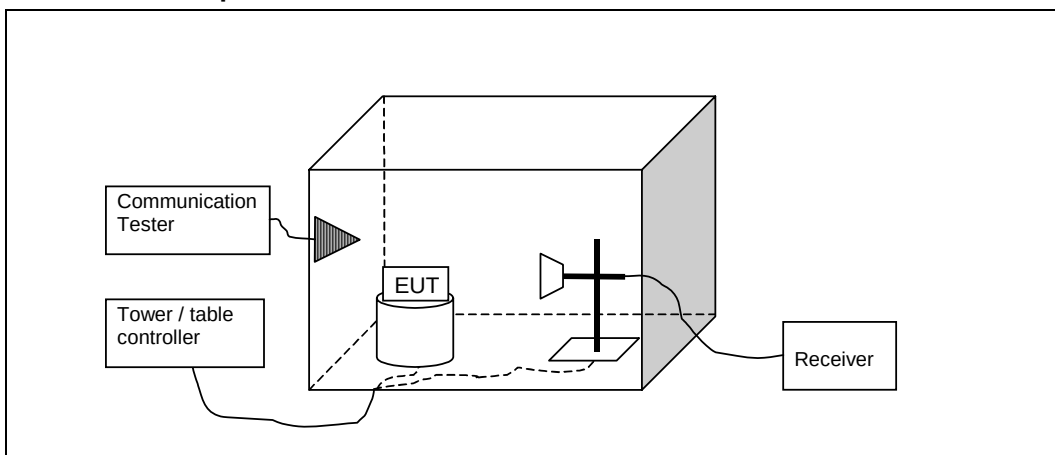

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [$dB\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4803.6	45.21	182.222	45.1	0.11	HORIZONTAL	PASSED
7205.5	50.15	321.81	45.1	5.05	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4803.6	29.71	30.567	29.6	0.11	HORIZONTAL	PASSED
7205.5	33.24	45.899	28.19	5.05	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
31.784	26.65	21.496	30.15	-3.5	VERTICAL	PASSED
32.224	24.27	16.344	28.07	-3.8	VERTICAL	PASSED
32.25	24.86	17.49	28.68	-3.82	VERTICAL	PASSED
897.608	24.58	16.934	26.98	-2.4	HORIZONTAL	PASSED
903.707	24.69	17.165	27.04	-2.35	HORIZONTAL	PASSED
907.002	24.75	17.272	26.98	-2.23	VERTICAL	PASSED
907.074	24.75	17.278	26.98	-2.23	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7287.376	51.31	367.748	46.07	5.24	VERTICAL	PASSED
7322.548	50.43	332.239	45.1	5.33	VERTICAL	PASSED
16463.932	57.64	761.904	41.03	16.61	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7287.376	33.7	48.428	28.46	5.24	VERTICAL	PASSED
7322.548	33.53	47.452	28.2	5.33	VERTICAL	PASSED
16463.932	44.02	158.891	27.41	16.61	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960	45.57	189.933	45.1	0.47	VERTICAL	PASSED
7440.2	49.26	290.536	44.12	5.14	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960	31.31	36.749	30.84	0.47	VERTICAL	PASSED
7440.2	33.4	46.779	28.26	5.14	HORIZONTAL	PASSED

3.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4805.9	43	141.172	42.9	0.1	VERTICAL	PASSED
7207.7	47.4	234.531	42.34	5.06	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4805.9	29.77	30.796	29.67	0.1	VERTICAL	PASSED
7207.7	33.19	45.661	28.13	5.06	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
31.92	29.34	29.306	32.93	-3.59	VERTICAL	PASSED
31.994	29.09	28.477	32.73	-3.64	VERTICAL	PASSED
32.07	29.4	29.502	33.1	-3.7	VERTICAL	PASSED
35.221	27.54	23.809	33.41	-5.87	VERTICAL	PASSED
46.303	29.68	30.475	43.35	-13.67	HORIZONTAL	PASSED
46.373	29.56	30.057	43.29	-13.73	HORIZONTAL	PASSED
49.49	28.98	28.109	44.98	-16	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3907.618	42.17	128.322	42.89	-0.72	VERTICAL	PASSED
3945.288	42.16	128.277	42.75	-0.59	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3907.618	29.11	28.527	29.83	-0.72	VERTICAL	PASSED
3945.288	29.21	28.864	29.8	-0.59	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960	44.45	166.936	43.98	0.47	VERTICAL	PASSED
7438.8	46.69	215.973	41.55	5.14	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960	31.28	36.635	30.81	0.47	VERTICAL	PASSED
7438.8	33.43	46.914	28.29	5.14	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C, 15B
BJPCPT0069	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0114	Signal Generator	E8257C	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-