

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-900_01.docx	Date of Report:	17-Jan-2013
Number of pages:	8	Customer's Contact person:	Zhang Wei (davizhan)
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-900 / Battery BL-4U		
FCC ID:	QTLRM-900	IC:	661AB-RM900
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Gao Sherina, Engineer, EMC

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	30-Dec-2012
Testing completed	09-Jan-2013
The customer's contact person	Zhang Wei (davizhan)
Test Plan referred to	T:\Projects\RM-900\TestPlan\RS_Testplan_RM-900.xlsm
Notes	-
Document name	FCC22&24_RM-900_01.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-900	004402471286413	0204	-	aqs12w49	53086
Battery	BL-4U	4955402283061411387;0670560	-	-	-	53072

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	PASSED
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-132 4.4, RSS-133 6.4).....	4
2.2. Test method and limit.....	4
2.3. GSM850 TX test results	5
2.4. GSM1900 TX test results	5
3. Band edge compliance (FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5)	6
3.2. Test method and limit.....	6
3.3. GSM850 test results.....	7
3.4. GSM1900 test results.....	8

2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-132 4.4, RSS-133 6.4)

EUT with DUT number	RM-900, DUT 53086
Accessories with DUT numbers	BL-4U, DUT 53072
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/31/102.8
Date of measurements	09-Jan-2012
Measured by	Zou Ming

2.1.1 Test setup

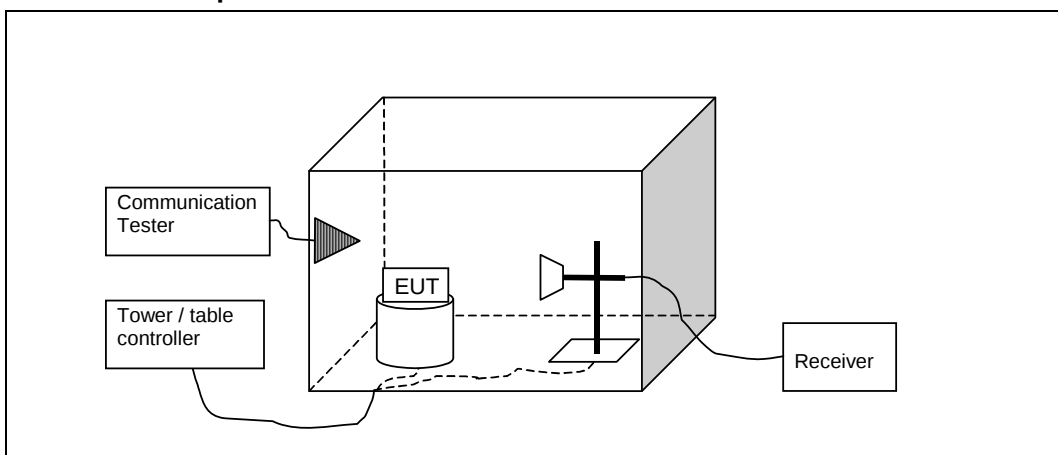

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. The measurement results are obtained as described below:

$$P[\text{dBm}] = P_{\text{SUBST TX}} + P_{\text{MEAS}} - P_{\text{SUBST RX}} - L_{\text{SUBST CABLE}} + G_{\text{SUBST TX ANT}}$$

Where $P_{\text{SUBST TX}}$ is signal generator level. P_{MEAS} is measured power level from the EUT. $P_{\text{SUBST RX}}$ is measured power level in substitute measurement. $L_{\text{SUBST CABLE}}$ is the loss of the cable between the signal generator and the substitution antenna and $G_{\text{SUBST TX ANT}}$ is substitution antenna gain.

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7 ERP	38.5
1850 - 1910	2 EIRP	33

2.3. GSM850 TX test results

GSM mode

Channel / f _c [MHz]	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBd]	L _{SUBST CABLE} [dB]	Polarisation	Result
128 / 824.2	29.64	0.920	-3.87	+10	-29.7	-2.9	3.29	HORIZONTAL	PASSED
190 / 836.6	29.85	0.966	-2.85	+10	-28.95	-2.82	3.43	HORIZONTAL	PASSED
251 / 848.8	30.32	1.076	-2.48	+10	-28.9	-2.7	3.4	VERTICAL	PASSED

2.4. GSM1900 TX test results

GSM mode


Channel / f _c [MHz]	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	P _{SUBST TX} [dBm]	P _{SUBST RX} [dBm]	G _{SUBST TX} ANT [dBi]	L _{SUBST CABLE} [dB]	Polarisation	Result
512 / 1850.2	31.19	1.315	-13.02	+10	-31.13	8.12	5.04	VERTICAL	PASSED
661 / 1880	31.69	1.476	-12.5	+10	-31.19	8.06	5.06	VERTICAL	PASSED
810 / 1909.8	32.04	1.600	-12.63	+10	-31.48	8.3	5.11	VERTICAL	PASSED

3. Band edge compliance

(FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-900, DUT 53086
Accessories with DUT numbers	BL-4U, DUT 53072
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/31/102.8
Date of measurements	09-Jan-2012
Measured by	Zou Ming

3.1.1 Test setup

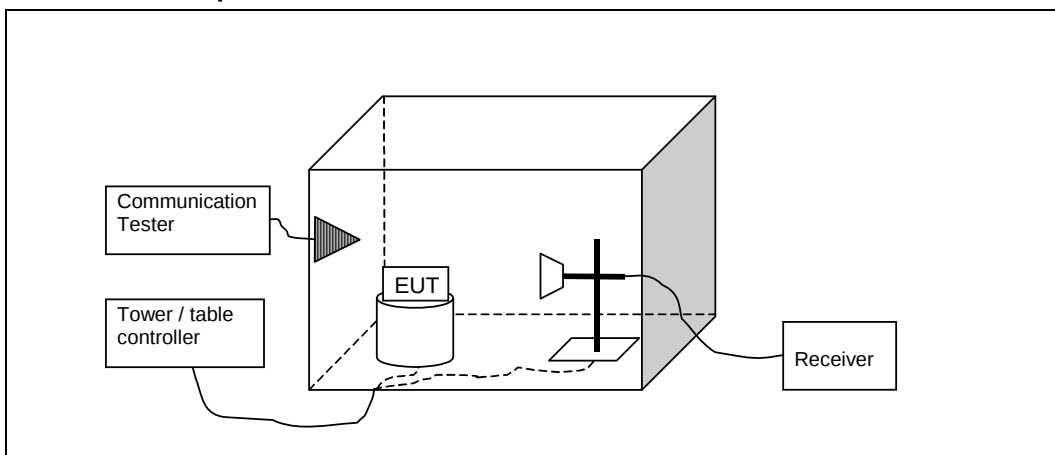


3.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and IC standards , RSS-132, RSS-133.

Limits for band edge compliance measurements


Operation band	Frequency range [MHz]	Limit [dBm]
GSM850	Below 824 and above 849	-13
GSM1900	Below 1850 and above 1910	-13

3.3. GSM850 test results

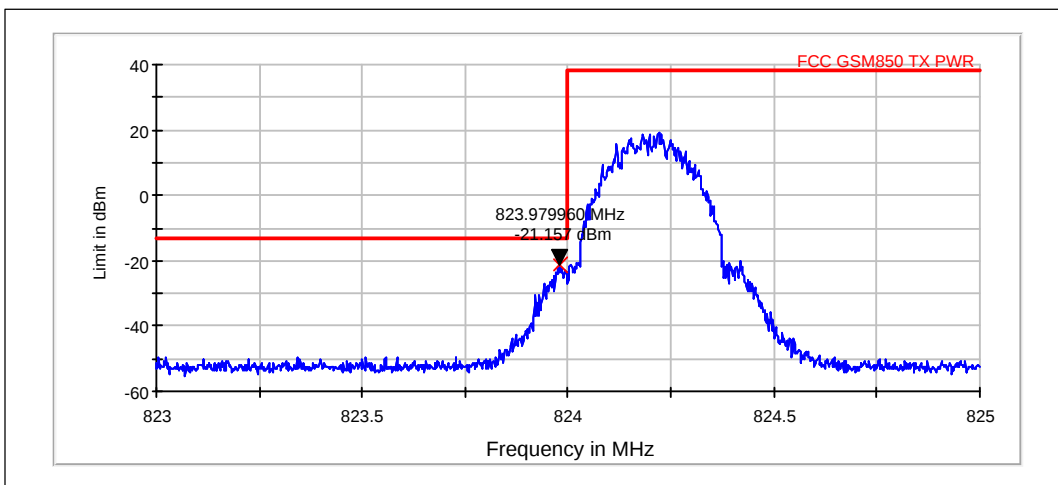

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
GSM	128 / 824.2	-21.16	PASSED

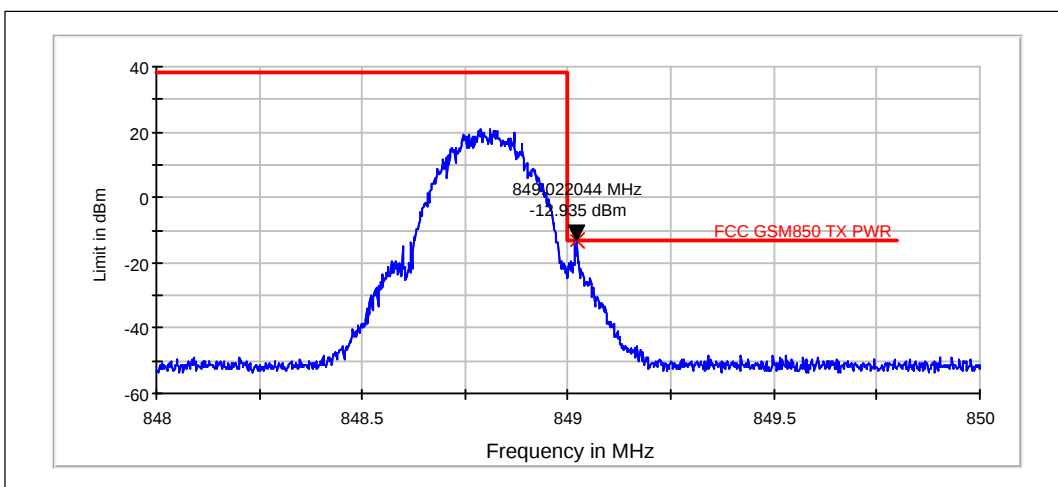

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)


Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
GSM	251 / 848.8	-12.94	PASSED

3.4. GSM1900 test results

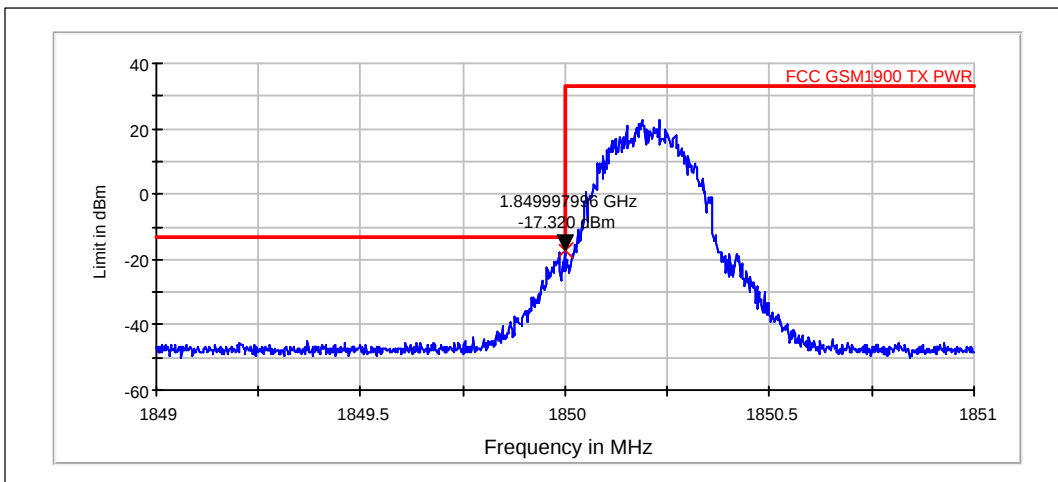

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
GSM	512 / 1850.2	-17.32	PASSED

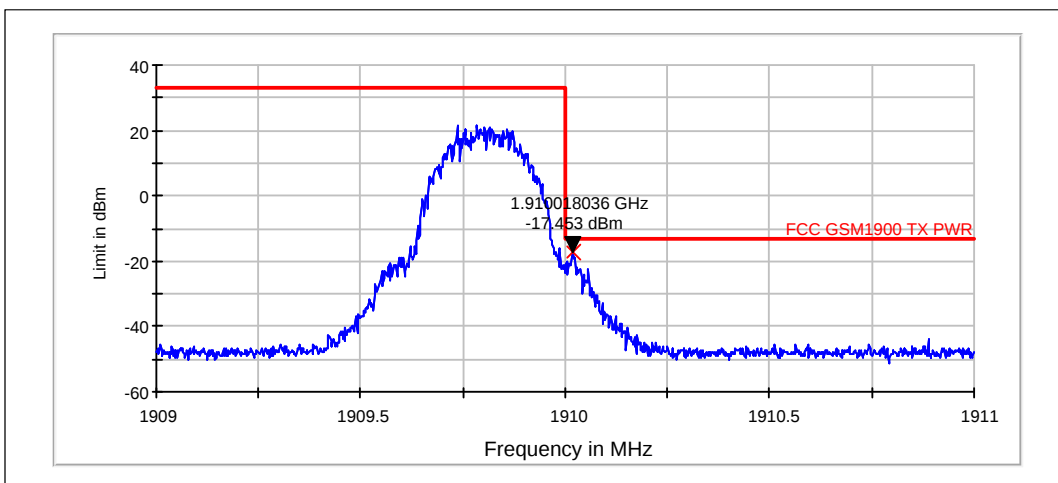

Peak (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Channel fc [MHz]	Level [dBm]	Results
GSM	810 / 1909.8	-17.45	PASSED