

SAR Compliance Test Report

Test report no.:	FCC_RM-914_09	Date of report:	2013-10-23
Template version:	19.3	Number of pages:	66
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Client:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
Responsible test engineer:	Liu Xianchao	Product contact person:	Craig Li
Measurements made by:	Yuan Rui, He Ying, Xu Liping		
Tested device:	RM-914		
FCC ID:	QTLRM-914	IC:	-
Supplement reports:	FCC_RM-914_03; SAR_Photo_RM-914_10		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC published RF exposure KDB procedures RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures:

For the contents:

CONTENTS

1. SUMMARY OF SAR TEST REPORT	4
1.1 TEST DETAILS.....	4
1.1.1 <i>Supplement reports referenced on the front cover of this report.....</i>	<i>4</i>
1.2 MAXIMUM RESULTS.....	5
1.2.1 <i>Head Configuration.....</i>	<i>5</i>
1.2.2 <i>Body Worn Configuration.....</i>	<i>5</i>
1.2.3 <i>Wireless Router Configuration.....</i>	<i>6</i>
1.2.4 <i>Summary SAR data.....</i>	<i>7</i>
1.2.5 <i>Maximum Drift.....</i>	<i>7</i>
1.2.6 <i>Measurement Uncertainty.....</i>	<i>7</i>
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	8
2.1 DESCRIPTION OF THE ANTENNA.....	9
3. TEST CONDITIONS	11
3.1 TEMPERATURE AND HUMIDITY.....	11
3.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER.....	11
3.3 TEST CASES AND TEST MINIMISATION	12
4. DESCRIPTION OF THE TEST EQUIPMENT	14
4.1 MEASUREMENT SYSTEM AND COMPONENTS	14
4.1.1 <i>Isotropic E-field Probe Type ES3DV3.....</i>	<i>16</i>
4.1.2 <i>Isotropic E-field Probe Type EX3DV4.....</i>	<i>16</i>
4.2 PHANTOMS	17
4.3 TISSUE SIMULANTS	17
4.3.1 <i>Tissue Simulant Recipes.....</i>	<i>17</i>
4.4 SYSTEM VALIDATION AND SYSTEM CHECKING.....	18
4.4.1 <i>System validation status.....</i>	<i>18</i>
4.4.2 <i>System Checking.....</i>	<i>18</i>
4.5 TISSUE SIMULANTS USED IN THE MEASUREMENTS.....	21
5. DESCRIPTION OF THE TEST PROCEDURE	22
5.1 DEVICE HOLDER.....	22
5.2 TEST POSITIONS.....	22
5.2.1 <i>Against Phantom Head.....</i>	<i>22</i>
5.2.2 <i>Body Worn Configuration.....</i>	<i>23</i>
5.3 SCAN PROCEDURES.....	23
5.4 SAR AVERAGING METHODS.....	23
6. MEASUREMENT UNCERTAINTY	24
7. RESULTS	25
7.1 THE MEASURED HEAD SAR VALUES FOR THE TEST DEVICE.....	25
7.1.1 <i>Area scan based combined Head SAR data.....</i>	<i>30</i>
7.2 THE MEASURED BODY SAR VALUES FOR THE TEST DEVICE.....	31
7.2.1 <i>Area scan based combined Body SAR data.....</i>	<i>33</i>

7.3	BODY SAR ASSESSMENT OF WIRELESS ROUTER MODE AT 10.0MM SEPARATION DISTANCE.....	35
7.3.1	<i>Area scan based combined Body SAR data of Wireless Router mode</i>	<i>37</i>
APPENDIX A: SYSTEM CHECKING SCANS.....		39
APPENDIX B: MAXIMUM MEASUREMENT PLOTS.....		45
APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS.....		60
APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S).....		61
APPENDIX E: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)		62
APPENDIX F: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED GSM/GPRS TRANSMISSION MODES		63
F.1	POWER TUNING TARGETS FOR HEAD AND BODY-WORN MEASUREMENTS	63
F.2	CONDUCTED POWER FROM THE SAMPLES USED IN THE TESTING	64
APPENDIX G: CONDUCTED POWER MEASUREMENTS FOR WLAN		65
G.1	POWER TUNING TARGETS.....	65
G.2	CONDUCTED POWER MEASUREMENTS	66

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2013-01-14 to 2013-10-17
SN, HW and SW numbers of tested device	SN: 004402/47/206437/1, HW: 0153, SW: 1030.6100.1251.10045, DUT: 52911 SN: 358352/05/719511/0, HW: 1507, SW: 3051.40000.1336.0000, DUT: 53555
Batteries used in testing	BL-5J, DUT: 52916, 52915
Headsets used in testing	WH-108, DUT: 52807
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.1.1 Supplement reports referenced on the front cover of this report

FCC_RM-914_03 / FCC ID: QTLRM-914:

Head, Body-worn and Wireless Router SAR data and test details for all cellular and PCS bands have been fully copied from this report; 1 sample was used in the RM-914 SAR testing. Tests for new WLAN module were now added to this reporting. FCC Grant for RM-914 / FCC ID: QTLRM-914 was issued on Feb 26th 2013.

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f(MHz)	Conducted power	Position	Measured SAR value (1g avg)	Reported* SAR value (1g avg)	SAR limit (1g avg)	Result	Plot#
3-slot GPRS850**	251 / 848.8	28.11 dBm	Left, Cheek	0.542 W/kg	0.61 W/kg	1.6 W/kg	PASSED	1
3-slot GPRS1900**	810 / 1909.8	26.85 dBm	Right, Cheek	0.644 W/kg	0.72 W/kg	1.6 W/kg	PASSED	2
WLAN2450	11 / 2462.0	13.20 dBm	Left, Cheek	0.481 W/kg	0.65 W/kg	1.6 W/kg	PASSED	3
3-slot GPRS850 + WLAN2450	-	-	Left, Cheek	0.620 W/kg	0.75 W/kg	1.6 W/kg	PASSED	4
3-slot GPRS1900 + WLAN2450	-	-	Left, Cheek	0.645 W/kg	0.73 W/kg	1.6 W/kg	PASSED	5

1.2.2 Body Worn Configuration

Mode	Ch / f(MHz)	Conducted power	Separation distance	Measured SAR value (1g avg)	Reported* SAR value (1g avg)	SAR limit (1g avg)	Result	Plot#
3-slot GPRS850**	128 / 824.2	28.05 dBm	1.5cm	0.598 W/kg	0.67 W/kg	1.6 W/kg	PASSED	6
3-slot GPRS1900**	661 / 1880.0	26.85 dBm	1.5cm	0.363 W/kg	0.41 W/kg	1.6 W/kg	PASSED	7
WLAN2450	6 / 2437.0	13.30 dBm	1.5cm	0.068 W/kg	0.09 W/kg	1.6 W/kg	PASSED	8
3-slot GPRS850 + WLAN2450	-	-	1.5cm	0.620 W/kg	0.70 W/kg	1.6 W/kg	PASSED	9
3-slot GPRS1900 + WLAN2450	-	-	1.5cm	0.385 W/kg	0.44 W/kg	1.6 W/kg	PASSED	10

1.2.3 Wireless Router Configuration

Mode	Ch / f(MHz)	Conducted power	Separation distance	Measured SAR value (1g avg)	Reported* SAR value (1g avg)	SAR limit (1g avg)	Result	Plot#
3-slot GPRS850**	190 / 836.6	28.10 dBm	1.0cm	0.749 W/kg	0.84 W/kg	1.6 W/kg	PASSED	11
3-slot GPRS1900**	810 / 1909.8	26.85 dBm	1.0cm	1.08 W/kg	1.21 W/kg	1.6 W/kg	PASSED	12
WLAN2450	6 / 2437.0	13.30 dBm	1.0cm	0.072 W/kg	0.09 W/kg	1.6 W/kg	PASSED	13
3-slot GPRS850 + WLAN2450	-	-	1.0cm	0.768 W/kg	0.87 W/kg	1.6 W/kg	PASSED	14
3-slot GPRS1900 + WLAN2450	-	-	1.0cm	1.10 W/kg	1.23 W/kg	1.6 W/kg	PASSED	15

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance. In addition, SAR values are scaled up by 12% to cover measurement drift. As a consequence of this upward drift correction, the contribution of measurement drift to the overall measurement uncertainty (Section 6) is reduced to zero.

**SAR data taken from FCC_RM-914_03.

1.2.4 Summary SAR data

	FCC-defined SAR values for the Grants of Equipment Authorization			
	PCE	DTS	NII	DSS
Maximum Head SAR values	0.72 W/kg	0.65 W/kg	-	-
{Max + Max} Simultaneous Head SAR value	1.26 W/kg			
Maximum Body SAR values	0.67 W/kg	0.09 W/kg	-	-
{Max + Max} Simultaneous Body SAR value	0.73 W/kg			
Maximum Product Specific (Wireless Router) SAR values	1.21 W/kg	0.09 W/kg	-	-
{Max + Max} Simultaneous Product Specific SAR value	1.22 W/kg			
Maximum Simultaneous SAR value Head SAR: 3-slot GPRS850 + WLAN2450	1.26 W/kg			

Note:

PCE contains the highest results between all cellular modes (cellular, AWS and PCS bands)
DTS contains the highest results between WLAN 2.4GHz + RLAN 5725-5850MHz
NII contains the highest results between RLAN 5150-5250, 5250-5350 and 5470-5725
DSS contains the highest results of BT 2450

1.2.5 Maximum Drift

Maximum drift covered by 12% scaling up of the SAR values	Maximum drift during measurements
0.5dB	0.48dB

1.2.6 Measurement Uncertainty

Expanded Uncertainty (k=2) 95%	± 27.1%
--------------------------------	---------

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	Portable
Exposure environment	General population / uncontrolled

Modes of Operation	Band s	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)	Power Tuning Target (dBm)				Upper Limit of Power Tuning Tolerance (dBm)			
					1-slot	2-slot	3-slot	4-slot	1-slot	2-slot	3-slot	4-slot
GSM / GPRS	850 1900	GMSK	1/8 to 4/8	824 – 849	32.50	29.50	27.70	26.50	32.85	29.85	28.05	26.85
				1850 – 1910	30.50	28.00	26.50	25.00	30.85	28.35	26.85	25.35
EGPRS	850 1900	GMSK	1/8 to 4/8	824 – 849	27.00	27.00	26.00	25.00	27.35	27.35	26.35	25.35
				1850 – 1910	26.00	26.00	26.00	25.00	26.35	26.35	26.35	25.35
BT	2450	GFSK	1	2402 – 2480	7.00				8.50			
Modes of Operation	Band s	Modulation Mode	Duty Cycle	Transmitter Frequency Range (MHz)	Power Tuning Target (dBm)			Upper Limit of Power Tuning Tolerance (dBm)				
					Ch 1	Ch 6	Ch 11	Ch 1	Ch 6	Ch 11		
WLAN b-mode	2450	Up to 11Mbps QPSK	1	2412 – 2472	13.00	13.00	13.00	14.50	14.50	14.50		
WLAN g-mode	2450	Up to 54Mbps 64QAM	1	2412 – 2472	12.00	12.00	12.00	13.50	13.50	13.50		
WLAN n-mode 20MHz	2450	Up to 72.2Mbps 64QAM	1	2412 – 2472	12.00	12.00	12.00	13.50	13.50	13.50		

Outside of USA, the transmitter of the device is capable of operating also in GSM/GPRS/EGPRS900, GSM/GPRS/EGPRS1800, WCDMA900 and WCDMA2100 bands which are not part of this filing.

This device has Voice-over-IP capability for use at the ear. Therefore, SAR for multi slot GPRS mode was evaluated against the head profile of the phantom.

This is a BT Class 1 device; as its power tuning target plus tolerance is 8.5dBm (7.08mW), SAR testing was deemed unnecessary since $(7.08\text{mW}/5\text{mm}) \cdot \sqrt{2.48\text{GHz}} < 3.0$ (KDB447498 D01 General RF Exposure Guidelines v05 Section 4.3.1 Standalone SAR test exclusion considerations)

This device has Wireless Router "Hotspot" mode capability.

This device uses a single antenna for transmission of GSM/GPRS850 and GSM/GPRS1900 bands; a separate single antenna is used for WLAN. Simultaneous transmission of any singular cellular and PCS band is possible with WLAN in Head and Body-worn use according to the table below.


Simultaneous transmission capabilities in Head and Body-worn use	
	WLAN2450
GSM/GPRS850	✓
GSM/GPRS1900	✓

Simultaneous transmission capabilities in Wireless Router use	
	WLAN2450
GSM/GPRS850	✓
GSM/GPRS1900	✓


2.1 Description of the Antenna

The device has an internal antenna for cellular use. The cellular antenna is located at the bottom underneath the back cover.


Phone Dimension and Distance Between Main antenna and BT Antenna

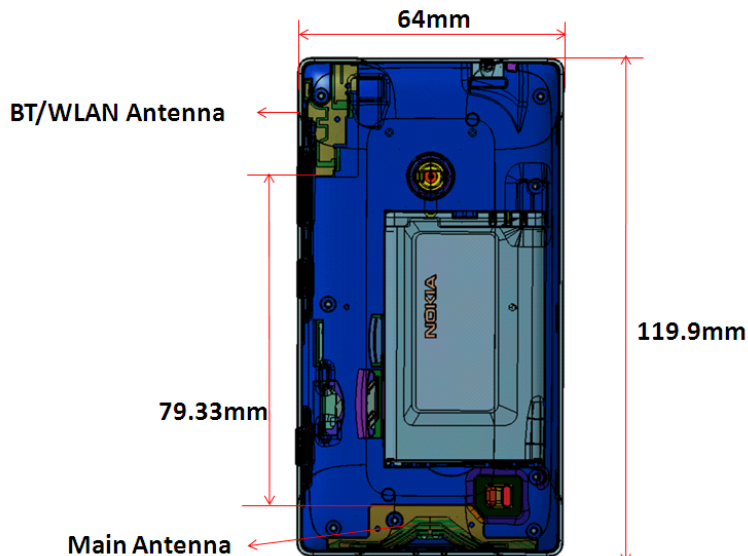

Distances between Outside surfaces of Device and BT, WLAN Antenna

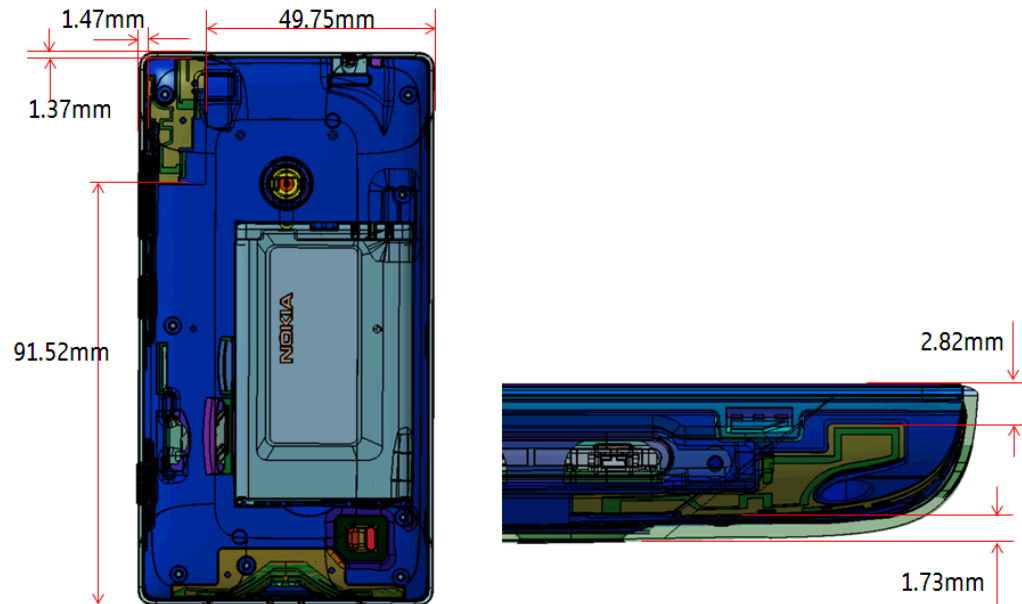

Distances between Outside surfaces of Device and Main Antenna

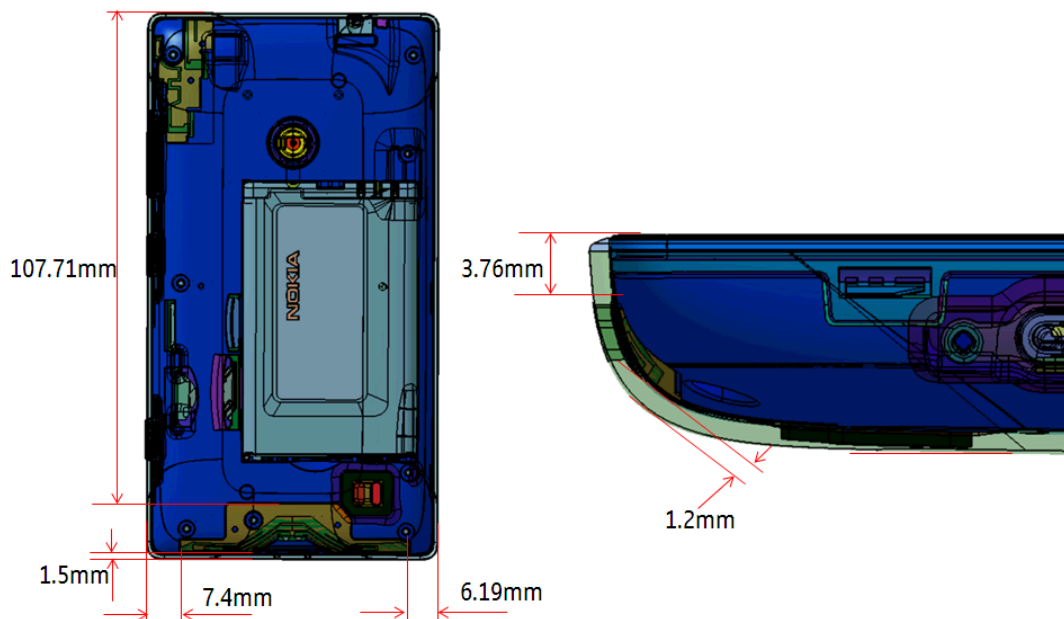

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	21.5 – 22.5
Ambient humidity (RH %):	35 - 55

3.2 Test Signal, Frequencies and Output Power

This device was tested in all the available multi-slot GMSK GPRS modes.

The device was put into operation by using a call tester except for testing WLAN2450 where control software was used. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

The maximum power levels in tested samples were set to upper limit of production tuning tolerance. Tuning targets and conducted power results are presented in Appendix F.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The radiated output power of the device was measured by a separate test laboratory on the same unit(s) as used for SAR testing. The results are given in the EMC report supporting this application.

The transmission mode of the device in all WLAN b-mode tests was DSSS QPSK 1Mbps. This mode has the highest (or equal highest) time-averaged output power of all the WLAN b and g modulation modes in Nokia devices. All WLAN testing has been carried out in accordance with FCC KDB 248227: SAR Measurement Procedures for 802.11 a/b/g Transmitters.

The conducted output power of the device was measured by a separate test laboratory on the same units as used for SAR testing. The results are given in Appendix F-G of this report.

All the cellular SAR results and test data have been taken from FCC_RM-914_03. The only difference between RM-914 HW1507 and HW0153 is different WLAN2450 modules. The associated difference between these products does not affect the Cellular SAR performance.

Here is a summary list of the KDB documents used in the reported testing:

KDB 941225 D01 SAR Measurement Procedures for 3G Devices

KDB 248227: SAR Measurement Procedures for 802.11 a/b/g Transmitters

KDB 648474 D04 SAR Handsets Multi Xmitter and Ant v01

KDB 941225 D06 v01 Hot Spot SAR

KDB 447498 D01 General RF Exposure Guidance v05

KDB 690783 D01 SAR Listings on Grants

KDB 865664 D01 SAR Measurements 100MHz to 6GHz v01

KDB 865664 D02 SAR Reporting v01

3.3 Test Cases and Test Minimisation

The tested device examined in this report may not incorporate all of the features described in the text that follows, but its SAR evaluation will have been subjected to the same considerations and test logic described below.

Whilst it's possible to identify the maximum SAR test cases from inspection of the conducted power levels given in the Results tables (Section 7), different modes in the same band and multi-slot transmit GSM/GPRS modes can create some difficulties. Therefore the sequence of the SAR tests made in evaluating this device has used test logic that is based on measured SAR values. Comparison of measured SAR values in this way, can also allow some test minimization (i.e. test elimination) to be made.

For example, when SAR testing multi-slot GSM/GPRS/EGPRS modes, it is an inefficient use of test resources to fully SAR test every test configuration in each of the different modes as these modes have a fixed power relationship between them that is the same, irrespective of the test configuration. In the case of multi-slot GSM/GPRS modes, a single comparative SAR test - using the same test channel and test configuration - is made in each of the n-slot modes; the mode with the highest measured SAR value is then subjected to full SAR testing in all test configurations. These comparative SAR tests (same frequency, same test configuration) are regarded as extremely accurate as they are relative tests in which the tested device changes neither its frequency nor its position between tests. For different modes that operate in the same band and use the same antenna e.g. GSM/GPRS850 and WCDMA850, full SAR testing is carried out in the GSM/GPRS850 mode but WCDMA850 testing is limited to 3 channel testing in the maximum SAR test configuration for GSM/GPRS850.

Multi-slot SAR testing against the Head is always performed whenever such a device offers Push to Talk over cellular with the internal earpiece active, Dual Transfer Mode (i.e. the ability to transmit voice and data simultaneously using the same transmitter) or has WLAN (which enables a Voice over IP call to take place whilst the device can simultaneously transmit data on a cellular band). Whenever a device has an intended multi-slot use against the head, it is also Head SAR tested in EGPRS mode. It should be noted that EGPRS transmit modes can have either

GMSK or 8PSK modulation but, when tested, only 8PSK EGPRS will appear explicitly in the results tables, as GMSK EGPRS mode has identical time-averaged power to the reported GPRS mode.

Devices that have flips or slides are fully SAR tested in all device configurations consistent with their intended usage. For example, flip phones that can receive a call in closed mode are SAR tested against the head in both open and closed configurations. Similarly, slide phones are fully SAR tested in all slide configurations in which calls are intended to be made or received.

In the results tables in Section 7, the maximum SAR value for the ‘basic’ tests (i.e. left cheek, left tilt, right cheek and right tilt in Head SAR testing; with and without headset with the back &/or display side facing the flat phantom in Body SAR testing) is bolded for each band. In some cases, after full testing of the basic SAR test configurations has been completed, additional checking SAR tests are made. These checking tests are always based on the bolded result from the ‘basic’ testing. When the SAR value of a checking test exceeds the maximum value from the basic tests, it is also bolded and used as the basis for any further checking tests that might be needed.

Checking tests are largely voluntary and can cover optional batteries, different camera slide positions, optional covers, etc. In the case of optional batteries, if the construction of the optional battery is significantly different to the battery used in the full testing e.g. if the outer can is floating electrically rather than grounded, then the maximum SAR test configuration in each band is tested with the optional battery in 3 channels. For camera slides, if the slide material is metal, then checking tests in 3 channels are again run for the maximum SAR test configuration in each band. For plastic camera slides, SAR checking is only carried out in the channel that provided the maximum SAR value for the original. Optional front and back covers are tested if their shape differs significantly from the original or if their metallic content varies by more than 15% from the original; in the former case, the testing depends on the extent of the physical differences, whereas in the latter case, 3 channel SAR testing is performed in every band in the max SAR test configuration.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated DASY near-field scanning system manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration date	Calibration expiry
DAE 4	1324	2013-03	2014-03
DAE 4	1324	2012-02	2013-02
DAE 4	887	2012-03	2013-03
DAE 4	860	2012-10	2013-10
E-field Probe ES3DV3	3280	2013-03	2014-03
E-field Probe EX3DV4	3838	2012-02	2013-02
E-field Probe ES3DV3	3195	2012-03	2013-03
E-field Probe EX3DV4	3839	2012-10	2013-10
Dipole Validation Kit, D835V2	4d005	2012-03	2014-03
Dipole Validation Kit, D835V2	479	2011-03	2013-03
Dipole Validation Kit, D1900V2	547	2011-10	2013-10
Dipole Validation Kit, D2450V2	760	2013-03	2015-03
DASY4 software	Version 4.7	-	-
DASY5 software	Version 52.8	-	-

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration expiry
Signal Generator	E4432B	US40052231	2013-04	2014-04
Signal Generator	SME06	829445	2013-04	2014-04
Signal Generator	E4432B	US40052231	2012-04	2013-04
Signal Generator	SME06	829445	2012-04	2013-04
Call Tester	CMU200	835352/008	-	-
Call Tester	CMU200	110735	-	-
Amplifier	AR 5S1G4M1	306024	-	-
Amplifier	ZHL-4240W	e060204/1		
RF Network Analyzer	E5071C	MY46104578	2013-04	2014-04
RF Network Analyzer	8753ES	US39170317	2013-04	2014-04
RF Network Analyzer	8753ES	My40002096	2012-04	2013-04
Dielectric Probe Kit	DAK-3.5	1065	-	-
Dielectric Probe Kit	85070C	653	-	-
Dielectric Probe Kit	85070C	2577	-	-
Power Meter	Agilent E4419B	My41291520	2012-04	2013-04
Power Sensor	Agilent 8482A	US37295411	2012-04	2013-04
Power Meter	R&S NRP	101293	2012-04	2013-04
Power Sensor	R&S NRP-Z51	102842	2012-04	2013-04
Power Meter	Agilent E4419B	My41291520	2013-04	2014-04
Power Sensor	Agilent 8482A	US37295411	2013-04	2014-04
Power Meter	R&S NRP	101293	2013-04	2014-04
Power Sensor	R&S NRP-Z51	102842	2013-04	2014-04

4.1.1 Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to 4 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm
Application	Distance from probe tip to dipole centers: 2.0 mm General dosimetry up to 4 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.1.2 Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 10 mm Body diameter: 12 mm Tip diameter: 2.5 mm
Application	Distance from probe tip to dipole centers: 1.0 mm General dosimetry up to 6 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

The phantom used for all Body SAR tests i.e. for both system checks and device testing, was a "Triple Flat Phantom", also manufactured by SPEAG; this phantom conform to the requirements of FCC published RF exposure KDB procedures.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2003 and FCC published RF Exposure KDB Procedures. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was at least 15.0 cm measured from the ear reference point during system checking and device measurements.

4.3.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue simulant(s):

800MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	39.74	55.97
HEC	0.25	1.21
Sugar	58.31	41.76
Preservative	0.15	0.27
Salt	1.55	0.79

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.50	70.25
Tween 20	45.23	29.41
Salt	0.27	0.34

2450MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	56.0	70.20
Tween 20	44.0	29.62
Salt	-	0.18

4.4 System validation and System checking

4.4.1 System validation status

Probe Calibration Point f / MHz	Test System	DASY SW	Dipole Type / SN	Probe Type / SN	DAE unit Type / SN	Validation done	
						Head tissue simulant	Body tissue simulant
835	TCC Beijing / SAR-1	V4.7	D835V2 / 479	EX3DV4 / 3839	DAE4 / 860	2012-11	2012-11
835	TCC Beijing / SAR-3	V4.7	D835V2 / 4d005	EX3DV4 / 3838	DAE4 / 1324	2012-04	-
1900	TCC Beijing / SAR-1	V4.7	D1900V2 / 547	EX3DV4 / 3839	DAE4 / 860	2012-11	2012-11
2450	TCC Beijing / SAR-2	V52.8	D2450V2 / 760	ES3DV3 / 3280	DAE4 / 1324	2013-09	-
2450	TCC Beijing / SAR-3	V52.8	D2450V2 / 760	ES3DV3 / 3195	DAE4 / 887		2013-08

4.4.2 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

System checking, head tissue simulant

f [MHz]	Description	SAR 1g [W/kg]	Estimated SAR 1g [W/kg]	Estimated SAR 1g Deviation	Dielectric Parameters		SAR 1g Deviation from target	Dielectric Parameters Deviation from target		Temp [°C]	Plot #
				dSAR [%]	ϵ_r	σ [S/m]	dSAR [%]	d ϵ_r [%]	d σ [%]		
	Tolerances			±3%			±10 %	±5 %	±5 %		
835	IEEE1528 / IEC62209				41.5	0.90					
	Reference result SN:4d005	2.32	-		41.5	0.89	TCC Beijing/SAR-3 EX3DV4 SN:3838 Head835				
	2013-01-14	2.32			41.6	0.89	0.00	0.24	0.00	22.3	1
1900	IEEE1528 / IEC62209				40.0	1.40					
	Reference result SN:547	10.4	-		39.5	1.43	TCC Beijing/SAR-1 EX3DV4 SN:3839 Head1900				
	2013-01-30	10.3	-	-	39.2	1.46	-0.96	-0.76	2.10	22.1	2
2450	IEEE1528 / IEC62209				39.2	1.80					
	Reference result SN:760	13.7	-		37.8	1.85	TCC Bej/SAR-2 EX3DV3 SN:3280 Head 2450MHz				
	2013-10-12	12.7	-	-	38.3	1.81	-7.30	1.32	-2.16	22.5	3

System checking, body tissue simulant

f [MHz]	Description	SAR 1g [W/kg]	Estimated SAR 1g [W/kg]	Estimated SAR 1g Deviation	Dielectric Parameters		SAR 1g Deviation from target	Dielectric Parameters Deviation from target		Temp [°C]	Plot #
				dSAR [%]	ϵ_r	σ [S/m]	dSAR [%]	d ϵ_r [%]	d σ [%]		
	Tolerances			±3%			±10 %	±5 %	±5 %		
835	IEEE1528 / IEC62209				55.2	0.97					
	Reference result SN:479	2.52	-		54.3	0.99	TCC Bej/SAR-1 EX3DV3 SN:3839 Body 835MHz				
	2013-01-18	2.41	-	-	54.7	0.96	-4.37	0.74	-3.03	22.0	4
1900	IEEE1528 / IEC62209				54.2	1.59					
	Reference result SN:547	10.6	-		54.2	1.59	TCC Bej/SAR-1 EX3DV3 SN:3195 Body 1900MHz				
	2013-01-31	10.2	-	-	52.1	1.53	-3.77	-3.87	-3.77	22.0	5
2450	IEEE1528 / IEC62209				52.7	1.95					
	Reference result SN:760	12.8	-		50.7	2.01	TCC Bej/SAR-3 EX3DV3 SN:3195 Body 2450MHz				
	2013-10-16	13.1	-	-	51.0	1.99	2.34	0.59	-1.00	21.8	6
	2013-10-17	12.7	-	-	50.5	1.92	-0.78	-0.39	-4.48	22.1	-

Plots of the system checking scans are given in Appendix A.

4.5 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Dielectric Parameters Deviation from Standard target		Temp [°C]
		ϵ_r	σ [S/m]	d ϵ_r [%]	d σ [%]	
	Deviation of tolerances			±5 %	±5 %	
836	Recommended value	41.5	0.90			
	2013-01-14	41.6	0.89	0.24	-1.11	22.3
1880	Recommended value	40.0	1.40			
	2013-01-30	39.3	1.45	-1.75	3.57	22.1
2437	Recommended value	39.2	1.79			
	2013-10-12	38.2	1.79	-2.55	0.00	22.5

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Dielectric Parameters Deviation from Standard target		Temp [°C]
		ϵ_r	σ [S/m]	d ϵ_r [%]	d σ [%]	
	Deviation of tolerances			±5 %	±5 %	
836	Recommended value	55.2	0.97			
	2013-01-18	54.7	0.96	-0.91	-1.03	22.0
1880	Recommended value	53.3	1.52			
	2013-01-31	52.1	1.51	-2.25	-0.66	22.0
2437	Recommended value	52.7	1.94			
	2013-10-16	51.1	1.98	-3.04	2.06	21.8
	2013-10-17	50.6	1.90	-3.98	-2.06	22.1

Dielectric parameter data for the band edges is given in Appendix C.

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “Tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in Section 1.2.2 using a separate flat spacer that was removed before the start of the measurements. The device was oriented with both sides facing the phantom to find the highest results.

Nokia body-worn accessories are commonly available for the separation distance used in this testing.

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan, a minimum of 5x5x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	C_i	$C_i \cdot U_i$ (%)	V_i
Measurement System							
Probe Calibration	E2.1	± 6.55	N	1	1	± 6.55	∞
Axial Isotropy	E2.2	± 4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Hemispherical Isotropy	E2.2	± 9.6	R	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary Effect	E2.3	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Linearity	E2.4	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	E2.5	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	E2.6	± 1.0	N	1	1	± 1.0	∞
Response Time	E2.7	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	E2.8	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Conditions - Noise	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Conditions - Reflections	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	± 0.4	R	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	± 2.9	R	$\sqrt{3}$	1	± 1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5	± 3.9	R	$\sqrt{3}$	1	± 2.3	∞
Test sample Related							
Test Sample Positioning	E4.2	± 6.0	N	1	1	± 6.0	11
Device Holder Uncertainty	E4.1	± 5.0	N	1	1	± 5.0	7
Output Power Variation - SAR drift measurement	6.6.3	± 5.0	R	$\sqrt{3}$	1	± 2.9	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Conductivity Target - tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Conductivity - measurement uncertainty	E3.3	± 5.5	N	1	0.64	± 3.5	5
Permittivity Target - tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Permittivity - measurement uncertainty	E3.3	± 2.9	N	1	0.6	± 1.7	5
Combined Standard Uncertainty			RSS			± 13.5	116
Coverage Factor for 95%			k=2				
Expanded Uncertainty						± 27.1	

7. RESULTS

7.1 The measured Head SAR values for the test device

850MHz Head SAR results**

Mode	Device orientation	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
		Ch 128	Ch 190	Ch 251	Ch 128	Ch 190	Ch 251	
		824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz	
GSM	Tuning Target + Tolerance [dBm]	32.85			Scaling factor*			
	Conducted Slot Average Power [dBm]	32.90	33.00	32.95	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	23.87	23.97	23.92	1.12	1.12	1.12	Lin
	Left Cheek	-	0.373	-	-	0.418	-	-
	Left Tilt	-	-	-	-	-	-	-
	Right Cheek	-	-	-	-	-	-	-
	Right Tilt	-	-	-	-	-	-	-
2-slot GPRS	Tuning Target + Tolerance [dBm]	29.85			Scaling factor*			
	Conducted Slot Average Power [dBm]	29.90	29.90	29.95	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	23.88	23.88	23.93	1.12	1.12	1.12	Lin
	Left Cheek	-	0.433	-	-	0.485	-	-
	Left Tilt	-	-	-	-	-	-	-
	Right Cheek	-	-	-	-	-	-	-
	Right Tilt	-	-	-	-	-	-	-

(Table continues)

(Table continues)

3-slot GPRS	Tuning Target + Tolerance [dBm]	28.05			Scaling factor*			
	Conducted Slot Average Power [dBm]	28.05	28.10	28.11	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	23.79	23.84	23.85	1.12	1.12	1.12	Lin
	Left Cheek	0.500	0.521	0.542	0.560	0.584	0.607	1
	Left Tilt	-	0.290	-	-	0.325	-	-
	Right Cheek	-	0.519	-	-	0.581	-	-
	Right Tilt	-	0.281	-	-	0.315	-	-
4-slot GPRS	Tuning Target + Tolerance [dBm]	26.85			Scaling factor*			
	Conducted Slot Average Power [dBm]	26.90	26.95	26.90	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	23.89	23.94	23.89	1.12	1.12	1.12	Lin
	Left Cheek	-	0.515	-	-	0.577	-	-
	Left Tilt	-	-	-	-	-	-	-
	Right Cheek	-	-	-	-	-	-	-
	Right Tilt	-	-	-	-	-	-	-
3-slot 8PSK EGPRS	Tuning Target + Tolerance [dBm]	26.35			Scaling factor*			
	Conducted Slot Average Power [dBm]	26.45	26.45	26.40	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	22.19	22.19	22.14	1.12	1.12	1.12	Lin
	Left Cheek	-	-	0.376	-	-	0.421	-
	Left Tilt	-	-	-	-	-	-	-
	Right Cheek	-	-	-	-	-	-	-
	Right Tilt	-	-	-	-	-	-	-

1900MHz Head SAR results**

Mode	Device orientation	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
		Ch 512	Ch 661	Ch 810	Ch 512	Ch 661	Ch 810	
		1850.2 MHz	1880.0 MHz	1909.8 MHz	1850.2 MHz	1880.0 MHz	1909.8 MHz	
GSM	Tuning Target + Tolerance [dBm]	30.85			Scaling factor*			
	Conducted Slot Average Power [dBm]	30.90	30.92	30.95	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	21.87	21.89	21.92	1.12	1.12	1.12	Lin
	Left Cheek	-	0.352	-	-	0.394	-	-
	Left Tilt	-	-	-	-	-	-	-
	Right Cheek	-	-	-	-	-	-	-
	Right Tilt	-	-	-	-	-	-	-
2-slot GPRS	Tuning Target + Tolerance [dBm]	28.35			Scaling factor*			
	Conducted Slot Average Power [dBm]	28.40	28.50	28.35	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	22.38	22.48	22.33	1.12	1.12	1.12	Lin
	Left Cheek	-	0.345	-	-	0.386	-	-
	Left Tilt	-	-	-	-	-	-	-
	Right Cheek	-	-	-	-	-	-	-
	Right Tilt	-	-	-	-	-	-	-
3-slot GPRS	Tuning Target + Tolerance [dBm]	26.85			Scaling factor*			
	Conducted Slot Average Power [dBm]	26.85	26.85	26.85	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	22.59	22.59	22.59	1.12	1.12	1.12	Lin
	Left Cheek	-	0.397	-	-	0.445	-	-
	Left Tilt	-	0.286	-	-	0.320	-	-
	Right Cheek	0.531	0.632	0.644	0.594	0.708	0.721	2
	Right Tilt	-	0.249	-	-	0.279	-	-

(Table continues)

(Table continues)

4-slot GPRS	Tuning Target + Tolerance [dBm]	25.35			Scaling factor*			
	Conducted Slot Average Power [dBm]	25.35	25.35	25.35	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	22.34	22.34	22.34	1.12	1.12	1.12	Lin
	Left Cheek	-	0.386	-	-	0.432	-	-
	Left Tilt	-	-	-	-	-	-	-
	Right Cheek	-	-	-	-	-	-	-
	Right Tilt	-	-	-	-	-	-	-
3-slot 8PSK EGPRS	Tuning Target + Tolerance [dBm]	25.35			Scaling factor*			
	Conducted Slot Average Power [dBm]	26.35	26.35	26.36	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	22.09	22.09	22.10	1.12	1.12	1.12	Lin
	Left Cheek	-	-	-	-	-	-	-
	Left Tilt	-	-	-	-	-	-	-
	Right Cheek	-	-	0.509	-	-	0.570	-
	Right Tilt	-	-	-	-	-	-	-

2450MHz Head SAR results

Mode	Device orientation	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
		Ch 1	Ch 6	Ch 11	Ch 1	Ch 6	Ch 11	
		2412.0 MHz	2437.0 MHz	2462.0 MHz	2412.0 MHz	2437.0 MHz	2462.0 MHz	
WLAN b-mode 1Mbps	Tuning Target + Tolerance [dBm]	14.50			Scaling factor*			
	Conducted Power [dBm]	13.30	13.30	13.20	1.20	1.20	1.30	dB
	Time-averaged power [dBm]	13.30	13.30	13.20	1.32	1.32	1.35	Lin
	Left Cheek	0.466	0.489	0.481	0.614	0.645	0.649	3
	Left Tilt	-	0.358	-	-	0.472	-	-
	Right Cheek	-	0.336	-	-	0.443	-	-
	Right Tilt	-	0.279	-	-	0.368	-	-

Values in following combined SAR tables are reported SAR values.

Simultaneous transmissions: Combined head SAR results – Individual band Max results

Test configuration	Max. 1g SAR results		
	WLAN	3-slot GPRS850**	3-slot GPRS1900**
Head: Left, Cheek	0.649	0.607	0.445
Head: Left, Tilt	0.472	0.325	0.320
Head: Right, Cheek	0.443	0.581	0.721
Head: Right, Tilt	0.368	0.315	0.279

Simultaneous transmissions: Combined head SAR results – Max + Max combined results

Test configuration	Max. 1g SAR results	
	3-slot GPRS850 + WLAN	3-slot GPRS1900 + WLAN
Head: Left, Cheek	1.256	1.094
Head: Left, Tilt	0.797	0.792
Head: Right, Cheek	1.024	1.164
Head: Right, Tilt	0.683	0.647

7.1.1 Area scan based combined Head SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values. It is these values that appear in the Summary table in Section 1.2.

**Simultaneous transmissions: Combined head SAR results –
SPEAG Combined Multiband algorithm results**

Test configuration	Max. 1g SAR results	
	3-slot GPRS850 + WLAN	3-slot GPRS1900 + WLAN
Head: Left, Cheek	0.748	-
Head: Left, Tilt	-	-
Head: Right, Cheek	-	0.731
Head: Right, Tilt	-	-

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product. The Combined SAR data given in the tables above has been voluntarily calculated.

Note:

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance. As a consequence of this upward drift correction, the contribution of measurement drift to the overall measurement uncertainty (Section 6) is reduced to zero.

Highest result within individual zoom scan or individual expanded zoom scan results is given in Section 1.2 for each transmitter. Highest result within contributing individual zoom scan, individual expanded zoom scan, Speag combined algorithm or combined expanded zoom scan results are given in Section for each simultaneous transmitter combination.

Plots of the Measurement scans are given in Appendix B.

7.2 The measured Body SAR values for the test device

850MHz Body SAR results**

Mode	Device orientation		Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
			Ch 128	Ch 190	Ch 251	Ch 128	Ch 190	Ch 251	
			824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz	
3-slot GPRS	Tuning Target + Tolerance [dBm]		28.05			Scaling factor*			
	Conducted Slot Average Power [dBm]		28.05	28.10	28.11	0.50	0.50	0.50	dB
	Time-averaged power [dBm]		23.79	23.84	23.85	1.12	1.12	1.12	Lin
	Back facing phantom	Without headset	0.598	0.572	0.571	0.670	0.641	0.640	6
		Headset WH-108	-	0.471	-	-	0.528	-	-
	Display facing phantom	Without headset	-	0.453	-	-	0.507	-	-
		Headset WH-108	-	0.353	-	-	0.395	-	-

1900MHz Body SAR results**

Mode	Device orientation		Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
			Ch 512	Ch 661	Ch 810	Ch 512	Ch 661	Ch 810	
			1850.2 MHz	1880.0 MHz	1909.8 MHz	1850.2 MHz	1880.0 MHz	1909.8 MHz	
3-slot GPRS	Tuning Target + Tolerance [dBm]		26.85			Scaling factor*			
	Conducted Slot Average Power [dBm]		26.85	26.85	26.85	0.50	0.50	0.50	dB
	Time-averaged power [dBm]		22.59	22.59	22.59	1.12	1.12	1.12	Lin
	Back facing phantom	Without headset	-	0.351	-	-	0.393	-	-
		Headset WH-108	-	0.316	-	-	0.354	-	-
	Display facing phantom	Without headset	0.354	0.363	0.338	0.396	0.407	0.379	7
		Headset WH-108	-	0.351	-	-	0.393	-	-

2450MHz Body SAR results

Mode	Device orientation		Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
			Ch 1	Ch 6	Ch 11	Ch 1	Ch 6	Ch 11	
			2412.0 MHz	2437.0 MHz	2462.0 MHz	2412.0 MHz	2437.0 MHz	2462.0 MHz	
WLAN b-mode 1Mbps	Tuning Target + Tolerance [dBm]		14.50			Scaling factor*			
	Conducted Power [dBm]		13.30	13.30	13.20	1.20	1.20	1.30	dB
	Time-averaged power [dBm]		13.30	13.30	13.20	1.32	1.32	1.35	Lin
	Back facing phantom	Without headset		0.049			0.064		-
		Headset WH-108		0.052			0.068		-
	Display facing phantom	Without headset	0.066	0.068	0.057	0.086	0.090	0.076	8
		Headset WH-108		0.054			0.071		-

Values in following combined SAR tables are reported SAR values.

Simultaneous transmissions: Combined body SAR results – Individual band Max results

Test configuration	Max. 1g SAR results		
	WLAN	3-slot GPRS850**	3-slot GPRS1900**
Body: Back facing phantom, Without Headset	0.064	0.670	0.393
Body: Back facing phantom, Headset WH-108	0.068	0.528	0.354
Body: Display facing phantom, Without Headset	0.090	0.507	0.407
Body: Display facing phantom, Headset WH-108	0.071	0.395	0.393

**Simultaneous transmissions: Combined body SAR results –
Max + Max combined results**

Test configuration	Max. 1g SAR results	
	3-slot GPRS850 + WLAN	3-slot GPRS1900 + WLAN
Body: Back facing phantom, Without Headset	0.734	0.457
Body: Back facing phantom, Headset WH-108	0.596	0.422
Body: Display facing phantom, Without Headset	0.597	0.497
Body: Display facing phantom, Headset WH-108	0.466	0.464

7.2.1 Area scan based combined Body SAR data

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values. It is these values that appear in the Summary table in Section 1.2.

**Simultaneous transmissions: Combined body SAR results –
SPEAG Combined Multiband algorithm results**

Test configuration	Max. 1g SAR results	
	3-slot GPRS850 + WLAN	3-slot GPRS1900 + WLAN
Body: Back facing phantom, Without Headset	0.699	-
Body: Back facing phantom, Headset WH-108	-	-
Body: Display facing phantom, Without Headset	-	0.436
Body: Display facing phantom, Headset WH-108	-	-

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product. The Combined SAR data given in the tables above has been voluntarily calculated.

Note:

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance. As a consequence of this upward drift correction, the contribution of measurement drift to the overall measurement uncertainty (Section 6) is reduced to zero.

Highest result within individual zoom scan or individual expanded zoom scan results is given in Section 1.2 for each transmitter. Highest result within contributing individual zoom scan, individual expanded zoom scan, Speag combined algorithm or combined expanded zoom scan results are given in Section for each simultaneous transmitter combination.

Plots of the Measurement scans are given in Appendix B.

7.3 Body SAR assessment of Wireless Router mode at 10.0mm separation distance

850MHz Body SAR results**

Mode	Device orientation	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
		Ch 128	Ch 190	Ch 251	Ch 128	Ch 190	Ch 251	
		824.2 MHz	836.6 MHz	848.8 MHz	824.2 MHz	836.6 MHz	848.8 MHz	
3-slot GPRS	Tuning Target + Tolerance [dBm]	28.05			Scaling factor*			
	Conducted Slot Average Power [dBm]	28.05	28.10	28.11	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	23.79	23.84	23.85	1.12	1.12	1.12	Lin
	Back facing phantom	0.746	0.749	0.736	0.836	0.839	0.824	11
	Display facing phantom	-	0.599	-	-	0.671	-	-
	Top edge facing phantom	-	0.016	-	-	0.018	-	-
	Bottom edge facing phantom	-	0.042	-	-	0.047	-	-
	Left edge facing phantom	-	0.385	-	-	0.431	-	-
	Right edge facing phantom	-	0.404	-	-	0.452	-	-

1900MHz Body SAR results**

Mode	Device orientation	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
		Ch 512	Ch 661	Ch 810	Ch 512	Ch 661	Ch 810	
		1850.2 MHz	1880.0 MHz	1909.8 MHz	1850.2 MHz	1880.0 MHz	1909.8 MHz	
3-slot GPRS	Tuning Target + Tolerance [dBm]	26.85			Scaling factor*			
	Conducted Slot Average Power [dBm]	26.85	26.85	26.85	0.50	0.50	0.50	dB
	Time-averaged power [dBm]	22.59	22.59	22.59	1.12	1.12	1.12	Lin
	Back facing phantom	-	0.610	-	-	0.683	-	-
	Display facing phantom	-	0.626	-	-	0.701	-	-
	Top edge facing phantom	-	0.033	-	-	0.037	-	-
	Bottom edge facing phantom	0.455	0.662	1.08	0.510	0.741	1.21	12
	Left edge facing phantom	-	0.161	-	-	0.180	-	-
	Right edge facing phantom	-	0.175	-	-	0.196	-	-
	Repeated SAR: Bottom edge facing phantom	-	-	1.08	-	-	1.21	-

2450MHz Body SAR results

Mode	Device orientation	Measured 1g SAR [W/kg]			Reported* 1g SAR [W/kg]			Plot #
		Ch 1	Ch 6	Ch 11	Ch 1	Ch 6	Ch 11	
		2412.0 MHz	2437.0 MHz	2462.0 MHz	2412.0 MHz	2437.0 MHz	2462.0 MHz	
WLAN b-mode 1Mbps	Tuning Target + Tolerance [dBm]	14.50			Scaling factor*			
	Conducted Power [dBm]	13.30	13.30	13.20	1.20	1.20	1.30	dB
	Time-averaged power [dBm]	13.30	13.30	13.20	1.32	1.32	1.35	Lin
	Back facing phantom		0.054			0.071		-
	Display facing phantom	0.057	0.071	0.063	0.075	0.094	0.084	13
	Top edge facing phantom		0.040			0.053		-
	Bottom edge facing phantom		0.007			0.009		-
	Left edge facing phantom		0.032			0.042		-
	Right edge facing phantom		0.040			0.053		-

Simultaneous transmissions: Combined SAR results – Individual band Max results

Test configuration	Max. 1g SAR results		
	WLAN	3-slot GPRS850**	3-slot GPRS1900**
Back facing phantom	0.071	0.839	0.683
Display facing phantom	0.094	0.671	0.701
Top edge facing phantom	0.053	0.018	0.037
Bottom edge facing phantom	0.009	0.047	1.21
Left edge facing phantom	0.042	0.431	0.180
Right edge facing phantom	0.053	0.452	0.196

**SAR data taken from FCC_RM-914_03.

**Simultaneous transmissions: Combined SAR results –
Max + Max combined results**

Test configuration	Max. 1g SAR results	
	3-slot GPRS850 + WLAN	3-slot GPRS1900 + WLAN
Back facing phantom	0.910	0.754
Display facing phantom	0.765	0.795
Top edge facing phantom	0.071	0.09
Bottom edge facing phantom	0.056	1.219
Left edge facing phantom	0.473	0.222
Right edge facing phantom	0.505	0.249

7.3.1 Area scan based combined Body SAR data of Wireless Router mode

The Combined SAR data given in the tables below has been voluntarily calculated and should be ignored for FCC certification.

The following table gives a more accurate assessment of the SAR values for simultaneous transmission. These values have been calculated using the SPEAG Combined Multiband algorithm, which is based on area scans. It a) converts the 2D area scans into 3D volume scans by assuming frequency-dependent decay characteristics for the E-field, b) sums the SAR values for WLAN2450 and the cellular bands point-by-point and c) calculates the combined average SAR values. It is these values that appear in the Summary table in Section 1.2.

**Simultaneous transmissions: Combined SAR results –
SPEAG Combined Multiband algorithm results**

Test configuration	Max. 1g SAR results	
	3-slot GPRS850 + WLAN	3-slot GPRS1900 + WLAN
Back facing phantom	0.866	-
Display facing phantom	-	-
Top edge facing phantom	-	-
Bottom edge facing phantom	-	1.23
Left edge facing phantom	-	-
Right edge facing phantom	-	-

Note: Simultaneous Transmission Procedures as described in KDB648474 are not required for this product. The Combined SAR data given in the tables above has been voluntarily calculated.

Note:

* Reported SAR values are scaled to, or measured at, upper limit of power tuning tolerance. As a consequence of this upward drift correction, the contribution of measurement drift to the overall measurement uncertainty (Section 6) is reduced to zero.

Highest result within individual zoom scan or individual expanded zoom scan results is given in Section 1.2 for each transmitter. Highest result within contributing individual zoom scan, individual expanded zoom scan, Speag combined algorithm or combined expanded zoom scan results are given in Section for each simultaneous transmitter combination.

Plots of the Measurement scans are given in Appendix B.

APPENDIX A: SYSTEM CHECKING SCANS

Date/Time: 2013-01-14 09:44:02

Test Laboratory: TCC Nokia
Type: D835V2; Serial: 4d005

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 835 SAM10; Medium Notes: Medium Temperature: $t = 22.3\text{ C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.889\text{ mho/m}$; $\epsilon_r = 41.635$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3838
- ConvF(8.67, 8.67, 8.67); Calibrated: 2012-02-20;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2012-02-15
- Phantom: SAM10; Type: SAM; Serial: TP - 1410
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 2.53 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.657 V/m


Peak SAR (extrapolated) = 3.473 mW/g

SAR(1 g) = 2.32 mW/g

SAR(10 g) = 1.52 mW/g

Power Drift = -0.09 dB

Maximum value of SAR (measured) = 2.50 mW/g

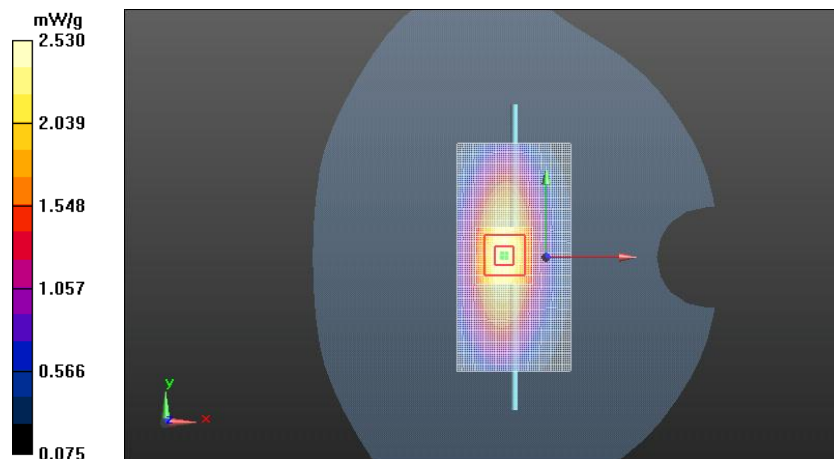

Date/Time: 2013-01-30 09:50:04

Test Laboratory: TCC Nokia

Type: D1900V2; Serial: 547

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900; Medium Notes: Medium Temperature: t=22.1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.464$ mho/m; $\epsilon_r = 39.215$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3839
- ConvF(7.38, 7.38, 7.38); Calibrated: 2012-10-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn860; Calibrated: 2012-10-17
- Phantom: SAM4; Type: SAM; Serial: TP - 1427
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.401 V/m


Peak SAR (extrapolated) = 19.418 mW/g

SAR(1 g) = 10.3 mW/g

SAR(10 g) = 5.29 mW/g

Power Drift = -0.08 dB

Maximum value of SAR (measured) = 11.5 mW/g

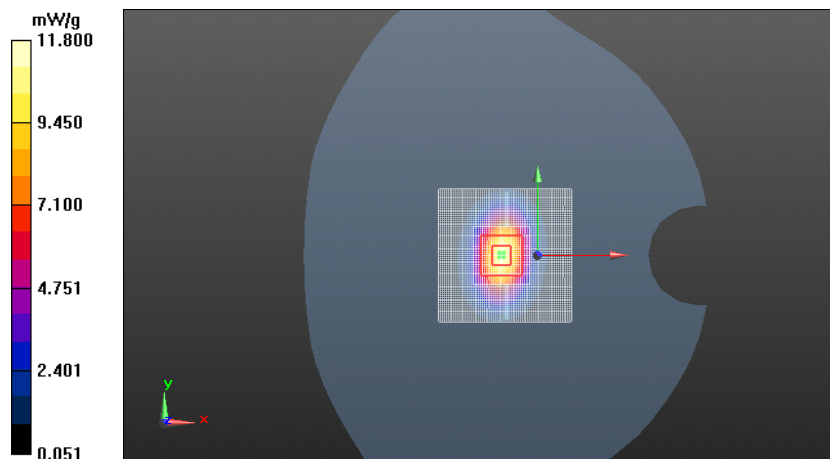

Date/Time: 2013-10-12 9:50:37

Test Laboratory: TCC Nokia

Type: D2450V2; Serial: D2450V2 - SN:760

Communication System: CW2450

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Head 2450 SAR2; Medium Notes: Medium Temperature: t=22.5C

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 38.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3280
- ConvF(4.57, 4.57, 4.57); Calibrated: 2013-03-08;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2013-03-06
- Phantom: SAR2 - SAM2; Type: Not Specified; Serial: Not Specified
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

d=10mm, Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.7 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.006 V/m


Peak SAR (extrapolated) = 26.1 W/kg

SAR(1 g) = 12.7 W/kg

SAR(10 g) = 5.92 W/kg

Power Drift = -0.01 dB

Maximum value of SAR (measured) = 14.4 W/kg

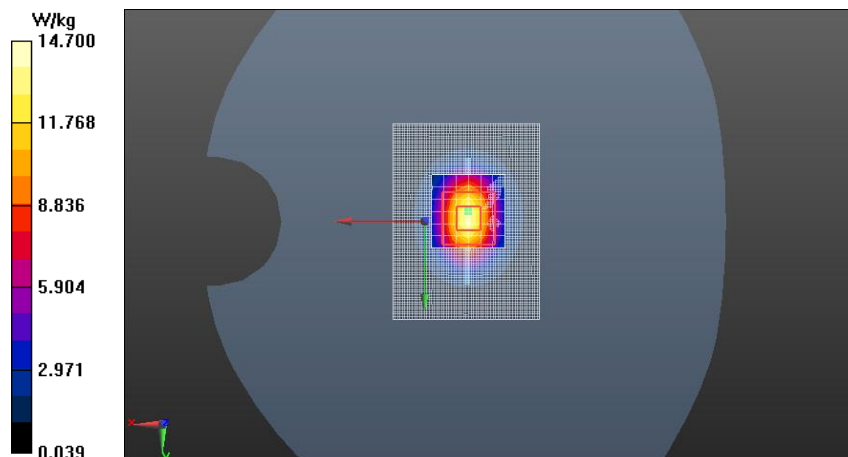

Date/Time: 2013-01-18 09:52:36

Test Laboratory: TCC Nokia

Type: D835V2; Serial: 479

Communication System: CW835

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Body 835; Medium Notes: Medium Temperature: $t = 22.0\text{ C}$

Medium parameters used: $f = 835\text{ MHz}$; $\sigma = 0.958\text{ mho/m}$; $\epsilon_r = 54.745$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3839
- ConvF(8.97, 8.97, 8.97); Calibrated: 2012-10-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn860; Calibrated: 2012-10-17
- Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

d=15mm, Pin=250mW/Area Scan (121x61x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 2.62 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.361 V/m


Peak SAR (extrapolated) = 3.570 mW/g

SAR(1 g) = 2.41 mW/g

SAR(10 g) = 1.6 mW/g

Power Drift = -0.05 dB

Maximum value of SAR (measured) = 2.62 mW/g

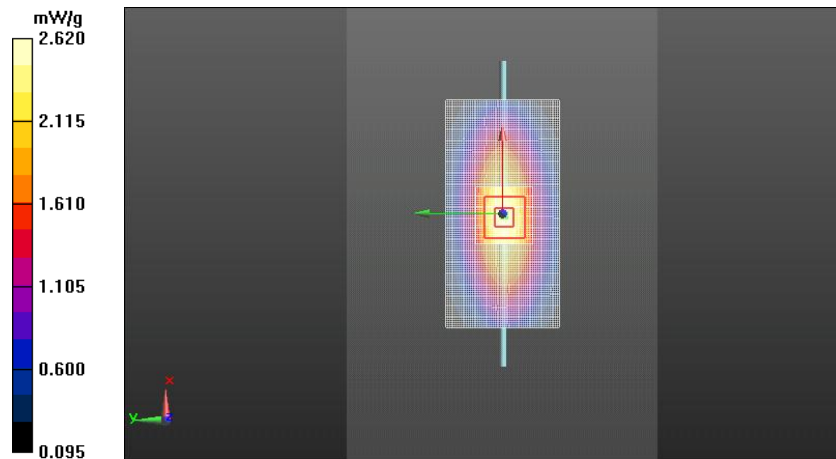

Date/Time: 2013-01-31 09:48:16

Test Laboratory: TCC Nokia
Type: D1900V2; Serial: 547

Communication System: CW1900

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Body 1900; Medium Notes: Medium Temperature: t=22.0

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.069$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3839
- ConvF(7.03, 7.03, 7.03); Calibrated: 2012-10-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn860; Calibrated: 2012-10-17
- Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.7 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.728 V/m


Peak SAR (extrapolated) = 18.452 mW/g

SAR(1 g) = 10.2 mW/g

SAR(10 g) = 5.33 mW/g

Power Drift = -0.01 dB

Maximum value of SAR (measured) = 11.5 mW/g

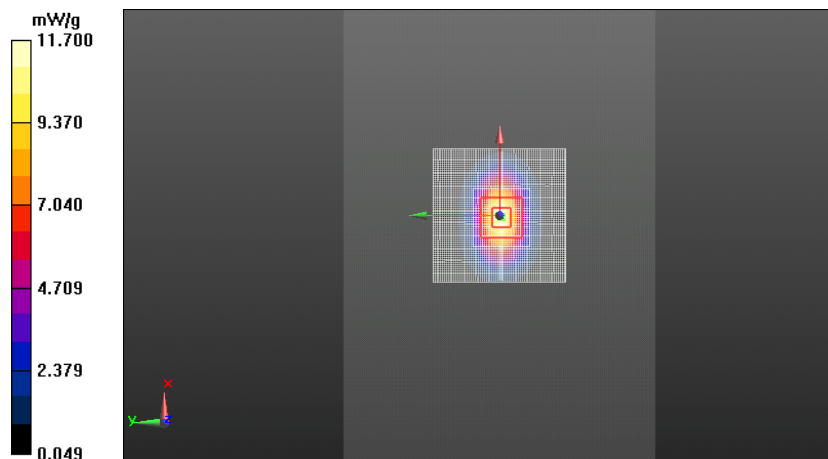

Date/Time: 2013-10-16 17:28:14

Test Laboratory: TCC Nokia

Type: D2450V2; Serial: D2450V2 - SN:760

Communication System: CW2450

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Body 2450 SAR3; Medium Notes: Medium Temperature: t=21.8C

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 51.045$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3195
- ConvF(4.31, 4.31, 4.31); Calibrated: 2013-03-08;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn887; Calibrated: 2013-03-07
- Phantom: SAR3 - TFP; Type: Not Specified; Serial: Not Specified
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.8 (7028)

d=10mm, Pin=250mW/Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.3 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 86.918 V/m

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.1 W/kg

Maximum value of SAR (measured) = 14.9 W/kg

Power Drift = 0.02 dB

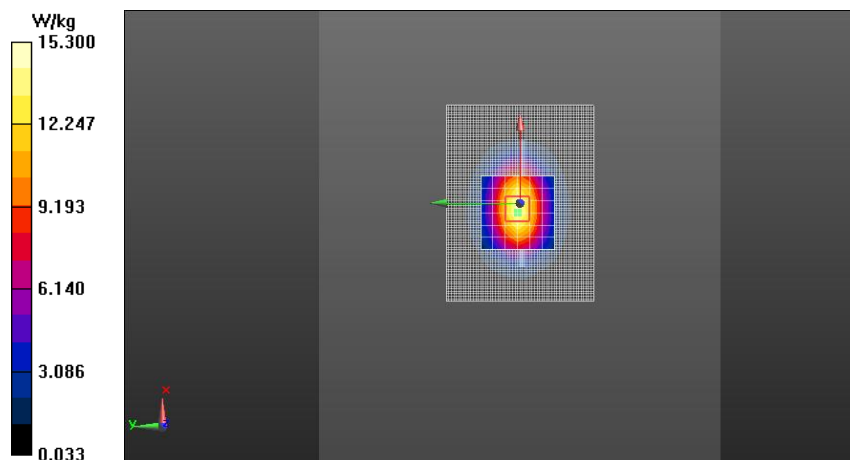

APPENDIX B: MAXIMUM MEASUREMENT PLOTS

Plot 1

Date/Time: 2013-01-14 12:55:36

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS850

Frequency: 848.8 MHz; Duty Cycle: 1:2.8

Medium: Head 835 SAM10; Medium Notes: Medium Temperature: $t = 22.3$ C

Medium parameters used: $f = 849$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 41.583$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3838
- ConvF(8.67, 8.67, 8.67); Calibrated: 2012-02-20;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2012-02-15
- Phantom: SAM10; Type: SAM; Serial: TP - 1410
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

3-slot GPRS850 – Left/Cheek - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.594 mW/g

3-slot GPRS850 – Left/Cheek - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.744 V/m


Peak SAR (extrapolated) = 0.661 mW/g

SAR(1 g) = 0.542 mW/g

SAR(10 g) = 0.407 mW/g

Power Drift = -0.03 dB

Maximum value of SAR (measured) = 0.568 mW/g

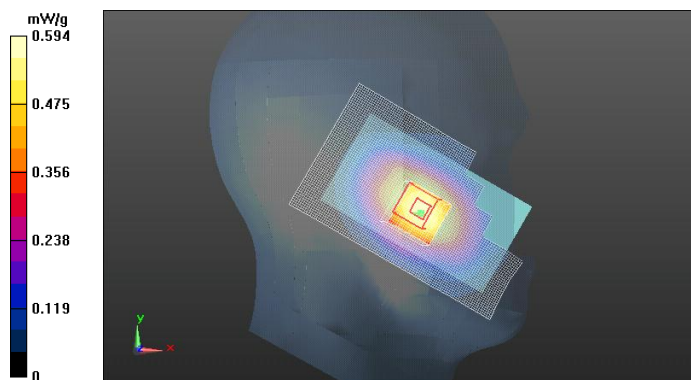

Plot 2

Date/Time: 2013-01-30 12:54:20

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS1900

Frequency: 1909.8 MHz; Duty Cycle: 1:2.8

Medium: Head 1900; Medium Notes: Medium Temperature: t=22.1

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 39.152$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3839
- ConvF(7.38, 7.38, 7.38); Calibrated: 2012-10-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn860; Calibrated: 2012-10-17
- Phantom: SAM4; Type: SAM; Serial: TP - 1427
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

3-slot GPRS1900 – Right/Cheek - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.678 mW/g

3-slot GPRS1900 – Right/Cheek - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.648 V/m


Peak SAR (extrapolated) = 1.037 mW/g

SAR(1 g) = 0.644 mW/g

SAR(10 g) = 0.383 mW/g

Power Drift = 0.14 dB

Maximum value of SAR (measured) = 0.698 mW/g

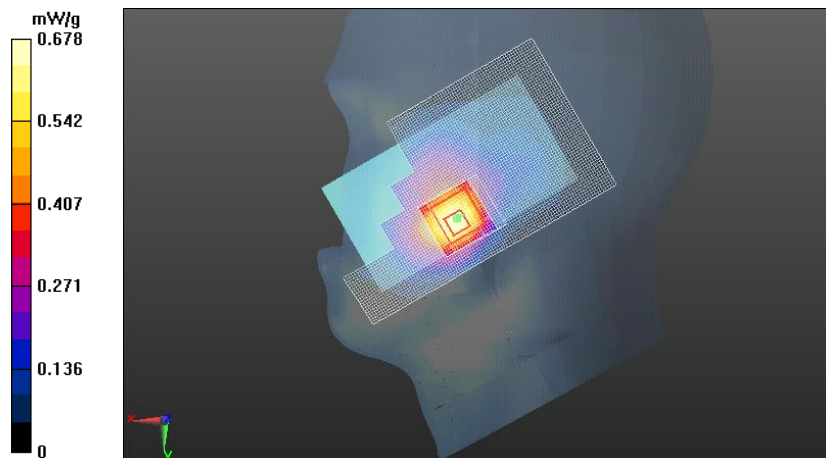

Plot 3

Date/Time: 2013-10-12 16:07:39

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: Head 2450 SAR2; Medium Notes: Medium Temperature: t=22.5C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3280
- ConvF(4.57, 4.57, 4.57); Calibrated: 2013-03-08;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2013-03-06
- Phantom: SAR2 - SAM2; Type: Not Specified; Serial: Not Specified
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

WLAN2450 b-mode - Left/Cheek - Channel 11 - BPSK 1 Mbps/Area Scan (91x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.595 W/kg

WLAN2450 b-mode - Left/Cheek - Channel 11 - BPSK 1 Mbps/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.823 V/m


Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.481 W/kg

SAR(10 g) = 0.233 W/kg

Power Drift = -0.10 dB

Maximum value of SAR (measured) = 0.539 W/kg

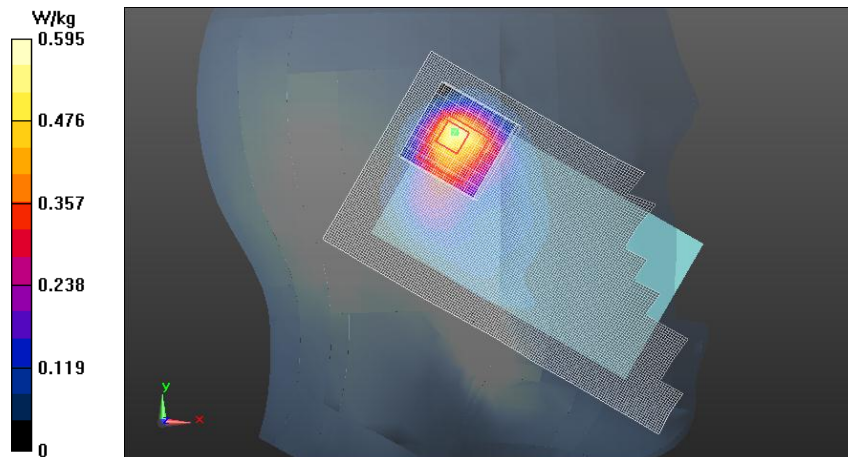

Plot 4

Date/Time: 2013-01-14 12:55:36

DASY Configuration for 3-slot GPRS850 – Left/Cheek - High/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:2.8; PMF: 1.67332

Medium: Head 835 SAM10 Medium parameters used: $f = 849$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 41.583$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Probe: EX3DV4 - SN3838; ConvF(8.67, 8.67, 8.67); Calibrated: 2012-02-20;
Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE4 Sn1324; Calibrated: 2012-02-15
Phantom: SAM10; Type: SAM; Serial: TP - 1410
Measurement SW: DASY4, Version 4.7 (80)

Date/Time: 2013-10-12 16:07:39

DASY Configuration for WLAN2450 b-mode - Left/Cheek - Channel 11 - BPSK 1 Mbps/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode; Frequency: 2462 MHz; Duty Cycle: 1:1; PMF: 1


Medium: Head 2450 SAR2 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Probe: ES3DV3 - SN3280; ConvF(4.57, 4.57, 4.57); Calibrated: 2013-03-08;
Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE4 Sn1324; Calibrated: 2013-03-06
Phantom: SAR2 - SAM2; Type: Not Specified; Serial: Not Specified
Measurement SW: DASY52, Version 52.8 (5)

Fast SAR of Combined Scans: SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.480 W/kg

Maximum value of SAR (interpolated) = 0.841 W/kg

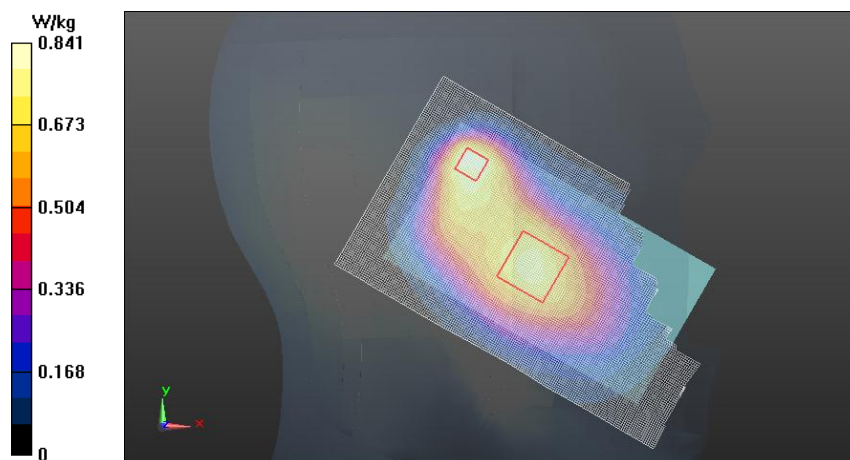

Note: 3-slot GPRS850 result was scaled by a factor of 1.12, WLAN result was scaled by a factor of 1.35 before combining.

Plot 5

Date/Time: 2013-01-30 12:54:20

DASY Configuration for 3-slot GPRS1900 – Right/ Cheek - High/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.8; PMF: 1.67332

Medium: Head 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.473$ S/m; $\epsilon_r = 39.152$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Probe: EX3DV4 - SN3839; ConvF(7.38, 7.38, 7.38); Calibrated: 2012-10-25;
Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE4 Sn860; Calibrated: 2012-10-17
Phantom: SAM4; Type: SAM; Serial: TP - 1427
Measurement SW: DASY4, Version 4.7 (80)

Date/Time: 2013-10-12 14:43:00

DASY Configuration for WLAN2450 b-mode - Right/Cheek - Channel 6 - BPSK 1 Mbps/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode; Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1


Medium: Head 2450 SAR2 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.793$ S/m; $\epsilon_r = 38.324$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Probe: ES3DV3 - SN3280; ConvF(4.57, 4.57, 4.57); Calibrated: 2013-03-08;
Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE4 Sn1324; Calibrated: 2013-03-06
Phantom: SAR2 - SAM2; Type: Not Specified; Serial: Not Specified
Measurement SW: DASY52, Version 52.8 (5)

Fast SAR of Combined Scans: SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (interpolated) = 0.803 W/kg

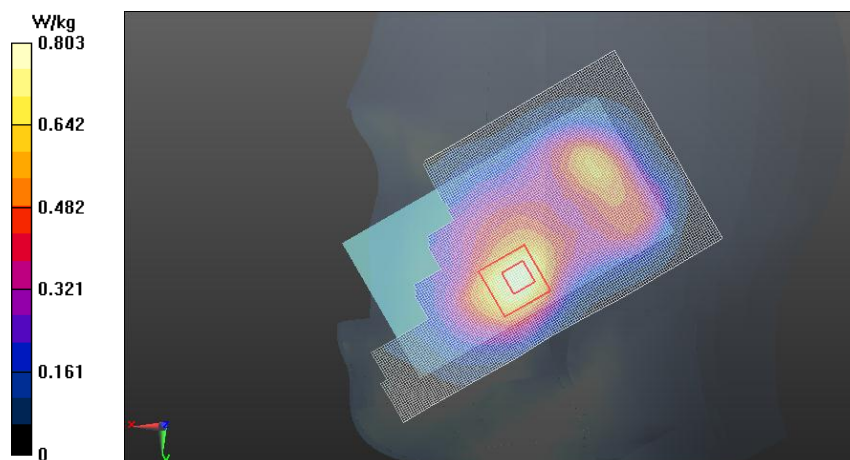

Note: 3-slot GPRS1900 result was scaled by a factor of 1.12, WLAN result was scaled by a factor of 1.32 before combining.

Plot 6

Date/Time: 2013-01-18 13:49:00

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS850

Frequency: 824.2 MHz; Duty Cycle: 1:2.8

Medium: Body 835; Medium Notes: Medium Temperature: $t = 22.0$ C

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 54.821$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3839
- ConvF(8.97, 8.97, 8.97); Calibrated: 2012-10-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn860; Calibrated: 2012-10-17
- Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

3-slot GPRS850/Body - Low - No Headset - Back Facing Phantom/Area Scan (101x61x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.636 mW/g

3-slot GPRS850/Body - Low - No Headset - Back Facing Phantom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 9.495 V/m


Peak SAR (extrapolated) = 0.757 mW/g

SAR(1 g) = 0.598 mW/g

SAR(10 g) = 0.449 mW/g

Power Drift = 0.06 dB

Maximum value of SAR (measured) = 0.629 mW/g

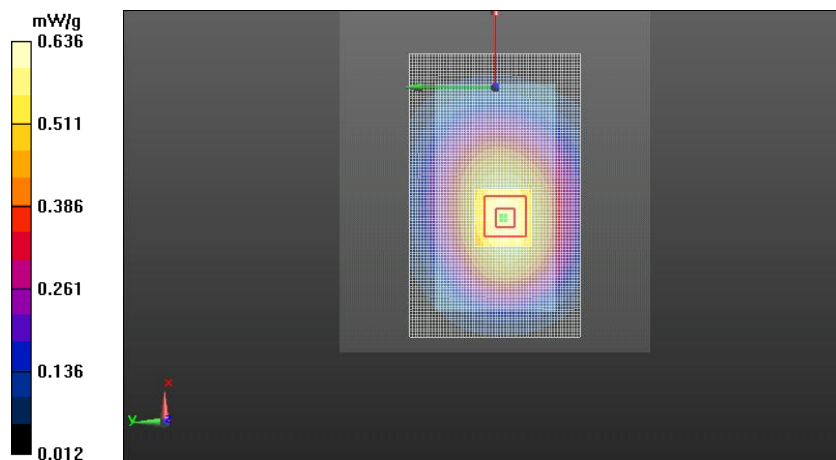

Plot 7

Date/Time: 2013-01-31 11:24:40

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS1900

Frequency: 1880 MHz; Duty Cycle: 1:2.8

Medium: Body 1900; Medium Notes: Medium Temperature: t=22.0

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.511$ mho/m; $\epsilon_r = 52.099$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3839
- ConvF(7.03, 7.03, 7.03); Calibrated: 2012-10-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn860; Calibrated: 2012-10-17
- Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

3-slot GPRS1900/Body - Middle - No Headset - Display Facing Phantom/Area Scan (101x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.388 mW/g

3-slot GPRS1900/Body - Middle - No Headset - Display Facing Phantom/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.408 V/m


Peak SAR (extrapolated) = 0.559 mW/g

SAR(1 g) = 0.363 mW/g

SAR(10 g) = 0.229 mW/g

Power Drift = 0.09 dB

Maximum value of SAR (measured) = 0.389 mW/g

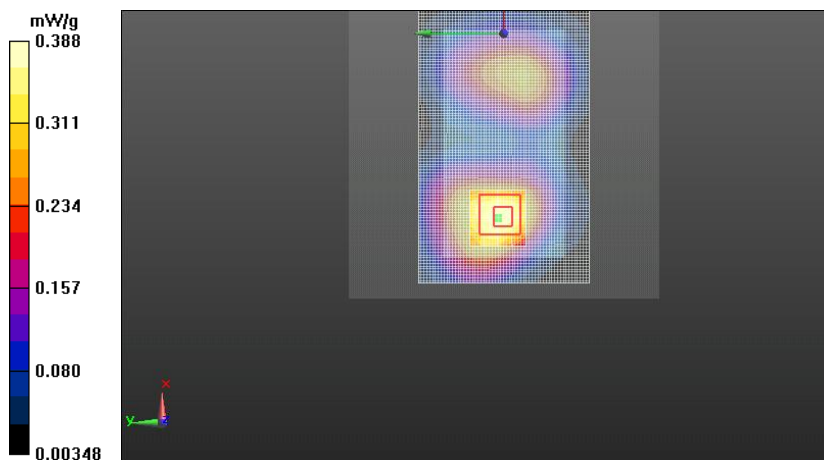

Plot 8

Date/Time: 2013-10-16 21:57:33

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Body 2450 SAR3; Medium Notes: Medium Temperature: t=21.8C

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.065$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3195
- ConvF(4.31, 4.31, 4.31); Calibrated: 2013-03-08;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn887; Calibrated: 2013-03-07
- Phantom: SAR3 - TFP; Type: Not Specified; Serial: Not Specified
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.8 (7028)

WLAN2450 b-mode/Body - Channel 6 - BPSK 1 Mbps - Spacer 15mm - No Headset - Display Facing

Phantom/Area Scan (161x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0717 W/kg

WLAN2450 b-mode/Body - Channel 6 - BPSK 1 Mbps - Spacer 15mm - No Headset - Display Facing

Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.418 V/m

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.0721 W/kg

Power Drift = 0.10 dB

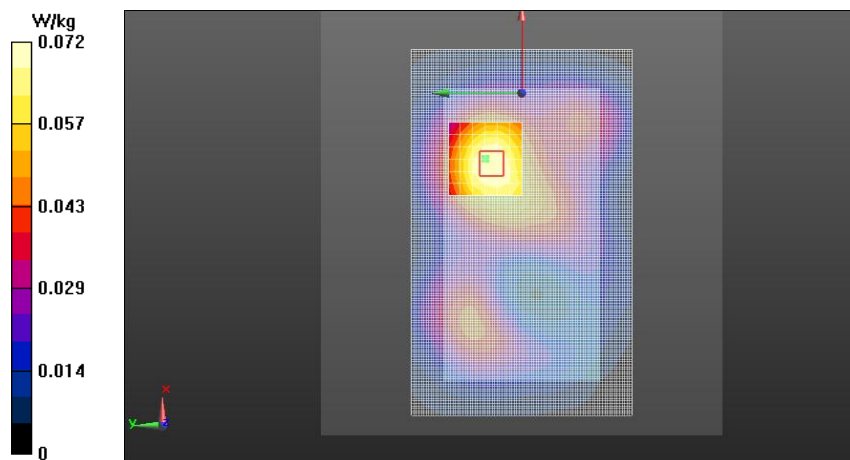

Plot 9

Date/Time: 2013-01-18 13:49:00

DASY Configuration for 3-slot GPRS850/Body - Low - No Headset - Back Facing Phantom/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS850; Frequency: 824.2 MHz; Duty Cycle: 1:2.8; PMF: 1.67332

Medium: Body 835 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 54.821$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: EX3DV4 - SN3839; ConvF(8.97, 8.97, 8.97); Calibrated: 2012-10-25;

Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE4 Sn860; Calibrated: 2012-10-17

Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130

Measurement SW: DASY4, Version 4.7 (80)

Date/Time: 2013-10-16 20:25:09

DASY Configuration for WLAN2450 b-mode/Body - Channel 6 - BPSK 1 Mbps - Spacer 15mm - No Headset - Back Facing Phantom/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode; Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1

Medium: Body 2450 SAR3 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.065$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: ES3DV3 - SN3195; ConvF(4.31, 4.31, 4.31); Calibrated: 2013-03-08;

Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE4 Sn887; Calibrated: 2013-03-07

Phantom: SAR3 - TFP; Type: Not Specified; Serial: Not Specified

Measurement SW: DASY52, Version 52.8 (7)

Fast SAR of Combined Scans: SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.494 W/kg

Maximum value of SAR (interpolated) = 0.739 W/kg

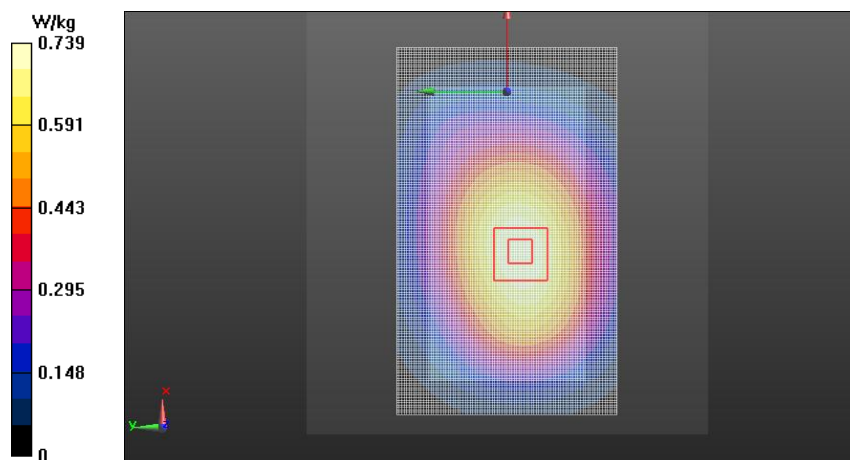

Note: 3-slot GPRS850 result was scaled by a factor of 1.12, WLAN result was scaled by a factor of 1.32 before combining.

SAR Report

FCC_RM-914_09

Applicant: Nokia Corporation

Type: RM-914

Copyright © 2013 TCC Nokia

Plot 10

Date/Time: 2013-01-31 11:24:40

DASY Configuration for 3-slot GPRS1900/Body - Middle - No Headset - Display Facing Phantom/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.8; PMF: 1.67332

Medium: Body 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 52.099$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: EX3DV4 - SN3839; ConvF(7.03, 7.03, 7.03); Calibrated: 2012-10-25;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn860; Calibrated: 2012-10-17

Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130

Measurement SW: DASY4, Version 4.7 (80)

Date/Time: 2013-10-16 21:57:33

DASY Configuration for WLAN2450 b-mode/Body - Channel 6 - BPSK 1 Mbps - Spacer 15mm - No Headset - Display Facing Phantom/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode; Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1

Medium: Body 2450 SAR3 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.065$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: ES3DV3 - SN3195; ConvF(4.31, 4.31, 4.31); Calibrated: 2013-03-08;

Sensor-Surface: 4mm (Mechanical Surface Detection)


Electronics: DAE4 Sn887; Calibrated: 2013-03-07

Phantom: SAR3 - TFP; Type: Not Specified; Serial: Not Specified

Measurement SW: DASY52, Version 52.8 (7)

Fast SAR of Combined Scans: SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (interpolated) = 0.473 W/kg

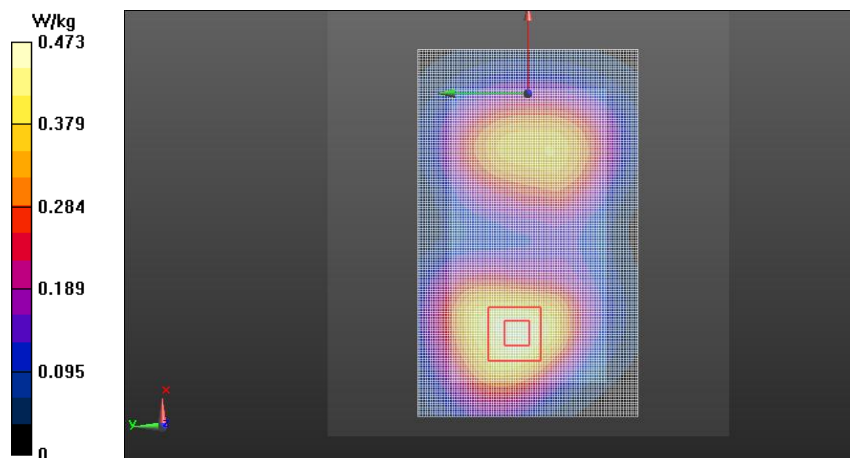

Note: 2-slot GPRS1900 result was scaled by a factor of 1.12, WLAN result was scaled by a factor of 1.32 before combining.

Plot 11

Date/Time: 2013-01-18 11:12:53

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS850

Frequency: 836.6 MHz; Duty Cycle: 1:2.8

Medium: Body 835; Medium Notes: Medium Temperature: t= 22.0 C

Medium parameters used: f = 837 MHz; σ = 0.959 mho/m; ϵ_r = 54.726; ρ = 1000 kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3839
- ConvF(8.97, 8.97, 8.97); Calibrated: 2012-10-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn860; Calibrated: 2012-10-17
- Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

3-slot GPRS850/Body - Middle - Spacer 10mm - No Headset - Back facing phantom/Area Scan (101x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.782 mW/g

3-slot GPRS850/Body - Middle - Spacer 10mm - No Headset - Back facing phantom/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.621 V/m


Peak SAR (extrapolated) = 0.938 mW/g

SAR(1 g) = 0.749 mW/g

SAR(10 g) = 0.562 mW/g

Power Drift = -0.01 dB

Maximum value of SAR (measured) = 0.788 mW/g

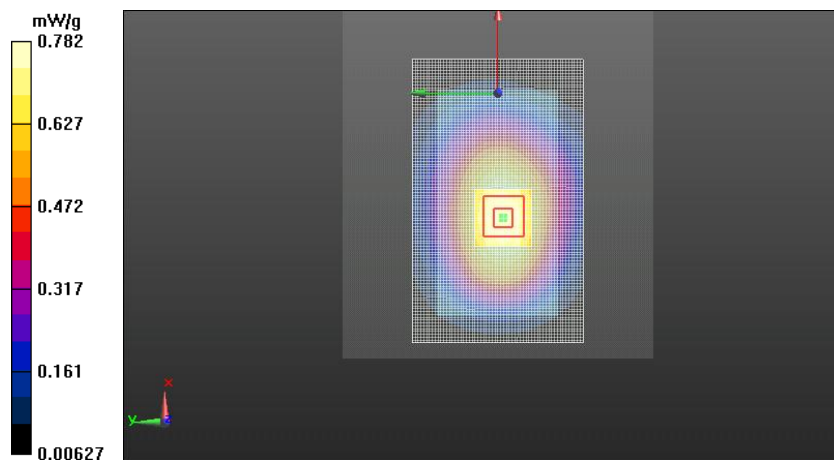

Plot 12

Date/Time: 2013-01-31 13:31:09

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS1900

Frequency: 1909.8 MHz; Duty Cycle: 1:2.8

Medium: Body 1900; Medium Notes: Medium Temperature: t=22.0

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.543$ mho/m; $\epsilon_r = 52.047$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: EX3DV4 - SN3839
- ConvF(7.03, 7.03, 7.03); Calibrated: 2012-10-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn860; Calibrated: 2012-10-17
- Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.5 (6469)

3-slot GPRS1900/Body - High - Spacer 10mm - No Headset - Bottom facing phantom/Area Scan (61x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.40 mW/g

3-slot GPRS1900/Body - High - Spacer 10mm - No Headset - Bottom facing phantom/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.890 V/m


Peak SAR (extrapolated) = 1.885 mW/g

SAR(1 g) = 1.08 mW/g

SAR(10 g) = 0.560 mW/g

Power Drift = 0.12 dB

Maximum value of SAR (measured) = 1.23 mW/g

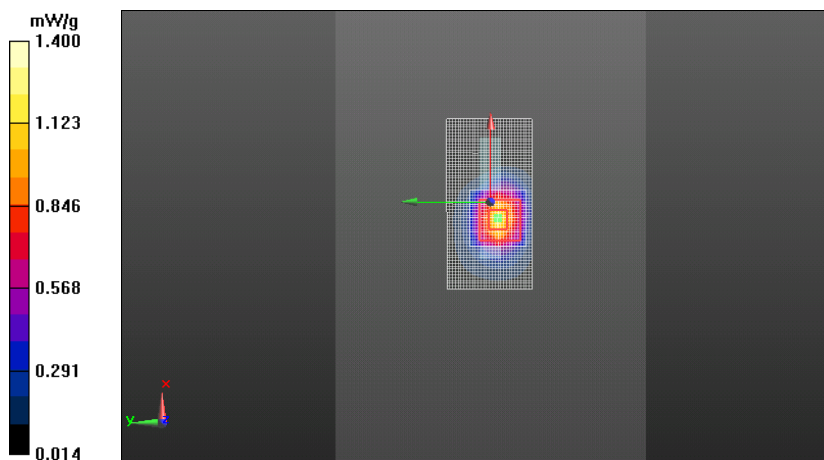

Plot 13

Date/Time: 2013-10-17 17:27:58

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Body 2450 SAR3; Medium Notes: Medium Temperature: t=22.1C

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 50.574$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY Configuration:

- Probe: ES3DV3 - SN3195
- ConvF(4.31, 4.31, 4.31); Calibrated: 2013-03-08;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn887; Calibrated: 2013-03-07
- Phantom: SAR3 - TFP; Type: Not Specified; Serial: Not Specified
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.8 (7028)

WLAN 2450 b-mode/Body - Channel 6 - DSSS 1 Mbps - Spacer 10mm - No Headset - Display Facing

Phantom/Area Scan (161x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0778 W/kg

WLAN 2450 b-mode/Body - Channel 6 - DSSS 1 Mbps - Spacer 10mm - No Headset - Display Facing

Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.052 V/m

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.0763 W/kg

Power Drift = -0.03 dB

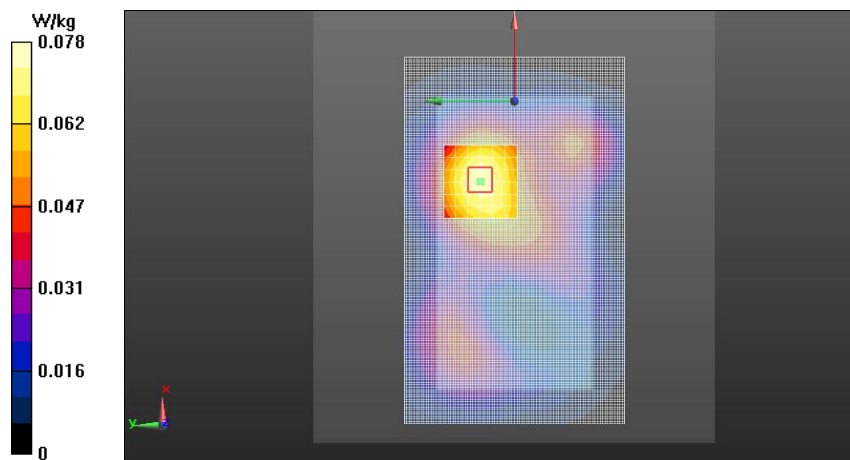

Plot 14

Date/Time: 2013-01-18 11:12:53

DASY Configuration for 3-slot GPRS850/Body - Middle - Spacer 10mm - Back facing phantom/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.8; PMF: 1.67332

Medium: Body 835 Medium parameters used: $f = 837$ MHz; $\sigma = 0.959$ S/m; $\epsilon_r = 54.726$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: EX3DV4 - SN3839; ConvF(8.97, 8.97, 8.97); Calibrated: 2012-10-25;
Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE4 Sn860; Calibrated: 2012-10-17
Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130
Measurement SW: DASY4, Version 4.7 (80)

Date/Time: 2013-10-17 18:00:31

DASY Configuration for WLAN 2450 b-mode/Body - Channel 6 - BPSK 1 Mbps - Spacer 10mm - No Headset - Back Facing Phantom/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode; Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1


Medium: Body 2450 SAR3 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 50.574$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: ES3DV3 - SN3195; ConvF(4.31, 4.31, 4.31); Calibrated: 2013-03-08;
Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE4 Sn887; Calibrated: 2013-03-07
Phantom: SAR3 - TFP; Type: Not Specified; Serial: Not Specified
Measurement SW: DASY52, Version 52.8 (7)

Fast SAR of Combined Scans: SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.610 W/kg

Maximum value of SAR (interpolated) = 0.916 W/kg

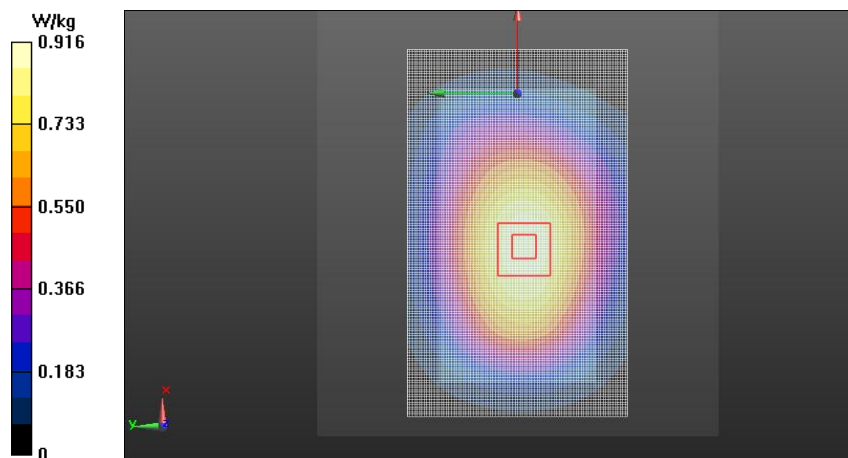

Note: 3-slot GPRS850 result was scaled by a factor of 1.12, WLAN result was scaled by a factor of 1.32 before combining.

Plot 15

Date/Time: 2013-01-31 13:31:09

DASY Configuration for 3-slot GPRS1900/Body - High - Spacer 10mm - Bottom facing phantom/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 004402/47/206437/1

Communication System: 3-slot GPRS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.8; PMF: 1.67332

Medium: Body 1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.543$ S/m; $\epsilon_r = 52.047$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: EX3DV4 - SN3839; ConvF(7.03, 7.03, 7.03); Calibrated: 2012-10-25;
Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE4 Sn860; Calibrated: 2012-10-17
Phantom: TFP3; Type: QD 000 P51 CA; Serial: 1130
Measurement SW: DASY4, Version 4.7 (80)

Date/Time: 2013-10-17 19:52:25

DASY Configuration for WLAN 2450 b-mode/Body - Channel 6 - BPSK 1 Mbps - Spacer 10mm - No Headset - Bottom Facing Phantom/Area Scan:

Test Laboratory: TCC Nokia

Type: RM-914; Serial: 358352/05/719511/0

Communication System: WLAN2450 b-mode; Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1


Medium: Body 2450 SAR3 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 50.574$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Probe: ES3DV3 - SN3195; ConvF(4.31, 4.31, 4.31); Calibrated: 2013-03-08;
Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE4 Sn887; Calibrated: 2013-03-07
Phantom: SAR3 - TFP; Type: Not Specified; Serial: Not Specified
Measurement SW: DASY52, Version 52.8 (7)

Fast SAR of Combined Scans: SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.605 W/kg

Maximum value of SAR (interpolated) = 1.44 W/kg

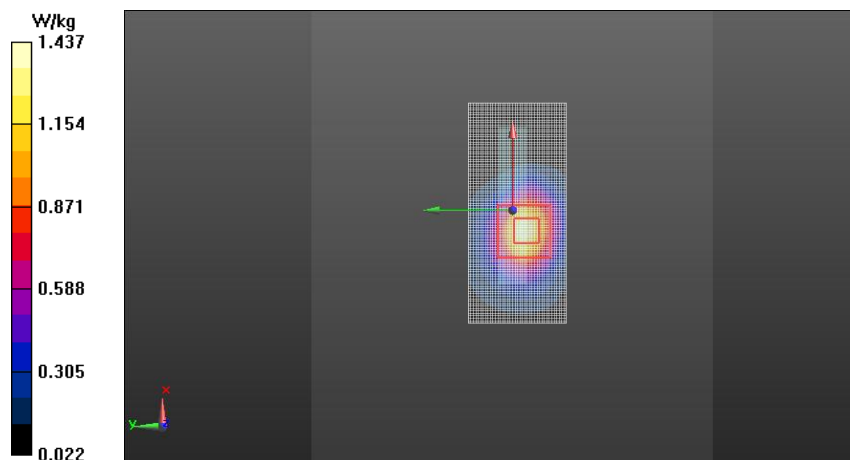

Note: 3-slot GPRS1900 result was scaled by a factor of 1.12, WLAN result was scaled by a factor of 1.32 before combining.

APPENDIX C: DIELECTRIC PARAMETERS OF THE TISSUE SIMULANTS

Head tissue simulant dielectric parameters used in the measurements:

f (MHz)	Date	Dielectric Parameters					
		824.2MHz		837.0MHz		849.0MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
GSM/GPRS850	2013-01-14	41.7	0.88	41.6	0.89	41.6	0.90
f (MHz)	Date	Dielectric Parameters					
		1850.0MHz		1880.0MHz		1910.0MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
GSM/GPRS1900	2013-01-30	39.4	1.41	39.3	1.45	39.2	1.47
f (MHz)	Date	Dielectric Parameters					
		2412.0MHz		2437.0MHz		2462.0MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
WLAN2450	2013-10-12	38.5	1.76	38.3	1.79	38.3	1.82

Body tissue simulant dielectric parameters used in the measurements:

f (MHz)	Date	Dielectric Parameters					
		824.2MHz		837.0MHz		849.0MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
GSM/GPRS850	2013-01-18	54.8	0.95	54.7	0.96	54.6	0.97
f (MHz)	Date	Dielectric Parameters					
		1850.0MHz		1880.0MHz		1910.0MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
GSM/GPRS1900	2013-01-31	52.1	1.48	52.1	1.51	52.0	1.54
f (MHz)	Date	Dielectric Parameters					
		2412.0MHz		2437.0MHz		2462.0MHz	
		ϵ_r	σ [S/m]	ϵ_r	σ [S/m]	ϵ_r	σ [S/m]
WLAN2450	2013-10-16	51.2	1.94	51.1	1.97	51.0	2.00
	2013-10-17	50.7	1.87	50.6	1.90	50.5	1.93

APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Beijing TCC**

Certificate No: **ES3-3280_Mar13**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3280**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **March 8, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
			Issued: March 8, 2013
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3280

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.27	1.31	1.34	± 10.1 %
DCP (mV) ^B	101.4	104.7	101.9	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	167.3	±3.5 %
		Y	0.0	0.0	1.0		165.2	
		Z	0.0	0.0	1.0		161.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3280

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	6.27	6.27	6.27	0.36	1.72	± 12.0 %
1750	40.1	1.37	5.35	5.35	5.35	0.49	1.50	± 12.0 %
1900	40.0	1.40	5.15	5.15	5.15	0.75	1.23	± 12.0 %
1950	40.0	1.40	4.97	4.97	4.97	0.80	1.17	± 12.0 %
2450	39.2	1.80	4.57	4.57	4.57	0.80	1.28	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3280

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	6.08	6.08	6.08	0.28	2.07	± 12.0 %
1750	53.4	1.49	4.86	4.86	4.86	0.52	1.59	± 12.0 %
1900	53.3	1.52	4.64	4.64	4.64	0.57	1.50	± 12.0 %
1950	53.3	1.52	4.75	4.75	4.75	0.51	1.63	± 12.0 %
2450	52.7	1.95	4.28	4.28	4.28	0.68	1.13	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

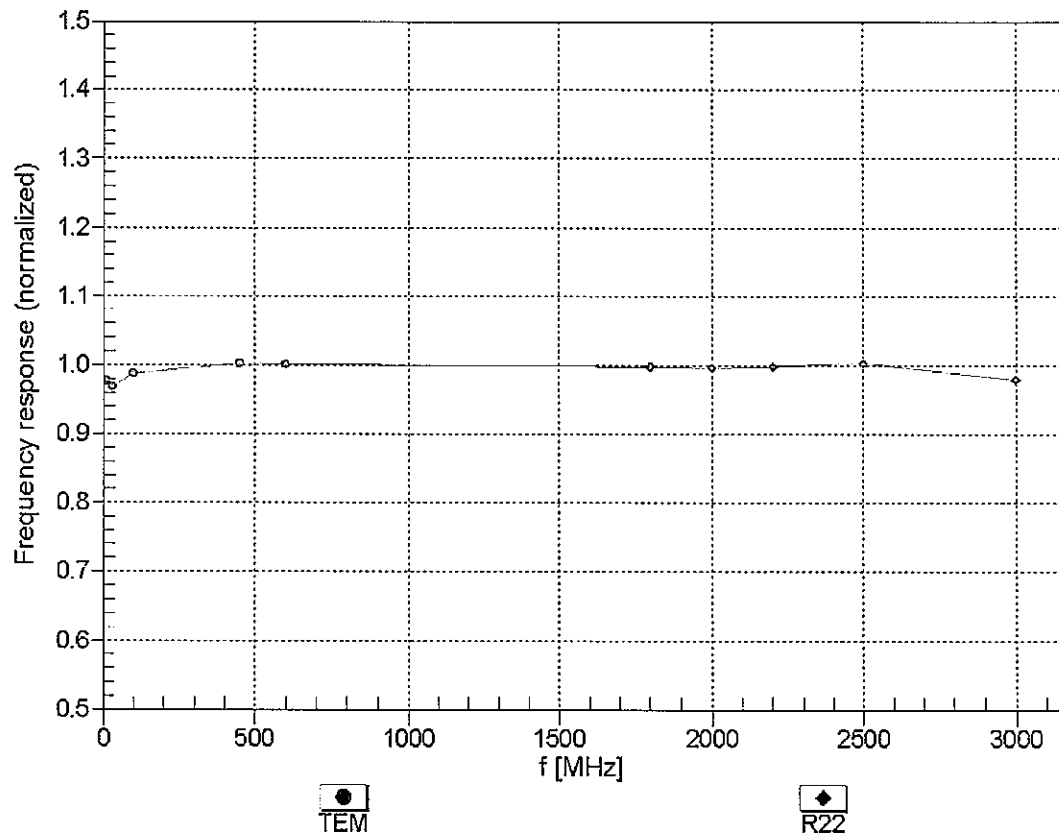



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Conversion Factor Assessment

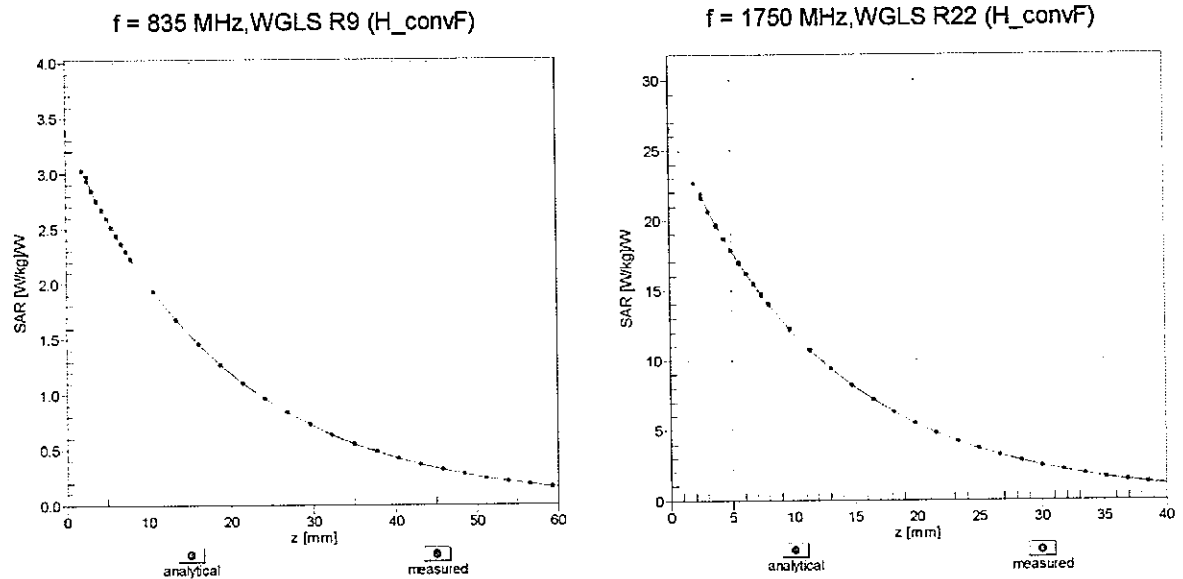

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), $f = 900 \text{ MHz}$

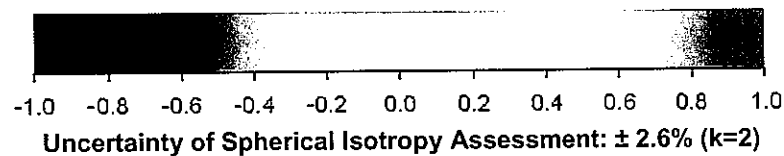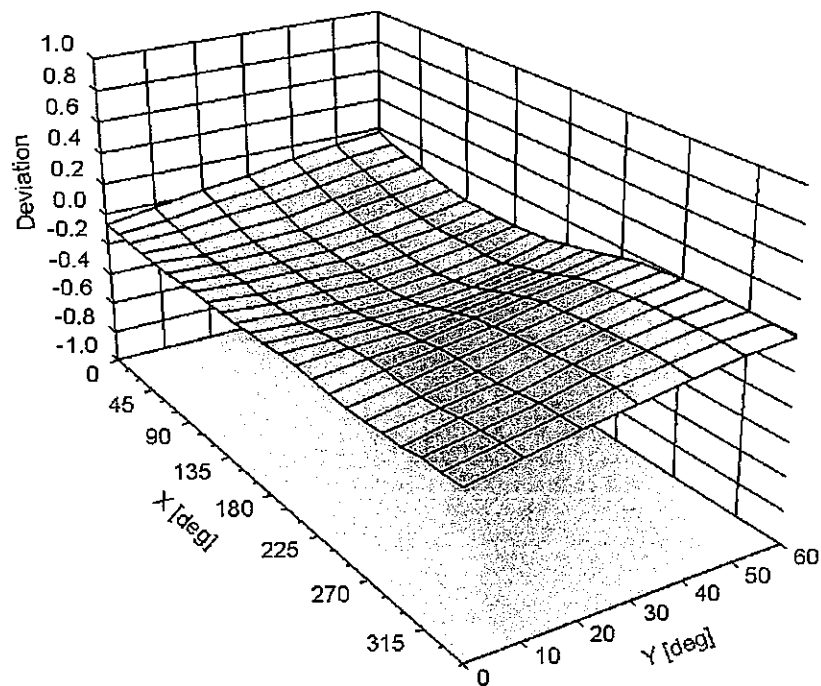



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Beijing TCC**

Certificate No: **EX3-3838_Feb12**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3838**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **February 20, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: February 21, 2012			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3838

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V/m})^2$) ^A	0.37	0.60	0.53	$\pm 10.1 \%$
DCP (mV) ^B	105.4	99.8	99.8	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	102.8	$\pm 1.9 \%$
			Y	0.00	0.00	1.00	97.2	
			Z	0.00	0.00	1.00	87.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3838

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	8.67	8.67	8.67	0.53	0.72	± 12.0 %
1750	40.1	1.37	7.81	7.81	7.81	0.57	0.72	± 12.0 %
1900	40.0	1.40	7.57	7.57	7.57	0.62	0.69	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3838

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	8.86	8.86	8.86	0.52	0.76	± 12.0 %
1750	53.4	1.49	7.72	7.72	7.72	0.49	0.86	± 12.0 %
1900	53.3	1.52	7.35	7.35	7.35	0.30	1.08	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

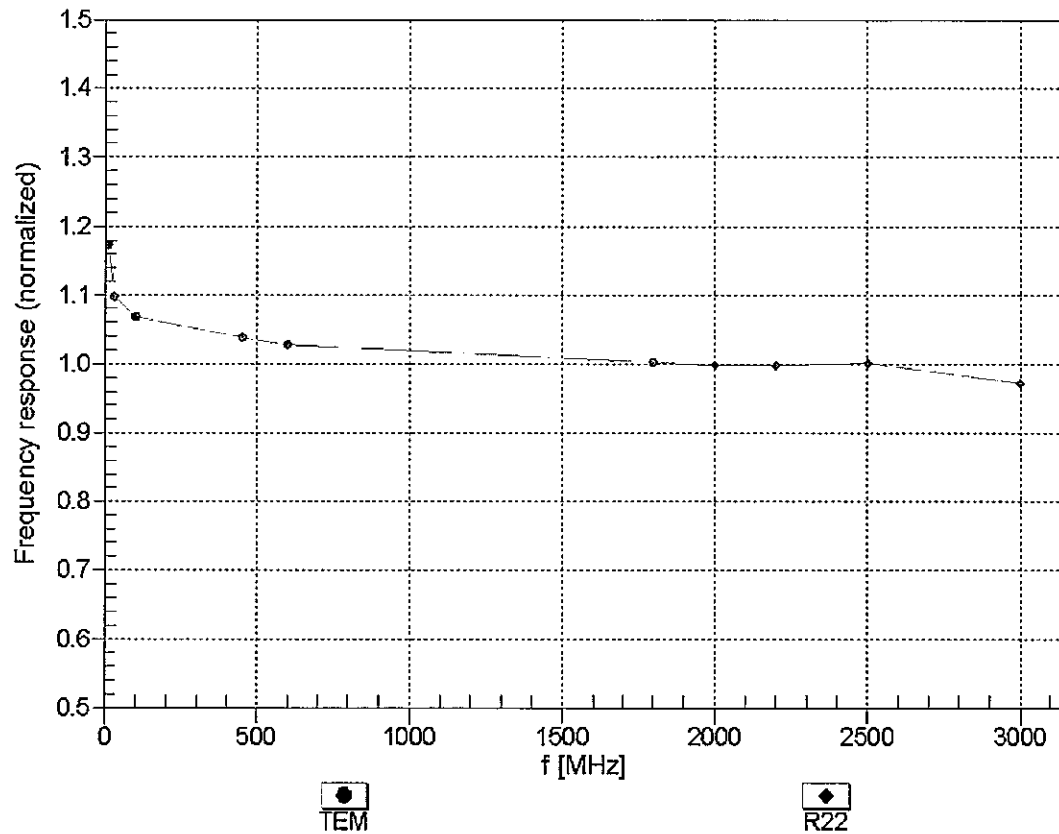



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Conversion Factor Assessment

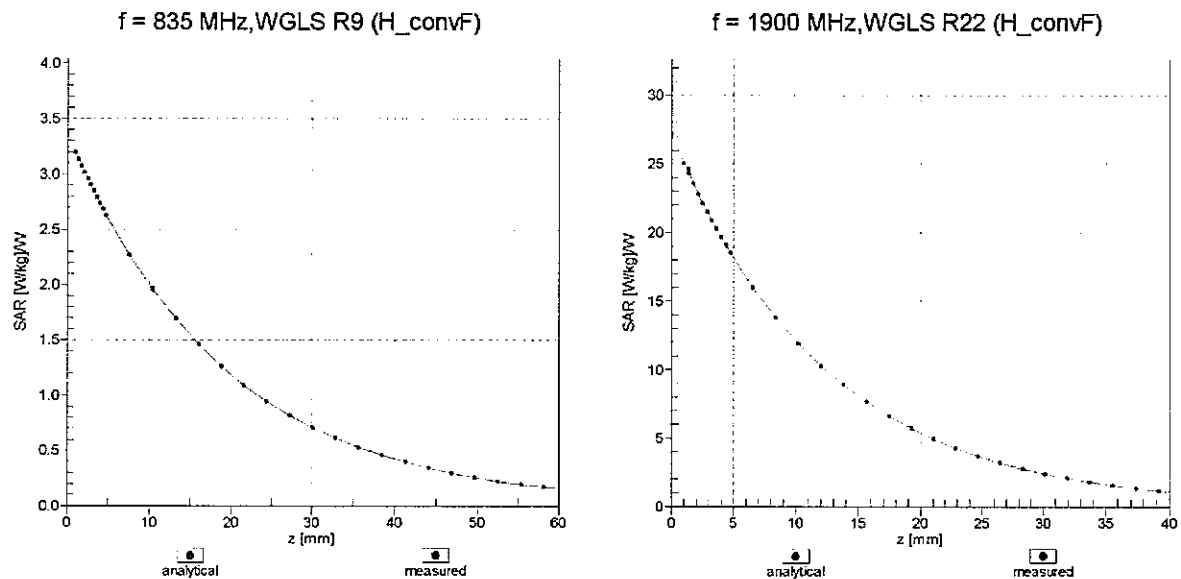

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

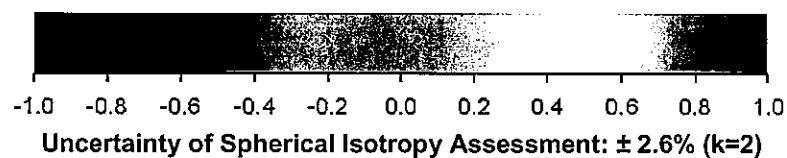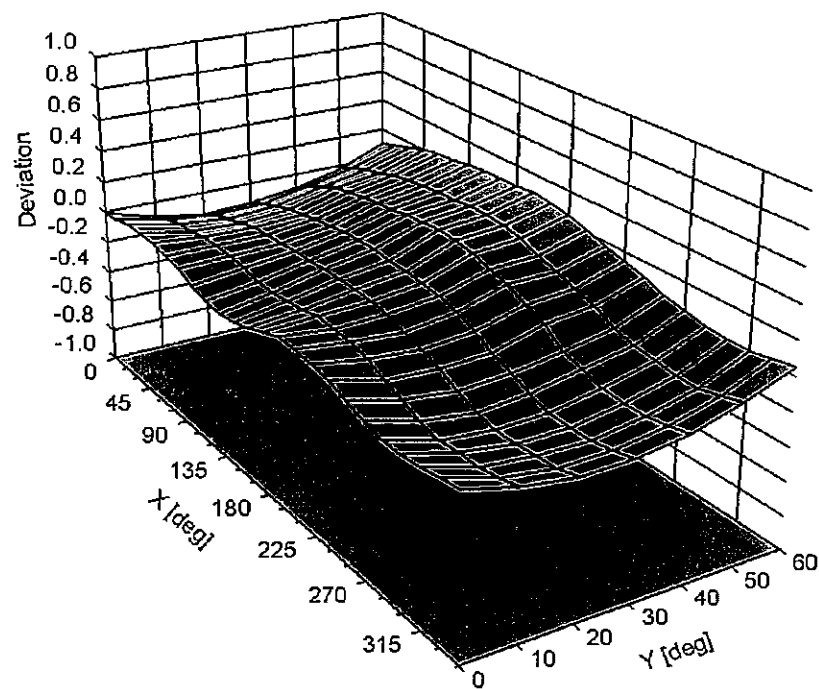

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Beijing TCC**

Certificate No: **ES3-3195_Mar12**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3195**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **March 12, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
			Issued: March 13, 2012
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3195

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.41	1.18	1.42	± 10.1 %
DCP (mV) ^B	102.1	100.5	98.9	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	119.4	±2.7 %
			Y	0.00	0.00	1.00	111.8	
			Z	0.00	0.00	1.00	88.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3195

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	6.13	6.13	6.13	0.48	1.55	± 12.0 %
1750	40.1	1.37	5.32	5.32	5.32	0.63	1.36	± 12.0 %
1900	40.0	1.40	5.14	5.14	5.14	0.80	1.19	± 12.0 %
1950	40.0	1.40	4.94	4.94	4.94	0.70	1.29	± 12.0 %
2450	39.2	1.80	4.45	4.45	4.45	0.64	1.46	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3195

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	6.16	6.16	6.16	0.80	1.16	± 12.0 %
1750	53.4	1.49	4.93	4.93	4.93	0.73	1.29	± 12.0 %
1900	53.3	1.52	4.72	4.72	4.72	0.74	1.28	± 12.0 %
1950	53.3	1.52	4.84	4.84	4.84	0.45	1.70	± 12.0 %
2450	52.7	1.95	4.31	4.31	4.31	0.74	1.14	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)

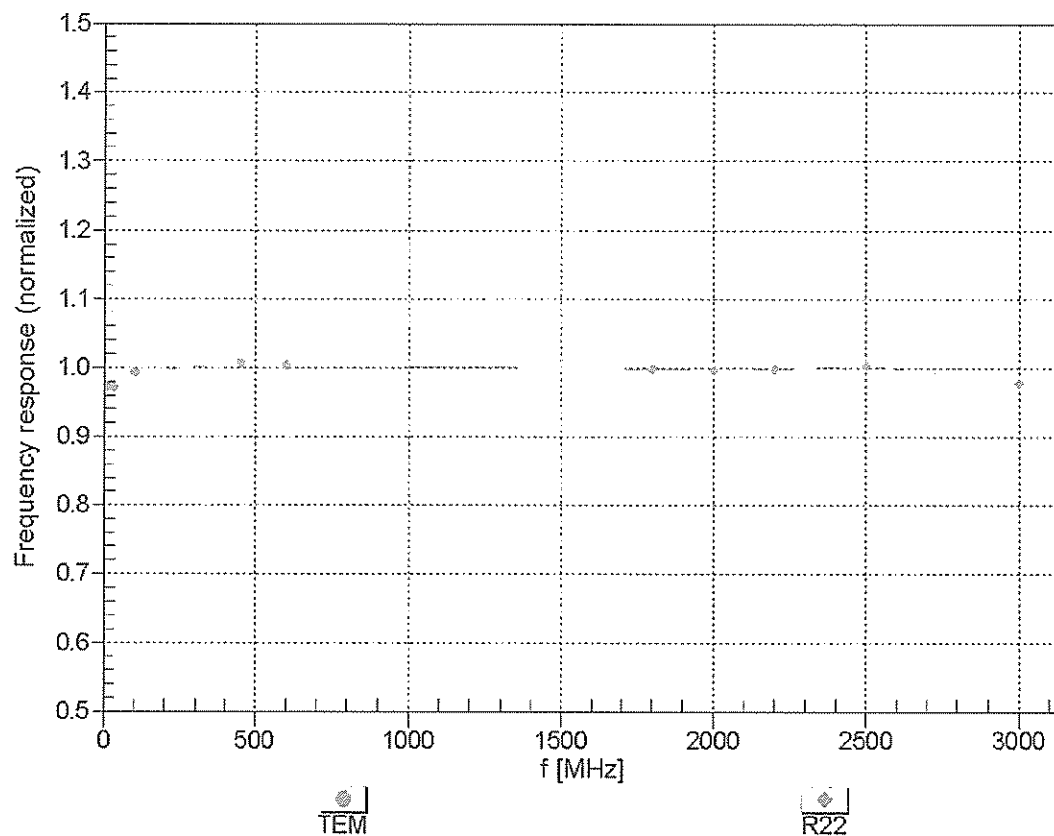


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Conversion Factor Assessment

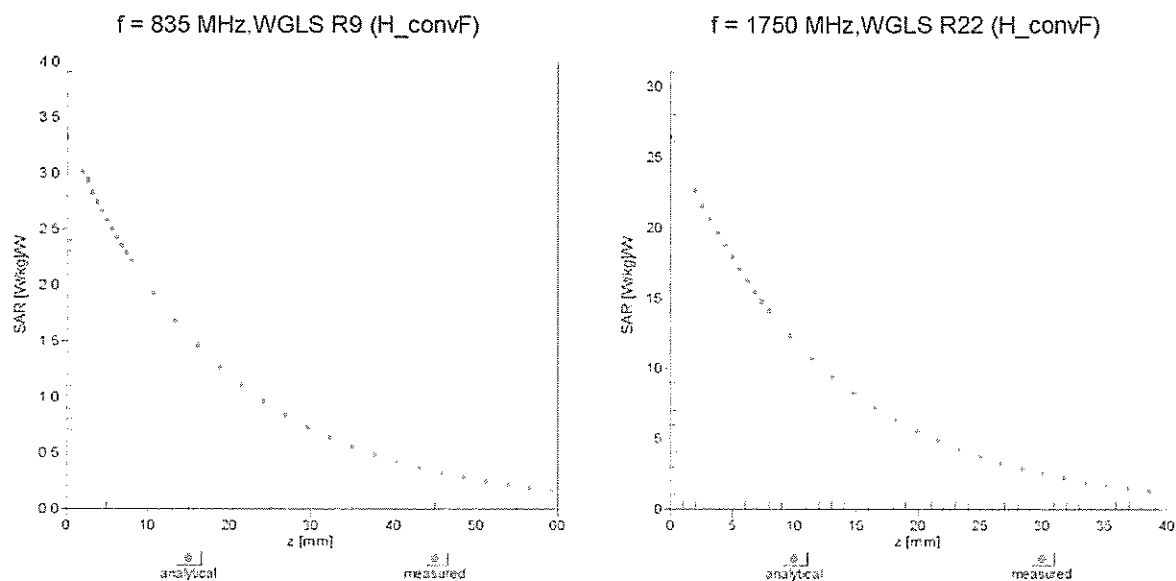

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

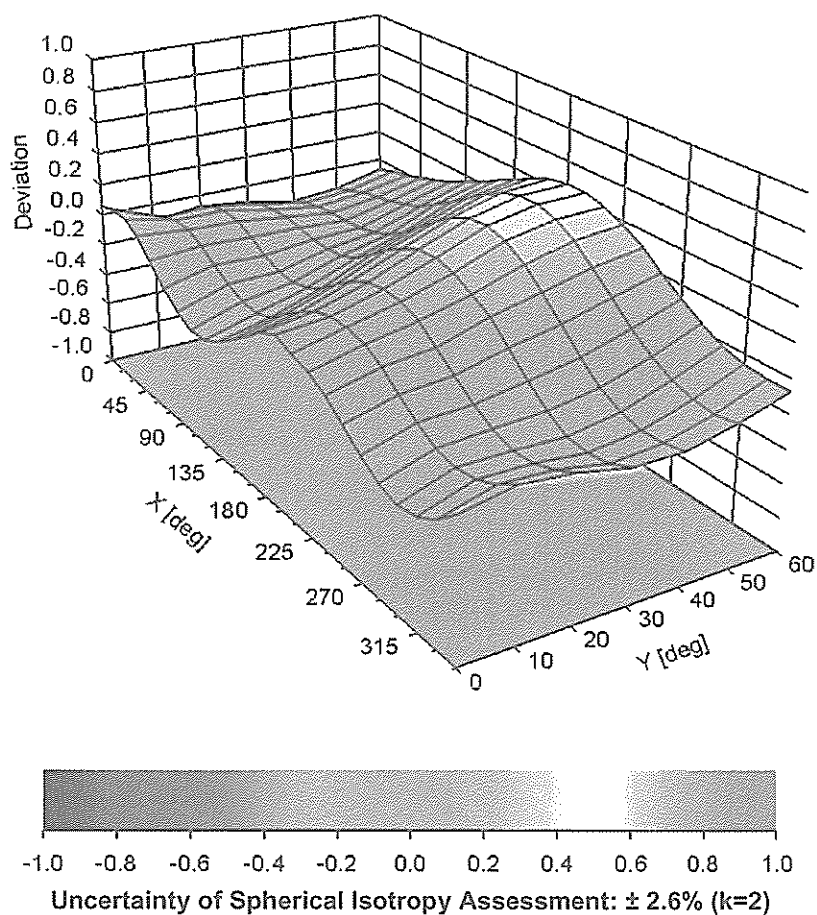



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Beijing TCC**

Certificate No: **EX3-3839_Oct12**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3839**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes


Calibration date: **October 25, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 660	20-Jun-12 (No. DAE4-660_Jun12)	Jun-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 
Approved by:	Katja Pokovic	Technical Manager	
			Issued: October 25, 2012
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3839

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.48	0.44	0.44	$\pm 10.1 \%$
DCP (mV) ^B	93.6	98.1	101.1	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
0	CW	0.00	X	0.0	0.0	1.0	115.1	$\pm 3.5 \%$
			Y	0.0	0.0	1.0	153.6	
			Z	0.0	0.0	1.0	147.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3839

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	8.74	8.74	8.74	0.39	0.85	± 12.0 %
1750	40.1	1.37	7.95	7.95	7.95	0.25	1.02	± 12.0 %
1900	40.0	1.40	7.38	7.38	7.38	0.69	0.64	± 12.0 %
5200	36.0	4.66	5.04	5.04	5.04	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.87	4.87	4.87	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.66	4.66	4.66	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.37	4.37	4.37	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.44	4.44	4.44	0.40	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3839

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	8.97	8.97	8.97	0.38	0.92	± 12.0 %
1750	53.4	1.49	7.26	7.26	7.26	0.54	0.73	± 12.0 %
1900	53.3	1.52	7.03	7.03	7.03	0.29	1.01	± 12.0 %
5200	49.0	5.30	4.32	4.32	4.32	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.07	4.07	4.07	0.42	1.90	± 13.1 %
5500	48.6	5.65	3.89	3.89	3.89	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.86	3.86	3.86	0.44	1.90	± 13.1 %
5800	48.2	6.00	4.18	4.18	4.18	0.45	1.90	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

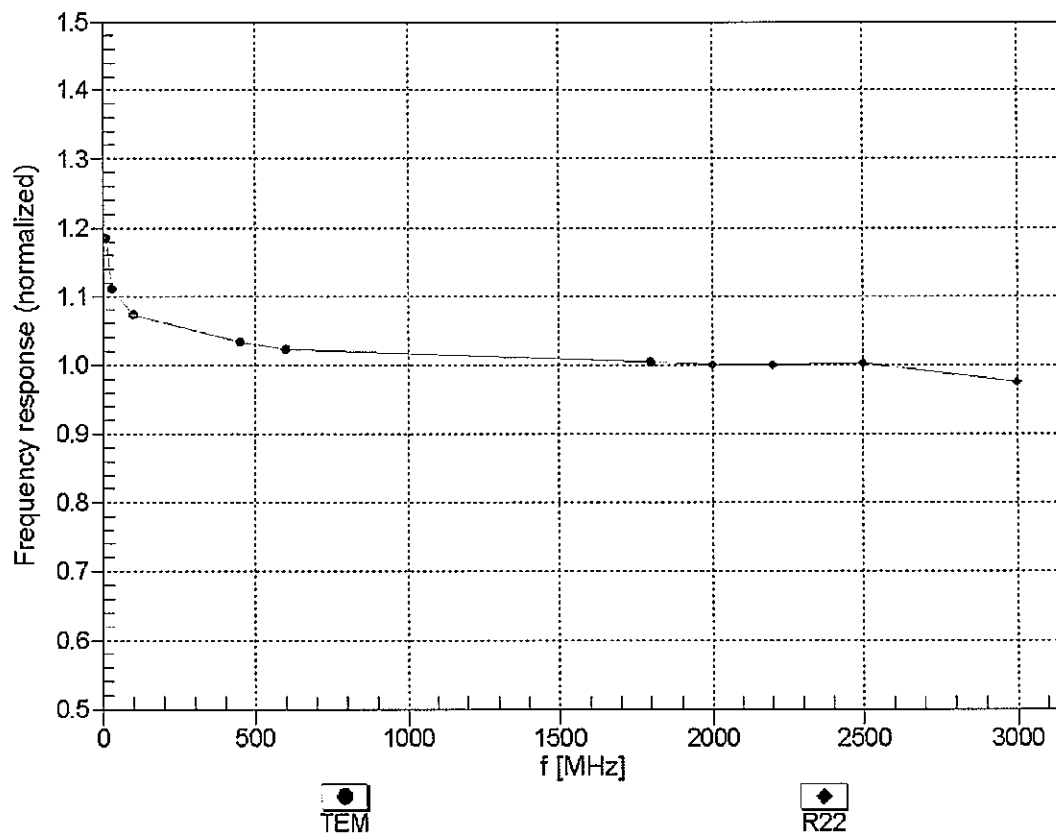



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Conversion Factor Assessment

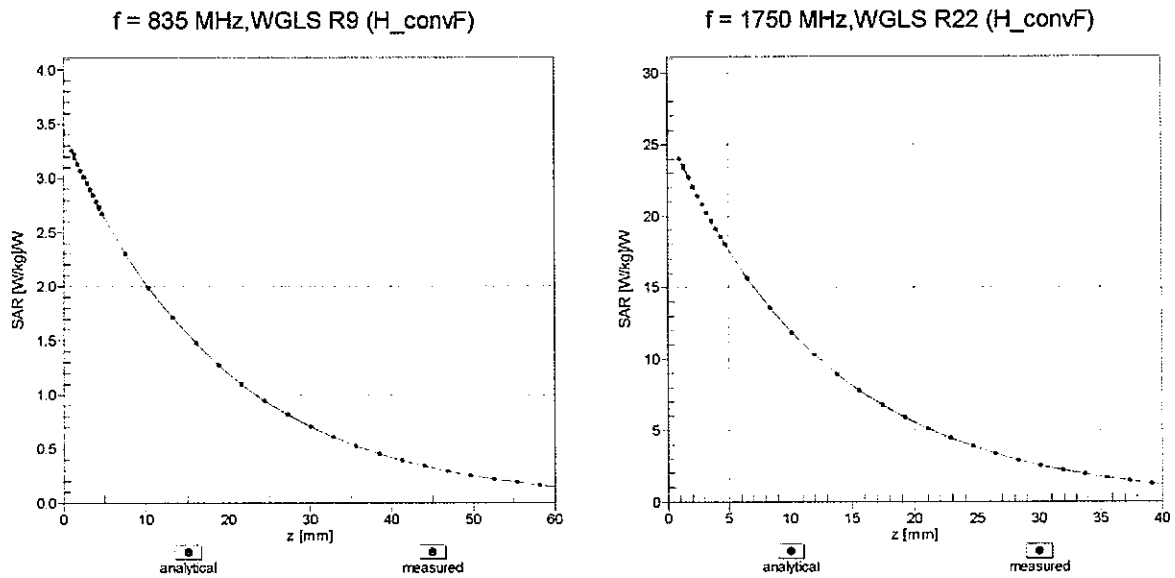

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

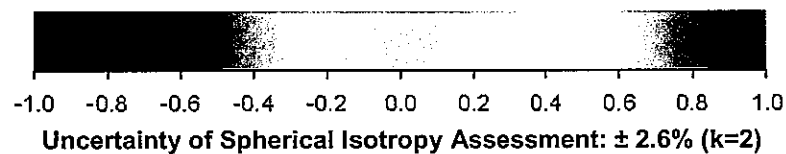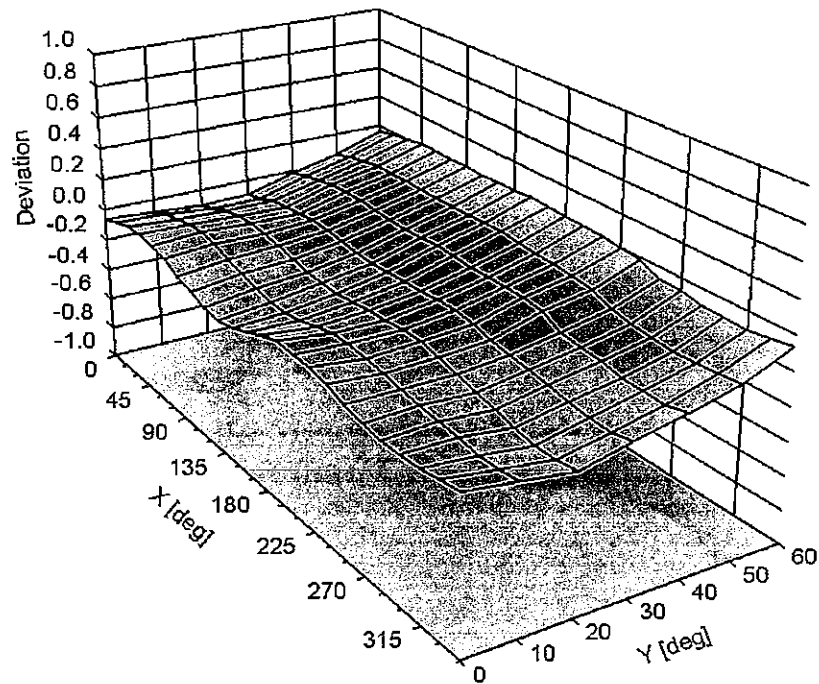

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

APPENDIX E: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Beijing TCC**

Certificate No: **D835V2-4d005_Mar12**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d005**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **March 06, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5086 (20g)	29-Mar-11 (No. 217-01368)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Israe El-Naouq	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 6, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.7 Ω - 3.4 j Ω
Return Loss	- 27.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.8 Ω - 5.1 j Ω
Return Loss	- 24.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.394 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 11, 2003

DASY5 Validation Report for Head TSL

Date: 06.03.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d005

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 30.12.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.103 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.4310

SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.52 mW/g

Maximum value of SAR (measured) = 2.709 mW/g

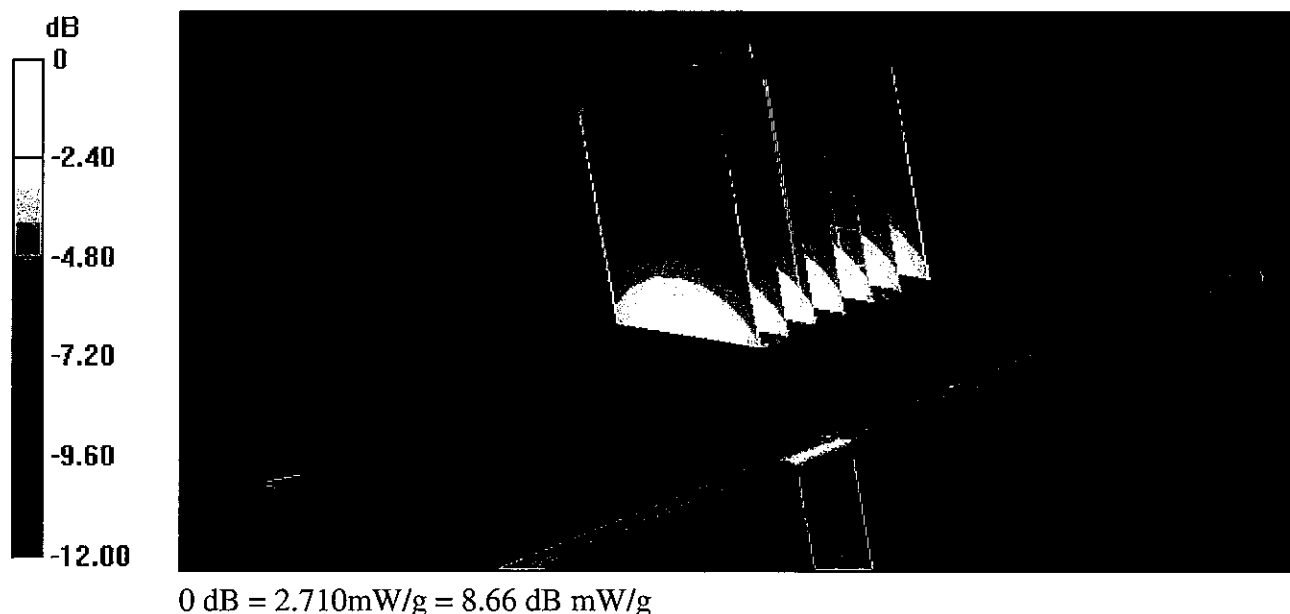

Impedance Measurement Plot for Head TSL

6 Mar 2012 10:16:48
 [CH1] S11 1 U FS 1: 52.680 Ω -3.4238 Ω 55.670 pF 835.000 000 MHz


*

De1

Cor

Avg
16

H1d

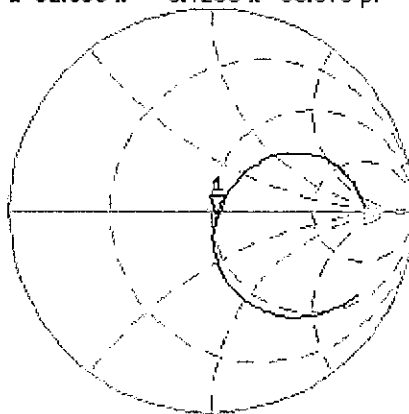


CH2 S11 LOG 5 dB/REF -20 dB 1:-27.460 dB 835.000 000 MHz

Cor

Avg
16

H1d

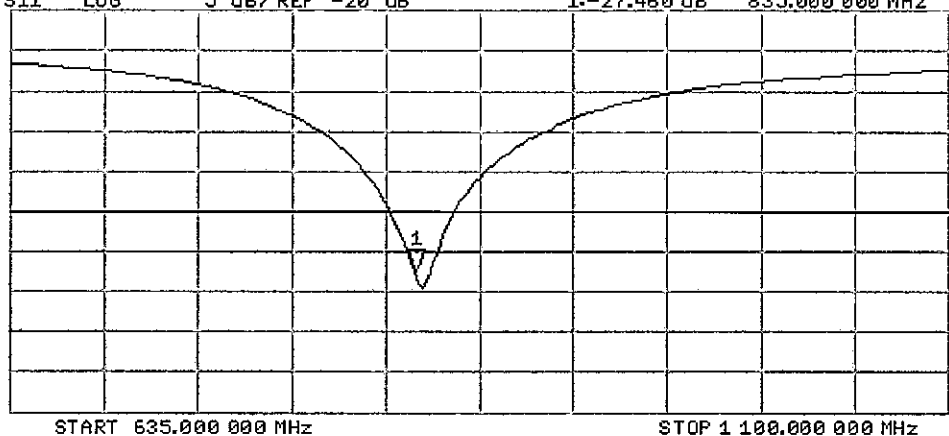

DASY5 Validation Report for Body TSL

Date: 05.03.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d005

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 30.12.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.011 V/m; Power Drift = 0.0071 dB


Peak SAR (extrapolated) = 3.4950

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.812 mW/g

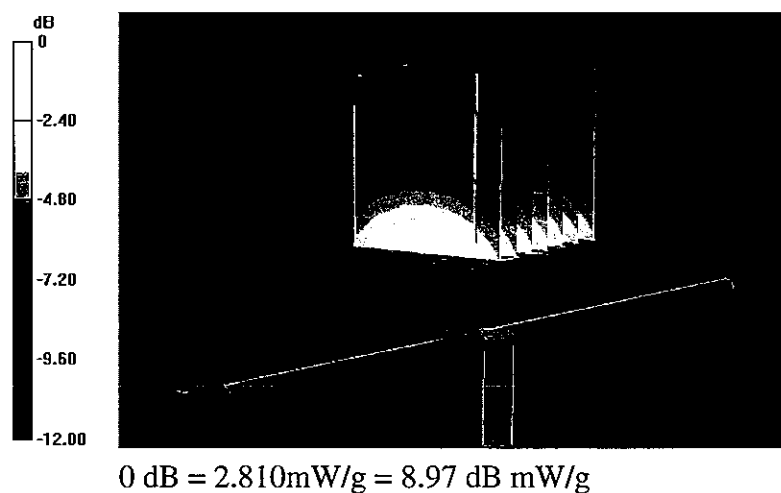

Impedance Measurement Plot for Body TSL

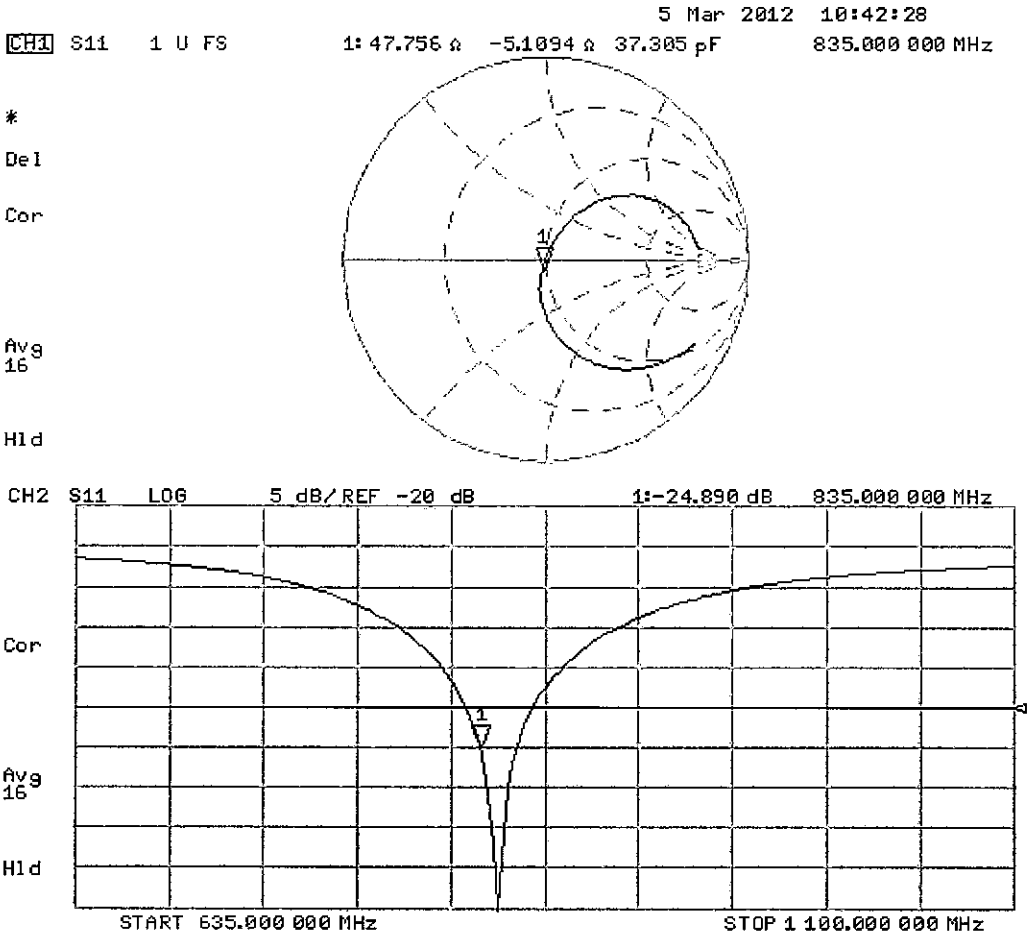

Dipole D835V2 – SN: 4d005 Antenna Parameters


Antenna Parameters with Head TSL

	Calibration certificate	Annual measurement 2013-03-06
Impedance, transformed to feed point	52.7 Ω - 3.4 j Ω	50.2 Ω - 3.8 j Ω
Return loss	- 27.5 dB	- 28.5 dB


Antenna Parameters with Body TSL

	Calibration certificate	Annual measurement 2013-03-06
Impedance, transformed to feed point	47.8 Ω - 5.1 j Ω	49.0 Ω - 6.1 j Ω
Return loss	- 24.9 dB	- 24.1 dB

Impedance Measurement plot for Head TSL 835

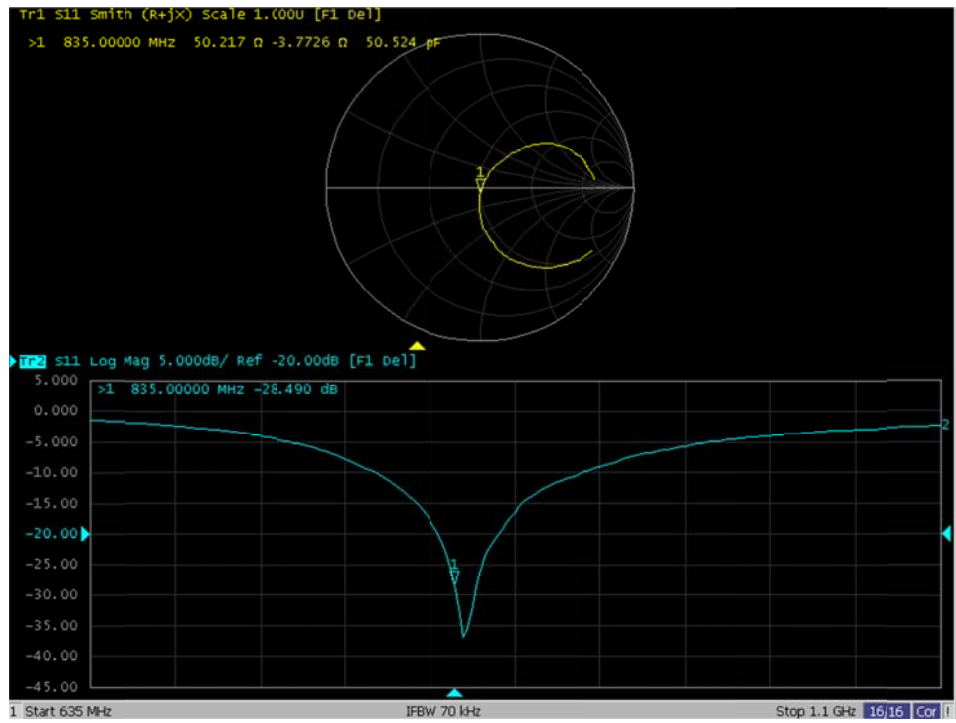

Impedance Measurement plot for Body TSL 835

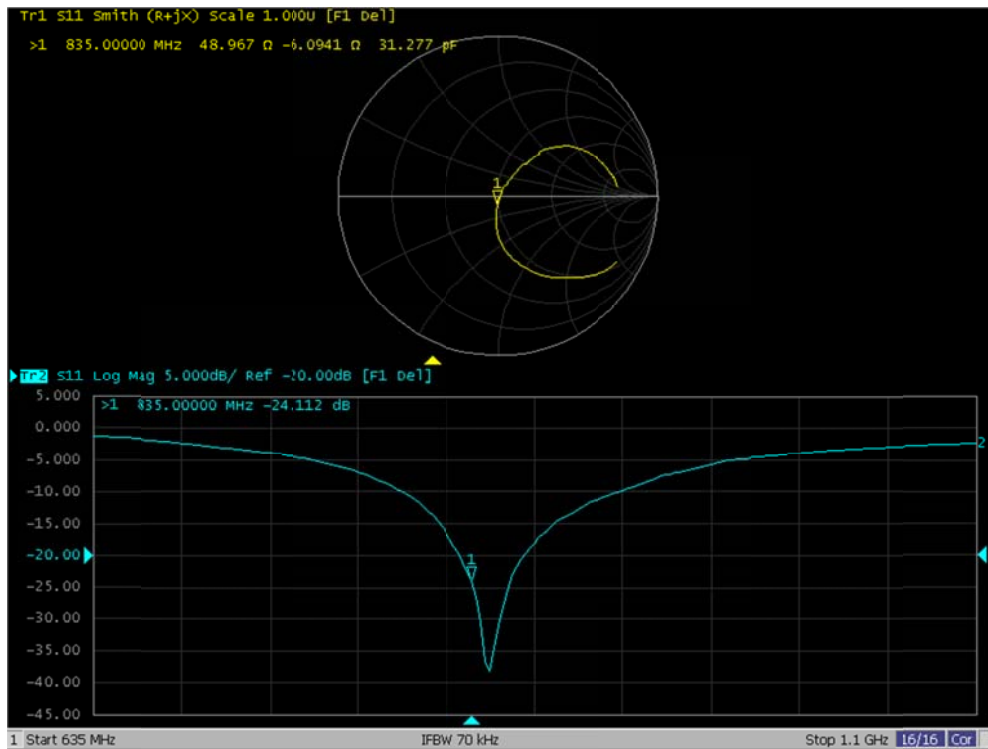



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Beijing TCC**

Certificate No: **D835V2-479_Mar11**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 479**

Calibration procedure(s) **QA CAL-05.v8**
Calibration procedure for dipole validation kits

Calibration date: **March 9, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: March 10, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.2 Ω - 3.3 j Ω
Return Loss	- 29.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.0 Ω - 5.2 j Ω
Return Loss	- 24.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.388 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 28, 2003

DASY5 Validation Report for Head TSL

Date/Time: 09.03.2011 14:54:54

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:479

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6 Build 2, Version 52.6.2 (424)
- Postprocessing SW: SEMCAD X, V14.4 Build 4, Version 14.4.4 (2829)

Head/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe) 2/Zoom Scan (7x7x7) (7x7x7)/Cube


0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.436 V/m; Power Drift = 0.0071 dB

Peak SAR (extrapolated) = 3.602 W/kg

SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.56 mW/g


Maximum value of SAR (measured) = 2.795 mW/g

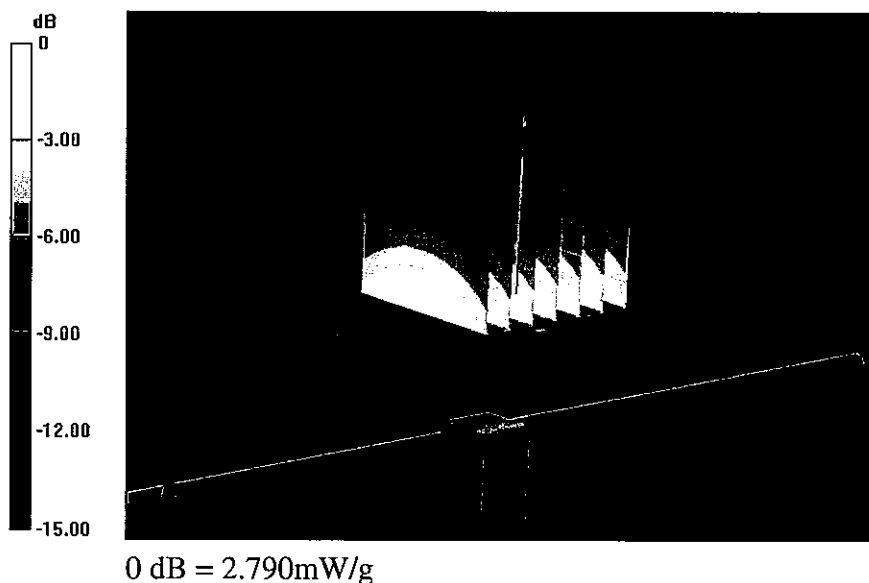

Impedance Measurement Plot for Head TSL

9 Mar 2011 09:54:00
 [CH1] S11 1 U FS 1: 51.205 Ω -3.2754 Ω 58.193 pF 835.000 000 MHz

*
 Del
 Cor

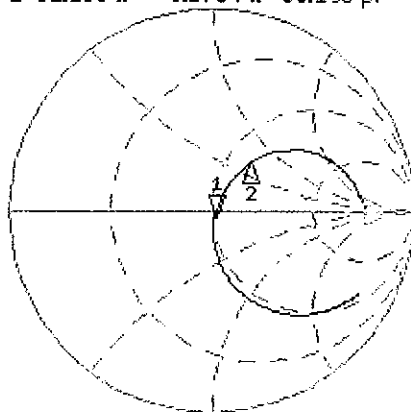

CH1 Markers
 2: 63.471 Ω
 32.488 Ω
 900.000 MHz

Avg
 16


↑

CH2 S11 LOG 5 dB/REF -20 dB 1: -29.247 dB 835.000 000 MHz

Cor

Avg
 16

↑

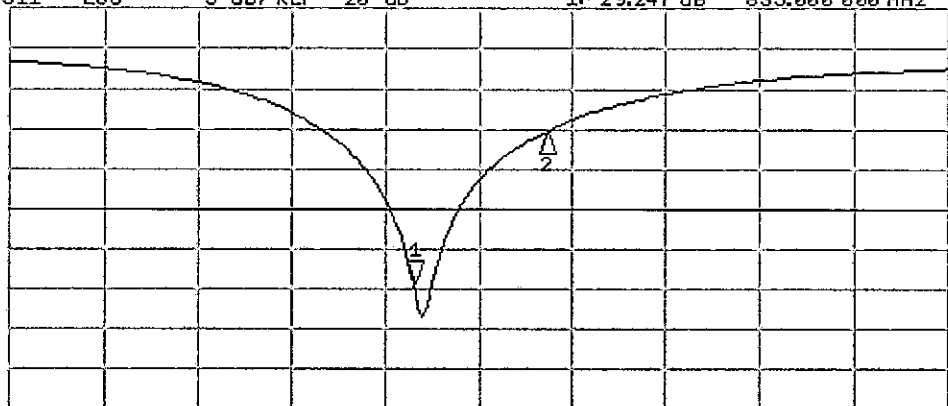

CH2 Markers
 2: -10.516 dB
 900.000 MHz

START 635.000 000 MHz

STOP 1 100.000 000 MHz

DASY5 Validation Report for Body TSL

Date/Time: 09.03.2011 10:34:32

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:479

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6 Build 2, Version 52.6.2 (424)
- Postprocessing SW: SEMCAD X, V14.4 Build 4, Version 14.4.4 (2829)

Body/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.238 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.717 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.65 mW/g


Maximum value of SAR (measured) = 2.938 mW/g

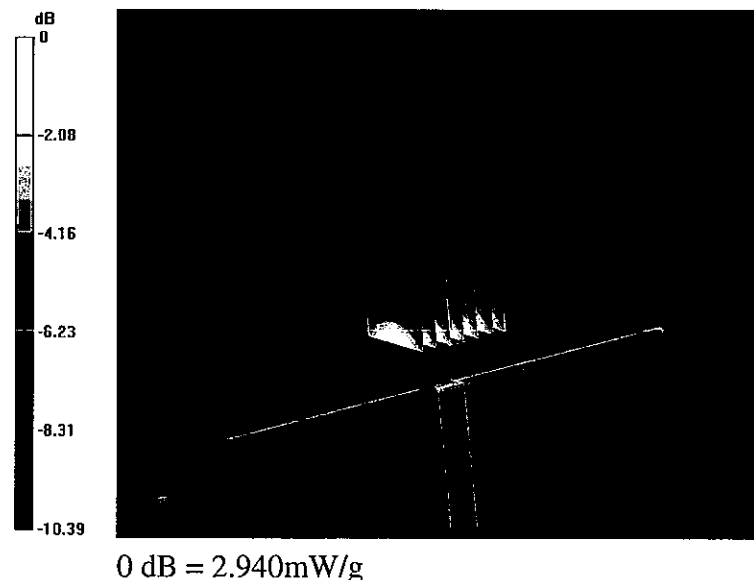

Impedance Measurement Plot for Body TSL

9 Mar 2011 10:25:30
 CH1 S11 1 U FS 1: 47.039 Ω -5.2051 Ω 36.619 pF 835.000 000 MHz

*
 De1
 Cor

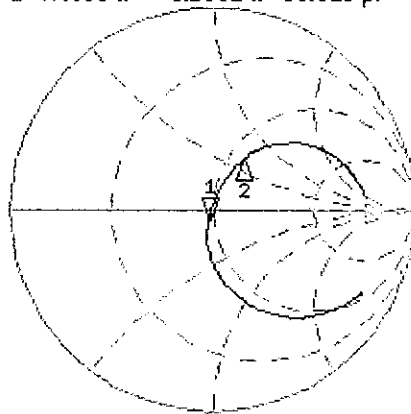


CH1 Markers
 2: 58.002 Ω
 30.787 Ω
 900.000 MHz

Avg
 16
 ↑

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.210 dB 835.000 000 MHz

Cor

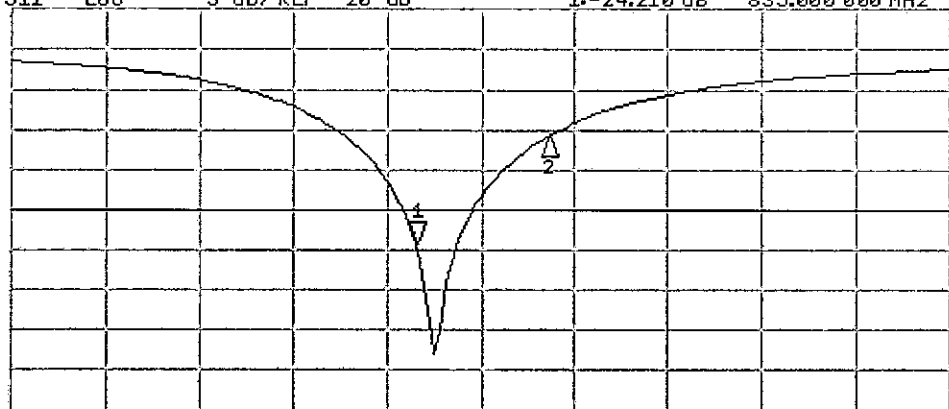

CH2 Markers
 2: -10.956 dB
 900.000 MHz

Avg
 16
 ↑

START 635.000 000 MHz

STOP 1 100.000 000 MHz

Dipole D835V2 – SN: 479 Antenna Parameters


Antenna Parameters with Head TSL

	Calibration certificate	Annual measurement 2012-03-15
Impedance, transformed to feed point	51.2 Ω - 3.3 j Ω	50.4 Ω - 3.8 j Ω
Return loss	- 29.2 dB	- 28.4 dB


Antenna Parameters with Body TSL

	Calibration certificate	Annual measurement 2012-03-15
Impedance, transformed to feed point	47.0 Ω - 5.2 j Ω	46.2 Ω - 5.2 j Ω
Return loss	- 24.2 dB	- 23.5 dB

Impedance Measurement plot for Head TSL 835

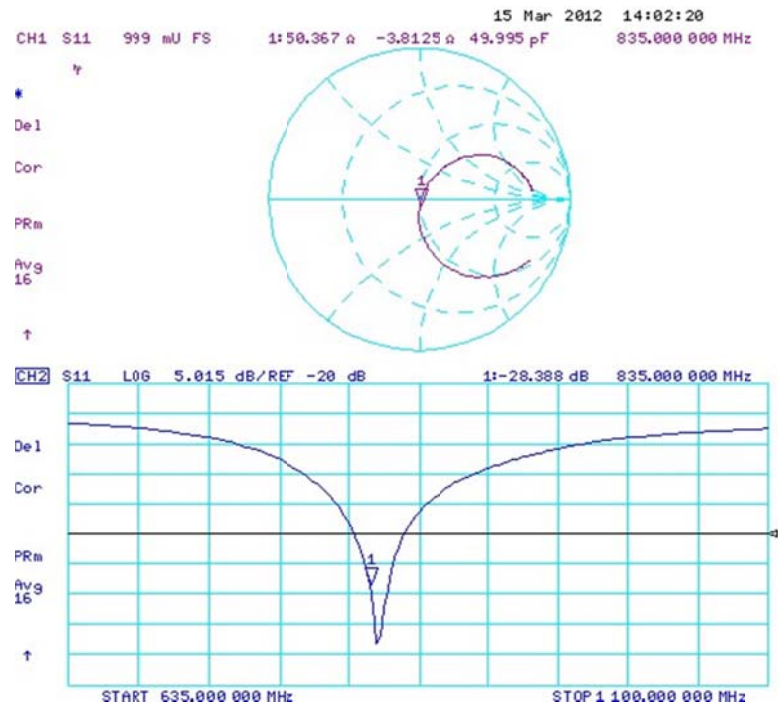

Impedance Measurement plot for Body TSL 835

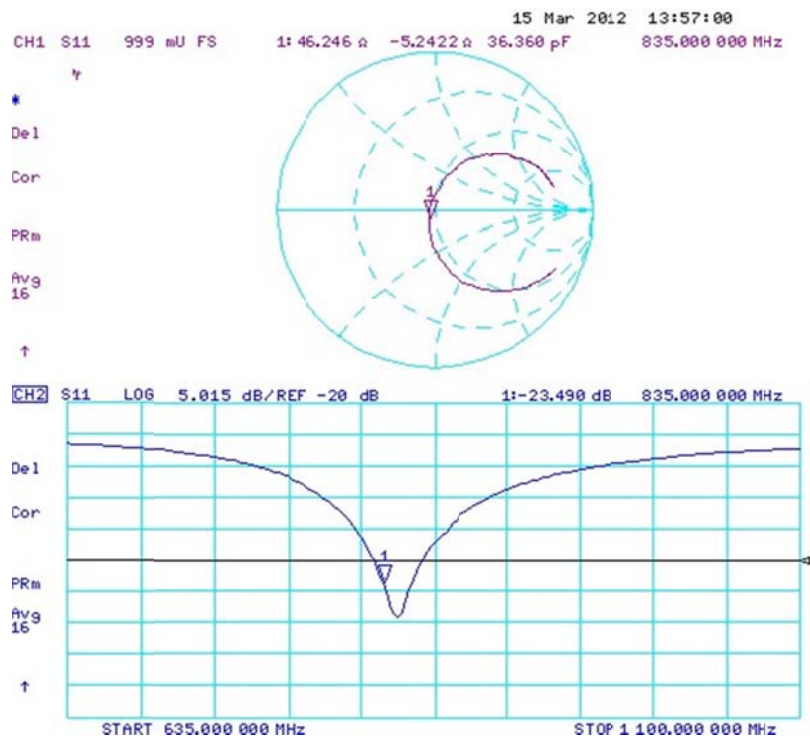



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Beijing TCC**

Certificate No: **D1900V2-547_Oct11**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 547**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**


Calibration date: **October 20, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5086 (20g)	29-Mar-11 (No. 217-01368)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	04-Jul-11 (No. DAE4-601_Jul11)	Jul-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 20, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.5 \Omega + 4.3 j\Omega$
Return Loss	- 27.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$46.8 \Omega + 3.5 j\Omega$
Return Loss	- 26.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.191 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Design Modification by End User

The dipole has been modified with Teflon Rings (TR) placed within identified markings close to the end of each dipole arm. Calibration has been performed with TR attached to the dipole.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 15, 2001

DASY5 Validation Report for Head TSL

Date: 20.10.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 547

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.072 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 19.037 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.4 mW/g

Maximum value of SAR (measured) = 13.012 mW/g



Impedance Measurement Plot for Head TSL

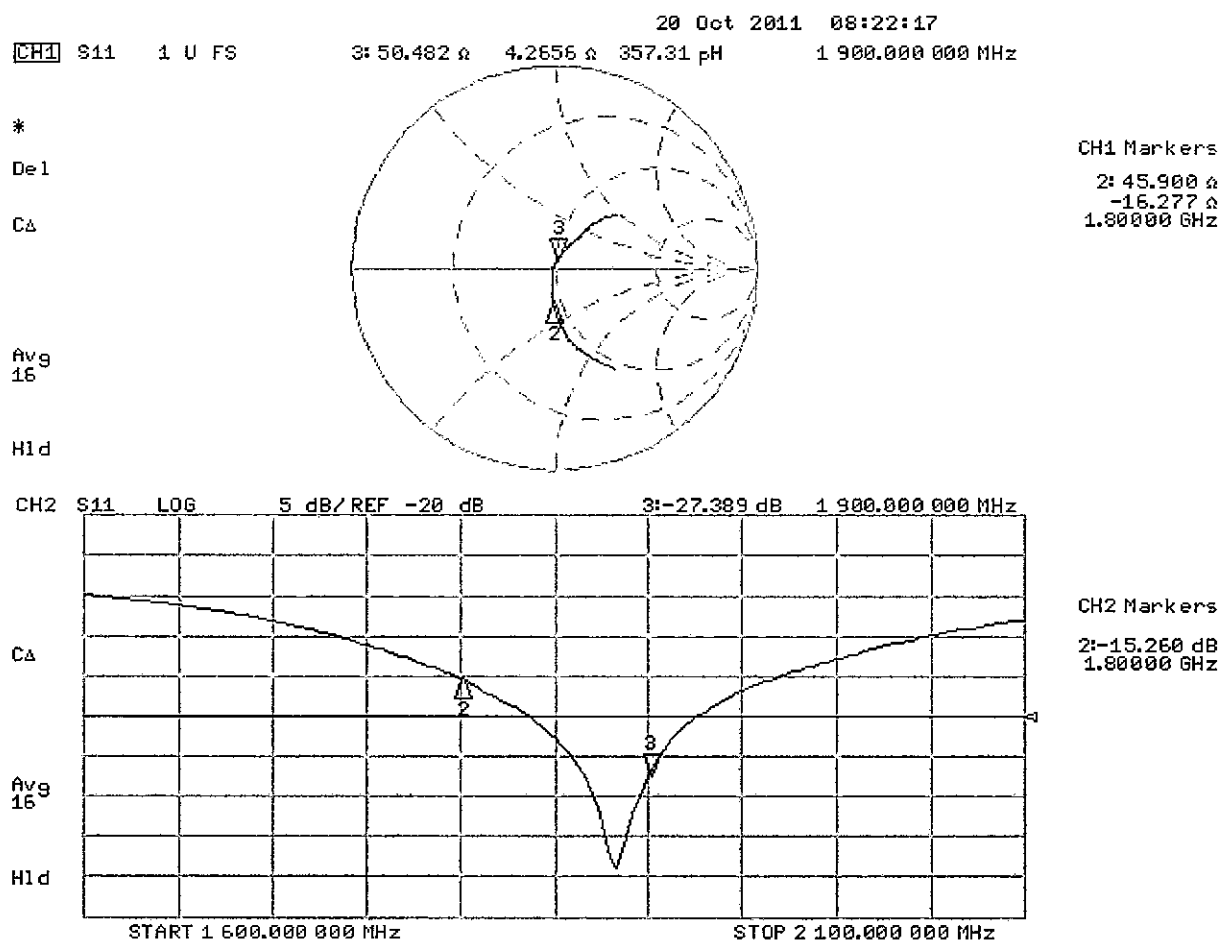

DASY5 Validation Report for Body TSL

Date: 18.10.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 547

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.823 V/m; Power Drift = 0.0092 dB


Peak SAR (extrapolated) = 18.788 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.5 mW/g

Maximum value of SAR (measured) = 13.491 mW/g

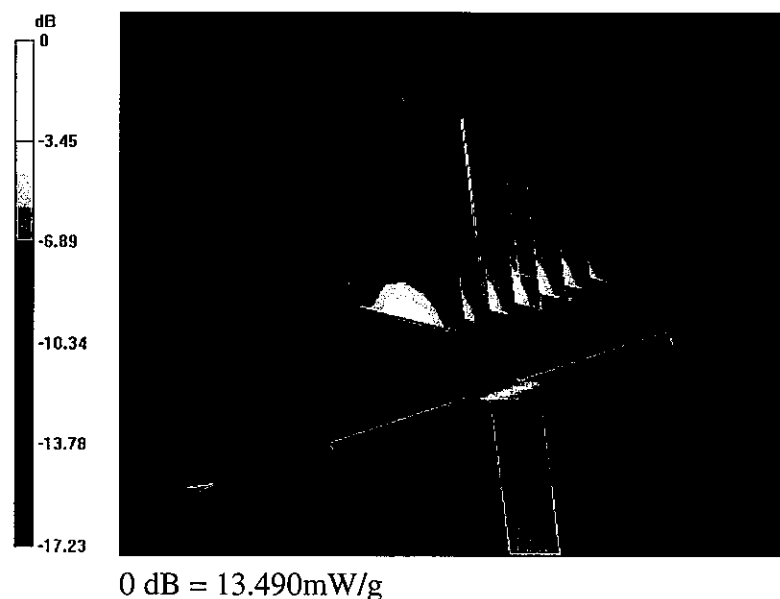

Impedance Measurement Plot for Body TSL

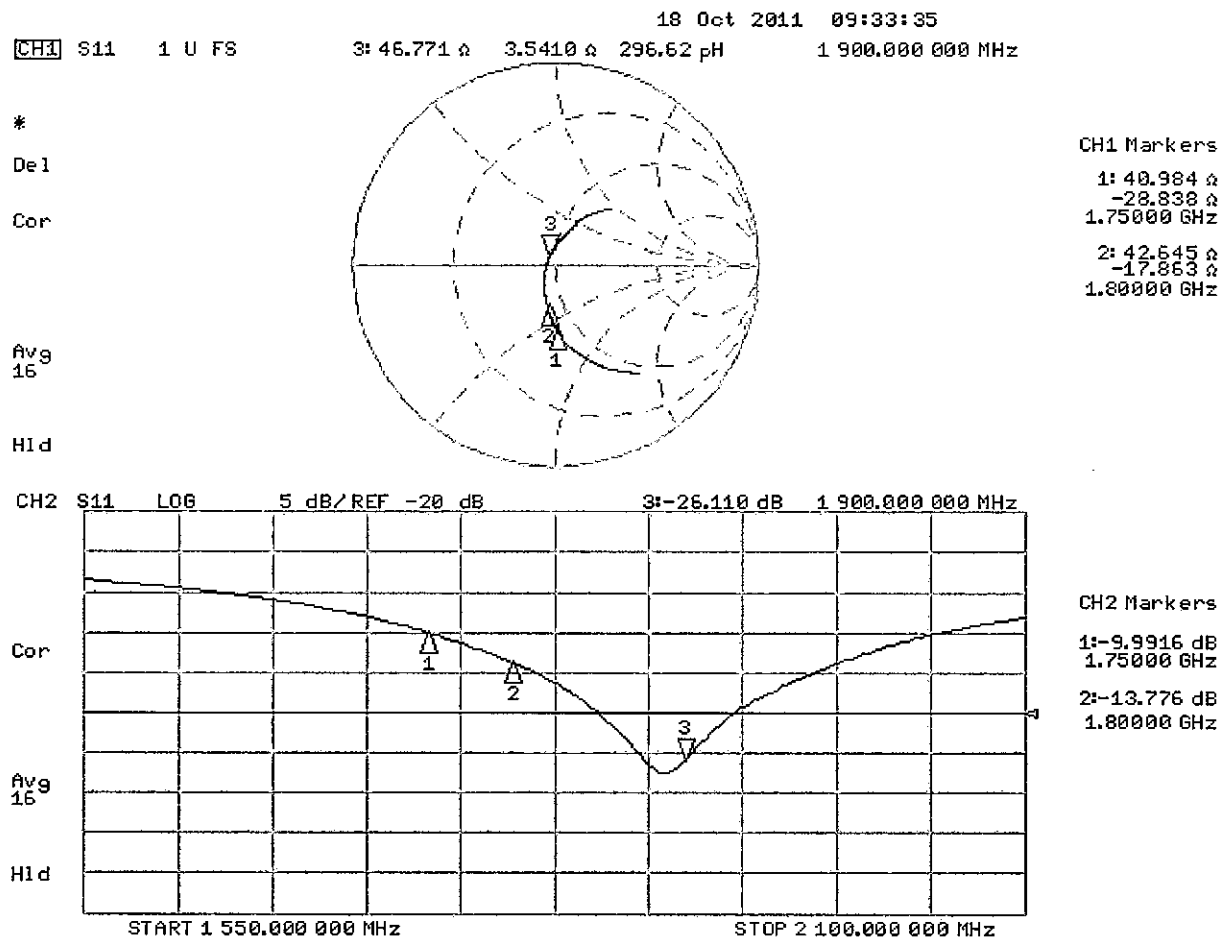

Dipole D1900V2 – SN: 547 Antenna Parameters


Antenna Parameters with Head TSL

	Calibration certificate	Annual measurement 2013-03-06
Impedance, transformed to feed point	50.5 Ω + 4.3 j Ω	49.5 Ω + 4.0 j Ω
Return loss	- 27.4 dB	- 27.9 dB


Antenna Parameters with Body TSL

	Calibration certificate	Annual measurement 2013-03-06
Impedance, transformed to feed point	46.8 Ω + 3.5 j Ω	45.6 Ω + 3.6 j Ω
Return loss	- 26.1 dB	- 24.5 dB

Impedance Measurement plot for Head TSL 1900

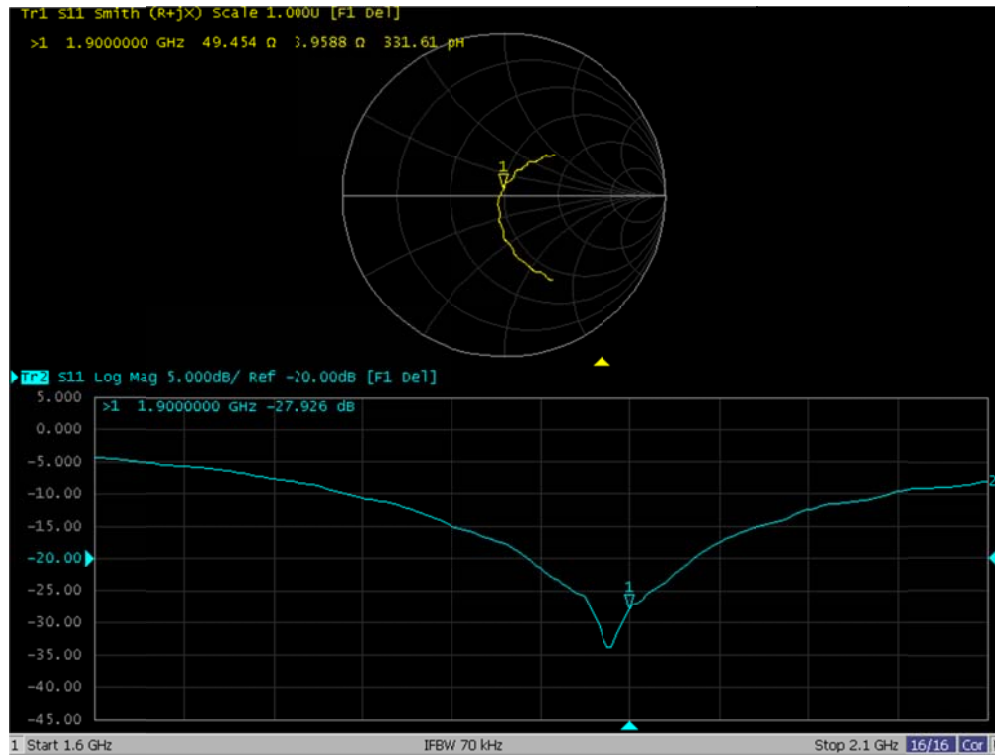

Impedance Measurement plot for Body TSL 1900

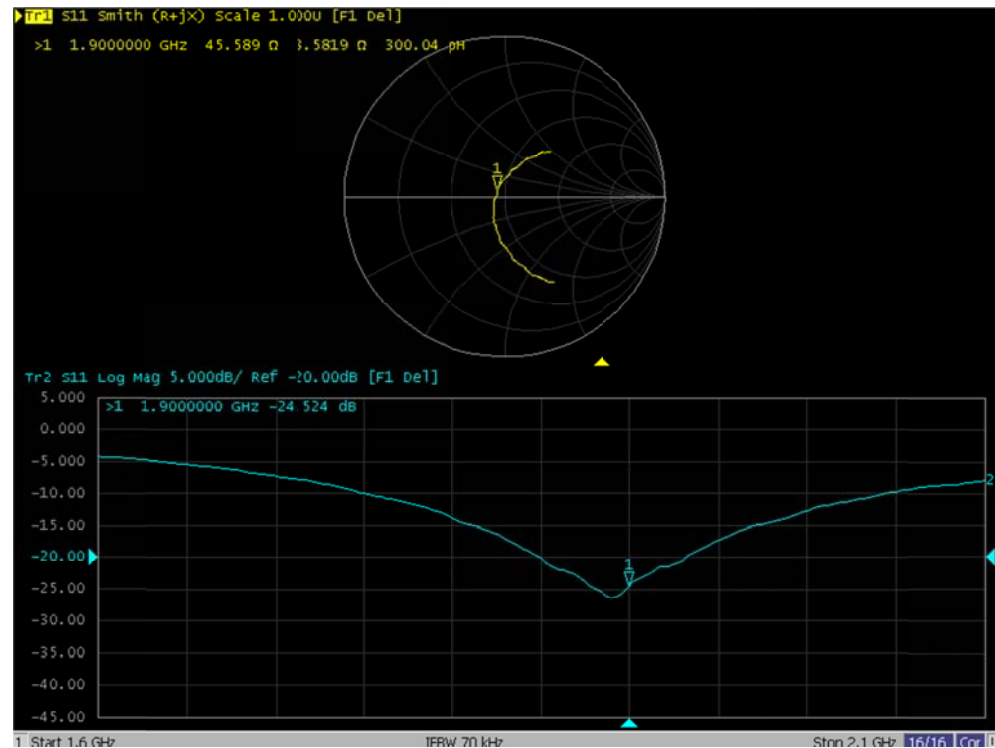



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Nokia Beijing TCC**

Certificate No: **D2450V2-760_Mar11**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 760**

Calibration procedure(s) **QA CAL-05.v8**
Calibration procedure for dipole validation kits

Calibration date: **March 17, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 17, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$55.3 \Omega + 2.7 j\Omega$
Return Loss	- 25.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$50.3 \Omega + 5.6 j\Omega$
Return Loss	- 25.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.159 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 22, 2004

DASY5 Validation Report for Head TSL

Date/Time: 17.03.2011 12:48:58

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:760

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.72$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.2 Build (424)
- Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.2 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 27.253 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.25 mW/g

Maximum value of SAR (measured) = 17.126 mW/g




0 dB = 17.130mW/g

Impedance Measurement Plot for Head TSL

17 Mar 2011 10:49:39
 CH1 S11 1 U FS 2: 55.270 Ω 2.6699 Ω 173.44 μH 2 450.000 000 MHz

*
 Del
 CA


Avg
 16

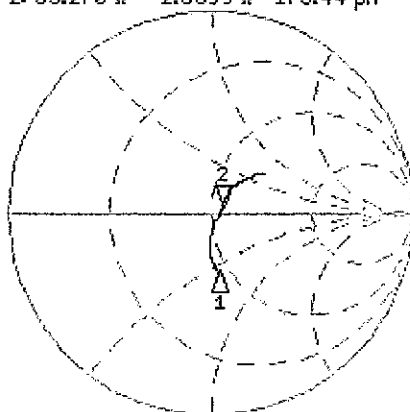

CH1 Markers
 1: 45.100 Ω
 -29.139 Ω
 2.25000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 2:-25.018 dB 2 450.000 000 MHz

CA
 Avg
 16

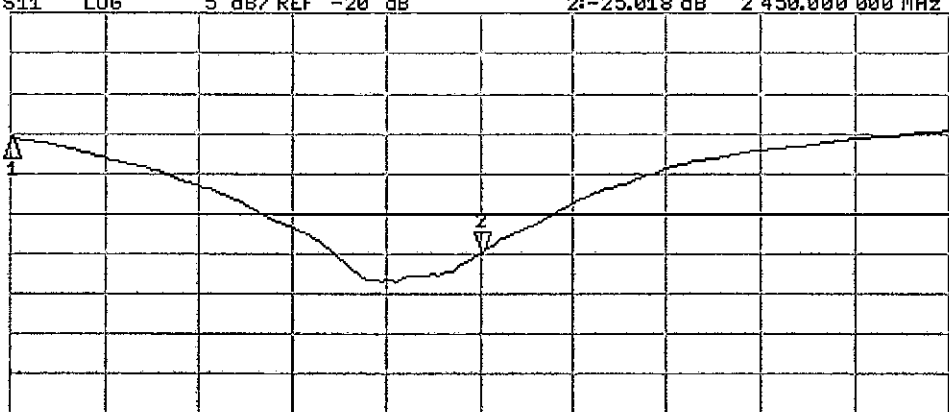

CH2 Markers
 1:-10.543 dB
 2.25000 GHz

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date/Time: 08.03.2011 14:08:11

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:760

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.2 Build (424)
- Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.844 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 27.853 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.14 mW/g

Maximum value of SAR (measured) = 17.439 mW/g

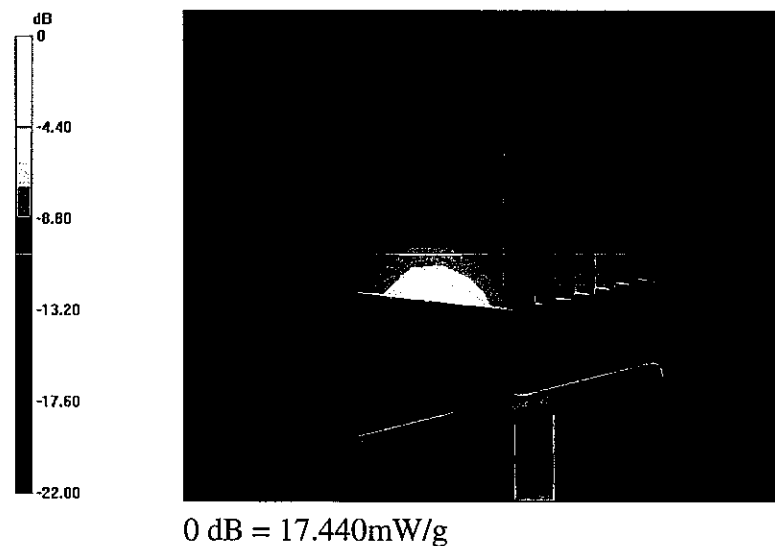


Impedance Measurement Plot for Body TSL

8 Mar 2011 10:20:36
 CH1 S11 1 U FS 4: 50.318 Ω 5.6465 Ω 366.80 pH 2 450.000 000 MHz

*
 De1
 CΔ

Avg
 15

↑

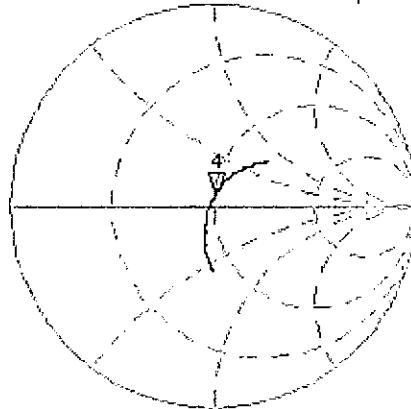


CH2 S11 LOG 5 dB/ REF -20 dB 4:-24.993 dB 2 450.000 000 MHz

CΔ

Avg
 15

↑

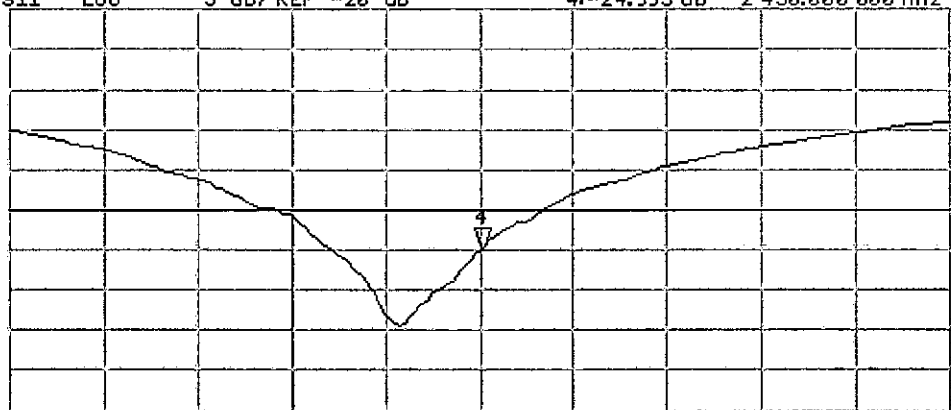

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

Dipole D2450V2 – SN: 760 Antenna Parameters


Antenna Parameters with Head TSL

	Calibration certificate	Annual measurement 2012-03-15
Impedance, transformed to feed point	$55.3\ \Omega + 2.7\ j\Omega$	$54.9\ \Omega + 3.6\ j\Omega$
Return loss	- 25.0 dB	- 24.8 dB


Antenna Parameters with Body TSL

	Calibration certificate	Annual measurement 2012-03-15
Impedance, transformed to feed point	$50.3\ \Omega + 5.6\ j\Omega$	$51.8\ \Omega + 6.3\ j\Omega$
Return loss	- 25.0 dB	- 23.9 dB

Impedance Measurement plot for Head TSL 2450

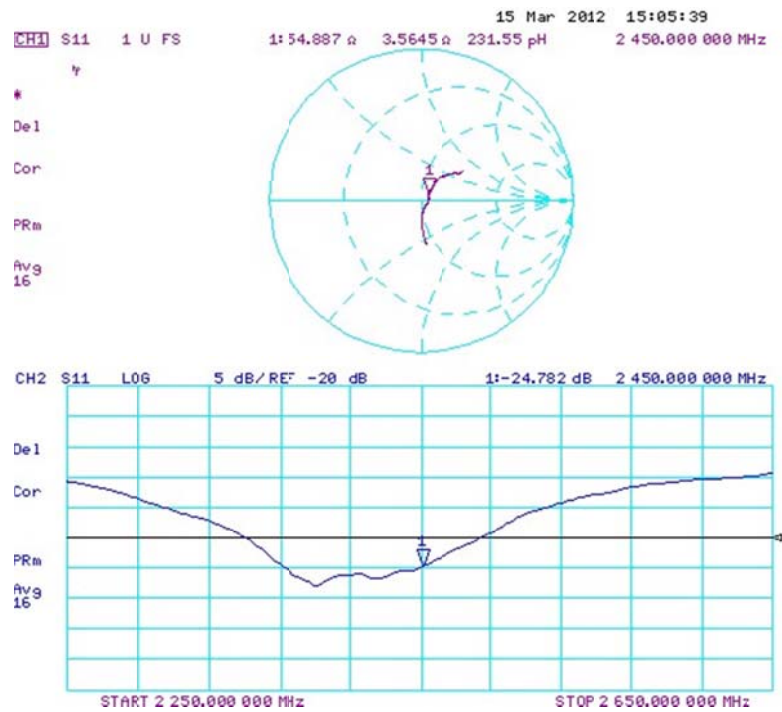

Impedance Measurement plot for Body TSL 2450

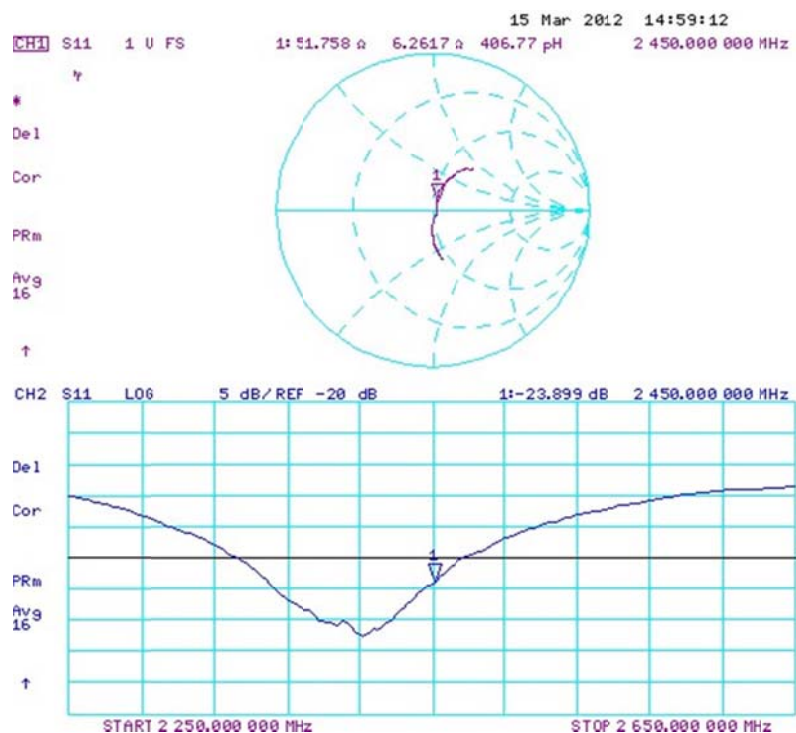

APPENDIX F: CONDUCTED POWER MEASUREMENTS FOR SUPPORTED GSM/GPRS TRANSMISSION MODES

F.1 Power Tuning Targets for Head and Body-worn measurements

GSM 850			
Slot configuration	Low channel	Mid channel	High channel
GSM 1-slot	32.5	32.5	32.5
GPRS 2-slot	29.5	29.5	29.5
GPRS 3-slot	27.7	27.7	27.7
GPRS 4-slot	26.5	26.5	26.5
EGRPS 1-slot	27.0	27.0	27.0
EGPRS 2-slot	27.0	27.0	27.0
EGPRS 3-slot	26.0	26.0	26.0
EGPRS 4-slot	25.0	25.0	25.0

GSM 1900			
Slot configuration	Low channel	Mid channel	High channel
GSM 1-slot	30.5	30.5	30.5
GPRS 2-slot	28.0	28.0	28.0
GPRS 3-slot	26.5	26.5	26.5
GPRS 4-slot	25.0	25.0	25.0
EGRPS 1-slot	26.0	26.0	26.0
EGPRS 2-slot	26.0	26.0	26.0
EGPRS 3-slot	26.0	26.0	26.0
EGPRS 4-slot	25.0	25.0	25.0

F.2 Conducted Power from the Samples used in the Testing

Type: RM-914; Serial number: 004402/47/206437/1 used for GSM/GPRS850 SAR Head and Body-worn measurements.

GSM 850			
Slot configuration	Low channel	Mid channel	High channel
GSM 1-slot	32.90	33.00	32.95
GPRS 2-slot	29.90	29.90	29.95
GPRS 3-slot	28.05	28.10	28.11
GPRS 4-slot	26.90	26.95	26.90
EGRPS 1-slot	27.45	27.35	27.40
EGPRS 2-slot	27.45	27.35	27.40
EGPRS 3-slot	26.45	26.45	26.40
EGPRS 4-slot	25.40	25.43	25.40

Type: RM-914; Serial number: 004402/47/206437/1 used for GSM/GPRS1900 SAR Head and Body-worn measurements.

GSM 1900			
Slot configuration	Low channel	Mid channel	High channel
GSM 1-slot	30.90	30.92	30.95
GPRS 2-slot	28.40	28.50	28.35
GPRS 3-slot	26.85	26.85	26.85
GPRS 4-slot	25.35	25.35	25.35
EGRPS 1-slot	26.38	26.37	26.36
EGPRS 2-slot	26.38	26.35	26.36
EGPRS 3-slot	26.35	26.35	26.36
EGPRS 4-slot	25.37	25.36	25.41

APPENDIX G: CONDUCTED POWER MEASUREMENTS FOR WLAN

G.1 Power Tuning Targets

Tuning Targets					
Modulation mode	Ch 1	Ch 2	Ch 6	Ch 10	Ch 11
b-mode WLAN BPSK 1 Mbps	13.00	-	13.00	-	13.00
b-mode WLAN BPSK 2 Mbps	13.00	-	13.00	-	13.00
b-mode WLAN BPSK 5.5 Mbps	12.00	-	12.00	-	12.00
b-mode WLAN BPSK 11 Mbps	12.00	-	12.00	-	12.00
g-mode WLAN OFDM 6 Mbps	12.00	-	12.00	-	12.00
g-mode WLAN OFDM 9 Mbps	12.00	-	12.00	-	12.00
g-mode WLAN OFDM 12 Mbps	12.00	-	12.00	-	12.00
g-mode WLAN OFDM 18 Mbps	12.00	-	12.00	-	12.00
g-mode WLAN OFDM 24 Mbps	12.00	-	12.00	-	12.00
g-mode WLAN OFDM 36 Mbps	11.00	-	11.00	-	11.00
g-mode WLAN OFDM 48 Mbps	11.00	-	11.00	-	11.00
g-mode WLAN OFDM 54 Mbps	11.00	-	11.00	-	11.00
n-mode MCS 0: OFDM 6.5 / 7.25 Mbps	12.00	-	12.00	-	12.00
n-mode MCS 1: OFDM 13.0 / 14.4 Mbps	12.00	-	12.00	-	12.00
n-mode MCS 2: OFDM 19.5 / 21.7 Mbps	12.00	-	12.00	-	12.00
n-mode MCS 3: OFDM 26.0 / 28.9 Mbps	12.00	-	12.00	-	12.00
n-mode MCS 4: OFDM 39.0 / 43.3 Mbps	11.00	-	11.00	-	11.00
n-mode MCS 5: OFDM 52.0 / 57.8 Mbps	11.00	-	11.00	-	11.00
n-mode MCS 6: OFDM 58.5 / 65.0 Mbps	11.00	-	11.00	-	11.00
n-mode MCS 7: OFDM 65.0 / 72.2 Mbps	11.00	-	11.00	-	11.00

G.2 Conducted Power measurements

Type: RM-914; Serial number: 358352/05/719511/0 used for WLAN for SAR Head, Body-worn and Wireless Router measurements.

WLAN 2.4 GHz					
Modulation mode	Ch 1	Ch 2	Ch 6	Ch 10	Ch 11
b-mode WLAN BPSK 1 Mbps	13.3	-	13.3	-	13.2
b-mode WLAN BPSK 2 Mbps	13.3	-	13.3	-	13.2
b-mode WLAN BPSK 5.5 Mbps	12.4	-	12.4	-	12.2
b-mode WLAN BPSK 11 Mbps	12.3	-	12.2	-	12.2
g-mode WLAN OFDM 6 Mbps	12.1	-	12.1	-	12.1
g-mode WLAN OFDM 9 Mbps	12.1	-	12.2	-	12.1
g-mode WLAN OFDM 12 Mbps	12.1	-	12	-	12.1
g-mode WLAN OFDM 18 Mbps	12.1	-	12.1	-	12
g-mode WLAN OFDM 24 Mbps	12.1	-	12.1	-	12.1
g-mode WLAN OFDM 36 Mbps	12.0	-	12.1	-	12.1
g-mode WLAN OFDM 48 Mbps	12.1	-	12	-	12.1
g-mode WLAN OFDM 54 Mbps	12.2	-	12.1	-	12.1
n-mode MCS 0: OFDM 6.5 / 7.25 Mbps	12.1	-	12	-	12.2
n-mode MCS 1: OFDM 13.0 / 14.4 Mbps	12.0	-	12.2	-	12.1
n-mode MCS 2: OFDM 19.5 / 21.7 Mbps	12.2	-	12	-	12.1
n-mode MCS 3: OFDM 26.0 / 28.9 Mbps	12.1	-	12.3	-	12.2
n-mode MCS 4: OFDM 39.0 / 43.3 Mbps	12.1	-	12	-	12.1
n-mode MCS 5: OFDM 52.0 / 57.8 Mbps	12.1	-	12.2	-	12
n-mode MCS 6: OFDM 58.5 / 65.0 Mbps	12.1	-	12.1	-	12.2
n-mode MCS 7: OFDM 65.0 / 72.2 Mbps	12.2	-	12.2	-	12.1