

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-994_09.docx	Date of Report:	25-Nov-2013
Number of pages:	25	Customer's Contact person:	Hu Helen
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-994 / Battery BV-4BWA(Sony) / AC-Charger AC-60E / USB data cable CA-190CD / Headset WH-108 / Dummy battery -		
FCC ID:	QTLRM-994	IC:	
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22/24 , TIA-603-C-2004 and IC standards, RSS-GEN (Issue 3, December 2010), RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Gao Sherina, Engineer, EMC

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	01-Nov-2013
Testing completed	22-Nov-2013
The customer's contact person	Hu Helen
Test Plan referred to	T:\Projects\RM-994\TestPlan\RS_testplan_RM-994.xlsm
Notes	-
Document name	FCC22&24_RM-994_09.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-994	004402476325307	1001	-	3052.40000.1342.0000	53797
Battery	BV-4BWA(Sony)	-	Ver.2.0	-	-	53959
AC-Charger	AC-60E	4868673331710300060;0675677	-	-	-	53961
USB data cable	CA-190CD	07304563151628	-	-	-	53962
Headset	WH-108	3323471	-	-	-	53963
Phone	RM-994	004402476325679	1001	-	3052.40000.1342.0000	53795
Dummy Battery	-	-	Ver.2.0	-	-	53937
Phone	RM-994	004402476329242	1000	-	3052.40000.1341.0000	53796
Battery	BV-4BWA(Sony)	-	Ver.2.0	-	-	53938
AC-charger	AC-60E	4868673343710301247;0675677	-	-	-	53949
USB data cable	CA-190CD	-	-	-	-	53951
Headset	WH-108	3323471	-	-	-	53950

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.3	Frequency stability, voltage variation	PASSED

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED

§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	PASSED
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. 99% occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	6
2.1. Test Setup.....	6
2.2. Test method and limit.....	6
2.3. GSM 1900 Test results	7
2.4. GSM 850 Test results	8
2.5. WCDMA 850 Test results.....	9
3. Band edge compliance (FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5)	10
3.1. Test Setup.....	10
3.2. Test method and limit.....	10
3.3. GSM 1900 Test results	11
3.4. GSM 850 Test results	13
3.5. WCDMA 850 Test results.....	15
4. Spurious radiated emissions (FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5).....	16
4.2. Test method and limit.....	16
4.3. GSM850 TX test results	18
4.4. GSM850-E1 TX test results.....	18
4.5. GSM1900 TX test results	18
4.6. GSM1900-E1 TX test results.....	18
4.7. WCDMA 850 (Band V) test results.....	19
5. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3).....	20
5.1. Test Setup.....	20
5.2. Test method and limit.....	20
5.3. GSM 1900 Test results	21
5.4. GSM 850 Test results	21
6. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)	22
6.1. Test Setup.....	22
6.2. Test method and limit.....	22
6.3. GSM 1900 Test results	23
6.4. GSM 850 Test results	23

7. Test Equipment.....	24
7.1. Conducted measurements	24
7.2. Radiated measurements	24

2. 99% occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-994, DUT 53797
Accessories with DUT numbers	BV-4BWA(Sony), DUT 53959 ; AC-60E, DUT 53961 ; CA-190CD, DUT 53962 ; WH-108, DUT 53963
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/34/101.7 to 20/30/101.4
Date of measurements	13-Nov-2013 to 14-Nov-2013
Measured by	Gao Sherina

2.1. Test Setup

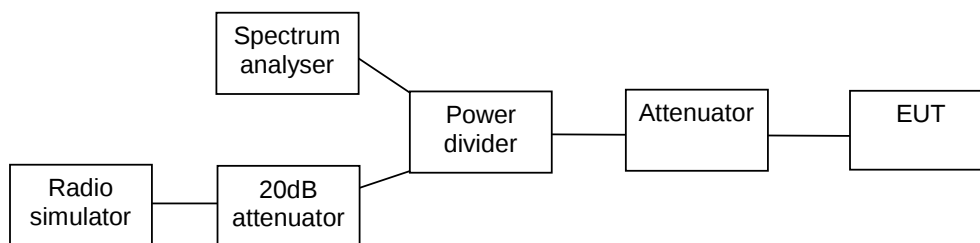


2.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and IC standard RSS-GEN.


2.3. GSM 1900 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
GSM	244
EGPRS	242

GSM, Channel 661 / 1880.0 MHz

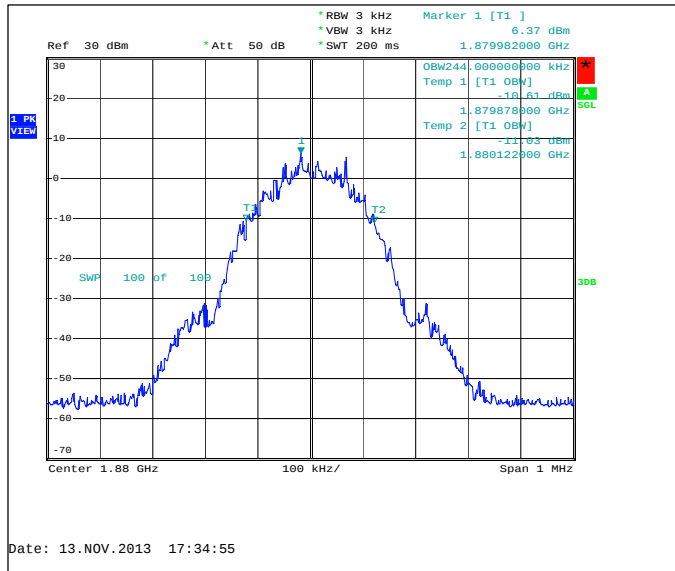


EGPRS, Channel 661 / 1880.0 MHz

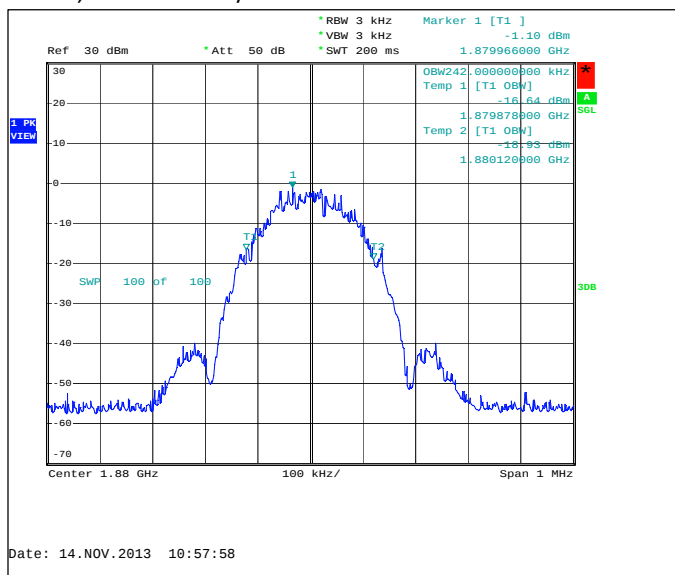


2.4. GSM 850 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
GSM	244
EGPRS	242

GSM, Channel 190 / 836.6 MHz

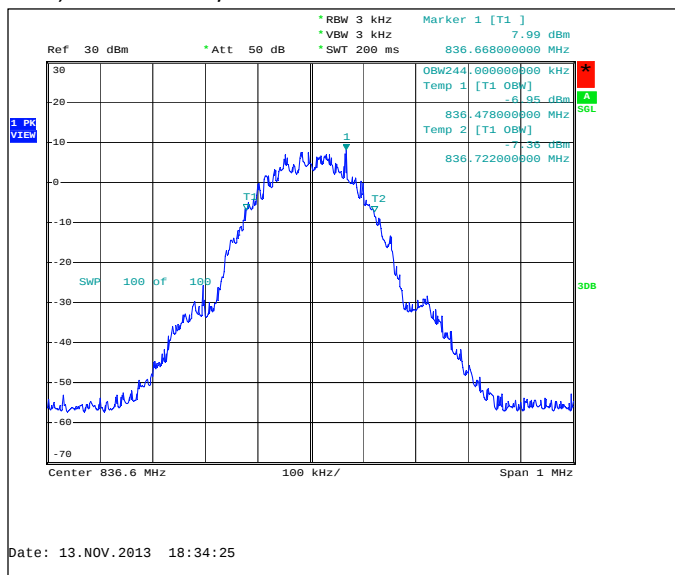


EGPRS, Channel 190 / 836.6 MHz

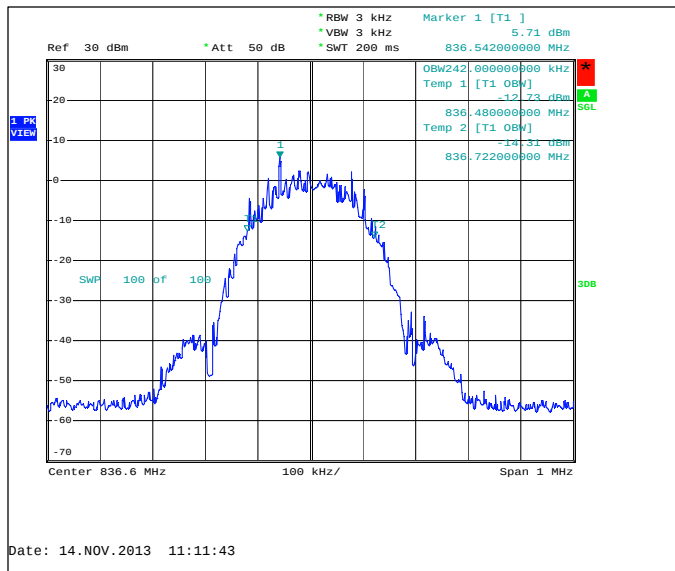

2.5. WCDMA 850 Test results

Operation mode (TX on)	99% Occupied bandwidth [kHz]
FDD	4180

FDD, Channel 4175 / 835.0 MHz

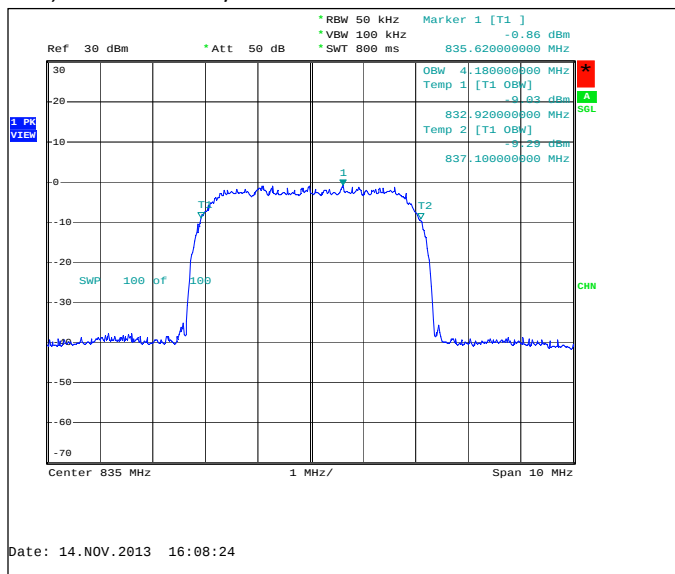


3. Band edge compliance

(FCC §22.917(a), §24.238(a), RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-994, DUT 53797
Accessories with DUT numbers	BV-4BWA(Sony), DUT 53959 ; AC-60E, DUT 53961 ; CA-190CD, DUT 53962 ; WH-108, DUT 53963
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/34/101.7
Date of measurements	13-Nov-2013
Measured by	Gao Sherina

3.1. Test Setup

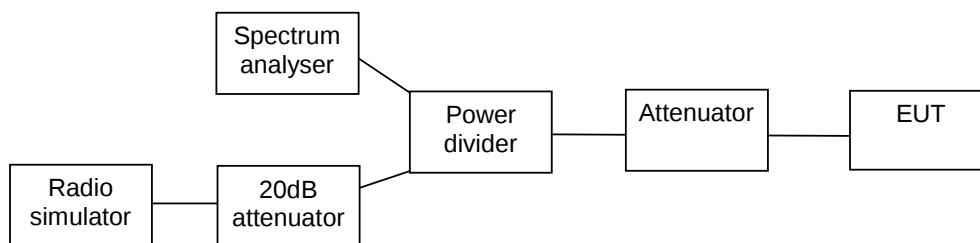

3.2. Test method and limit


The measurement is made according to FCC rules parts 22, 24 and IC standards , RSS-132, RSS-133.

Limits for band edge compliance measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM850 / WCDMA850	Below 824 and above 849	-13
GSM1900	Below 1850 and above 1910	-13

3.3. GSM 1900 Test results


Channel 512 / 1850.2 MHz

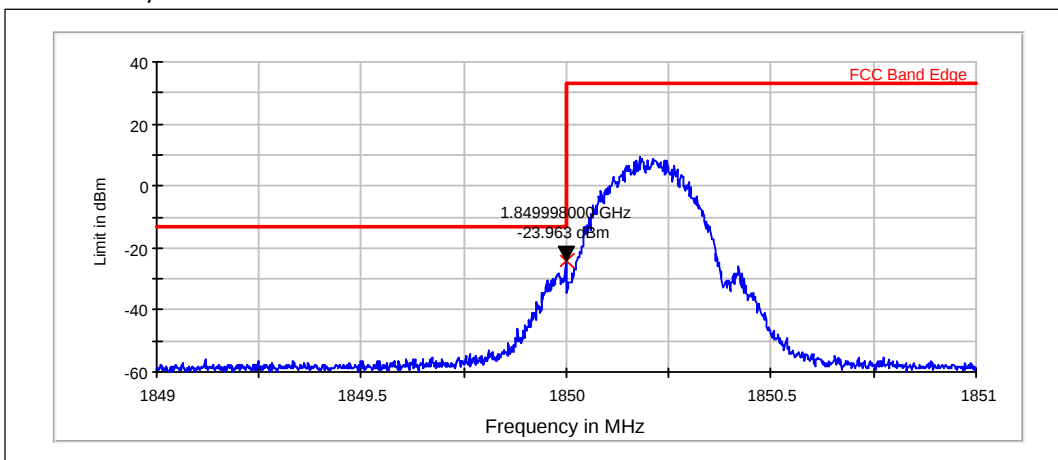

RMS (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
GSM	1849.998	-23.96	PASSED


Channel 810 / 1909.8 MHz

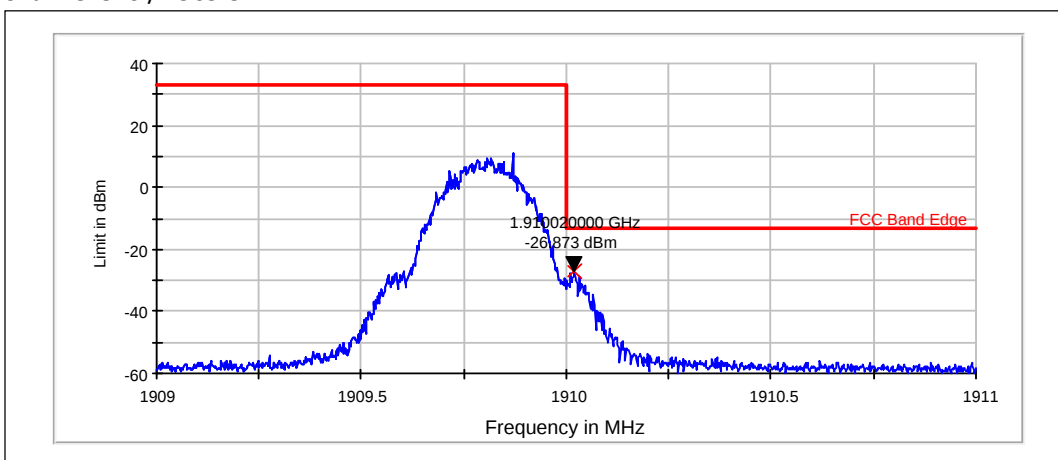

RMS (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
GSM	1910.020	-26.87	PASSED


Channel 512 / 1850.2 MHz

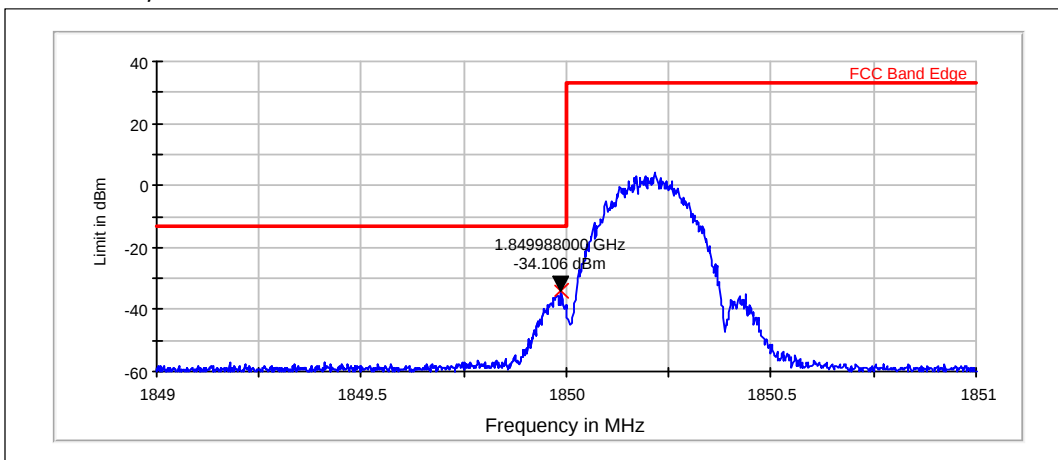

RMS (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
EGPRS	1849.988	-34.11	PASSED

Channel 810 / 1909.8 MHz

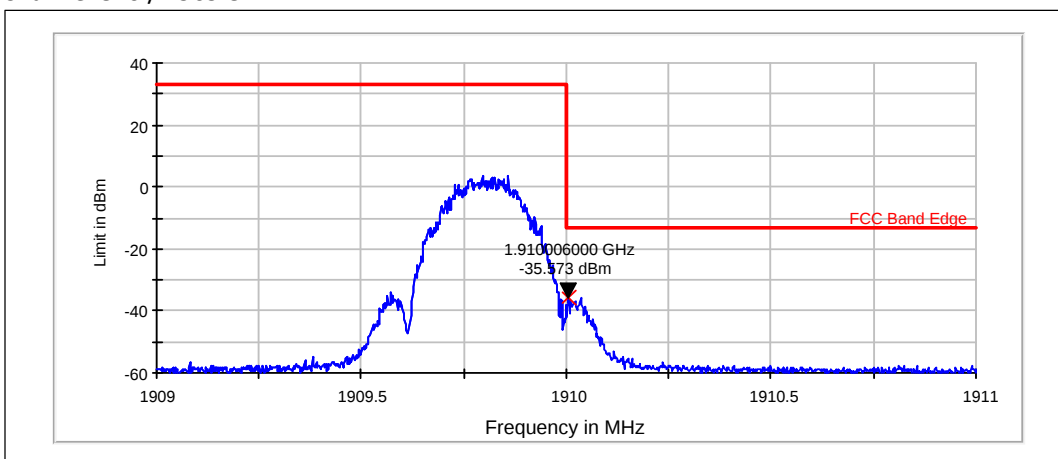


RMS (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
EGPRS	1910.006	-35.57	PASSED

3.4. GSM 850 Test results


Channel 128 / 824.2 MHz

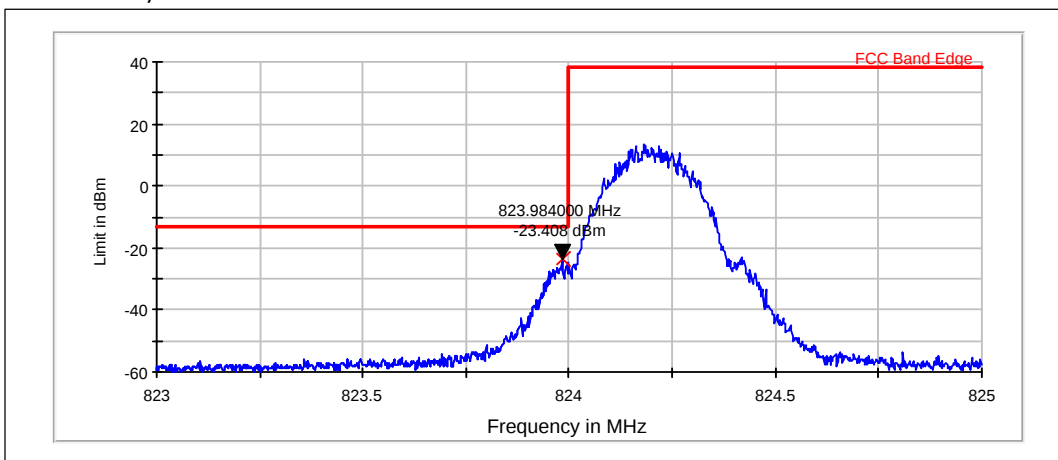

RMS (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
GSM	823.984	-23.41	PASSED


Channel 251 / 848.8 MHz

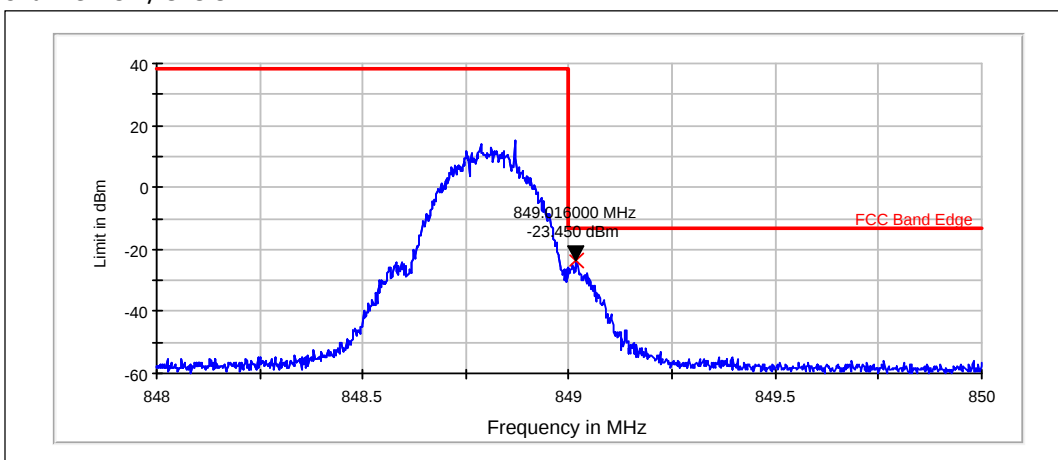

RMS (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
GSM	849.016	-23.45	PASSED


Channel 128 / 824.2 MHz

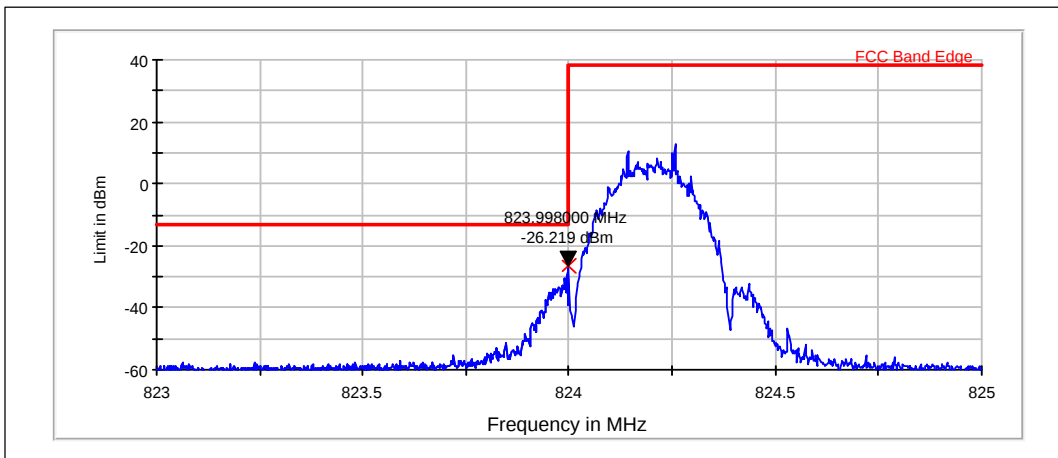

RMS (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
EGPRS	823.998	-26.22	PASSED

Channel 251 / 848.8 MHz

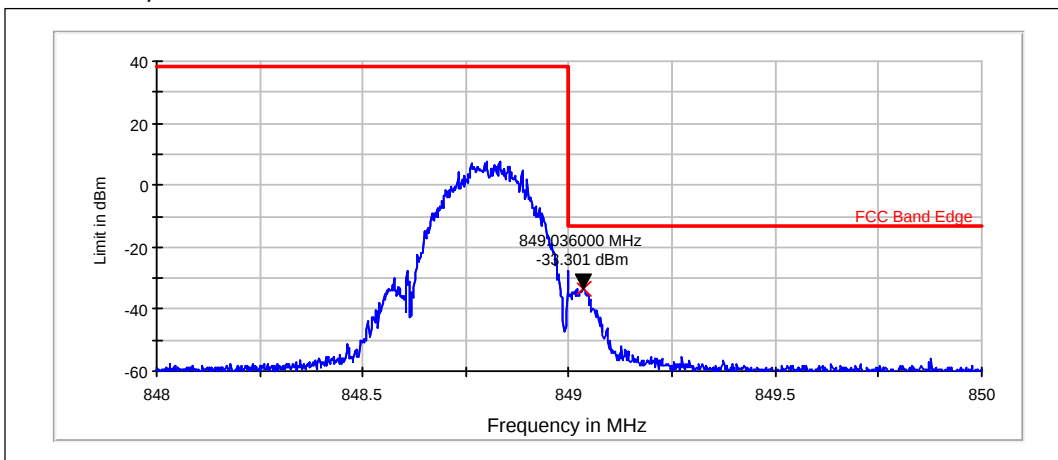


RMS (RBW: 3 kHz, VBW: 3 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
EGPRS	849.036	-33.30	PASSED

3.5. WCDMA 850 Test results


Channel 4132 / 826.4 MHz

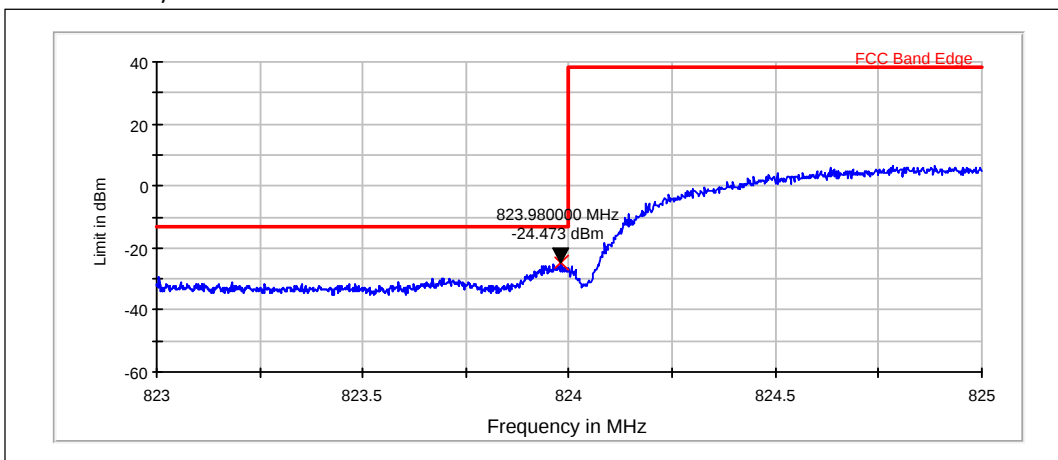

RMS (RBW: 50 kHz, VBW: 50 kHz, Max hold)

Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
FDD	823.980	-24.47	PASSED

Channel 4233 / 846.6 MHz

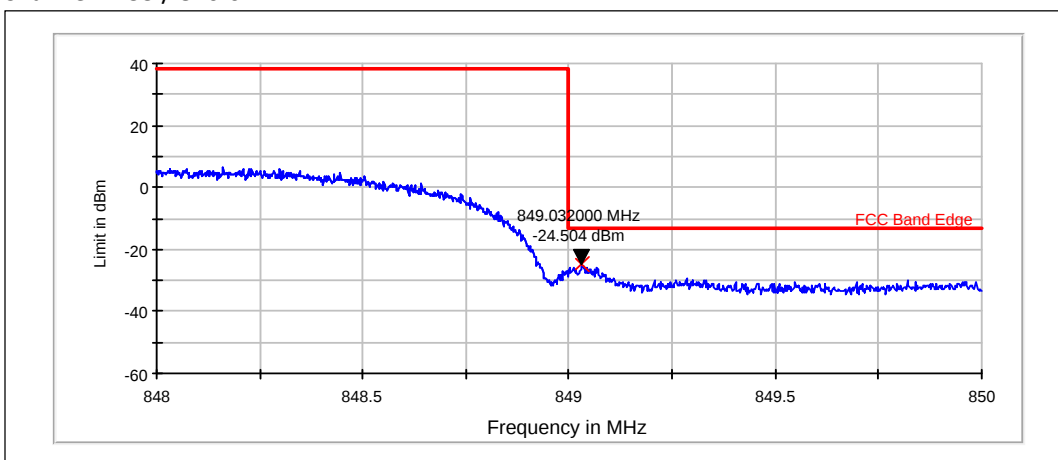

RMS (RBW: 50 kHz, VBW: 50 kHz, Max hold)


Operation mode (TX on)	Frequency [MHz]	Level [dBm]	Result
FDD	849.032	-24.50	PASSED

4. Spurious radiated emissions

(FCC §22.917(a), §2.1053, §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

EUT with DUT number	RM-994, DUT 53796
Accessories with DUT numbers	BV-4BWA(Sony), DUT 53938 ; AC-60E, DUT 53949 ; CA-190CD, DUT 53951 ; WH-108, DUT 53950
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 33/ 101.5
Date of measurements	07-Nov-2013
Measured by	Zou Ming

4.1.1 Test setup

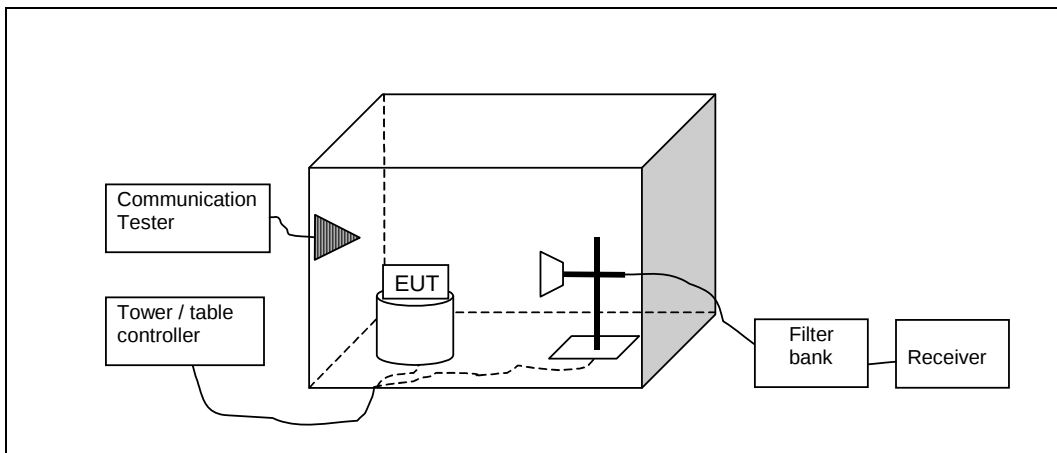

4.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$ASUBST = PSUBST_TX - PSUBST_RX - LSUBST_CABLES + GSUBST_TX_ANT$$

Where ASUBST is the final substitution correction including receive antenna gain. PSUBST_TX is signal generator level, PSUBST_RX is receiver level, LSUBST_CABLES is cable losses including both TX and RX cables and GSUBST_TX_ANT is substitution antenna gain.

The measurement results are obtained as described below:

$$P \text{ [dBm]} = \text{PMEAS} + \text{ATOT}$$

Where PMEAS is receiver reading in dBm and ATOT is total correction factor including cable loss, preamplifier gain and substitution correction (ATOT = LCABLES - GPREAMP + ASUBST).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM850 / WCDMA850	30 - 8500	-13
GSM1900	30 - 18000	-13

4.3. GSM850 TX test results

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
848.795	-70.68	9E-05	-66.31	-4.37	HORIZONTAL	PASSED
1673.066	-50.23	0.00948	-54.02	3.79	VERTICAL	PASSED
1673.267	-50.23	0.00948	-54.02	3.79	VERTICAL	PASSED
2509.739	-49.73	0.01063	-60.4	10.67	VERTICAL	PASSED
2576.232	-53.71	0.00426	-64.21	10.5	VERTICAL	PASSED
3371.623	-58.68	0.00136	-66.19	7.51	HORIZONTAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

4.4. GSM850-E1 TX test results

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
1673.14	-52.94	0.00508	-56.63	3.69	HORIZONTAL	PASSED
2508.698	-52.65	0.00543	-63.04	10.39	HORIZONTAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

4.5. GSM1900 TX test results

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
9225.451	-43.67	0.04293	-67.67	24	VERTICAL	PASSED
9625.812	-43.33	0.04641	-67.58	24.25	HORIZONTAL	PASSED
9799.319	-41.68	0.06798	-66.73	25.05	VERTICAL	PASSED
9878.838	-41.67	0.06806	-67.1	25.43	VERTICAL	PASSED
9959.801	-42.28	0.05917	-67.17	24.89	VERTICAL	PASSED
9995.958	-42.09	0.06184	-66.96	24.87	VERTICAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

4.6. GSM1900-E1 TX test results

Peak detector

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
3760.18	-52.93	0.0051	-63.5	10.57	VERTICAL	PASSED
5639.98	-43.2	0.04787	-57.04	13.84	VERTICAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

4.7. WCDMA 850 (Band V) test results

Channel 4175 / 835.0 MHz

FDD mode, Peak detector


Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarization	Results
850.919	-49.09	0.01232	-81.67	32.58	HORIZONTAL	PASSED
851.448	-48.3	0.01479	-80.86	32.56	HORIZONTAL	PASSED
1000.701	-59.71	0.00107	-62.01	2.3	HORIZONTAL	PASSED
2505.872	-51.07	0.00783	-61.74	10.67	VERTICAL	PASSED
2517.776	-52.41	0.00575	-62.89	10.48	HORIZONTAL	PASSED

*Substitution method could not be utilized as no emissions above noise floor were found during measurements.

5. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-994, DUT 53797
Accessories with DUT numbers	BV-4BWA(Sony) , DUT 53959 ; AC-60E, DUT 53961 ; CA-190CD, DUT 53962 ; WH-108, DUT 53963
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20/34/101.7
Date of measurements	13-Nov-2013
Measured by	Gao Sherina

5.1. Test Setup

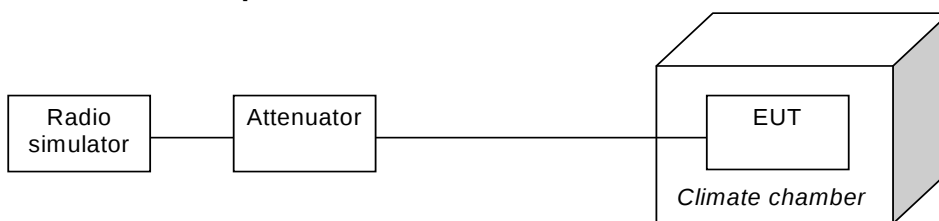

5.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and IC standard RSS-132, RSS-133 as follows:

The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.

The EUT is placed in the chamber.

The EUT is set in idle mode for 15 minutes.

The EUT is set to transmit.

The transmit frequency error was measured immediately.

The steps c - e were repeated for each temperature. Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
+/- 2.5

5.3. GSM 1900 Test results

GSM, Channel 661 / 1880.0 MHz

Temperature [°C]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
50	1880.00	-24.34000	-0.0129	PASSED
40	1880.00	-26.41000	-0.014	PASSED
30	1880.00	-8.72000	-0.0046	PASSED
20	1880.00	-23.63000	-0.0126	PASSED
10	1880.00	-23.89000	-0.0127	PASSED
0	1880.00	-17.56000	-0.0093	PASSED
-10	1880.00	-17.31000	-0.0092	PASSED
-20	1880.00	-22.28000	-0.0119	PASSED
-30	1880.00	-4.20000	-0.0022	PASSED

5.4. GSM 850 Test results


GSM, Channel 190 / 836.6 MHz

Temperature [°C]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
50	836.60	-10.14000	-0.0121	PASSED
40	836.60	-12.20000	-0.0146	PASSED
30	836.60	-7.49000	-0.009	PASSED
20	836.60	0.39000	0.0005	PASSED
10	836.60	-11.11000	-0.0133	PASSED
0	836.60	0.84000	0.001	PASSED
-10	836.60	-6.78000	-0.0081	PASSED
-20	836.60	-8.01000	-0.0096	PASSED
-30	836.60	-7.81000	-0.0093	PASSED

6. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-994, DUT 53795
Accessories with DUT numbers	Dummy battery, DUT 53937
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19/34/102.5
Date of measurements	22-Nov-2013
Measured by	Gao Sherina

6.1. Test Setup



6.2. Test method and limit

The measurement is made according to FCC rules parts 22, 24 and IC standard RSS-132, RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
+/- 2.5

6.3. GSM 1900 Test results

GSM, Channel 661 / 1880.0 MHz

Voltage level [V]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
Nominal / 4.2	1880.00	-9.81000	-0.0052	PASSED
Battery cut-off point / 3.4	1880.00	-25.18000	-0.0134	PASSED
Max / 4.2	1880.00	-24.73000	-0.0132	PASSED

6.4. GSM 850 Test results

GSM, Channel 190 / 836.6 MHz

Voltage level [V]	Frequency [MHz]	Deviation [Hz]	Deviation [ppm]	Result
Nominal / 4.2	836.60	-0.58000	-0.0007	PASSED
Battery cut-off point / 3.4	836.60	2.13000	0.0025	PASSED
Max / 4.2	836.60	-5.94000	-0.0071	PASSED

7. Test Equipment

7.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0069	LISN 50 µH	ESH3-Z5	R&S	15C,15B
BJPCTC0323	Signal Generator	SMR 27	R&S	22/24/27, 15C, 15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C.15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C.15R
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C.15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0082	Humidity and Temperature Sensor	175-H2	Testo	15B,15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B,15C
BJPCTC0089	Tempreture Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPB-RS232 convertor	GPB-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0127	AC Power source	SOYI-500VA	SOYI	15B 15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0306	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0305	GPB converter	GPB-RS232	NI	22/24/27, 15C
BJPCTC0304	Spectrum Analyser	FSV30	R&S	22/24/27, 15C
BJPCTC0309	GPB-RS232 convertor	RS232	NI	22/24/27, 15C
BJPCTC0307	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0308	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCHW0571	Signal Generator 20GHz	MG3692B	Anritsu	22/24/27, 15C
BJBDATC0169	Tempreture Test chamber	VT4002	Votsch	22/24/27, 15C

7.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0166	Antenna	VUBA 9117	Swarzbeck	22/24/27
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C.15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C.15R
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0081	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B, 15C
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C
BJPCTC0115	Communication Tester	CMU200	R&S	22/24/27, 15B, 15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-
BJPCTC0125	Loop Antenna	HFH2-Z2	R&S	15C
BJPCTC0126	Tripod	FHU-Z	R&S	15C
BJPCTC0128	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JXTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0133	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0134	Open Swith and contril unit	OSP 150	R&S	15B, 15C
BJPCTC0135	Open Swith and contril unit	OSP 130	R&S	15B, 15C
BJPCTC0136	Communication antenna	JXTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0171	Broad-band Horn Antenna	BBHA9120 D	SCHWARZBECK MESS - ELEKTRONIK	22/24/27, 15C, 15B
BJPCTC0310	Horn Antenna	QSH20SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0311	Horn Antenna	QSH18SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0312	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0313	High Pass Filter	WHKX1.0/15G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0314	High Pass Filter	WHKX8.0/18G-88SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0315	High Pass Filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0316	Preamplifier	AMT-5F-18002550-25-108	-	22/24/27, 15C, 15B
BJPCTC0317	Preamplifier	AMF-6D-02001800-29-20P	-	22/24/27, 15C, 15B
BJPCTC0318	Preamplifier	AFS42-00101500-25-10P-42	-	22/24/27, 15C, 15B
BJPCTC0324	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0329	Relay Switch Unit	-	-	22/24/27, 15C, 15B