

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0923_16.doc	Date of Report:	12-Aug-2009
Number of pages:	13	Customer's Contact person:	Janne Sarna
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 50 Mattianniemi 6-8 FIN-40101 JYVÄSKYLÄ, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 78000
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-333 hw 1450 / Battery BL-5K, AC charger AC-10E, Audio adapter AD-54, Headset HS-45		
FCC ID:	QURRM-333	IC:	661AC-RM333
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, Test System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	18-May-2009
Testing completed	11-Jun-2009
The customer's contact person	Janne Sarna
Test Plan referred to	T:\Projects\RM-333\TestPlan_RS\RS_Test_Plan_RM-333_CR_HW1450.xls
Notes	-
Document name	T:\Projects\RM-333\EMC\Results\FCC\Tre_FCC_0923_16.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/VIII) mobile phone with GPRS, EGPRS, Bluetooth, WLAN and FM transmitter. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-333	355708021807259	1450	-	20.175	41891
Phone	RM-333	355708021810139	1450	-	20.175	41892
Battery	BL-5K	4620408414L10116186;0670580	-	-	-	41894
AC charger	AC-10E	3997918336010500775;0675406	-	-	-	41893
Audio adapter	AD-54	-	-	-	-	41691
Headset	HS-45	-	-	-	-	41692

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (a)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (b)	Power spectral density	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Tampere Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	5
3.1. Test method and limit	5
3.2. WLAN Test results	6
4. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a))	8
4.1. Test method and limit.....	8
4.2. WLAN test results	9
5. Test Equipment.....	12
5.1. Conducted measurements	12
5.2. Radiated measurements	12

2. Test setups


2.1. Conducted RF test setup

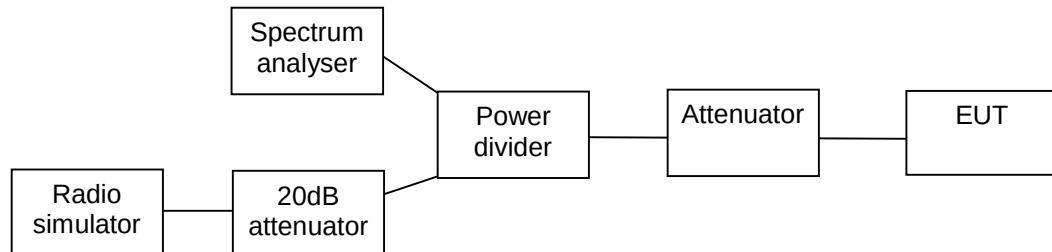

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

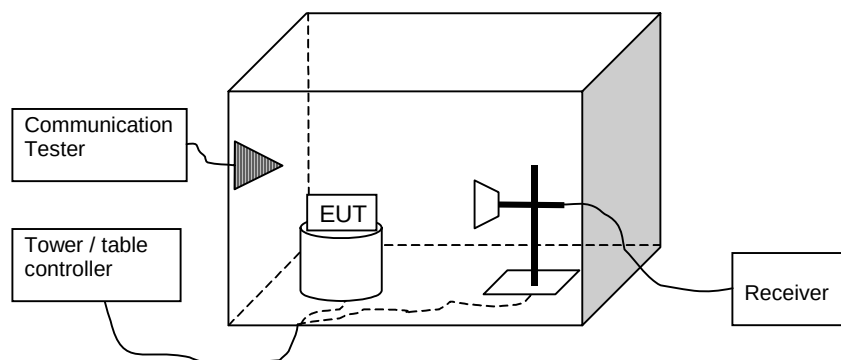

3. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-333 DUT 41891
Accessories with DUT numbers	BL-5K DUT 41894, AC-10E DUT 41893, AD-54 DUT 41691, HS-45 DUT 41692
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 50 / 101.0
Date of measurements	11-Jun-2009
Measured by	Jari Jantunen

3.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

3.2. WLAN Test results

3.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

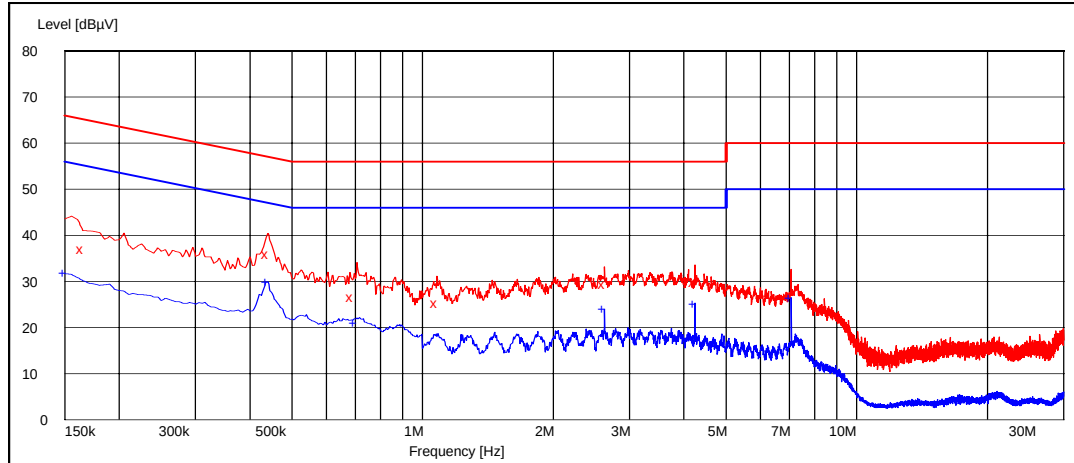

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.165000	37.10	N	PASSED
0.440000	36.00	L1	PASSED
0.690000	26.60	L1	PASSED
1.080000	25.40	L1	PASSED
2.625000	29.40	L1	PASSED
4.240000	29.80	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.150000	31.90	N	PASSED
0.440000	29.90	L1	PASSED
0.700000	21.00	L1	PASSED
2.625000	24.10	L1	PASSED
4.240000	25.00	L1	PASSED
7.065000	26.50	L1	PASSED

3.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 7 / 2442 MHz

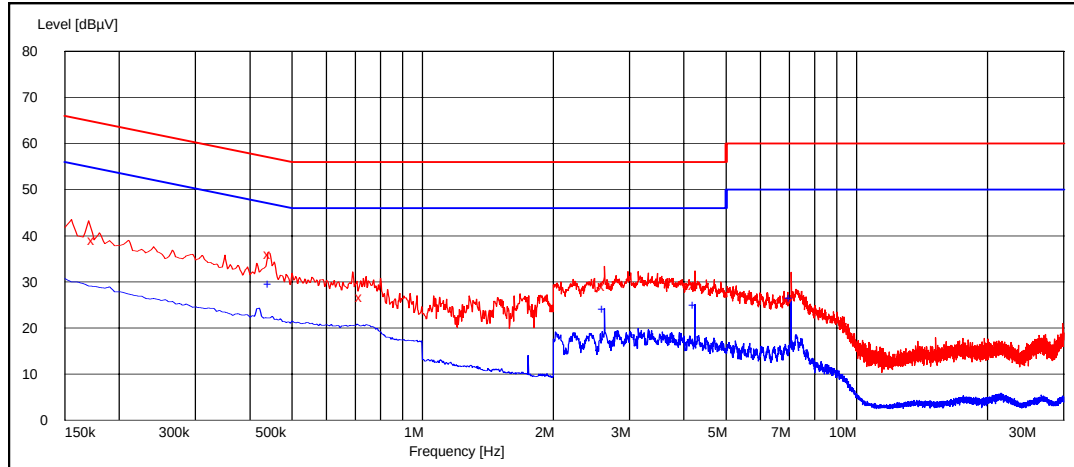

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.175000	39.10	L1	PASSED
0.445000	36.10	L1	PASSED
0.725000	26.70	L1	PASSED
2.625000	29.10	L1	PASSED
4.240000	29.40	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.445000	29.50	L1	PASSED
2.625000	24.00	L1	PASSED
4.240000	25.00	L1	PASSED
7.065000	26.50	L1	PASSED

4. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (a))

EUT with DUT number	RM-333 DUT 41892
Accessories with DUT numbers	BL-5K DUT 41894
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 55 / 101.4
Date of measurements	08-Jun-2009
Measured by	Jari Jantunen

4.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

4.2. WLAN test results


4.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	10737.179	PASSED
7	10817.308	PASSED
11	10817.308	PASSED

Channel 1 / 2412 MHz

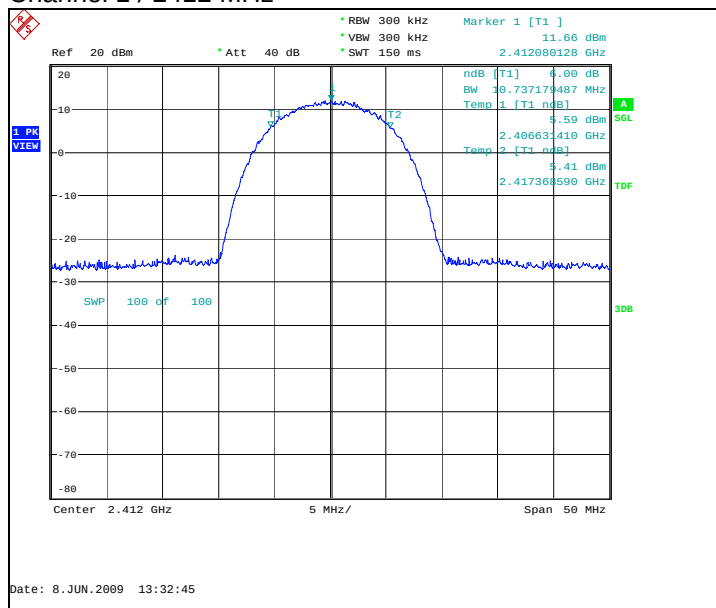

Channel 7 / 2442 MHz

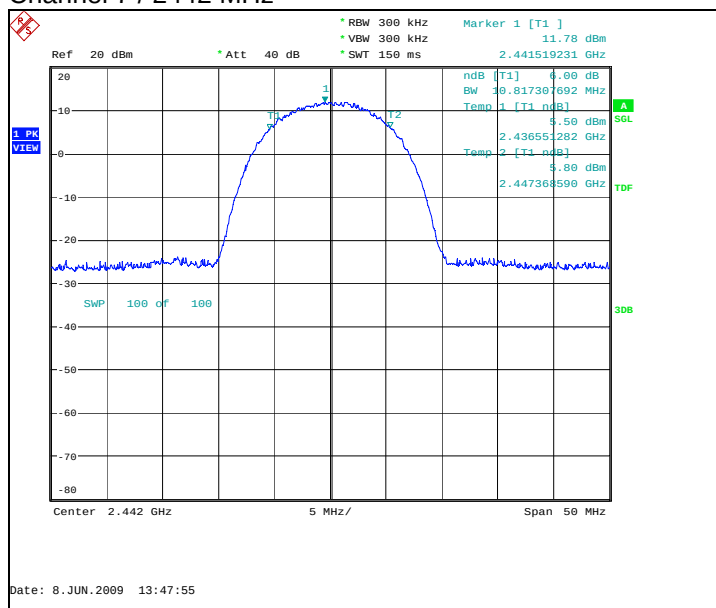

Ref 20 dBm * Att 40 dB
 5 RBW 300 kHz Marker 1 [T1] 11.98 dBm
 VBW 300 kHz 2.463362179 GHz
 SWT 150 ms

ndB [T1] 6.00 dB
 BW 10.817307692 MHz
 Temp 1 [T1 ndB] 5.68 dBm
 2.45655282 GHz
 Temp 2 [T1 ndB] 6.00 dBm
 2.467368599 GHz

1 PK VIEW
 SWP 100 of 100
 30 dB


Center 2.462 GHz 5 MHz/ Span 50 MHz

Date: 8.JUN.2009 14:06:12


Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	16506.410	PASSED
7	16506.410	PASSED
11	16506.410	PASSED

[illegible]

Channel 7 / 2442 MHz

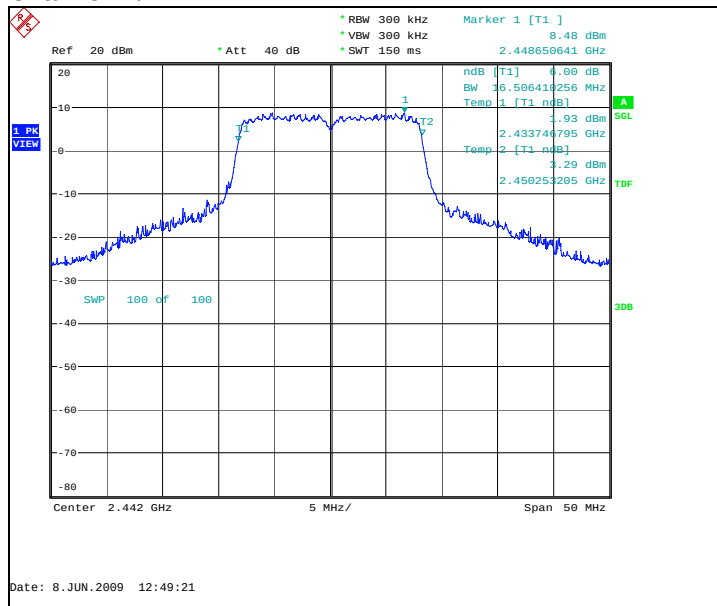

Channel 11 / 2462 MHz

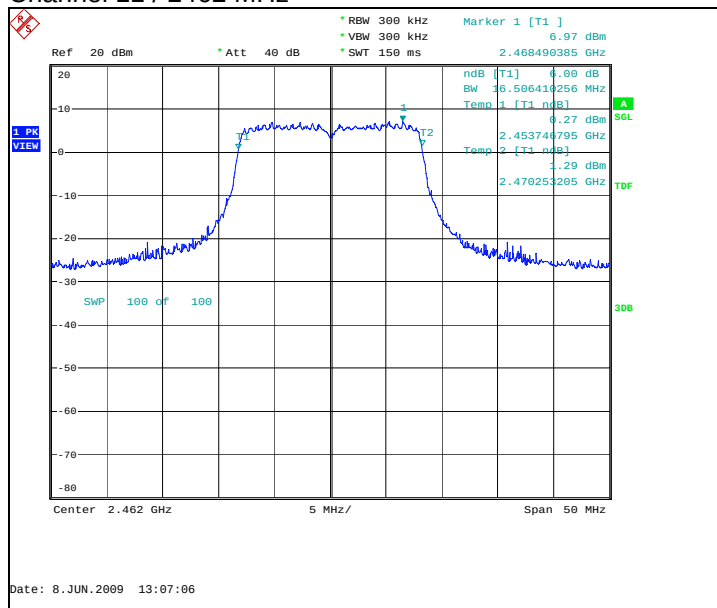

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B