

FCC Part 22 Compliance Test Report

Test Report no.:	FCC22_RM-485_04.doc	Date of Report:	04-Nov-2009
Number of pages:	13	Customer's Contact person:	Asko Pasanen
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 50 Mattianniemi 6-8 FIN-40101 JYVÄSKYLÄ, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 78000
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-485 / Battery BL-5K, AC charger AC-10E, Audio adapter AD-54, Headset HS-83		
FCC ID:	QURRM-485X	IC:	661AC-RM485
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 22, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007) and RSS-132 (Issue 2, September 2005). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Sami Lehtonen, System Specialist, EMC

1. Summary for FCC Part 22 Compliance Test Report

Date of receipt	05-May-2009
Testing completed	08-May-2009
The customer's contact person	Asko Pasanen
Test Plan referred to	T:\Projects\RM-485\TestPlan_RS\RS_testplan_RM-485.xls
Notes	-
Document name	T:\Projects\RM-485\EMC\FCC22_RM-485_04.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/V(850)) mobile phone with GPRS, EGPRS, Bluetooth, WLAN and FM transmitter. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-485	004401103549545	0831	-	10.007	41864
Phone	RM-485	004401103548992	0831	-	10.051	41880
Battery	BL-5K	4620408441L20113832;0670580	-	-	-	41865
AC charger	AC-10E	3997918112240401180;0675408	-	-	-	41479
Audio adapter	AD-54	-	-	-	-	41867
Headset	HS-83	-	-	-	-	41866

1.2. Summary of Test Results

WCDMA 850 (Band V):

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	PASSED
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 22 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §22.913(a), RSS-132 4.4)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. WCDMA 850 Test results slide open	5
2.4. WCDMA 850 Test results slide closed	5
3. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	6
3.1. Test setup	6
3.2. Test method and limit	6
3.3. WCDMA 850 Test results	7
4. Band edge compliance (FCC §22.917(a), RSS-132 4.5)	8
4.1. Test setup	8
4.2. Test method and limit	8
4.3. WCDMA 850 Test results	9
5. Spurious radiated emissions (FCC §22.917(a), §2.1053, RSS-132 4.5)	10
5.1. Test setup	10
5.2. Test method and limit	10
5.3. WCDMA 850 Test results	11
6. Test Equipment	12
6.1. Conducted measurements	12
6.2. Radiated measurements	12

2. Radiated RF output power (FCC §22.913(a), RSS-132 4.4)

EUT with DUT number	RM-485 DUT 41864
Accessories with DUT numbers	BL-5K DUT 41865, AC-10E DUT 41479, AD-54 DUT 41867, HS-83 DUT 41866
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Slide open/closed
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 100.5
Date of measurements	05-May-2009
Measured by	Jari Jantunen

2.1. Test setup

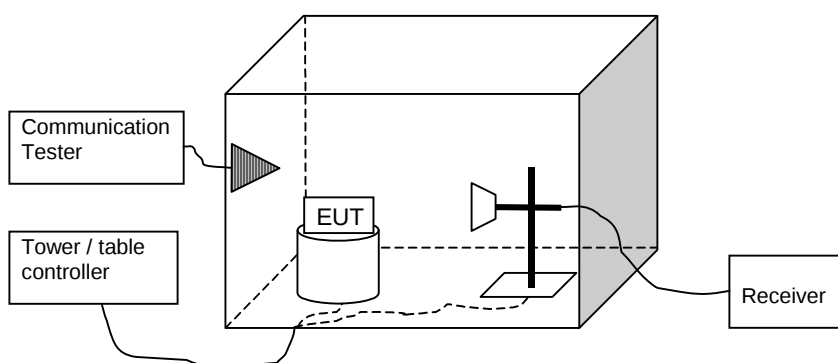

2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7	38.5

2.3. WCDMA 850 Test results slide open

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
4132 / 826.4	17.60	0.058	- 14.10	31.70	VERTICAL	PASSED
4175 / 835.0	18.30	0.068	- 13.10	31.40	HORIZONTAL	PASSED
4233 / 846.6	19.10	0.081	- 12.40	31.50	HORIZONTAL	PASSED


2.4. WCDMA 850 Test results slide closed

Channel / f_c [MHz]	ERP [dBm]	ERP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
4132 / 826.4	12.40	0.017	- 19.30	31.70	VERTICAL	PASSED
4175 / 835.0	13.10	0.020	- 18.60	31.70	VERTICAL	PASSED
4233 / 846.6	14.70	0.030	- 16.80	31.50	VERTICAL	PASSED

3. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-485 DUT 41880
Accessories with DUT numbers	BL-5K DUT 41865
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 43 / 100.9
Date of measurements	08-May-2009
Measured by	Jari Jantunen

3.1. Test setup

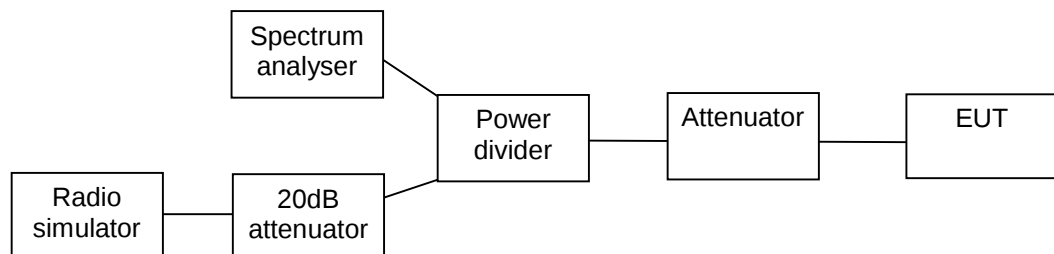


3.2. Test method and limit

The measurement is made according to FCC rules part 22 and IC standard RSS-GEN.

3.3. WCDMA 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4134.615


Channel 4175 / 835.0 MHz

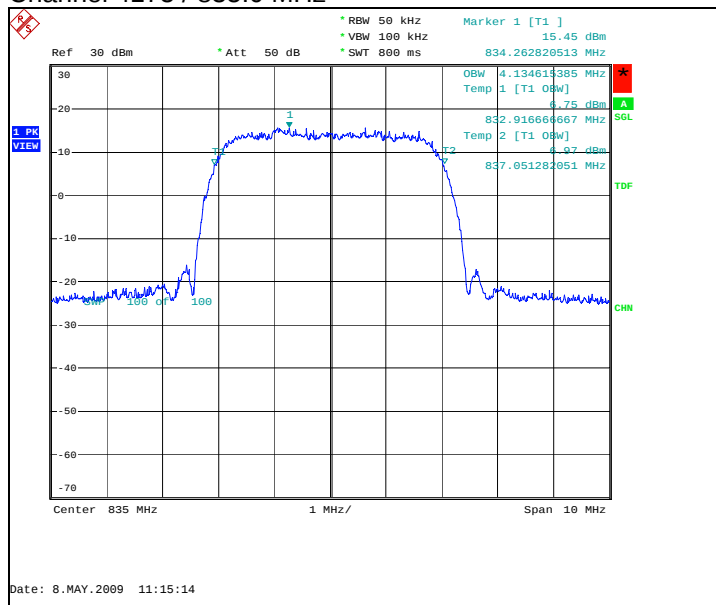

4. Band edge compliance (FCC §22.917(a), RSS-132 4.5)

EUT with DUT number	RM-485 DUT 41864
Accessories with DUT numbers	BL-5K DUT 41865, AC-10E DUT 41479, AD-54 DUT 41867, HS-83 DUT 41866
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Slide open
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 100.5
Date of measurements	05-May-2009
Measured by	Jari Jantunen

4.1. Test setup

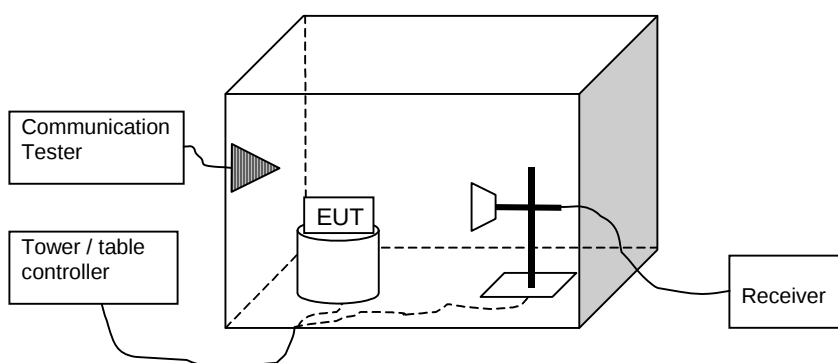

4.2. Test method and limit


The measurement is made according to FCC rules part 22 and IC standard RSS-132.

Limits for band edge compliance measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA 850	Below 824 and above 849	-13


4.3. WCDMA 850 Test results

Channel 4132 / 826.4 MHz (Peak detector, RBW: 50 kHz, VBW: 50 kHz)

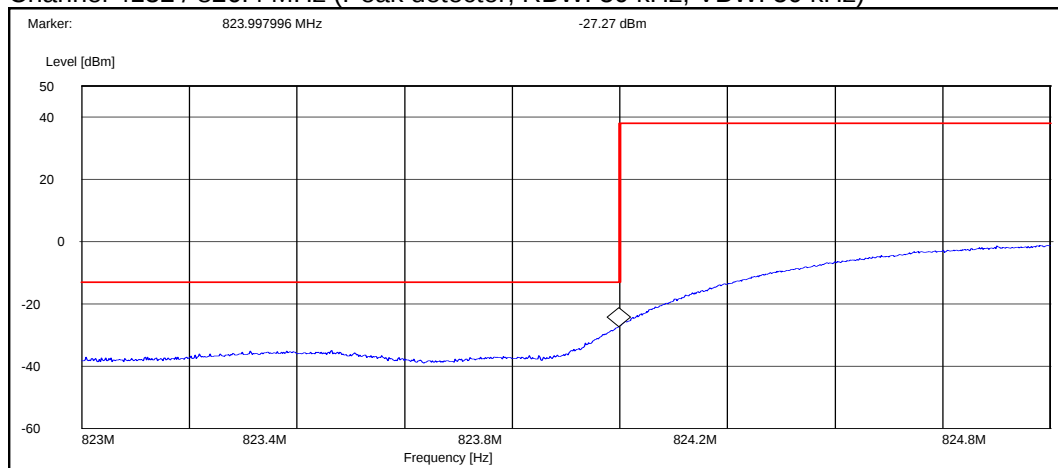

Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
FDD	4132 / 826.4	-27.30

Channel 4233 / 846.6 MHz (Peak detector, RBW: 50 kHz, VBW: 50 kHz)

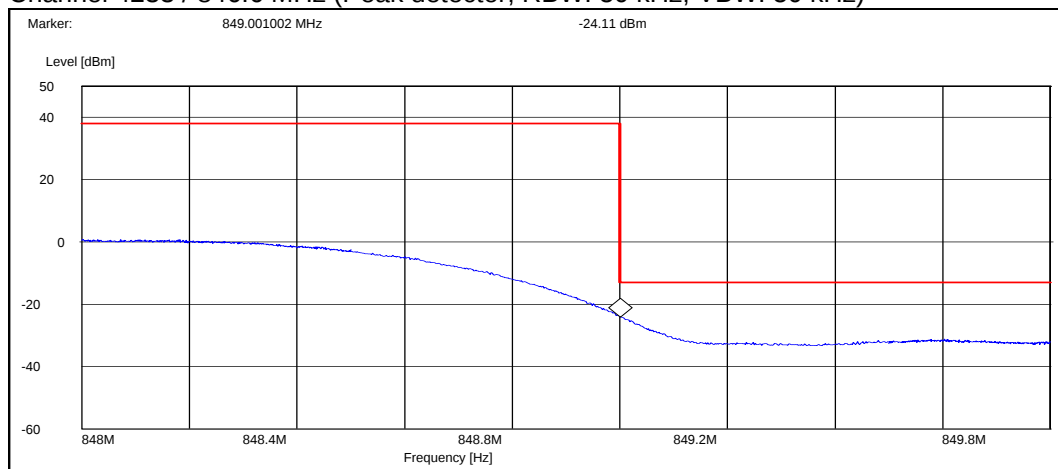


Operation mode (TX on)	Channel / f_c [MHz]	P [dBm]
FDD	4233 / 846.6	-24.10

5. Spurious radiated emissions (FCC §22.917(a), §2.1053, RSS-132 4.5)

EUT with DUT number	RM-485 DUT 41864
Accessories with DUT numbers	BL-5K DUT 41865, AC-10E DUT 41479, AD-54 DUT 41867, HS-83 DUT 41866
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Slide open/closed
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 46 / 100.5
Date of measurements	05-May-2009
Measured by	Jari Jantunen

5.1. Test setup

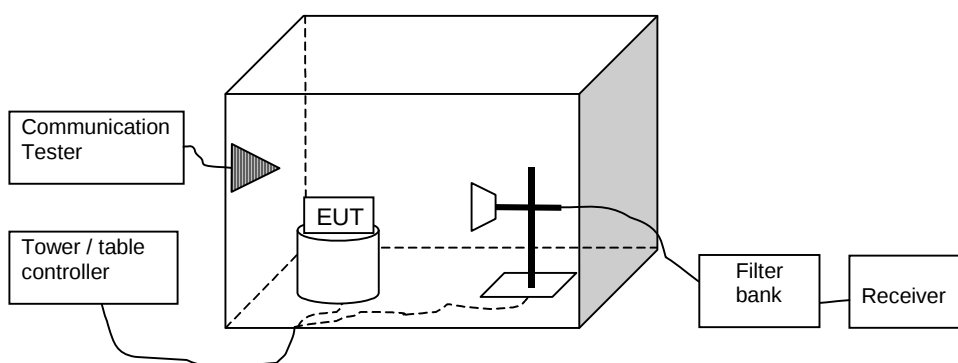

5.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA 850	30 - 8500	-13

5.3. WCDMA 850 Test results

Channel 4175 / 835.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1672.437876	-54.20	0.00380	- 47.90	- 6.30	HORIZONTAL	PASSED
2504.909820	-49.50	0.01122	- 50.50	1.00	HORIZONTAL	PASSED
3347.689379	-59.30	0.00117	- 63.80	4.50	VERTICAL	PASSED

6. Test Equipment

6.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

6.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B