

DATE: 12 August 2010

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Home Free Systems Ltd.

(An Attenti Subsidiary)

Equipment under test:

Fall Detection Transmitter Unit

FDU-830

Written by:




D. Shidlow, Documentation

Approved by:



A. Sharabi, Test Engineer

Approved by:



I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Fall Detection Transmitter Unit

FCC ID: QUX-FDU-830

Koby Cohen
Home Free
2 Habarzel St.
Tel-Aviv, 61131
Israel
Tel: +972-3-647-8871
Fax: +972-3-647-8872
e-mail: kobyc@dmatek.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System	7
3.	RADIATED MEASUREMENT TEST SET-UP PHOTOS	8
4.	AVERAGE FACTOR CALCULATION	9
4.1	Test Instrumentation Used	11
5.	PERIODIC OPERATION	12
5.1	Specification	12
5.2	Requirements	12
5.3	Results	12
6.	FIELD STRENGTH OF FUNDAMENTAL	17
6.1	Test Specification	17
6.2	Test Procedure	17
6.3	Measured Data	17
6.4	Test Instrumentation Used, Field Strength of Fundamental	21
7.	RADIATED EMISSION, 9 KHZ – 30 MHZ	22
7.1	Test Specification	22
7.2	Test Procedure	22
7.3	Measured Data	22
7.4	Test Instrumentation Used, Radiated Measurements	23
7.5	Field Strength Calculation	23
8.	SPURIOUS RADIATED EMISSION, 30 – 4500 MHZ	24
8.1	Test Specification	24
8.2	Test Procedure	24
8.3	Test Data	25
8.4	Test Instrumentation Used, Radiated Measurements	27
9.	BANDWIDTH	28
9.1	Test procedure	28
9.2	Results table	29
9.3	Test Equipment Used	30
10.	APPENDIX A - CORRECTION FACTORS	31
10.1	Correction factors for CABLE	31
10.2	Correction factors for CABLE	32
10.3	Correction factors for CABLE	33
10.4	Correction factors for LOG PERIODIC ANTENNA	34
10.5	Correction factors for LOG PERIODIC ANTENNA	35
10.6	Correction factors for BICONICAL ANTENNA	36
10.7	Correction factors for ACTIVE LOOP ANTENNA	37

1. General Information

1.1 Administrative Information

Manufacturer:	Home Free Systems Ltd.
Manufacturer's Address:	2 Habarzel St. Tel-Aviv 61131 Israel Tel: +972-3-647-8871 Fax: +972-3-647-8872
Manufacturer's Representative:	Rafi Hadar Shai avigdory
Equipment Under Test (E.U.T):	Fall Detection Transmitter Unit
Equipment Model No.:	FDU-830
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	24.04.10
Start of Test:	24.04.10
End of Test:	28.04.10
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15 Subpart C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 *Product Description*

The FDU-830 is a battery-operated device (3 VDC) that is designed for use in areas covered by the HomeFree Area Monitoring System. This device is designed to provide notification to the system that the monitored person has got out of their bed or chair. This is achieved using a pressure pad that is connected to the FDU. When the pressure exerted by the weight of the person's body is no longer detected, the device will generate an alarm that will continue until manually reset by a member of staff.

1.4 *Test Methodology*

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 *Test Facility*

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 *Measurement Uncertainty*

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 *Justification*

The Test Setup is suitable to the device's operational functionality. Transmitter, that sends RF transmissions to notify that either an ALARM of Incontinence or fall has occurred, the other RF transmissions are just for Supervisory use. The product was also checked at the exact orientation that it would be used by the customer.

2.2 *EUT Exercise Software*

The HomeFree AMS system is a short-range wireless platform offering solutions for wandering prevention, nurse call, and both resident and staff safety features. This solution allows the facility to be divided into virtual zones that can easily be monitored in real-time providing status indication and the approximate location of monitored individuals within the area covered by the system.

2.3 *Special Accessories*

No special accessories were needed.

2.4 *Equipment Modifications*

No modifications were needed in order to achieve compliance

2.5 *Configuration of Tested System*




Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photos



Figure 2. Radiated Emission Test 9 kHz – 30 MHz



Figure 3. Radiated Emission Test 30 – 4500 MHz

4. Average Factor Calculation

1. Burst duration = 7 msec
2. Time between bursts = 300msec , >100msec
3. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

$$\text{Average Factor} = 20 \log \left[1 \times \frac{7}{100} \times 1 \right] = -23.0\text{dB}$$

13:42:47 APR 06, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRA 7.0000 msec
-1.57 dB

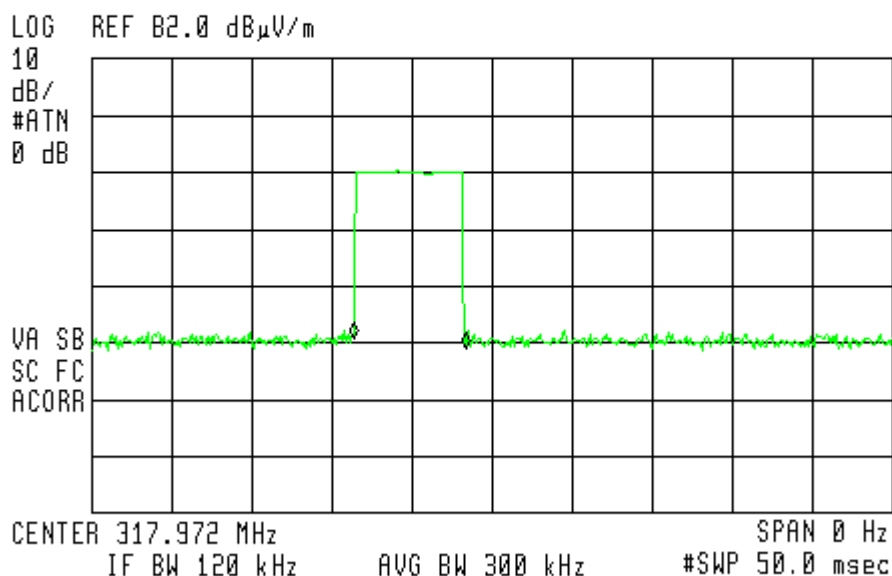



Figure 4. Burst duration = 7msec

 12:41:33 APR 07, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG

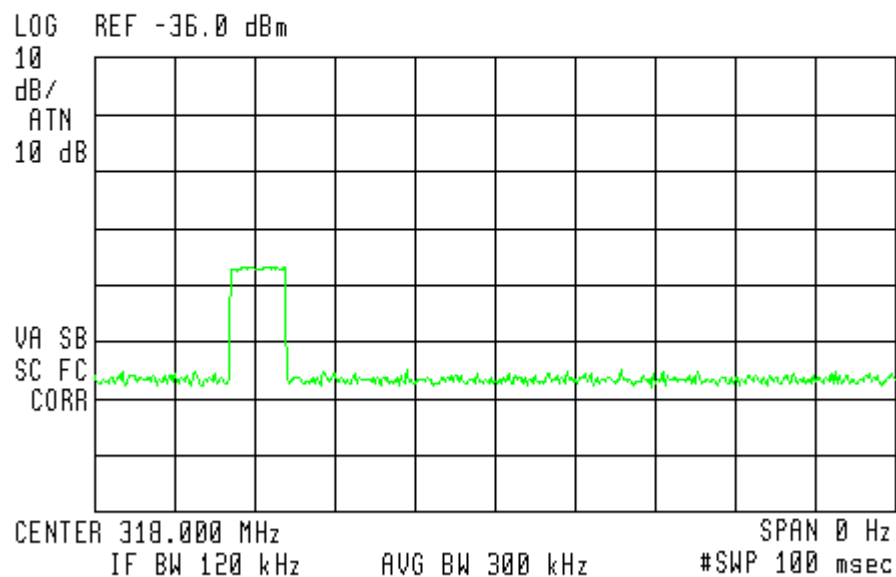


Figure 5. Time between bursts >100ms

4.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 17, 2009	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 03, 2009	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 Year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

5. Periodic Operation

5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

5.2 Requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N/A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	N/A	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	See Figure 6 and Figure 7.	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N/A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	See Figure 8 and Figure 9.	Complies

5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature: 


Date: 10.05.10

Typed/Printed Name: A. Sharabi

Periodic Operation

E.U.T Description Fall Detection Transmitter Unit
 Type FDU-830
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

 14:39:55 APR 06, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 2.9375 sec
 31.52 dB μ V/m

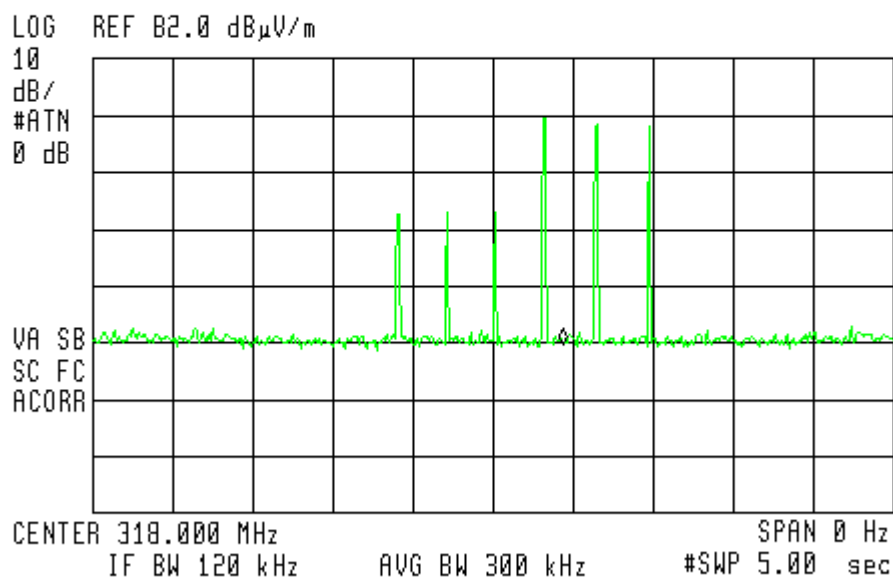



Figure 6. Automatic transmission within 5 seconds

Periodic Operation

E.U.T Description Fall Detection Transmitter Unit
 Type FDU-830
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

 14:50:49 APR 06, 2010

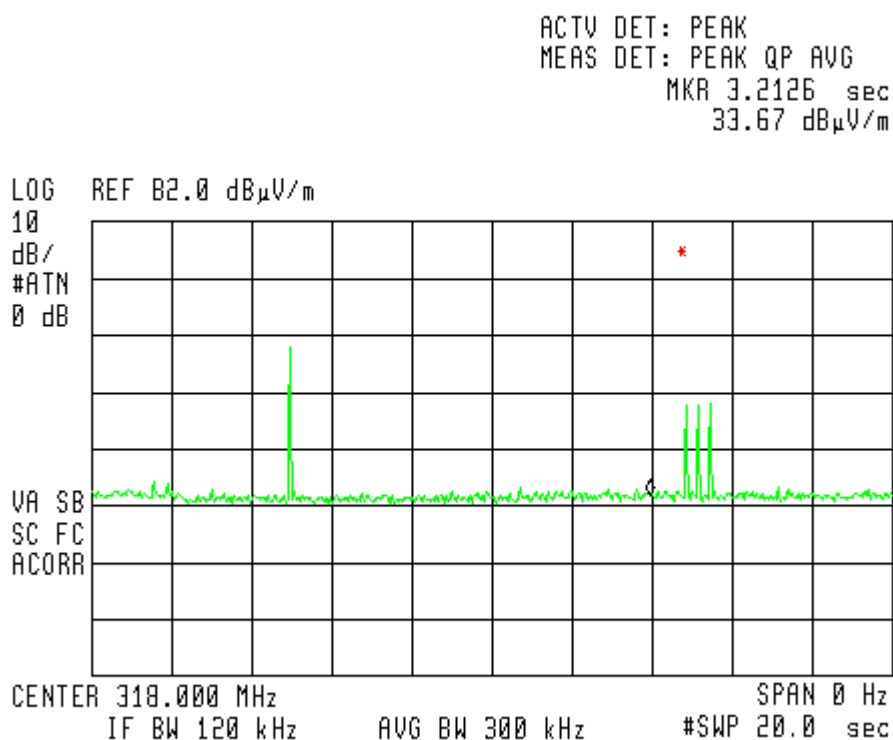


Figure 7. Continues Sequence after the alarm is ON according to 15.231(a)(4)

Periodic Operation

E.U.T Description Fall Detection Transmitter Unit
 Type FDU-830
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

09:13:28 APR 06, 2010

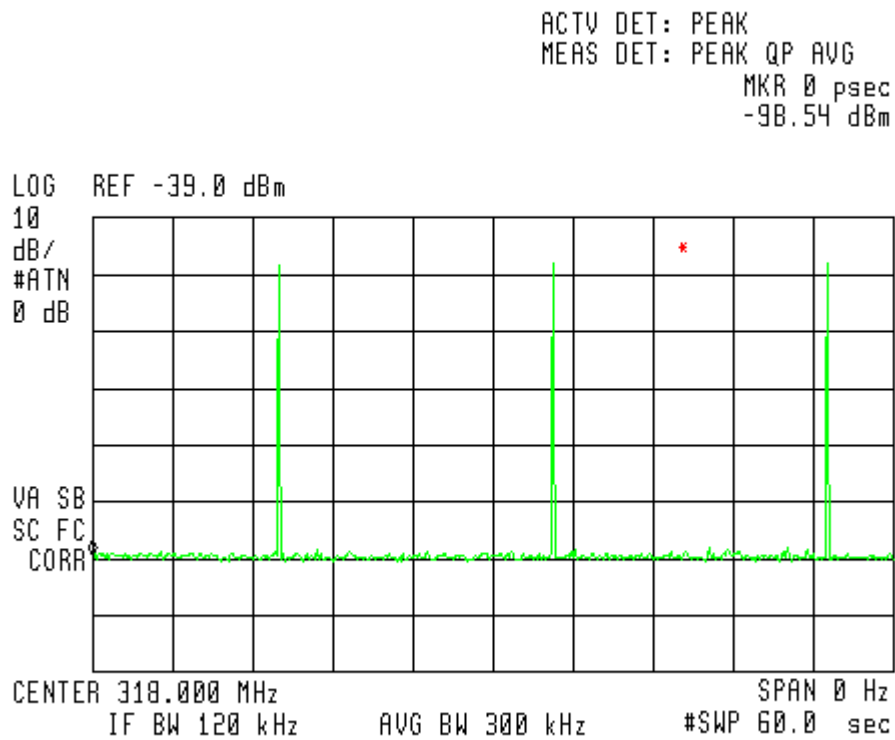



Figure 8. System Integrity every 20 sec

Periodic Operation

E.U.T Description Fall Detection Transmitter Unit
 Type FDU-830
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

 13:42:47 APR 06, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKRΔ 7.0000 msec
 -1.57 dB

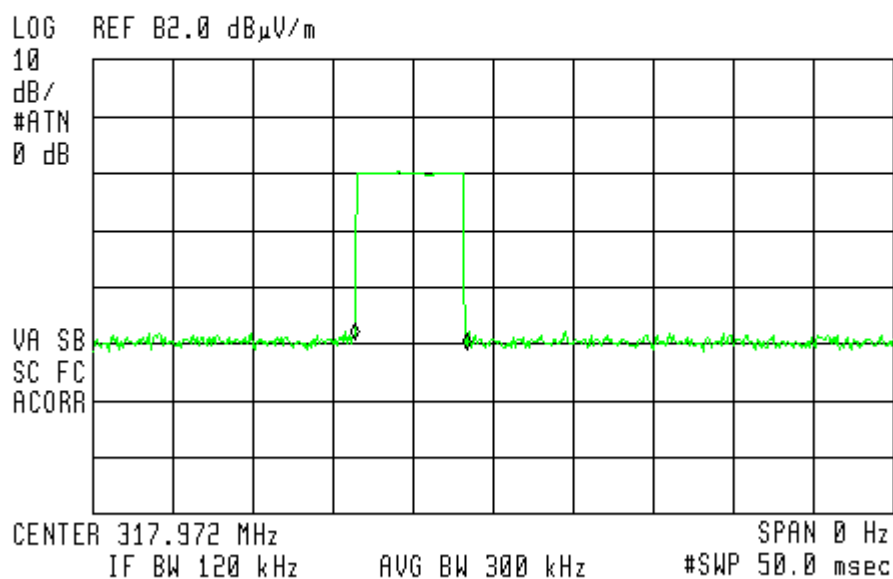


Figure 9. System Integrity burst width

(In one hour : 7milliseconds X 3 X 60= 1260 milliseconds<2000msec)

6. Field Strength of Fundamental

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.231(b)

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (318 MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB μ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)

6.3 Measured Data

JUDGEMENT: Passed by 4.33 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure 10 to Figure 12.

TEST PERSONNEL:

Tester Signature:  Date: 10.05.10

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Fall Detection Transmitter Unit
Type FDU-830
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq.	Pol.	Peak Reading	Average Factor	AVG Result	AVG Specification	Margin
(MHz)	V/H	(dBμ V/m)	(dB)	(dBμ V/m)	(dBμ V/m)	(dB)
318.00	H	94.47	-23.0	71.47	75.8	-4.33
318.00	V	88.84	-23.0	65.84	75.8	-9.96

Figure 10. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading" (dBμ V/m) included the "Correction Factors".
"Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.

Field Strength of Fundamental


E.U.T Description Fall Detection Transmitter Unit
 Type FDU-830
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

 11:51:33 APR 06, 2010

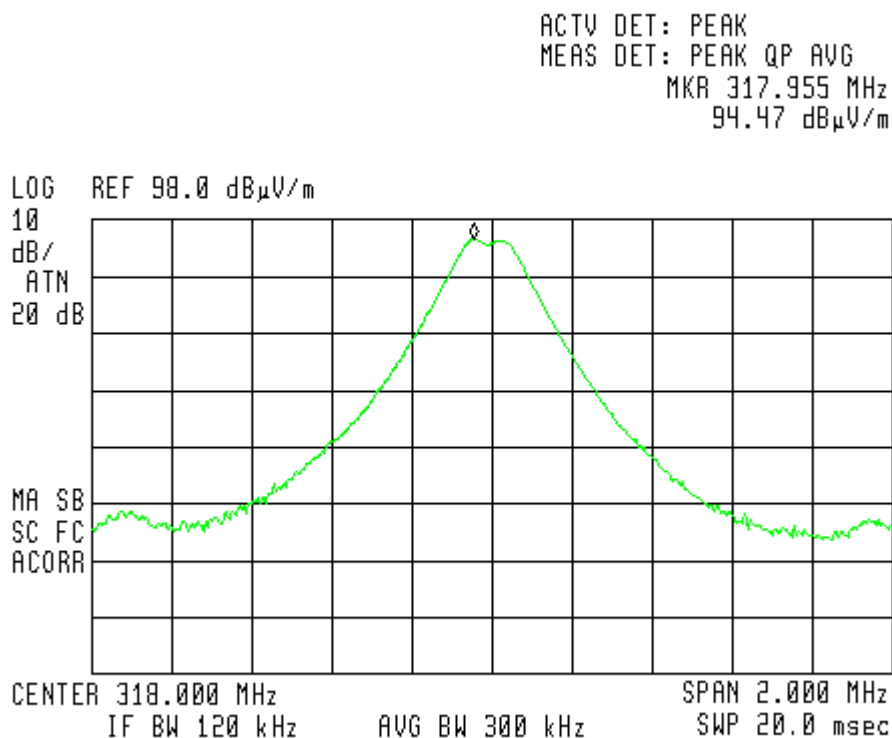


Figure 11. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak, Average

Field Strength of Fundamental

E.U.T Description Fall Detection Transmitter Unit

Type FDU-830

Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)


Antenna Polarization: Vertical

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

11:40:13 APR 06, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 317.960 MHz
88.84 dB μ V/m

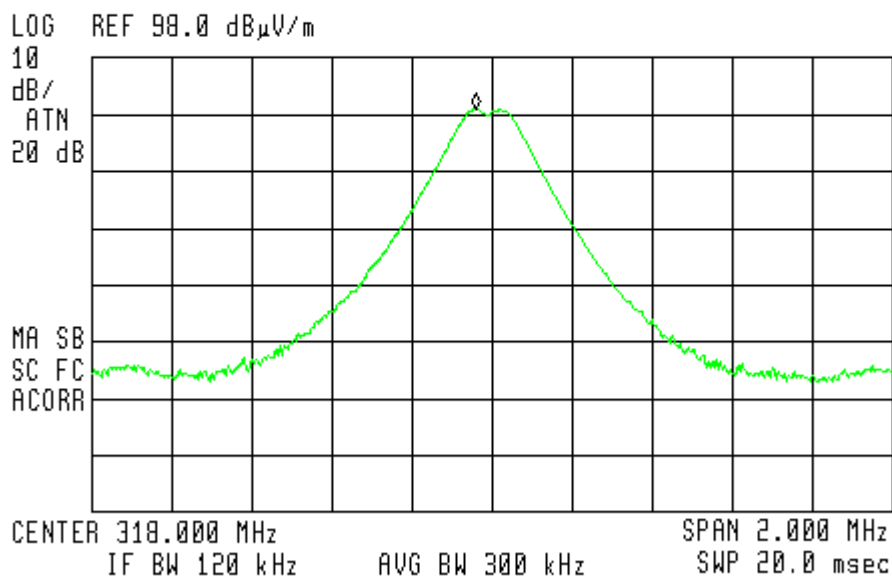

**Figure 12. Field Strength of Fundamental. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak, Average**

6.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 2.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 433.92 MHz. This frequency was measured using a peak detector.

7.3 Measured Data

JUDGEMENT: Passed

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

No signals were detected in the frequency range of 9 kHz – 30 MHz.

TEST PERSONNEL:

Tester Signature: 

Date: 10.05.10

Typed/Printed Name: A. Sharabi

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2009	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

8. Spurious Radiated Emission, 30 – 4500 MHz

8.1 Test Specification

30 - 4500 MHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 2. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1. The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 4.5 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.


8.3 Test Data

JUDGEMENT: Passed by 24.03 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The margin between the emission level and the specification limit was 24.03 dB in the worst case at the frequency of 1590.00 MHz, vertical polarization.

TEST PERSONNEL:

Tester Signature:  Date: 09.08.10

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description Fall Detection Transmitter
Unit
Type FDU-830
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 4500 MHz
Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency (MHz)	Peak Reading (dB μ V/m)	Avg Factor	Avg Amp (dB μ V/m)	Antenna Polarity (H/V)	Specification (dB μ V/m)	Margin (dB)
636.00	37.67	-23	14.67	V	55.8	-41.13
954.00	48.79	-23	25.79	V	55.8	-30.01
1272.00	47.20	-23	24.2	V	55.8	-31.60
1590.00	50.97	-23	27.97	V	54.0	-24.03

**Figure 13. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	January 13, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	August 03, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

9. Bandwidth

9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 30 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points.

The EUT was set up as shown in Figure 1, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

11:54:59 APR 06, 2010

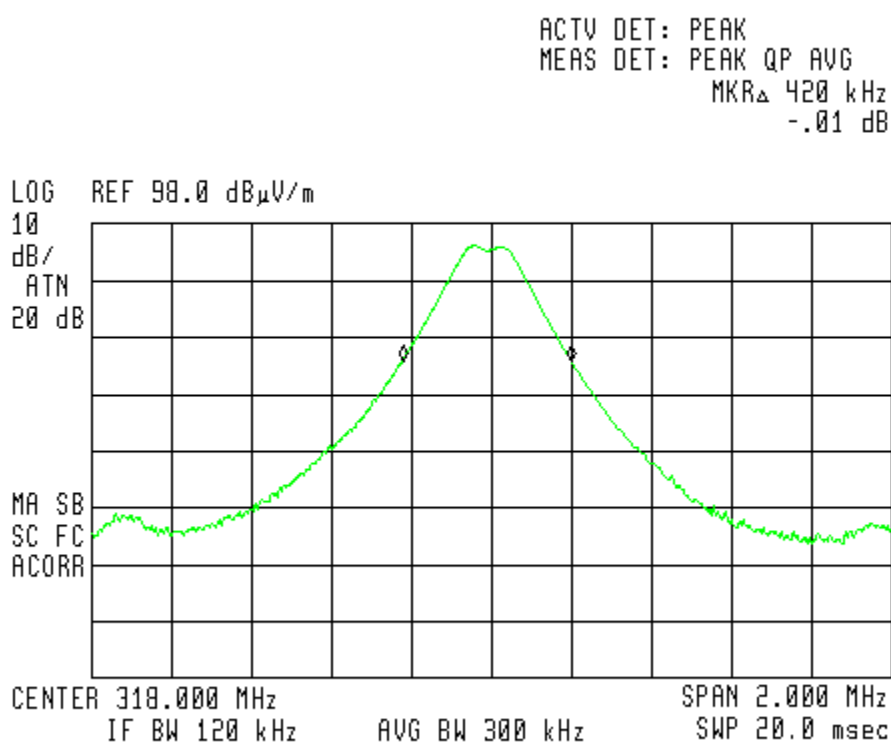


Figure 14

9.2 Results table

E.U.T Description: Fall Detection Transmitter Unit
Model: FDU-830
Serial Number: Not Designated
Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Bandwidth Reading	Specification (kHz)	Margin (kHz)
420	795	-375

Figure 15 Bandwidth

JUDGEMENT: Passed by 375 kHz

TEST PERSONNEL:

Tester Signature: 

Date: 09.08.10

Typed/Printed Name: A. Sharabi

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

9.3 Test Equipment Used.

Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 16 Test Equipment Used

10. APPENDIX A - CORRECTION FACTORS

10.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY	CORRECTION
(GHz)	FACTOR
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

10.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

- 1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.*
- 2. The cable is used for measurements above 2.9 GHz.*
- 3. The overall length of the cable is 10 meters.*

10.4 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

10.5 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

10.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

10.7 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2