

DATE: 05 October 2010

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Home Free Systems LTD

Equipment under test:

Call Button and Pull Tag

PB-830

Written by: *E. Ever*
E. Ever, Documentation

Approved by: *E. Ever*
E. Ever, Test Engineer

Approved by: *I. Raz*
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Home Free Systems LTD Call Button and Pull Tag

PB-830

FCC ID: QUX-PB-830

05 October 2010

This report concerns: Original Grant: x
Class I change:
Class II change:

Equipment type: Part 15 Security/Remote Control Transceiver

47CFR15 Section 15231 (a-d)

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:
Ishaishou Raz
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
e-mail Sraz@itl.co.il

Applicant for this device:
(different from "prepared by")
Koby Cohen
Home Free
2 Habarzel St.
Tel-Aviv, 61131
Israel
Tel: +972-3-647-8871
Fax: +972-3-647-8872
e-mail: kobyc@dmatek.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION-----	4
1.1	Administrative Information.....	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION-----	7
2.1	Justification.....	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System	7
3.	TEST SET-UP PHOTO-----	8
4.	AVERAGE FACTOR CALCULATION-----	9
4.1	Test Instrumentation Used	10
5.	PERIODIC OPERATION -----	11
5.1	Specification	11
5.2	Requirements	11
5.3	Results.....	11
5.4	Test Instrumentation Used	15
6.	FIELD STRENGTH OF FUNDAMENTAL-----	16
6.1	Test Specification	16
6.2	Test Procedure.....	16
6.3	Measured Data.....	16
6.4	Test Instrumentation Used, Field Strength of Fundamental	20
7.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	21
7.1	Test Specification	21
7.2	Test Procedure.....	21
7.3	Measured Data.....	21
7.4	Test Instrumentation Used, Radiated Measurements	22
7.5	Field Strength Calculation	23
8.	SPURIOUS RADIATED EMISSION -----	24
8.1	Test Specification	24
8.2	Test Procedure.....	24
8.3	Test Data	25
8.4	Test Instrumentation Used, Radiated Measurements	27
9.	BANDWIDTH-----	28
9.1	Test procedure	28
9.2	Results table.....	30
9.3	Test Equipment Used.....	31
10.	11. APPENDIX A - CORRECTION FACTORS -----	32
10.1	Correction factors for CABLE	32
10.2	Correction factors for CABLE	33
10.3	Correction factors for CABLE	34
10.4	Correction factors for LOG PERIODIC ANTENNA	35
10.5	Correction factors for LOG PERIODIC ANTENNA	36
10.6	Correction factors for BICONICAL ANTENNA	37
10.7	Correction factors for ACTIVE LOOP ANTENNA	38

1. General Information

1.1 Administrative Information

Manufacturer:	Home Free Systems LTD
Manufacturer's Address:	2 Habarzel St. Tel-aviv 61131 Israel Tel: +972-3-647-8871 Fax: +972-3-647-8872
Manufacturer's Representative:	Koby Cohen
Equipment Under Test (E.U.T):	Call Button and Pull Tag
Equipment Model No.:	PB-830
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	28/06/2010
Start of Test:	28/06/2010
End of Test:	28/06/2010
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15 Sub-part C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 *Product Description*

The Call Button is a small, lightweight push button unit worn by the monitored individual that alerts caregivers whenever the monitored individual activates a panic alert. The Call Button is not for use outside the monitored area.

1.4 *Test Methodology*

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 *Test Facility*

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 *Measurement Uncertainty*

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 *Justification*

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the vertical position.

2.2 *EUT Exercise Software*

The PB830_VER1.1.HEX software program was used.

2.3 *Special Accessories*

No special accessories were needed.

2.4 *Equipment Modifications*

No modifications were needed in order to achieve compliance

2.5 *Configuration of Tested System*




Figure 1. Configuration of Tested System

3. Test Set-up Photo



Figure 2. Radiated Emission Test

4. Average Factor Calculation

1. Burst duration = 5.75msec
2. Time between bursts = 0.3 to 0.6 sec.
3. Average Factor = $20 \log \left[\frac{\text{burst duration}}{100\text{msec}} \right]$

$$\text{Average Factor} = 20 \log \left[\frac{5.75}{100} \right] = -24.8\text{dB}$$

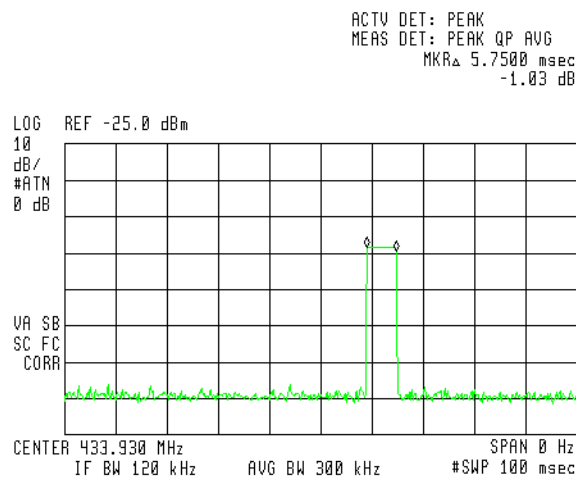


Figure 3. Burst duration = 5.75msec

4.1 *Test Instrumentation Used*

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 Year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year

5. Periodic Operation

5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

5.2 Requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	Manufacturer Declaration	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	Manufacturer declaration. See plot in <i>Figure 5</i> .	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	N/A	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	Manufacturer Declaration	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	Manufacturer Declaration	Complies

5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature: E. Ever

Date: 04.08.10

Typed/Printed Name: E. Ever

4th of October 2009

DECLARATION

I HEREBY DECLARE THAT THE

Call Button and Pull Tag, PB-830

Complies with the following requirements of 47CFR15 Section 15.231(a):

(a) The provisions of this Section are restricted to periodic operation within the band 40.66 - 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. **Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal.** The following conditions shall be met to comply with the provisions for this periodic operation:

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.



(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Thank you,

Signature: 

Gil Gemer
CTO

Periodic Operation

E.U.T Description Call Button and Pull Tag
Type PB-830
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

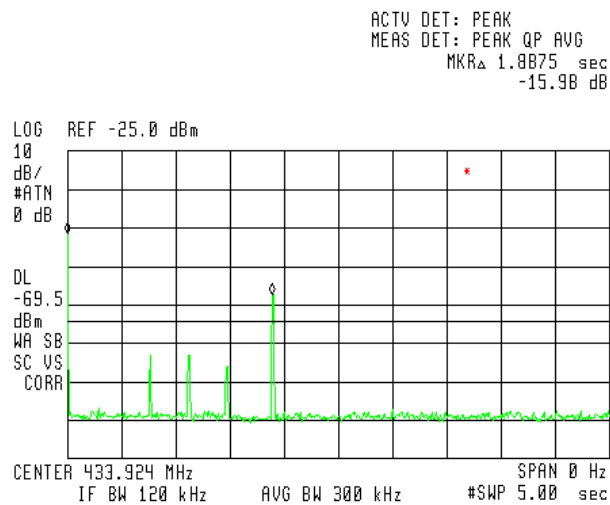


Figure 4. System Integrity Pulse Width

5.4 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 Year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year

6. Field Strength of Fundamental

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.231(b)

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (433.88 MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB μ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)

6.3 Measured Data

JUDGEMENT: Passed by 8.6 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure 5 to Figure 7.

TEST PERSONNEL:

Tester Signature: E. Ever

Date: 04/08/10

Typed/Printed Name: E. Ever

Field Strength of Fundamental

E.U.T Description Call Button and Pull Tag
Type PB-830
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq.	Pol.	Peak Reading	Average Factor	AVG Result	AVG Specification	Margin
(MHz)	V/H	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
433.88	H	92.0	-24.8	67.2	75.8	-8.6
433.88	V	81.8	-24.8	57.0	75.8	-18.8

Figure 5. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Reading." (dB μ V/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor (dB) + Cable Loss.
4. "Average Factor" = $20 \log [(burst\ duration/100msec)] = 20 \log [(5.75/100)] = -24.8dB$
5. "Average Result" (dB μ V/m) = Peak Reading (dB μ V/m)+D.C.F. (dB)

Field Strength of Fundamental

E.U.T Description Call Button and Pull Tag
Type PB-830
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

09:54:28 JUN 28, 2010

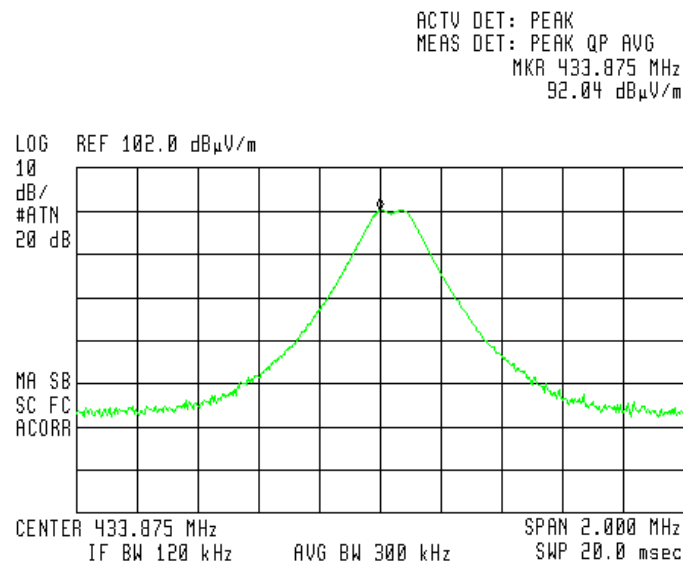


Figure 6. Average Factor Calculation

“Average Factor = $20 \log [(burst\ duration/100msec)] = 20 \log [(5.75/100)] = -24.8\ dB$

Field Strength of Fundamental

E.U.T Description Call Button and Pull Tag
Type PB-830
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

10:00:07 JUN 28, 2010

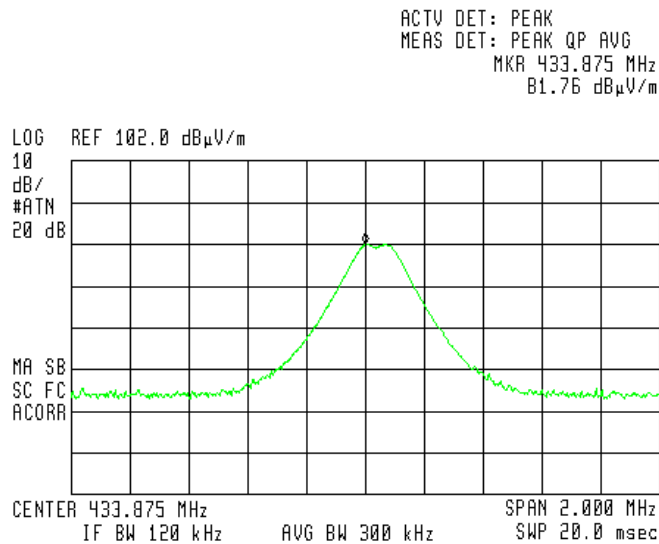


Figure 7. Average Factor Calculation

“Average Factor = $20 \log [(burst\ duration/100msec)] = 20 \log [(5.75/100)] = -24.8\ dB$

6.4 *Test Instrumentation Used, Field Strength of Fundamental*

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.

The E.U.T. was operated at the frequency of 433.88 MHz. This frequency was measured using a peak detector.


7.3 Measured Data

JUDGEMENT: PASSED

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C specification.

All emissions were below the noise level, and more than 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature: 

Date: 04/08/10

Typed/Printed Name: E. Ever

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2009	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
RA: Receiver Amplitude [dB μ V]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

8. Spurious Radiated Emission

8.1 Test Specification

30 – 4340 MHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*. The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 3.2 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

8.3 Test Data

JUDGEMENT: Passed by 4.8 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

The margin between the emission level and the specification limit was 4.8 dB in the worst case at the frequency of 1301.84 MHz, horizontal polarization.

TEST PERSONNEL:

Tester Signature: Char Ever

Date: 04/08/10

Typed/Printed Name: E. Ever

Radiated Emission

E.U.T Description Call Button and Pull Tag
Type PB-830
Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 4340 MHz
Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency (MHz)	Peak Reading (dB μ V/m)	QP Reading (dB μ V/m)	Antenna Polarity (H/V)	Specification (dB μ V/m)	Margin (dB)
867.72	35.7	31.5	H	46.0	-14.5
1301.84	49.2	N/A	H	54.0	-4.8
868.14	42.6	38.5	V	46.0	-7.5
1301.84	48.2	N/A	V	54.0	-5.2

**Figure 8. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS- 0411N313	013	January 7, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 03, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2010	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

9. Bandwidth

9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 30 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points.

The EUT was set up as shown in *Figure 1*, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

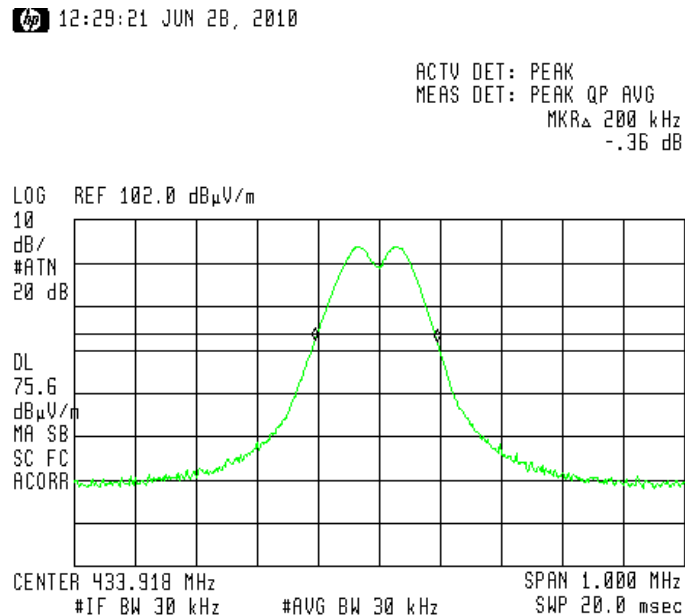


Figure 9 Normal Bandwidth Reading

12:30:45 JUN 20, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 423 kHz
 .21 dB

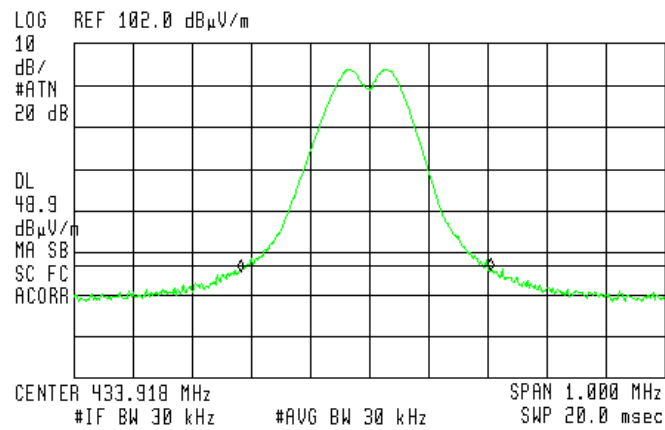


Figure 10 Bandwidth at 99%

9.2 Results table

E.U.T Description: Call Button and Pull Tag

Model: PB-830

Serial Number: Not Designated

Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Bandwidth Reading (kHz)	Specification (1) (kHz)	Margin (kHz)
200	1084.8	-884.8

Figure 11 Bandwidth

JUDGEMENT: Passed by 884.8 kHz

TEST PERSONNEL:

Tester Signature: *E. Ever*

Date: 04/08/10

Typed/Printed Name: E. Ever

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

9.3 Test Equipment Used.

Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 24, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 12 Test Equipment Used

10. 11. APPENDIX A - CORRECTION FACTORS

10.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

10.3 Correction factors for

CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

10.4 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**10.5 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

10.6 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2