



Test Report – FCC Part 15.231 Momentary Transmitter

Applicant: ENTERPRISE ELECTRONICS, L.L.C.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 1/4/2024

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

Table of Contents

1.	APPLICANT INFORMATION.....	3
1.1	TEST RESULT SUMMARY.....	3
2.	LOCATION OF TESTING.....	4
2.1	TEST LABORATORY.....	4
2.2	TESTING WAS PERFORMED, REVIEWED BY.....	4
3.	TEST SAMPLE(S) (EUT/DUT).....	5
3.1	DESCRIPTION OF THE EUT.....	5
3.2	CONFIGURATION OF EUT.....	6
3.3	TEST SETUP OF EUT.....	6
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	7
4.1	TEST METHODS/STANDARDS/GUIDANCE.....	7
5.	MEASUREMENT UNCERTAINTY.....	7
6.	ENVIRONMENTAL CONDITIONS.....	7
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	8
8.	TEST RESULTS.....	9
8.1	PERIODIC OPERATION.....	10
8.1.1	<i>Declaration Provided by Applicant.....</i>	<i>10</i>
8.1.2	<i>Test Data: 5 Second Turn-Off Period Plot.....</i>	<i>11</i>
8.2	DUTY CYCLE.....	12
8.2.1	<i>Duty Cycle Calculation Table.....</i>	<i>12</i>
8.2.2	<i>Subpulse 1 Activity in 100 ms Plot.....</i>	<i>13</i>
8.2.3	<i>Subpulse 1 Duration.....</i>	<i>14</i>
8.3	OCCUPIED BANDWIDTH.....	15
8.3.1	<i>99% Bandwidth Plot, 434 MHz.....</i>	<i>16</i>
8.3.2	<i>20 dB Measurement Plot, 434 MHz.....</i>	<i>17</i>
8.4	FIELD STRENGTH OF FUNDAMENTAL.....	18
8.4.1	<i>Field strength of fundamental.....</i>	<i>18</i>
8.5	RADIATED EMISSIONS.....	18
8.5.1	<i>Radiated Emissions Table.....</i>	<i>20</i>
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	21
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	21
11.	HISTORY OF TEST REPORT CHANGES.....	21

1. Applicant Information

Applicant: Enterprise Electronics, L.L.C.
Address: 1200 Kempar Avenue
 Madison Heights, MI, 48071
 United States

1.1 Test Result Summary

The following test procedure was used ANSI C63.4-2014. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Clauses	Description of the Requirements	Result (Pass, Fail or N/A)
15.231(a)	Periodic Operation	Note 2
-	Duty Cycle*	Pass
2.1046, 15.231(b)	Radiated Field Strength of the Fundamental	Pass
2.1053, 15.231(b), 15.209(a), 15.205(a), (b)	Radiated Field Strength of Spurious Emissions	Pass
2.1049, 15.231(c)	Occupied Bandwidth	Pass
15.207(a), (c)	AC Powerline Conducted Emissions	Note 1
15.203	Antenna Requirement	Pass

Notes:

- 1) EUT is not intended for connection with AC Mains.
- 2) Manufacturer provided attestation letter; no test required.

2. Location of Testing

2.1 Test Laboratory


Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780
FCC Designation # US1070
FCC site registration is under A2LA certificate # 0955.01
ISED Canada test site registration # 2056A
EU Notified Body # 1177
For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: 5/29/2023 – 6/2/2023

Signature:



Sr. EMC Engineer
EMC-003838-NE




Name & Title:

Tim Royer, EMC Engineer

Date of Signature

1/4/2024

Signature:



Name & Title:

Terri Allen, Project Specialist

Date of Signature

1/4/2024

3. Test Sample(s) (EUT/DUT)

The test sample was received: 5/29/2023

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	QV4-434
Brief Description	434 MHz Keypad
Model(s) #	PCBA004F434A
Firmware version	N/A
Software version	N/A
Serial Number	N/A

Technical Characteristics	
Technology	434 MHz Keypad
Frequency Range	434 MHz
Antenna Connector	N/A
Voltage Rating (AC or Batt.)	Battery
Emission Designator	F1D

3.2 Configuration of EUT

Band (MHz)	Mode	Number of Ant.
434	Transmit	1

Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

Peripherals used during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power-line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance

The measurement was performed as per ANSI 63.10. Full test results are available in this report.

Limits and Regulatory Limits:

- 1) FCC 15C

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	

7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer’s model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	12./21/2023
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016

8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Units of measurement

Unless noted otherwise in the referenced standard, the measurements of ac power-line conducted emissions and conducted power output will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of radiated emissions will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB μ V/m @ 3m


$$\text{EIRP} = \text{Pcond (dBm)} + \text{dBi}$$

8.1 PERIODIC OPERATION

8.1.1 Declaration Provided by Applicant

Item	Description – Model # PCBA004F434A	Yes	No
1	Does this device transmit a signal that is only used to control another device?	X	
2	Does this device send data with this control signal?	X	
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.		X
4	Does this device transmit: continuously or <u>automatically</u>		X
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?	X	
6	If automatically operated does it deactivate 5 seconds after activation?	NA	NA
7	Does it transmit at regular predetermined intervals?		X
8	Does it poll or send supervisory information?		X
	If yes does it do a system integrity check?	NA	NA
	If yes, How often?	NA	
9	Is this a fire, security or safety of life device?		X
	If Yes, does the device stop transmitting after the alarm condition is satisfied?		NA
10	The device's Duty cycle:	50%	
	Maximum Pulse On-time (in 100 ms Period):	NA	
	On-time Period (if other than 100 ms):	100ms	
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, On-Off Keying, etc.	FSK	

8.1.2 Test Data: 5 Second Turn-Off Period Plot

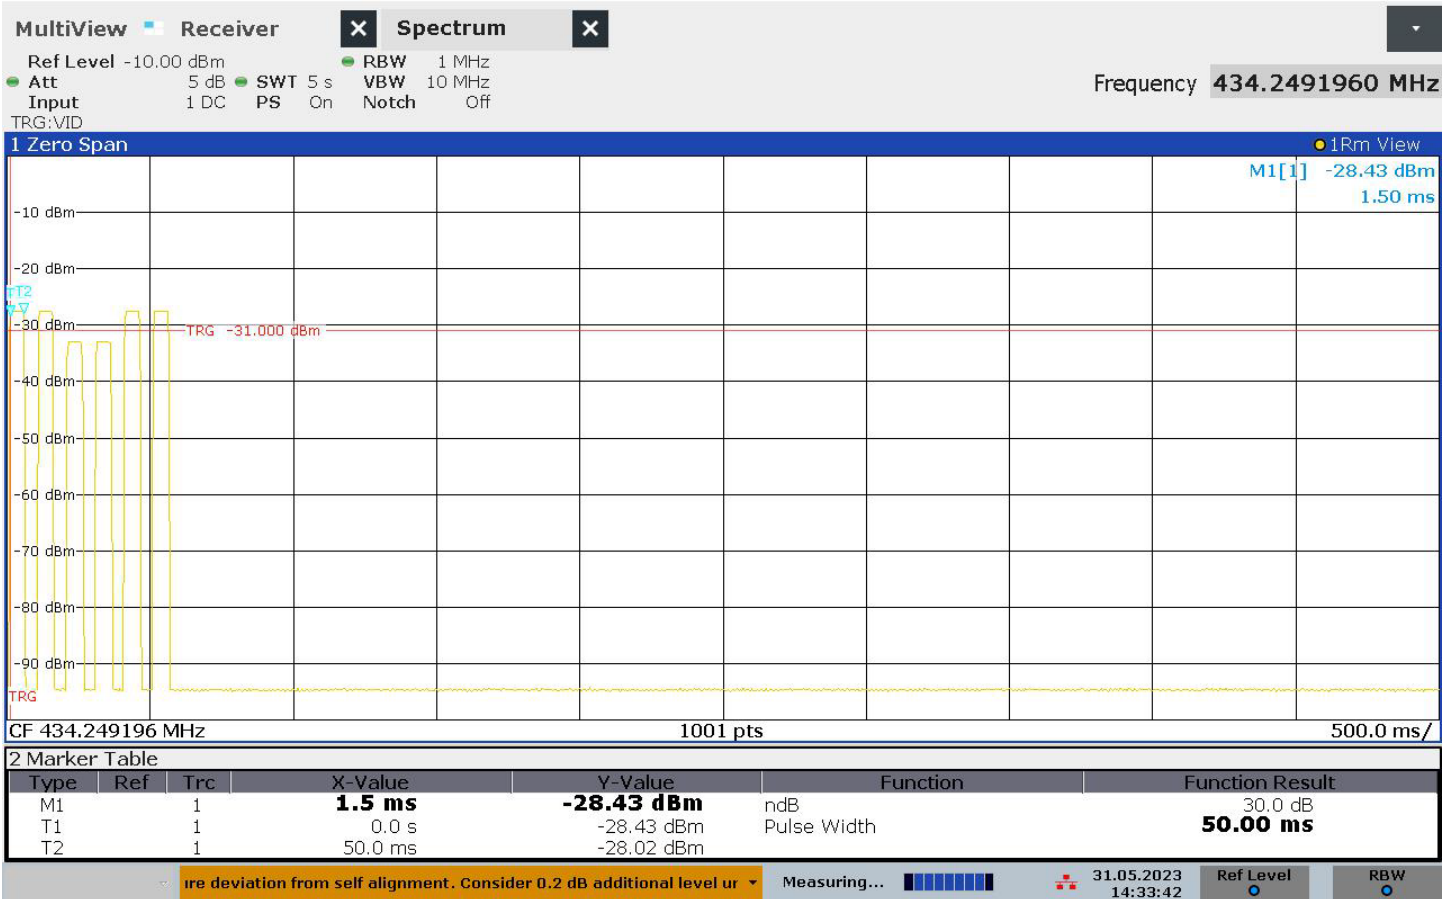

14:33:43 31.05.2023

8.2 DUTY CYCLE

Duty Cycle Formula: ANSI C63.10 Section 7.5, Equation 10:

$$\delta \text{ (dB)} = 20 \log \left[\frac{\sum (n_i t_i)}{T} \right]$$

Where:

δ is the duty cycle correction factor (dB)

T is the pulse is the period that the pulses are averaged over, (≤ 100 ms).

t_1 is the pulse width of subpulse 1

t_2 is the pulse width of subpulse 2 (and so on)

n_1 is the number of t_1 pulses

n_2 is the number of t_2 pulses (and so on)

8.2.1 Duty Cycle Calculation Table

Sub Pulse	Duration (ms)	Occurances	On-Time (ms)
1	53.0000	1	53.0000
2	0.0000	0	0.0000
3	0.0000	0	0.0000
Total On Time (ms)			53.0000
Period (ms)			100.00
Duty Cycle (%)			53.00%
Duty Cycle Correction Factor (dB)			-5.51

8.2.2 Subpulse 1 Activity in 100 ms Plot



20:14:37 30.05.2023


8.2.3 Subpulse 1 Duration



20:14:37 30.05.2023

8.3 OCCUPIED BANDWIDTH

Setup




Tuned Frequency (MHz)	Limit (MHz)
434	1.085

Tuned Frequency (MHz)	Measured 20 dB BW (kHz)	Margin (kHz)
434	34.02	1.050


Tuned Frequency (MHz)	Measured 99% BW (kHz)
434	33.55

8.3.1 99% Bandwidth Plot, 434 MHz

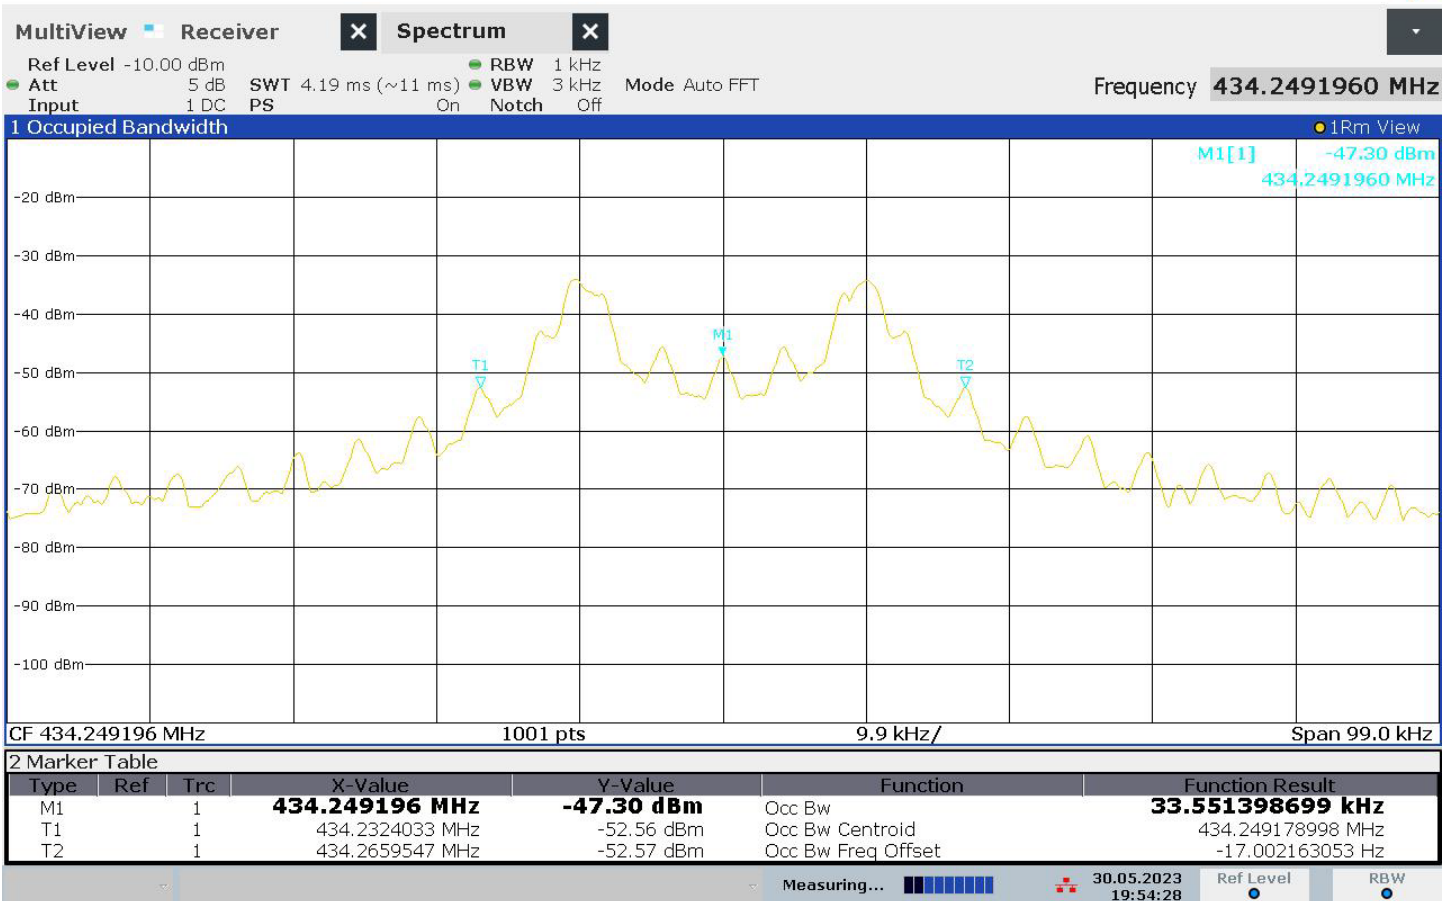

19:54:28 30.05.2023


8.3.2 20 dB Measurement Plot, 434 MHz

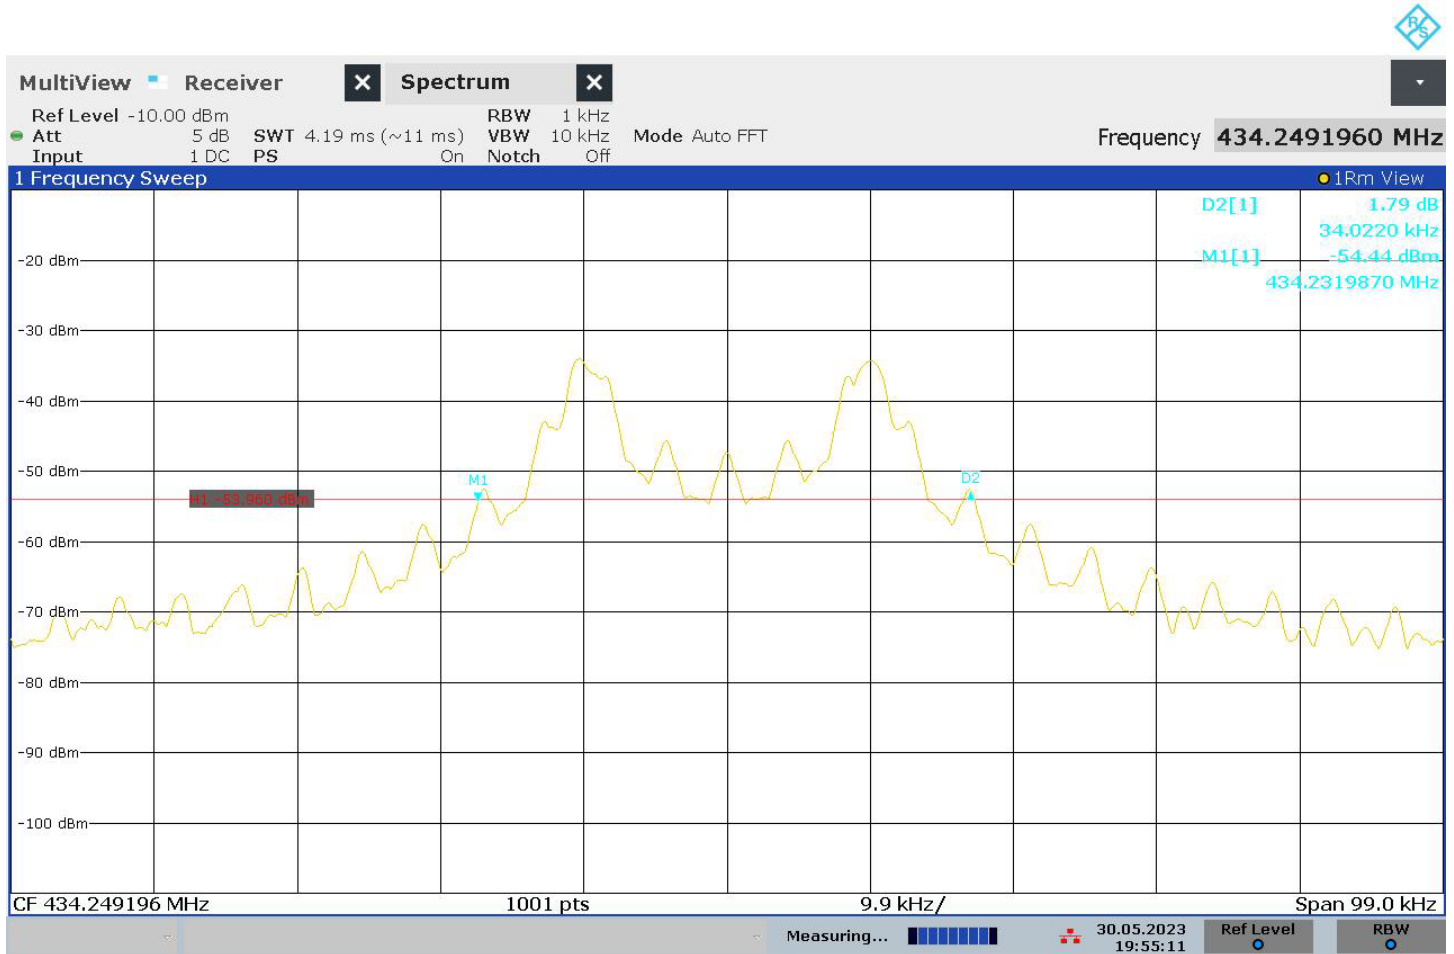

19:55:11 30.05.2023

8.4 Field Strength of Fundamental

Limits from FCC 15.231 and test procedure from ANSI C63.10.

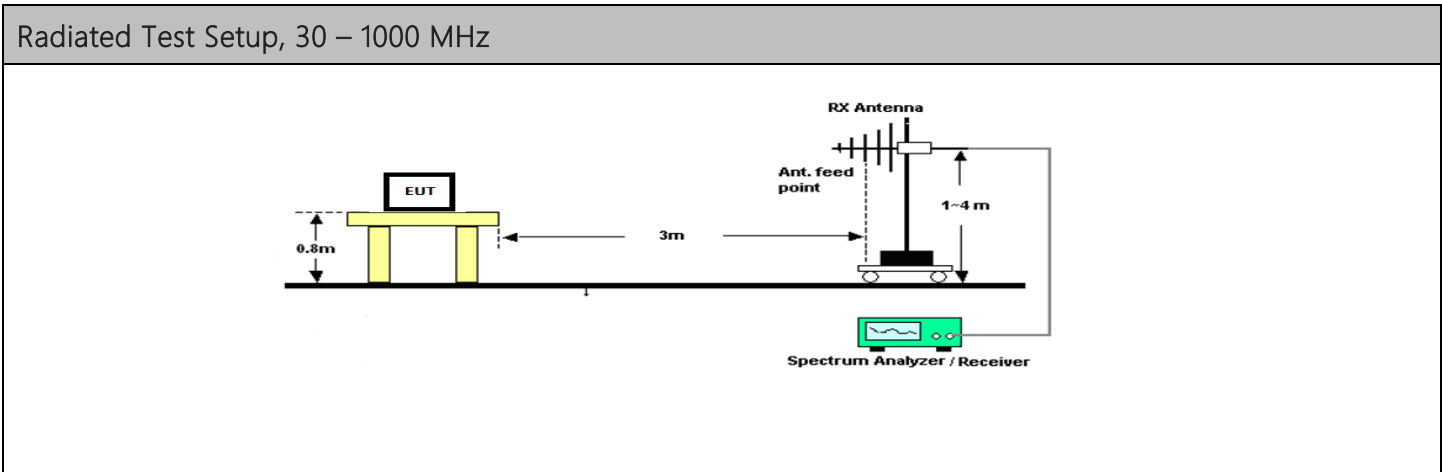


8.4.1 Field strength of fundamental

Tuned Frequency (MHz)	Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	15.231 Fundamental Limit	Margin (dB)
434.00	PK	50.97	H	2.39	-5.51	15.76	3.00	63.60	80.83	17.22
434.00	PK	49.93	V	2.39	-5.51	15.76	3.00	62.56	80.83	18.26


8.5 Radiated Emissions

Limits from FCC 15.209 and test procedure from ANSI C63.10.

Radiated Test Setup, 30 – 1000 MHz

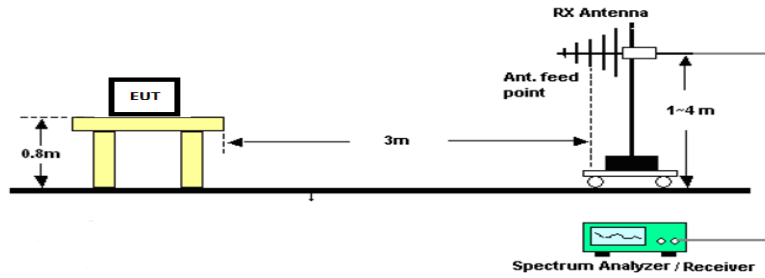

Radiated Test Setup, Above 1000 MHz

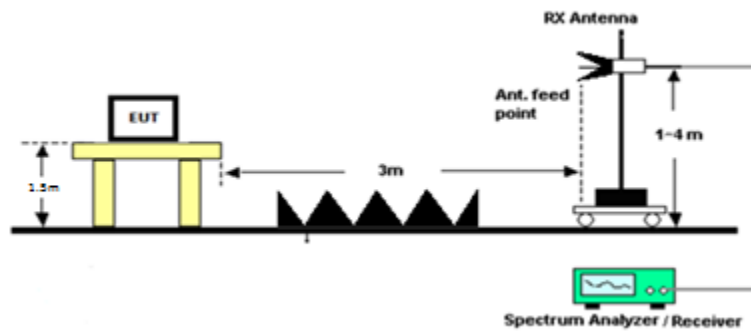

Radiated Emissions, Tabular Data

8.5.1 Radiated Emissions Table

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	15.231 Spurious Limit (dBµV/m)	Margin (dB)
434.00	868.00		PK	21.11	H	3.51	-5.51	22.58	3.00	41.69	60.83	19.14
434.00	1302.00	X	PK	19.74	H	4.18	-5.51	28.68	3.00	47.09	60.83	13.74
434.00	1736.00		PK	23.63	H	4.83	-5.51	29.54	3.00	52.49	60.83	8.34
434.00	2170.00		PK	14.84	H	5.35	-5.51	31.27	3.00	45.95	60.83	14.88
434.00	2604.00		PK	7.22	H	5.80	-5.51	32.41	3.00	39.91	60.83	20.92
434.00	3038.00		PK	4.23	H	6.38	-5.51	32.61	3.00	37.71	60.83	23.12
434.00	3472.00		PK	7.22	H	6.90	-5.51	32.64	3.00	41.24	60.83	19.59
434.00	3906.00	X	PK	4.23	H	7.00	-5.51	33.25	3.00	38.96	60.83	21.87
434.00	4340.00	X	PK	4.23	H	7.45	-5.51	33.55	3.00	39.71	60.83	21.11
434.00	868.00		PK	4.23	V	3.51	-5.51	22.58	3.00	24.81	60.83	36.02
434.00	1302.00	X	PK	4.23	V	4.18	-5.51	28.68	3.00	31.58	60.83	29.25
434.00	1736.00		PK	4.23	V	4.83	-5.51	29.54	3.00	33.09	60.83	27.74
434.00	2170.00		PK	4.23	V	5.35	-5.51	31.27	3.00	35.34	60.83	25.49
434.00	2604.00		PK	4.23	V	5.80	-5.51	32.41	3.00	36.92	60.83	23.91
434.00	3038.00		PK	4.23	V	6.38	-5.51	32.61	3.00	37.71	60.83	23.12
434.00	3472.00		PK	4.23	V	6.90	-5.51	32.64	3.00	38.25	60.83	22.58
434.00	3906.00	X	PK	4.23	V	7.00	-5.51	33.25	3.00	38.96	60.83	21.87
434.00	4340.00	X	PK	4.23	V	7.45	-5.51	33.55	3.00	39.71	60.83	21.11

9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in a separate document.

10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate document.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_8165-23_FCC_15.231_	1	Initial release	1/4/2024



13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

END OF TEST REPORT
