





Test Report



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Report No	EP0016-1
Client	Trimble Navigation
Address	1 Merrill Street Woburn, MA 01801
Phone	(781) 305-4321
Items tested	M6E-NANO
FCC ID	QV5MERCURY6EN
IC	5407A-MERCURY6EN
FRN	0008403743
Equipment Type	Part 15.247 Frequency Hopper
Equipment Code	DSS
FCC/IC Rule Parts	47 CFR 15.247, RSS-210
Test Dates	January 19-20 and 22, 2015, March 9, 2015
Results	As detailed within this report
Prepared by	 Tuyen Truong – Test Engineer
Authorized by	 Christopher Reynolds – EMC Supervisor
Issue Date	<u>3/24/2015</u>
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 38 of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

Contents2
Summary3
Test Methodology3
Product Tested - Configuration Documentation4
 Statement of Conformity5
Test Results6
 Bandwidth6
 Channel Frequency Separation9
 Time of Occupancy13
 Output Power18
 Conducted Spurious Emissions22
 Radiated Spurious Emissions28
 AC Line Conducted Emissions32
 Occupied Bandwidth34
Measurement Uncertainty37
Conditions Of Testing38

Form Final Report REV 7-20-07 (DW)



Summary

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 15.247. The product is the M6E-NANO RFID Module. It is a frequency hopping transmitter that operates in the range 917.4-927.2MHz. Product was tested with a MTI Wireless antenna (MT-263020 8dBi) and a LAIRD Technology antenna (FG9026 8.15dBi) respectively.

We found that the product met the above requirements without modification. Khaled EIMahgoub from Trimble Navigation Limited was present during the testing. The test sample was received in good condition.

Test Methodology

Radiated emission and AC Line conducted testing was performed according DA 00-705 document specified in ANSI C63.10 (2009) and C63.4 (2003). Radiated Emissions were maximized by rotating the device around its axes as well as varying the test antenna’s height and polarity. The device antenna was maximized separately.

Conducted emission at the antenna port was performed, as required by rule section.

The EUT operating voltage is 5VDC

Low operating channel frequency = 917.4MHz

Mid operating channel frequency = 922.4MHz

High operating channel frequency = 927.2MHz

The following bandwidths were used during radiated spurious and line conducted emissions.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	300kHz
1-10GHz	1MHz	3MHz

Release Control Record

Issue No.	Reason for change	Date Issued
1	Original Release	March 19, 2015



Product Tested - Configuration Documentation

EUT Configuration										
Work Order: P0016 Company: Trimble Navigation Company Address: 1 Merrill Street Woburn, MA 01801 Contact: Khaled EIMahgoub Person Present: Khaled EIMahgoub										
			MN				SN			
EUT: M6E-NANO 451467701514 MTI Wireless Edge Antenna: MT-263020/TRH/A/K -- LAIRD Technology Antenna: FG9026 -- EUT Description: NANO Embedded UHF RFID Module EUT Max Frequency: 48MHz EUT TX Frequency: 917.4-927.2MHz										
			MN				SN			
Support Equipment:										
EDAC Power Elec AC/DC Power Brick EA10603B -- Dell Laptop Latitude E6430 -- Carrier Board 430-0070-01 X2 451470702119 Dev Kit 400-0033-01 02 521133614099 BK Precision Power Supply 17358 --										
EUT Ports:										
Port Label	Port Type	No. of ports	No. Populated	Cable Type	Shielded	Ferrites	Length	Max Length	In/Out NEBS Type	Comment
RS232	DB9	1	1	DB9	Yes	None	1.5m	>3m	Indoor	
Antenna port	MMCX	1	1	Coaxial	Yes	None	1m	>3m	Indoor	Redundant
Host Dev Kit Ports		No. of ports	No. Populated	Cable Type	Shielded	Ferrites	Length			
12 VDC Power		1	1	2-wire conductor	no	1 molded on DC input side	1m			
Software / Operating Mode Description:										
EUT is set to transmit on Low (917.4MHz), Mid (922.4MHz) and High (927.2MHz) channels from 917 to 928MHz										



Statement of Conformity

The M6E-NANO has been found to conform to the following parts of 47 CFR and as detailed below:

RSS-GEN	RSS 210	Part 15	Comments
5.3		15.15(b)	There are no controls accessible to the user that varies the output power above specified limits.
5.2		15.19	The label is shown in the label exhibit.
7.1.5		15.21	Information to the user is shown in the instruction manual exhibit.
		15.27	No special accessories are required for compliance.
		15.31	The EUT was tested in accordance with the measurement standards in this section.
		15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
		15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
7.1.4		15.203	EUT employs a unique reverse polarity SMA antenna connector.
	2.6	15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209.
7.2.2		15.207	EUT meets the AC Line conducted emissions requirements of 15.207.
	Annex 8	15.247	The unit complies with the requirements of 15.247
4.6.1			Occupied Bandwidth measurements were made.

Test Results

Bandwidth

LIMIT

The 20dB bandwidth is used to determine channel frequency separation limits and required number of hopping frequencies.

MEASUREMENTS / RESULTS

20dB Bandwidth		
Frequency (MHz)	Mode	20dB Bandwidth (KHz)
917.4	PR-ASK modulation	52.00
922.4	PR-ASK modulation	57.75
927.2	PR-ASK modulation	53.50
Tested by: Tuyen Truong Date: 1/19/2015 Company: Trimble Navigation EUT: M6E-NANO		RBW = 3KHz VBW = 10KHz Analyzer: Brown Attenuator: PE7019-20
Temp/Humidity/Pressure: 21.6°C, 26% and 1015mBar		


Rev. 1/18/2015

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Brown	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	5/12/2015	5/12/2014
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Cat	Calibration Due	Calibrated on	
1DCC-OATS-3M-I	719150	2762A-8	A-0015	30-1000MHz	II	5/17/2015	5/17/2013	
Preamps / Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF 20dB 50W Attenuator	0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/14/2015	7/14/2014
Meteorological Meters	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)	BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014	
TH A#1830	35519-044	Control Company	130320003	1830	II	6/13/2015	6/13/2013	


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Plot(s)

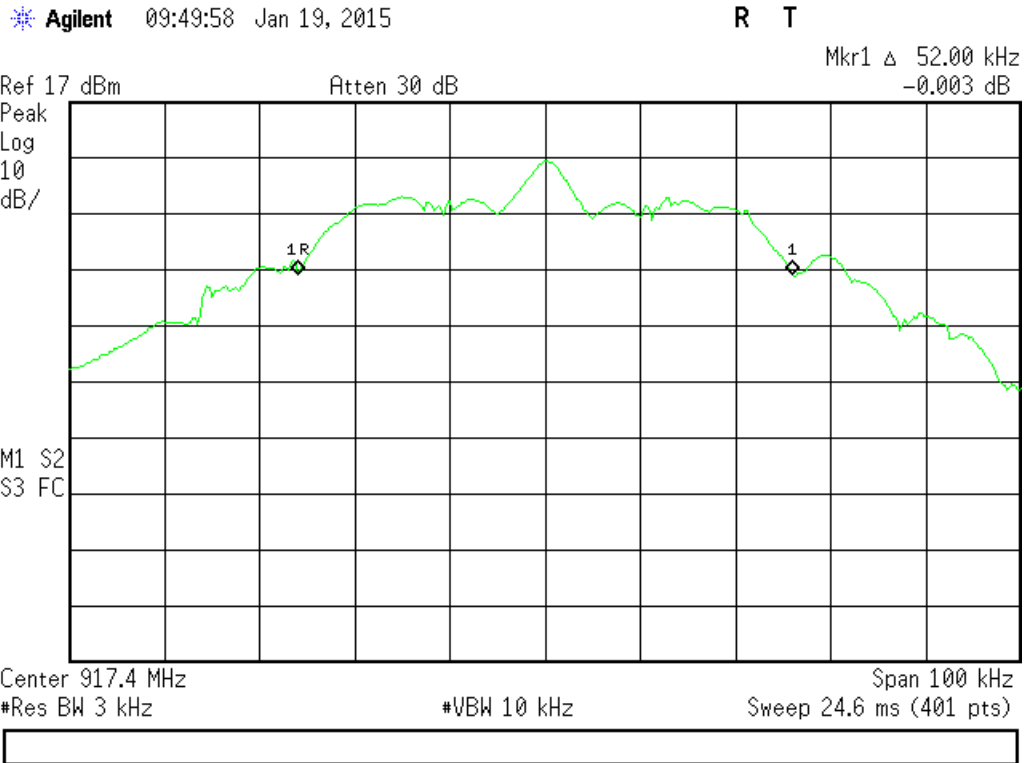

Low Channel

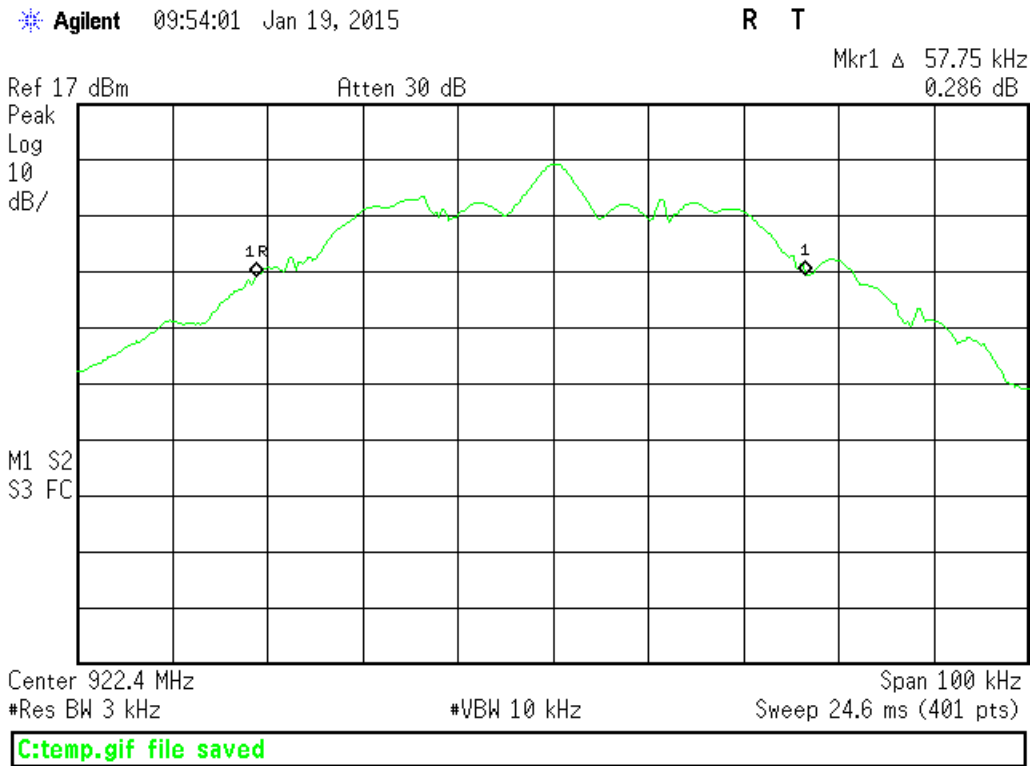


Mid Channel



Agilent 09:55:36 Jan 19, 2015

R T

Mkr1 Δ 53.50 kHz
0.096 dB

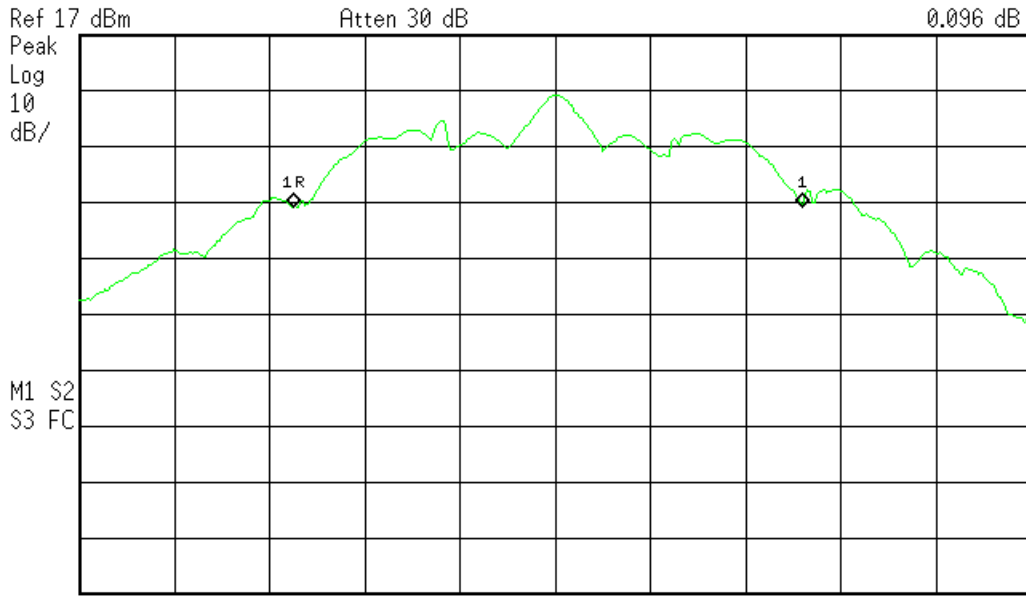

Center 927.2 MHz Span 100 kHz
#Res BW 3 kHz #VBW 10 kHz Sweep 24.6 ms (401 pts)

C:\temp.gif file saved

High Channel



Channel Frequency Separation

LIMIT

“Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.”
[15.247(a)(1)]


Limit = 20dB bandwidth = 57.75 kHz. (Worst case observed – See 20dB BW section)

Engineer	Tuyen Truong
Date	January 19, 2015
Site	3M Indoor
Temp/Humidity/Pressure	21.6°C, 26% and 1015mBar

MEASUREMENTS / RESULTS

Channel Frequency Separation = 200 kHz

Plot(s)

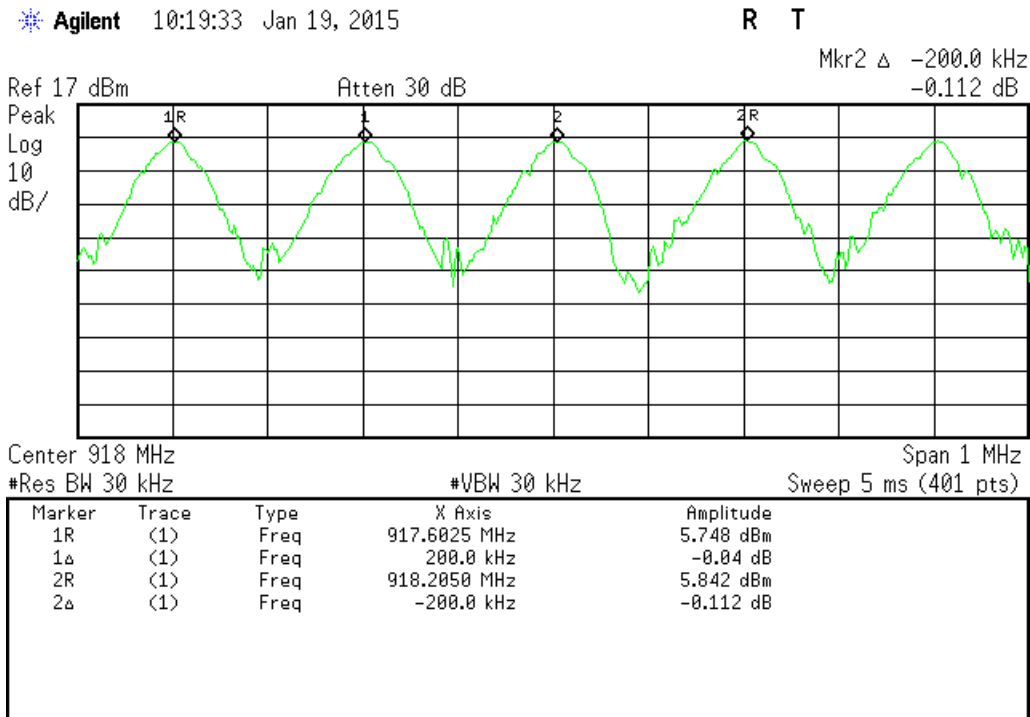


C:\temp.gif file saved

Channel Separation - Low Channel & Adjacent Channels

Agilent 10:21:50 Jan 19, 2015

R T

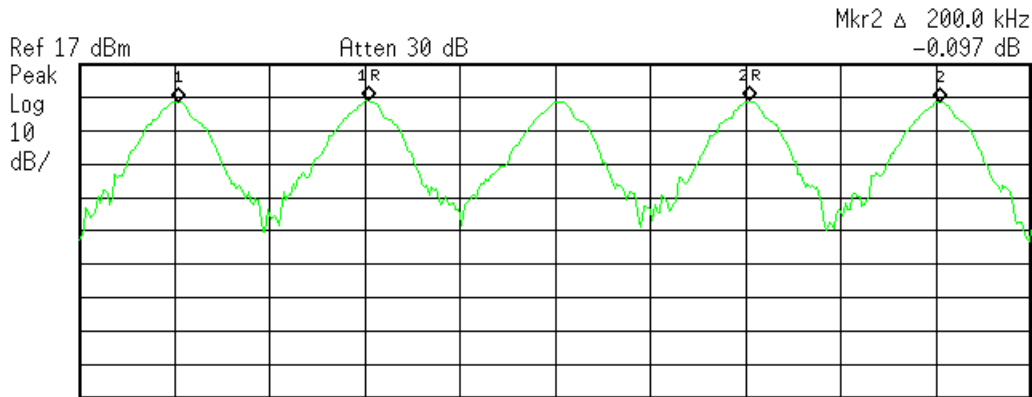

Center 922 MHz Span 1 MHz
 #Res BW 30 kHz #VBW 30 kHz Sweep 5 ms (401 pts)


Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Freq	921.8050 MHz	5.833 dBm
1Δ	(1)	Freq	-200.0 kHz	-0.223 dB
2R	(1)	Freq	922.2050 MHz	5.781 dBm
2Δ	(1)	Freq	200.0 kHz	-0.097 dB

C:\temp.gif file saved

Channel Separation - Mid Channel & Adjacent Channels

Agilent 10:17:25 Jan 19, 2015

R T

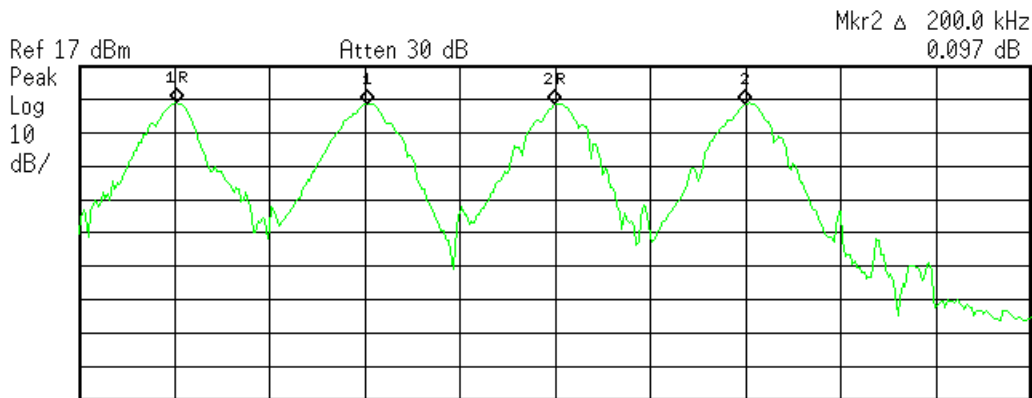

Center 927 MHz Span 1 MHz
 #Res BW 30 kHz #VBW 30 kHz Sweep 5 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Freq	926.6025 MHz	5.805 dBm
1Δ	(1)	Freq	200.0 kHz	-0.067 dB
2R	(1)	Freq	927.0000 MHz	5.388 dBm
2Δ	(1)	Freq	200.0 kHz	0.097 dB

C:\temp.gif file saved

Channel Separation - High Channel & Adjacent Channels



Rev. 1/18/2015

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Brown	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	5/12/2015	5/12/2014
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on
1DCC-OATS-3M-I	719150	2762A-8	A-0015	30-1000MHz		II	5/17/2015	5/17/2013
Preamps / Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF 20dB 50W Attenuator	0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/14/2015	7/14/2014
Meteorological Meters		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
TH A#1830		35519-044	Control Company	130320003	1830	II	6/13/2015	6/13/2013

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Number of Hopping Frequencies

LIMIT

“...if the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping frequencies...”

[15.247(a)(1)(i)]

Engineer	Tuyen Truong
Date	January 19, 2015
Site	3M Indoor
Temp/Humidity/Pressure	21.6°C, 26% and 1015mBar


MEASUREMENTS / RESULTS

Number of hopping frequencies = 50

Plot(s)

Agilent 10:27:26 Jan 19, 2015

R T

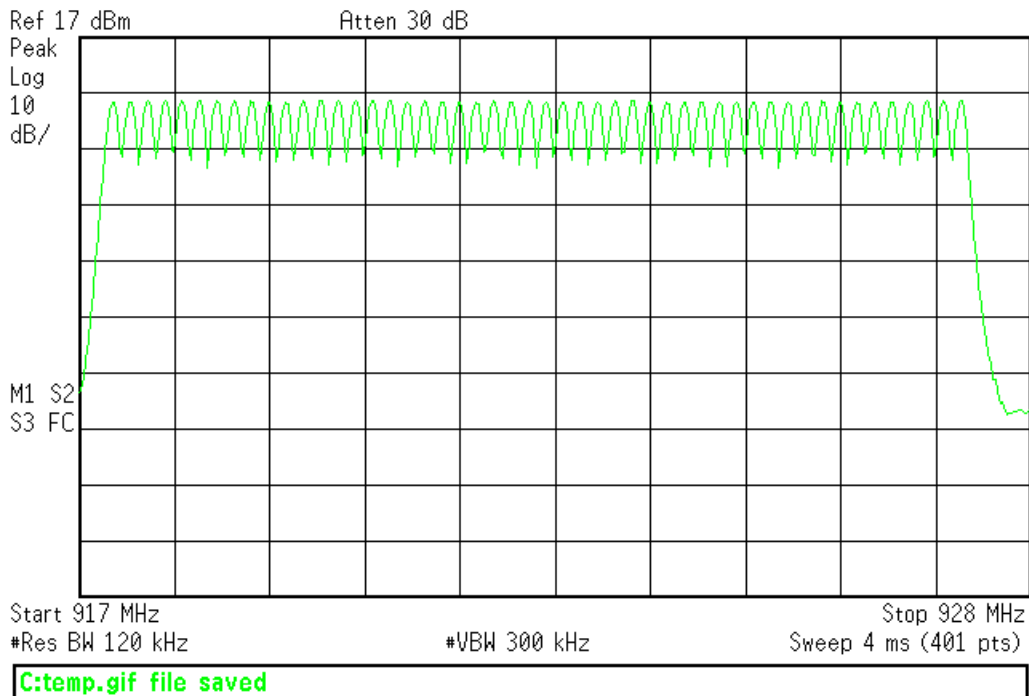

Number of Hopping Frequencies - 50 Channels

Time of Occupancy

LIMIT

“...if the 20dB bandwidth of the hopping channel is less than 250kHz...the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period” [15.247(a)(1)(i)]

Engineer	Tuyen Truong
Date	January 19, 2015
Site	3M Indoor
Temp/Humidity/Pressure	21.6°C, 26% and 1015mBar

MEASUREMENTS / RESULTS

Time of Occupancy							
Frequency (MHz)	Mode	Channel Dwell Time (ms)	Repetition Rate in 20sec	Total Occupied Time in 20sec (ms)	Limit (ms)	Margin (ms)	Pass/Fail
917.4	PR-ASK modulation	23.25	17	395.25	400	4.75	Pass
922.4	PR-ASK modulation	23	17	391	400	9	Pass
927.2	PR-ASK modulation	23.25	17	395.25	400	4.75	Pass
Tested by: Tuyen Truong Date: 1/19/2015 Company: Trimble Navigation EUT: M6E-NANO				RBW = 120KHz VBW = 300KHz Analyzer: Brown Attenuator: PE7019-20			


Rev. 1/18/2015

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Brown	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	5/12/2015	5/12/2014
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Cat	Calibration Due	Calibrated on	
1DCC-OATS-3M-I	719150	2762A-8	A-0015	30-1000MHz	II	5/17/2015	5/17/2013	
Preamps / Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF 20dB 50W Attenuator	0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/14/2015	7/14/2014
Meteorological Meters	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only) TH A#1830	BA928 35519-044	Oregon Scientific Control Company	C3166-1 130320003	831 1830	I II	3/19/2016 6/13/2015	3/19/2014 6/13/2013	


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Plot(s)

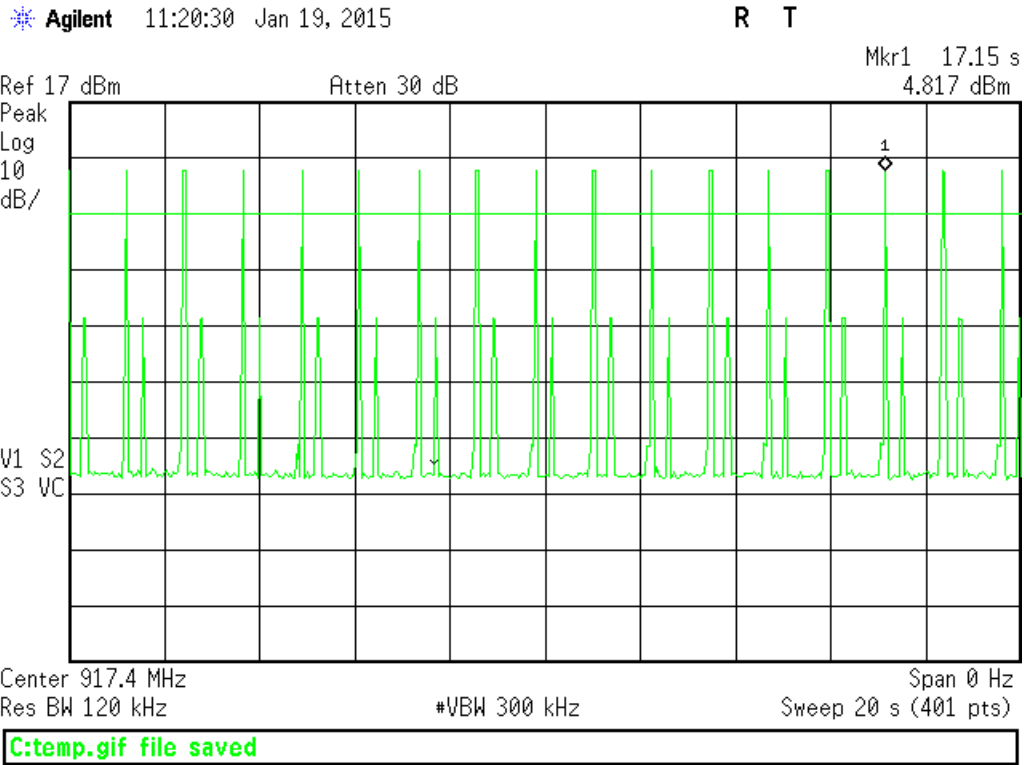

Time of Occupancy - Low Channel

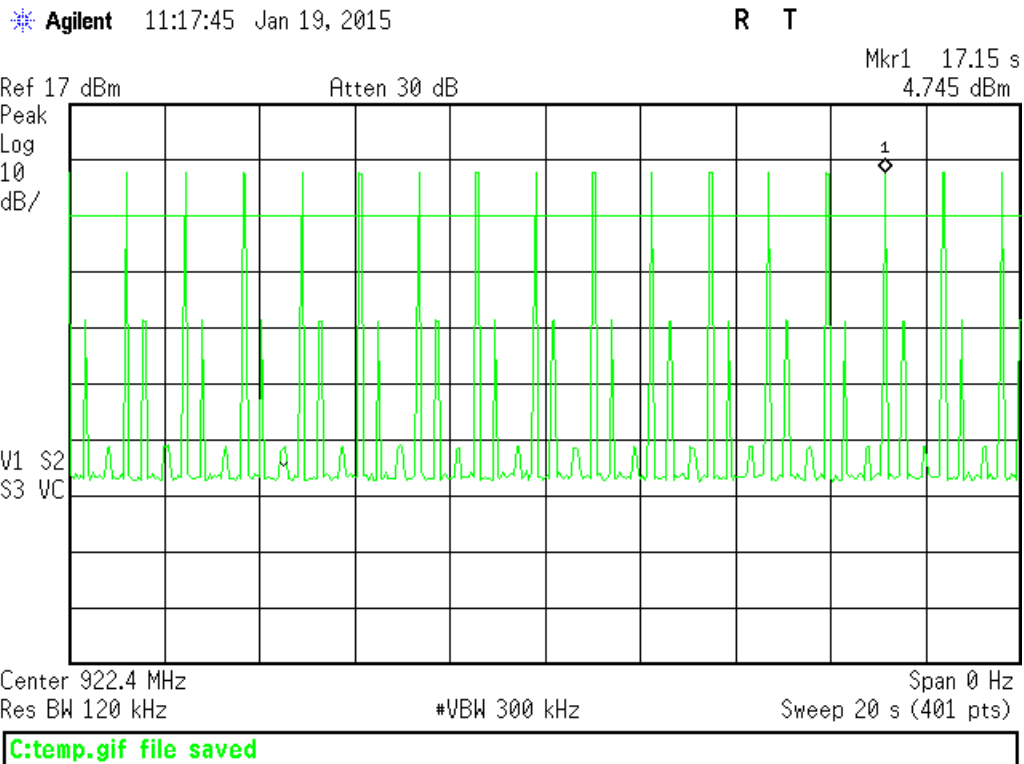


Time of Occupancy - Mid Channel



Agilent 11:22:41 Jan 19, 2015

R T

Mkr1 13.5 s
4.923 dBm

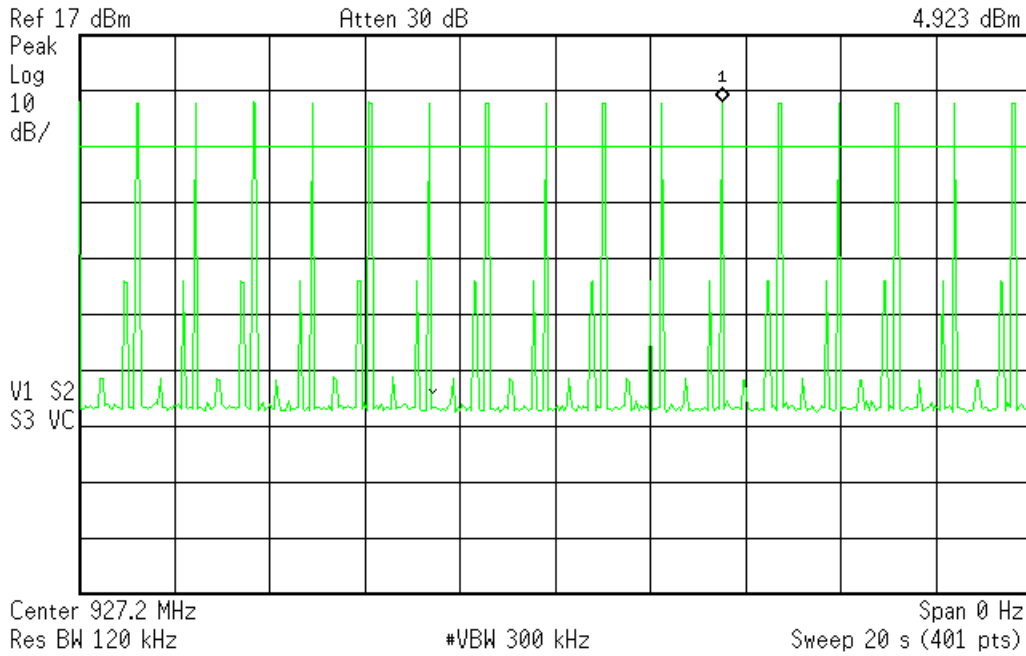


C:\temp.gif file saved

Time of Occupancy - High Channel

Agilent 11:25:56 Jan 19, 2015

R T

Mkr1 Δ 23.25 ms
-55.8 dB

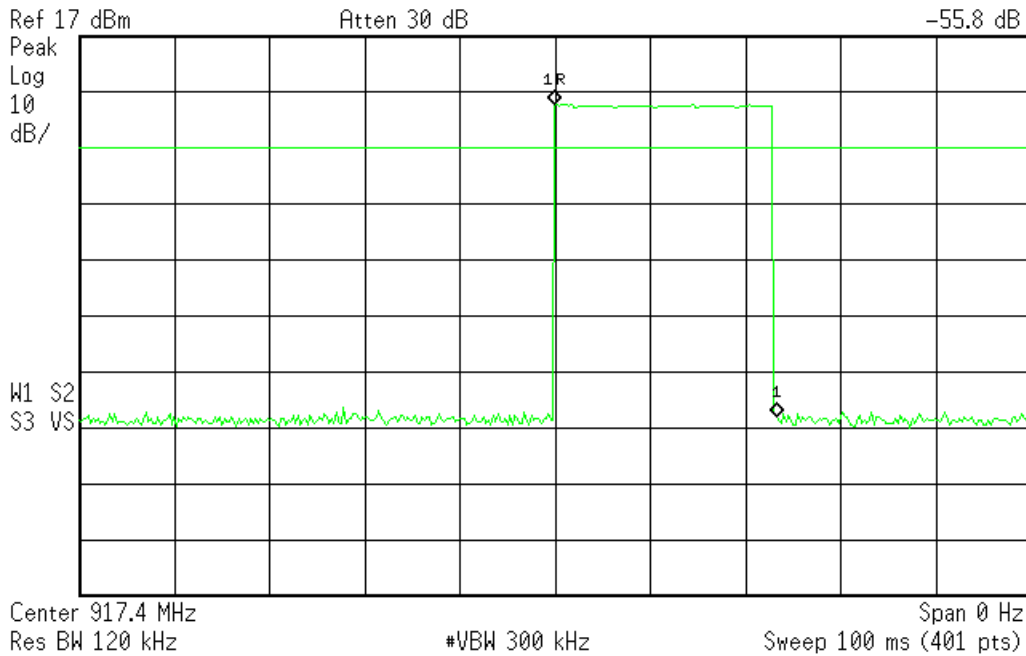

C:\temp.gif file saved


Channel Dwell - Low Channel



Agilent 11:28:19 Jan 19, 2015

R T

Mkr1 Δ 23 ms
-56.77 dB

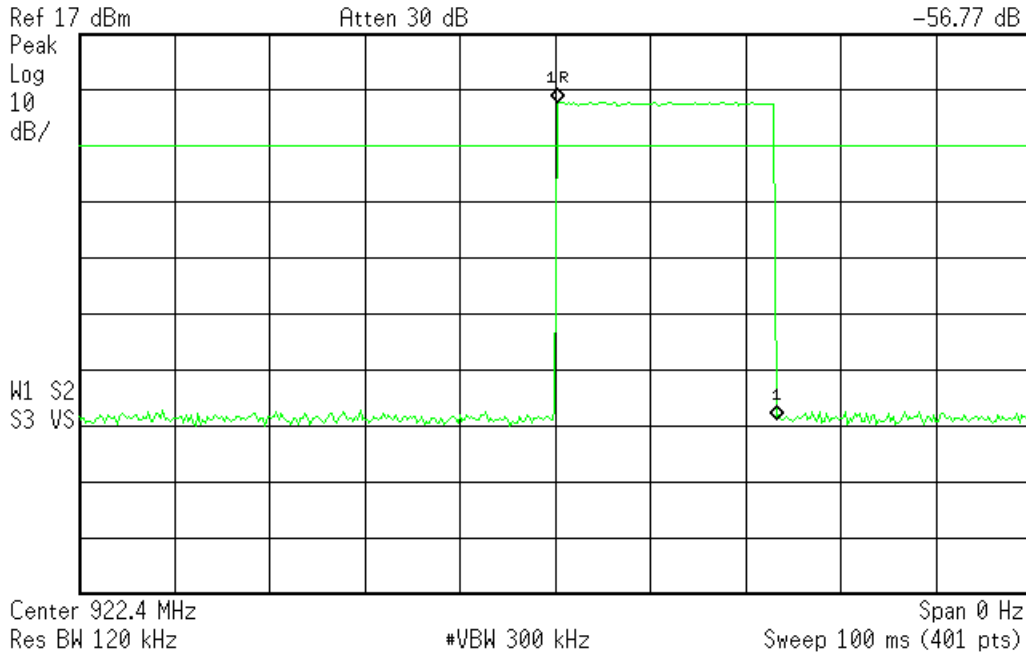


C:\temp.gif file saved

Channel Dwell - Middle Channel

Agilent 11:24:31 Jan 19, 2015

R T

Mkr1 Δ 23.25 ms
-57.23 dB

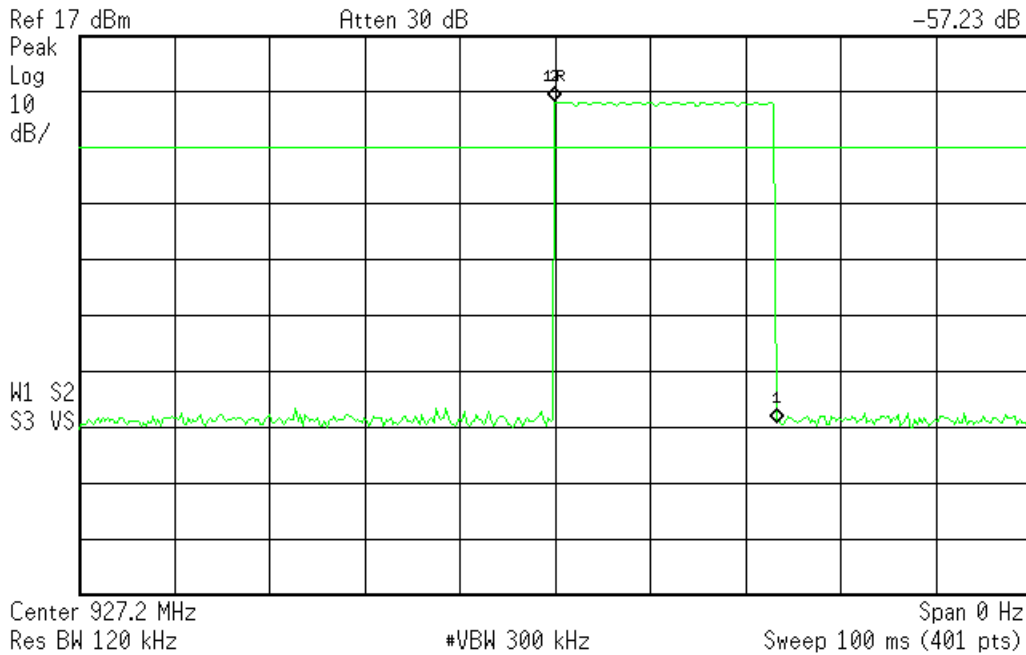

C:\temp.gif file saved

Channel Dwell - High Channel





Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Output Power

LIMIT

“The maximum peak conducted output power of the intentional radiator shall not exceed...For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels”

[15.247(b)(2)]

Limit = 30dBm

Engineer	Tuyen Truong
Date	January 19, 2015
Site	3M Indoor
Temp/Humidity/Pressure	21.6°C, 26% and 1015mBar

MEASUREMENTS / RESULTS

Maximum Conducted Peak Output Power							
Tested by: Tuyen Truong			Analyzer: Brown			WO: P0016	
Date: 1/19/2015			Attenuator: PE7019-20 #791			RBW = 100KHz	
Company: Trimble Navigation			Operating Voltage: 5Vdc			VBW = 100KHz	
EUT: M6E-NANO			TX Mode: CW				
			Antenna: FG9026 8.15dBi				
Channel (MHz)	Measured power (dBm)	Attenuator factor (dB)	Cable Loss	Adjusted power measurement (dBm)	Adjusted Limit for Laird 8.15dBi Antenna (dBm)	Margin (dB)	Result
917.4	5.08	19.48	2.46	27.02	27.85	-0.83	PASS
922.4	5.11	19.46	2.52	27.09	27.85	-0.77	PASS
927.2	5.10	19.47	2.43	27.00	27.85	-0.86	PASS

Maximum Conducted Peak Output Power							
Tested by: Tuyen Truong			Analyzer: Brown			WO: P0016	
Date: 1/19/2015			Attenuator: PE7019-20 #791			RBW = 100KHz	
Company: Trimble Navigation			Operating Voltage: 5Vdc			VBW = 100KHz	
EUT: M6E-NANO			TX Mode: CW				
			Antenna: MT-263020 8dBi				
Channel (MHz)	Measured power (dBm)	Attenuator factor (dB)	Cable Loss	Adjusted power measurement (dBm)	Adjusted Limit for MTI 8dBi Antenna (dBm)	Margin (dB)	Result
917.4	5.08	19.48	2.46	27.02	28	-0.98	PASS
922.4	5.11	19.46	2.52	27.09	28	-0.91	PASS
927.2	5.10	19.47	2.43	27.00	28	-1.01	PASS

Note: Cable factor (cable loss) provided by client, (Verified using the HP83752A Agilent Sweeper – Asset #87.)



Rev. 3/8/2015

Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Brown		9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	5/12/2015	5/12/2014
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on
1DCC-OATS-3M-I		719150	2762A-8	A-0015	30-1000MHz		II	5/17/2015	5/17/2013
Preamps /Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF 20dB 50W Attenuator		0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/14/2015	7/14/2014
Meteorological Meters			MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
TH A#1830			35519-044	Control Company	130320003	1830	II	6/13/2015	6/13/2013
Signal Generators		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
RFI-High Sweeper 1		0.01-20.0GHz	HP83752A	Agilent	3610A01133	87	I	10/20/2015	10/20/2014

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.




Plot(s)

Agilent 13:33:07 Jan 19, 2015

R T

Mkr1 917.380 MHz
5.081 dBm

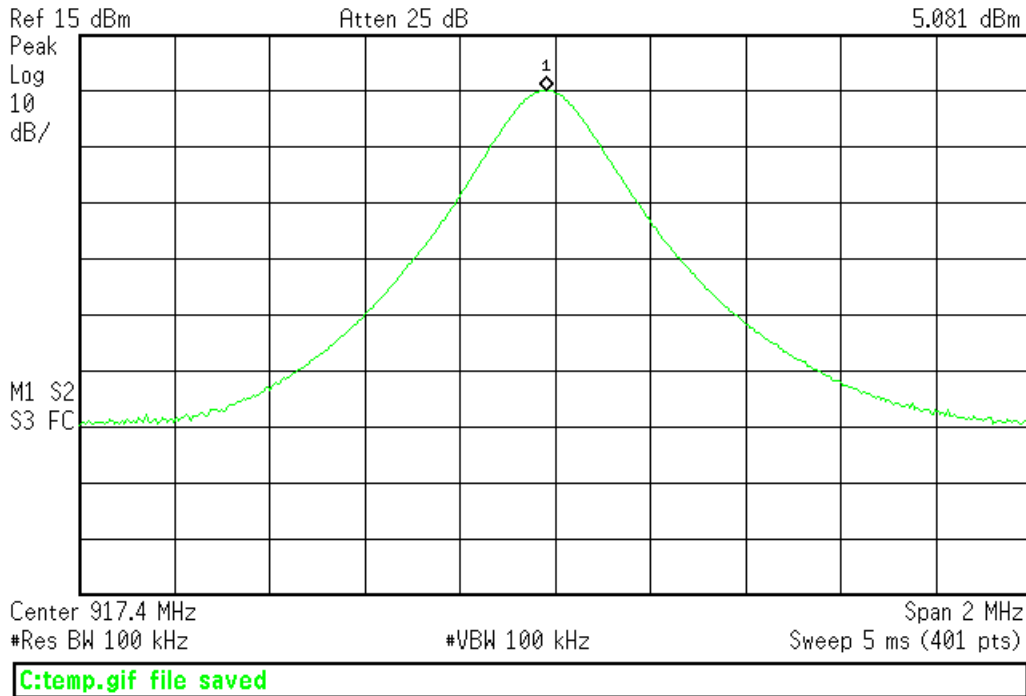


Output Power - Low Channel

Agilent 13:34:24 Jan 19, 2015

R T

Mkr1 922.380 MHz
5.105 dBm

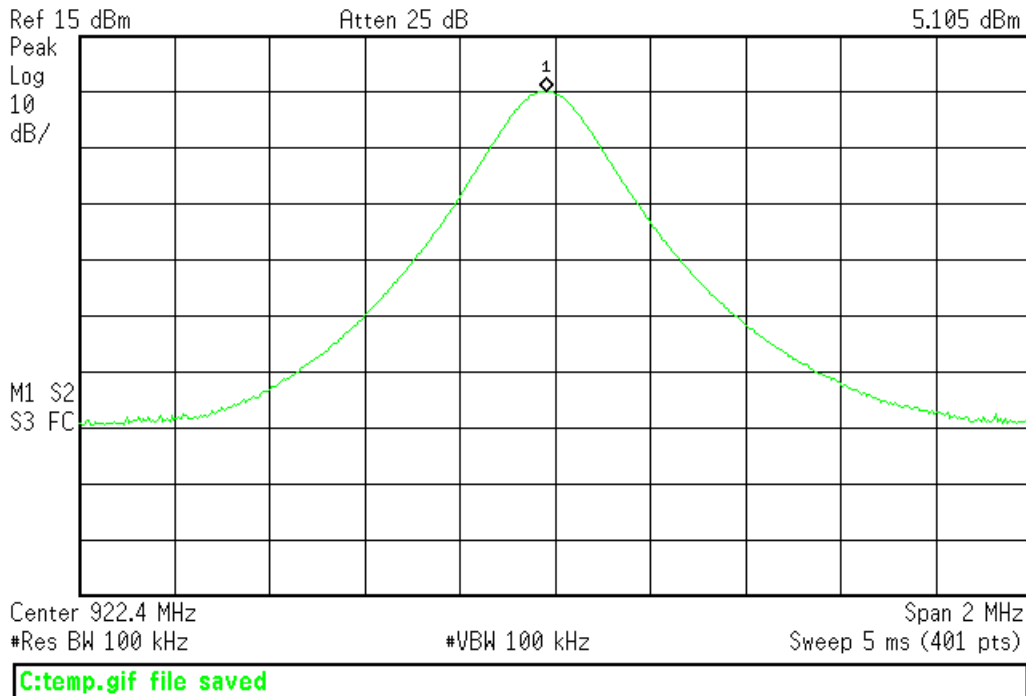


Output Power - Mid Channel



Agilent 13:36:11 Jan 19, 2015

R T

Mkr1 927.180 MHz
5.095 dBm

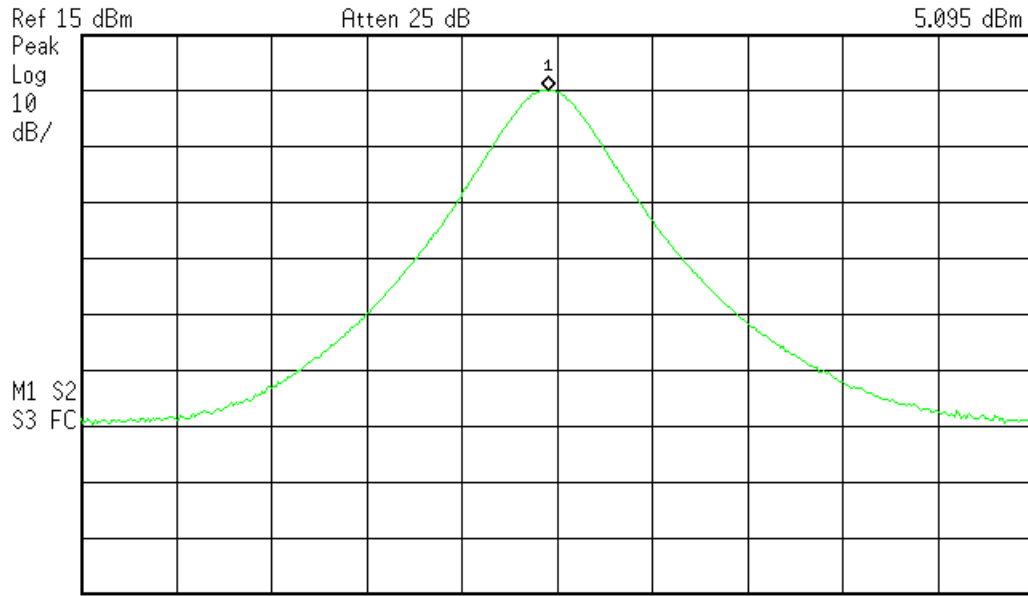

Center 927.2 MHz Span 2 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 5 ms (401 pts)

C:temp.gif file saved

Output Power - High Channel



Conducted Spurious Emissions

LIMITS


“In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power”

[15.247(d)]

Engineer	Tuyen Truong
Date	January 19, 2015
Site	3M Indoor
Temp/Humidity/Pressure	21.6°C, 26% and 1015mBar

MEASUREMENTS / RESULTS


Conducted Band Edge Plot(s)

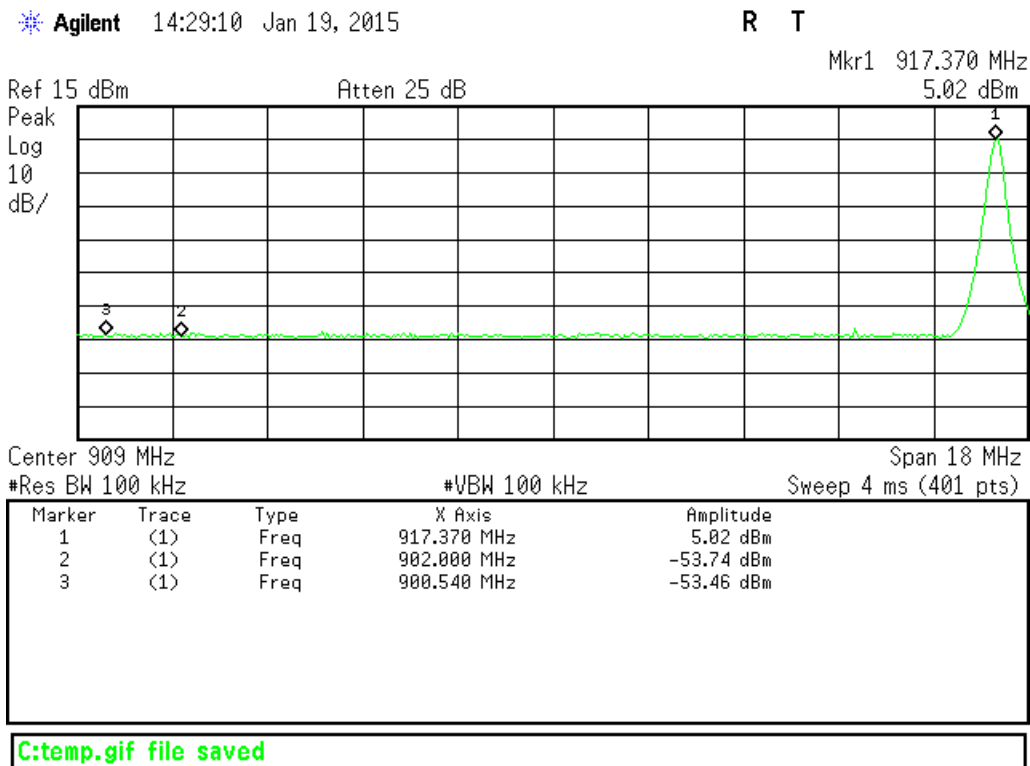

Conducted Spurious EMI - Lower Band Edge

Agilent 14:31:41 Jan 19, 2015

R T

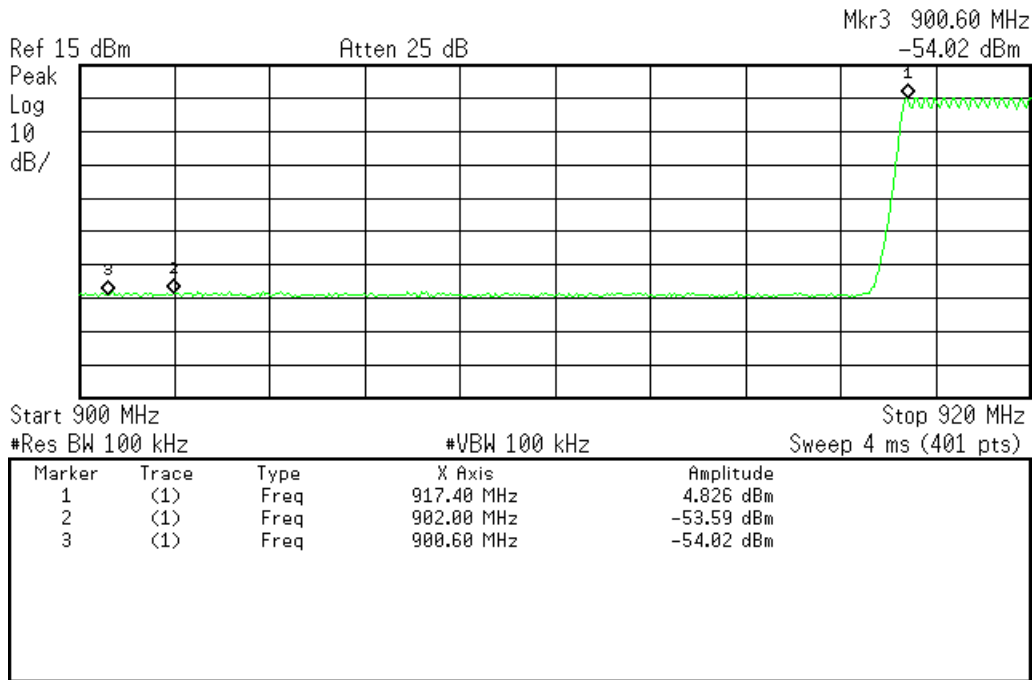


C:\temp.gif file saved

Conducted Spurious EMI - Lower Band Edge (Hopping Enable)

Agilent 14:34:13 Jan 19, 2015

R T

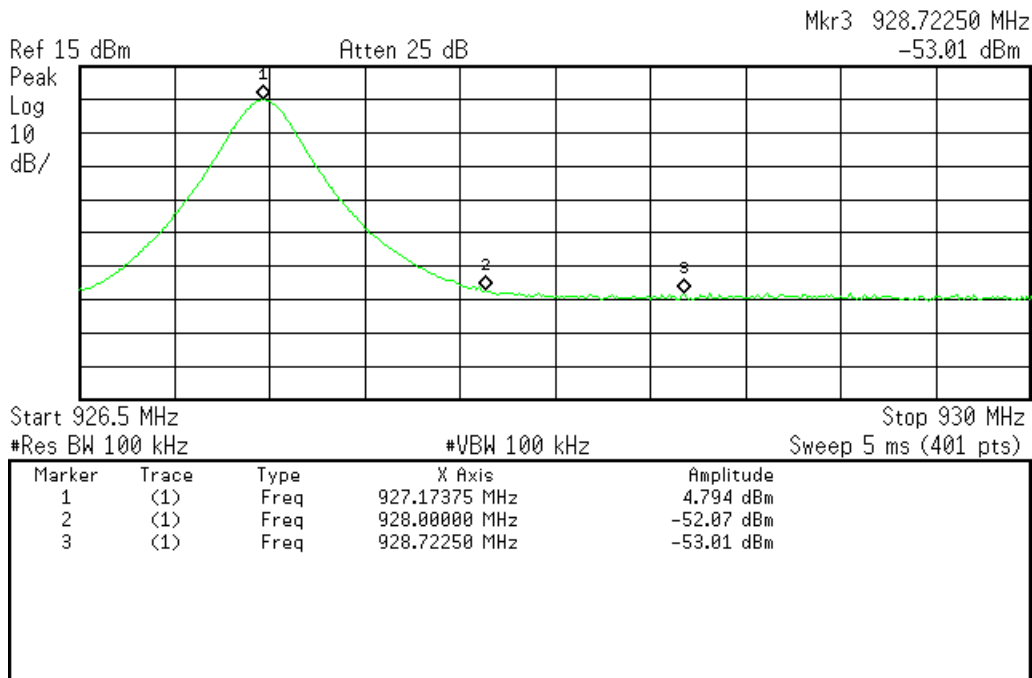

C:\temp.gif file saved


Conducted Spurious EMI - Upper Band Edge



Agilent 14:36:11 Jan 19, 2015

R T

Mkr3 928.72250 MHz
-54.1 dBm

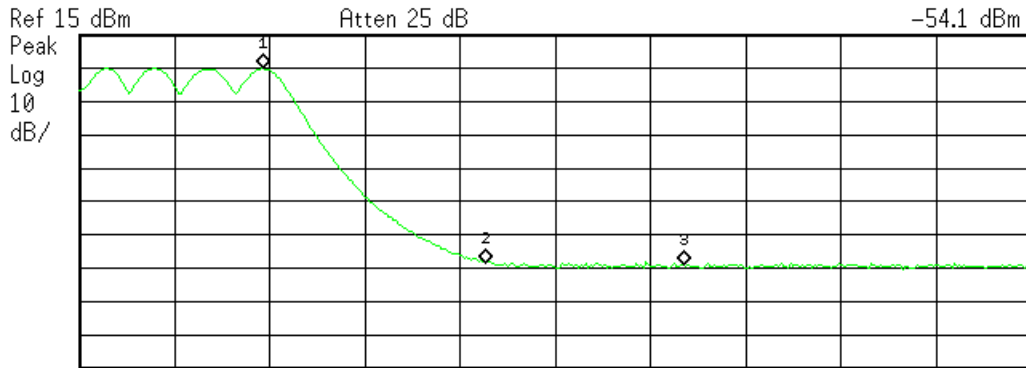


Start 926.5 MHz Stop 930 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 5 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	927.17375 MHz	4.785 dBm
2	(1)	Freq	928.00000 MHz	-53.21 dBm
3	(1)	Freq	928.72250 MHz	-54.1 dBm

C:\temp.gif file saved


Conducted Spurious EMI - Upper Band Edge (Hopping Enable)

Conducted Spurious Emission Plot(s)

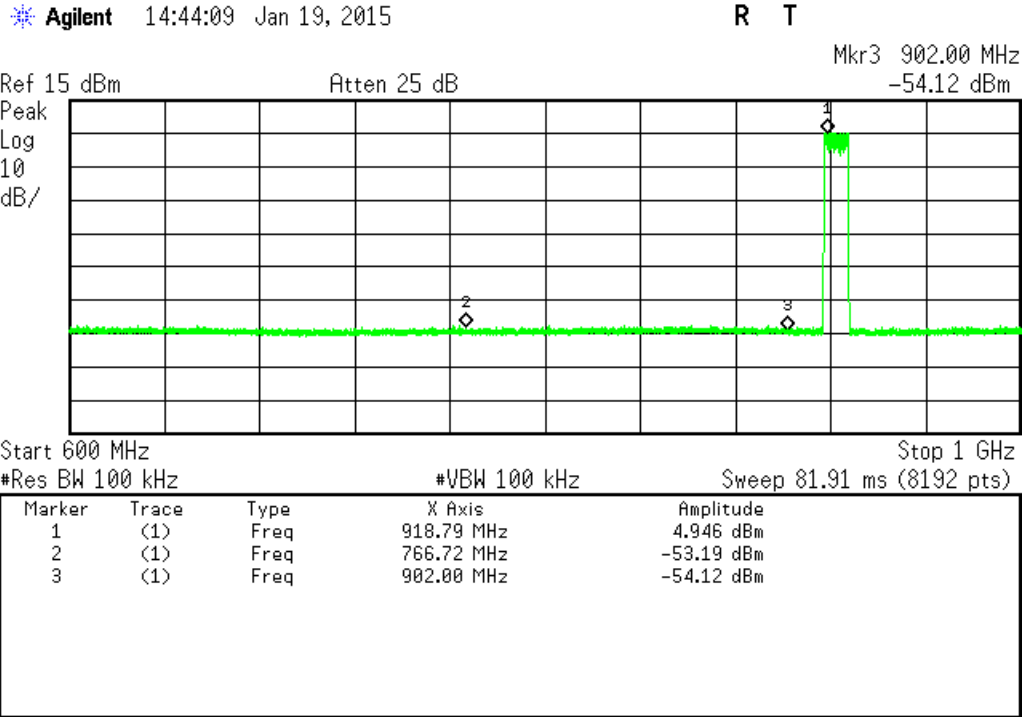

C:\temp.gif file saved

Conducted Spurious EMI - 1

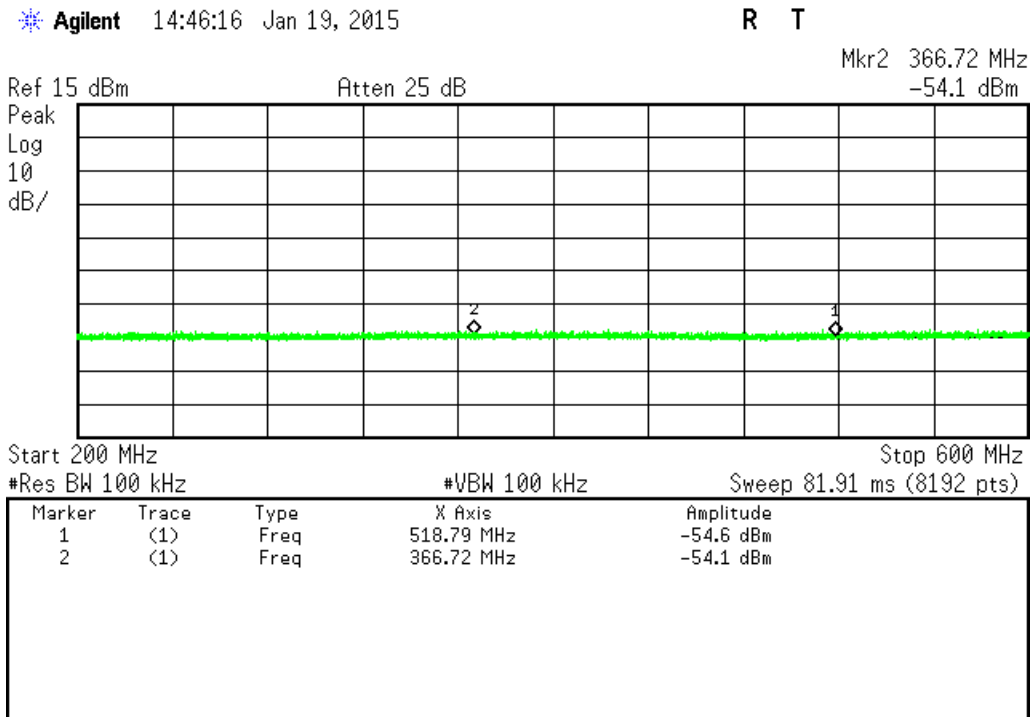

C:\temp.gif file saved


Conducted Spurious EMI - 2



Agilent 14:47:02 Jan 19, 2015

R T

Mkr2 100.856 MHz
-54.99 dBm

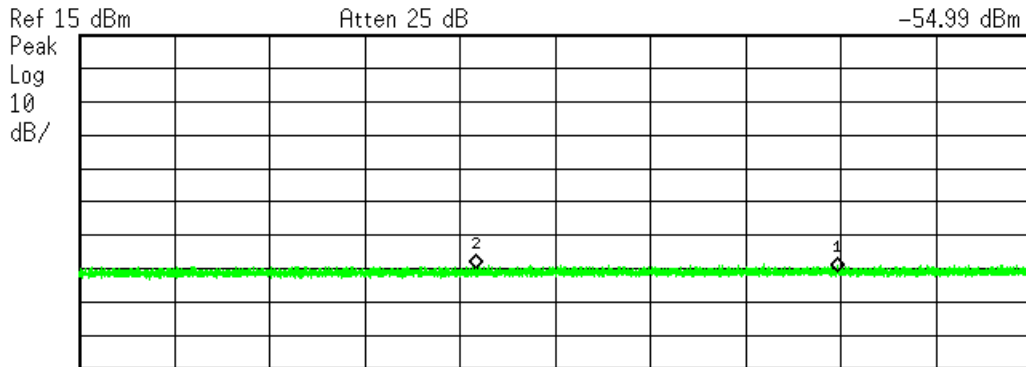

Ref 15 dBm Atten 25 dB
Start 30 MHz Stop 200 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 81.91 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	165.485 MHz	-55.86 dBm
2	(1)	Freq	100.856 MHz	-54.99 dBm


C:\temp.gif file saved

Conducted Spurious EMI – 3

Agilent 14:50:11 Jan 19, 2015

R T

Mkr2 8.7795 GHz
-54.28 dBm

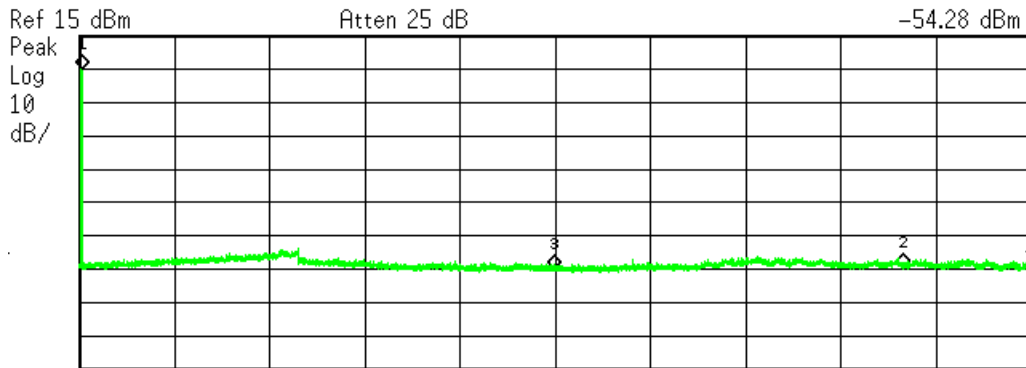

Ref 15 dBm Atten 25 dB
Start 900 MHz Stop 10 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 1.172 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	925.6 MHz	4.981 dBm
2	(1)	Freq	8.7795 GHz	-54.28 dBm
3	(1)	Freq	5.4494 GHz	-55.87 dBm

C:\temp.gif file saved

Conducted Spurious EMI – 4



For Conducted Spurious Emissions at the Antenna Port, the spectrum analyzer was set to the following:

Span: 400MHz or less
Resolution Bandwidth: 100 KHz
Video Bandwidth: 300 KHz
Points per sweep: 8192

The frequency range 30MHz-10GHz was tested at EUT antenna port and no emissions were found within 10dB of the limit, which was set at 30dB below the power of the transmit frequency. The low, mid, and high channels and hopping function enabled were tested. (See Conducted Spurious Emission - Plot(s))

Radiated Spurious Emissions

LIMITS

“...radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) ”
[15.247(d)]

MEASUREMENTS / RESULTS

EUT tested with MTI Wireless Edge antenna

Radiated Emissions Table												
Date: 09-Mar-15			Company: Trimble Navigation				Work Order: P0016					
Engineer: Tuyen Truong			EUT Desc: M6E-NANO				EUT Operating Voltage/Frequency: 5Vdc					
Temp: 22°C			Humidity: 3%				Pressure: 1010mBar					
Frequency Range: 30 - 1000MHz							Measurement Distance: 3 m					
Notes: EUT tested with MTI Wireless Edge 8dBi Antenna										EUT Max Freq: 917.4-927.2MHz		
EUT was tested while it was hopping through all channels. EUT was also checked while it individually transmitted on Low, Mid and High Channels.												
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	---			FCC Class 15.209		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
v	55.52	55.2	25.4	7.7	0.6	38.1	---	---	---	40.0	-1.9	Pass
h	57.42	39.6	25.4	7.7	0.7	22.6	---	---	---	40.0	-17.4	Pass
v	57.47	56.2	25.4	7.7	0.7	39.2	---	---	---	40.0	-0.8	Pass
v	59.52	50.2	25.4	7.8	0.7	33.3	---	---	---	40.0	-6.7	Pass
v	152.7	34.8	25.1	12.9	1.0	23.6	---	---	---	43.5	-19.9	Pass
v	339.8	24.7	25.3	14.7	1.4	15.5	---	---	---	46.0	-30.5	Pass
h	340.8	24.7	25.3	14.7	1.4	15.5	---	---	---	46.0	-30.5	Pass
v	864.8	34.7	25.7	22.4	2.2	33.6	---	---	---	46.0	-12.4	Pass
h	909.9	28.4	25.4	22.9	2.2	28.1	---	---	---	46.0	-17.9	Pass
v	911.3	35.0	25.3	22.9	2.2	34.8	---	---	---	46.0	-11.2	Pass
v	977.2	33.5	24.4	23.4	2.3	34.8	---	---	---	54.0	-19.2	Pass
Table Result: Pass			by -0.8 dB				Worst Freq: 57.47 MHz					
Test Site: EMI Chamber 2			Cable 1: Asset #1506				Cable 2: Asset #1507			Cable 3: ---		
Analyzer: Rental SA#2			Preamp: Blue-Blk				Antenna: Red-White			Preselector: ---		

Rev.3/8/2015

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
SA #2 (1860)	9kHz-26.5 GHz	E7405A	Agilent	MY45104916	1860	I	6/4/2015	
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
EMI Chamber 2	719150	2762A-7	A-0015	30-1000MHz		II	4/9/2015	3/9/2014
Preamps / Couplers / Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Blue-Black	0.009-2000MHz	ZFL-1000-LN	CS	N/A	800	II	12/26/2015	12/26/2014
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Red-White Bilog	30-2000MHz	JB1	Sunol	A091604-1	1105	I	7/24/2015	7/24/2013
Cables	Range	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Asset #1506	9kHz - 18GHz	Florida RF				II	3/8/2016	3/8/2015
Asset #1507	9kHz - 18GHz	Florida RF				II	2/15/2016	2/15/2015
Meteorological Meters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
TH A#1833		35519-044	Control Company	130318278	1833	II	6/13/2015	6/13/2013

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Radiated Emissions Table															
Date: 09-Mar-15				Company: Trimble Navigation				Work Order: P0016							
Engineer: Tuyen Truong				EUT Desc: M6E-NANO				EUT Operating Voltage/Frequency: 5Vdc							
Temp: 22°C				Humidity: 3%				Pressure: 1010mBar							
Frequency Range: 1-10GHz							Measurement Distance: 3 m (1-6GHz) and 1m (6-10GHz)								
Notes: EUT tested with MTI Wireless Antenna 1288 HPF in place EUT was tested while it was hoping through all channels. EUT was also checked while it individually transmitted on Low, Mid and High Channels.															
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBuV/m)	Adjusted Avg Reading (dBuV/m)	FCC15.209 High Frequency - Peak			FCC 15.209 High Frequency - Average			
									Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	
v	1834.8	33.1	26.3	20.6	30.7	3.2	46.4	39.6	74.0	-27.6	Pass	54.0	-14.4	Pass	
v	1844.0	34.49	30.4	20.6	30.8	3.2	47.9	43.8	74.0	-26.1	Pass	54.0	-10.2	Pass	
v	1854.4	36.21	32.5	20.6	30.9	3.2	49.7	46.0	74.0	-24.3	Pass	54.0	-8.0	Pass	
v	2065.0	31.51	21.6	21.1	31.9	4.1	46.4	36.5	74.0	-27.6	Pass	54.0	-17.5	Pass	
v	2705.0	33.2	22.6	21.9	32.9	4.6	48.8	38.2	74.0	-25.2	Pass	54.0	-15.8	Pass	
Table Result: Pass by -8.0 dB Worst Freq: 1854.4 MHz															
Test Site: EMI Chamber 2				Cable 1: Asset #1506				Cable 2: Asset #1507				Cable 3: ---			
Analyzer: Rental SA#2				Preamp: Asset #1517				Antenna: Blue Horn				Preselector: ---			

Rev.3/8/2015

Spectrum Analyzers / Receivers / Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
SA #2 (1860)		9kHz-26.5 GHz	E7405A	Agilent	MY45104916	1860	I	6/4/2015	
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on
EMI Chamber 2		719150	2762A-7	A-0015	30-1000MHz		II	4/9/2015	3/9/2014
Preamps / Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1517 HF Preamp		1-20GHz	CS	CS	N/A	1517	II	9/9/2015	9/9/2014
High Pass Filter		0.03-9 GHz	VHP-16	Mini-Circuits	NA	1288	II	1/13/2016	1/13/2015
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Blue Horn		1-18Ghz	3117	ETS	157647	1861	I	2/8/2017	2/8/2015
Cables		Range		Mfr			Cat	Calibration Due	Calibrated on
Asset #1506		9kHz - 18GHz		Florida RF			II	3/8/2016	3/8/2015
Asset #1507		9kHz - 18GHz		Florida RF			II	2/15/2016	2/15/2015
Meteorological Meters			MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
TH A#1833			35519-044	Control Company	130318278	1833	II	6/13/2015	6/13/2013

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



EUT tested with LAIRD Technology antenna

Radiated Emissions Table												
Date: 09-Mar-15			Company: Trimble Navigation				Work Order: P0016					
Engineer: Tuyen Truong			EUT Desc: M6E-NANO				EUT Operating Voltage/Frequency: 5Vdc					
Temp: 22°C			Humidity: 3%				Pressure: 1010mBar					
Frequency Range: 30 - 1000MHz							Measurement Distance: 3 m					
Notes: EUT tested with LAIRD Technology Antenna EUT was tested while it was hoping through all channels. EUT was also checked while it individually transmitted on Low, Mid and High Channels.										EUT Max Freq: 917.4-927.2MHz		
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBuV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBuV/m)	---			FCC 15.209		
							Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)
v	45.62	39.4	25.3	10.8	0.6	25.5	---	---	---	40.0	-14.5	Pass
v	53.58	51.7	25.4	8.0	0.6	34.9	---	---	---	40.0	-5.1	Pass
v	55.45	55.9	25.4	7.8	0.6	38.9	---	---	---	40.0	-1.1	Pass
v	55.52	53.4	25.4	7.7	0.6	36.3	---	---	---	40.0	-3.7	Pass
v	59.53	44.1	25.4	7.8	0.7	27.2	---	---	---	40.0	-12.8	Pass
h	208.5	43.7	25.2	11.3	1.1	30.9	---	---	---	43.5	-12.6	Pass
v	210.4	42.8	25.2	11.2	1.1	29.9	---	---	---	43.5	-13.6	Pass
v	212.6	42.1	25.1	11.3	1.1	29.4	---	---	---	43.5	-14.1	Pass
h	266.7	37.0	25.4	13.3	1.3	26.2	---	---	---	46.0	-19.8	Pass
h	713.9	25.5	25.1	20.7	2.1	23.2	---	---	---	46.0	-22.8	Pass
v	864.0	32.7	25.7	22.4	2.2	31.6	---	---	---	46.0	-14.4	Pass
v	972.8	28.6	24.4	23.4	2.3	29.9	---	---	---	54.0	-24.1	Pass
Table Result: Pass by -1.1 dB Worst Freq: 55.45 MHz												
Test Site: EMI Chamber 2			Cable 1: Asset #1506				Cable 2: Asset #1507			Cable 3: ---		
Analyzer: Rental SA#2			Preamp: Blue-Blk				Antenna: Red-White			Preselector: ---		

Rev.3/8/2015

Spectrum Analyzers / Receivers/Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
SA #2 (1860)	9kHz-26.5 GHz	E7405A	Agilent	MY45104916	1860	I	6/4/2015	
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Cat	Calibration Due	Calibrated on	
EMI Chamber 2	719150	2762A-7	A-0015	30-1000MHz	II	4/9/2015	3/9/2014	
Preamps/Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Blue-Black	0.009-2000MHz	ZFL-1000-LN	CS	N/A	800	II	12/26/2015	12/26/2014
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Red-White Bilog	30-2000MHz	JB1	Sunol	A091604-1	1105	I	7/24/2015	7/24/2013
Cables	Range	Mfr	Cat	Calibration Due	Calibrated on			
Asset #1506	9kHz - 18GHz	Florida RF	II	3/8/2016	3/8/2015			
Asset #1507	9kHz - 18GHz	Florida RF	II	2/15/2016	2/15/2015			
Meteorological Meters	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only) TH A#1833	BA928 35519-044	Oregon Scientific Control Company	C3166-1 130318278	831 1833	I II	3/19/2016 6/13/2015	3/19/2014 6/13/2013	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Radiated Emissions Table														
Date: 09-Mar-15			Company: Trimble Navigation				Work Order: P0016							
Engineer: Tuyen Truong			EUT Desc: M6E-NANO				EUT Operating Voltage/Frequency: 5Vdc							
Temp: 22°C			Humidity: 3%				Pressure: 1010mBar							
Frequency Range: 1-10GHz							Measurement Distance: 3 m (1-6GHz) and 1m (6-10GHz)							
Notes: EUT tested with LAIRD Technology Antenna 1288 HPF in place EUT was tested while it was hoping through all channels. EUT was also checked while it individually transmitted on Low, Mid and High Channels.										EUT Max Freq: 917.4-927.2MHz				
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBuV/m)	Adjusted Avg Reading (dBuV/m)	FCC15.209 High Frequency - Peak			FCC 15.209 High Frequency - Average		
									Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBuV/m)	Margin (dB)	Result (Pass/Fail)
v	1834.8	33.03	22.4	20.6	30.7	3.2	46.3	35.7	74.0	-27.7	Pass	54.0	-18.3	Pass
v	1844.0	33.44	25.4	20.6	30.8	3.2	46.8	38.8	74.0	-27.2	Pass	54.0	-15.2	Pass
v	1854.4	33.05	25.6	20.6	30.9	3.2	46.6	39.1	74.0	-27.4	Pass	54.0	-14.9	Pass
v	2065.9	33.99	34.0	21.1	31.9	4.1	48.9	48.9	74.0	-25.1	Pass	54.0	-5.1	Pass
v	2752.2	32.81	23.6	21.9	33.0	4.5	48.4	39.2	74.0	-25.6	Pass	54.0	-14.8	Pass
Table Result: Pass by -5.1 dB Worst Freq: 2065.9 MHz														
Test Site: EMI Chamber 2			Cable 1: Asset #1506				Cable 2: Asset #1507			Cable 3: ---				
Analyzer: Rental SA#2			Preamp: Asset #1517				Antenna: Blue Horn			Preselector: ---				



Rev.3/8/2015

Spectrum Analyzers / Receivers/Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
SA #2 (1860)		9kHz-26.5 GHz	E7405A	Agilent	MY45104916	1860	I	6/4/2015	
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on
EMI Chamber 2		719150	2762A-7	A-0015	30-1000MHz		II	4/9/2015	3/9/2014
Preamps/Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1517 HF Preamp		1-20GHz	CS	CS	N/A	1517	II	9/9/2015	9/9/2014
High Pass Filter		0.03-9 GHz	VHP-16	Mini-Circuits	NA	1288	II	1/13/2016	1/13/2015
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Blue Horn		1-18Ghz	3117	ETS	157647	1861	I	2/8/2017	2/8/2015
Cables		Range		Mfr			Cat	Calibration Due	Calibrated on
Asset #1506		9kHz - 18GHz		Florida RF			II	3/8/2016	3/8/2015
Asset #1507		9kHz - 18GHz		Florida RF			II	2/15/2016	2/15/2015
Meteorological Meters			MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
TH A#1833			35519-044	Control Company	130318278	1833	II	6/13/2015	6/13/2013

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



AC Line Conducted Emissions LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dBµV)	Average limit (dBµV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.
[47 CFR 15.207(a)]

MEASUREMENTS / RESULTS

AC side of AC/DC Power Supply - Conducted Emissions Data Table														
Date: 22-Jan-15			Company: Trimble Navigation					Work Order: P0016						
Engineer: Tuyen Truong			EUT Desc: M6E-NANO					Pressure: 1015mBar						
Temp: 23.0 °C			Humidity: 2%											
Notes: EUT tx on low, mid, high and hopping through all channels during testing.														
Frequency Range: 0.15-30MHz										EUT Input Voltage/Frequency: 5Vdc				
Frequency (MHz)	Quasi-Peak Readings		Average Readings		LISN Factors		Cable Factor (dB)	ATTN Factor (dB)	FCC 15.207			FCC 15.207		
	QP1 (dBµV)	QP2 (dBµV)	AVG1 (dBµV)	AVG2 (dBµV)	L1 (dB)	L2 (dB)			QP Limit (dBµV)	Margin (dB)	Result (Pass/Fail)	AVG Limit (dBµV)	Margin (dB)	Result (Pass/Fail)
0.25	34.2	34.2	2.9	2.2	0.0	-0.1	0.0	-19.8	61.7	-7.6	Pass	51.7	-28.9	Pass
1.98	14.5	6.3	1.5	1.7	0.0	0.0	-0.1	-19.8	56.0	-21.6	Pass	46.0	-24.4	Pass
5.94	11.4	6.7	4.0	4.6	0.0	0.0	-0.1	-19.8	60.0	-28.7	Pass	50.0	-25.5	Pass
13.84	18.1	16.1	11.7	12.1	-0.1	-0.1	-0.2	-19.8	60.0	-21.8	Pass	50.0	-17.8	Pass
11.86	13.8	12.6	8.4	7.4	-0.1	-0.1	-0.2	-19.8	60.0	-26.1	Pass	50.0	-21.6	Pass
16.67	15.0	17.7	7.4	6.9	-0.1	-0.1	-0.3	-19.8	60.0	-22.2	Pass	50.0	-22.5	Pass
19.77	20.5	21.4	17.5	18.9	-0.1	-0.1	-0.3	-19.8	60.0	-18.4	Pass	50.0	-10.9	Pass
23.72	20.7	21.3	15.6	16.7	-0.1	-0.1	-0.3	-19.8	60.0	-18.6	Pass	50.0	-13.1	Pass
29.66	18.4	20.1	13.1	15.0	-0.1	-0.2	-0.3	-19.8	60.0	-19.6	Pass	50.0	-14.8	Pass
Result: Pass			Worst Margin: -7.6 dB					Frequency: 0.252 MHz						
Measurement Device: LISN ASSET 1730(Line 1) LISN ASSET 1731(Line 2)					Cable: CEM1-11			Spectrum Analyzer: Gold						
					Attenuator: 20dB Attenuator-02			Site: CEM1 1						

Rev.1/22/2015

Spectrum Analyzers / Receivers /Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Gold	100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	3/28/2015	3/28/2014	
LISNs/Measurement Probes	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
LISN Asset 1730	150kHz-30MHz	LI-150A	Com-Power	201090	1730	I	2/26/2015	2/26/2014	
LISN Asset 1731	150kHz-30MHz	LI-150A	Com-Power	201091	1731	I	3/3/2015	3/3/2014	
Conducted Test Sites (Mains / Telco)	FCC Code	VCCI Code	Cat	Calibration Due	Calibrated on				
CEM1 1	719150	A-0015	III	NA	N/A				
Cables	Range	Mfr	Cat	Calibration Due	Calibrated on				
CEM1-11	9kHz - 2GHz	C-S	II	5/3/2015	5/3/2014				
Attenuators	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
20dB Attenuator-02	9kHz-2GHz	PE7000-20	Pasternack	N/A		II	7/26/2015	7/26/2014	
Meteorological Meters	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on		
Weather Clock (Pressure Only)	BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014		
TH A#1828	35519-044	Control Company	130318292	1828	II	6/13/2015	6/13/2013		

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.





Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Occupied Bandwidth

REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. [RSS-GEN 4.6.1]

MEASUREMENTS / RESULTS

99% Occupied Bandwidth		
Frequency (MHz)	Mode	99% Occupied Bandwidth (KHz)
917.4	PR-ASK Modulation	111.6242
922.4	PR-ASK Modulation	112.1874
927.2	PR-ASK Modulation	111.3972
Tested by: Tuyen Truong RBW = 30kHz VBW = 100kHz Date: 1/19/2015 Analyzer: Brown Company: Trimble Navigation Attenuator: PE7019-20 EUT: M6E-NANO Temp/Humidty/Pressure: 21.6°C, 26% and 1015mBar		

Rev. 1/18/2015

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Brown	9kHz-26.5GHz	E4407B	Agilent	SG44210511	1510	I	5/12/2015	5/12/2014
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on
1DCC-OATS-3M-I	719150	2762A-8	A-0015	30-1000MHz		II	5/17/2015	5/17/2013
Preamps/Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF 20dB 50W Attenuator	0.009-18 GHz	PE 7019-20	Pasternack	1	791	II	7/14/2015	7/14/2014
Meteorological Meters		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	3/19/2016	3/19/2014
TH A#1830		35519-044	Control Company	130320003	1830	II	6/13/2015	6/13/2013


All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Plot(s)

Agilent 13:55:54 Jan 19, 2015

R T

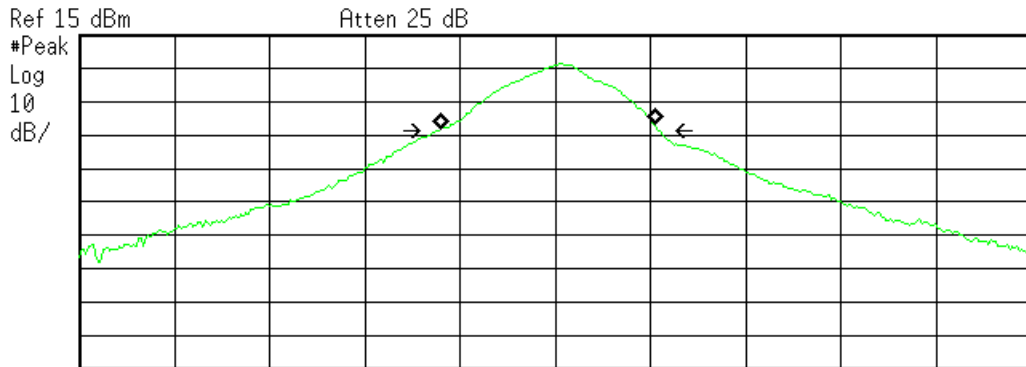

Center 917.4 MHz Span 500 kHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
 111.6242 kHz

Occ BW % Pwr 99.00 %
 x dB -20.00 dB


Transmit Freq Error -3.621 kHz
 x dB Bandwidth 116.793 kHz

C:\temp.gif file saved

99% Occupied Bandwidth - Low Channel

Agilent 13:58:03 Jan 19, 2015

R T

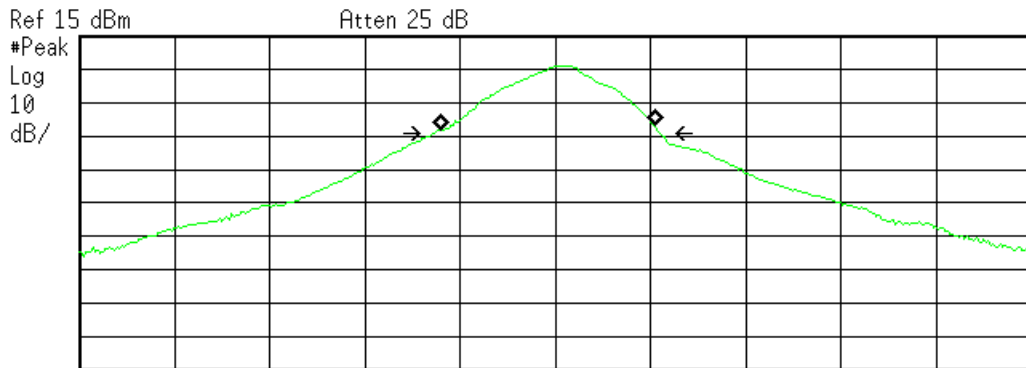

Center 922.4 MHz Span 500 kHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth
 112.1874 kHz

Occ BW % Pwr 99.00 %
 x dB -20.00 dB

Transmit Freq Error -4.157 kHz
 x dB Bandwidth 117.969 kHz


C:\temp.gif file saved

99% Occupied Bandwidth - Mid Channel



Agilent 13:54:36 Jan 19, 2015

R T

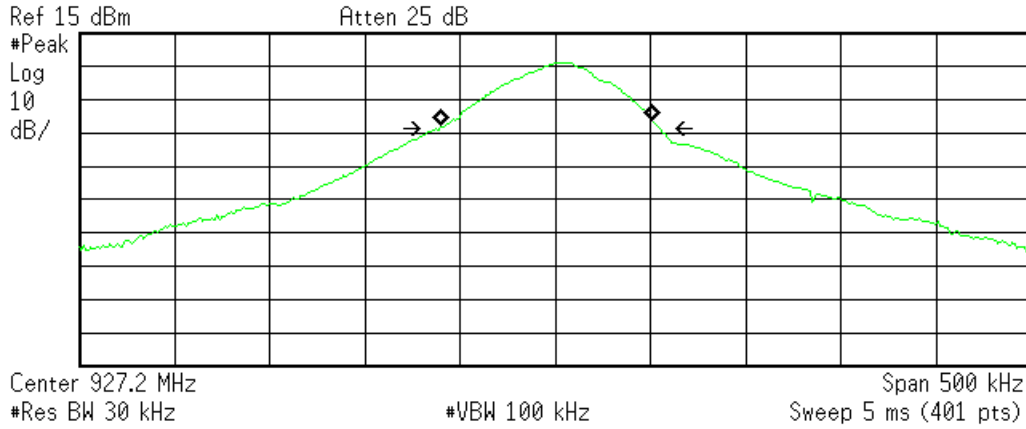

Occupied Bandwidth
111.3972 kHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -4.076 kHz
x dB Bandwidth 117.811 kHz

C:\temp.gif file saved

99% Occupied Bandwidth - High Channel



Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)		
NIST	5.6dB	N/A
CISPR	4.6dB	5.2dB (Ucisprr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucisprr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4%	5%
Adjacent channel power	0.3dB	3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%

The above reflects a 95% confidence level



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "**BUREAU VERITAS**," "**BUREAU VERITAS CONSUMER PRODUCTS SERVICES**," "**BVCPS**," "**MTL**," "**ACTS**," "**MTL-ACTS**" and "**CURTIS-STRAUS**" (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.
Rev.160009121(2)_#684340 v14CS



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

