

**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 Issue 3**

**TEST REPORT**

*For*

**Hyperion PCBA**

**MODEL NUMBER: DBWIFIBLE06, DBWIFIBLE07**

**REPORT NUMBER: 4791405137-1-RF-1**

**ISSUE DATE: November 21, 2024**

**FCC ID: QVHDBWIFIBLE06  
IC: 7986A-DBWIFIBLE06**

*Prepared for*

**FCC: Dyson Inc  
ISED: Dyson Manufacturing Sdn Bhd  
FCC: 1330 W Fulton St 5th Fl, Chicago Illinois, 60607 United States  
ISED: Dyson Manufacturing Sdn Bhd, Plo 208, Jalan Cyber 14, Senai Industrial  
Estate IV, Senai Johor, 81400 Malaysia**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	November 21, 2024	Initial Issue	

### Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>6</b>
<b>2. TEST METHODOLOGY.....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>9</i>
5.2. <i>CHANNEL LIST .....</i>	<i>9</i>
5.3. <i>MAXIMUM POWER .....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.6. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>10</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>11</i>
5.8. <i>SUPPORT UNITS FOR SYSTEM TEST .....</i>	<i>12</i>
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED.....</b>	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
7.1. <i>CONDUCTED OUTPUT POWER .....</i>	<i>16</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>17</i>
7.3. <i>POWER SPECTRAL DENSITY .....</i>	<i>19</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>20</i>
7.5. <i>DUTY CYCLE .....</i>	<i>22</i>
<b>8. RADIATED TEST RESULTS.....</b>	<b>23</b>
8.1. <i>RESTRICTED BANDEDGE .....</i>	<i>31</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ) .....</i>	<i>52</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ) .....</i>	<i>58</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ) .....</i>	<i>84</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ) .....</i>	<i>87</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ) .....</i>	<i>89</i>
<b>9. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>91</b>
<b>10. TEST DATA.....</b>	<b>95</b>

10.1.	<i>APPENDIX A: DTS BANDWIDTH</i> .....	95
10.1.1.	Test Result.....	95
10.1.2.	Test Graphs .....	96
10.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH</i> .....	101
10.2.1.	Test Result.....	101
10.2.2.	Test Graphs .....	102
10.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER</i> .....	107
10.3.1.	Test Result.....	107
10.4.	<i>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY</i> .....	108
10.4.1.	Test Result.....	108
10.4.2.	Test Graphs .....	109
10.5.	<i>APPENDIX E: BAND EDGE MEASUREMENTS</i> .....	114
10.5.1.	Test Result.....	114
10.5.2.	Test Graphs .....	115
10.6.	<i>APPENDIX F: CONDUCTED SPURIOUS EMISSION</i> .....	119
10.6.1.	Test Result.....	119
10.6.2.	Test Graphs .....	120
10.7.	<i>APPENDIX G: DUTY CYCLE</i> .....	133
10.7.1.	Test Result.....	133
10.7.2.	Test Graphs .....	134

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: FCC: Dyson Inc  
ISED: Dyson Manufacturing Sdn Bhd  
Address: FCC: 1330 W Fulton St 5th Fl, Chicago Illinois, 60607 United States  
ISED: Dyson Manufacturing Sdn Bhd, Plo 208, Jalan Cyber 14, Senai Industrial Estate IV, Senai Johor, 81400 Malaysia

### Manufacturer Information


Company Name: FCC: Dyson Technology Limited  
ISED: Dyson Manufacturing Sdn Bhd  
Address: FCC: Tetbury Hill Malmesbury Wiltshire SN16 0RP United Kingdom  
ISED: Dyson Manufacturing Sdn Bhd, Plo 208, Jalan Cyber 14, Senai Industrial Estate IV, Senai Johor, 81400 Malaysia

### EUT Information

EUT Name: Hyperion PCBA  
Model: DBWIFIBLE06  
Series Model: DBWIFIBLE07  
Model difference: Please refer to section 5.1  
Brand: Dyson  
Sample Received Date: August 21, 2024  
Sample ID: 7527212  
Date of Tested: August 27, 2024 to November 21, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass


Prepared By:



Fanny Huang

Engineer Project Associate

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISSED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2013 and ISSED RSS-GEN Issue 5

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Hyperion PCBA
Model	DBWIFIBLE06
Series Model	DBWIFIBLE07
Model difference	DBWIFIBLE07 has the same RF technical construction including circuit diagram, PCB Layout, all electrical construction and mechanical construction with DBWIFIBLE06. The only difference lies is DBWIFIBLE06 has heating function, but DBWIFIBLE07 hasn't. All these changes do not degrade the unwanted emissions of the certified product. We have pre-test two models and select the worst model DBWIFIBLE06 to test and perform in the report.

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20
Normal Test Voltage:	DC 20V

### 5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

### 5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	16.41
g	2412 ~ 2462	1-11[11]	16.35
n HT20	2412 ~ 2462	1-11[11]	16.52

#### 5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1, CH 2, CH 6, CH 10, CH11	2412 MHz, 2417 MHz, 2437 MHz, 2457MHz, 2462 MHz
n HT20	CH 1, CH 2, CH 6, CH 10, CH11	2412 MHz, 2417 MHz, 2437 MHz, 2457MHz, 2462 MHz

#### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band									
Test Software		MP Tool							
Modulation Mode	Transmit Antenna Number	Test Channel							
		NCB: 20MHz					NCB: 40MHz		
		CH 1	CH 2	CH 6	CH 10	CH 11	CH 3	CH 6	CH 9
802.11b	1	95	/	94	/	94	/		
802.11g	1	82	91	91	90	83			
802.11n HT20	1	83	90	91	91	82			

#### 5.6. WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

## 5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PCB antenna	4.04

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
Note: 1.BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously. (declared by client)		

## 5.8. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E14	/
2	DC Source	Array	3662A	A1512015

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

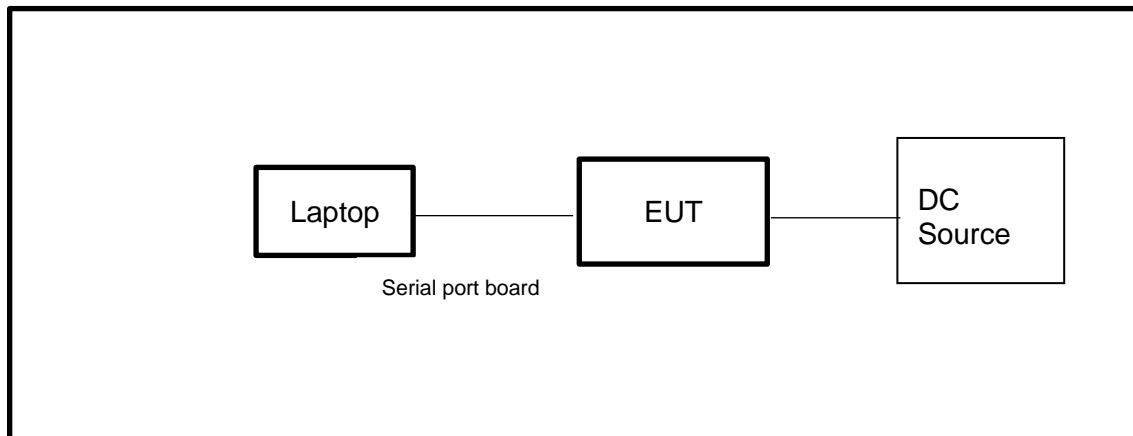

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	/	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Software						
Description		Manufacturer		Name		Version
For R&S TS 8997 Test System		Rohde & Schwarz		EMC 32		10.60.10
Tonsend RF Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	1201.0002K50-161167-ij	/	Sep 28, 2024	Sep 27, 2025
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75-1025	Sep.25, 2023	Sep 13, 2024	Sep 12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
RF Control Unit	Tonscend	JS0806-2	23B80620666	/	Mar.25,2024	Mar.24,2025
Software						
Description	Manufacturer		Name			Version
Tonsend SRD Test System	Tonsend		JS1120-3 RF Test System			V3.2.22

Conducted Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Sep 28, 2024	Sep 27, 2025
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Sep 28, 2024	Sep 27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Sep 28, 2024	Sep 27, 2025
Software						
Description			Manufacturer		Name	Version
Test Software for Conducted Emissions			Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug.02, 2021	June 28, 2024	June 27, 2027
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Horn Antenna	TDK	HRN-0118	130939	/	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	/	June 30, 2024	June 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Loop antenna	Schwarzbeck	1519B	00008	/	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-	4	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025

		2533.5-40SS				
Software						
Description		Manufacturer		Name	Version	
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1	

Other Instrument						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025

## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.

#### TEST SETUP

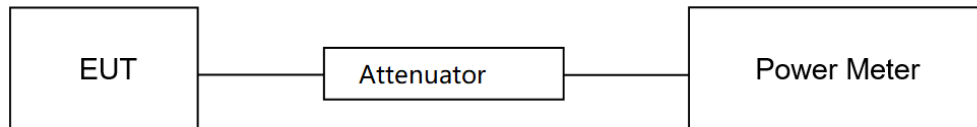

#### TEST ENVIRONMENT

Temperature	25.6°C	Relative Humidity	60.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V

#### TEST DATE / ENGINEER

Test Date	August 28, 2024	Test By	Bairong Liu
-----------	-----------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C



## 7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	$\geq 500$ kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

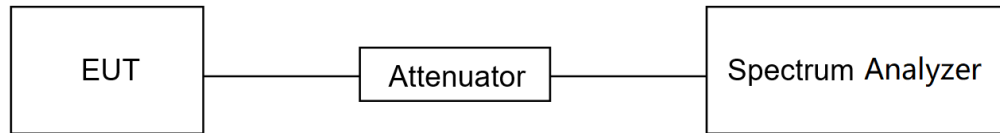**TEST SETUP****TEST ENVIRONMENT**

Temperature	25.6℃	Relative Humidity	60.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V

**TEST DATE / ENGINEER**

Test Date	August 28, 2024	Test By	Bairong Liu
-----------	-----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A&B

### 7.3. POWER SPECTRAL DENSITY

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{OBW bandwidth}$
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST SETUP

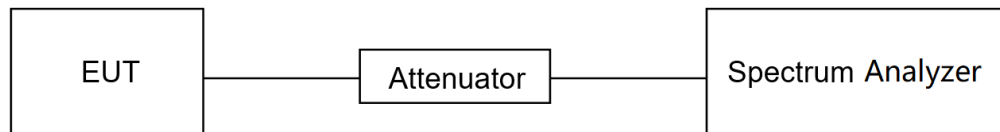

#### TEST ENVIRONMENT

Temperature	25.6°C	Relative Humidity	60.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V

#### TEST DATE / ENGINEER

Test Date	August 28, 2024	Test By	Bairong Liu
-----------	-----------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix D

## 7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

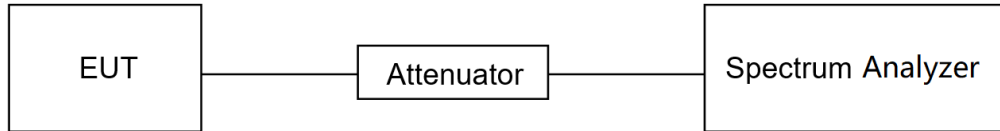**TEST SETUP****TEST ENVIRONMENT**

Temperature	25.6℃	Relative Humidity	60.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V

**TEST DATE / ENGINEER**

Test Date	August 28, 2024	Test By	Bairong Liu
-----------	-----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E&F

## 7.5. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	25.6°C	Relative Humidity	60.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V

### TEST DATE / ENGINEER

Test Date	August 28, 2024	Test By	Bairong Liu
-----------	-----------------	---------	-------------

### TEST RESULTS

Please refer to section "Test Data" - Appendix G

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c



**TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

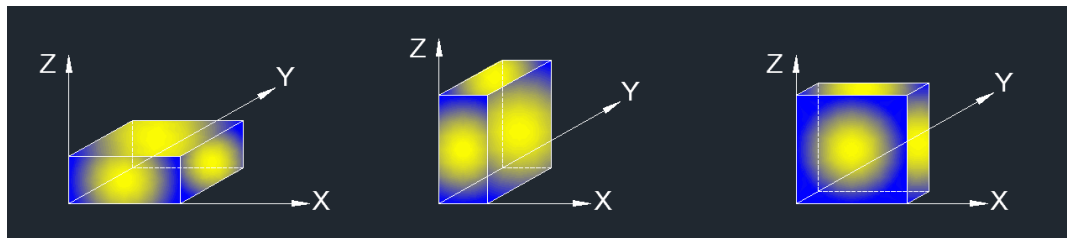

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5.  $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


### **TEST SETUP**

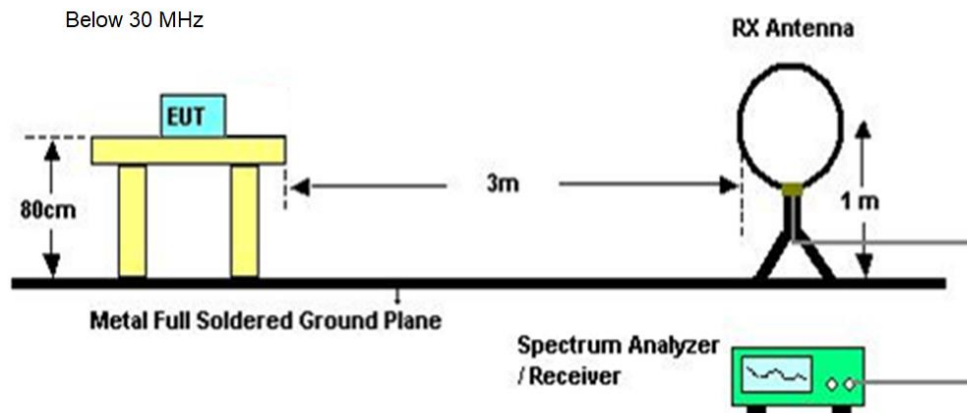

Below 1 GHz and above 30 MHz



Above 1 GHz

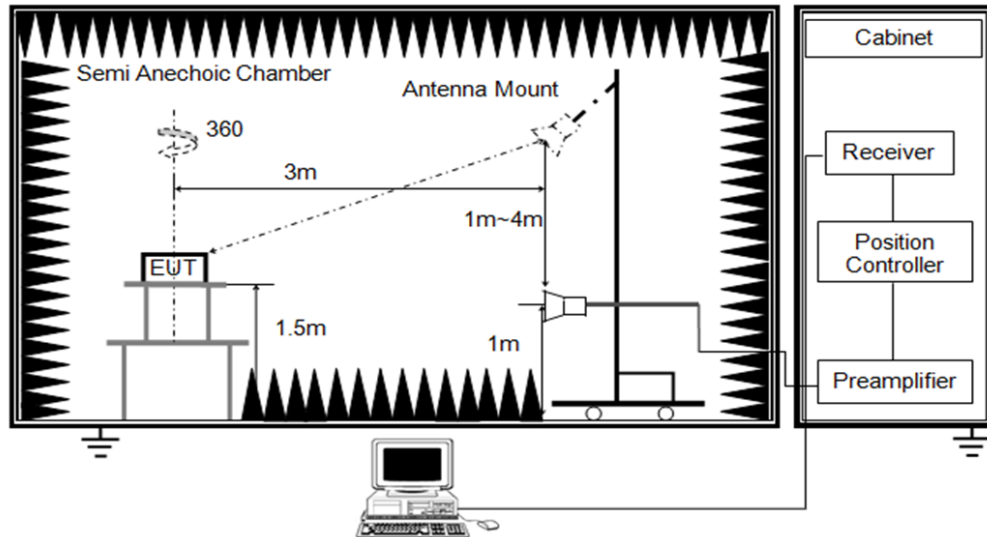

### TEST ENVIRONMENT

Temperature	23.7°C	Relative Humidity	62.4%
Atmosphere Pressure	101kPa	Test Voltage	


### TEST DATE / ENGINEER

Test Date	September 5, 2024	Test By	Mason Wang
-----------	-------------------	---------	------------

### TEST RESULTS


## 8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

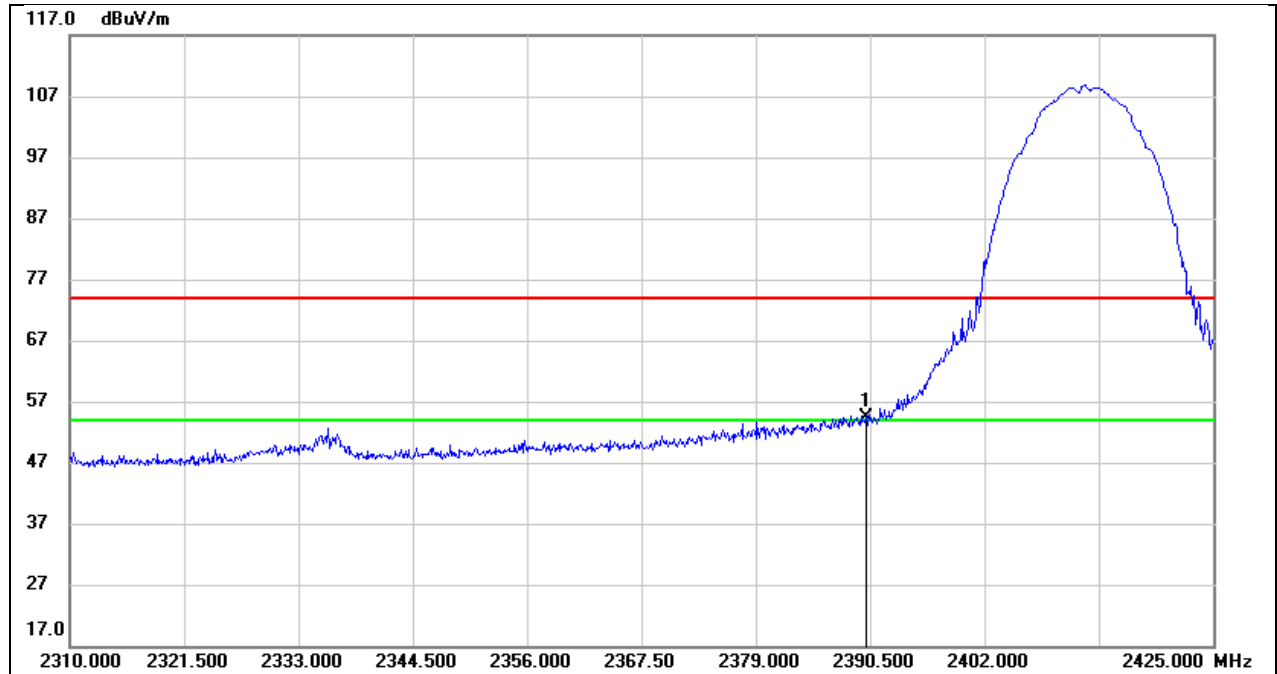

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	21.54	32.79	54.33	74.00	-19.67	peak


Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

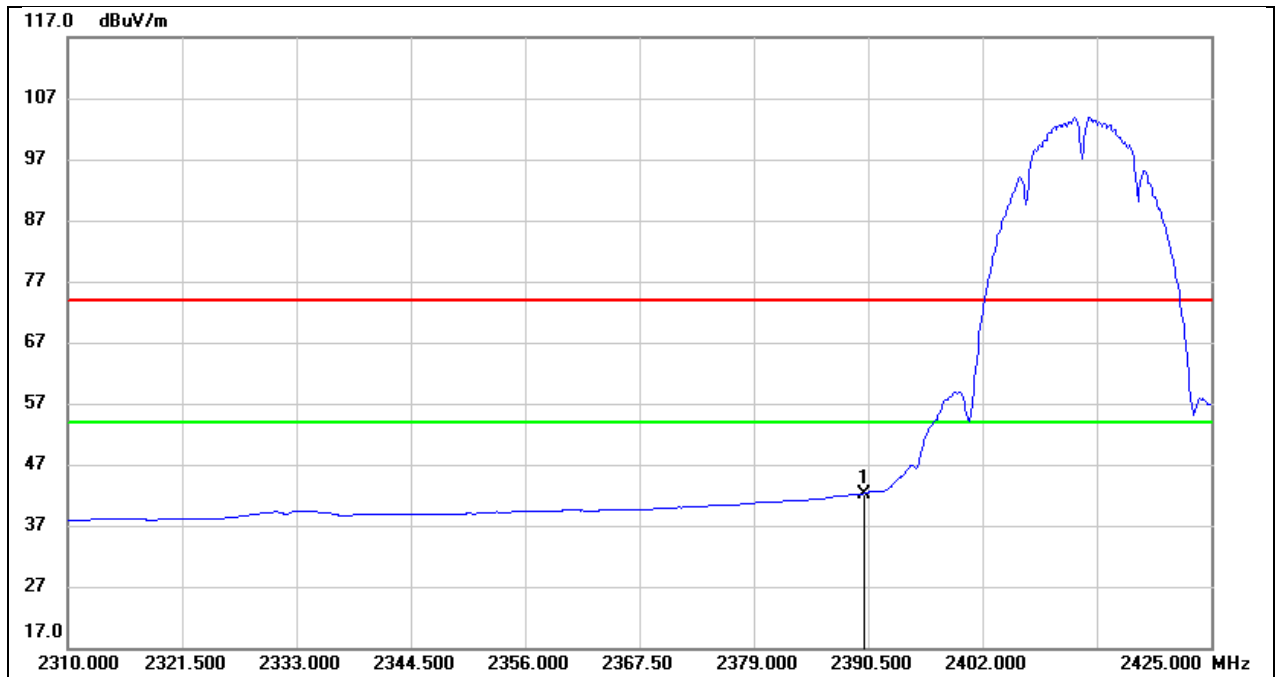

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	9.46	32.79	42.25	54.00	-11.75	AVG




Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 20V

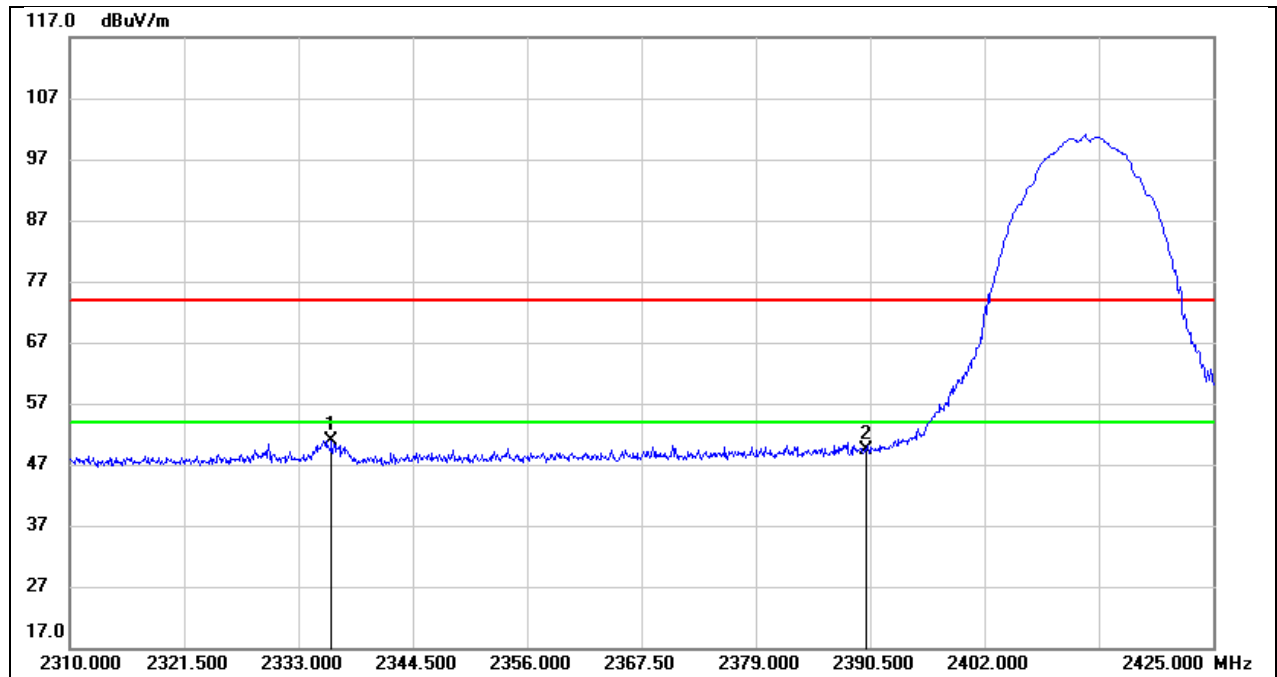


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2336.335	17.54	33.37	50.91	74.00	-23.09	peak
2	2390.000	15.89	33.61	49.50	74.00	-24.50	peak

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

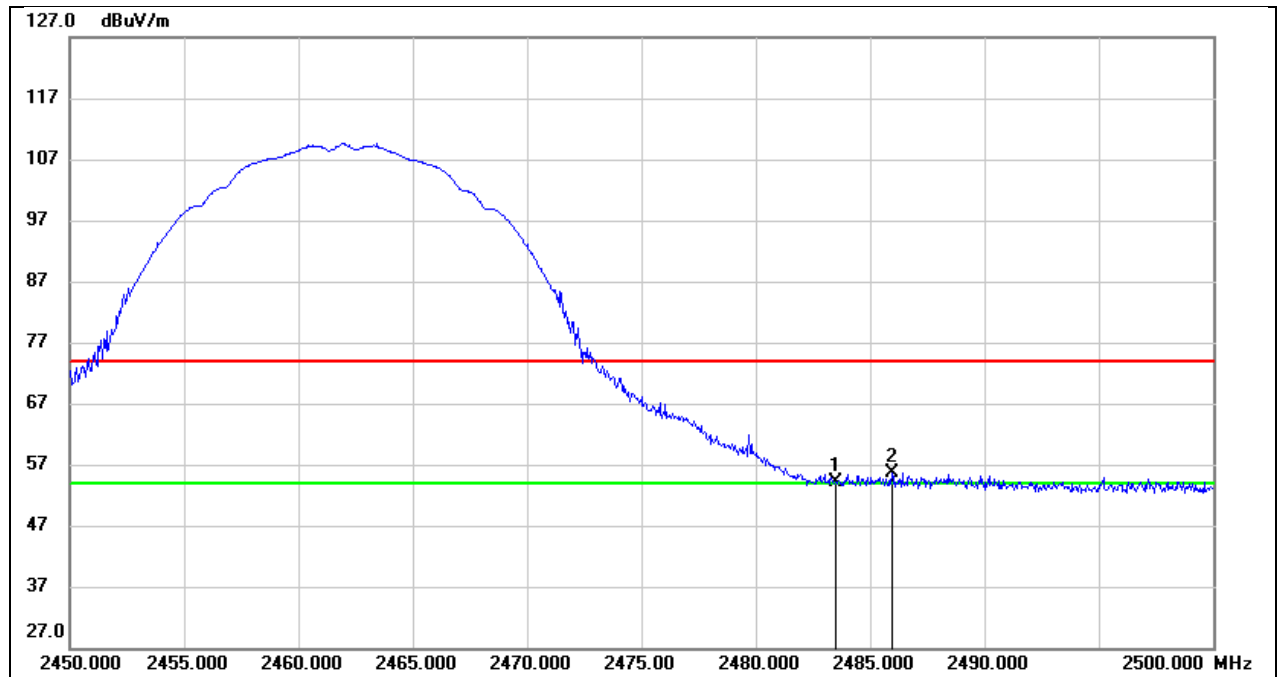


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	21.40	32.75	54.15	74.00	-19.85	peak
2	2485.950	22.79	32.74	55.53	74.00	-18.47	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

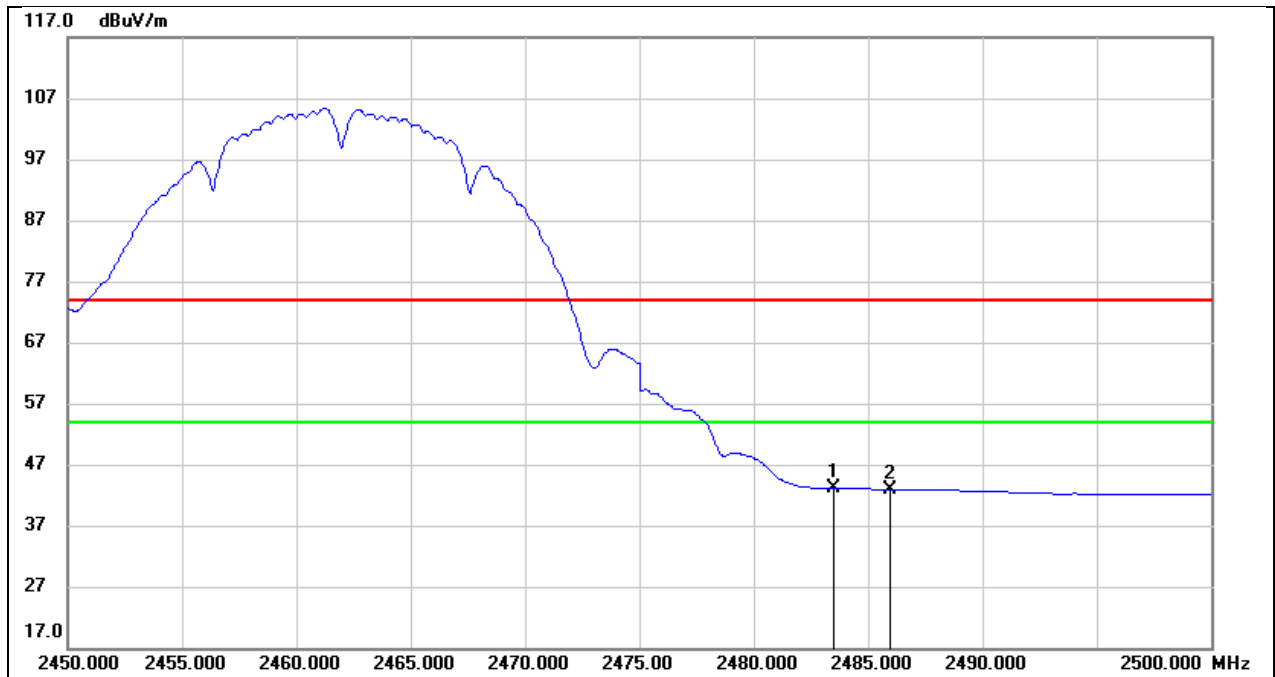


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.34	32.75	43.09	54.00	-10.91	AVG
2	2485.950	10.11	32.74	42.85	54.00	-11.15	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

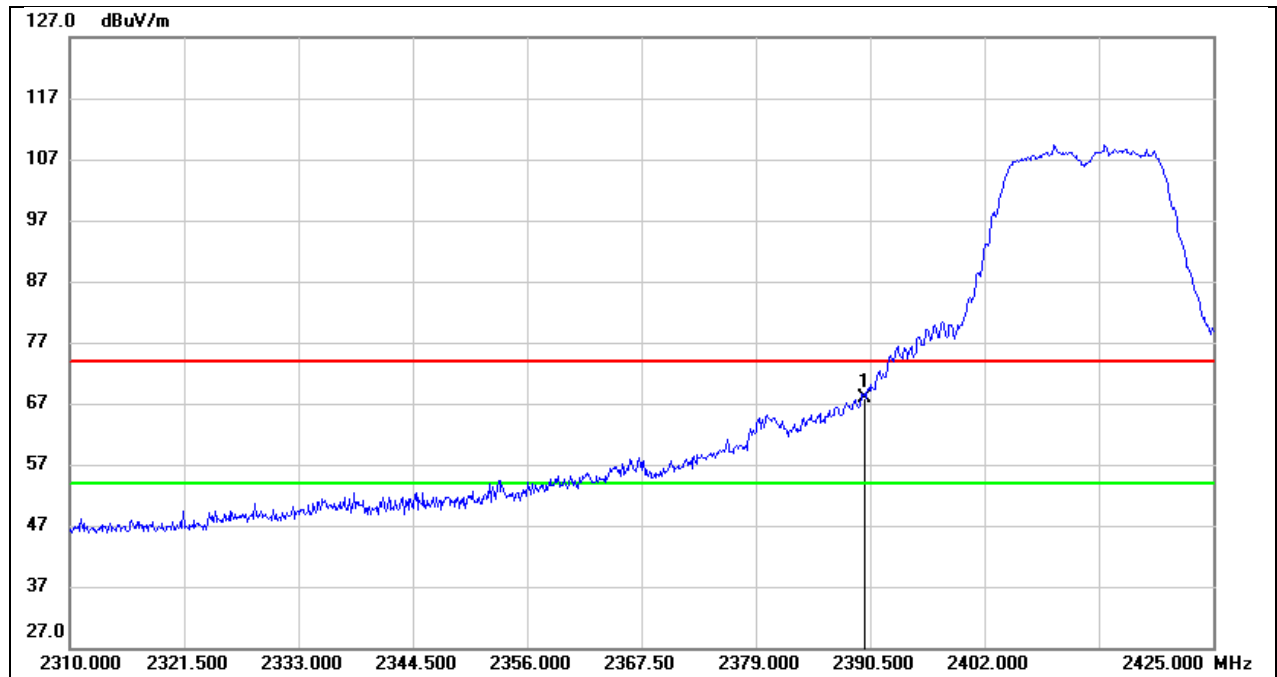


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	35.15	32.79	67.94	74.00	-6.06	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

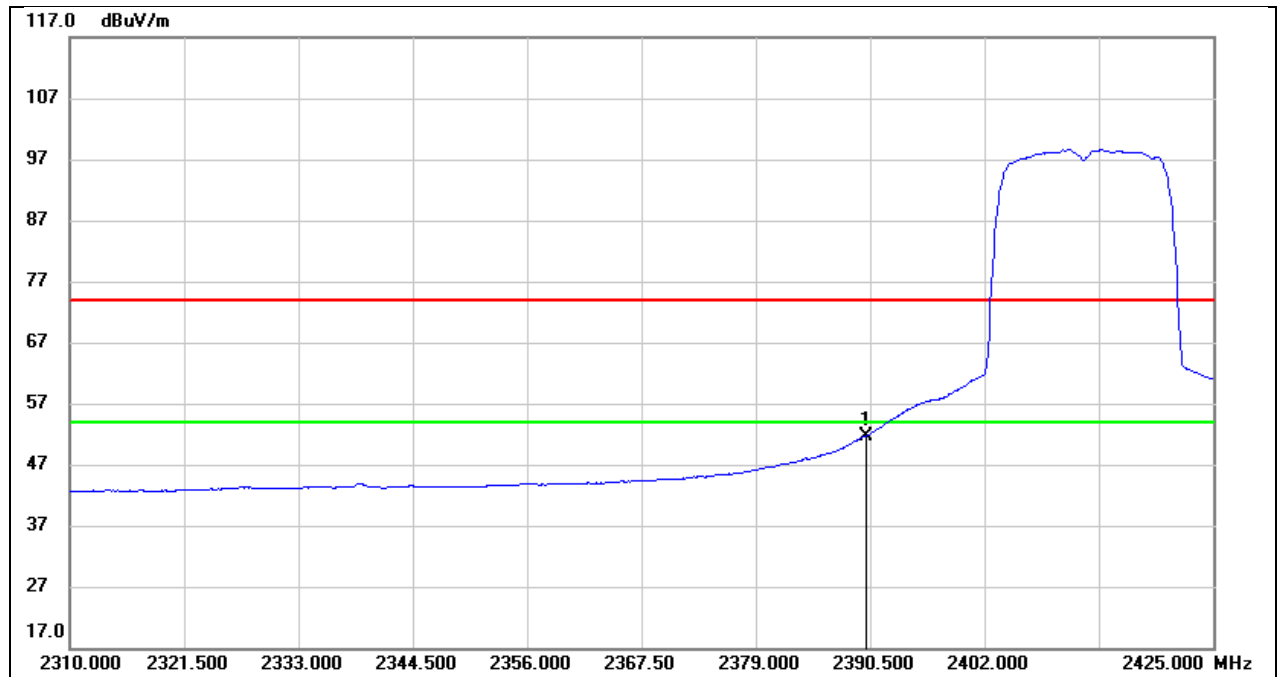


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	18.87	32.79	51.66	54.00	-2.34	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 20V

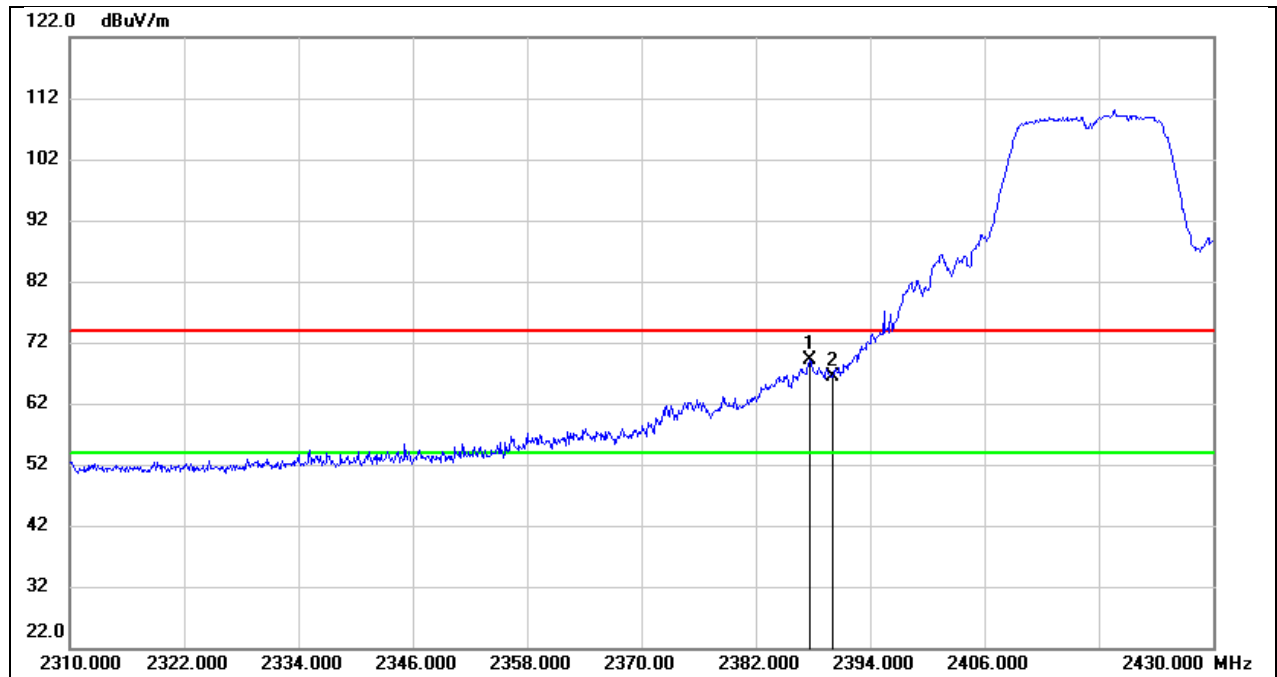


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.640	36.27	32.78	69.05	74.00	-4.95	peak
2	2390.000	33.61	32.79	66.40	74.00	-7.60	peak

Test Mode:	802.11g AV	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 20V

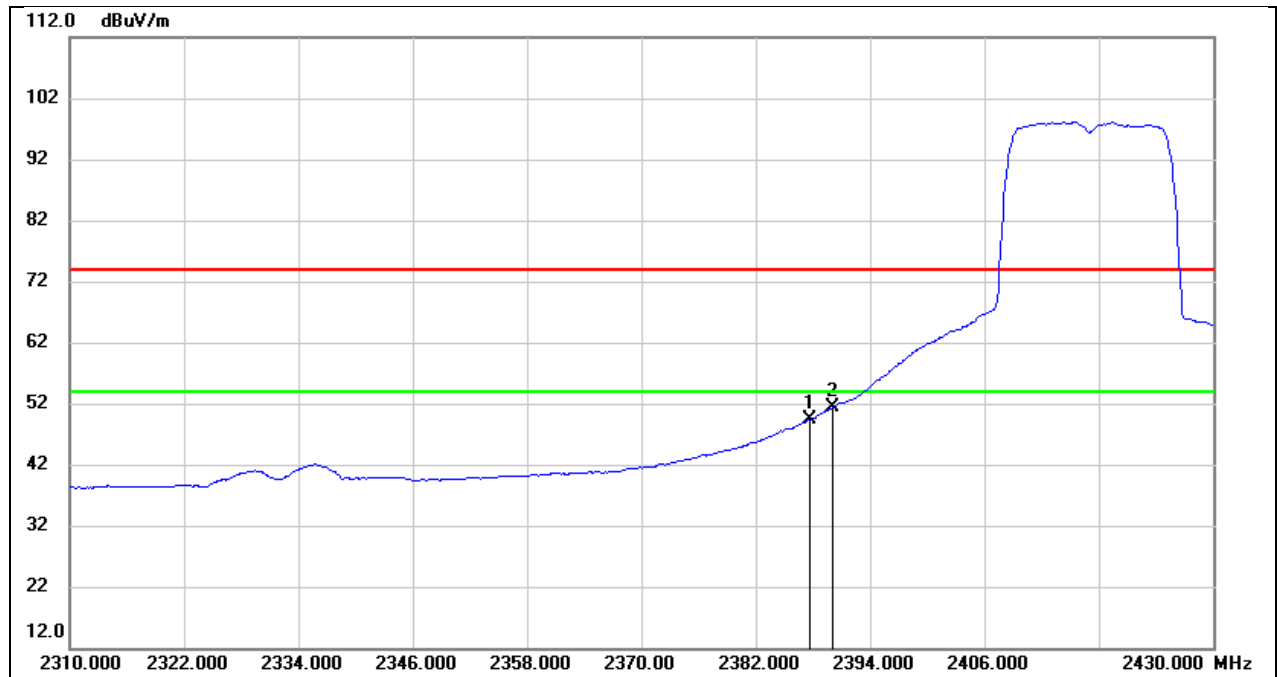

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.640	16.59	32.78	49.37	54.00	-4.63	AVG
2	2390.000	18.54	32.79	51.33	54.00	-2.67	AVG


Test Mode:	802.11g PK	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 20V

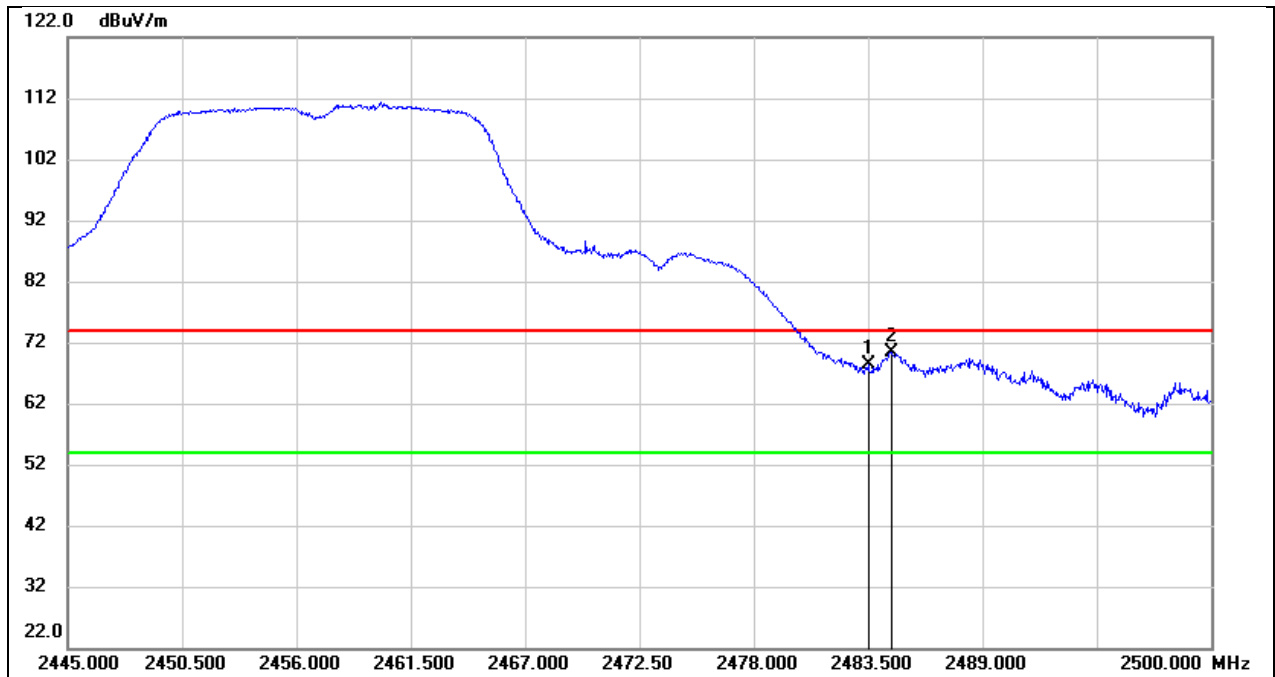

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.52	32.75	68.27	74.00	-5.73	peak
2	2484.655	37.55	32.75	70.30	74.00	-3.70	peak




Test Mode:	802.11g AV	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 20V

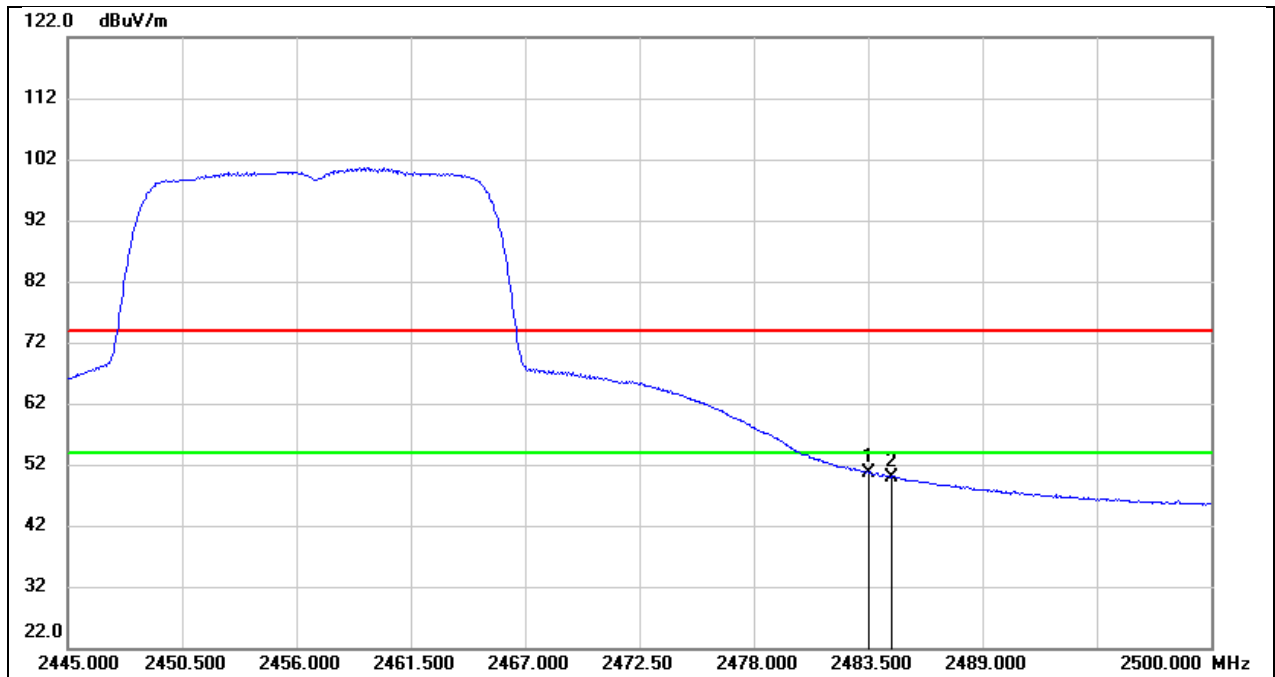


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.81	32.75	50.56	54.00	-3.44	AVG
2	2484.655	17.19	32.75	49.94	54.00	-4.06	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

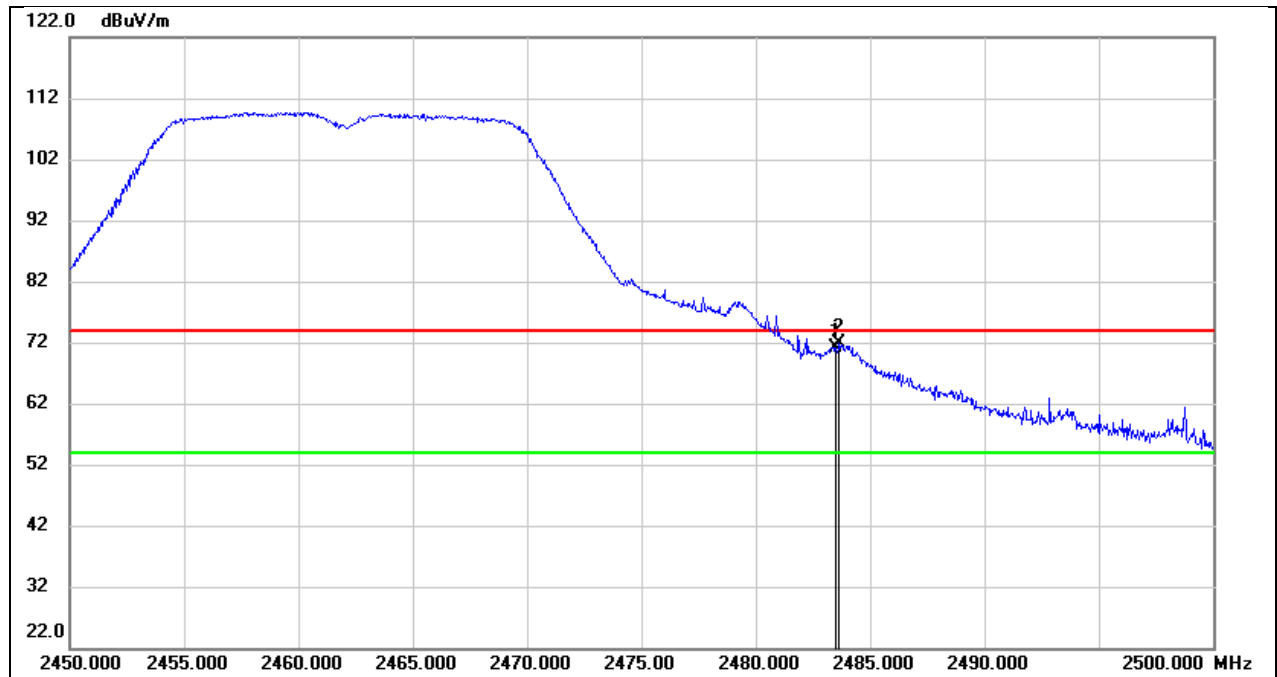


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.27	32.75	71.02	74.00	-2.98	peak
2	2483.650	39.04	32.75	71.79	74.00	-2.21	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

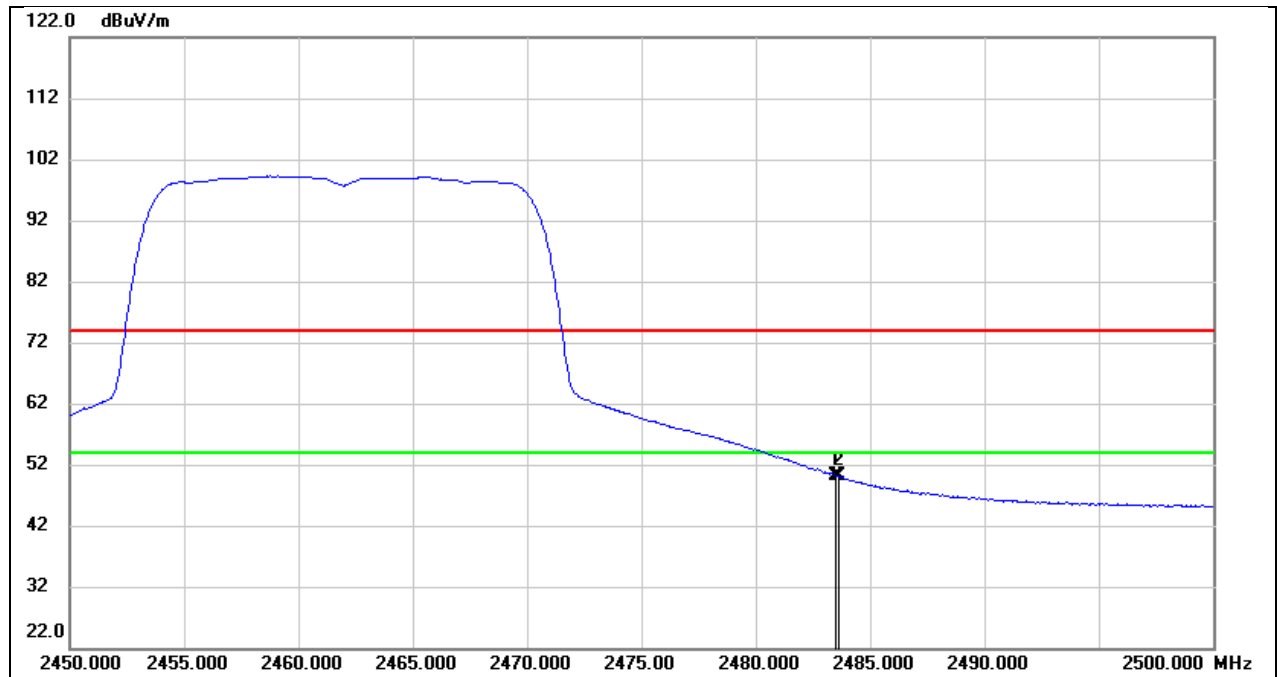


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.33	32.75	50.08	54.00	-3.92	AVG
2	2483.650	17.31	32.75	50.06	54.00	-3.94	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

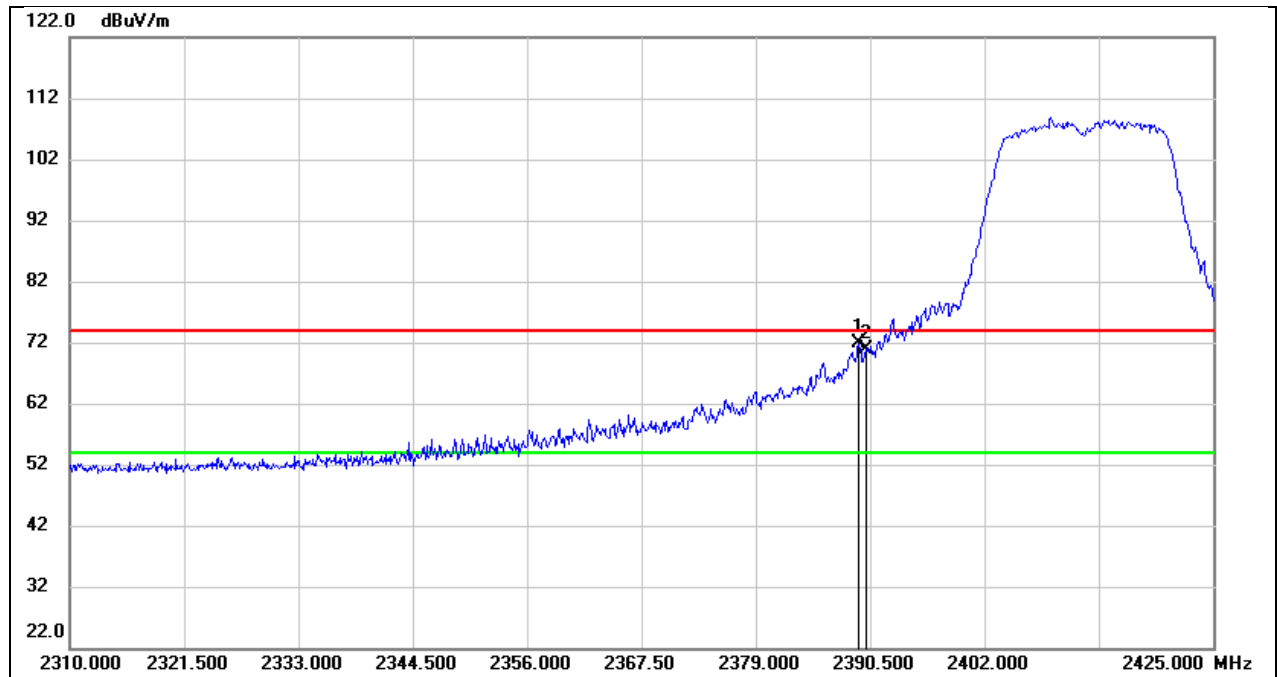


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.350	39.12	32.79	71.91	74.00	-2.09	peak
2	2390.000	38.03	32.79	70.82	74.00	-3.18	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

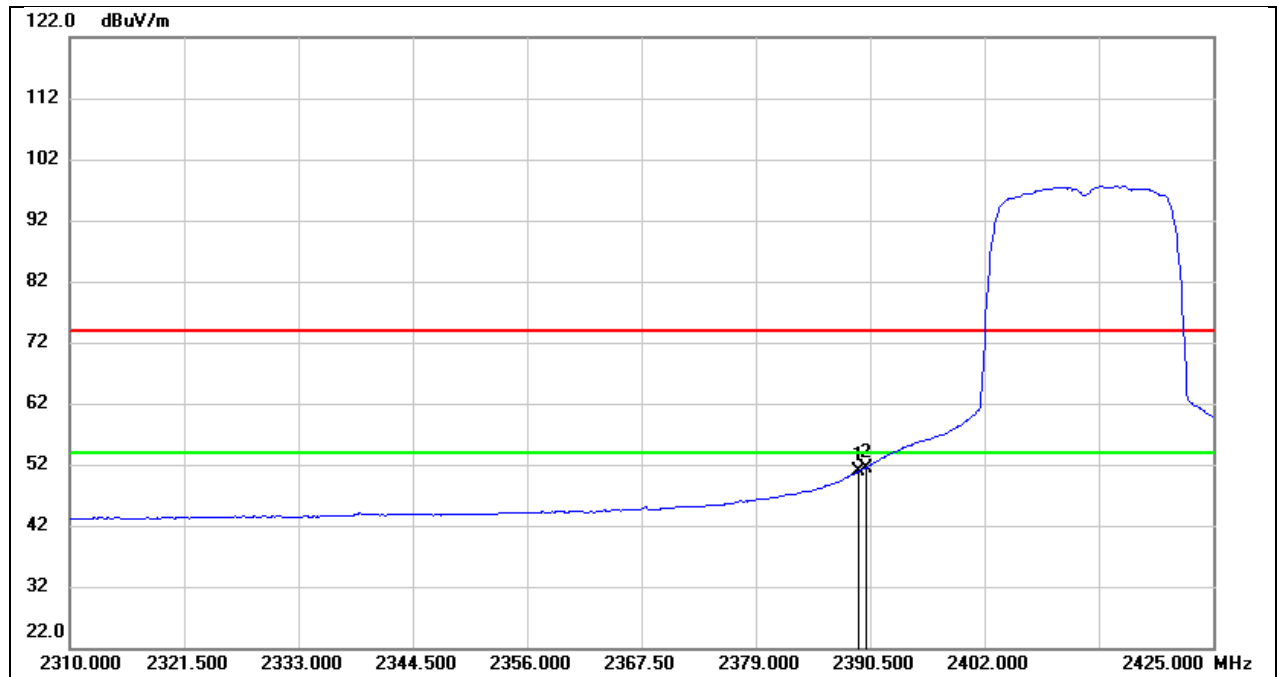


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.350	18.13	32.79	50.92	54.00	-3.08	AVG
2	2390.000	18.69	32.79	51.48	54.00	-2.52	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 20V

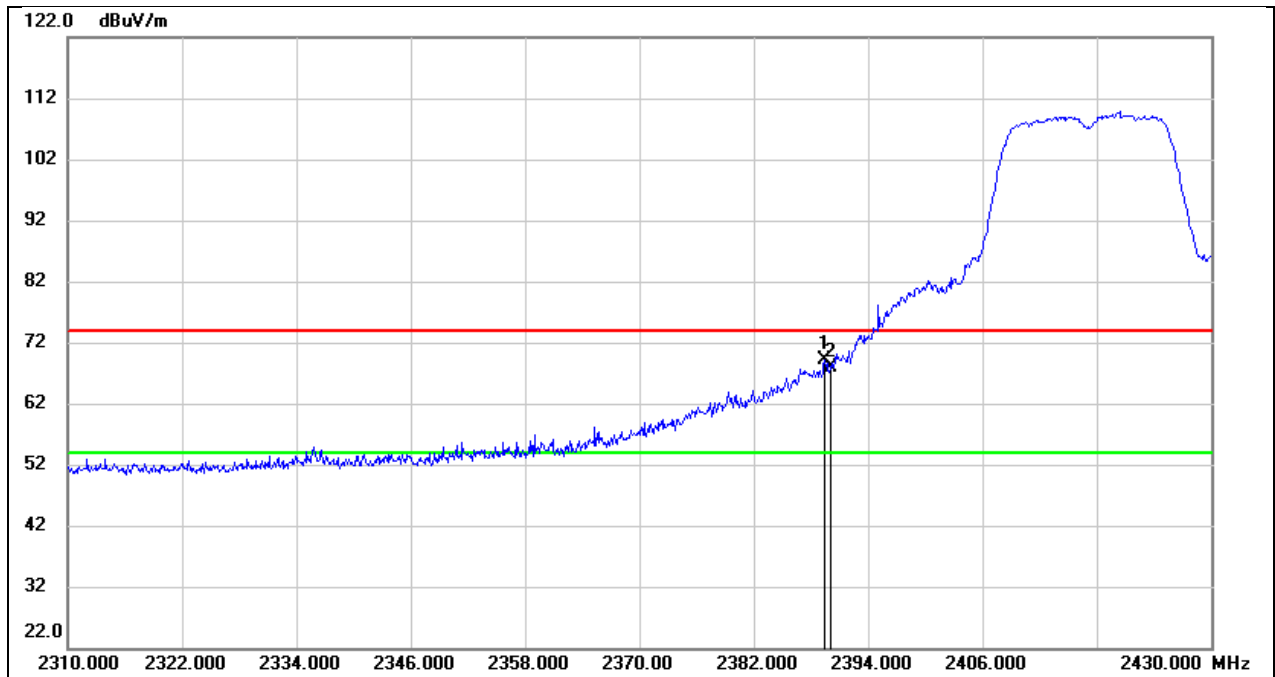


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.440	36.26	32.79	69.05	74.00	-4.95	peak
2	2390.000	35.09	32.79	67.88	74.00	-6.12	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 20V

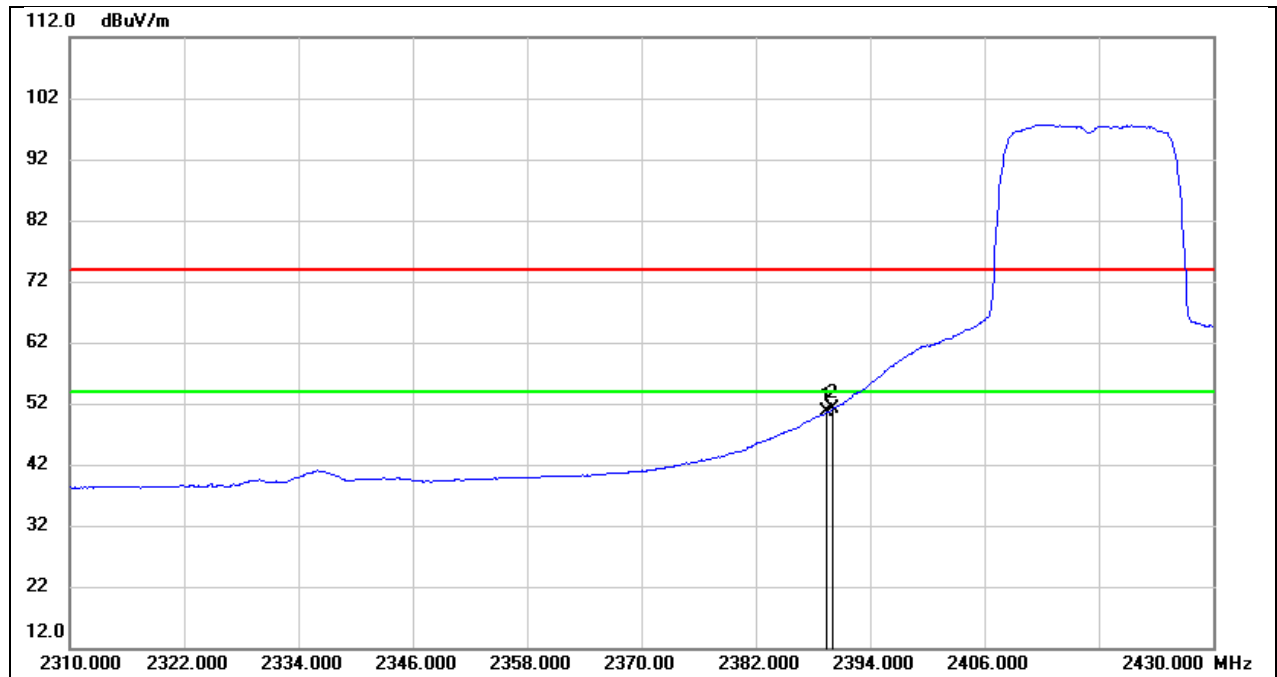

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.440	17.76	32.79	50.55	54.00	-3.45	AVG
2	2390.000	18.37	32.79	51.16	54.00	-2.84	AVG


Test Mode:	802.11n HT20 PK	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 20V

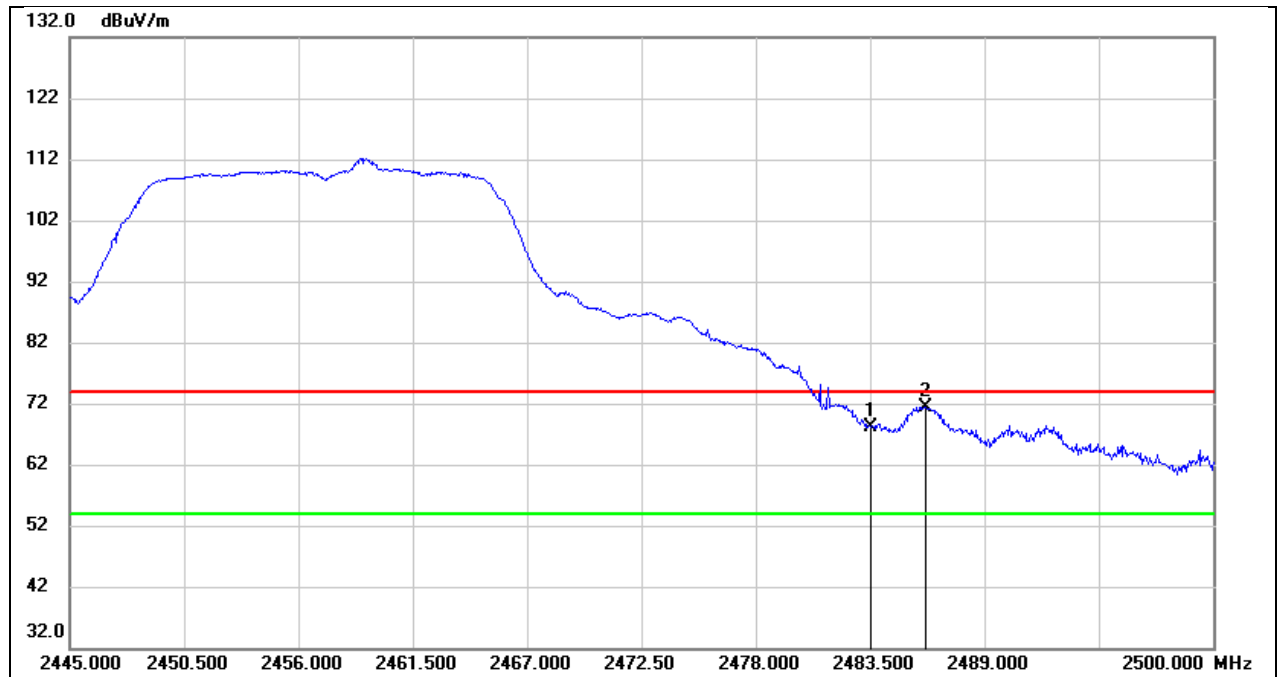

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.50	32.75	68.25	74.00	-5.75	peak
2	2486.195	38.71	32.74	71.45	74.00	-2.55	peak




Test Mode:	802.11n HT20 AV	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 20V

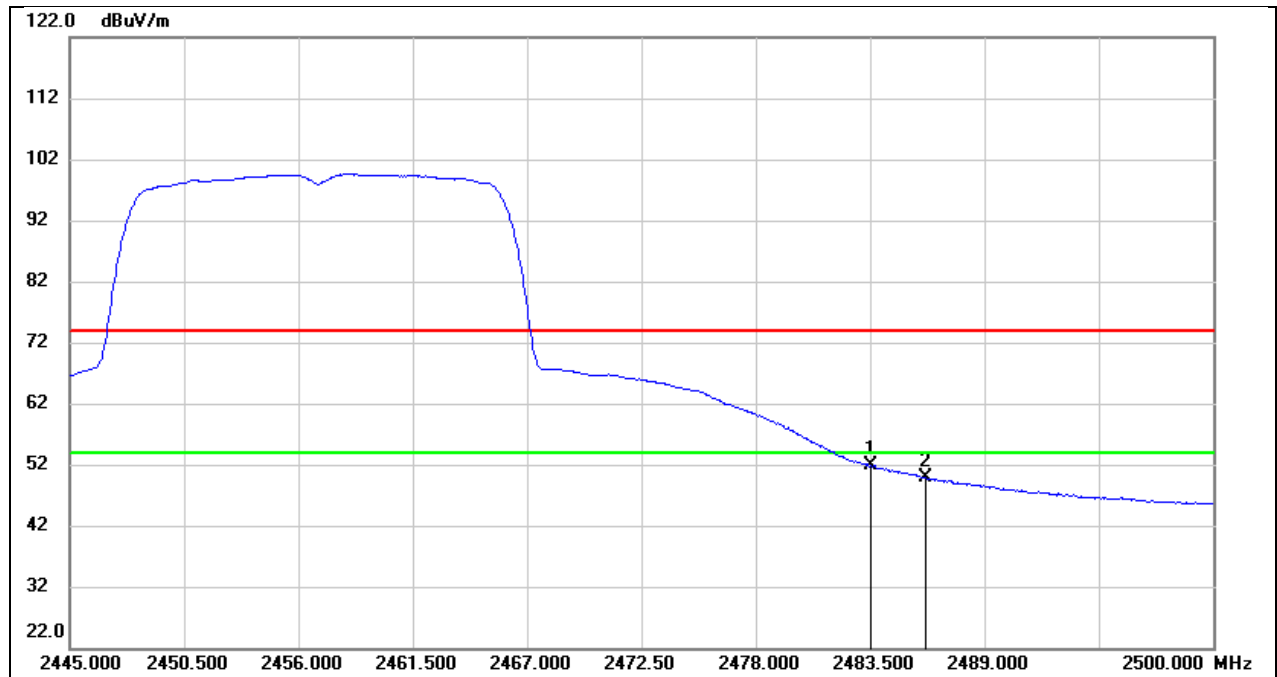


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.16	32.75	51.91	54.00	-2.09	AVG
2	2486.195	17.24	32.74	49.98	54.00	-4.02	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

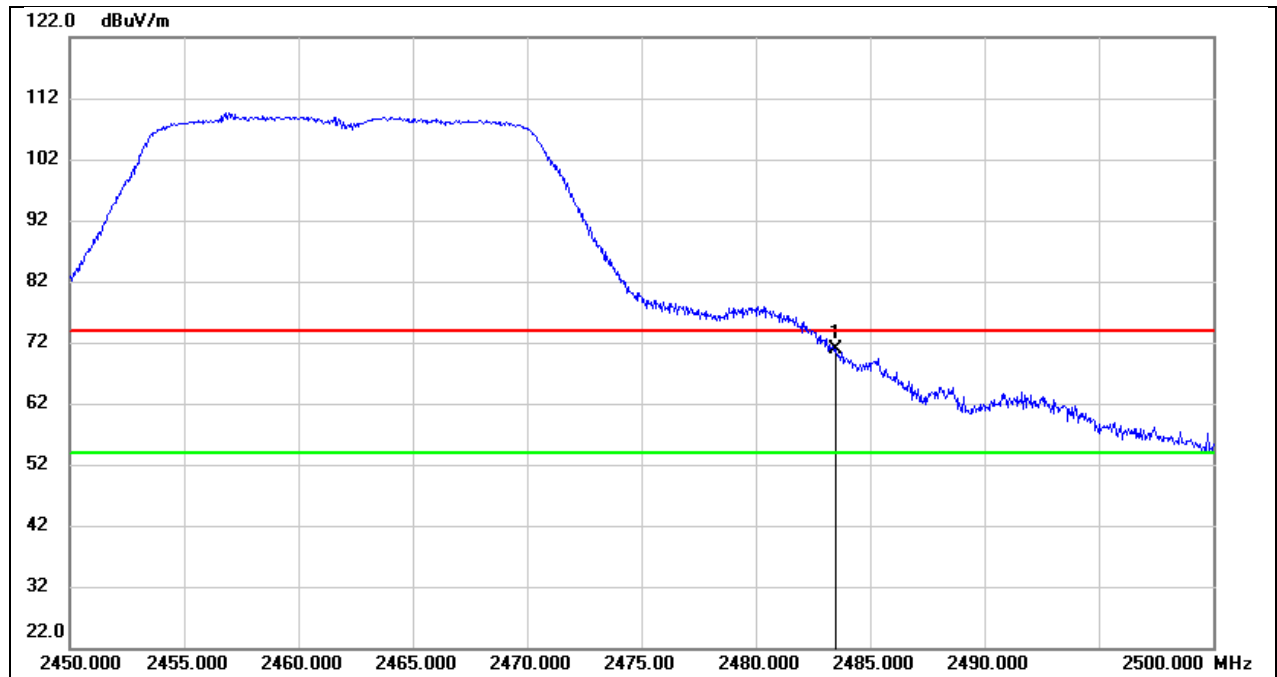

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.08	32.75	70.83	74.00	-3.17	peak


Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

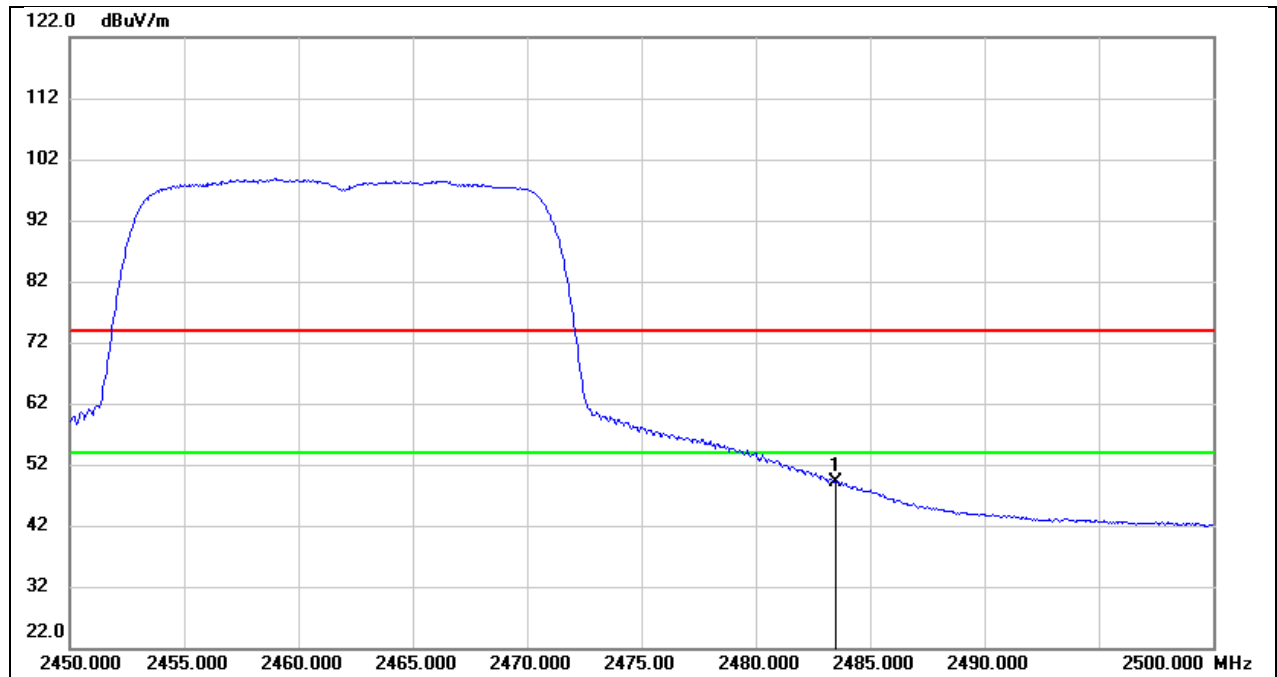

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.28	32.75	49.03	54.00	-4.97	AVG


## 8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

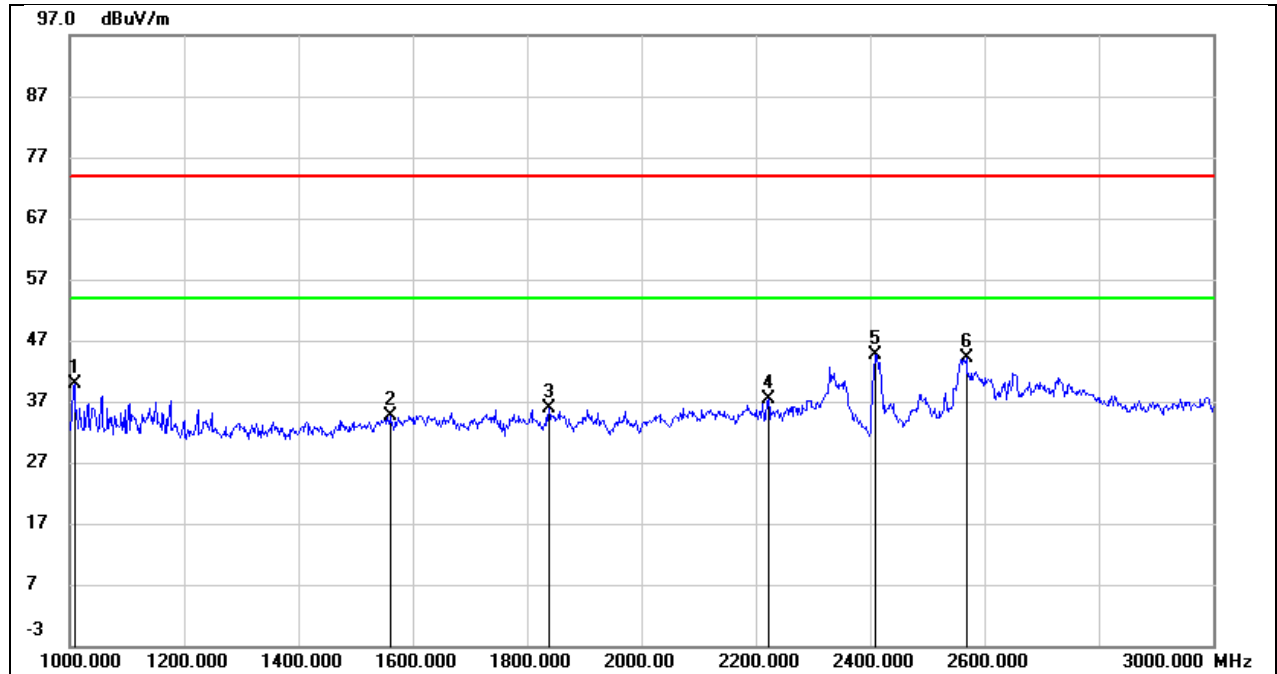


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1008.000	53.85	-13.95	39.90	74.00	-34.10	peak
2	1560.000	45.85	-11.21	34.64	74.00	-39.36	peak
3	1838.000	46.07	-10.09	35.98	74.00	-38.02	peak
4	2222.000	46.16	-8.75	37.41	74.00	-36.59	peak
5	2412.000	52.18	-7.55	44.63	/	/	Fundamental
6	2568.000	51.92	-7.76	44.16	74.00	-29.84	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 20V

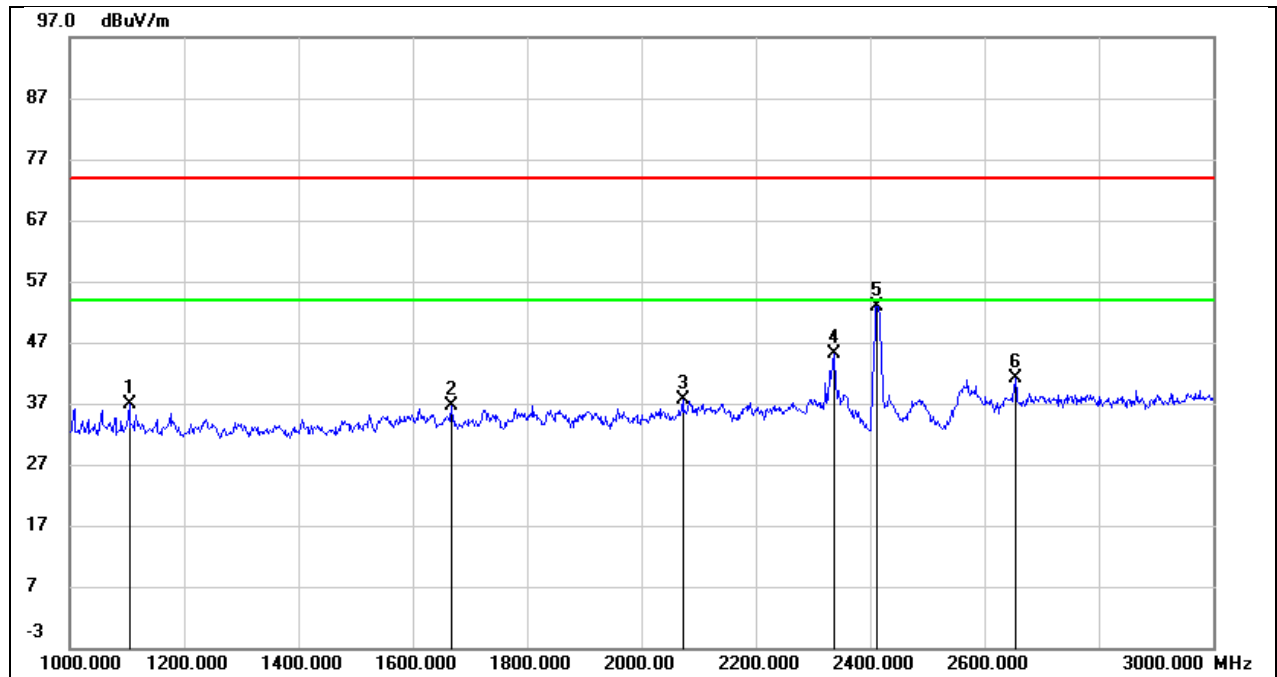


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1104.000	49.46	-12.55	36.91	74.00	-37.09	peak
2	1668.000	46.88	-10.32	36.56	74.00	-37.44	peak
3	2072.000	46.35	-8.72	37.63	74.00	-36.37	peak
4	2336.000	52.16	-7.14	45.02	74.00	-28.98	peak
5	2412.000	59.71	-6.74	52.97	/	/	Fundamental
6	2654.000	47.62	-6.57	41.05	74.00	-32.95	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 20V

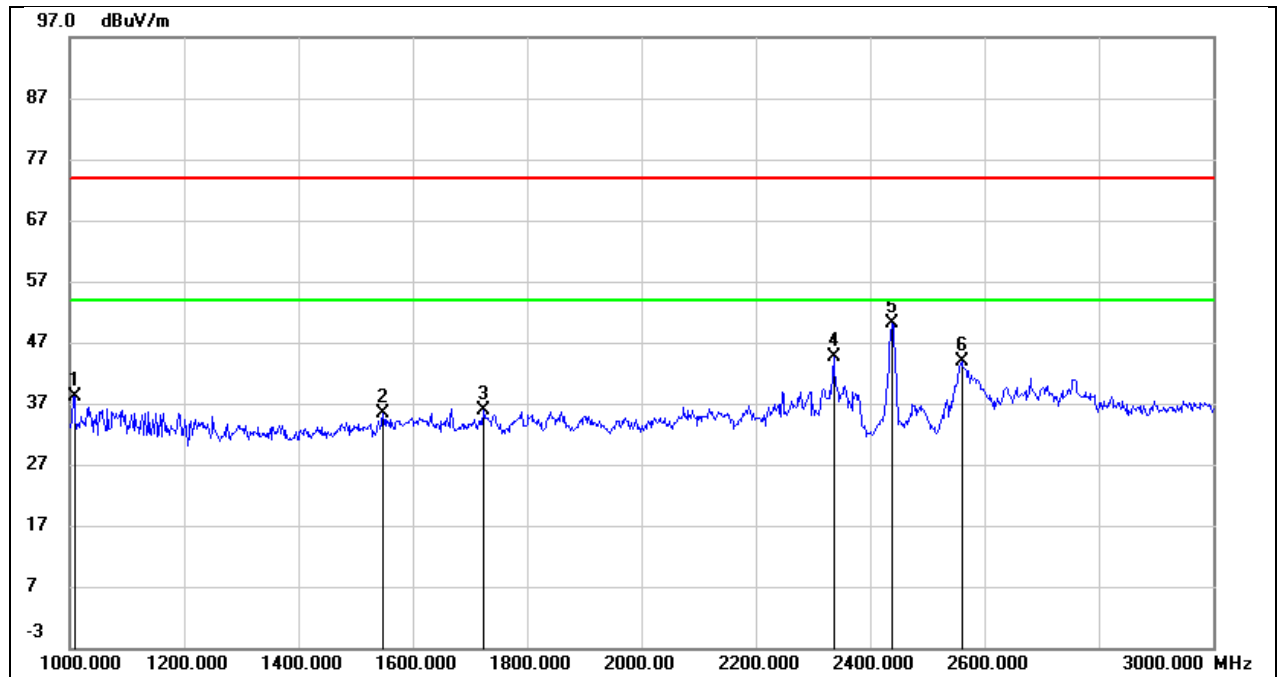


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1008.000	52.11	-13.95	38.16	74.00	-35.84	peak
2	1548.000	46.68	-11.27	35.41	74.00	-38.59	peak
3	1724.000	46.38	-10.44	35.94	74.00	-38.06	peak
4	2336.000	52.57	-7.97	44.60	74.00	-29.40	peak
5	2437.000	57.68	-7.59	50.09	/	/	Fundamental
6	2560.000	51.65	-7.76	43.89	74.00	-30.11	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 20V

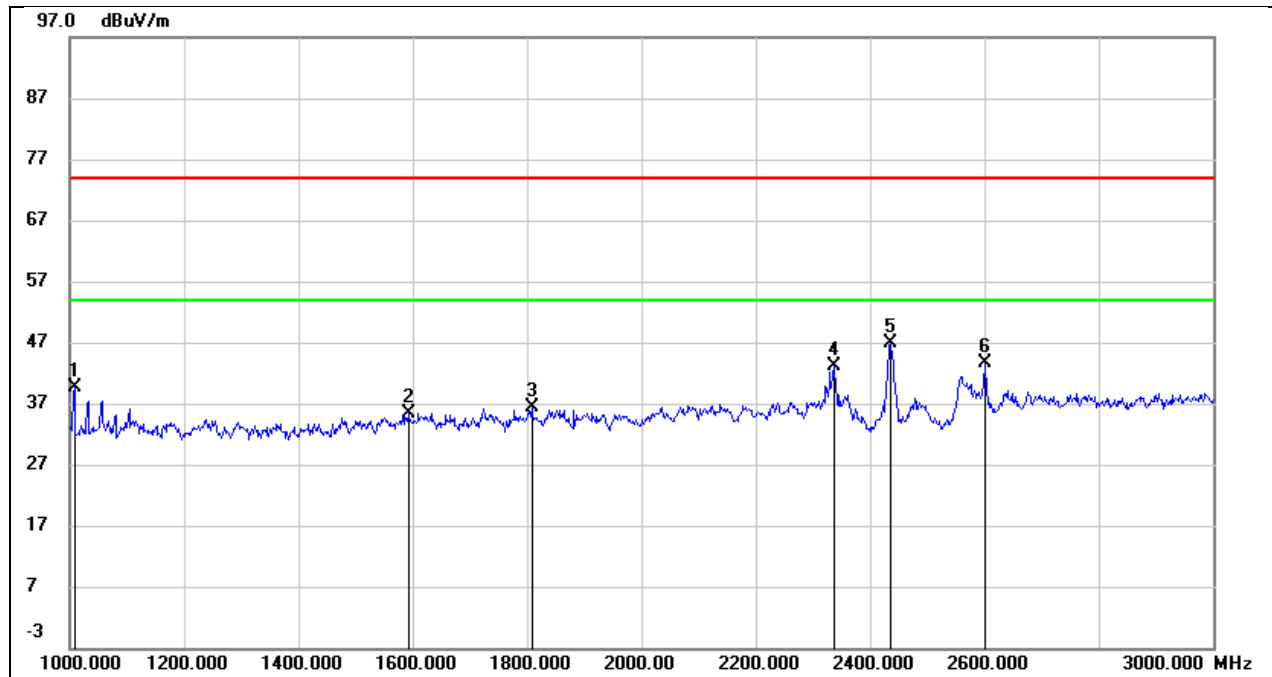

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1008.000	52.95	-13.26	39.69	74.00	-34.31	peak
2	1592.000	46.17	-10.79	35.38	74.00	-38.62	peak
3	1808.000	45.94	-9.50	36.44	74.00	-37.56	peak
4	2336.000	50.19	-7.14	43.05	74.00	-30.95	peak
5	2437.000	53.60	-6.78	46.82	/	/	Fundamental
6	2600.000	50.52	-6.90	43.62	74.00	-30.38	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

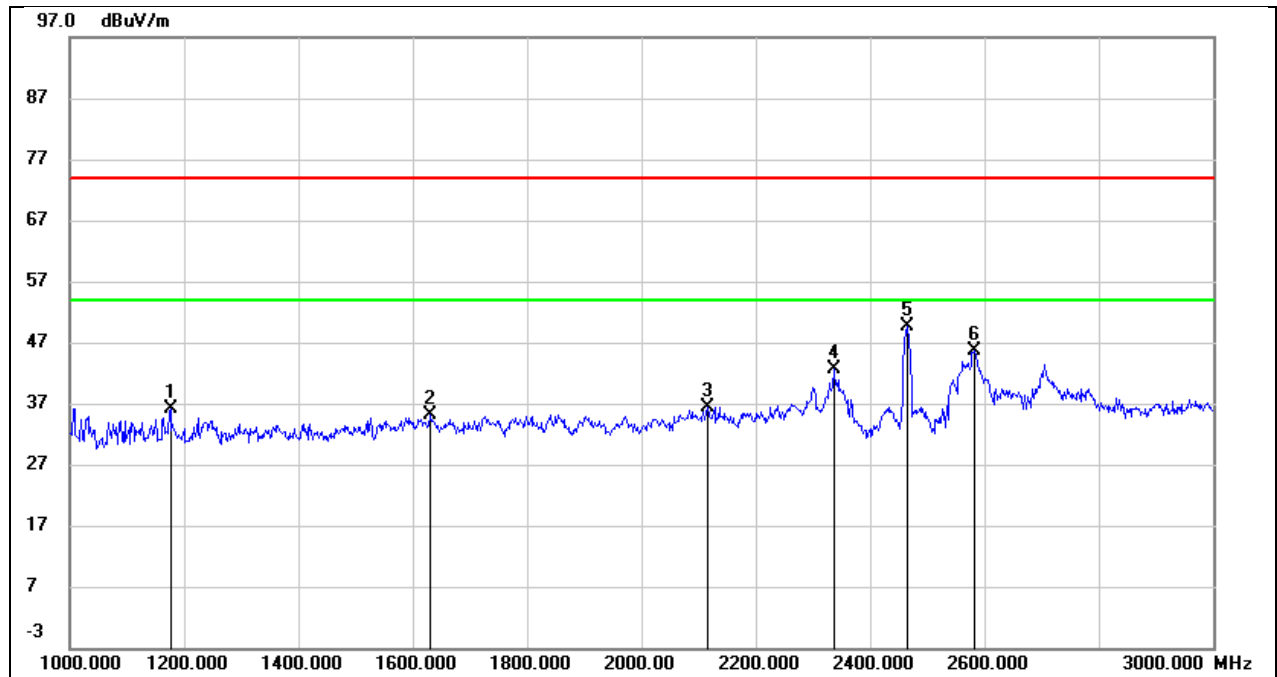

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1176.000	48.75	-12.52	36.23	74.00	-37.77	peak
2	1630.000	45.96	-10.85	35.11	74.00	-38.89	peak
3	2116.000	45.74	-9.37	36.37	74.00	-37.63	peak
4	2336.000	50.54	-7.97	42.57	74.00	-31.43	peak
5	2462.000	57.32	-7.65	49.67	/	/	Fundamental
6	2582.000	53.49	-7.78	45.71	74.00	-28.29	peak




Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 20V

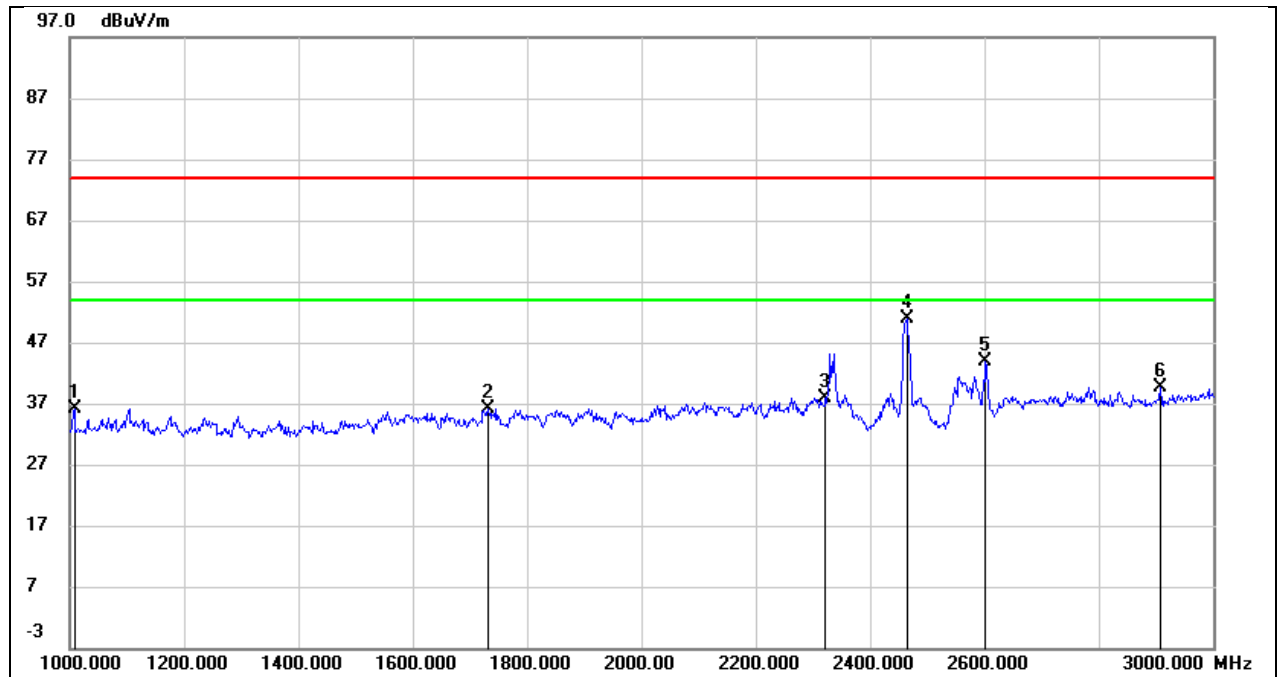

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1008.000	49.36	-13.26	36.10	74.00	-37.90	peak
2	1732.000	46.13	-9.93	36.20	74.00	-37.80	peak
3	2322.000	45.19	-7.23	37.96	74.00	-36.04	peak
4	2462.000	57.62	-6.84	50.78	/	/	Fundamental
5	2602.000	50.84	-6.89	43.95	74.00	-30.05	peak
6	2908.000	44.65	-4.97	39.68	74.00	-34.32	peak


### 8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

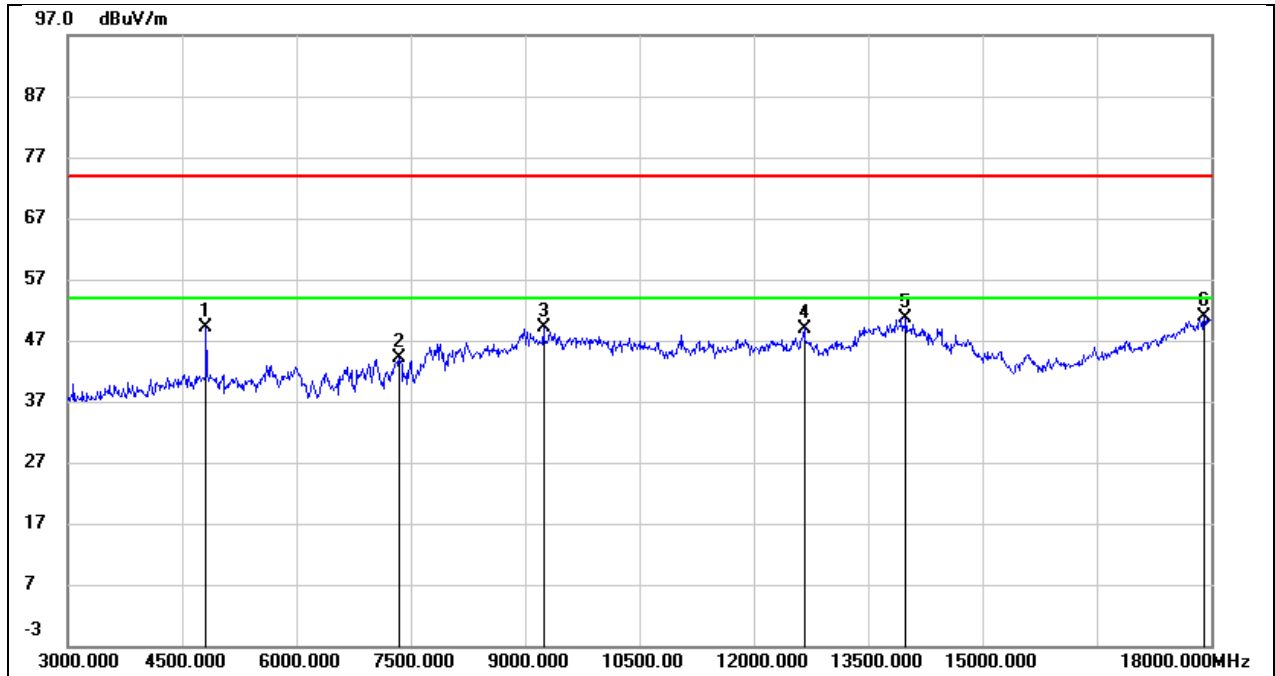


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	48.37	0.65	49.02	74.00	-24.98	peak
2	7350.000	36.86	7.34	44.20	74.00	-29.80	peak
3	9240.000	38.93	10.20	49.13	74.00	-24.87	peak
4	12660.000	30.88	18.12	49.00	74.00	-25.00	peak
5	13995.000	28.03	22.66	50.69	74.00	-23.31	peak
6	17910.000	23.05	27.86	50.91	74.00	-23.09	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 20V

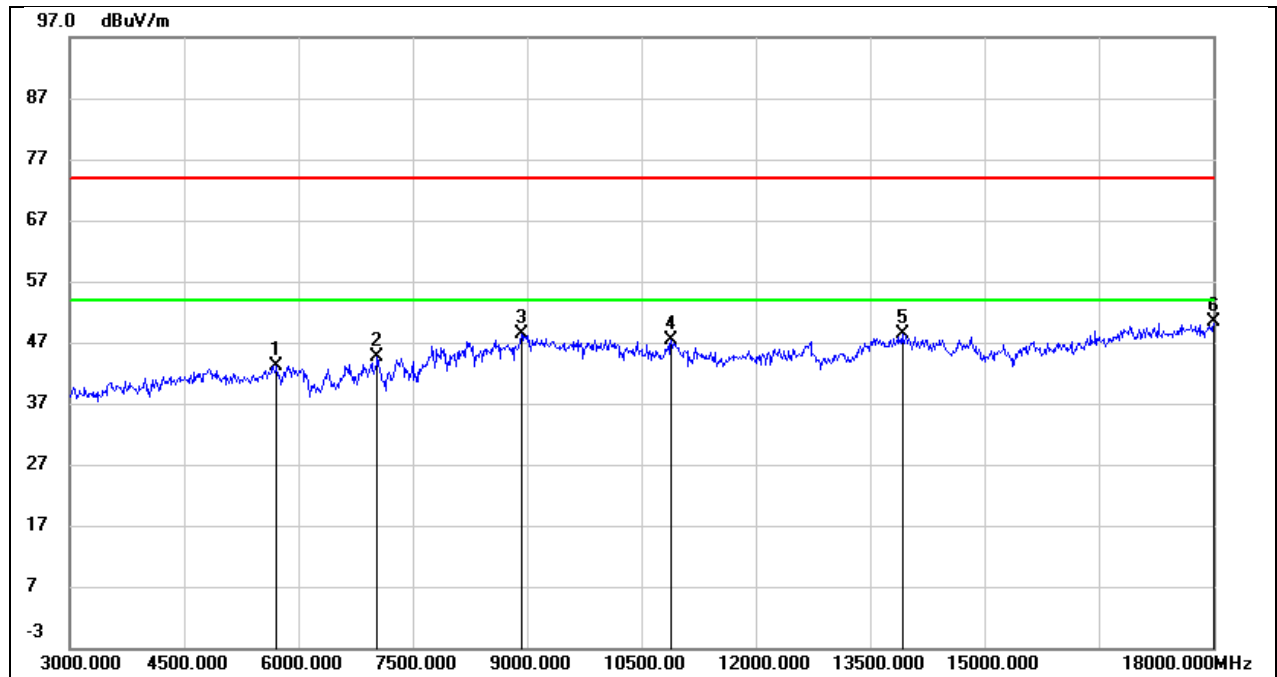


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5715.000	39.67	3.54	43.21	74.00	-30.79	peak
2	7035.000	36.33	8.26	44.59	74.00	-29.41	peak
3	8925.000	37.67	10.67	48.34	74.00	-25.66	peak
4	10890.000	33.79	13.57	47.36	74.00	-26.64	peak
5	13920.000	27.43	20.96	48.39	74.00	-25.61	peak
6	18000.000	24.29	26.13	50.42	74.00	-23.58	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 20V

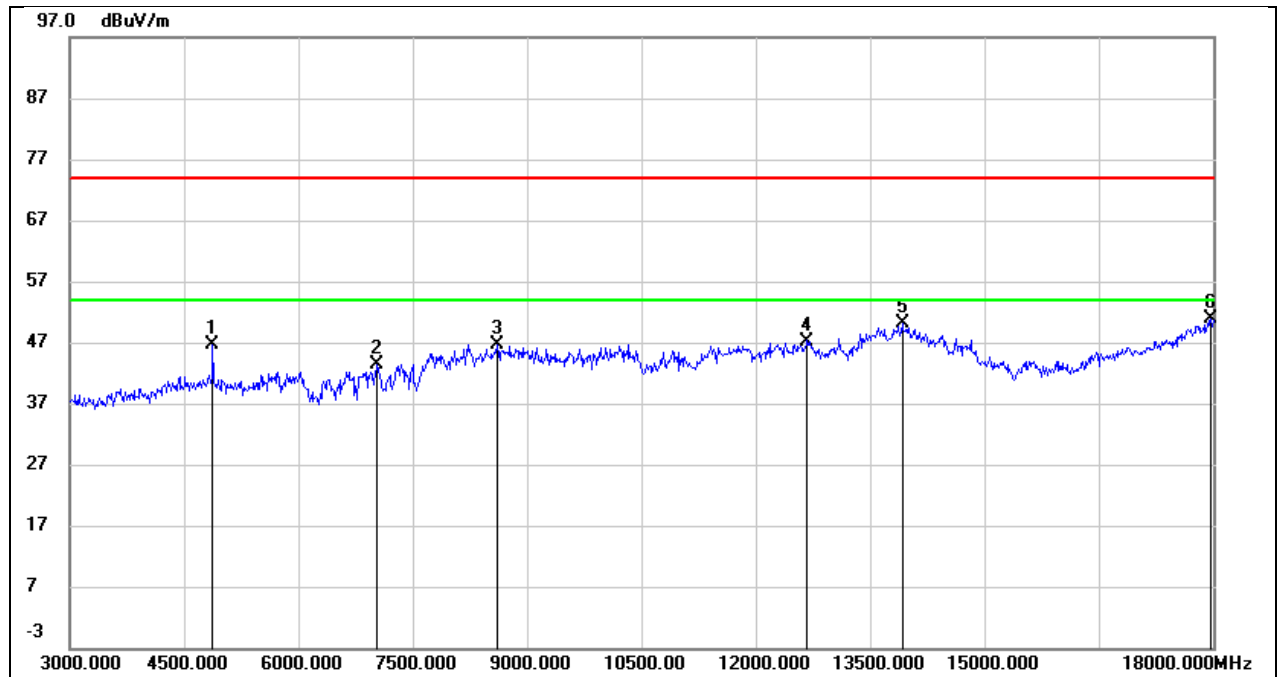


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.93	0.78	46.71	74.00	-27.29	peak
2	7035.000	36.00	7.39	43.39	74.00	-30.61	peak
3	8610.000	37.80	8.81	46.61	74.00	-27.39	peak
4	12675.000	29.07	18.18	47.25	74.00	-26.75	peak
5	13920.000	27.48	22.58	50.06	74.00	-23.94	peak
6	17970.000	22.79	28.17	50.96	74.00	-23.04	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 20V

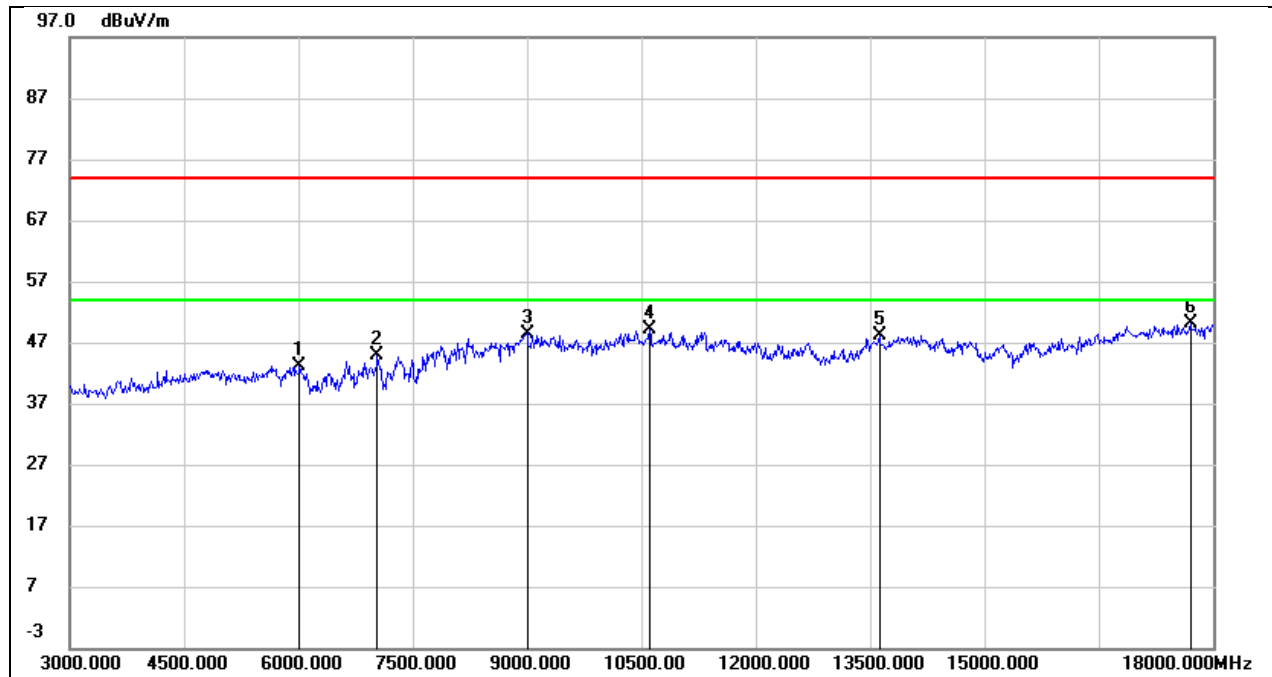


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6015.000	39.07	4.18	43.25	74.00	-30.75	peak
2	7035.000	36.72	8.26	44.98	74.00	-29.02	peak
3	9000.000	36.83	11.67	48.50	74.00	-25.50	peak
4	10605.000	35.66	13.35	49.01	74.00	-24.99	peak
5	13620.000	28.22	19.83	48.05	74.00	-25.95	peak
6	17700.000	24.81	25.31	50.12	74.00	-23.88	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

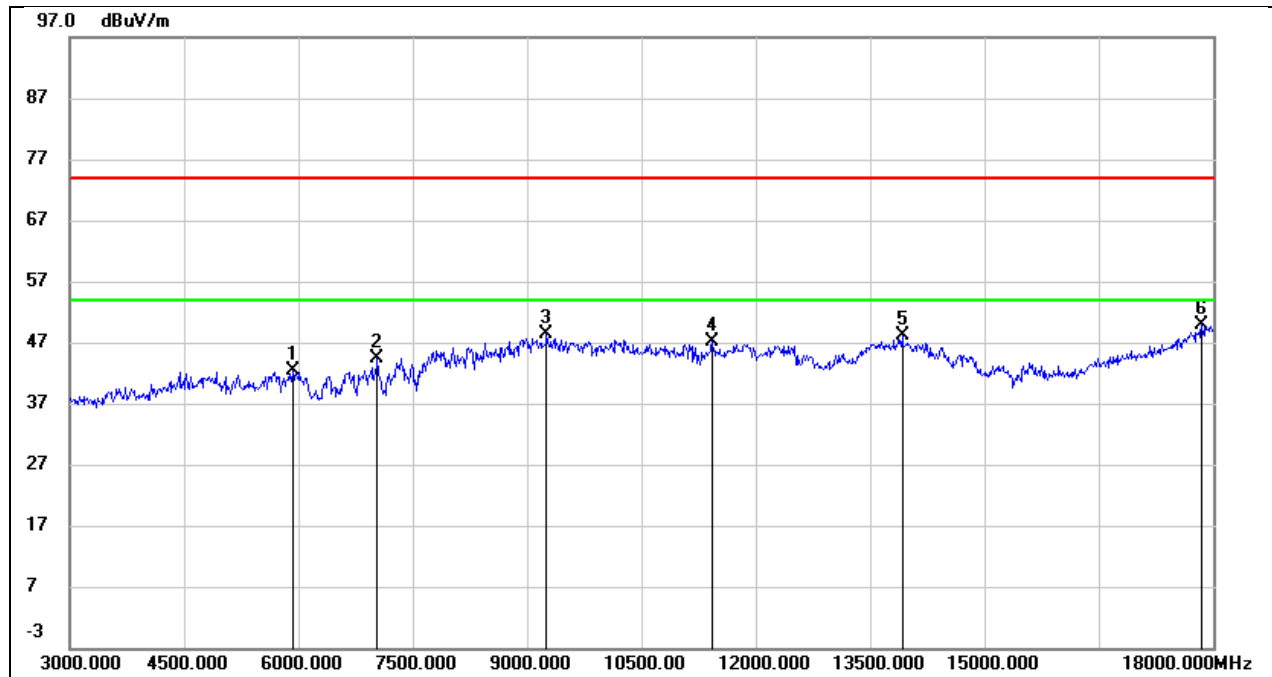


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	39.63	2.85	42.48	74.00	-31.52	peak
2	7035.000	36.90	7.39	44.29	74.00	-29.71	peak
3	9255.000	38.10	10.24	48.34	74.00	-25.66	peak
4	11430.000	30.80	16.37	47.17	74.00	-26.83	peak
5	13920.000	25.46	22.58	48.04	74.00	-25.96	peak
6	17850.000	22.22	27.54	49.76	74.00	-24.24	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 20V

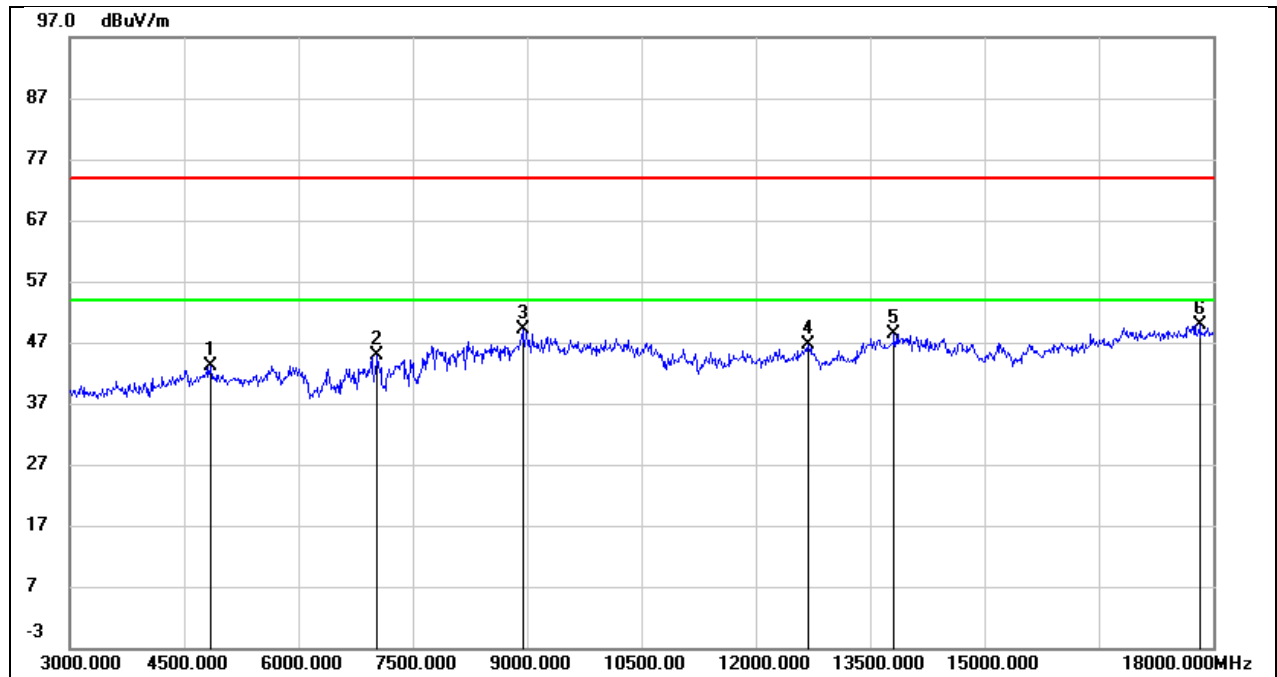

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	41.25	1.82	43.07	74.00	-30.93	peak
2	7035.000	36.50	8.26	44.76	74.00	-29.24	peak
3	8940.000	38.21	10.87	49.08	74.00	-24.92	peak
4	12690.000	29.46	17.22	46.68	74.00	-27.32	peak
5	13815.000	27.58	20.84	48.42	74.00	-25.58	peak
6	17820.000	24.02	25.96	49.98	74.00	-24.02	peak


Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

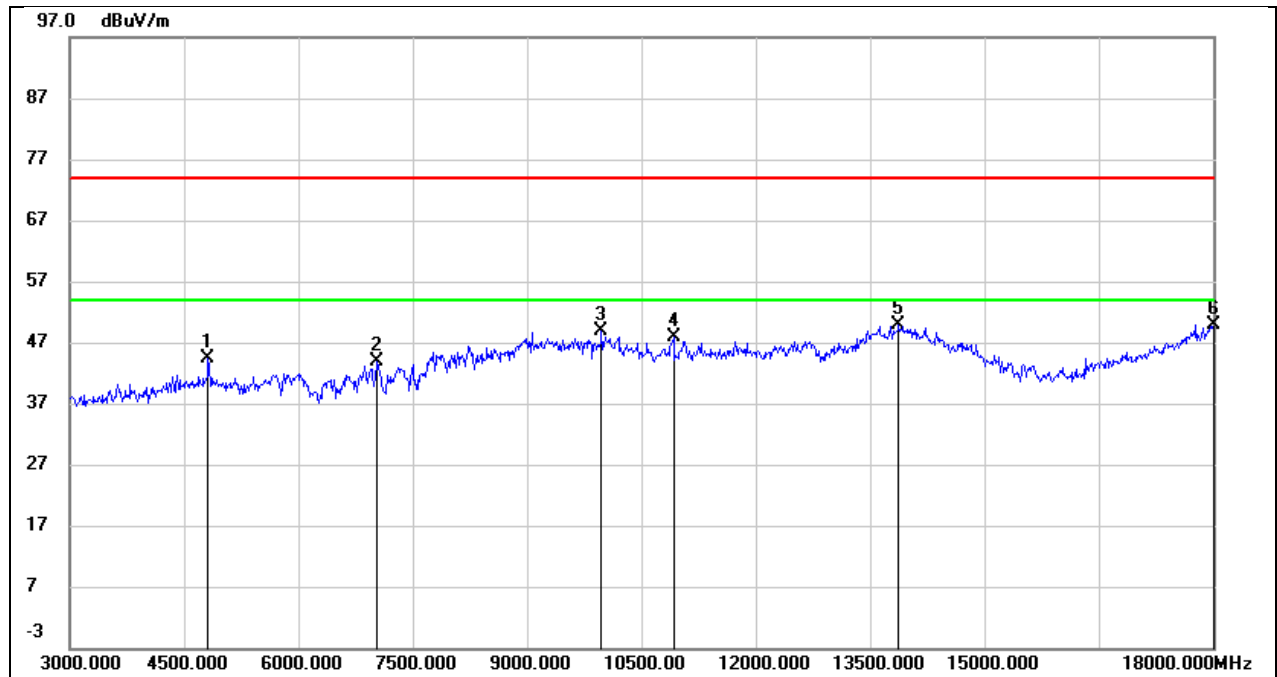

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.75	0.65	44.40	74.00	-29.60	peak
2	7035.000	36.42	7.39	43.81	74.00	-30.19	peak
3	9975.000	36.48	12.47	48.95	74.00	-25.05	peak
4	10920.000	33.54	14.41	47.95	74.00	-26.05	peak
5	13875.000	27.23	22.53	49.76	74.00	-24.24	peak
6	18000.000	21.50	28.33	49.83	74.00	-24.17	peak




Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 20V

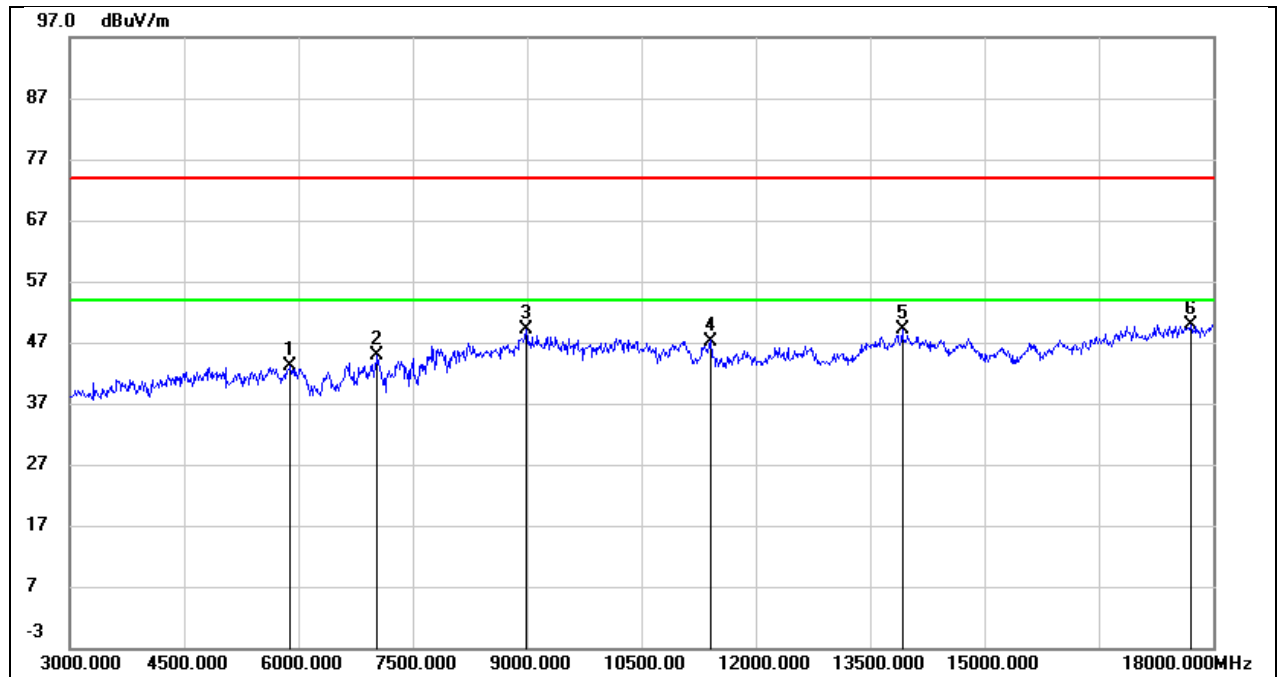


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	39.30	3.74	43.04	74.00	-30.96	peak
2	7035.000	36.71	8.26	44.97	74.00	-29.03	peak
3	8985.000	37.57	11.48	49.05	74.00	-24.95	peak
4	11415.000	32.31	14.94	47.25	74.00	-26.75	peak
5	13920.000	28.16	20.96	49.12	74.00	-24.88	peak
6	17715.000	24.47	25.41	49.88	74.00	-24.12	peak

Test Mode:	802.11g	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 20V

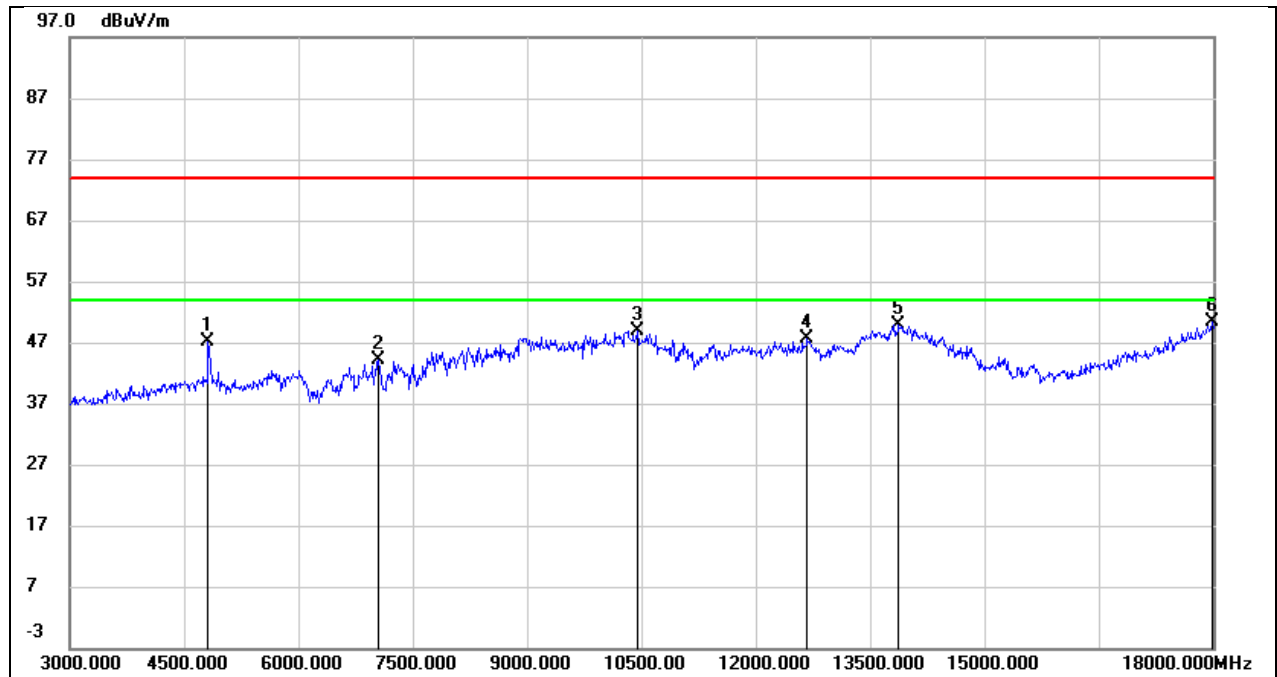


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	46.56	0.65	47.21	74.00	-26.79	peak
2	7050.000	36.75	7.30	44.05	74.00	-29.95	peak
3	10455.000	35.60	13.32	48.92	74.00	-25.08	peak
4	12675.000	29.42	18.18	47.60	74.00	-26.40	peak
5	13875.000	27.46	22.53	49.99	74.00	-24.01	peak
6	17985.000	22.20	28.25	50.45	74.00	-23.55	peak

Test Mode:	802.11g	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 20V

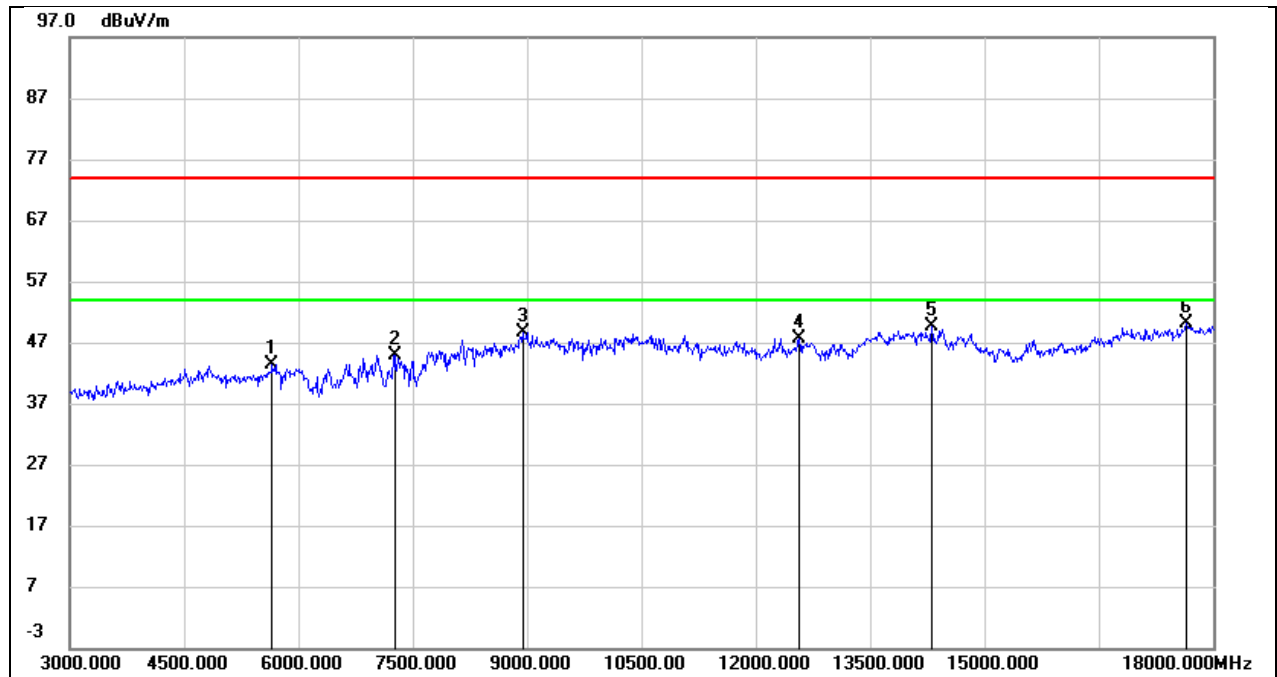


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.61	3.70	43.31	74.00	-30.69	peak
2	7260.000	37.46	7.46	44.92	74.00	-29.08	peak
3	8940.000	37.87	10.87	48.74	74.00	-25.26	peak
4	12570.000	30.66	17.02	47.68	74.00	-26.32	peak
5	14310.000	29.01	20.67	49.68	74.00	-24.32	peak
6	17640.000	25.21	24.92	50.13	74.00	-23.87	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 20V

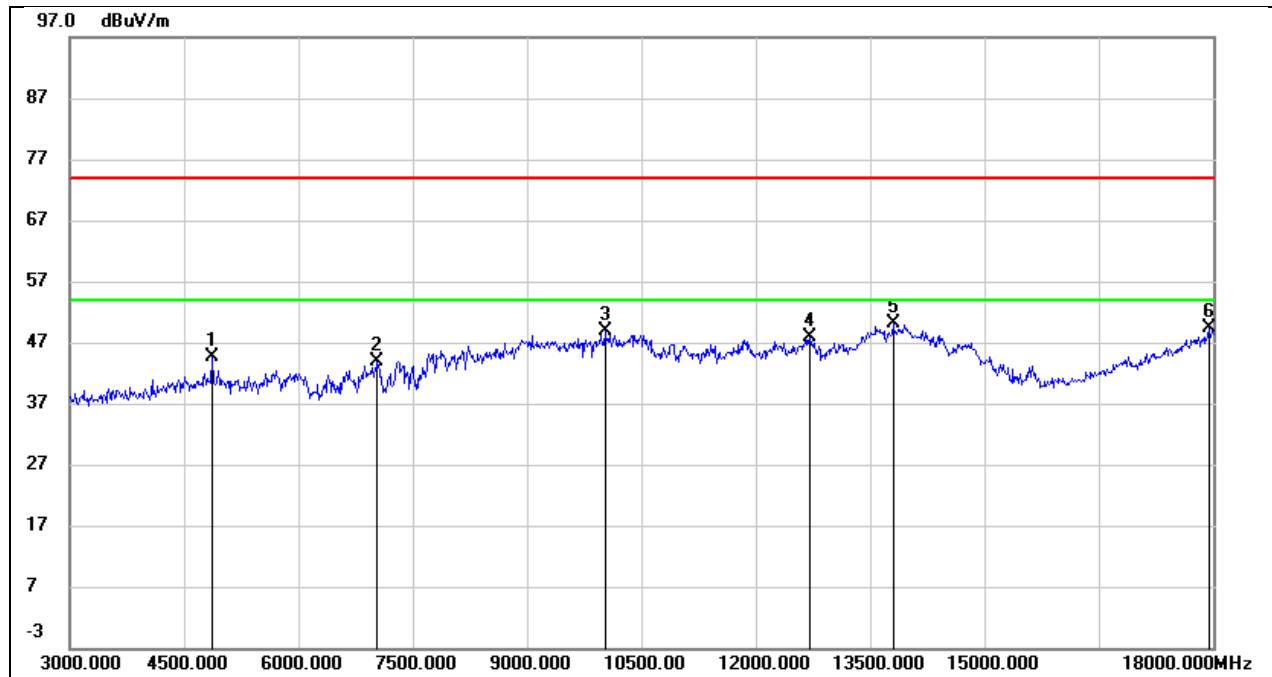


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	43.88	0.75	44.63	74.00	-29.37	peak
2	7035.000	36.60	7.39	43.99	74.00	-30.01	peak
3	10020.000	36.34	12.56	48.90	74.00	-25.10	peak
4	12705.000	29.63	18.30	47.93	74.00	-26.07	peak
5	13800.000	27.71	22.46	50.17	74.00	-23.83	peak
6	17940.000	21.29	28.01	49.30	74.00	-24.70	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 20V

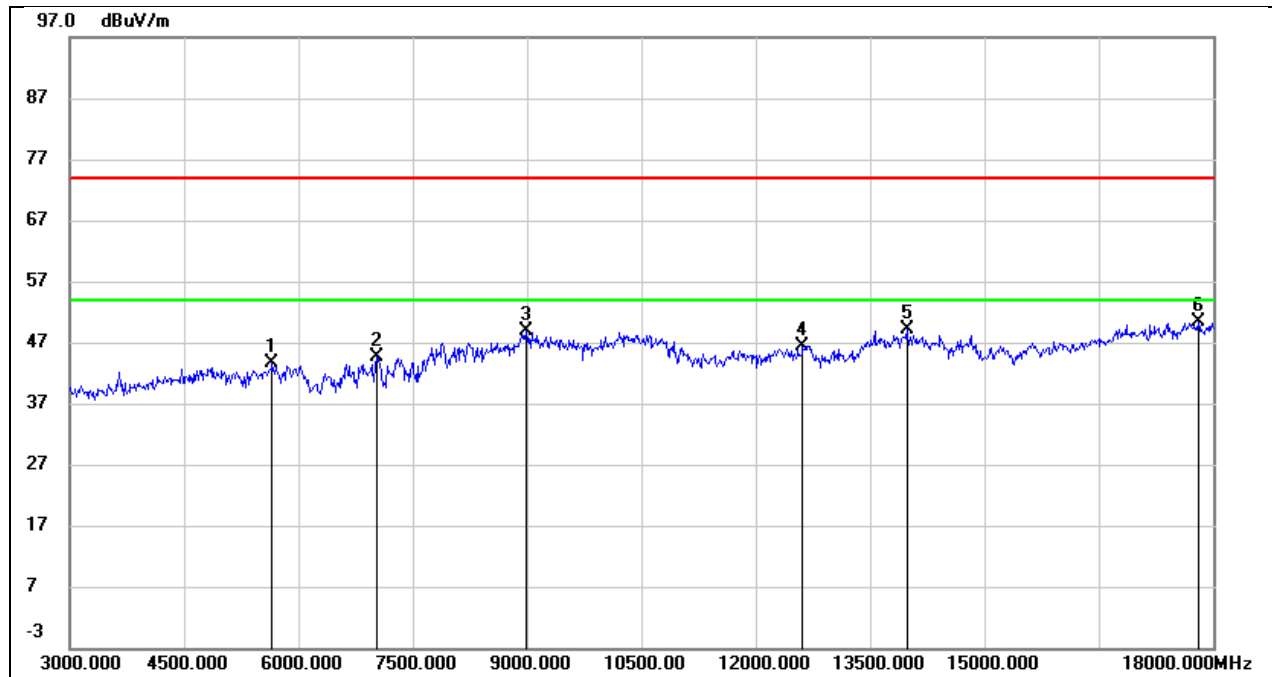


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.96	3.70	43.66	74.00	-30.34	peak
2	7035.000	36.41	8.26	44.67	74.00	-29.33	peak
3	8985.000	37.47	11.48	48.95	74.00	-25.05	peak
4	12615.000	29.44	16.98	46.42	74.00	-27.58	peak
5	13980.000	28.00	21.04	49.04	74.00	-24.96	peak
6	17805.000	24.38	25.96	50.34	74.00	-23.66	peak

Test Mode:	802.11g	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 20V

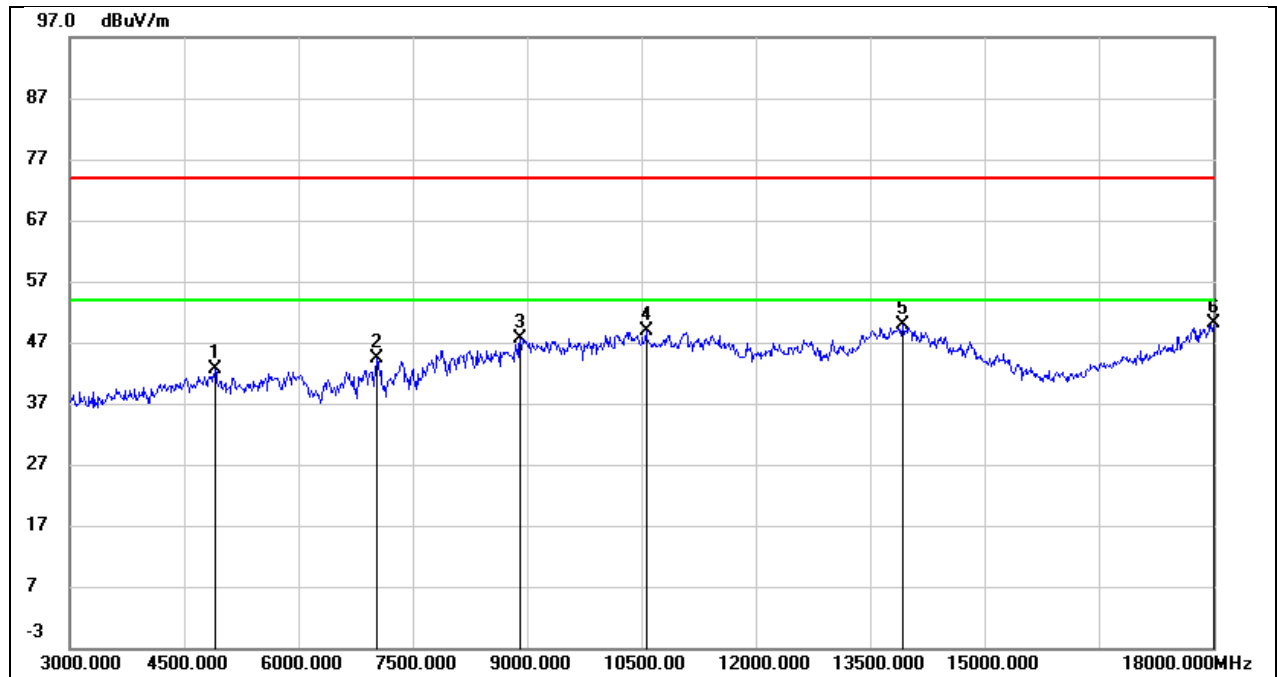


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	41.88	0.84	42.72	74.00	-31.28	peak
2	7035.000	36.97	7.39	44.36	74.00	-29.64	peak
3	8910.000	37.53	10.03	47.56	74.00	-26.44	peak
4	10560.000	35.24	13.57	48.81	74.00	-25.19	peak
5	13920.000	27.20	22.58	49.78	74.00	-24.22	peak
6	18000.000	21.90	28.33	50.23	74.00	-23.77	peak

Test Mode:	802.11g	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 20V

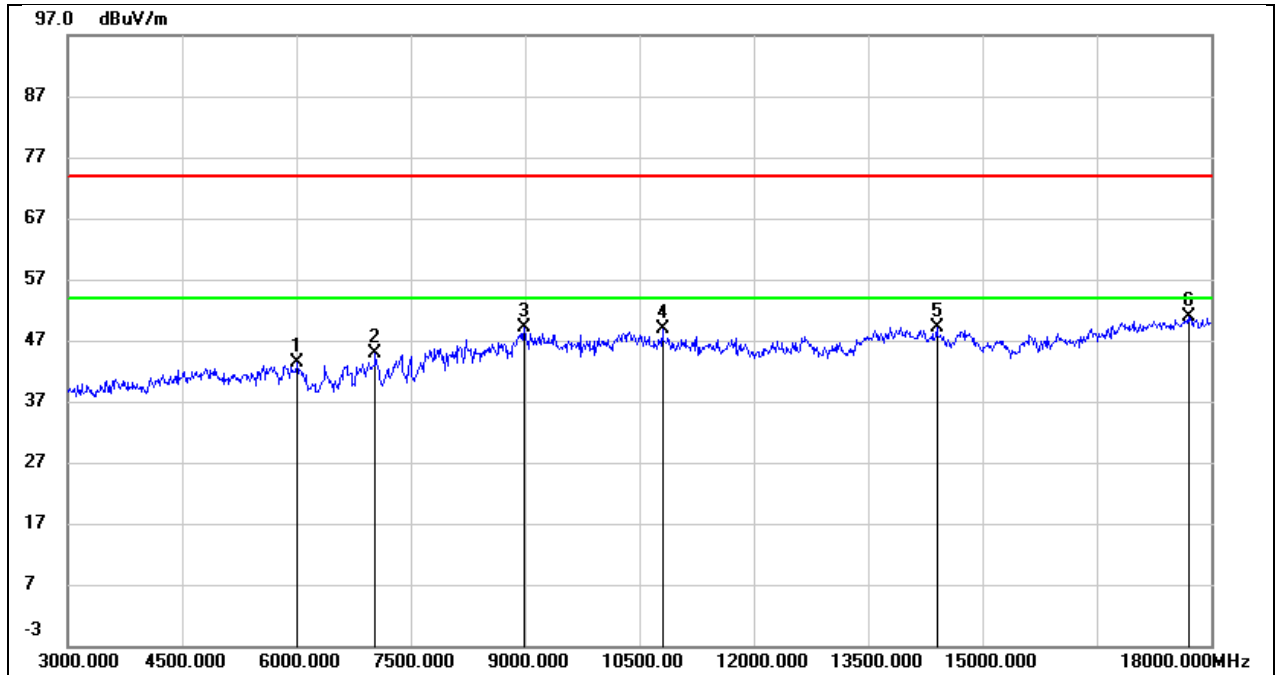

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6015.000	39.08	4.18	43.26	74.00	-30.74	peak
2	7035.000	36.59	8.26	44.85	74.00	-29.15	peak
3	8985.000	37.72	11.48	49.20	74.00	-24.80	peak
4	10800.000	35.59	13.21	48.80	74.00	-25.20	peak
5	14400.000	28.83	20.40	49.23	74.00	-24.77	peak
6	17700.000	25.55	25.31	50.86	74.00	-23.14	peak


Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

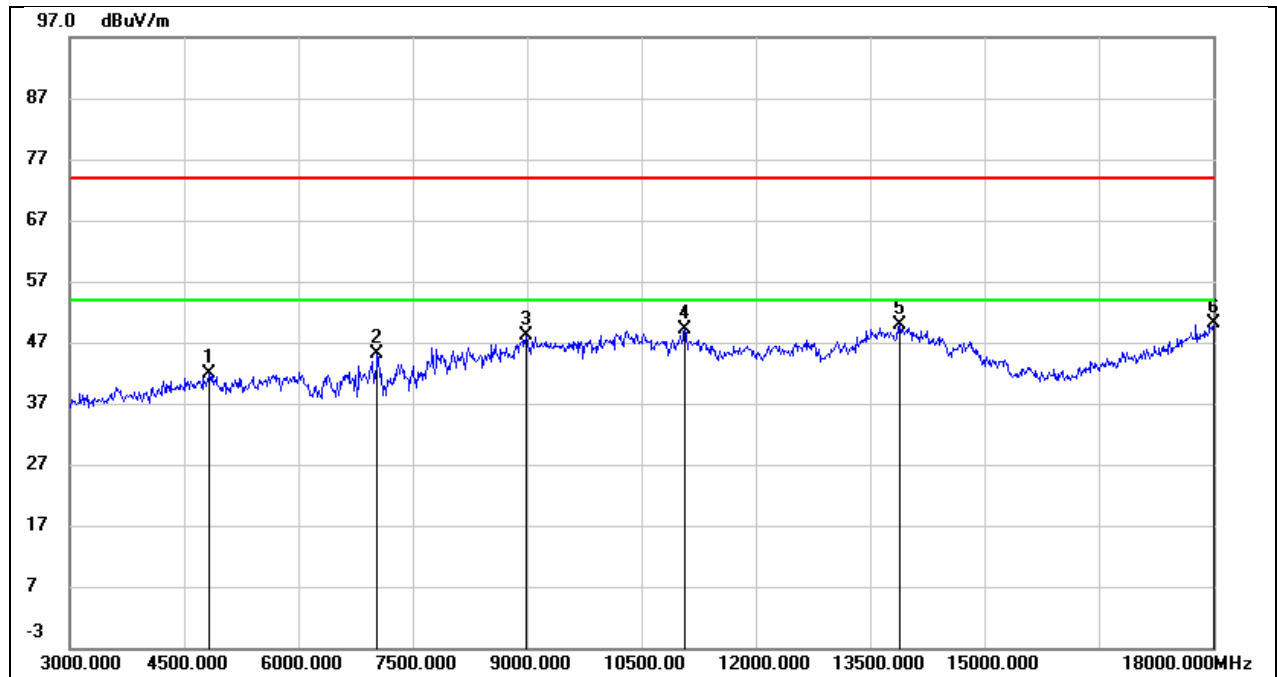

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	41.21	0.68	41.89	74.00	-32.11	peak
2	7035.000	37.70	7.39	45.09	74.00	-28.91	peak
3	8985.000	36.97	11.07	48.04	74.00	-25.96	peak
4	11070.000	34.07	14.95	49.02	74.00	-24.98	peak
5	13890.000	27.25	22.55	49.80	74.00	-24.20	peak
6	18000.000	21.69	28.33	50.02	74.00	-23.98	peak




Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 20V

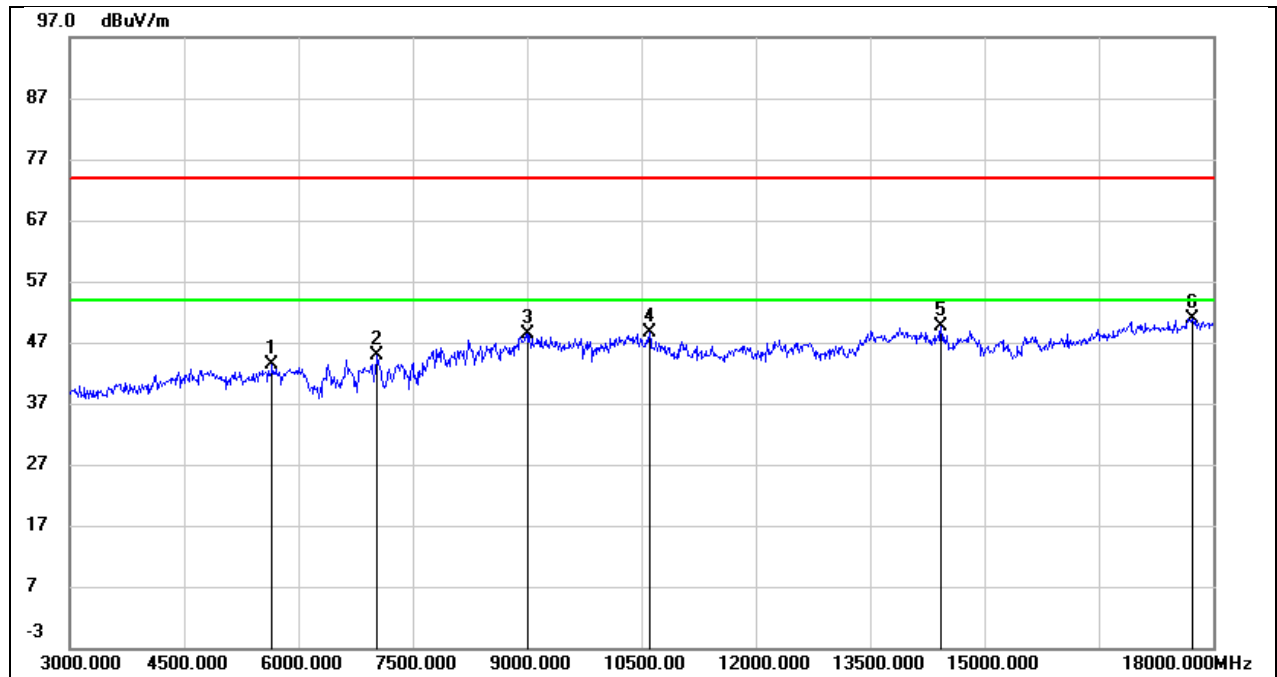


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.63	3.70	43.33	74.00	-30.67	peak
2	7035.000	36.51	8.26	44.77	74.00	-29.23	peak
3	9015.000	36.87	11.57	48.44	74.00	-25.56	peak
4	10605.000	35.17	13.35	48.52	74.00	-25.48	peak
5	14430.000	29.39	20.36	49.75	74.00	-24.25	peak
6	17730.000	25.46	25.50	50.96	74.00	-23.04	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

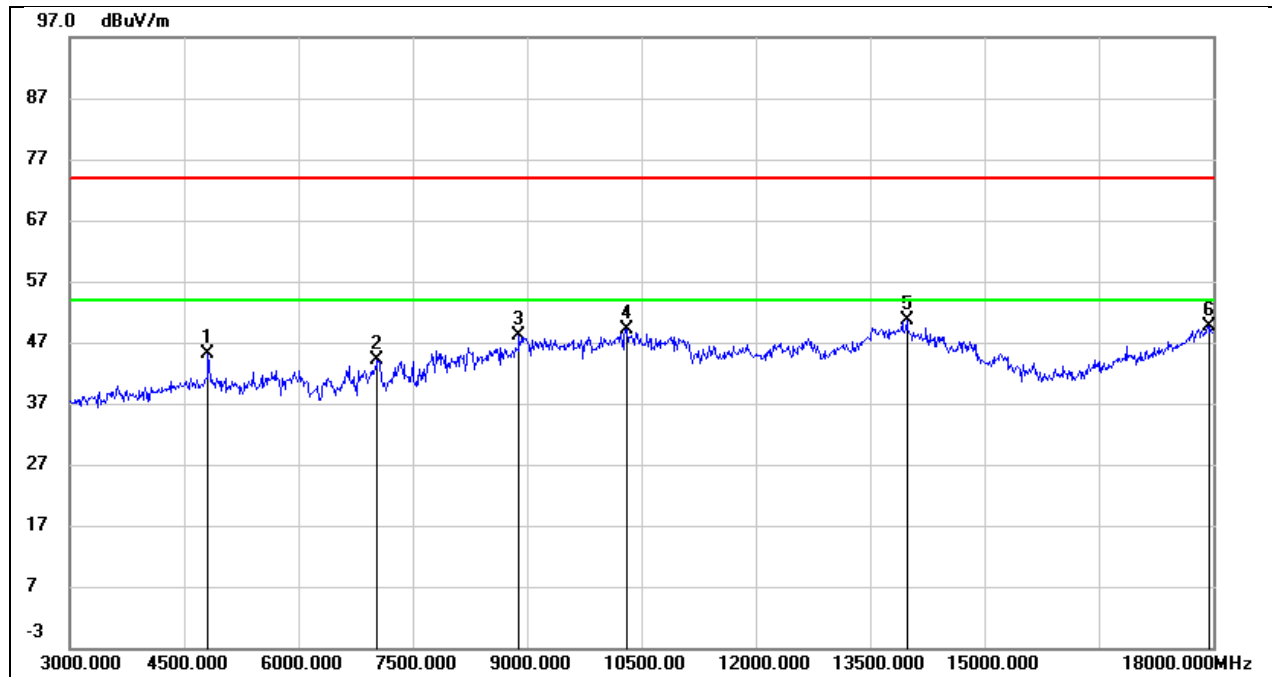


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	44.38	0.65	45.03	74.00	-28.97	peak
2	7035.000	36.65	7.39	44.04	74.00	-29.96	peak
3	8895.000	38.37	9.83	48.20	74.00	-25.80	peak
4	10305.000	36.33	12.85	49.18	74.00	-24.82	peak
5	13980.000	28.07	22.64	50.71	74.00	-23.29	peak
6	17940.000	21.59	28.01	49.60	74.00	-24.40	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 20V

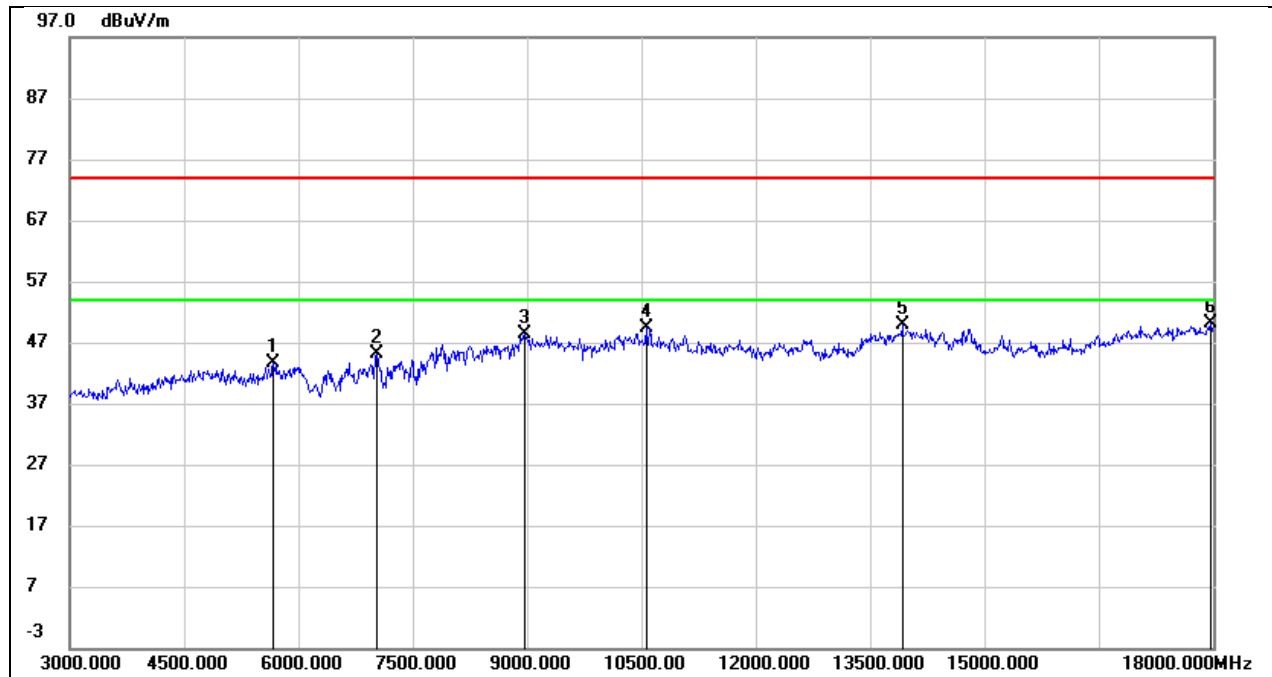


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.000	39.88	3.65	43.53	74.00	-30.47	peak
2	7035.000	36.79	8.26	45.05	74.00	-28.95	peak
3	8970.000	37.17	11.27	48.44	74.00	-25.56	peak
4	10560.000	36.01	13.30	49.31	74.00	-24.69	peak
5	13920.000	29.04	20.96	50.00	74.00	-24.00	peak
6	17970.000	24.14	26.10	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 20V

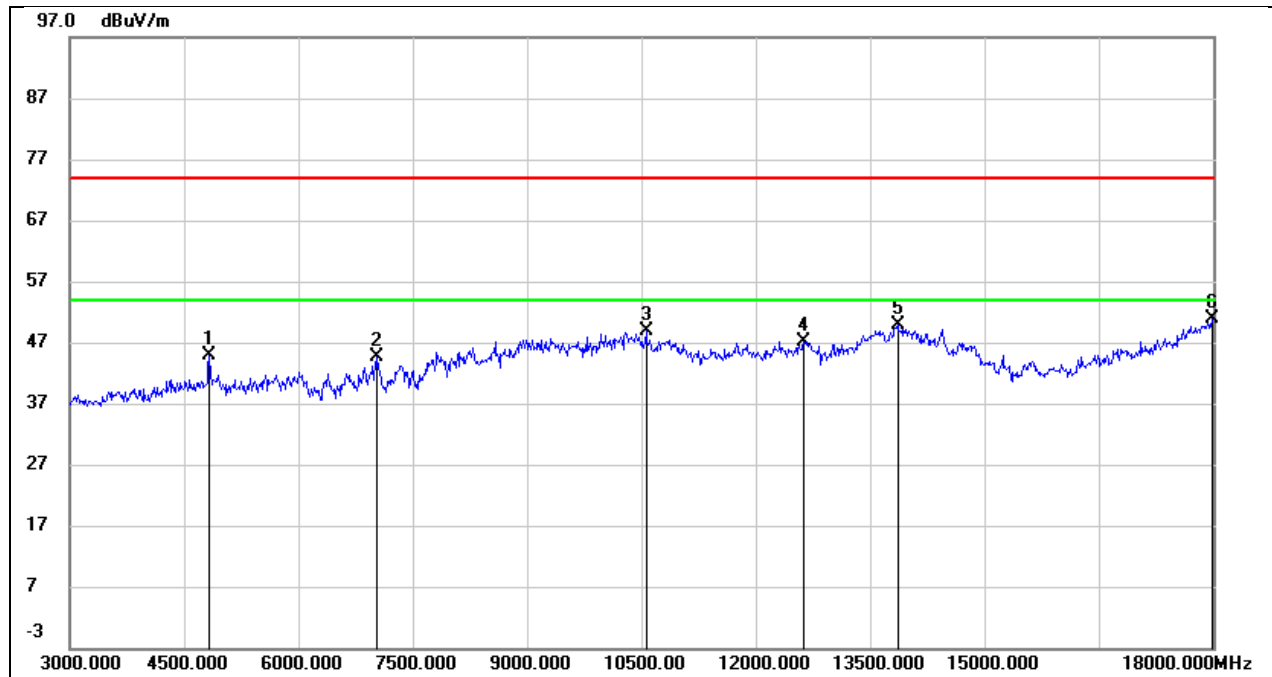


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	44.29	0.68	44.97	74.00	-29.03	peak
2	7035.000	37.19	7.39	44.58	74.00	-29.42	peak
3	10560.000	35.19	13.57	48.76	74.00	-25.24	peak
4	12630.000	29.23	18.01	47.24	74.00	-26.76	peak
5	13860.000	27.42	22.52	49.94	74.00	-24.06	peak
6	17985.000	22.63	28.25	50.88	74.00	-23.12	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 20V

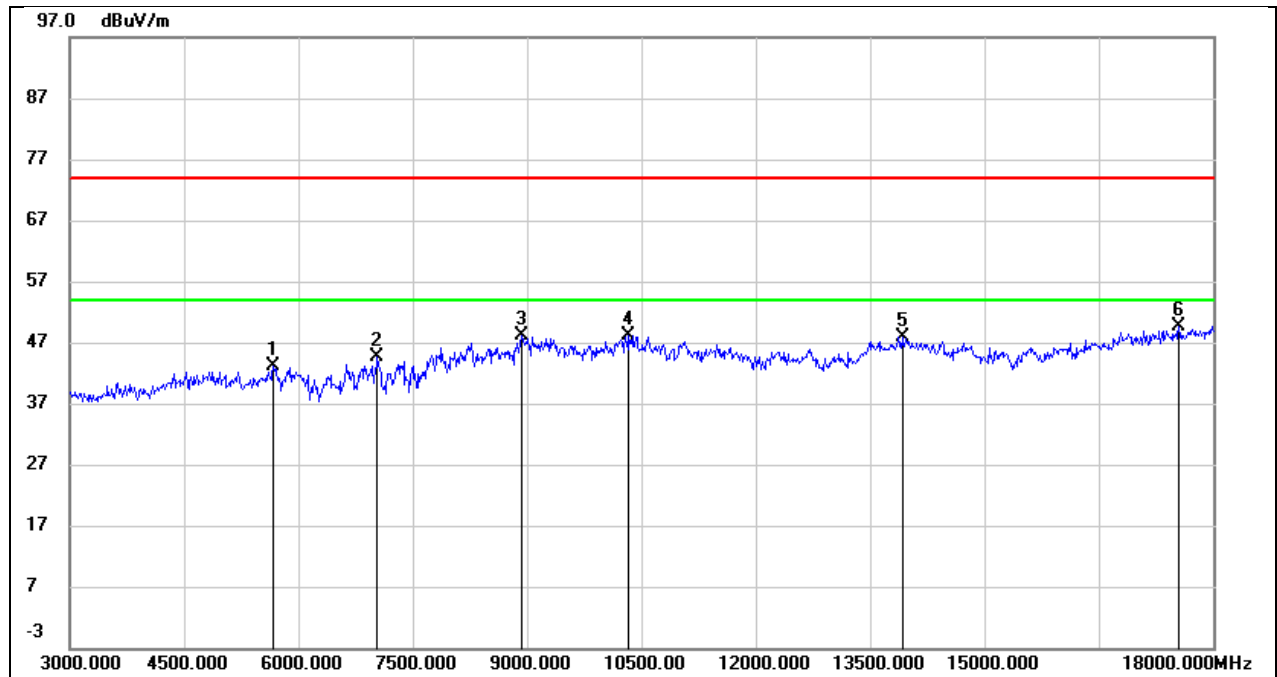


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.000	39.48	3.65	43.13	74.00	-30.87	peak
2	7035.000	36.31	8.26	44.57	74.00	-29.43	peak
3	8925.000	37.34	10.67	48.01	74.00	-25.99	peak
4	10335.000	35.54	12.61	48.15	74.00	-25.85	peak
5	13920.000	26.88	20.96	47.84	74.00	-26.16	peak
6	17550.000	25.18	24.54	49.72	74.00	-24.28	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 20V

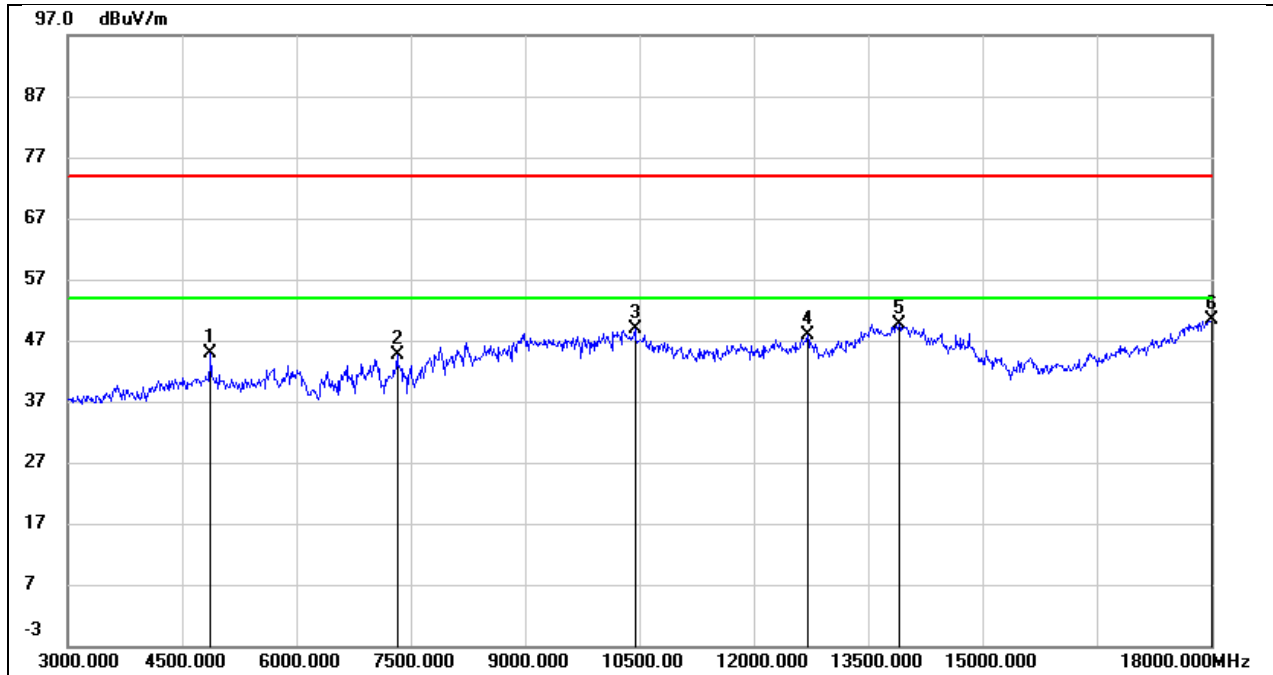


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.13	0.78	44.91	74.00	-29.09	peak
2	7320.000	37.41	7.15	44.56	74.00	-29.44	peak
3	10440.000	35.63	13.30	48.93	74.00	-25.07	peak
4	12705.000	29.67	18.30	47.97	74.00	-26.03	peak
5	13905.000	27.16	22.56	49.72	74.00	-24.28	peak
6	18000.000	21.93	28.33	50.26	74.00	-23.74	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 20V

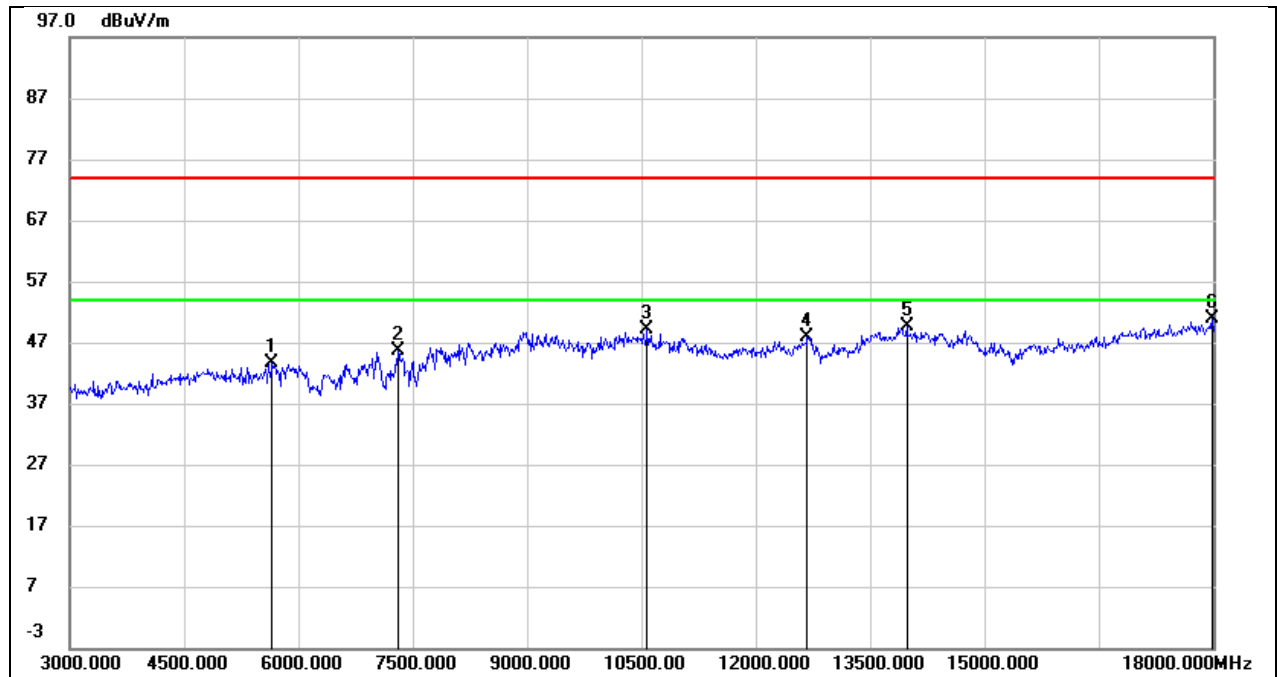

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.83	3.70	43.53	74.00	-30.47	peak
2	7305.000	38.04	7.70	45.74	74.00	-28.26	peak
3	10575.000	35.93	13.31	49.24	74.00	-24.76	peak
4	12675.000	30.59	17.17	47.76	74.00	-26.24	peak
5	13980.000	28.60	21.04	49.64	74.00	-24.36	peak
6	17985.000	24.66	26.11	50.77	74.00	-23.23	peak


Test Mode:	802.11n HT20	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 20V

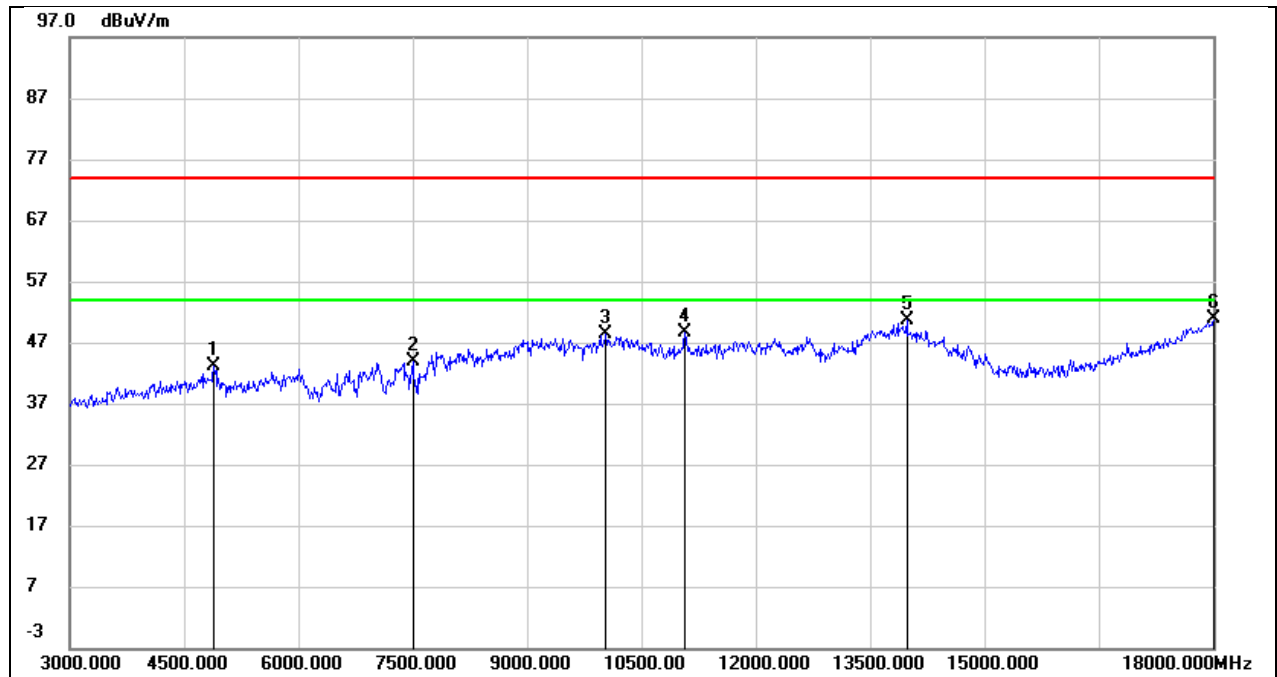

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	42.23	0.81	43.04	74.00	-30.96	peak
2	7500.000	36.48	7.38	43.86	74.00	-30.14	peak
3	10035.000	35.80	12.55	48.35	74.00	-25.65	peak
4	11070.000	33.65	14.95	48.60	74.00	-25.40	peak
5	13980.000	27.90	22.64	50.54	74.00	-23.46	peak
6	18000.000	22.57	28.33	50.90	74.00	-23.10	peak




Test Mode:	802.11n HT20	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 20V

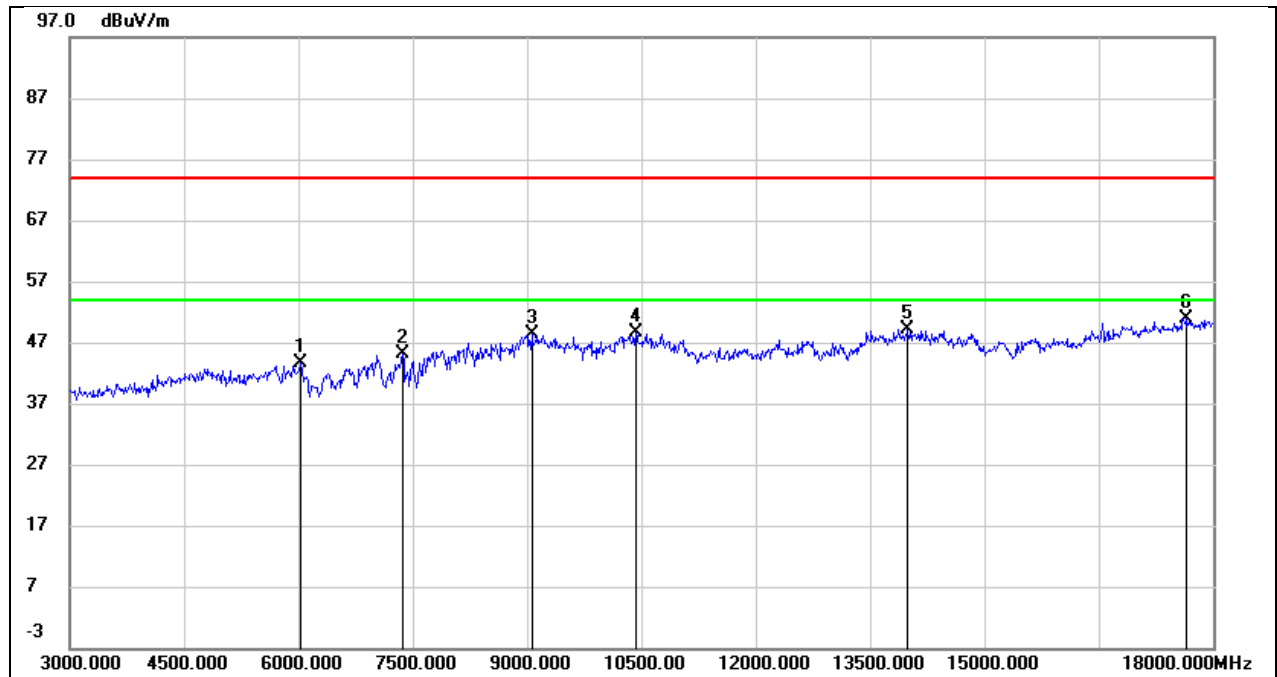


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6030.000	39.57	4.15	43.72	74.00	-30.28	peak
2	7365.000	37.14	8.03	45.17	74.00	-28.83	peak
3	9060.000	37.01	11.27	48.28	74.00	-25.72	peak
4	10425.000	35.54	13.00	48.54	74.00	-25.46	peak
5	13995.000	27.96	21.06	49.02	74.00	-24.98	peak
6	17655.000	25.96	25.02	50.98	74.00	-23.02	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 20V

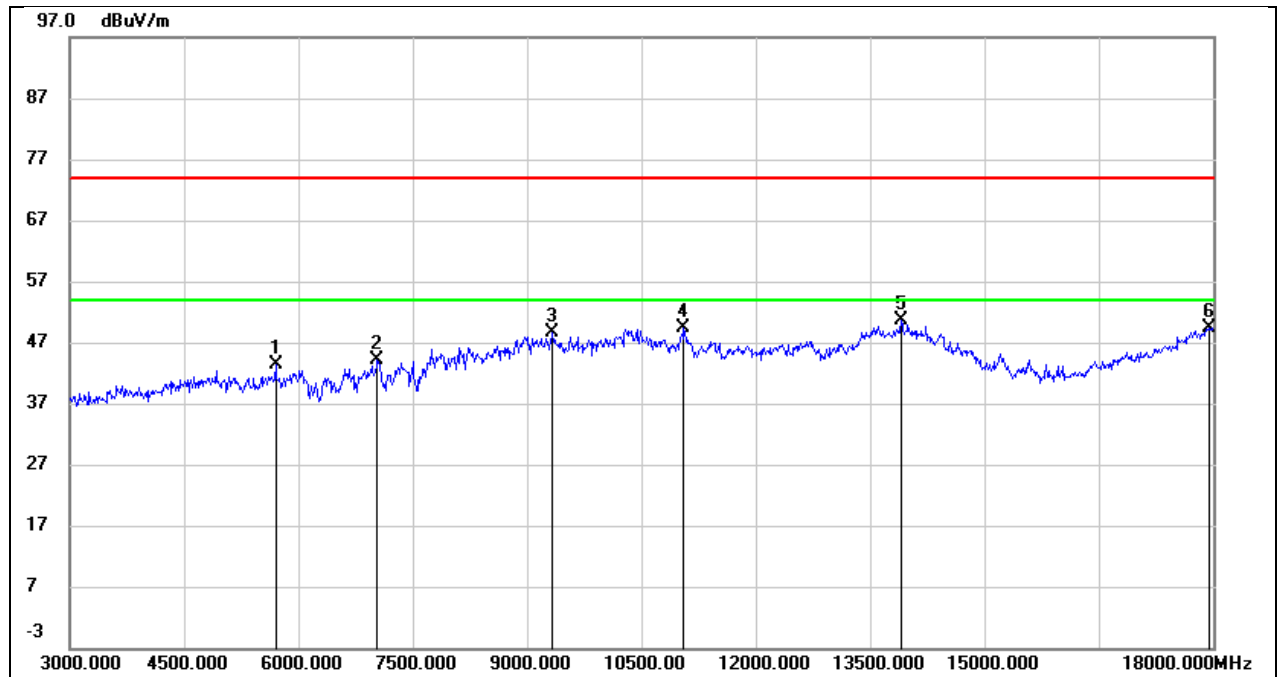

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5700.000	40.87	2.46	43.33	74.00	-30.67	peak
2	7035.000	36.74	7.39	44.13	74.00	-29.87	peak
3	9330.000	38.16	10.40	48.56	74.00	-25.44	peak
4	11055.000	34.44	14.92	49.36	74.00	-24.64	peak
5	13905.000	28.03	22.56	50.59	74.00	-23.41	peak
6	17940.000	21.49	28.01	49.50	74.00	-24.50	peak


Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 20V

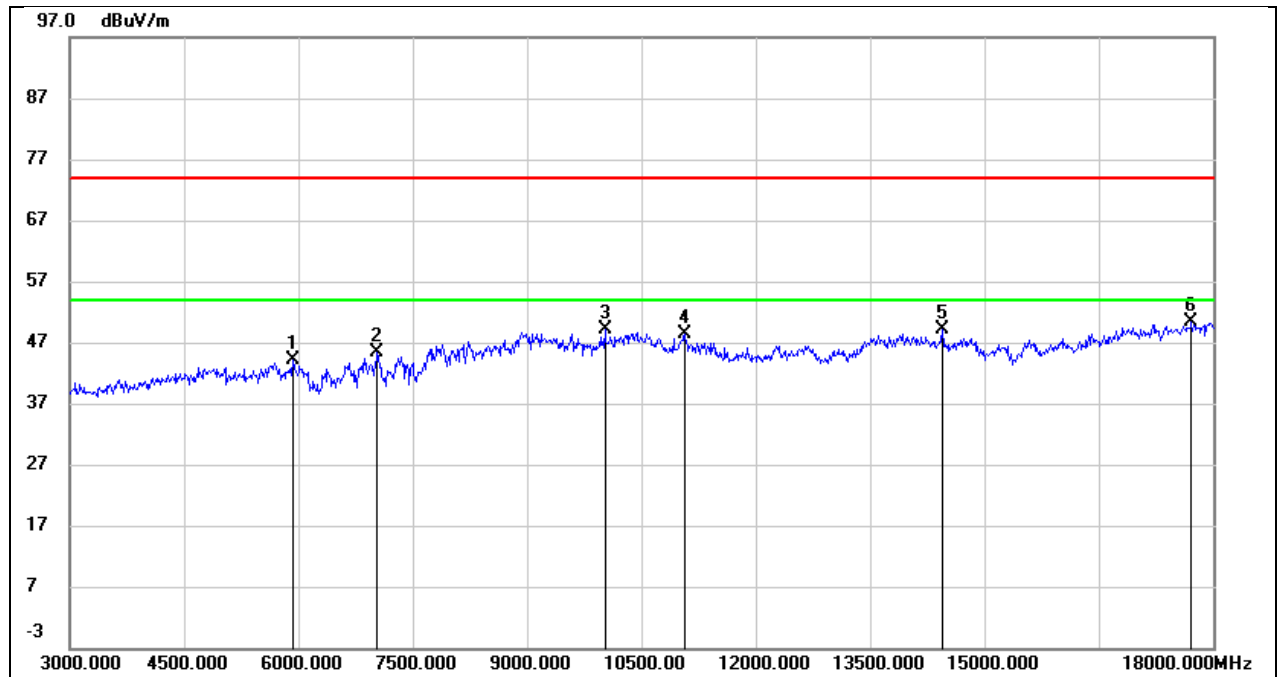

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	40.27	3.88	44.15	74.00	-29.85	peak
2	7035.000	37.11	8.26	45.37	74.00	-28.63	peak
3	10020.000	37.28	11.88	49.16	74.00	-24.84	peak
4	11070.000	34.39	14.06	48.45	74.00	-25.55	peak
5	14445.000	28.67	20.34	49.01	74.00	-24.99	peak
6	17715.000	24.93	25.41	50.34	74.00	-23.66	peak


#### 8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

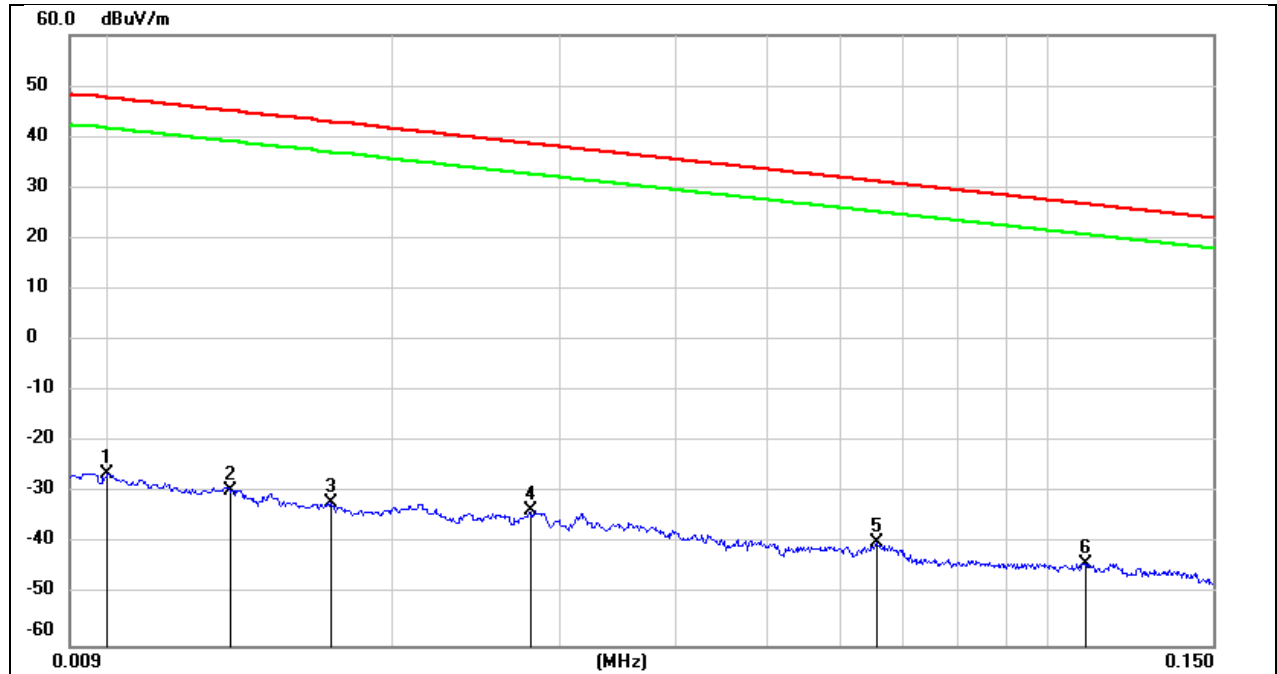


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	75.22	-101.40	-26.18	47.6	-77.68	-3.90	-73.78	peak
2	0.0134	71.96	-101.39	-29.43	45.06	-80.93	-6.44	-74.49	peak
3	0.0171	69.38	-101.36	-31.98	42.94	-83.48	-8.56	-74.92	peak
4	0.0280	67.79	-101.38	-33.59	38.66	-85.09	-12.84	-72.25	peak
5	0.0656	61.86	-101.55	-39.69	31.26	-91.19	-20.24	-70.95	peak
6	0.1100	57.92	-101.77	-43.85	26.78	-95.35	-24.72	-70.63	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

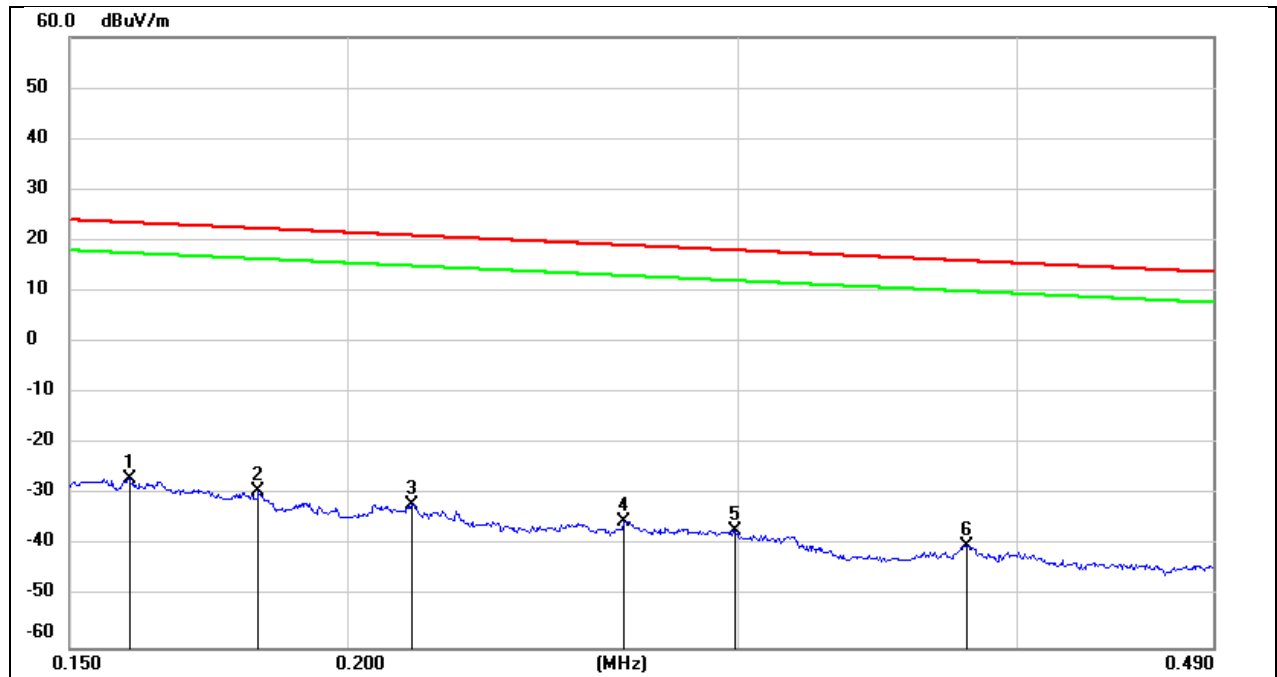

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1595	74.86	-101.65	-26.79	23.55	-78.29	-27.95	-50.34	peak
2	0.1824	72.34	-101.68	-29.34	22.38	-80.84	-29.12	-51.72	peak
3	0.2139	69.68	-101.74	-32.06	21	-83.56	-30.50	-53.06	peak
4	0.2660	66.53	-101.82	-35.29	19.1	-86.79	-32.40	-54.39	peak
5	0.2988	64.77	-101.85	-37.08	18.09	-88.58	-33.41	-55.17	peak
6	0.3800	62.02	-101.94	-39.92	16.01	-91.42	-35.49	-55.93	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

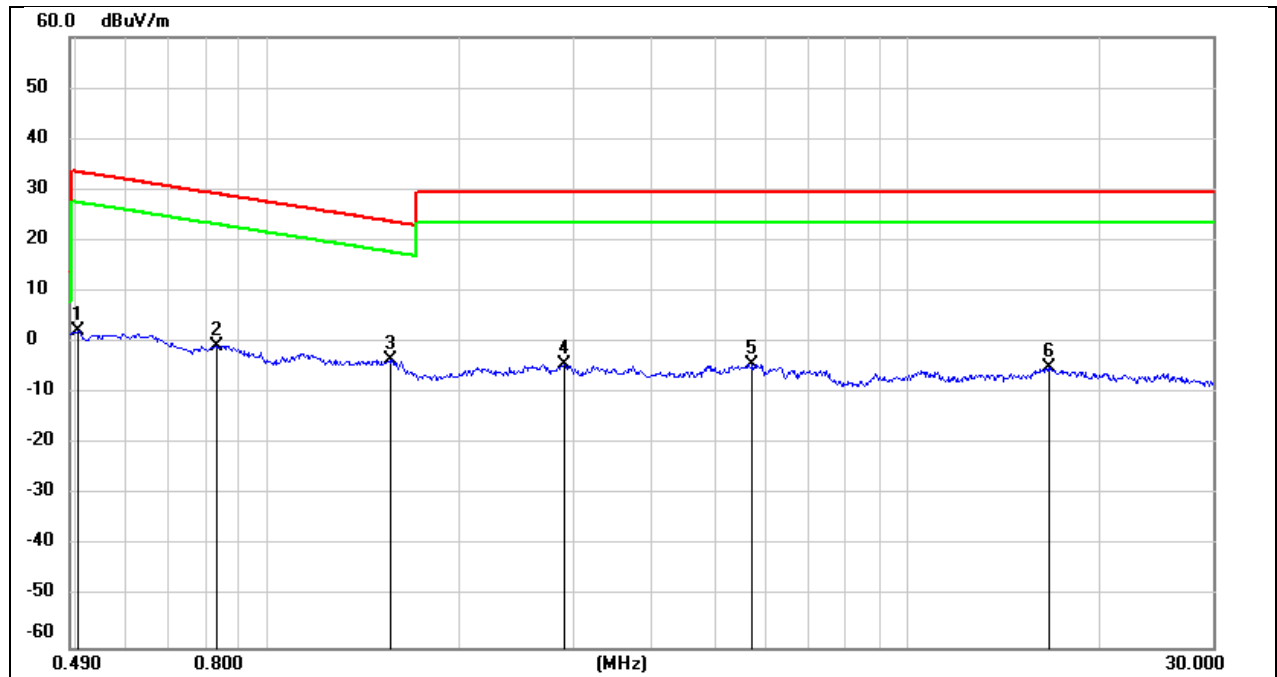

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	64.43	-62.07	2.36	33.56	-49.14	-17.94	-31.20	peak
2	0.8296	61.44	-62.17	-0.73	29.23	-52.23	-22.27	-29.96	peak
3	1.5564	58.68	-62.02	-3.34	23.76	-54.84	-27.74	-27.10	peak
4	2.9098	57.24	-61.60	-4.36	29.54	-55.86	-21.96	-33.90	peak
5	5.7145	57.17	-61.39	-4.22	29.54	-55.72	-21.96	-33.76	peak
6	16.6021	56.02	-60.96	-4.94	29.54	-56.44	-21.96	-34.48	peak


## 8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

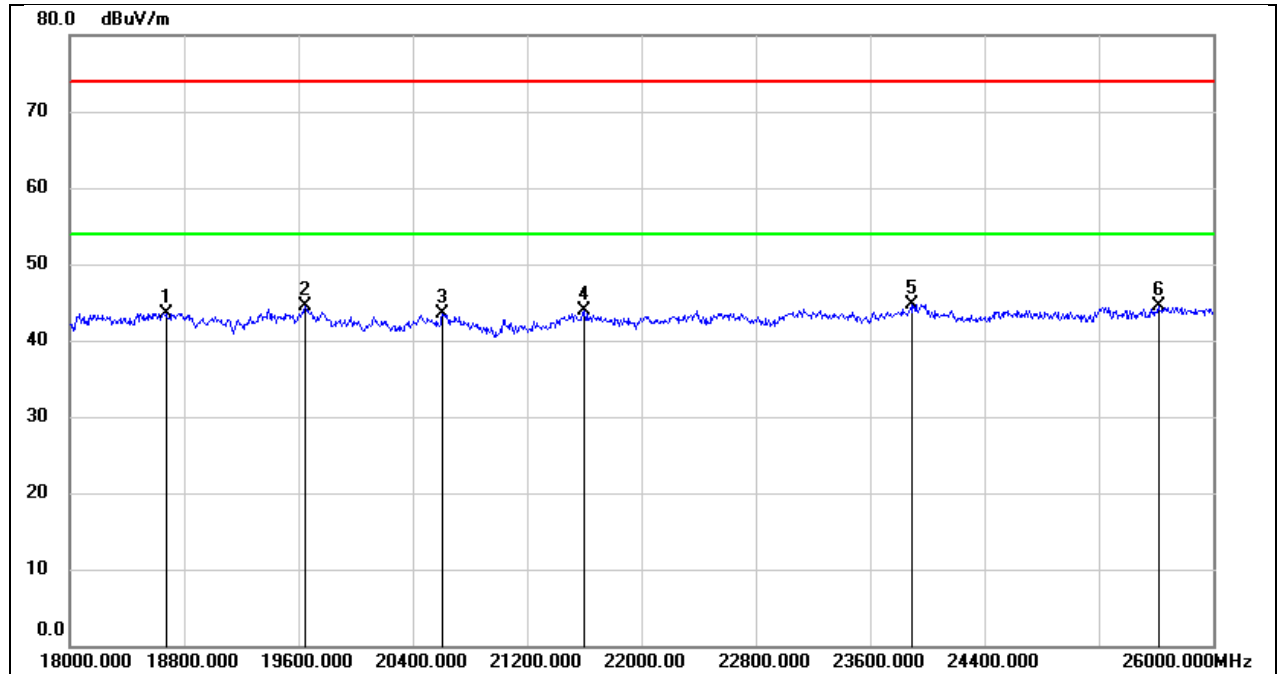

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18672.000	48.96	-5.38	43.58	74.00	-30.42	peak
2	19648.000	49.90	-5.37	44.53	74.00	-29.47	peak
3	20608.000	48.76	-5.25	43.51	74.00	-30.49	peak
4	21600.000	48.52	-4.54	43.98	74.00	-30.02	peak
5	23896.000	47.61	-2.93	44.68	74.00	-29.32	peak
6	25616.000	45.68	-1.24	44.44	74.00	-29.56	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 20V

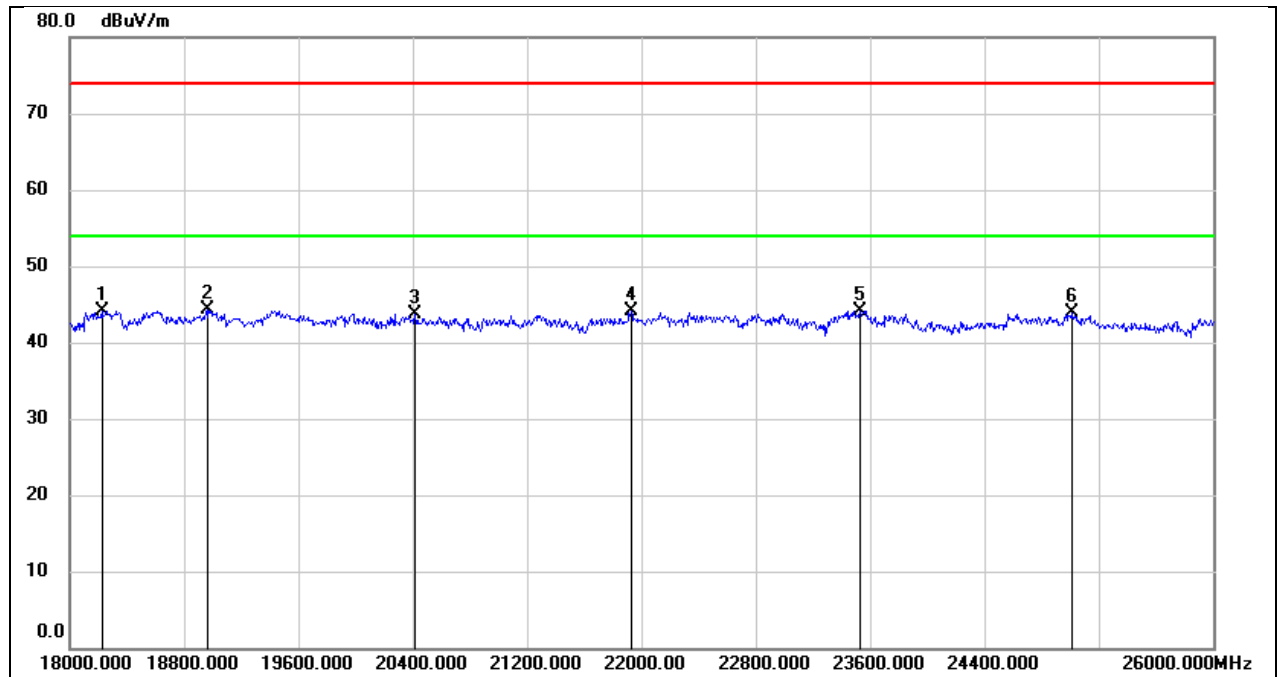


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18224.000	49.58	-5.53	44.05	74.00	-29.95	peak
2	18960.000	49.51	-5.25	44.26	74.00	-29.74	peak
3	20416.000	49.13	-5.45	43.68	74.00	-30.32	peak
4	21928.000	48.55	-4.43	44.12	74.00	-29.88	peak
5	23528.000	47.23	-3.14	44.09	74.00	-29.91	peak
6	25008.000	46.00	-2.08	43.92	74.00	-30.08	peak




## 8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 20V

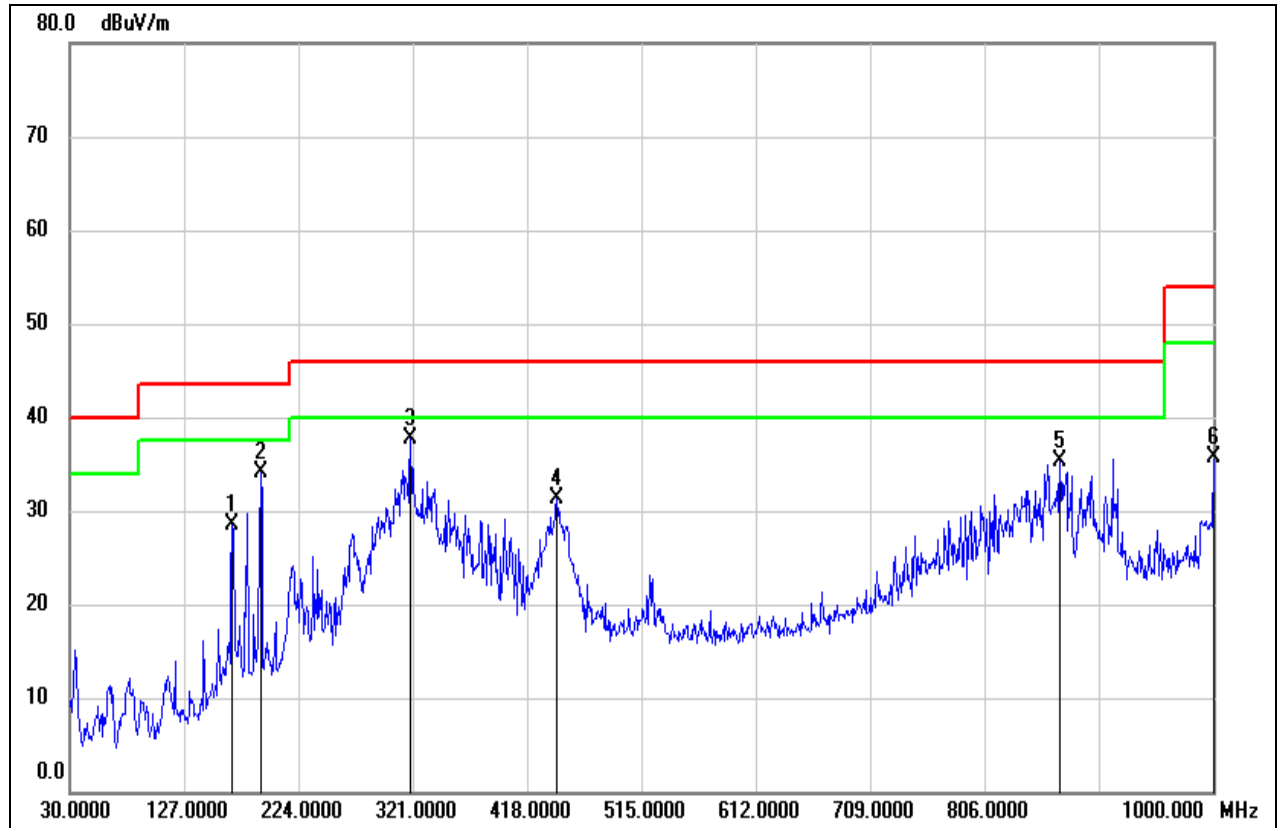

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	167.7400	40.22	-11.71	28.51	43.50	-14.99	QP
2	191.9900	45.64	-11.52	34.12	43.50	-9.38	QP
3	319.0600	48.24	-10.44	37.80	46.00	-8.20	QP
4	443.2200	39.68	-8.29	31.39	46.00	-14.61	QP
5	870.0200	36.64	-1.40	35.24	46.00	-10.76	QP
6	1000.0000	36.50	-0.83	35.67	54.00	-18.33	QP

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 20V

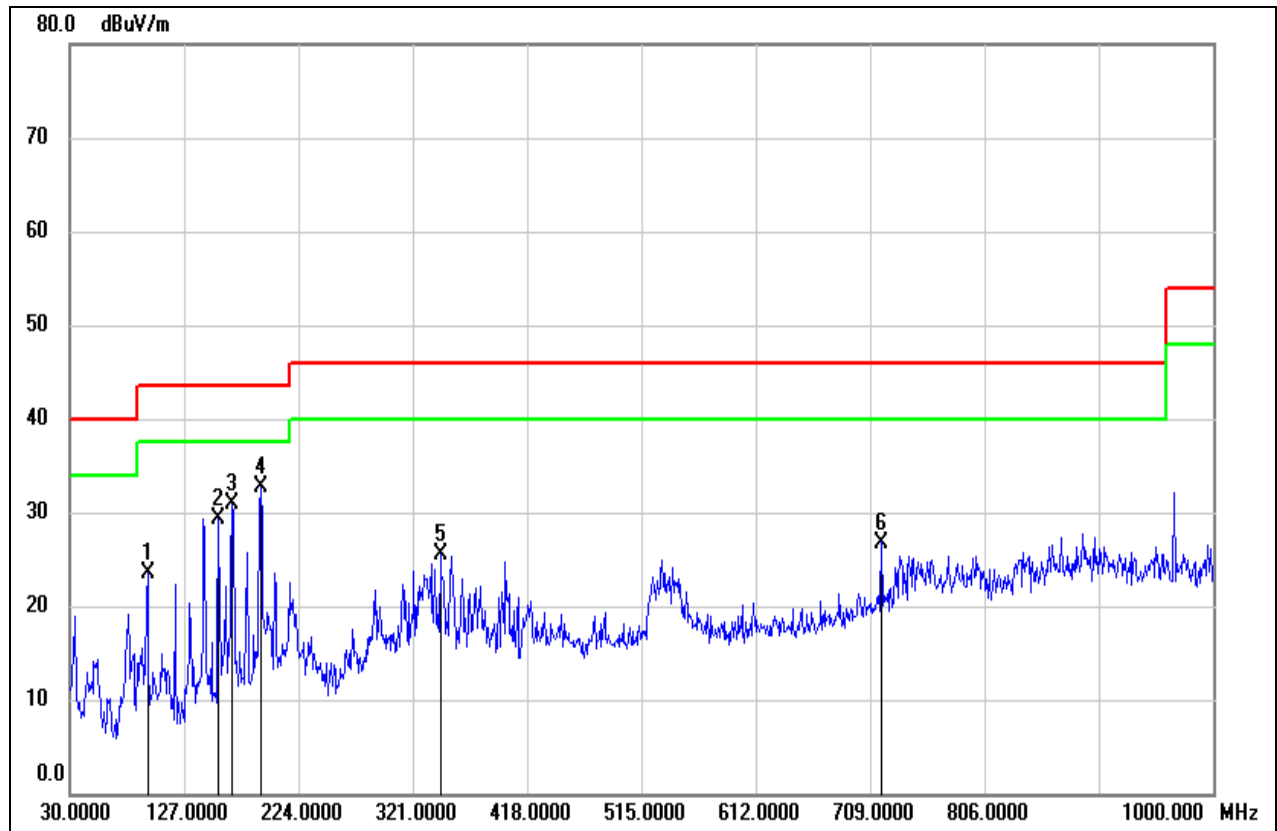

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	95.9600	39.94	-16.48	23.46	43.50	-20.04	QP
2	156.1000	41.90	-12.51	29.39	43.50	-14.11	QP
3	167.7400	42.60	-11.71	30.89	43.50	-12.61	QP
4	191.9900	44.31	-11.52	32.79	43.50	-10.71	QP
5	344.2800	34.99	-9.42	25.57	46.00	-20.43	QP
6	718.7000	30.24	-3.44	26.80	46.00	-19.20	QP

## 9. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

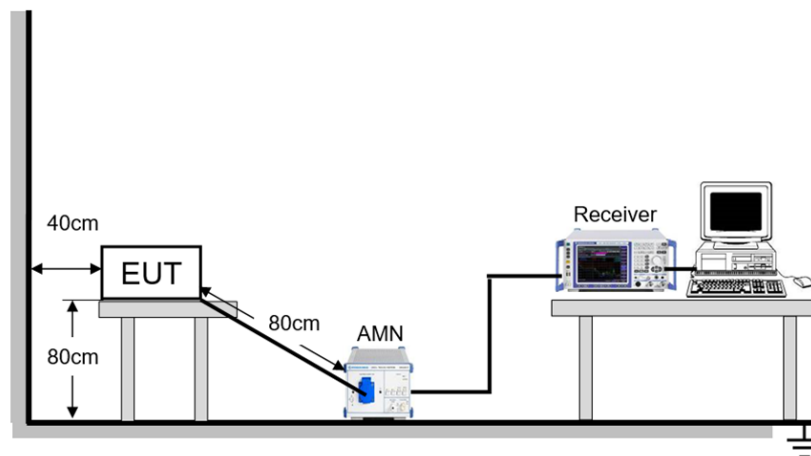

**TEST ENVIRONMENT**


Temperature	23.5°C	Relative Humidity	59.0%
Atmosphere Pressure	101kPa	Test Voltage	DC 20V

**TEST DATE / ENGINEER**

Test Date	November 20, 2024	Test By	Johnson Liu
-----------	-------------------	---------	-------------

## TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412MHz
Line:	Line		

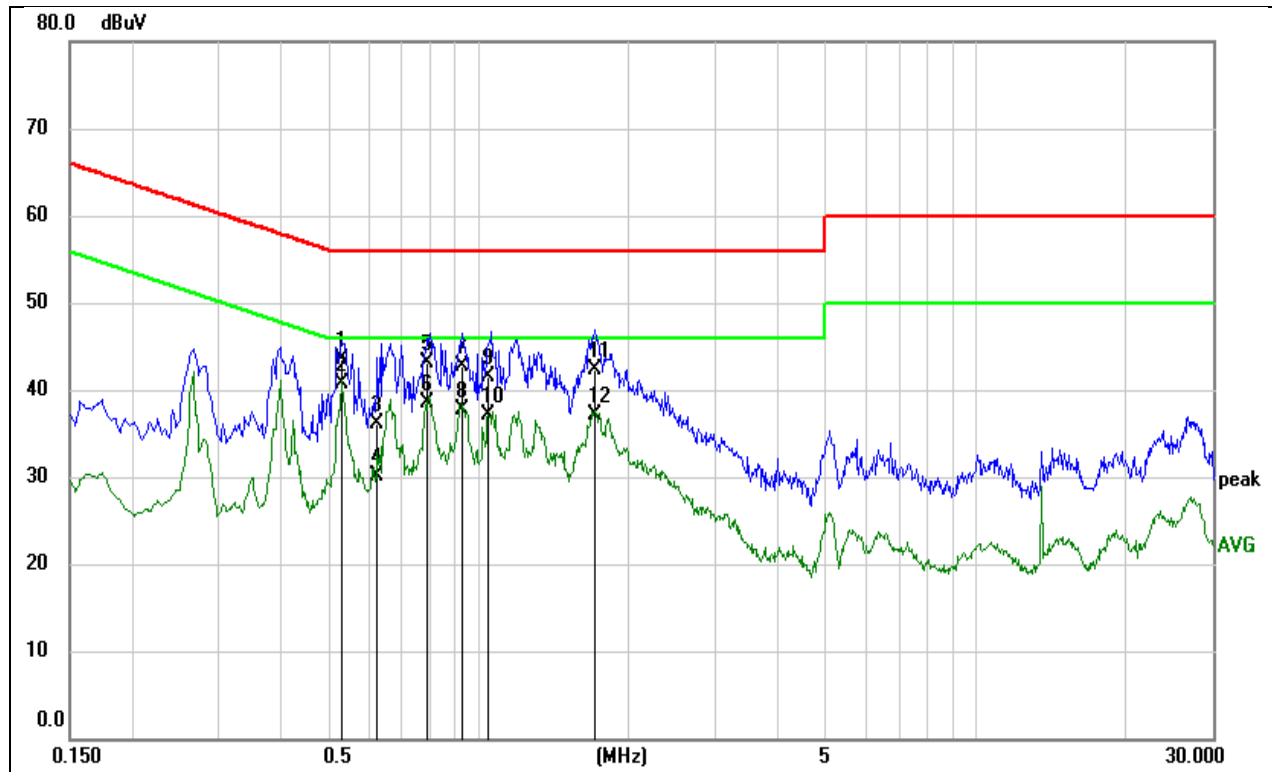


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5307	33.54	10.04	43.58	56.00	-12.42	QP
2	0.5307	30.59	10.04	40.63	46.00	-5.37	AVG
3	0.6196	25.97	10.04	36.01	56.00	-19.99	QP
4	0.6196	19.98	10.04	30.02	46.00	-15.98	AVG
5	0.7900	33.19	9.97	43.16	56.00	-12.84	QP
6	0.7900	28.48	9.97	38.45	46.00	-7.55	AVG
7	0.9280	32.88	9.88	42.76	56.00	-13.24	QP
8	0.9280	27.76	9.88	37.64	46.00	-8.36	AVG
9	1.0443	31.71	9.84	41.55	56.00	-14.45	QP
10	1.0443	27.29	9.84	37.13	46.00	-8.87	AVG
11	1.7083	32.41	9.98	42.39	56.00	-13.61	QP
12	1.7083	27.06	9.98	37.04	46.00	-8.96	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412MHz
Line:	Neutral		

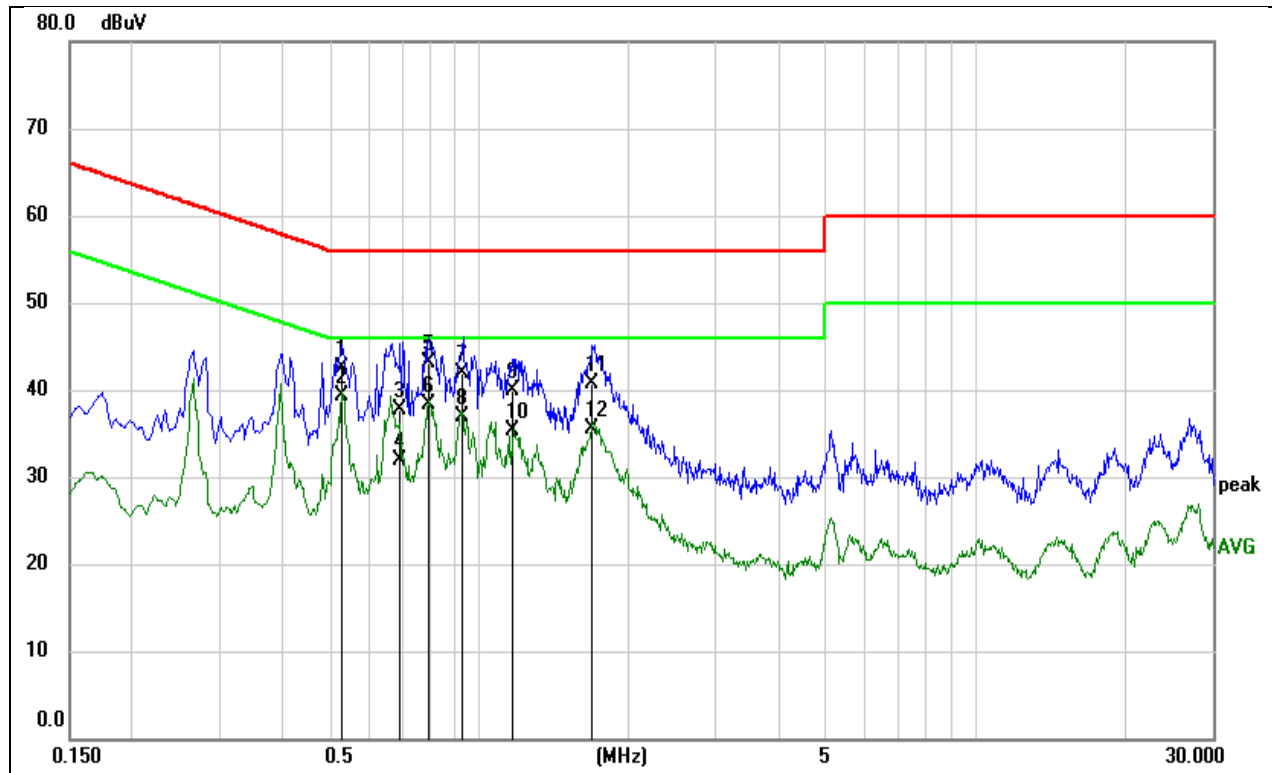

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5319	32.48	10.04	42.52	56.00	-13.48	QP
2	0.5319	29.31	10.04	39.35	46.00	-6.65	AVG
3	0.6922	27.61	10.03	37.64	56.00	-18.36	QP
4	0.6922	21.82	10.03	31.85	46.00	-14.15	AVG
5	0.7954	33.06	9.97	43.03	56.00	-12.97	QP
6	0.7954	28.38	9.97	38.35	46.00	-7.65	AVG
7	0.9228	32.06	9.88	41.94	56.00	-14.06	QP
8	0.9228	26.99	9.88	36.87	46.00	-9.13	AVG
9	1.1773	30.03	9.87	39.90	56.00	-16.10	QP
10	1.1773	25.39	9.87	35.26	46.00	-10.74	AVG
11	1.7005	30.75	9.98	40.73	56.00	-15.27	QP
12	1.7005	25.43	9.98	35.41	46.00	-10.59	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.


## 10. TEST DATA

### 10.1. APPENDIX A: DTS BANDWIDTH


#### 10.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.00	2406.92	2415.92	≥0.5	PASS
		2437	10.08	2431.92	2442.00	≥0.5	PASS
		2462	10.00	2456.96	2466.96	≥0.5	PASS
11G	Ant1	2412	16.32	2403.80	2420.12	≥0.5	PASS
		2417	16.36	2408.76	2425.12	≥0.5	PASS
		2437	16.32	2428.80	2445.12	≥0.5	PASS
		2457	16.32	2448.80	2465.12	≥0.5	PASS
		2462	16.32	2453.80	2470.12	≥0.5	PASS
11N20SISO	Ant1	2412	17.60	2403.16	2420.76	≥0.5	PASS
		2417	17.16	2408.56	2425.72	≥0.5	PASS
		2437	17.16	2428.40	2445.56	≥0.5	PASS
		2457	17.32	2448.40	2465.72	≥0.5	PASS
		2462	17.04	2453.44	2470.48	≥0.5	PASS


## 10.1.2. Test Graphs

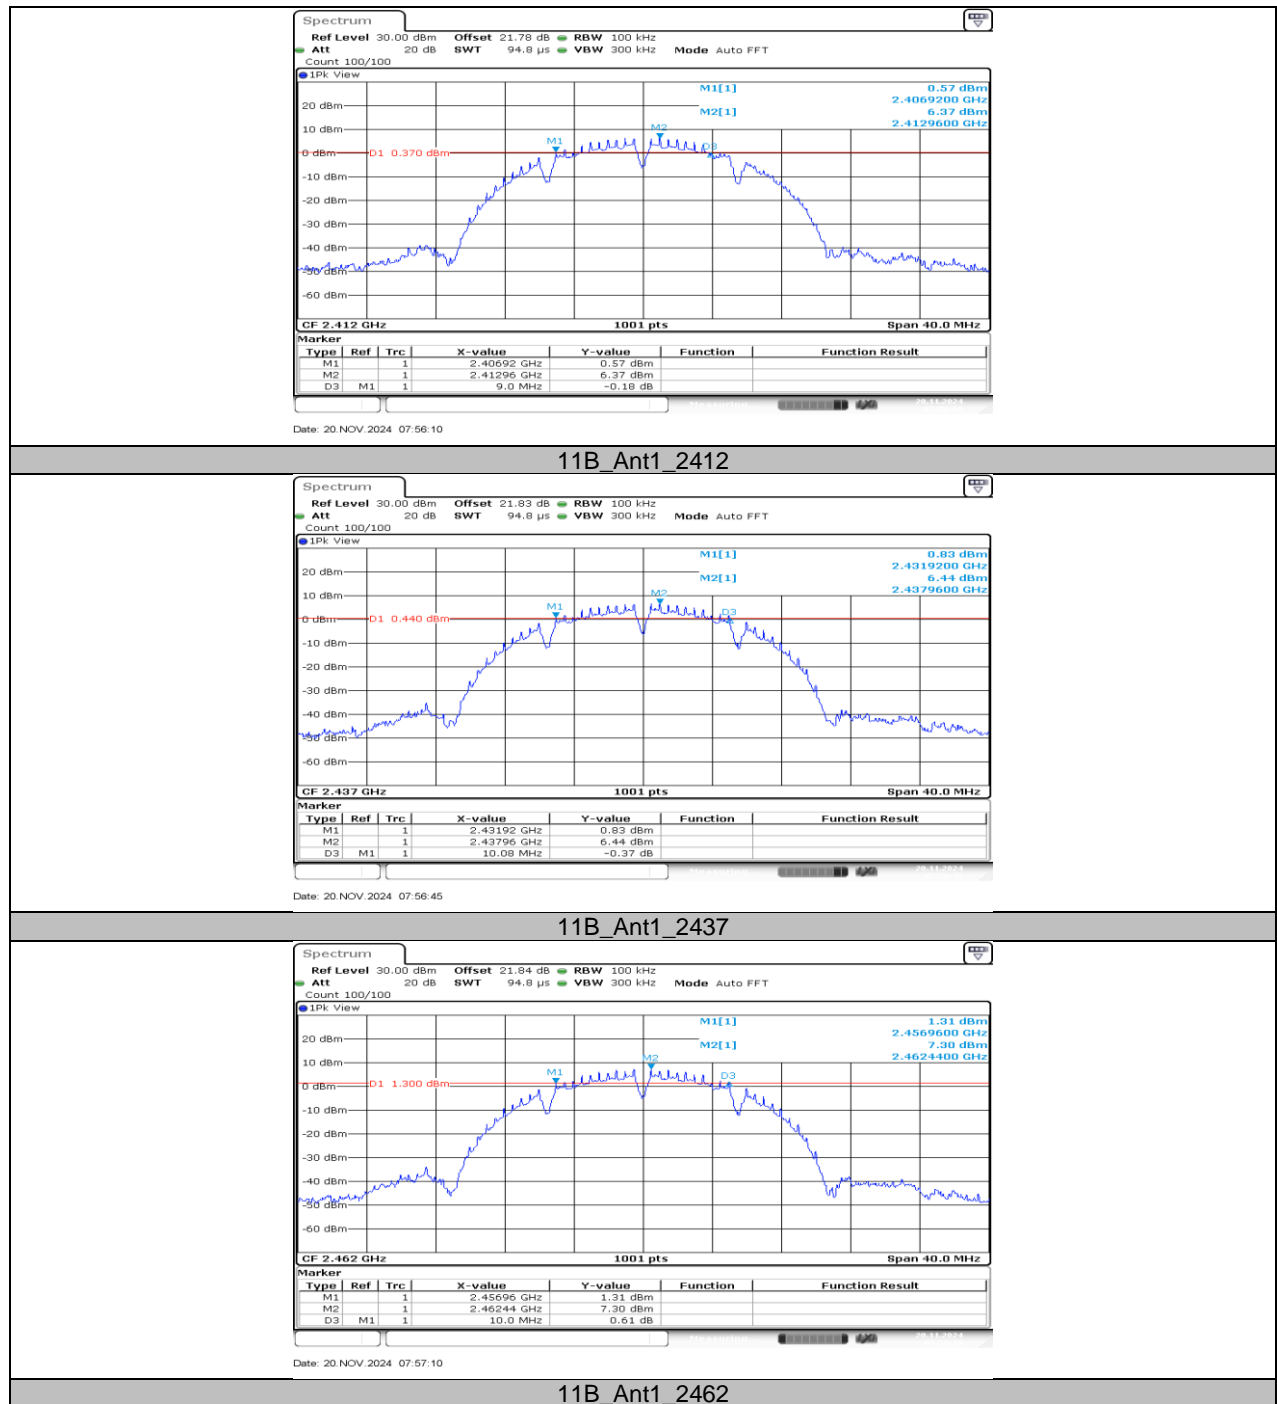




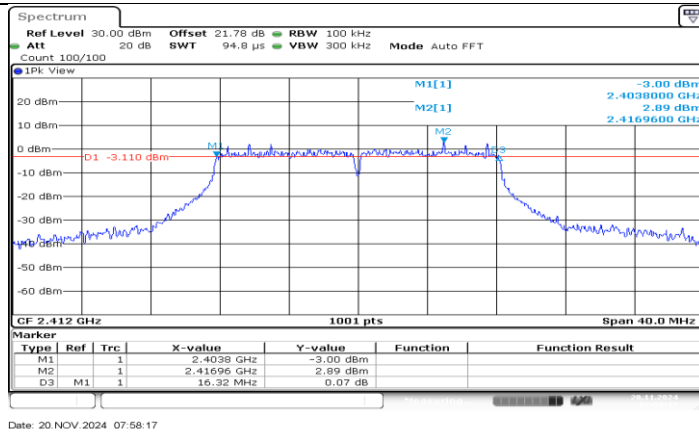


11G\_Ant1\_2412

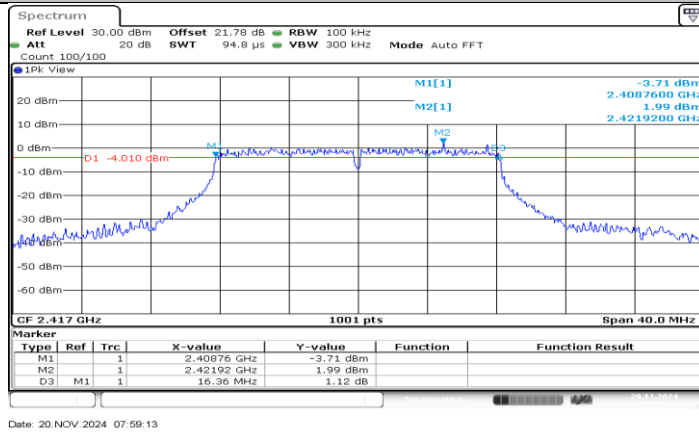


11G\_Ant1\_2417

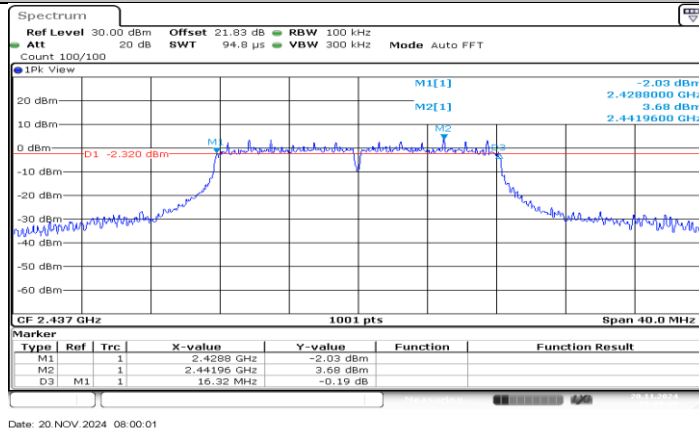


11G\_Ant1\_2437

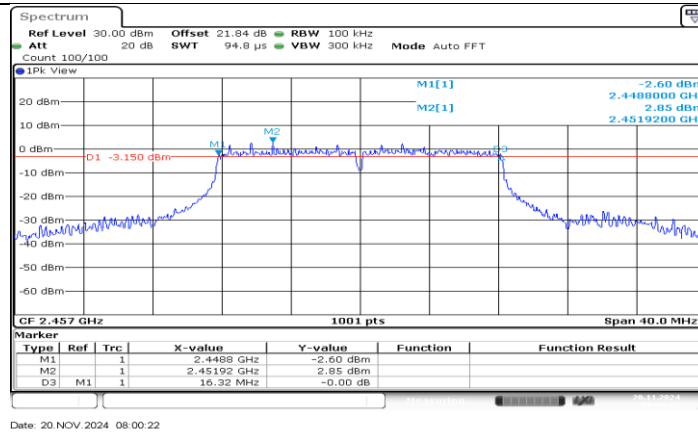


11G\_Ant1\_2457

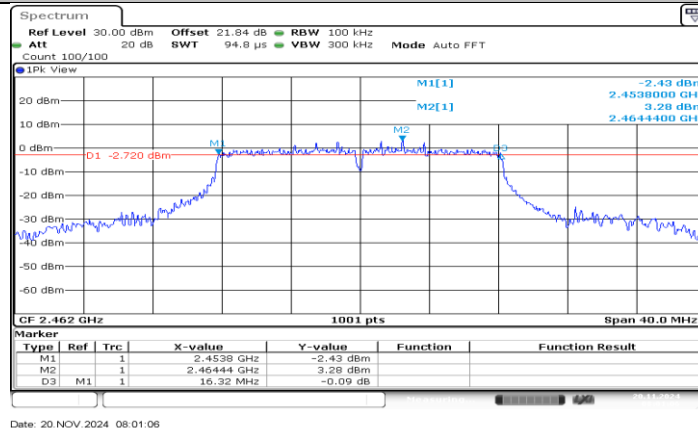


11G\_Ant1\_2462

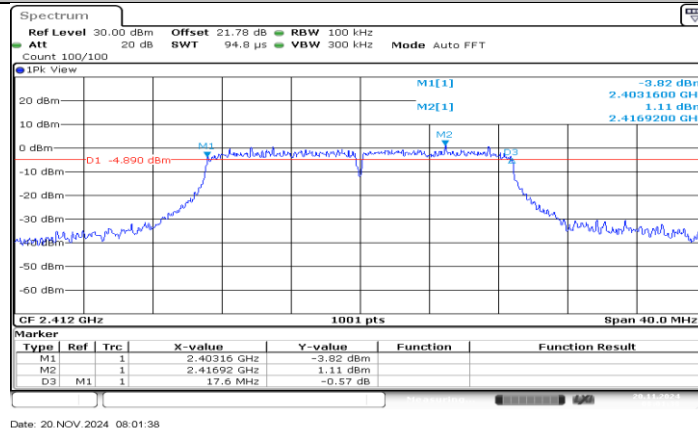


11N20SISO\_Ant1\_2412

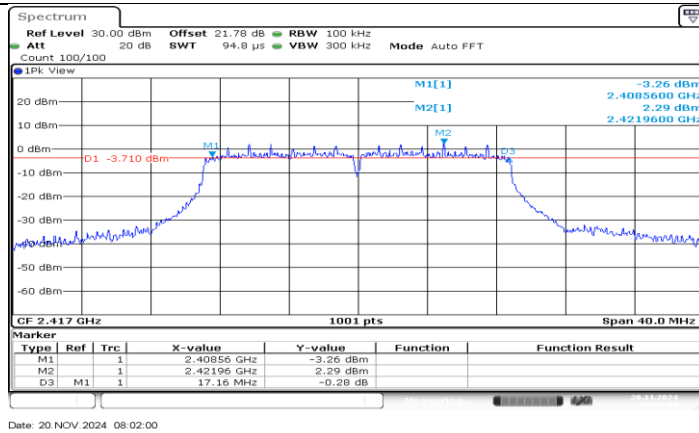


11N20SISO\_Ant1\_2417

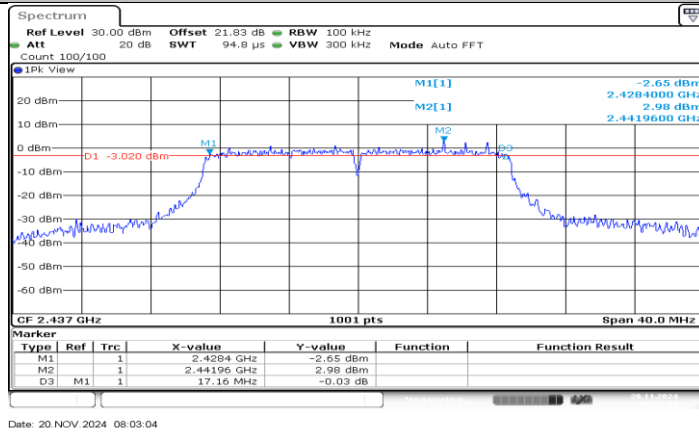

11N20SISO\_Ant1\_2437

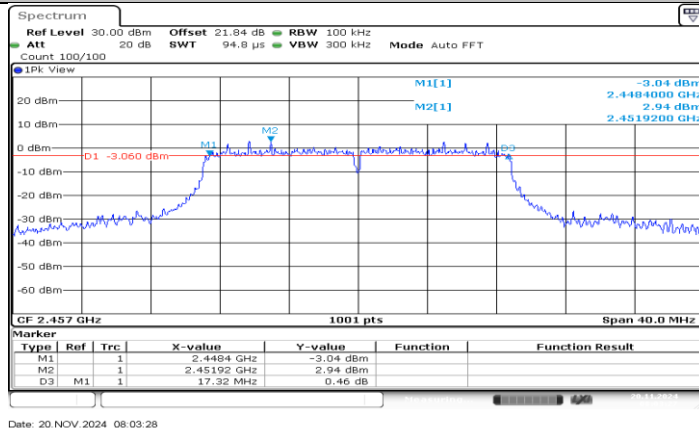


11N20SISO\_Ant1\_2457

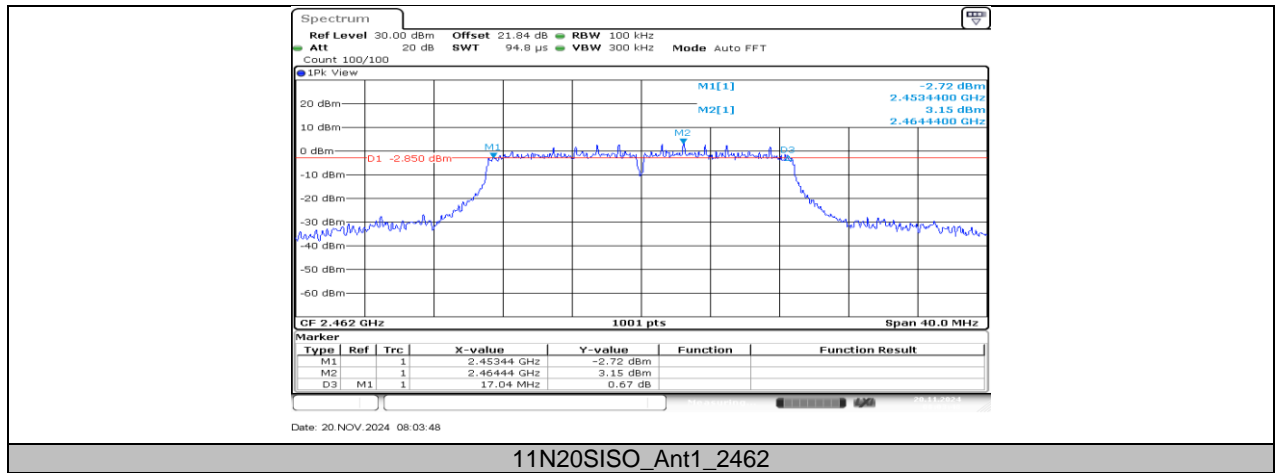


**10.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH****10.2.1. Test Result**


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	Ant1	2412	14.785	2404.6074	2419.3926
		2437	14.705	2429.6474	2444.3526
		2462	14.745	2454.6074	2469.3526
11G	Ant1	2412	17.463	2403.2887	2420.7512
		2417	17.622	2408.2488	2425.8711
		2437	17.542	2428.2488	2445.7912
		2457	17.902	2448.2088	2466.1109
		2462	17.702	2453.2088	2470.9111
11N20SISO	Ant1	2412	18.422	2402.8492	2421.2707
		2417	18.422	2407.8092	2426.2308
		2437	18.981	2427.5295	2446.5105
		2457	18.701	2447.6494	2466.3506
		2462	18.541	2452.7692	2471.3107

## 10.2.2. Test Graphs

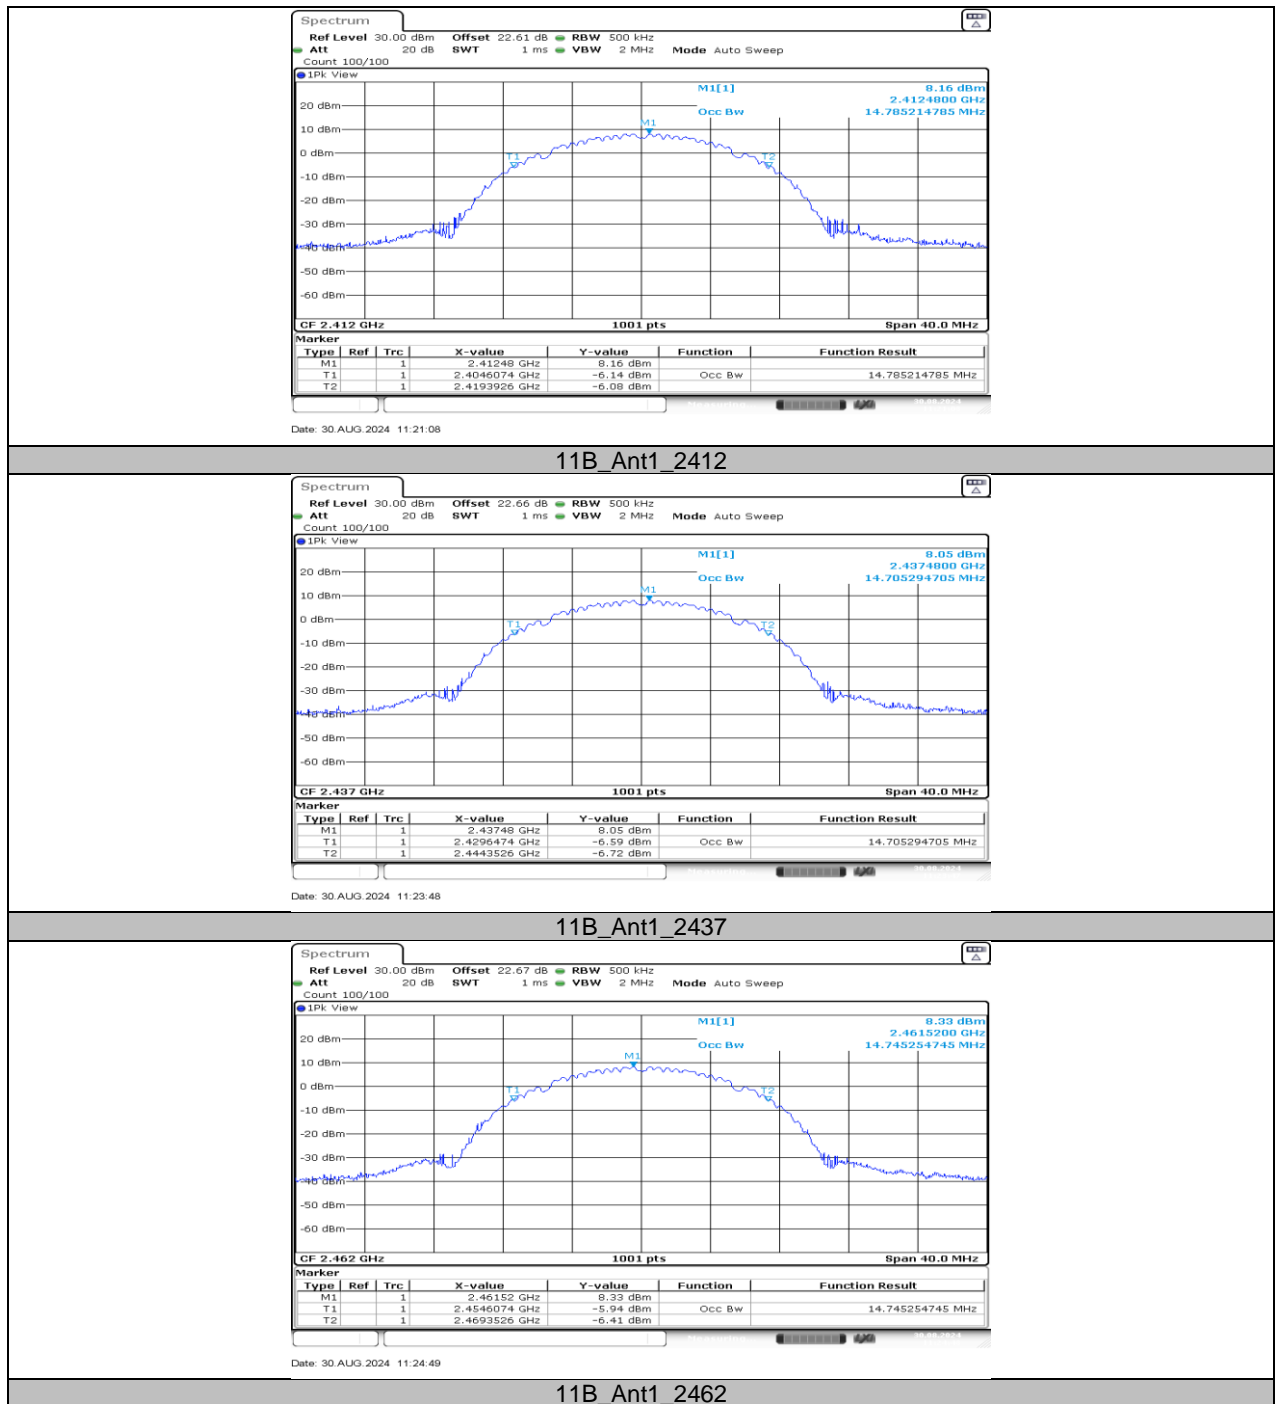


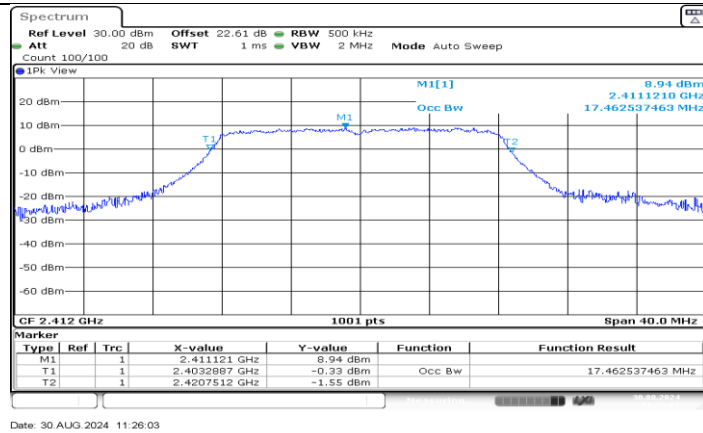


11G\_Ant1\_2412

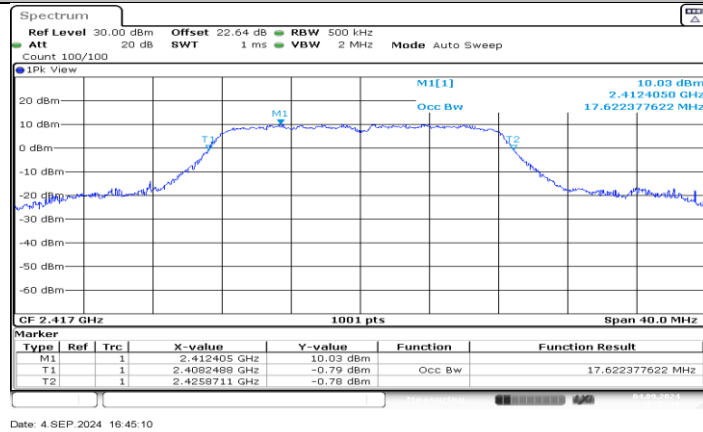


11G\_Ant1\_2417

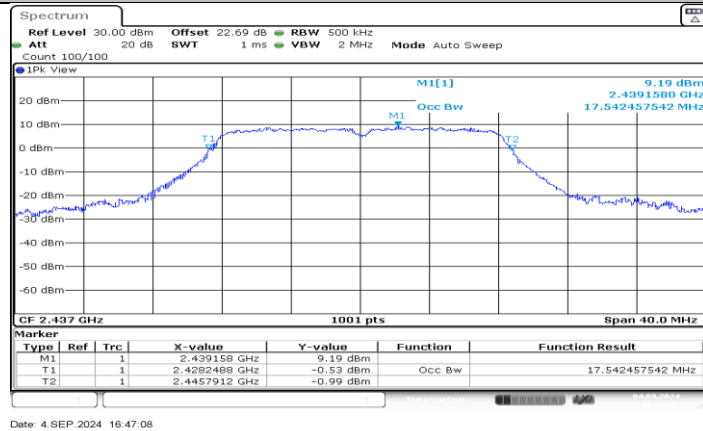


11G\_Ant1\_2437

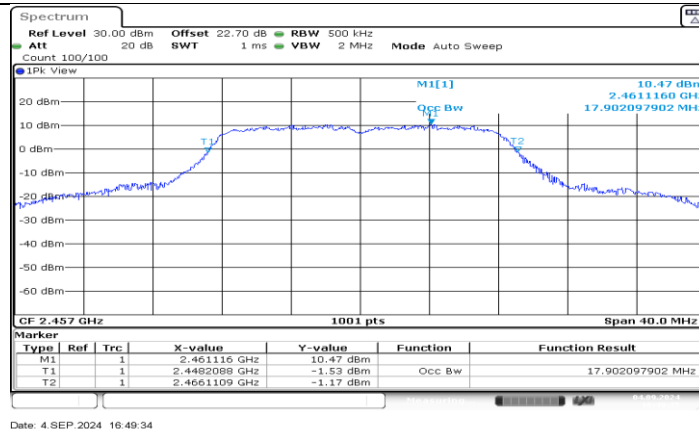

11G\_Ant1\_2457

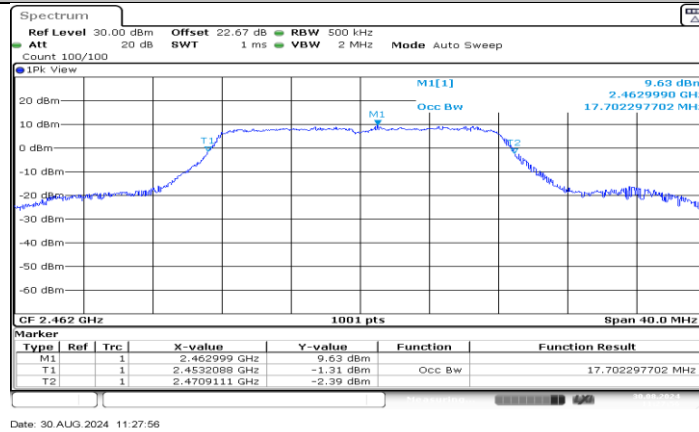


11G\_Ant1\_2462

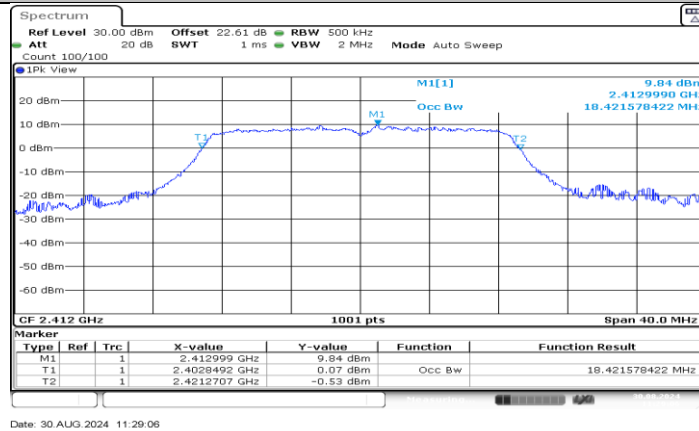


11N20SISO\_Ant1\_2412




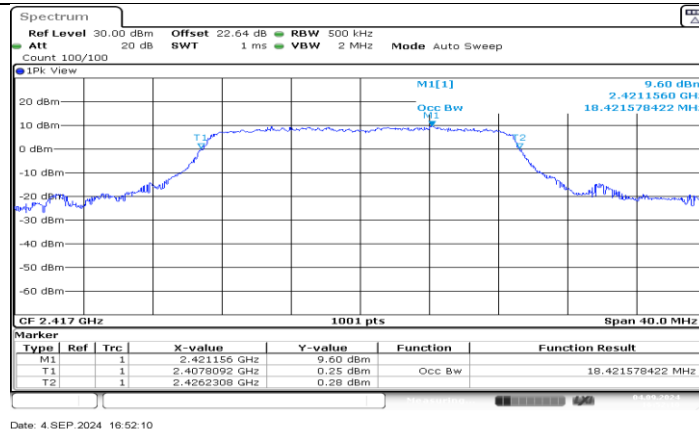


11N20SISO\_Ant1\_2417

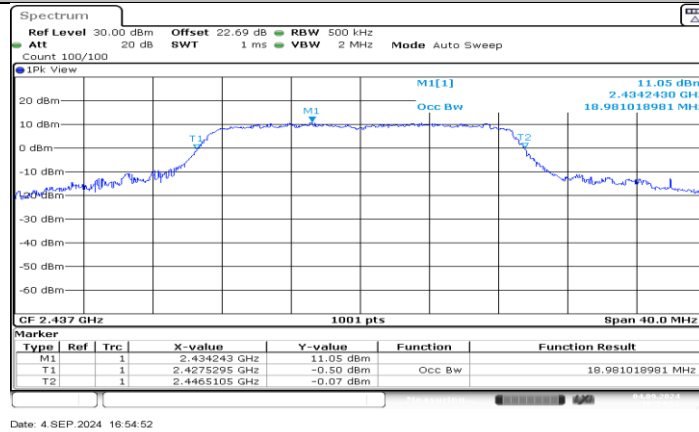

11N20SISO\_Ant1\_2437

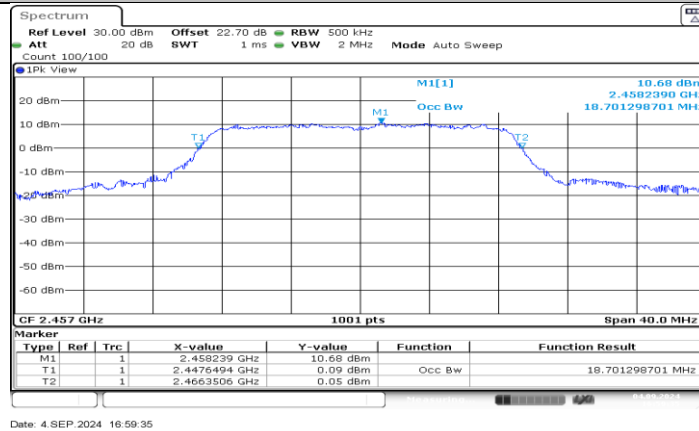

11N20SISO\_Ant1\_2457

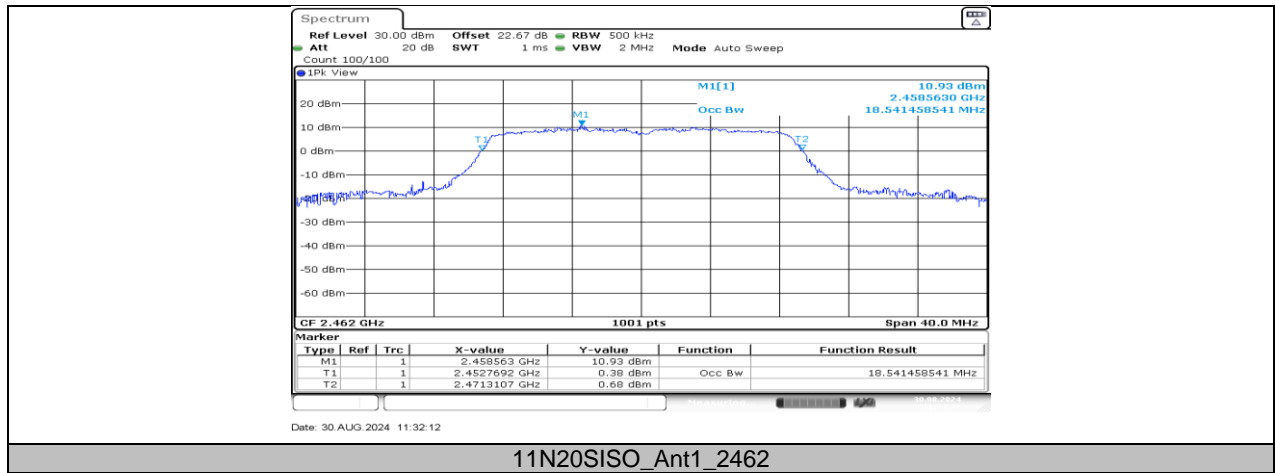

**10.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER****10.3.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	16.29	≤30.00	PASS
		2437	16.41	≤30.00	PASS
		2462	16.40	≤30.00	PASS
11G	Ant1	2412	13.18	≤30.00	PASS
		2417	15.98	≤30.00	PASS
		2437	16.03	≤30.00	PASS
		2457	16.35	≤30.00	PASS
		2462	13.20	≤30.00	PASS
11N20SISO	Ant1	2412	13.55	≤30.00	PASS
		2417	15.70	≤30.00	PASS
		2437	16.14	≤30.00	PASS
		2457	16.52	≤30.00	PASS
		2462	13.57	≤30.00	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.


**10.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY****10.4.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.33	≤8.00	PASS
		2437	-15.15	≤8.00	PASS
		2462	-14.86	≤8.00	PASS
11G	Ant1	2412	-17.48	≤8.00	PASS
		2417	-15.01	≤8.00	PASS
		2437	-14.85	≤8.00	PASS
		2457	-15.10	≤8.00	PASS
		2462	-17.20	≤8.00	PASS
11N20SISO	Ant1	2412	-16.68	≤8.00	PASS
		2417	-15.76	≤8.00	PASS
		2437	-14.58	≤8.00	PASS
		2457	-14.42	≤8.00	PASS
		2462	-16.85	≤8.00	PASS


Note: 1. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

## 10.4.2. Test Graphs

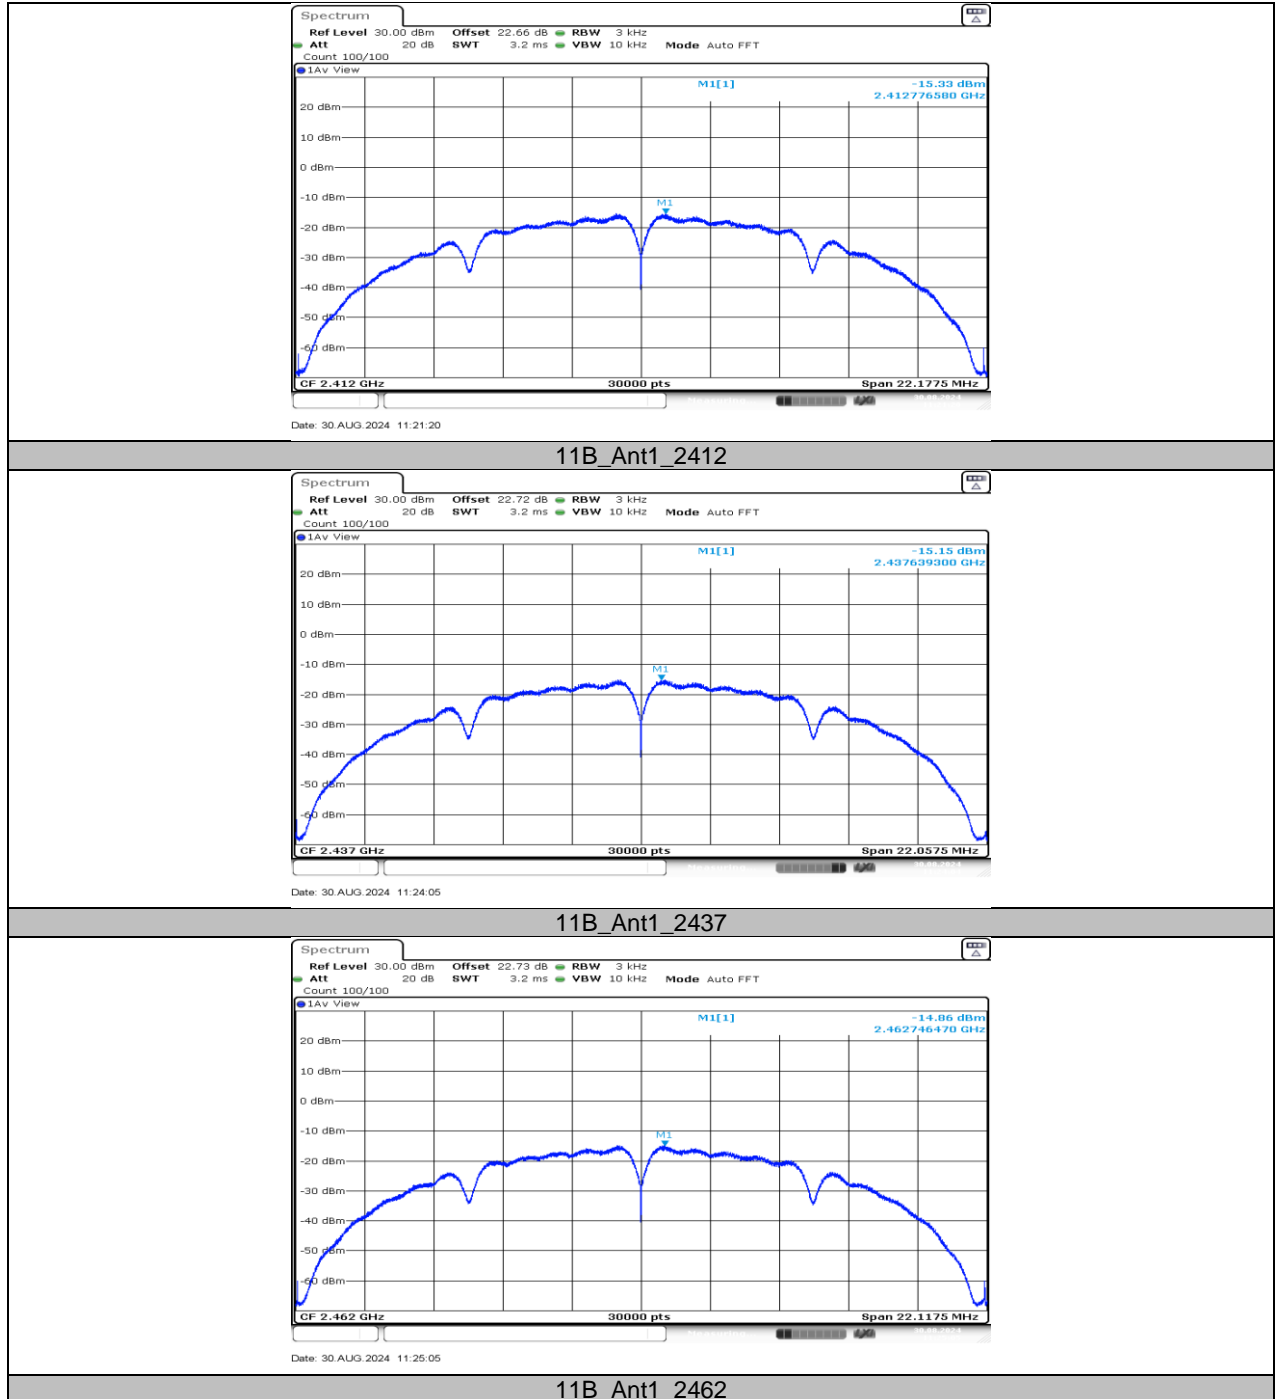


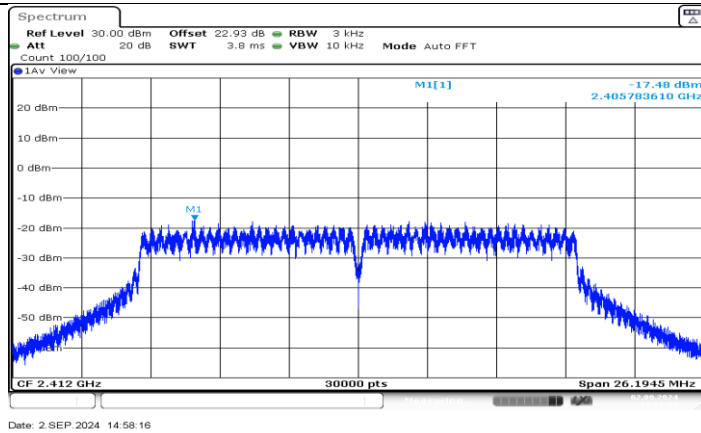


11G\_Ant1\_2412

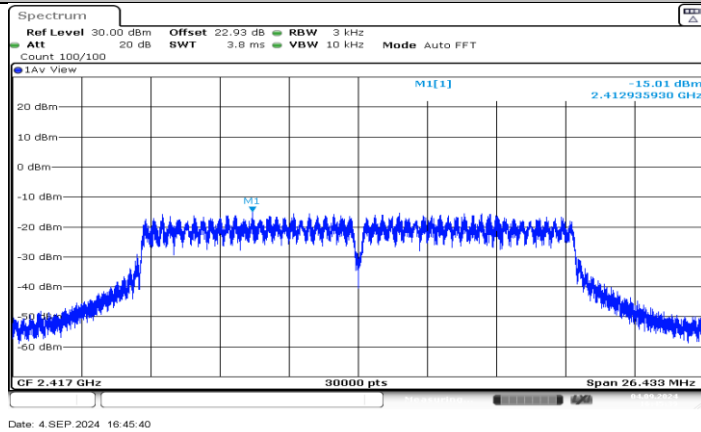


11G\_Ant1\_2417

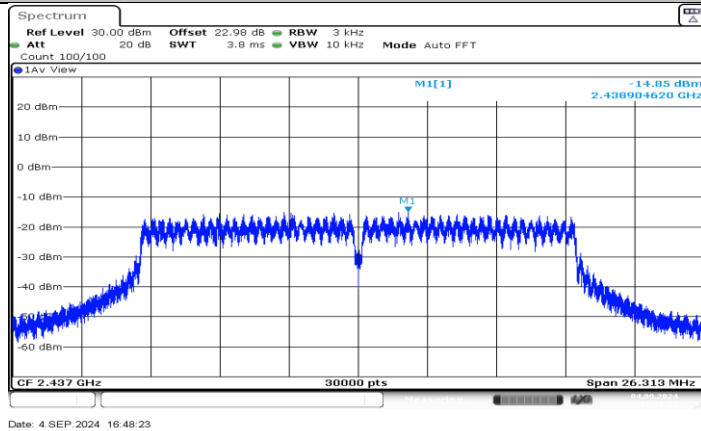


11G\_Ant1\_2437

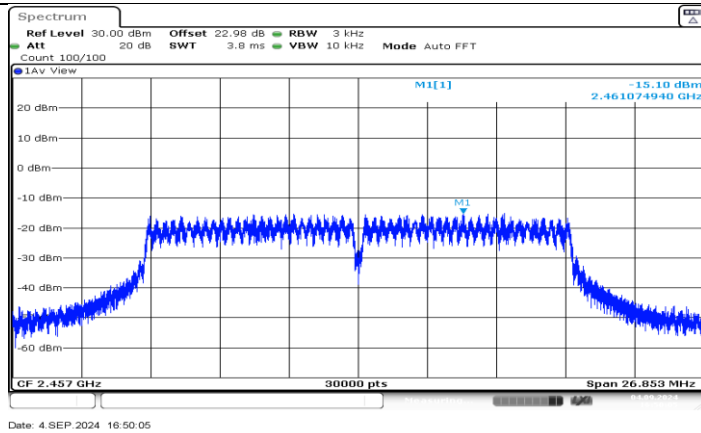


11G\_Ant1\_2457

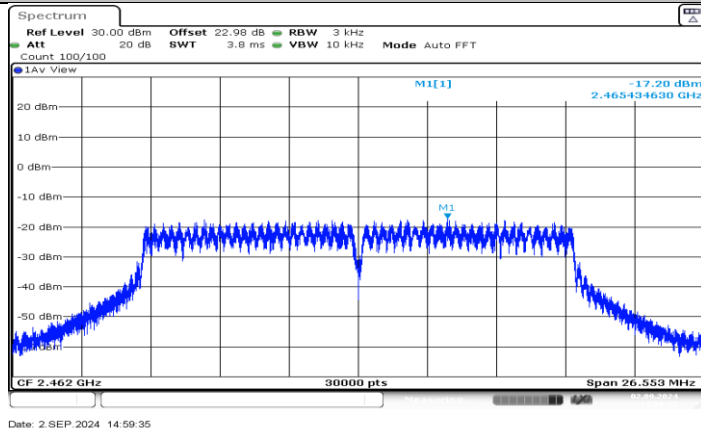


11G\_Ant1\_2462

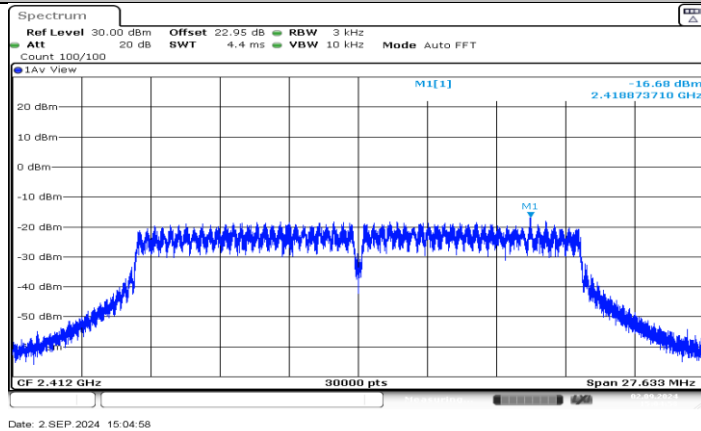


11N20SISO\_Ant1\_2412

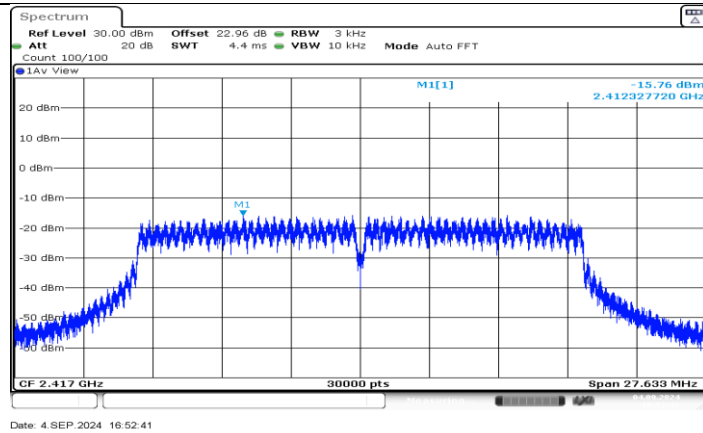

11N20SISO\_Ant1\_2417

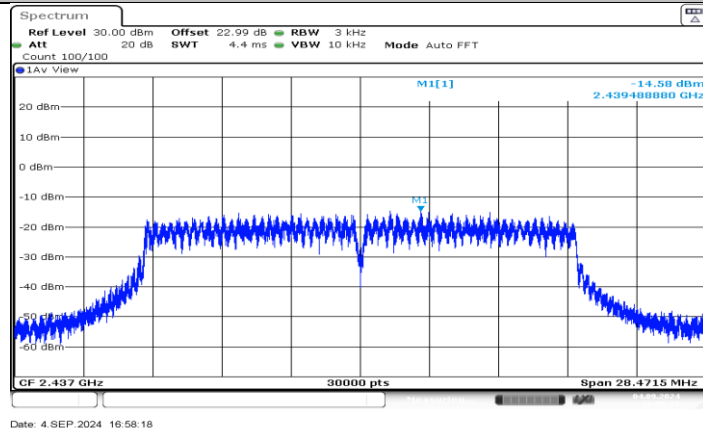

11N20SISO\_Ant1\_2437

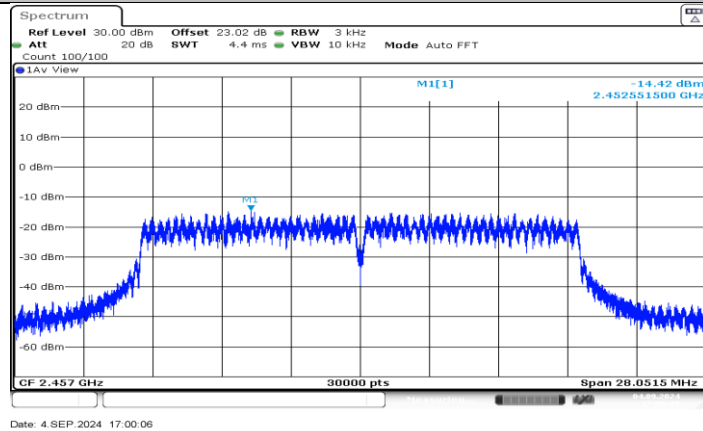

11N20SISO\_Ant1\_2457