

Figure 167 - Main (A) 5690 MHz (CH138) 26 dB and 99% Bandwidth

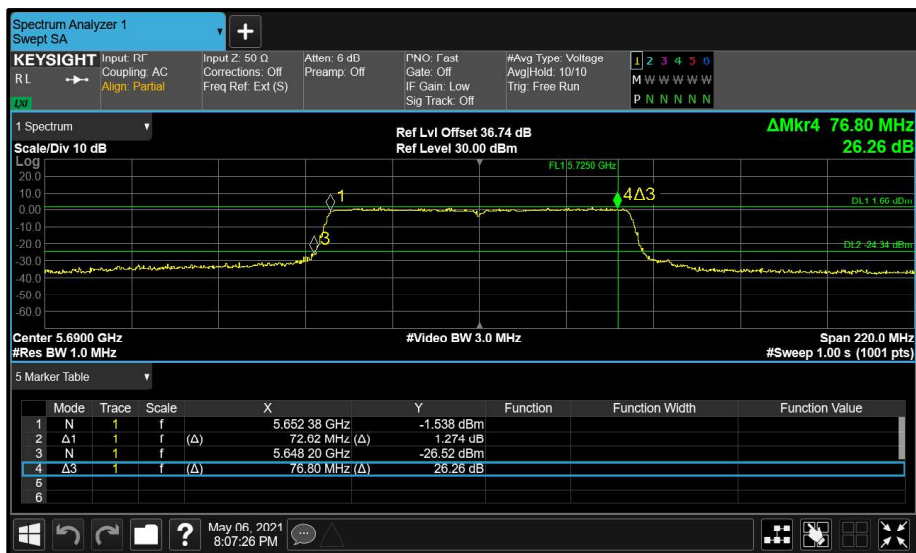


Figure 168 - Aux (B) 5690 MHz (CH138) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	6 Mbps	DCCF (dB):	-
Antenna Configuration:	Spatial Diversity	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Main + Aux)	Active Chain(s):	1+2

Test Frequency (MHz)	6 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5720	3.220	3.220	-	-	3.220	≥500.0
5745	16.500	16.500	-	-	16.500	≥500.0
5785	16.500	16.500	-	-	16.500	≥500.0
5825	16.500	16.500	-	-	16.500	≥500.0

Table 178 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5720	3.640	3.700	-	-	3.640	-
5745	16.680	16.680	-	-	16.680	-
5785	16.620	16.680	-	-	16.620	-
5825	16.620	16.680	-	-	16.620	-

Table 179 - 99% Bandwidth Results

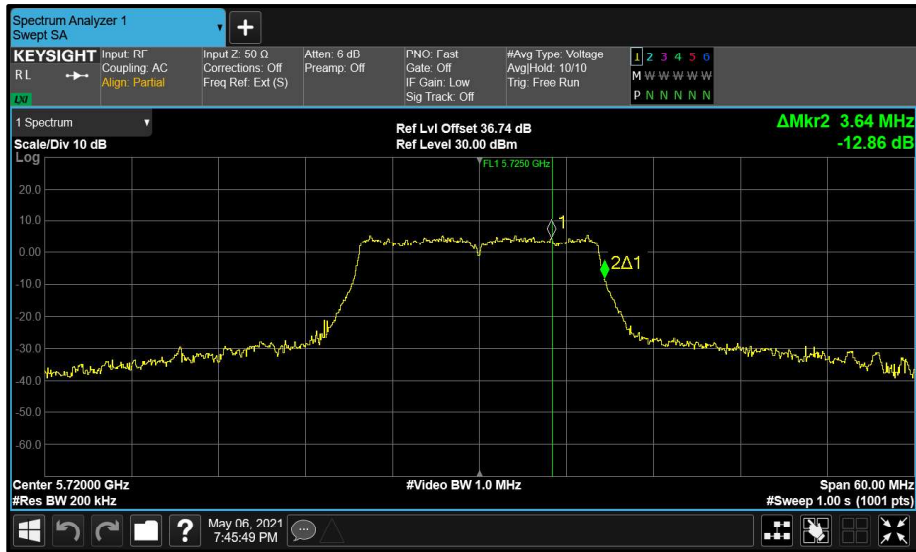


Figure 169 - Main (A) 5720 MHz (CH144) 99% Bandwidth



Figure 170 - Main (A) 5720 MHz (CH144) 6 dB Bandwidth



Figure 171 - Aux (B) 5720 MHz (CH144) 99% Bandwidth



Figure 172 - Aux (B) 5720 MHz (CH144) 6 dB Bandwidth



Figure 173 - Main (A) 5745 MHz (CH149) 99% Bandwidth

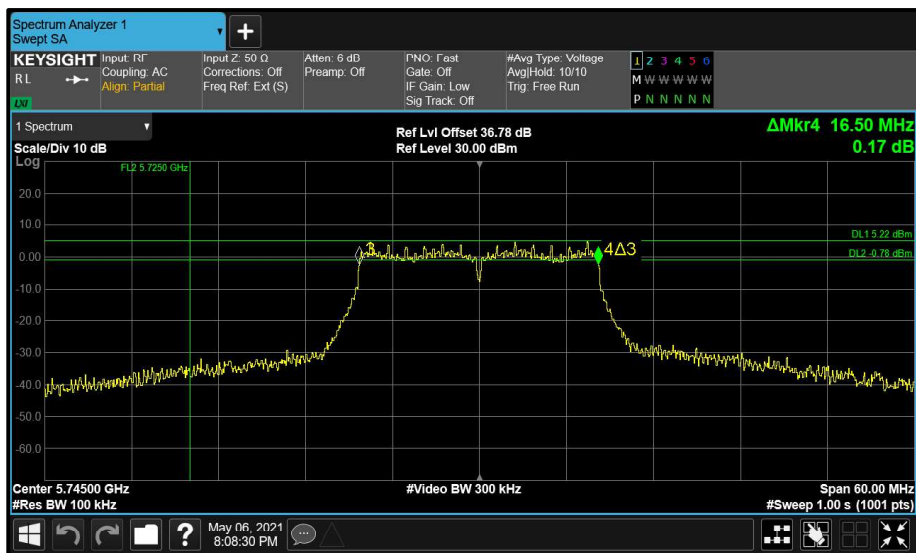


Figure 174 - Main (A) 5745 MHz (CH149) 6 dB Bandwidth

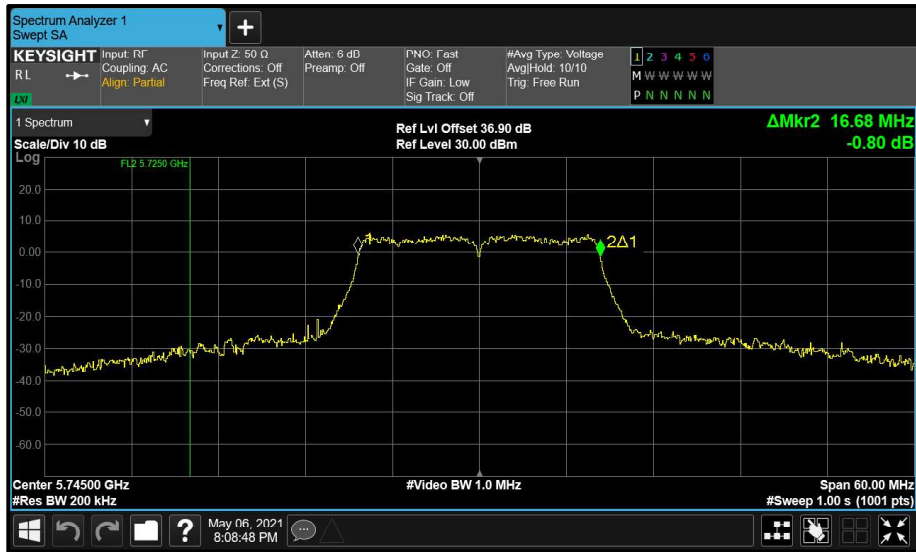


Figure 175 - Aux (B) 5745 MHz (CH149) 99% Bandwidth



Figure 176 - Aux (B) 5745 MHz (CH149) 6 dB Bandwidth

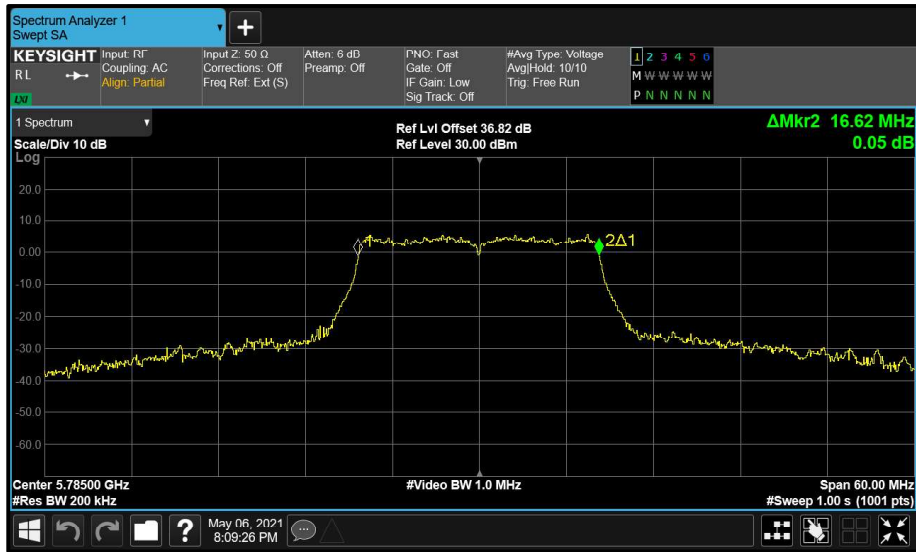


Figure 177 - Main (A) 5785 MHz (CH157) 99% Bandwidth

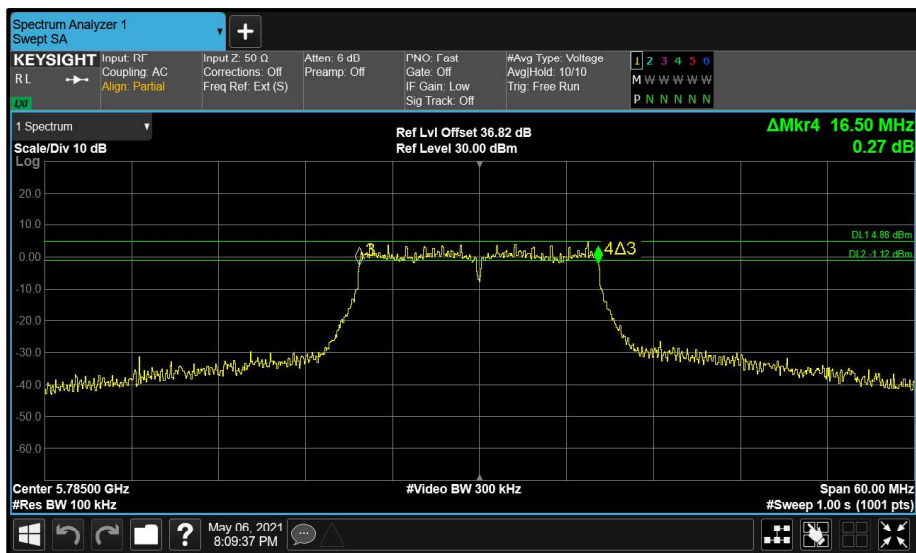


Figure 178 - Main (A) 5785 MHz (CH157) 6 dB Bandwidth

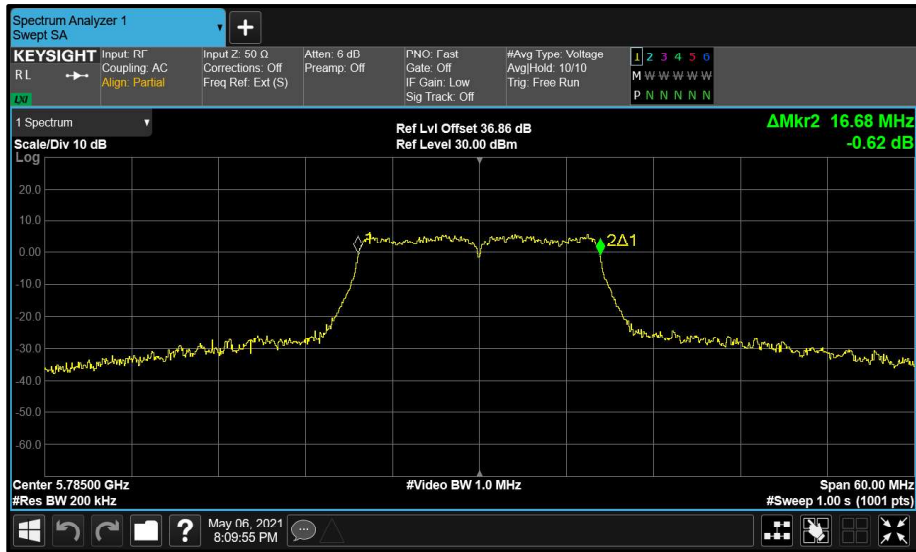


Figure 179 - Aux (B) 5785 MHz (CH157) 99% Bandwidth



Figure 180 - Aux (B) 5785 MHz (CH157) 6 dB Bandwidth



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS0	DCCF (dB):	-
Antenna Configuration:	Spatial Diversity	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Main + Aux)	Active Chain(s):	1+2

Test Frequency (MHz)	6 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5720	3.820	3.820	-	-	3.820	≥500.0
5745	17.700	17.700	-	-	17.700	≥500.0
5785	17.700	17.700	-	-	17.700	≥500.0
5825	17.700	17.700	-	-	17.700	≥500.0

Table 180 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5720	4.060	4.120	-	-	4.060	-
5745	17.700	17.760	-	-	17.700	-
5785	17.700	17.700	-	-	17.700	-
5825	17.700	17.700	-	-	17.700	-

Table 181 - 99% Bandwidth Results



Figure 185 - Main (A) 5720 MHz (CH144) 99% Bandwidth



Figure 186 - Main (A) 5720 MHz (CH144) 6 dB Bandwidth

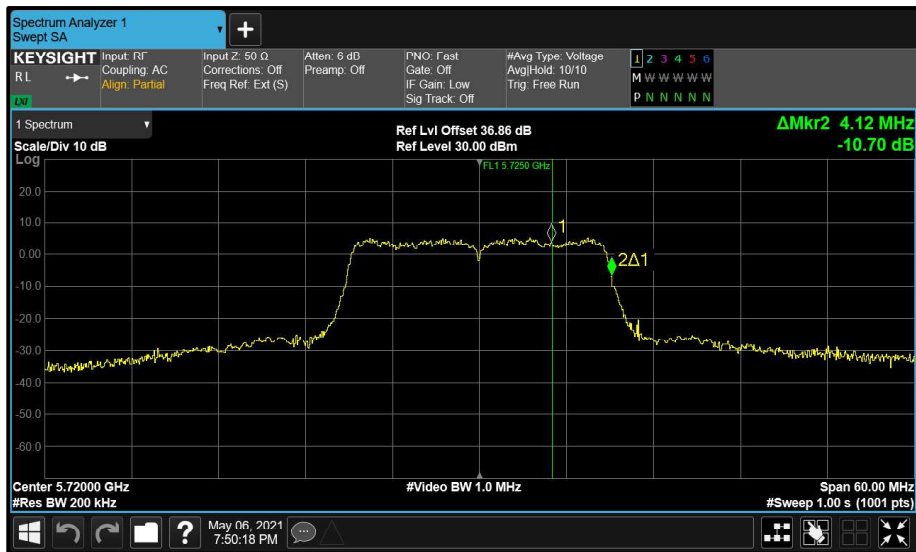


Figure 187 - Aux (B) 5720 MHz (CH144) 99% Bandwidth

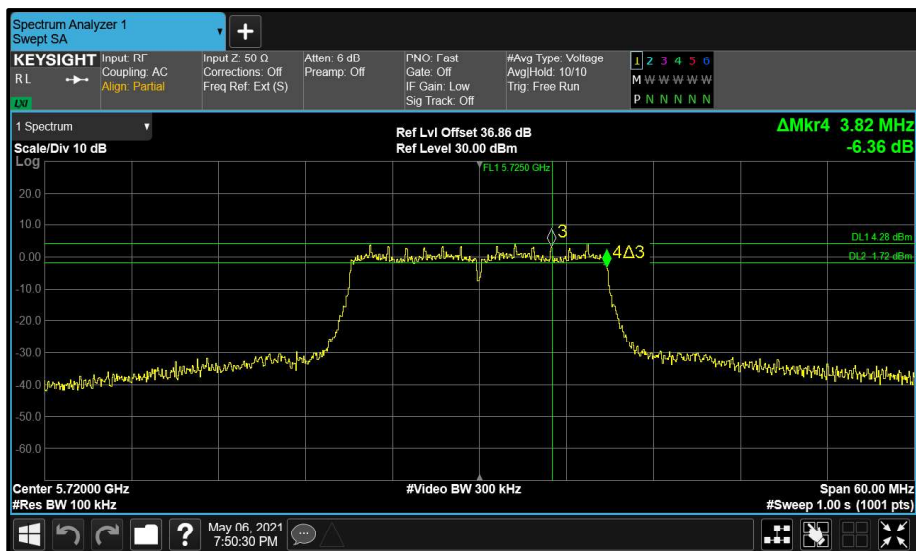


Figure 188 - Aux (B) 5720 MHz (CH144) 6 dB Bandwidth

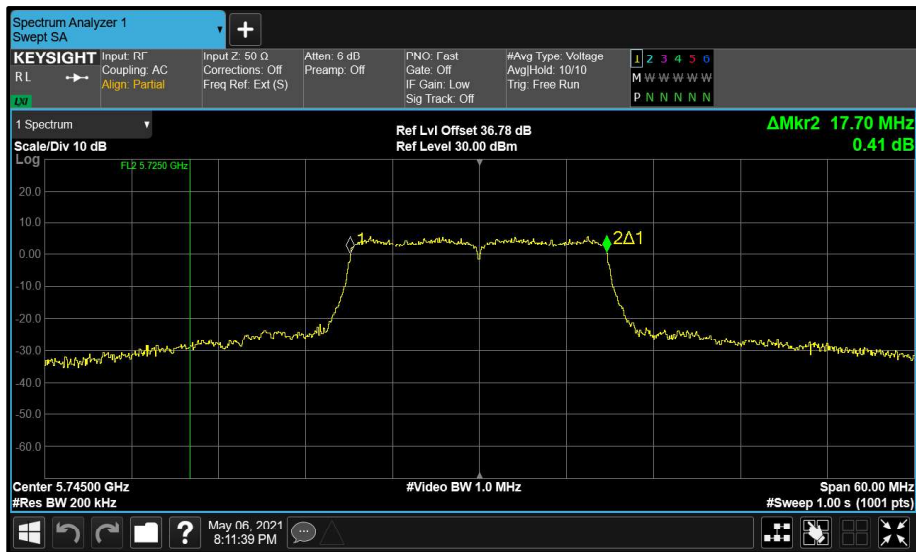


Figure 189 - Main (A) 5745 MHz (CH149) 99% Bandwidth



Figure 190 - Main (A) 5745 MHz (CH149) 6 dB Bandwidth

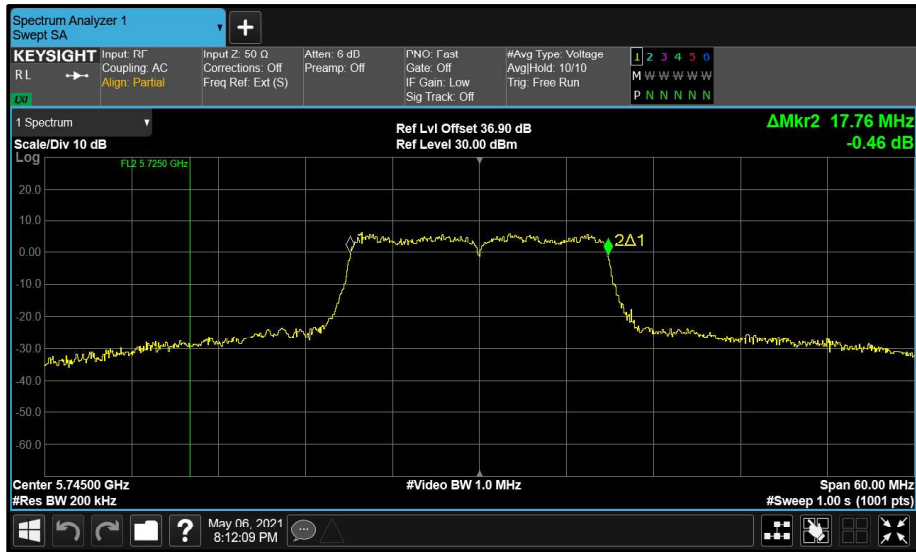


Figure 191 - Aux (B) 5745 MHz (CH149) 99% Bandwidth



Figure 192 - Aux (B) 5745 MHz (CH149) 6 dB Bandwidth

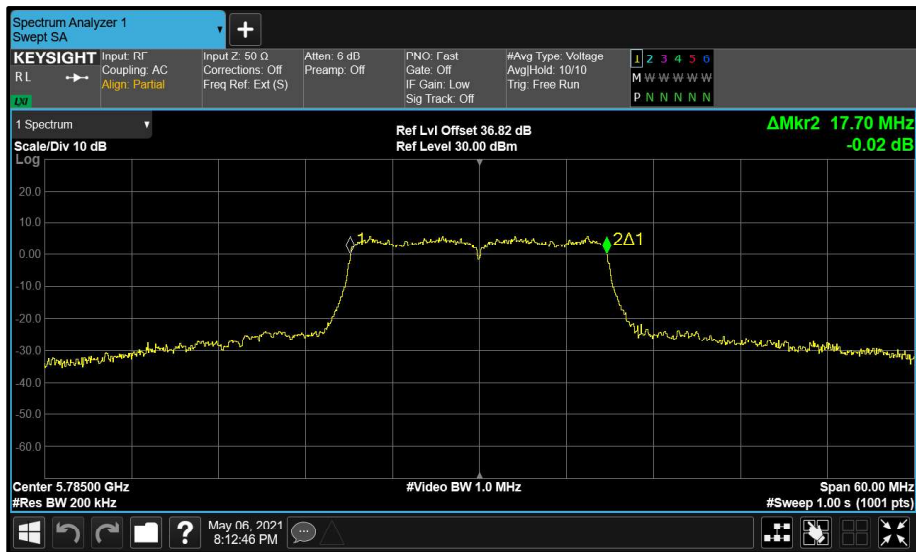


Figure 193 - Main (A) 5785 MHz (CH157) 99% Bandwidth



Figure 194 - Main (A) 5785 MHz (CH157) 6 dB Bandwidth

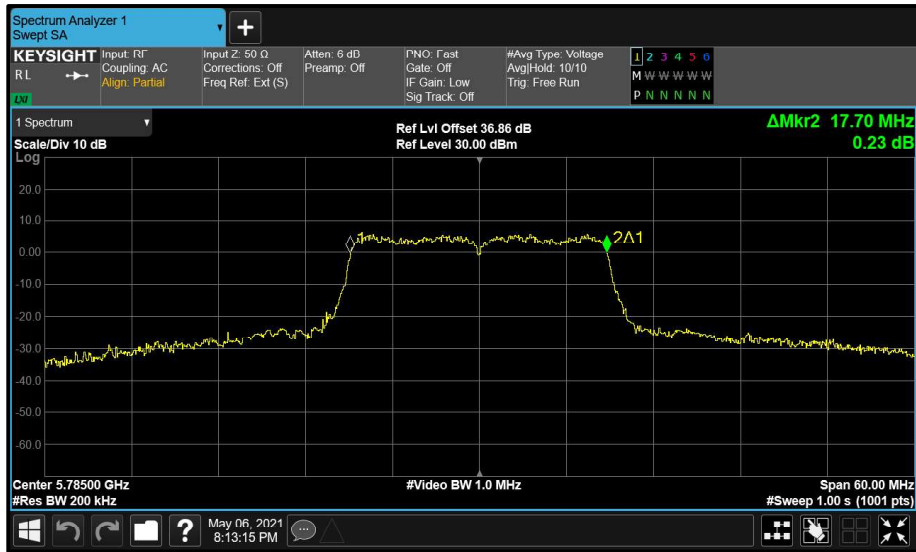


Figure 195 - Aux (B) 5785 MHz (CH157) 99% Bandwidth



Figure 196 - Aux (B) 5785 MHz (CH157) 6 dB Bandwidth

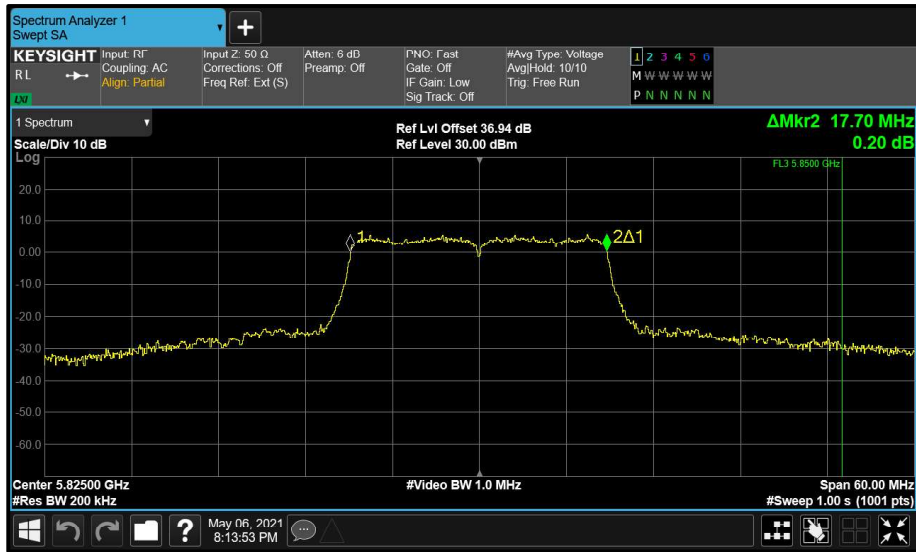


Figure 197 - Main (A) 5825 MHz (CH165) 99% Bandwidth



Figure 198 - Main (A) 5825 MHz (CH165) 6 dB Bandwidth

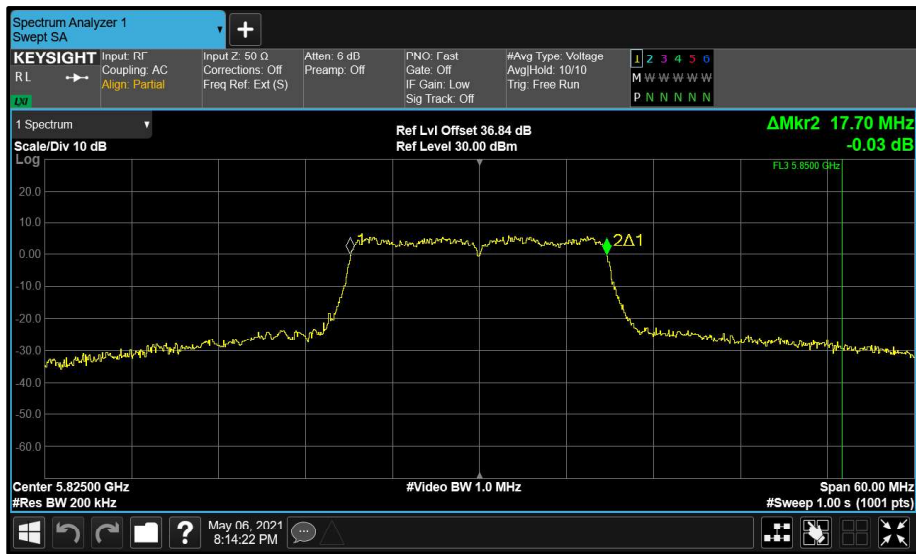


Figure 199 - Aux (B) 5825 MHz (CH165) 99% Bandwidth



Figure 200 - Aux (B) 5825 MHz (CH165) 6 dB Bandwidth



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS8	DCCF (dB):	-
Antenna Configuration:	Spatial Diversity	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Main + Aux)	Active Chain(s):	1+2

Test Frequency (MHz)	6 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5720	3.820	3.820	-	-	3.820	≥500.0
5745	17.700	17.700	-	-	17.700	≥500.0
5785	17.700	17.700	-	-	17.700	≥500.0
5825	17.700	17.700	-	-	17.700	≥500.0

Table 182 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5720	4.060	4.060	-	-	4.060	-
5745	17.700	17.700	-	-	17.700	-
5785	17.700	17.700	-	-	17.700	-
5825	17.700	17.700	-	-	17.700	-

Table 183 - 99% Bandwidth Results



Figure 201 - Main (A) 5720 MHz (CH144) 99% Bandwidth



Figure 202 - Main (A) 5720 MHz (CH144) 6 dB Bandwidth



Figure 205 - Main (A) 5745 MHz (CH149) 99% Bandwidth



Figure 206 - Main (A) 5745 MHz (CH149) 6 dB Bandwidth

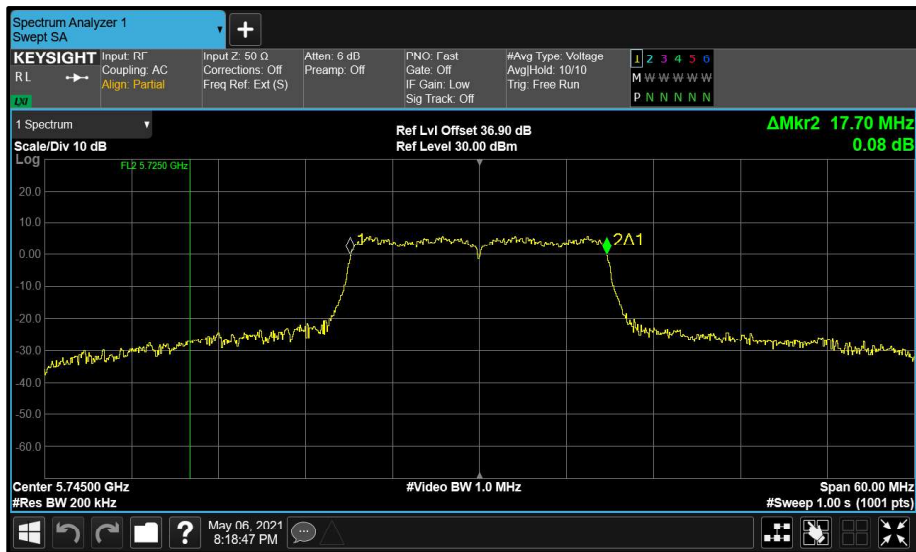


Figure 207 - Aux (B) 5745 MHz (CH149) 99% Bandwidth



Figure 208 - Aux (B) 5745 MHz (CH149) 6 dB Bandwidth

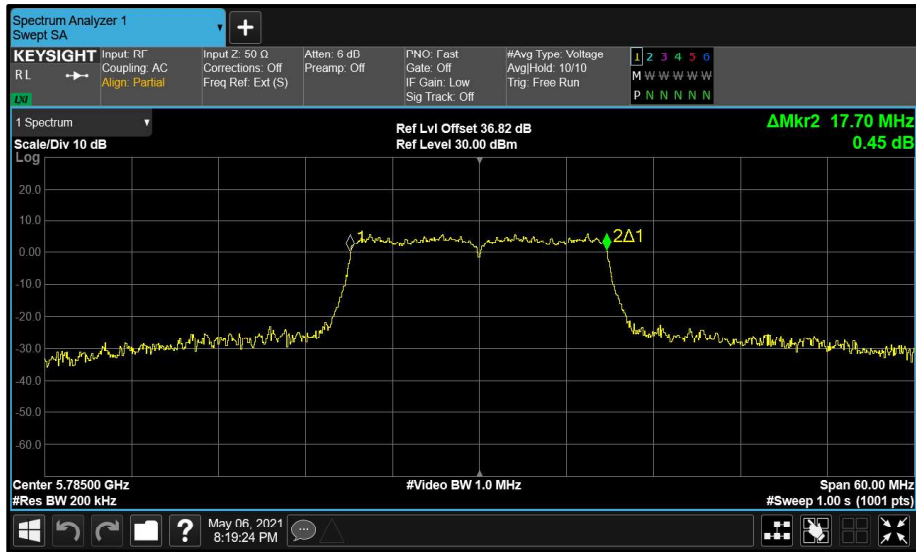


Figure 209 - Main (A) 5785 MHz (CH157) 99% Bandwidth



Figure 210 - Main (A) 5785 MHz (CH157) 6 dB Bandwidth



Figure 213 - Main (A) 5825 MHz (CH165) 99% Bandwidth



Figure 214 - Main (A) 5825 MHz (CH165) 6 dB Bandwidth



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS0	DCCF (dB):	-
Antenna Configuration:	Spatial Diversity	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Main + Aux)	Active Chain(s):	1+2

Test Frequency (MHz)	6 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5710	2.600	3.000	-	-	2.600	≥500.0
5755	35.800	36.000	-	-	35.800	≥500.0
5795	36.100	36.200	-	-	36.100	≥500.0

Table 184 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5710	4.400	5.000	-	-	4.400	-
5755	36.300	36.500	-	-	36.300	-
5795	36.300	36.500	-	-	36.300	-

Table 185 - 99% Bandwidth Results



Figure 221 - Main (A) 5755 MHz (CH151) 99% Bandwidth

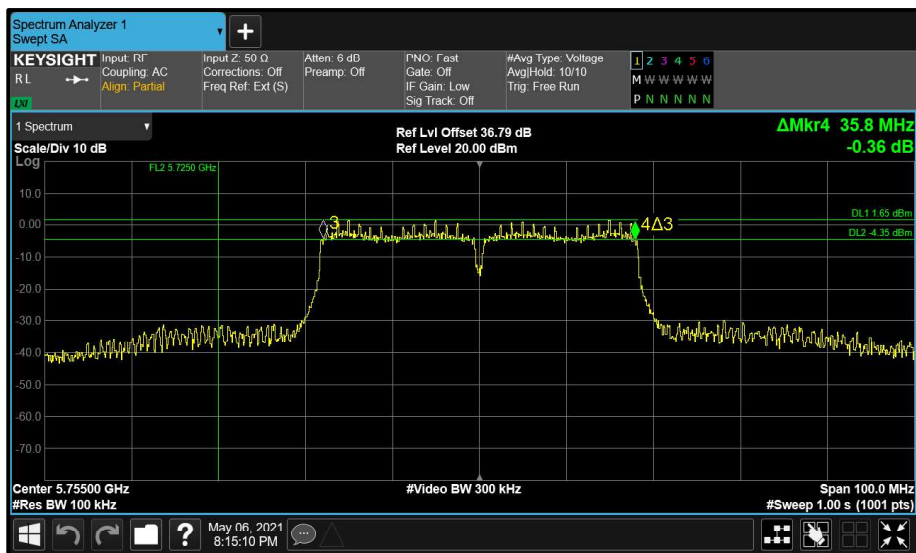


Figure 222 - Main (A) 5755 MHz (CH151) 6 dB Bandwidth



Figure 223 - Aux (B) 5755 MHz (CH151) 99% Bandwidth

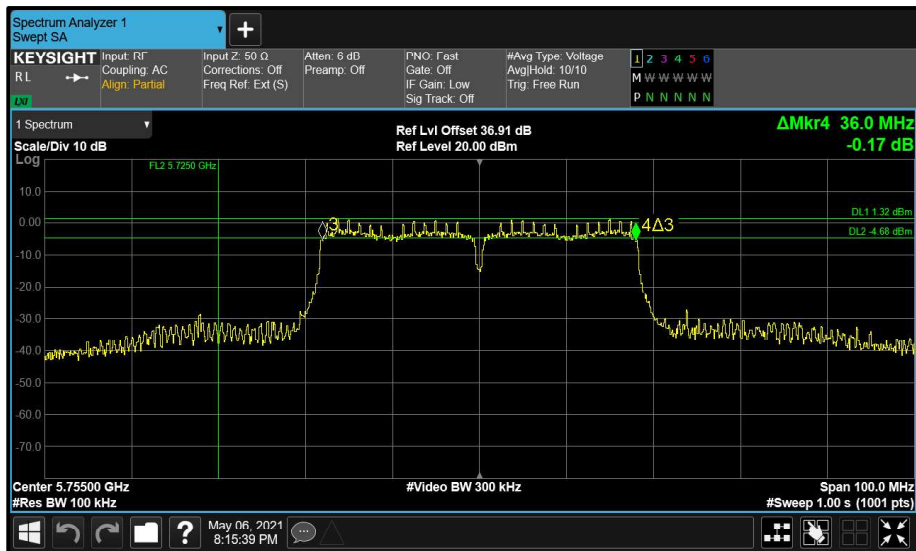


Figure 224 - Aux (B) 5755 MHz (CH151) 6 dB Bandwidth

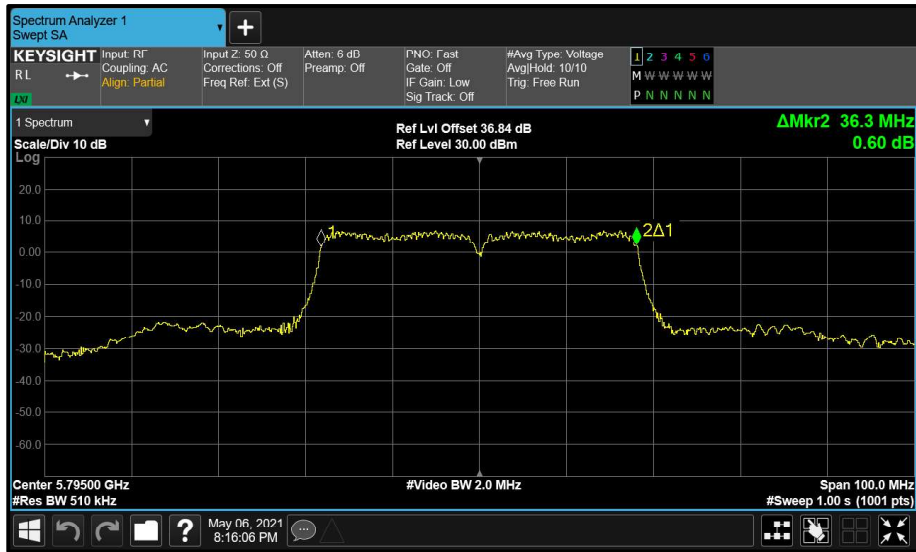


Figure 225 - Main (A) 5795 MHz (CH159) 99% Bandwidth



Figure 226 - Main (A) 5795 MHz (CH159) 6 dB Bandwidth

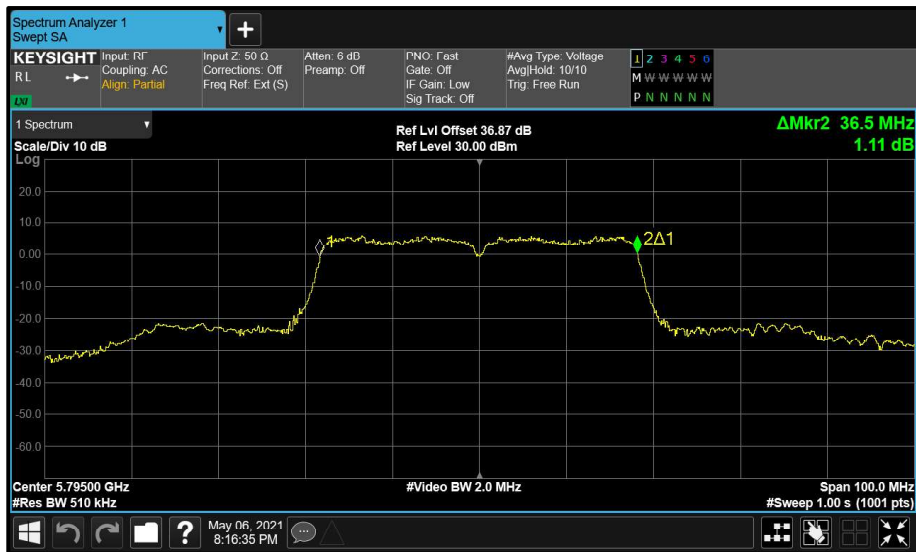


Figure 227 - Aux (B) 5795 MHz (CH159) 99% Bandwidth

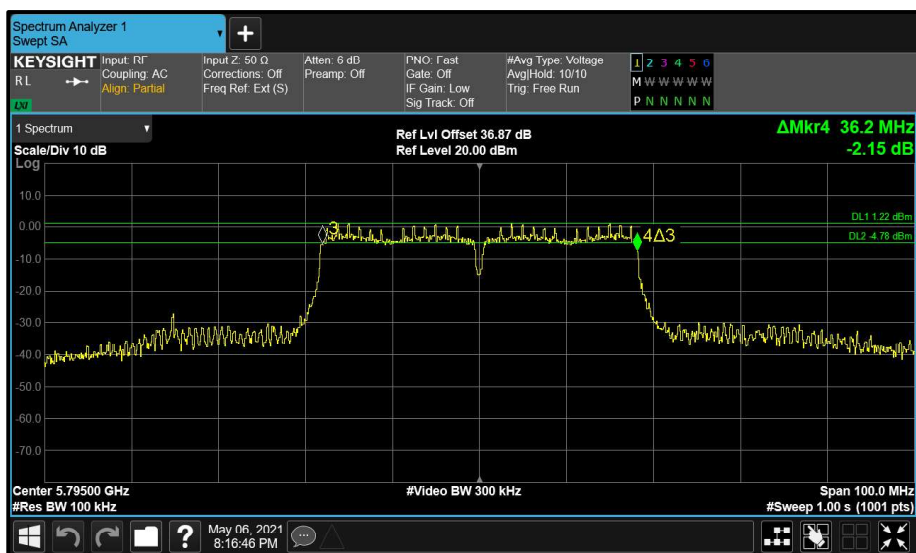


Figure 228 - Aux (B) 5795 MHz (CH159) 6 dB Bandwidth



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS8	DCCF (dB):	-
Antenna Configuration:	Spatial Diversity	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Main + Aux)	Active Chain(s):	1+2

Test Frequency (MHz)	6 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5710	3.000	2.800	-	-	2.800	≥500.0
5755	36.000	35.800	-	-	35.800	≥500.0
5795	36.000	35.900	-	-	35.900	≥500.0

Table 186 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5710	4.000	4.300	-	-	4.000	-
5755	36.300	36.500	-	-	36.300	-
5795	36.400	36.500	-	-	36.400	-

Table 187 - 99% Bandwidth Results