

FCC and ISED Test Report

Dyson Technology Limited
Air Purifying Headphones, Model: WP01

In accordance with FCC 47 CFR Part 15C, ISED
RSS-247 and ISED RSS-GEN
(2.4 GHz Bluetooth)

Prepared for: Dyson Technology Limited
Tetbury Hill, Malmesbury,
SN16 0RP
United Kingdom

FCC ID: QVHWP01001 IC: 7968A-WP01001

COMMERCIAL-IN-CONFIDENCE

Document 75950381-05 Issue 01



Add value.
Inspire trust.

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steve Marshall	Senior Engineer	Authorised Signatory	20 March 2023

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Pier Lorusso	20 March 2023	
Testing	Thomas Biddlecombe	20 March 2023	

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

ISED Accreditation
12669A Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2020, ISED RSS-247: Issue 2 (02-2017) and ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2023 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Application Form	4
1.5	Product Information	7
1.6	Deviations from the Standard.....	7
1.7	EUT Modification Record	7
1.8	Test Location	8
2	Test Details	9
2.1	Restricted Band Edges.....	9
2.2	Frequency Hopping Systems - Average Time of Occupancy	16
2.3	Frequency Hopping Systems - Channel Separation.....	21
2.4	Frequency Hopping Systems - Number of Hopping Channels	26
2.5	Frequency Hopping Systems - 20 dB Bandwidth	31
2.6	Maximum Conducted Output Power	41
2.7	Authorised Band Edges	49
2.8	Spurious Radiated Emissions	55
3	Photographs	89
3.1	Test Setup Photographs	89
4	Measurement Uncertainty	91



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	20-March-2023

Table 1

1.2 Introduction

Applicant	Dyson Technology Limited
Manufacturer	Dyson Technology Limited
Model Number(s)	WP01
Serial Number(s)	F40E11710004, F40E11710006, M8D-CN-FDN00012X and M8D-CN-FDN00014X
Hardware Version(s)	OR1
Software Version(s)	10.3
Number of Samples Tested	4
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2020, ISED RSS-247: Issue 2 (02-2017) ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021)
Order Number	6000091736
Date	06-November-2020
Date of Receipt of EUT	20-January-2022 and 26-August-2022
Start of Test	24-January-2022
Finish of Test	05-October-2022
Name of Engineer(s)	Pier Lorusso and Thomas Biddlecombe
Related Document(s)	ANSI C63.10 (2013) ANSI C63.10 (2020)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz Bluetooth - BR/EDR - Right Cup						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	3.1	8.10	Restricted Band Edges	Pass	
2.2	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Average Time of Occupancy	Pass	
2.3	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Channel Separation	Pass	
2.4	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Number of Hopping Channels	Pass	
2.5	15.247 (a)(1)	5.1	6.7	Frequency Hopping Systems - 20 dB Bandwidth	Pass	
2.6	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	
2.8	15.247 (d)	5.5	-	Authorised Band Edges	Pass	
2.7	15.247 (d) and 15.209	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	
Configuration and Mode: 2.4 GHz Bluetooth - BR/EDR - Left Cup						
2.6	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	
2.7	15.247 (d) and 15.209	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	

Table 2



1.4 Application Form

Equipment Description

Technical Description: <i>(Please provide a brief description of the intended use of the equipment including the technologies the product supports)</i>	The EUT is an Air Purifying Headphone with Bluetooth BR/EDR and Bluetooth Low Energy technologies	
Manufacturer:	Dyson Technology Limited	
Model:	WP01	
Part Number:	WP01	
Hardware Version:	OR1	
Software Version:	10.3	
FCC ID of the product under test – see guidance here	QVHWP01001	
IC ID of the product under test – see guidance here	7968A-WP01001	

Table 3

Intentional Radiators

Technology	Bluetooth (BR+EDR)	Bluetooth Low Energy				
Frequency Range (MHz to MHz)	2400-2483.5	2400-2483.5				
Conducted Declared Output Power (dBm)	11.5	7.70				
Antenna Gain (dBi)	2.25	2.25				
Supported Bandwidth(s) (MHz) (e.g. 1 MHz, 20 MHz, 40 MHz)	1	1, 2				
Modulation Scheme(s) (e.g. GFSK, QPSK etc)	GFSK, $\pi/4$ DQPSK, 8-DPSK	GFSK				
ITU Emission Designator (see guidance here) (not mandatory for Part 15 devices)	1M00GXW	1M00GXW, 2M00GXW				
Bottom Frequency (MHz)	2402	2402				
Middle Frequency (MHz)	2441	2440				
Top Frequency (MHz)	2480	2480				

Table 4

Un-intentional Radiators

Highest frequency generated or used in the device or on which the device operates or tunes	2483.5
Lowest frequency generated or used in the device or on which the device operates or tunes	2400
Class A Digital Device (Use in commercial, industrial or business environment) <input type="checkbox"/>	
Class B Digital Device (Use in residential environment only) <input checked="" type="checkbox"/>	

Table 5



Battery Power Source

Voltage:	3.85	V
End-point voltage:	4.4	V (Point at which the battery will terminate)
Alkaline <input type="checkbox"/> Leclanche <input type="checkbox"/> Lithium <input checked="" type="checkbox"/> Nickel Cadmium <input type="checkbox"/> Lead Acid* <input type="checkbox"/> *(Vehicle regulated)		
Other <input type="checkbox"/>	Please detail:	

Table 6

Charging

Can the EUT transmit whilst being charged	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
---	---

Table 7

Temperature

Minimum temperature:	-10	°C
Maximum temperature:	40	°C

Table 8

Cable Loss

Adapter Cable Loss (Conducted sample)	0.6	dB
---------------------------------------	-----	----

Table 9



Antenna Characteristics

Antenna connector <input type="checkbox"/>		State impedance		Ohm
Temporary antenna connector <input type="checkbox"/>		State impedance		Ohm
Integral antenna <input checked="" type="checkbox"/>	Type:		Gain	2.25 dBi
External antenna <input type="checkbox"/>	Type:		Gain	dBi
For external antenna only: Standard Antenna Jack <input type="checkbox"/> If yes, describe how user is prohibited from changing antenna (if not professional installed): Equipment is only ever professionally installed <input type="checkbox"/> Non-standard Antenna Jack <input type="checkbox"/>				

Table 10

Ancillaries (if applicable)

Manufacturer:		Part Number:	
Model:		Country of Origin:	

Table 11

The above information was provided by the applicant.



1.5 Product Information

1.5.1 Technical Description

The EUT is an Air Purifying Headphone with Bluetooth BR/EDR and Bluetooth Low Energy technologies.

1.6 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: WP01, Serial Number: F40E11710006			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: WP01, Serial Number: F40E11710004			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: WP01, Serial Number: M8D-CN-FDN00012X			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: WP01, Serial Number: M8D-CN-FDN00014X			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 12



1.8 Test Location

TÜV SÜD conducted the following tests at our Octagon House Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth - BR/EDR - Right Cup		
Restricted Band Edges	Pier Lorusso	UKAS
Frequency Hopping Systems - Average Time of Occupancy	Thomas Biddlecombe	UKAS
Frequency Hopping Systems - Channel Separation	Thomas Biddlecombe	UKAS
Frequency Hopping Systems - Number of Hopping Channels	Thomas Biddlecombe	UKAS
Frequency Hopping Systems - 20 dB Bandwidth	Thomas Biddlecombe	UKAS
Maximum Conducted Output Power	Thomas Biddlecombe	UKAS
Spurious Radiated Emissions	Pier Lorusso	UKAS
Authorised Band Edges	Pier Lorusso	UKAS
Configuration and Mode: 2.4 GHz Bluetooth - BR/EDR - Left Cup		
Maximum Conducted Output Power	Thomas Biddlecombe	UKAS
Spurious Radiated Emissions	Pier Lorusso	UKAS

Table 13

Office Address:

TÜV SÜD
 Octagon House
 Concorde Way
 Fareham
 Hampshire
 PO15 5RL
 United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205
ISED RSS-247, Clause 3.1
ISED RSS-GEN, Clause 8.10

2.1.2 Equipment Under Test and Modification State

WP01, S/N: M8D-CN-FDN00014X - Modification State 0

2.1.3 Date of Test

05-October-2022

2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5. These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10, clause 4.1.4.2.2 to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

2.1.5 Environmental Conditions

Ambient Temperature	20.4 - 21.8 °C
Relative Humidity	54.8 - 56.3 %



2.1.6 Test Results

2.4 GHz Bluetooth - BR/EDR - Right Cup

Modulation	Packet Type	Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
GFSK	DH5	2402	2390.0	49.70	36.63
$\pi/4$ DQPSK	2DH5	2402	2390.0	48.98	36.27
8-DPSK	3DH5	2402	2390.0	48.65	36.22
GFSK	DH5	2480	2483.5	49.78	37.16
$\pi/4$ DQPSK	2DH5	2480	2483.5	51.63	38.01
8-DPSK	3DH5	2480	2483.5	51.08	38.06

Table 14

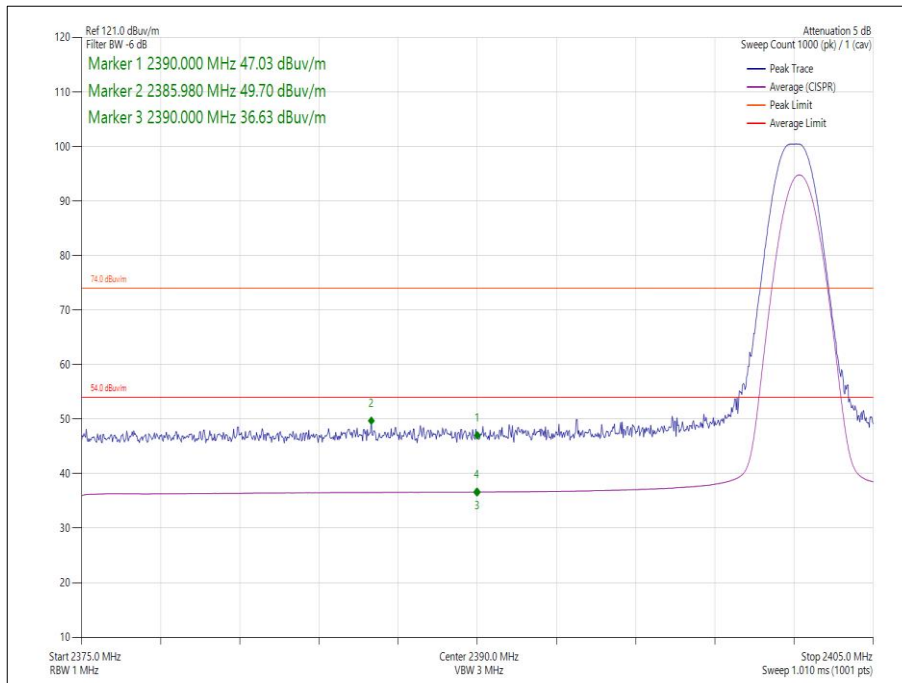


Figure 1 - GFSK/DH5 - 2402 MHz – Band Edge Frequency 2390.0 MHz

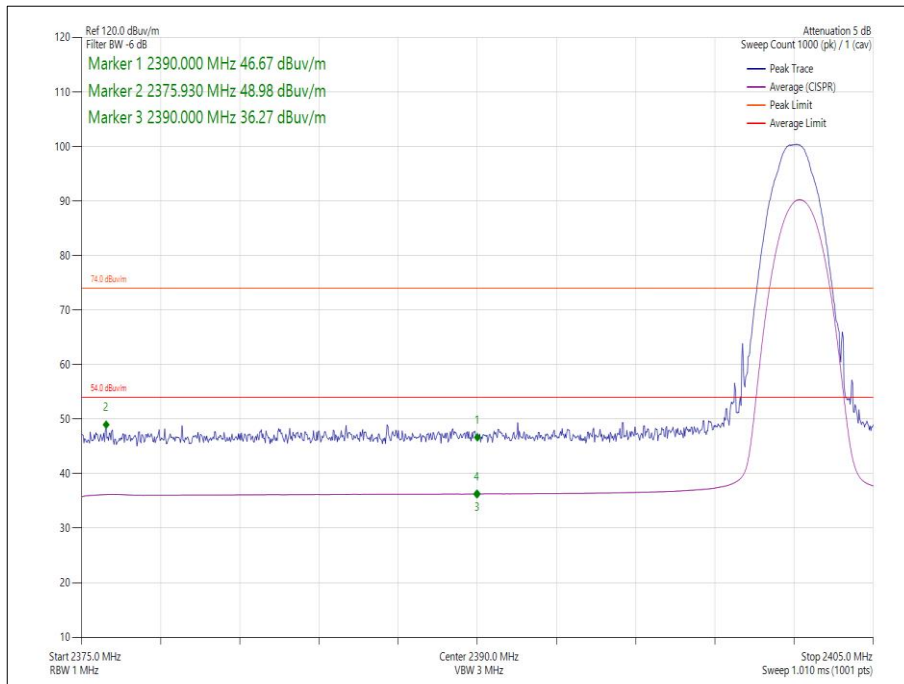


Figure 2 - $\pi/4$ DQPSK/2DH5 - 2402 MHz – Band Edge Frequency 2390.0 MHz

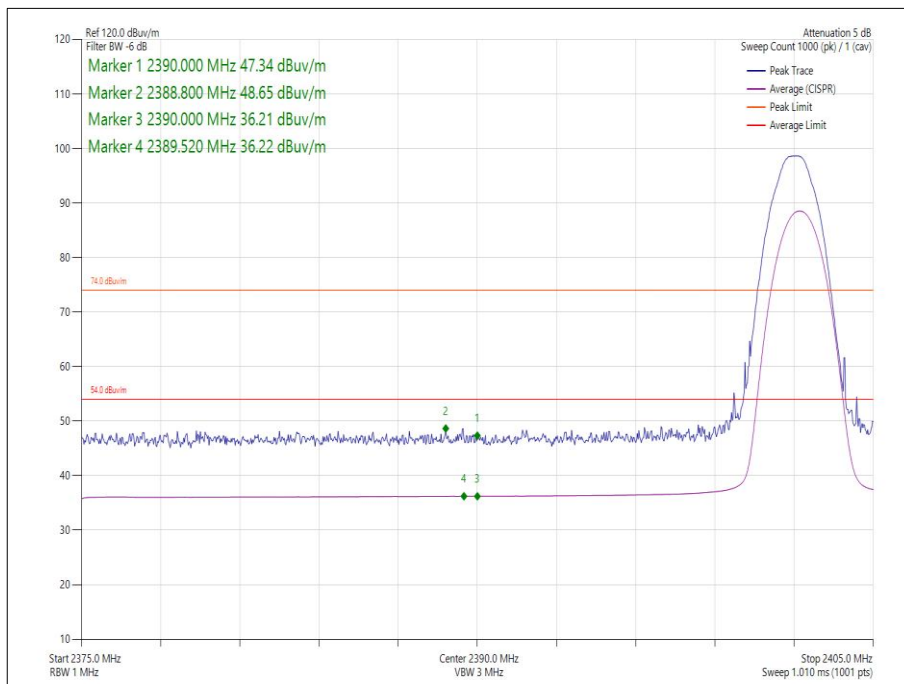


Figure 3 - 8-DPSK/3DH5 - 2402 MHz – Band Edge Frequency 2390.0 MHz

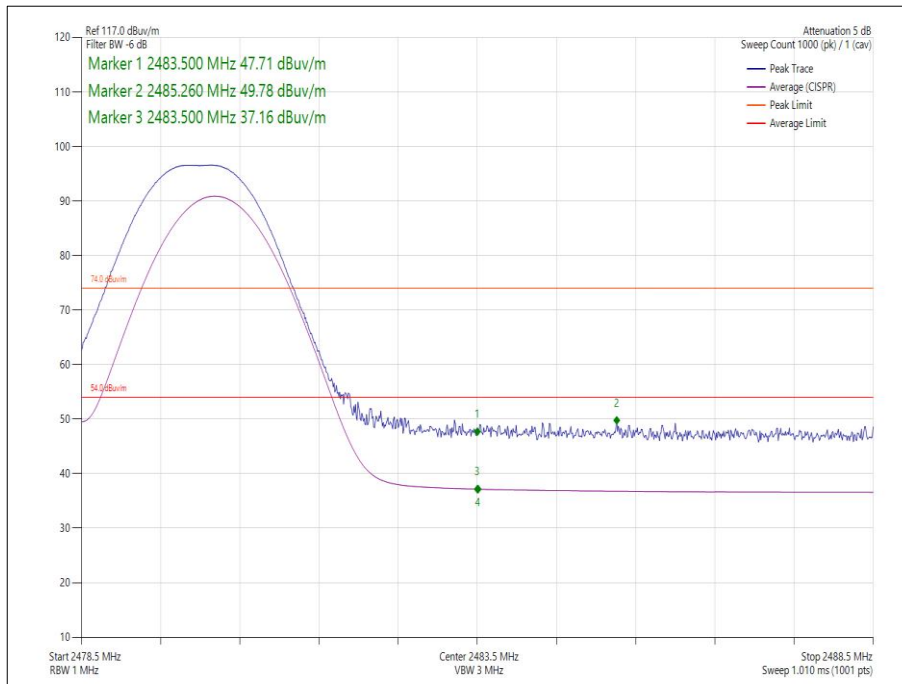


Figure 4 - GFSK/DH5 - 2480 MHz – Band Edge Frequency 2483.5 MHz

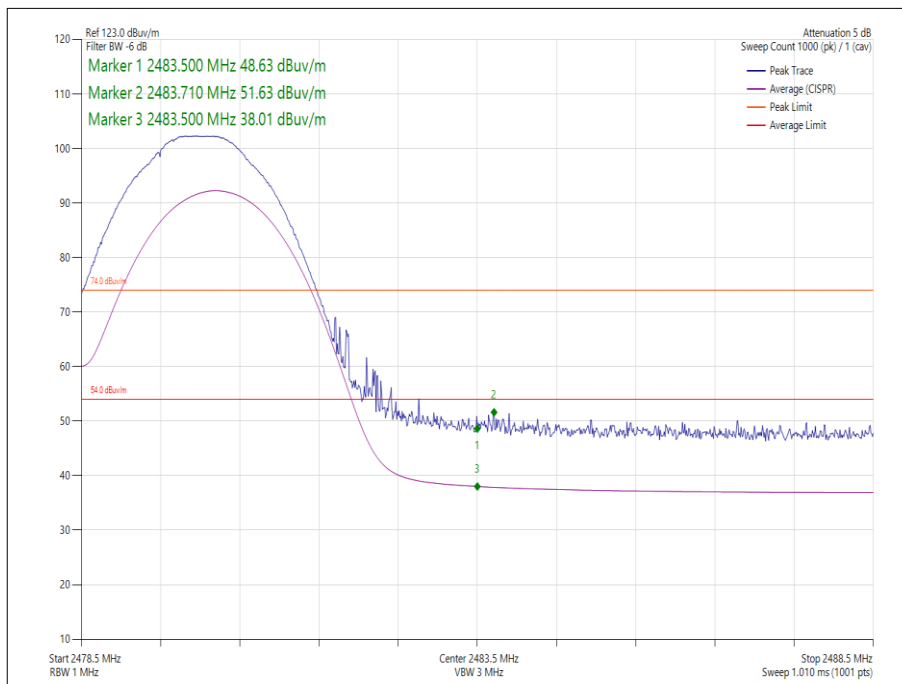


Figure 5 - $\pi/4$ DQPSK/2DH5 - 2480 MHz – Band Edge Frequency 2483.5 MHz

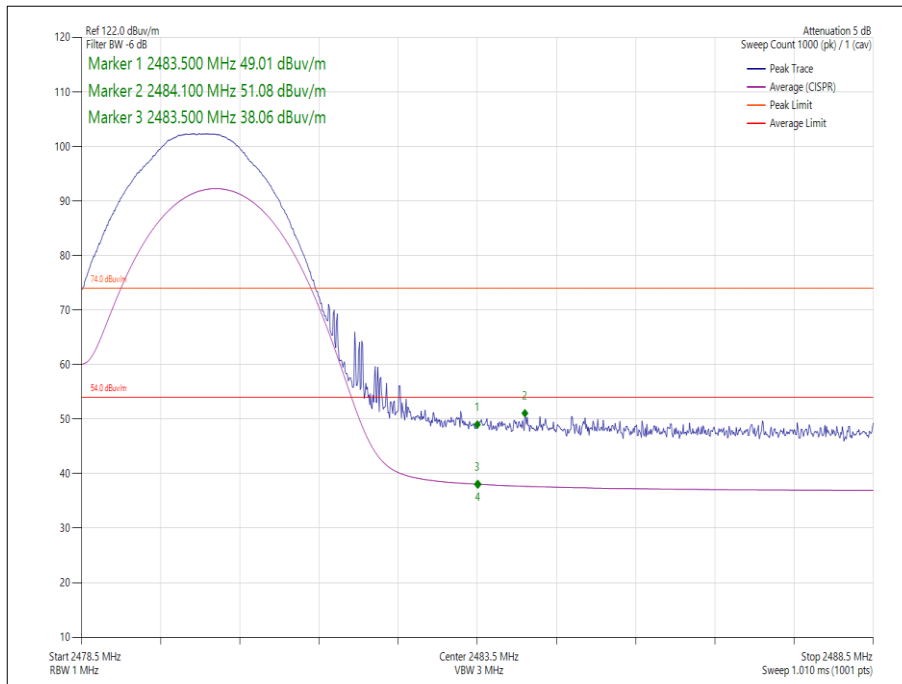


Figure 6 - 8-DPSK/3DH5 - 2480 MHz – Band Edge Frequency 2483.5 MHz



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 15

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 16

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
True RMS Multimeter	Fluke	179	4006	12	29-Mar-2023
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	17-May-2023
Emissions Software	TUV SUD	EmX V3.1.4	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	24-Nov-2024
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Antenna (DRG 1-10.5GHz)	Schwarzbeck	BBHA9120B	5215	12	28-May-2023
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	07-Apr-2023
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	12-Apr-2023
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2023

Table 17

TU - Traceability Unscheduled



2.2 Frequency Hopping Systems - Average Time of Occupancy

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.2.2 Equipment Under Test and Modification State

WP01, S/N: F40E11710006 - Modification State 0

2.2.3 Date of Test

25-January-2022

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.4.

2.2.5 Environmental Conditions

Ambient Temperature	21.5 °C
Relative Humidity	27.1 %



2.2.6 Test Results

2.4 GHz Bluetooth - BR/EDR - Right Cup

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH1)	Duty Cycle (%):	15.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	0.397	157	62.4	400.0

Table 18 - Time of Occupancy Results

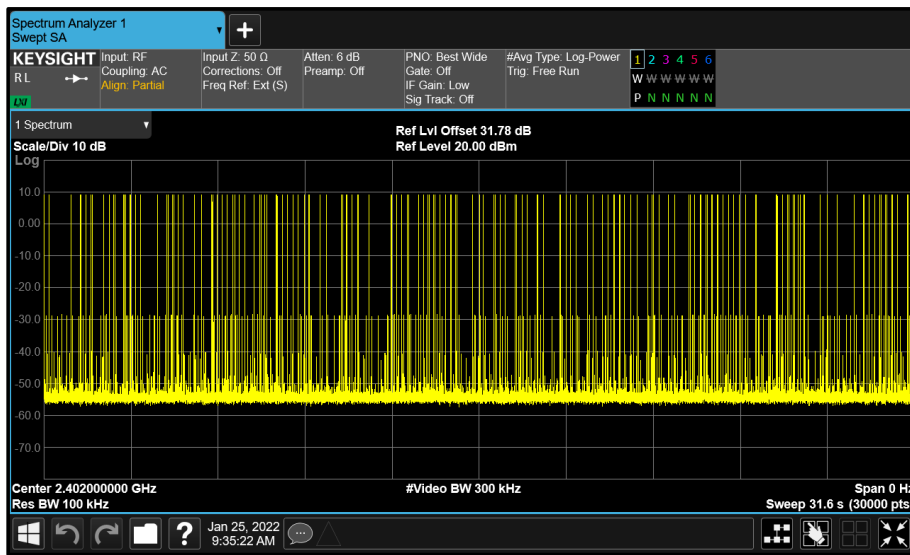


Figure 7 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH3)	Duty Cycle (%):	44.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	1.653	103	170.3	400.0

Table 19 - Time of Occupancy Results

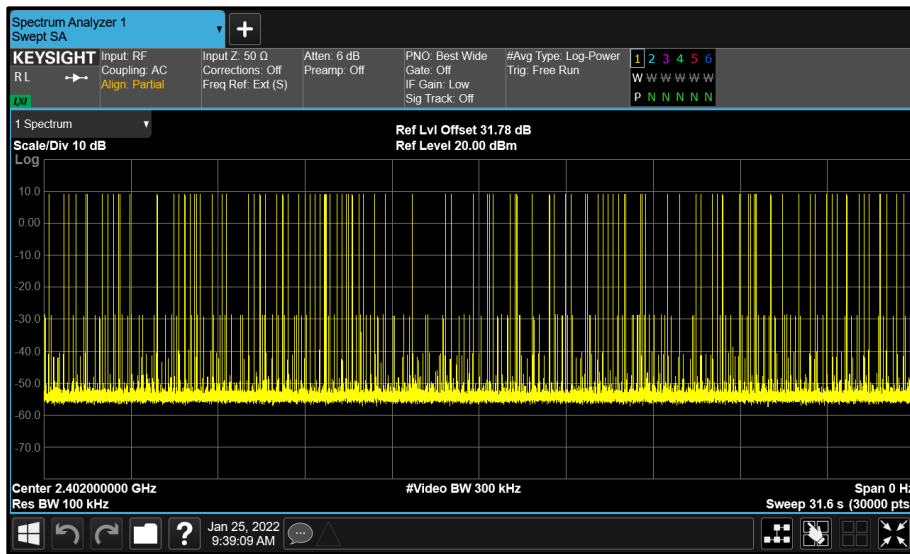


Figure 8 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH5)	Duty Cycle (%):	57.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.901	83	240.8	400.0

Table 20 - Time of Occupancy Results



Figure 9 - GFSK - 2402 MHz Accumulated Transmit Time

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Industry Canada RSS-247, Limit Clause 5.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	30-Jun-2022
MXA Signal Analyser	Keysight Technologies	N9020B	5528	24	04-Mar-2022
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	16-Apr-2022

Table 21



2.3 Frequency Hopping Systems - Channel Separation

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.3.2 Equipment Under Test and Modification State

WP01, S/N: F40E11710006 - Modification State 0

2.3.3 Date of Test

24-January-2022

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.2.

2.3.5 Environmental Conditions

Ambient Temperature	22.7 °C
Relative Humidity	27.6 %



2.3.6 Test Results

2.4 GHz Bluetooth - BR/EDR - Right Cup

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.035	2440.988	2441.989	1.001	≥690.0

Table 22 - Carrier Frequency Separation Results



Figure 10 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.180	2440.997	2441.997	1.000	≥ 786.7

Table 23 - Carrier Frequency Separation Results



Figure 11 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.185	2441.004	2442.003	0.999	≥790.0

Table 24 - Carrier Frequency Separation Results



Figure 12 - 8-DPSK - 2441 MHz (CH39)



FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

ISED RSS-247, Limit Clause 5.1 (b)

FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	30-Jun-2022
MXA Signal Analyser	Keysight Technologies	N9020B	5528	24	04-Mar-2022
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	16-Apr-2022

Table 25



2.4 Frequency Hopping Systems - Number of Hopping Channels

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.4.2 Equipment Under Test and Modification State

WP01, S/N: F40E11710006 - Modification State 0

2.4.3 Date of Test

25-January-2022

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.3.

2.4.5 Environmental Conditions

Ambient Temperature	21.5 °C
Relative Humidity	27.1 %



2.4.6 Test Results

2.4 GHz Bluetooth - BR/EDR - Right Cup

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.3
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH1)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Number of Hopping Frequencies	Limit
79	≥15.0

Table 26 - Number of Hopping Frequencies Results

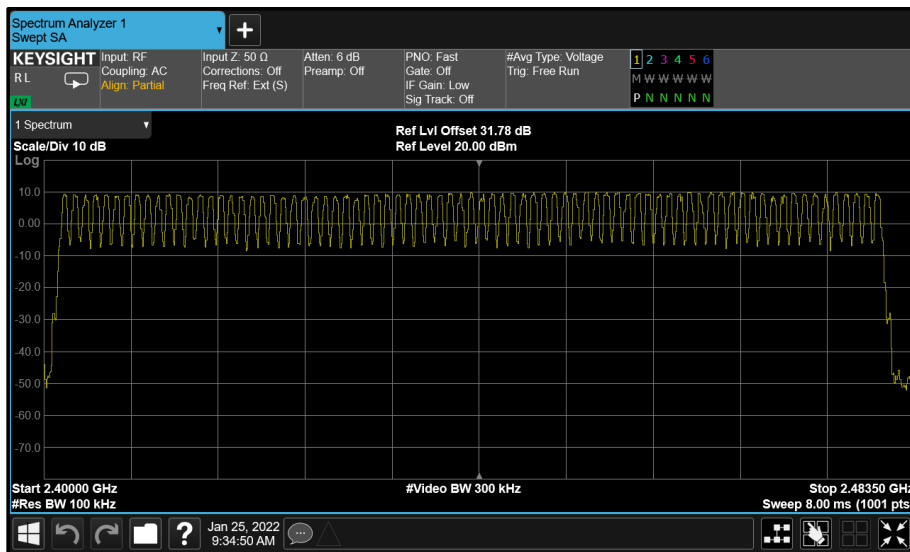


Figure 13 - GFSK (DH1) - Number of Hopping Channels



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.3
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH3)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Number of Hopping Frequencies	Limit
79	≥15.0

Table 27 - Number of Hopping Frequencies Results

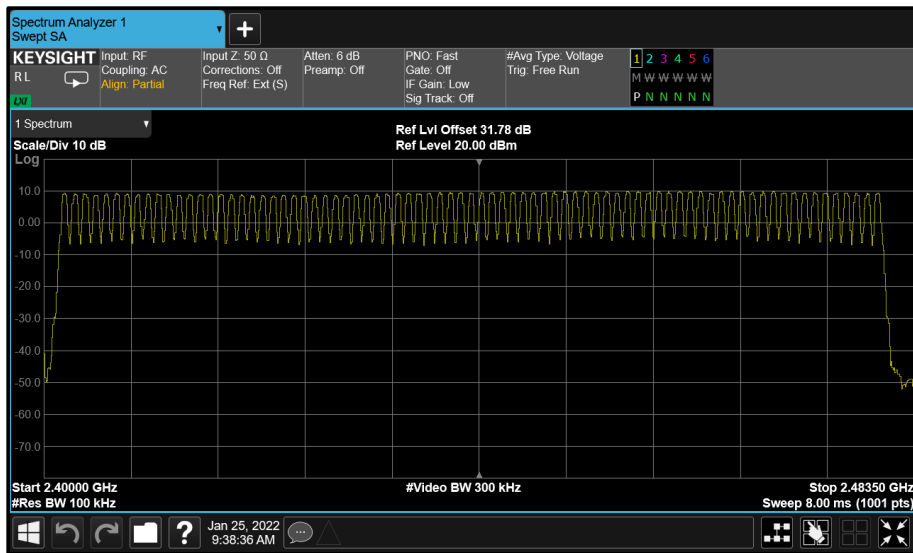


Figure 14 - GFSK (DH3) - Number of Hopping Channels



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.3
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Number of Hopping Frequencies	Limit
79	≥15.0

Table 28 - Number of Hopping Frequencies Results

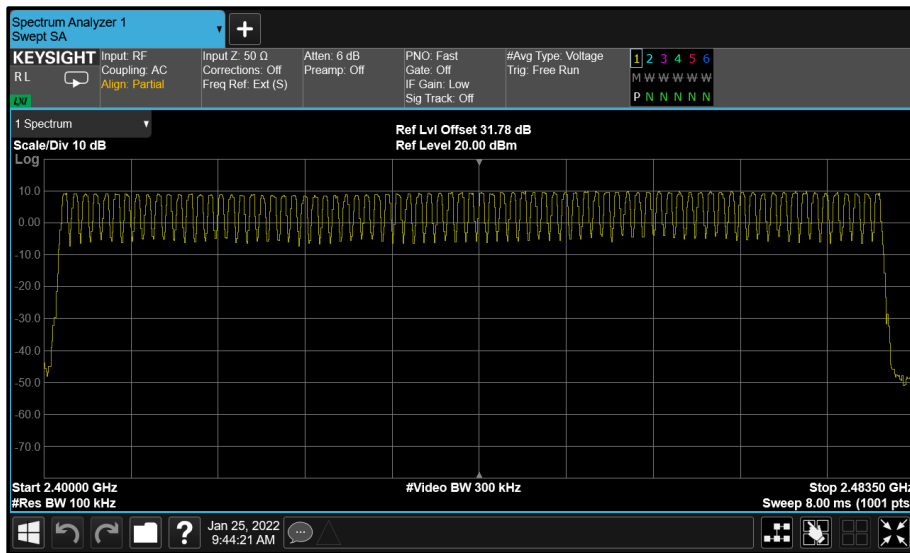


Figure 15 - GFSK (DH5) - Number of Hopping Channels

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

≥ 15 channels

ISED RSS-247, Limit Clause 5.1 (d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.



2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	30-Jun-2022
MXA Signal Analyser	Keysight Technologies	N9020B	5528	24	04-Mar-2022
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	16-Apr-2022

Table 29



2.5 Frequency Hopping Systems - 20 dB Bandwidth

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1
ISED RSS-GEN, Clause 6.7

2.5.2 Equipment Under Test and Modification State

WP01, S/N: F40E11710006 - Modification State 0

2.5.3 Date of Test

24-January-2022

2.5.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.9.2.

2.5.5 Environmental Conditions

Ambient Temperature	22.7 °C
Relative Humidity	27.6 %



2.5.6 Test Results

2.4 GHz Bluetooth - BR/EDR - Right Cup

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.038	-	-	-
2441	1.035	-	-	-
2480	1.032	-	-	-

Table 30 - 20 dB Bandwidth Results

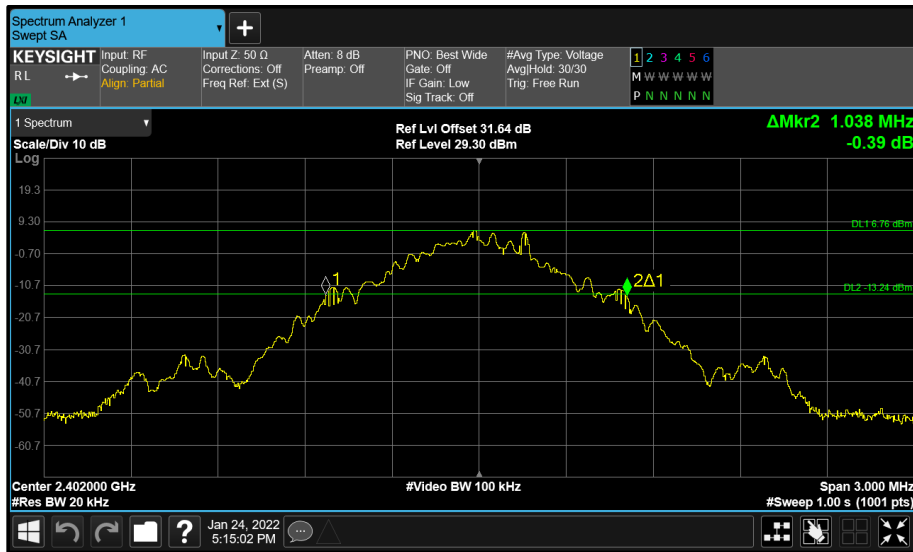


Figure 16 - R Cup (A) 2402 MHz (CH0) 20 dB Bandwidth

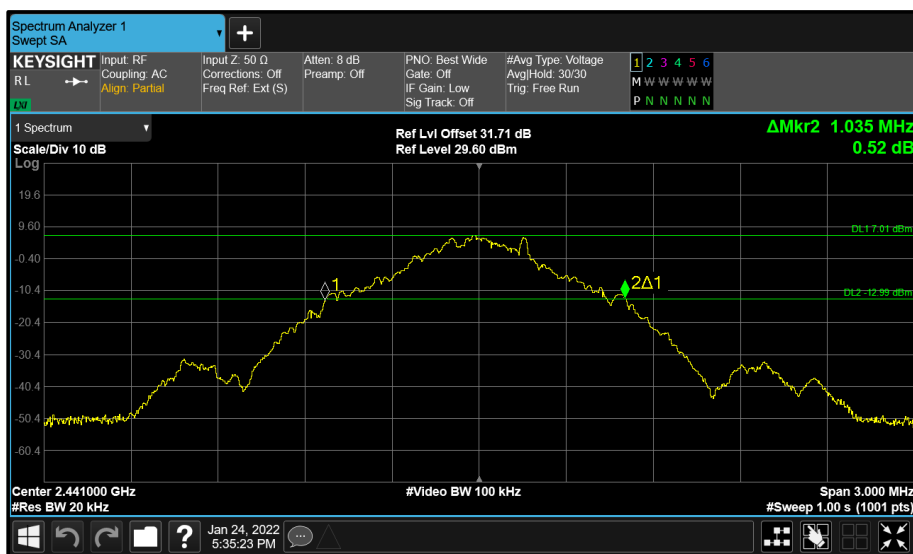


Figure 17 - R Cup (A) 2441 MHz (CH39) 20 dB Bandwidth

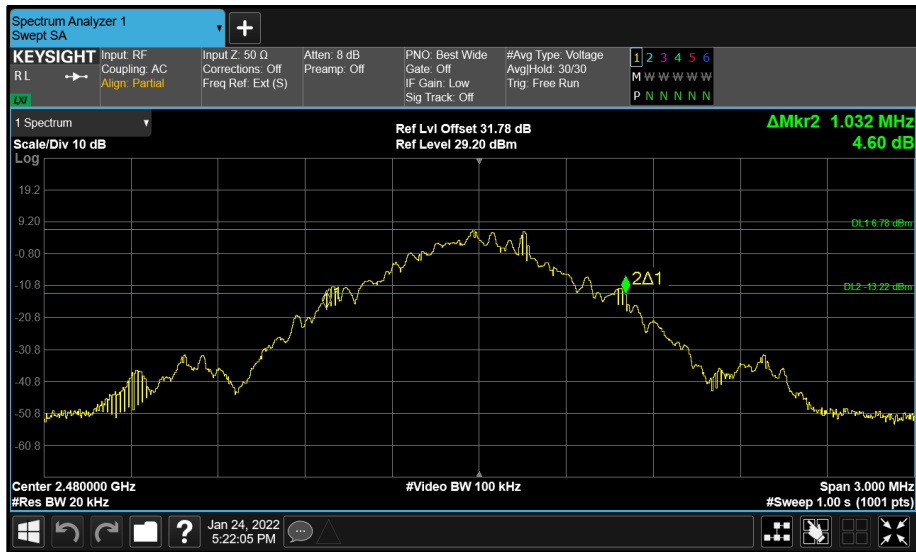


Figure 18 - R Cup (A) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.185	-	-	-
2441	1.180	-	-	-
2480	1.180	-	-	-

Table 31 - 20 dB Bandwidth Results

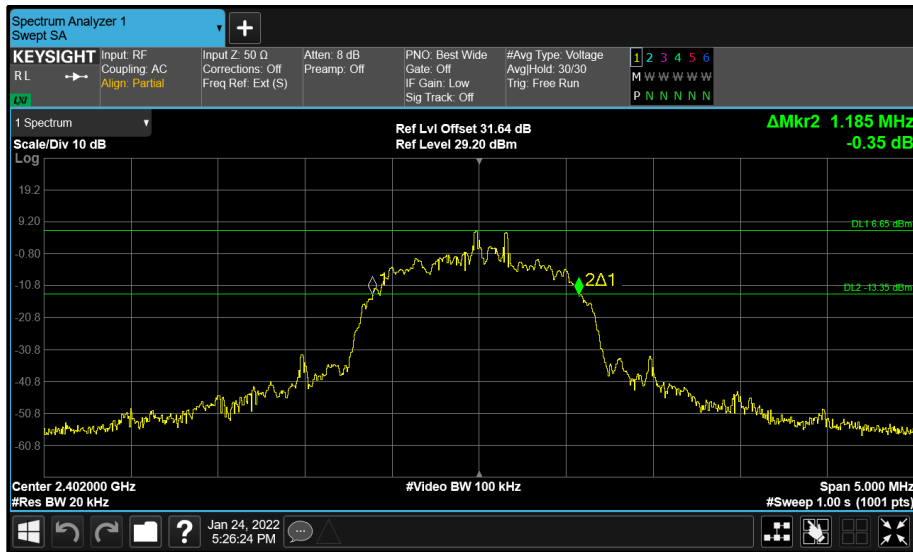


Figure 19 - R Cup (A) 2402 MHz (CH0) 20 dB Bandwidth

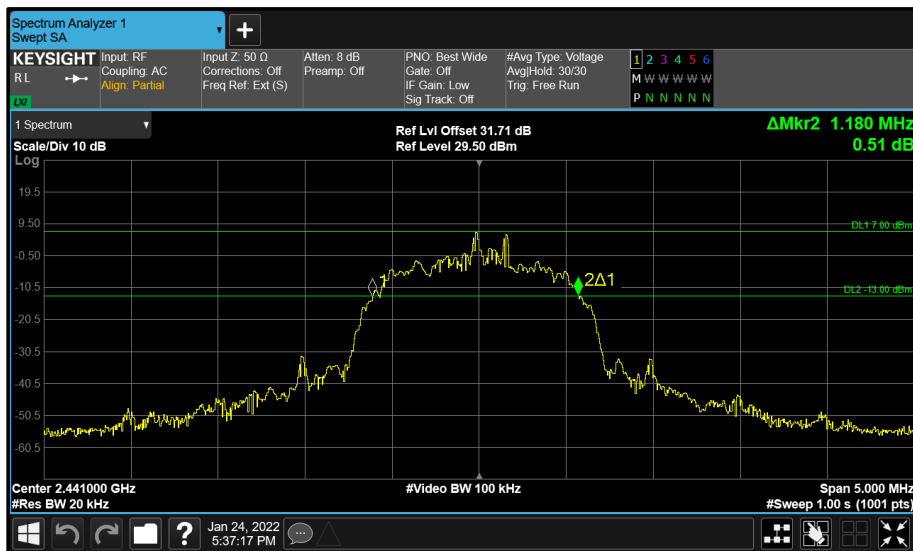


Figure 20 - R Cup (A) 2441 MHz (CH39) 20 dB Bandwidth

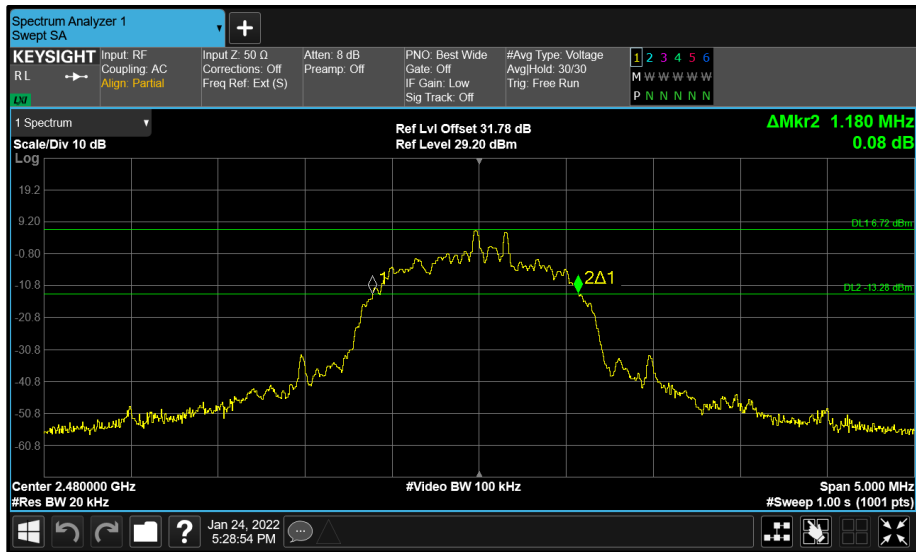


Figure 21 - R Cup (A) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.185	-	-	-
2441	1.185	-	-	-
2480	1.185	-	-	-

Table 32 - 20 dB Bandwidth Results

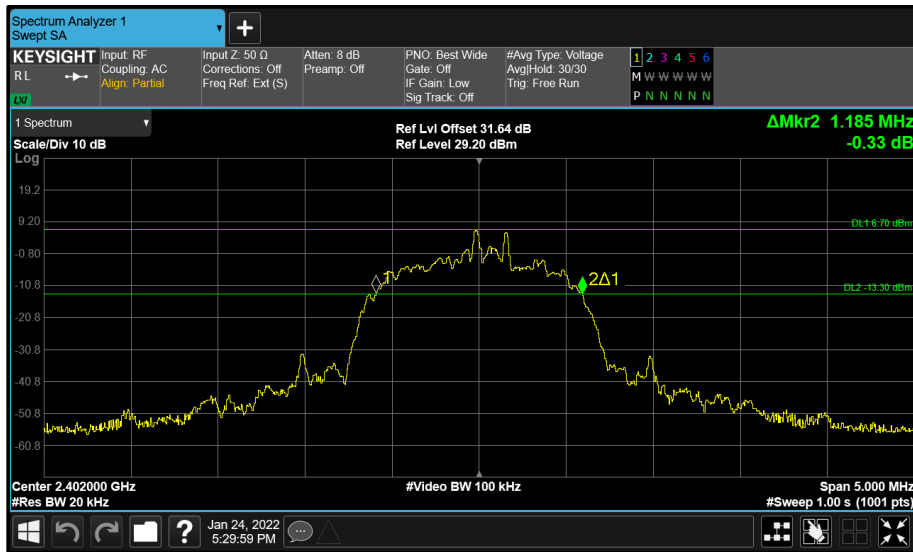


Figure 22 - R Cup (A) 2402 MHz (CH0) 20 dB Bandwidth

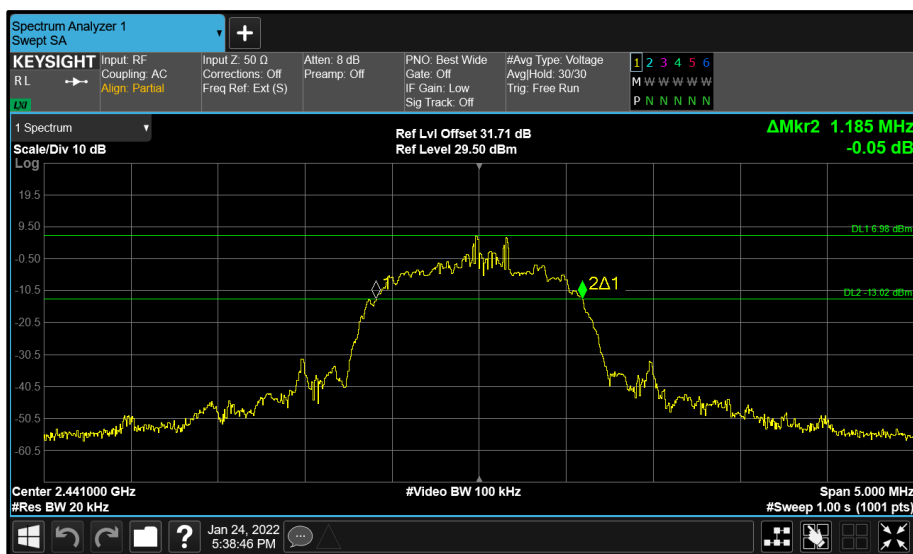


Figure 23 - R Cup (A) 2441 MHz (CH39) 20 dB Bandwidth

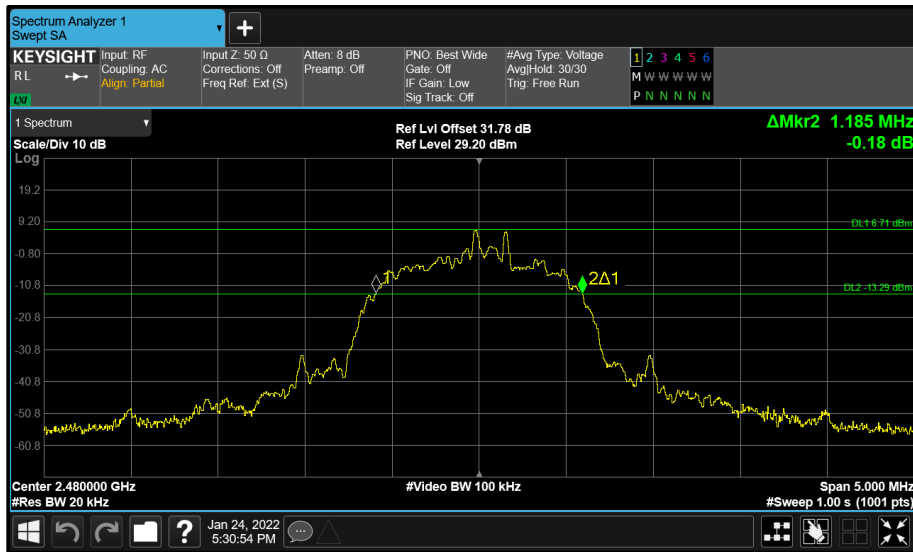


Figure 24 - R Cup (A) 2480 MHz (CH78) 20 dB Bandwidth

FCC 47 CFR Part 15 and ISED RSS-247 Limit Clause

None specified.

2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	30-Jun-2022
MXA Signal Analyser	Keysight Technologies	N9020B	5528	24	04-Mar-2022
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	16-Apr-2022

Table 33



2.6 Maximum Conducted Output Power

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)
ISED RSS-247, Clause 5.4
ISED RSS-GEN, Clause 6.12

2.6.2 Equipment Under Test and Modification State

WP01, S/N: F40E11710006 - Modification State 0
WP01, S/N: F40E11710004 - Modification State 0

2.6.3 Date of Test

24-January-2022 to 25-January-2022

2.6.4 Test Method

The test was performed in accordance with ANSI C63.10 clause 7.8.5 using a power meter.

2.6.5 Environmental Conditions

Ambient Temperature	21.5 - 22.7 °C
Relative Humidity	27.1 - 27.6 %



2.6.6 Test Results

2.4 GHz Bluetooth - BR/EDR - Right Cup

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH5)	Duty Cycle (%):	57.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	2.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	9.30	-	-	-	-	30.00	-20.70
2441	9.58	-	-	-	-	30.00	-20.42
2480	9.24	-	-	-	-	30.00	-20.76

Table 34 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	9.30	-	-	-	-	30.00	-20.70	11.55	36.00	-24.45
2441	9.58	-	-	-	-	30.00	-20.42	11.83	36.00	-24.17
2480	9.24	-	-	-	-	30.00	-20.76	11.49	36.00	-24.51

Table 35 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	58.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	2.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	9.22	-	-	-	-	30.00	-20.78
2441	9.54	-	-	-	-	30.00	-20.46
2480	9.20	-	-	-	-	30.00	-20.80

Table 36 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	9.22	-	-	-	-	30.00	-20.78	11.47	36.00	-24.53
2441	9.54	-	-	-	-	30.00	-20.46	11.79	36.00	-24.21
2480	9.20	-	-	-	-	30.00	-20.80	11.45	36.00	-24.55

Table 37 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT 8-DPSK (3-DH5)	Duty Cycle (%):	58.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (R Cup)	Peak Antenna Gain (dBi):	2.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	9.22	-	-	-	-	30.00	-20.78
2441	9.55	-	-	-	-	30.00	-20.45
2480	9.17	-	-	-	-	30.00	-20.83

Table 38 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	9.22	-	-	-	-	30.00	-20.78	11.47	36.00	-24.53
2441	9.55	-	-	-	-	30.00	-20.45	11.80	36.00	-24.20
2480	9.17	-	-	-	-	30.00	-20.83	11.42	36.00	-24.58

Table 39 - ISED Maximum Conducted (peak) Output Power Results



2.4 GHz Bluetooth - BR/EDR - Left Cup

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT GFSK (DH5)	Duty Cycle (%):	57.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (L Cup)	Peak Antenna Gain (dBi):	2.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	9.70	-	-	-	30.00	-20.30
2441	-	9.66	-	-	-	30.00	-20.34
2480	-	9.98	-	-	-	30.00	-20.02

Table 40 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	9.70	-	-	-	30.00	-20.30	11.95	36.00	-24.05
2441	-	9.66	-	-	-	30.00	-20.34	11.91	36.00	-24.09
2480	-	9.98	-	-	-	30.00	-20.02	12.23	36.00	-23.77

Table 41 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	58.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (L Cup)	Peak Antenna Gain (dBi):	2.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	9.57	-	-	-	30.00	-20.43
2441	-	9.60	-	-	-	30.00	-20.40
2480	-	9.89	-	-	-	30.00	-20.11

Table 42 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	9.57	-	-	-	30.00	-20.43	11.82	36.00	-24.18
2441	-	9.60	-	-	-	30.00	-20.40	11.85	36.00	-24.15
2480	-	9.89	-	-	-	30.00	-20.11	12.14	36.00	-23.86

Table 43 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(1) RSS-247 5.4 b)	Test Method(s):	C63.10 7.8.5
Additional Reference(s):	-		

DUT Configuration			
Mode:	BT 8-DPSK (3-DH5)	Duty Cycle (%):	58.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (L Cup)	Peak Antenna Gain (dBi):	2.25

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	9.56	-	-	-	30.00	-20.44
2441	-	9.60	-	-	-	30.00	-20.40
2480	-	9.88	-	-	-	30.00	-20.12

Table 44 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	9.56	-	-	-	30.00	-20.44	11.81	36.00	-24.19
2441	-	9.60	-	-	-	30.00	-20.40	11.85	36.00	-24.15
2480	-	9.88	-	-	-	30.00	-20.12	12.13	36.00	-23.87

Table 45 - ISED Maximum Conducted (peak) Output Power Results

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISED RSS-247, Limit Clause 5.4 (d)

For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.



2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
USB Power Sensor	Boonton	RTP5006	5184	12	19-Apr-2022
USB Power Sensor	Boonton	RTP5006	5187	12	19-Apr-2022
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	16-Apr-2022

Table 46



2.7 Authorised Band Edges

2.7.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
ISED RSS-247, Clause 5.5

2.7.2 Equipment Under Test and Modification State

WP01, S/N: M8D-CN-FDN00014X - Modification State 0

2.7.3 Date of Test

05-October-2022

2.7.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

2.7.5 Environmental Conditions

Ambient Temperature	20.4 °C
Relative Humidity	54.8 %



2.7.6 Test Results

2.4 GHz Bluetooth - BR/EDR - Right Cup

Mode	Modulation	Packet Type	Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	GFSK	DH5	2402	2400.0	-53.02
Static	$\pi/4$ DQPSK	2DH5	2402	2400.0	-53.09
Static	8-DPSK	3DH5	2402	2400.0	-51.87
Hopping	GFSK	DH5	2402	2400.0	-56.65
Hopping	$\pi/4$ DQPSK	2DH5	2402	2400.0	-58.84
Hopping	8-DPSK	3DH5	2402	2400.0	-56.66

Table 47

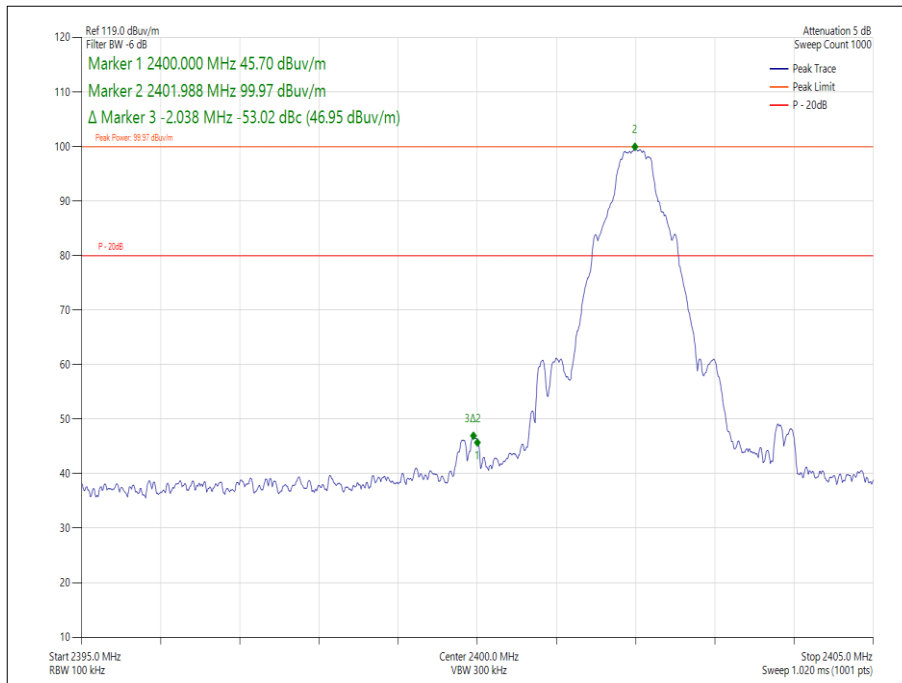


Figure 25 - Static - GFSK/DH5 - 2402 MHz - Measured Frequency 2400.0 MHz

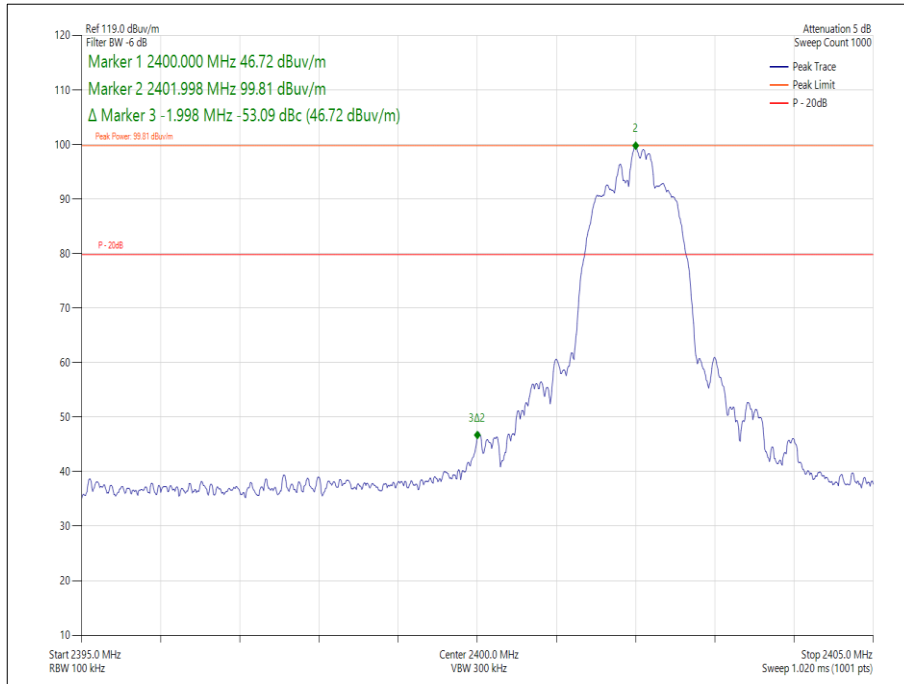


Figure 26 - Static - $\pi/4$ DQPSK/2DH5 - 2402 MHz - Measured Frequency 2400.0 MHz

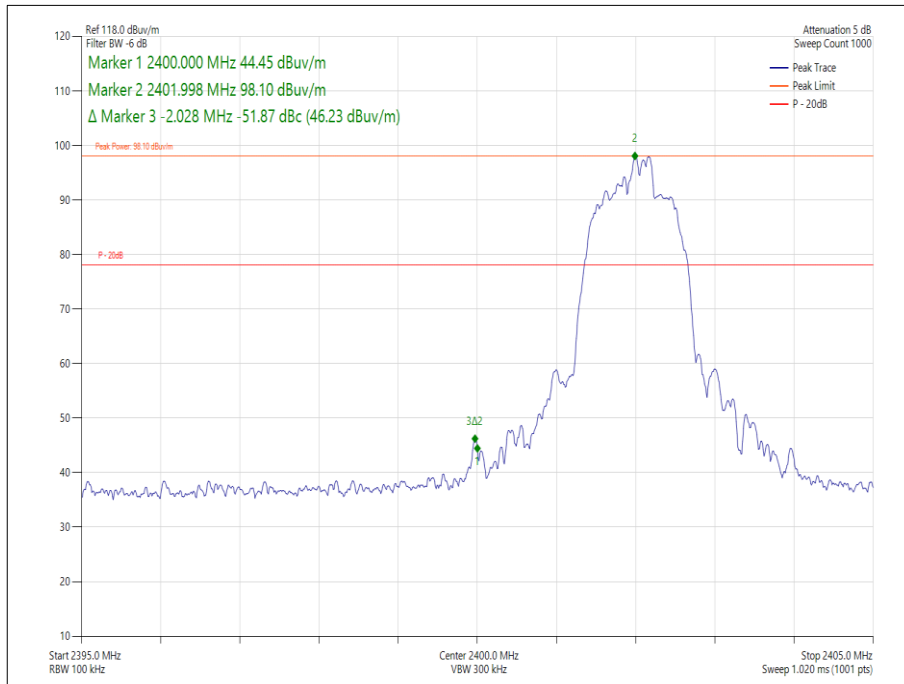


Figure 27 - Static - 8-DPSK/3DH5 - 2402 MHz - Measured Frequency 2400.0 MHz

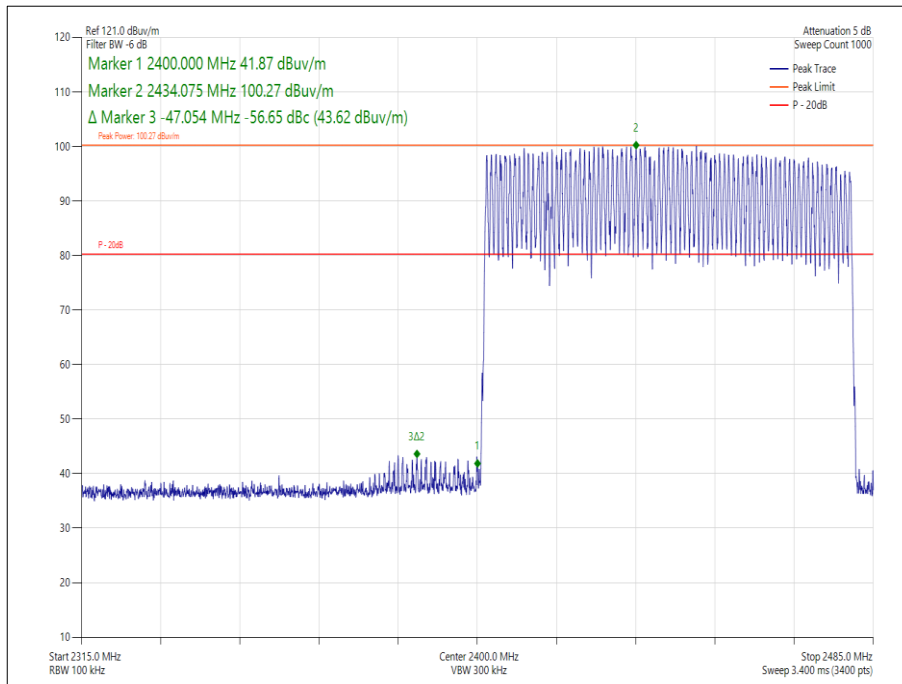


Figure 28 - Hopping - GFSK/DH5 - 2402 MHz - Measured Frequency 2400.0 MHz

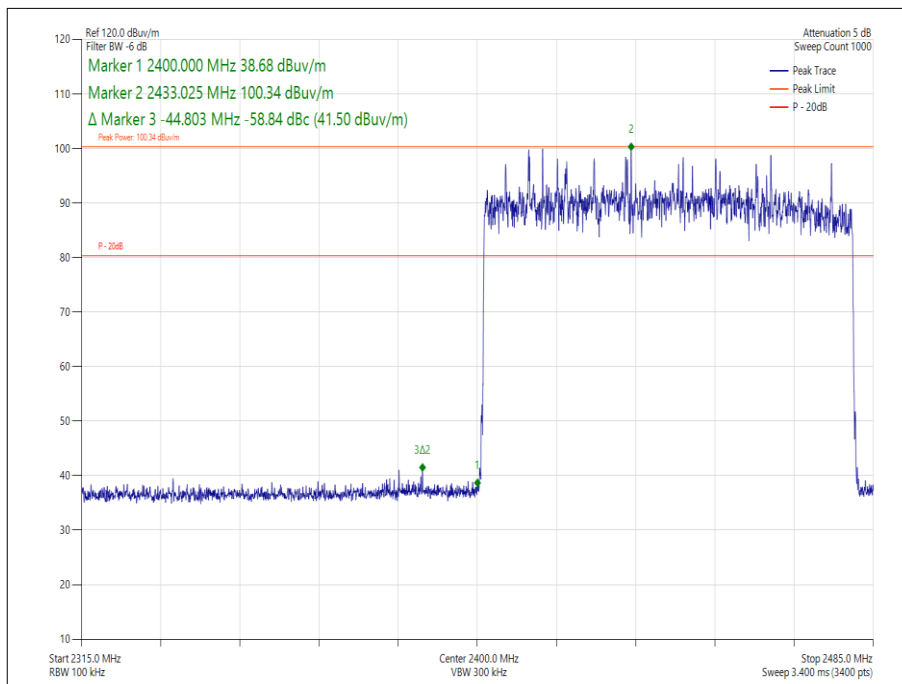


Figure 29 - Hopping - $\pi/4$ DQPSK/2DH5 - 2402 MHz - Measured Frequency 2400.0 MHz

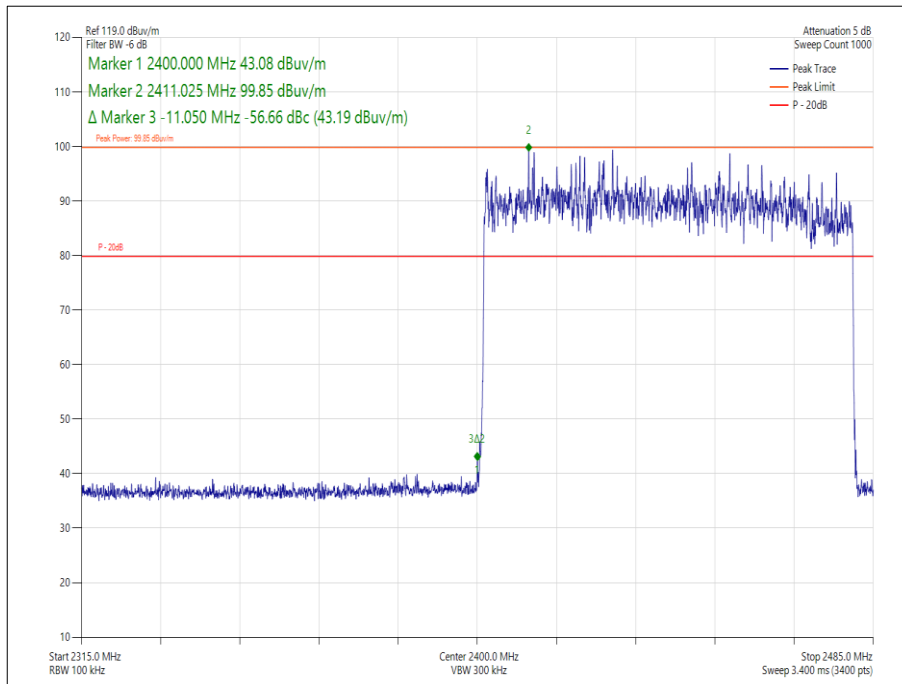


Figure 30 - Hopping - 8-DPSK/3DH5 - 2402 MHz - Measured Frequency 2400.0 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



2.7.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
True RMS Multimeter	Fluke	179	4006	12	29-Mar-2023
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	17-May-2023
Emissions Software	TUV SUD	EmX V3.1.4	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	24-Nov-2024
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Antenna (DRG 1-10.5GHz)	Schwarzbeck	BBHA9120B	5215	12	28-May-2023
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	07-Apr-2023
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	12-Apr-2023
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2023

Table 48

TU - Traceability Unscheduled



2.8 Spurious Radiated Emissions

2.8.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.209
ISED RSS-247, Clause 3.3 and 5.5
ISED RSS-GEN, Clause 6.13 and 8.9

2.8.2 Equipment Under Test and Modification State

WP01, S/N: M8D-CN-FDN00012X- Modification State 0
WP01, S/N: M8D-CN-FDN00014X- Modification State 0

2.8.3 Date of Test

30-September-2022 to 04-October-2022

2.8.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

Prior to emission pre-scans, checks on the fundamental were performed with the device positioned flat, on its side and up-right on the turntable platform. With the measurement antenna orientated in both horizontal and vertical polarisation, it was determined which position resulted in the maximum level of the fundamental signal. Any emission identified within 10 dB of the limit was then investigated in the other positions.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5 to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.2.

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:

$10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

Above 18 GHz, the measurement distance was reduced to 1 m. The limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

At a measurement distance of 1 meter the limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

Where formal measurements have been necessary, the results have been presented in the emissions table.

2.8.5 Test Setup Diagram

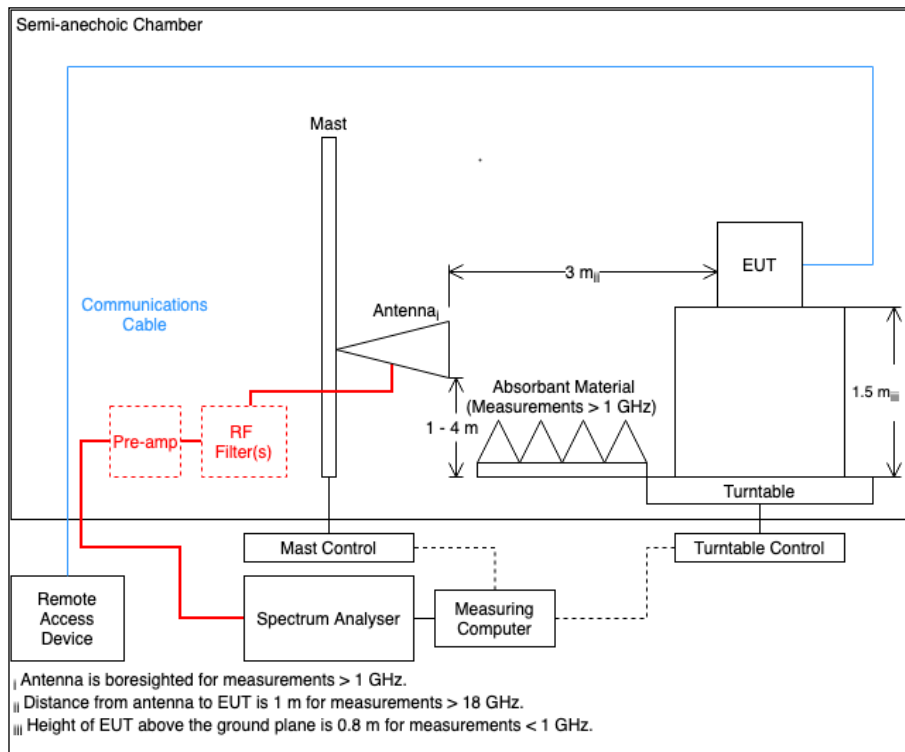


Figure 31

2.8.6 Environmental Conditions

Ambient Temperature	20.5 - 21.8 °C
Relative Humidity	43.4 - 56.3 %



2.8.7 Test Results

2.4 GHz Bluetooth - BR/EDR - Right Cup

Testing was performed on the modulation and packet type which resulted in the highest conducted output power. The Modulation/Packet type was DH5.

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 49 - 2402 MHz, 30 MHz to 1 GHz

*No emissions were detected within 10 dB of the limit.

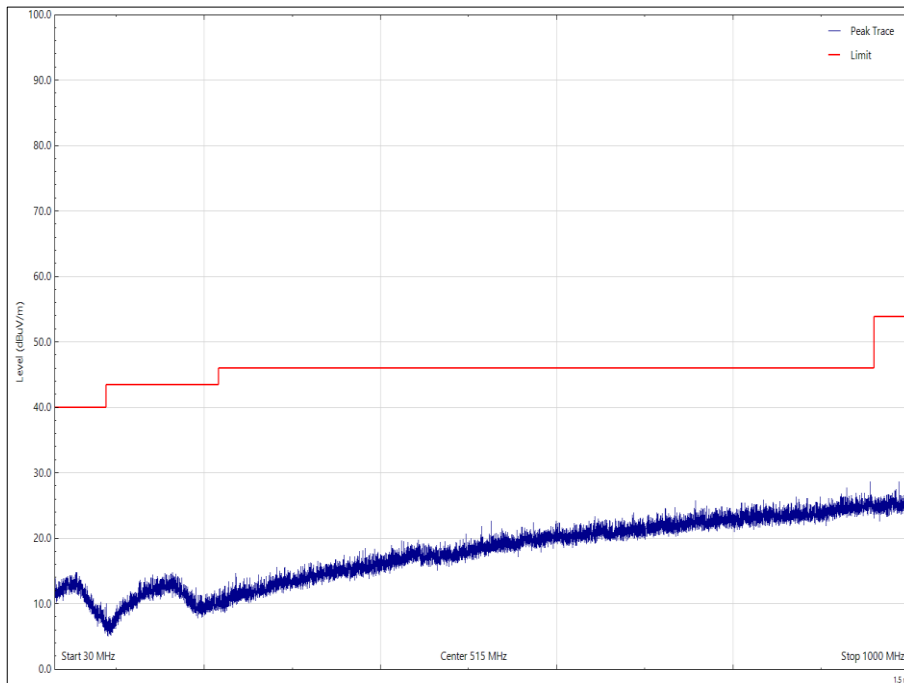


Figure 32 - 2402 MHz, 30 MHz to 1 GHz, Horizontal

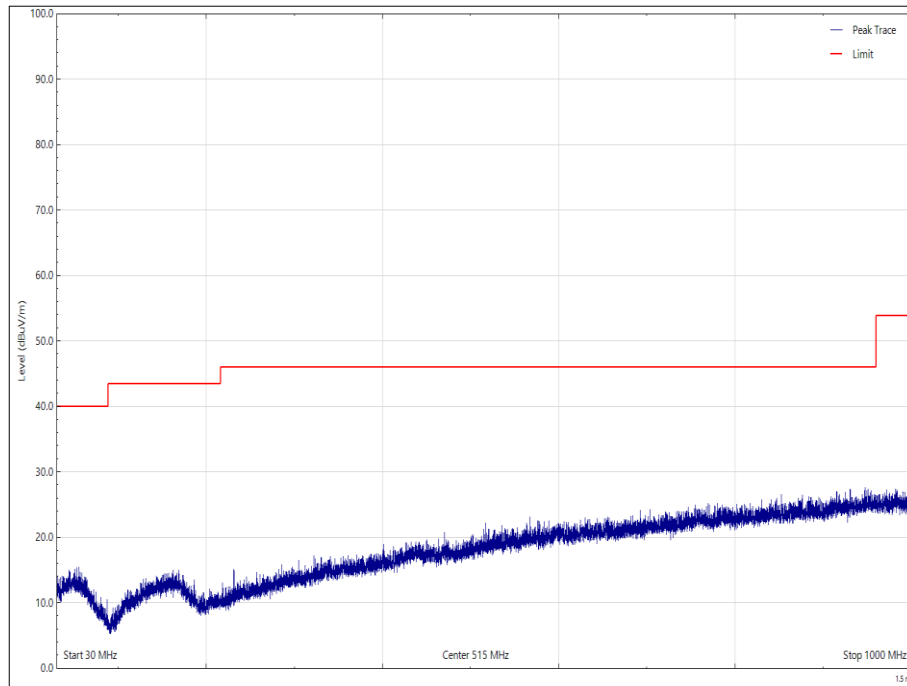


Figure 33 - 2402 MHz, 30 MHz to 1 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 50 - 2402 MHz, 1 GHz to 25GHz

*No emissions were detected within 10 dB of the limit.

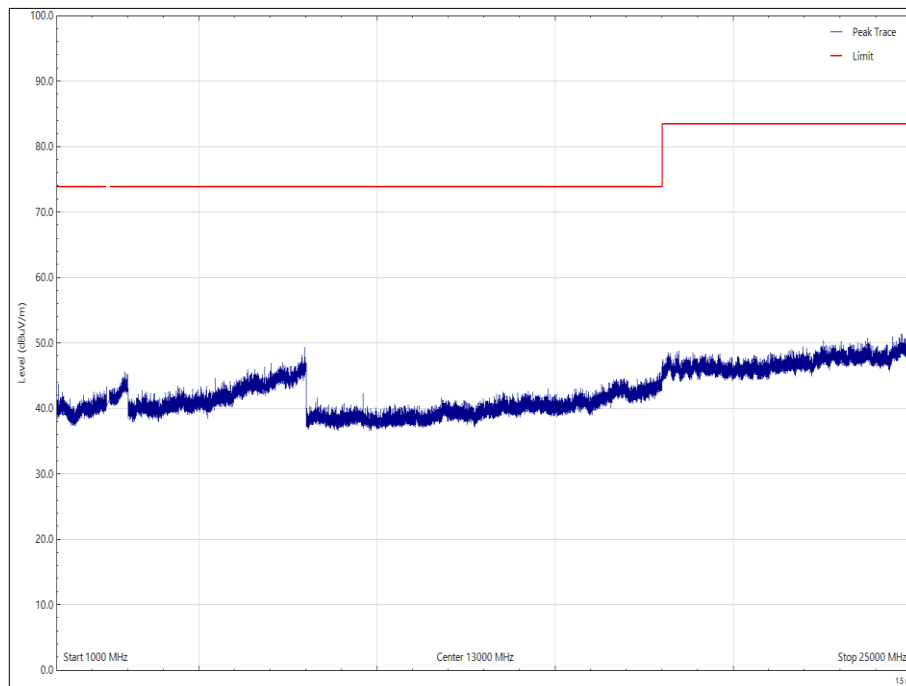


Figure 34 - 2402 MHz, 1 GHz to 25 GHz, Horizontal - Peak

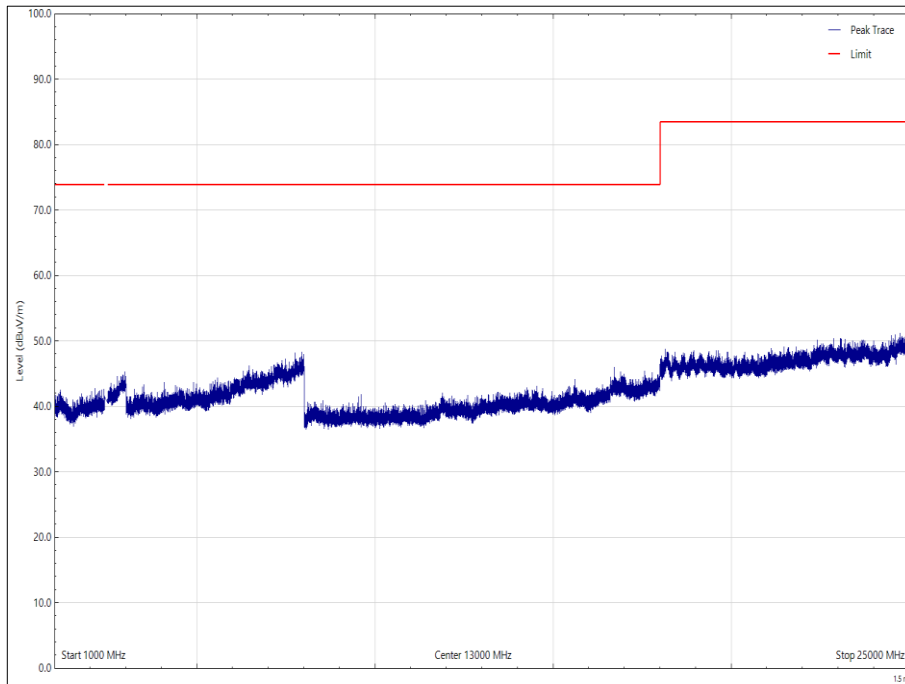


Figure 35 - 2402 MHz, 1 GHz to 25 GHz, Vertical - Peak

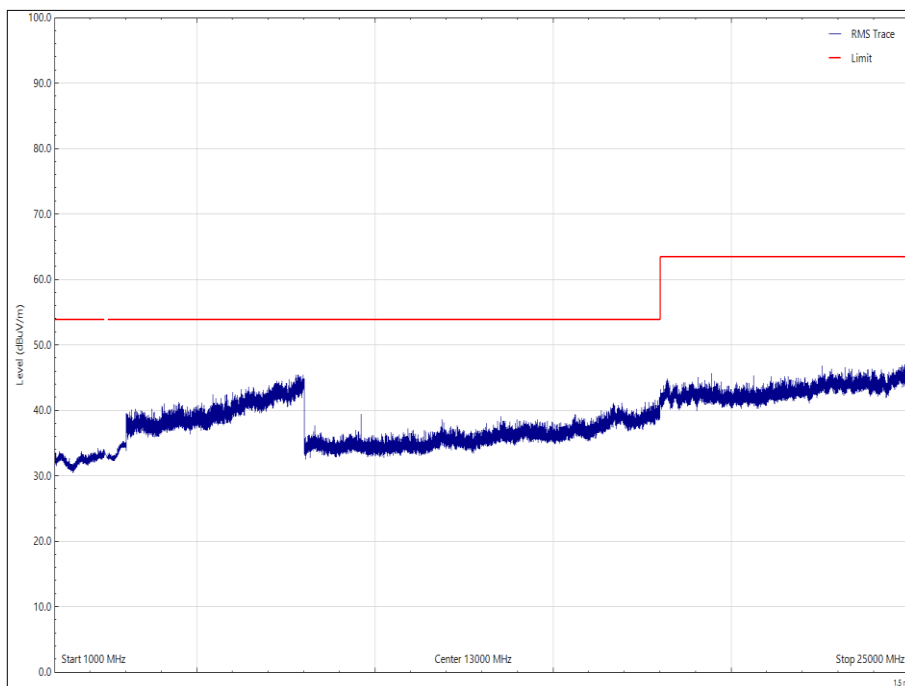


Figure 36 - 2402 MHz, 1 GHz to 25 GHz, Horizontal - Average

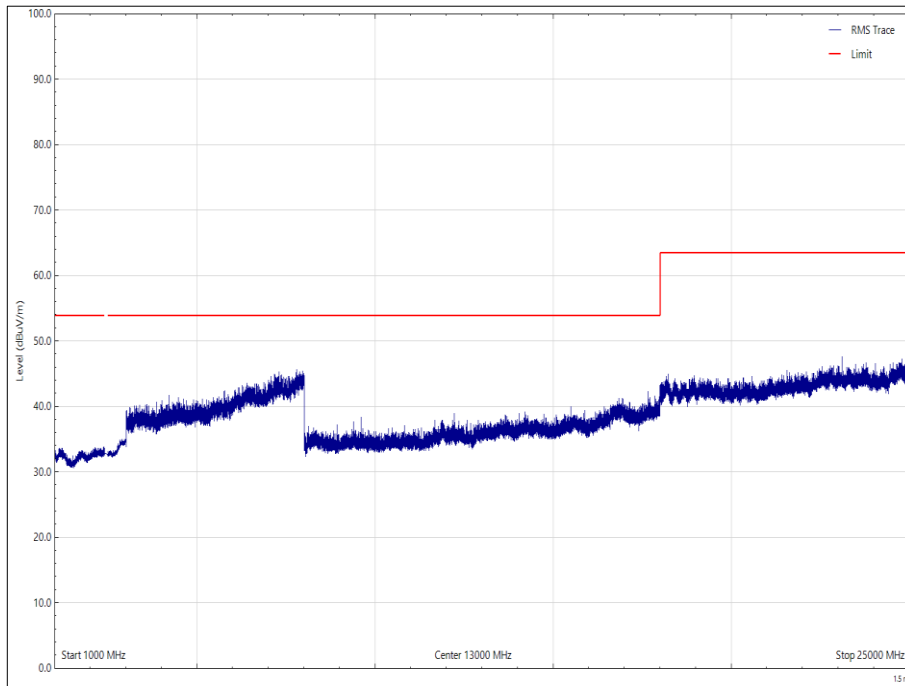


Figure 37 - 2402 MHz, 1 GHz to 25 GHz, Vertical - Average



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 51 - 2440 MHz, 30 MHz to 1 GHz

*No emissions were detected within 10 dB of the limit.

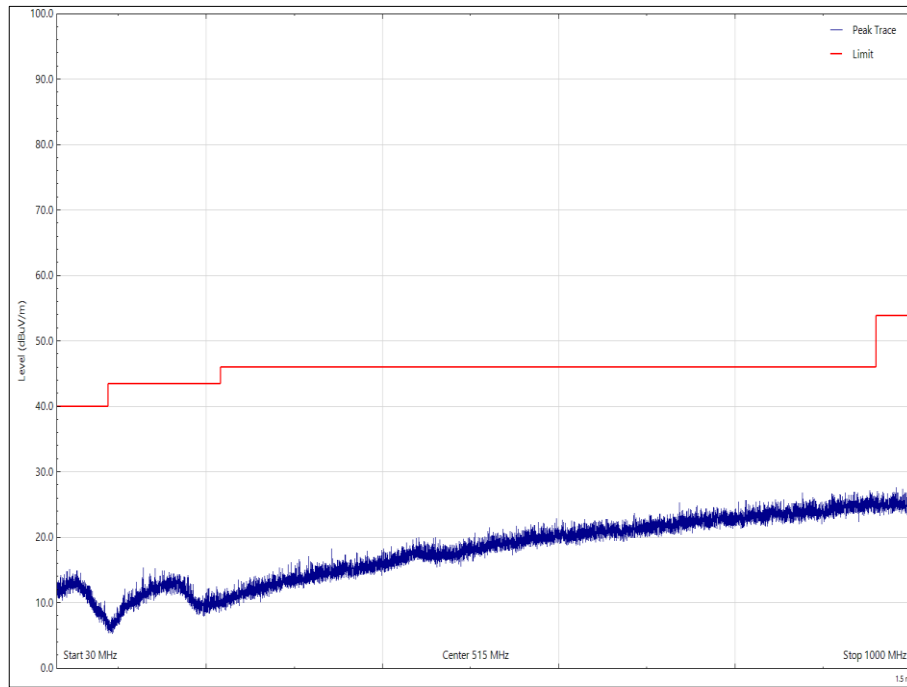


Figure 38 - 2440 MHz, 30 MHz to 1 GHz, Horizontal

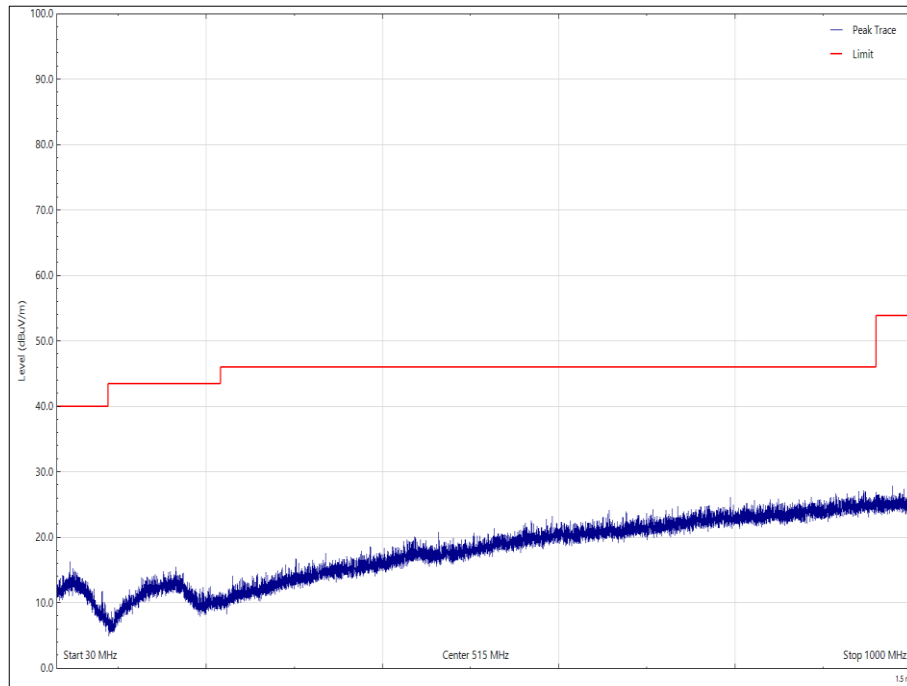


Figure 39 - 2440 MHz, 30 MHz to 1 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 52 - 2440 MHz - 1 GHz to 25 GHz

*No emissions were detected within 10 dB of the limit.

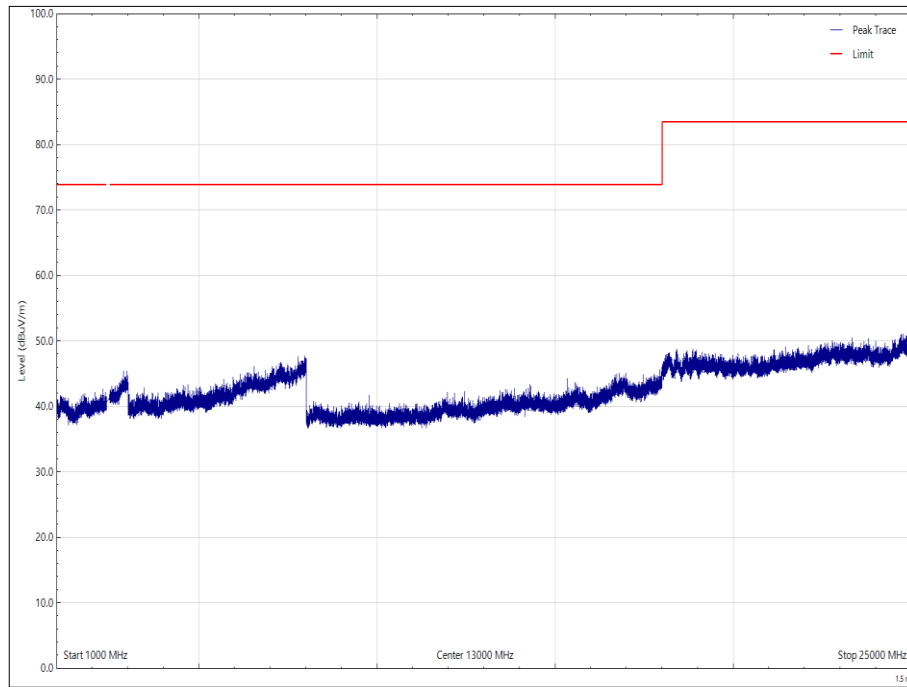


Figure 40 - 2440 MHz – 1 GHz to 25 GHz, Horizontal - Peak

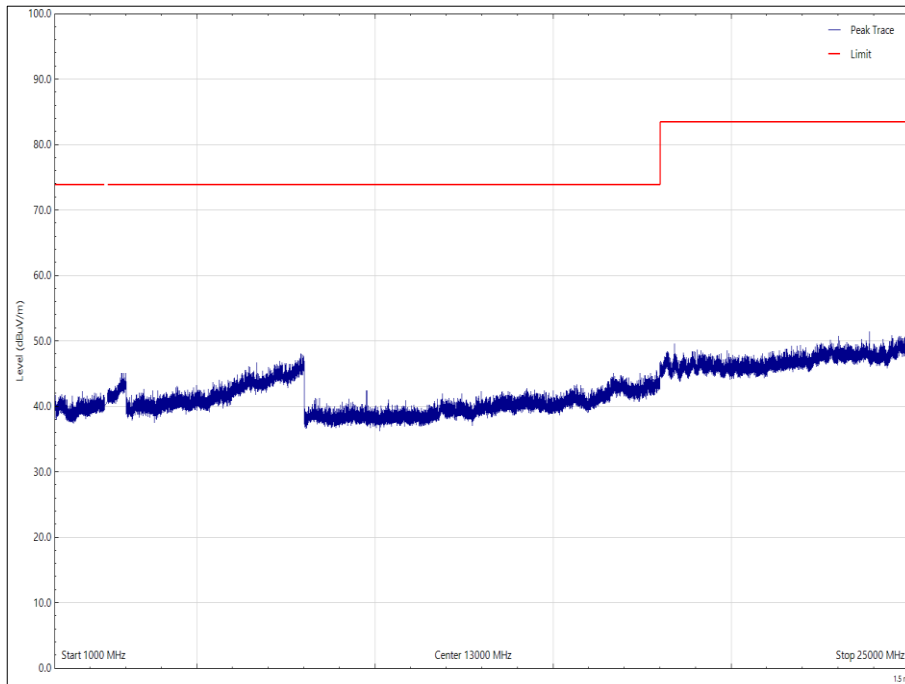


Figure 41 - 2440 MHz – 1 GHz to 25 GHz, Vertical - Peak

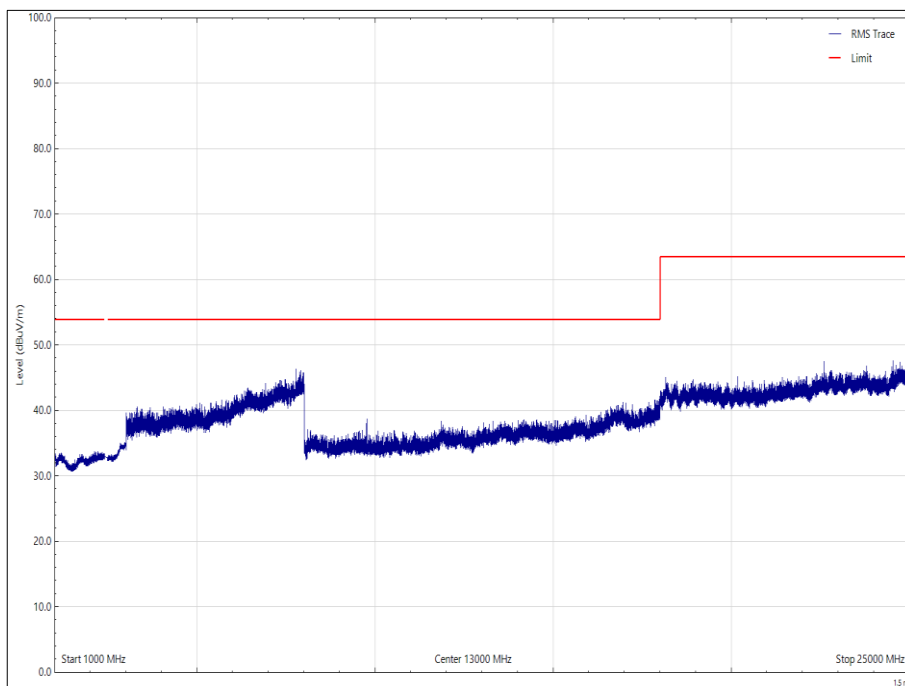


Figure 42 - 2440 MHz – 1 GHz to 25 GHz, Horizontal - Average

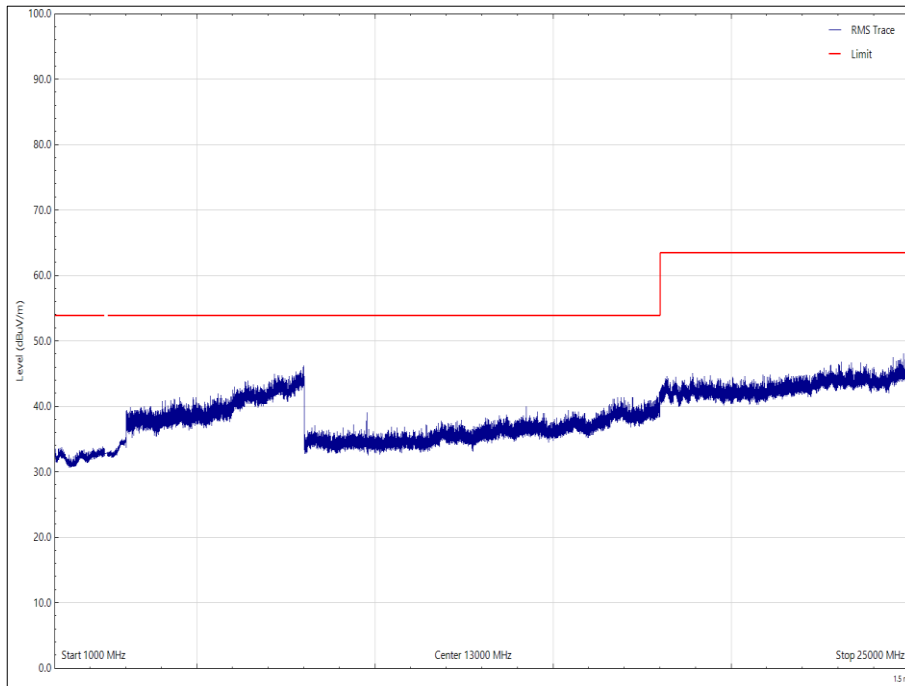


Figure 43 - 2440 MHz – 1 GHz to 25 GHz, Vertical - Average



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 53 - 2480 MHz, 30 MHz to 1 GHz, X Orientation

*No emissions were detected within 10 dB of the limit.

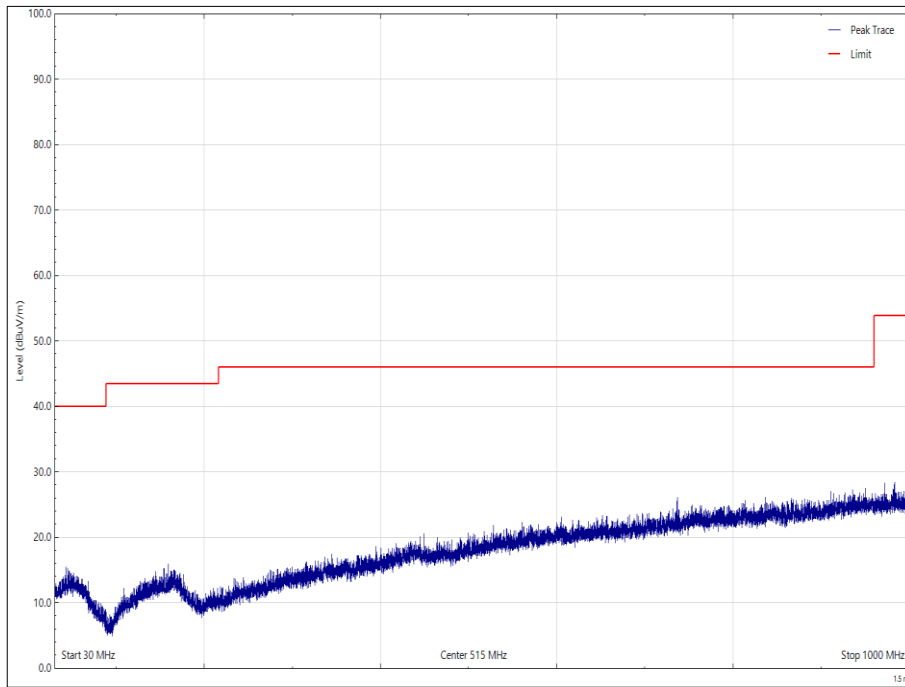


Figure 44 - 2480 MHz, 30 MHz to 1 GHz, Horizontal

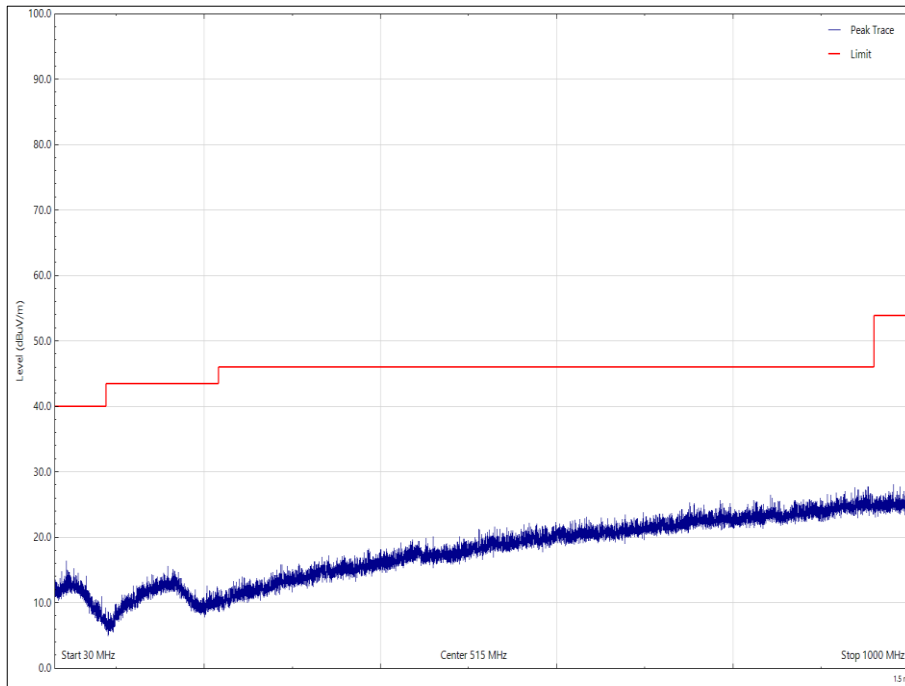


Figure 45 - 2480 MHz, 30 MHz to 1 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 54 - 2480 MHz - 1 GHz to 25 GHz

*No emissions were detected within 10 dB of the limit.

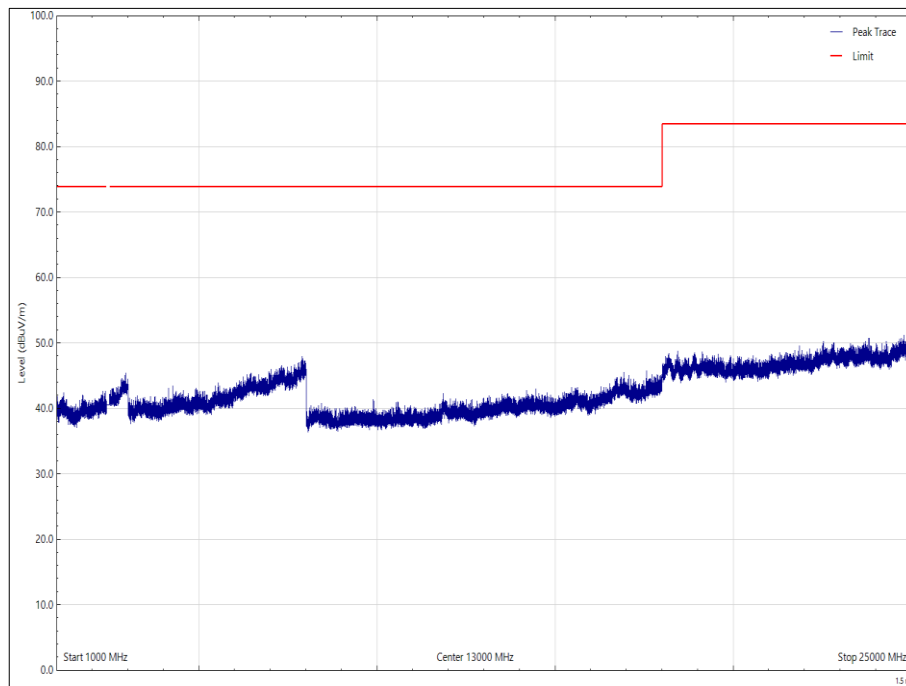


Figure 46 - 2480 MHz – 1 GHz to 25 GHz, Horizontal - Peak

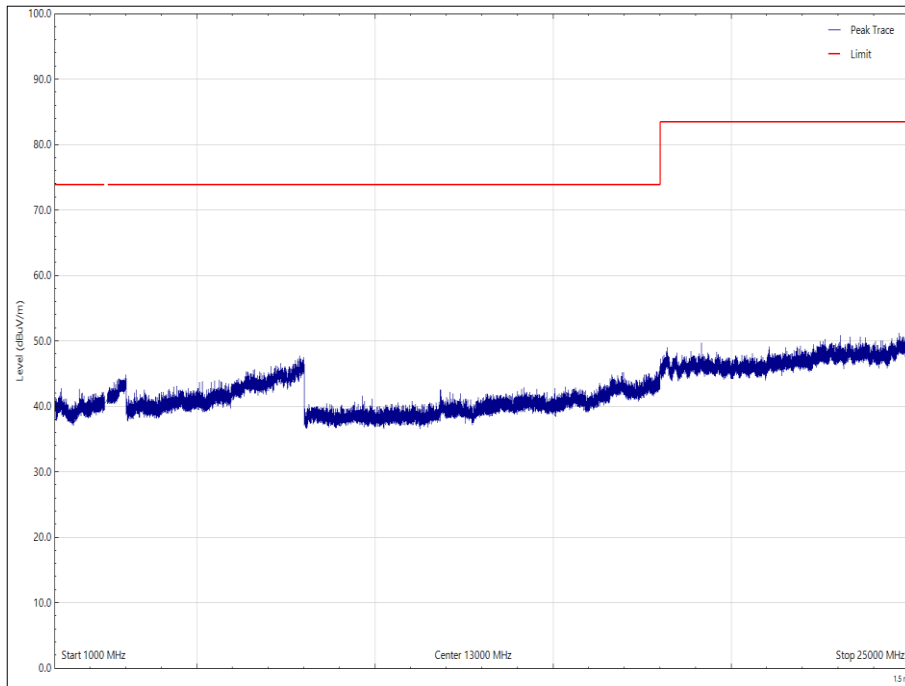


Figure 47 - 2480 MHz – 1 GHz to 25 GHz, Vertical - Peak

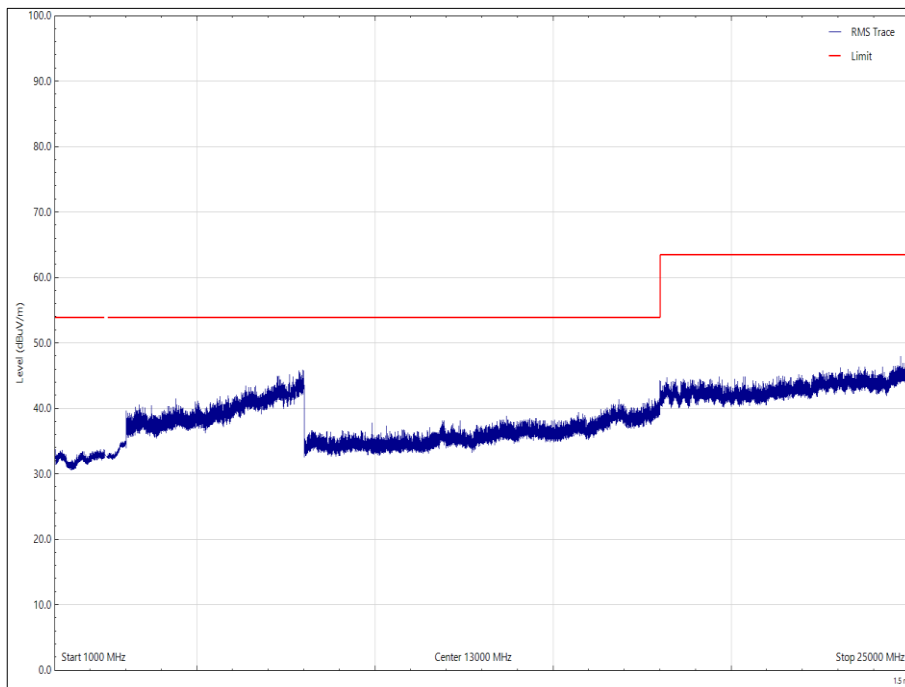


Figure 48 - 2480 MHz – 1 GHz to 25 GHz, Horizontal - Average

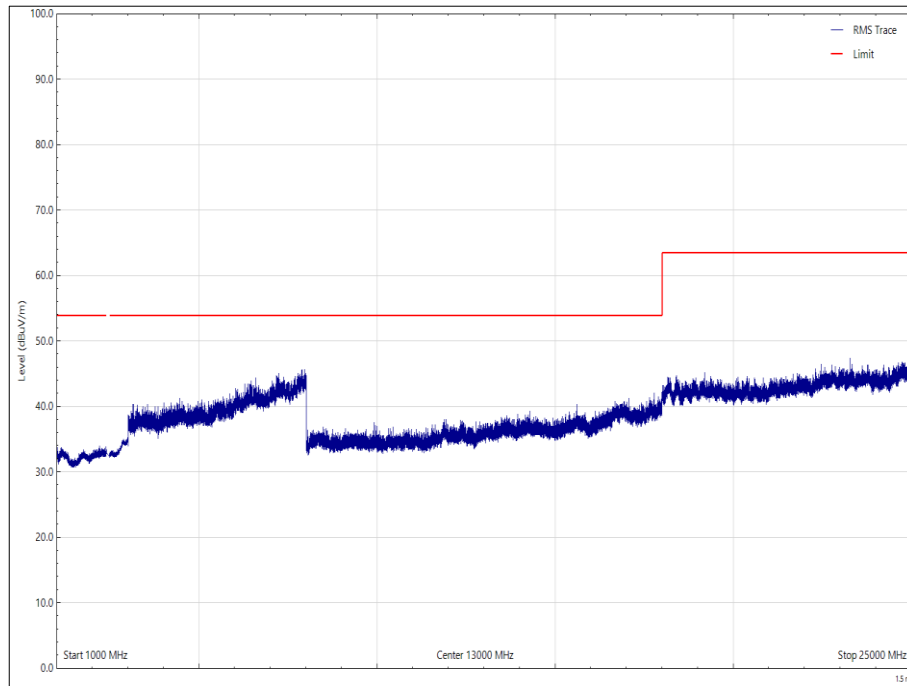


Figure 49 - 2480 MHz – 1 GHz to 25 GHz, Vertical - Average



2.4 GHz Bluetooth - BR/EDR - Left Cup

Testing was performed on the modulation and packet type which resulted in the highest conducted output power. The Modulation/Packet type was DH5.

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 55 - 2402 MHz, 30 MHz to 1 GHz

*No emissions were detected within 10 dB of the limit.

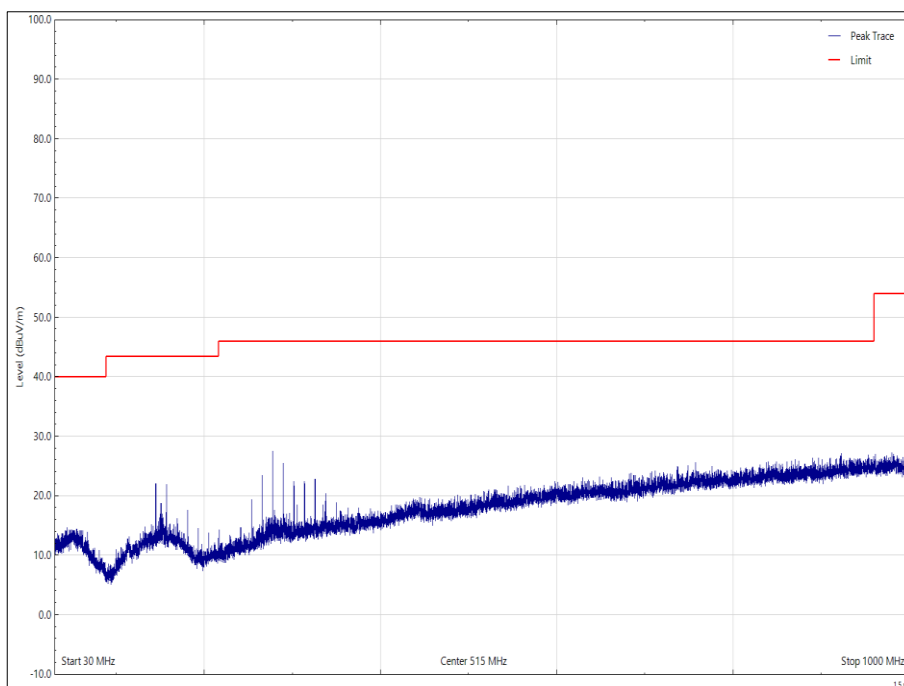


Figure 50 - 2402 MHz, 30 MHz to 1 GHz, Horizontal

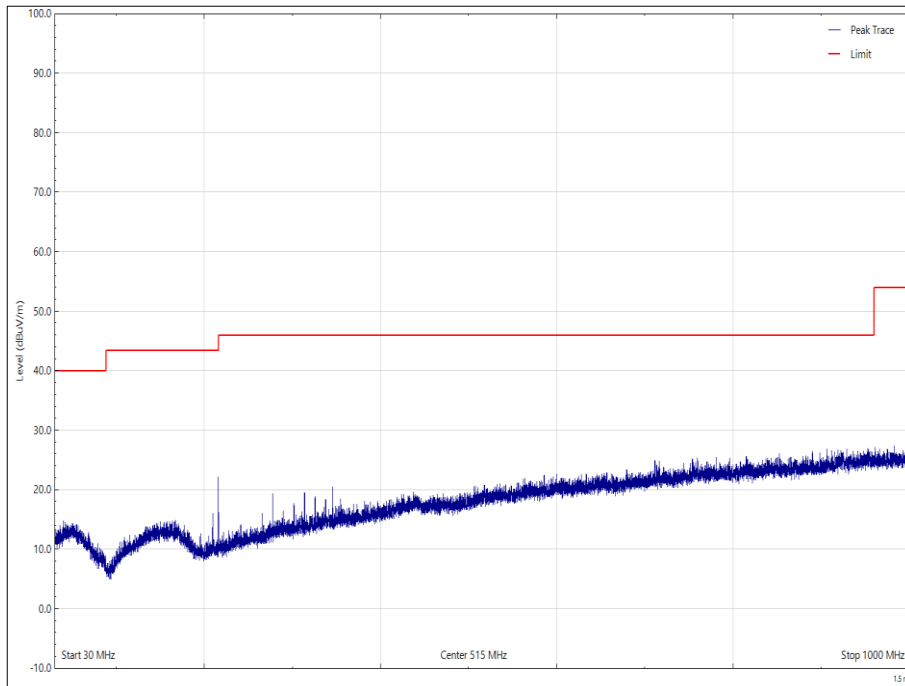


Figure 51 - 2402 MHz, 30 MHz to 1 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 56 - 2402 MHz, 1 GHz to 25 GHz

*No emissions were detected within 10 dB of the limit.

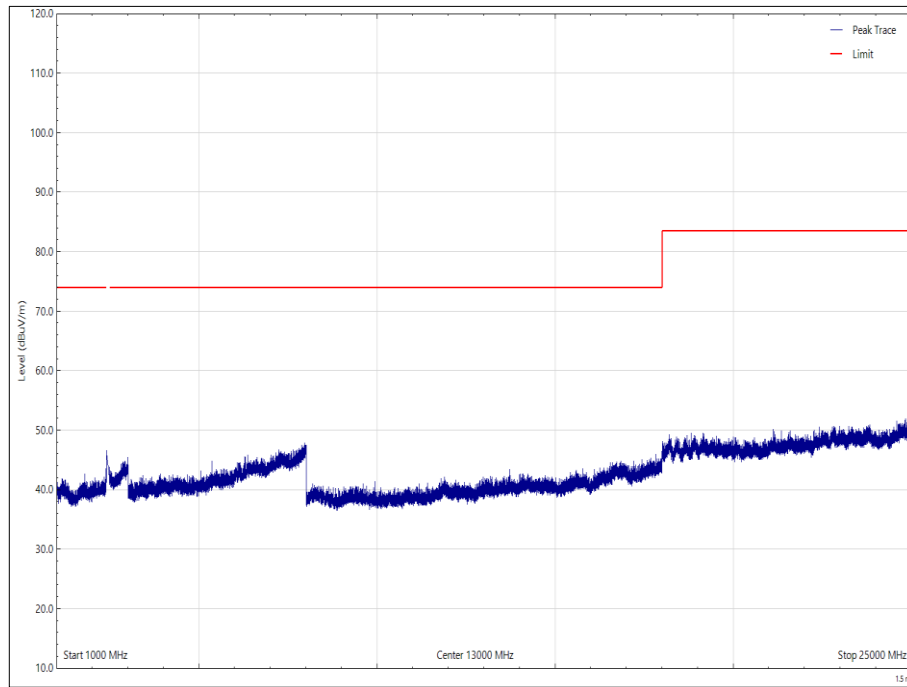


Figure 52 - 2402 MHz, 1 GHz to 25 GHz, Horizontal - Peak

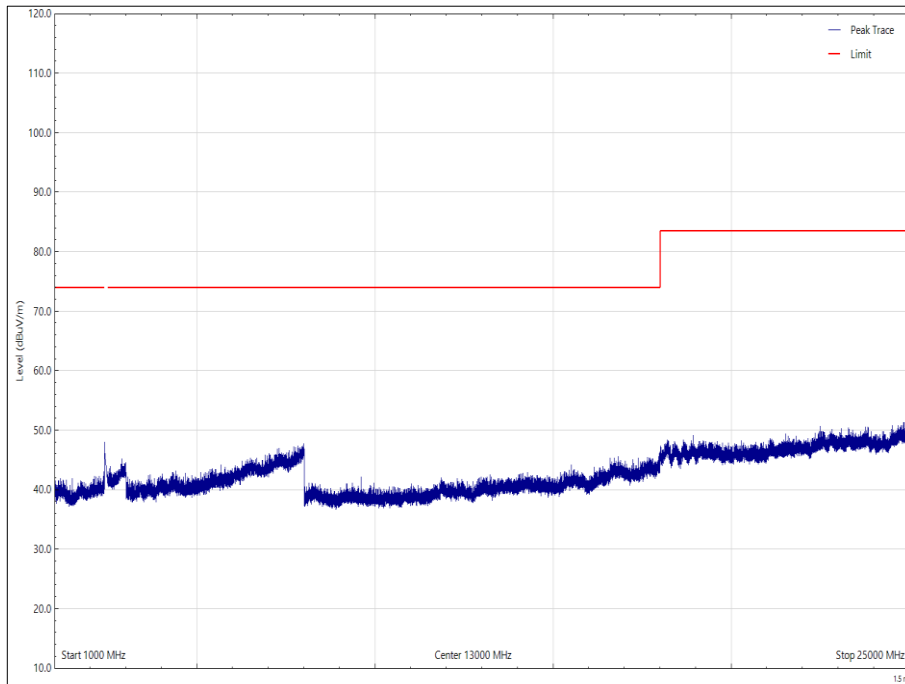


Figure 53 - 2402 MHz, 1 GHz to 25 GHz, Vertical - Peak

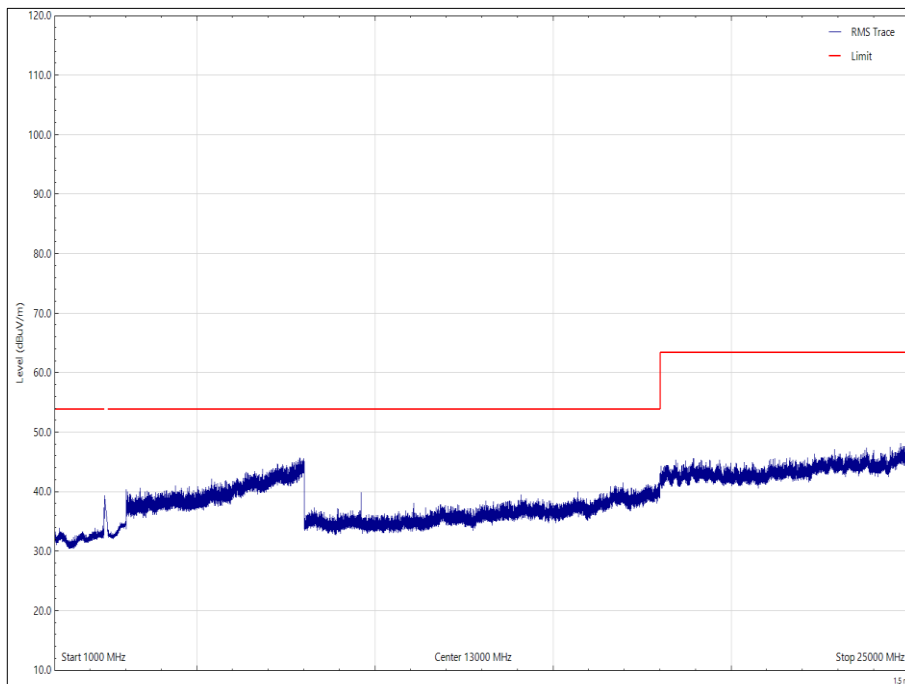


Figure 54 - 2402 MHz, 1 GHz to 25 GHz, Horizontal - Average

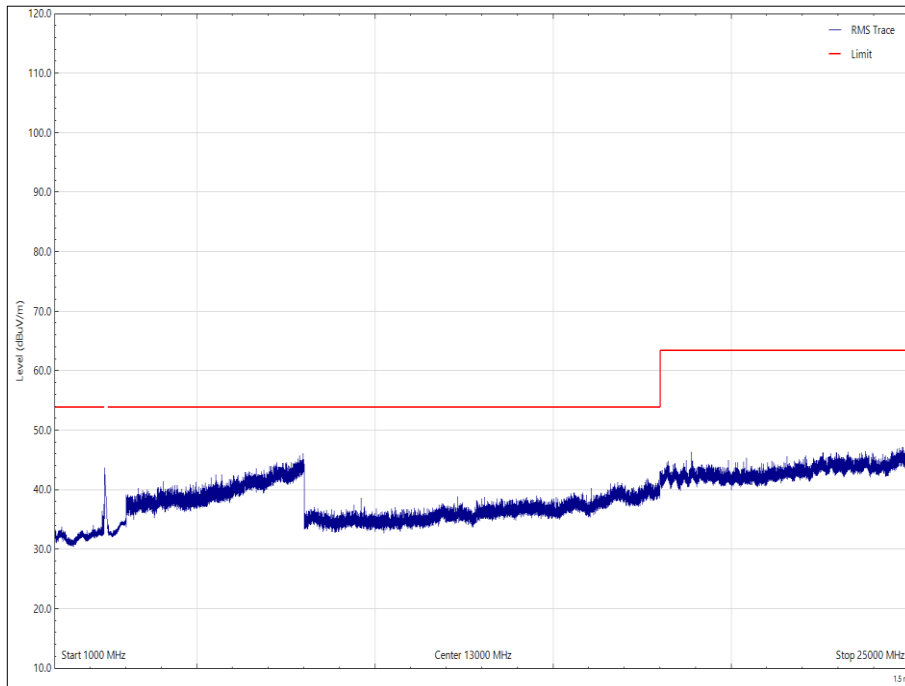


Figure 55 - 2402 MHz, 1 GHz to 25 GHz, Vertical - Average



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 57 - 2440 MHz, 30 MHz to 1 GHz

*No emissions were detected within 10 dB of the limit.

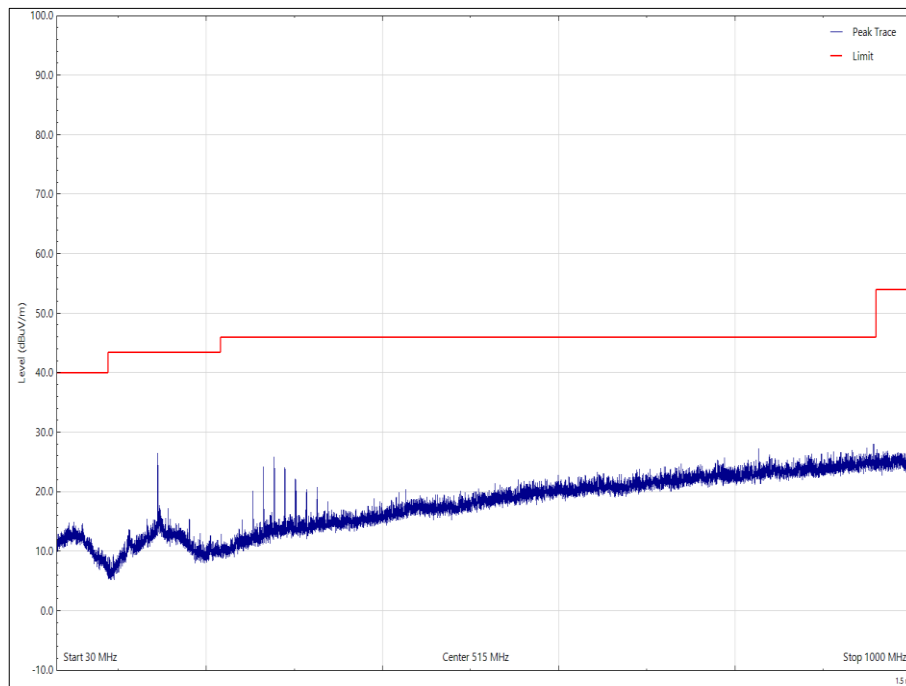


Figure 56 - 2440 MHz, 30 MHz to 1 GHz, Horizontal

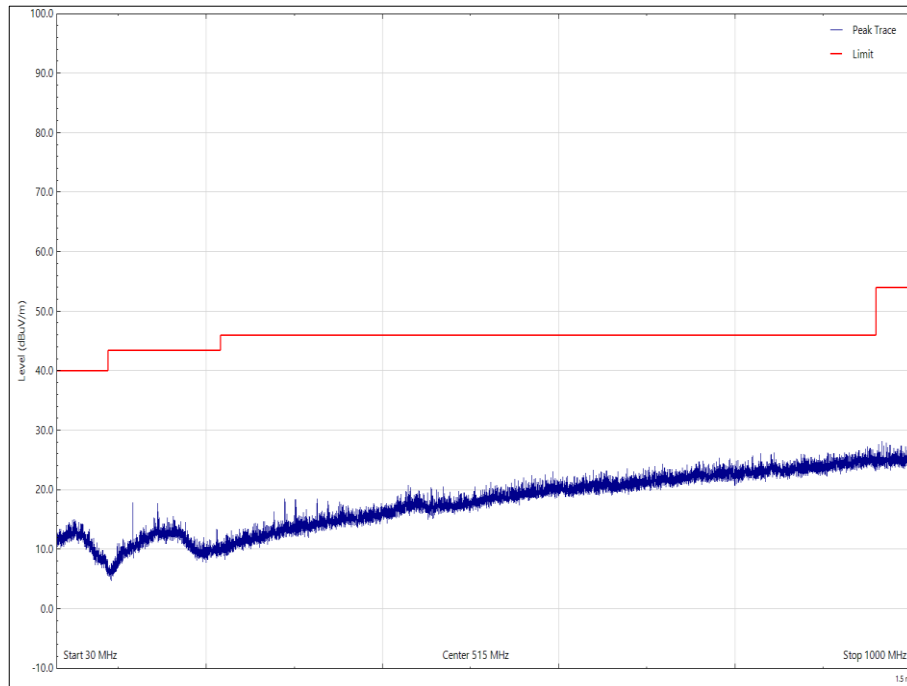


Figure 57 - 2440 MHz, 30 MHz to 1 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 58 - 2440 MHz - 1 GHz to 25 GHz

*No emissions were detected within 10 dB of the limit.

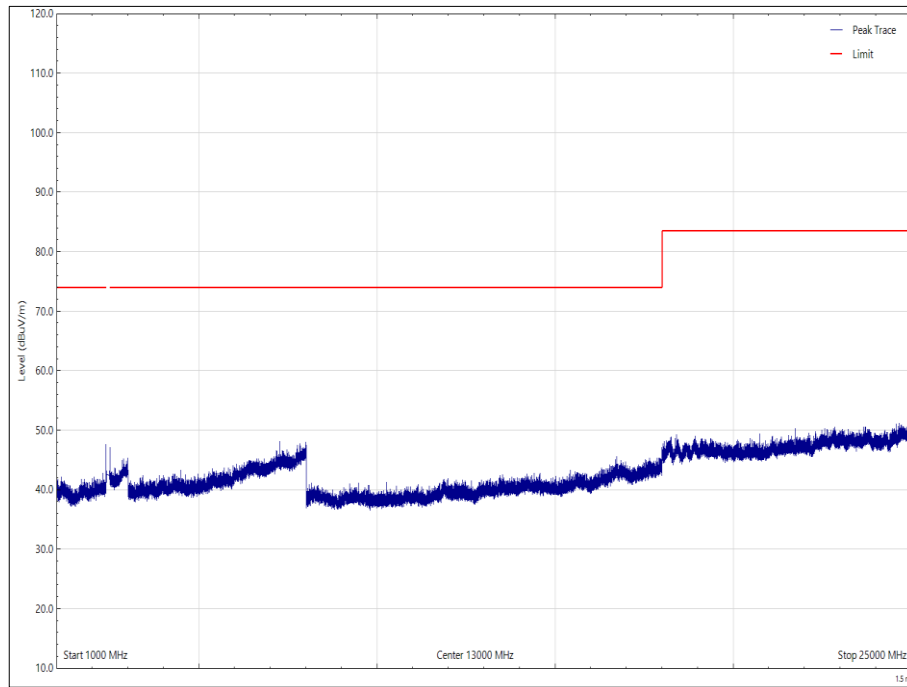


Figure 58 - 2440 MHz - 1 GHz to 25 GHz, Horizontal - Peak

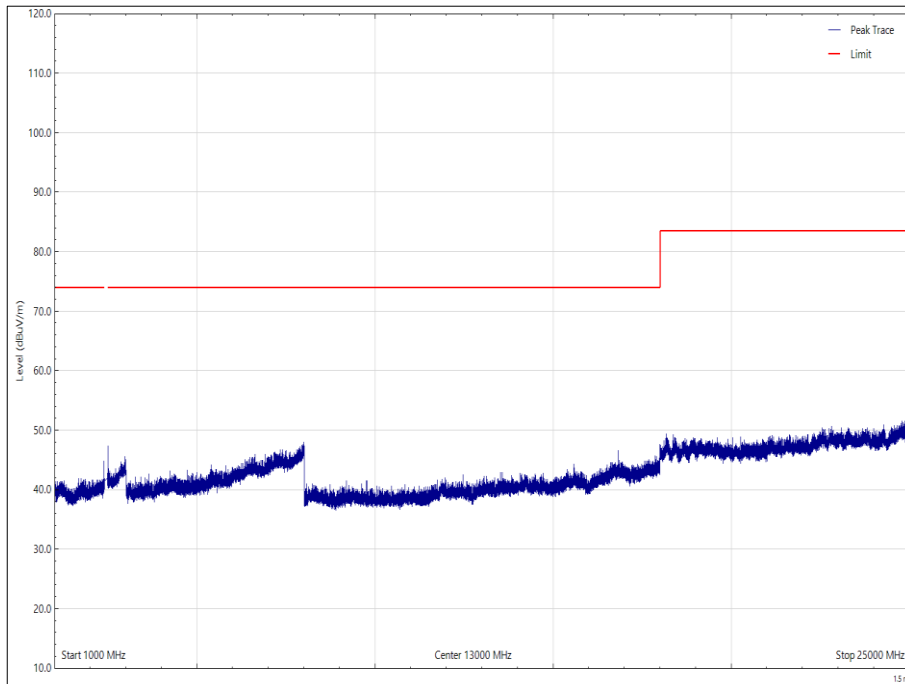


Figure 59 - 2440 MHz - 1 GHz to 25 GHz, Vertical - Peak

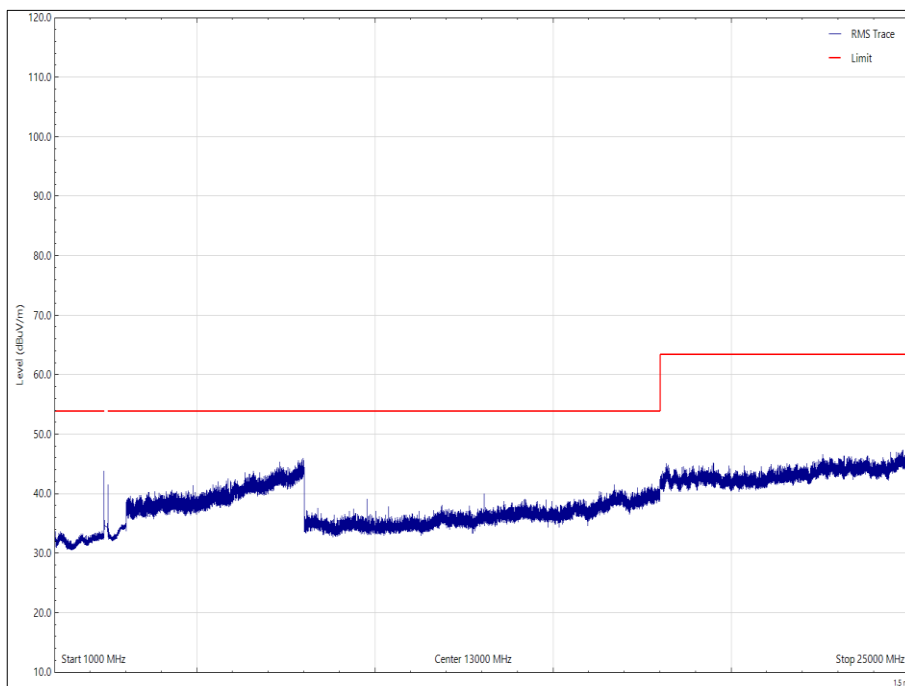


Figure 60 - 2440 MHz - 1 GHz to 25 GHz, Horizontal - Average

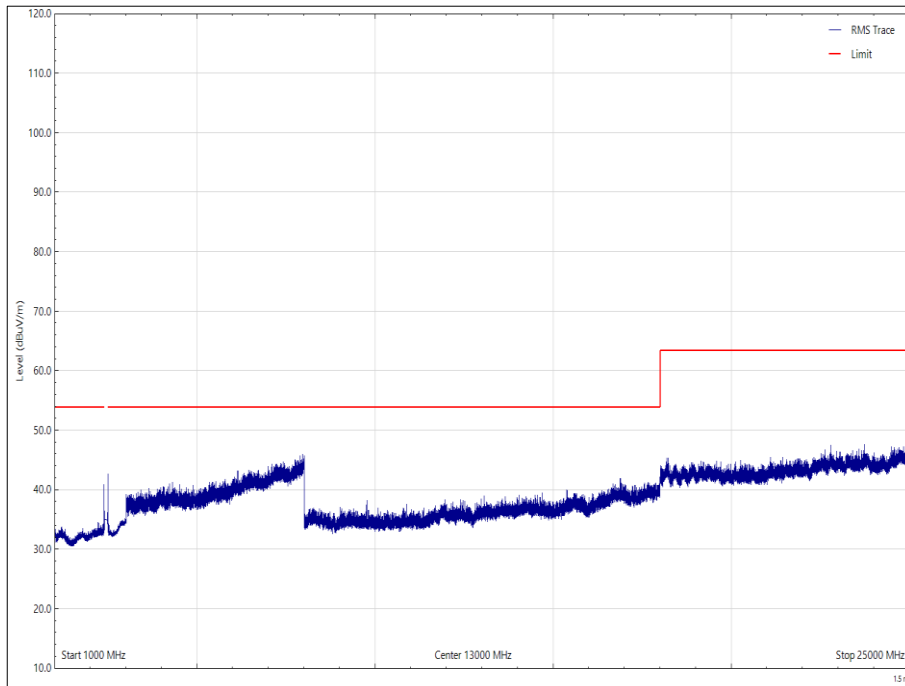


Figure 61 - 2440 MHz - 1 GHz to 25 GHz, Vertical - Average



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 59 - 2480 MHz, 30 MHz to 1 GHz

*No emissions were detected within 10 dB of the limit.

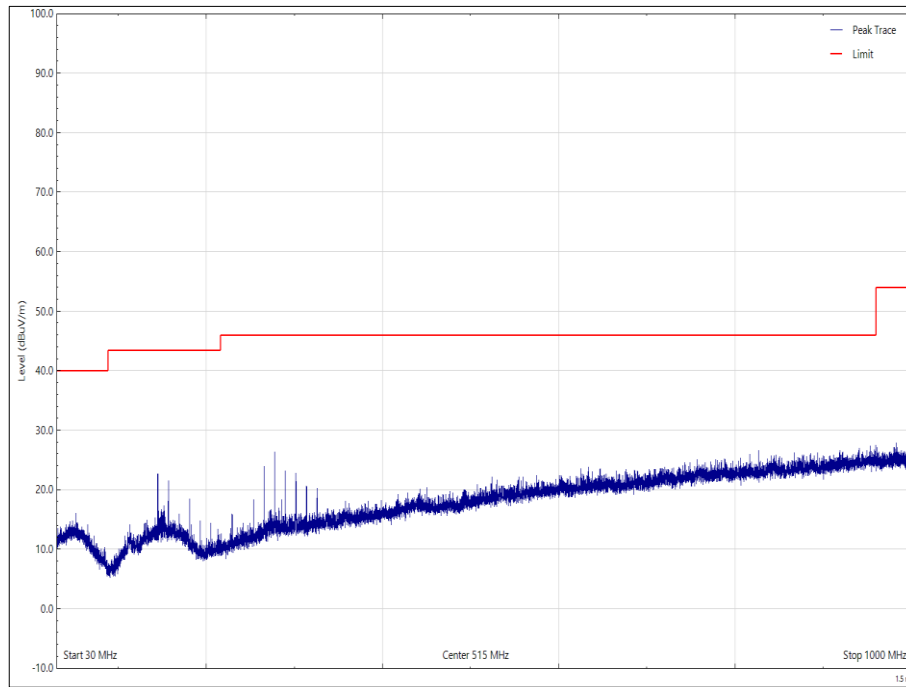


Figure 62 - 2480 MHz, 30 MHz to 1 GHz, Horizontal

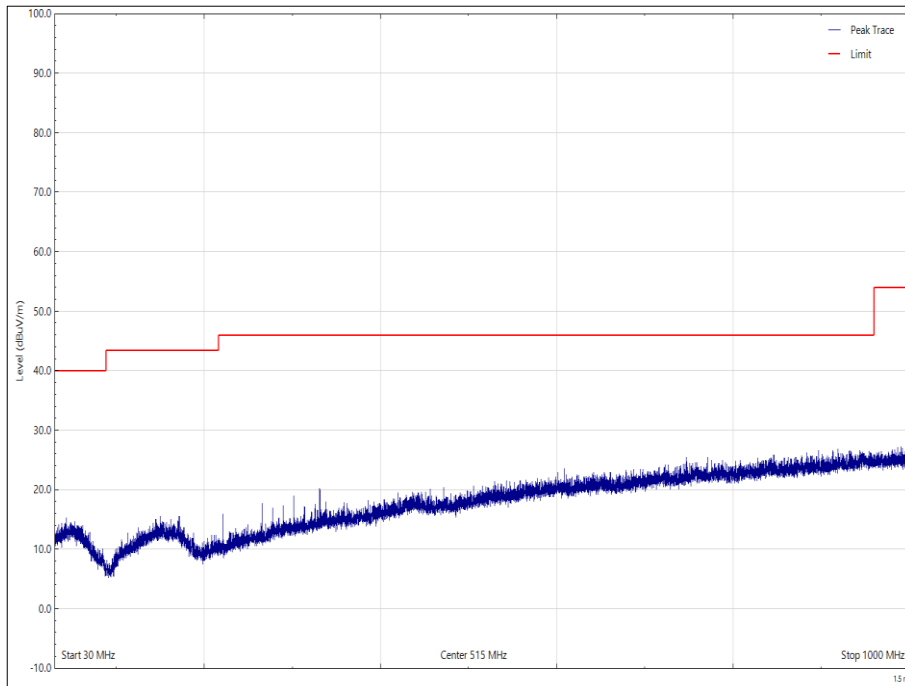


Figure 63 - 2480 MHz, 30 MHz to 1 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 60 - 2480 MHz - 1 GHz to 25 GHz

*No emissions were detected within 10 dB of the limit.

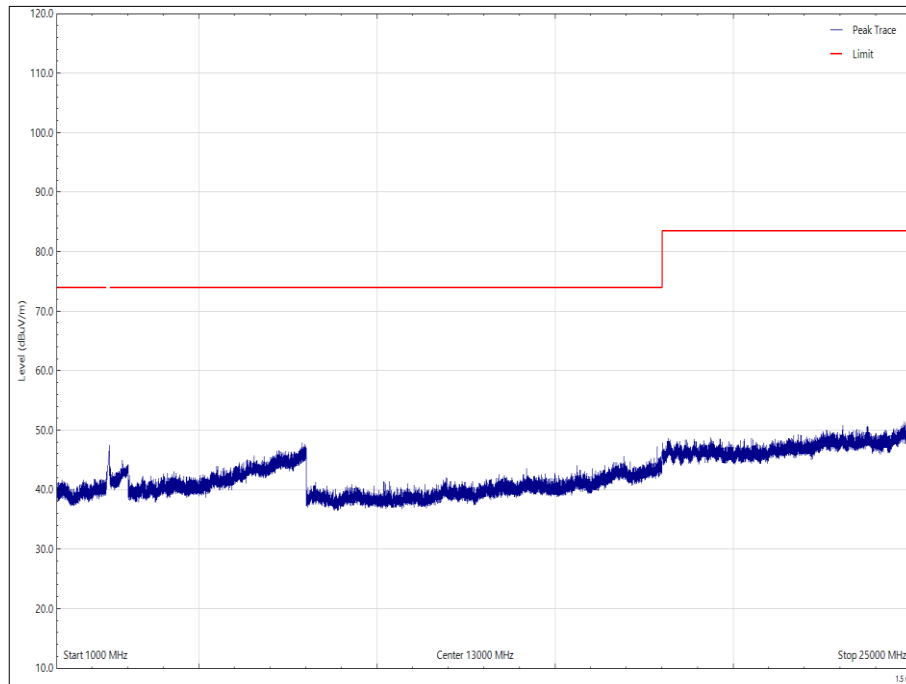


Figure 64 - 2480 MHz - 1 GHz to 25 GHz, Horizontal – Peak

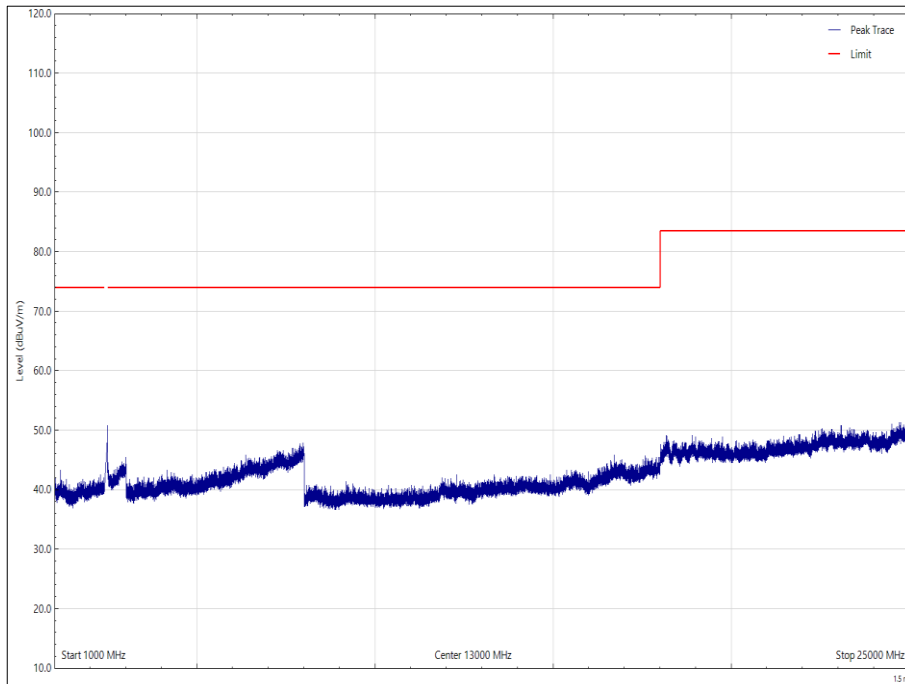


Figure 65 - 2480 MHz - 1 GHz to 25 GHz, Vertical - Peak

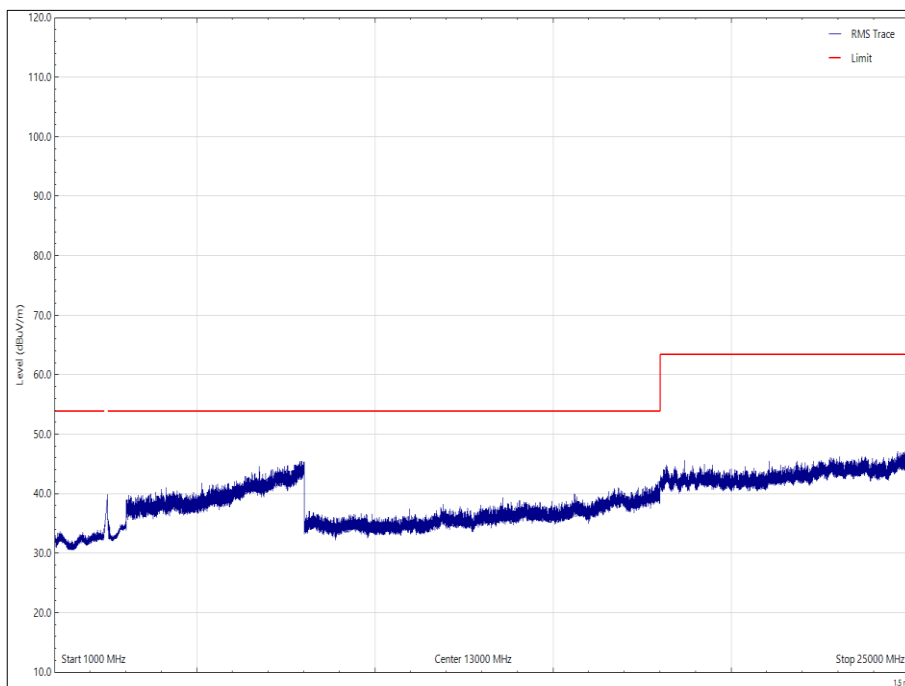


Figure 66 - 2480 MHz - 1 GHz to 25 GHz, Horizontal - Average

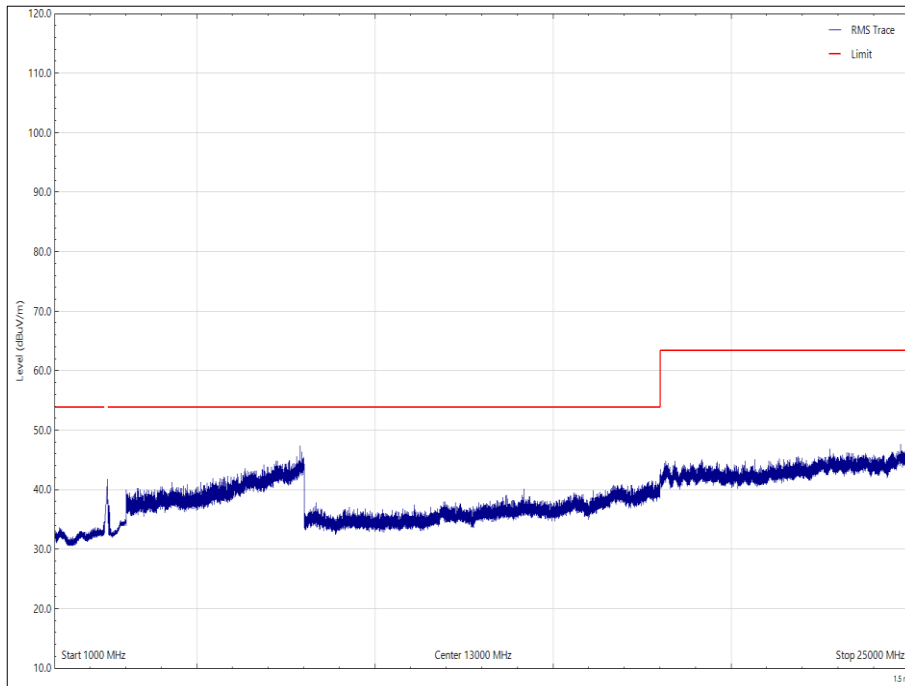


Figure 67 - 2480 MHz - 1 GHz to 25 GHz, Vertical - Average



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-GEN, clause 8.10, must also comply with the radiated emission limits specified in RSS-GEN clause 8.9.



2.8.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
True RMS Multimeter	Fluke	179	4006	12	29-Mar-2023
Pre-Amplifier (8 GHz to 18 GHz)	Wright Technologies	PS06-0061/PS06-0060	4971	6	19-Nov-2022
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	17-May-2023
Cable (18 GHz)	Rosenberger	LU7-071-1000	5103	12	17-Nov-2022
Emissions Software	TUV SUD	EmX V3.1.4	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	24-Nov-2024
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Antenna (DRG 1-10.5GHz)	Schwarzbeck	BBHA9120B	5215	12	28-May-2023
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5216	12	29-May-2023
Antenna (DRG, 15 GHz to 40 GHz)	Schwarzbeck	BBHA 9170	5217	12	25-Jan-2023
3 GHz High pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	5220	12	23-Mar-2023
Preamplifier (30dB 1GHz to 18GHz)	Schwarzbeck	BBV 9718 C	5261	12	08-Apr-2023
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	07-Apr-2023
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	12-Apr-2023
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2023
7 GHz High pass Filter	Wainwright	WHKX12-5850-6800-18000-80SS	5550	12	19-May-2023
Cable (K Type 2m)	Junkosha	MWX241-01000KMSKMS/B	5934	12	14-May-2023
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5942	24	03-Feb-2024

Table 61

TU - Traceability Unscheduled

3 Photographs

3.1 Test Setup Photographs

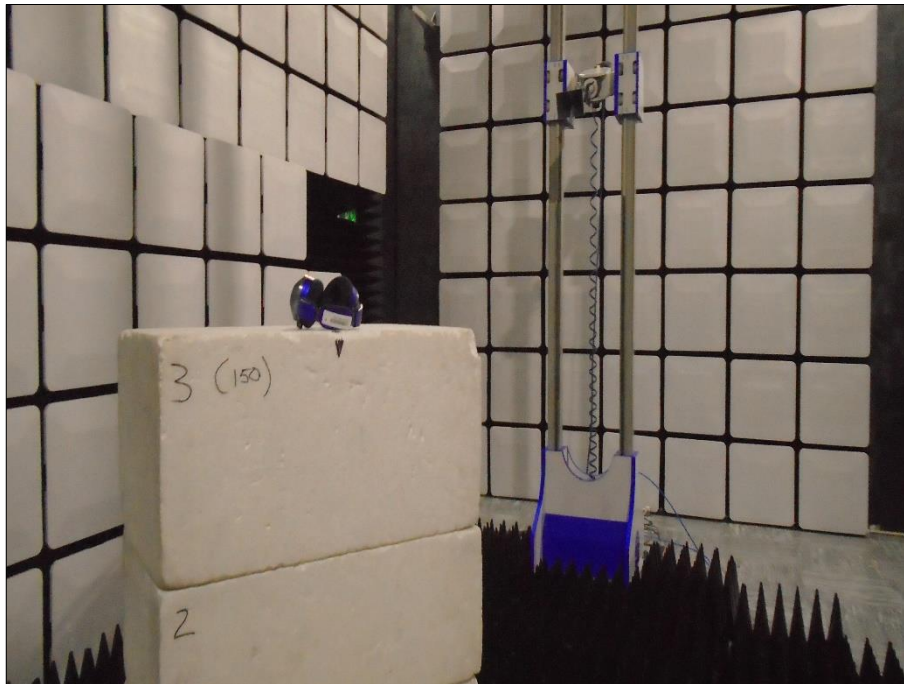


Figure 68 - Test Setup - 1 GHz to 18 GHz

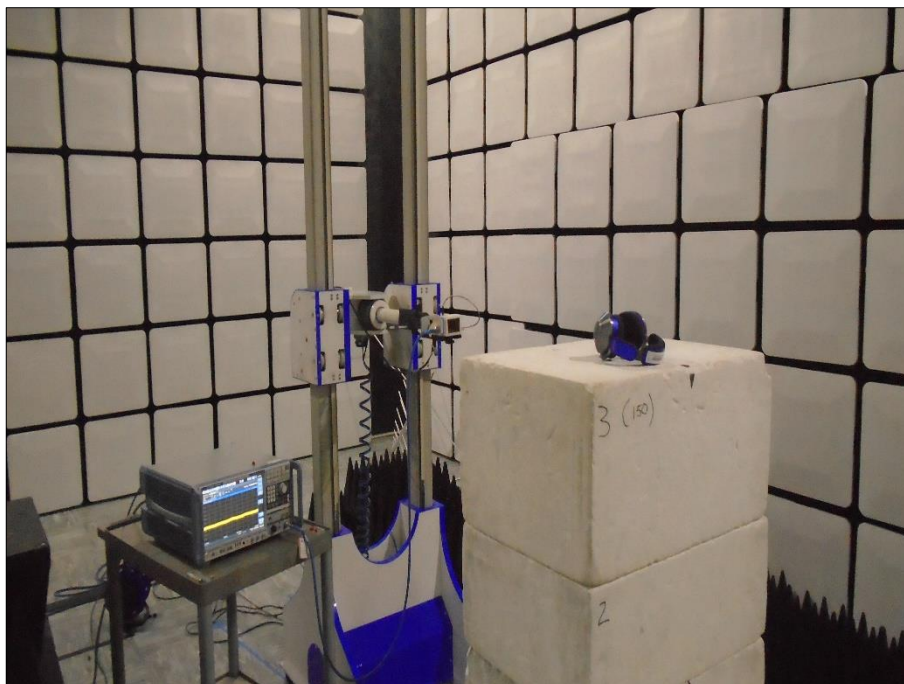


Figure 69 - Test Setup - 18 GHz to 25 GHz

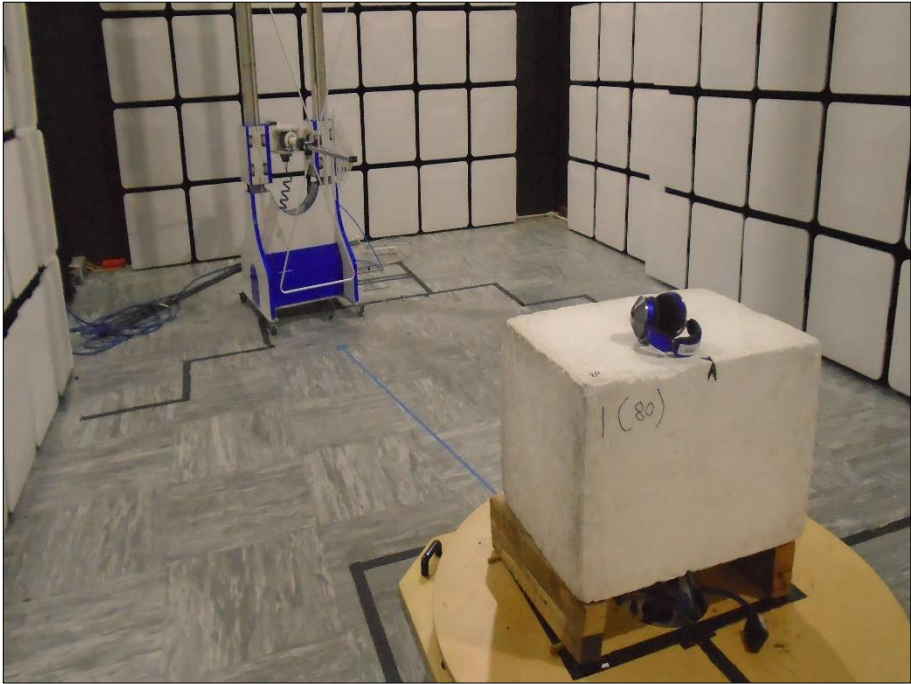


Figure 70 - Test Setup - 30 MHz to 1 GHz



4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Frequency Hopping Systems - Average Time of Occupancy	-
Frequency Hopping Systems - Channel Separation	± 20.5079346326052 kHz
Frequency Hopping Systems - Number of Hopping Channels	-
Frequency Hopping Systems - 20 dB Bandwidth	± 20.5079346326052 kHz
Maximum Conducted Output Power	± 1.38 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB

Table 62

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.