


ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT AND INDUSTRY CANADA RSS-210

	OF
Product Name:	INTERPHONE BTMOTOF5
Marketing Name:	SUPERTOOTH
Brand Name:	INTERPHONE
Model Name:	BTMOTOF5
Model Difference:	N/A
IC:	7717A-BTMOTOF5
FCC ID:	QVNBTMOTOF5
Report No.:	EF/2011/60003
Issue Date:	Jun. 21 2011
	§15.247, Cat: DSS
Rule Part:	RSS-210 issue 8:2010, Annex 8
Prepared for:	Euro Communication Equipements SAS
Treparentin	Route de Foix 11500 Nebias, Quillan, France
	SGS Taiwan Ltd.
	Electronics & Communication Laboratory
Prepared by:	No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei
	County, Taiwan.

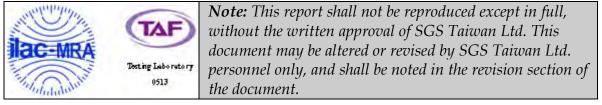

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles textent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 2 of 67

CERTIFICATION OF COMPLIANCE

Applicant:	pplicant: Euro Communication Equipements SAS	
	Route de Foix 11500 Nebias, Quillan, France	
Product Name:	INTERPHONE BTMOTOF5	
Marketing Name:	SUPERTOOTH	
Brand Name:	INTERPHONE	
IC:	7717A-BTMOTOF5	
FCC ID:	QVNBTMOTOF5	
Model No.:	BTMOTOF5	
Model Difference:	N/A	
File Number:	EF/2011/60003	
Date of test:	Jun. 08, 2011 ~ Jun. 21, 2011	
Date of EUT Received:	Jun. 08, 2011	

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and RSS-Gen. issue 3:2010, the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C:2007, §15.247 and RSS-210 issue 8: 2010 Annex 8.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Lion Wang	Date:	Jun. 21, 2011	
Prepared By:	Lion Wang / Engineer Chemy Chen	Date:	Jun. 21, 2011	
Approved By:	Cherry Chen / Clerk Tim Ch ang	Date:	Jun. 21, 2011	

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Version

Version No.	Date	Description
00	Jun. 21, 2011	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Display with and the second product with and product with

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 S Taiwan Ltd.



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 4 of 67

Table of Contents

1.	GEN	ERAL INFORMATION	6
	1.1.	Product Description	
	1.2.	Related Submittal(s) / Grant (s)	
	1.3.	Test Methodology	
	1.4.	Test Facility	7
	1.5.	Special Accessories	
	1.6.	Equipment Modifications	7
2.	SYS	TEM TEST CONFIGURATION	
	2.1.	EUT Configuration	
	2.2.	EUT Exercise	
	2.3.	Test Procedure	
	2.4.	Configuration of Tested System	9
3.	SUM	IMARY OF TEST RESULTS	
4.	DES	CRIPTION OF TEST MODES	
5.	AC I	POWER LINE CONDUCTED EMISSION TEST	
	5.1.	Standard Applicable:	
	5.2.	Measurement Equipment Used:	
	5.3.	EUT Setup:	
	5.4.	Measurement Procedure:	
	5.5.	Measurement Result:	
6.	PEA	K OUTPUT POWER MEASUREMENT	
	6.1.	Standard Applicable:	
	6.2.	Measurement Equipment Used:	
	6.3.	Test Set-up:	
	6.4.	Measurement Procedure:	
	6.5.	Measurement Result:	
7.	100K	KHz BANDWIDTH OF BAND EDGES MEASUREMENT	
	7.1.	Standard Applicable:	
	7.2.	Measurement Equipment Used:	
	7.3.	Test SET-UP:	
	7.4.	Measurement Procedure:	
	7.5.	Field Strength Calculation	
	7.6.	Measurement Result:	
8.		RIOUS EMISSION TEST	
	8.1.	Standard Applicable:	
	8.2.	Measurement Equipment Used:	
	8.3.	Test SET-UP:	
	8.4.	Measurement Procedure:	
	8.5.	Field Strength Calculation	
	86	Measurement Result:	79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

際非分有說明,近報告結果僅到測点之体結算頁,同時近体品僅K留9U天。今年報告大總本公司書面計可,个可部切復娶。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsifi-cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 5 of 67

9.	FREC	QUENCY SEPARATION	
	9.1.	Standard Applicable:	
	9.2.	Measurement Equipment Used:	51
	9.3.	Test Set-up:	51
	9.4.	Measurement Procedure:	51
	9.5.	Measurement Result:	51
10.	NUM	BER OF HOPPING FREQUENCY	
	10.1.	Standard Applicable:	
	10.2.	Measurement Equipment Used:	53
	10.3.	Test Set-up:	53
	10.4.	Measurement Procedure:	53
	10.5.	Measurement Result:	53
11.	TIM	E OF OCCUPANCY (DWELL TIME)	
	11.1.	Standard Applicable:	
	11.2.	Measurement Equipment Used:	
	11.3.	Test Set-up:	55
	11.4.	Measurement Procedure:	
	11.5.	Measurement Result:	56
12.	20dB	Bandwidth & 99% Bandwidth	
	12.1.	Standard Applicable:	62
	12.2.	Measurement Equipment Used:	
	12.3.	Test Set-up:	
	12.4.	Measurement Procedure:	
	12.5.	Measurement Result:	63
13.	ANTI	ENNA REQUIREMENT	
	13.1.	Standard Applicable:	
	13.2.	Antenna Connected Construction:	
14.	RF E	XPOSURE	
	14.1.	Standard Applicable	
	14.2.	Measurement Result:	67
PH	ото	RAPHS OF SETUP	
PH	отос	RAPHS OF EUT	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Display with and the second product with and product with



1. GENERAL INFORMATION

1.1. Product Description

General:

Product Name	INTERPHO	INTERPHONE BTMOTOF5		
Marketing Name	SUPERTOC	DTH		
Brand Name	INTERPHO	NE		
Model Name	BTMOTOF	5		
Model Difference	N/A	N/A		
Speaker	Model: N/A	Model: N/A		
Microphone	Model: N/A			
	3.7Vdc from battery or 5Vdc form adapter			
Power Supply	Battery	Model No.: 402060P, Supplier: SZ BAK		
	Adapter	Model No.: KSCFB0500070W1US, Supplier: Ktec		
Product description	BTMOTOF5 is a wireless Handsfree kit with DSP and FM RDS, in- tended to be used with Bluetooth phones on motorcycles.			

Bluetooth:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V3.0
Channel number:	79 channels
Modulation type:	Frequency Hopping Spread Spectrum
Transmit Power:	9.18 dBm (Peak)
Dwell Time:	<= 0.4s
Operating Mode:	Point-to-Point
Antenna Designation:	Printed Antenna, 2.5dBi.
Type of Emission:	877KF1D

The EUT is compliance with Bluetooth V3.0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>**OVNBTMOTOF5**</u> filing to comply with Section 15.247 of the FCC Part 15C, Subpart C Rules. And IC: <u>7717A-BTMOTOF5</u> filing to comply with Industry Canada RSS-210 issue 8: 2010 Annex 8.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003) and RSS-Gen: 2010. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC Public Notice DA 00-705

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was tested with a test program to fix the Tx/RX frequency that was for the purpose of the measurements. For more information please see test data and APPENDIX 1 for set-up photographs.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7, 13 of ANSI C63.4-2003 and RSS-Gen:2010.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003 and DA 00-705..

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 www.tw.sgs.com



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 9 of 67

2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
1.	Notebook	DELL	D505	34056609472

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Display the network with the instance with the instance of this document is used to the instance of the instan

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 S Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sgs.com



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)/ RSS-Gen §7.2.4	AC Power line Conducted Emission	Compliant
§15.247(b)(1)/ RSS-210 issue 8,§A8.4(2)	Peak Output Power	Compliant
§15.247(d) RSS-210 issue 8,§A8.5	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(c) RSS-Gen §7.2.5 RSS-210 issue 8,§A2.9	TX/RX Spurious Emission	Compliant
§15.247(a)(1)/ RSS-210 issue 8,§A8.1(b)	Frequency Separation	Compliant
<pre>§15.247(a)(1)(iii)/ RSS-210 issue 8,§A8.1(d)</pre>	Number of hopping frequency	Compliant
\$15.247(a)(1)(ii)/ RSS-210 issue 8,\$A8.1(d)	Time of Occupancy	Compliant
§15.247(a)(1) RSS210 issue ,§A8.1(b)	20dB Bandwidth & 99% Power Bandwidth	Compliant
§15.203, §15.247(c)/ RSS- Gen issue §7.1.2	Antenna Requirement	Compliant

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. The EDR function is not supported.

Channel low (2402MHz) \cdot mid (2441MHz) and high (2480MHz) with highest data rate are chosen for full testing.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



5. AC POWER LINE CONDUCTED EMISSION TEST

5.1. Standard Applicable:

According to \$15.207 and RSS-Gen \$7.2.4, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range		mits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1. The lower limit shall apply at the t	ransition frequencies	

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2.	Measurement Equipment Used	l:
5.2.	Measurement Equipment Used	1

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESCS30	828985/004	09/23/2010	09/22/2011				
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2011	02/01/2012				
LISN FCC		FCC-LISN-50/250-25-2-01	04034	02/02/2011	02/01/2012				
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2010	11/27/2011				

5.3. EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 12 of 67

5.4. Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

5.5. Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Result: Please refer to next pages.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 13 of 67

AC POWER LINE CONDUCTED EMISSION TEST DATA

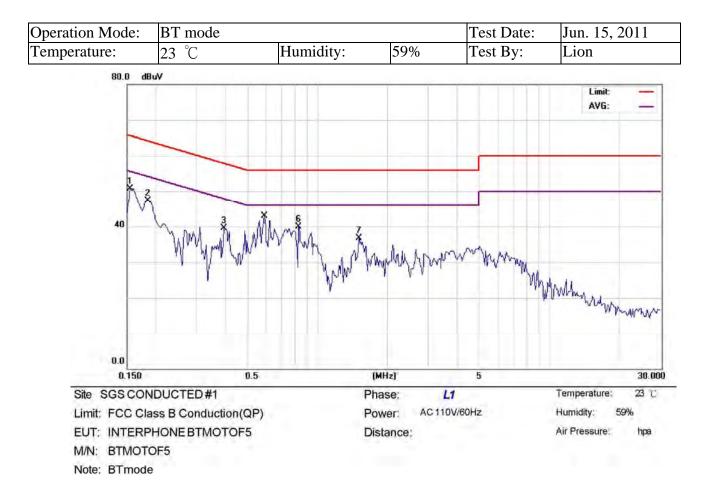

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	*	0.1550	50.65	0.14	50.79	65.73	-14.94	peak		
2		0.1850	47.21	0.13	47.34	64.26	-16.92	peak		
3		0.3950	39.32	0.12	39.44	57.96	-18.52	peak		
4		0.5901	37.49	0.12	37.61	56.00	-18.39	QP		
5		0.5901	28.11	0.12	28.23	46.00	-17.77	AVG		
6		0.8300	39.70	0.12	39.82	56.00	-16.18	peak		
7		1.5100	36.53	0.15	36.68	56.00	-19.32	peak		


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

```
SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號
```



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 14 of 67

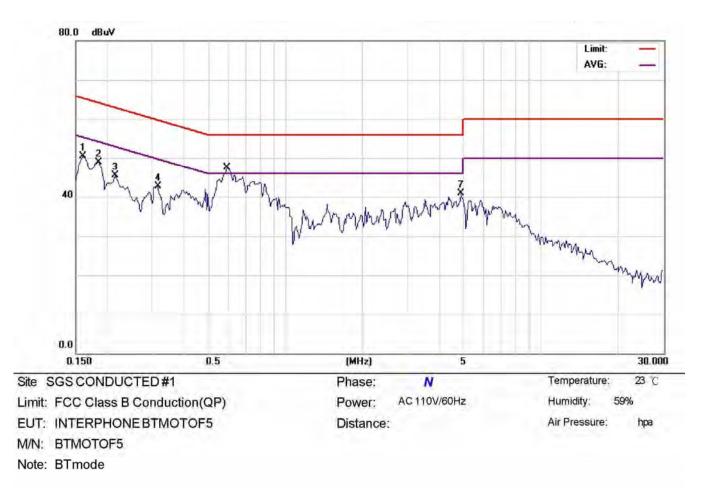

lk. Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
0.1600	50.42	0.13	50.55	65.46	-14.91	peak		
0.1850	48.81	0.13	48.94	64.26	-15.32	peak		
0.2150	45.44	0.12	45.56	63.01	-17.45	peak		
0.3150	42.58	0.11	42.69	59.84	-17.15	peak		
0.5895	42.44	0.12	42.56	56.00	-13.44	QP		
0.5895	31.71	0.12	31.83	46.00	-14.17	AVG		
4.8500	40.63	0.22	40.85	56.00	-15.15	peak		
	MHz 0.1600 0.1850 0.2150 0.3150 0.5895 0.5895	Ik. Freq. Level MHz dBuV 0.1600 50.42 0.1850 48.81 0.2150 45.44 0.3150 42.58 0.5895 42.44 0.5895 31.71	Ik. Freq. Level Factor MHz dBuV dB 0.1600 50.42 0.13 0.1850 48.81 0.13 0.2150 45.44 0.12 0.3150 42.58 0.11 0.5895 42.44 0.12 0.5895 31.71 0.12	Ik. Freq. Level Factor ment MHz dBuV dB dBuV 0.1600 50.42 0.13 50.55 0.1850 48.81 0.13 48.94 0.2150 45.44 0.12 45.56 0.3150 42.58 0.11 42.69 0.5895 42.44 0.12 31.83	Ik. Freq. Level Factor ment Limit MHz dBuV dB dBuV dBuV dBuV 0.1600 50.42 0.13 50.55 65.46 0.1850 48.81 0.13 48.94 64.26 0.2150 45.44 0.12 45.56 63.01 0.3150 42.58 0.11 42.69 59.84 0.5895 42.44 0.12 42.56 56.00 0.5895 31.71 0.12 31.83 46.00	Ik. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dBuV dB dBuV dB 0.1600 50.42 0.13 50.55 65.46 -14.91 0.1850 48.81 0.13 48.94 64.26 -15.32 0.2150 45.44 0.12 45.56 63.01 -17.45 0.3150 42.58 0.11 42.69 59.84 -17.15 0.5895 42.44 0.12 42.56 56.00 -13.44 0.5895 31.71 0.12 31.83 46.00 -14.17	Ik. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dBuV dB Detector 0.1600 50.42 0.13 50.55 65.46 -14.91 peak 0.1850 48.81 0.13 48.94 64.26 -15.32 peak 0.2150 45.44 0.12 45.56 63.01 -17.45 peak 0.3150 42.58 0.11 42.69 59.84 -17.15 peak 0.5895 42.44 0.12 42.56 56.00 -13.44 QP 0.5895 31.71 0.12 31.83 46.00 -14.17 AVG	Ik. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dBuV dB Detector Comment 0.1600 50.42 0.13 50.55 65.46 -14.91 peak 0.1850 48.81 0.13 48.94 64.26 -15.32 peak 0.2150 45.44 0.12 45.56 63.01 -17.45 peak 0.3150 42.58 0.11 42.69 59.84 -17.15 peak 0.5895 42.44 0.12 42.56 56.00 -13.44 QP 0.5895 31.71 0.12 31.83 46.00 -14.17 AVG

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



6. PEAK OUTPUT POWER MEASUREMENT

6.1. Standard Applicable:

According to \$15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

According to RSS-210 issue 8,§A8.4(2), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012				
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2011	01/24/2012				
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2011	01/04/2012				
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011				
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011				
Attenuator	Attenuator Mini-Circuit		001	07/05/2010	07/04/2011				
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011				

6.2. Measurement Equipment Used:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

www.tw.sgs.com



6.3. Test Set-up:



6.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max peak function, RBW >20dB bandwidth, VBW>RBW)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



6.5. Measurement Result:

BDR mode:

Frequency (MHz)	Reading Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	9.12	9.12	0.00817	1
2441.00	9.18	9.18	0.00828	1
2480.00	9.10	9.10	0.00813	1

*Note: offset 0.5dB

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Display the network with the instance with the instance of this document is used to the instance of the instan




Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 18 of 67

Peak Power Output Data Plot (CH Low) (BDR mode)



Peak Power Output Data Plot (CH Mid) (BDR mode)

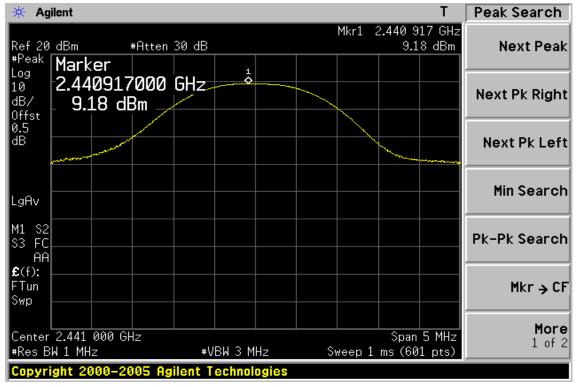

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 19 of 67

🔆 Agilent Peak Search т Mkr1 2.479 833 GHz Ref 20 dBm #Atten 30 dB 9.10 dBm Next Peak #Peak Marker Log 2.479833000 GHz 10 Next Pk Right 9.10 dBm dB/ Offst 0.5 dB Next Pk Left Min Search LgAv S2 FC Μ1 Pk-Pk Search S3 AA £(f): FTun Mkr → CF Swp More Center 2.480 000 GHz Span 5 MHz 1 of 2 ₩VBW 3 MHz #Res BW 1 MHz Sweep 1 ms (601 pts) Copyright 2000-2005 Aailent Technologie

Peak Power Output Data Plot (CH High) (BDR mode)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

7.1. Standard Applicable:

According to \$15.247(d), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in \$15.205(a), must also comply with the radiated emission limits specified in15.209(a).

According to RSS-210 issue 8,§A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



7.2. Measurement Equipment Used:

7.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

7.2.2. Radiated emission:

966 Chamber									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2011	02/11/2012				
Loop antenna	MESSTEC	FLA30	03/10086	07/08/2010	07/07/2011				
Bilog Antenna	SCHWAZBECK	VULB9160	3136	11/19/2010	11/18/2011				
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2011	05/08/2012				
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2010	11/27/2011				
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2011	01/04/2012				
Turn Table	HD	DT420	N/A	N.C.R	N.C.R				
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R				
Controller	HD	HD100	N/A	N.C.R	N.C.R				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2011	01/04/2012				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2011	01/04/2012				
3m Site	SGS	966 chamber	N/A	09/06/2010	09/05/2011				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 22 of 67


7.3. Test SET-UP:

7.3.1. Conducted Emission at antenna port:


Refer to section 6.3 for details.

7.3.2. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

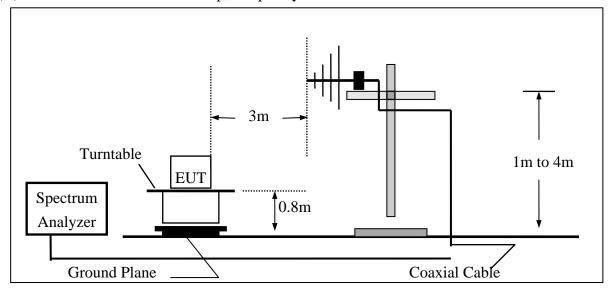

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

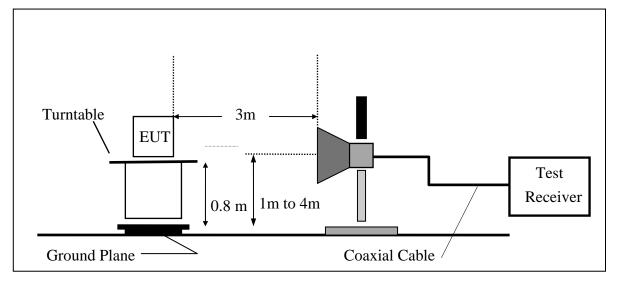

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document contained bereproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

www.tw.sgs.com



7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

7.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 **Issue Date: Jun. 21, 2011** Page: 24 of 67

BDR Mode(worse case) **Band Edges Test Data CH-Low**

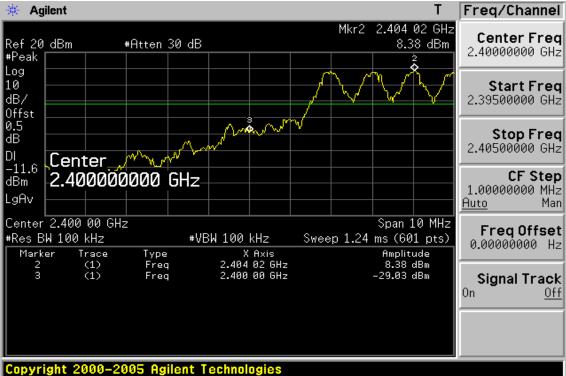

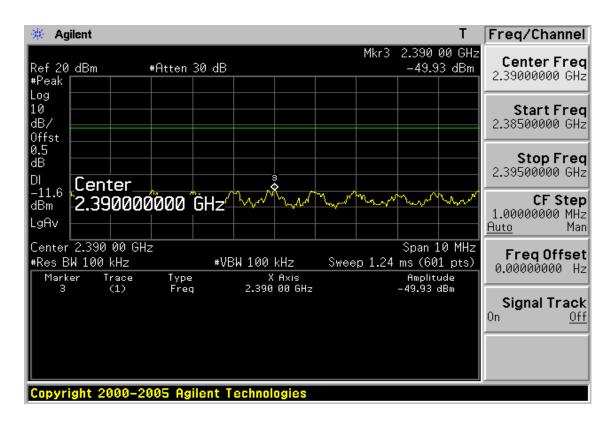

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and iurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 S Taiwan Ltd. www.tw.sgs.com



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 25 of 67

Band Edges Test Data CH-High

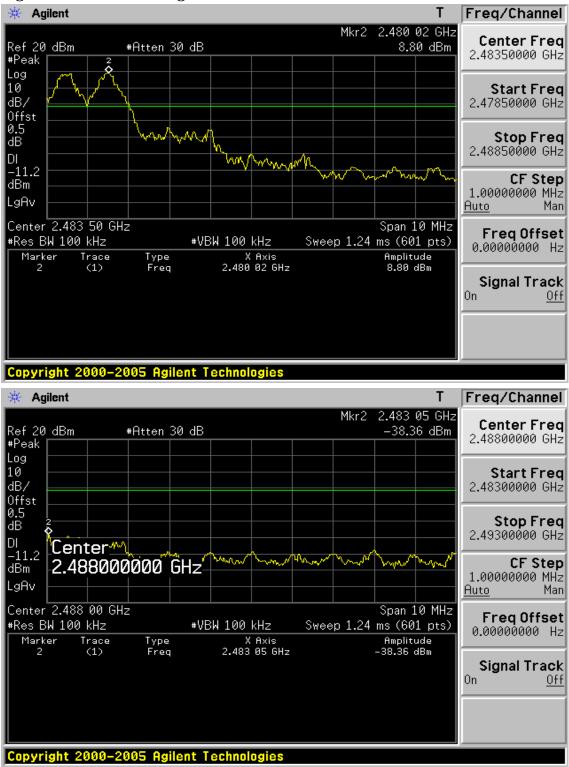

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 26 of 67

Radiated	Emission:	(worse cas	se BDR	mode)
Maulattu	12111351011.	(WUISC Cas		mouc)

Operation Mode	TX CH Low	Test Date	Jun. 17, 2011
Fundamental Frequency	2402 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Pea k	AV		
Freq.	Reading	Reading		Peak	AV	Limit	Limit	U	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2390.00	46.46		-1.06	45.40		74.00	54.00	-28.60	Peak
Operation	Mode	TX C	CH Low			Test	Date	Jun. 17, 20)11
Fundamen	tal Freque	ncy 2402	MHz			Test	By	Lion	
Temperatu	ire	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Pea k	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2390.00	49.19		-1.06	48.13		74.00	54.00	-25.87	Peak

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 27 of 67

Radiated Emission:

Operation Mode	TX CH High	Test Date	Jun. 17, 2011
Fundamental Frequency	2480 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Pea k	AV		
Freq.	e	Reading		Peak	AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	$\mathbf{CF}(\mathbf{dB})$	(dBuV/m)	(dBuV/m)	(dBuV/m)	(d Bu V /n	n) (d B)	
2483.50	55.11	33.60	-0.59	54.52	33.01	74.00	54.00	-20.99	AV
Operation	Mode	TX C	'H High			Test	Date	Jun. 17, 20	11
Fundamen	tal Freque	ncy 2480	MHz			Test	By	Lion	
Temperatu	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Pea k	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2483.50	67.48	40.94	-0.52	66.96	40.42	74.00	54.00	-13.58	AV

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 28 of 67

8. SPURIOUS EMISSION TEST

8.1. Standard Applicable:

According to \$15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in \$15.209(a). And according to \$15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §7.2.5 and RSS-210 issue 8,§A2.9, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

8.2. Measurement Equipment Used:

8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2. Radiated emission:

Refer to section 7.2 for details.

8.3. Test SET-UP:

8.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

8.3.2. Radiated emission:

Refer to section 7.3 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



8.4. Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

8.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6. Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 30 of 67



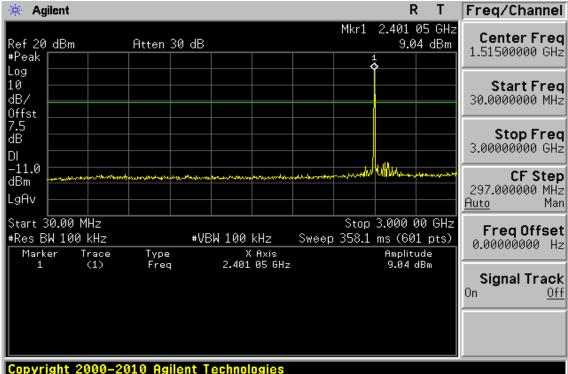



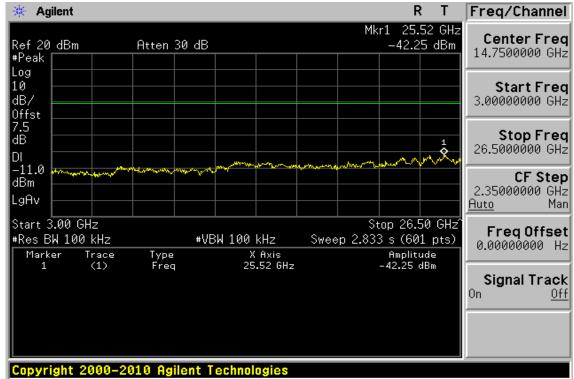


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 31 of 67

Ch Mid 30MHz – 3GHz

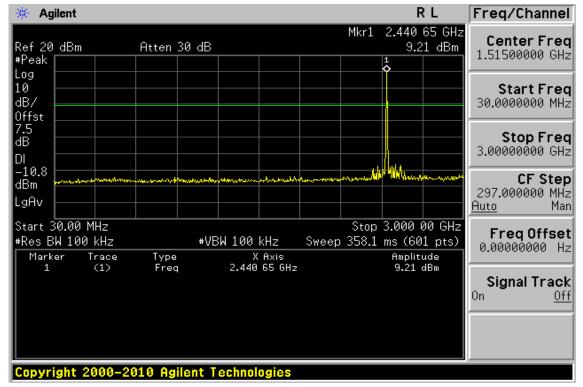

Ch Mid 3GHz – 26.5GHz

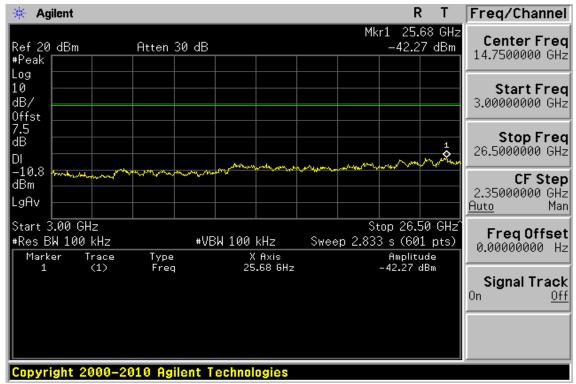

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

www.tw.sgs.com




Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 32 of 67

Ch High 30MHz – 3GHz

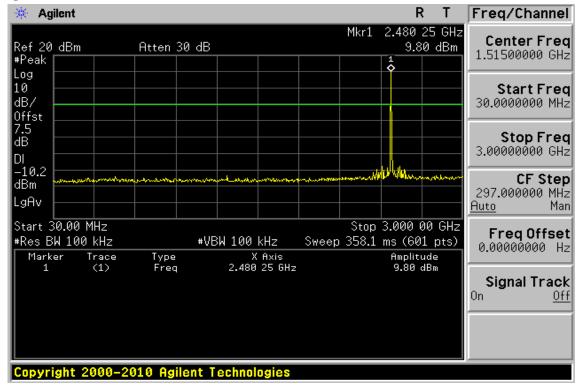

Ch High 3GHz – 26.5GHz

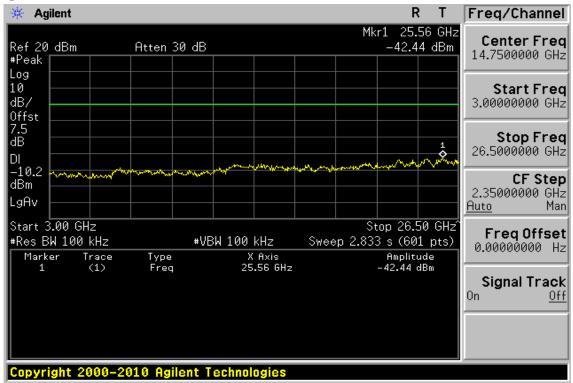

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsifi-

cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 33 of 67

Radiated Spurious Emission Measurement Result (below 1GHz) (Worst BDR mode)

Operation Mode	TX CH Low	Test Date	Jun. 17, 2011
Fundamental Frequency	2402MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor.
Humidity	65 %		

Freq. Ant.Pol.		Detector Mode	Reading Factor		Actual FS	Limit3m	Safe Margin	
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
99.84	V	Peak	33.09	-16.70	16.39	43.50	-27.11	
182.29	V	Peak	35.11	-14.54	20.57	43.50	-22.93	
215.27	V	Peak	32.14	-15.33	16.81	43.50	-26.69	
368.53	V	Peak	34.74	-11.22	23.52	46.00	-22.48	
580.96	V	Peak	32.31	-7.46	24.85	46.00	-21.15	
888.45	V	Peak	28.76	-2.57	26.19	46.00	-19.81	
43.58	Н	Peak	28.83	-13.62	15.21	40.00	-24.79	
184.23	Н	Peak	51.96	-14.77	37.19	43.50	-6.31	
288.02	Н	Peak	51.75	-12.77	38.98	46.00	-7.02	
367.56	Н	Peak	48.72	-11.31	37.41	46.00	-8.59	
404.42	Н	Peak	41.67	-10.83	30.84	46.00	-15.16	
544.10	Н	Peak	34.86	-8.28	26.58	46.00	-19.42	

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 34 of 67

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	Jun. 17, 2011	
Fundamental Frequency	2441MHz	Test By	Lion	
Temperature	25 ℃	Pol	Ver./Hor.	
Humidity	65 %			

Freq.	Freq. Ant.Pol.		eq. Ant.Pol. Detector Mode		Reading	Reading Factor		Limit3m	Safe Margin	
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)			
53.28	V	Peak	30.37	-14.08	16.29	40.00	-23.71			
183.26	V	Peak	45.85	-14.54	31.31	43.50	-12.19			
200.72	V	Peak	32.98	-15.98	17.00	43.50	-26.50			
386.96	V	Peak	28.68	-11.07	17.61	46.00	-28.39			
451.95	V	Peak	29.33	-9.76	19.57	46.00	-26.43			
890.39	V	Peak	28.47	-2.54	25.93	46.00	-20.07			
96.93	Н	Peak	36.31	-16.86	19.45	43.50	-24.05			
185.20	Н	Peak	52.62	-14.77	37.85	43.50	-5.65			
286.08	Н	Peak	52.55	-12.81	39.74	46.00	-6.26			
362.71	Н	Peak	47.15	-11.41	35.74	46.00	-10.26			
451.95	Н	Peak	41.02	-9.76	31.26	46.00	-14.74			
583.87	Н	Peak	34.77	-7.38	27.39	46.00	-18.61			

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 35 of 67

Radiated Spurious Emission Measurement Result (below 1GHz)

Detector

Operation Mode	TX CH High	Test Date	Jun. 17, 2011	
Fundamental Frequency	2480MHz	Test By	Lion	
Temperature	25 ℃	Pol	Ver./Hor.	
Humidity	65 %			

	Freq.	req. Ant.Pol.		Reading Factor		Actual FS	Limit3m	Safe Margin	
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	53.28	V	Peak	30.95	-14.08	16.87	40.00	-23.13	
	112.45	V	Peak	35.59	-15.21	20.38	43.50	-23.12	
	183.26	V	Peak	51.18	-14.54	36.64	43.50	-6.86	
	218.18	V	Peak	46.77	-15.20	31.57	46.00	-14.43	
	364.65	V	Peak	41.76	-11.38	30.38	46.00	-15.62	
	884.57	V	Peak	28.92	-2.64	26.28	46.00	-19.72	
	61.04	Н	Peak	34.49	-14.90	19.59	40.00	-20.41	
	196.84	Н	Peak	55.29	-15.77	39.52	43.50	-3.98	
	347.19	Н	Peak	46.10	-11.58	34.52	46.00	-11.48	
	451.95	Н	Peak	41.58	-9.76	31.82	46.00	-14.18	
	544.10	Н	Peak	33.86	-8.28	25.58	46.00	-20.42	
	880.69	Н	Peak	29.49	-2.71	26.78	46.00	-19.22	

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	Jun. 17, 2011
Fundamental Frequency	2402 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4802.5	30.24		5.25	35.49		74.00	54.00	-38.51	Peak
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	Jun. 17, 2011
Fundamental Frequency	2402 MHz	Test By	Lion
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4802.5	26.49		5.25	31.74		74.00	54.00	-42.26	Peak
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	Jun. 17, 2011
Fundamental Frequency	2441 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4887.0	33.54		5.43	38.97		74.00	54.00	-35.03	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	Jun. 17, 2011
Fundamental Frequency	2441 MHz	Test By	Lion
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4887.0	25.30		5.39	30.69		74.00	54.00	-43.31	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	Jun. 17, 2011
Fundamental Frequency	2480 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4965.0	29.39		5.62	35.01		74.00	54.00	-38.99	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	Jun. 17, 2011
Fundamental Frequency	2480 MHz	Test By	Lion
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4965.0	24.70		5.51	30.21		74.00	54.00	-43.79	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 42 of 67

Radiated Spurious Emission Measurement Result (below 1GHz)

D ()

Operation Mode	RX CH Low	Test Date	Jun. 17, 2011
Fundamental Frequency	2402MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	53.28	V	Peak	31.23	-14.08	17.15	40.00	-22.85
	182.29	V	Peak	35.11	-14.54	20.57	43.50	-22.93
	199.75	V	Peak	32.42	-15.99	16.43	43.50	-27.07
	370.47	V	Peak	33.34	-11.20	22.14	46.00	-23.86
	443.22	V	Peak	30.78	-9.96	20.82	46.00	-25.18
	896.21	V	Peak	29.09	-2.42	26.67	46.00	-19.33
	63.95	Н	Peak	32.70	-15.26	17.44	40.00	-22.56
	181.32	Н	Peak	51.48	-14.38	37.10	43.50	-6.40
	286.08	Н	Peak	50.67	-12.81	37.86	46.00	-8.14
	364.65	Н	Peak	47.83	-11.38	36.45	46.00	-9.55
	399.57	Н	Peak	45.67	-10.90	34.77	46.00	-11.23
	890.39	Н	Peak	28.01	-2.54	25.47	46.00	-20.53

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 43 of 67

Radiated Spurious Emission Measurement Result (below 1GHz)

D ()

Operation Mode	RX CH Mid	Test Date	Jun. 17, 2011
Fundamental Frequency	2441MHz	Test By	Lion
Temperature	25°C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	53.28	V	Peak	31.55	-14.08	17.47	40.00	-22.53
	181.32	V	Peak	44.99	-14.38	30.61	43.50	-12.89
	212.36	V	Peak	32.41	-15.58	16.83	43.50	-26.67
	357.86	V	Peak	28.25	-11.45	16.80	46.00	-29.20
	461.65	V	Peak	28.88	-9.66	19.22	46.00	-26.78
	894.27	V	Peak	28.19	-2.46	25.73	46.00	-20.27
	52.31	Н	Peak	29.18	-13.92	15.26	40.00	-24.74
	182.29	Н	Peak	41.32	-14.54	26.78	43.50	-16.72
	288.02	Н	Peak	43.50	-12.77	30.73	46.00	-15.27
	352.04	Н	Peak	45.38	-11.52	33.86	46.00	-12.14
	399.57	Н	Peak	41.07	-10.90	30.17	46.00	-15.83
	697.36	Н	Peak	36.12	-5.33	30.79	46.00	-15.21

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz $\,^\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 44 of 67

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	RX CH High	Test Date	Jun. 17, 2011
Fundamental Frequency	2480MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65%		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	53.28	V	Peak	31.69	-14.08	17.61	40.00	-22.39
	185.20	V	Peak	47.99	-14.77	33.22	43.50	-10.28
	215.27	V	Peak	45.94	-15.33	30.61	43.50	-12.89
	367.56	V	Peak	29.07	-11.31	17.76	46.00	-28.24
	476.20	V	Peak	28.91	-9.48	19.43	46.00	-26.57
	885.54	V	Peak	28.51	-2.64	25.87	46.00	-20.13
	35.82	Н	Peak	29.47	-14.08	15.39	40.00	-24.61
	183.26	Н	Peak	41.76	-14.54	27.22	43.50	-16.28
	217.21	Н	Peak	42.75	-15.20	27.55	46.00	-18.45
	367.56	Н	Peak	32.50	-11.31	21.19	46.00	-24.81
	482.02	Н	Peak	30.61	-9.40	21.21	46.00	-24.79
	787.57	Н	Peak	33.63	-3.78	29.85	46.00	-16.15

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	RX CH Low	Test Date	Jun. 17, 2011
Fundamental Frequency	2402 MHz	Test By	Lion
Temperature	25°C	Pol	Ver.
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
23.91		5.52	29.43		74.00	54.00	-44.57	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 23.91 	Reading Reading (dBuV) (dBuV) 23.91 <tr tr=""> <</tr>	ReadingReadingAnt./Cla(dBuV)(dBuV)CF(dB)23.915.52 <t< td=""><td>ReadingReadingAnt./CLPeak(dBu/)CF(dB)(dBu/)23.915.5229.43</td></t<> <td>ReadingReadingAnt./CLPeakAV(dBu/)CF(dB)(dBu/)(dBu/)23.915.5229.435.5229.43</td> <td>Reading (dBuv)Ant./CLPeakAVLimit(dBuv)CF(dB)(dBuV,m)(dBuV,m)(dBuV,m)23.915.5229.4374.005.5229.4374.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00</td> <td>Reading (dBuv)Ant./CLPeakAVLimit(dBuv)CF(dB)(dBuV/m)(dBuV/m)(dBuV/m)(dBuV/m)23.915.5229.4374.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00<!--</td--><td>Reading (dBuv)Ant./CLPeakAVLinitLinitMargin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)23.915.5229.4374.0054.00-44.5774.0054.0074.0054.0074.0054.0074.0054.00</td></td>	ReadingReadingAnt./CLPeak(dBu/)CF(dB)(dBu/)23.915.5229.43	ReadingReadingAnt./CLPeakAV(dBu/)CF(dB)(dBu/)(dBu/)23.915.5229.435.5229.43	Reading (dBuv)Ant./CLPeakAVLimit(dBuv)CF(dB)(dBuV,m)(dBuV,m)(dBuV,m)23.915.5229.4374.005.5229.4374.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00	Reading (dBuv)Ant./CLPeakAVLimit(dBuv)CF(dB)(dBuV/m)(dBuV/m)(dBuV/m)(dBuV/m)23.915.5229.4374.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00 </td <td>Reading (dBuv)Ant./CLPeakAVLinitLinitMargin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)23.915.5229.4374.0054.00-44.5774.0054.0074.0054.0074.0054.0074.0054.00</td>	Reading (dBuv)Ant./CLPeakAVLinitLinitMargin(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)23.915.5229.4374.0054.00-44.5774.0054.0074.0054.0074.0054.0074.0054.00

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	RX CH Low	Test Date	Jun. 17, 2011
Fundamental Frequency	2402 MHz	Test By	Lion
Temperature	25 ℃	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4804.0	24.41		5.27	29.68		74.00	54.00	-44.32	Peak
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	RX CH Mid	Test Date	Jun. 17, 2011
Fundamental Frequency	2441 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4882.0	25.61		5.05	30.66		74.00	54.00	-43.34	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	RX CH Mid	Test Date	Jun. 17, 2011
Fundamental Frequency	2441 MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65%		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4882.0	24.19		5.30	29.49		74.00	54.00	-44.51	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	RX CH High	Test Date	Jun. 17, 2011
Fundamental Frequency	2480 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4960.0	24.85		4.68	29.53		74.00	54.00	-44.47	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	RX CH High	Test Date	Jun. 17, 2011
Fundamental Frequency	2480 MHz	Test By	Lion
Temperature	25 ℃	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4960.0	24.63		5.15	29.78		74.00	54.00	-44.22	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



9. FREQUENCY SEPARATION

9.1. Standard Applicable:

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

According to RSS 210 issue 8, A8.1(b), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2. Measurement Equipment Used:

Refer to section 6.2 for details.

9.3. Test Set-up:

Refer to section 6.3 for details.

9.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=3KHz, Adjust Span to 3.0 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

9.5. Measurement Result:

Channel separation (MHz)	Limit	Result
1	>=25KHz or 2/3 times 20dB bandwidth	PASS

Note: Refer to next page for plots.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 52 of 67

Frequency Separation Test Data

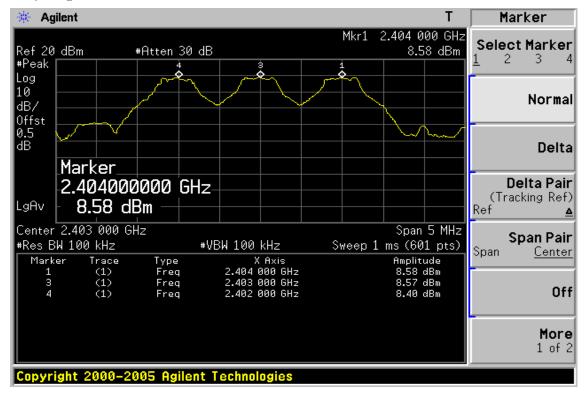

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

www.tw.sgs.com



10. NUMBER OF HOPPING FREQUENCY

10.1. Standard Applicable:

According to \$15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

According to RSS-210 issue 8,§A8.1(d), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

10.2. Measurement Equipment Used:

Refer to section 6.2 for details.

10.3. Test Set-up:

Refer to section 6.3 for details.

10.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW=430KHz, VBW=100MHz,
- 5. Max hold, view and count how many channel in the band.

10.5. Measurement Result:

Note: Refer to next page for plots.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 54 of 67

Channel Number 2.4 GHz – 2.441GHz

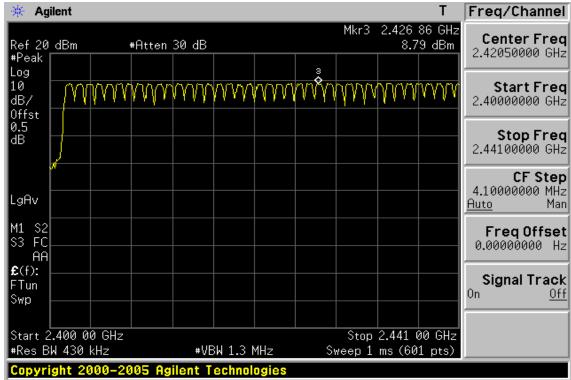

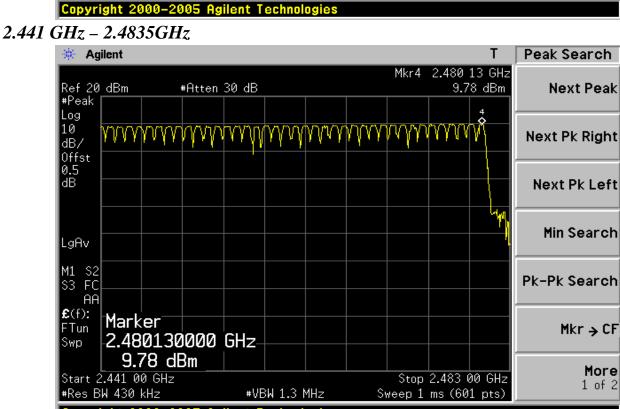

Copyright 2000–2005 Agilent Technologies

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



11. TIME OF OCCUPANCY (DWELL TIME)

11.1. Standard Applicable:

According to \$15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

According to RSS-210 issue 8,§A8.1(d), Frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

11.2. Measurement Equipment Used:

Refer to section 6.2 for details.

11.3. Test Set-up:

Refer to section 6.3 for details.

11.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1 MHz /3MHz, Span = 0Hz, Adjust Sweep = 30s.
- 5. Repeat above procedures until all frequency measured were complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11.5. Measurement Result:

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low:	DH1 time slot = 0.397 (ms) * (1600/(2*79)) * 31.6 =	127.04(ms)
	DH3 time slot = 1.650 (ms) * (1600/(4*79)) * 31.6 =	264.00(ms)
	DH5 time slot = 2.895 (ms) * (1600/(6*79)) * 31.6 =	308.80(ms)
CH Mid:	DH1 time slot = 0.393 (ms) * (1600/(2*79)) * 31.6 =	125.76(ms)
	DH3 time slot = 1.650 (ms) * (1600/(4*79)) * 31.6 =	264.00(ms)
	DH5 time slot = 2.895 (ms) * (1600/(6*79)) * 31.6 =	308.80(ms)
CH High:	DH1 time slot = 0.397 (ms) * (1600/(2*79)) * 31.6 =	127.04(ms)
	DH3 time slot = 1.642 (ms) * (1600/(4*79)) * 31.6 =	262.72 (ms)
	DH5 time slot = 2.883 (ms) * (1600/(6*79)) * 31.6 =	307.52(ms)

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


Display with and the second product with and prod

www.tw.sgs.com




Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 57 of 67

CH-Low

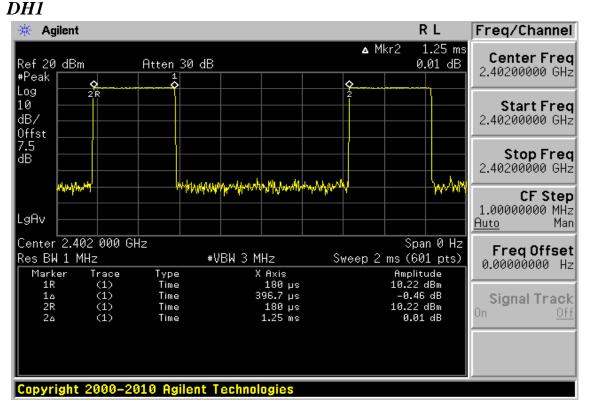

DH3

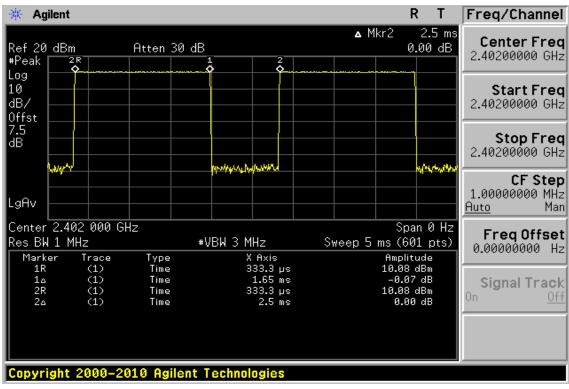

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 58 of 67

DH5

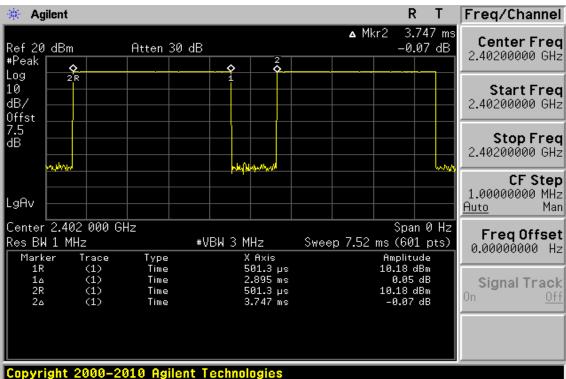

CH-Mid DH1

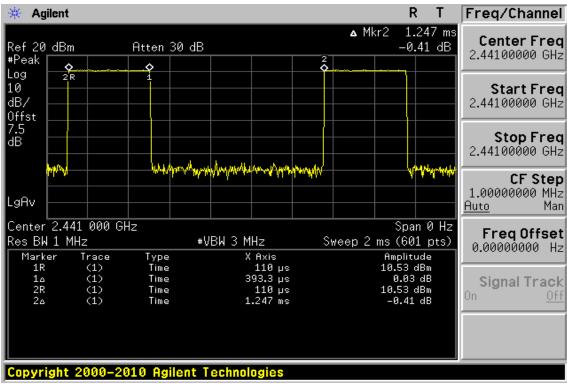

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

```
SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號
台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
```




Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 59 of 67

DH3

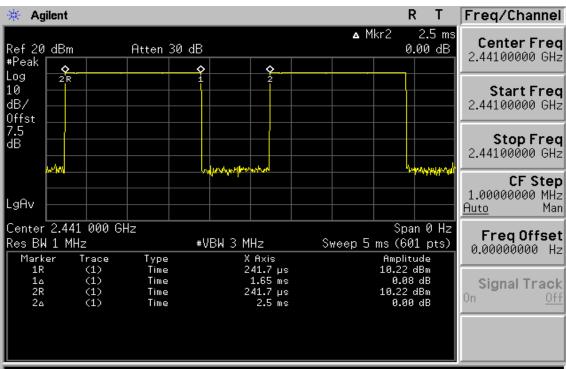

Copyright 2000-2010 Agilent Technolog



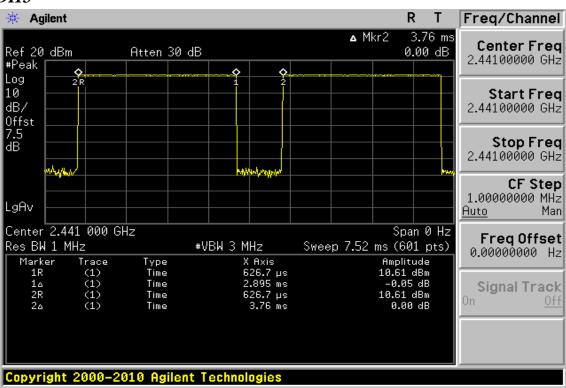

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsifi-

cation of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EF/2011/60003 **Issue Date: Jun. 21, 2011** Page: 60 of 67

CH-High DH1

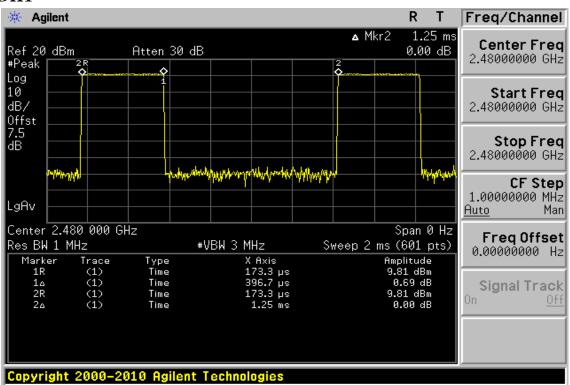

DH3

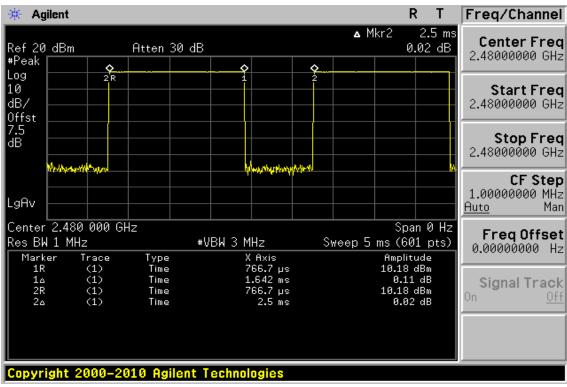

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

```
No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號
S Taiwan Ltd.
                                                                             www.tw.sgs.com
```



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 61 of 67

DH5

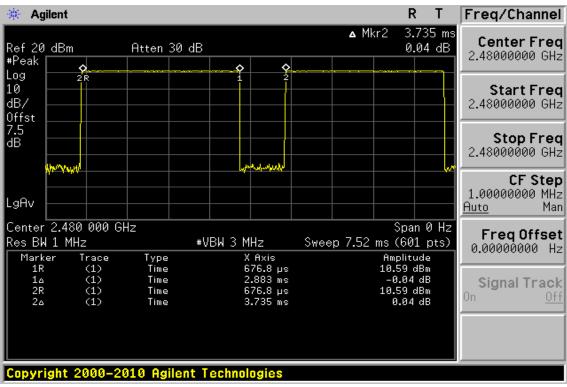

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



12. 20dB Bandwidth & 99% Bandwidth

12.1. Standard Applicable:

According to \$15.247(a)(1), and RSS210 A8.1(b) for frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

12.3. Test Set-up:

Refer to section 6.3 for details.

12.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as $RBW \ge 1$ % of Bandwidth.VBW $\ge RBW$, Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488 www.tw.sgs.com



12.5. Measurement Result:

20dB Bandwidth : BDR mode

СН	Bandwidth
	(kHz)
Lower	925.261
Mid	931.126
Higher	932.388

99% Bandwidth : BDR Mode

СН	Bandwidth (kHz)
Lower	868.6598
Mid	872.2786
Higher	877.8643

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

Display the network with the instance with the instance of this document is used to the instance of the instan



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 64 of 67



BDR Mode 20dB Bandwidth & 99% Bandwidth Test Data CH-Low

20dB Bandwidth & 99% Bandwidth Test Data CH-Mid




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 65 of 67

20dB Bandwidth & 99% Bandwidth Test Data CH-High

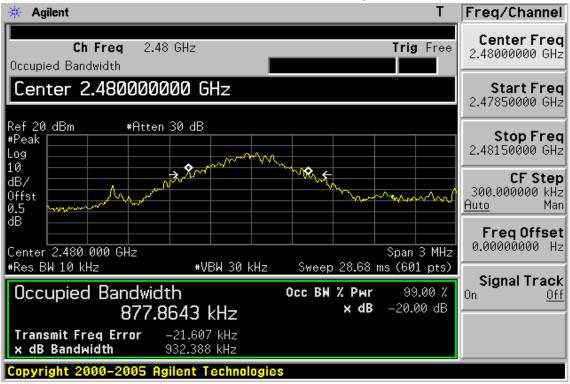

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document contained bereproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



13. ANTENNA REQUIREMENT

13.1. Standard Applicable:

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.246(1), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the high-est-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

13.2. Antenna Connected Construction:

The directional gains of antenna used for transmitting is 2.5dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2011/60003 Issue Date: Jun. 21, 2011 Page: 67 of 67

14. RF EXPOSURE

14.1. Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a mobile device.

14.2. Measurement Result:

This is a portable device and the Max peak output power is 9.18 EIRP (0.00828W) lower than low threshold 60/fGHz mW (24.48mW), d<2.5cm in general population category ;

The SAR measurement is not necessary.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.tw.sgs.com