



# FCC RF Test Report

APPLICANT : Cheng Uei Precision Industry Co., Ltd.  
EQUIPMENT : Mobile phone  
BRAND NAME : Foxlink  
MODEL NAME : QB57L25  
FCC ID : QVZ-QB57  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Jun. 15, 2011 and completely tested on Aug. 04, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : QVZ-QB57

Page Number : 1 of 60

Report Issued Date : Aug. 11, 2011

Report Version : Rev. 01



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

    2.1 RF Output Power ..... 8

    2.2 Test Mode..... 9

    2.3 Connection Diagram of Test System..... 10

    2.4 RF Utility ..... 10

**3 TEST RESULT ..... 11**

    3.1 Number of Channel Measurement ..... 11

    3.2 20dB Bandwidth Measurement ..... 13

    3.3 Hopping Channel Separation Measurement ..... 20

    3.4 Dwell Time Measurement..... 23

    3.5 Peak Output Power Measurement ..... 25

    3.6 Band Edges Measurement ..... 28

    3.7 Spurious Emission Measurement..... 40

    3.8 AC Conducted Emission Measurement..... 44

    3.9 Radiated Emission Measurement..... 48

    3.10 Antenna Requirements ..... 57

**4 LIST OF MEASURING EQUIPMENT..... 58**

**5 UNCERTAINTY OF EVALUATION..... 59**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 6.9 dB at 0.41 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.96 dB at 2483.5 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**Cheng Uei Precision Industry Co., Ltd.**

No. 49, Sec. 4, Zhongyang Rd., Tucheng Dist., New Taipei City 23675, Taiwan (R.O.C.)

## 1.2 Manufacturer

**Cheng Uei Precision Industry Co., Ltd.**

No. 49, Sec. 4, Zhongyang Rd., Tucheng Dist., New Taipei City 23675, Taiwan (R.O.C.)

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
<b>Equipment</b>	Mobile phone
<b>Brand Name</b>	Foxlink
<b>Model Name</b>	QB57L25
<b>FCC ID</b>	QVZ-QB57
<b>Tx/Rx Frequency Range</b>	2400 MHz ~ 2483.5 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Channel Spacing</b>	1 MHz
<b>Maximum Output Power to Antenna</b>	Bluetooth (1Mbps) : 2.97 dBm (0.0020 W) Bluetooth EDR (2Mbps) : 3.29 dBm (0.0021 W) Bluetooth EDR (3Mbps) : 3.73 dBm (0.0024 W)
<b>Antenna Type</b>	Chip Antenna with gain 2.61 dBi
<b>HW Version</b>	QB57L25-0B
<b>SW Version</b>	QB57L25.00.00.B25.13.08
<b>Type of Modulation</b>	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi$ /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
<b>EUT Stage</b>	Identical Prototype

**Remark:**

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO05-HY	03CH07-HY	722060/4086B-1

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.



### 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi$ /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	2.52 dBm	2.75 dBm	3.21 dBm
Ch39	2441MHz	2.66 dBm	2.88 dBm	3.31 dBm
Ch78	2480MHz	2.97 dBm	3.29 dBm	<b>3.73 dBm</b>

**Remark:**

1. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.



## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


<b>Test Cases</b>			
<b>Test Item</b>	<b>Data Rate / Modulation</b>		
	<b>Bluetooth 1Mbps GFSK</b>	<b>Bluetooth EDR 2Mbps <math>\pi</math>/4-DQPSK</b>	<b>Bluetooth EDR 3Mbps 8-DPSK</b>
<b>Conducted TCs</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
<b>Radiated TCs</b>	N/A	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz
<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + WLAN Link + Bluetooth Link + Earphone + MPEG4 + Adapter		
<b>Remark:</b> For radiated TCs, the data rate was set in 3Mbps due to the highest RF output power; only the data of these modes was reported.			

## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

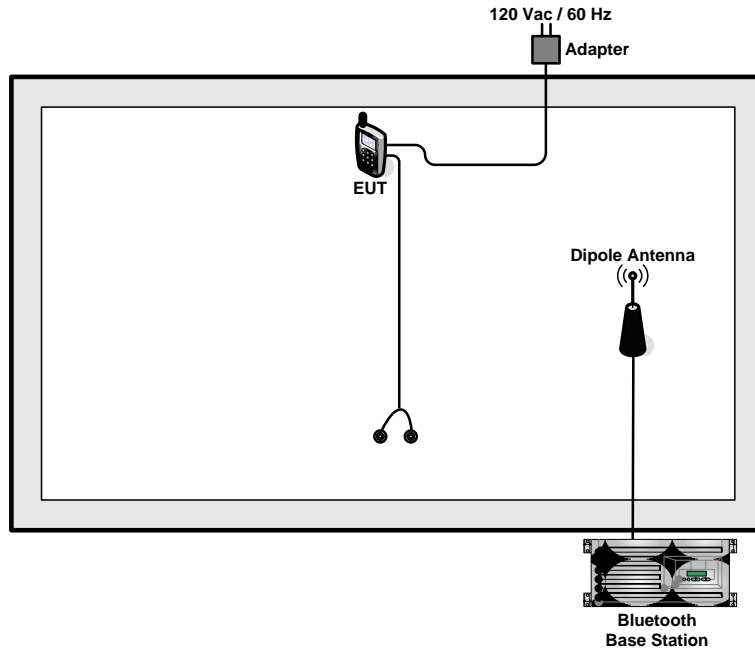

<AC Conducted Emission Mode>

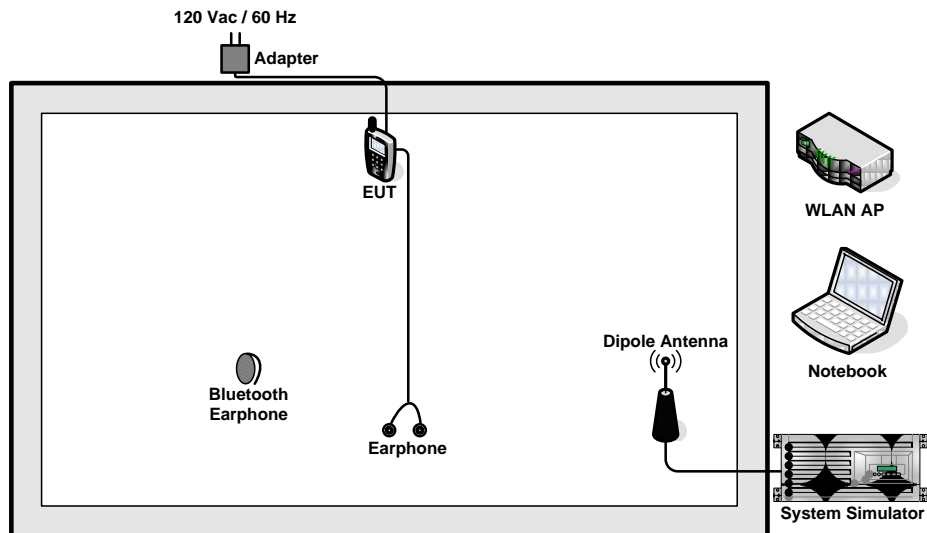

## 2.4 RF Utility

For Bluetooth function, execute "Enter DUT mode" to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto;  
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

##### 3.1.4 Test Setup

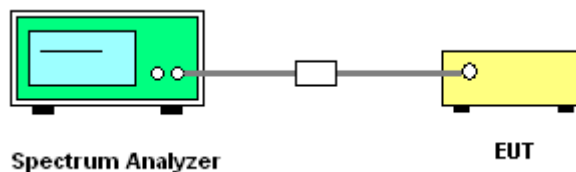


##### 3.1.5 Test Result of Number of Hopping Frequency


<b>Test Mode :</b>	Mode 7~9	<b>Temperature :</b>	23~26°C
<b>Test Engineer :</b>	Hank Yu	<b>Relative Humidity :</b>	51~54%
<b>Number of Hopping Channels (Channel)</b>		<b>Limits (Channel)</b>	<b>Pass/Fail</b>
79		> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

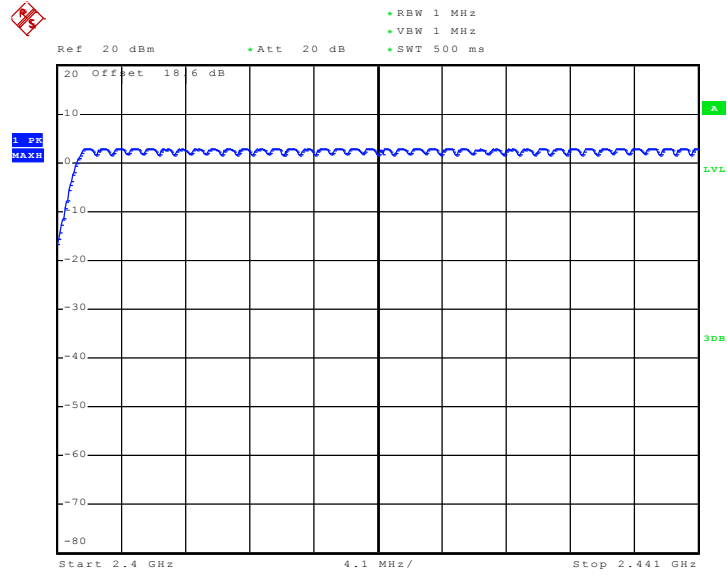

Date: 21.JUN.2011 22:45:44

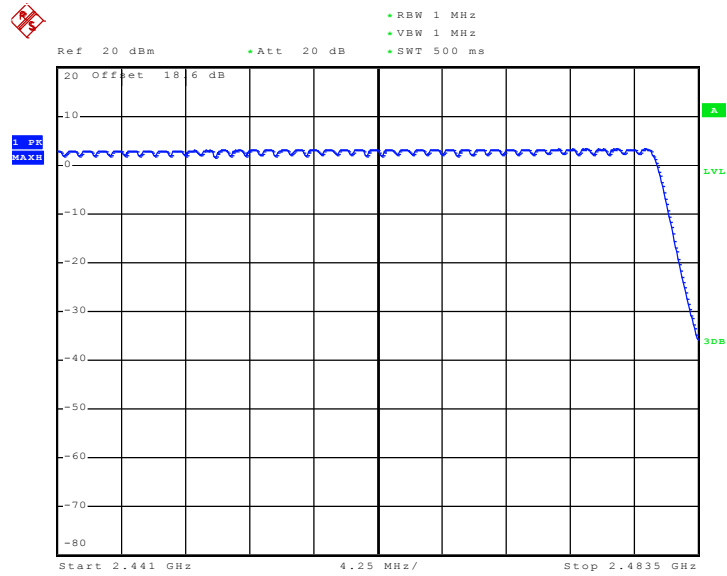

Date: 21.JUN.2011 22:50:15

## 3.2 20dB Bandwidth Measurement

### 3.2.1 Limit of 20dB Bandwidth

N/A


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

### 3.2.4 Test Setup

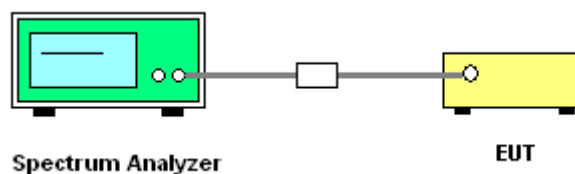




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	23~26°C
Test Engineer :	Hank Yu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.964
39	2441	0.956
78	2480	0.936


20 dB Bandwidth Plot on Channel 00

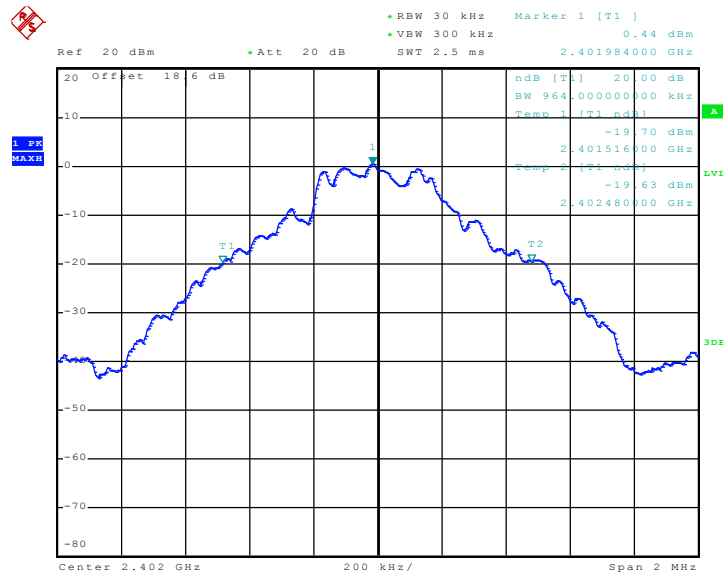

Date: 21.JUN.2011 22:23:06




20 dB Bandwidth Plot on Channel 39

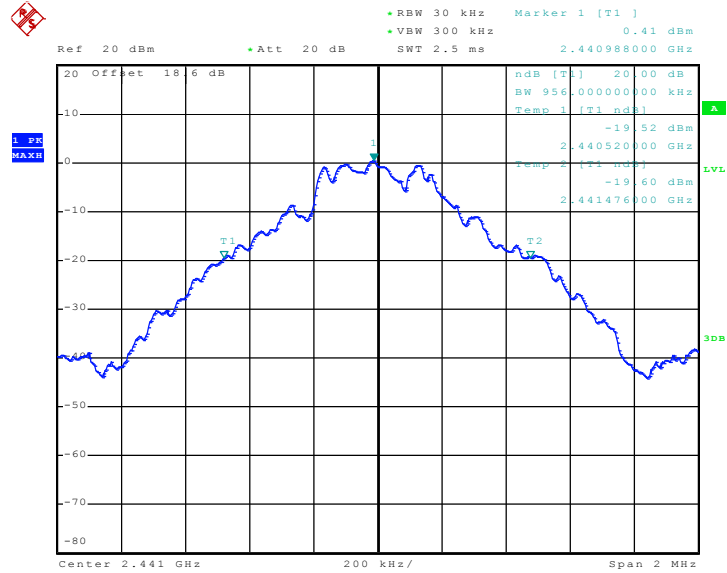

Date: 21.JUN.2011 22:23:19

20 dB Bandwidth Plot on Channel 78

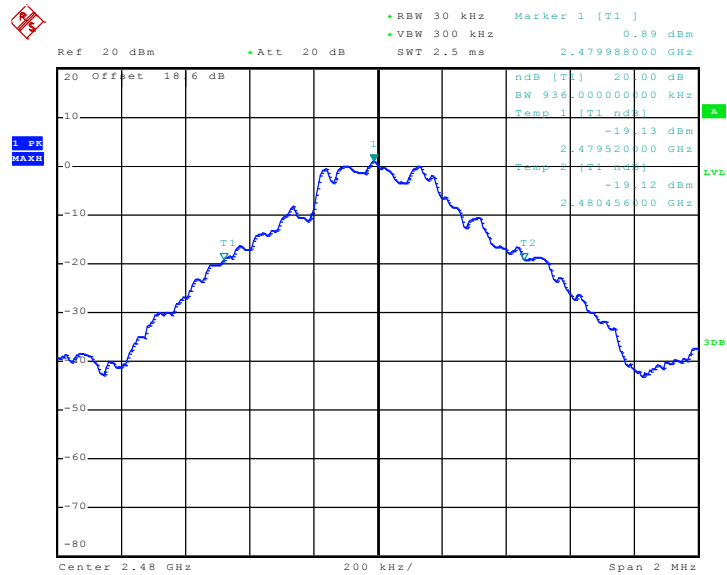


Date: 21.JUN.2011 22:23:48



Test Mode :	Mode 4, 5, 6	Temperature :	23~26°C
Test Engineer :	Hank Yu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.254
39	2441	1.254
78	2480	1.254

20 dB Bandwidth Plot on Channel 00

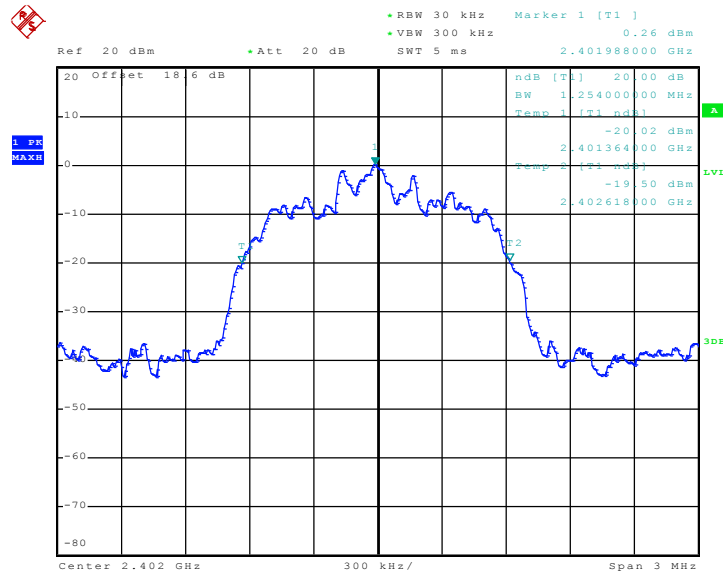


Date: 21.JUN.2011 22:24:00






### 20 dB Bandwidth Plot on Channel 39

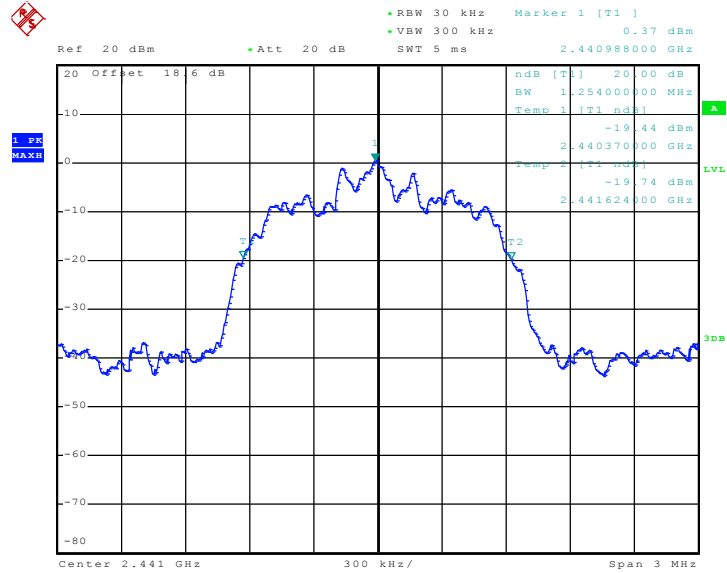

Date: 21.JUN.2011 22:24:13

### 20 dB Bandwidth Plot on Channel 78

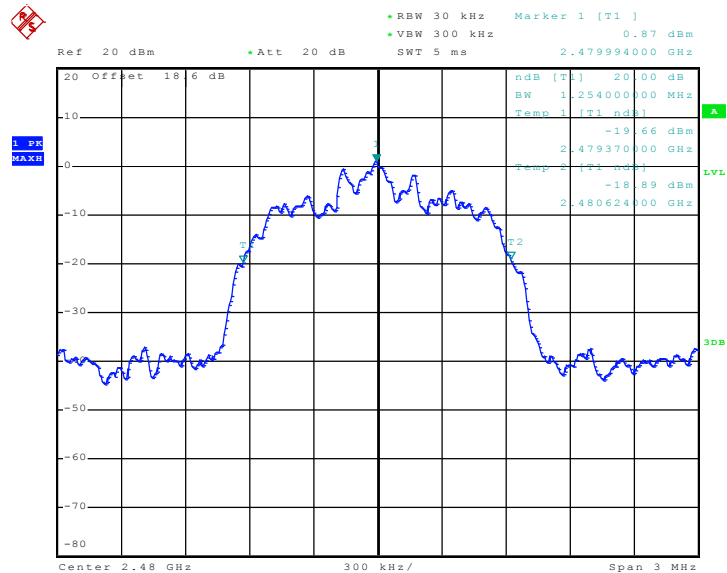


Date: 21.JUN.2011 22:24:28



Test Mode :	Mode 7, 8, 9	Temperature :	23~26°C
Test Engineer :	Hank Yu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.230
39	2441	1.230
78	2480	1.230


20 dB Bandwidth Plot on Channel 00

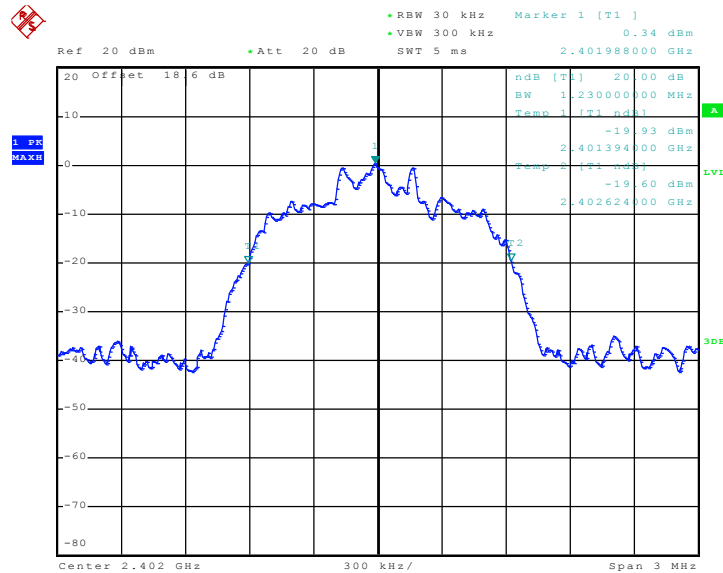

Date: 21.JUN.2011 22:24:58




### 20 dB Bandwidth Plot on Channel 39

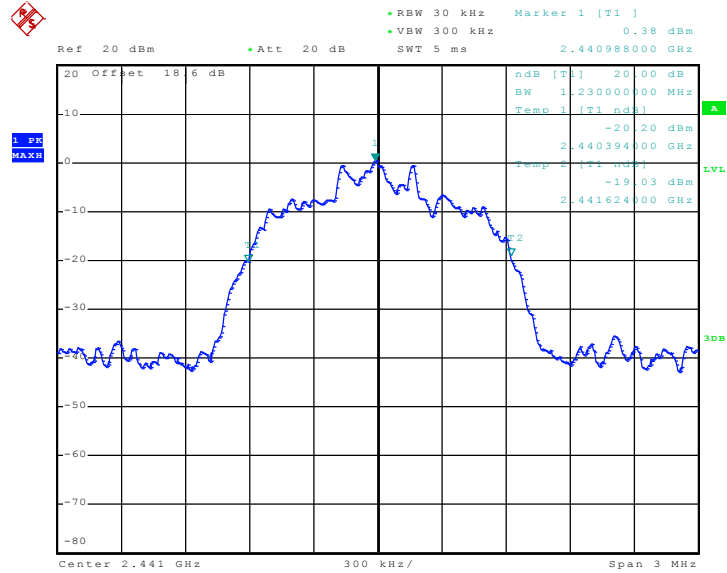

Date: 21.JUN.2011 22:25:23

### 20 dB Bandwidth Plot on Channel 78

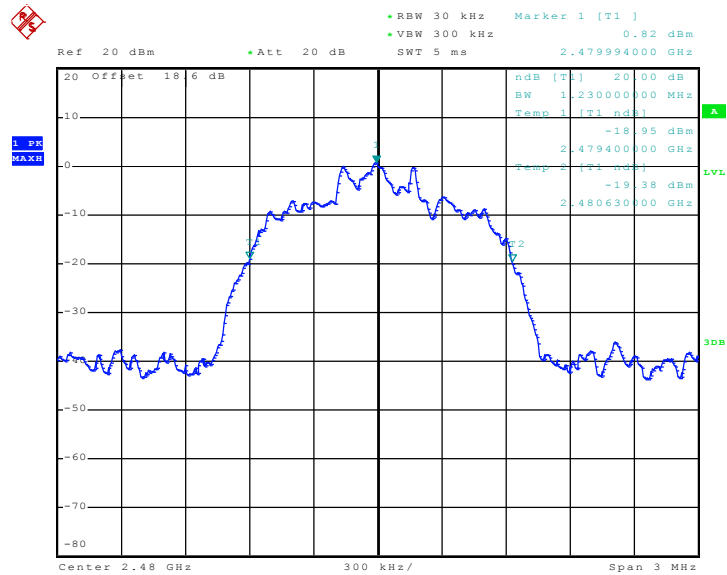

Date: 21.JUN.2011 22:25:38

### 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.3.4 Test Setup

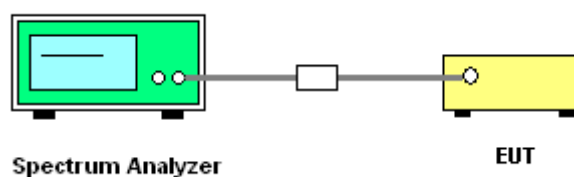




### 3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 7, 8, 9	Temperature :	23~26°C
Test Engineer :	Hank Yu	Relative Humidity :	51~54%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.820	Pass
39	2441	1.002	0.820	Pass
78	2480	1.002	0.820	Pass


Channel Separation Plot on Channel 00 - 01

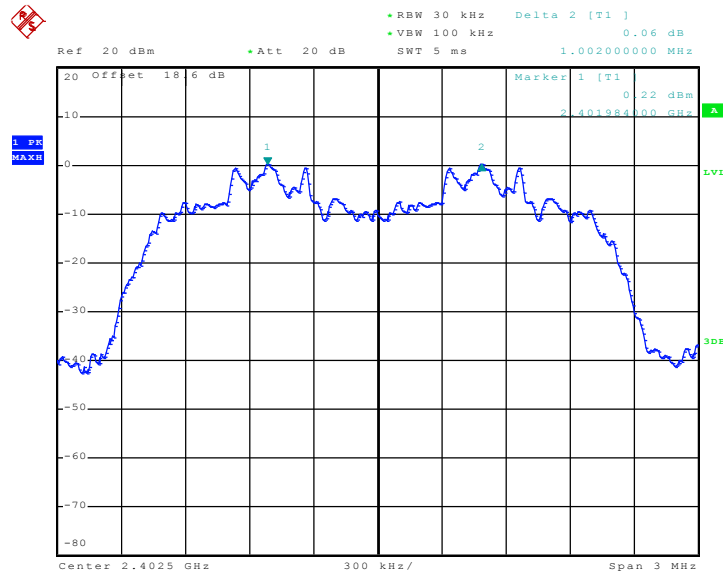

Date: 21.JUN.2011 22:18:11




Channel Separation Plot on Channel 39 - 40

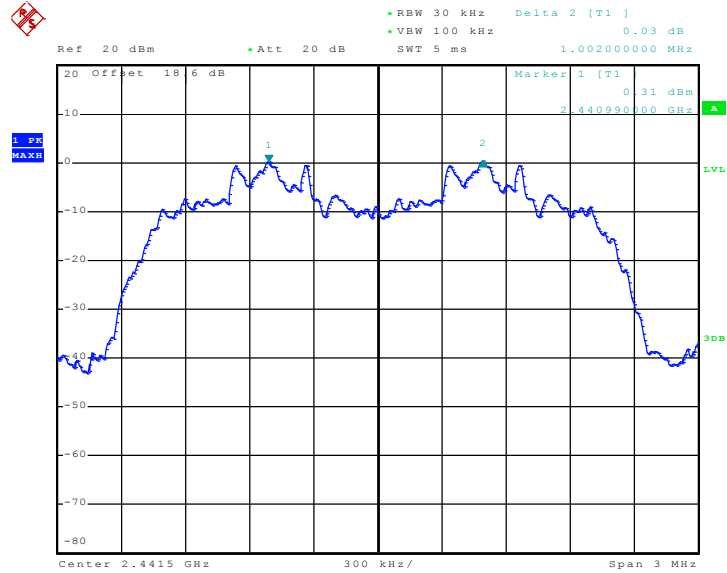

Date: 21.JUN.2011 22:18:52

Channel Separation Plot on Channel 77 - 78

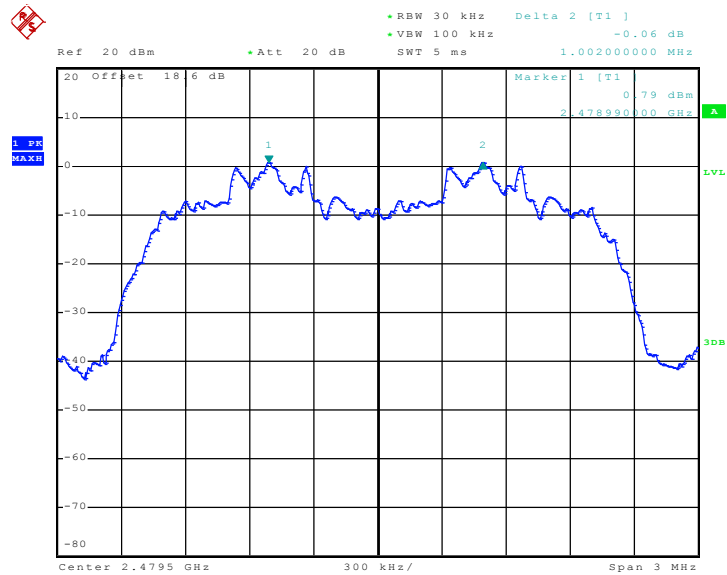

Date: 21.JUN.2011 22:20:08

### 3.4 Dwell Time Measurement

#### 3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

#### 3.4.4 Test Setup

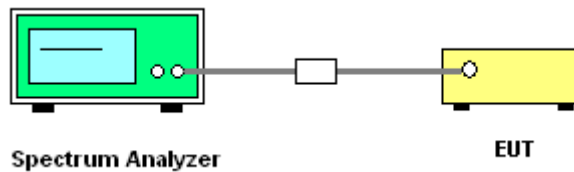

#### 3.4.5 Test Result of Dwell Time

<b>Test Mode :</b>	Mode 8	<b>Temperature :</b>	23~26°C
<b>Test Engineer :</b>	Hank Yu	<b>Relative Humidity :</b>	51~54%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	3.30	3000.00	0.31	0.4	Pass

**Remark:**

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




### 3DH5 Dwell Time (One Pulse) Plot on Channel 39

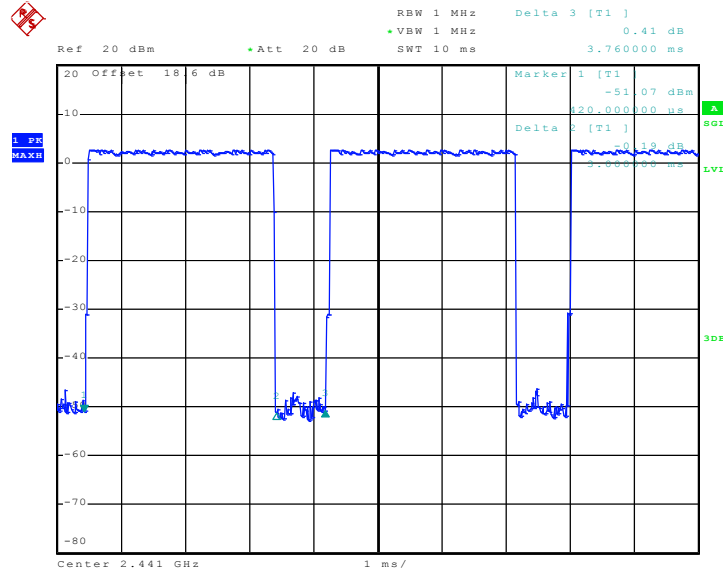

Date: 21.JUN.2011 22:11:42

### 3DH5 Dwell Time (Count Pulses) Plot on Channel 39

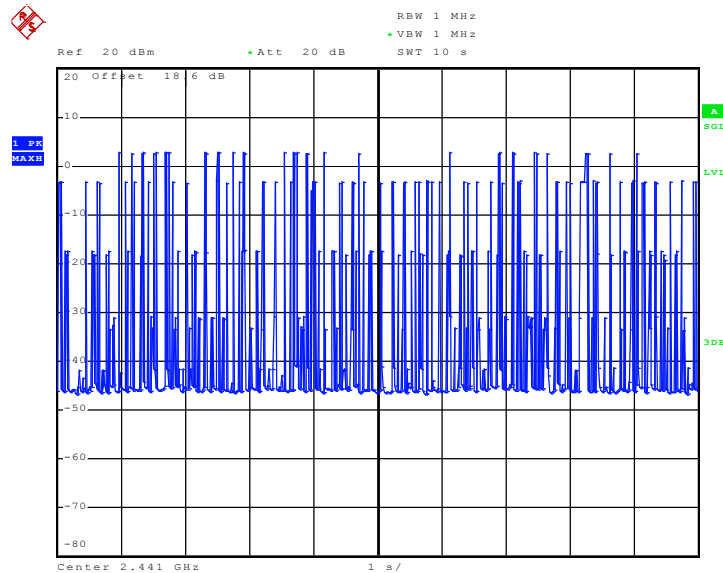

Date: 21.JUN.2011 22:22:25



### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (20.97dBm).


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

#### 3.5.4 Test Setup

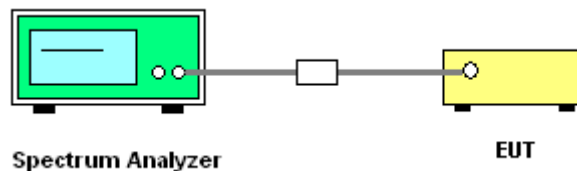


#### 3.5.5 Test Result of Peak Output Power

<b>Test Mode :</b>	Mode 7, 8, 9	<b>Temperature :</b>	23~26°C	
<b>Test Engineer :</b>	Hank Yu	<b>Relative Humidity :</b>	51~54%	
Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	3.21	20.97	Pass
39	2441	3.31	20.97	Pass
78	2480	3.73	20.97	Pass




Peak Output Power Plot on Channel 00

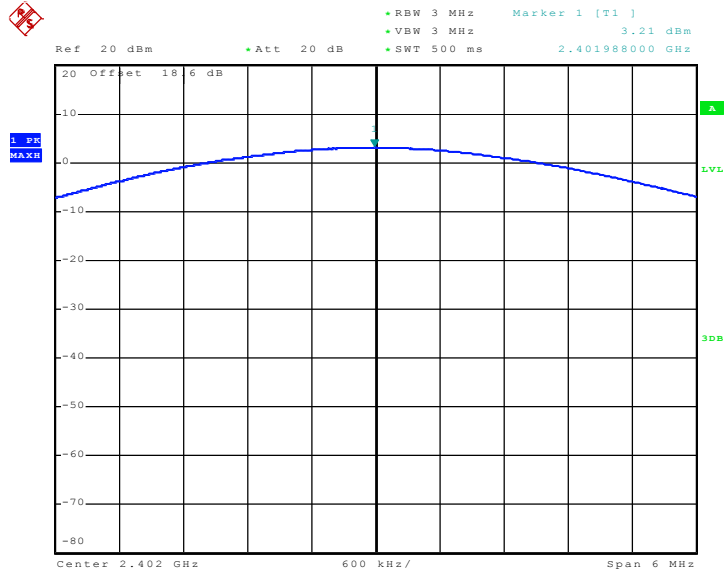

Date: 21.JUN.2011 22:02:23


Peak Output Power Plot on Channel 39

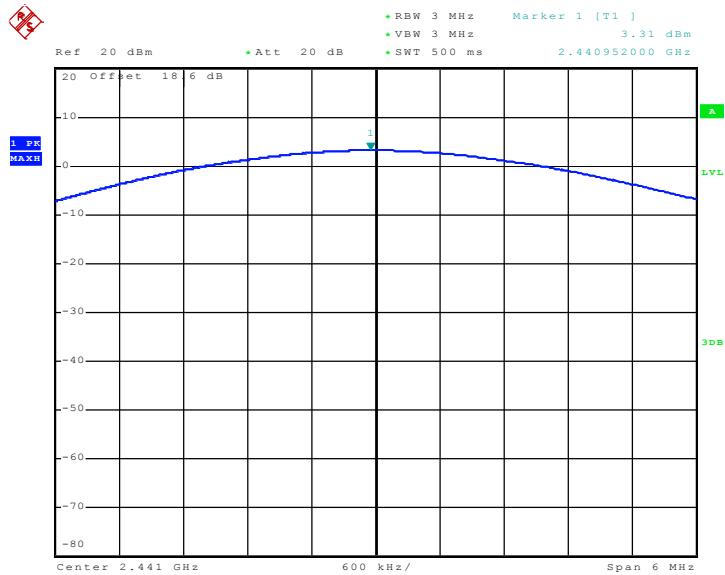

Date: 21.JUN.2011 22:03:40



Peak Output Power Plot on Channel 78

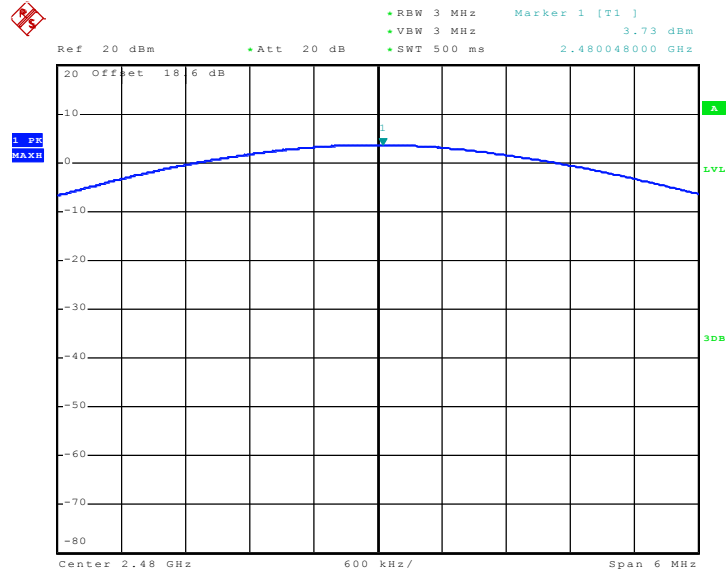

Date: 21.JUN.2011 22:04:58



## **3.6 Band Edges Measurement**

### **3.6.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### **3.6.2 Measuring Instruments**


See list of measuring instruments of this test report.

### **3.6.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

### 3.6.4 Test Setup

#### <Radiated Band Edges>

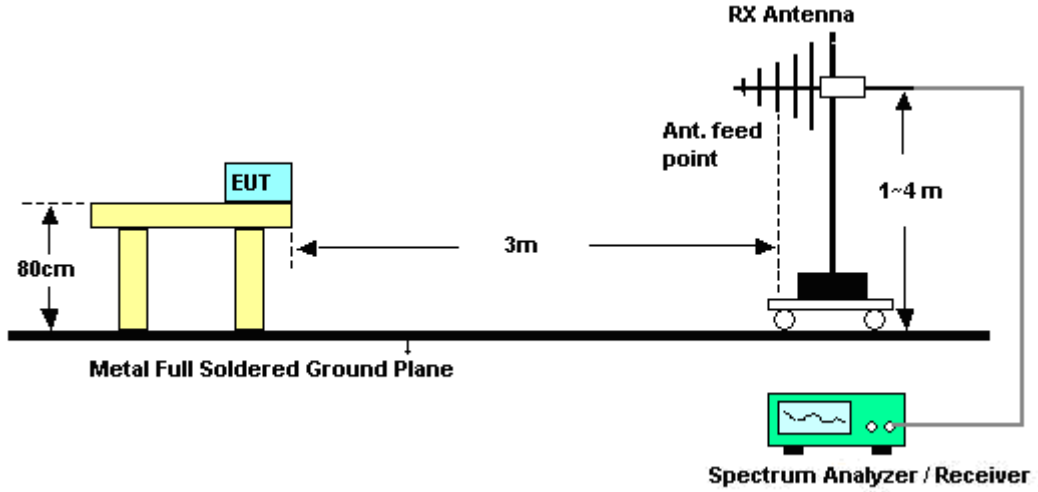

#### <Conducted Band Edges>

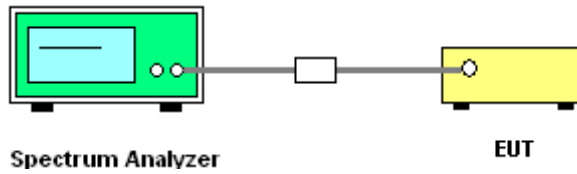



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	50~51%
		Test Engineer :	Ivan Chiang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2388.85	49.99	-24.01	74	45.63	32.18	6.03	33.85	155	1	Peak
2388.85	38.09	-15.91	54	33.73	32.18	6.03	33.85	155	1	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.42	47.76	-26.24	74	43.4	32.18	6.03	33.85	100	59	Peak
2389.42	35.23	-18.77	54	30.87	32.18	6.03	33.85	100	59	Average



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	50~51%
		Test Engineer :	Ivan Chiang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	68.04	-5.96	74	63.48	32.28	6.18	33.9	103	16	Peak
2483.5	29.26	-24.74	54	24.7	32.28	6.18	33.9	103	16	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	86.55	57.29	29.26	54	-24.74	Pass
Hopping Mode	86.55	57.6	28.95	54	-25.05	Pass

Note : Average result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	62.97	-11.03	74	58.41	32.28	6.18	33.9	100	104	Peak
2483.5	26.92	-27.08	54	22.36	32.28	6.18	33.9	100	104	Average


Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	82	55.2	26.80	54	-27.20	Pass
Hopping Mode	82	55.08	26.92	54	-27.08	Pass

Note : Average result = Maximum field strength – Delta result



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	50~51%
Test Engineer :	Ivan Chiang	Polarization :	Horizontal

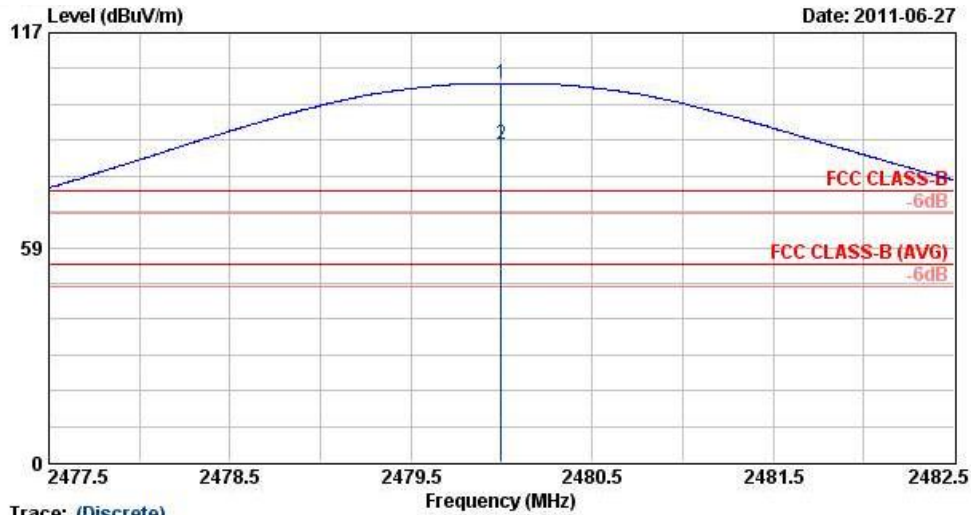

Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : FCC CLASS-B HF\_ANT\_100824 HORIZONTAL  
 Project : FR 161534  
 Mode : Mode 3


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg	
1 @	2480.00	103.23	29.23	74.00	98.67	32.28	6.18	33.90	103	16	Peak
2 @	2480.00	86.55	32.55	54.00	81.99	32.28	6.18	33.90	103	16	Average

\* Maximum field strength of the fundamental emission





Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	50~51%
Test Engineer :	Ivan Chiang	Polarization :	Horizontal

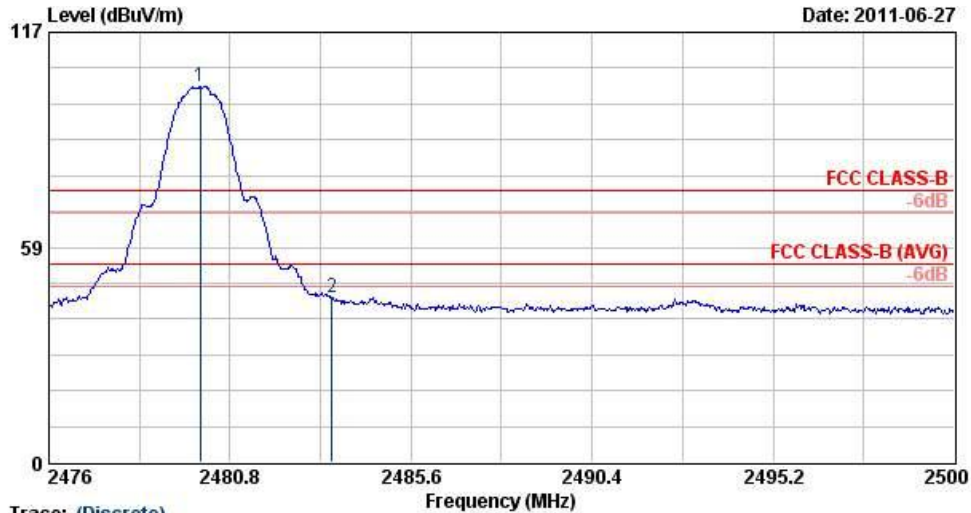

Trace: (Discrete)


Site : D3CH07-HY  
 Condition : FCC CLASS-B HF\_ANT\_100824 HORIZONTAL  
 Project : FR 161534  
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	102.16	28.16	74.00	97.60	32.28	6.18	33.90	103	16	Peak
2	2483.50	44.87	-29.13	74.00	40.31	32.28	6.18	33.90	103	16	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 57.29 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	50~51%
Test Engineer :	Ivan Chiang	Polarization :	Horizontal

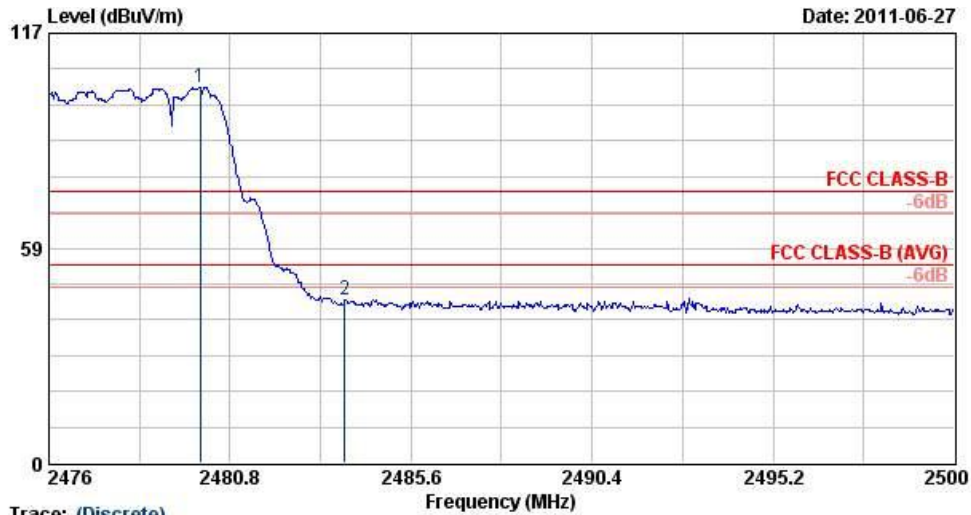

Trace: (Discrete)


Site : 03CH07-HY  
 Condition : FCC CLASS-B HF\_ANT\_100824 HORIZONTAL  
 Project : FR 161534  
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	102.17	28.17	74.00	97.61	32.28	6.18	33.90	103	16	Peak
2	2483.85	44.57	-29.43	74.00	40.01	32.28	6.18	33.90	103	16	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 57.6 dB , Hopping Mode



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	50~51%
Test Engineer :	Ivan Chiang	Polarization :	Vertical

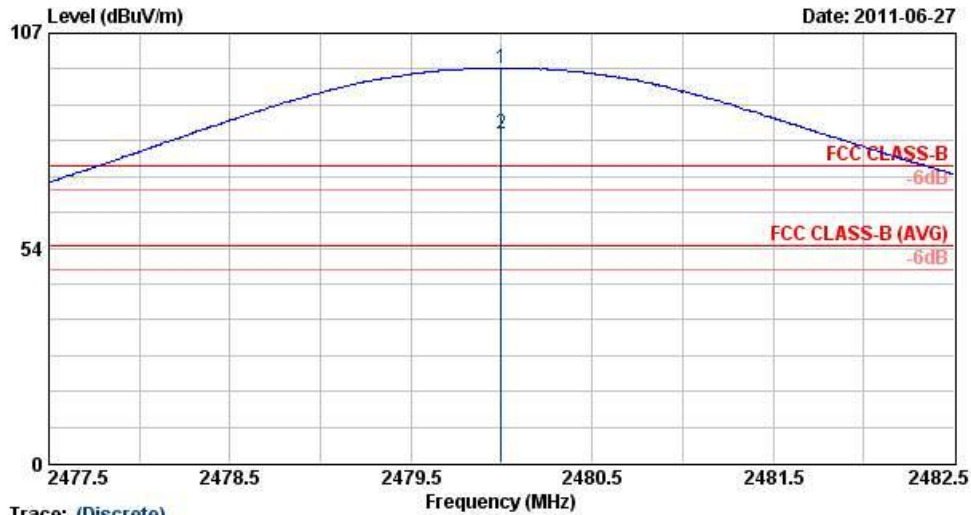

Trace: (Discrete)


Site : 03CH07-HY  
 Condition : FCC CLASS-B HF\_ANT\_100824 VERTICAL  
 Project : FR 161534  
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	98.23	24.23	74.00	93.67	32.28	6.18	33.90	100	104	Peak
2 @	2480.00	82.00	28.00	54.00	77.44	32.28	6.18	33.90	100	104	Average

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	50~51%
Test Engineer :	Ivan Chiang	Polarization :	Vertical

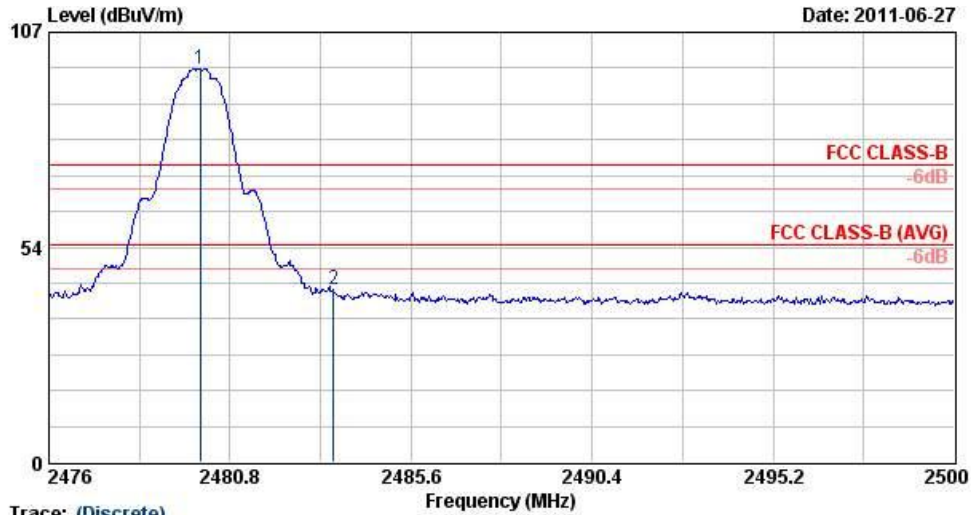

Trace: (Discrete)


Site : 03CH07-HY  
 Condition : FCC CLASS-B HF\_ANT\_100824 VERTICAL  
 Project : FR 161534  
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	97.96	23.96	74.00	93.40	32.28	6.18	33.90	100	104	Peak
2	2483.54	42.76	-31.24	74.00	38.20	32.28	6.18	33.90	100	104	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 55.2 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	50~51%
Test Engineer :	Ivan Chiang	Polarization :	Vertical

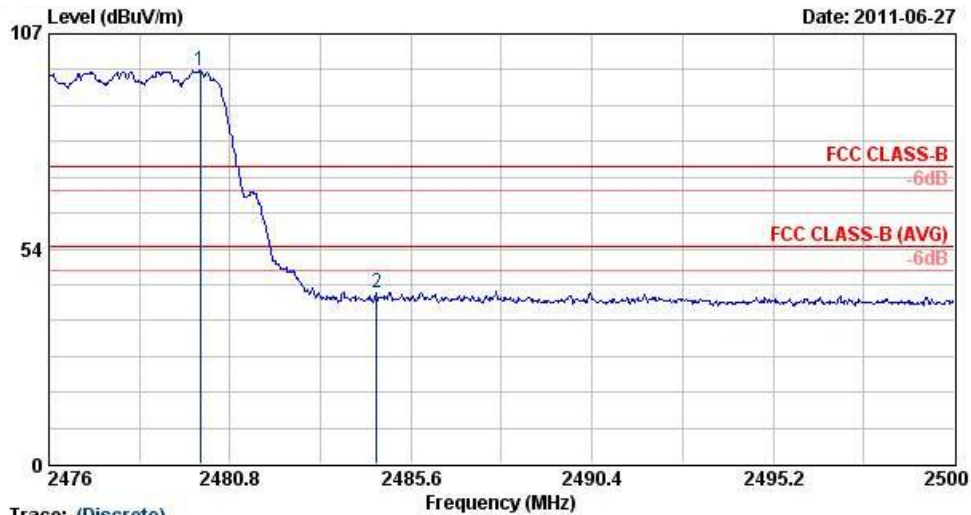

Trace: (Discrete)

Site : 03CH07-RY  
 Condition : FCC CLASS-B HF\_ANT\_100824 VERTICAL  
 Project : FR 161534  
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	97.79	23.79	74.00	93.23	32.28	6.18	33.90	100	104	Peak
2	2484.69	42.71	-31.29	74.00	38.15	32.28	6.18	33.90	100	104	Peak


\* Marker-Delta Method (RBW/VBW=100KHz): 55.08 dB , Hopping Mode



### 3.6.6 Test Result of Conducted Band Edges

Test Mode :	Mode 7 and 9	Temperature :	23~26°C
Test Channel :	00 and 78	Relative Humidity :	51~54%
		Test Engineer :	Hank Yu


Low Band Edge Plot on Channel 00

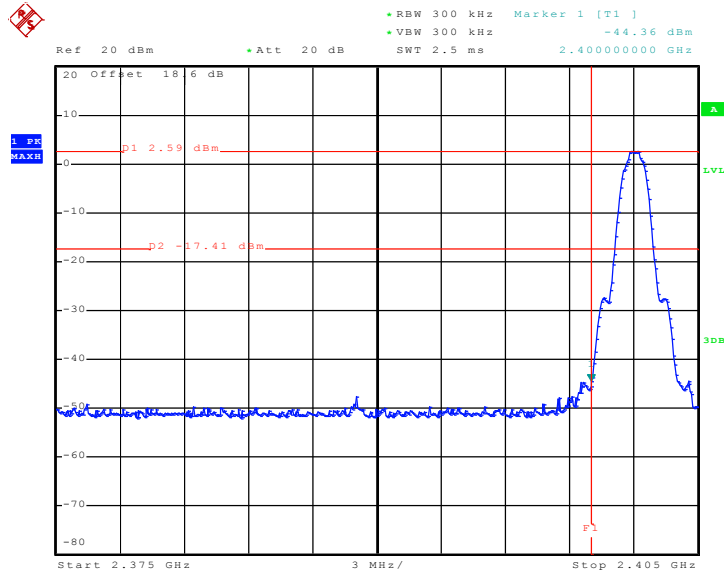

Date: 21.JUN.2011 22:30:22



High Band Edge Plot on Channel 78

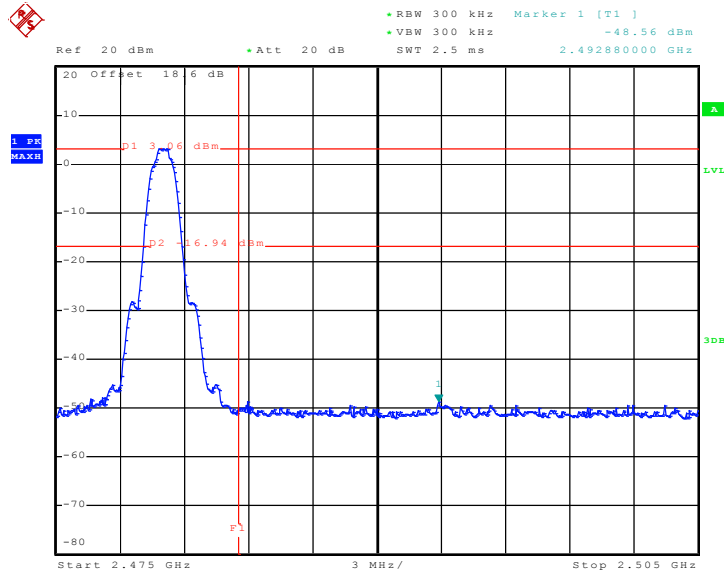

Date: 21.JUN.2011 22:31:25

## 3.7 Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

### 3.7.4 Test Setup

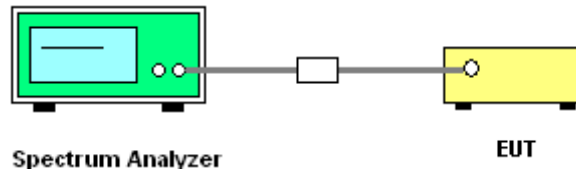




3.7.5 Test Result


Test Mode :	Mode 7	Temperature :	23~26°C
Test Channel :	00	Relative Humidity :	51~54%
		Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

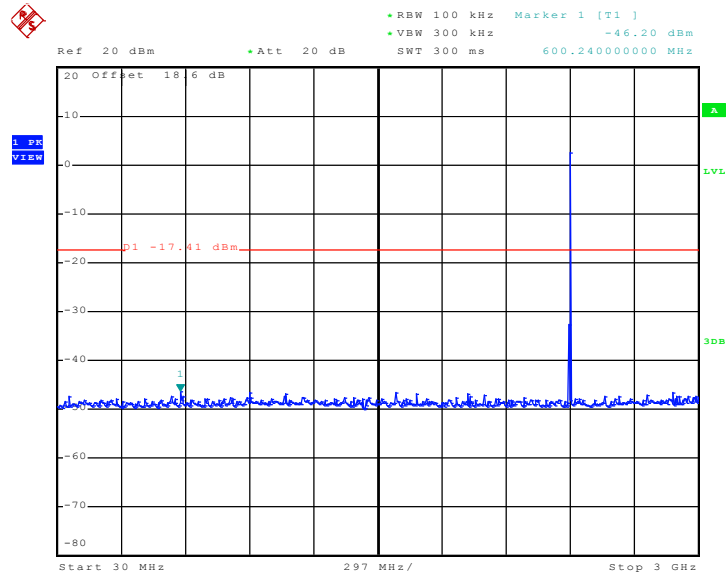

Date: 21.JUN.2011 22:37:47

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

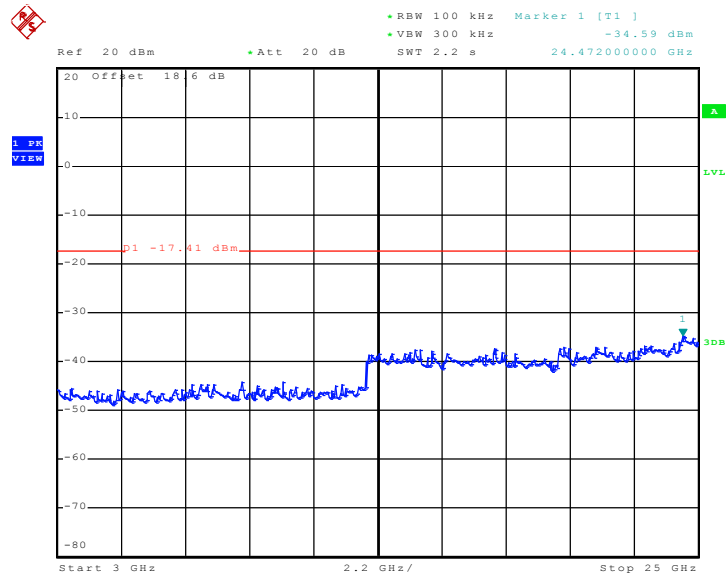


Date: 21.JUN.2011 22:38:00




Test Mode :	Mode 8	Temperature :	23~26°C
Test Channel :	39	Relative Humidity :	51~54%
		Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

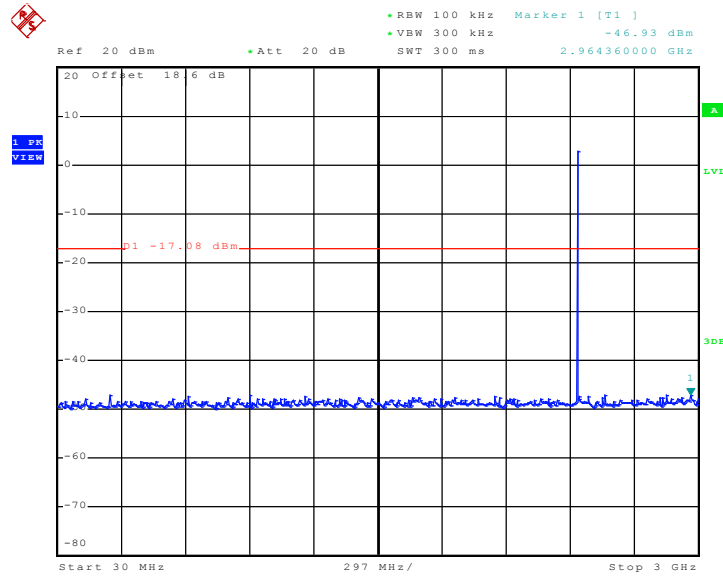

Date: 21.JUN.2011 22:38:52

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

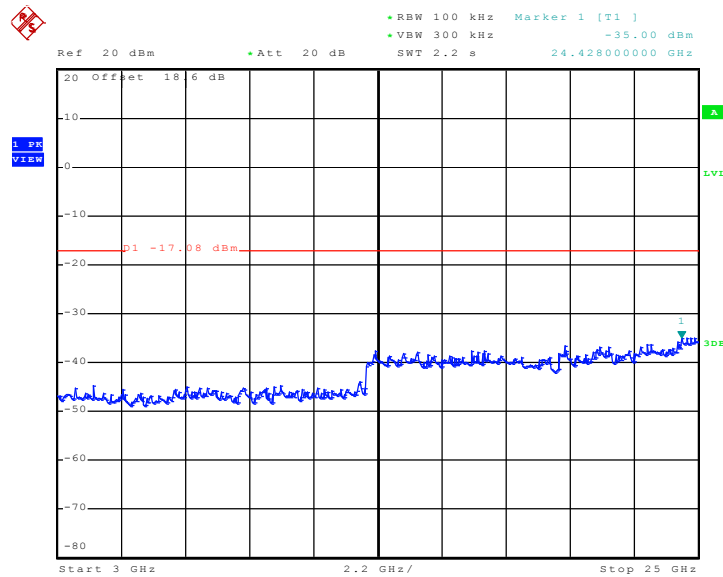


Date: 21.JUN.2011 22:39:05




Test Mode :	Mode 9	Temperature :	23~26°C
Test Channel :	78	Relative Humidity :	51~54%
		Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

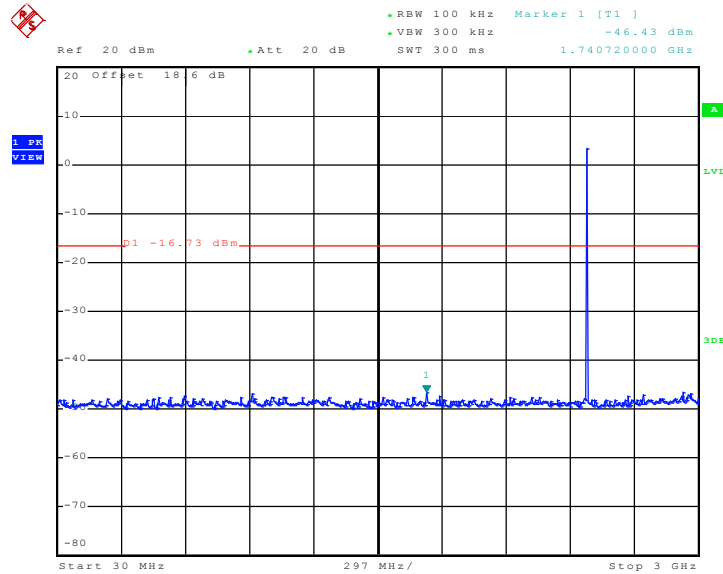

Date: 21.JUN.2011 22:39:57

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

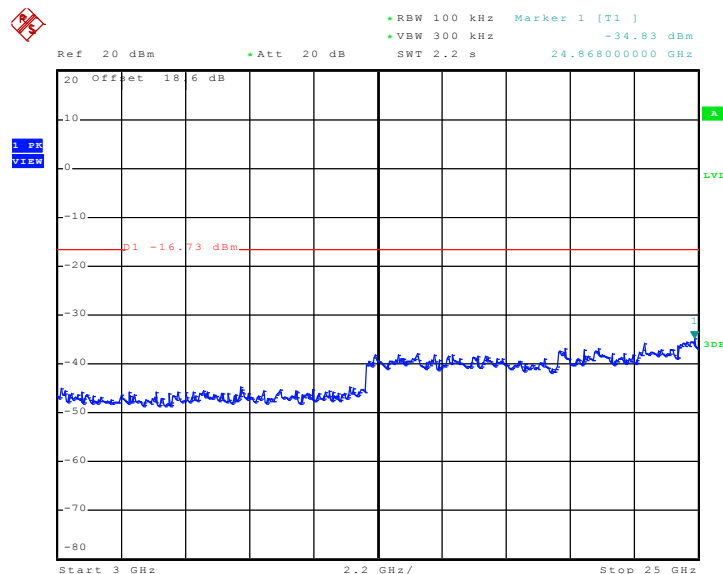

Date: 21.JUN.2011 22:40:09

## 3.8 AC Conducted Emission Measurement

### 3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.8.4 Test Setup



3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + WLAN Link + Bluetooth Link + Earphone + MPEG4 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

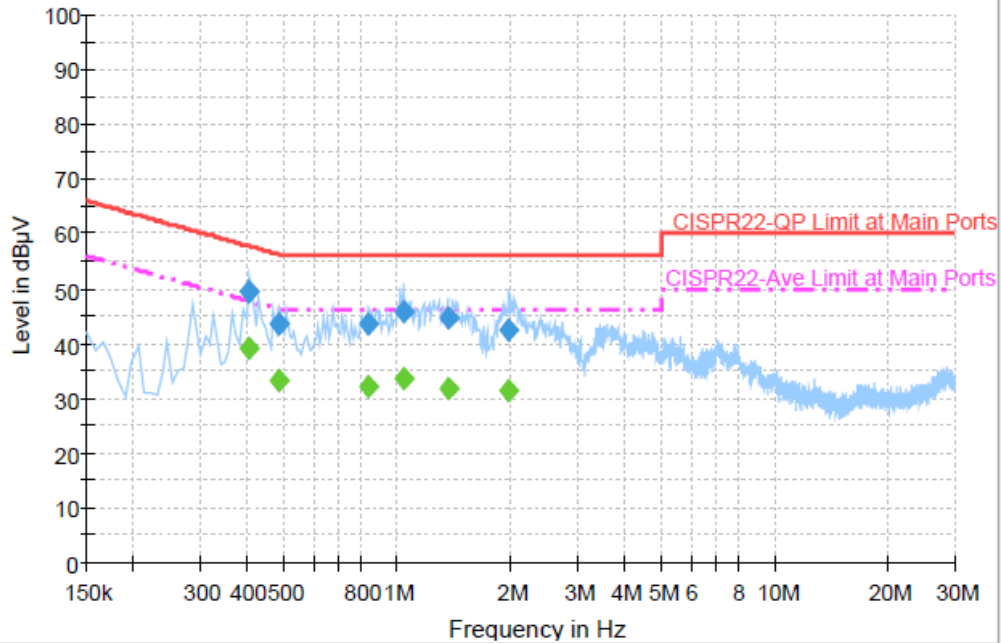

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406000	49.5	Off	L1	19.4	8.2	57.7
0.486000	43.4	Off	L1	19.4	12.8	56.2
0.838000	43.5	Off	L1	19.5	12.5	56.0
1.038000	45.7	Off	L1	19.4	10.3	56.0
1.366000	44.8	Off	L1	19.4	11.2	56.0
1.974000	42.6	Off	L1	19.4	13.4	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406000	39.0	Off	L1	19.4	8.7	47.7
0.486000	33.2	Off	L1	19.4	13.0	46.2
0.838000	31.9	Off	L1	19.5	14.1	46.0
1.038000	33.7	Off	L1	19.4	12.3	46.0
1.366000	31.8	Off	L1	19.4	14.2	46.0
1.974000	31.3	Off	L1	19.4	14.7	46.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + WLAN Link + Bluetooth Link + Earphone + MPEG4 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

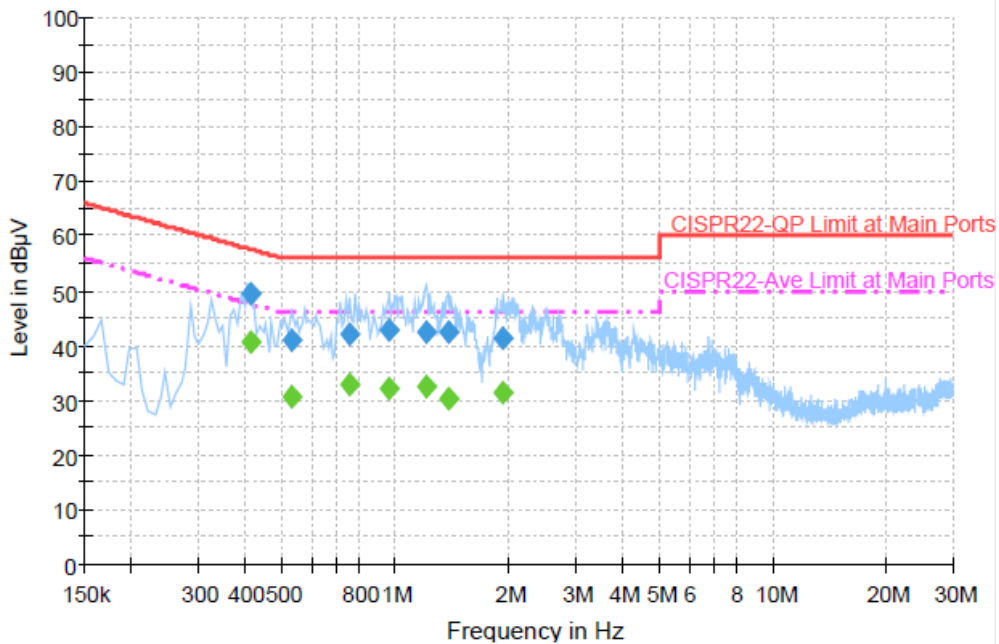

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.414000	49.5	Off	N	19.4	8.1	57.6
0.534000	40.9	Off	N	19.3	15.1	56.0
0.758000	42.2	Off	N	19.4	13.8	56.0
0.966000	42.8	Off	N	19.4	13.2	56.0
1.206000	42.4	Off	N	19.5	13.6	56.0
1.382000	42.4	Off	N	19.5	13.6	56.0
1.926000	41.4	Off	N	19.5	14.6	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.414000	40.7	Off	N	19.4	6.9	47.6
0.534000	30.8	Off	N	19.3	15.2	46.0
0.758000	32.8	Off	N	19.4	13.2	46.0
0.966000	32.2	Off	N	19.4	13.8	46.0
1.206000	32.6	Off	N	19.5	13.4	46.0
1.382000	30.2	Off	N	19.5	15.8	46.0
1.926000	31.4	Off	N	19.5	14.6	46.0

### 3.9 Radiated Emission Measurement

#### 3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.9.2 Measuring Instruments

See list of measuring instruments of this test report.


#### 3.9.3 Test Procedures

1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
  - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
 Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
4. Measured average value for the peak value is greater than 54 dBuV/m




### 3.9.4 Test Setup


For radiated emissions below 30MHz

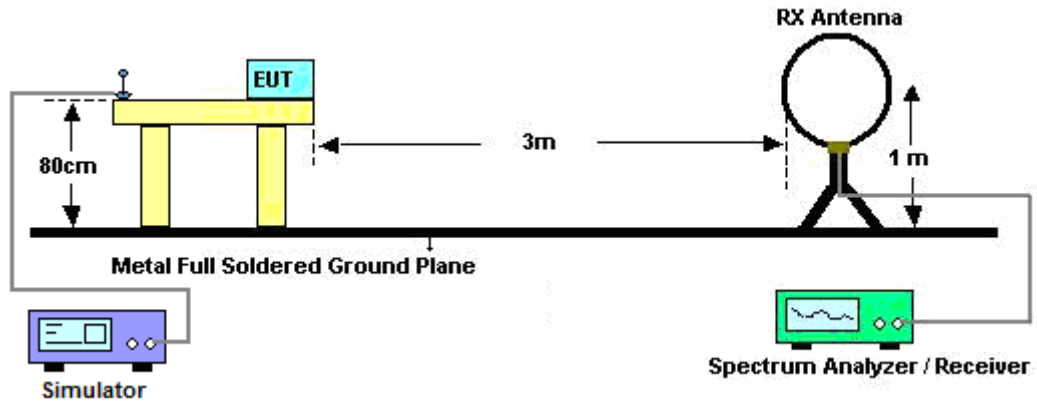

For radiated emissions from 30MHz to 1GHz

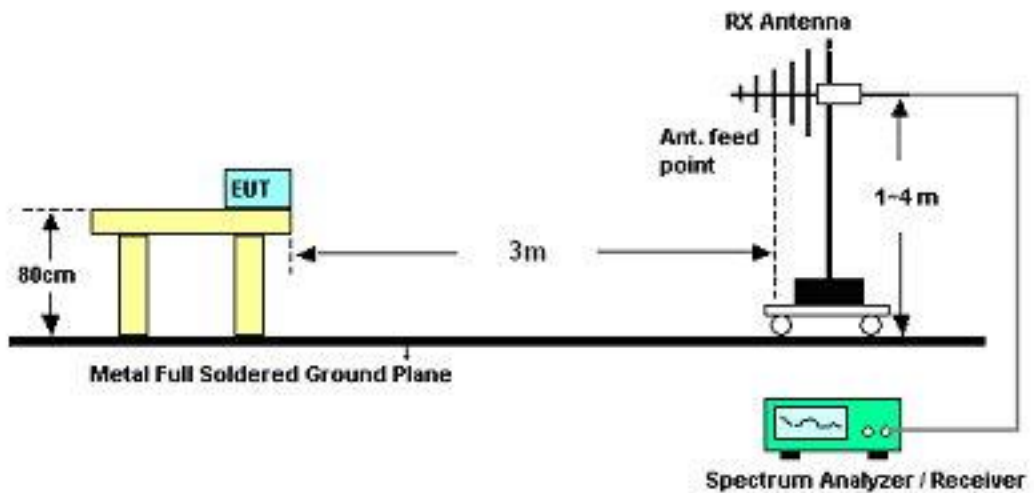

For radiated emissions above 1GHz

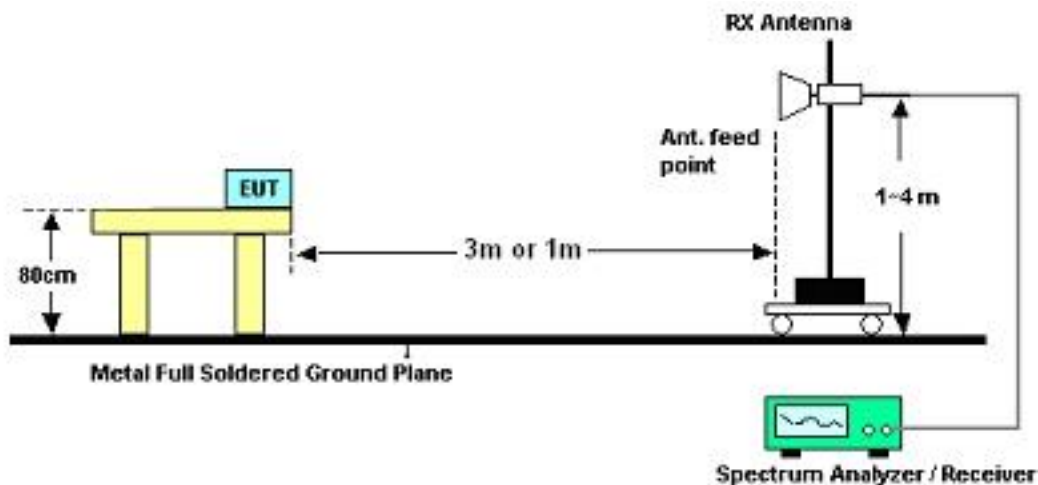

### 3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Ivan Chiang	Temperature :	25~26°C	
		Relative Humidity :	50~51%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	50~51%
Test Engineer :	Ivan Chiang	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.9	28.62	-11.38	40	50.39	9.08	0.68	31.53	100	126	Peak
62.94	20.83	-19.17	40	45.73	5.86	0.78	31.54	-	-	Peak
297.57	23.08	-22.92	46	39.23	13.43	1.75	31.33	-	-	Peak
618.5	22.33	-23.67	46	30.5	19.98	2.75	30.9	-	-	Peak
772.5	23.56	-22.44	46	29.12	22.03	3.1	30.69	-	-	Peak
971.3	26.66	-27.34	54	29.23	24.52	3.48	30.57	-	-	Peak
2388.85	49.99	-24.01	74	45.63	32.18	6.03	33.85	155	1	Peak
2388.85	38.09	-15.91	54	33.73	32.18	6.03	33.85	155	1	Average
2402	103.08	-	-	98.72	32.18	6.03	33.85	155	1	Peak
2402	86.23	-	-	81.87	32.18	6.03	33.85	155	1	Average
2486	33.42	-20.58	54	28.86	32.28	6.18	33.9	155	1	Average
2486	45.54	-28.46	74	40.98	32.28	6.18	33.9	155	1	Peak
4804	43.47	-30.53	74	59.44	34.06	9.11	59.14	100	0	Peak



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Ivan Chiang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.9	28.29	-11.71	40	50.06	9.08	0.68	31.53	107	314	Peak
91.02	22.42	-21.08	43.5	44.2	8.79	0.95	31.52	-	-	Peak
255.45	22.74	-23.26	46	39.85	12.75	1.56	31.42	-	-	Peak
492.5	20.83	-25.17	46	31.38	18.1	2.42	31.07	-	-	Peak
652.1	21.65	-24.35	46	29.33	20.35	2.84	30.87	-	-	Peak
780.9	24.29	-21.71	46	29.71	22.16	3.11	30.69	-	-	Peak
2389.42	47.76	-26.24	74	43.4	32.18	6.03	33.85	100	59	Peak
2389.42	35.23	-18.77	54	30.87	32.18	6.03	33.85	100	59	Average
2402	97.57	-	-	93.21	32.18	6.03	33.85	100	59	Peak
2402	81.75	-	-	77.39	32.18	6.03	33.85	100	59	Average
2494	33.3	-20.7	54	28.72	32.3	6.18	33.9	100	59	Average
2494	45.35	-28.65	74	40.77	32.3	6.18	33.9	100	59	Peak
4804	44.14	-29.86	74	60.11	34.06	9.11	59.14	100	0	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Ivan Chiang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
42.69	23.51	-16.49	40	42.79	11.59	0.64	31.51	-	-	Peak
48.9	28.45	-11.55	40	50.22	9.08	0.68	31.53	100	93	Peak
283.26	21.95	-24.05	46	38.44	13.2	1.65	31.34	-	-	Peak
614.3	21.16	-24.84	46	29.42	19.92	2.73	30.91	-	-	Peak
729.8	24.1	-21.9	46	30.49	21.35	3.01	30.75	-	-	Peak
853.7	25.26	-20.74	46	29.62	23.09	3.28	30.73	-	-	Peak
2350	46	-28	74	41.77	32.11	5.95	33.83	182	5	Peak
2350	33.47	-20.53	54	29.24	32.11	5.95	33.83	182	5	Average
2441	102.11	-	-	97.64	32.24	6.11	33.88	182	5	Peak
2441	85.14	-	-	80.67	32.24	6.11	33.88	182	5	Average
2484	45.05	-28.95	74	40.49	32.28	6.18	33.9	182	5	Peak
2484	33.5	-20.5	54	28.94	32.28	6.18	33.9	182	5	Average
4882	45.26	-28.74	74	61.08	34.08	9.14	59.04	100	0	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Ivan Chiang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	25.57	-14.43	40	40.44	16.04	0.55	31.46	-	-	Peak
48.9	28.69	-11.31	40	50.46	9.08	0.68	31.53	121	224	Peak
268.14	24.25	-21.75	46	41.04	12.96	1.63	31.38	-	-	Peak
399.4	19.83	-26.17	46	32.31	16.56	2.14	31.18	-	-	Peak
610.1	21.56	-24.44	46	29.87	19.88	2.72	30.91	-	-	Peak
729.8	23.31	-22.69	46	29.7	21.35	3.01	30.75	-	-	Peak
2388	33.87	-20.13	54	29.51	32.18	6.03	33.85	185	99	Average
2388	46.38	-27.62	74	42.02	32.18	6.03	33.85	185	99	Peak
2441	96.37	-	-	91.9	32.24	6.11	33.88	185	99	Peak
2441	80.95	-	-	76.48	32.24	6.11	33.88	185	99	Average
2500	46.13	-27.87	74	41.55	32.3	6.18	33.9	185	99	Peak
2500	33.31	-20.69	54	28.73	32.3	6.18	33.9	185	99	Average
4882	44.27	-29.73	74	60.09	34.08	9.14	59.04	100	0	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Ivan Chiang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.9	28.05	-11.95	40	49.82	9.08	0.68	31.53	100	49	Peak
191.73	22.48	-21.02	43.5	43.61	9.08	1.29	31.5	-	-	Peak
286.5	24.15	-21.85	46	40.57	13.24	1.67	31.33	-	-	Peak
635.3	21.92	-24.08	46	29.84	20.16	2.8	30.88	-	-	Peak
819.4	24.46	-21.54	46	29.27	22.7	3.19	30.7	-	-	Peak
965.7	26.6	-27.4	54	29.23	24.46	3.48	30.57	-	-	Peak
2380	45.82	-28.18	74	41.48	32.16	6.03	33.85	103	16	Peak
2380	33.01	-20.99	54	28.67	32.16	6.03	33.85	103	16	Average
2480	103.32	-	-	98.76	32.28	6.18	33.9	103	16	Peak
2480	86.23	-	-	81.67	32.28	6.18	33.9	103	16	Average
2483.5	68.04	-5.96	74	63.48	32.28	6.18	33.9	103	16	Peak
2483.5	29.26	-24.74	54	24.7	32.28	6.18	33.9	103	16	Average
4960	47.23	-26.77	74	62.89	34.09	9.16	58.91	100	0	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Ivan Chiang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.7	25.55	-14.45	40	40.66	15.8	0.56	31.47	-	-	Peak
48.9	28.77	-11.23	40	50.54	9.08	0.68	31.53	-	-	Peak
93.18	32.44	-11.06	43.5	54	9.01	0.96	31.53	106	115	Peak
302.1	22.24	-23.76	46	38.24	13.55	1.78	31.33	-	-	Peak
573.7	20.56	-25.44	46	29.52	19.37	2.62	30.95	-	-	Peak
685.7	21.92	-24.08	46	29.11	20.73	2.91	30.83	-	-	Peak
2390	45.22	-28.78	74	40.86	32.18	6.03	33.85	100	104	Peak
2390	33.47	-20.53	54	29.11	32.18	6.03	33.85	100	104	Average
2480	97.98	-	-	93.42	32.28	6.18	33.9	100	104	Peak
2480	82.07	-	-	77.51	32.28	6.18	33.9	100	104	Average
2483.5	62.97	-11.03	74	58.41	32.28	6.18	33.9	100	104	Peak
2483.5	26.92	-27.08	54	22.36	32.28	6.18	33.9	100	104	Average
4960	48.98	-25.02	74	64.64	34.09	9.16	58.91	100	0	Peak





## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

The antennas type used in this product is Chip Antenna without connector and it is considered to meet antenna requirement.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Aug. 11, 2010	Aug.10, 2011	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Jun. 12, 2012	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 13, 2010	Sep. 12, 2011	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 14, 2010	Sep. 13, 2011	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 18, 2010	Oct. 17, 2011	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2010	Oct. 30, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 03, 2010	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Aug. 18, 2011	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB.GAIN	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100522	N/A	Jan.13, 2011	Jan.13, 2013	Radiation (03CH07-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		



**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP161534 as below.