



ELECTROMAGNETIC RESEARCH INSTITUTE



EMI TEST REPORT

Emission of electromagnetic disturbance

Test Report No. : ERI-FCC03-0066
Equipment : MP3 Player
Name of basic model : MP-400D
Family model : MP-400E, MP-400F, MP-400G, SSF
Manufacturer : CENIX DIGICOM CO., LTD.
Applicant : CENIX DIGICOM CO., LTD.
Tested date : 2003. 9. 30 – 10.1
Issued date : 2003. 10. 16
Test results : PASS
Test Standards : FCC Part 15 Subpart B (Class B)
/digital devices & peripherals

Test Procedure and Items:

- AC Power line Conducted emissions measurement : ANSI C63.4-1992
- Radiated emissions measurement : ANSI C63.4-1992

Tested by: GWEON, HUR

Approved by: UK-CHO, RIM

The results in this report apply only to the sample tested.

This test report shall not be reproduced except in full, without the written approval of **ERI Laboratory**.

CONTENTS

1. CLIENT INFORMATION
2. LABORATORY INFORMATION
3. EQUIPMENT UNDER TEST INFORMATION(EUT)
 - 3.1 Identification of the EUT
 - 3.2 Additional information about the EUT
 - 3.3 Peripheral equipment
4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL
 - 4.1 Operating environment
 - 4.2 Test set-up and test procedures
 - 4.3 Operation Conditions
 - 4.4 Test instrument
 - 4.5 Test results
5. RADIATED DISTURBANCE : 30MHz – 1000MHz
 - 5.1 Operating environment
 - 5.2 Test set-up
 - 5.3 Test conditions
 - 5.4 Test instrument
 - 5.5 Test results(Test mode: Up & download mode)
 - 5.6 Test results(Test mode: Play mode)
 - 5.7 Test results(Test mode : FM Tuner, Others)

APPENDIX

(None)

1. CLIENT INFORMATION

The EUT has been tested by request of :

Company : CENIX DIGICOM CO., LTD.
Address : #584-4 PAJANG- DONG, JANGAN- KU, SUWON-CITY,
KYUNGGI- DO, KOREA
Name of contact : -
Telephone : +82-31-245-2900
Facsimile : +82-31-251-6425

2. LABORATORY INFORMATION

The 10m full-anechoic chamber and/or EMC facilities are used for these testing.
These facilities were accredited by KOLAS, EK, MIC of Korea and FCC of USA.

Address

ELECTROMAGNETIC RESEARCH INSTITUTE.
66-6, JEIL-RI, YANGJI-MYUN, YOUNGIN-CITY, KYUNGGI- DO, KOREA
Telephone No. : +82-31-336-1186 ~ 7
Facsimile No. : +82-31-336-1184

Registered No.

KOLAS : 111
EK : J
MIC : KR0030
FCC Filing No. : 302567

3. EQUIPMENT UNDER TEST INFORMATION(EUT)

3.1 Identification of the EUT

Type of equipment : MP3 Player
Model name : MP-400D
Brand name : -
Manufacturer : CENIX DIGICOM CO., LTD.
Address : #584-4 PAJANG- DONG, JANGAN- KU, SUWON-CITY,
KYUNGGI- DO, KOREA
Telephone : +82-31-245-2900
Facsimile : +82-31-251-6425
Country of origin : KOREA
Rating : DC 1.5V

3.2 Additional information about the EUT

Class B,

Family Models List:

Basic Model	Variant Model	Differential point
MP-400D	MP-400E	Model name
	MP-400F	Model name
	MP-400G	Model name
	SSF	Model name

3.3 Peripheral equipment

Defined as equipment needed for correct operation of the EUT.

Description	Model No.	Serial No.	Manufacture
Printer	C6427A	CN13V1B1SZ	HP
Joystick	-	LCA70651918	LOGITECH
Mouse	M-S48	LZA82142279	LOGITECH
Keyboard	SDM4510UH	4M020619	SAMSUNG
PC	Dreamsys EZ/AC	5004135400304	SAMBO COMPUTER
Monitor	PN15VT	P181H80R907989	-
Earphone	-	-	-


4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL

: Frequency range 0.15 MHz to 30 MHz

4.1 Operating environment

Temperature : 19.0
Relative Humidity : 58.0 %

4.2 Test set-up and test procedures

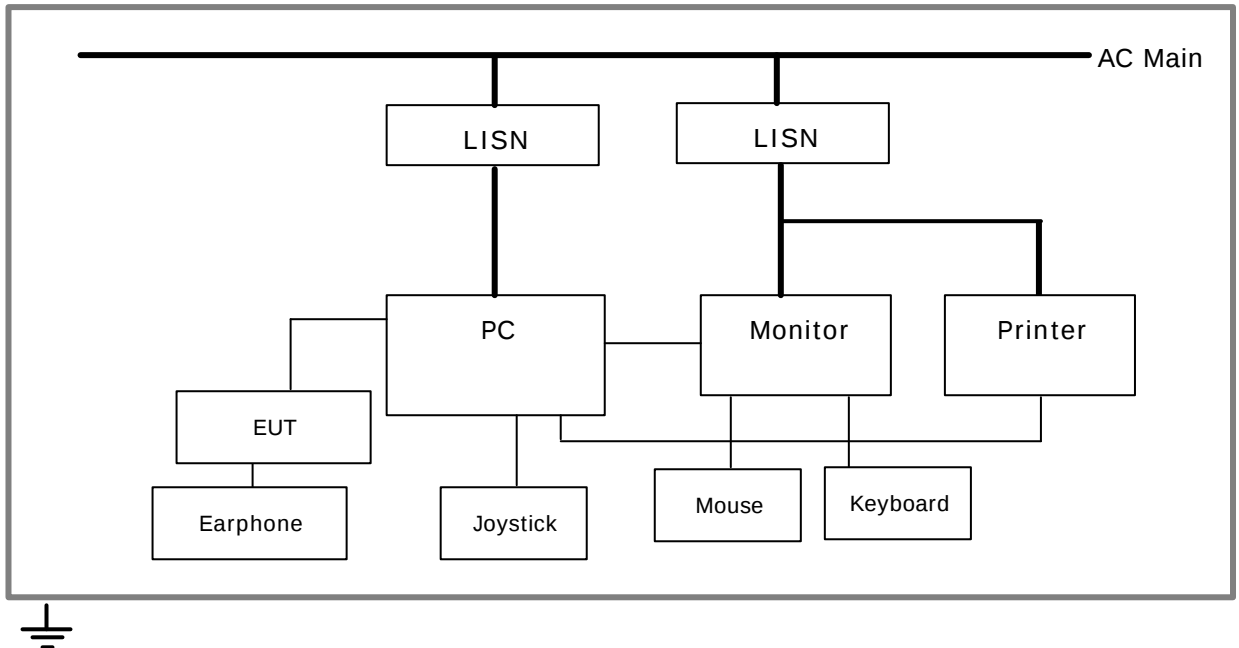

The mains terminal disturbance voltage was measured with the equipment under test(EUT) in a shield room. The EUT was connected to an artificial mains network(LISN) placed on the floor. The EUT was placed on non-metallic table 0.4m above the metallic, grounded floor. The distance to other metallic surface was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

4.3 Operation Conditions

Up & download mode, play mode

4.4 Test instrument

Instrument	Model No	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2004. 1. 24	
L.I.S.N.	ESH3-Z5	827246/008	R&S	2004. 3. 19	
	ESH3-Z5	831887/018	R&S	2004. 3. 19	
Shield room	8 × 6 × 3.3m/H	-	-	-	

4.5 Test results

Date of test: Sep 30, 2003

An overview sweep performed with peak detector & average detector are included in the report **as test reports**.


Frequency	Tested	LISN	Meter		Limits	
Range	Freq.		Reading			
			QP	AV	QP	AV
[MHz]	[MHz]		[dBuV]		[dBuV]	
0.15 - 30(MHz)	0.150	H	42.9	16.5	66.0	56.0
	0.195	N	55.8	45.8	63.9	53.9
	0.258	H	42.1	32.2	61.5	51.5
	0.324	H	36.9	34.3	59.5	49.5
	0.654	N	36.5	35.8	56.0	46.0
	0.720	N	36.9	36.9	56.0	46.0
	1.242	N	37.0	36.0	56.0	46.0
	1.308	N	36.9	35.8	56.0	46.0
	11.982	N	41.3	34.5	60.0	50.0
	18.000	H	42.2	15.2	60.0	50.0

<5 : mean less than 5dB


Other frequency keep over 20dB margin.

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.

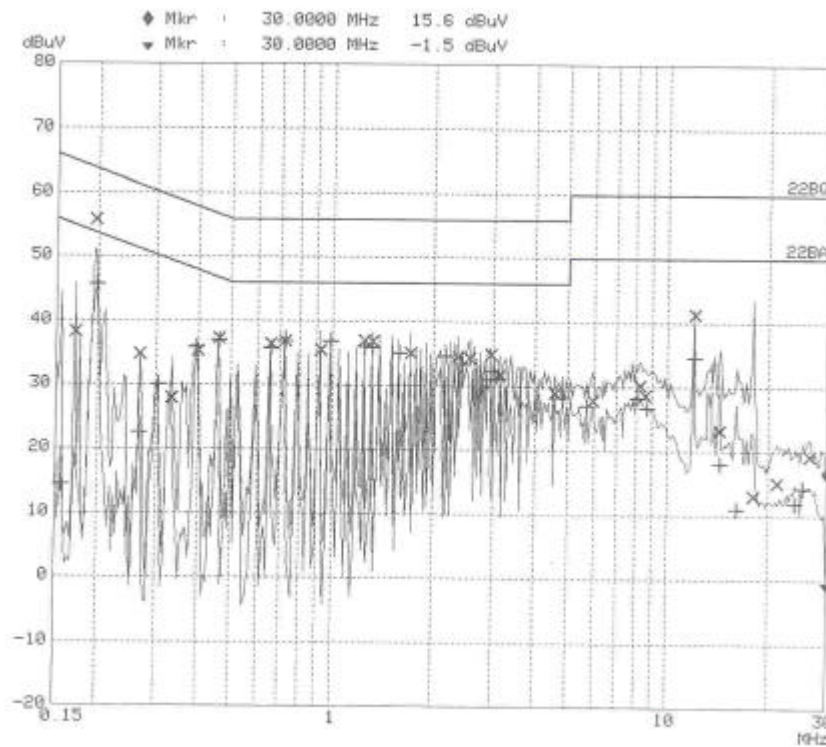

PAGE 1
[Live line]

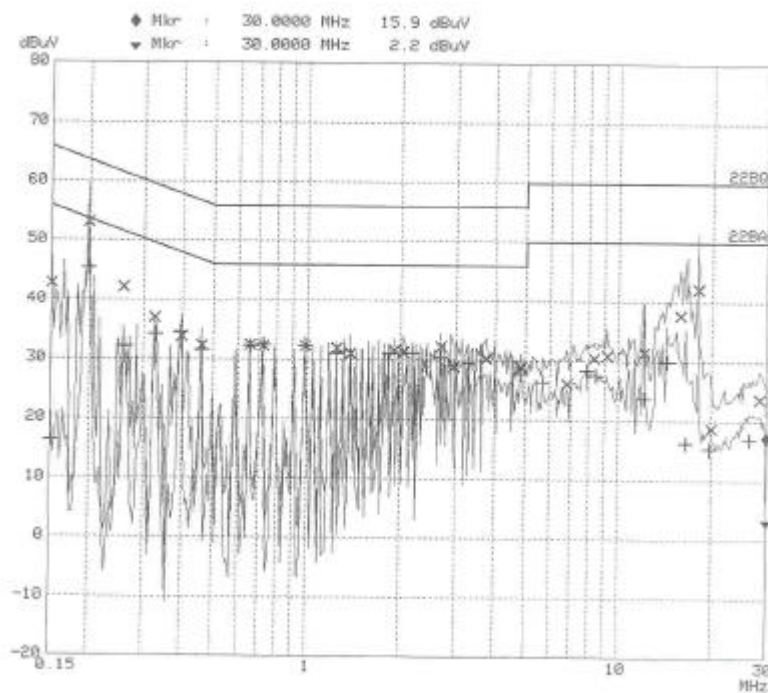

PAGE 1
[Neutral line]

5. RADIATED DISTURBANCE : 30MHz – 1000MHz

5.1 Operating environment

Temperature : 22.0
Relative Humidity : 55.0 %

5.2 Test set-up

The frequency range investigated was 30 MHz to 1000 MHz.

All readings are quasi-peak unless stated otherwise.


The half-wave dipole antenna was tuned to the frequency found during Preliminary radiated measurements. The EUT, support equipment and Interconnecting cables were re-configured to the set-up to the producing the Maximum emission for the frequency and were placed on top of a 0.8 meter High non-metallic 1 X 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turntable containing the system was rotated the antenna height was varied 1 to 4 meters

and stopped at the azimuth or height producing the maximum emission.

And this device(EUT) was tested in 3 orthogonal planes.

The antenna measured both horizontal and vertical polarization.

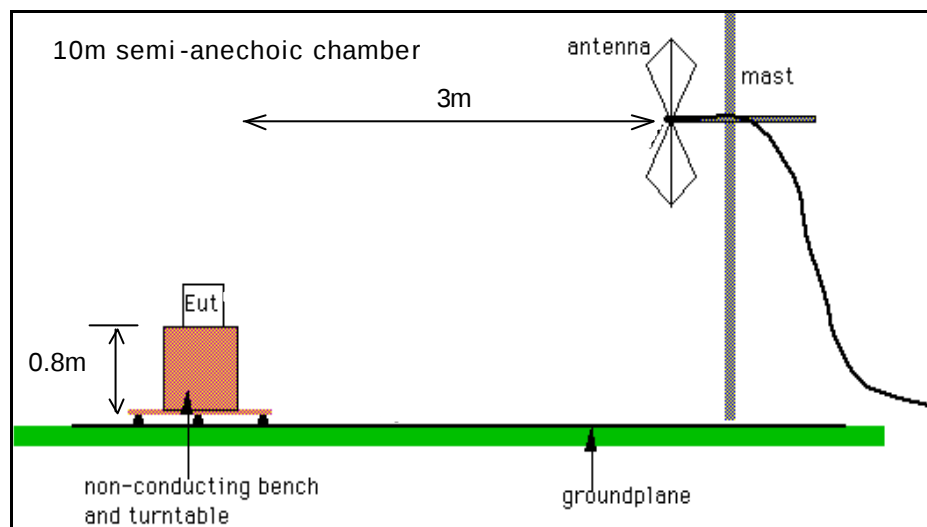

<General test set-up for radiated emissions>

5.3 Operation Conditions

Up & download mode, play mode

5.4 Test instrument

Instrument	Model No.	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2004. 1. 24	
L.I.S.N.	ESH3-Z5	827246/008	R&S	2004. 3. 19	
	ESH3-Z5	831887/018	R&S	2004. 3. 19	
Biconical Antenna	VHA9103	91031950	Schwarzbeck	2004.01.24	
Log-Periodic Antenna	UHALP9108A	0392	Schwarzbeck	2004.01.23	
Antenna Mast	MA240	N/A	HD	-	
Turn Table	DT430S	N/A	HD	-	

5.5 Test results(Test mode: Up & download mode)

Date of test: Sep 30, 2003

Freq (MHz)	Reading (dBuV / m)	Ant	AF (dB)	CL (dB)	Result (dBuV / m)	Limit (dB)	Margin (dB)
42.00	11.36	V	11.05	1.85	24.26	40.00	15.74
79.00	14.46	V	8.20	2.60	25.26	40.00	14.74
91.00	10.28	V	8.68	2.63	21.59	43.50	21.91
132.00	8.21	H	11.45	3.15	22.81	43.50	20.69
134.00	11.90	V	11.50	3.20	26.60	43.50	16.90
229.00	7.32	H	14.60	4.40	26.32	46.00	19.68
277.00	4.97	H	17.30	5.05	27.32	46.00	18.68
302.00	8.65	V	12.76	5.31	26.72	46.00	19.28
344.00	15.46	V	13.85	0.90	30.21	46.00	15.79
350.00	10.21	H	14.30	5.70	30.21	46.00	15.79
391.00	10.19	V	14.30	6.03	29.59	46.00	16.41
401.00	5.21	H	15.71	6.10	27.02	46.00	18.98

* Receiving Antenna Mode : **Horizontal, Vertical**

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization $\angle$ POL H = Horizontal POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result = Field Strength(AF + CL+ Reading)

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.

5.6 Test results(Test mode: Play mode)

Date of test: Sep 30, 2003

Freq (MHz)	Reading (dBuV / m)	Ant	AF (dB)	CL (dB)	Result (dBuV / m)	Limit (dB)	Margin (dB)
55.20	9.95	V	9.67	1.90	21.52	40.00	18.48
69.62	15.11	V	6.49	2.00	23.60	40.00	16.40
130.45	10.44	H	13.86	2.60	26.90	43.50	16.60
190.22	16.10	H	16.40	3.10	35.60	43.50	7.90
219.21	6.83	V	16.50	3.20	26.53	46.00	19.47
227.82	5.16	H	16.70	3.50	25.36	46.00	20.64
488.48	8.69	V	17.06	4.60	30.35	46.00	15.65
510.22	14.59	H	17.34	4.70	36.63	46.00	9.37
543.31	9.76	V	17.69	4.80	32.25	46.00	13.75
653.79	11.21	H	19.50	5.50	36.21	46.00	9.79
663.24	10.25	V	19.50	5.50	35.25	46.00	10.75

* Receiving Antenna Mode : **Horizontal, Vertical**

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization $\nearrow$ POL H = Horizontal POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result = Field Strength(AF + CL+ Reading)

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.

5.7 Test results < Test mode: FM tuner >

Date of test: Sep 30, 2003

T.	Tested	Meter Reading (quasi-peak)		Limits	Total Loss	Margins	
Frequency	Frequency	H	V			H	V
[MHz]	[MHz]	[dBuV/m]	[dBuV/m]			[dBuV/m]	[dBuV/m]
87.5	98.2	18.1	-	43.5	11.9	25.4	-
	196.4	25.4	-	43.5	17.8	18.1	-
	294.6	-	-	46.0	24.3	-	-
	392.8	-	-	46.0	21.4	-	-
	491.0	-	-	46.0	23.9	-	-
	589.2	-	-	46.0	26.2	-	-
	687.4	-	-	46.0	28.7	-	-
	785.6	-	-	46.0	30.0	-	-
	883.8	-	-	46.0	31.9	-	-
	982.0	-	-	54.0	33.1	-	-
98.0	108.7	20.0	-	43.5	12.7	23.5	-
	217.4	-	20.0	46.0	18.9	-	26.0
	326.1	-	-	46.0	18.9	-	-
	434.8	-	-	46.0	22.4	-	-
	543.5	-	-	46.0	25.2	-	-
	652.2	-	-	46.0	27.5	-	-
	760.9	-	-	46.0	29.7	-	-
	869.6	-	-	46.0	31.8	-	-
	978.3	-	-	54.0	33.0	-	-
108.0	118.7	20.5	-	43.5	13.7	23.0	-
	237.4	-	22.1	46.0	19.0	-	23.9
	356.1	-	-	46.0	20.1	-	-
	474.8	-	-	46.0	23.4	-	-
	593.5	-	-	46.0	26.3	-	-
	712.2	-	-	46.0	29.1	-	-
	830.9	-	-	46.0	30.7	-	-
	949.6	-	-	46.0	32.1	-	-
* Meter reading: Loss include * Margins : [Limits] - meter reading] * Receiving Antenna Mode: Horizontal, Vertical * 10m chamber * <5 : mean less than 5dB * Measurement uncertainty (K=2) 30-300MHz : +3.96dB / -4.04dB 300-1000MHz : +3.04dB / -3.00dB							

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.

Others

Date of test: Sep 30, 2003

Tested Frequency	ANT Pol.	Meter Reading	Antenna Factor	Cable Loss	Results	Limits
[MHz]		[A] [dBuV/m]	[B] [dB]	[C] [dB]	[A+B+C] [dBuV/m]	[dBuV/m]
42.36	H	12.07	14.25	1.70	28.02	40.00
51.80	V	11.92	11.50	1.70	25.12	40.00
130.12	V	13.17	13.86	2.60	29.63	43.50
145.60	H	13.15	14.70	2.70	30.55	43.50
162.50	H	11.31	15.59	2.90	29.80	43.50
207.00	V	12.62	16.29	3.20	32.11	46.00
213.20	H	11.85	16.50	3.20	31.55	46.00
343.50	V	16.75	13.85	0.90	31.50	46.00
410.20	H	13.04	15.87	4.10	33.01	46.00
520.20	H	8.21	17.34	4.70	30.25	46.00
847.00	V	4.83	21.18	6.10	32.11	46.00

* Receiving Antenna Mode : **Horizontal, Vertical**

* Test distance: **3m** (10m Anechoic Chamber)

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization ≠ POL H = Horizontal
POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result =
Field Strength(AF + CL+ Reading)