



EMI TEST REPORT

Emission of electromagnetic disturbance

Test Report No. : ERI-FCC04-0049

Equipment : MP3 Player

Name of basic model : MP-430TH

Family model : MP-430TE, MP-430TF, MP-430TG

Manufacturer : CENIX DIGICOM CO., LTD.

Applicant : CENIX DIGICOM CO., LTD.

Tested date : 2004. 8. 24 – 8. 28

Issued date : 2004. 8. 30

Test results : PASS

Test Standards : FCC Part 15 Subpart B (Class B)

/Digital devices & peripherals

Test Procedure and Items:

- AC Power line Conducted emissions measurement : ANSI C63.4-1992
- Radiated emissions measurement : ANSI C63.4-1992

Tested by: YOUNG-SIK, KIM

Approved by: SANG-KYU, LEE

The results in this report apply only to the sample tested.

This test report shall not be reproduced except in full, without the written approval of **ERI Laboratory**.

CONTENTS

1. CLIENT INFORMATION
2. LABORATORY INFORMATION
3. EQUIPMENT UNDER TEST INFORMATION(EUT)
 - 3.1 Identification of the EUT
 - 3.2 Additional information about the EUT
 - 3.3 Peripheral equipment
4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL
 - 4.1 Operating environment
 - 4.2 Test set-up and test procedures
 - 4.3 Operation Conditions
 - 4.4 Test instrument
 - 4.5 Test results
5. RADIATED DISTURBANCE : 30MHz – 1000MHz
 - 5.1 Operating environment
 - 5.2 Test set-up
 - 5.3 Test conditions
 - 5.4 Test instrument
 - 5.5 Test results (Test mode: Up & Download mode)
 - 5.6 Test results (Test mode: Play mode)
 - 5.7 Test results (Test mode : FM Tuner mode)

APPENDIX

(None)

3.2 Additional information about the EUT

Class B,

Family Models List:

Basic Model	Variant Model	Differential point	Memory size
MP-430TH (1G)	MP-430TE	Memory size	128M
	MP-430TF		256M
	MP-430TG		512M

3.3 Peripheral equipment

Defined as equipment needed for correct operation of the EUT.

Description	Model No.	Serial No.	Manufacture
PC	MTC2	FSZS91S	Dell
Monitor	PN15VT	P181G80R907989	-
Keyboard	TRI-270	108018331	Solid Year Co., Ltd.
Mouse	M-S48a	LZA95250340	Logitech
Printer	C6247A	CN13V1B1RY	HP


4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL

: Frequency range 0.15 MHz to 30 MHz

4.1 Operating environment

Temperature : 22.0
Relative Humidity : 46.0 %

4.2 Test set-up and test procedures

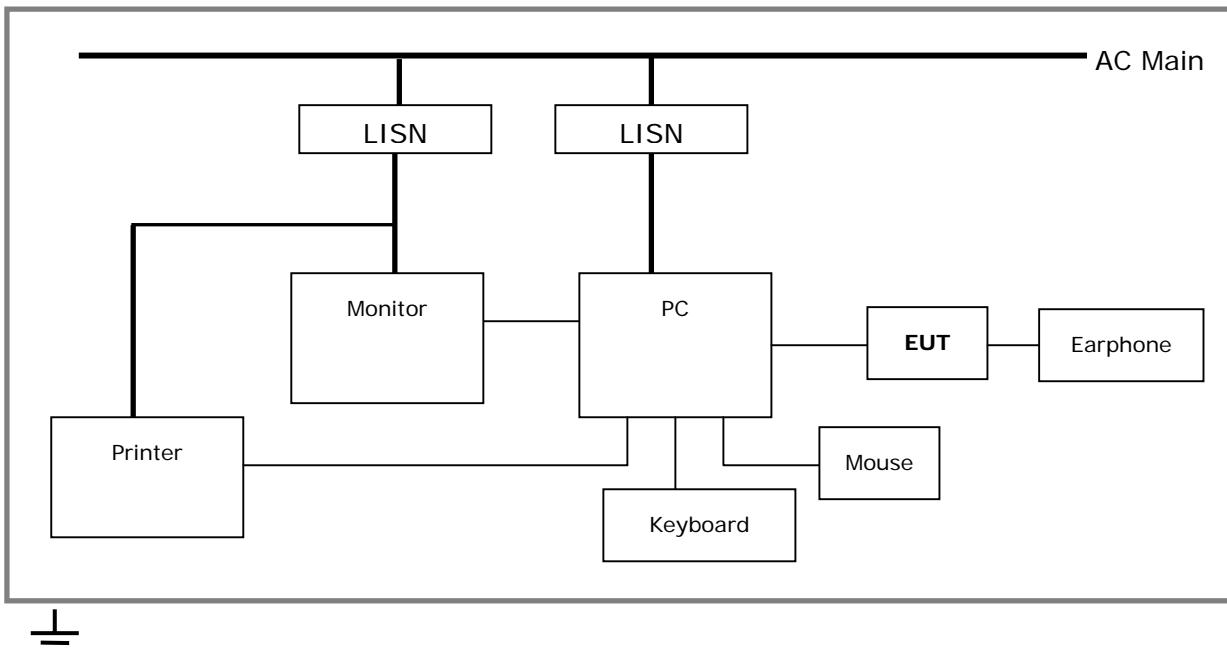

The mains terminal disturbance voltage was measured with the equipment under test(EUT) in a shield room. The EUT was connected to an artificial mains network(LISN) placed on the floor. The EUT was placed on non-metallic table 0.4m above the metallic, grounded floor. The distance to other metallic surface was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

4.3 Operation Conditions

Up & Down load mode, play mode

4.4 Test instrument

Instrument	Model No	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100022	R&S	2005. 06. 16	
L.I.S.N.	ESH3-Z5	100029	R&S	2004. 11. 11	
	ESH3-Z5	100031	R&S	2005. 01. 06	
Shield room	8 x 6 x 3.3m/H	-	-	-	

4.5 Test results



Date of test: Aug 24, 2004.

An overview sweep performed with peak detector & average detector are included in the report **as test reports**.

Frequency Range [MHz]	Tested Freq. [MHz]	LISN	Meter Reading		Limits		Margin	
			QP	AV	QP	AV	QP	AV
			[dBuV]		[dBuV]		[dBuV]	
0.15-30	0.156	N	35.4	35.0	65.7	55.7	30.3	20.7
	0.195	H	33.9	33.8	63.8	53.8	29.9	20.0
	0.981	H	33.4	33.0	56.0	46.0	22.6	13.0
	2.253	N	34.0	33.2	56.0	46.0	22.0	12.8
	2.646	H	35.5	35.2	56.0	46.0	20.5	10.8
	2.742	N	34.1	33.0	56.0	46.0	21.9	13.0
	3.820	H	36.6	36.1	56.0	46.0	19.4	9.9
	3.920	N	36.4	35.6	56.0	46.0	19.6	10.4
	4.700	H	33.7	32.9	60.0	50.0	26.3	17.1
	7.640	H	33.3	30.1	60.0	50.0	26.7	19.9

* <5 : mean less than 5dB

* Other frequency keep over 20dB margin.

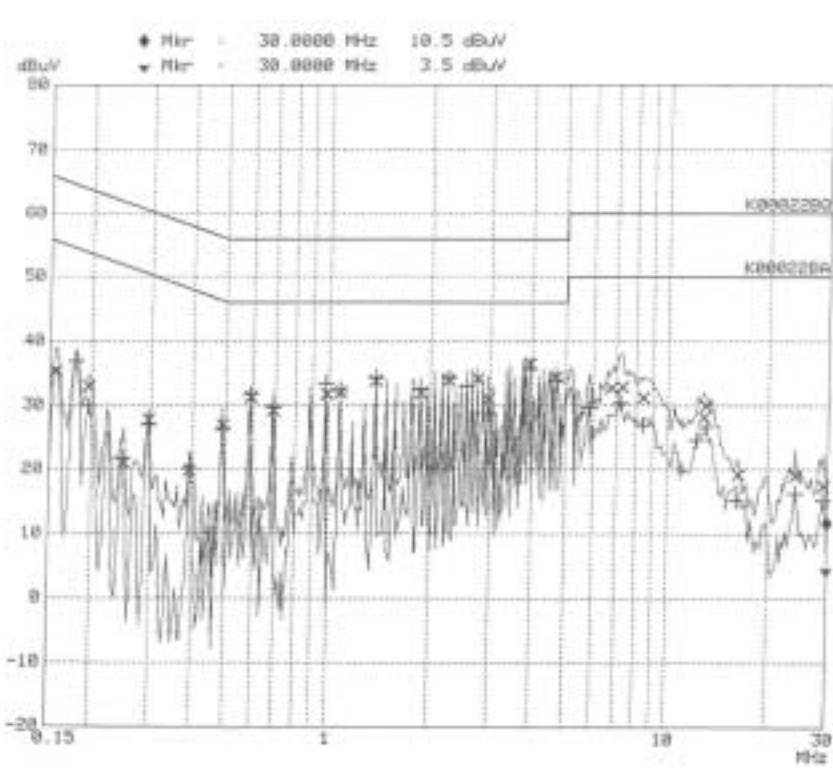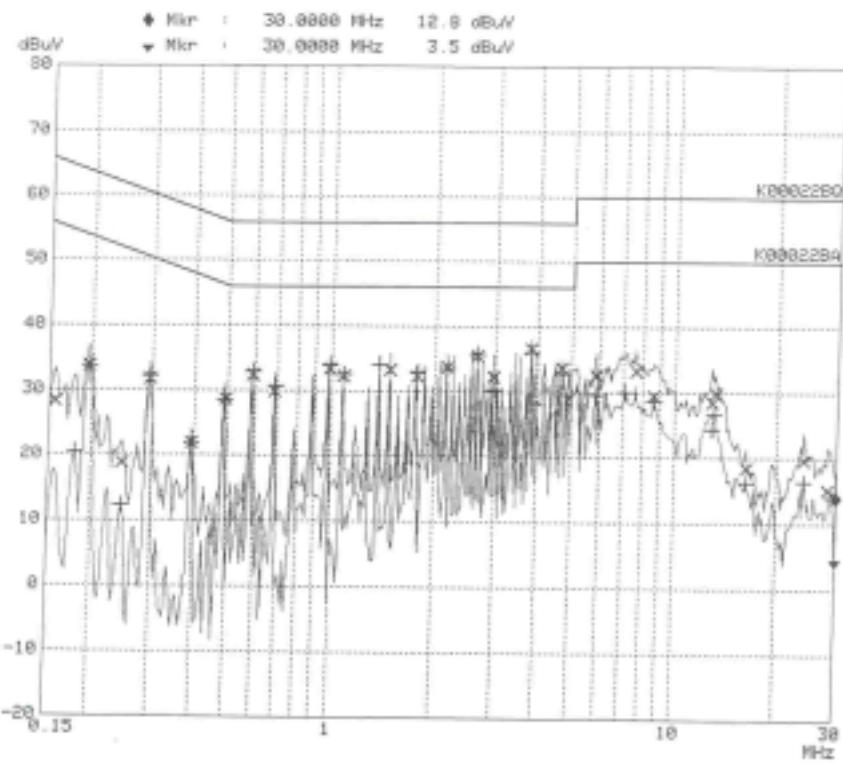

5. RADIATED DISTURBANCE : 30MHz – 1000MHz

5.1 Operating environment

Temperature : 23.0
Relative Humidity : 48.0 %

5.2 Test set-up

The frequency range investigated was 30 MHz to 1000 MHz.

All readings are quasi-peak unless stated otherwise.


The half-wave dipole antenna was tuned to the frequency found during Preliminary radiated measurements. The EUT, support equipment and Interconnecting cables were re-configured to the set-up to the producing the Maximum emission for the frequency and were placed on top of a 0.8 meter High non-metallic 1 X 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turntable containing the system was rotated the antenna height was varied 1 to 4 meters

and stopped at the azimuth or height producing the maximum emission.

And this device(EUT) was tested in 3 orthogonal planes.

The antenna measured both horizontal and vertical polarization.

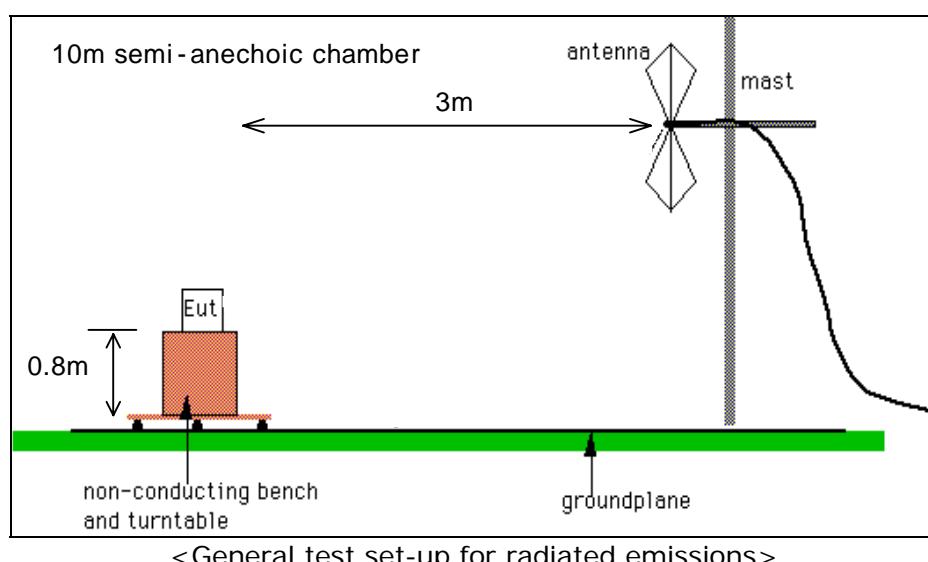

5.3 Operation Conditions

Up load mode, play mode, tuner mode

5.4 Test instrument

Instrument	Model No.	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2005. 02.06	
Biconical Antenna	VHA9103	91031950	Schwarzbeck	2005. 02.04	
Log-Periodic Antenna	UHALP9108A	0392	Schwarzbeck	2005. 02.04	
Antenna Mast	MA240	N/A	HD	-	
Turn Table	DT430S	N/A	HD	-	

5.5 Test results (Test mode: Up & Download)

Date of test: Aug 25, 2004.

Freq (MHz)	Reading (dBuV/m)	Ant	AF (dB)	CL (dB)	Result (dBuV/m)	Limit (dB)	Margin (dB)
384.10	19.03	H	15.17	4.00	38.20	46.00	7.80
445.20	16.63	H	16.27	4.30	37.20	46.00	8.80
456.80	19.36	H	16.64	4.40	40.40	46.00	5.60
468.30	15.46	H	16.64	4.40	36.50	46.00	9.50
480.10	13.74	H	17.06	4.60	35.40	46.00	10.60
505.90	10.26	H	17.34	4.70	32.30	46.00	13.70
752.20	8.62	V	20.28	5.50	34.40	46.00	11.60

* Receiving Antenna Mode : *Horizontal, Vertical*

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization → POL H = Horizontal POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result = Field Strength(AF + CL + Reading)

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.

5.6 Test results (Test mode: Play mode)

Date of test: Aug 25, 2004.

Freq (MHz)	Reading (dBuV/m)	Ant	AF (dB)	CL (dB)	Result (dBuV/m)	Limit (dB)	Margin (dB)
358.40	12.59	H	14.31	3.80	30.70	46.00	15.30
370.20	11.19	H	14.31	3.80	29.30	46.00	16.70
384.10	20.33	H	15.17	4.00	39.50	46.00	6.50

* Receiving Antenna Mode : *Horizontal, Vertical*

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization \rightarrow POL H = Horizontal POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result = Field Strength(AF + CL+ Reading)

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.

5.7 Test results < Test mode: FM tuner >

Date of test: Aug 25, 2004.

T.	Tested	Meter Reading (quasi-peak)		Limits	Margins	
		Frequency	Frequency		H	V
[MHz]	[MHz]	[dBuV/m]	[dBuV/m]		[dBuV/m]	[dBuV/m]
87.5	99.8	3.2	-	43.5	40.3	-
	198.6	2.5	-	43.5	41.0	-
	297.4	-	-	46.0	-	-
	396.2	-	-	46.0	-	-
	495.0	-	-	46.0	-	-
	593.8	-	-	46.0	-	-
	692.6	-	-	46.0	-	-
	791.4	-	-	46.0	-	-
	890.2	-	-	46.0	-	-
	989.0	-	-	54.0	-	-
98.0	108.8	2.7	-	43.5	40.8	-
	217.6	2.0	-	46.0	44.0	-
	326.4	-	-	46.0	-	-
	435.2	-	-	46.0	-	-
	544.0	-	-	46.0	-	-
	652.8	-	-	46.0	-	-
	761.6	-	-	46.0	-	-
	870.4	-	-	46.0	-	-
	979.2	-	-	54.0	-	-
	118.4	3.1	-	43.5	40.4	-
108.0	236.8	1.9	-	46.0	44.1	-
	355.2	-	-	46.0	-	-
	473.6	-	-	46.0	-	-
	592.0	-	-	46.0	-	-
	710.4	-	-	46.0	-	-
	828.8	-	-	46.0	-	-
	947.2	-	-	46.0	-	-
	174.5	14.84	-	46.0	12.4	-
Others	192.0	6.30	-	46.0	20.2	-
	239.9	3.10	-	46.0	22.5	-
	384.1	11.73	-	46.0	15.1	-

* Meter reading: *Loss include** Margins : *[Limits] – [Meter reading]** Receiving Antenna Mode: *Horizontal, Vertical*

* 10m chamber

* <5 : mean less than 5dB

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.