



EMC RESEARCH INSTITUTE



EMI TEST REPORT

Emission of electromagnetic disturbance

Test Report No. : ERI-FCC03-0072

Equipment : MP3 Player

Name of basic model : MP-U200F

Family model : MP-U200E, MP-U200G

Manufacturer : CENIX DIGICOM CO., LTD.

Applicant : CENIX DIGICOM CO., LTD.

Tested date : 2003. 11. 25 – 11.26

Issued date : 2003. 11. 27

Test results : PASS

Test Standards : FCC Part 15 Subpart B (Class B)

/digital devices & peripherals

Test Procedure and Items:

- AC Power line Conducted emissions measurement : ANSI C63.4-1992
- Radiated emissions measurement : ANSI C63.4-1992

Tested by: GWEON, HUR

Approved by: SANG-KYU, LEE

The results in this report apply only to the sample tested.

This test report shall not be reproduced except in full, without the written approval of **ERI Laboratory**.

CONTENTS

1. CLIENT INFORMATION
2. LABORATORY INFORMATION
3. EQUIPMENT UNDER TEST INFORMATION(EUT)
 - 3.1 Identification of the EUT
 - 3.2 Additional information about the EUT
 - 3.3 Peripheral equipment
4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL
 - 4.1 Operating environment
 - 4.2 Test set-up and test procedures
 - 4.3 Operation Conditions
 - 4.4 Test instrument
 - 4.5 Test results
5. RADIATED DISTURBANCE : 30MHz – 1000MHz
 - 5.1 Operating environment
 - 5.2 Test set-up
 - 5.3 Test conditions
 - 5.4 Test instrument
 - 5.5 Test results(Test mode: Up & download mode)
 - 5.6 Test results(Test mode : FM Tuner, Others)

APPENDIX

(None)



3.2 Additional information about the EUT

Class B,

Family Models List:

Basic Model	Variant Model	Differential point
MP-U200F	MP-U200E	Model name
	MP-U200G	Model name

3.3 Peripheral equipment

Defined as equipment needed for correct operation of the EUT.

Description	Model No.	Serial No.	Manufacture
Printer	C6427A	CN13V1B1SZ	HP
NOTE PC	CM2080	5Y17JNZ9R622	LG
AC/DC adaptor	ADP-60DB	3141BS0035A	DELTA ELECTRONICS CO., LTD.
Earphone	-	-	-




4. CONTINUOUS DISTURBANCE VOLTAGE, MAIN TERMINAL

: Frequency range 0.15 MHz to 30 MHz

4.1 Operating environment

Temperature : 19.0
Relative Humidity : 37.0 %

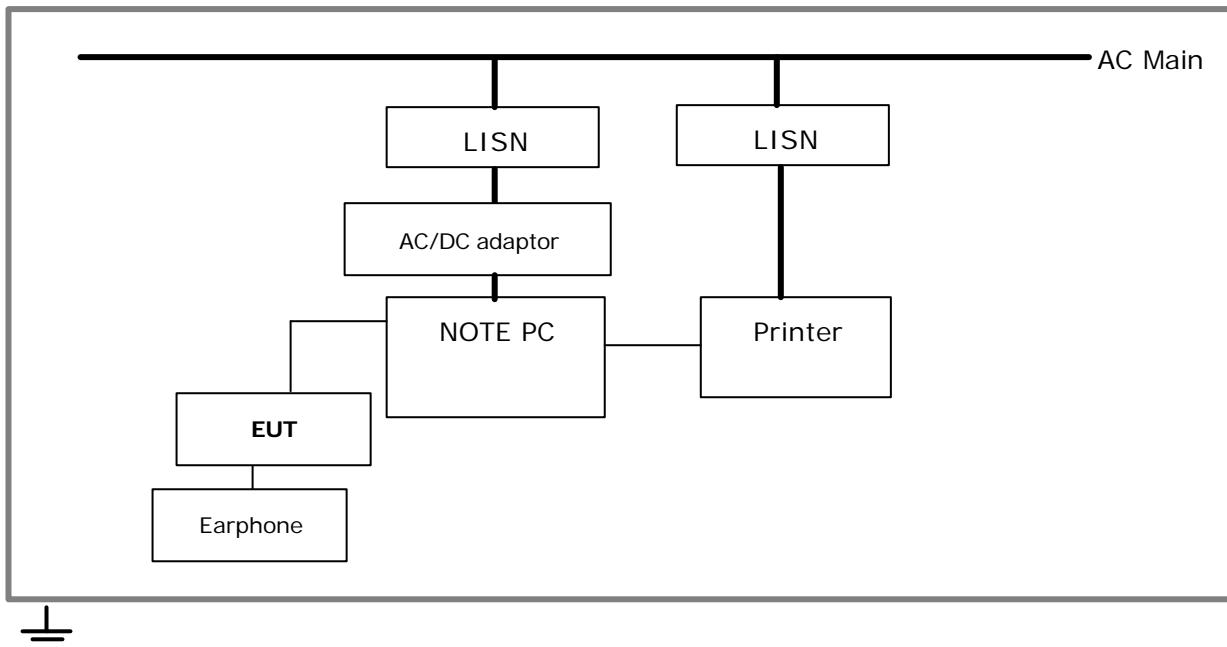4.2 Test set-up and test procedures

The mains terminal disturbance voltage was measured with the equipment under test(EUT) in a shield room. The EUT was connected to an artificial mains network(LISN) placed on the floor. The EUT was placed on non-metallic table 0.4m above the metallic, grounded floor. The distance to other metallic surface was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

4.3 Operation Conditions

Up & download mode, play mode

4.4 Test instrument

Instrument	Model No	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2004. 1. 24	
L.I.S.N.	ESH3-Z5	827246/008	R&S	2004. 3. 19	
	ESH3-Z5	831887/018	R&S	2004. 3. 19	
Shield room	8 x 6 x 3.3m/H	-	-	-	



4.5 Test results

Date of test: Nov 25, 2003

An overview sweep performed with peak detector & average detector are included in the report **as test reports**.

Frequency	Tested	LISN	Meter		Limits	
Range	Freq.		Reading			
			QP	AV	QP	AV
[MHz]	[MHz]		[dBuV]		[dBuV]	
0.15 - 30(MHz)	0.150	N	41.3	19.0	66.0	56.0
	0.210	N	49.3	39.1	63.2	53.2
	0.279	N	41.9	33.1	60.9	50.9
	0.285	N	33.1	31.5	60.6	50.6
	0.351	N	35.5	30.1	58.8	48.8
	0.489	N	33.0	29.6	56.1	46.1
	0.558	N	27.7	23.3	56.0	46.0
	1.326	N	27.3	25.3	56.0	46.0
	1.674	N	27.6	25.2	56.0	46.0
	5.300	N	27.6	19.5	60.0	50.0


<5 : mean less than 5dB

Other frequency keep over 20dB margin.


Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.



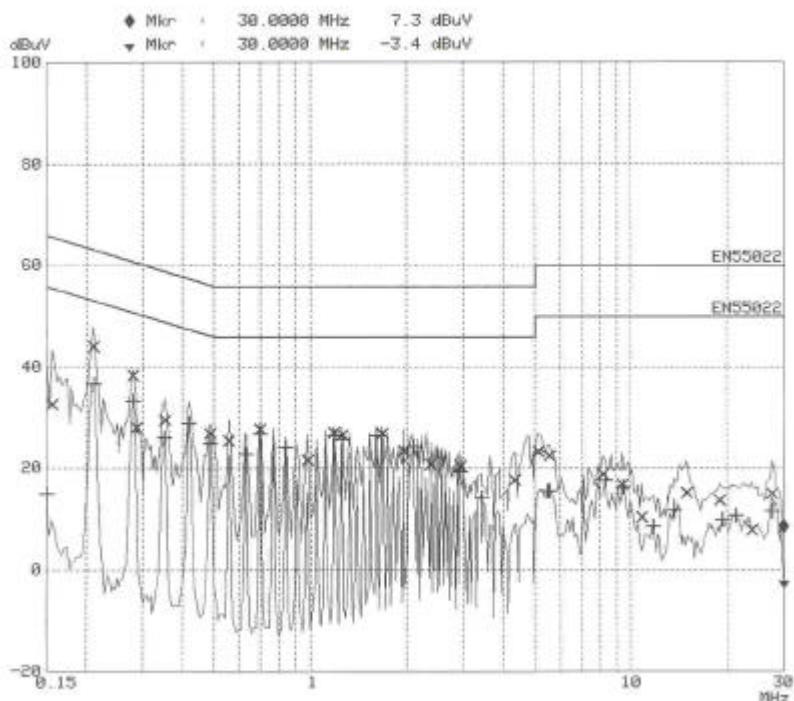

PAGE 1
[Live line]

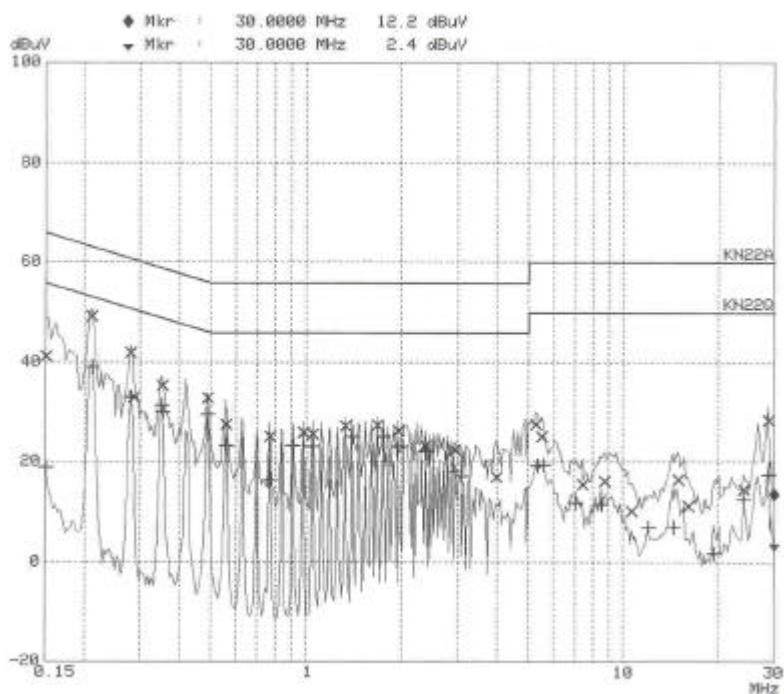

PAGE 1
[Neutral line]



5. RADIATED DISTURBANCE : 30MHz - 1000MHz

5.1 Operating environment

Temperature : 22.0
Relative Humidity : 31 %

5.2 Test set-up

The frequency range investigated was 30 MHz to 1000 MHz.

All readings are quasi-peak unless stated otherwise.


The half-wave dipole antenna was tuned to the frequency found during Preliminary radiated measurements. The EUT, support equipment and Interconnecting cables were re-configured to the set-up to the producing the Maximum emission for the frequency and were placed on top of a 0.8 meter High non-metallic 1 X 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turntable containing the system was rotated the antenna height was varied 1 to 4 meters

and stopped at the azimuth or height producing the maximum emission.

And this device(EUT) was tested in 3 orthogonal planes.

The antenna measured both horizontal and vertical polarization.

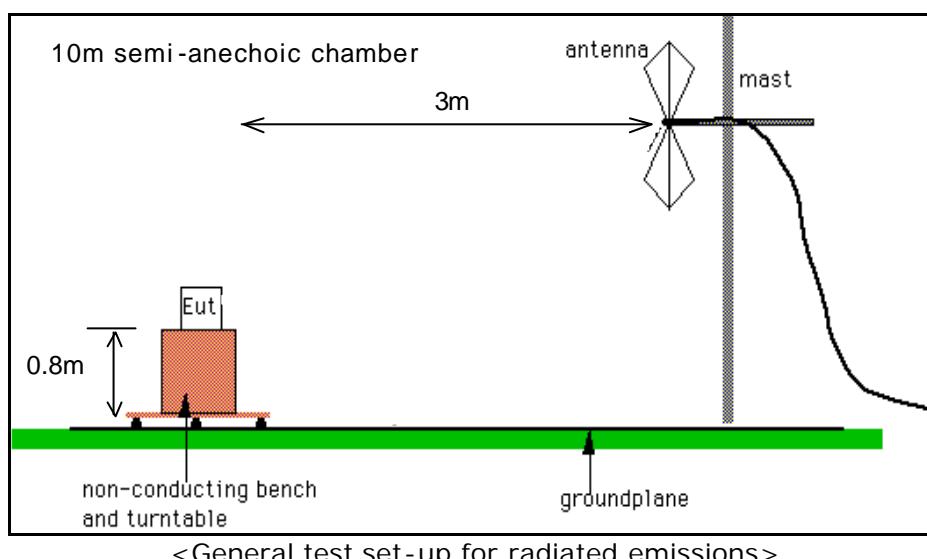

5.3 Operation Conditions

Up & download mode, play mode



5.4 Test instrument

Instrument	Model No.	Serial No.	Makers	Next cal.date	Used
Test receiver	ESCS30	100021	R&S	2004. 1. 24	
L.I.S.N.	ESH3-Z5	827246/008	R&S	2004. 3. 19	
	ESH3-Z5	831887/018	R&S	2004. 3. 19	
Biconical Antenna	VHA9103	91031950	Schwarzbeck	2004.01.24	
Log-Periodic Antenna	UHALP9108A	0392	Schwarzbeck	2004.01.23	
Antenna Mast	MA240	N/A	HD	-	
Turn Table	DT430S	N/A	HD	-	

5.5 Test results (Test mode: Up & download mode)

Date of test: Nov 26, 2003

Tested Frequency [MHz]	ANT Pol.	Meter Reading [A] [dBuV/m]	Antenna Factor [B] [dB]	Cable Loss [C] [dB]	Results [A+B+C] [dBuV/m]	Limits [dBuV/m]
48.20	V	14.17	12.50	1.70	28.37	40.00
115.10	H	19.21	12.10	2.50	33.81	43.50
190.70	H	19.52	16.40	3.10	39.02	43.50
209.60	H	18.07	16.29	3.20	37.56	43.50
249.40	H	15.84	17.10	3.50	36.44	46.00
449.00	V	20.64	16.27	4.30	41.21	46.00
547.00	H	18.36	17.69	4.80	40.85	46.00
622.00	H	10.84	18.88	5.20	34.92	46.00
746.00	H	7.80	20.19	5.40	33.39	46.00
802.00	V	6.02	20.84	5.90	32.76	46.00

* Receiving Antenna Mode : **Horizontal, Vertical**

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization ✕ POL H = Horizontal
 POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result =
 Field Strength(AF + CL+ Reading)

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.



5.6 Test results < Test mode: FM tuner >

Date of test: Nov 26, 2003

T.	Tested	Meter Reading (quasi-peak)		Limits	Total Loss	Margins	
		Frequency	Frequency			H	V
Frequency	[MHz]	[MHz]	[dBuV/m]	[dBuV/m]		[dBuV/m]	[dBuV/m]
87.5	98.2	-	-	43.5	11.9	-	-
	196.4	29.5	-	43.5	17.8	14.0	-
	294.6	-	-	46.0	24.3	-	-
	392.8	-	-	46.0	21.4	-	-
	491.0	-	-	46.0	23.9	-	-
	589.2	-	-	46.0	26.2	-	-
	687.4	-	-	46.0	28.7	-	-
	785.6	-	-	46.0	30.0	-	-
	883.8	-	-	46.0	31.9	-	-
	982.0	-	-	54.0	33.1	-	-
98.0	108.7	-	-	43.5	12.7	-	-
	217.4	30.3	-	46.0	18.9	15.7	-
	326.1	36.1	-	46.0	18.9	9.9	-
	434.8	-	-	46.0	22.4	-	-
	543.5	-	-	46.0	25.2	-	-
	652.2	-	-	46.0	27.5	-	-
	760.9	-	-	46.0	29.7	-	-
	869.6	-	-	46.0	31.8	-	-
	978.3	-	-	54.0	33.0	-	-
	118.7	-	-	43.5	13.7	-	-
108.0	237.4	-	-	46.0	19.0	-	-
	356.1	33.3	-	46.0	20.1	12.7	-
	474.8	-	-	46.0	23.4	-	-
	593.5	-	-	46.0	26.3	-	-
	712.2	-	-	46.0	29.1	-	-
	830.9	-	-	46.0	30.7	-	-
	949.6	-	-	46.0	32.1	-	-

* Meter reading: **Loss include**
 * Margins : **[Limits] - Meter reading]**
 * Receiving Antenna Mode: **Horizontal, Vertical**
 * 10m chamber
 * <5 : mean less than 5dB

Result: Pass

The measured emissions level of the EUT have found the below of the specified limit.



Others

Date of test: Nov 26, 2003.

* Receiving Antenna Mode : **Horizontal, Vertical**

* Test distance: **3m** (10m Anechoic Chamber)

* <5 : mean less than 5dB

Note : Reading = Test Receiver meter, P= Polarization \angle POL H = Horizontal
 POL V = Vertical A = Angle, AF = Antenna Factor CL = Cable Loss Result =
 Field Strength(AF + CL + Reading)