



Handheld microphone soldering antenna

TECHNICAL INDEX


Electrical performance	
model	MD-13
Frequency range(MHz)	584--608
Antenna type	auger-type
Polarization mode	vertical
Gain(dBi)	-1.5
standing-wave ratio	≤2
Impedance(Ω)	50
Horizontal beam width(°)	360
Vertical beam width(°)	78
Power Capacity(W)	10
Mechanical properties	
Size (diameter × Height)	∅9×29 mm
Weight(g)	11
Antenna material	Cu
operation temperature(℃)	-40~+70
humidity	5~95%
Manufacturer	Enping Enbao Electronics Co., Ltd

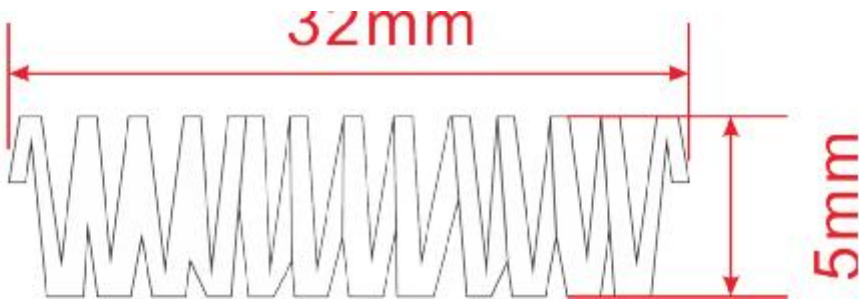


Total-3D-H- 585 MHZ

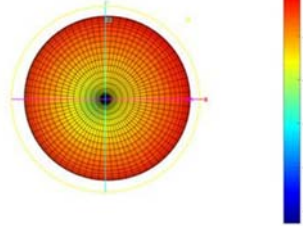


Total-3D-E1-585MHZ

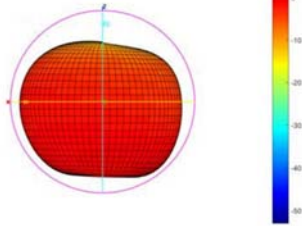


Total-3D-E2- 585MHZ

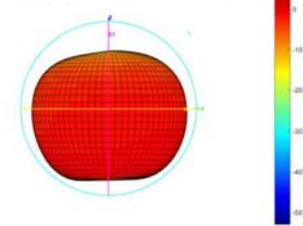


Total-Polar-H-585MHZ




Total-Polar-E1-585MHZ




Total-Polar-E2-585MHZ

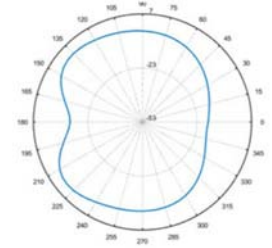


Total-3D-E1-600MHZ

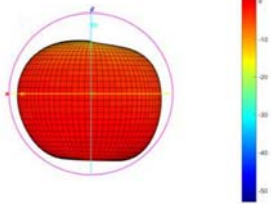


Total-3D-E2-600MHZ

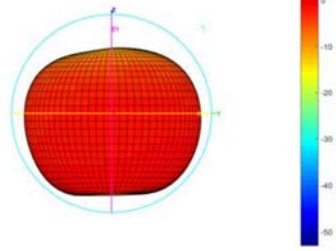


Total-3D-H-600MHZ

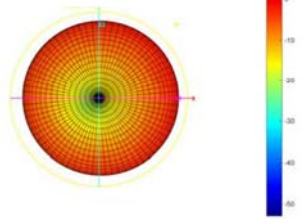


Total-polar-E2-600MHZ




Total-polar-E1-600MHZ




Total-polar-E1-600MHZ




Total-3D-H-605MHZ

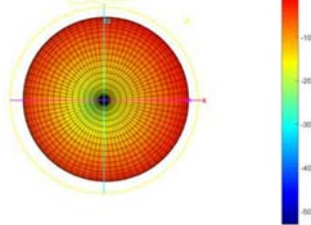


Total-3D-E1-605MHZ

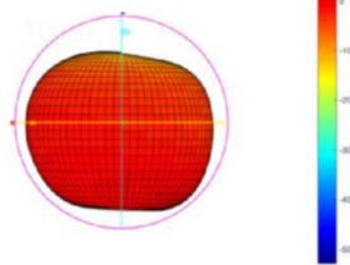


Total-3D-E2-605MHZ

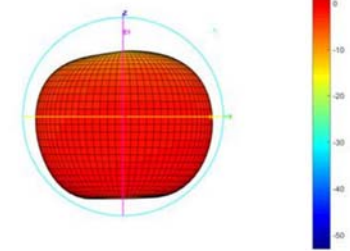

Total-polar-H-605MHZ



Total-polar-E1-605MHZ



Total-polar-E2-605MHZ

