

TEST REPORT

Test Report No. : UL-RPT-RP13194254-616A

Manufacturer : Cambium Networks Ltd
Model No. : 60 GHz cnWave V1000
FCC ID : QWP-60V1000
Test Standard(s) : FCC Parts 15.207, 15.209, 15.215 & 15.255

1. This test report shall not be reproduced except in full, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0.

Date of Issue: 16 October 2020

Checked by:



Sarah Williams
RF Operations Leader, Radio Laboratory

Company Signatory:



Ian Watch
Senior Test Engineer, Radio Laboratory
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its terms
of accreditation.

UL VS LTD

Unit 1-3 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	6
3.3. Modifications Incorporated in the EUT	6
3.4. Additional Information Related to Testing	7
3.5. EUT Settings	7
3.6. Support Equipment	8
4. Operation and Monitoring of the EUT during Testing	9
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
5. Measurements, Examinations and Derived Results	10
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter AC Conducted Spurious Emissions	11
5.2.2. Transmitter EIRP	16
5.2.3. Transmitter Peak Conducted Output Power	19
5.2.4. Transmitter 6 dB Bandwidth	21
5.2.5. Transmitter 20 dB Bandwidth	24
5.2.6. Transmitter Radiated Spurious Emissions	27
5.2.7. Transmitter Frequency Stability (Temperature Variation)	38
5.2.8. Transmitter Frequency Stability (Voltage Variation)	40
6. Measurement Uncertainty	42
7. Report Revision History	43

1. Customer Information










Company Name:	Cambium Networks Ltd
Address:	Unit B2 Linhay Business Park Eastern Road Ashburton Devon TQ13 7UP United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.255
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Radio Frequency Devices) – Section 15.255
Specification Reference:	47CFR15.207, 47CFR15.209 and 47CFR15.215
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207, 15.209 & 15.215
Site Registration:	621311
Location of Testing:	Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	03 July 2020 to 28 September 2020

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.207	Transmitter AC Conducted Emissions	
Part 15.255(c)(1)(i)	Transmitter EIRP	
Part 15.255(e)	Transmitter Peak Output Power	
Part 15.255(e)(1)	Transmitter 6 dB Bandwidth	
Part 15.215(c)	Transmitter 20 dB Bandwidth	
Part 15.255(d) / 15.209	Transmitter Spurious Emissions	
Part 15.255(f)	Transmitter Frequency Stability (Temperature & Voltage Variation)	
Key to Results  = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 174176 D01 Line Conducted FAQ v01r01 June 3, 2015
Title:	AC Power-Line Conducted Emissions Frequently Asked Questions

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Cambium Networks
Model Name or Number:	60 GHz cnWave V1000
Test Sample Serial Number:	X100108B009D
Hardware Version:	P5
Software Version:	DM Tools 3.2.0.1
Firmware Version:	10.11.1.10448236
FCC ID:	QWP-60V1000

3.2. Description of EUT

The equipment under test was a point-to-multipoint mid gain client node operating in the 57-71 GHz band.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Category of Equipment:	Transceiver	
Channel Spacing:	2.16 GHz	
Modulation Type:	BPSK, QPSK & 16QAM	
Antenna Type:	Integrated	
Antenna Gain:	22.5 dBi	
Transmit Frequency Range:	57 GHz to 66 GHz	
Transmit Channels Tested:	Channel ID	Channel Frequency (GHz)
	Bottom	58.320
	Middle	62.640
	Top	64.800
Power Supply Requirement:	Nominal	56 VDC via 120 VAC PoE
	Minimum	85 VAC (PoE)
	Maximum	276 VAC (PoE)
Tested Temperature Range:	Minimum	-20°C
	Maximum	50°C

3.5. EUT Settings

Channel	Sector	Tx Lineup	RF Lineup	DAC	LO GC	E-Base	Notch
1	27	0	13	26/26	0	0	-
3	27	0	15	26/26	0	0	-
4	27	0	14	26/26	0	0	-

3.6. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	PoE
Brand Name:	Cambium Networks
Model Name or Number:	N000900L017A
Serial Number:	1745005333

Description:	Test Laptop
Brand Name:	HP EliteBook
Model Name or Number:	NH121UC#ABU
Serial Number:	2CE00223BK

Description:	Ethernet Cables. Quantity 3. Length 1 m / 3 m / 10 m
Brand Name:	RS Pro
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Transmitting with BPSK MCS5 modulation, which was found to be the worst case mode after preliminary investigation.
- Operating on bottom, middle and top channels with a 2.16 GHz channel bandwidth.
- Transmitting at maximum output power with beamforming locked to sector 27 (straight ahead), which was found to be the direction of highest EIRP during preliminary investigation.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- A laptop PC with Qualcomm DMTools and QRCT software was used to configure the EUT during the testing. Telnet commands were used to set the channel and modulation. The laptop was connected to the EUT via Ethernet.
- The EUT was powered by a PoE supply connected to 120 VAC mains.
- Testing at voltage extremes was performed with the PoE supply connected to a variable AC power supply.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6: Measurement Uncertainties* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter AC Conducted Spurious Emissions

Test Summary:

Test Engineer:	Patrick Jones	Test Date:	03 September 2020
Test Sample Serial Number:	X100108B009D		

FCC Reference:	Part 15.207
Test Method Used:	ANSI C63.10 Section 6.2 / FCC KDB 174176 and notes below

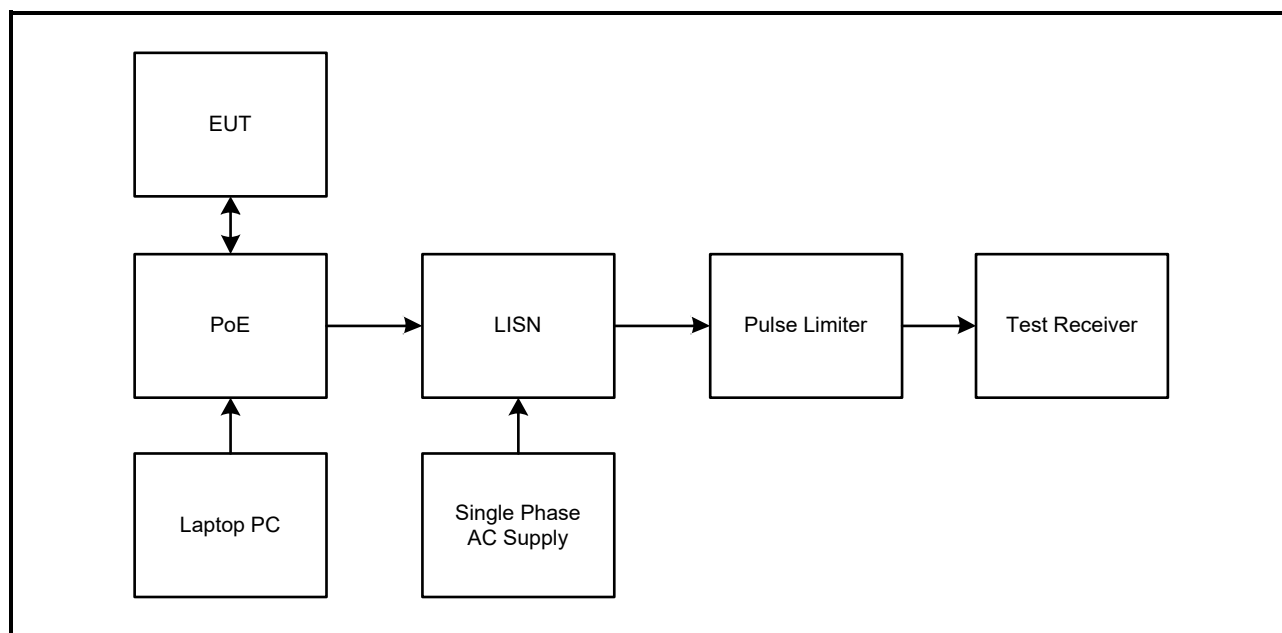
Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	48

Note(s):

1. The EUT was connected to a PoE adapter via ethernet cable. The PoE adapter was connected to 120 VAC 60 Hz single phase supply via a LISN.
2. In accordance with FCC KDB 174176 Q4, tests were performed with a 240 VAC 60 Hz single phase supply as this was within the voltage range marked on the PoE supply.
3. Pre-scans were performed and markers placed on the highest live and neutral measured levels. Final measurements were performed on the marker frequencies and the results entered into the tables below.
4. A pulse limiter was fitted between the LISN and the test receiver.

Test setup:



Transmitter AC Conducted Spurious Emissions (continued)**Results: Live / Quasi Peak / 120 VAC 60 Hz**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.164	Live	46.3	65.3	19.0	Complied
0.317	Live	32.5	59.8	27.3	Complied
3.899	Live	32.1	56.0	23.9	Complied
12.512	Live	30.9	60.0	29.1	Complied
26.412	Live	31.4	60.0	28.6	Complied
27.263	Live	28.9	60.0	31.1	Complied

Results: Live / Average / 120 VAC 60 Hz

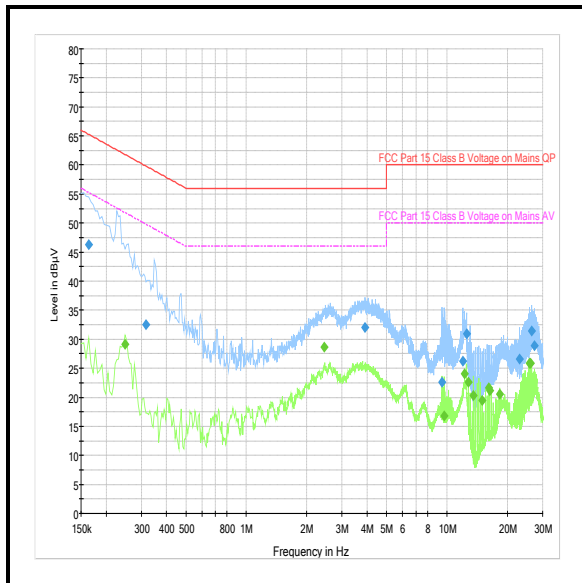
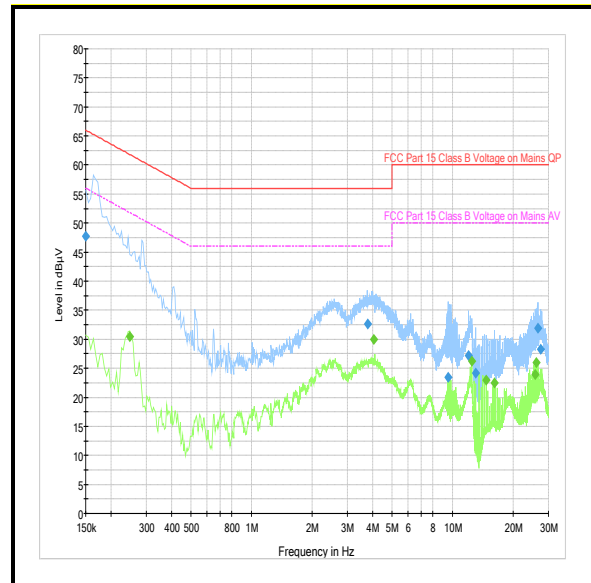
Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.249	Live	29.2	51.8	22.6	Complied
2.441	Live	28.6	46.0	17.4	Complied
12.228	Live	24.0	50.0	26.0	Complied
12.786	Live	22.6	50.0	27.4	Complied
25.859	Live	25.9	50.0	24.1	Complied
26.133	Live	25.9	50.0	24.1	Complied

Results: Neutral / Quasi Peak / 120 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.150	Neutral	47.8	66.0	18.2	Complied
3.795	Neutral	32.7	56.0	23.3	Complied
11.999	Neutral	27.2	60.0	32.8	Complied
13.070	Neutral	24.2	60.0	35.8	Complied
26.691	Neutral	31.9	60.0	28.1	Complied
27.542	Neutral	28.2	60.0	31.8	Complied

Results: Neutral / Average / 120 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.249	Neutral	30.5	51.8	21.3	Complied
4.070	Neutral	29.9	46.0	16.1	Complied
12.512	Neutral	26.2	50.0	23.8	Complied
14.739	Neutral	23.0	50.0	27.0	Complied
25.863	Neutral	24.0	50.0	26.0	Complied
26.138	Neutral	26.0	50.0	24.0	Complied

Transmitter AC Conducted Spurious Emissions (continued)**Results: 120 VAC 60 Hz****Live****Neutral**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter AC Conducted Spurious Emissions (continued)**Results: Live / Quasi Peak / 240 VAC 60 Hz**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.173	Live	43.5	64.8	21.3	Complied
0.470	Live	39.8	56.5	16.7	Complied
12.012	Live	30.4	60.0	29.6	Complied
16.278	Live	37.8	60.0	22.2	Complied
27.771	Live	26.6	60.0	33.4	Complied
29.985	Live	26.3	60.0	33.7	Complied

Results: Live / Average / 240 VAC 60 Hz

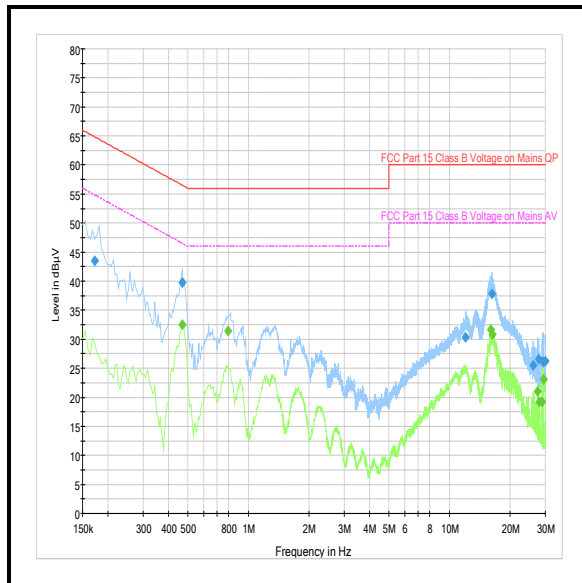
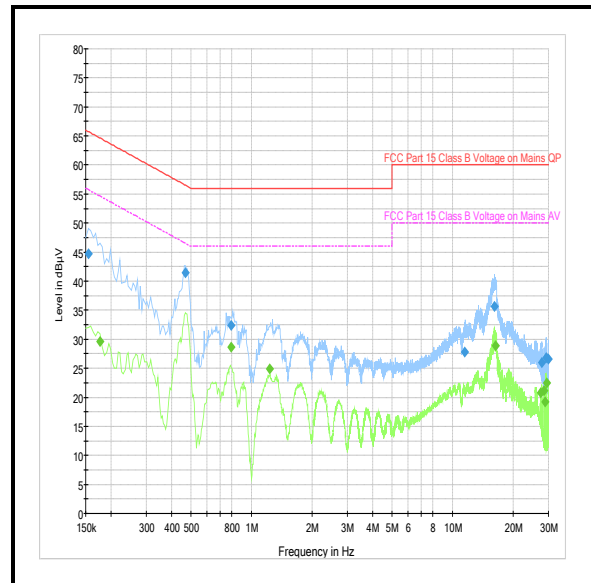
Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.470	Live	32.5	46.5	14.0	Complied
0.794	Live	31.4	46.0	14.6	Complied
16.116	Live	31.7	50.0	18.3	Complied
16.359	Live	30.8	50.0	19.2	Complied
27.497	Live	21.0	50.0	29.0	Complied
29.441	Live	23.0	50.0	27.0	Complied

Results: Neutral / Quasi Peak / 240 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.155	Neutral	44.7	65.7	21.0	Complied
0.470	Neutral	41.4	56.5	15.1	Complied
0.794	Neutral	32.4	56.0	23.6	Complied
11.481	Neutral	27.8	60.0	32.2	Complied
16.143	Neutral	35.7	60.0	24.3	Complied
29.166	Neutral	26.9	60.0	33.1	Complied

Results: Neutral / Average / 240 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.177	Neutral	29.6	54.6	25.0	Complied
0.794	Neutral	28.7	46.0	17.3	Complied
1.230	Neutral	24.9	46.0	21.1	Complied
16.413	Neutral	28.9	50.0	21.1	Complied
28.608	Neutral	21.2	50.0	28.8	Complied
29.436	Neutral	22.5	50.0	27.5	Complied

Transmitter AC Conducted Spurious Emissions (continued)**Results: 240 VAC 60 Hz****Live****Neutral**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2037	Thermohygrometer	Testo	608-H1	45124925	07 Jan 2021	12
A2086	LISN	Rohde & Schwarz	ESH3-Z5	101033	26 Feb 2021	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	07 Apr 2021	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	03 Dec 2020	12
A2953	Power Supply	Tacima	SC 5467	Not marked or stated	Calibrated before use	-

5.2.2. Transmitter EIRP**Test Summary:**

Test Engineer:	Ben Mercer	Test Date:	21 August 2020
Test Sample Serial Number:	X100108B009D		

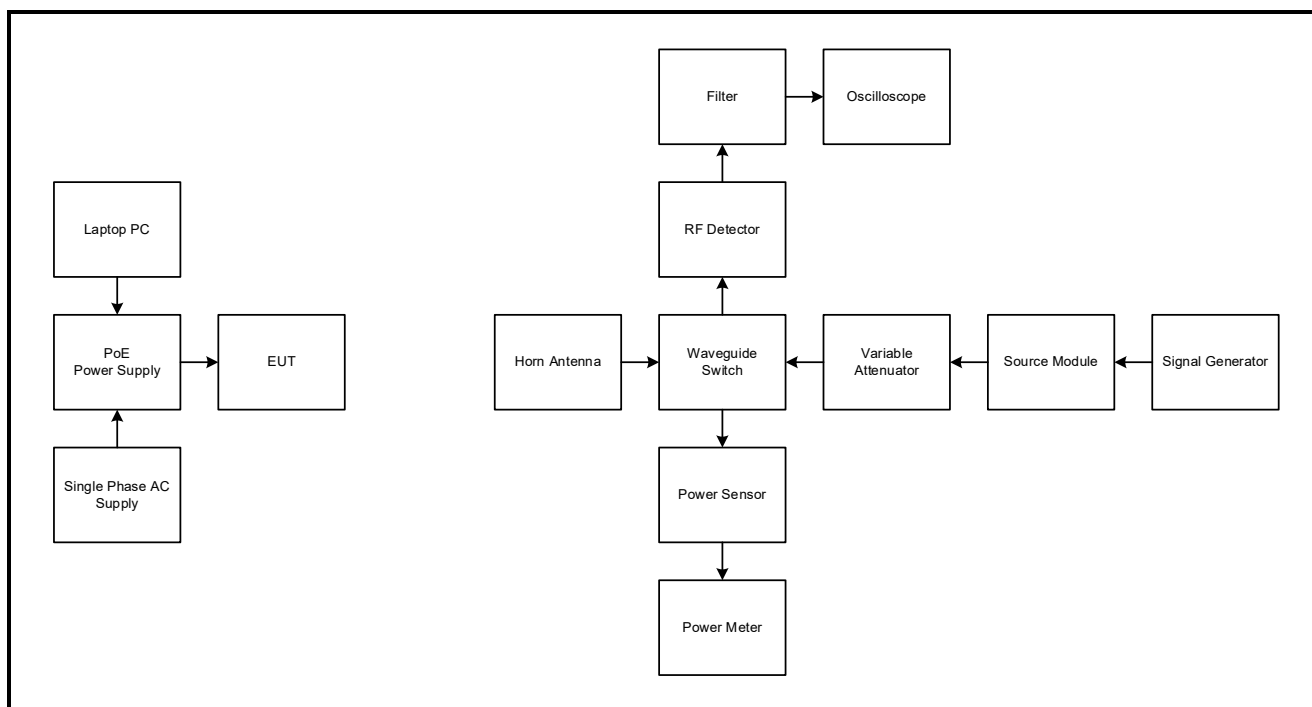
FCC Reference:	Part 15.255(c)(1)(i)
Test Method Used:	ANSI C63.10 Section 9.11

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	64

Note(s):

1. The measurement antenna was connected to an RF detector via a 4 way waveguide switch. A CW signal generator and wideband thermocouple power sensor were connected to the remaining two ports.
2. The RF detector was connected to the 50 Ω input of a digital storage oscilloscope via a 10 MHz low pass filter.
3. The EUT peak and average voltages were measured on the oscilloscope. The waveguide switch was then rotated to connect the signal generator to the RF detector, and the signal generator output was adjusted to match the previously measured voltages. The waveguide switch was then rotated to connect the signal generator output to the thermocouple power sensor, and the signal generator output power was measured.
4. The substituted levels recorded below include the calibrated path loss of the waveguide switch.

Test setup:

Transmitter EIRP (continued)**Results: Bottom Channel / Peak**

Frequency (GHz)	Level (V)	Substituted EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Result
58.320	20.3	37.3	43.0	5.7	Complied

Results: Bottom Channel / Average

Frequency (GHz)	Level (V)	Substituted EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Result
58.320	16.1	36.6	40.0	3.4	Complied

Results: Middle Channel / Peak

Frequency (GHz)	Level (V)	Substituted EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Result
62.640	17.5	36.5	43.0	6.5	Complied

Results: Middle Channel / Average

Frequency (GHz)	Level (V)	Substituted EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Result
62.640	14.7	36.2	40.0	3.8	Complied

Results: Top Channel / Peak

Frequency (GHz)	Level (mV)	Substituted EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Result
64.800	17.1	36.7	43.0	6.3	Complied

Results: Top Channel / Average

Frequency (GHz)	Level (mV)	Substituted EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Result
64.800	13.9	36.3	40.0	3.7	Complied

Transmitter EIRP (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	05 Jan 2021	12
M2070	Oscilloscope	Keysight	DSOX2024A	MY59125508	28 Aug 2021	24
A3233	Waveguide RF Detector	Sage Millimeter	SFD-503753-15SF-P1	18199-01	Calibrated before use	-
A3235	Waveguide Switch	Flann	25333-2	215753	Calibrated before use	-
M281	Power Meter	Hewlett Packard	E4418A	GB37170210-01	05 May 2021	12
M291	Waveguide Power Sensor	Hewlett Packard	V8486A	US39010039	11 Dec 2020	24
M1252	Signal Generator	Hewlett Packard	83640A	3119A00489	25 Jan 2022	24
G094	Source Module	Hewlett Packard	83557A	2948A00475	Calibrated before use	-
A2964	Horn Antenna	Link Microtek	AM15HA-ULV1	14930	17 Jan 2021	12
A3251	Video Amplifier	Femto	HVA-200M-40B	05-01-354	Calibrated before use	-
A3252	Low Pass Filter	Mini-Circuits	BLP-10.7+	YUU54901833	Calibrated before use	-

5.2.3. Transmitter Peak Conducted Output Power**Test Summary:**

Test Engineer:	Ben Mercer	Test Date:	21 August 2020
Test Sample Serial Number:	X100108B009D		

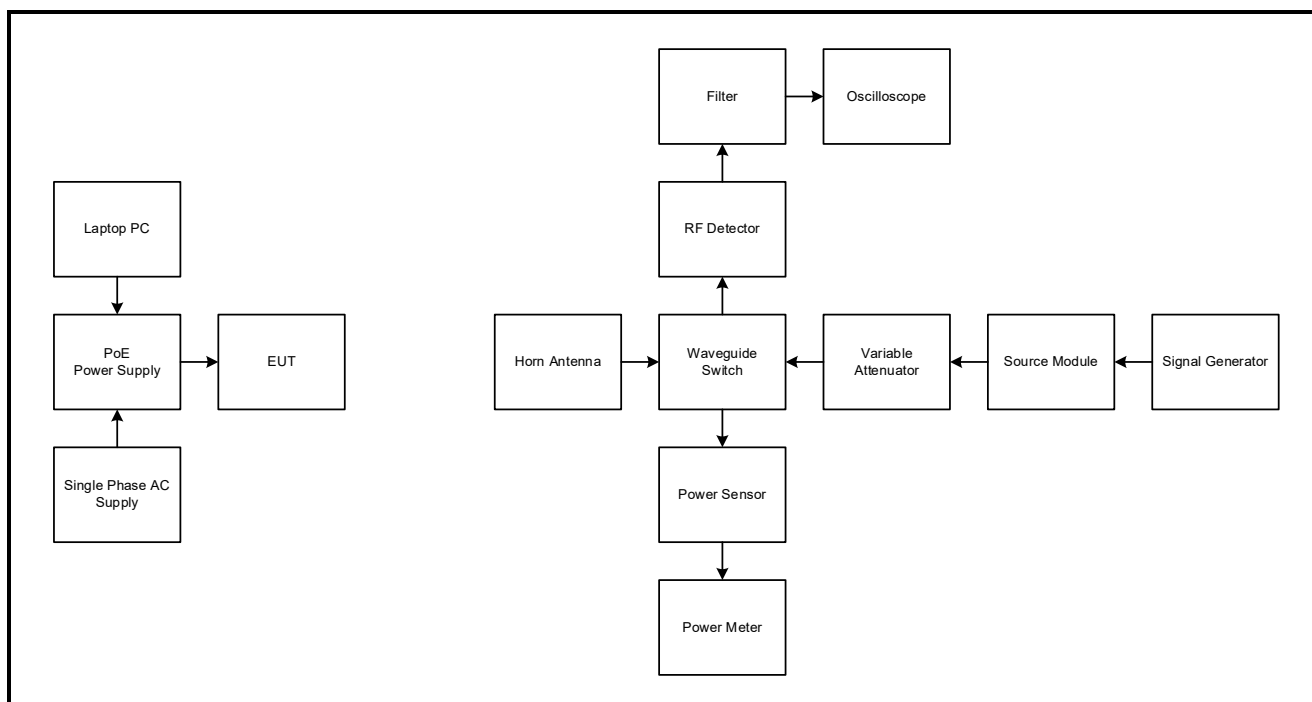
FCC Reference:	Part 15.255(e)
Test Method Used:	ANSI C63.10 Section 9.11

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	64

Note(s):

1. The measurement antenna was connected to an RF detector via a 4 way waveguide switch. A CW signal generator and wideband thermocouple power sensor were connected to the remaining two ports.
2. The RF detector was connected to the 50 Ω input of a digital storage oscilloscope via a 10 MHz low pass filter.
3. The EUT peak and average voltages were measured on the oscilloscope. The waveguide switch was then rotated to connect the signal generator to the RF detector, and the signal generator output was adjusted to match the previously measured voltages. The waveguide switch was then rotated to connect the signal generator output to the thermocouple power sensor, and the signal generator output power was measured.
4. The stated antenna gain was subtracted from the measured EIRP to obtain the conducted power.
5. The substituted levels recorded below include the calibrated path loss of the waveguide switch.

Test setup:

Transmitter Peak Conducted Output Power (continued)**Results: Bottom Channel**

EIRP Level (dBm)	Antenna Gain (dBi)	Conducted Level (dBm)	Conducted Level (mW)	Limit (mW)	Margin (mW)	Result
37.3	22.5	14.8	30.2	500	469.8	Complied

Results: Middle Channel

EIRP Level (dBm)	Antenna Gain (dBi)	Conducted Level (dBm)	Conducted Level (mW)	Limit (mW)	Margin (mW)	Result
36.5	22.5	14.0	25.1	500	474.9	Complied

Results: Top Channel

EIRP Level (dBm)	Antenna Gain (dBi)	Conducted Level (dBm)	Conducted Level (mW)	Limit (mW)	Margin (mW)	Result
36.7	22.5	14.2	26.3	500	473.7	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	05 Jan 2021	12
M2070	Oscilloscope	Keysight	DSOX2024A	MY59125508	28 Aug 2021	24
A3233	Waveguide RF Detector	Sage Millimeter	SFD-503753-15SF-P1	18199-01	Calibrated before use	-
A3235	Waveguide Switch	Flann	25333-2	215753	Calibrated before use	-
M281	Power Meter	Hewlett Packard	E4418A	GB37170210-01	05 May 2021	12
M291	Waveguide Power Sensor	Hewlett Packard	V8486A	US39010039	11 Dec 2020	24
M1252	Signal Generator	Hewlett Packard	83640A	3119A00489	25 Jan 2022	24
G094	Source Module	Hewlett Packard	83557A	2948A00475	Calibrated before use	-
A2964	Horn Antenna	Link Microtek	AM15HA-ULV1	14930	17 Jan 2021	12
A3251	Video Amplifier	Femto	HVA-200M-40B	05-01-354	Calibrated before use	-
A3252	Low Pass Filter	Mini-Circuits	BLP-10.7+	YUU54901833	Calibrated before use	-

5.2.4. Transmitter 6 dB Bandwidth**Test Summary:**

Test Engineer:	Ben Mercer	Test Date:	24 August 2020
Test Sample Serial Number:	X100108B009D		

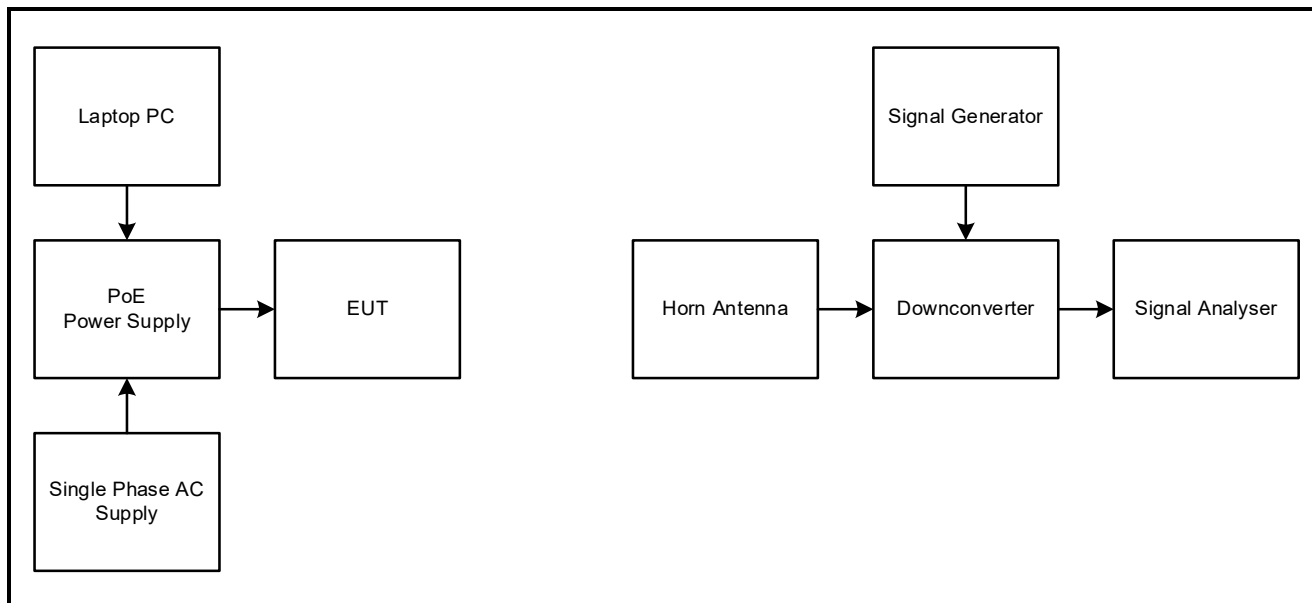
FCC Reference:	Part 15.255(e)(1)
Test Method Used:	ANSI C63.10 Section 9.3

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	50

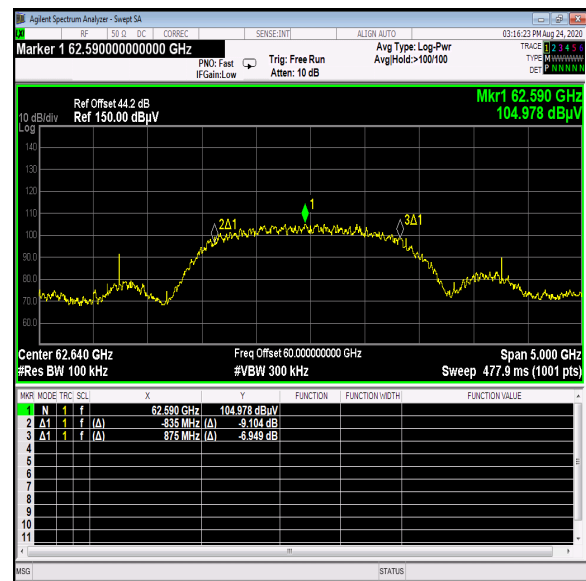
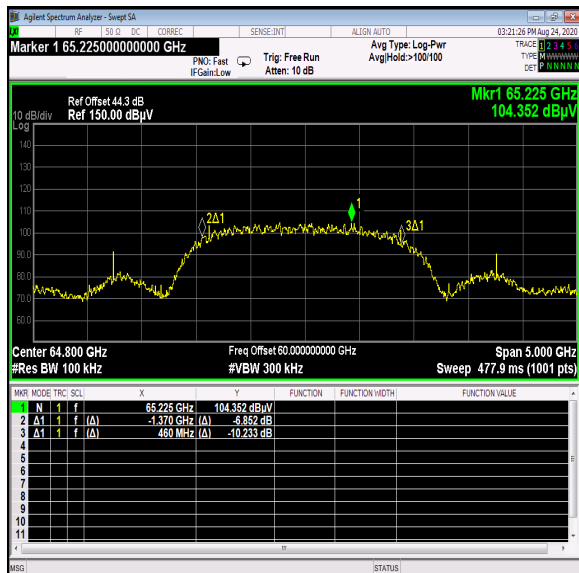
Note(s):

1. The analyser span was set to between two and three times the emission bandwidth. The RBW was set to 100 kHz, and the VBW was set to three times the RBW. The marker delta function was used to measure 6 dB down from the peak on both sides of the emission. The resulting frequency delta between the two markers was recorded as the emission bandwidth.

Test setup:

Transmitter 6 dB Bandwidth (continued)**Results:**

Channel	RBW (kHz)	VBW (kHz)	Emission Bandwidth (MHz)
Bottom	100	300	1480.000
Middle	100	300	1710.000
Top	100	300	1830.000

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 6 dB Bandwidth (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	05 Jan 2021	12
M1832	Signal Analyser	Agilent	N9010A	MY53470303	06 Mar 2022	24
M2069	Downconverter	Virginia Diodes	WR15SAX	SAX 394	09 Jul 2021	24
M1252	Signal Generator	Hewlett Packard	83640A	3119A00489	25 Jan 2022	24
A2964	Horn Antenna	Link Microtek	AM15HA-ULV1	14930	17 Jan 2021	12

5.2.5. Transmitter 20 dB Bandwidth**Test Summary:**

Test Engineer:	Ben Mercer	Test Date:	24 August 2020
Test Sample Serial Number:	X100108B009D		

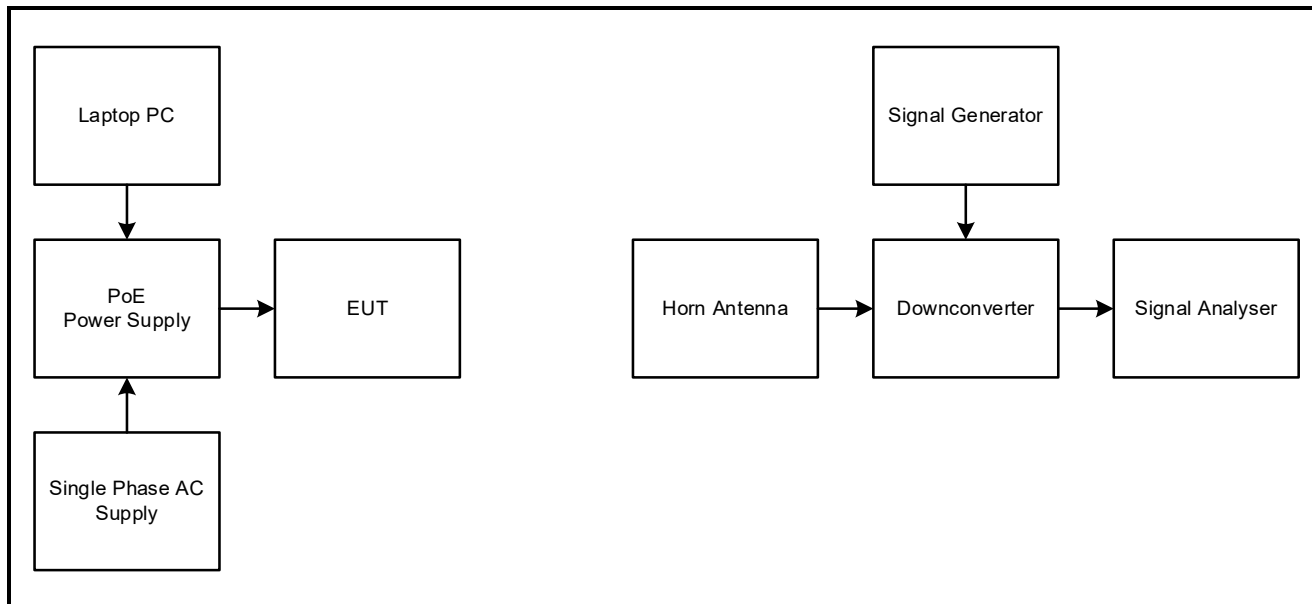
FCC Reference:	Part 15.215(c)
Test Method Used:	ANSI C63.10 Section 6.9.2

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	50

Note(s):

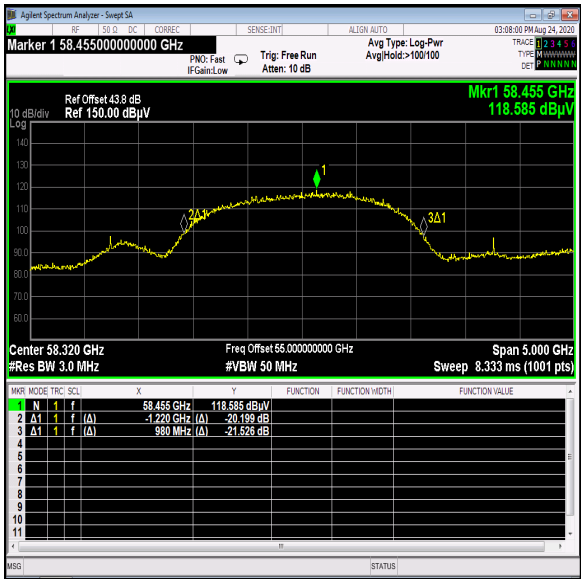
1. The signal analyser resolution bandwidth was set to 3 MHz and the video bandwidth to 50 MHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to 5 GHz. The marker delta function was used to measure 20 dB down from the peak on both sides of the emission. The resulting frequency delta between the two markers was recorded as the 20 dB bandwidth.
2. Due to limitations of the downconverter setup it was not possible to increase the signal analyser span above 5 GHz.

Test setup:

Transmitter 20 dB Bandwidth (continued)

Results:

Channel	20 dB Bandwidth (MHz)
Bottom	2200.000
Middle	2280.000
Top	2295.000



Bottom Channel



Middle Channel



Top Channel

Transmitter 20 dB Bandwidth (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	45041824	05 Jan 2021	12
M1832	Signal Analyser	Agilent	N9010A	MY53470303	06 Mar 2022	24
M2069	Downconverter	Virginia Diodes	WR15SAX	SAX 394	09 Jul 2021	24
M1252	Signal Generator	Hewlett Packard	83640A	3119A00489	25 Jan 2022	24
A2964	Horn Antenna	Link Microtek	AM15HA-ULV1	14930	17 Jan 2021	12

5.2.6. Transmitter Radiated Spurious Emissions**Test Summary:**

Test Engineers:	Patrick Jones & Nick Tye	Test Dates:	03 July 2020 & 28 September 2020
Test Sample Serial Number:	X100108B009D		

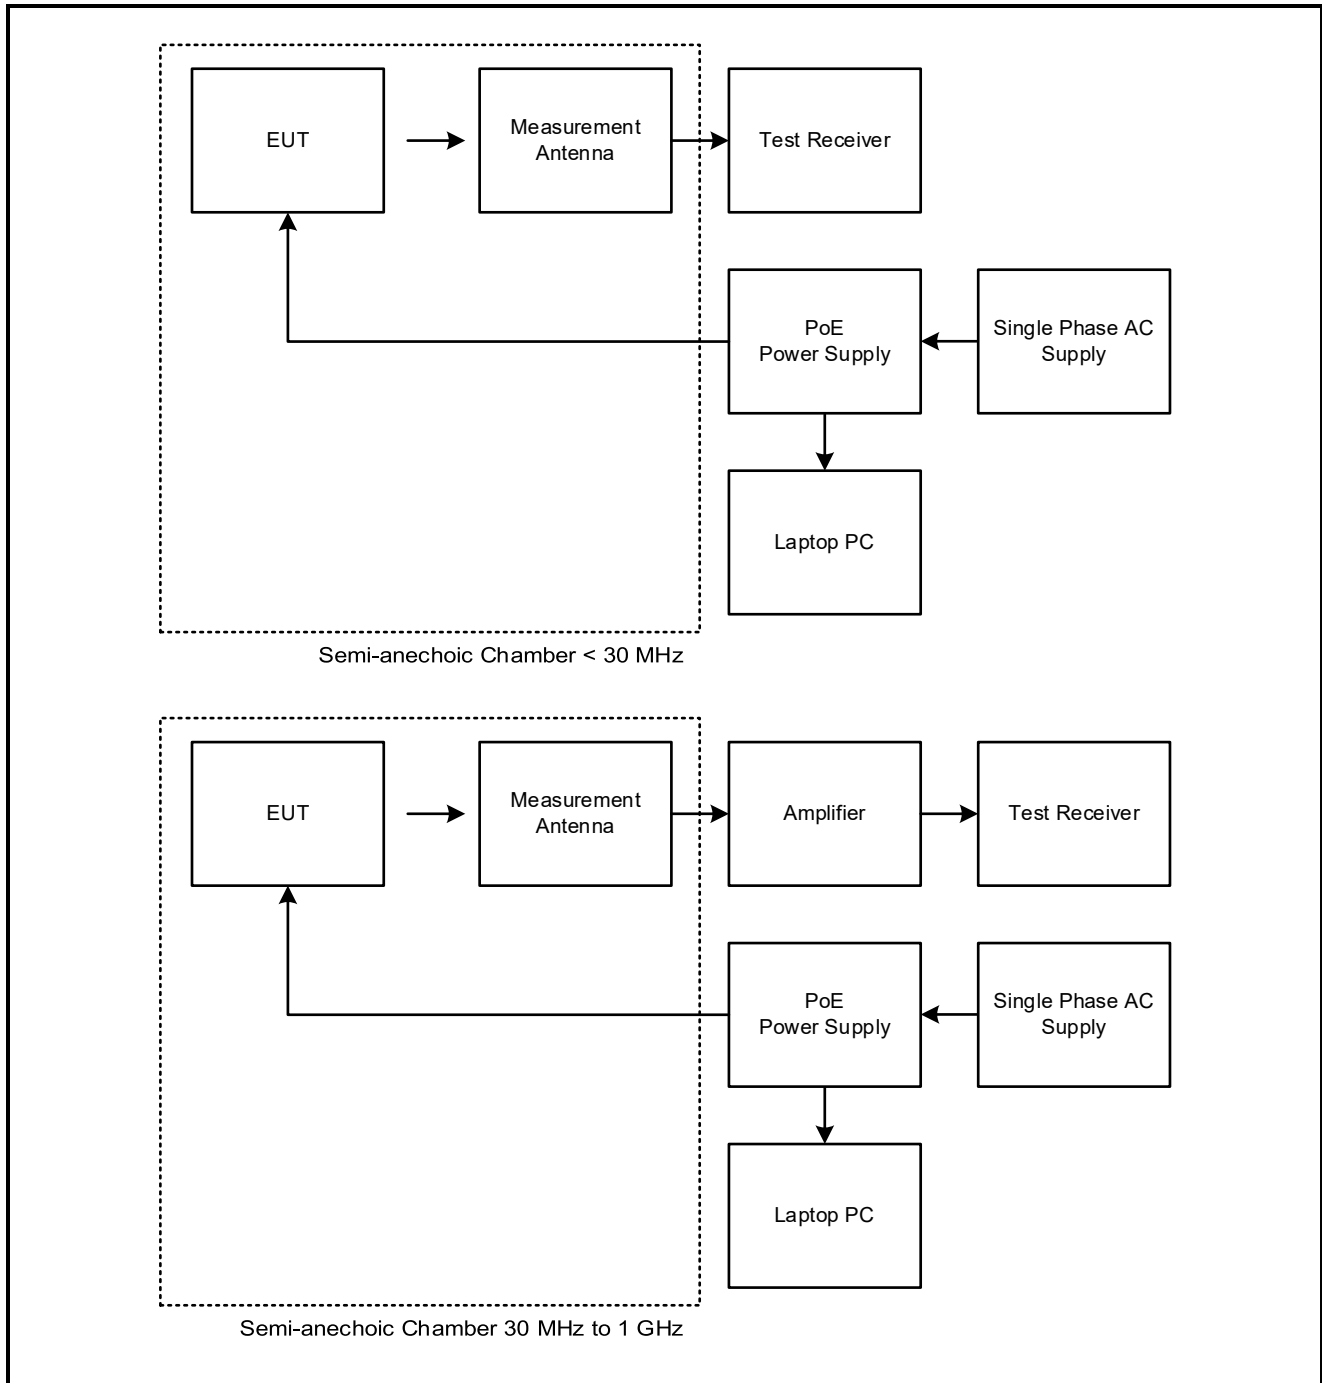
FCC Reference:	Part 15.255(d) / 15.209
Test Method Used:	ANSI C63.10 Sections 6.3, 6.4, 6.5 & 9.13
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	40 to 50

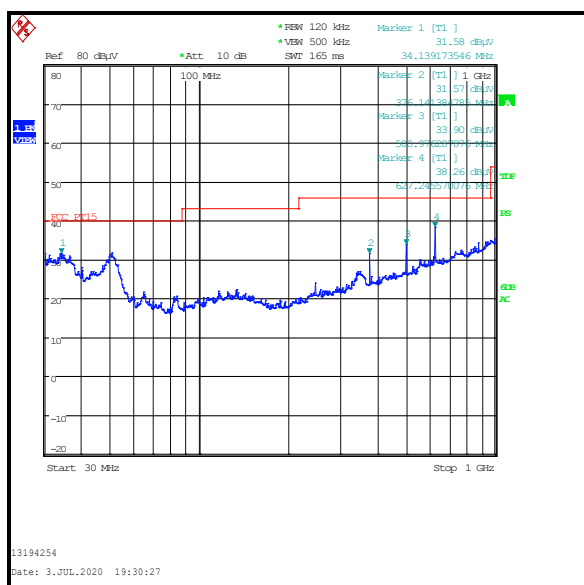
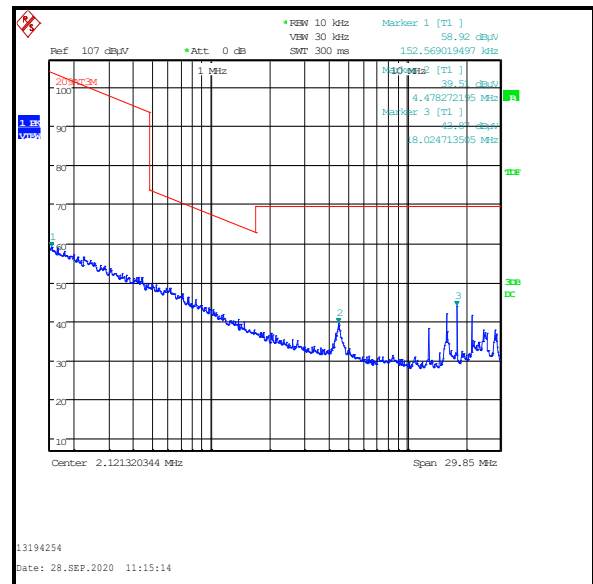
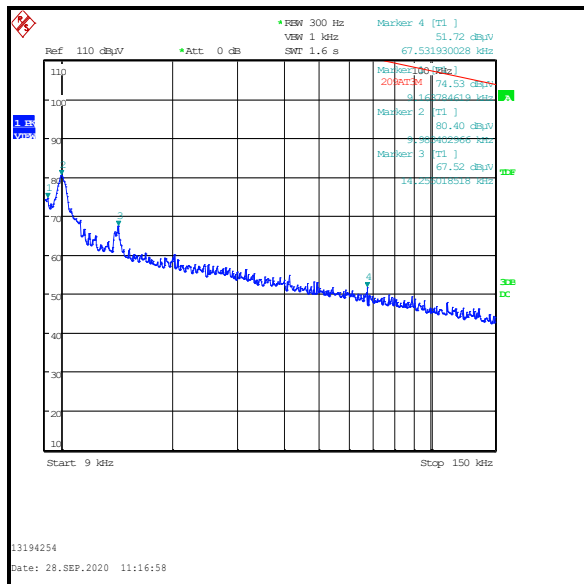
Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements below 1 GHz were performed with the EUT set to the middle channel only.
3. All other emissions were at least 20 dB below the appropriate limit or below the noise floor of the measurement system.
4. There are ambient emissions seen between 2 to 30 MHz on the pre-scan plot for 150 kHz to 30 MHz. A background scan is stored on the company server and is available for inspection upon request.
5. Measurements below 30 MHz were performed in a semi-anechoic chamber (asset number K0001) as a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. The limit was extrapolated to 3 metres in accordance with ANSI C63.10 Section 6.4.4.2. Correlation data between the semi-anechoic chamber and an open-field test site is available upon request.
6. Measurements between 30 MHz and 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Final measurements were performed and the results entered into the table below. The test receiver resolution bandwidth was set to 120 kHz, using a CISPR quasi-peak detector and a span wide enough to include the entire emission.

Transmitter Radiated Spurious Emissions (continued)**Test setup:**

Transmitter Radiated Spurious Emissions (continued)**Results: Quasi Peak**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
34.448545	Vertical	29.1	40.0	10.9	Complied
374.995167	Vertical	30.5	46.0	15.5	Complied
500.019269	Vertical	33.3	46.0	12.7	Complied
625.020199	Horizontal	31.2	46.0	14.8	Complied
625.022442	Vertical	37.9	46.0	8.1	Complied
875.033045	Horizontal	34.3	46.0	11.7	Complied



Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Transmitter Radiated Spurious Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2041	Thermohygrometer	Testo	608-H1	45119912	07 Jan 2021	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	01 Nov 2020	12
M1886	Test Receiver	Rohde & Schwarz	ESU26	100554	15 May 2021	12
A3167	Amplifier	Com-Power	PAM-103	18020010	01 Nov 2020	12
A259	Antenna	Chase	CBL6111A	1513	13 Jul 2021	12
M2040	Thermohygrometer	Testo	608-H1	451224934	07 Jan 2021	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	03 Sep 2021	12
A3198	Loop Antenna	ETS Lindgren	6502	00221887	01 Apr 2021	12
K0001	3m RSE Chamber	Rainford EMC	N/A	N/A	16 Oct 2020	12

Transmitter Radiated Spurious Emissions (continued)**Test Summary:**

Test Engineers:	Patrick Jones & Ben Mercer	Test Dates:	22 August 2020 to 04 September 2020
Test Sample Serial Numbers:	X100108B009D		

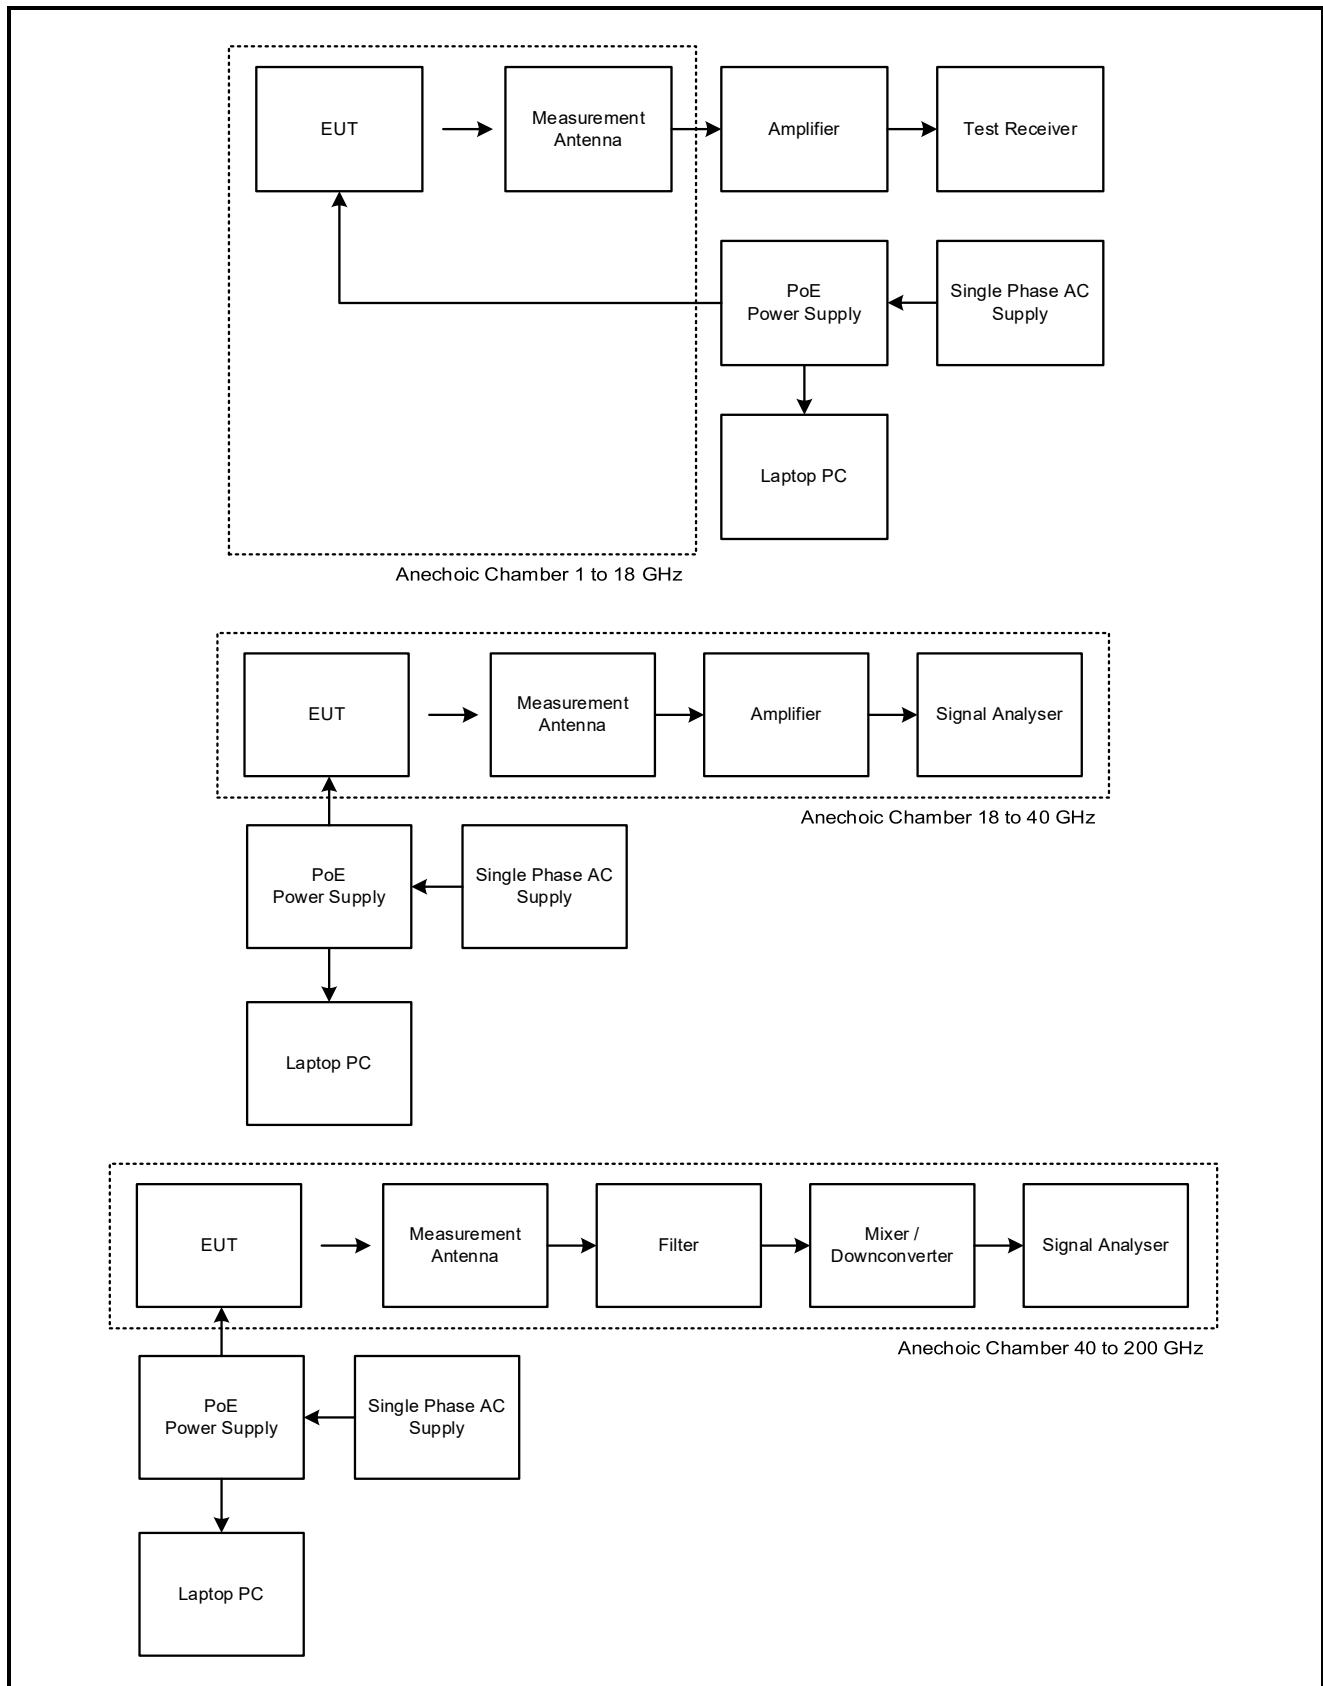
FCC Reference:	Part 15.255(d) / 15.209
Test Method Used:	ANSI C63.10 Sections 6.3, 6.6, 9.8, 9.9, 9.12 & 9.13
Frequency Range:	1 GHz to 200 GHz

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	51 to 60

Note(s):

1. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
2. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
3. The emission identified by a marker on the 57 - 71 GHz plot is the fundamental.
4. Part 15.255(d)(3) defines a power density limit of 90 pW/cm² at 3 metres for spurious emissions between 40 GHz and 200 GHz. This was converted to a field strength limit of 85.31 dBuV/m using the equations provided in section 9.6 of ANSI C63.10.
5. Measurements distances above 40 GHz were determined using the procedure defined in section 9.8 of ANSI C63.10. Measurements were made at the following distances:
 - 40 GHz to 50 GHz – 1 metre
 - 50 GHz to 75 GHz – 3 metres
 - 75 GHz to 110 GHz – 1 metre
 - 110 GHz to 170 GHz – 2 metres
 - 170 GHz to 200 GHz – 1 metre
6. Where measurements were performed at a distance other than that specified by the limit, a correction factor was calculated using the equation provided in section 9.4 of ANSI C63.10. This correction factor was included in the transducer factor entered on the signal analyser.
7. All other emissions were at least 20 dB below the appropriate limit or below the noise floor of the measurement system.

Transmitter Radiated Spurious Emissions (continued)**Test setup:**

Transmitter Radiated Spurious Emissions (continued)**Results: Bottom Channel / Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
7289.923	Vertical	55.5	74.0	18.5	Complied

Results: Bottom Channel / Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
7290.003	Vertical	52.3	54.0	1.7	Complied
115760.000	Vertical	79.2	85.3	6.1	Complied
117519.960	Vertical	80.9	85.3	4.4	Complied

Results: Middle Channel / Peak

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
7830.080	Vertical	55.7	74.0	18.3	Complied

Results: Middle Channel / Average

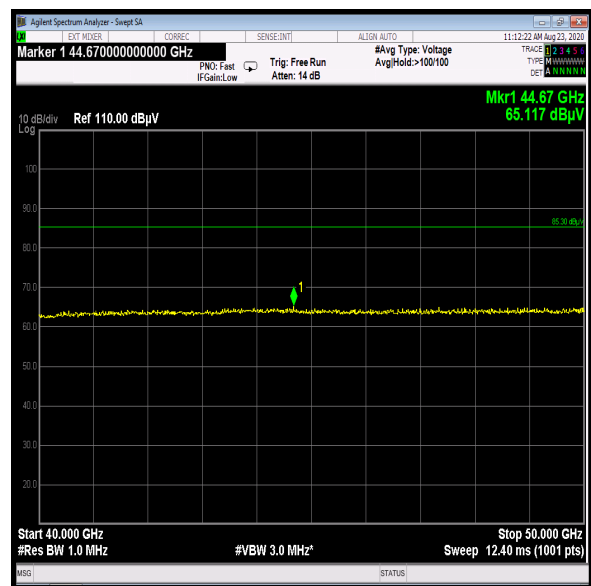
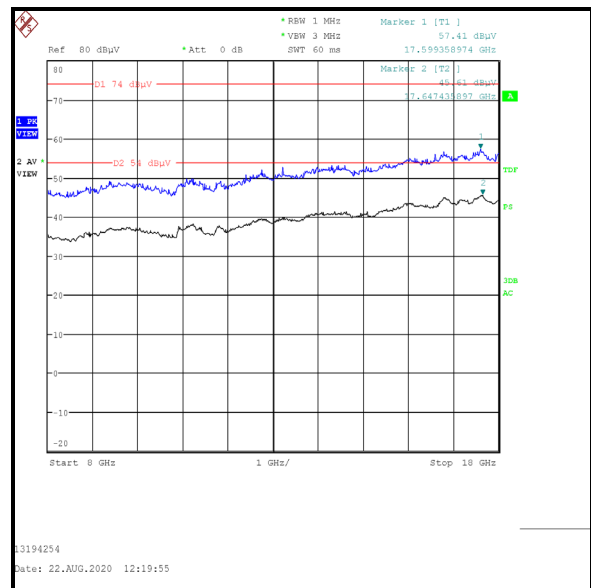
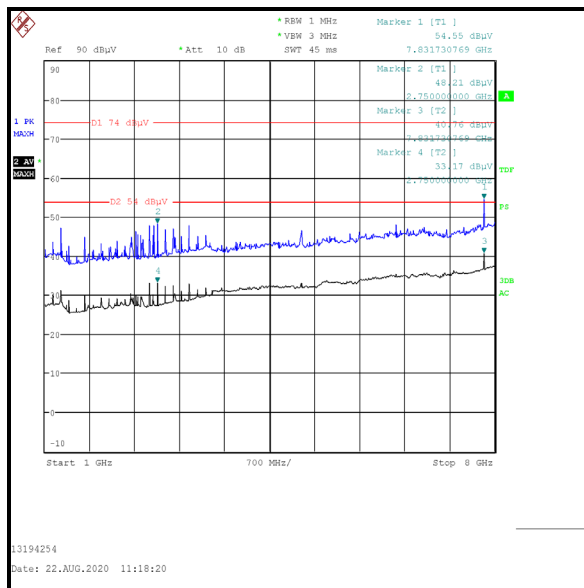
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
7829.968	Vertical	52.6	54.0	1.4	Complied
124399.990	Vertical	80.8	85.3	4.5	Complied
126159.930	Vertical	78.0	85.3	7.3	Complied

Results: Top Channel / Peak

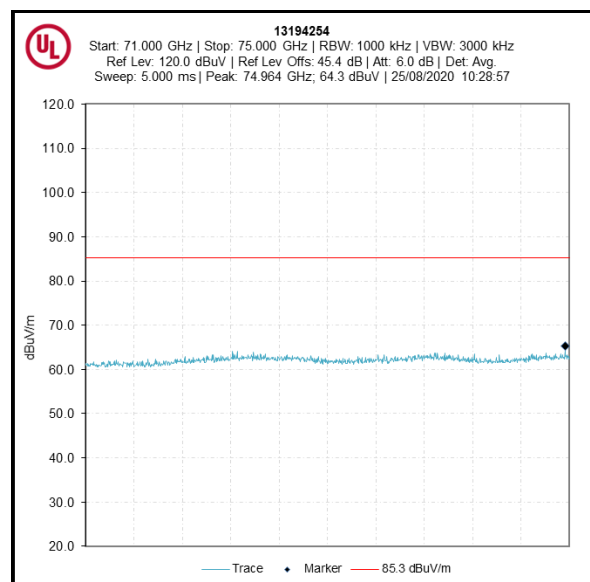
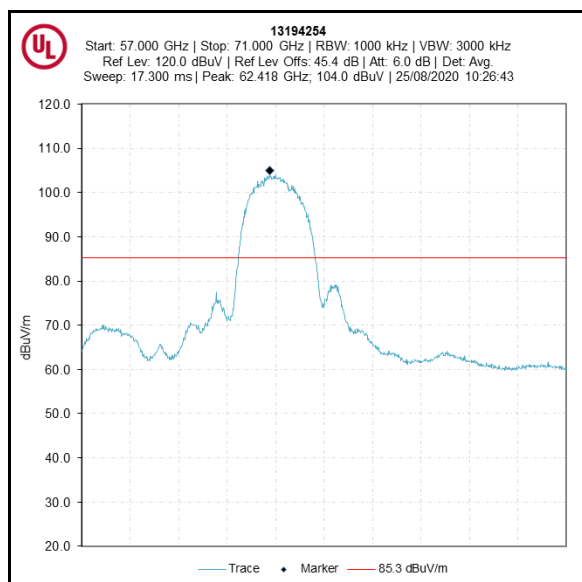
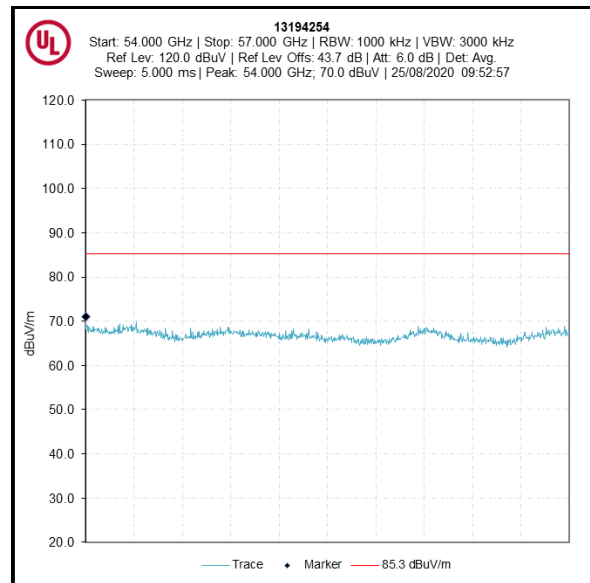
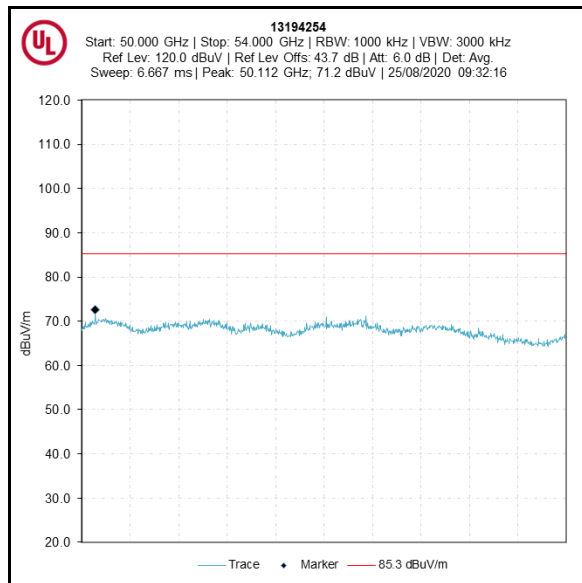
Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
8100.087	Vertical	53.0	74.0	21.0	Complied

Results: Top Channel / Average

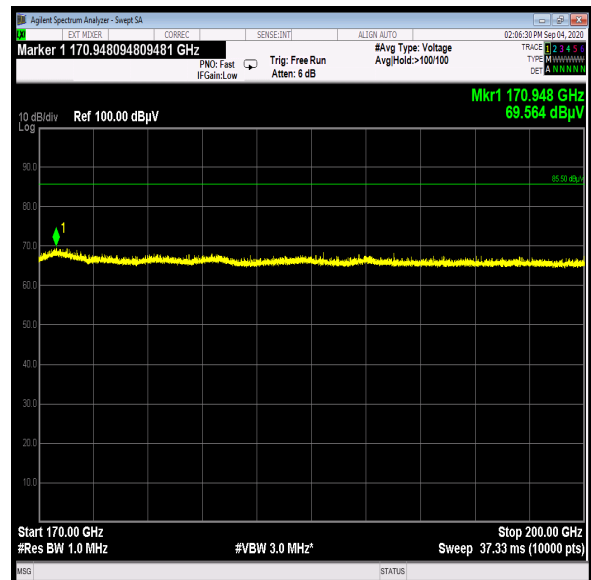
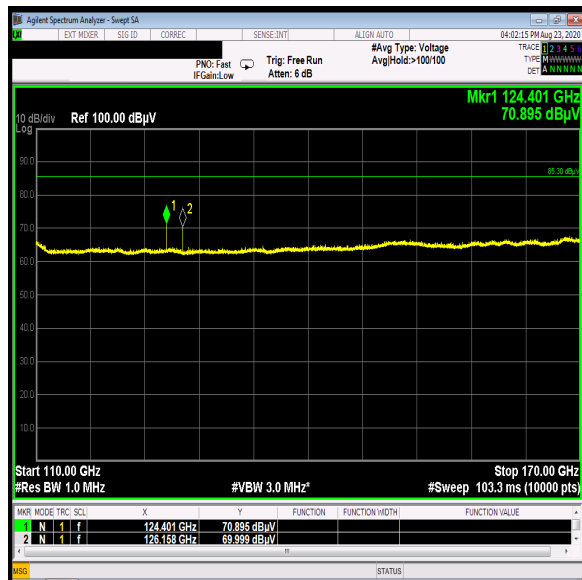
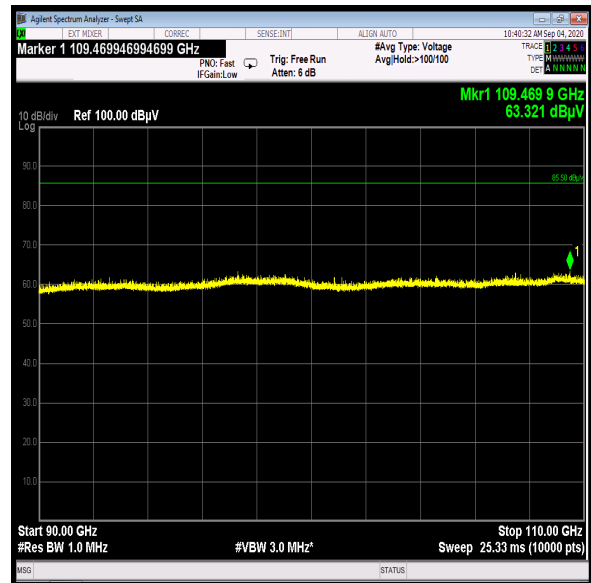
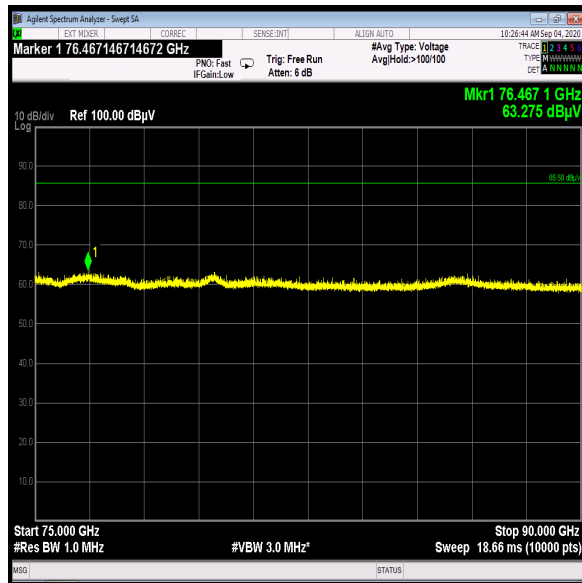
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
8099.968	Vertical	50.1	54.0	3.9	Complied
128719.900	Vertical	80.8	85.3	4.5	Complied
130480.000	Vertical	80.0	85.3	5.3	Complied

Transmitter Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Radiated Spurious Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2040	Thermohygrometer	Testo	608-H1	45124934	07 Jan 2021	12
K0001	3m RSE Chamber	Rainford EMC	N/A	N/A	16 Oct 2020	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	09 Apr 2021	12
A3155	Pre Amplifier	Com-Power	PAM-118A	18040037	04 Oct 2020	12
A3138	Antenna	Schwarzbeck	BBHA 9120 B	702	04 Oct 2020	12
A3139	Antenna	Schwarzbeck	HWRD750	27	07 Oct 2020	12
A2895	Antenna	Schwarzbeck	BBHA 9170	9170-728	13 Feb 2021	12
A2896	Pre Amplifier	Schwarzbeck	BBV 9721	9721 - 023	13 Feb 2021	12
M1832	Signal Analyser	Agilent	N9010A	MY53470303	06 Mar 2022	24
M197	Harmonic Mixer	Hewlett Packard	11970U	2332A00782	26 Oct 2020	36
M2064	Downconverter	Virginia Diodes	WR12SAX	SAX 325	07 Jan 2021	24
M2065	Downconverter	Virginia Diodes	WR10SAX	SAX 393	11 Jul 2021	24
M2066	Downconverter	Virginia Diodes	WR6.5SAX	SAX 392	24 Jul 2021	24
M2069	Downconverter	Virginia Diodes	WR15SAX	SAX 394	09 Jul 2021	24
A2963	Horn Antenna	Link Microtek	AM19HA-ULV1	14929	16 Jan 2021	12
A2964	Horn Antenna	Link Microtek	AM15HA-ULV1	14930	17 Jan 2021	12
A2967	Horn Antenna	Link Microtek	AM10HA-ULV1	14933	16 Jan 2021	12
A2968	Horn Antenna	Link Microtek	AM7HA-ULV1	14934	16 Jan 2021	12
A3212	Low Pass Filter	Sage Millimeter	SWF-50354340-22-L1	B10754-01	26 Feb 2021	12
A3213	High Pass Filter	Sage Millimeter	SWF-75370340-10-H1	18199-01	26 Feb 2021	12

5.2.7. Transmitter Frequency Stability (Temperature Variation)**Test Summary:**

Test Engineer:	Ben Mercer	Test Date:	17 September 2020
Test Sample Serial Number:	X100108B009D		

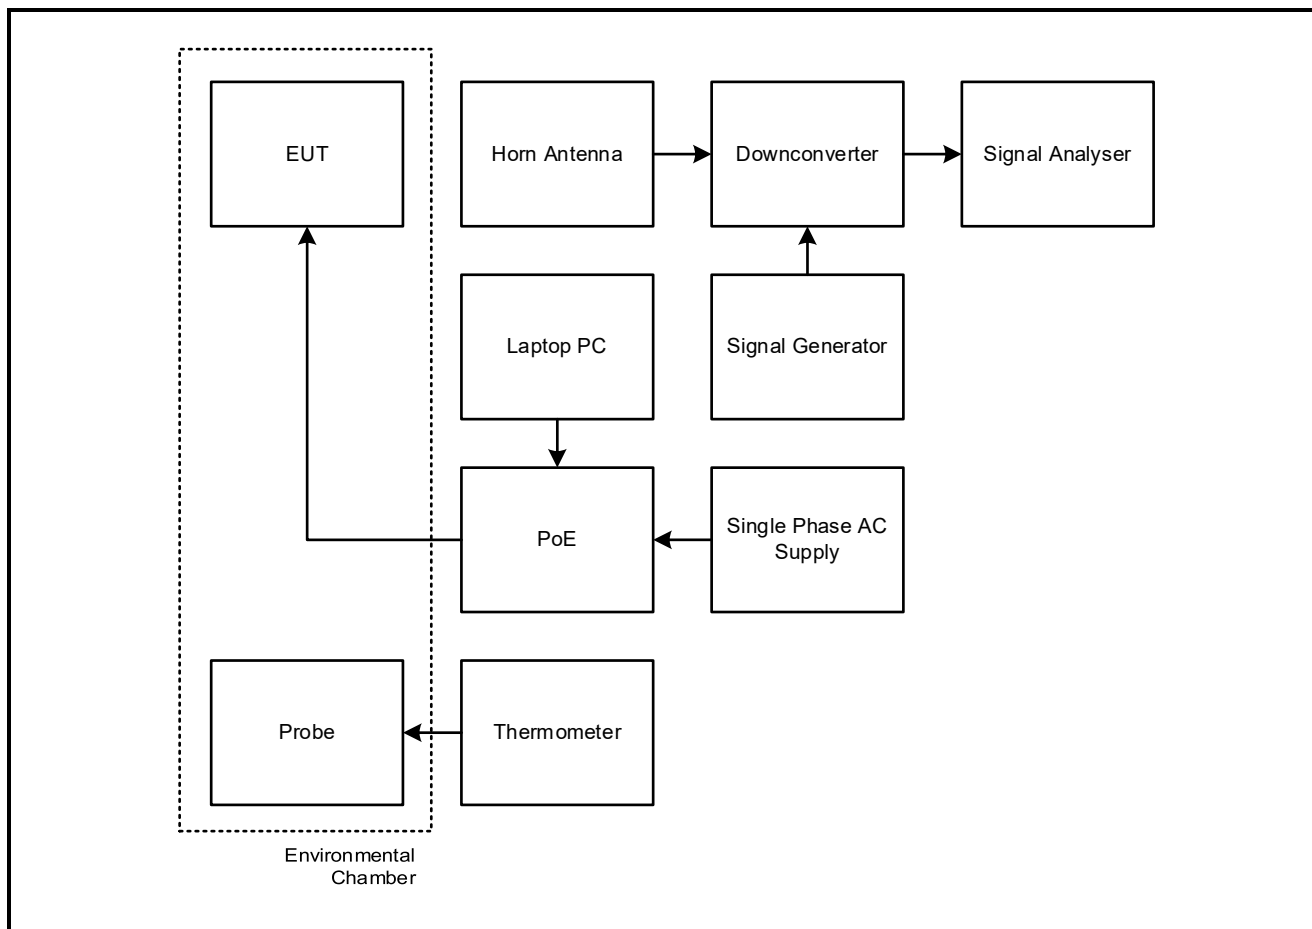
FCC Reference:	Part 15.255(f)
Test Method Used:	ANSI C63.10 Section 9.14

Environmental Conditions:

Ambient Temperature (°C):	24
Ambient Relative Humidity (%):	42

Note(s):

1. The 20 dB emission bandwidth was recorded on a signal analyser at bottom and top channel, and compared to the lower and upper emission edges respectively.
2. Temperature was monitored throughout the test with a calibrated digital thermometer.

Test setup:

Transmitter Frequency Stability (Temperature Variation) (continued)**Results: Bottom Channel / Lower Band Edge**

Temperature (°C)	Lower Band Edge Frequency (MHz)	Lower Emission Bandwidth Frequency (MHz)	Margin (MHz)	Result
-20	57000.000	57283.200	283.200	Complied
-10	57000.000	57274.560	274.560	Complied
0	57000.000	57252.960	252.960	Complied
10	57000.000	57196.800	196.800	Complied
20	57000.000	57252.960	252.960	Complied
30	57000.000	57252.960	252.960	Complied
40	57000.000	57300.480	300.480	Complied
50	57000.000	57335.040	335.040	Complied

Results: Top Channel / Upper Band Edge

Temperature (°C)	Upper Band Edge Frequency (MHz)	Upper Emission Bandwidth Frequency (MHz)	Margin (MHz)	Result
-20	71000.000	65918.880	5081.120	Complied
-10	71000.000	65832.480	5167.520	Complied
0	71000.000	65923.200	5076.800	Complied
10	71000.000	66566.880	4433.120	Complied
20	71000.000	66566.880	4433.120	Complied
30	71000.000	66566.880	4433.120	Complied
40	71000.000	66579.840	4420.160	Complied
50	71000.000	66566.880	4433.120	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2038	Thermohygrometer	Testo	608-H1	45124919	07 Jan 2021	12
M1832	Signal Analyser	Agilent	N9010A	MY53470303	06 Mar 2022	24
M2069	Downconverter	Virginia Diodes	WR15SAX	SAX 394	09 Jul 2021	24
M1252	Signal Generator	Hewlett Packard	83640A	3119A00489	25 Jan 2022	24
A2964	Horn Antenna	Link Microtek	AM15HA-ULV1	14930	17 Jan 2021	12
E0518	Environmental Chamber	TAS	LTCL 1200	24000107	Calibrated before use	-
M1642	Thermometer	Fluke	52II	18890119	04 May 2021	12

5.2.8. Transmitter Frequency Stability (Voltage Variation)**Test Summary:**

Test Engineer:	Ben Mercer	Test Date:	18 September 2020
Test Sample Serial Number:	X100108B009D		

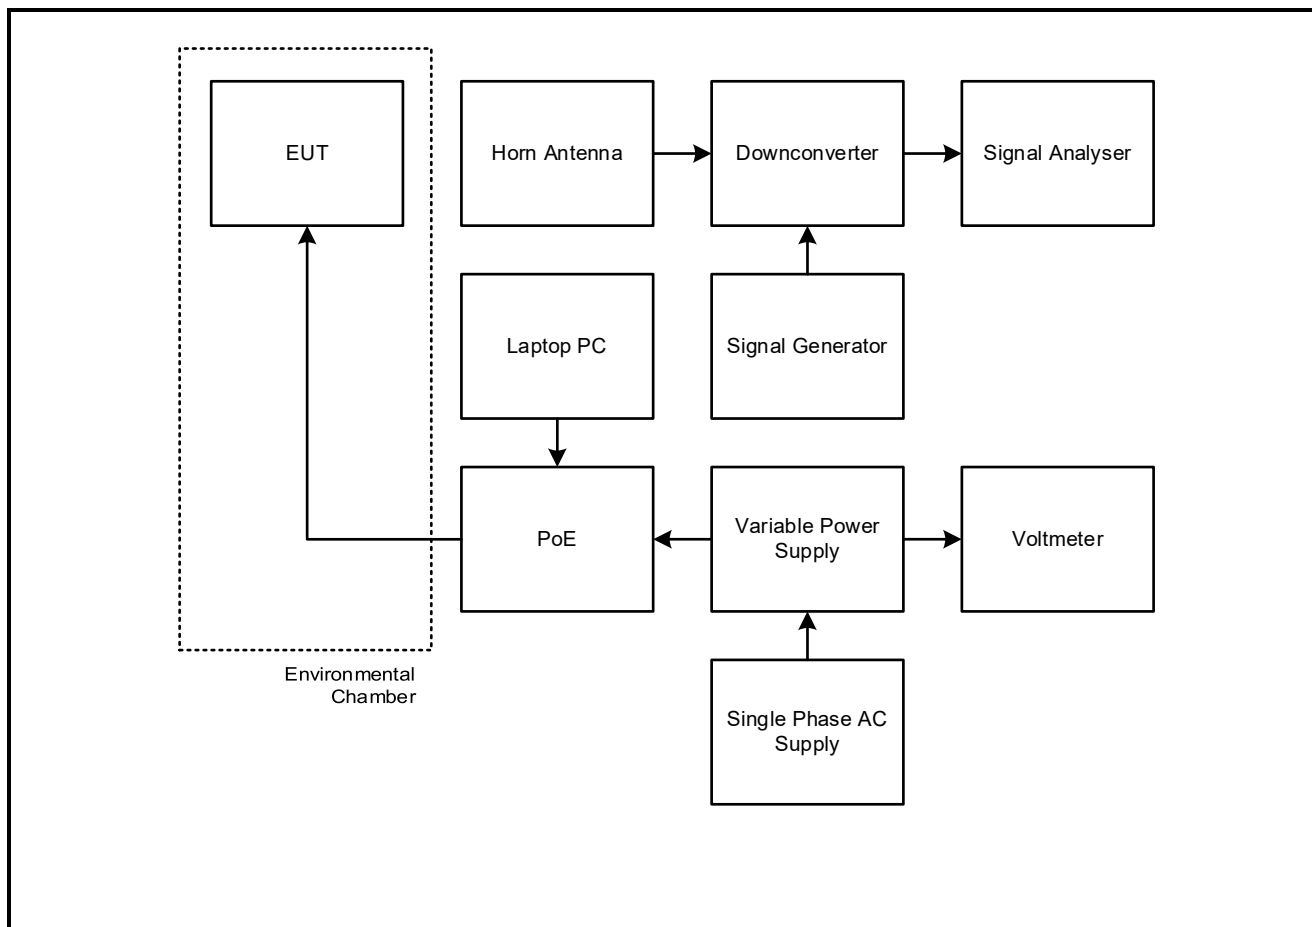
FCC Reference:	Part 15.255(f)
Test Method Used:	ANSI C63.10 Section 9.14

Environmental Conditions:

Ambient Temperature (°C):	21
Ambient Relative Humidity (%):	41

Note(s):

1. The 20 dB emission bandwidth was recorded on a signal analyser at bottom and top channel, and compared to the lower and upper emission edges respectively.
2. The PoE input voltage was set to 85% and 115% of the stated input voltage range of 100-240 V.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

Test setup:

Transmitter Frequency Stability (Voltage Variation) (continued)**Results: Bottom Channel / Lower Band Edge**

Supply Voltage (VAC)	Lower Band Edge Frequency (MHz)	Lower Emission Bandwidth Frequency (MHz)	Margin (MHz)	Result
85.0	57000.000	57240.000	240.000	Complied
276.0	57000.000	57248.640	248.640	Complied

Results: Top Channel / Upper Band Edge

Supply Voltage (VAC)	Upper Band Edge Frequency (MHz)	Upper Emission Bandwidth Frequency (MHz)	Margin (MHz)	Result
85.0	71000.000	65931.840	5068.160	Complied
276.0	71000.000	65931.840	5068.160	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2038	Thermohygrometer	Testo	608-H1	45124919	07 Jan 2021	12
M1832	Signal Analyser	Agilent	N9010A	MY53470303	06 Mar 2022	24
M2069	Downconverter	Virginia Diodes	WR15SAX	SAX 394	09 Jul 2021	24
M1252	Signal Generator	Hewlett Packard	83640A	3119A00489	25 Jan 2022	24
A2964	Horn Antenna	Link Microtek	AM15HA-ULV1	14930	17 Jan 2021	12
S0539	Variable AC Power Supply	Kikusui	PCR 1000L	13010170	Calibrated before use	-
M1251	Digital Voltmeter	Fluke	175	89170179	09 Apr 2021	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Transmitter EIRP	57 to 71 GHz	95%	± 5.36 dB
Transmitter Peak Output Power	57 to 71 GHz	95%	± 5.36 dB
Transmitter 6 dB Bandwidth	57 to 71 GHz	95%	±4.59 %
Transmitter 20 dB Bandwidth	57 to 71 GHz	95%	±4.59 %
Transmitter Radiated Emissions	9 kHz to 30 MHz	95%	±5.32 dB
Transmitter Radiated Emissions	30 MHz to 1 GHz	95%	±3.30 dB
Transmitter Radiated Emissions	1 GHz to 40 GHz	95%	±2.94 dB
Transmitter Radiated Emissions	40 GHz to 200 GHz	95%	±5.10 dB
Transmitter Frequency Stability	57 to 71 GHz	95%	±4.59 %

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version

--- END OF REPORT ---