

## TEST REPORT For FCC

Test Report No. : TK-FR10025

Date of Issue : 06/01/2010

Description of Product : Wireless LAN GW(Wireless LAN USB Dongle)

FCC ID : QWRMW-P150MS  
Model No. : MW-P150MS

Applicant : **Maverick Systems, Inc.**  
No.511 SeochoWorld Officetel, 1355-3,  
Seocho-Dong, Seocho-Gu Seoul , Korea

Manufacturer : **Maverick Systems, Inc.**  
No.511 SeochoWorld Officetel, 1355-3,  
Seocho-Dong, Seocho-Gu Seoul , Korea


Standards : FCC Part 15 Subpart C §15.247

Test Date : 05/18/2009 ~ 06/01/2010


Test Results :  PASS  FAIL

The test results relate only to the items tested.

**Tested by:**

  
Kyu-Chul Shin  
Test Engineer  
Date:06/01/2010

**Reviewed by:**

  
KT Kang  
Technical Manager  
Date: 06/01/2010

## THRU-KES CO.,LTD.

477-6, Hager-Ri, Yaju-Up, Yaju-Gun Kyunggi-Do, 469-803, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

---

## TABLE OF CONTENTS

1.0	General Product Description .....	3
1.1	Tested Frequency .....	3
1.2	Model Differences .....	4
1.3	Device Modifications .....	4
1.4	Peripheral Devices .....	4
1.5	Calibration Details of Equipment Used for Measurement .....	5
1.6	Test Facility.....	5
1.7	Laboratory Accreditations and Listings .....	5
2.0	Summary of tests .....	6
2.1	Technical Characteristic Test .....	7
2.1.1	6dB Bandwidth .....	7
2.1.2	Maximum peak Conducted Output Power.....	17
2.1.3	Power Spectral Density .....	27
2.1.4	Band - edge .....	37
2.1.5	Field Strength of Emissions .....	54
2.1.6	AC Conducted Emissions.....	62
APPENDIX A – Test Equipment Used For Tests .....		65

## 1.0 General Product Description

Equipment model name	: MW-P150MS
Serial number	: Prototype
EUT condition	: Pre-production, not damaged
Antenna type	: Chip antenna      Gain 0dBi
Frequency Range	: 802.11b/g/n(HT20) :2412MHz ~ 2472MHz : 802.11n(HT40) :2422MHz ~ 2462MHz : 802.11b: 9.24 dBm Peak Conducted
RF output power	: 802.11g: 7.93 dBm Peak Conducted : 802.11n(HT20): 7.91 dBm Peak Conducted : 802.11n(HT40): 7.43 dBm Peak Conducted
Number of channels	: 802.11b/g/n(HT20): 11 , 802.11n(HT40) : 7
Channel Spacing	: 5 MHz
Transfer Rate	: 11/5.5/2/1Mbps for 802.11b : 54/48/36/24/18/12/9/6Mbps for 802.11g : 65/58.5/52/36/26/19.5/13/6.5Mbps for 802.11n(HT20) : 130/117/104/78/52/39/26/13Mbps for 802.11n(HT40)
Type of Modulation	: CCK, DQPSK, DBPSK for DSSS : 64QAM, 16QAM, QPSK, BPSK for OFDM
Power Source	: DC 5V

## 1.1 Tested Frequency

802.11b/g/n(HT20)

	LOW	MID	HIGH
Frequency (MHz)	2412	2437	2462

802.11n(HT40)

	LOW	MID	HIGH
Frequency (MHz)	2422	2437	2452

## 1.2 Model Differences

Not applicable

## 1.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable

## 1.4 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
EUT	Maverick Systems, Inc.	MW-P150MS	-	-
Notebook	F U J I T S U L T D	LIFEBOOK S-5582	434230343466	DoC



### 1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

### 1.6 Test Facility

477-6, Hager-Ri, Yoju-Up, Yoju-Gun Kyunggi-Do, 469-803, Korea

### 1.7 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 93250
KOREA	KCC	EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR100

## 2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500kHz	Conducted	C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm @ 3kHz		C
15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.207	AC Conducted Emissions	EN 55022	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:  
- FCC Part 15.247, ANSI C63.4-2003

## 2.1 Technical Characteristic Test

### 2.1.1 6dB Bandwidth - 15.247(a)

**Procedure:**

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 40 MHz

VBW = 100 kHz (VBW ≥ RBW)

Sweep = auto

Trace = max hold

Detector function = peak

**Measurement Data:**

802.11b/g

Mode	Frequency (MHz)	Channel No.	Test Results	
			Measured Bandwidth (MHz)	Result
802.11b	2412	1	12.214	Complies
	2437	6	12.156	Complies
	2462	11	12.214	Complies
802.11g	2412	1	16.614	Complies
	2437	6	16.556	Complies
	2462	11	16.498	Complies

802.11n(HT20/HT40)

Mode	Frequency (MHz)	Channel No.	Test Results	
			Measured Bandwidth (MHz)	Result
802.11n (HT20)	2412	1	17.771	Complies
	2437	6	17.771	Complies
	2462	11	17.771	Complies
802.11n (HT40)	2422	3	36.469	Complies
	2437	6	36.469	Complies
	2452	9	36.469	Complies

- See next pages for actual measured spectrum plots.



**Minimum Standard:**

6 dB Bandwidth > 500kHz


See next pages for actual measured spectrum plots.





802.11b

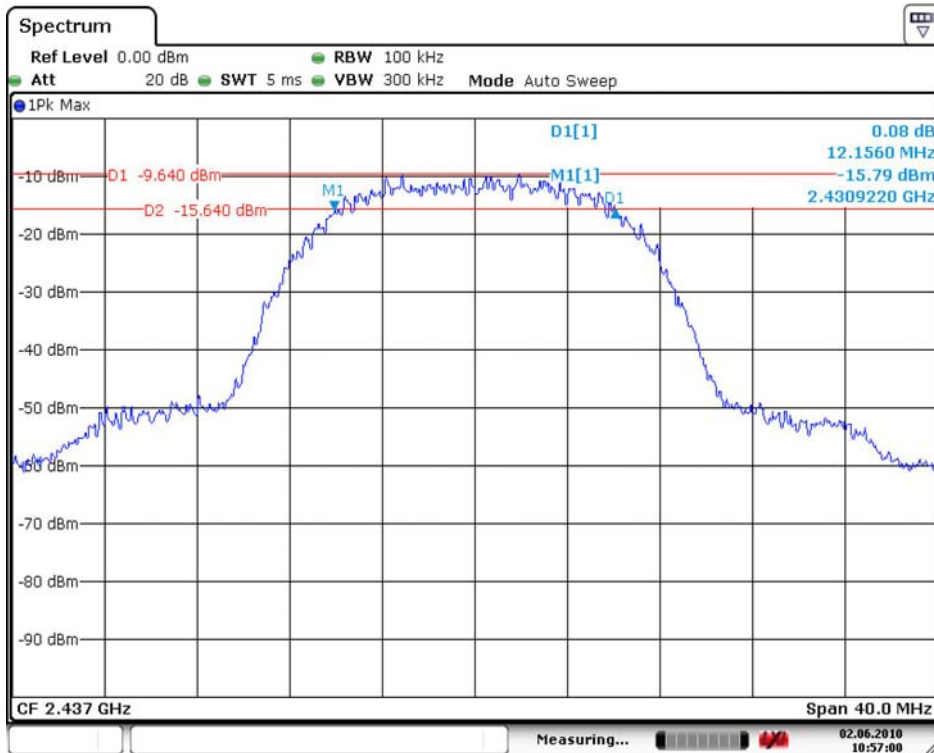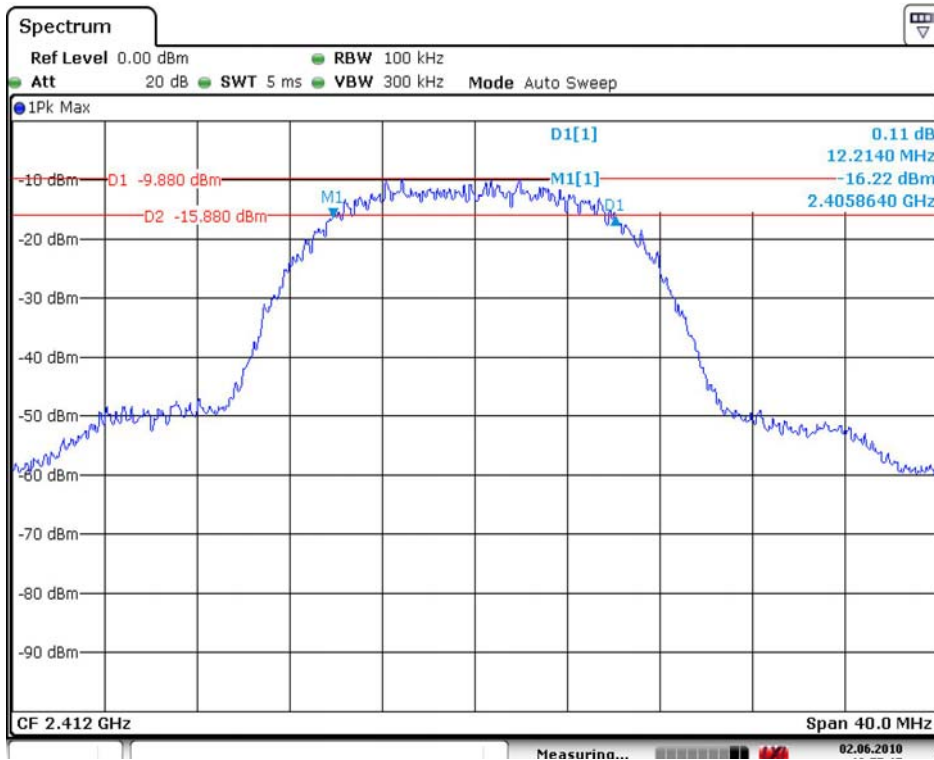


### 802.11b

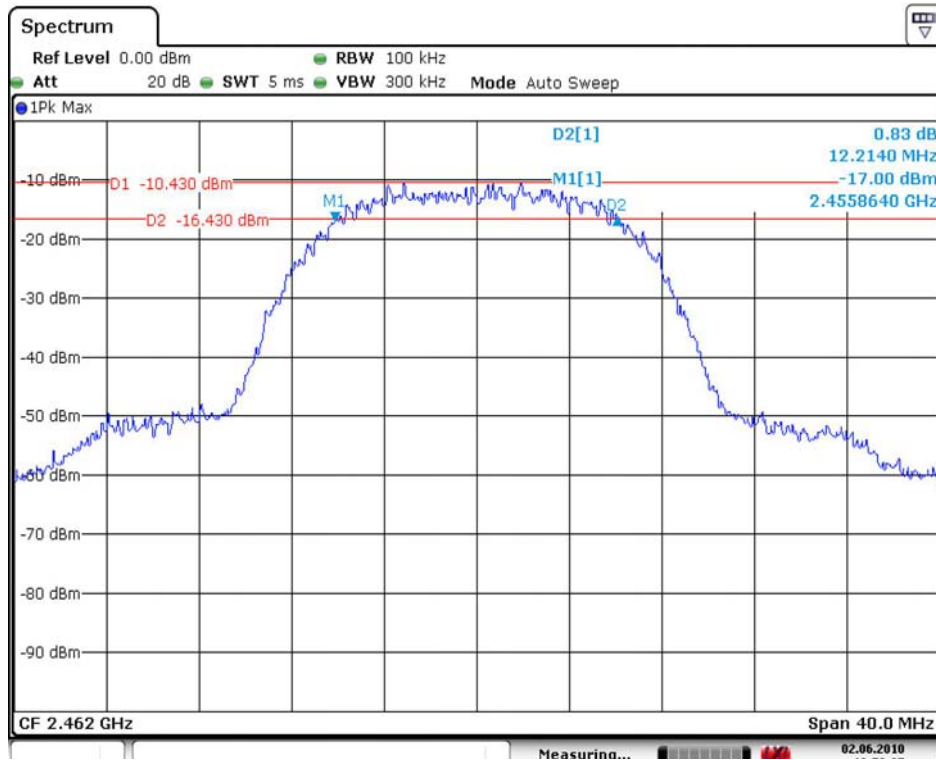



## 802.11g

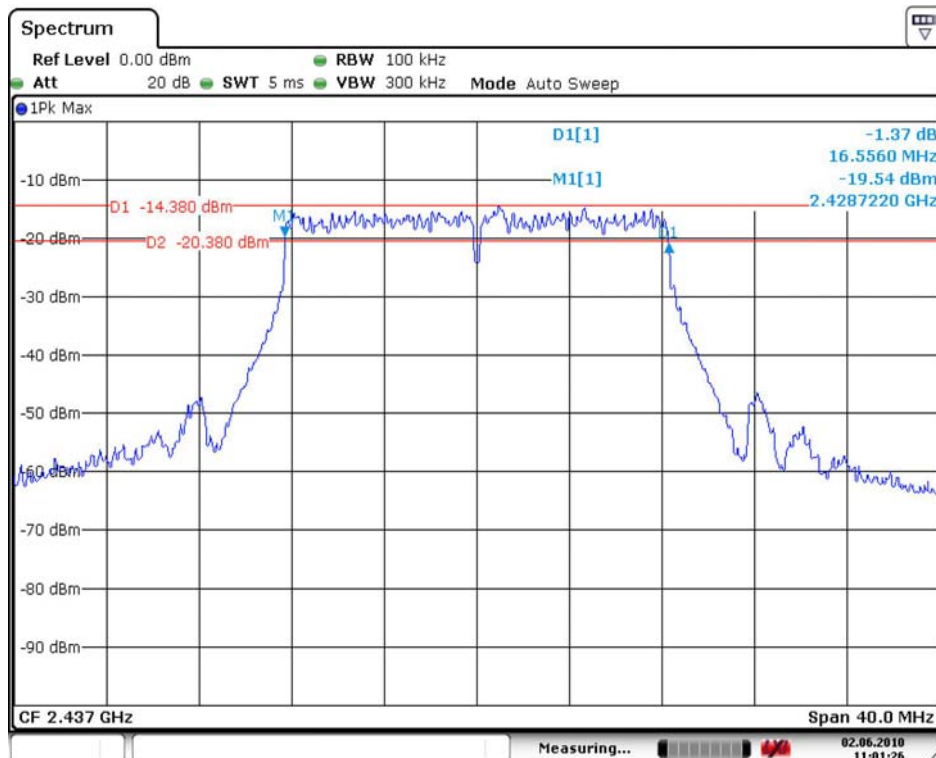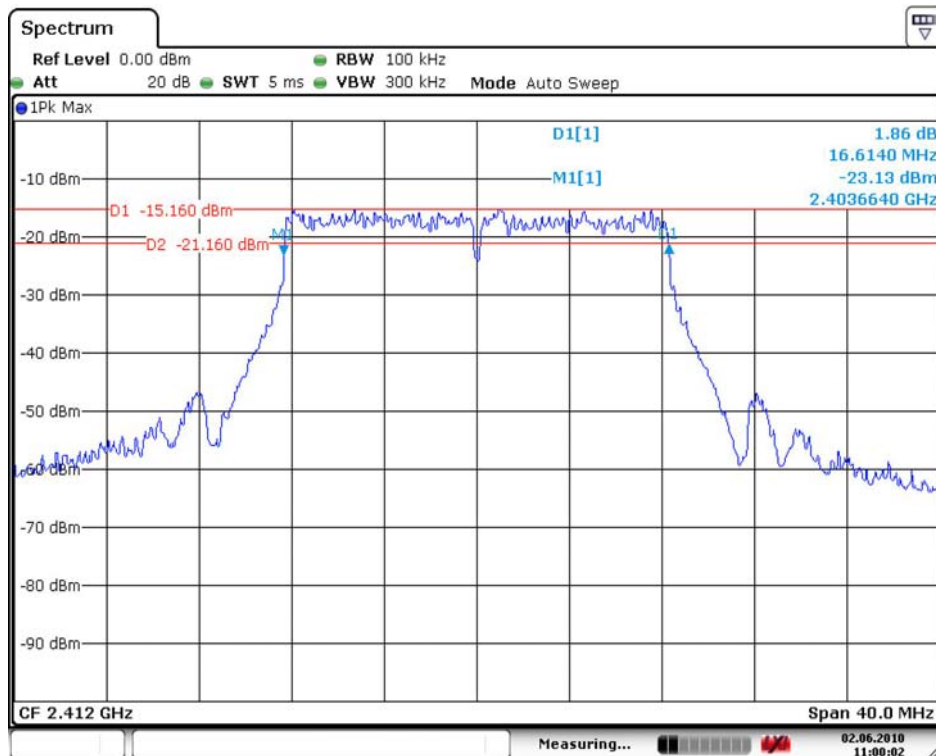


## 802.11g

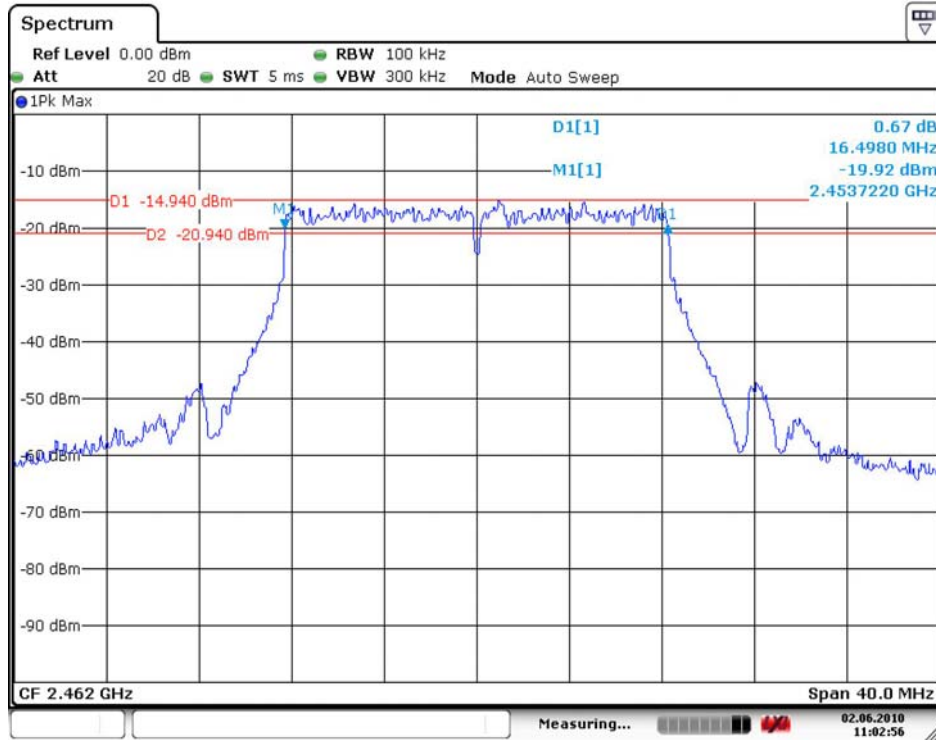



### 802.11n(HT20)

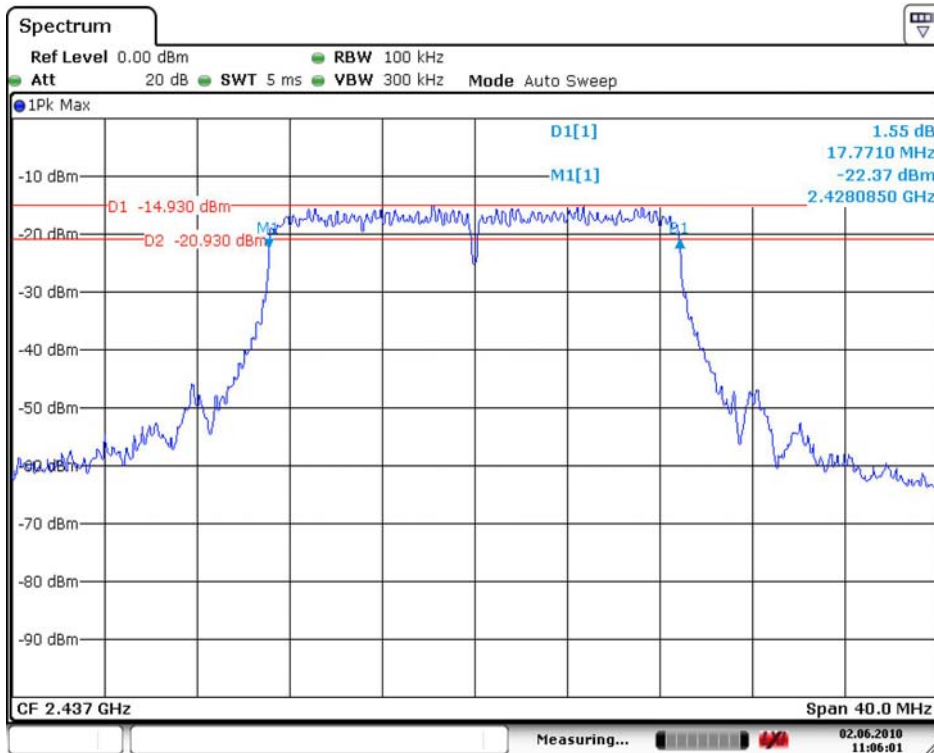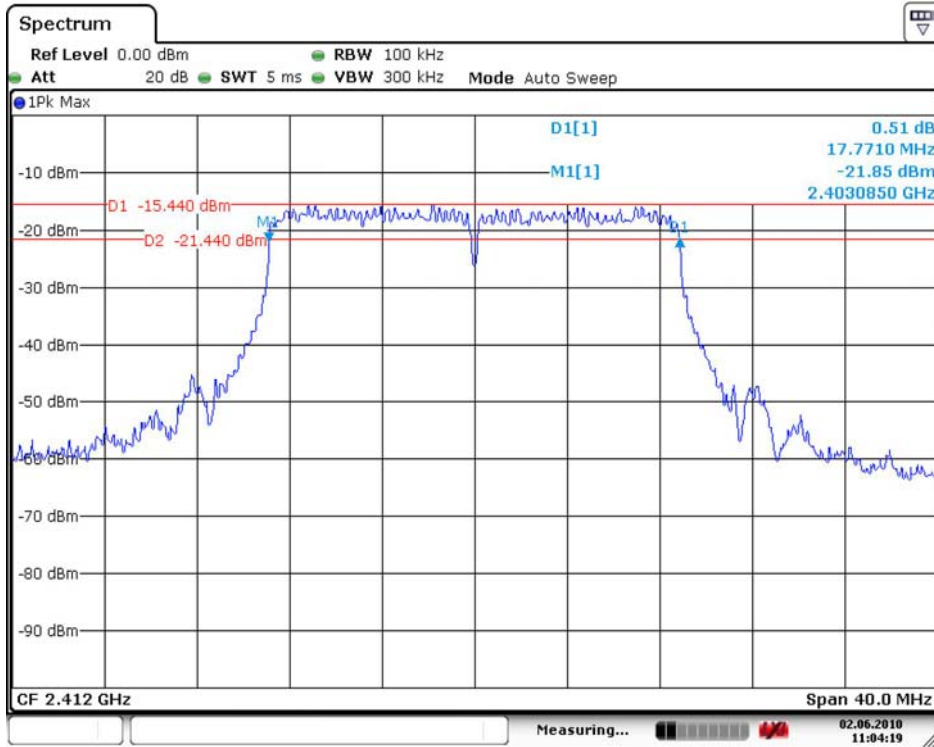


### 802.11n(HT20)

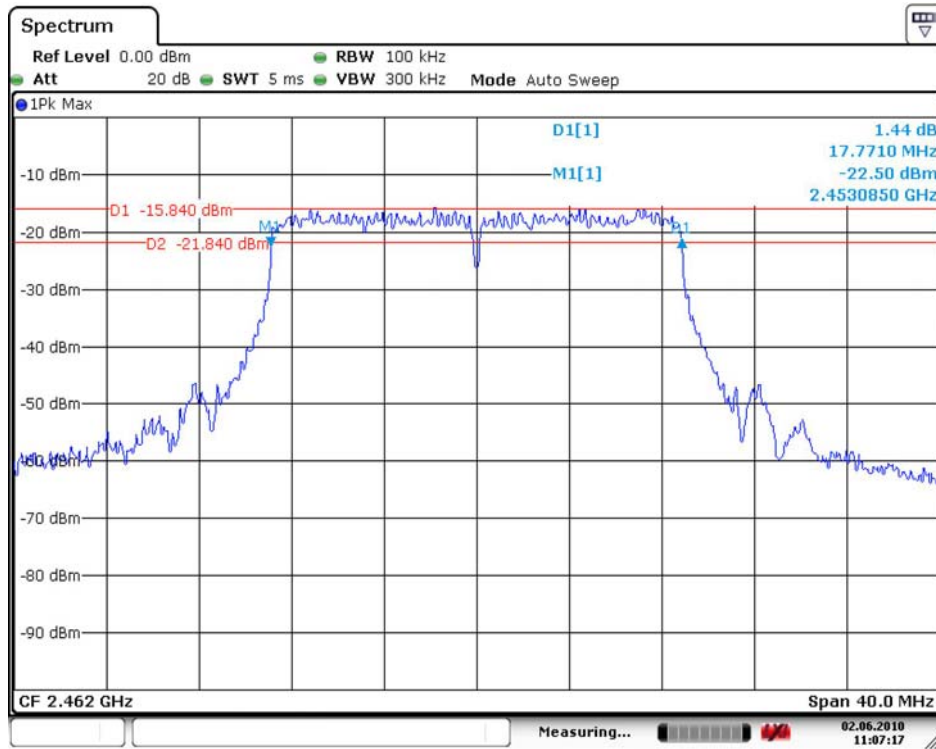

### 802.11n(HT40)

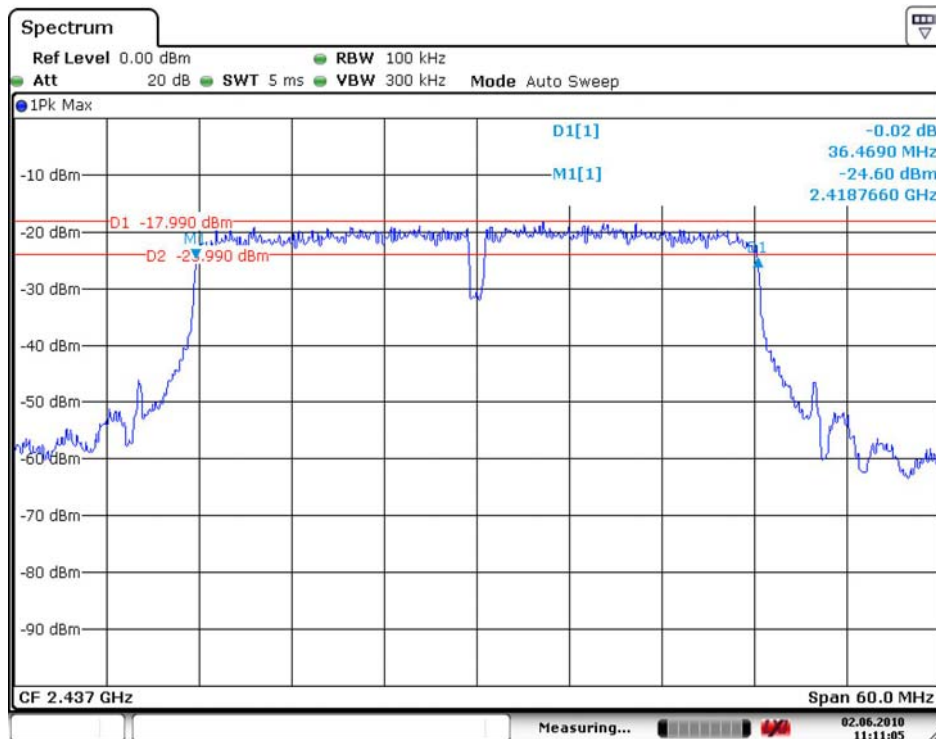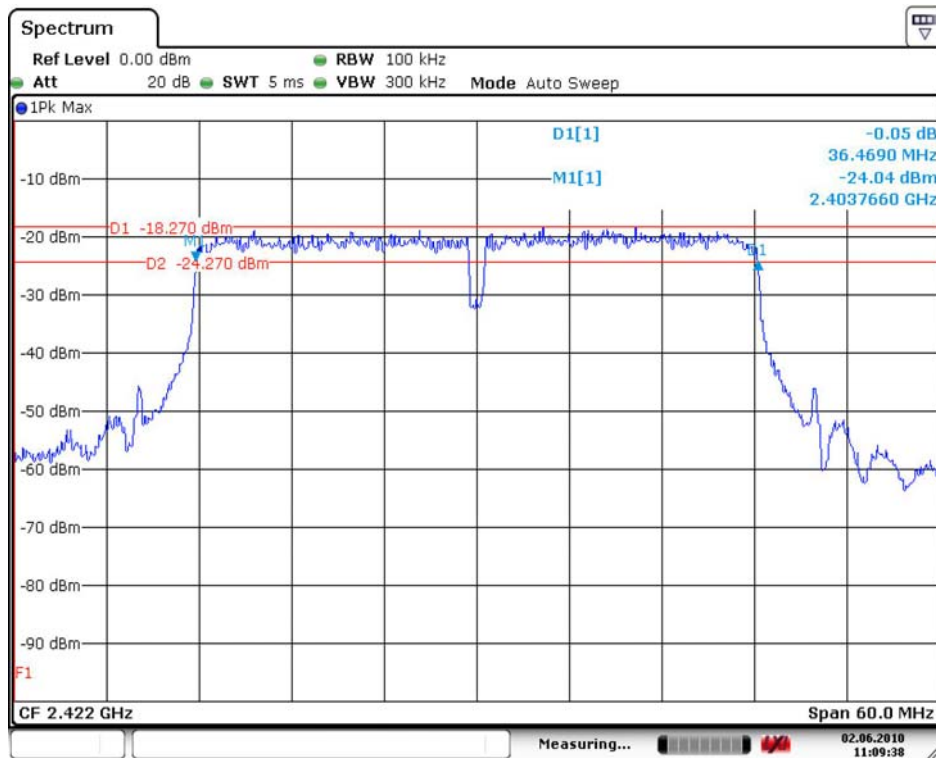

### 802.11n(HT40)

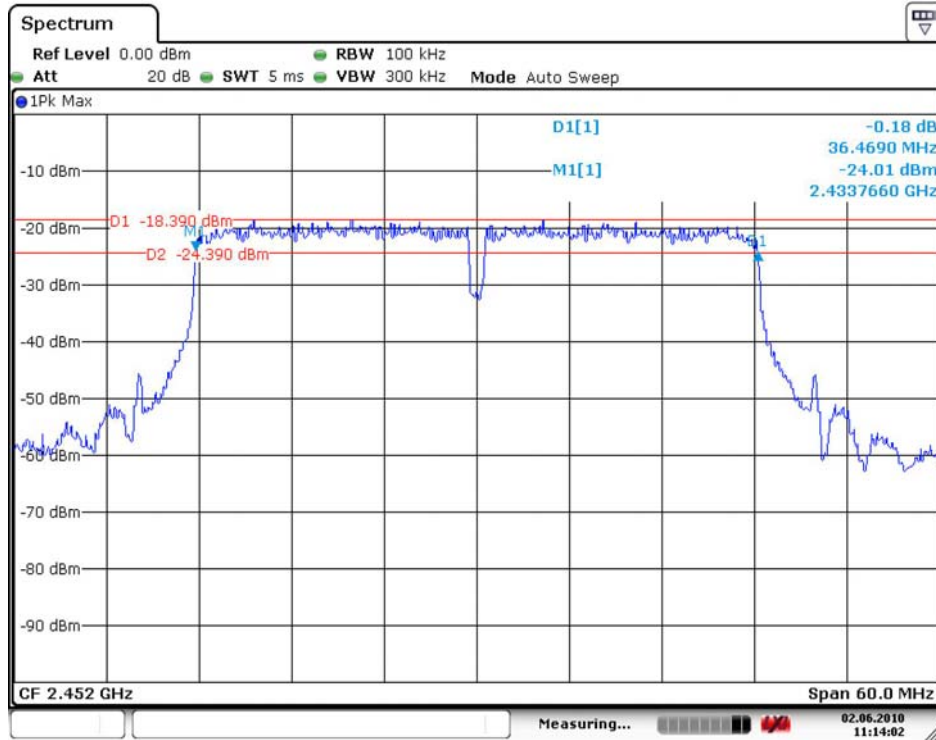




## 2.1.2 Maximum peak Conducted Output Power-15.247(b)

### Test Location

RF Test Room

### Test Procedures

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



### Limit

< 1 W

### Test Results

#### 802.11b mode

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2412	Low	8.96	30dBm	Complies
2437	Middle	9.24	30dBm	Complies
2462	High	8.56	30dBm	Complies

#### 802.11g mode

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2412	Low	7.76	30dBm	Complies
2437	Middle	7.93	30dBm	Complies
2462	High	7.51	30dBm	Complies

**802.11n(HT20) mode**



Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2412	Low	7.67	30dBm	Complies
2437	Middle	7.91	30dBm	Complies
2462	High	7.33	30dBm	Complies

**802.11n(HT40) mode**


Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2422	Low	7.29	30dBm	Complies
2437	Middle	7.43	30dBm	Complies
2452	High	7.41	30dBm	Complies

See next pages for actual measured spectrum plots.



**Peak Conducted Output Power – 802.11b**

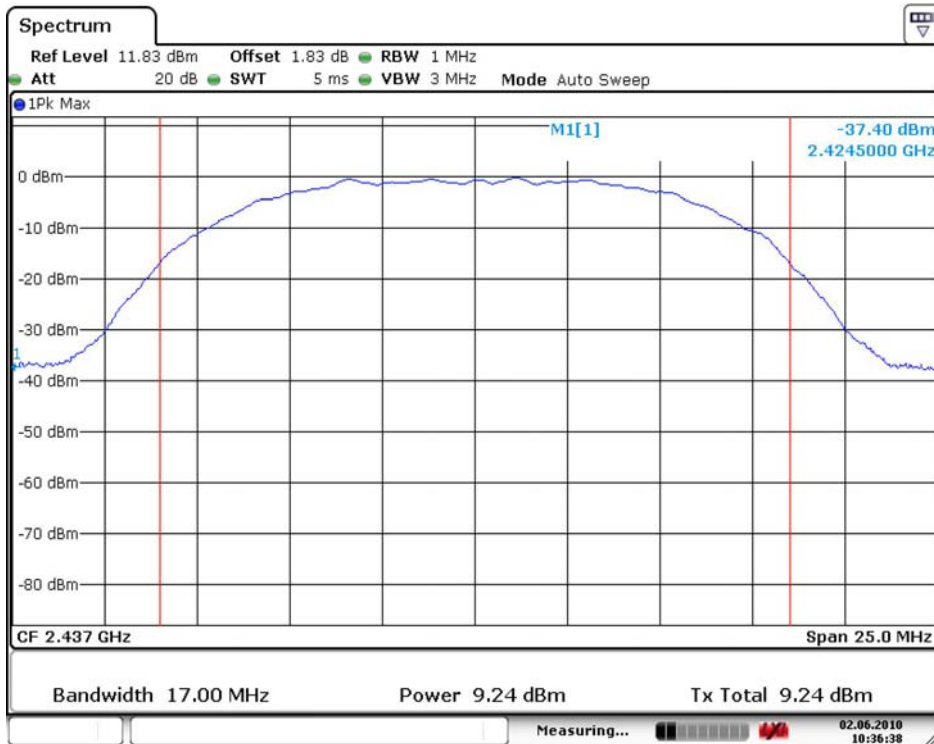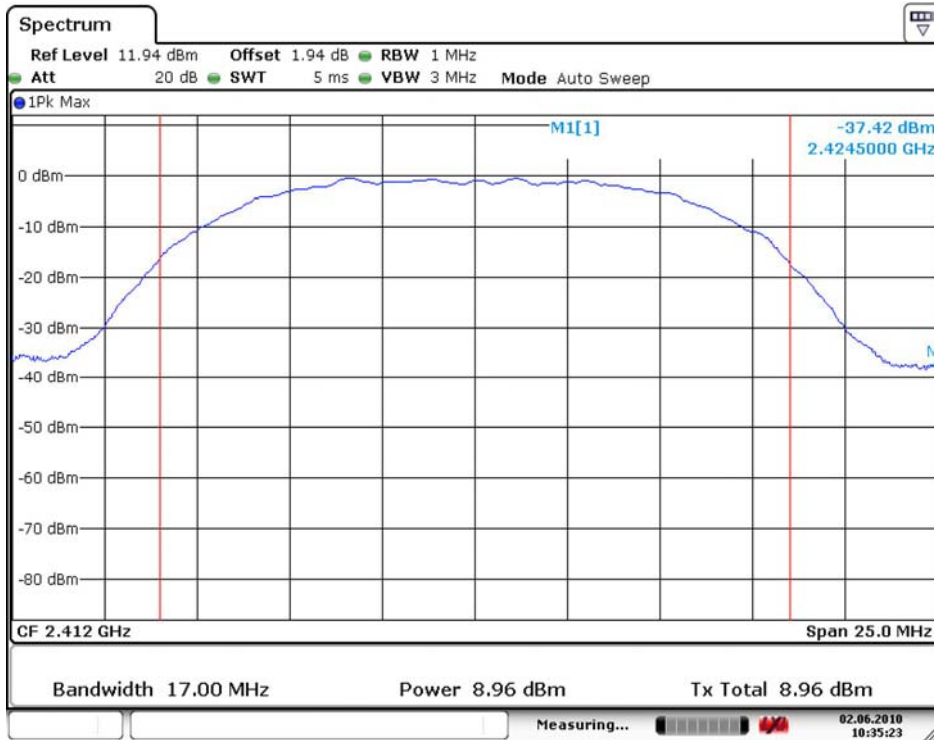


**Peak Conducted Output Power – 802.11b**

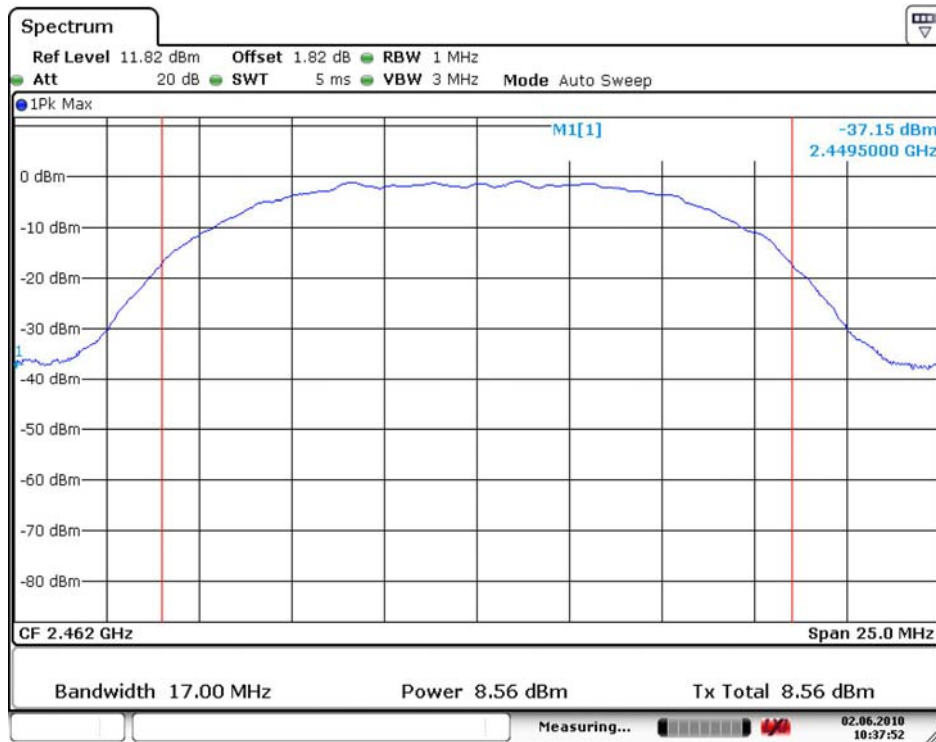



**Peak Conducted Output Power – 802.11g**

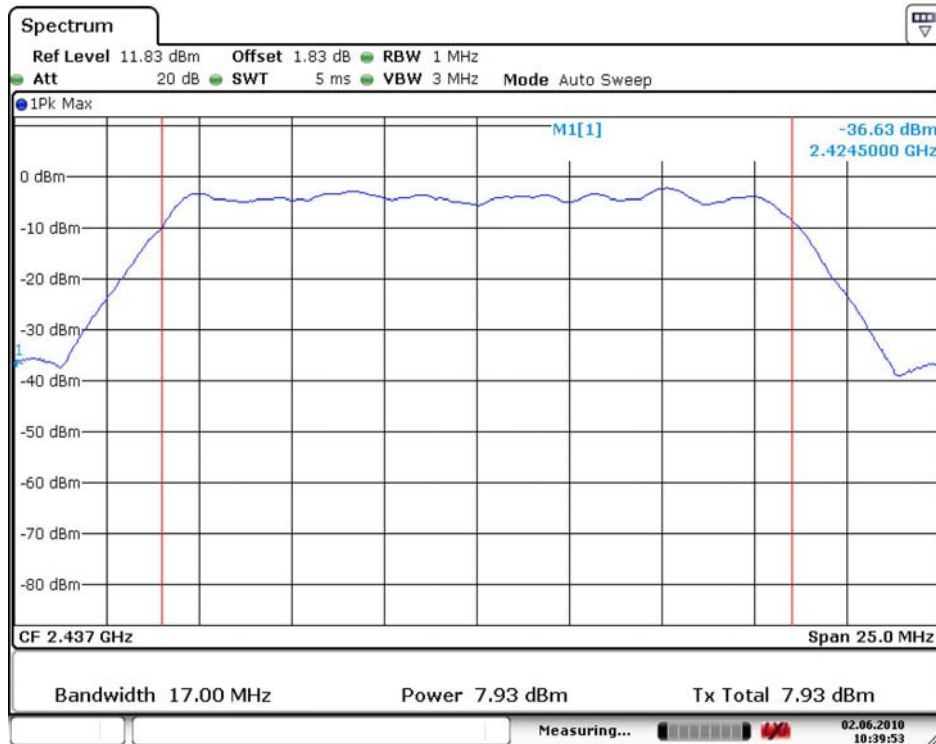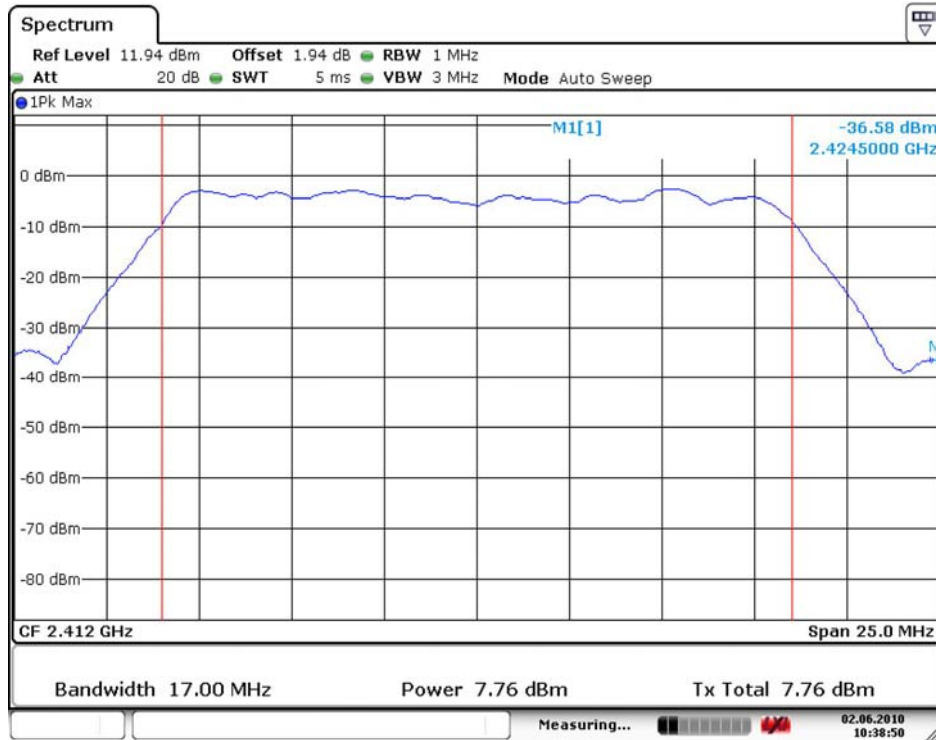


**Peak Conducted Output Power – 802.11g**

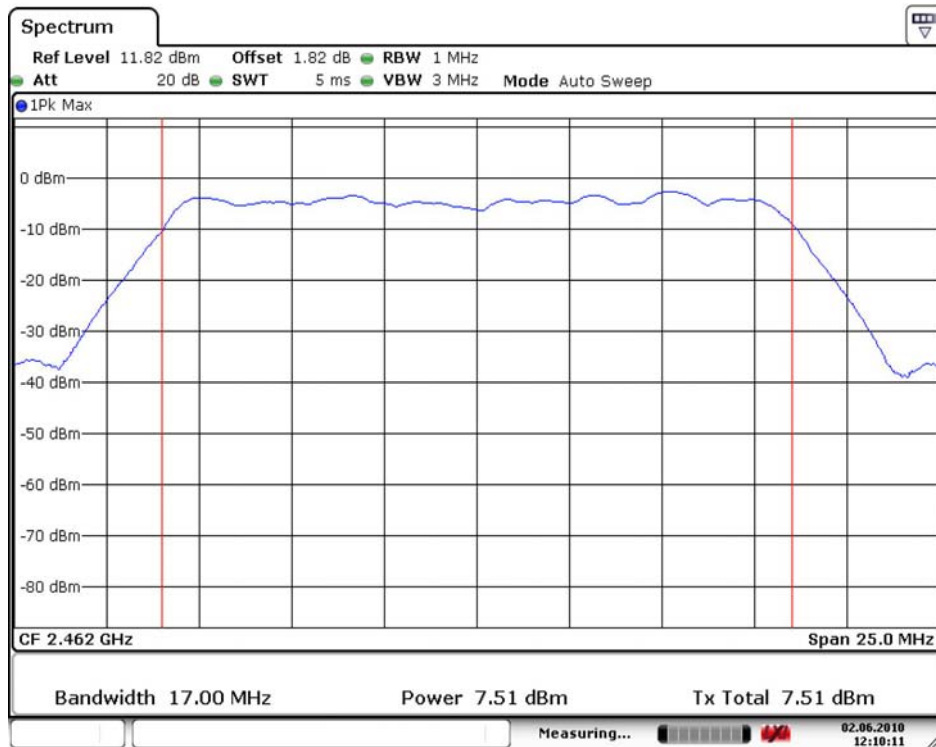

**Peak Conducted Output Power – 802.11n(HT20)**

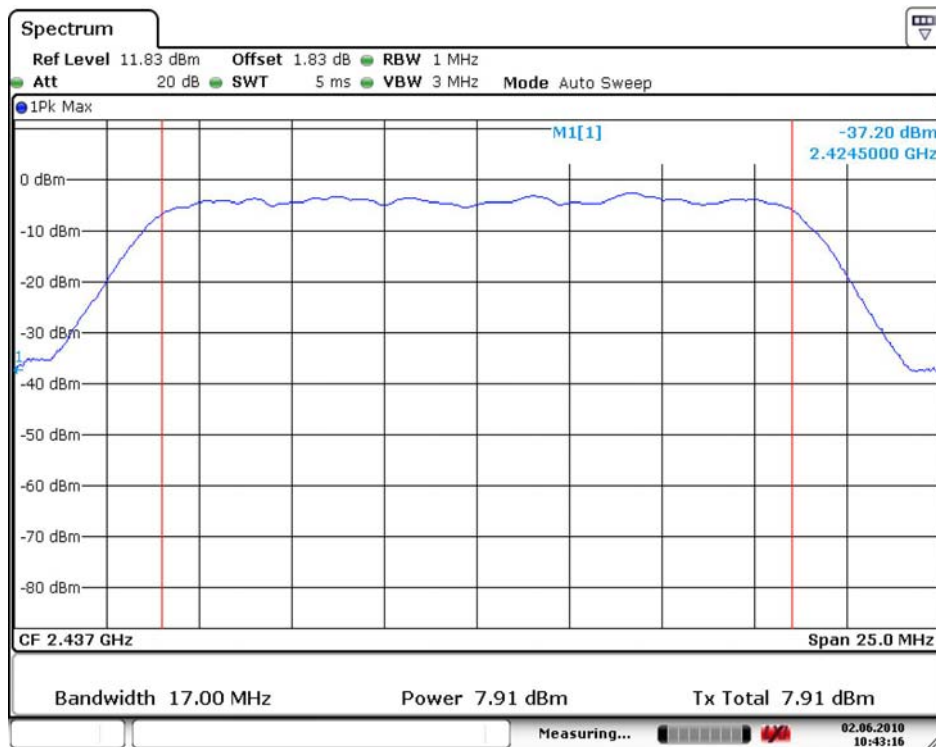
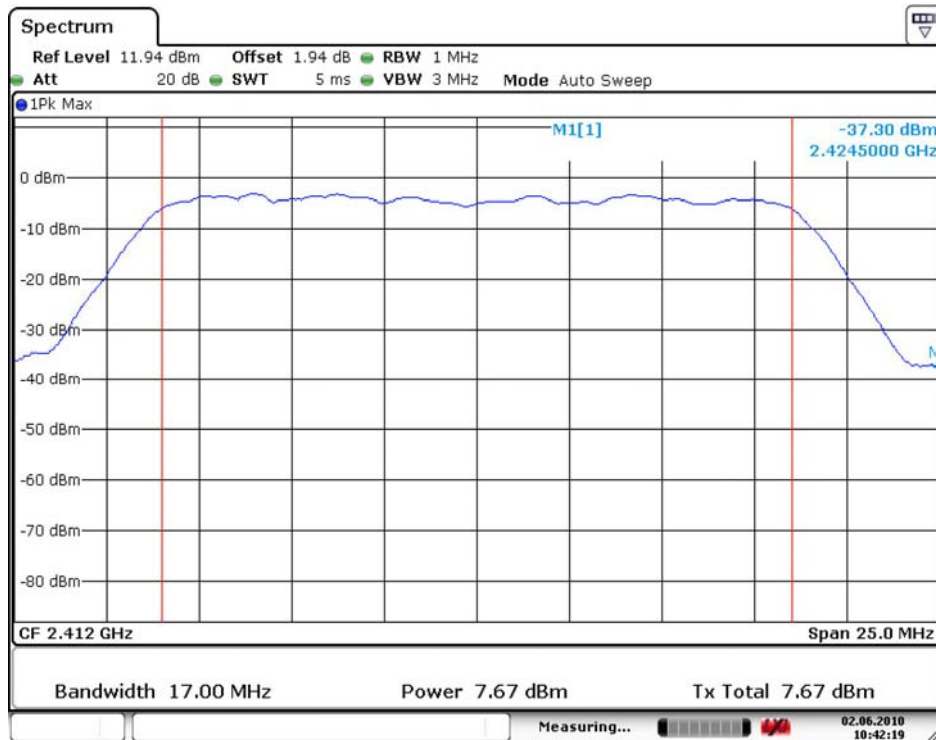


**Peak Conducted Output Power – 802.11n(HT20)**

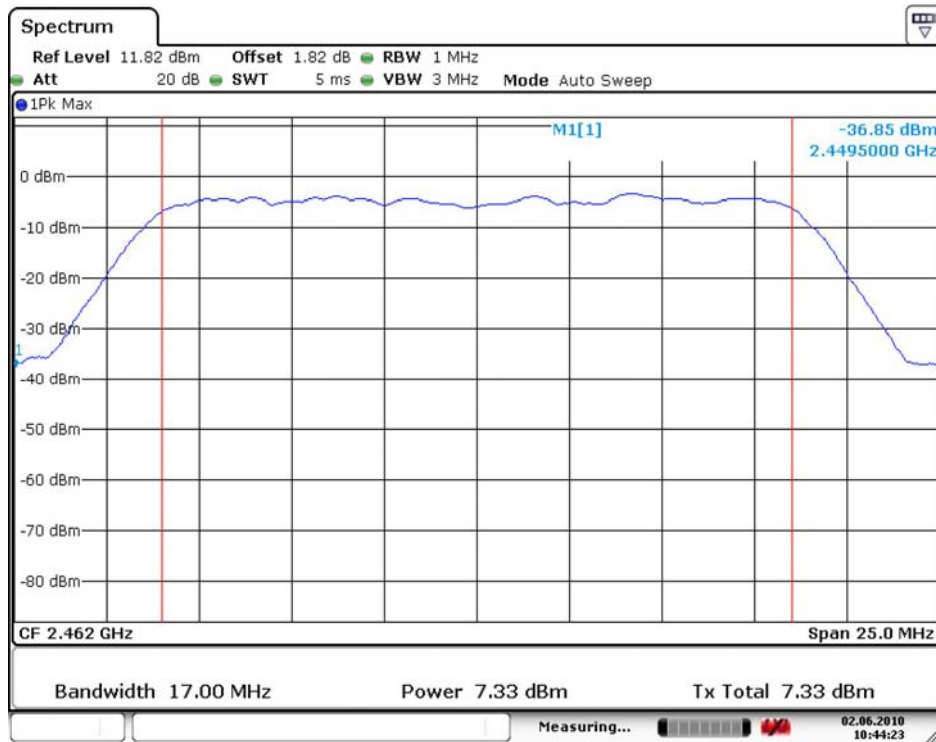




**Peak Conducted Output Power – 802.11n(HT40)**

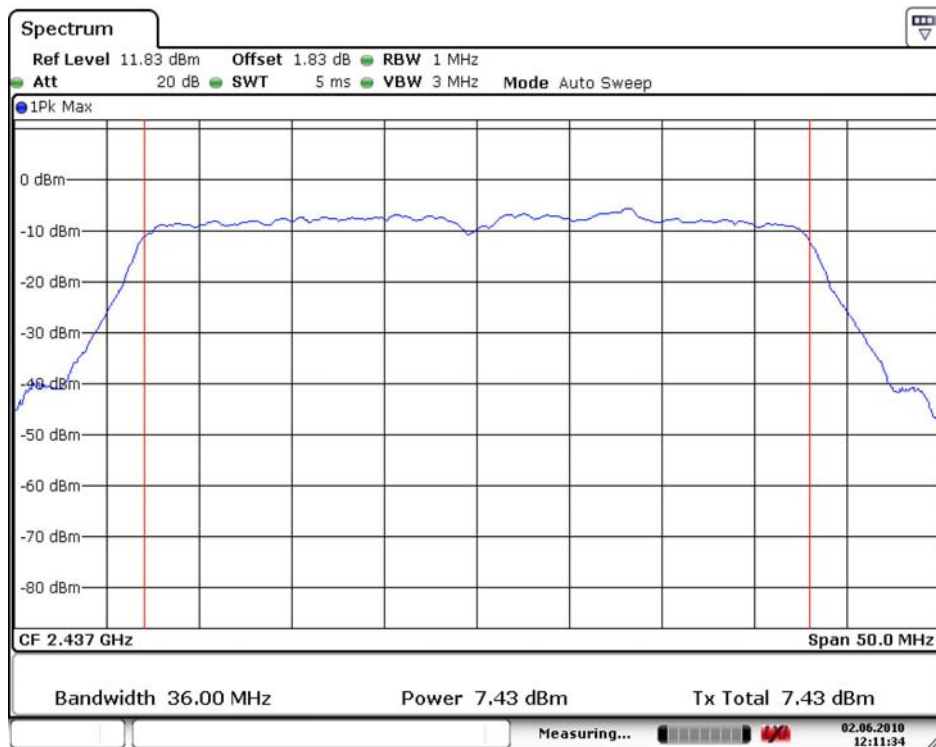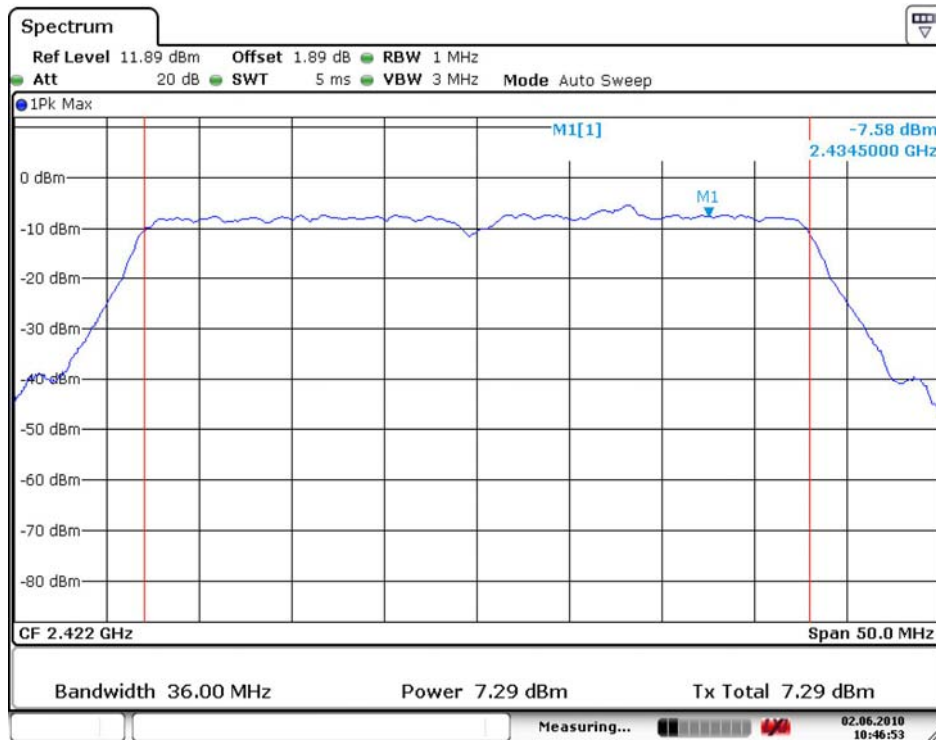

**Peak Conducted Output Power – 802.11n(HT40)**

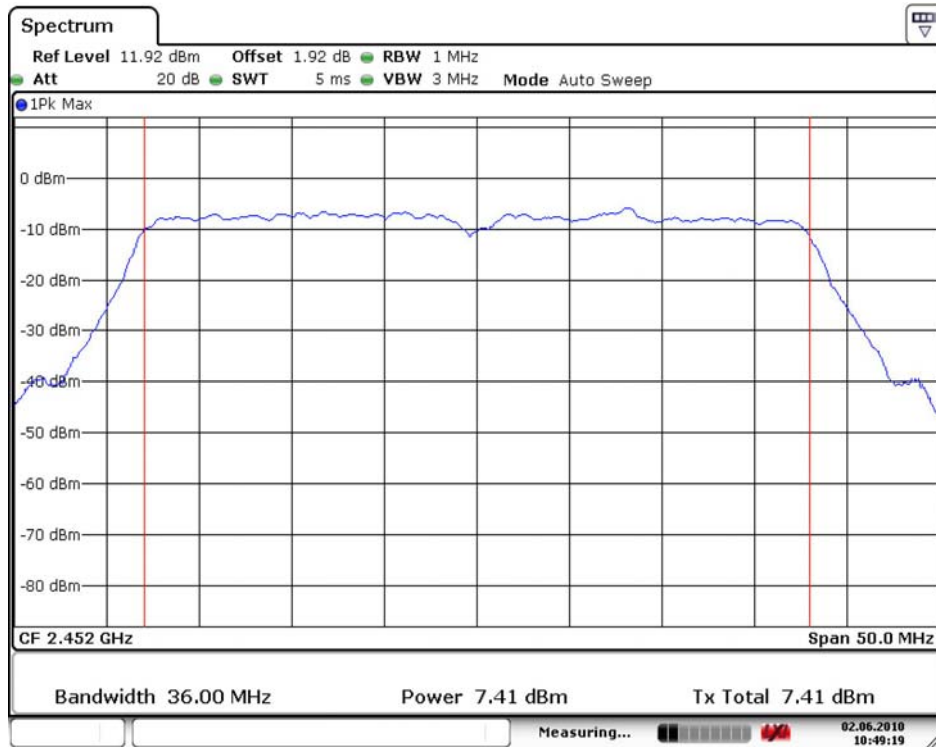

### 2.1.3 Power Spectral Density-15.247(d)

**Procedure:**

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

VBW = (VBW ≥ RBW)

Sweep = 100KHz(Span/3KHz)

Span = 300 KHz

Detector function = peak

Trace = max hold

**Measurement Data:**

Mode	Frequency (MHz)	Ch.	Test Results	
			dBm	Result
802.11b	2412	1	-23.68	Complies
	2437	6	-23.42	Complies
	2462	11	-24.29	Complies
802.11g	2412	1	-36.43	Complies
	2437	6	-36.53	Complies
	2462	11	-36.98	Complies

Mode	Frequency (MHz)	Ch.	Test Results	
			dBm	Result
802.11n (HT20)	2412	1	-35.84	Complies
	2437	6	-34.94	Complies
	2462	11	-36.08	Complies
802.11n (HT40)	2422	3	-38.52	Complies
	2437	6	-37.89	Complies
	2452	9	-38.59	Complies



- See next pages for actual measured spectrum plots.


**Minimum Standard:**

Power Spectral Density	< 8dBm @ 3kHz BW
------------------------	------------------



See next pages for actual measured spectrum plots.


## 802.11b Power Density Measurement

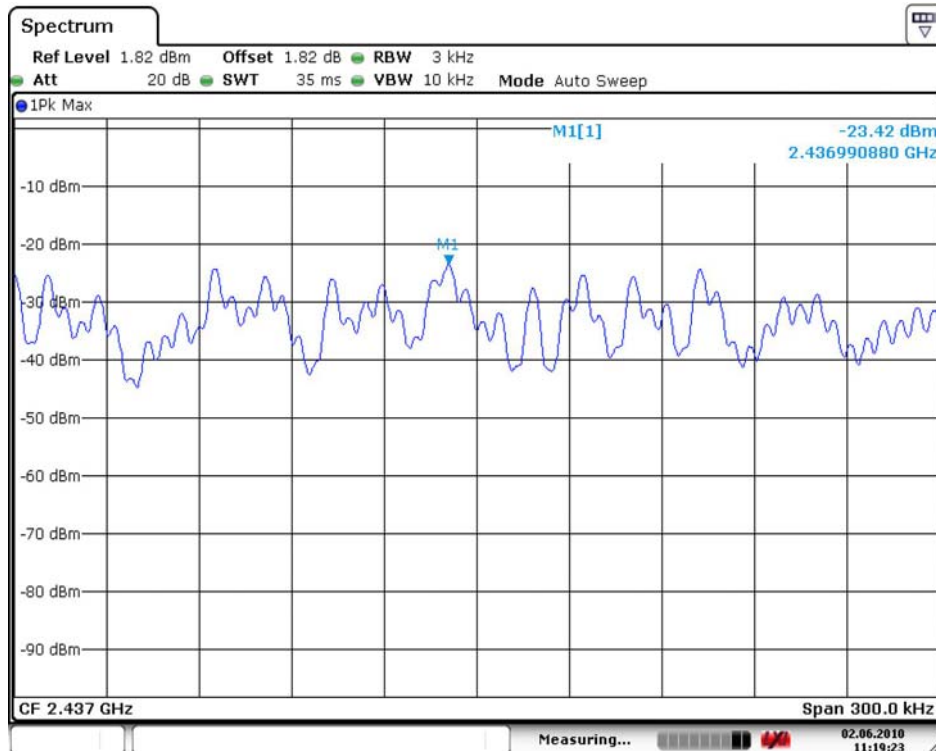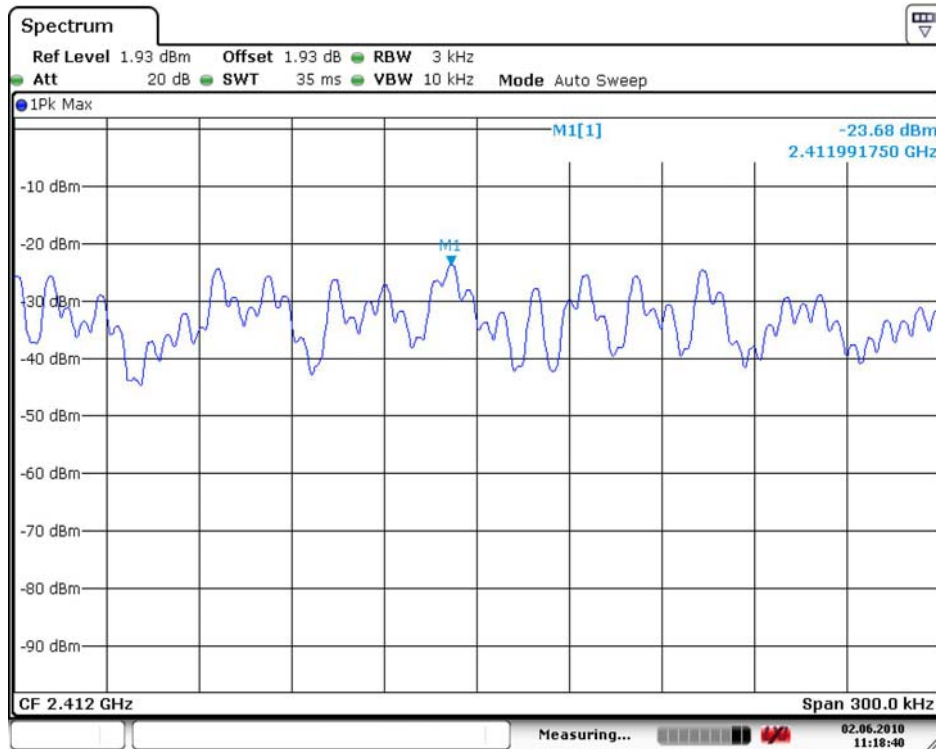

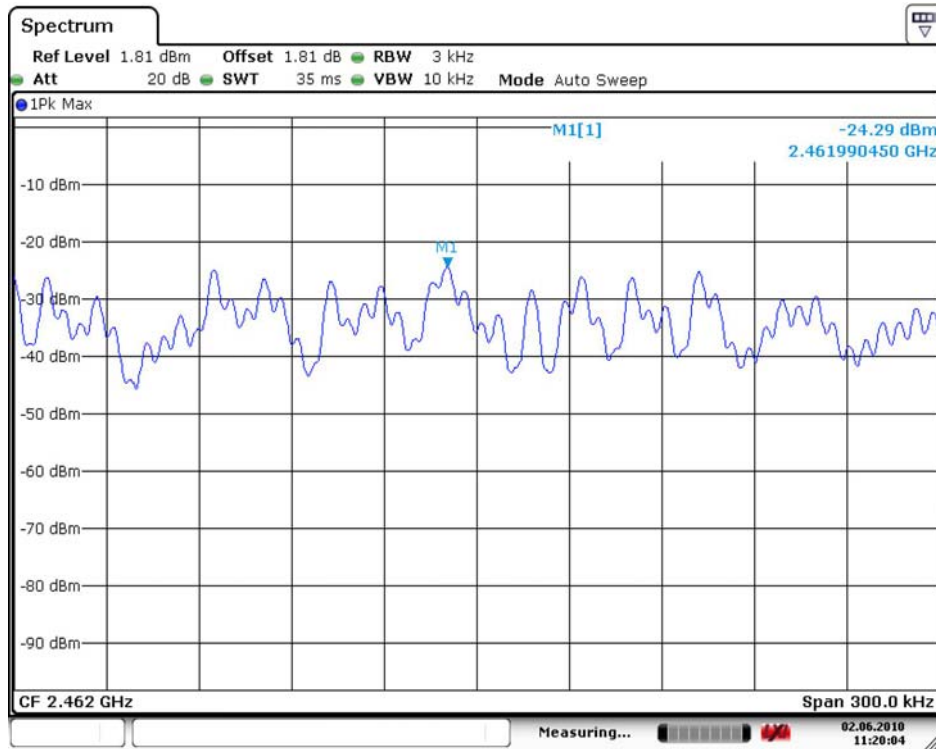



## 802.11g Power Density Measurement

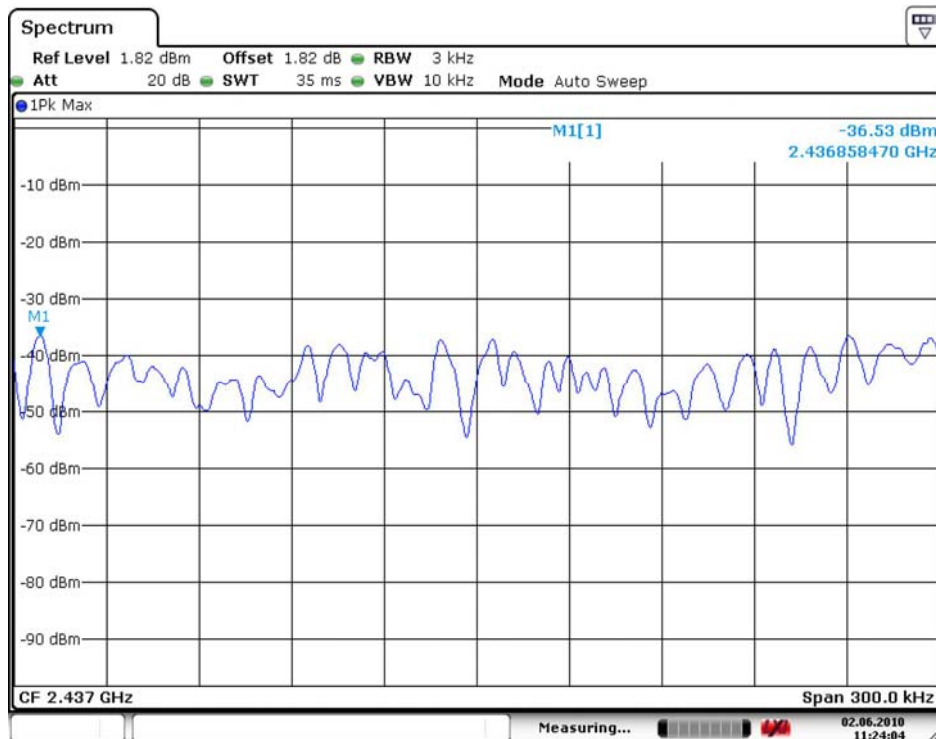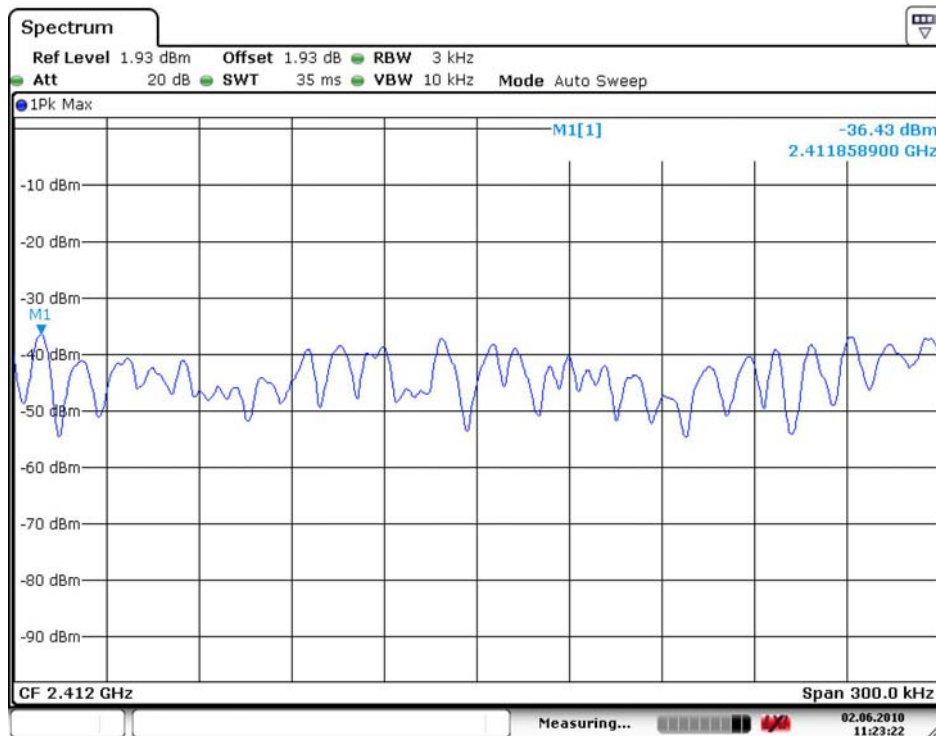


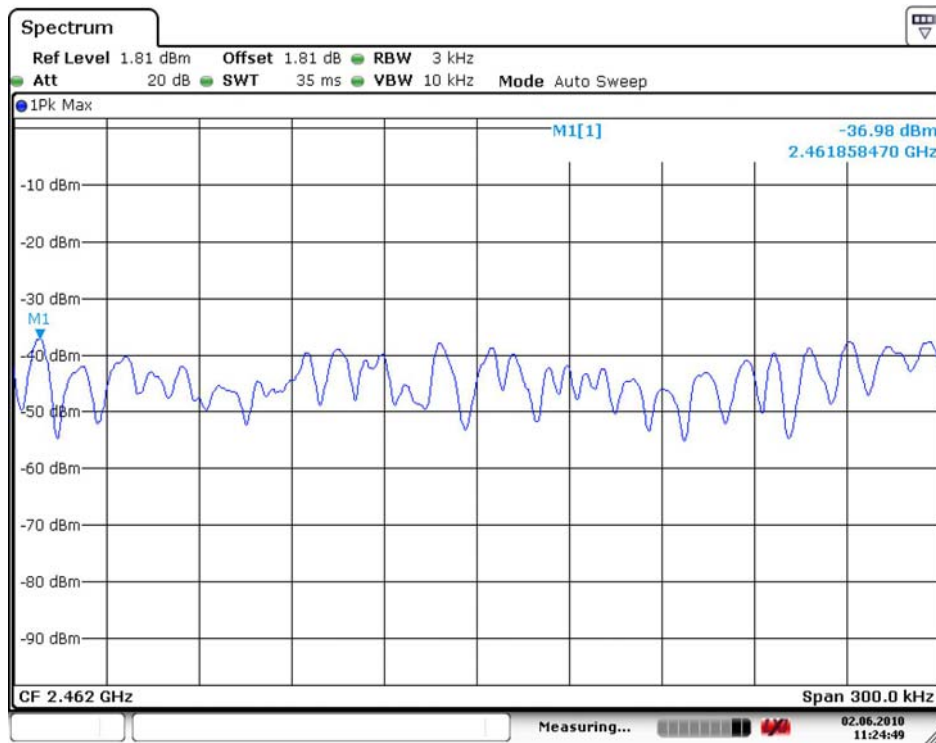






## 802.11n(HT20) Power Density Measurement

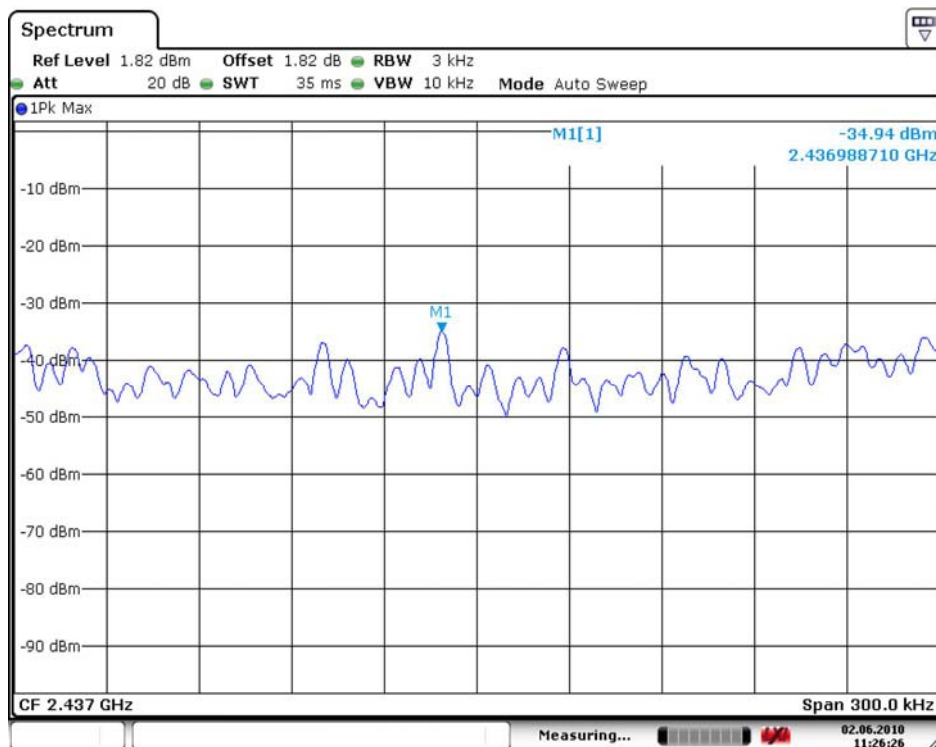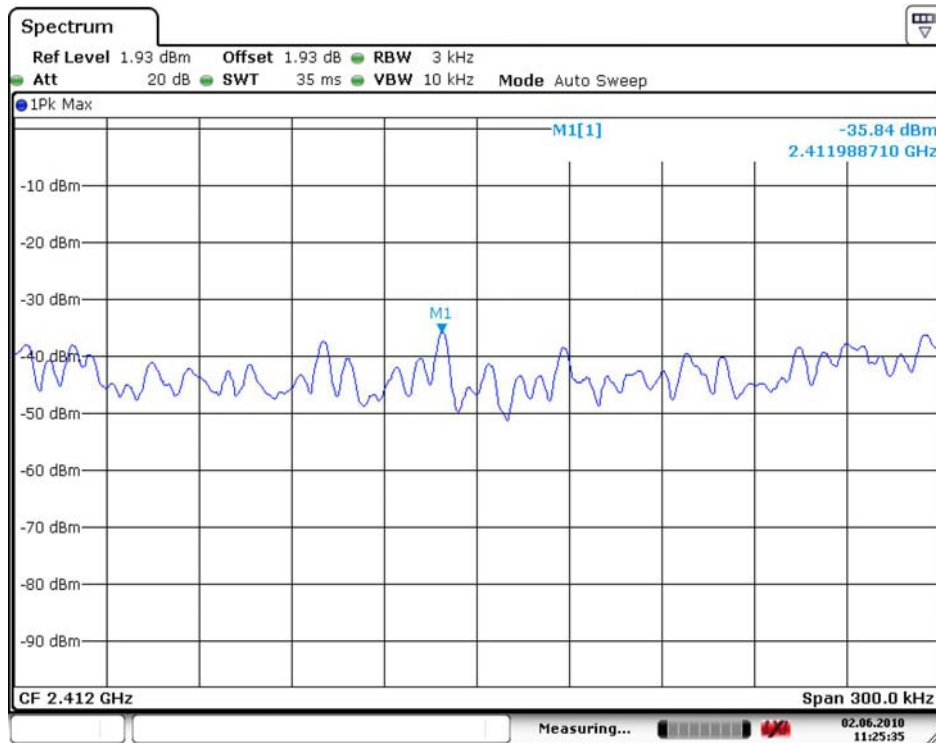

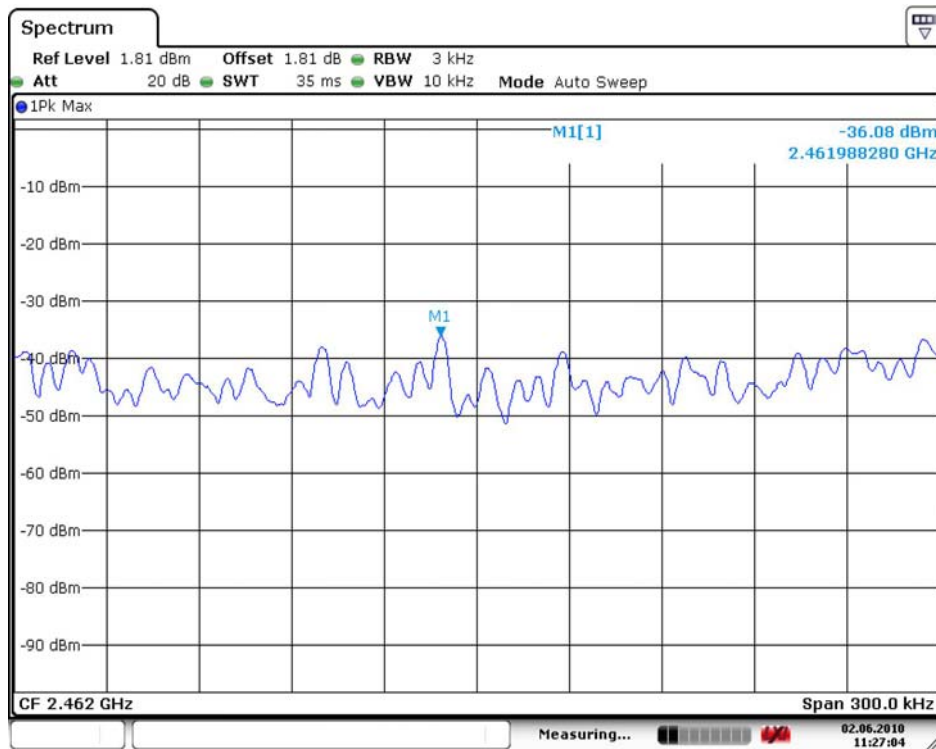

## 802.11n(HT40) Power Density Measurement

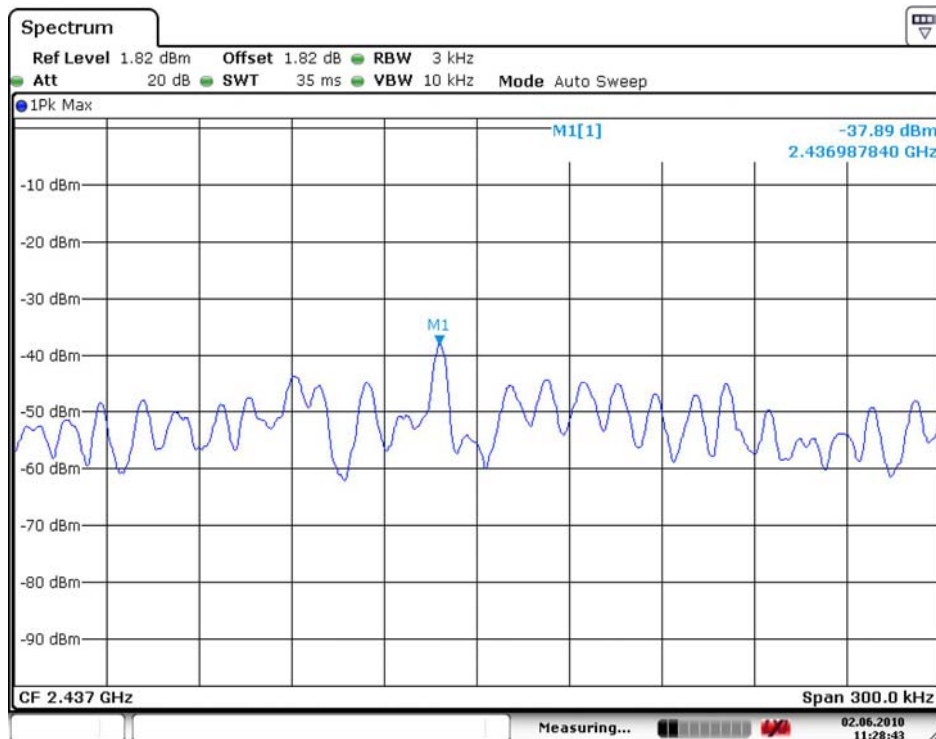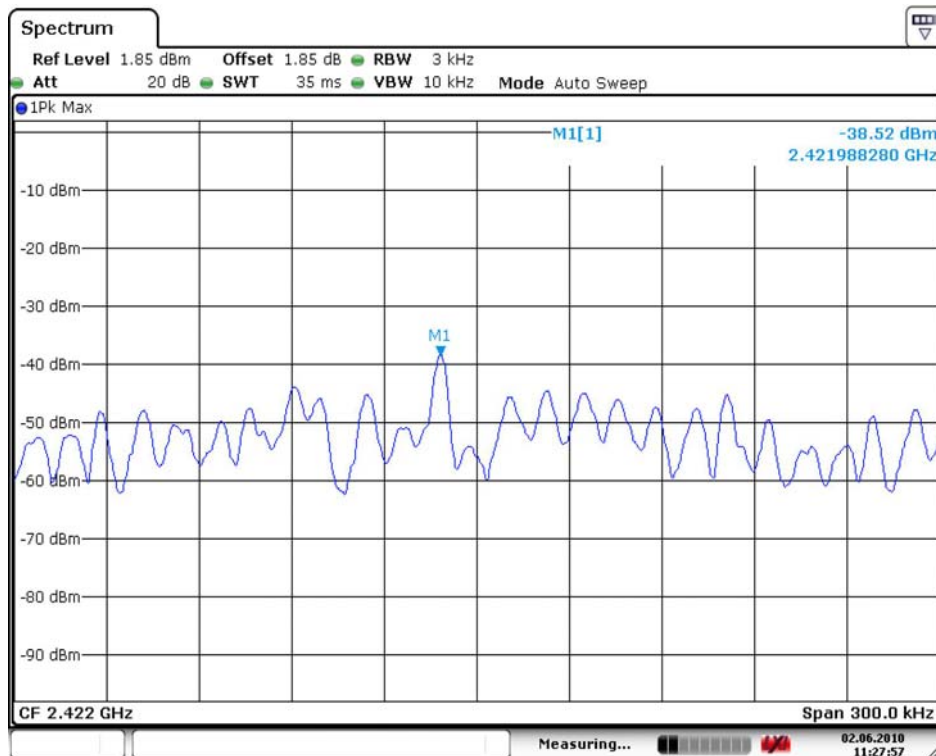

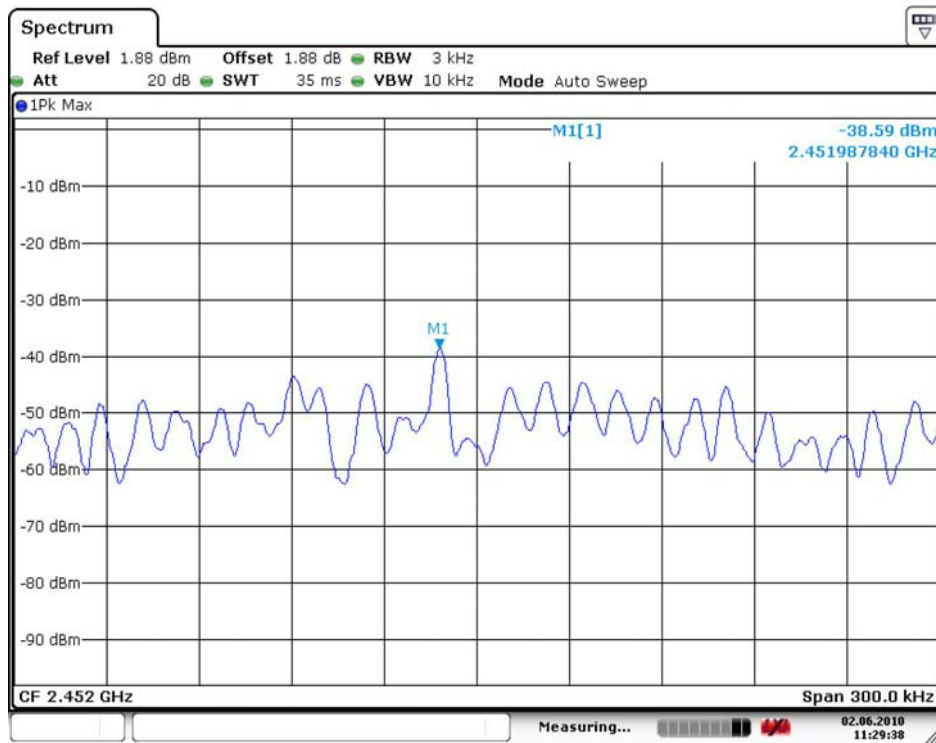

## 2.1.4 Band - edge -15.247(d)

### Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 40 MHz

Detector function = peak

Trace = max hold

Sweep = auto



### Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------

See next pages for actual measured spectrum plots.


### 802.11b Band-edge Measurements

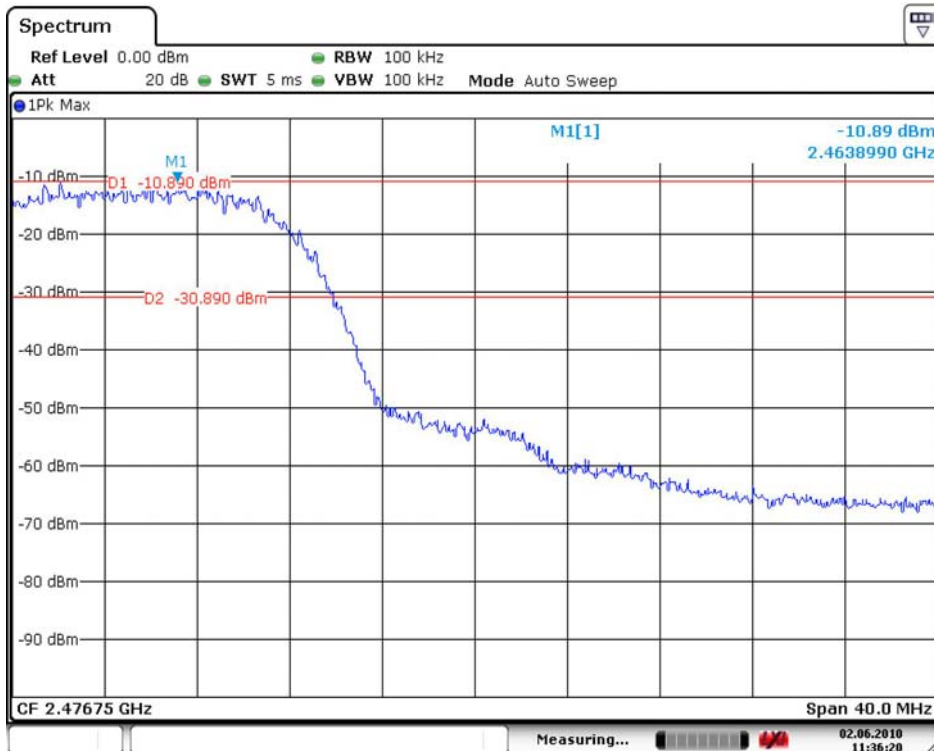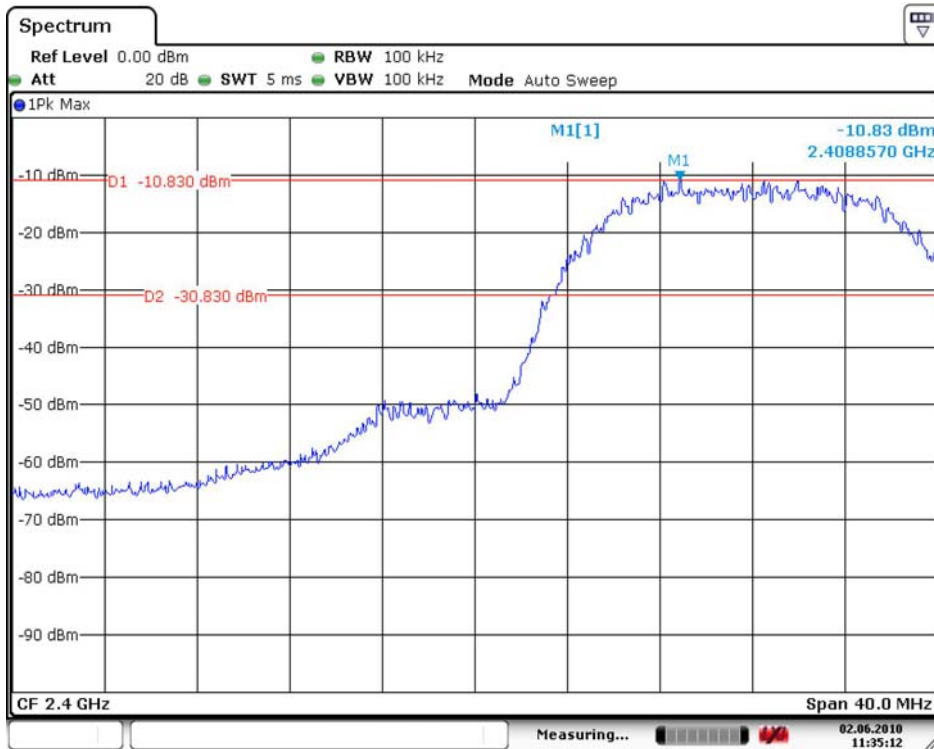

**Band – edge (at 20 dB blow) – Low channel (802.11b)  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

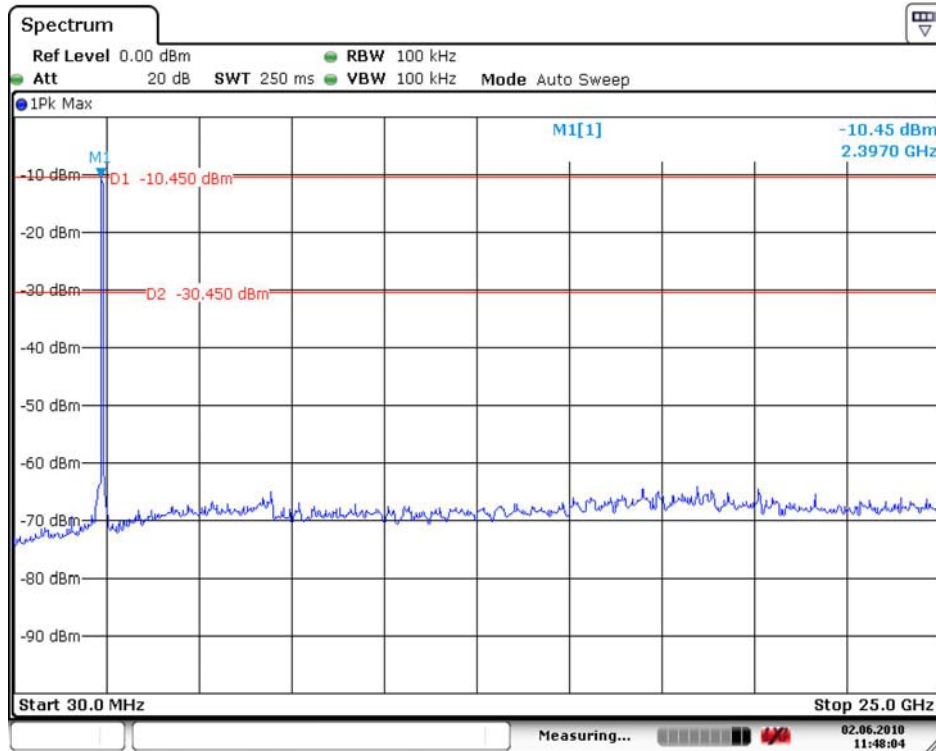


**Band – edge (at 20 dB blow) – Mid channel (802.11b)  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**


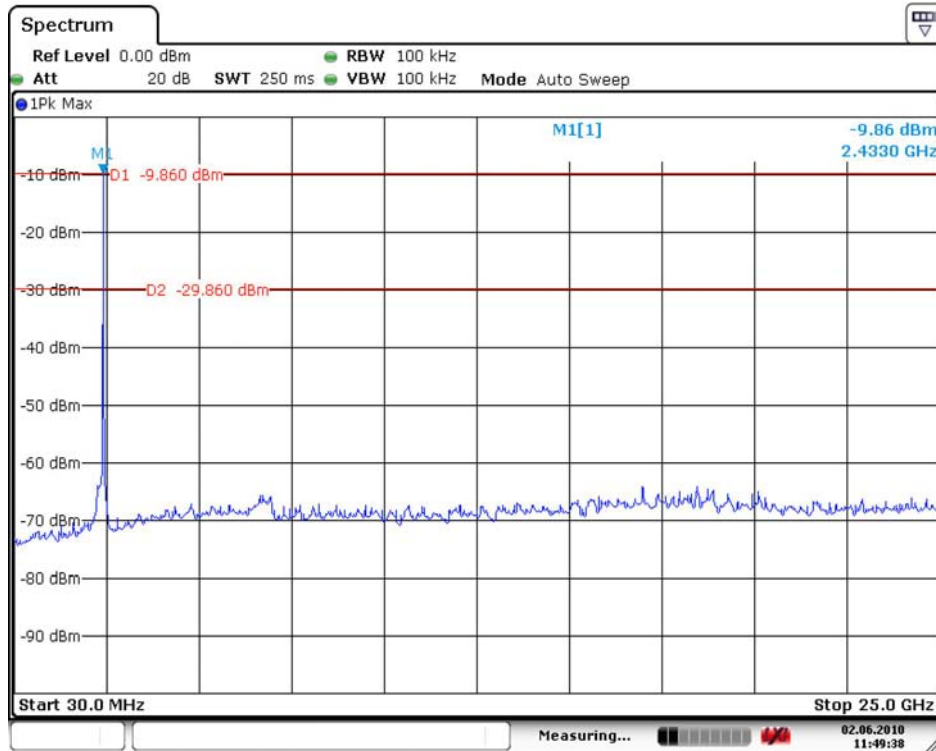





**Band – edge (at 20 dB blow) – High channel(802.11b)  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

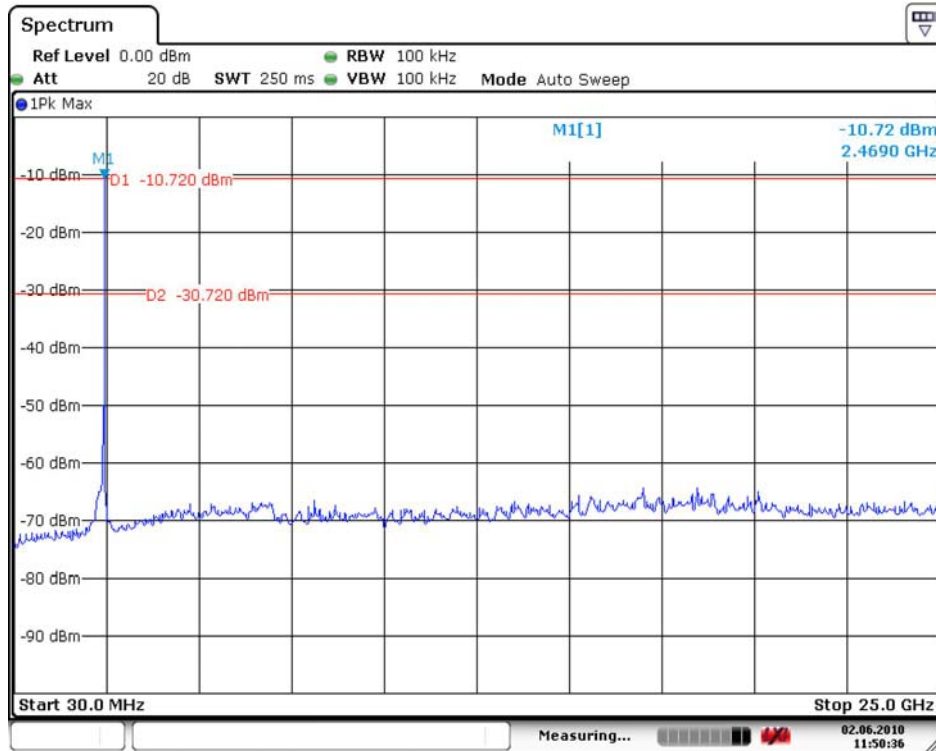


**802.11g Band-edge Measurements**

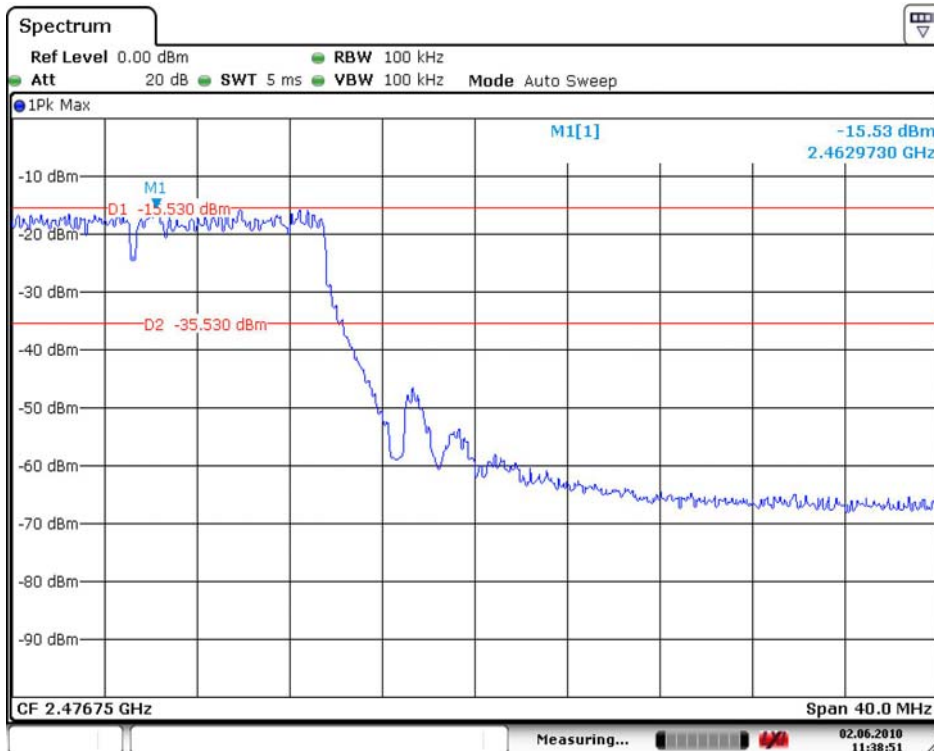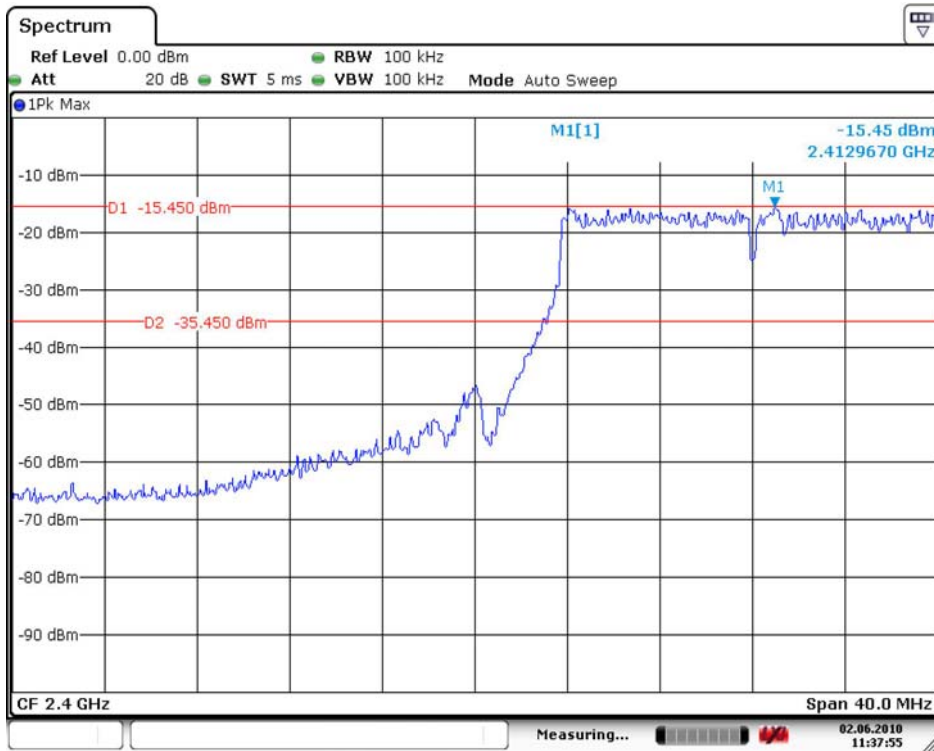


**Band – edge (at 20 dB blow) – Low channel (802.11g)  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

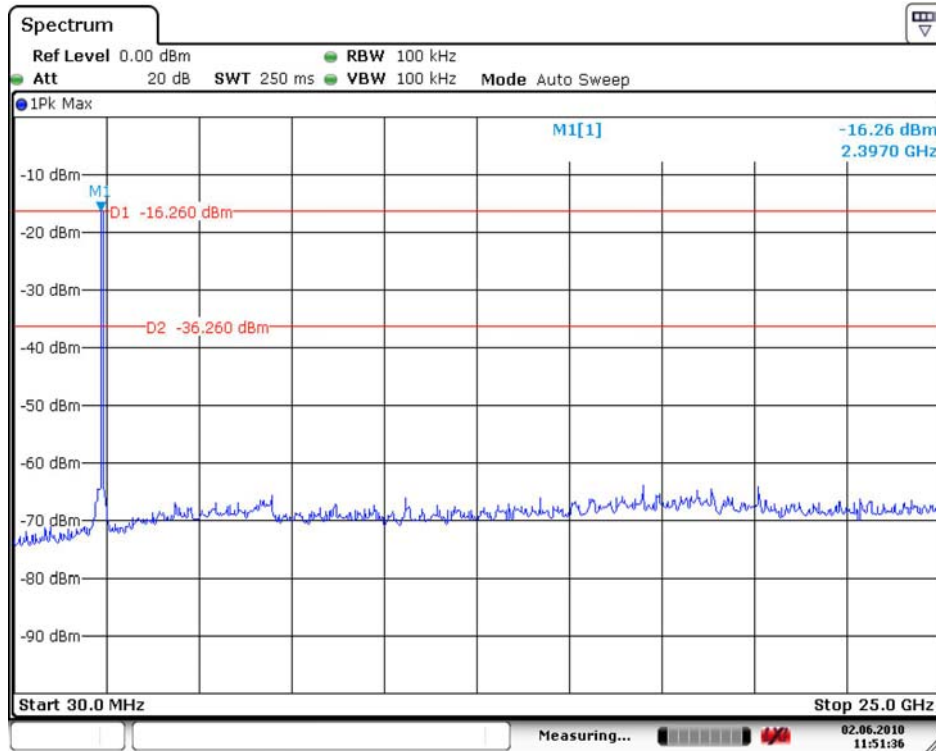



**Band – edge (at 20 dB blow) – Mid channel(802.11g)  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

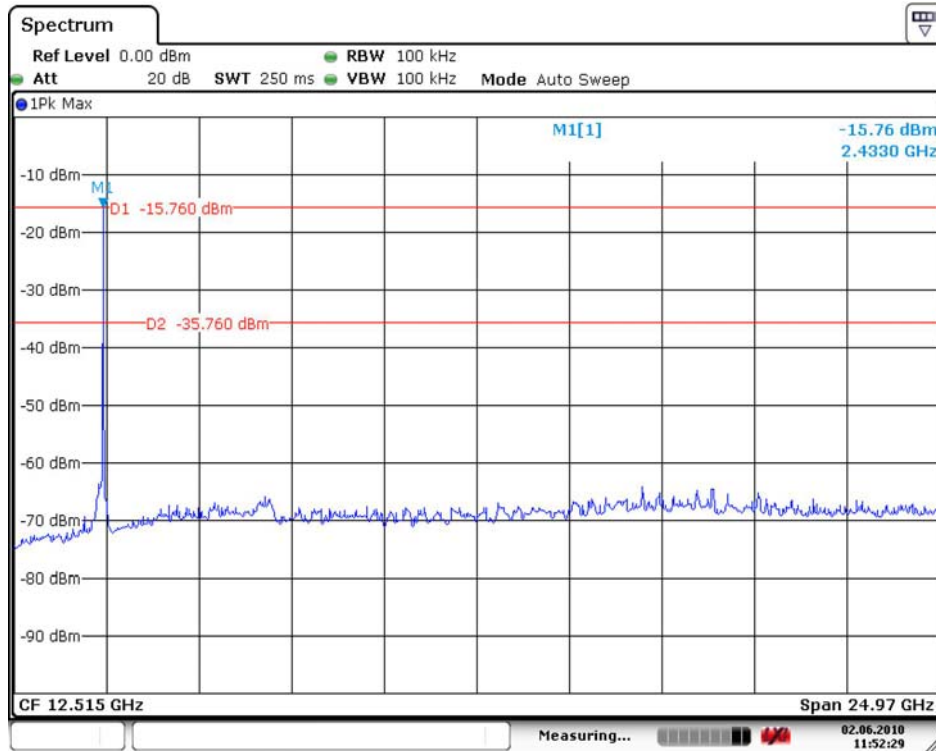


**Band – edge (at 20 dB blow) – High channel(802.11g)  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

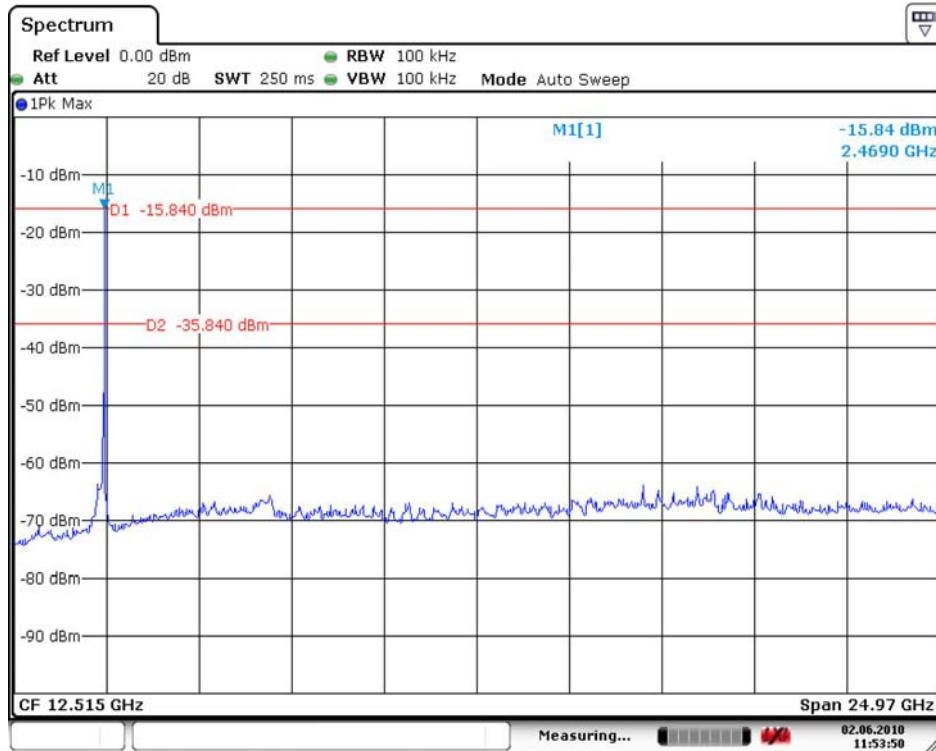


**802.11n(HT20) Band-edge Measurements**

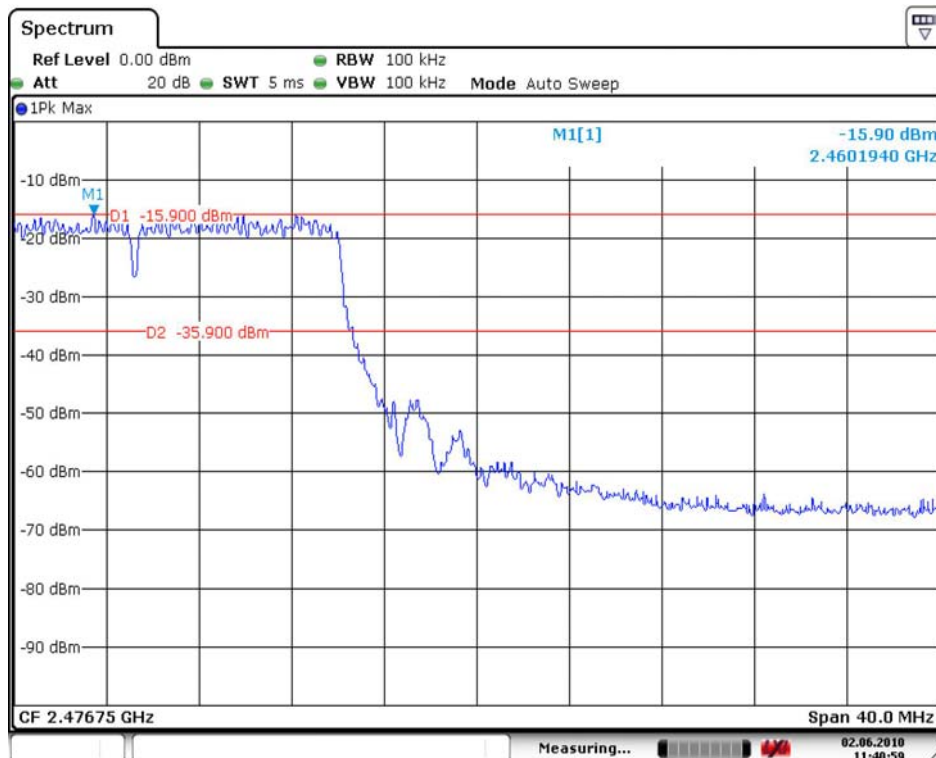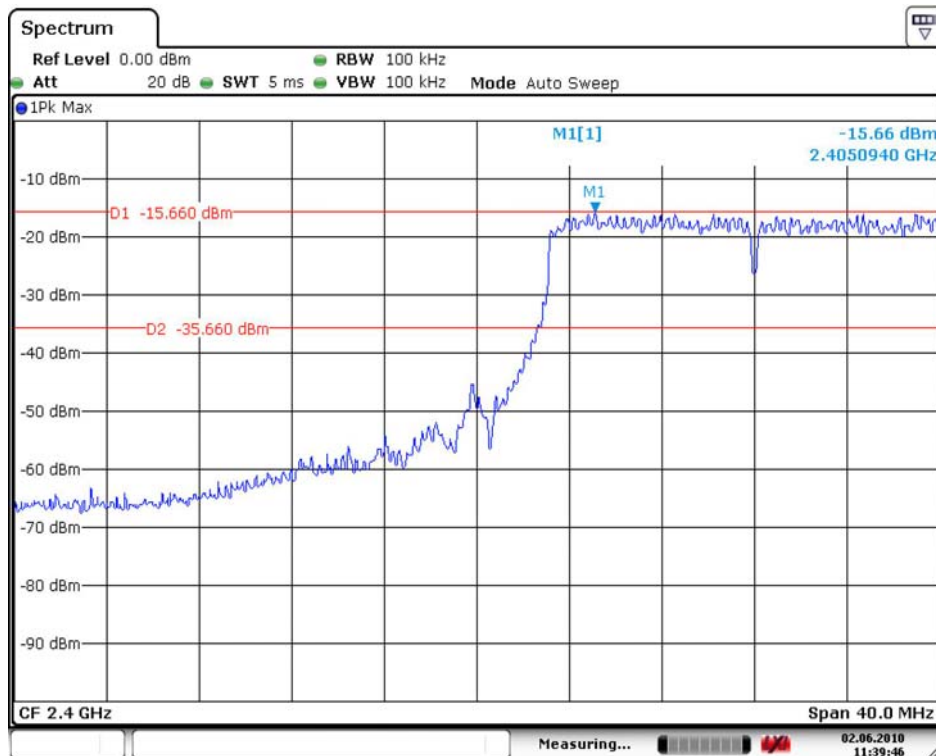

**Band – edge (at 20 dB blow) – Low channel (802.11n(HT20))**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

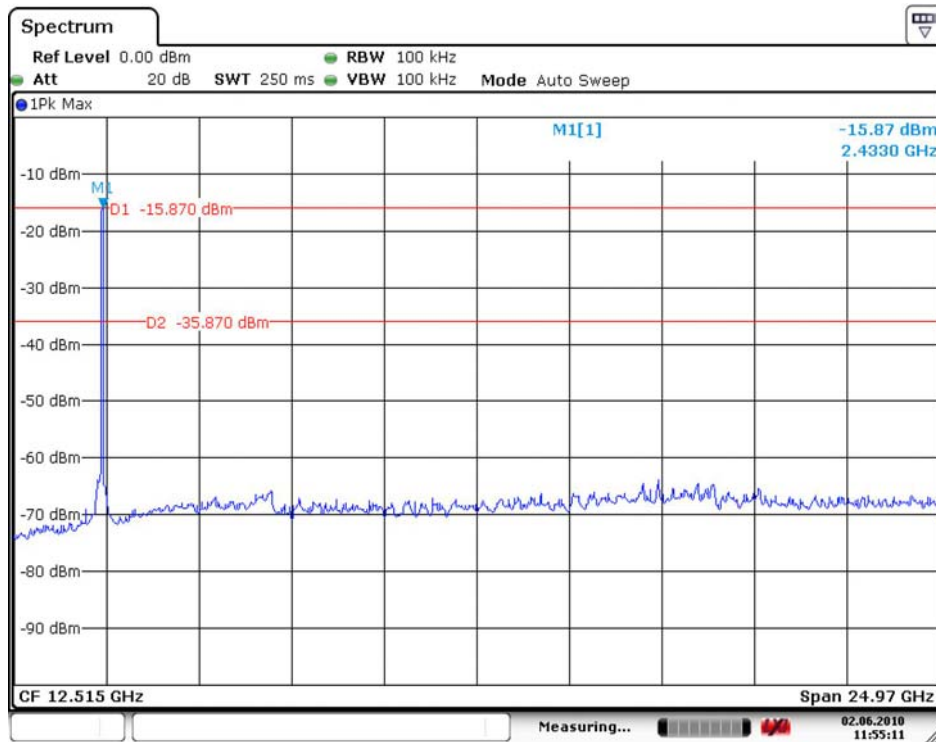


**Band – edge (at 20 dB blow) – Mid channel (802.11n(HT20))**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**


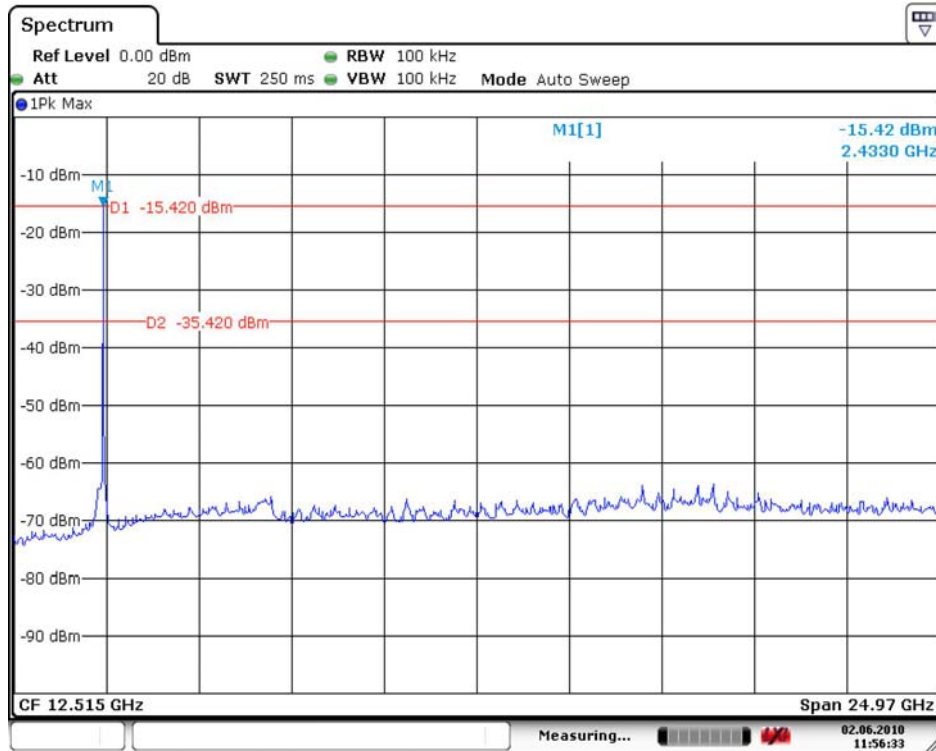





**Band – edge (at 20 dB blow) – High channel(802.11n(HT20))**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

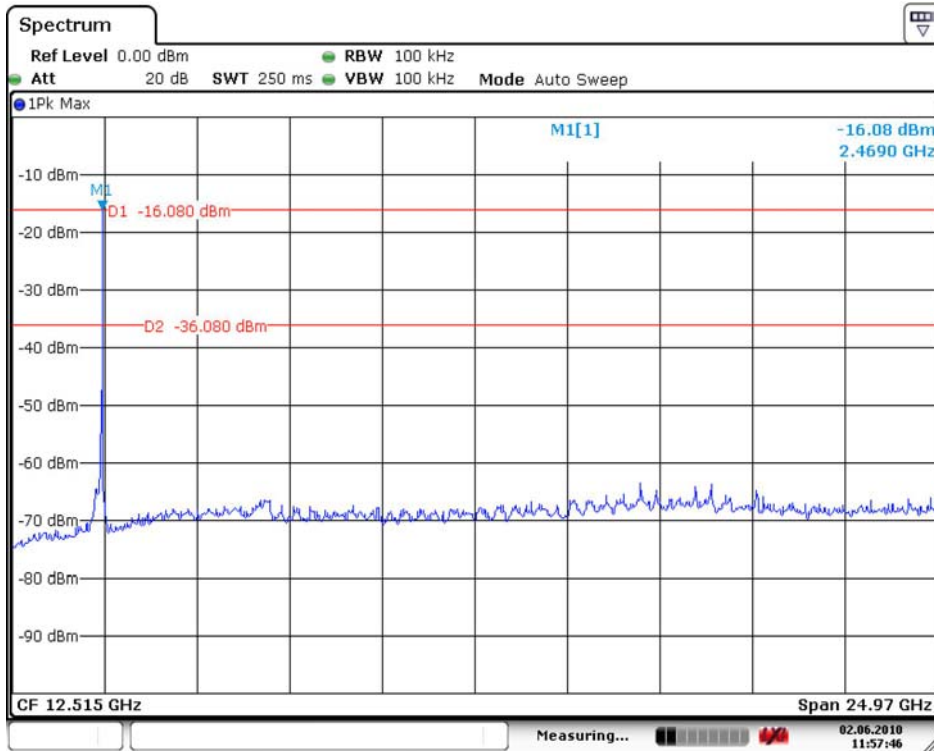


### 802.11n(HT40) Band-edge Measurements

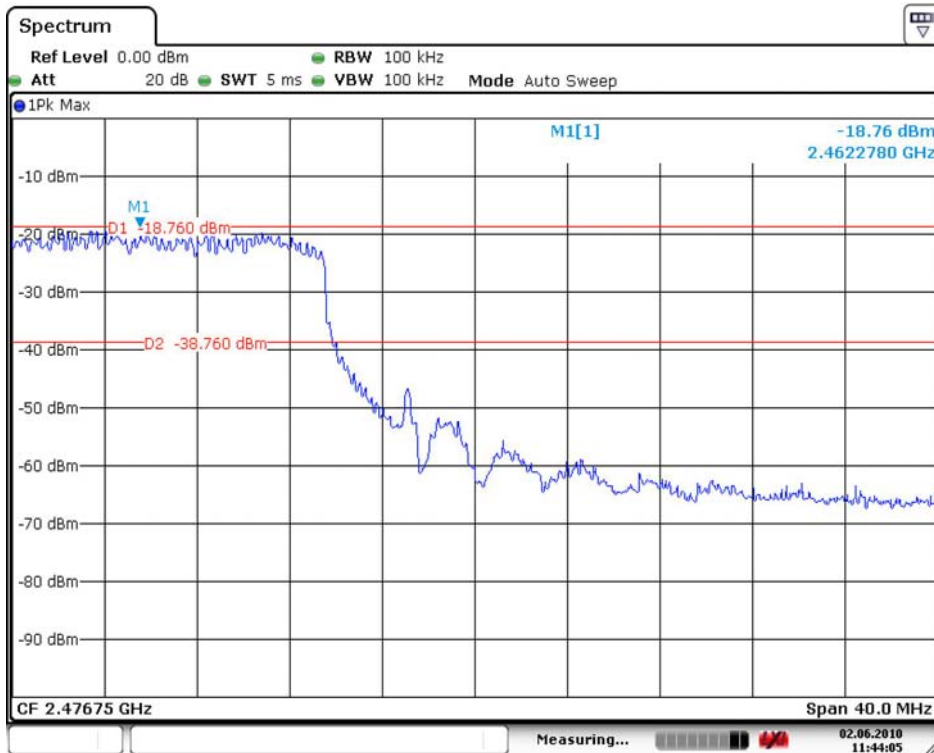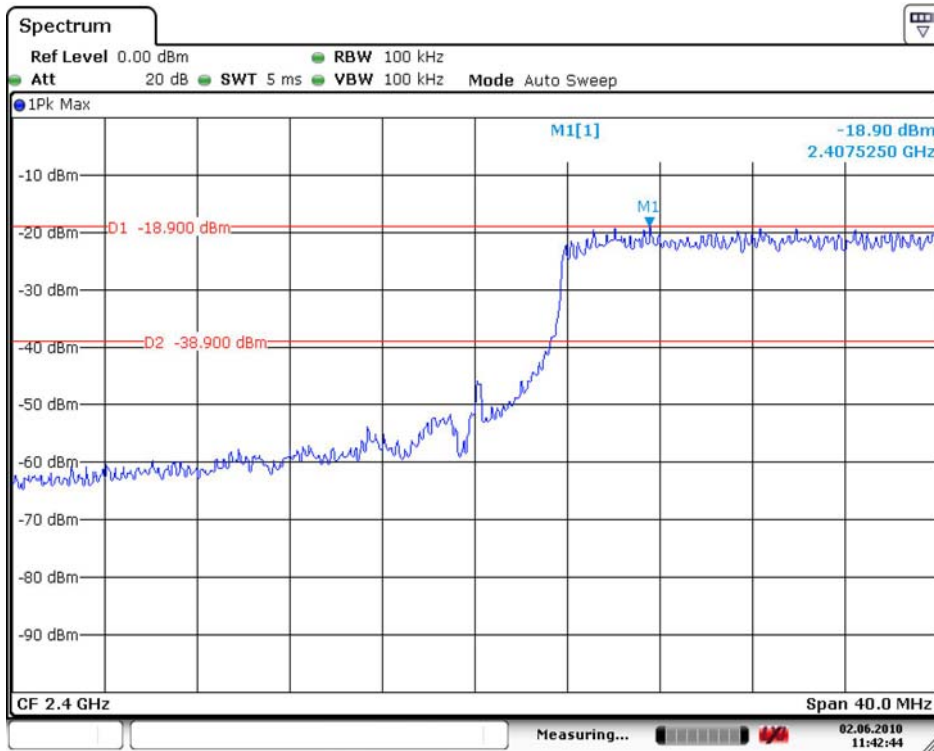


**Band – edge (at 20 dB blow) – Low channel (802.11n(HT40))**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

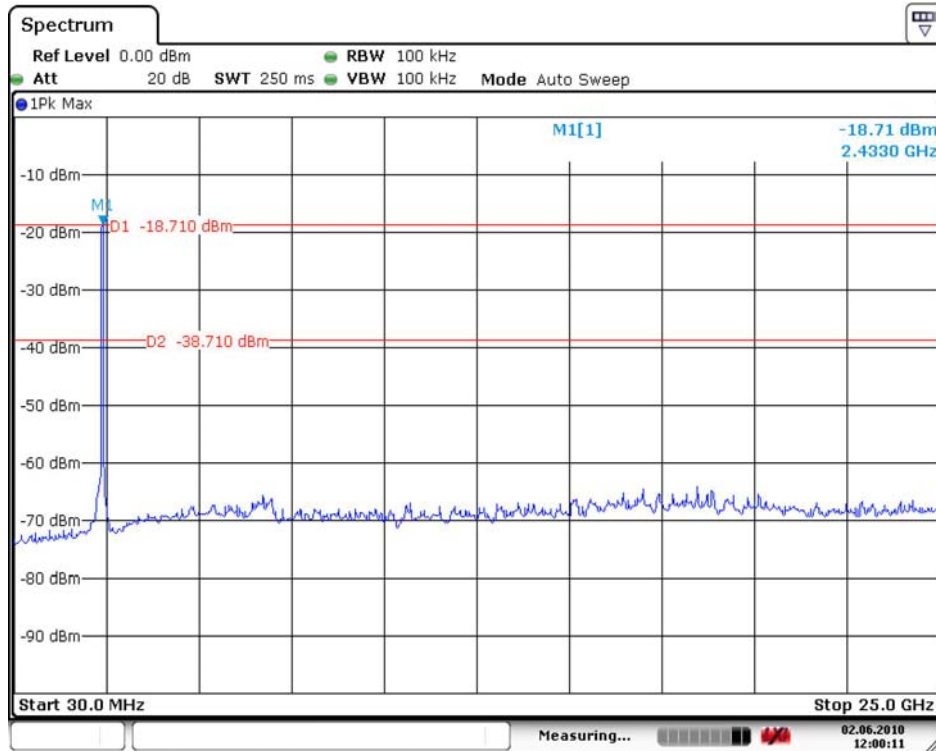

**Band – edge (at 20 dB blow) – Mid channel(802.11n(HT40))**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

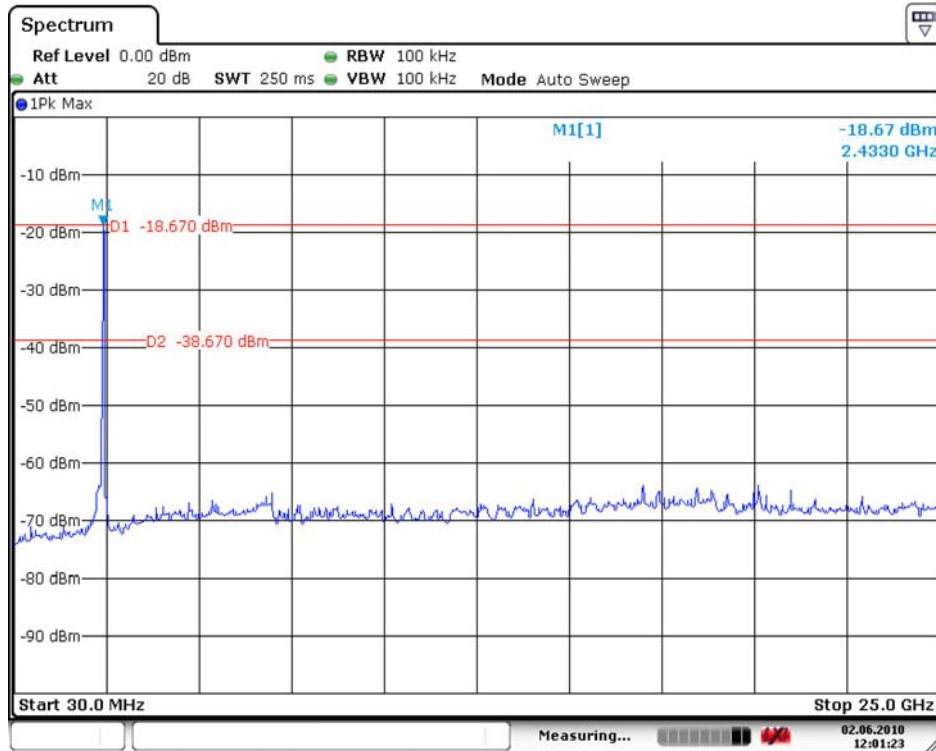

**Band – edge (at 20 dB blow) – High channel(802.11n(HT40))**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**

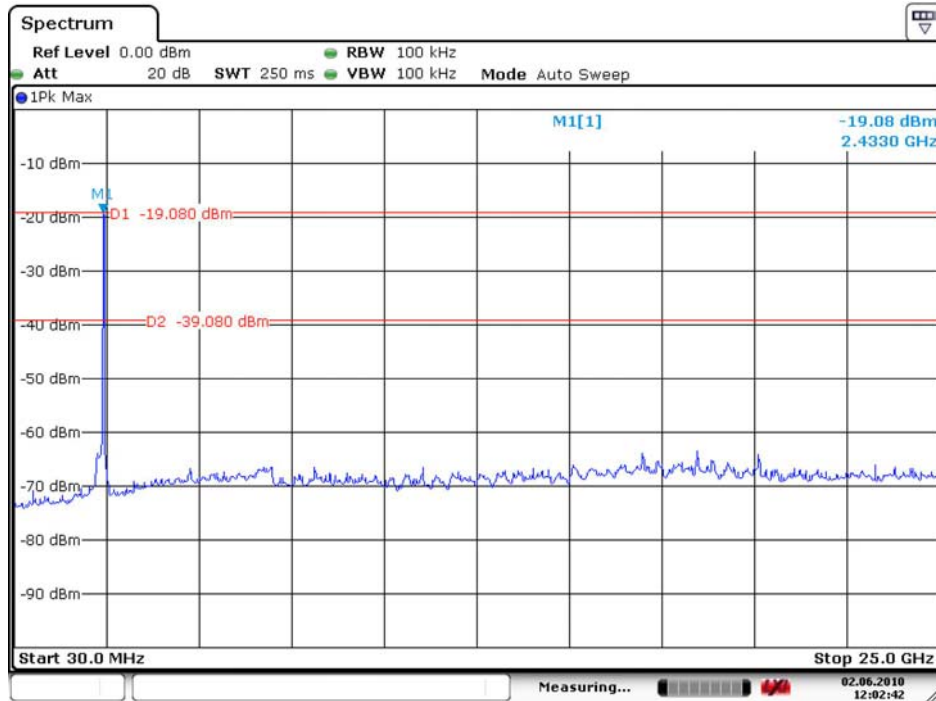

Date: 2.JUN.2010 12:02:42

## 2.1.5 Field Strength of Emissions 15.209

### Test Location

Testing was performed at a test distance of 3 meter Open Area Test Site

### Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

#### The spectrum analyzer is set to:


Below 1GHz :

RBW=100KHz/VBW=300KHz/Sweep=AUTO

Above 1GHz:

(a) PEAK:RBW=VBW=1MHz/Sweep=AUTO

(b) AVERAGE:RBW=1MHz/VBW=10Hz/Sweep=AUTO

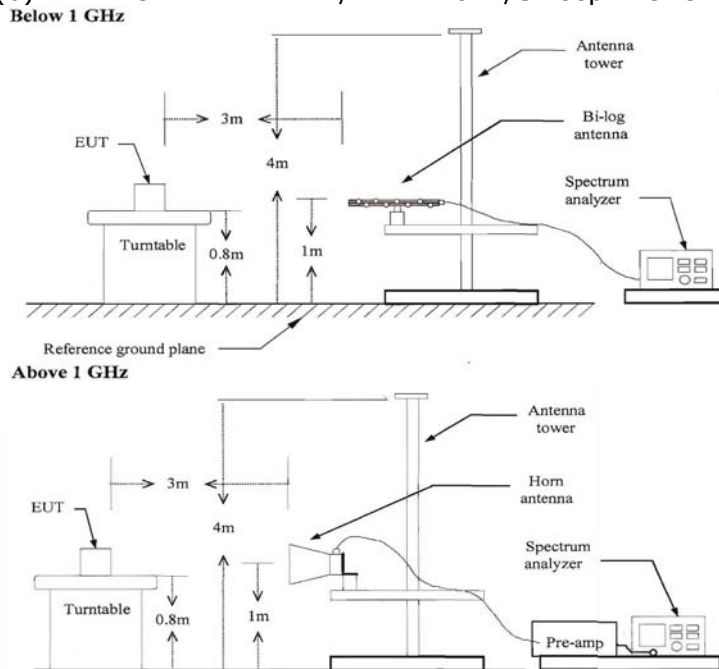

### Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m
30-88	100**	40
88-216	150**	43.5
216-960	200**	46
Above 960	500	54

\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

**Test Results**

EUT	Wireless LAN GW (Wireless LAN USB Dongle)	Measurement Detail	
Model	MW-P150MS	Frequency Range	Below 1000MHz
Channel	-	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
343.32	33.06	-12.94	Quasi-Peak

**Test Data**

Indicated		Antenna		Correction Factor		Corrected Amplitude (dBuV/m)	Section 15.109		
Frequency (MHz)	Amplitude (dBuV/m)	Polar. (H/V)	Height (m)	Ant. (dB)	Cable (dB)		Applicable Limit		Margin (dB)
							(dBuV/m)	(uV/m)	
39.22	7.9	V	3.5	13.21	3.25	24.34	40	100	-15.66
60.82	9.6	V	3.2	11.84	2.31	23.78	40	100	-16.22
69.21	8.8	H	3.8	10.22	2.39	21.40	40	100	-18.60
89.63	10.1	H	2.8	8.68	2.50	21.30	43.5	150	-22.20
119.08	10.5	H	2.2	11.39	2.30	24.15	43.5	150	-19.35
194.75	9.9	V	2.5	9.72	2.97	22.56	43.5	150	-20.94
322.99	6.3	V	2.1	13.20	3.68	23.17	46.0	200	-22.83
343.32	15.5	H	2.4	13.68	3.85	33.06	46.0	200	-12.94
400.94	10.1	V	1.9	14.88	4.11	29.04	46.0	200	-16.96
472.45	8.4	H	1.2	16.45	4.53	29.34	46.0	200	-16.66
472.50	7.9	V	1.5	16.45	4.53	28.84	46.0	200	-17.16
686.62	5.1	H	1.0	19.95	5.53	30.59	46.0	200	-15.41

**Test Results**

EUT	Wireless LAN GW (Wireless LAN USB Dongle)	Measurement Detail	
Model	MW-P150MS	Frequency Range	1-25GHz
Channel	Low	Detector function	Average/Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	Average/Peak

**Test Data – 802.11b**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Test Data – 802.11g**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								



**Test Data – 802.11n(HT20)**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Test Data – 802.11n(HT40)**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Restricted band edge test data**

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]
				Antenna	Amp. Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Test Results**

EUT	Wireless LAN GW (Wireless LAN USB Dongle)	Measurement Detail	
Model	MW-P150MS	Frequency Range	1-25GHz
Channel	Mid	Detector function	Average/Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	Average/Peak

**Test Data – 802.11b**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Test Data – 802.11g**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Test Data – 802.11n(HT20)**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Test Data – 802.11n(HT40)**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Restricted band edge test data**

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]
				Antenna	Amp. Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

**Test Results**

EUT	Wireless LAN GW (Wireless LAN USB Dongle)	Measurement Detail	
Model	MW-P150MS	Frequency Range	1-25GHz
Channel	High	Detector function	Average/Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	Average/Peak

**Test Data – 802.11b**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit								

**Test Data – 802.11g**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit								

**Test Data – 802.11n(HT20)**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit								

**Test Data – 802.11n(HT40)**

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
No emissions were detected at a level greater than 20dB below limit								

**Restricted band edge test data**

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]
				Antenna	Amp. Gain	Cable		
No emissions were detected at a level greater than 20dB below limit.								

## 2.1.6 AC Conducted Emissions 15.207

### Test Location

Shielded Room

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

#### - 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency.


### Test Results

The requirements are:


**Test Data**

Frequency (MHz) [MHz]	Correction		Phase Hot/ Neutral	Quasi peak			Average		
	LISN	Cable		Limit	Measure	Result	Limit	Measure	Result
0.153	0.08	0.12	H	65.8	54.60	54.80	55.8	49.30	49.50
0.153	0.12	0.12	N	65.8	52.20	52.44	55.8	48.90	49.14
0.228	0.05	0.15	H	62.5	42.90	43.10	52.5	41.00	41.20
0.228	0.08	0.15	N	62.5	40.80	41.03	52.5	38.70	38.93
0.231	0.05	0.14	H	62.4	42.40	42.60	52.4	40.70	40.90
0.231	0.08	0.14	N	62.4	42.50	42.73	52.4	41.00	41.23
0.534	0.05	0.10	H	56.0	33.10	33.25	46.0	29.20	29.35
0.537	0.05	0.10	N	56.0	31.90	32.05	46.0	29.40	29.55
0.537	0.05	0.10	H	56.0	32.20	32.35	46.0	28.20	28.35
0.849	0.05	0.03	N	56.0	29.90	29.98	46.0	23.80	23.88
0.915	0.05	0.04	H	56.0	29.10	29.19	46.0	23.00	23.09
1.233	0.06	0.05	N	56.0	27.40	27.51	46.0	17.00	17.11
14.835	0.51	0.10	H	60.0	33.20	33.81	50.0	30.00	30.61
17.832	0.73	0.19	N	60.0	38.00	38.93	50.0	28.70	29.63
17.832	0.68	0.19	H	60.0	37.70	38.57	50.0	28.30	29.17
21.396	0.94	0.16	N	60.0	32.20	33.30	50.0	20.00	21.10
29.415	1.36	0.34	N	60.0	42.30	44.00	50.0	35.00	36.70
29.577	1.25	0.32	H	60.0	43.10	44.68	50.0	35.10	36.68

[HOT]

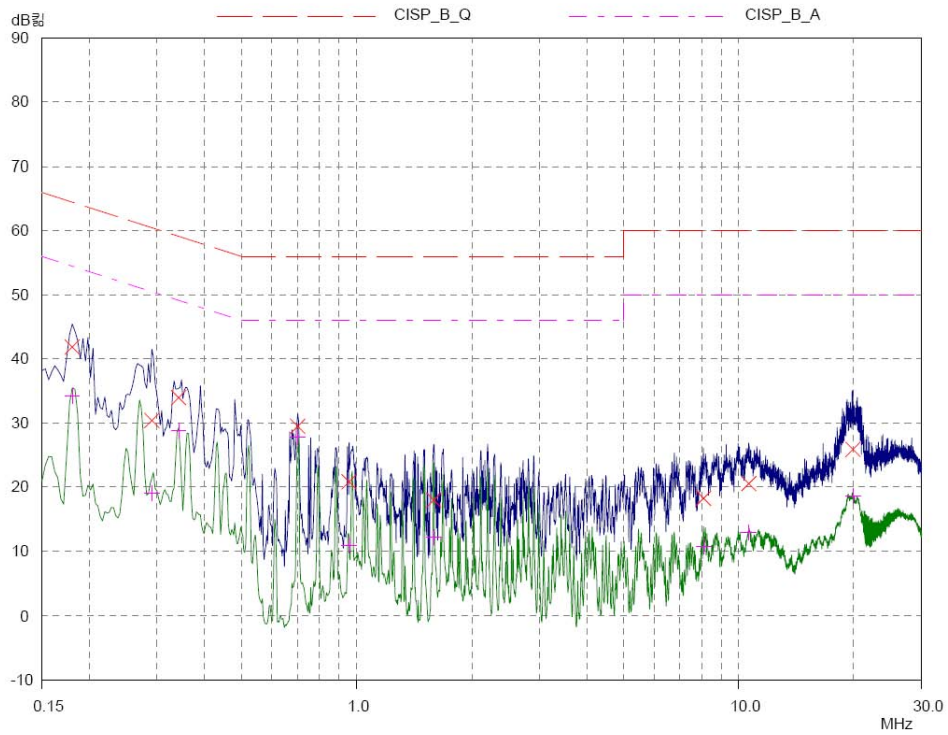

[NEUTRAL]

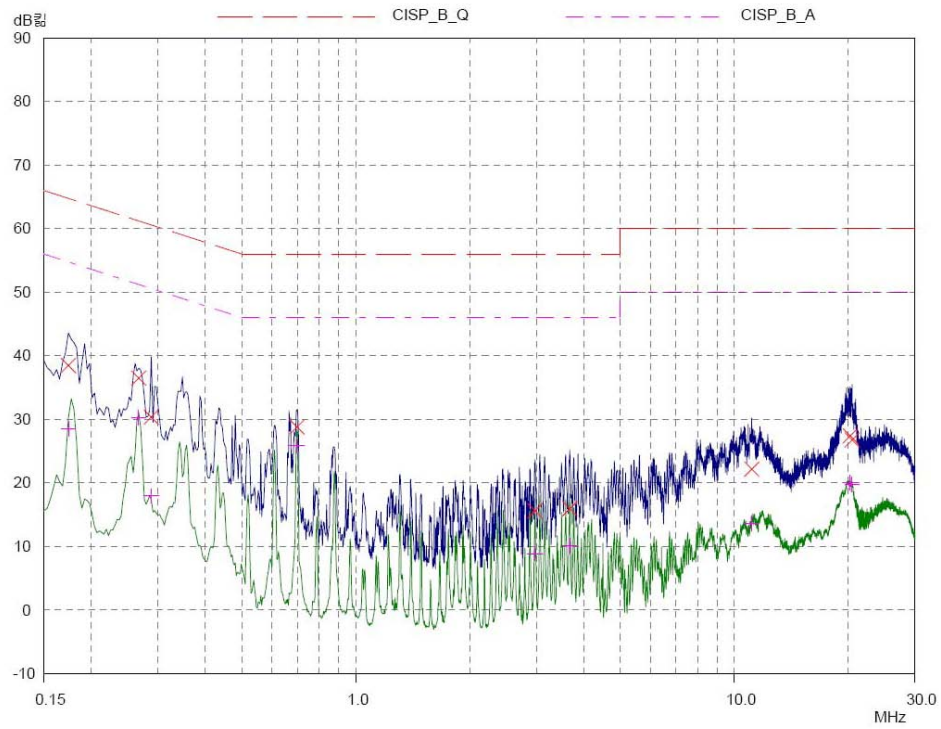



## APPENDIX A – Test Equipment Used For Tests

No	Description	Manufacturer	Model No.	Serial No.	Due Cal.
1	Test Receiver	Rohde & Schwarz	ESHS 10	862970/018	2011.05.06
2	Test Receiver	Rohde & Schwarz	ESVS 10	826008/014	2011.05.06
3	Spectrum Analyzer	Hewlett Packard	8566B	2311A02394	2011.05.06
4	Spectrum Analyzer	Rohde & Schwarz	FSP13	100130	2011.05.06
5	Modulation Analyzer	Hewlett Packard	8901B	3438A05094	2011.05.06
6	Audio analyzer	Hewlett Packard	8903B	3011A12915	2011.05.06
7	Preamplifier	Hewlett Packard	8447F	2805A02570	2011.05.06
8	Preamplifier	A.H. Systems	PAM-0118	164	2011.05.06
9	Signal Generator	Hewlett Packard	8673D	2708A00448	2011.05.06
10	Power Meter	Hewlett Packard	437B	312U24787	2011.05.06
11	Power Sensor	Hewlett Packard	8482B	3318A06943	2011.05.06
12	Loop Antenna	Rohde & Schwarz	HFH2-Z2.335.4711.52	826532/006	2011.02.06
13	Dipole Antenna	Rohde & Schwarz	VHAP	574	2010.07.07
14	Dipole Antenna	Rohde & Schwarz	VHAP	575	2010.07.17
15	Dipole Antenna	Rohde & Schwarz	UHAP	545	2010.07.17
16	Dipole Antenna	Rohde & Schwarz	UHAP	546	2010.07.07
17	Biconical Antenna	Eaton Corp.	94455-1	0977	2010.07.03
18	Biconical Antenna	EMCO	3104C	9111-2468	2010.07.03
19	Log Periodic Antenna	EMCO	3146	2051	2010.06.05
20	Log Periodic Antenna	EMCO	3146	8901-2320	2010.07.03
21	Horn Antenna	A.H. Systems	SAS-571	414	2011.03.16
22	Waveform Generator	Hewlett Packard	33120A	US34001190	2011.05.06
23	Digital Oscilloscope	Tektronix	TDS 340A	B012287	2011.05.06
24	Dummy Load	Bird Electronics	8251	11511	2011.05.06