


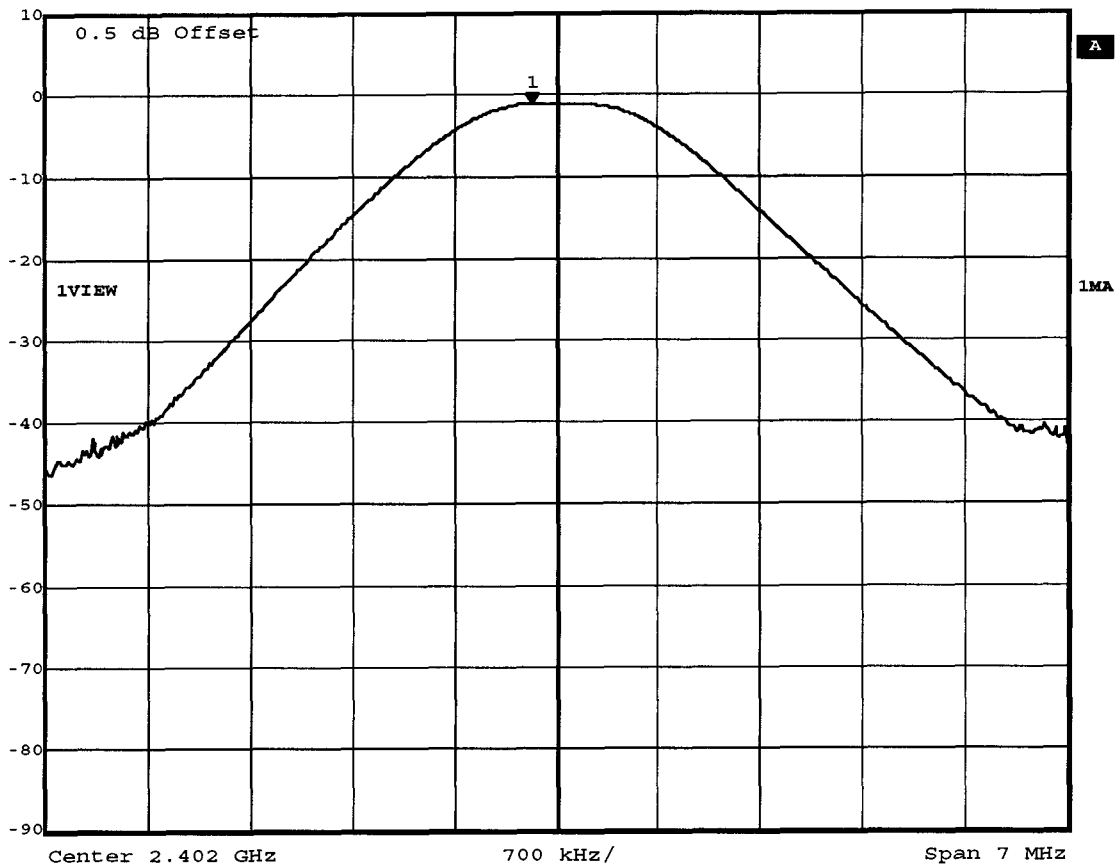
Appendix B

RF power output conducted

**FCC part 15.247
Peak output power conducted**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom=12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel: 0 / 2402 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-1.29 dBm	VBW	1 MHz	
	10 dBm	2.40183868 GHz	SWT	5 ms	Unit dBm




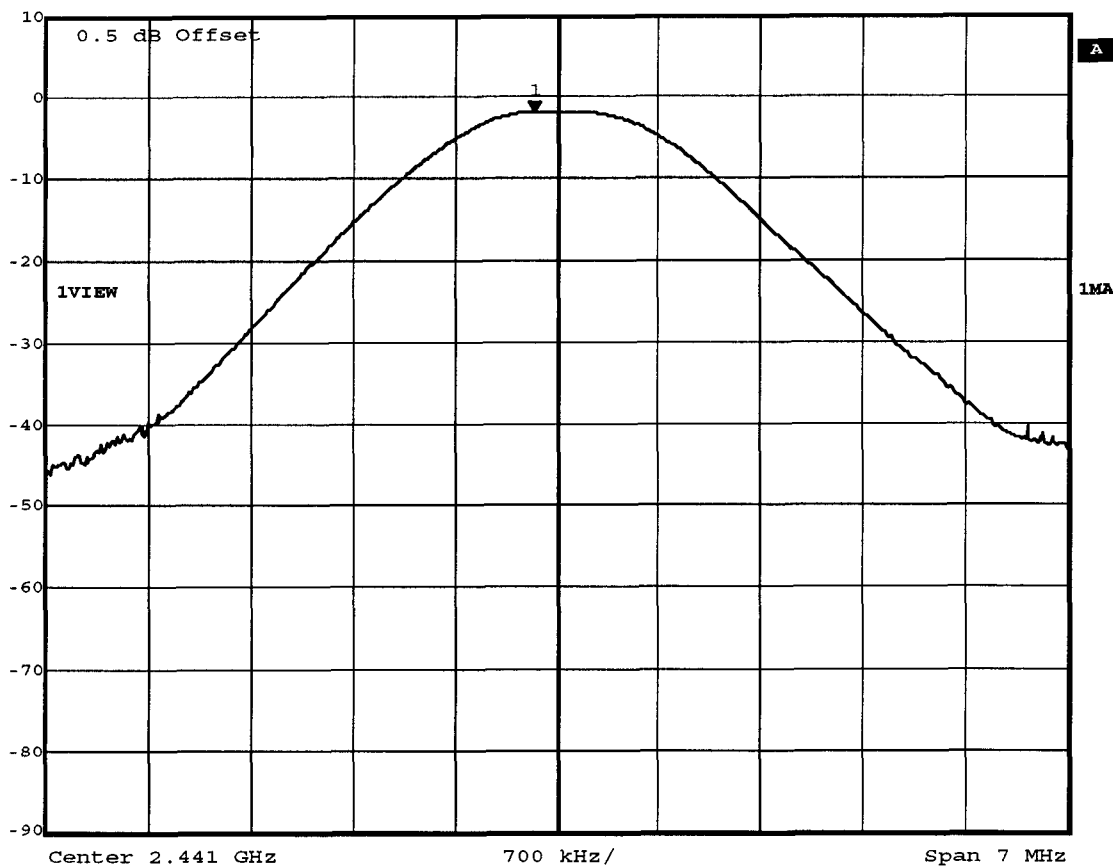
Comment A: Output power=-1.29 dBm; verdict: PASS
Date: 25.AUG.2006 13:40:08

Measurement diagram

**FCC part 15.247
Peak output power conducted**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom=12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-2.12 dBm	VBW	1 MHz	
	10 dBm	2.44085271 GHz	SWT	5 ms	Unit dBm




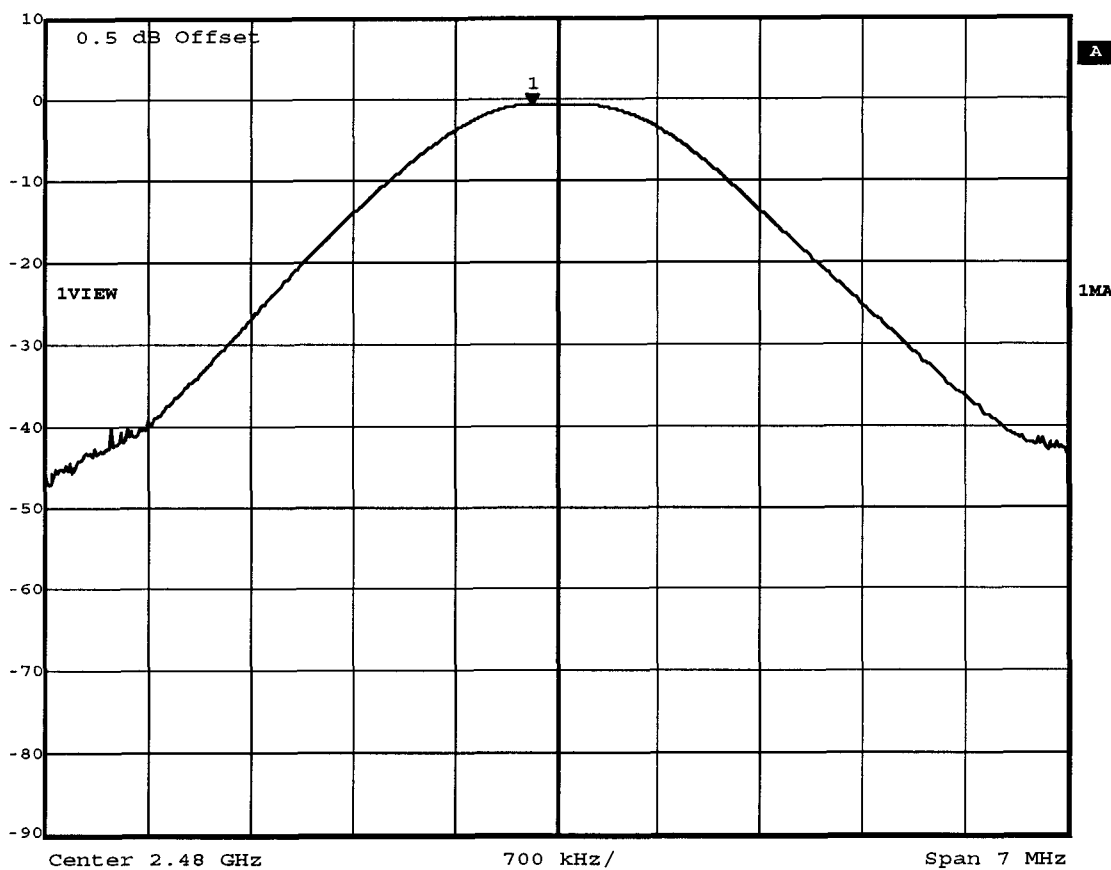
Comment A: Output power=-2.12 dBm; verdict: PASS
Date: 25.AUG.2006 13:55:24

Measurement diagram

FCC part 15.247
Peak output power conducted

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom=12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel: 78 / 2480 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-0.78 dBm	VBW	1 MHz	
	10 dBm	2.47983868 GHz	SWT	5 ms	Unit



Comment A: Output power=-0.78 dBm; verdict: PASS
 Date: 25.AUG.2006 14:03:30


Measurement diagram

FCC part 15.247

Peak output power conducted

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Umin=10 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel: 0 / 2402 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-1.29 dBm	VBW	1 MHz	
	10 dBm	2.40183868 GHz	SWT	5 ms	Unit dBm

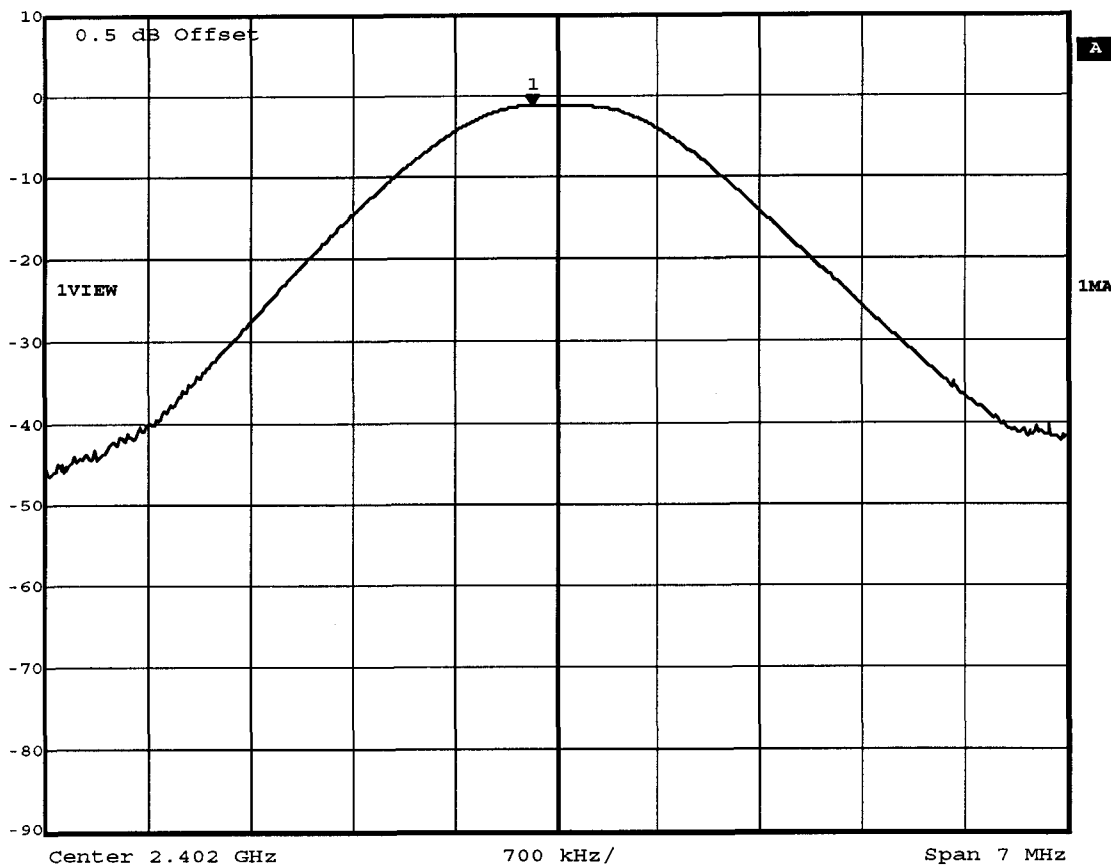


Comment A: Output power=-1.29 dBm; verdict: PASS
 Date: 25.AUG.2006 13:43:59

Measurement diagram

**FCC part 15.247
Peak output power conducted**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Umin=10 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-2.11 dBm	VBW	1 MHz	
	10 dBm	2.44083868 GHz	SWT	5 ms	Unit dBm

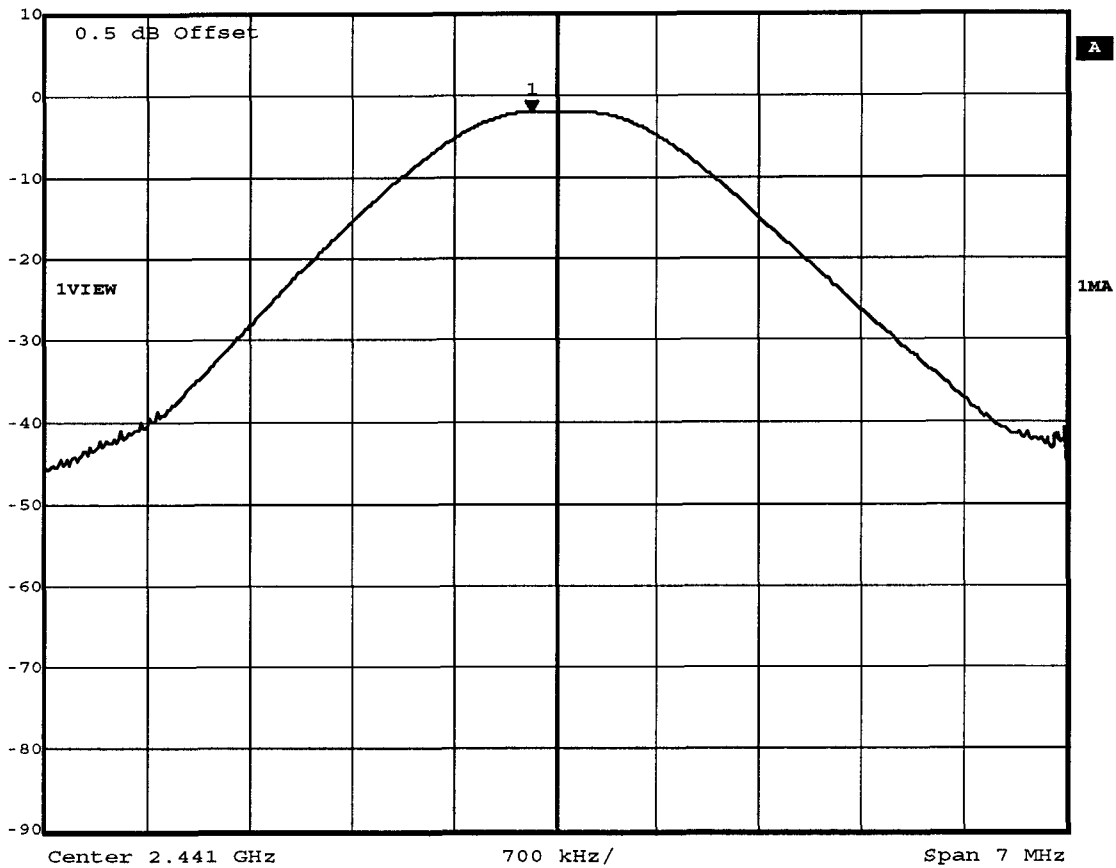


Comment A: Output power=-2.11 dBm; verdict: PASS
Date: 25.AUG.2006 13:56:58

Measurement diagram

**FCC part 15.247
Peak output power conducted**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Umin=10 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-0.78 dBm	VBW	1 MHz	
	10 dBm	2.47988076 GHz	SWT	5 ms	Unit dBm

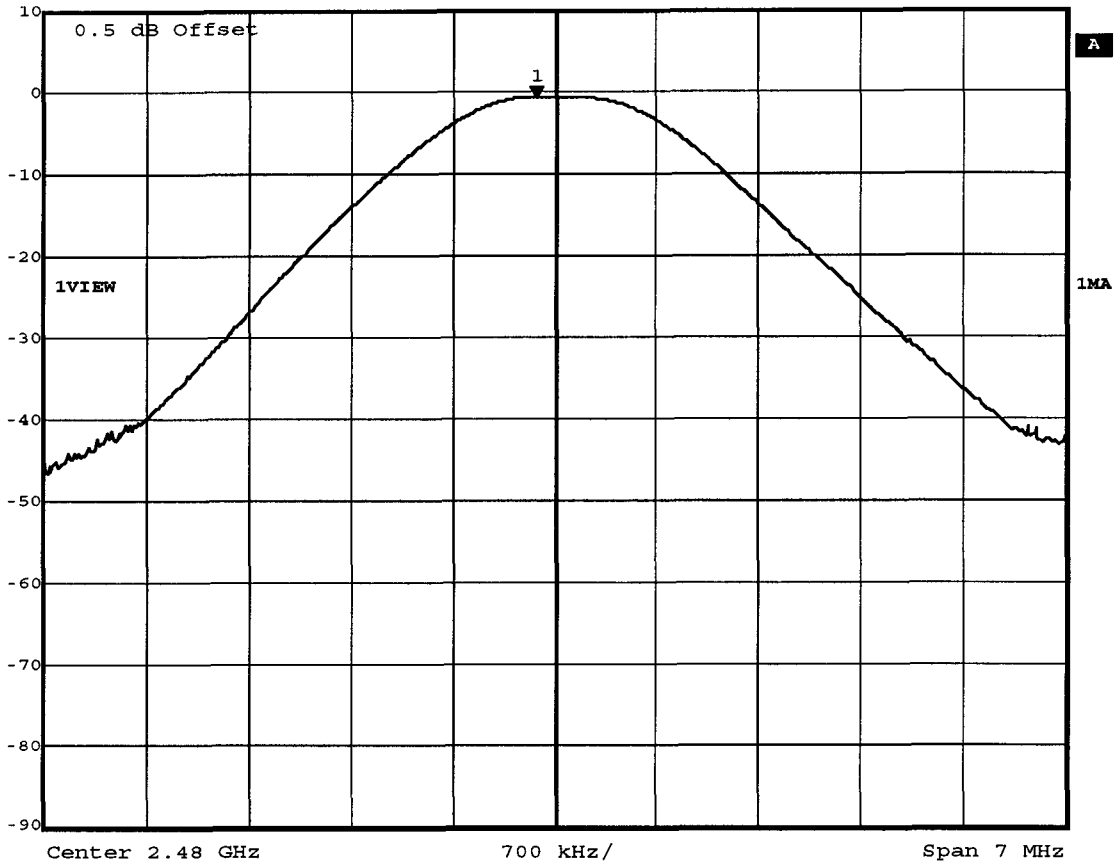


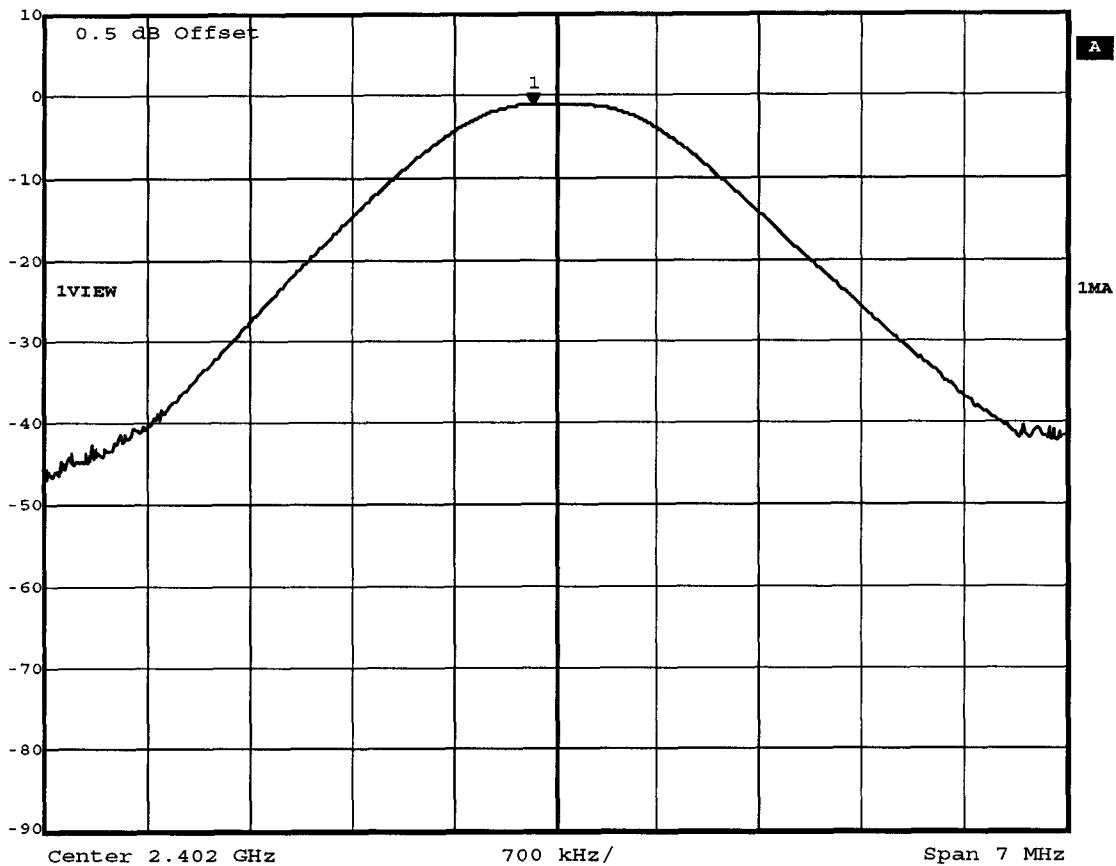
Comment A: Output power=-0.78 dBm; verdict: PASS
Date: 25.AUG.2006 14:05:19

Measurement diagram

FCC part 15.247
Peak output power conducted

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Umax=16 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-1.29 dBm	VBW	1 MHz	
	10 dBm	2.40185271 GHz	SWT	5 ms	Unit dBm




Comment A: Output power=-1.29 dBm; verdict: PASS
 Date: 25.AUG.2006 13:45:35

Measurement diagram

**FCC part 15.247
Peak output power conducted**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Umax=16 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
	Ref Lvl	-2.11 dBm	VBW	1 MHz	
	10 dBm	2.44082465 GHz	SWT	5 ms	Unit dBm

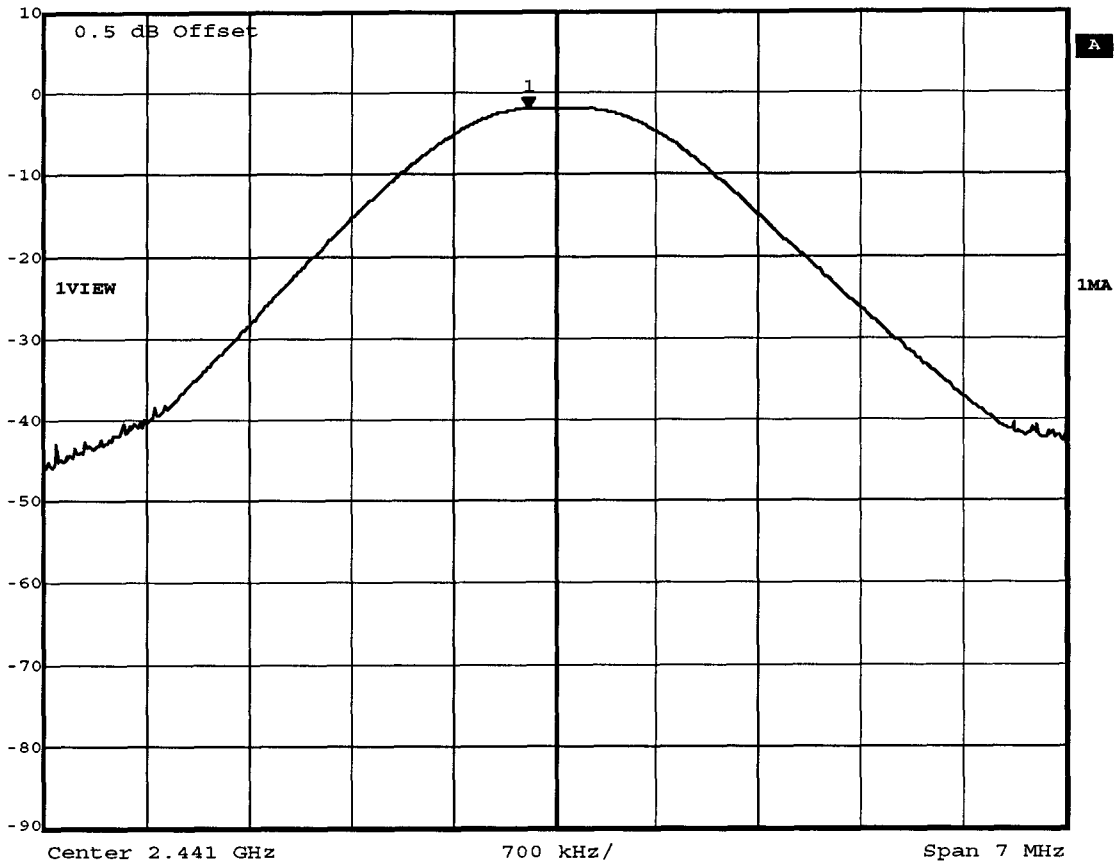


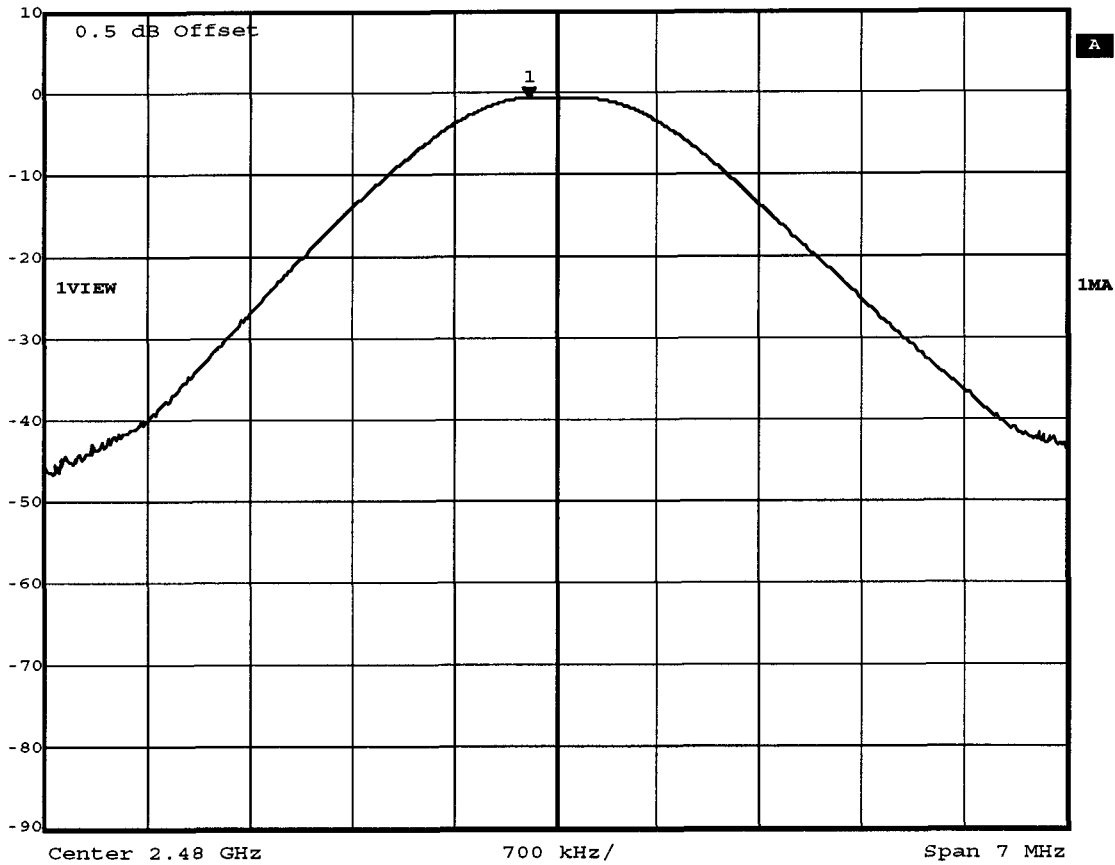
Comment A: Output power=-2.11 dBm; verdict: PASS
Date: 25.AUG.2006 13:58:39

Measurement diagram

FCC part 15.247
Peak output power conducted

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Umax=16 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Peak output power
Comment 2	Channel: 78 / 2480 MHz
Comment 3	

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
Ref Lvl	-0.78 dBm	VBW	1 MHz		
10 dBm	2.47982465 GHz	SWT	5 ms	Unit	dBm



Comment A: Output power=-0.78 dBm; verdict: PASS
Date: 25.AUG.2006 14:06:33

Measurement diagram

Appendix C


RF power output radiated (EIRP)

Appendix D

20 dB bandwidth

**FCC part 15.247
20 dB bandwidth**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	

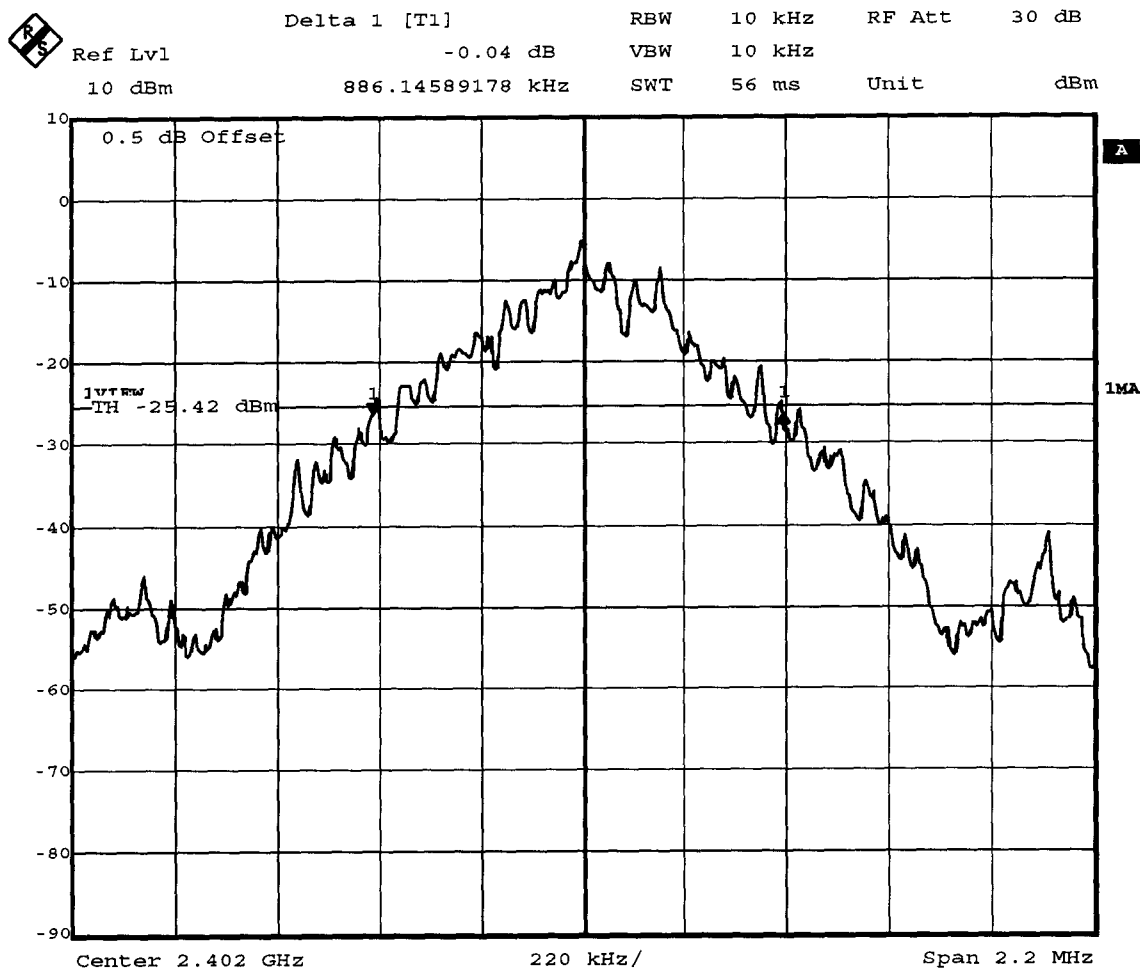


Comment A: 20 dB bandwidth: 886.1 KHz < 1MHz; verdict: PASS
Date: 25.AUG.2006 14:30:40

Measurement diagram

FCC part 15.247
20 dB bandwidth

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

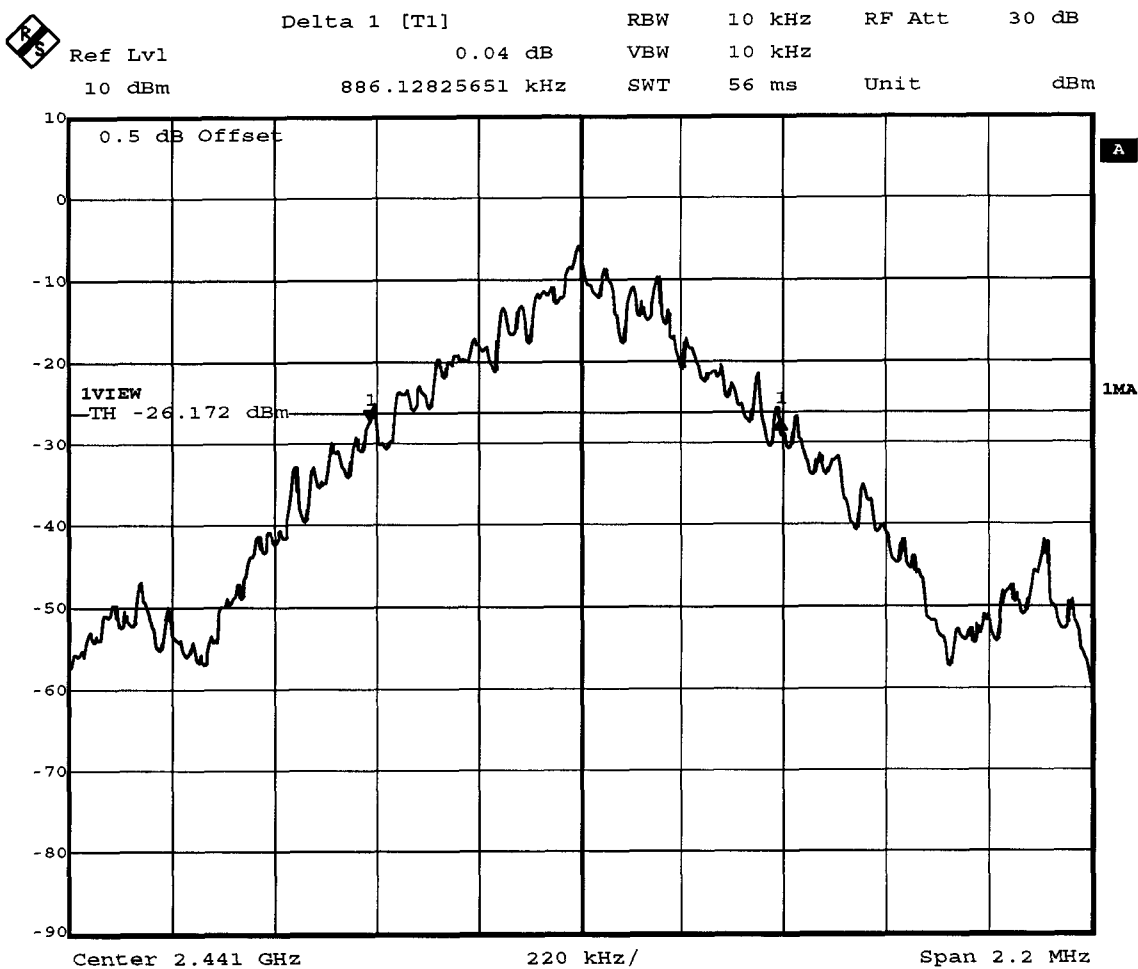


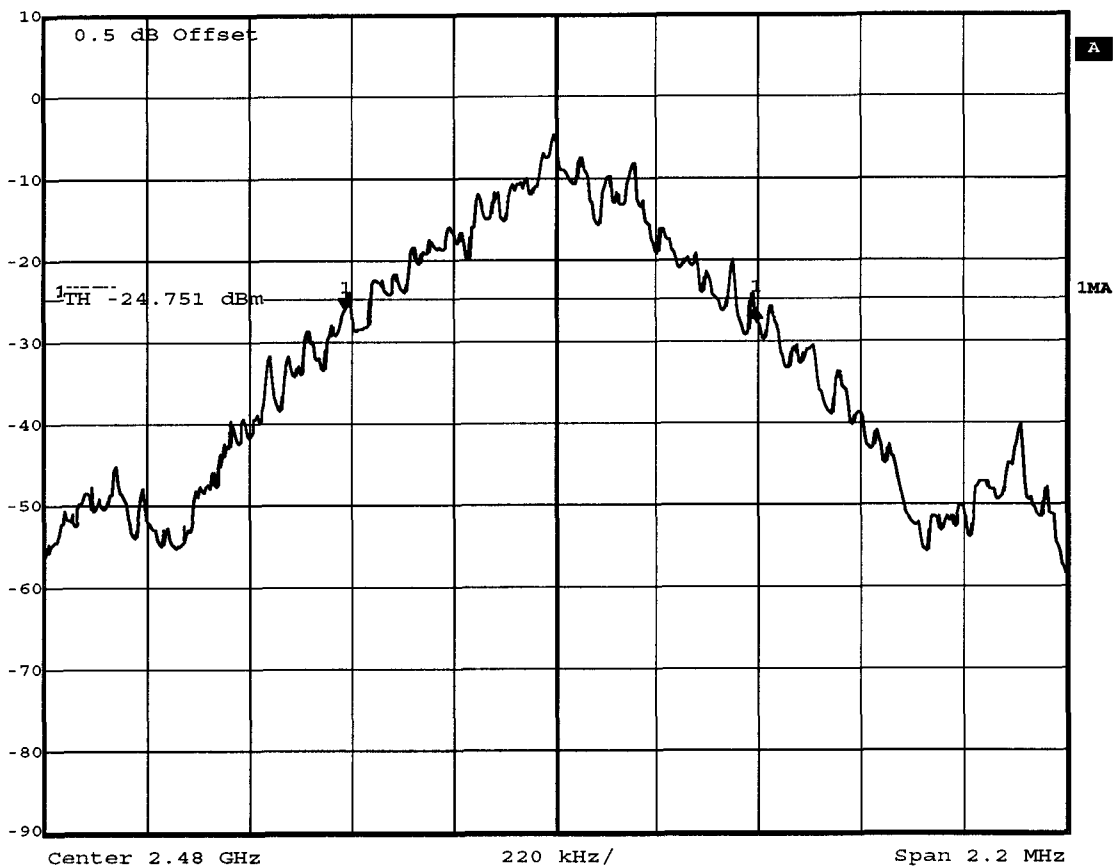
Comment A: 20 dB bandwidth: 886.1 KHz < 1MHz; verdict: PASS
Date: 25.AUG.2006 14:28:08

Measurement diagram

**FCC part 15.247
20 dB bandwidth**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	

	Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
	Ref Lvl	-0.19 dB	VBW	10 kHz	
	10 dBm	886.14589178 kHz	SWT	56 ms	Unit dBm



Comment A: 20 dB bandwidth: 886.1 KHz < 1MHz; verdict: PASS
Date: 25.AUG.2006 14:25:08


Measurement diagram

Appendix E

Time of occupancy (dwell time)

FCC part 15.247
Time of occupancy (dwell time)

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Time of occupancy
Comment 2	Channel.: 39 / 2441 MHz (Hopping mode)
Comment 3	64 events * 2.935 ms result: 187.840 ms

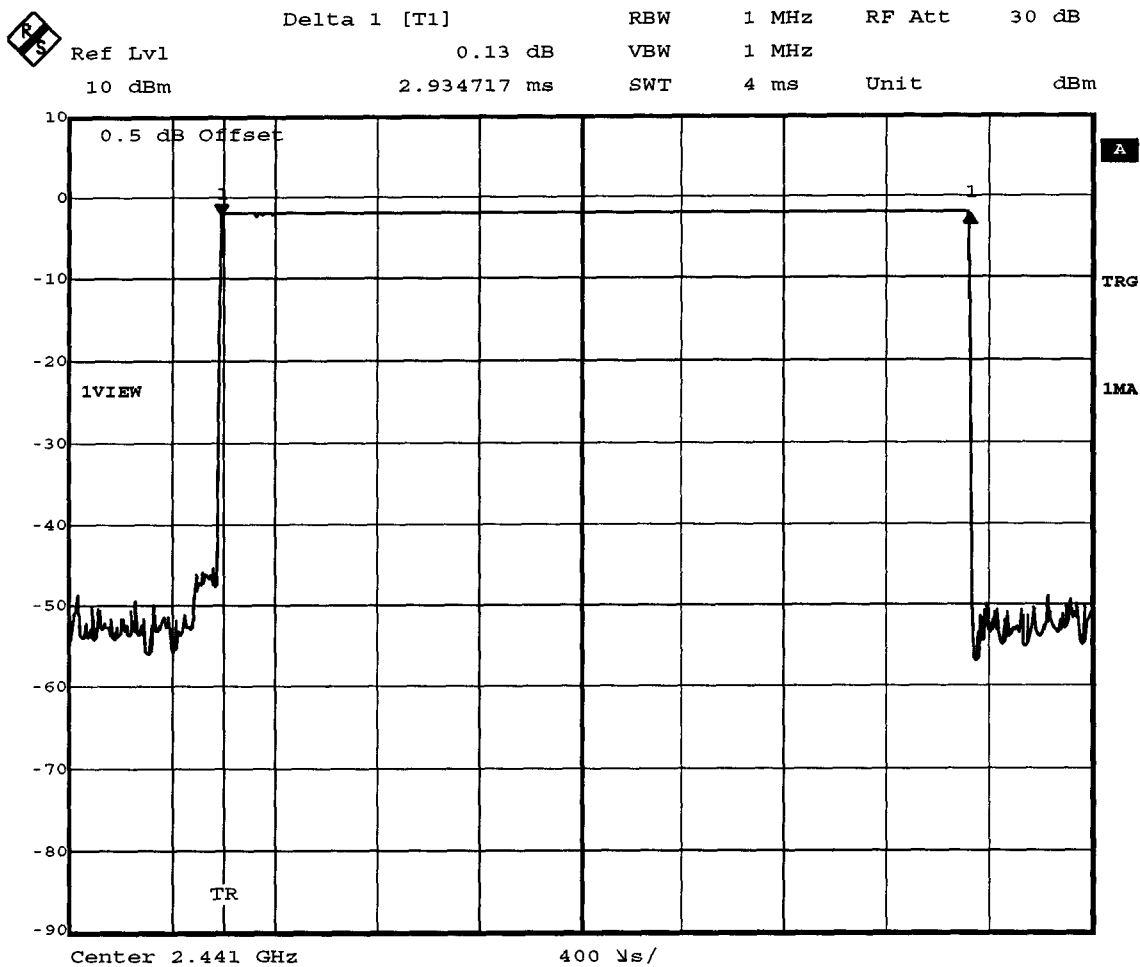


Comment A: Burst length=2.93472 ms
 Date: 25.AUG.2006 15:24:58

Measurement diagram

FCC part 15.247
Time of occupancy inquiry

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Time of occupancy
Comment 2	Channel.: 39 / 2441 MHz (inquiry mode)
Comment 3	375 events * 0.119939 ms result: 44.977 ms

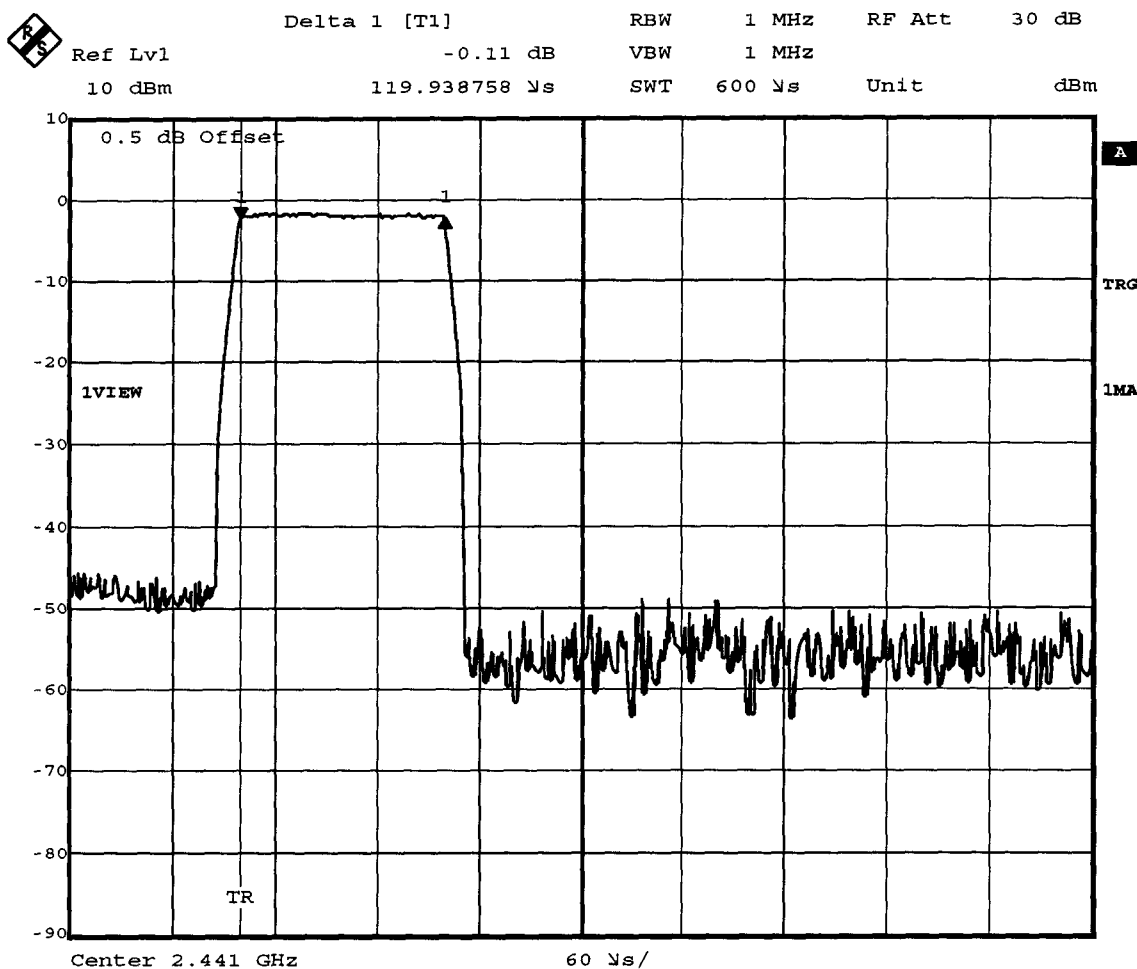


Comment A: Burst length=0.11994 ms
Date: 25.AUG.2006 15:34:11

Measurement diagram

FCC part 15.247
Duty cycle

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(b)
Comment 1	Duty cycle
Comment 2	Channel.: 39 / 2441 MHz
Comment 3	

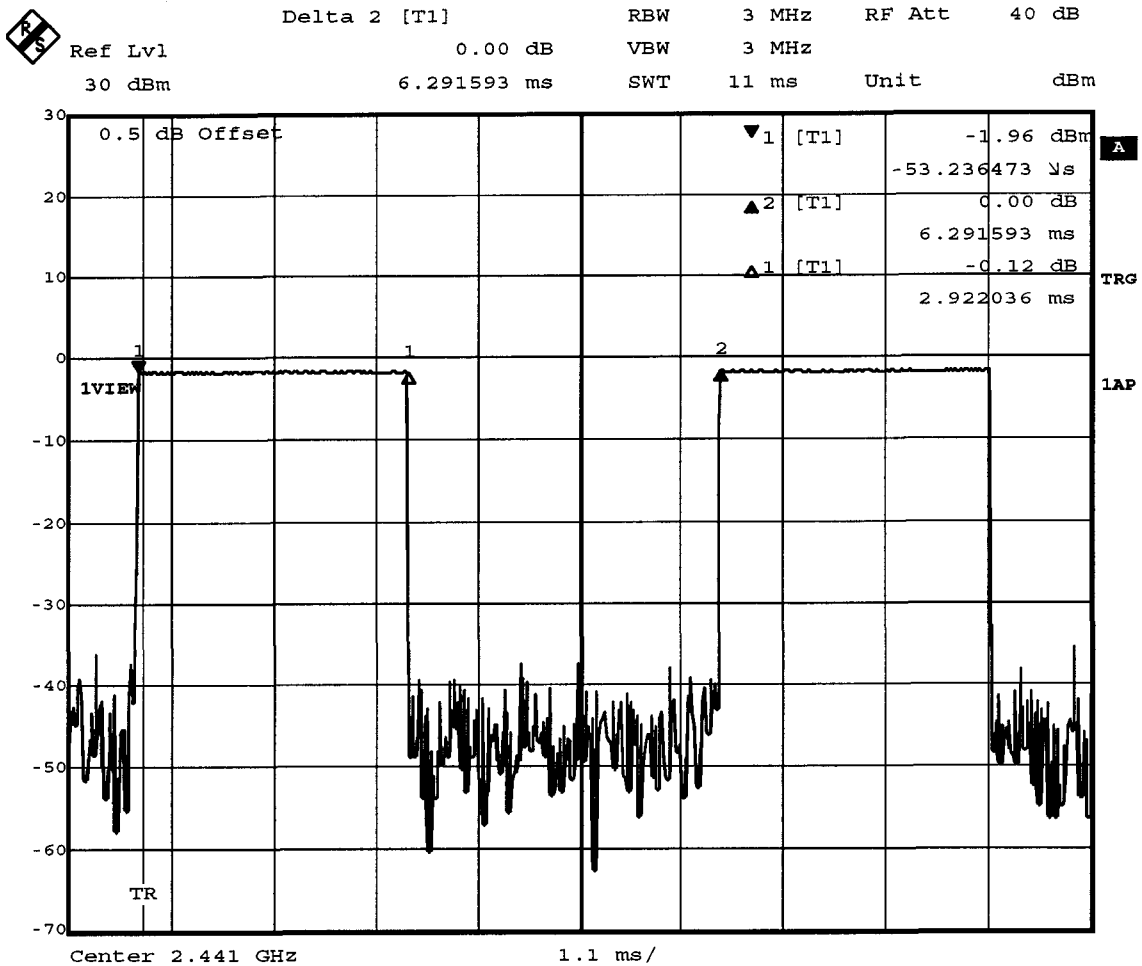

Comment A: Duty cycle=0.47
Date: 25.AUG.2006 15:20:15


Measurement diagram

Appendix F

Number of hopping frequencies

**FCC part 15.247
Number of hopping frequencies**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 0-13
Comment 3	

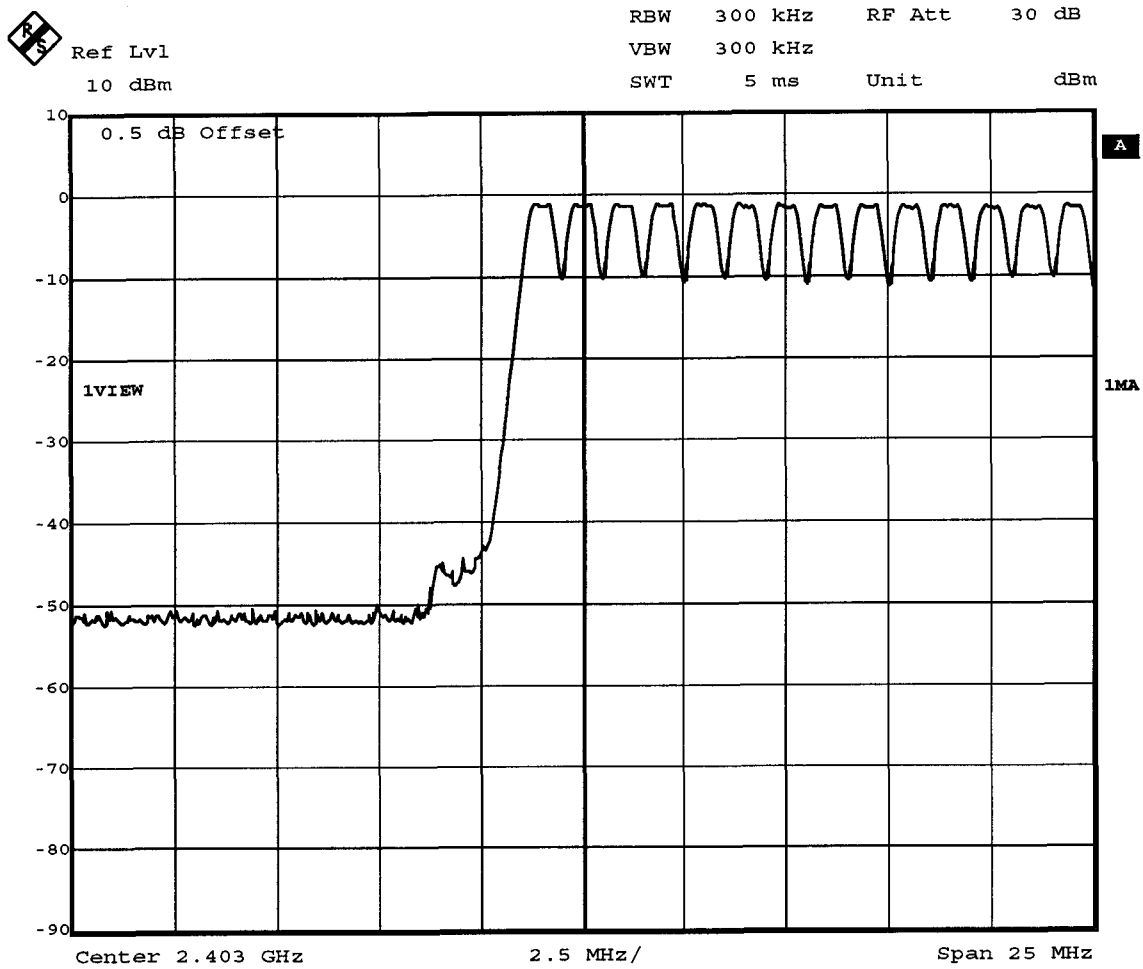


Comment A: Number of hopping frequencies
Date: 25.AUG.2006 15:02:51

Measurement diagram

FCC part 15.247
Number of hopping frequencies

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 14-38
Comment 3	

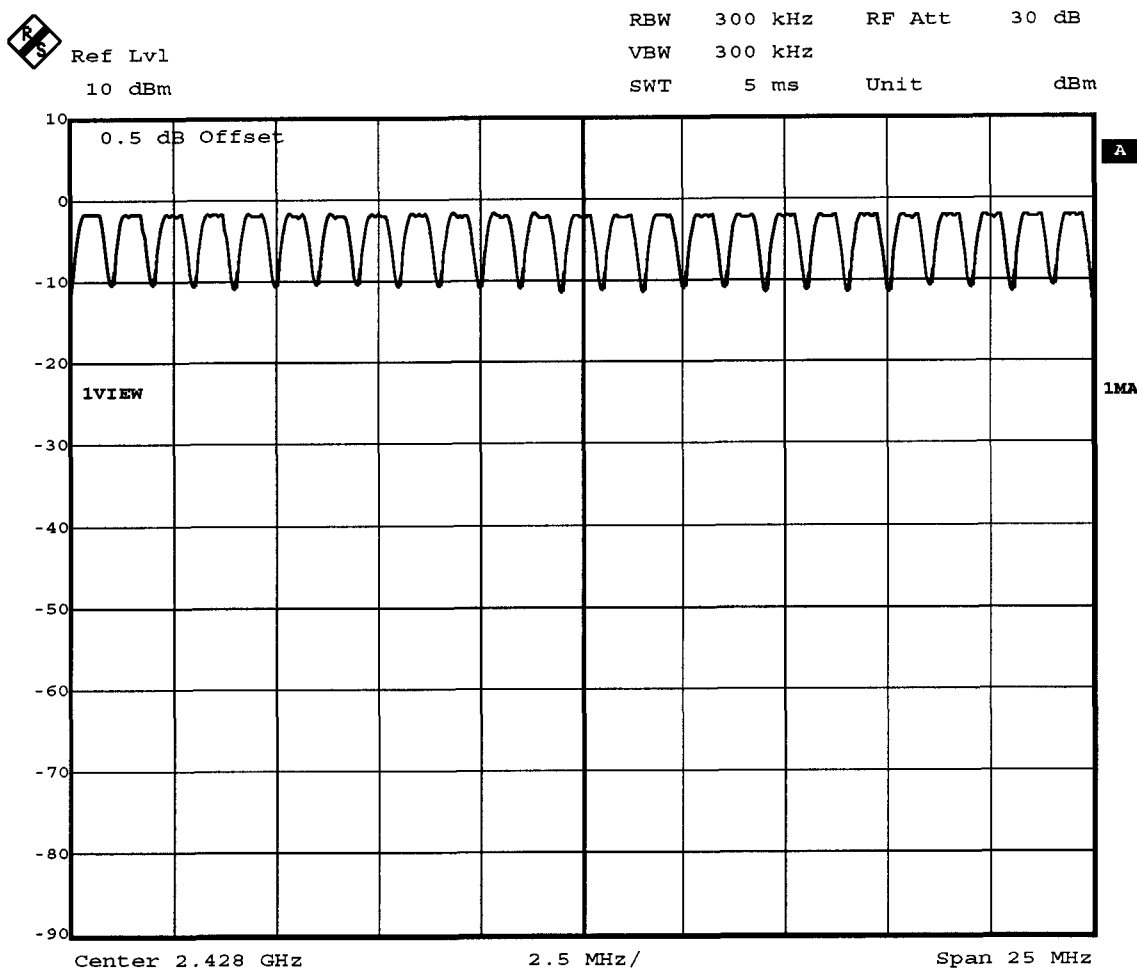


Comment A: Number of hopping frequencies
 Date: 25.AUG.2006 15:08:07

Measurement diagram

**FCC part 15.247
Number of hopping frequencies**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.:39-63
Comment 3	

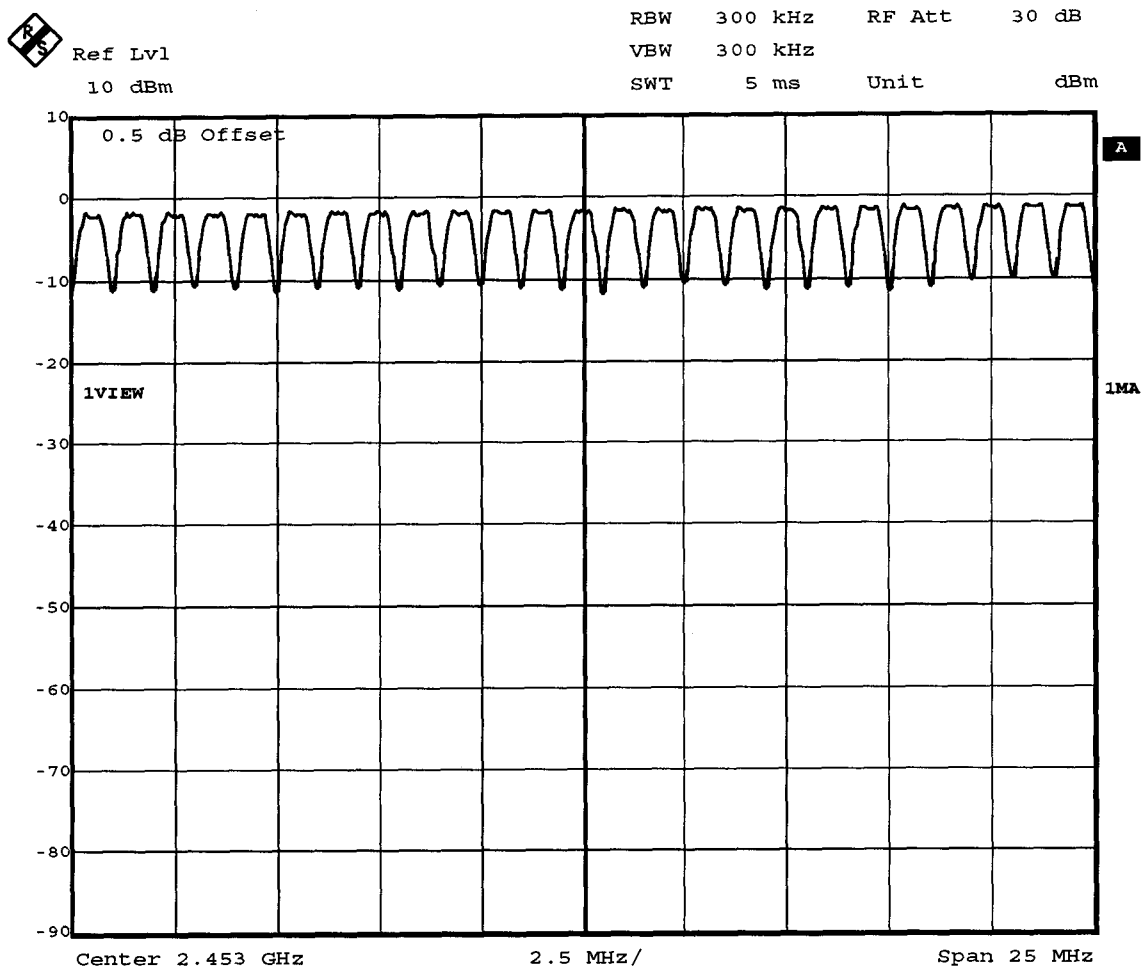


Comment A: Number of hopping frequencies
Date: 25.AUG.2006 15:10:29

Measurement diagram

FCC part 15.247
Number of hopping frequencies

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 64-78
Comment 3	

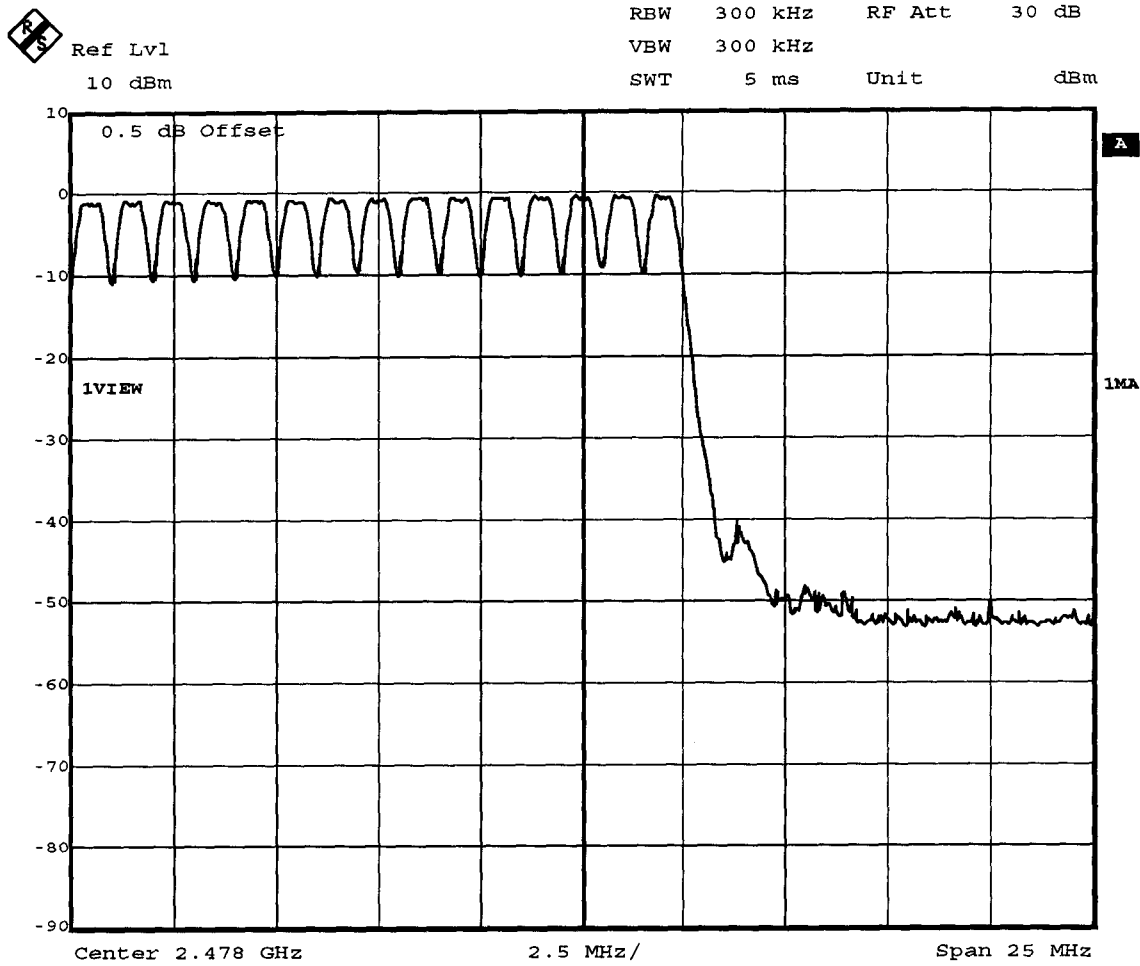


Comment A: Number of hopping frequencies
 Date: 25.AUG.2006 15:13:03

Measurement diagram

**FCC part 15.247
Number of hopping frequencies**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Master inquiry mode
Comment 3	

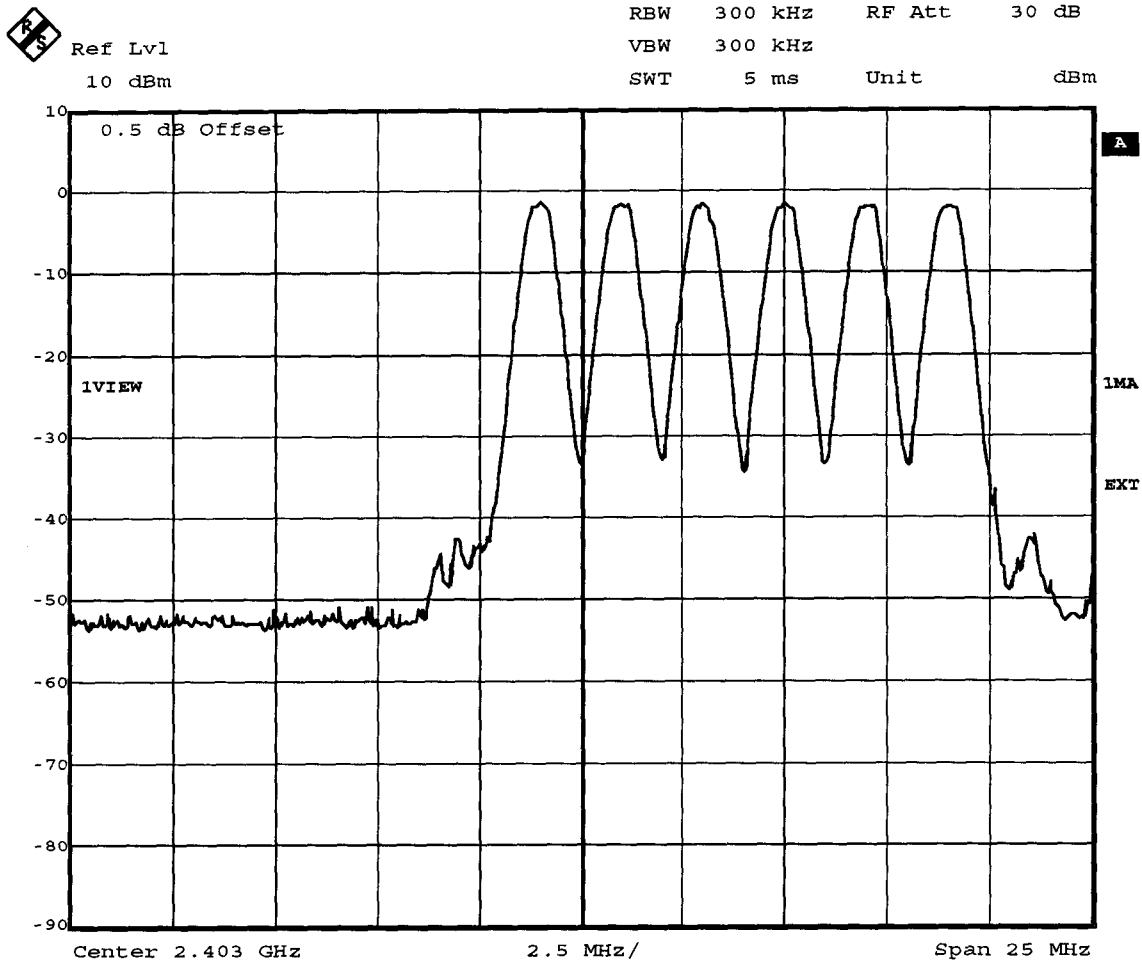


Comment A: Number of hopping frequencies
Date: 28.AUG.2006 07:21:26

Measurement diagram

FCC part 15.247
Number of inquiry frequencies

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Master inquiry mode
Comment 3	

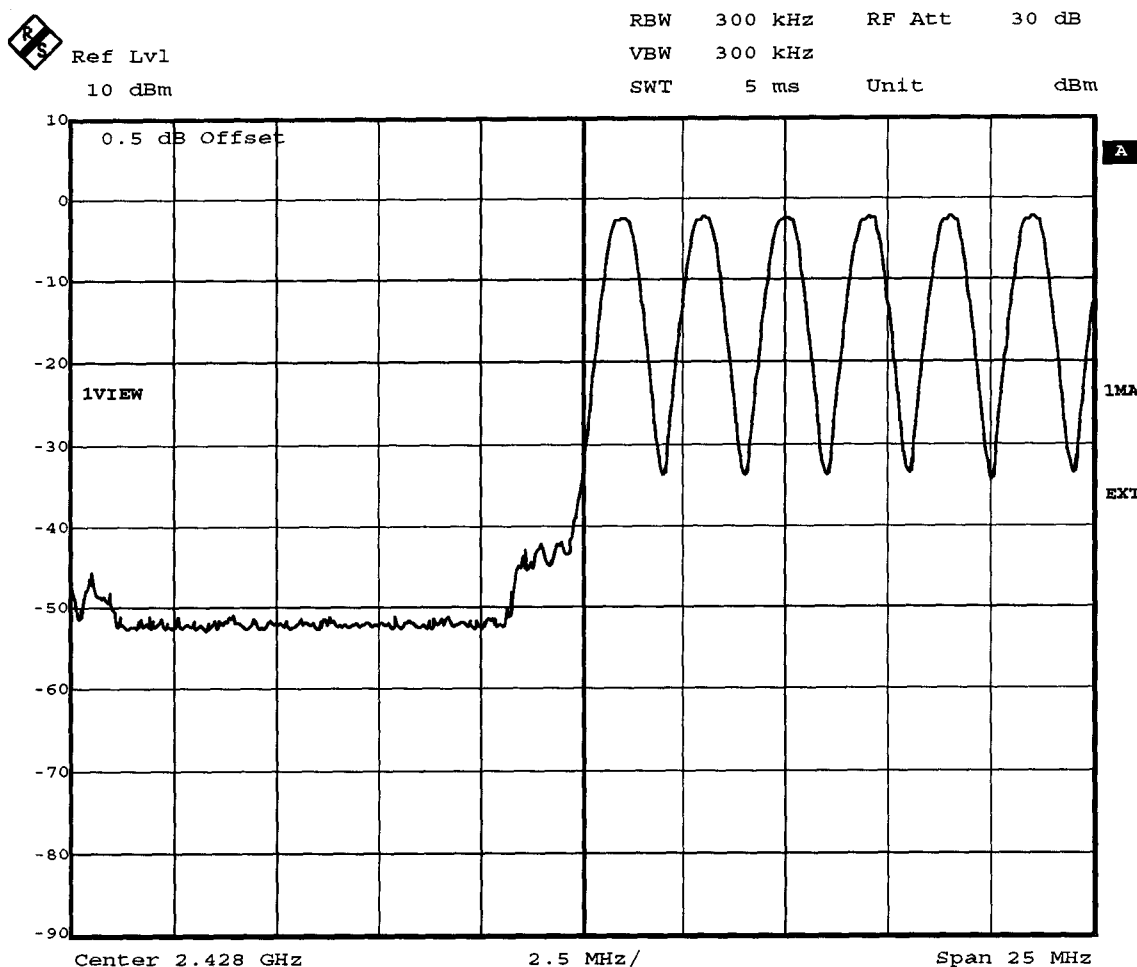


Comment A: Number of hopping frequencies
 Date: 28.AUG.2006 07:16:33

Measurement diagram

FCC part 15.247
Number of inquiry frequencies

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Master inquiry mode
Comment 3	

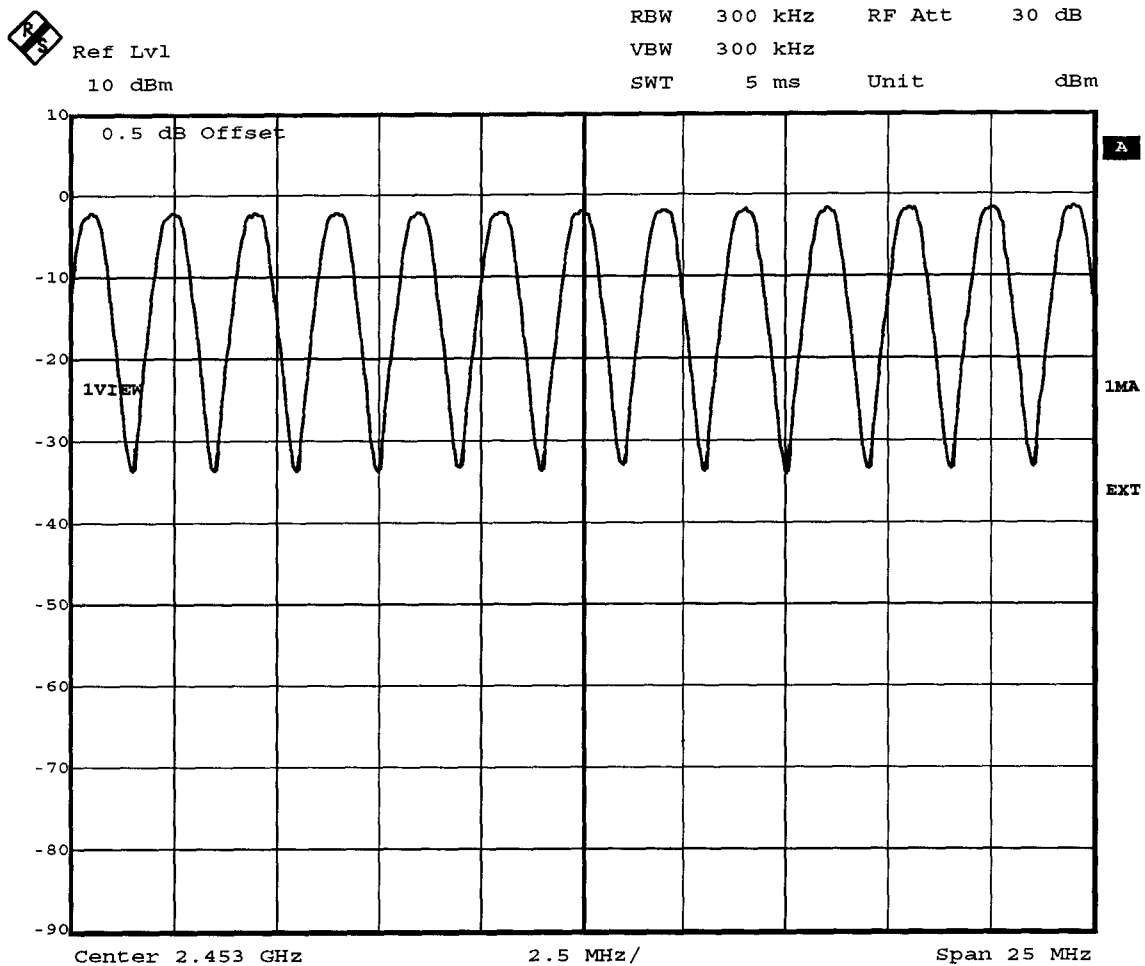


Comment A: Number of hopping frequencies
Date: 28.AUG.2006 07:29:21

Measurement diagram

FCC part 15.247
Number of inquiry frequencies

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Master inquiry mode
Comment 3	

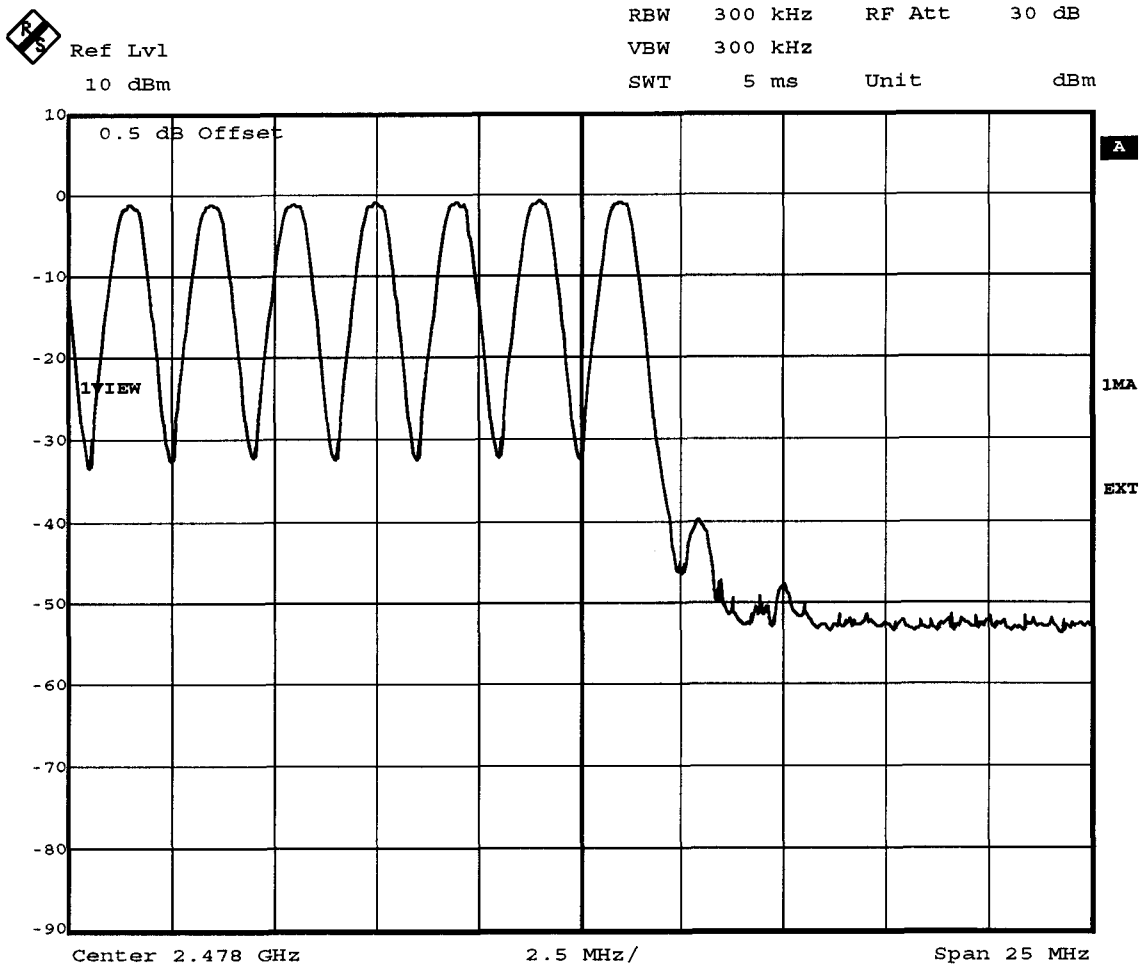

Comment A: Number of hopping frequencies
 Date: 28.AUG.2006 07:36:31

Measurement diagram


Appendix G

Carrier frequency separation

**FCC part 15.247
Carrier frequency separation**

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DV
Test Site / Operator	ETS
Test Specification	FCC part 15 section 247(b)
Comment 1	Carrier frequency separation
Comment 2	Channel.: 39/40 / 2441/2442 MHz
Comment 3	Hopping mode

	Delta 1 [T1]	RBW	100 kHz	RF Att	30 dB
	Ref Lvl	-0.01 dB	VBW	100 kHz	
	10 dBm	1.00080160 MHz	SWT	5 ms	Unit dBm

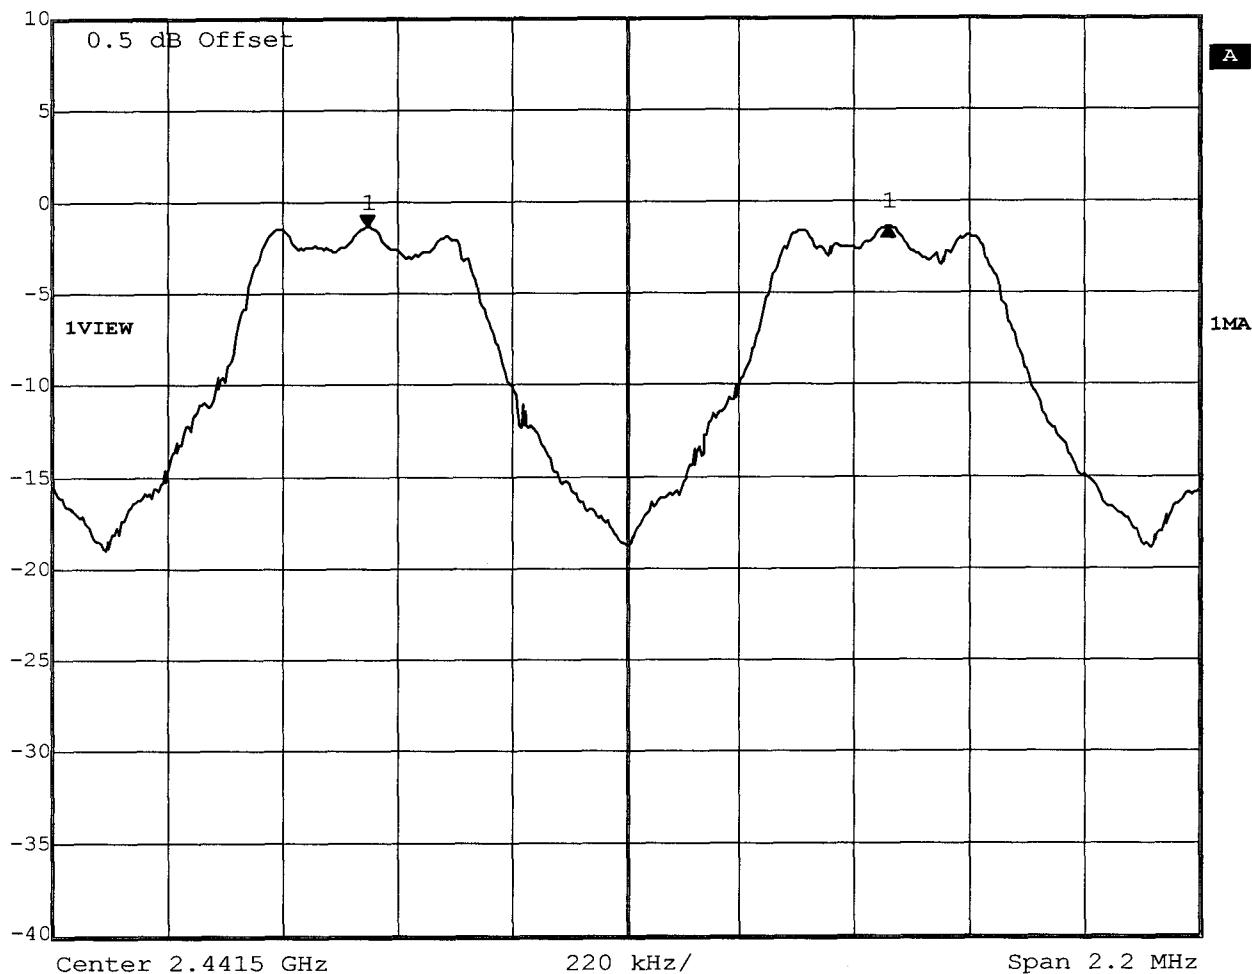

Comment A: Limit: > two-thirds of the 20 dB bandwidth ; Result: Pass
Date: 6.SEP.2006 08:29:03

Measurement diagram

Appendix H


Spurious emission conducted

Appendix I

Spurious emission radiated


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.480GHz, Emax: 94.67dBµV/m, RBW: 100kHz

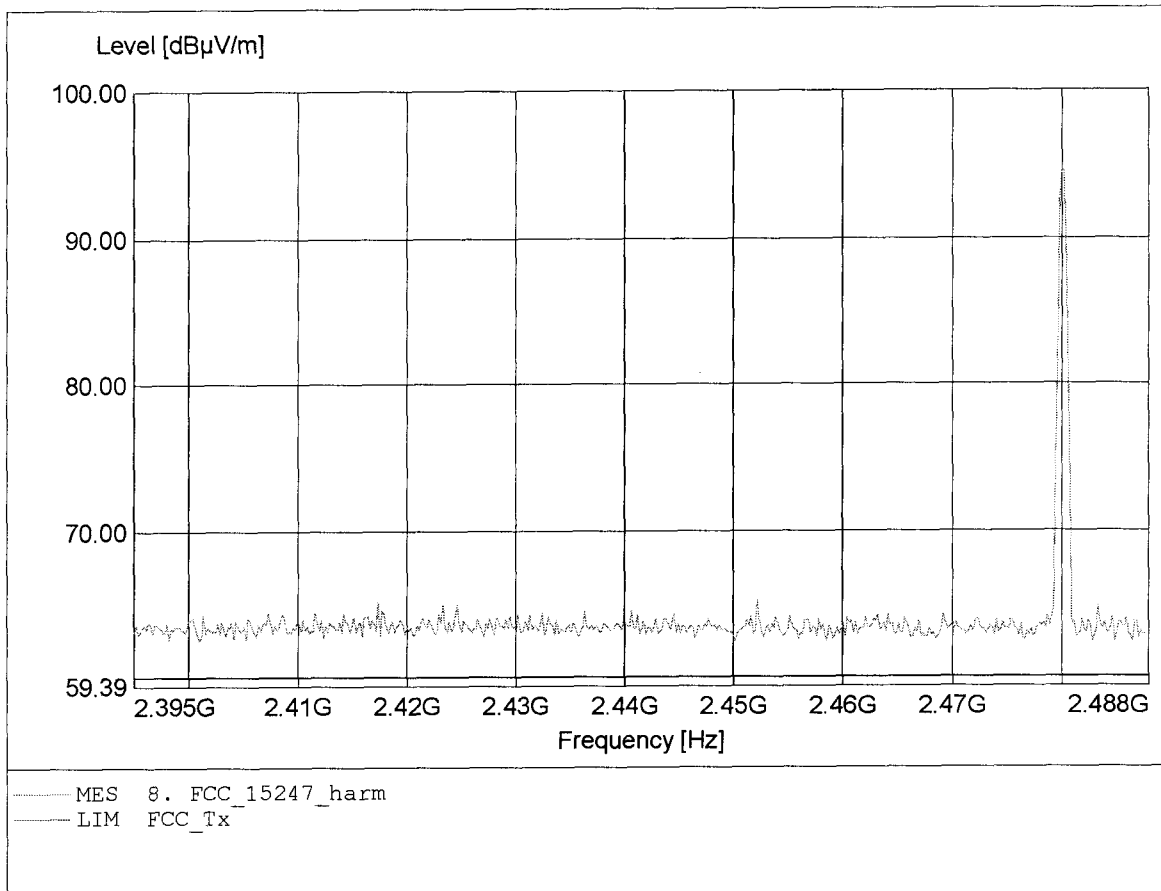


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 31.78dBµV/m, RBW: 100kHz

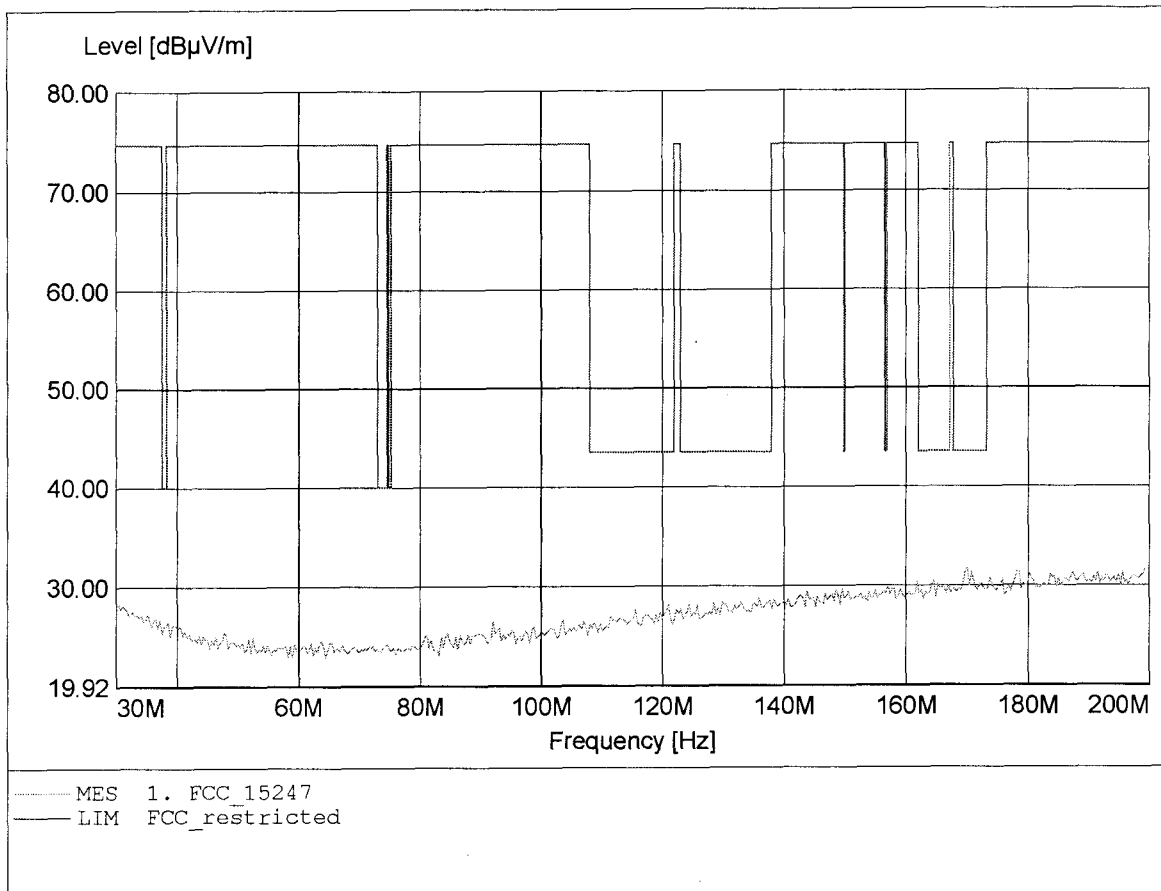


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.571MHz, Emax: 32.30dBµV/m, RBW: 100kHz

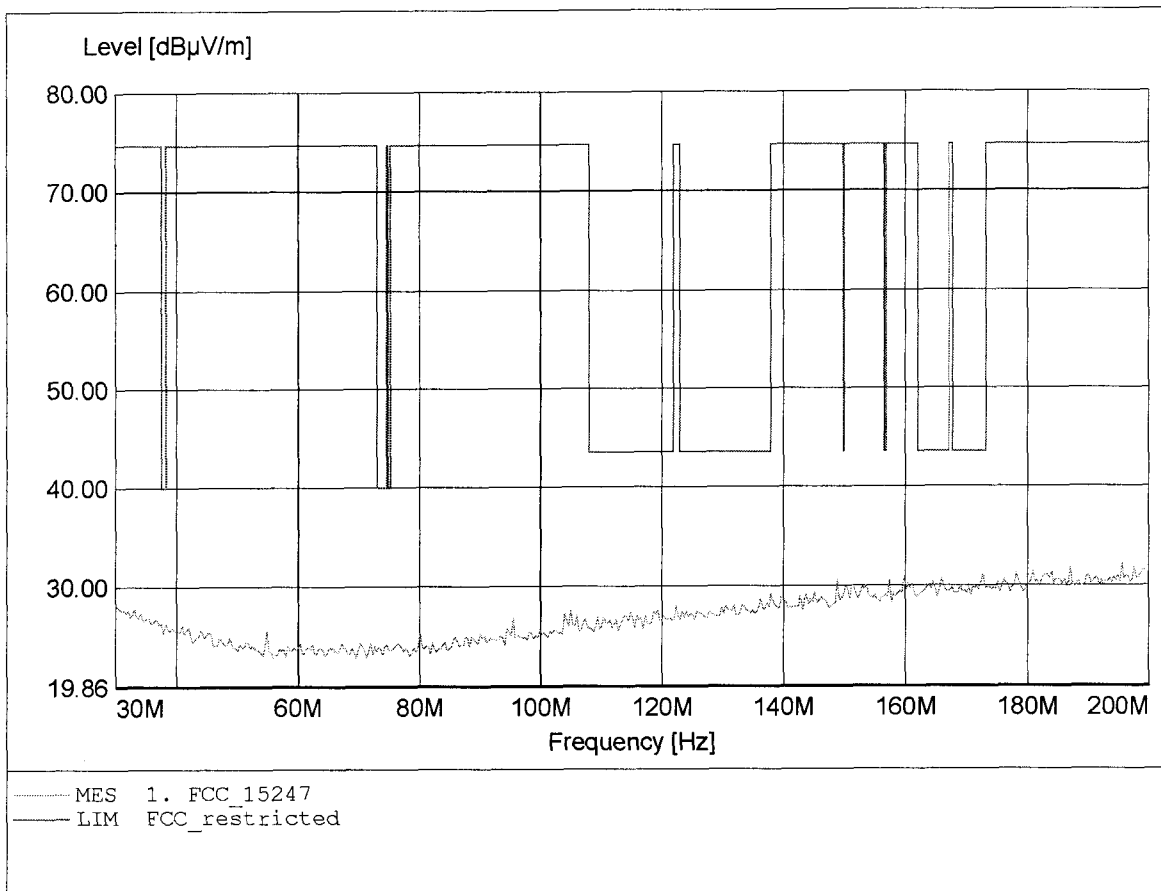


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 915.030MHz, Emax: 28.18dBµV/m, RBW: 100kHz

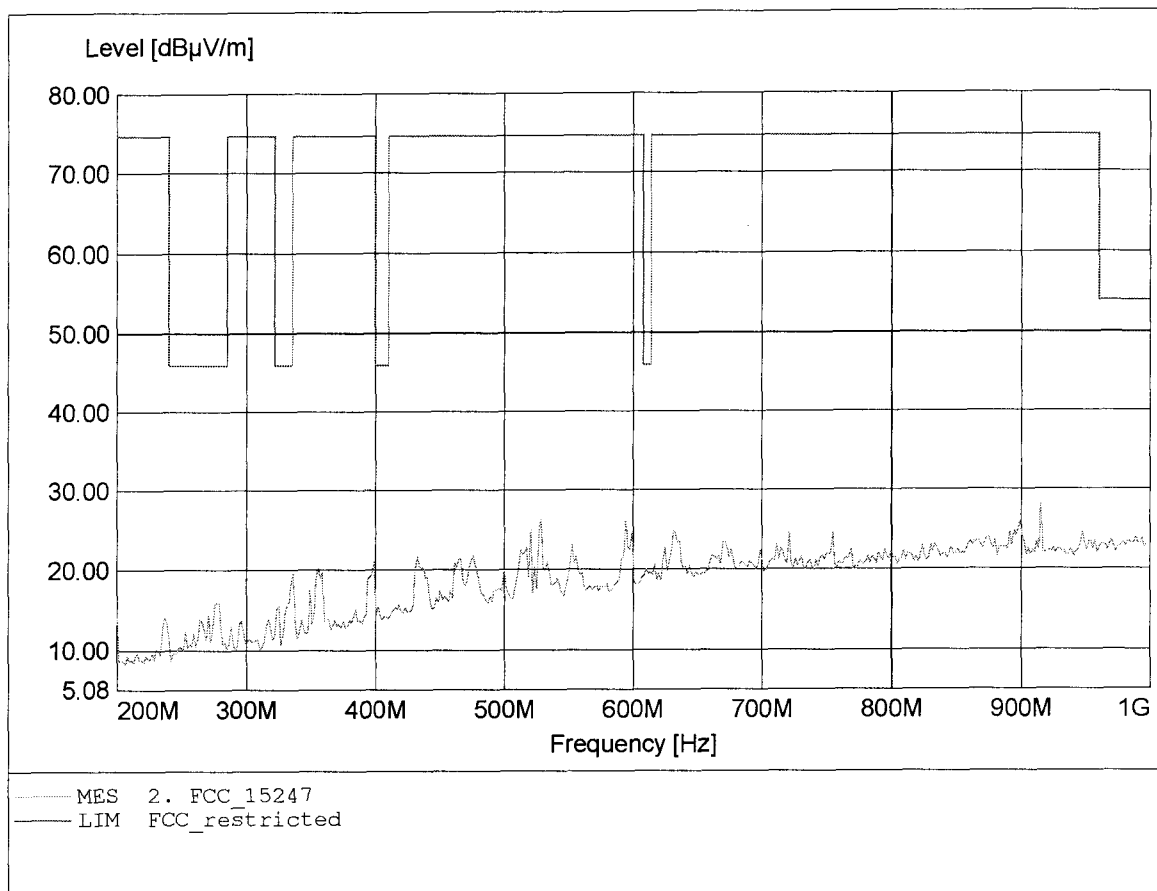


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 671.343MHz, Emax: 25.80dBµV/m, RBW: 100kHz

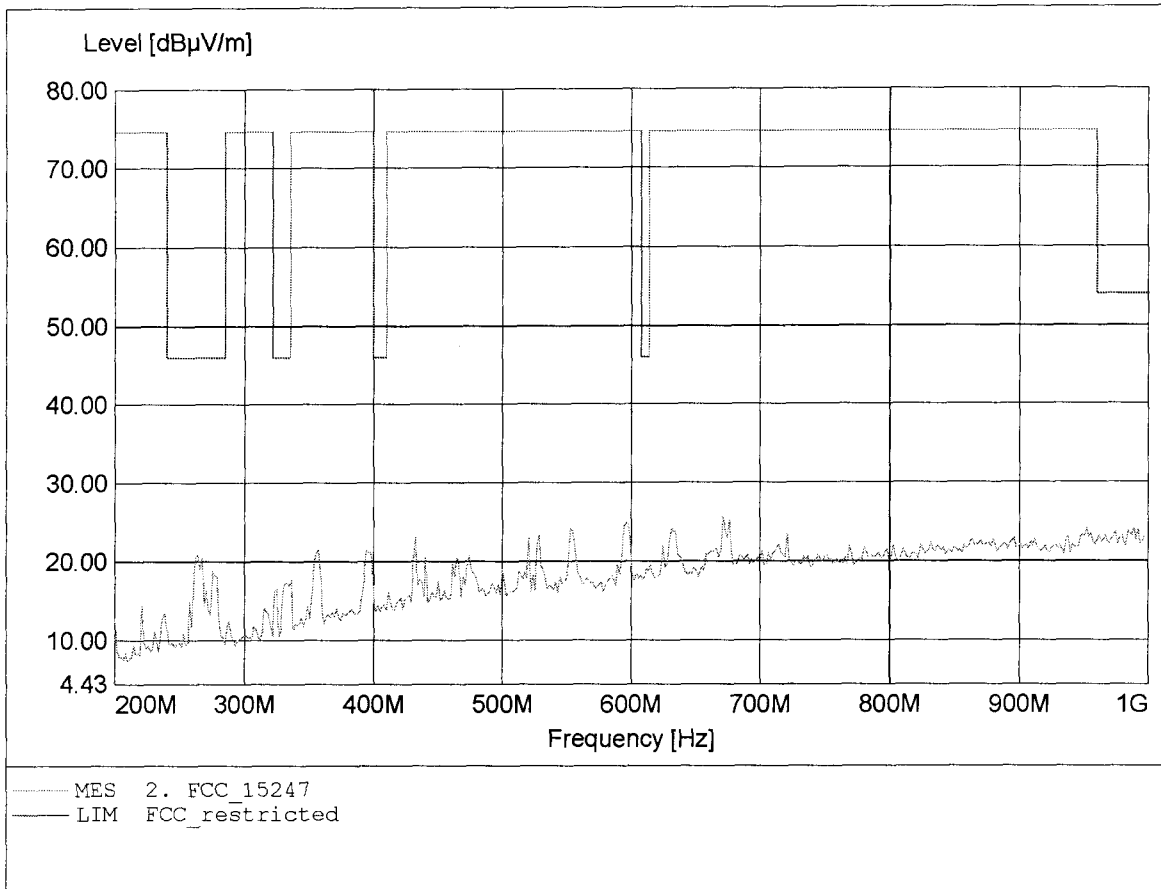


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.985GHz, Emax: 51.59dBµV/m, RBW: 1MHz

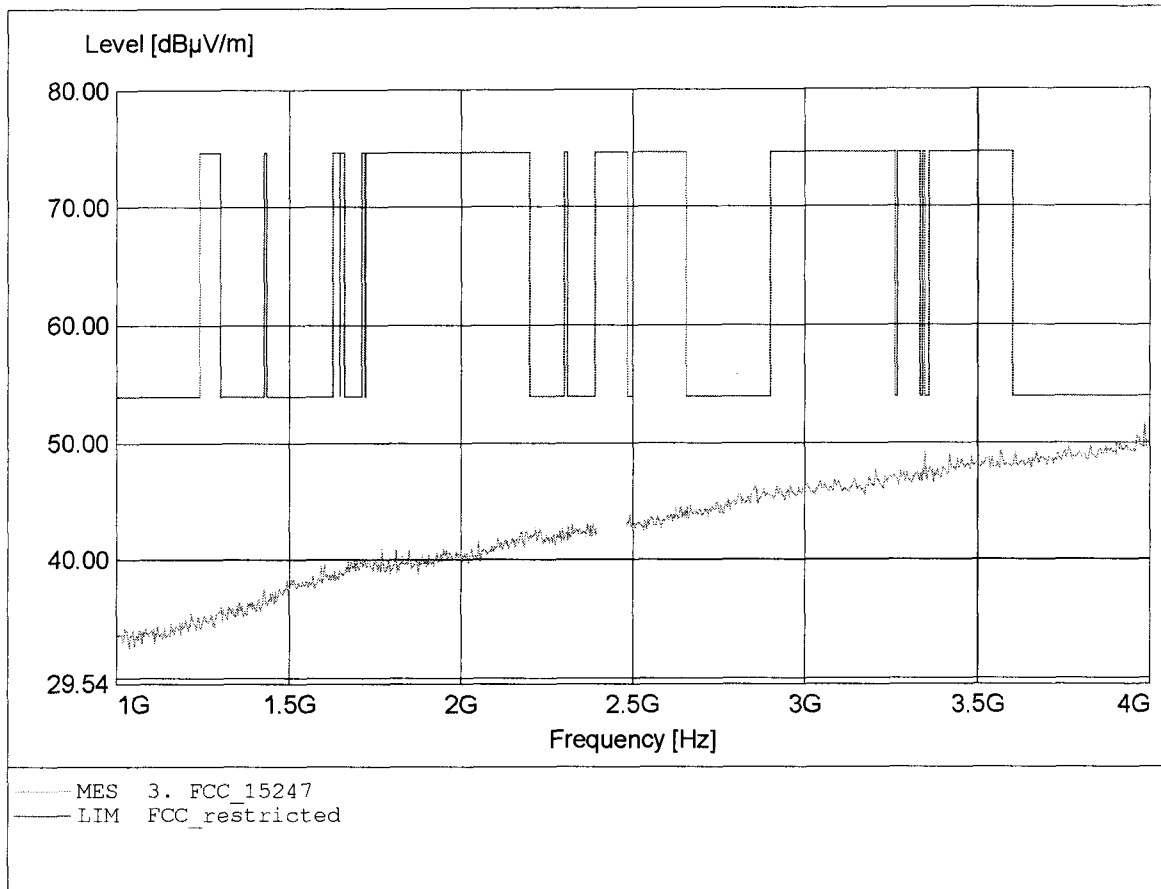


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.204GHz, Emax: 52.92dBµV/m, RBW: 1MHz

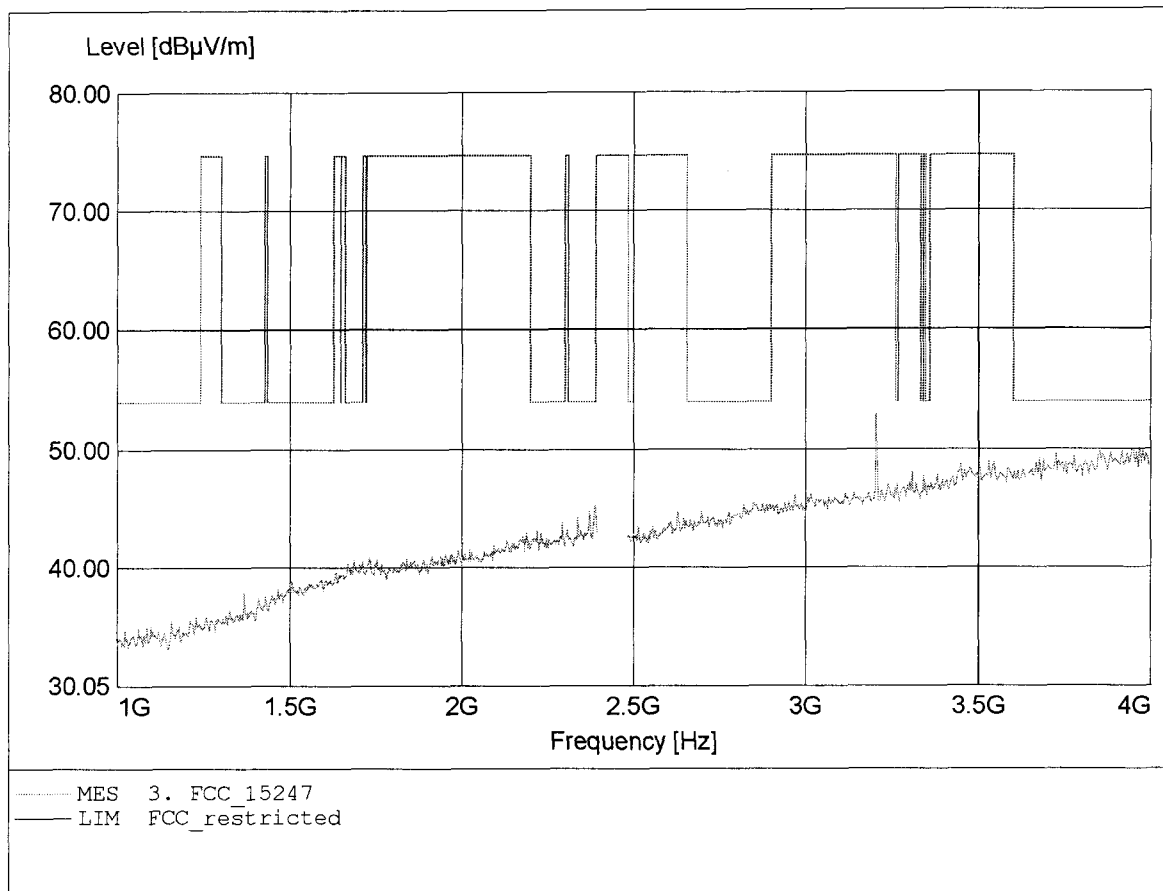


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 51.69dBµV/m, RBW: 1MHz

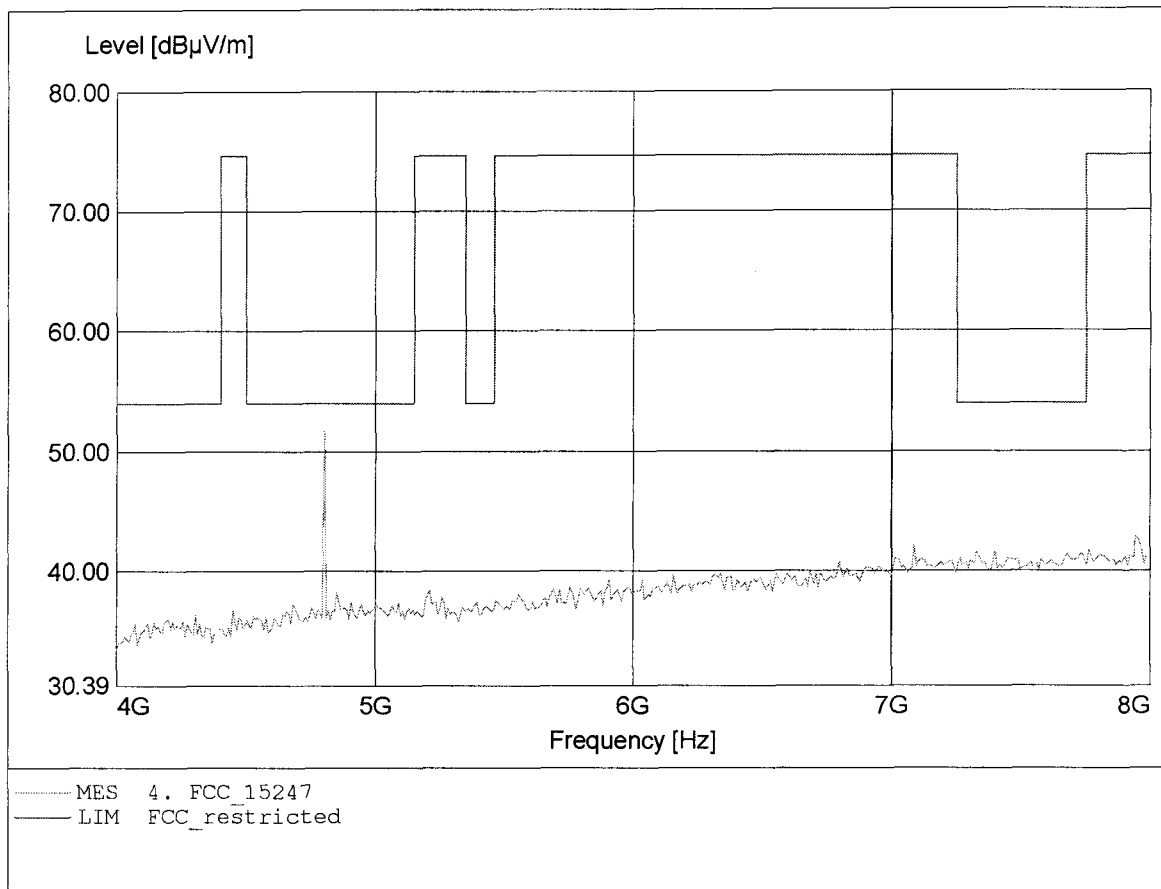


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 55.71dBµV/m, RBW: 1MHz

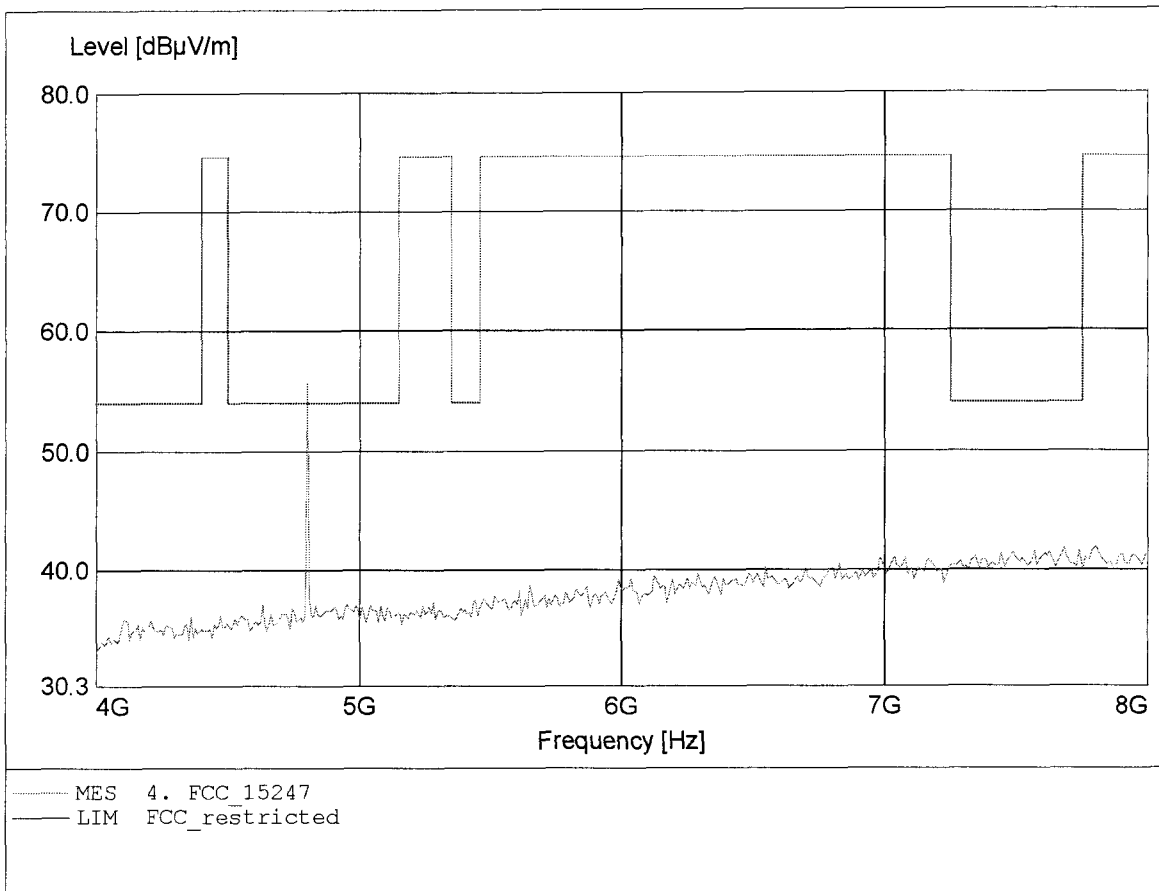


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 34.63dBµV/m, RBW: 1MHz

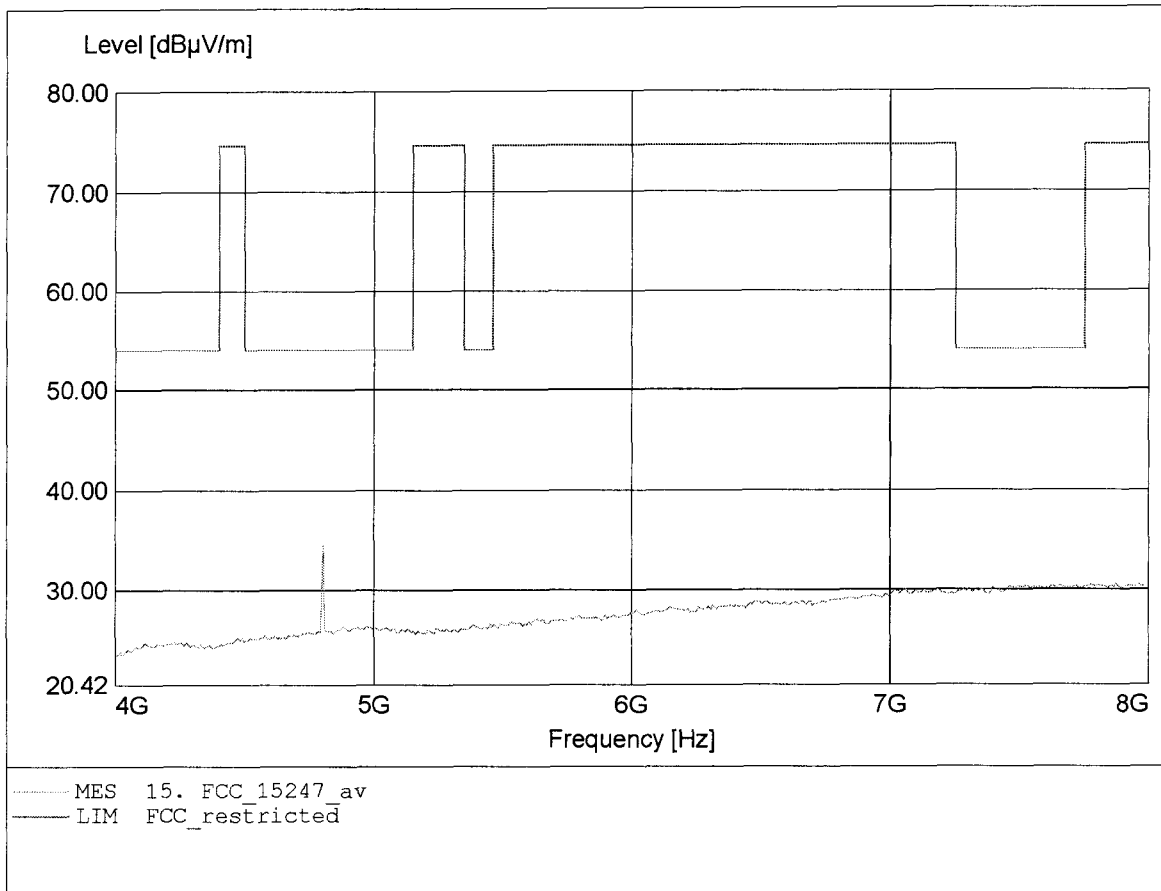


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.896GHz, Emax: 46.37dBµV/m, RBW: 1MHz

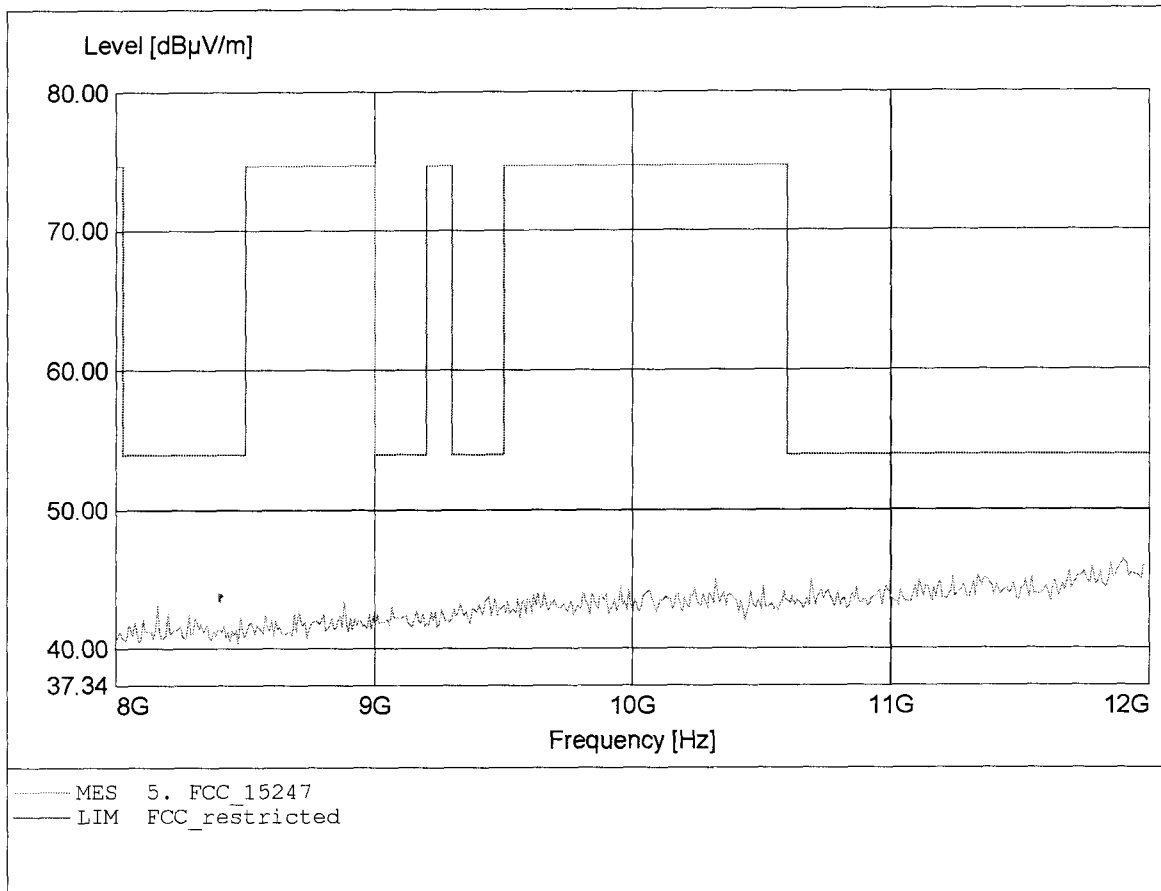


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.912GHz, Emax: 46.51dBµV/m, RBW: 1MHz

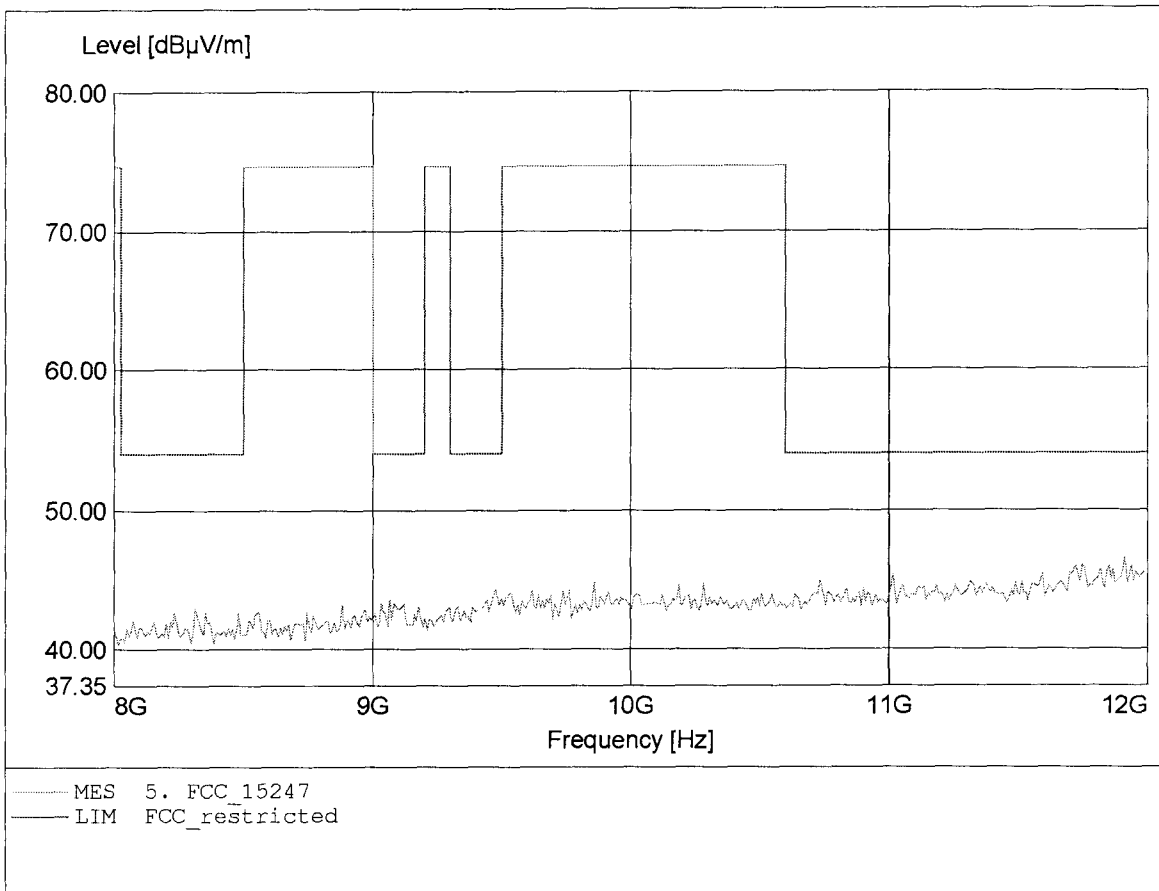


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.261GHz, Emax: 51.01dBµV/m, RBW: 1MHz

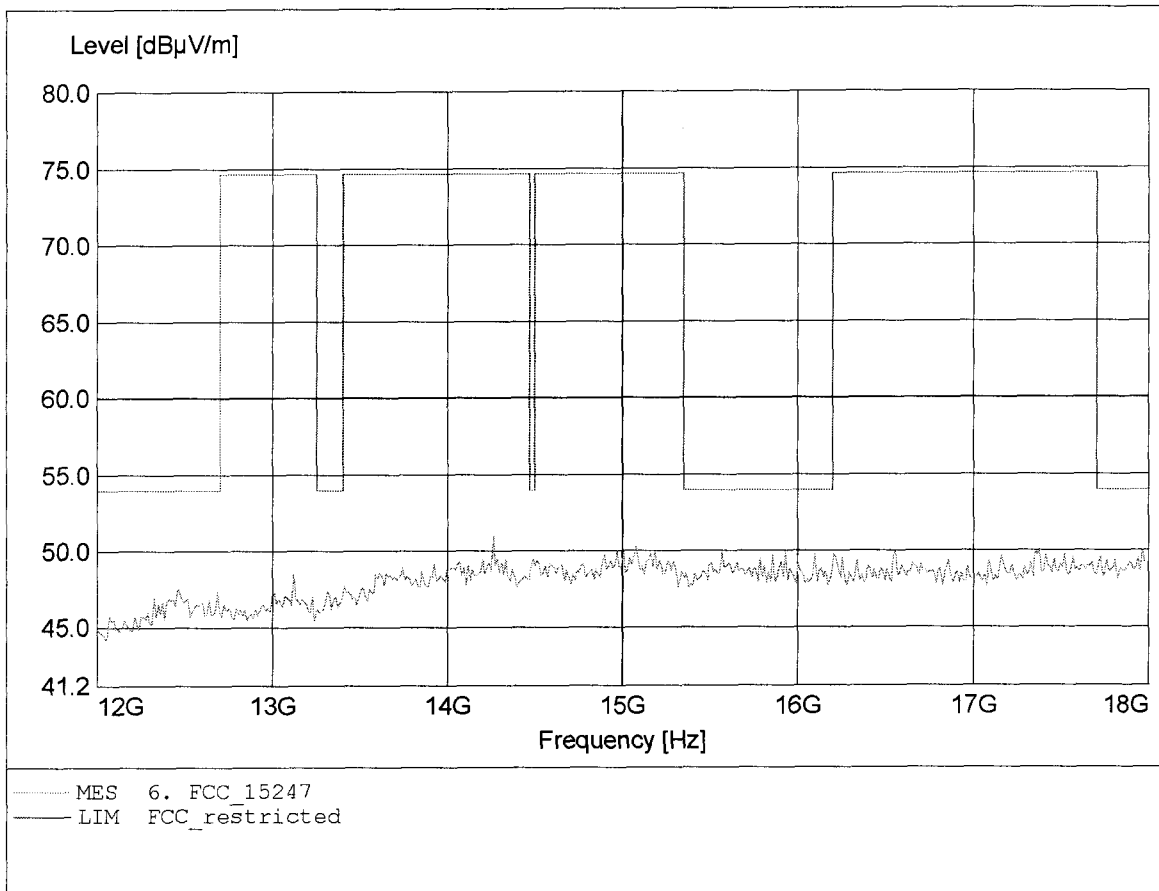


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.968GHz, Emax: 50.70dBµV/m, RBW: 1MHz

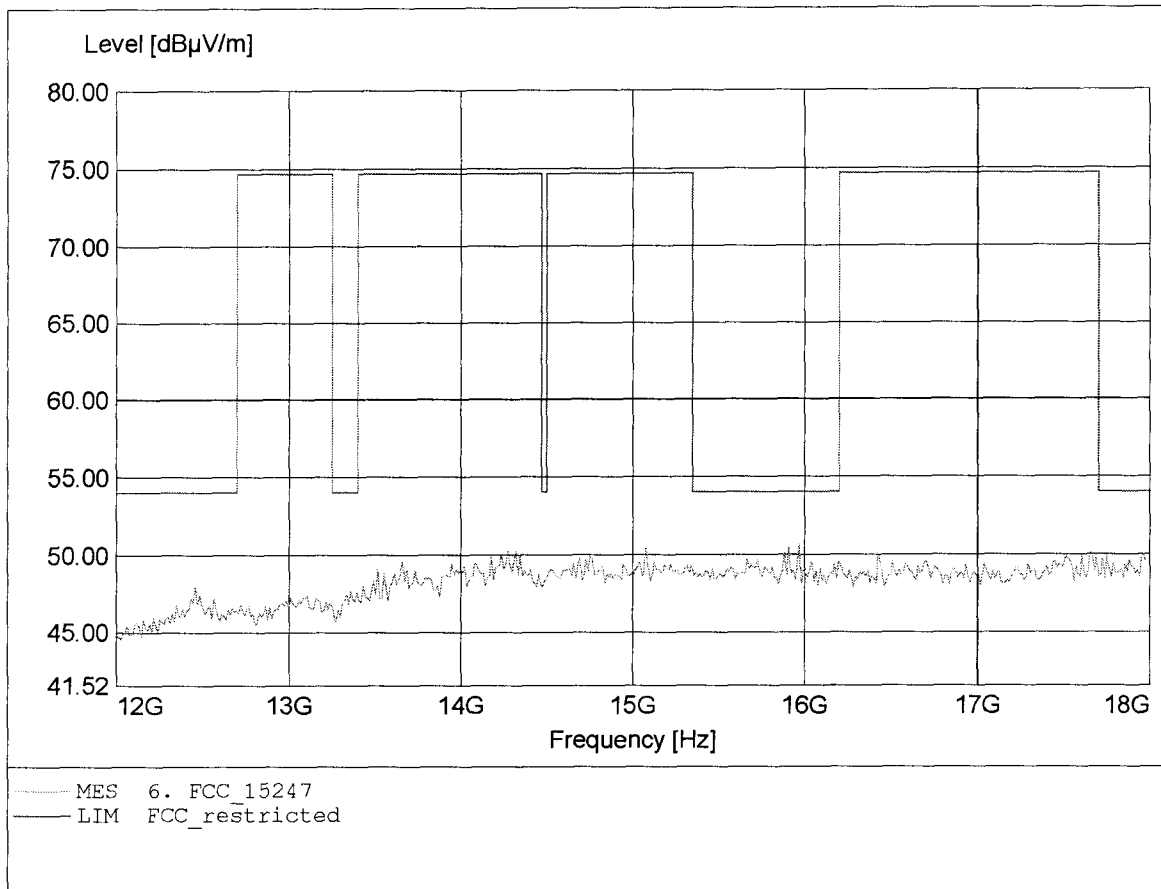


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.142GHz, Emax: 50.16dBµV/m, RBW: 1MHz

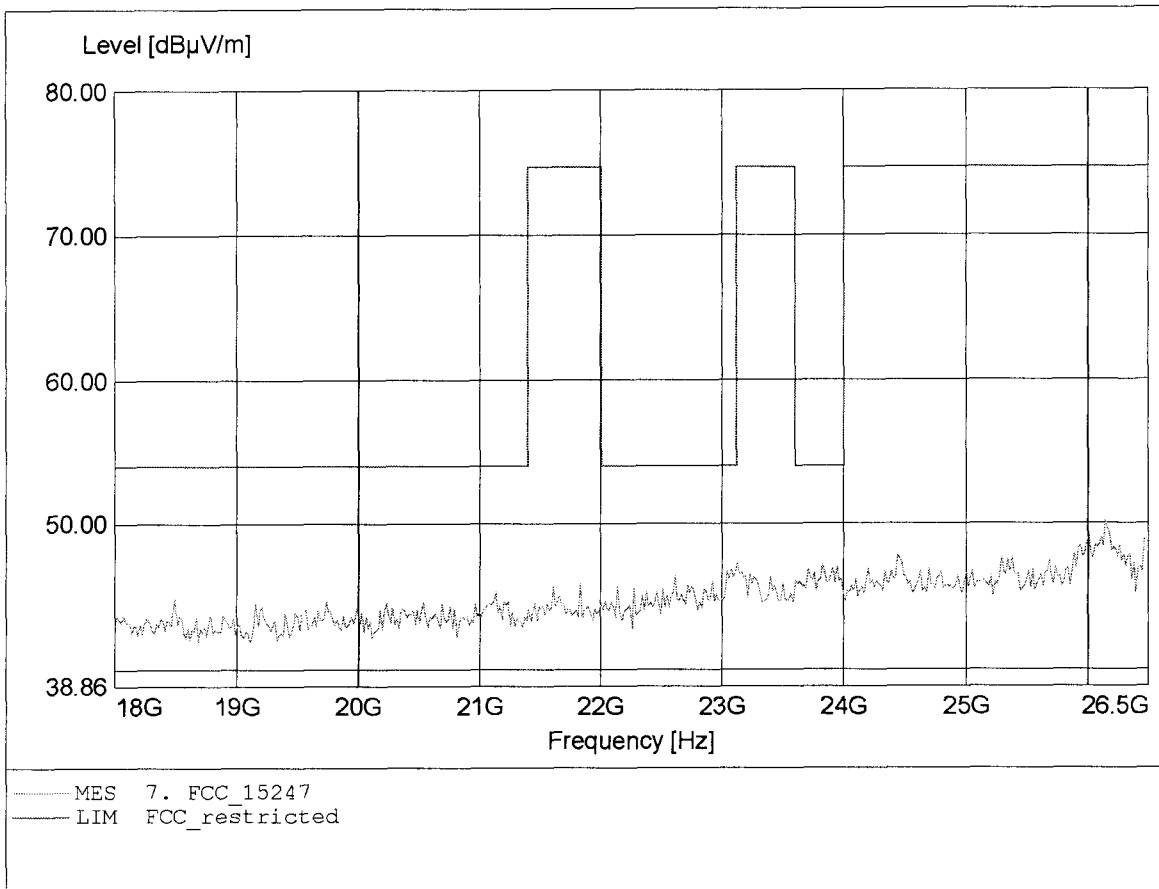


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2402
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.091GHz, Emax: 49.29dBµV/m, RBW: 1MHz

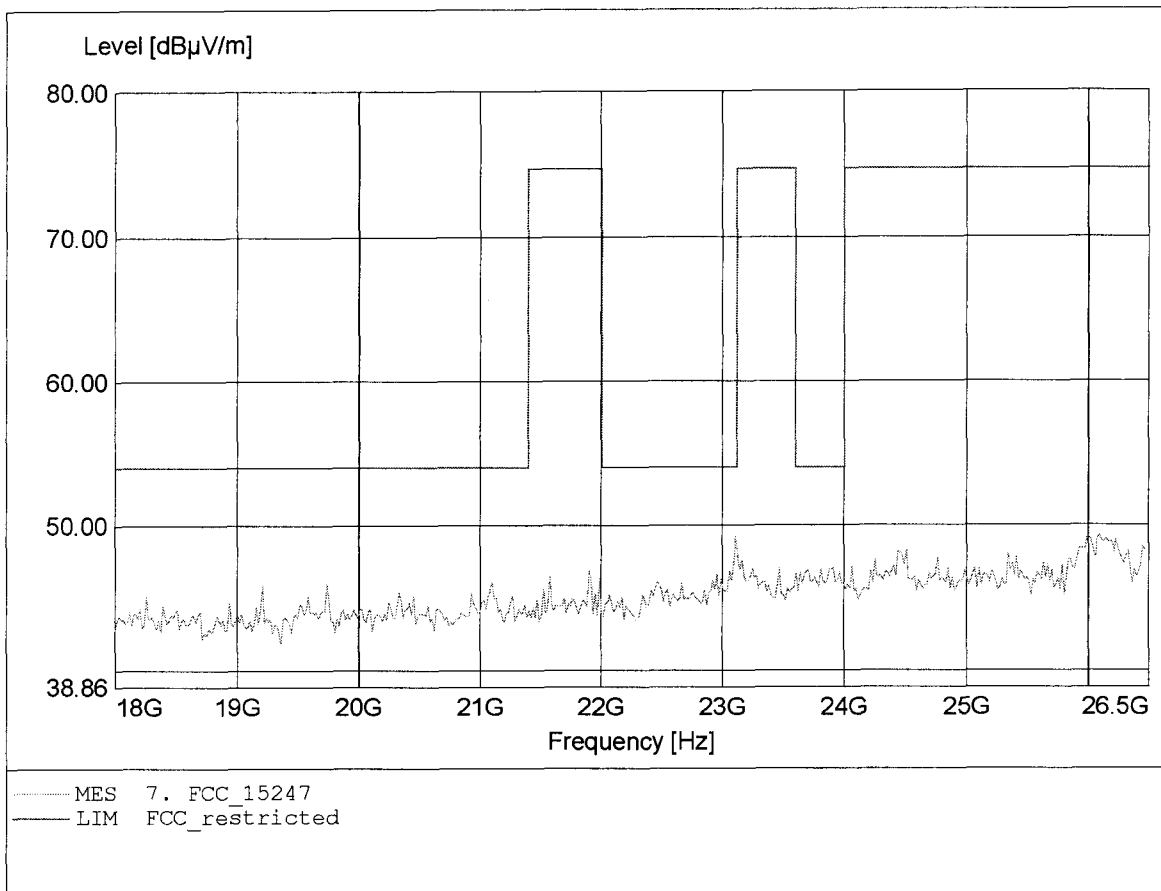


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.571MHz, Emax: 32.39dBµV/m, RBW: 100kHz

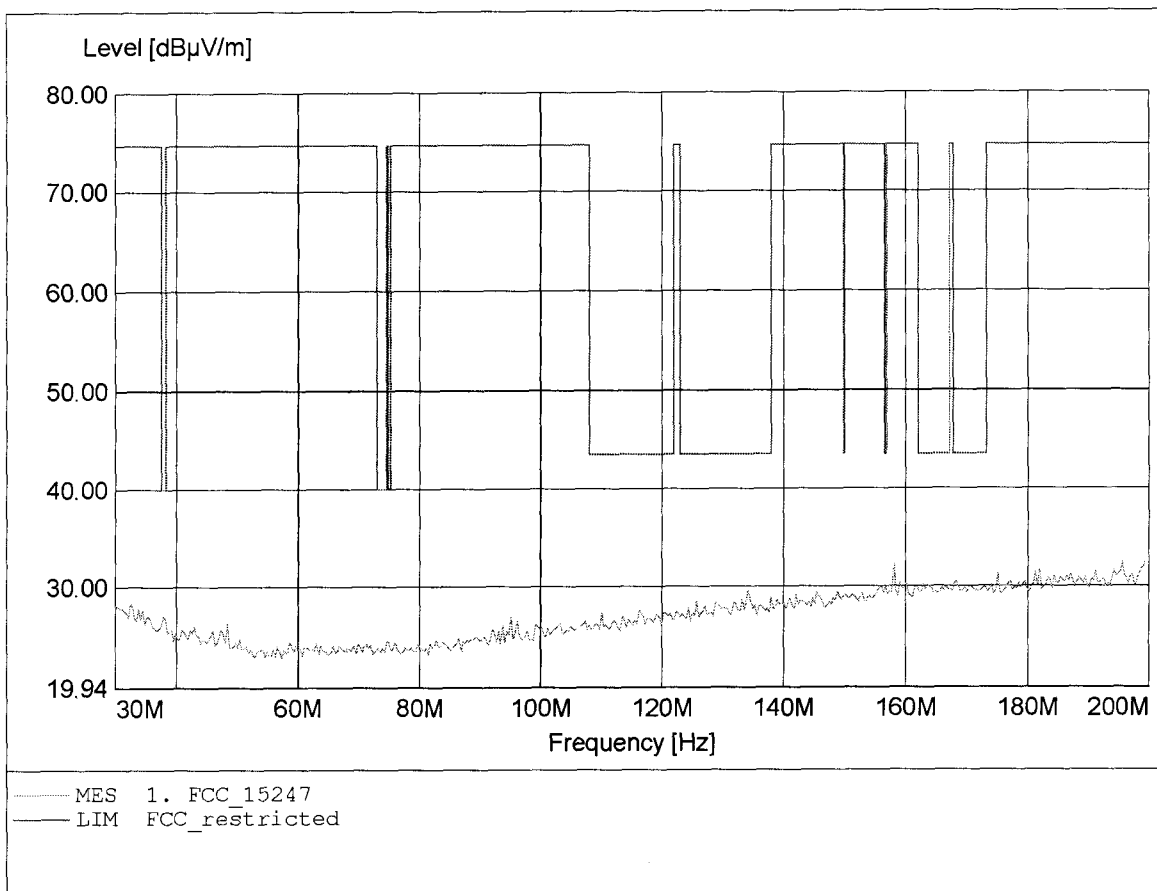


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 174.449MHz, Emax: 32.32dBµV/m, RBW: 100kHz

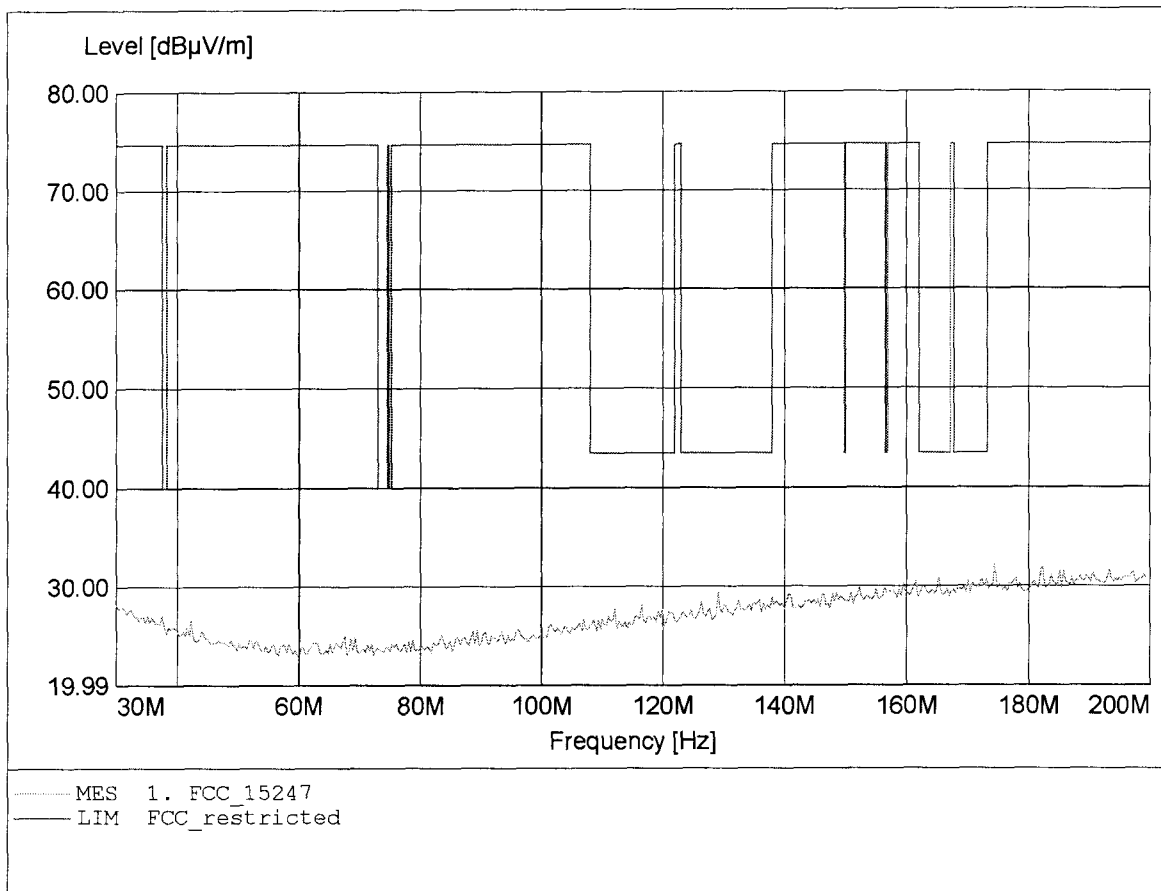


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 599.198MHz, Emax: 27.35dBµV/m, RBW: 100kHz

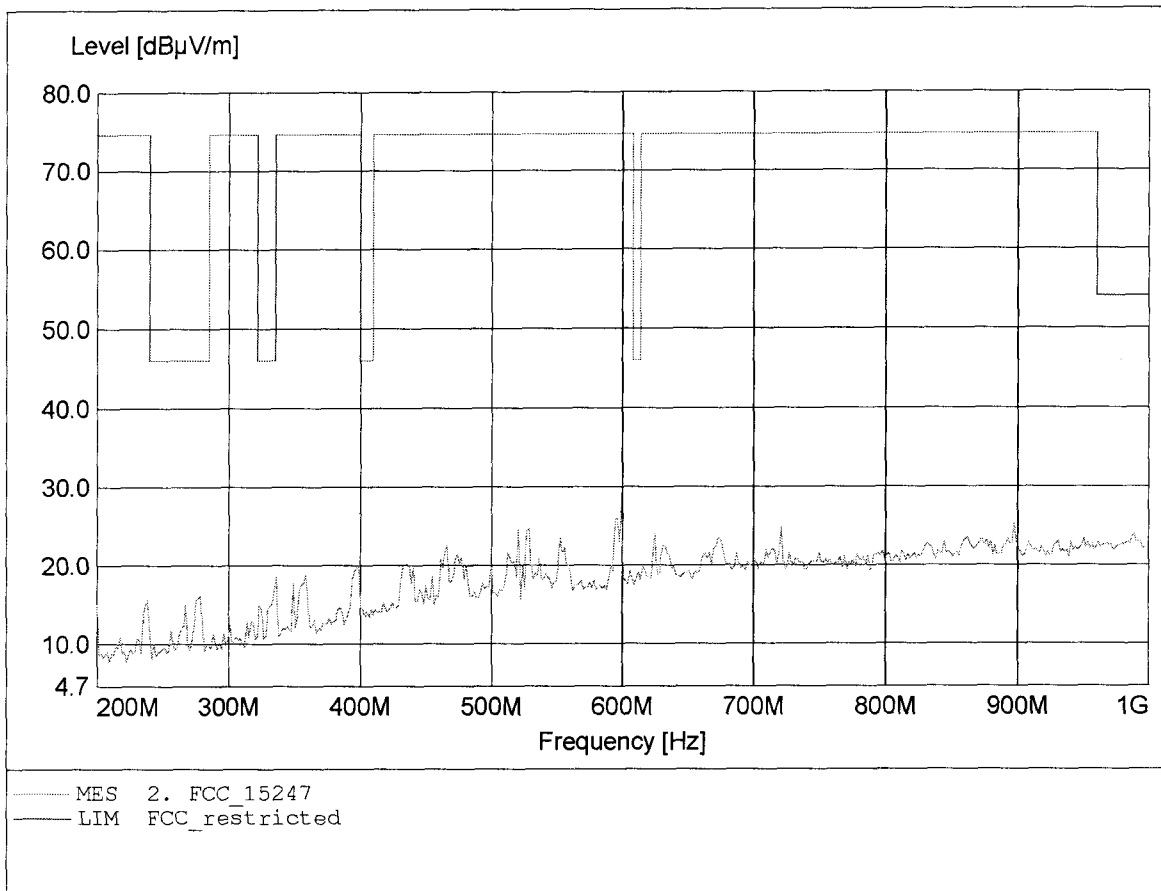


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 674.549MHz, Emax: 24.99dBµV/m, RBW: 100kHz

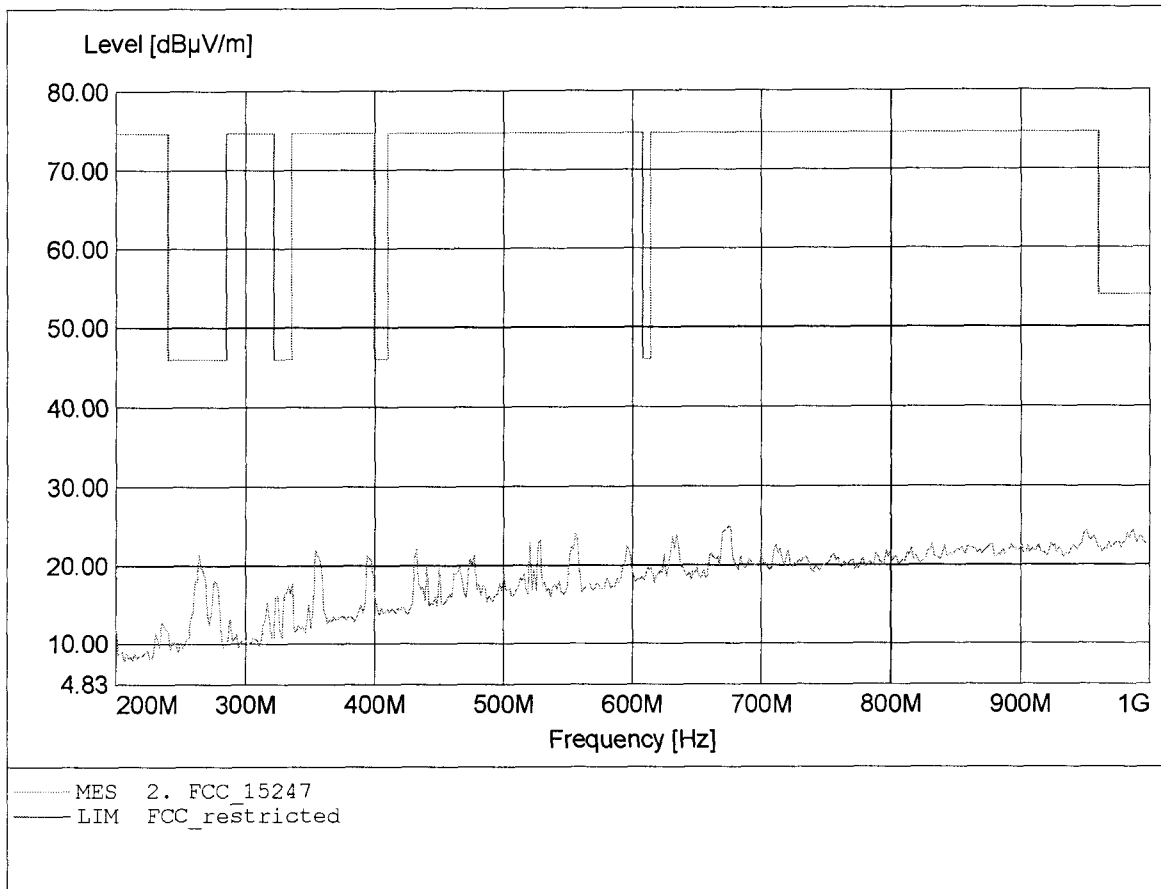


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.951GHz, Emax: 50.45dBµV/m, RBW: 1MHz

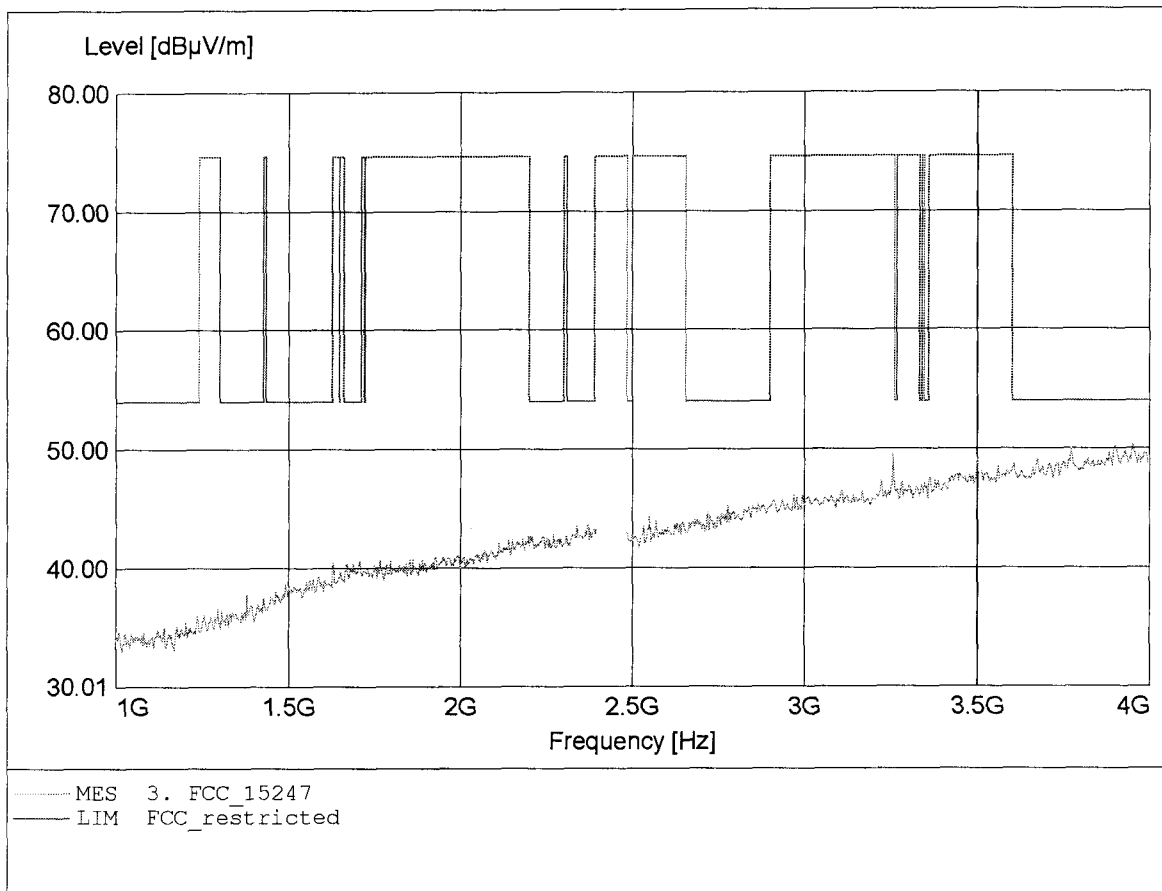


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.255GHz, Emax: 55.84dBµV/m, RBW: 1MHz

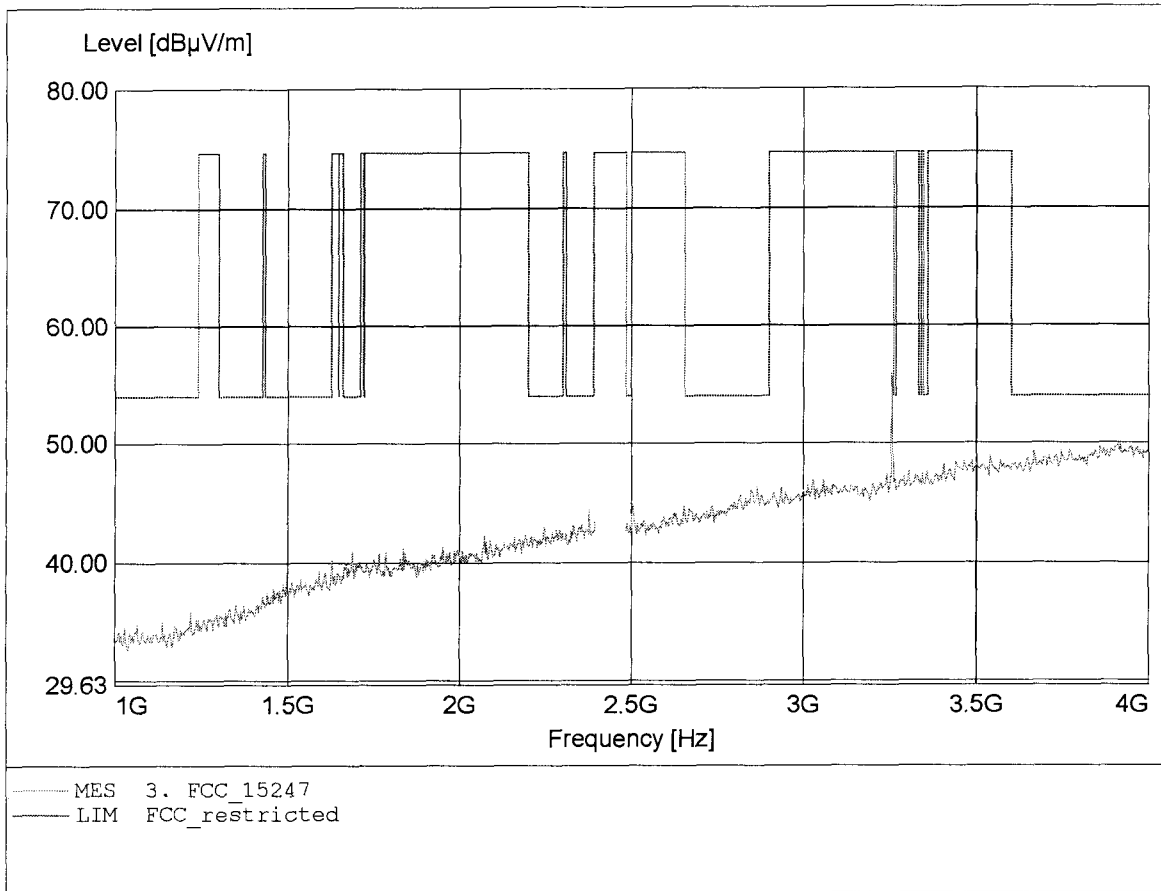


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.255GHz, Emax: 55.84dBµV/m, RBW: 1MHz

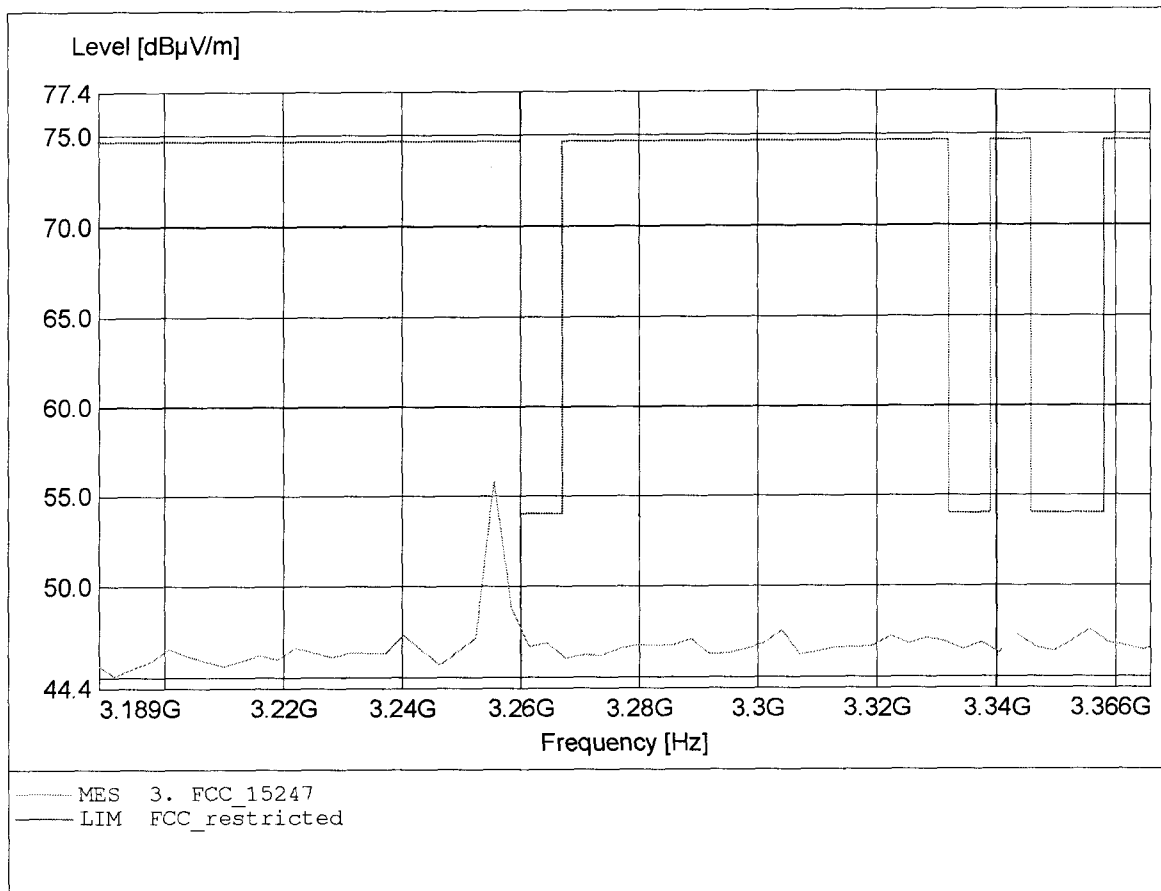


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 54.02dBµV/m, RBW: 1MHz

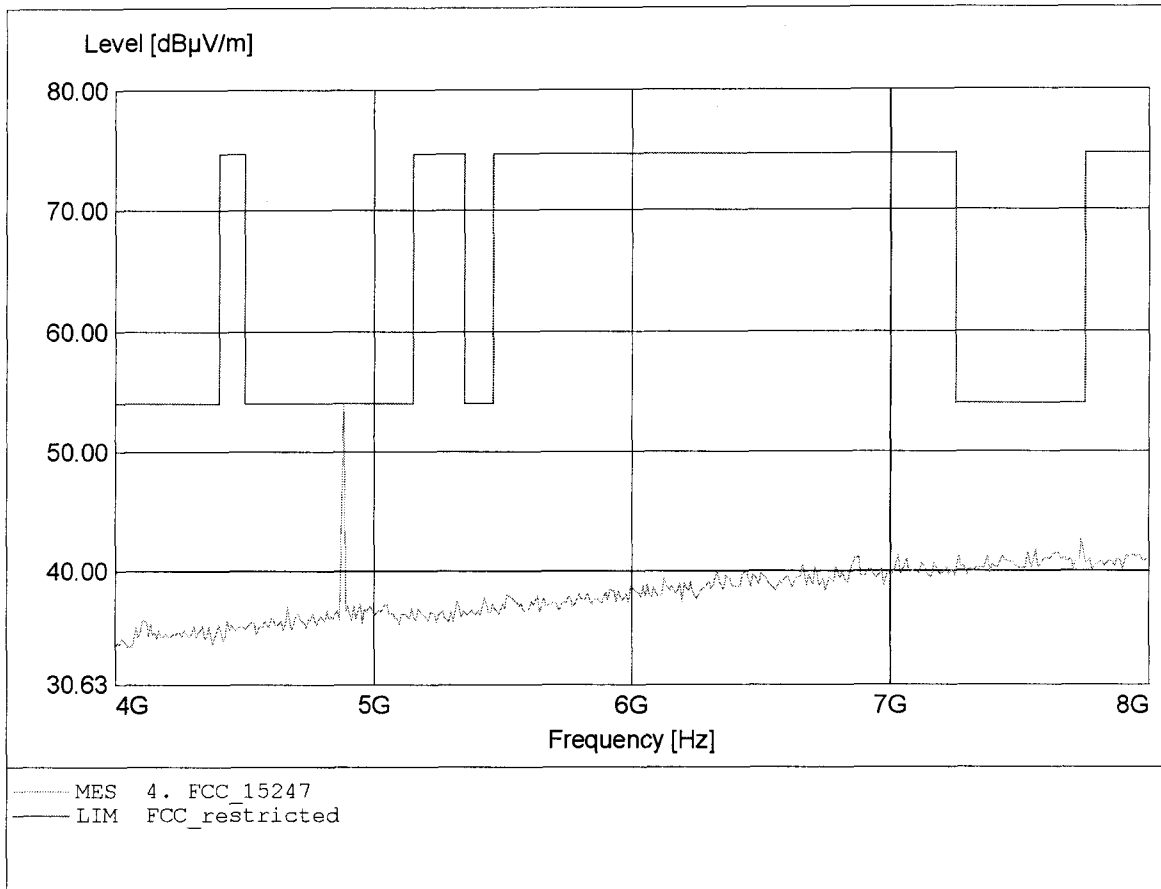


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 32.68dBµV/m, RBW: 1MHz

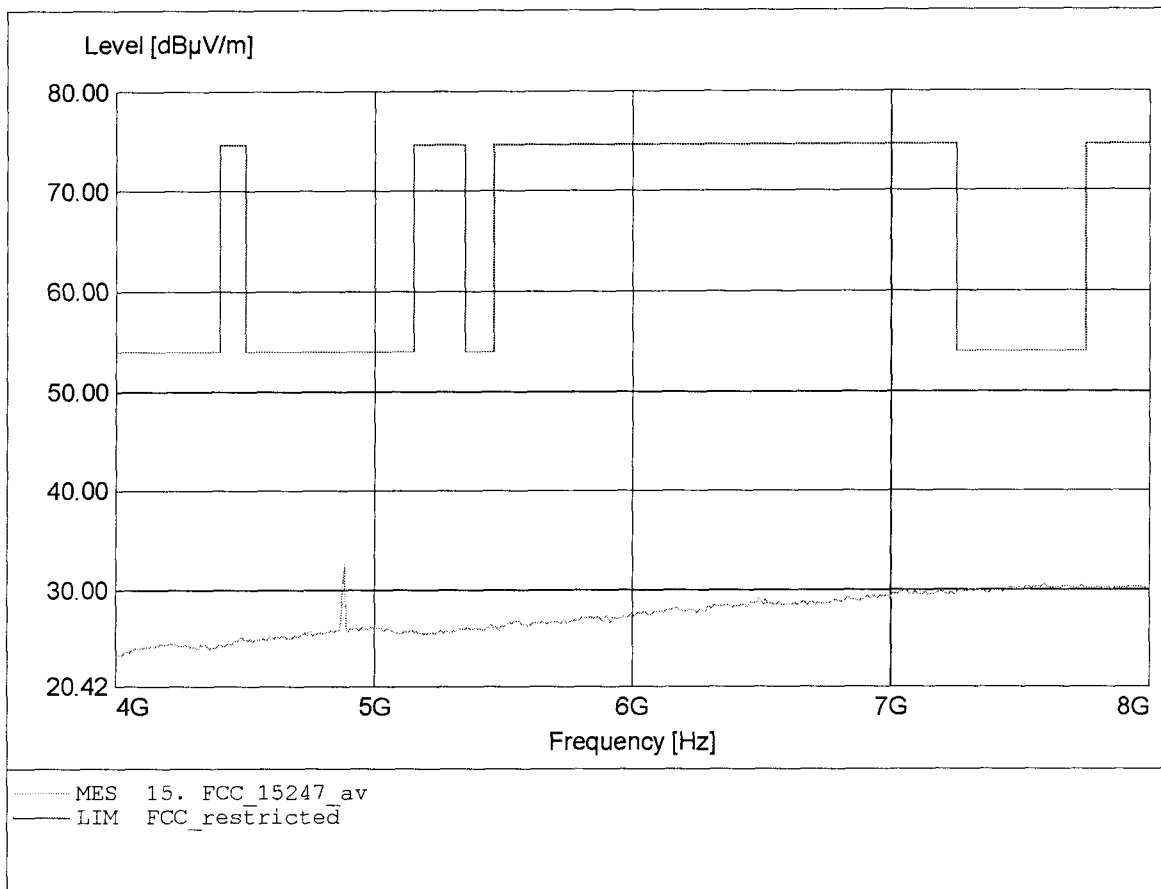


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 57.58dBµV/m, RBW: 1MHz

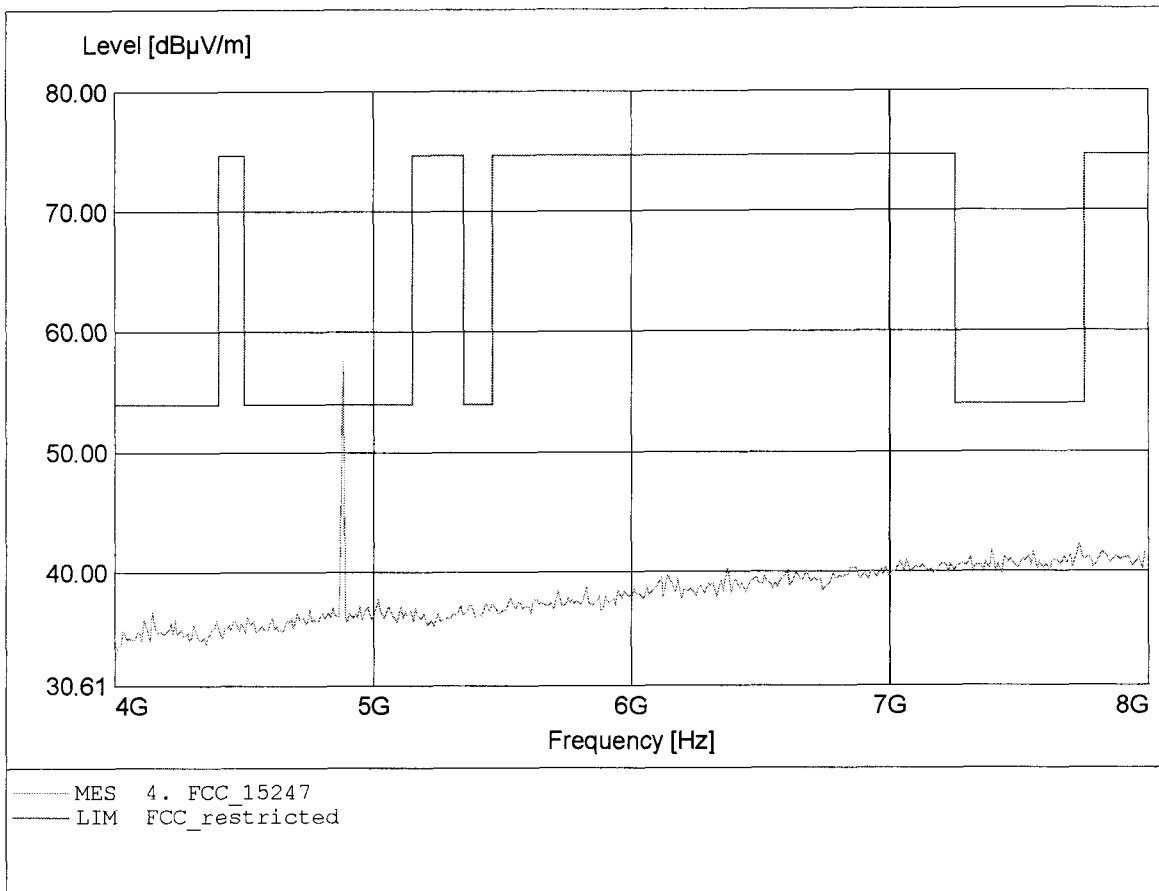


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 35.10dBµV/m, RBW: 1MHz

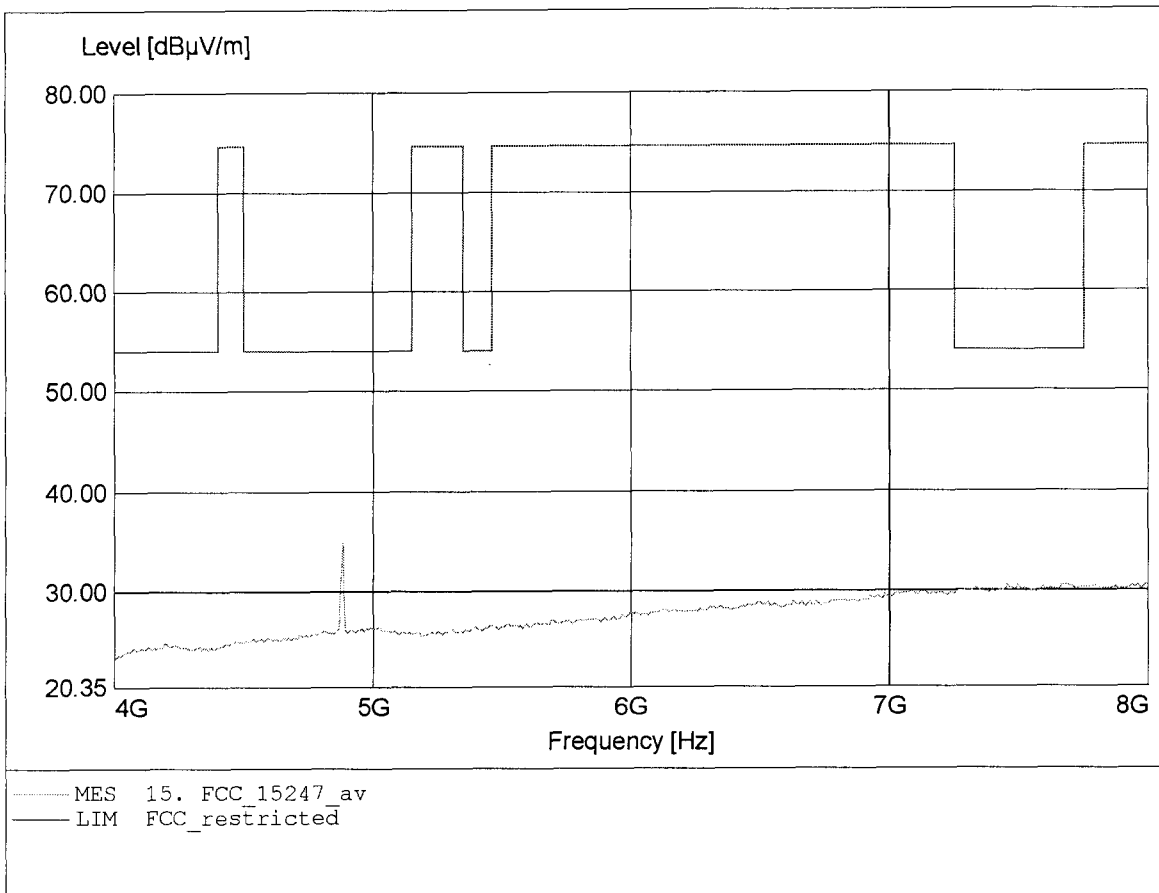


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.888GHz, Emax: 45.95dBµV/m, RBW: 1MHz

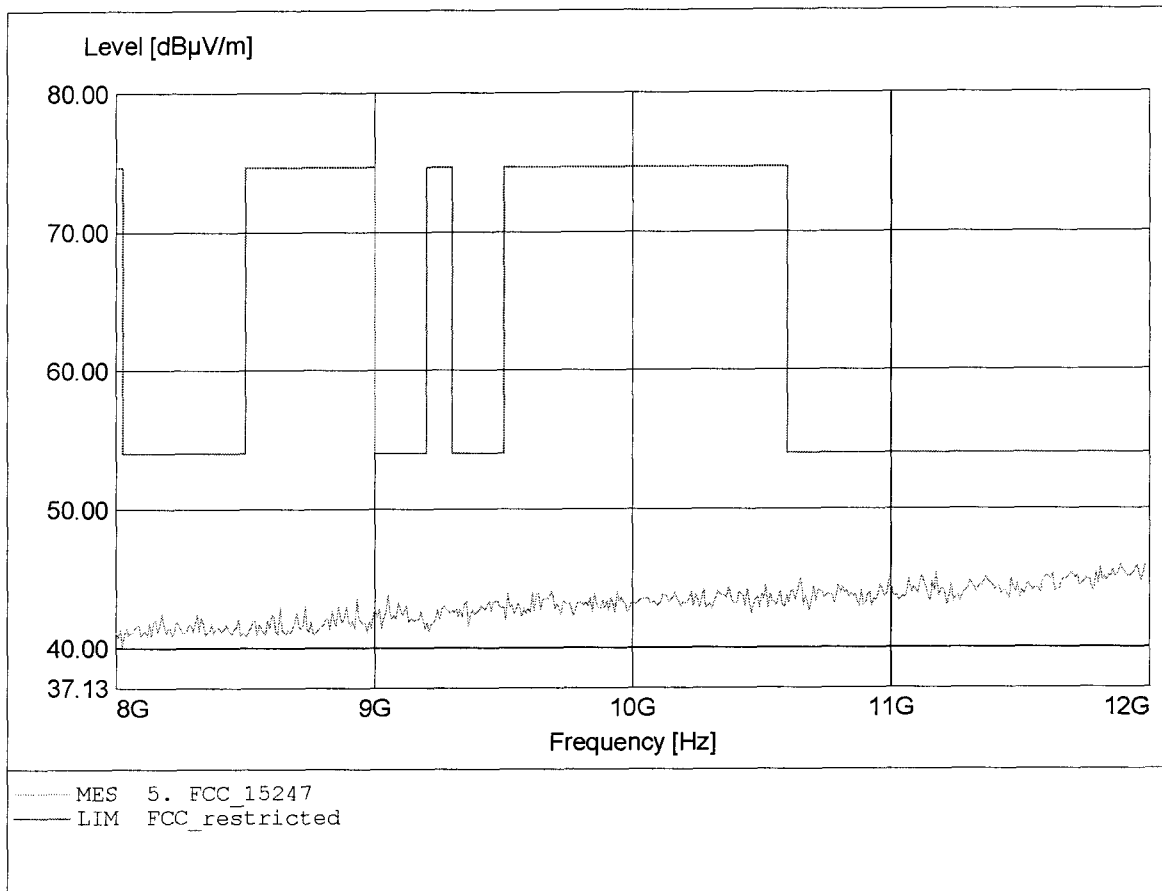


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.928GHz, Emax: 46.45dBµV/m, RBW: 1MHz

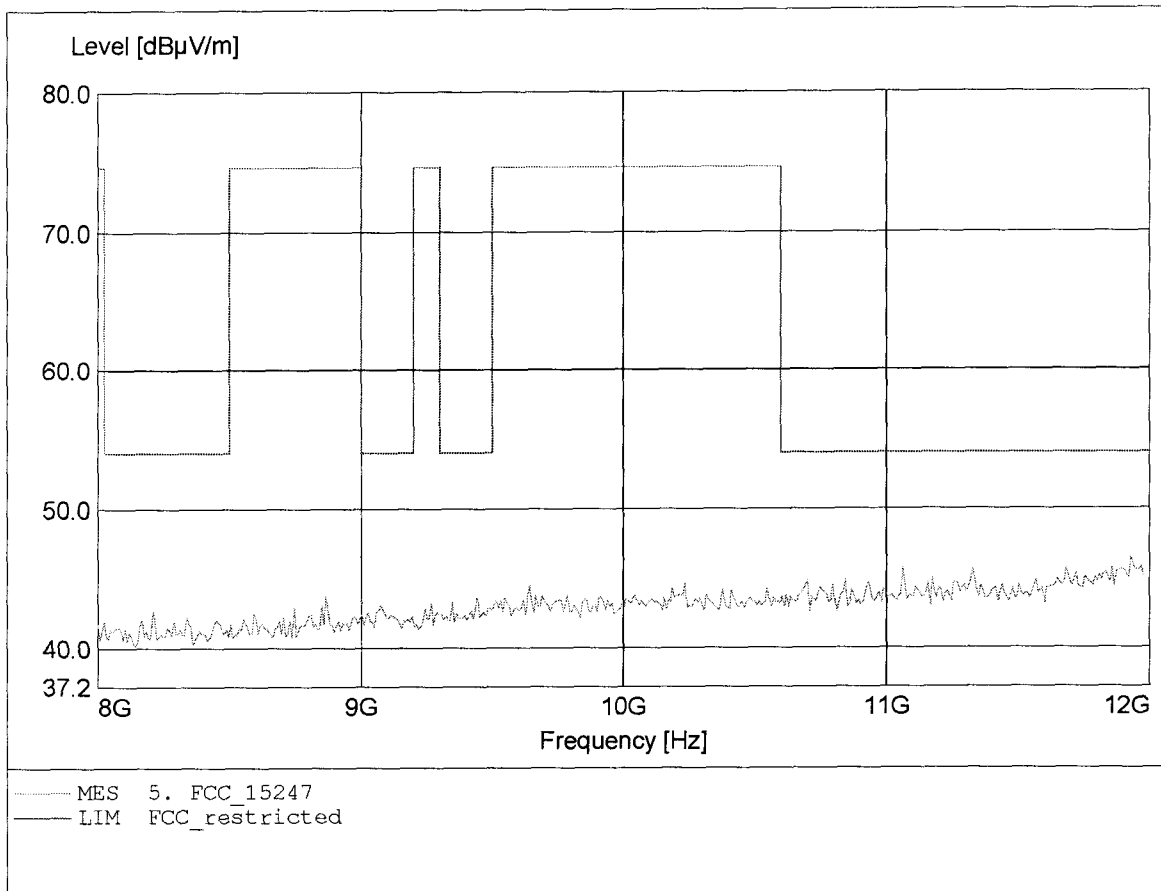


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.603GHz, Emax: 50.84dBµV/m, RBW: 1MHz

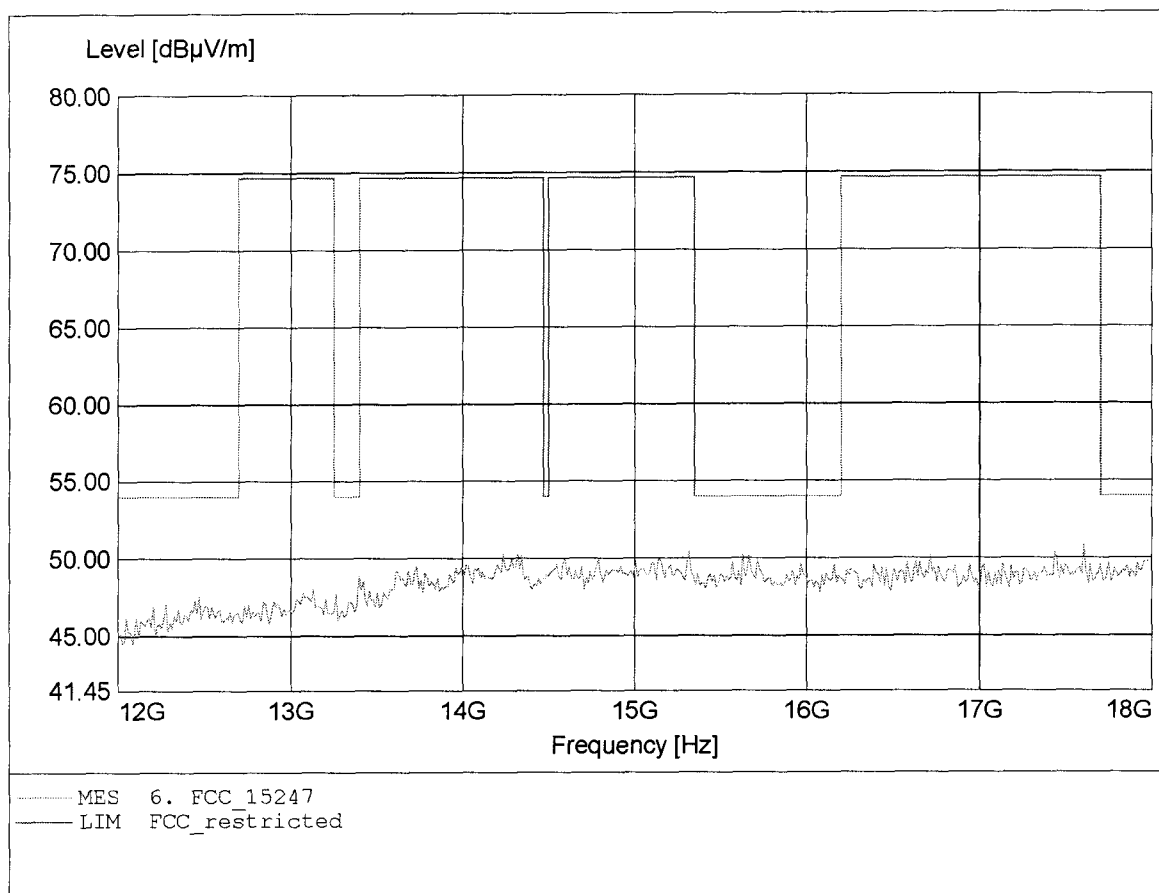


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.303GHz, Emax: 50.32dBµV/m, RBW: 1MHz

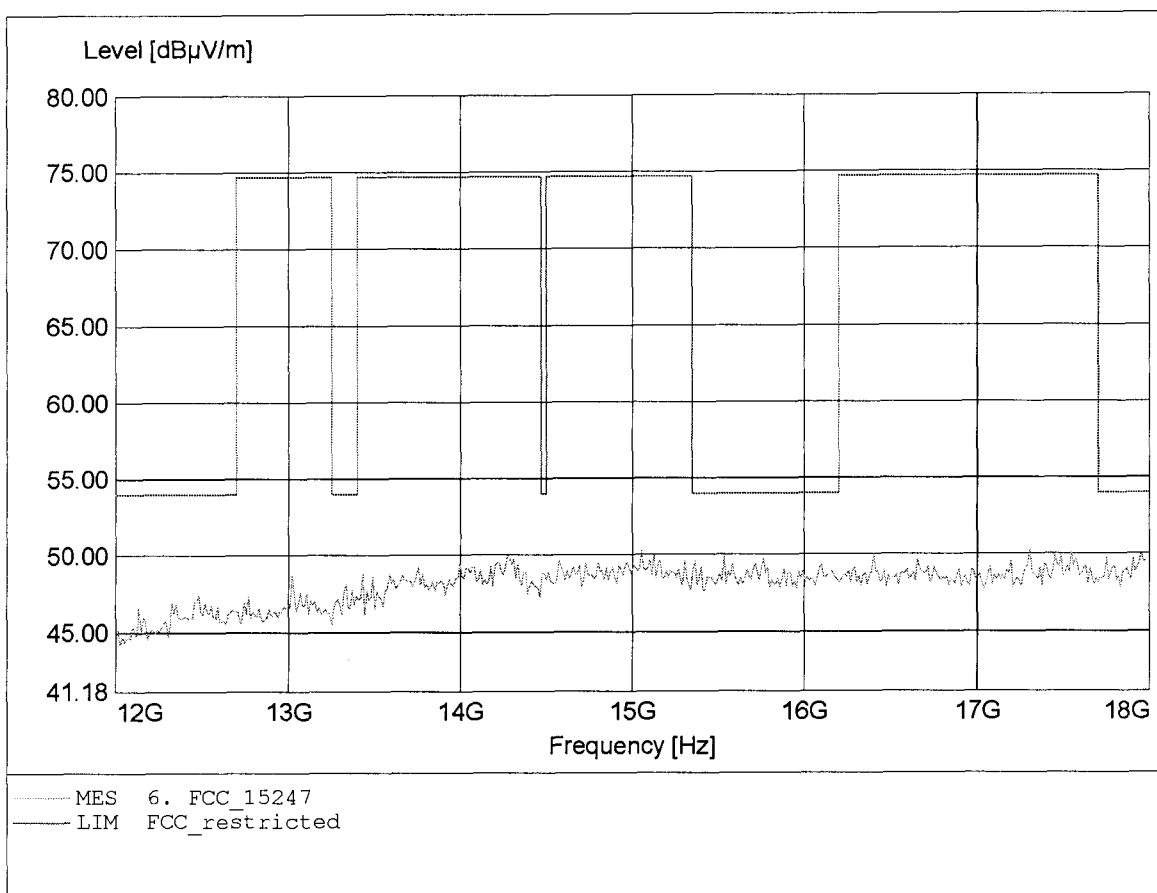


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.227GHz, Emax: 50.16dBµV/m, RBW: 1MHz

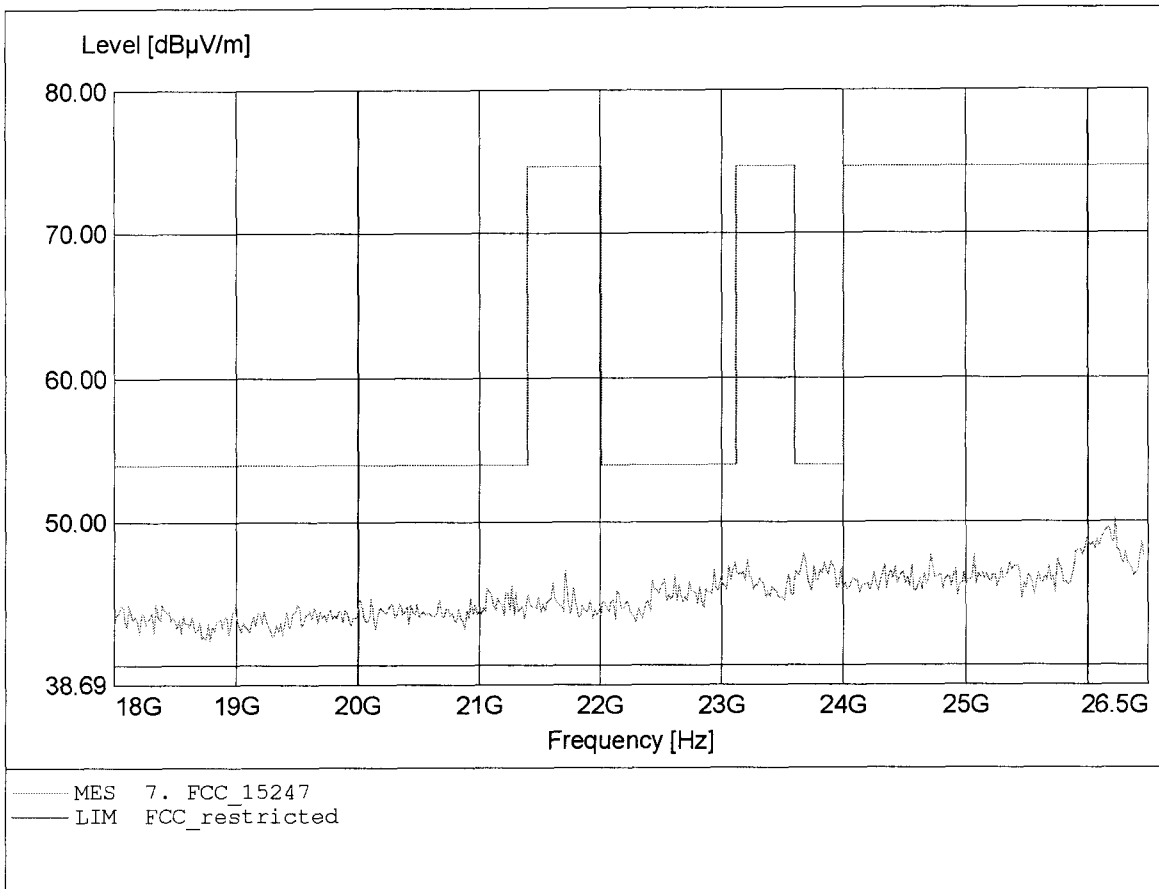


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.193GHz, Emax: 50.44dBµV/m, RBW: 1MHz

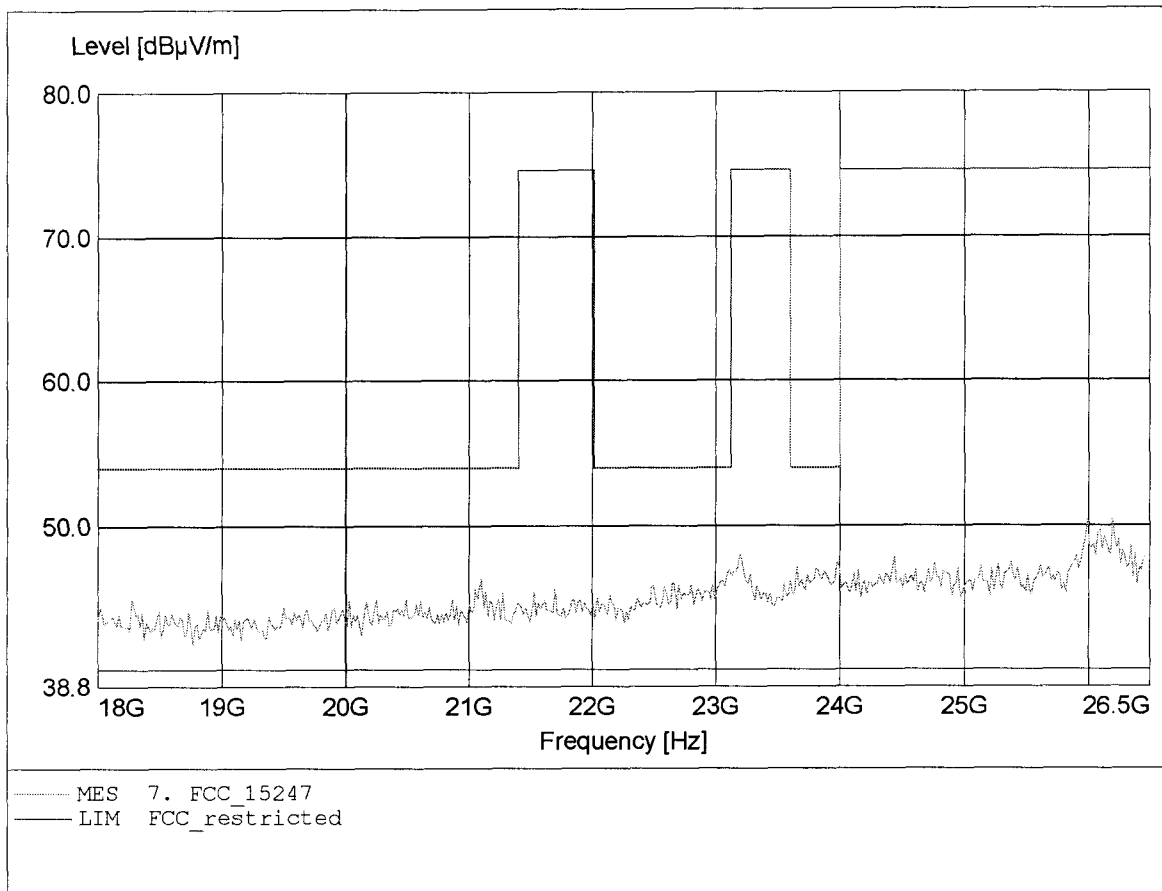


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 32.37dBµV/m, RBW: 100kHz

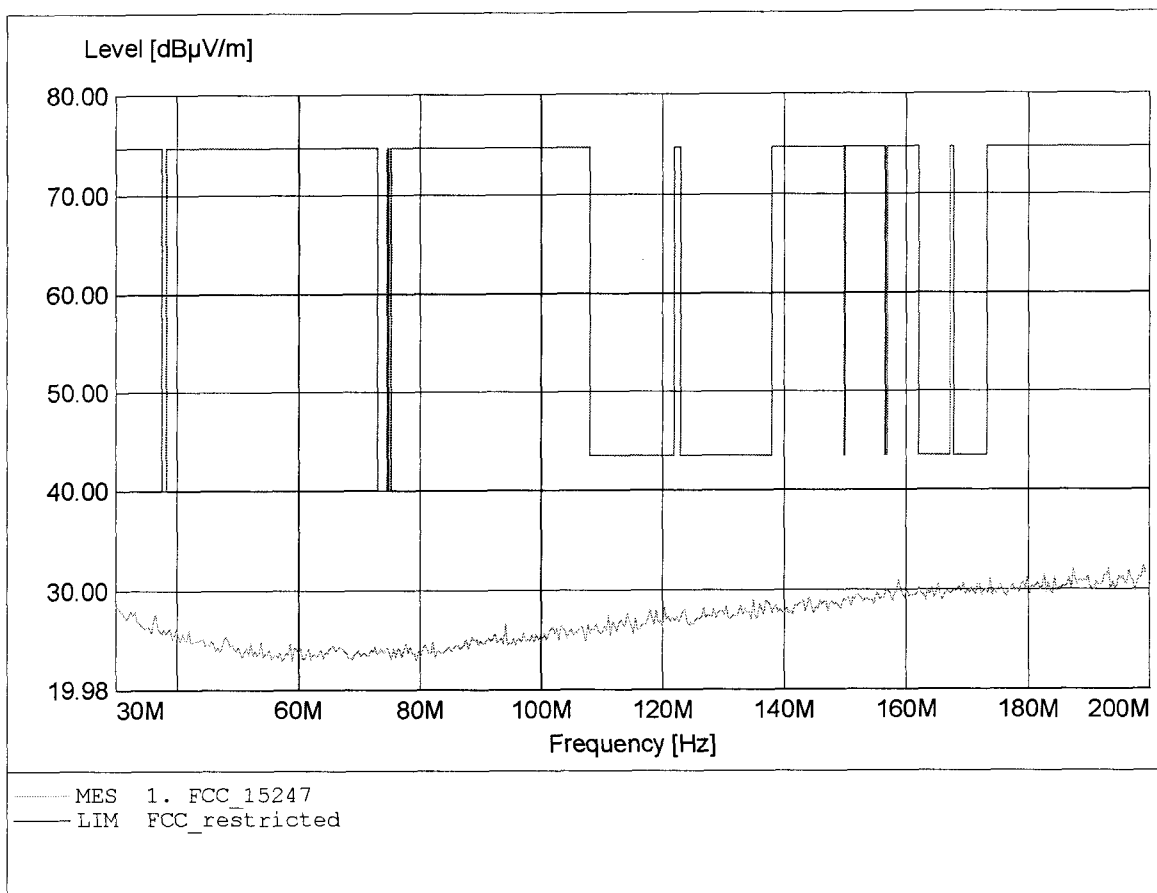


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.208MHz, Emax: 32.00dBµV/m, RBW: 100kHz

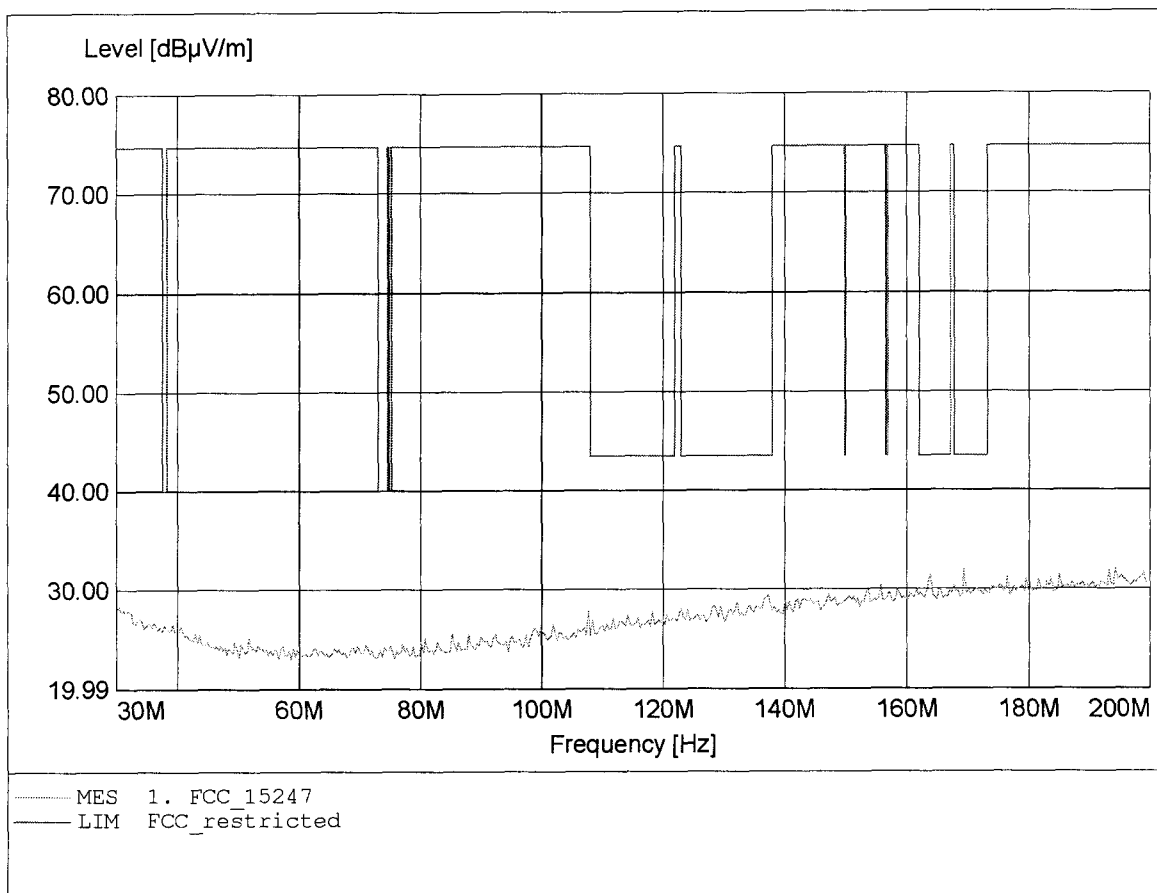


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 528.657MHz, Emax: 27.74dBµV/m, RBW: 100kHz

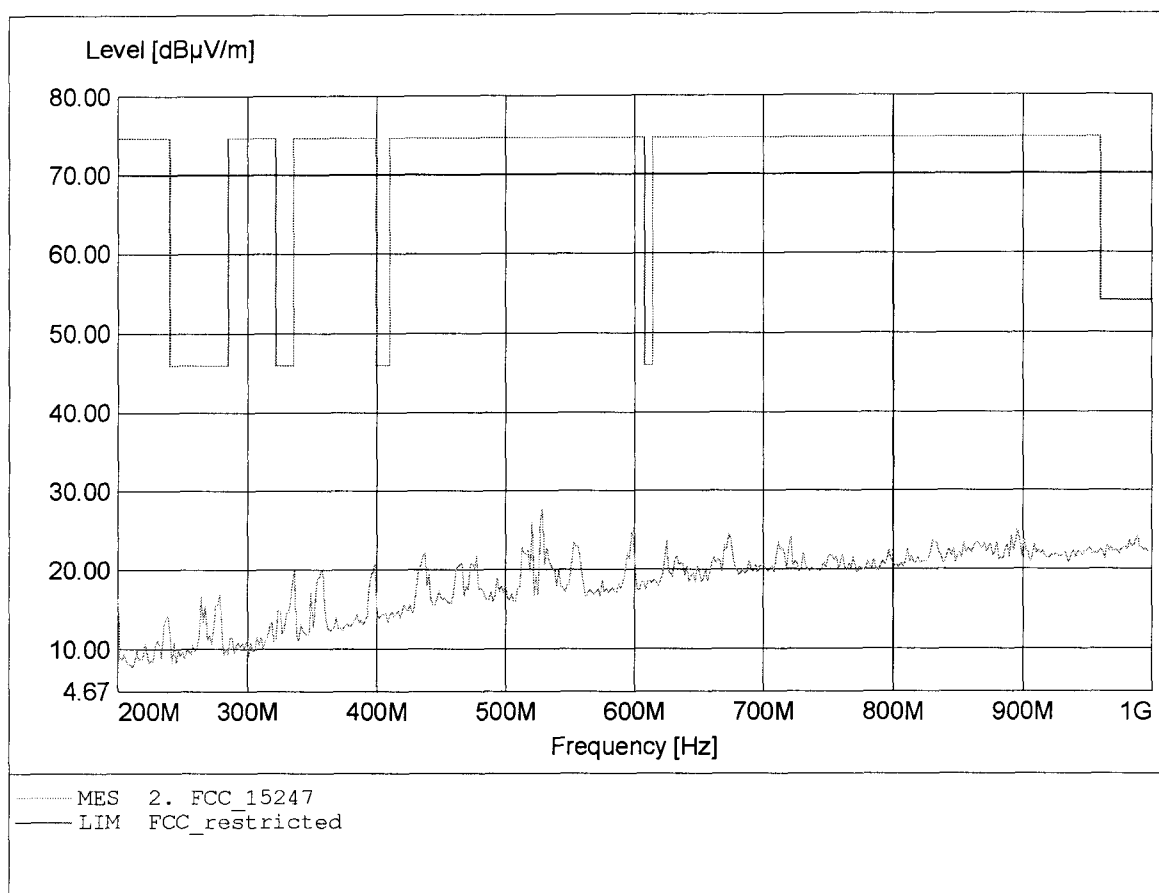


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 672.946MHz, Emax: 26.72dBµV/m, RBW: 100kHz

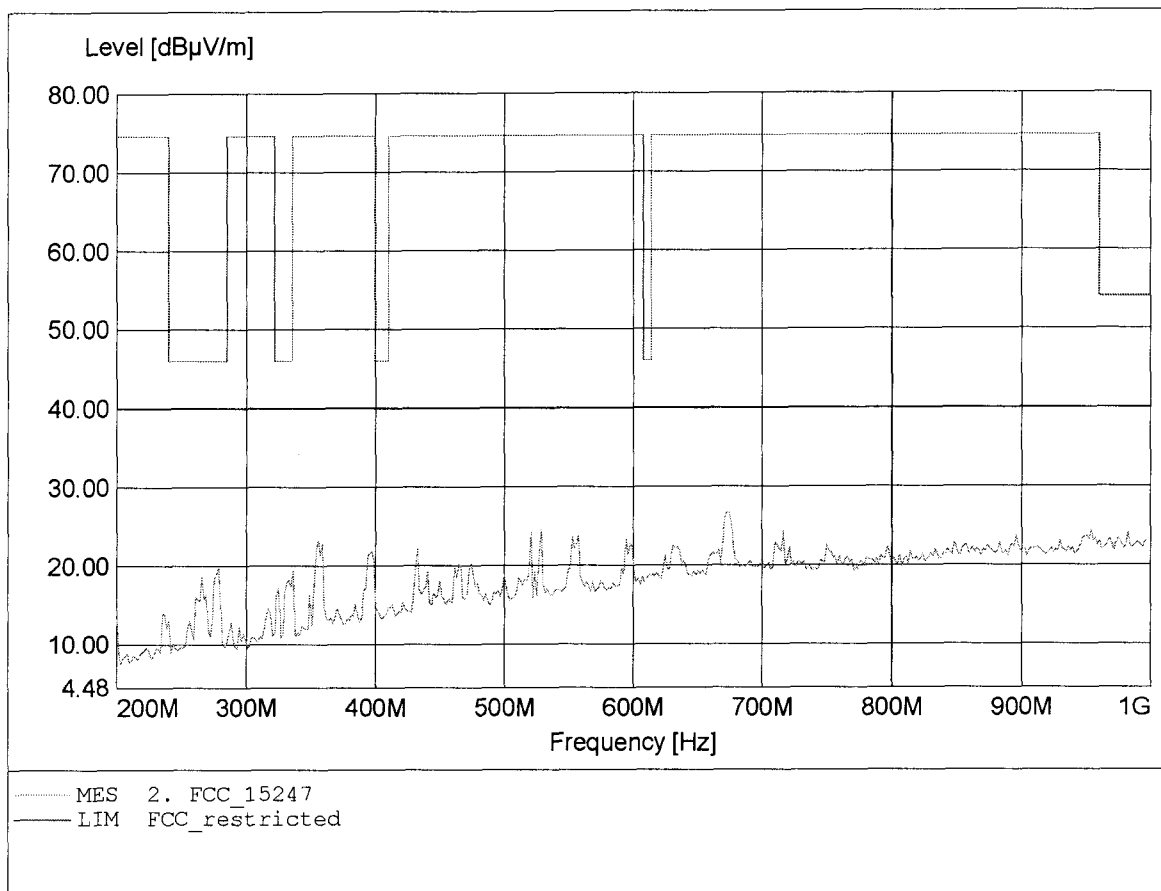


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.745GHz, Emax: 50.10dBµV/m, RBW: 1MHz

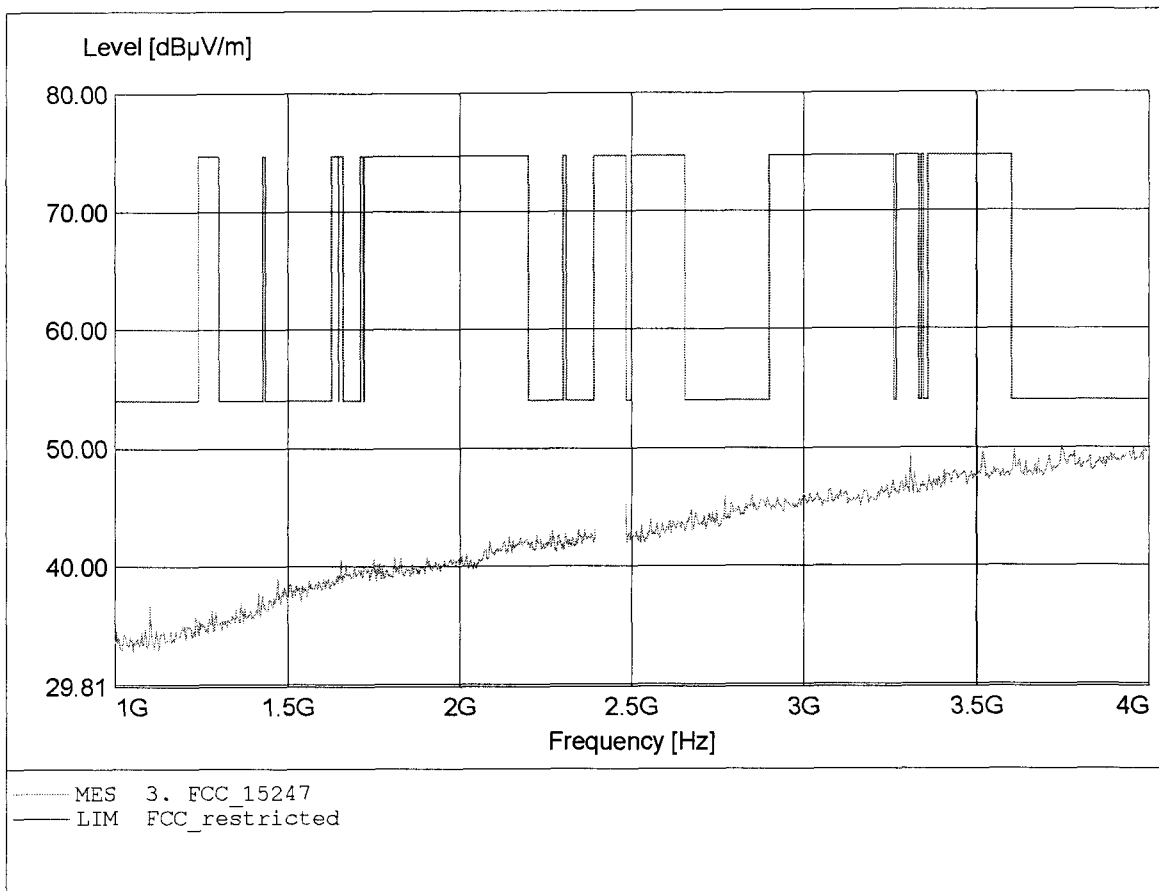


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.307GHz, Emax: 55.10dBµV/m, RBW: 1MHz

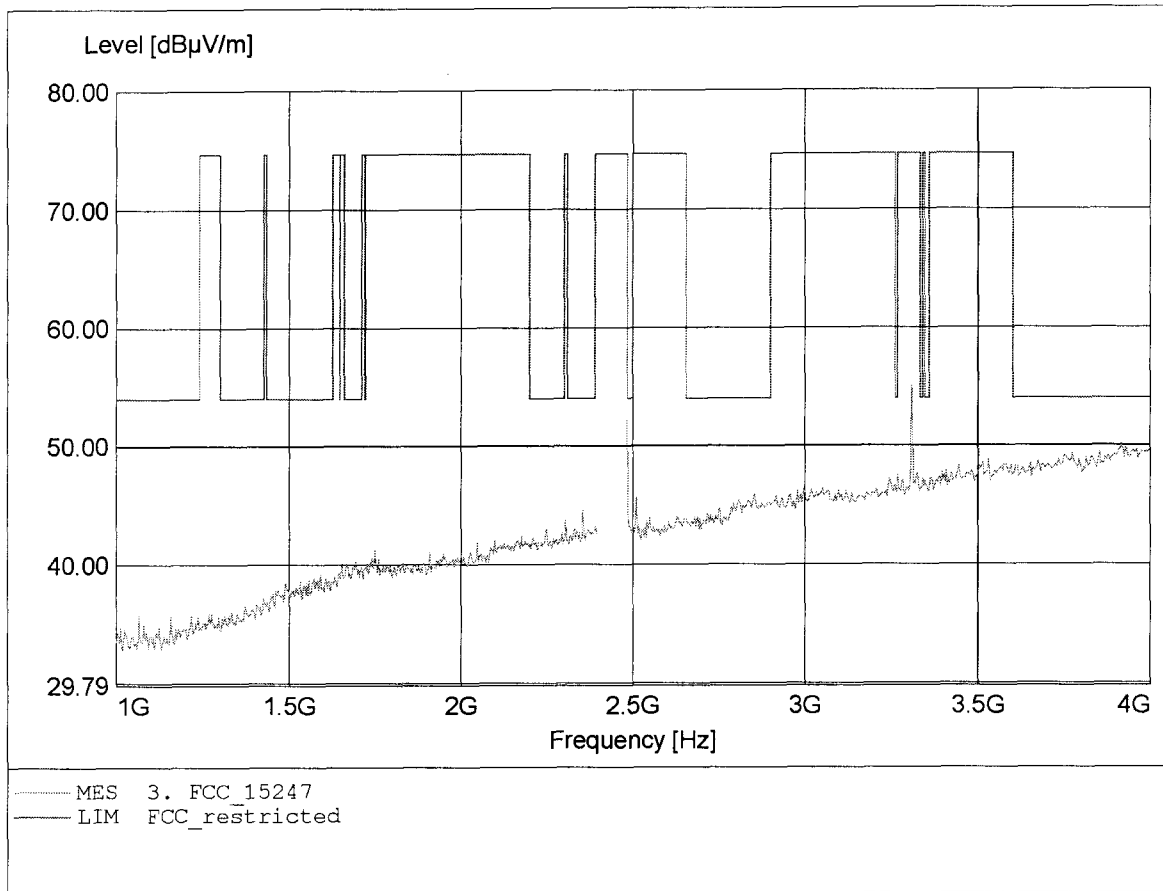


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 52.84dBµV/m, RBW: 1MHz

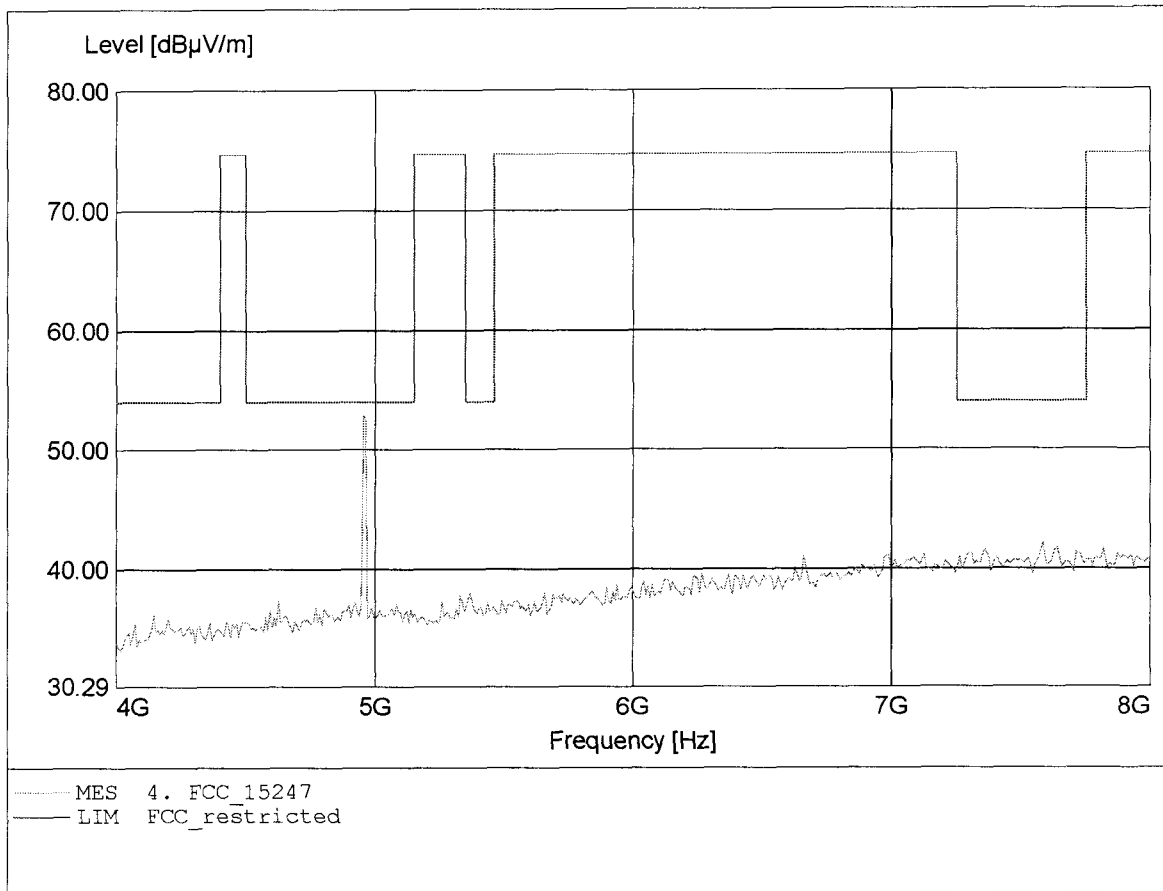


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 54.76dBµV/m, RBW: 1MHz

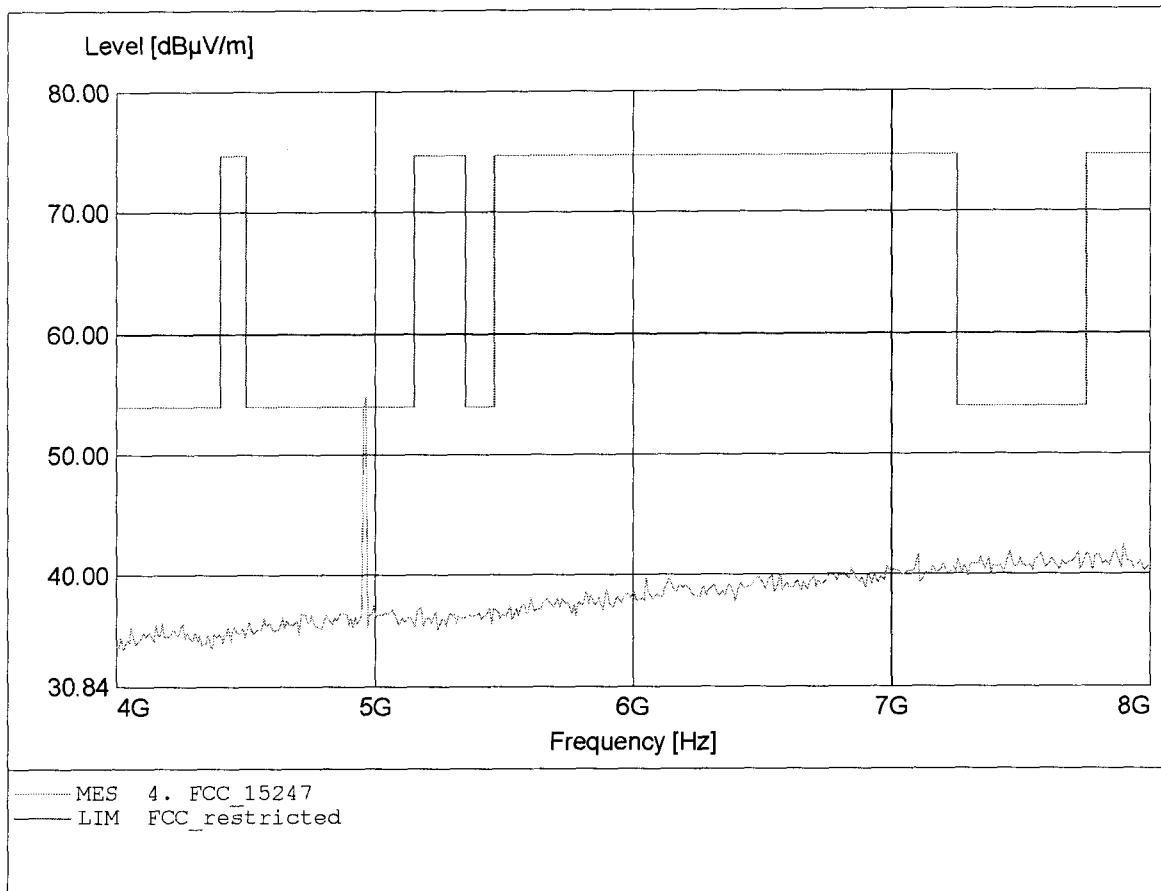


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.703GHz, Emax: 30.67dBµV/m, RBW: 1MHz

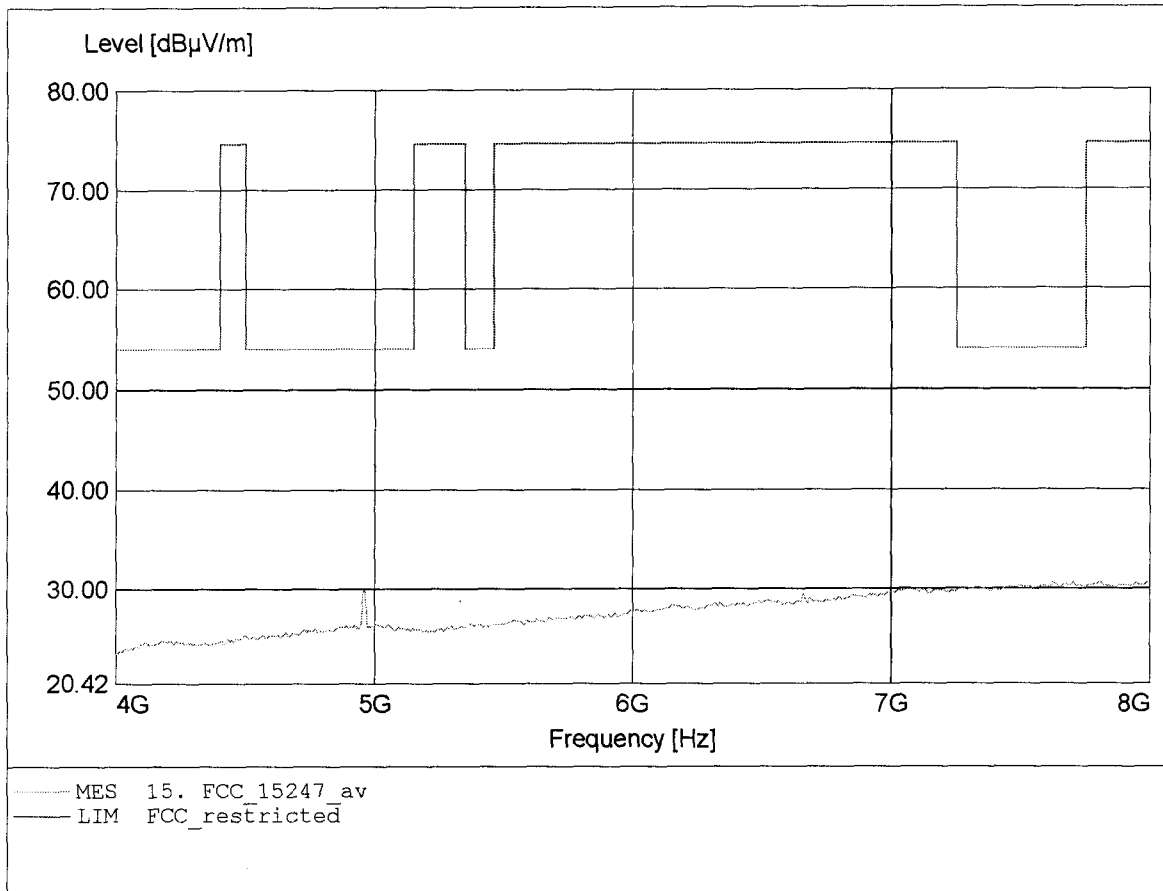


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.703GHz, Emax: 30.67dBµV/m, RBW: 1MHz

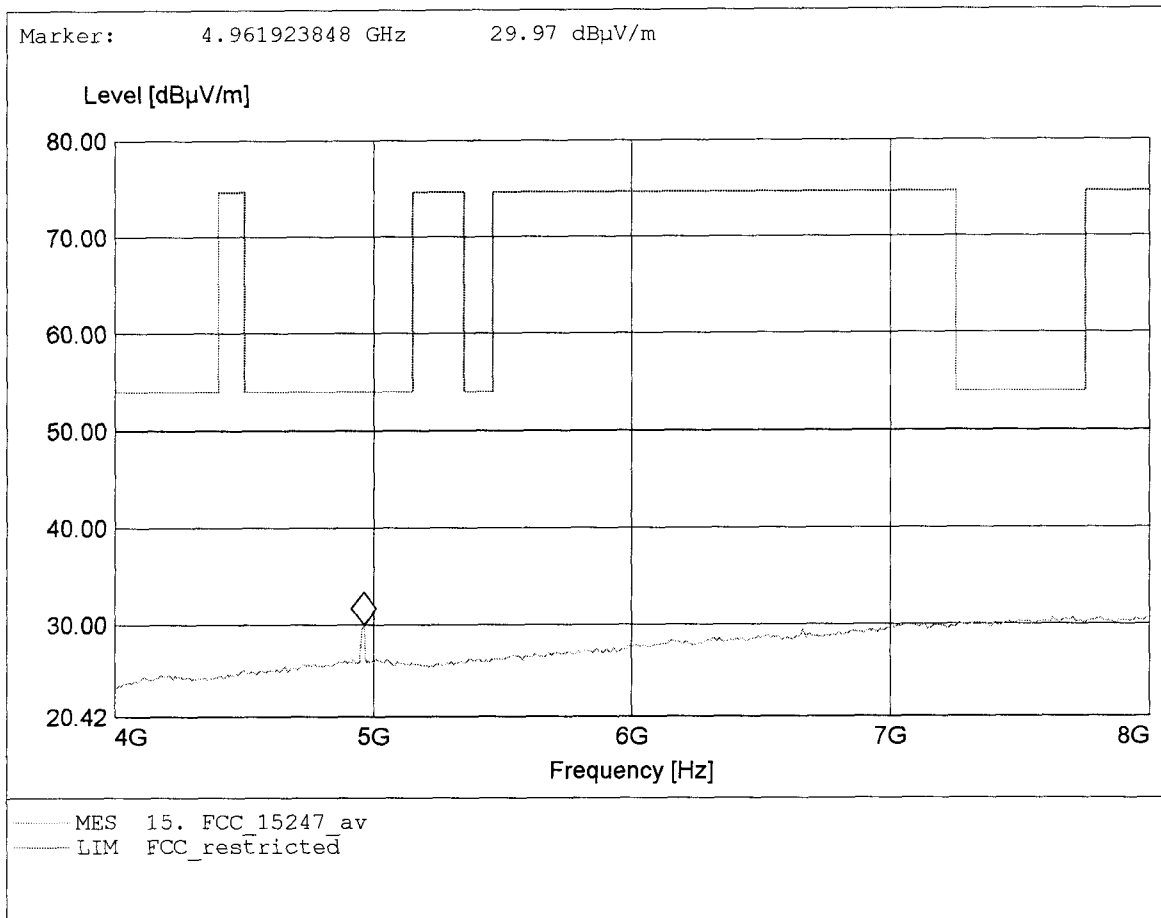


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.976GHz, Emax: 46.38dBµV/m, RBW: 1MHz

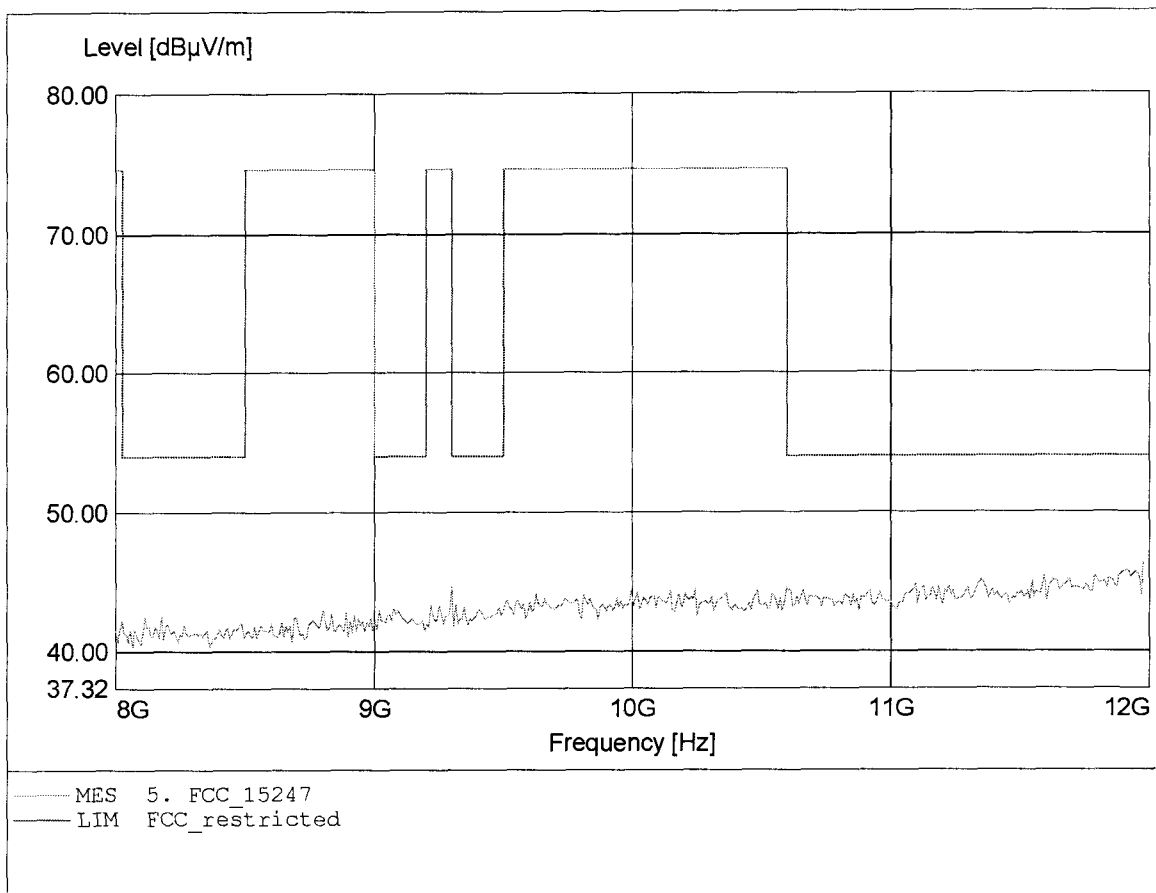


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.824GHz, Emax: 46.24dBµV/m, RBW: 1MHz

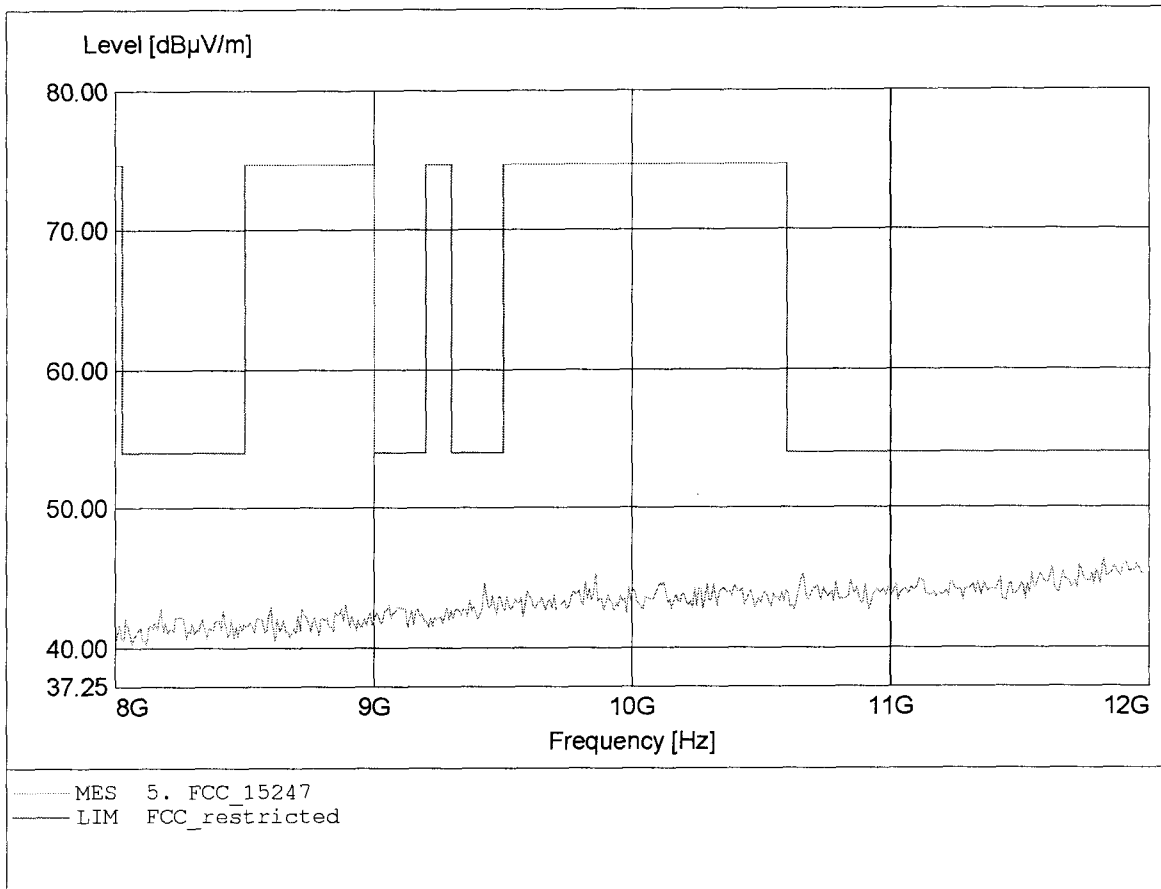


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.273GHz, Emax: 51.46dBµV/m, RBW: 1MHz

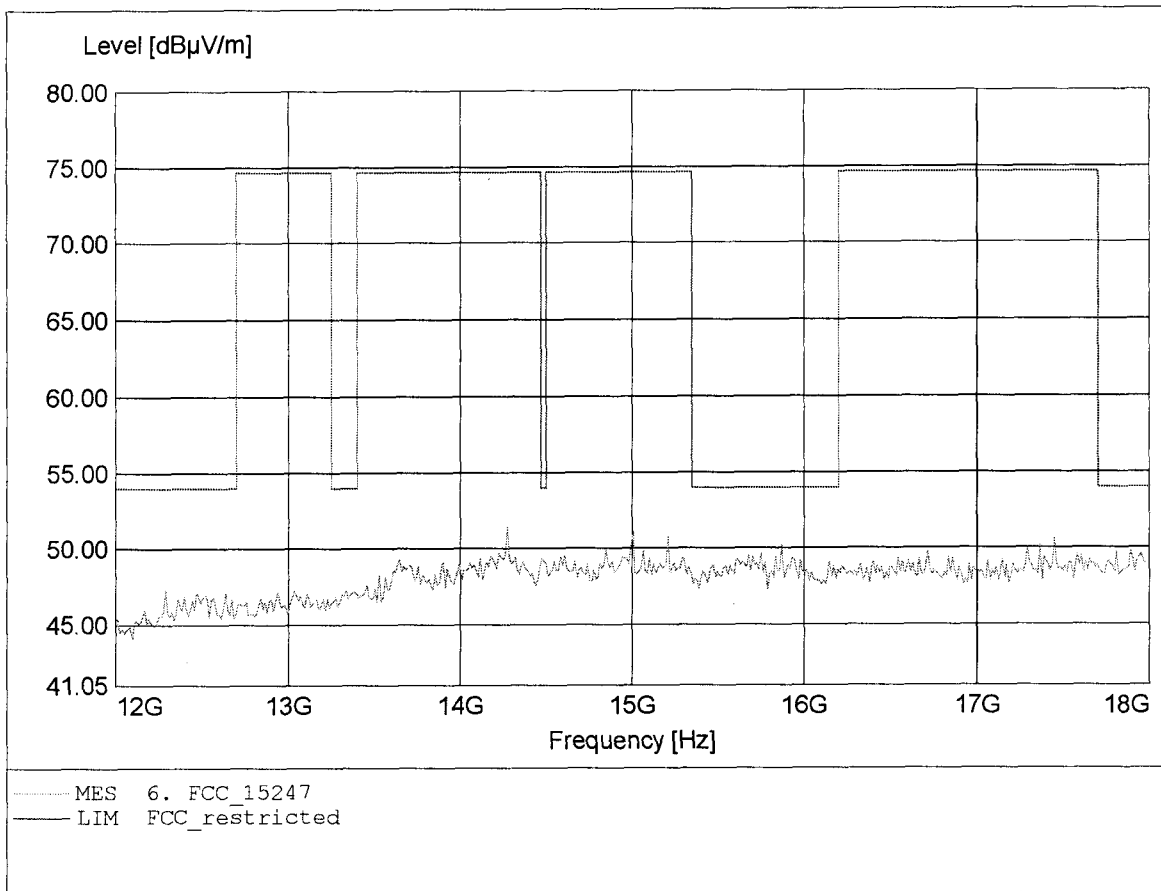


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.080GHz, Emax: 50.86dBµV/m, RBW: 1MHz

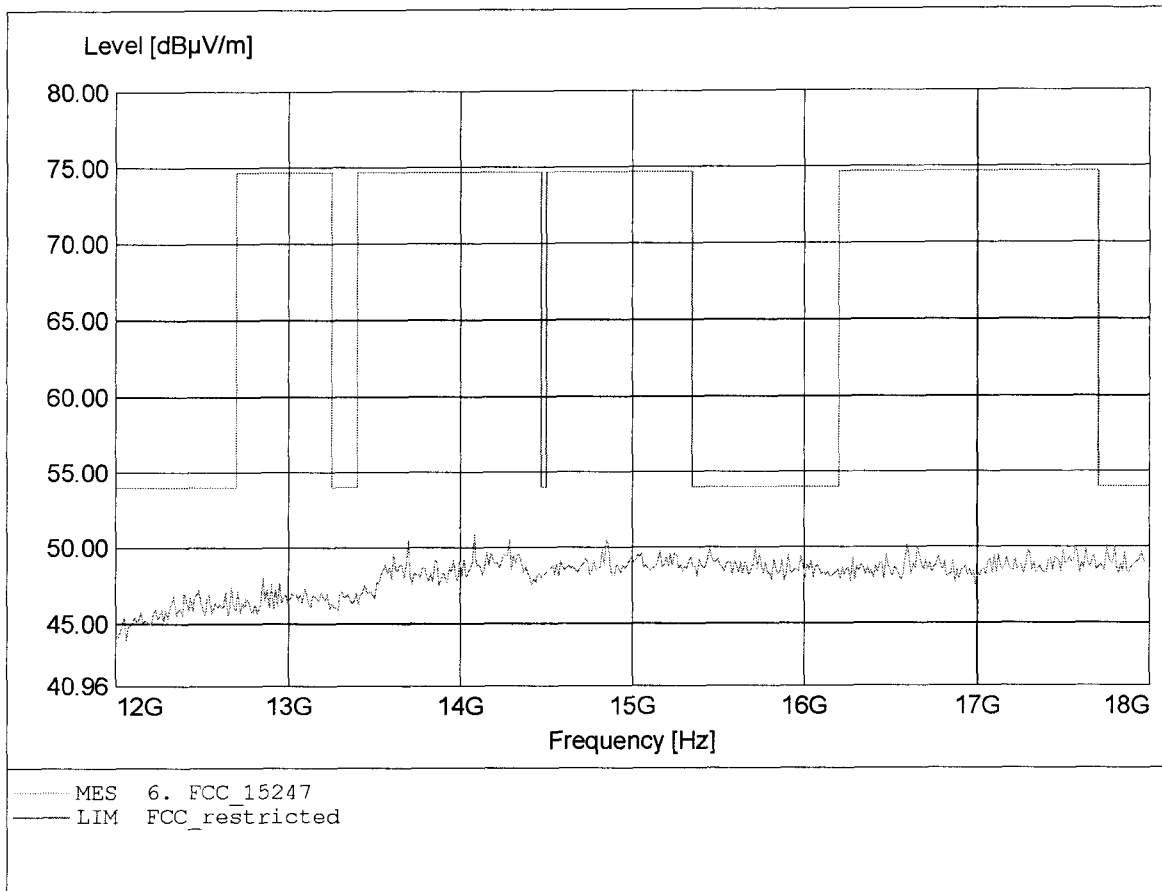


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.125GHz, Emax: 50.06dBµV/m, RBW: 1MHz

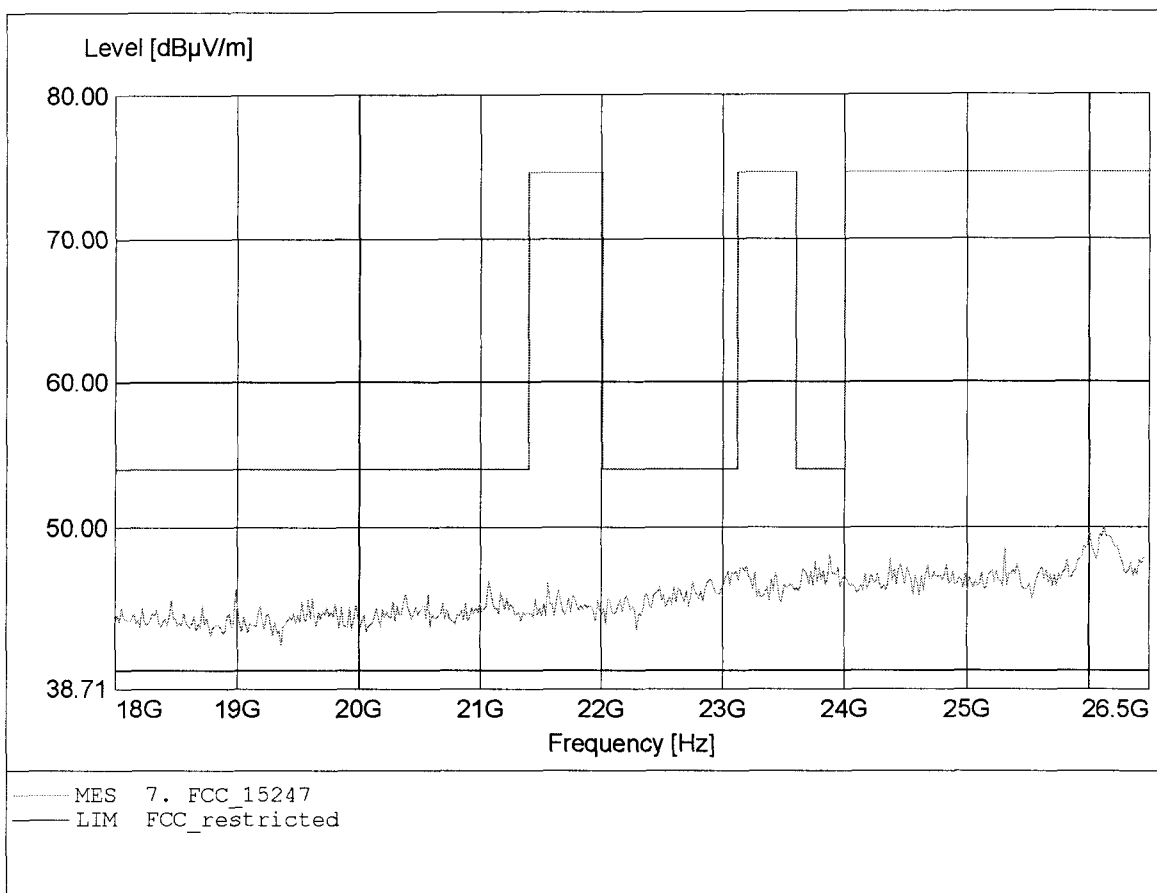

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2480
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.159GHz, Emax: 49.83dBµV/m, RBW: 1MHz

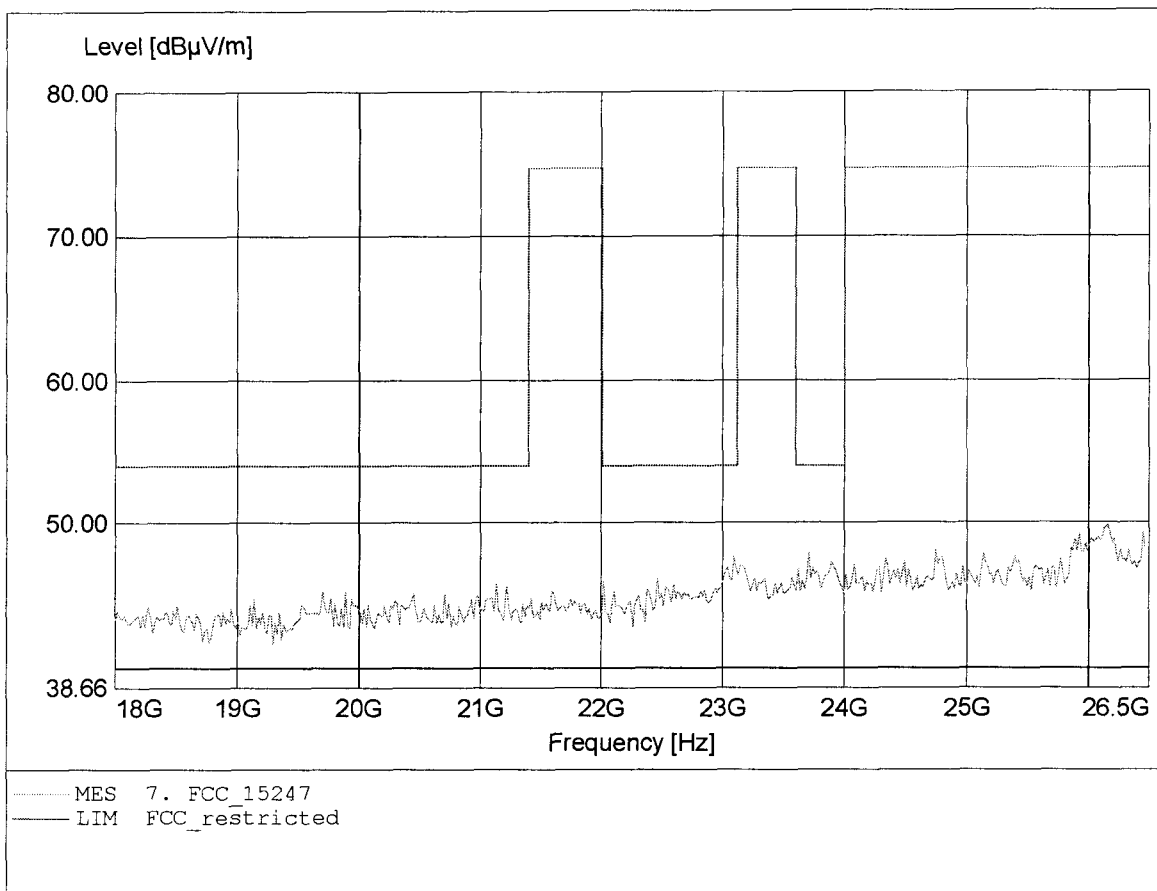


Appendix J

Band-edge compliance

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	Single frequency mode

	Delta 1 [T1]	RBW	50 kHz	RF Att	30 dB
	Ref Lvl	-46.06 dB	VBW	50 kHz	
	10 dBm	-2.01833667 MHz	SWT	5 ms	Unit dBm

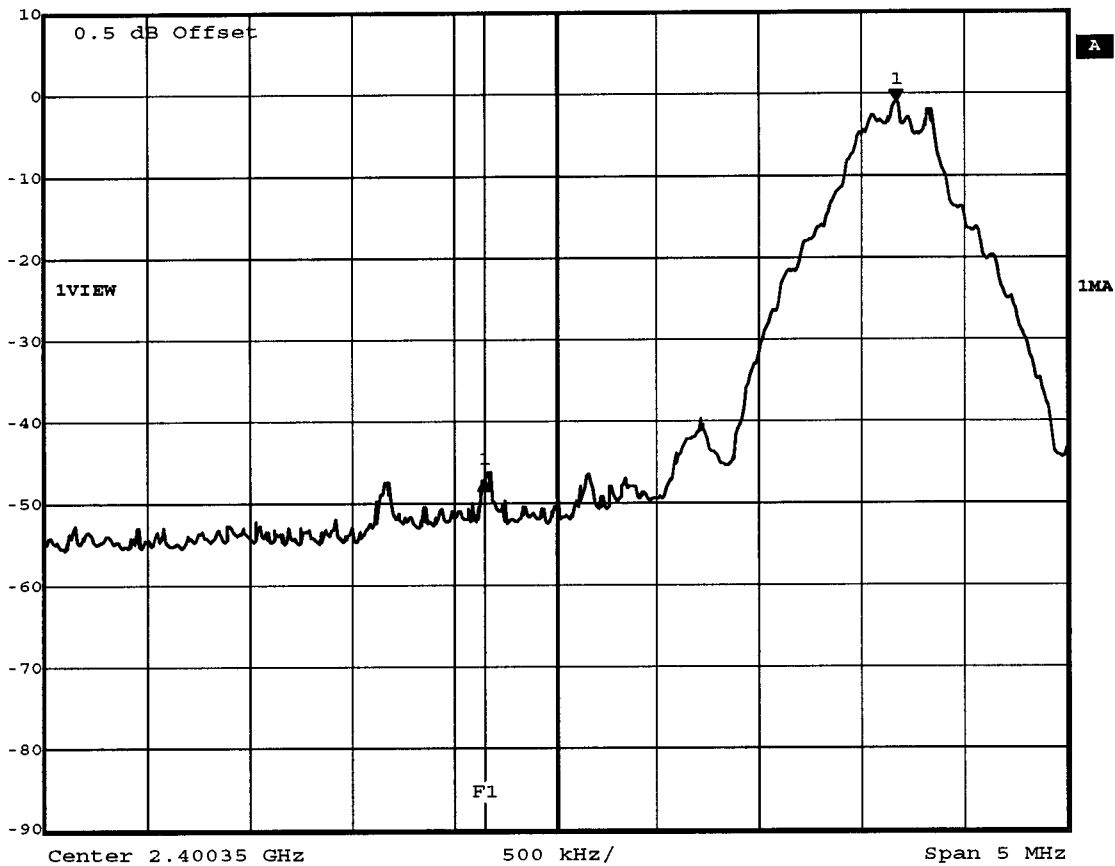


Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 25.AUG.2006 14:33:22

Measurement diagram

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	Single frequency mode

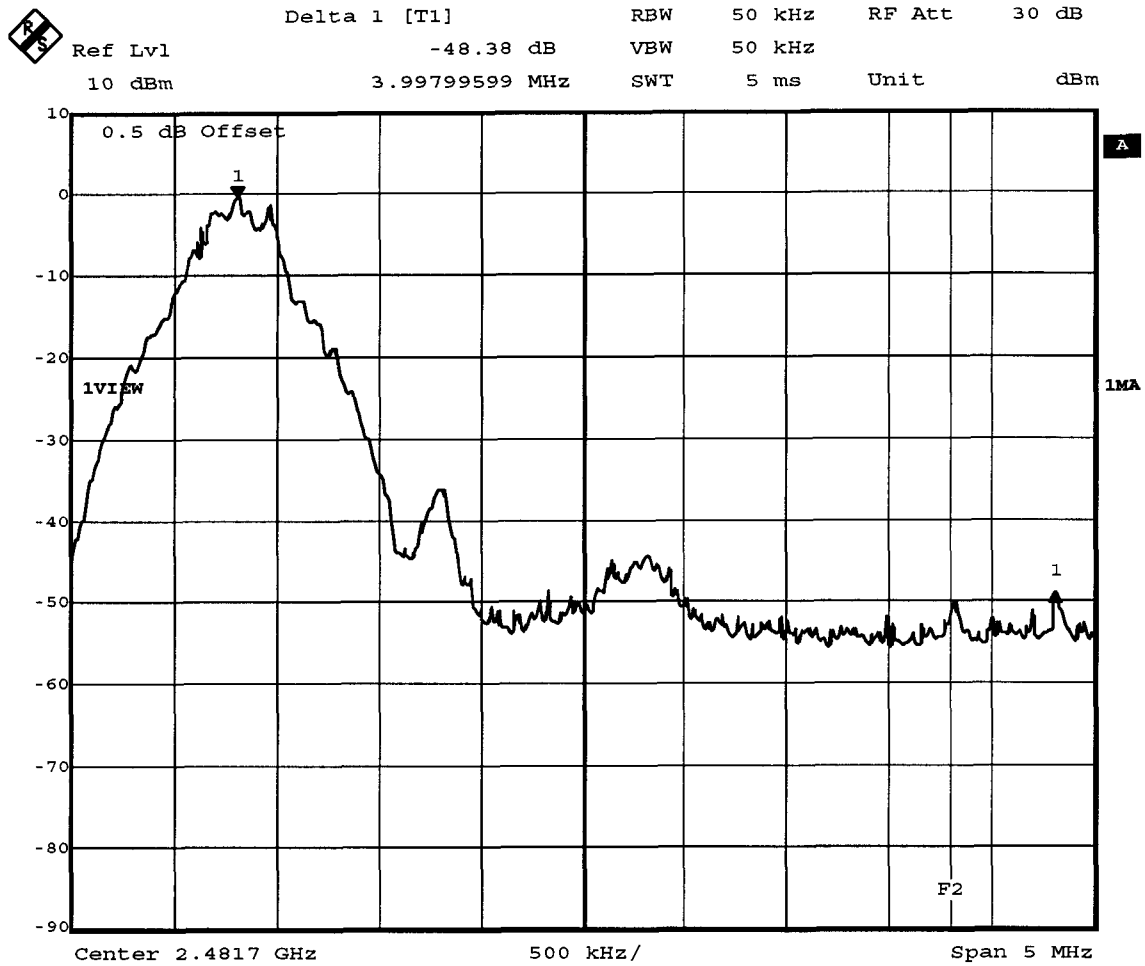


Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 25.AUG.2006 14:35:32

Measurement diagram

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	Hopping mode

	Delta 1 [T1]	RBW	50 kHz	RF Att	30 dB
	Ref Lvl	-45.92 dB	VBW	50 kHz	
	10 dBm	-2.17865731 MHz	SWT	5 ms	Unit dBm

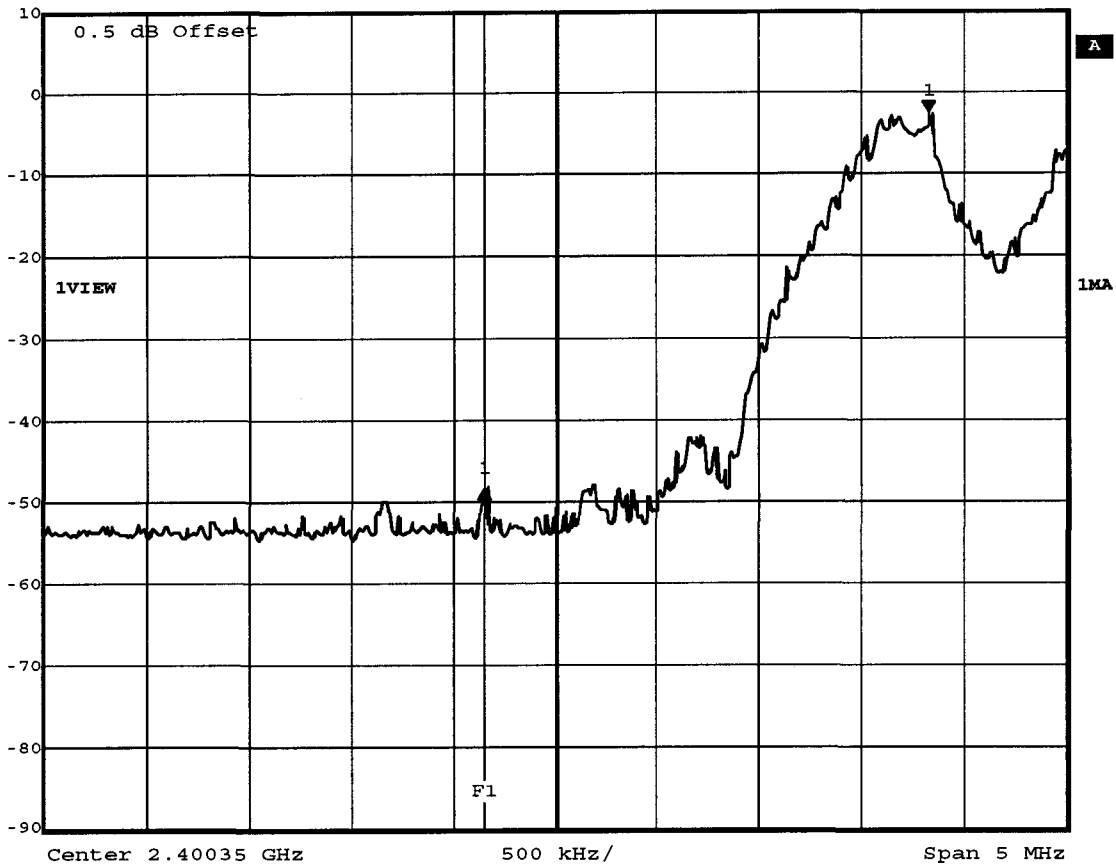


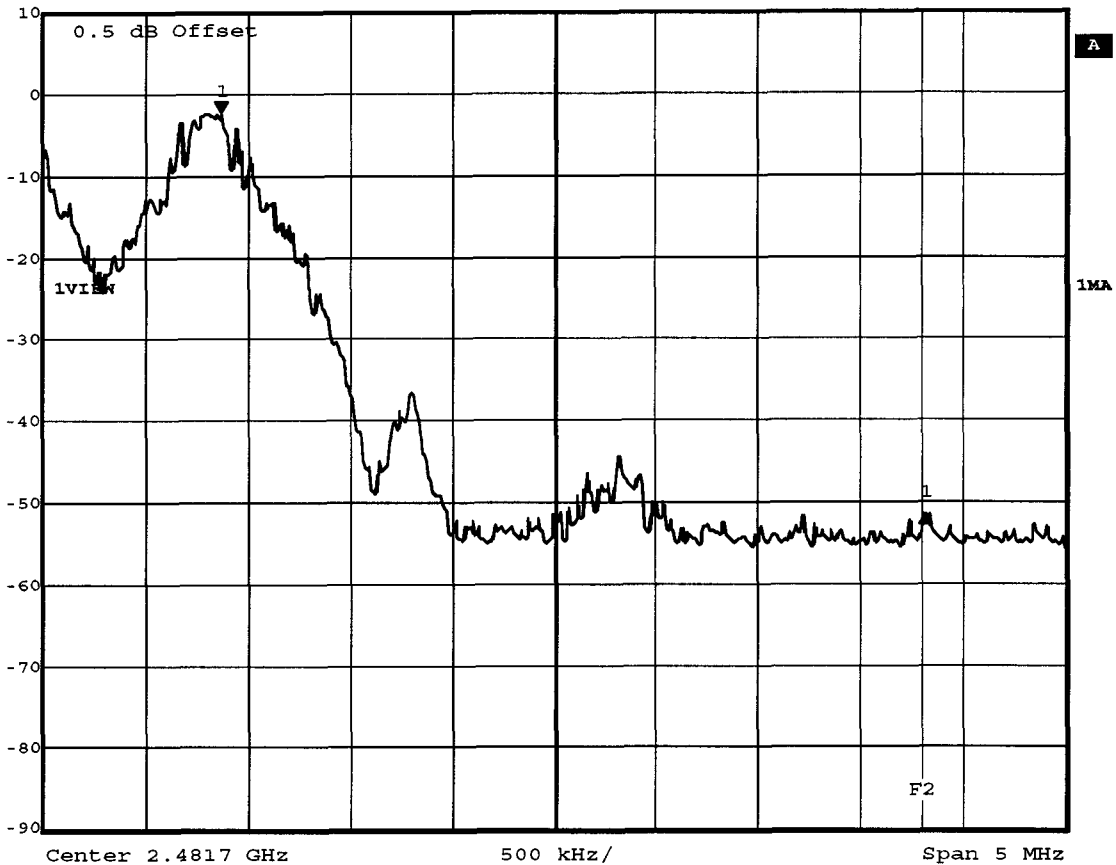
Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 25.AUG.2006 14:41:24

Measurement diagram

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	Car phone with Bluetooth
Model	CK III HFP 2
Approval Holder	Peiker Acoustic GmbH & Co. KG
Temperature / Voltage	23°C / Unom: 12 V DC
Test Site / Operator	ETS / Mr. Hoppe
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	Hopping mode

	Delta 1 [T1]	RBW	50 kHz	RF Att	30 dB
	Ref Lvl	-49.14 dB	VBW	50 kHz	
	10 dBm	3.44689379 MHz	SWT	5 ms	Unit



Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 25.AUG.2006 14:44:43

Measurement diagram

Appendix K


AC power line conducted emissions

Appendix L

Receiver radiated emissions


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:181.944MHz Emax:32.08dBµV/m RBW: 100 kHz

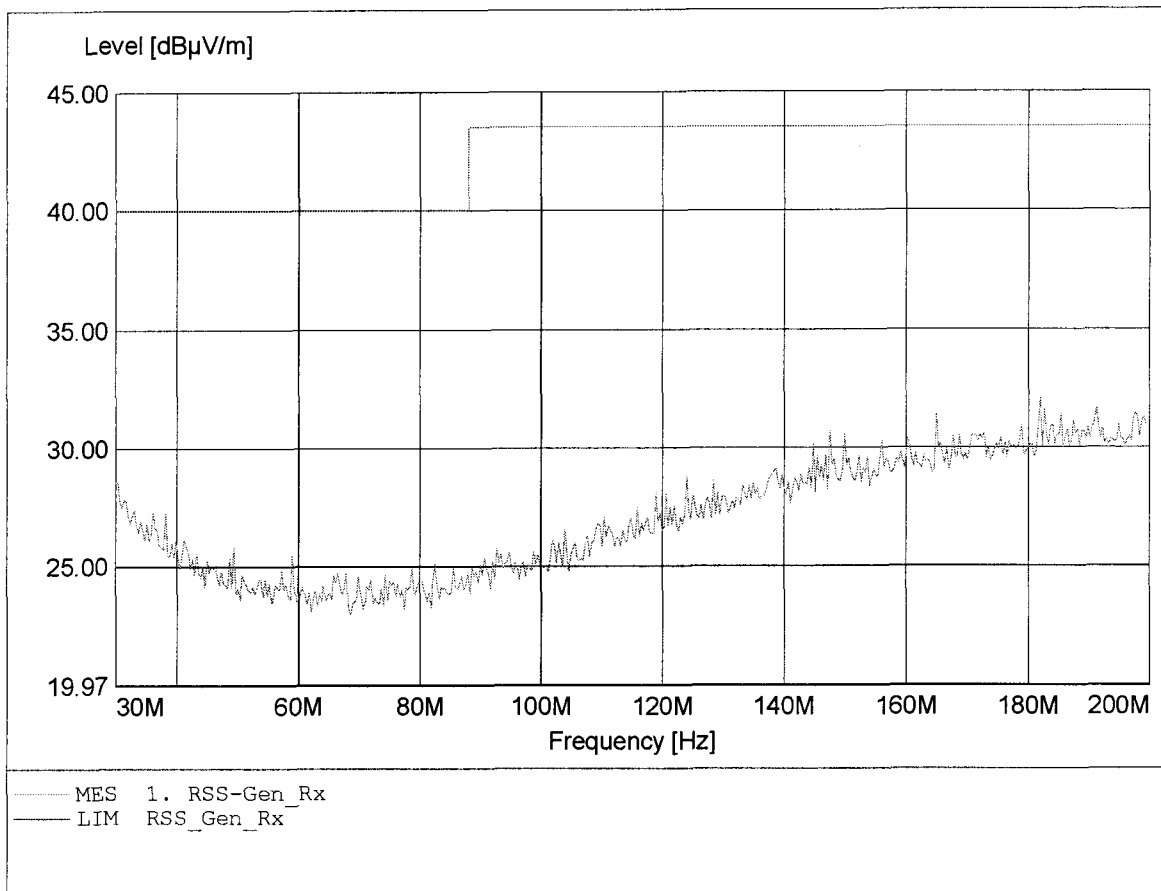


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198.637MHz Emax:32.25dBµV/m RBW: 100 kHz

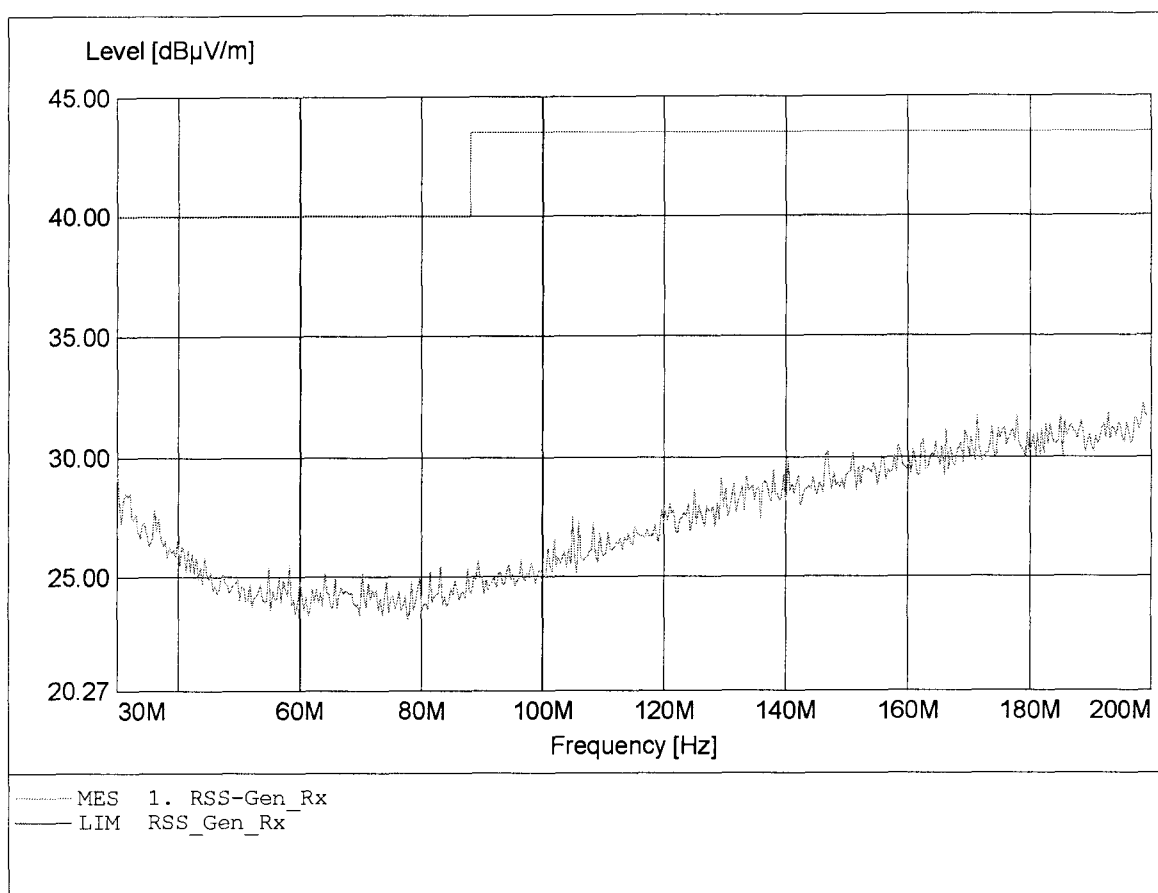


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:594.389MHz Emax:32.27dBµV/m RBW: 100 kHz

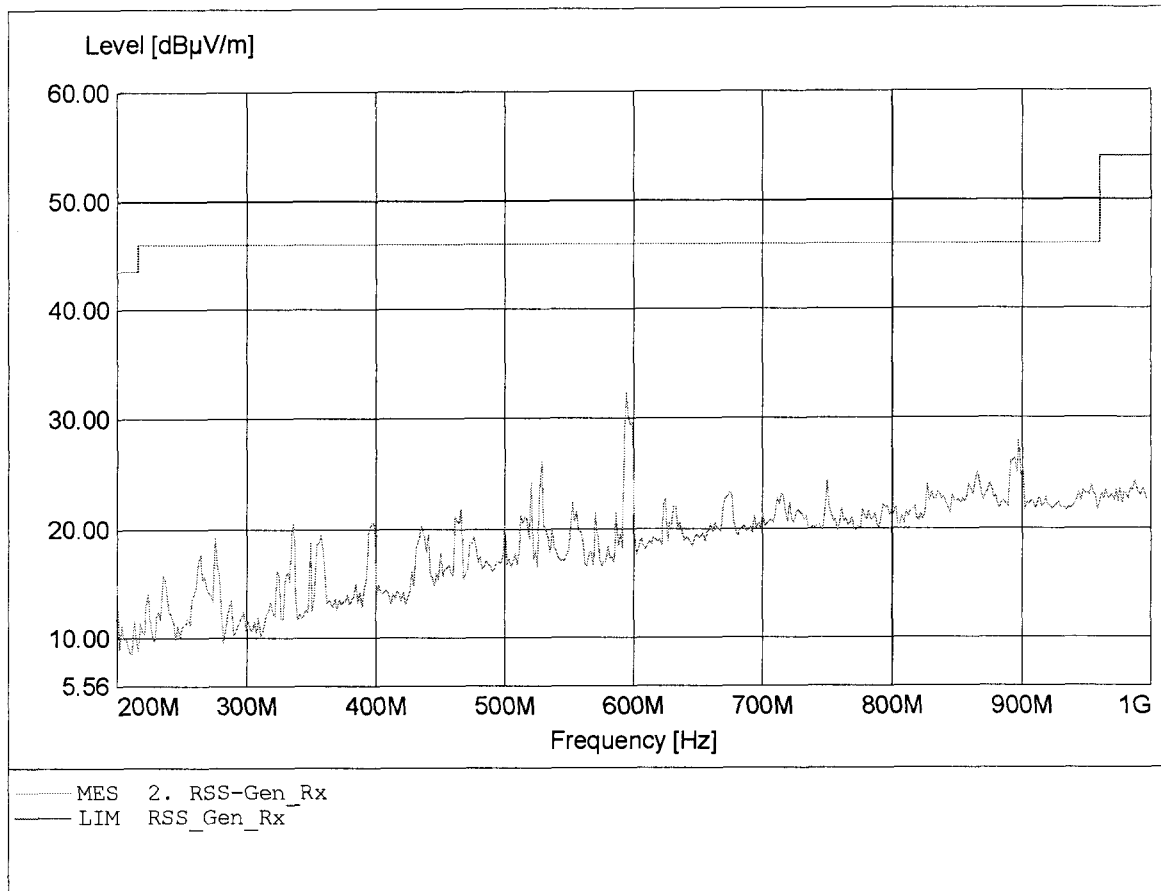


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:672.946MHz Emax:27.51dBµV/m RBW: 100 kHz

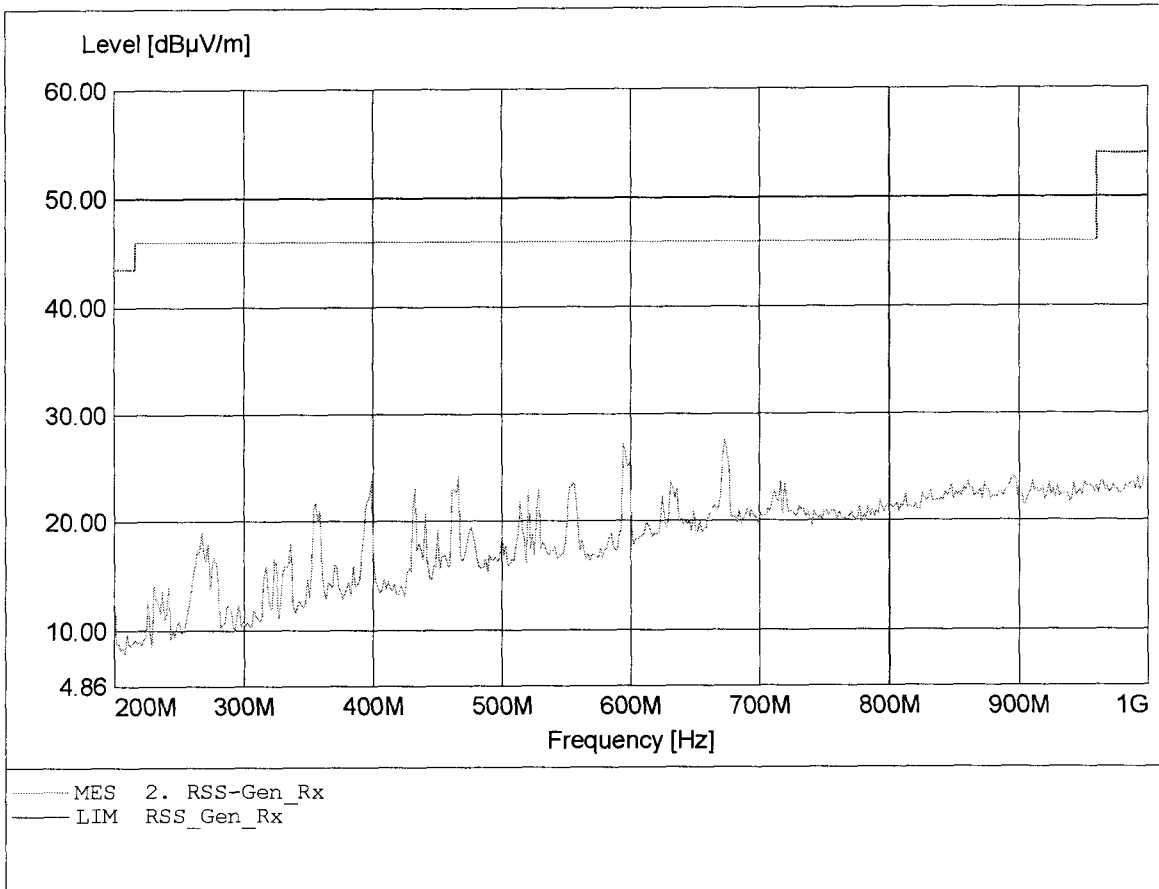


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.880GHz Emax:50.17dB μ V/m RBW: 1 MHz

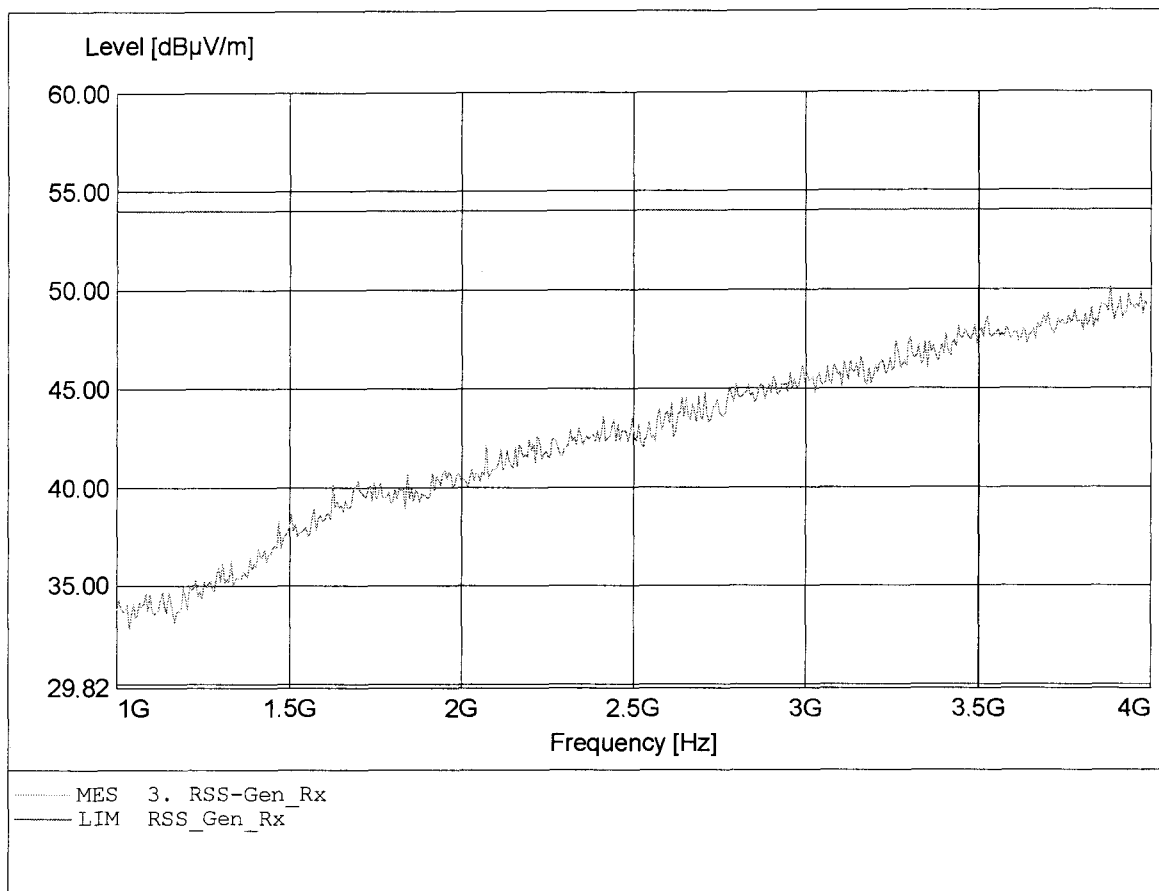


**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.826GHz Emax:49.87dB μ V/m RBW: 1 MHz

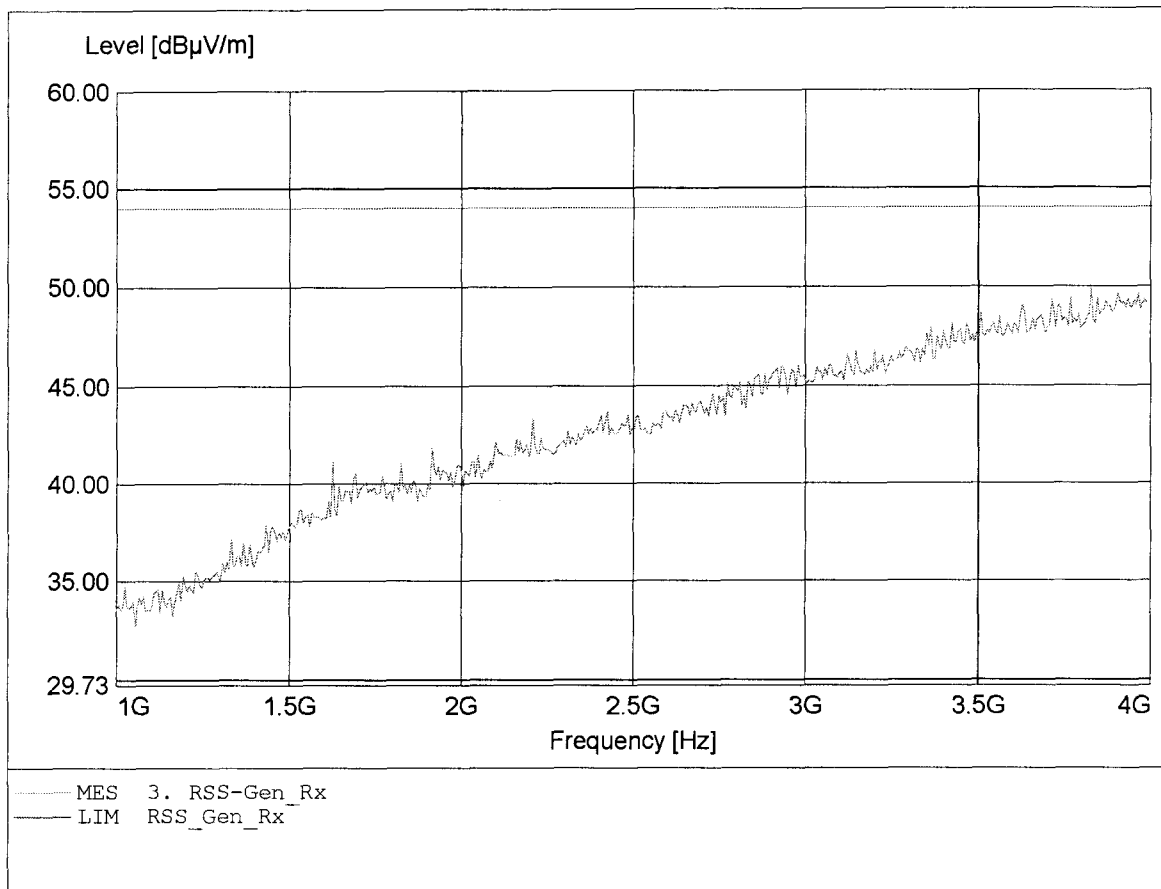

**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: Peiker Acoustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.808GHz Emax:47.44dBμV/m RBW: 1 MHz

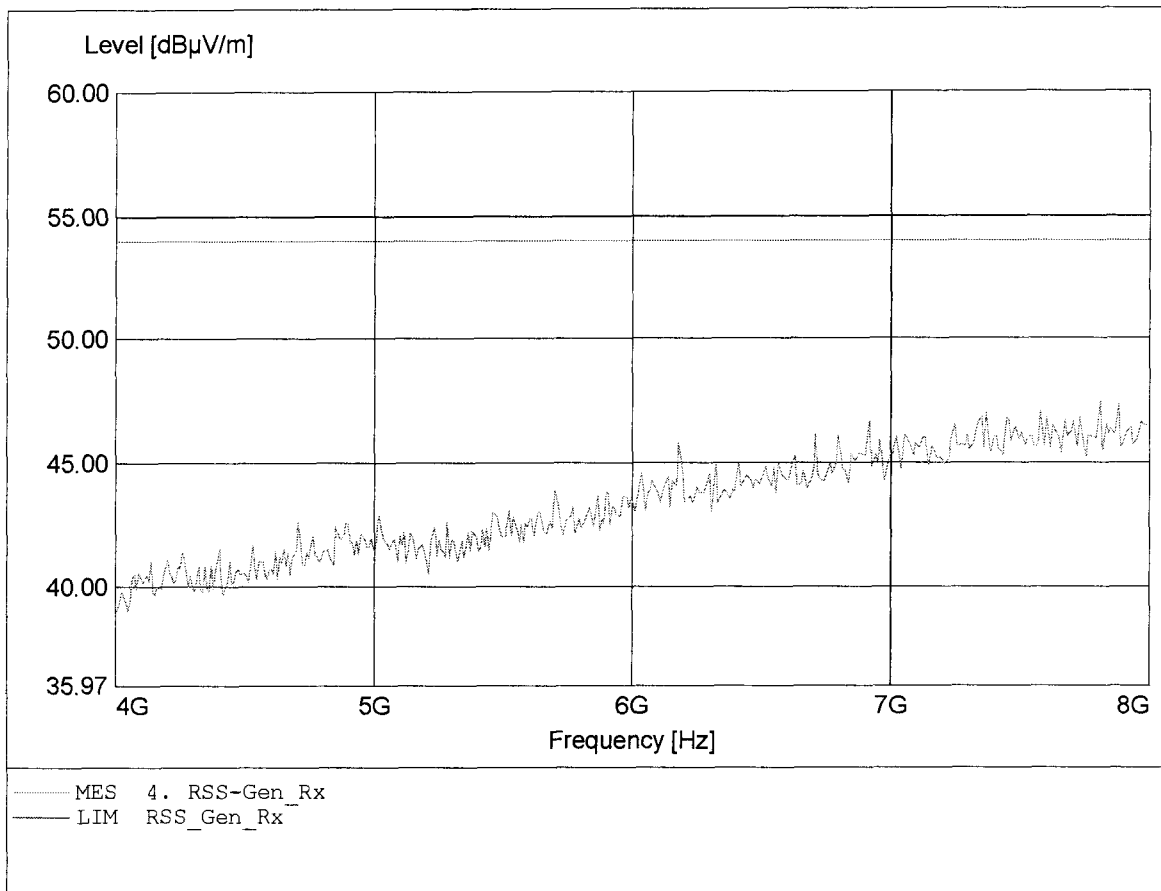

**Field Strength under normal conditions
Standards Industry Canada, RSS-GEN**

Approval Holder: Peiker Acustic GmbH & Co. KG
EUT: Car Phone with Bluetooth
Model / Channel: CK III HFP 2 / 2441
Test Site / Operator: ETS / Mr. Handrik
Operating Conditions: 23°C / Unom.: 12.0 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.583GHz Emax:47.84dBµV/m RBW: 1 MHz

