

**TEST REPORT**  
 No.: 15-1-0007501-02d







According to:  
**FCC Regulations**  
 Part 1.1310, Part 2.1091

for

peiker acustic GmbH & Co. KG

**GSM/W-CDMA/LTE Module**  
**V1140-101-1**  
 (Trunk/ Roof Set-up)

**FCC-ID: QWY-V1140-101-1**

Laboratory Accreditation and Listings			
 <b>DAkKS</b> Deutsche Akkreditierungsstelle D-PL-12047-01-01	 <b>FCC</b> FEDERAL COMMUNICATIONS COMMISSION U.S.A. MRA US-EU 0003	 <b>Industry Canada</b> Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	 <b>Voluntary Controls for            Electromagnetic Emissions</b> Reg. No.: R-2666 C-2914, T-1967, G-301
 <b>WiFi</b> ALLIANCE AUTHORIZED RF LABORATORY	 <b>CTIA Authorized Test Lab</b> LAB CODE 20011130-00		
accredited according to DIN EN ISO/IEC 17025			
<b>CETECOM GmbH</b> Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com			

## Table of contents

<b>1. SUMMARY OF TEST RESULTS</b> .....	<b>4</b>
1.1. TX mode, tests overview FCC Part 2.1091 .....	4
<b>2. ADMINISTRATIVE DATA</b> .....	<b>5</b>
2.1. Identification of the testing laboratory .....	5
2.2. Test location .....	5
2.2.1. Test laboratory “CTC” .....	5
2.3. Organizational items .....	5
2.4. Applicant’s details .....	5
2.5. Manufacturer’s details .....	5
<b>3. EQUIPMENT UNDER TEST (EUT)</b> .....	<b>6</b>
3.1. TECHNICAL GSM DATA OF MAIN EUT DECLARED BY APPLICANT .....	6
3.2. TECHNICAL W-CDMA DATA OF MAIN EUT DECLARED BY APPLICANT .....	7
3.3. TECHNICAL DATA OF MAIN EUT (LTE-TECHNOLOGY) DECLARED BY APPLICANT .....	8
3.4. EUT: Type, S/N etc. and short descriptions used in this test report .....	10
3.5. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions .....	10
3.6. EUT set-ups .....	11
3.7. Configuration of cables used for testing .....	11
3.8. EUT operating modes .....	12
<b>4. MEASUREMENTS</b> .....	<b>14</b>
4.1. Radio Frequency Exposure Evaluation §2.1091 .....	14
4.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')	14
4.1.2. Requirements .....	14
4.1.3. General Limits: .....	15
4.1.4. Evaluation Method .....	15
4.2. Results for fixed and mobile operations .....	16
4.2.1. Results for lower operational band: LTE Band 5 and LTE band 17, GSM850 and FDD Band 5 .....	16
4.2.1.1. MPE results, set-up 2 .....	16
4.2.1.2. Max. Antenna Gain consideration, set-up 2 .....	17
4.2.1.3. MPE results, set-up 3 (Roof-Version-Internal Antenna) .....	18
4.2.1.4. MPE results, set-up 4 (Roof-Version-External Antenna) .....	19
4.2.1.5. MPE results, set-up 5 (Trunk Version-External Antenna) .....	20
4.2.2. Results for upper operational band: LTE band 4 .....	21
4.2.2.1. MPE results for set-up 2 .....	21
4.2.2.2. Max. Antenna gain considerations results for set-up 2 .....	21
4.2.2.3. MPE results, set-up 3 ATM Roof Internal Cellular antenna .....	22
4.2.2.4. MPE results, set-up 4 ATM Roof External Cellular antenna .....	22
4.2.2.5. MPE results, set-up 5 (Trunk Version-External Antenna) .....	22
4.2.3. Results for upper operational band: FDD 2, LTE 2 and GSM1900 .....	23
4.2.3.1. MPE results set-up 2 .....	23
4.2.3.2. Max. Antenna Gain considerations for set-up 2 .....	23
4.2.3.3. MPE results, set-up 3 (ATM Roof Internal Cellular antenna) .....	24
4.2.3.4. MPE results, set-up 4 (ATM Roof External Cellular antenna) .....	24
4.2.3.5. MPE results, set-up 5 (Trunk Version-External Antenna) .....	25
4.3. Measurement uncertainties .....	26
<b>5. ABBREVIATIONS USED IN THIS REPORT</b> .....	<b>27</b>
<b>6. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES</b> .....	<b>27</b>
<b>7. INSTRUMENTS AND ANCILLARY</b> .....	<b>28</b>
7.0.1. Test software and firmware of equipment .....	28
7.0.2. Single instruments and test systems .....	29
7.0.3. Legend .....	31

## Table of annex

Total pages

Annex 2: External photographs - separate document	7
Annex 3: Internal photos: to be supplied by applicant	--
Annex 4: Test set-up photographs – separate document	5
Annex 5: Applicant’s document “Tune-Up Information for Peiker LTE-NAD module type V1140-101-1, Rev. 1.1” dated 2016-03-16	6

The listed attachments are an integral part of this report.

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency cellular technology. The permissive maximum antenna gain is calculated for the module.

Following tests have been performed to show compliance with applicable FCC Part 2.1091 and FCC Part 1.1310 of the FCC CFR 47 Rules..

### 1.1. TX mode, tests overview FCC Part 2.1091

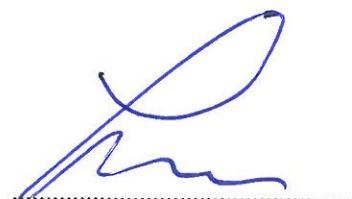
No. of Diagram group	Test Cases	Port	References & Limits		EUT set-up	EUT op-mode	Result
			FCC Standard	Test limits			
--	RF Power (conducted)	Antenna terminal (conducted)	§2.1046	N/A	1	1 to 10	passed Remark 1
--	RF Power (radiated)	Cabinet	§2.1046 §22.913(a)(2)	< 7 Watt ERP	2	1 to 10	passed Remark 2
			§24.232(c)	< 2Watt (EIRP)			
			§27.50( c)(10)	< 3 Watt (ERP)			
			§27.50(d)	< 1 Watt (EIRP)			
--	Radio frequency Exposure Evaluation (MPE)	Cabinet	§1.1310 §2.1091	FCC: §1.1310 Table 1, Limits for General Population	2+3+4+ 5	1 to 10	Passed, Remark 3

**Remark:**

- 1.) See separate test reports 15-1-0007501-02a/b/c and corresponding annexes
- 2.) Calculations based on RF-conducted power and stated antenna gain.
- 3.) Based on info delivered by applicant, see annex 5



Dipl.-Ing. Rachid Acharkaoui  
Responsible for test section

Dipl.-Ing. C. Lorenz  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Rachid Acharkaoui
Deputy:	Dipl.-Ing. Niels Jeß

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

### 2.3. Organizational items

Responsible for test report and project leader:	Dipl.-Ing. C. Lorenz
Receipt of EUT:	remark 1.)
Date(s) of test:	remark 1.)
Date of report:	2015-12-15
-----	
Version of template:	13.02 <b>Remark 1:</b> based on applicants tune-up info

### 2.4. Applicant's details

Applicant's name:	peiker acoustic GmbH & Co. KG
Address:	Max-Planck-Straße 32 61381 Friedrichsdorf  Germany
Contact person:	Mr. Martin Fleckenstein

### 2.5. Manufacturer's details

Manufacturer's name:	please see Applicant's details
Address:	please see Applicant's details

### 3. Equipment under test (EUT)

#### 3.1. TECHNICAL GSM DATA OF MAIN EUT DECLARED BY APPLICANT

GSM Frequency range (US/Canada -bands)	<input checked="" type="checkbox"/> GSM 850: 824 – 849 MHz (Uplink), 869-894 MHz (Downlink) <input checked="" type="checkbox"/> GSM1900: 1850-1910 MHz (Uplink), 1930-1990 MHz (Downlink)		
Type of modulation	<input checked="" type="checkbox"/> GSM,GPRS, GMSK <input checked="" type="checkbox"/> EGPRS-Mode: 8-PSK		
Number of channels (USA/Canada -bands)	<input checked="" type="checkbox"/> GSM 850: 128 – 251, 125 channels <input checked="" type="checkbox"/> GSM1900: 512 – 810, 300 channels		
Test Channel frequencies	<input checked="" type="checkbox"/> GSM/E-GPRS 850 MHz Band: Channel 128/192/251 <input checked="" type="checkbox"/> GSM/E-GPRS 1900 MHz Band: Channel 512/661/810		
Emission designator(s)	See initial modules's certification		
Antenna Type	<input type="checkbox"/> Integrated (enclosure) <input type="checkbox"/> External - dedicated, no RF- connector <input checked="" type="checkbox"/> External, separate FAKRA type RF-connector		
Antenna Gain Tx (main)	<input checked="" type="checkbox"/> Values among operating bands (data sheet information): GSM1900 Band: max. 1.9 dBi GSM850 Band max. 2.8 dBi (0.64dBd)		
Antenna Gain Dx (diversity)	<input type="checkbox"/> Not applicable <input checked="" type="checkbox"/> No information from customer		
Measured Output Power [dBm]: Conducted GSM 850 Conducted EDGE850	32.9 (Peak) / 32.5 (AV) 29.8 (Peak) / 26.6 (AV)		
Measured Output Power [dBm]:: Radiated GSM 850 Radiated EDGE 850	32.9 dBm (conducted power) + 0.65 dBd (max. antenna gain) = 33.55dBm erp 29.8 dBm (conducted power) + 0.65 dBd ( max. antenna gain) = 30.45dBm erp		
Measured Output Power [dBm]:: Conducted GSM 1900 Conducted EDGE 1900	29.3 (Peak) / 29.0 (AV) 28.3 (Peak) / 25.2 (AV)		
Measured Output Power [dBm]:: Radiated GSM 1900 Radiated EDGE1900	29.3 (conducted power) + 1.9dBi (max. antenna gain) = 31.2dBm eirp 28.3 (conducted power) + 1.9dBi (max. antenna gain) = 30.2dBm eirp		
Installed options	<input checked="" type="checkbox"/> GSM 900 and GSM 1800 Bands (not usable in USA/Canada)		
Power supply	<input checked="" type="checkbox"/> DC power only: 3.8 Volt		
Special EMI components	--		
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamic microphones, etc.?	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC label attached	<input checked="" type="checkbox"/> yes – engraved on Cover-Shield		<input checked="" type="checkbox"/> no

### 3.2. TECHNICAL W-CDMA DATA OF MAIN EUT DECLARED BY APPLICANT

TX-frequency range	<input checked="" type="checkbox"/> FDD Band 2: 1852.4–1907.6 MHz (Uplink), 1930-1990 MHz (Downlink) <input checked="" type="checkbox"/> FDD Band 5: 826.4-846.6 MHz (Uplink), 869-894 MHz (Downlink)		
Type of modulation	<input checked="" type="checkbox"/> FDD-Mode Release99: QPSK <input type="checkbox"/> FDD Mode Release 5+6: 16QAM additional		
Number of channels	<input checked="" type="checkbox"/> FDD Band 2: UARFCN range 9262 – 9400 – 9538 <input checked="" type="checkbox"/> FDD Band 5: UARFCN range 4132 – 4183 – 4233		
UMTS-HSPA connectivity	<input checked="" type="checkbox"/> Uplink speed: 5.76 Mb/s (category 6) <input type="checkbox"/> Uplink speed:		
Emission designator(s)	see initial module's certification		
Antenna Type	<input type="checkbox"/> Integrated (enclosure) <input type="checkbox"/> External - dedicated, no RF- connector <input checked="" type="checkbox"/> External, separate RF-connector TX-Main + Secondary RX		
Antenna Gain Tx (main)	<input checked="" type="checkbox"/> Values among operating bands (data sheet information): W-CDMA Band 2: max. 1.9 dBi W-CDMA Band 5: max. 2.8 dBi (0.64dBd) <input type="checkbox"/> No information from customer		
Antenna Gain TX/RX (diversity)	<input type="checkbox"/> Value: no information <input checked="" type="checkbox"/> No information from customer		
MAX PEAK Output Power: Radiated	<b>(based on calculations)</b> FDD-Mode 2 27.07 dBm (max. Peak RF-conducted power) + 1.9 dBi = 28.97 dBm eirp FDD-Mode 5 26.58 dBm (max. Peak RF-conducted power) +0.64 dBd = 27.22 dBm erp		
MAX PEAK Output Power: Conducted	FDD-Mode 2 27.07 dBm (PK) / 23.53 dBm (AV) FDD-Mode 5 26.58 dBm (PK) / 22.98 dBm (AV)		
Installed option	<input checked="" type="checkbox"/> GSM 900 and GSM 1800 Bands (not usable in USA/Canada)		
Power supply	<input checked="" type="checkbox"/> DC power only: 3.8 V DC		
Special EMI components	--		
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamic microphones, etc.?	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC label attached	<input checked="" type="checkbox"/> yes – engraved on Cover-Shield		<input type="checkbox"/> no

### 3.3. TECHNICAL DATA OF MAIN EUT (LTE-TECHNOLOGY) DECLARED BY APPLICANT

TX-frequency range (E-UTRA operating bands)	<input checked="" type="checkbox"/> LTE Band 2: 1850 - 1910 MHz (Uplink), 1930-1990 MHz (Downlink) <input checked="" type="checkbox"/> LTE Band 4: 1710 - 1755 MHz (Uplink), 2110 - 2155 MHz (Downlink) <input checked="" type="checkbox"/> LTE Band 5: 824 - 849 MHz (Uplink), 869-894 MHz (Downlink) <input checked="" type="checkbox"/> LTE Band 17: 704 - 716 MHz (Uplink), 734 - 746 MHz (Downlink)		
Type of modulation	QPSK, 16-QAM		
Data rates	Cat3, Downlink: max. 100Mbps, Uplink: max. 50Mbps		
Number of channels – Table 5.4.4-1 accord. 3GPP TS36.521-1  (See Note in 3GPP-Standard about channels not to be used depending on channel bandwidths)	<input checked="" type="checkbox"/> LTE Band 2: UARFCN range 18600 - 19199 <input checked="" type="checkbox"/> LTE Band 4: UARFCN range 19950 - 20399 <input checked="" type="checkbox"/> LTE Band 5: UARFCN range 20400 - 20649 <input checked="" type="checkbox"/> LTE Band 17: UARFCN range 23730 - 23849		
Emission designator(s)	Nominal Channel bandwidth	QPSK Modulation:	16-QAM Modulation
	1.4 MHz 3 MHz 5 MHz 10 MHz 15 MHz 20 MHz	See initial modules's certification	
Antenna Type	<input type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input checked="" type="checkbox"/> External, separate RF-connector TX-Main + Secondary RX		
Antenna Gain Tx (main)	<input checked="" type="checkbox"/> Values among operating bands (data sheet information): LTE Band 2: max. 1.9 dBi LTE Band 4: max. 2.4 dBi LTE Band 5: max. 2.8 dBi (0.64dBd) LTE Band 17: max. 1.8 dBi (-0.34dBd) <input type="checkbox"/> No information from customer		
Antenna Gain RX (diversity)	<input type="checkbox"/> Value: no information <input checked="" type="checkbox"/> No information from customer		



<b>MAX PEAK Output Power:</b>		<b>(based on calculations)</b>	
Radiated	LTE-Mode 2	28.89dBm (max. RF-conducted power) +1.9 dBi (max. Gain Antenna) = 30.79 dBm eirp	
	LTE-Mode 4	29.45dBm (max. RF-conducted power) +2.4 dBi (max. Gain Antenna) = 31.85 dBm eirp	
	LTE-Mode 5	30.29dBm (max. RF-conducted power) + 0.64 dBd (max. Gain Antenna) = 30.93 dBm erp	
	LTE-Mode 17	29.81dBm (max. RF-conducted power) – 0.34 dBd (max. Gain Antenna) = 29.47 dBm erp	
<b>MAX PEAK Output Power QPSK-Modulation</b>			
Conducted	LTE-Mode 2	28.77 dBm (PK) / 23.38 dBm (AV)	
	LTE-Mode 4	29.26 dBm (PK) / 23.64 dBm (AV)	
	LTE-Mode 5	29.85 dBm (PK) / 23.59 dBm (AV)	
	LTE-Mode 17	29.78 dBm (PK) / 23.28 dBm (AV)	
<b>MAX PEAK Output Power 16-QAM-Modulation</b>			
Conducted	LTE-Mode 2	28.89 dBm (PK) / 22.79 dBm (AV)	
	LTE-Mode 4	29.45 dBm (PK) / 22.99 dBm (AV)	
	LTE-Mode 5	30.29 dBm (PK) / 23.32 dBm (AV)	
	LTE-Mode 17	29.81 dBm (PK) / 22.89 dBm (AV)	
Installed option	<input checked="" type="checkbox"/> GSM 900 and GSM 1800 Bands (not usable in USA/Canada)		
Power supply	<input checked="" type="checkbox"/> DC power only: 3.8 V DC Nominal		
Special EMI components	--		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC label attached	<input checked="" type="checkbox"/> yes – engraved on Cover-Shield	<input type="checkbox"/> no	

### 3.4. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	GSM/W-CDMA/LTE Module	V1140-101-1	IMEI: 353812-07-000002-2 Remark2.)	Rev. 008	M9615A-CETWTDZM-6.3.1.100087
EUT B	Automotive antenna Roof-Pod	No. 34105 US-4G Version	09-07-14 0017	--	--
EUT C	Automotive Fender Antenna	Part.No. 920325-102	--	LTE worldwide	--

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.5. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	LTE-NAD Evaluation Board	Testboard	LP1307-1	--	--
AE 2	Microphone	KL1/B	9263744	--	--
AE 3	Loudspeaker	KL1/B	#1	4Ω/6Watt	--
AE 4	Small Ground-Plane	For AE4 30cm diameter	--	--	--
AE 5	DC power cable	For AE 1	--	1m long	--
AE 6	Notebook Dell	Lattitude D2120	#Test PC6	--	Windows 7
AE 7	USB cable	Mini-USB	--	1m long	--

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.6. EUT set-ups

EUT set-up no.)*	Combination of EUT and AE	Remarks
set. 1	EUT A + EUT B + AE 1+ AE 2 + AE 3 + AE 4 + AE 5+ (AE 6 + AE 7)	Radiated tests. AE 8 used temporary for setting up the operating mode.
set. 2	EUT A + AE 1 + (AE 6 + AE 7)	Conducted tests. SMA Adapter used. AE 8 used temporary for setting up the operating mode.
set. 3	EUT A + EUT B Set-up to be defined with ATM-01 R2-xxx-yy Product ID: 2609-07x-xxx-51	Roof-Antenna Set-up, based on ATM Rev.3.0 document , <u>Internal cellular Antenna</u>
set. 4		Roof-Antenna Set-up, based on ATM Rev.3.0 release document dated 2015-12-09, <u>External cellular Antenna</u> , Antenna Model No. 34105 (US-4G)
set. 5	EUT A + EUT C Set-up to be defined with ATM-01 T2-xxx-yy Product ID: 2609-07x-xxx-51	ATM Trunk Version Set-up, Rev.2.0 release document dated 2015-12-09, External cellular Antenna Part No. 920325-102,

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.7. Configuration of cables used for testing

Cable number	Item	Type	S/N serial number	HW hardware status	Cable length
Cable 1	TRX-Antenna cable	--	--	--	1m
Cable 2	DRX antenna cable	--	--	--	1m
Cable 3	GPS Antenna	--	--	--	1m
Cable 4	DC power cable	--	--	--	1m
Cable 5	Loudspeaker cable	--	--	--	2m long

### 3.8. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
op. 1	GPRS 850 TCH mode TCH=128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). USF_Duty CYCLE set to 100%, coding scheme CS-1 for GMSK modulation, slot 3 active, uplink gamma: 3 (33dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 2	E-GPRS 850 TCH mode TCH=128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8PSK modulation, slot 3 active, uplink gamma: 6 (27dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 3	GSM1900-Voice Traffic channels = 512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link
op. 4	E-GPRS 1900 TCH mode PCL=0 (max. power) TCH=512/661/810	<b>A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 26 dBm (power class 1; power control level 0). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8-PSK modulation, slot 3 active, uplink gamma: 5 (26dBm).</b> The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link
op. 5	FDD Mode 2  RMC99-Mode	<b>A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 24dBm.</b>  The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.
op. 6	FDD Mode 5  RMC99-Mode	Chosen settings: 12.2kbps RMC + HSPA 34.108  This setting was chosen for all Release 6 mobile equipment.

\*) EUT operating mode no. is used to simplify the test report.

EUT operating mode no. *)	Description of operating modes	Additional information
op. 7	LTE-Band 2 RMC Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK and/or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 8	LTE-Band 4 RMC Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK and/or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 9	LTE-Band 5 RMC Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK and/or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 10	LTE-Band 17 RMC Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK and/or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.

\*) EUT operating mode no. is used to simplify the test report.

## 4. Measurements

### 4.1. Radio Frequency Exposure Evaluation §2.1091

#### 4.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
	For Evaluation instruments are not needed. Results are determined by calculation based on applicants delivered Tune-Up procedure.		

#### 4.1.2. Requirements

FCC: §1.1310	<i>The criteria used for the evaluation of human exposure to radio frequency radiation is table 1 according FCC §1.1310. As the mobile equipment is authorized under Part 22 (Subpart H) and Part 24 of the FCC Rules, it is subject for evaluation of the RF exposure prior to equipment authorization.</i>
FCC § 2.1091	<i>Further information on evaluating compliance with these limits can be found in the FCC's OST/OET Bulletin Number 65, 'Evaluating Compliance with FCC-Specified Guidelines for Human Exposure to Radiofrequency Radiation.' For purposes of these requirements mobile devices are defined by the FCC as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits given in Table 1 of Appendix A.</i>

#### 4.1.2.1. Valid for FCC

Table 1: LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)				
Frequency range [MHz]	Electric field strength [V/m]	Magnetic field strength [A/m]	Power density [mW/cm <sup>2</sup> ]	Averaging time [minutes]
30 - 300	61.4	0.163	1.0	6
300 - 1500	-	-	f/300	6
1500 - 100,000	-	-	5	6
(B) Limits for General Population / Uncontrolled Exposure				
0.3 - 1.34	614	1.63	*(100)	30
1.34 - 30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f/1500	30
1500 - 100,0	-	-	1.0	30

For given Power density limit at a single frequency (accord. Table 1 Limits) the maximum antenna gain can be calculated.

The used equation to predict the power density in the far-field of one single radiating antenna can be made by following equation:

$$S = \frac{EIRP}{4\pi R^2} = \frac{P * G}{4\pi R^2}$$

$$G_{NUMERIC} = \frac{S * 4\pi R^2}{P}$$

#### 4.1.3. General Limits:

FCC: §1.1307	<i>Cellular Radiotelephone Service (subpart H of part 22) Non-building-mounted antennas: height above ground level to lowest point of antenna &lt; 10 m and total power of all channels &gt; 1000 W ERP (1640 W EIRP)</i>
FCC §1.1307	<i>Personal Communications Services (part 24) Broadband PCS (subpart E): non-building-mounted antennas: height above ground level to lowest point of antenna &lt; 10 m and total power of all channels &gt; 2000 W ERP (3280 W EIRP)</i>
FCC §1.1310	<i>LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE) Table 1(B) Limits for General Population/Uncontrolled Exposure 300–1500 MHz: <math>f/1500</math> mW/cm<sup>2</sup> 1500–100,000 MHz: 1.0 mW/cm<sup>2</sup></i>
FCC §2.1091	<i>Subject to routine evaluation is required when the device operate at frequencies of 1.5 GHz or below and their effective radiated power (ERP) is 1.5 watts or more, or if they operate at frequencies above 1.5 GHz and their ERP is 3 watts or more.</i>
FCC §24.232	<i>(a) Base stations are limited to 1640 watts peak equivalent isotropically radiated power (e.i.r.p.) with an antenna height up to 300 meters HAAT. b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power, ...</i>
FCC §22.913	<i>(a) Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.</i>
FCC §27.50 (C)(10)	<i>(10) Portable stations (hand-held devices) are limited to 3 watts ERP; and</i>
FCC §27.50(d)	<i>(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP.</i>
KDBs	<i>No. 447498 D01 v05r02</i>

#### 4.1.4. Evaluation Method

##### Valid for GSM/GPRS/EDGE mode:

- The power was considered on 3 frequencies (lowest/middle/highest) within each operable bands and the results compared to applicant's declared power values (tune-up info).
- One uplink slot (1 TX) was considered for voice operation, 4 TX slots are maximum possible for this device and calculated as worst-case regarding GPRS class
- A duty-cycle correction factor of  $10 \cdot \log_{10}$  (max. number of possible active slots / 8 slots) were applied

Please find in the following tables the calculations based on applicants tune-up information for the power values. Also the maximum admissible allowed antenna gain is calculated which is not exceeding the MPE limit for fixed and mobile operations.

##### Valid for W-CDMA/LTE Mode:

- The power was considered on 3 frequencies (lowest/middle/highest) within each operable FDD-band (see separate report for W-CDMA technology) and the results compared to applicant's declared power values (tune-up info). A RMS detector was used.
- No duty-cycle correction factor is applicable

Please find in the following tables **the calculations based on applicants tune-up information**, Annex 5.

## 4.2. Results for fixed and mobile operations

### 4.2.1. Results for lower operational band: LTE Band 5 and LTE band 17, GSM850 and FDD Band 5

#### 4.2.1.1. MPE results, set-up 2

Distance	20	cm											
Operating Mode	Frequency on channel	Declared maximum conducted output power	Max. positive tolerance according manufacturer	Antenna Gain	Calculated maximum ERP (declared+ Tune-up+ antenna Gain)	Duty cycle	Declared Maximum ERP	Equivalent ERP (maximum ERP x duty cycle)	MPE Limit accord. Table 1	MPE-Value	Margin to limit:	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
	(MHz)	(dBm)	(dB)	(dBd)	(dBm)	%	(W)	(mW)	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )		
GSM (1Slot)	824,2	32,5	1,5	0	34,0	12,5%	2,512	314	0,5495	0,1024	0,4470	0,1864	0,1864
	837	32,5	1,5	0	34,0		2,512	314	0,5580	0,1024	0,4556	0,1836	
	848,8	32,5	1,5	0	34,0		2,512	314	0,5659	0,1024	0,4634	0,1810	
GPRS (4Slots)	824,2	32,0	1,5	0	33,5	50%	2,239	1119	0,5495	0,3652	0,1843	0,6647	0,6647
	837	32,0	1,5	0	33,5		2,239	1119	0,5580	0,3652	0,1928	0,6545	
	848,8	32,0	1,5	0	33,5		2,239	1119	0,5659	0,3652	0,2007	0,6454	
EDGE (1Slot)	824,2	26,5	2,5	0	29,0	12,5%	0,794	99	0,5495	0,0324	0,5171	0,0590	0,0590
	837	26,5	2,5	0	29,0		0,794	99	0,5580	0,0324	0,5256	0,0581	
	848,8	26,5	2,5	0	29,0		0,794	99	0,5659	0,0324	0,5335	0,0572	
EDGE (4Slots)	824,2	26,5	2,5	0	29,0	50%	0,794	397	0,5495	0,1296	0,4199	0,2358	0,2358
	837	26,5	2,5	0	29,0		0,794	397	0,5580	0,1296	0,4284	0,2322	
	848,8	26,5	2,5	0	29,0		0,794	397	0,5659	0,1296	0,4363	0,2290	
WCDMA FDD Band 5 (RMS-Value)	826,4	23,0	2,0	0	25,0	100%	0,316	316	0,5509	0,1032	0,4478	0,1873	0,1873
	836,4	23,0	2,0	0	25,0		0,316	316	0,5576	0,1032	0,4544	0,1850	
	846,6	23,0	2,0	0	25,0		0,316	316	0,5644	0,1032	0,4612	0,1828	
LTE Band 17 (QPSK, #RB=1, RMS-Value)	706,5	23,0	2,0	0	25,0	100%	0,316	316	0,4710	0,1032	0,3678	0,2191	0,2191
	710	23,0	2,0	0	25,0		0,316	316	0,4733	0,1032	0,3702	0,2180	
	713,5	23,0	2,0	0	25,0		0,316	316	0,4757	0,1032	0,3725	0,2169	
LTE Band 17 (16QAM, #RB=1, RMS-Value)	706,5	23,0	2,0	0	25,0	100%	0,316	316	0,4710	0,1032	0,3678	0,2191	0,2191
	710	23,0	2,0	0	25,0		0,316	316	0,4733	0,1032	0,3702	0,2180	
	713,5	23,0	2,0	0	25,0		0,316	316	0,4757	0,1032	0,3725	0,2169	
LTE Band 5 (QPSK, #RB=1, RMS-Value)	824,7	23,0	2,0	0	25,0	100%	0,316	316	0,5498	0,1032	0,4466	0,1877	0,1877
	836,5	23,0	2,0	0	25,0		0,316	316	0,5577	0,1032	0,4545	0,1850	
	848,3	23,0	2,0	0	25,0		0,316	316	0,5655	0,1032	0,4624	0,1824	
LTE Band 5 (16QAM, #RB=1, RMS-Value)	824,7	23,0	2,0	0	25,0	100%	0,316	316	0,5498	0,1032	0,4466	0,1877	0,1877
	836,5	23,0	2,0	0	25,0		0,316	316	0,5577	0,1032	0,4545	0,1850	
	848,3	23,0	2,0	0	25,0		0,316	316	0,5655	0,1032	0,4624	0,1824	

Maximum calculated MPE value:		
Lowest MPE-Limit in Frequency-Band:	0,4710	[mW/cm <sup>2</sup> ]
Highest MPE value in frequency-band:	0,3652	[mW/cm <sup>2</sup> ]
Lowest margin to limit in frequency band:	0,1843	[mW/cm <sup>2</sup> ]



#### 4.2.1.2. Max. Antenna Gain consideration, set-up 2

<b>Maximum antenna gain considerations for fixed/mobile operations for complying with limits:</b>		
---	--	--

P	Maximum power input to the antenna incl. Duty cycle [mW]: (Avg. Burst Power or RMS)	1119
R	Distance [cm]:	20
S	MPE limit acc. §1.1310 for uncontrolled exposure [mW/cm <sup>2</sup> ]: (FCC use mW/cm <sup>2</sup> )	0,47
G <sub>1</sub>	Maximum Antenna gain to comply with MPE limit [dBd]:	<b>1,77</b>

(For G1 the lowest measured channel to reach minimum ant. Gain selected)

ERP power limit according to §2.1091 [W]: (Avg. Burst Power or RMS)		1,50
G <sub>2</sub>	Max. Antenna gain to comply with limit incl. Duty cycle [dBd]:	<b>1,27</b>

(For G2 select the max. Avg. Burst Power or RMS value incl. Duty cycle)

ERP power limit according to §22.913 [W ERP]:		7,00
G <sub>3</sub>	Max. Antenna gain to comply with limit [dBd]:	<b>4,45</b>

(For G3 select the max. Average burst power value excluding Duty cycle)

<b>G<sub>850</sub> MHz band</b>	<b>Min (G<sub>1</sub>, G<sub>2</sub>, G<sub>3</sub>) [dBd]</b>	<b>1,27</b>
---------------------------------	--	-------------

<b>Summarized results:</b>	The max. ant. gain for mobile operation at 700/850MHz band to comply with MPE and EIRP limits incl. path loss shall not exceed (dBd):	<b>1,27</b>
----------------------------	---	-------------

### 4.2.1.3. MPE results, set-up 3 (Roof-Version-Internal Antenna)

Distance	20	cm													
Operating Mode	Frequency on channel	Declared maximum conducted output power	Max. positive tolerance according manufacturer	Antenna Gain	Path Loss Module to internal antenna	Uncertainty of RF-path loss data	Calculated maximum ERP (declared+ Tune-up+ antenna Gain) (dBm)	Duty cycle	Declared Maximum ERP	Equivalent ERP (maximum ERP x duty cycle) (m W)	MPE Limit accord. Table 1 (m W/cm ^2)	MPE-Value (m W/cm ^2)	Margin to limit: (m W/cm ^2)	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
	(MHz)	(dBm)	(dB)	(dBd)	(dB)	(dB)	(dB)	%	(W)	(m W)	(m W/cm ^2)	(m W/cm ^2)	(m W/cm ^2)		
GSM (1Slot)	824,2	32,5	1,5	-0,85	0,7	0,25	32,7	12,5%	1,862	233	0,5495	0,0759	0,4735	0,1382	0,1382
	837	32,5	1,5	-0,85	0,7	0,25	32,7		1,862	233	0,5580	0,0759	0,4821	0,1361	
	848,8	32,5	1,5	-0,85	0,7	0,25	32,7		1,862	233	0,5659	0,0759	0,4899	0,1342	
GPRS (4Slots)	824,2	32,0	1,5	-0,85	0,7	0,25	32,2	50%	1,660	830	0,5495	0,2707	0,2787	0,4927	0,4927
	837	32,0	1,5	-0,85	0,7	0,25	32,2		1,660	830	0,5580	0,2707	0,2873	0,4852	
	848,8	32,0	1,5	-0,85	0,7	0,25	32,2		1,660	830	0,5659	0,2707	0,2951	0,4784	
EDGE (1Slot)	824,2	26,5	2,5	-0,85	0,7	0,25	27,7	12,5%	0,589	74	0,5495	0,0240	0,5255	0,0437	0,0437
	837	26,5	2,5	-0,85	0,7	0,25	27,7		0,589	74	0,5580	0,0240	0,5340	0,0430	
	848,8	26,5	2,5	-0,85	0,7	0,25	27,7		0,589	74	0,5659	0,0240	0,5419	0,0424	
EDGE (4Slots)	824,2	26,5	2,5	-0,85	0,7	0,25	27,7	50%	0,589	294	0,5495	0,0961	0,4534	0,1748	0,1748
	837	26,5	2,5	-0,85	0,7	0,25	27,7		0,589	294	0,5580	0,0961	0,4619	0,1722	
	848,8	26,5	2,5	-0,85	0,7	0,25	27,7		0,589	294	0,5659	0,0961	0,4698	0,1698	
WCDMA FDD Band 5 (RMS-Value)	826,4	23,0	2,0	-0,85	0,7	0,25	23,7	100%	0,234	234	0,5509	0,0765	0,4744	0,1388	0,1388
	836,4	23,0	2,0	-0,85	0,7	0,25	23,7		0,234	234	0,5576	0,0765	0,4811	0,1372	
	846,6	23,0	2,0	-0,85	0,7	0,25	23,7		0,234	234	0,5644	0,0765	0,4879	0,1355	
LTE Band 17 (QPSK, #RB=1, RMS-Value)	706,5	23,0	2,0	-1,05	0,7	0,25	23,5	100%	0,224	224	0,4710	0,0730	0,3980	0,1551	0,1551
	710	23,0	2,0	-1,05	0,7	0,25	23,5		0,224	224	0,4733	0,0730	0,4003	0,1543	
	713,5	23,0	2,0	-1,05	0,7	0,25	23,5		0,224	224	0,4757	0,0730	0,4026	0,1536	
LTE Band 17 (16QAM, #RB=1, RMS-Value)	706,5	23,0	2,0	-1,05	0,7	0,25	23,5	100%	0,224	224	0,4710	0,0730	0,3980	0,1551	0,1551
	710	23,0	2,0	-1,05	0,7	0,25	23,5		0,224	224	0,4733	0,0730	0,4003	0,1543	
	713,5	23,0	2,0	-1,05	0,7	0,25	23,5		0,224	224	0,4757	0,0730	0,4026	0,1536	
LTE Band 5 (QPSK, #RB=1, RMS-Value)	824,7	23,0	2,0	-0,85	0,7	0,25	23,7	100%	0,234	234	0,5498	0,0765	0,4733	0,1391	0,1391
	836,5	23,0	2,0	-0,85	0,7	0,25	23,7		0,234	234	0,5577	0,0765	0,4812	0,1372	
	848,3	23,0	2,0	-0,85	0,7	0,25	23,7		0,234	234	0,5655	0,0765	0,4890	0,1352	
LTE Band 5 (16QAM, #RB=1, RMS-Value)	824,7	23,0	2,0	-0,85	0,7	0,25	23,7	100%	0,234	234	0,5498	0,0765	0,4733	0,1391	0,1391
	836,5	23,0	2,0	-0,85	0,7	0,25	23,7		0,234	234	0,5577	0,0765	0,4812	0,1372	
	848,3	23,0	2,0	-0,85	0,7	0,25	23,7		0,234	234	0,5655	0,0765	0,4890	0,1352	

Maximum calculated MPE value:		
Lowest MPE-Limit in Frequency-Band:	0,4710	[m W/cm ^2]
Highest MPE value in frequency-band:	0,2707	[m W/cm ^2]
Lowest margin to limit in frequency band:	0,2787	[m W/cm ^2]

4.2.1.4. MPE results, set-up 4 (Roof-Version-External Antenna)

Distance	20	cm													
Operating Mode	Frequency on channel	Declared maximum conducted output power	Max. positive tolerance according manufacturer	Antenna Gain	Path Loss Module to external antenna	Uncertainty of RF-path loss data	Calculated maximum ERP (declared+ Tune-up+ antenna Gain) (dBm)	Duty cycle	Declared Maximum ERP	Equivalent ERP (maximum ERP x duty cycle) (m W)	MPE Limit accord. Table 1 (m W/cm ^2)	MPE-Value (m W/cm ^2)	Margin to limit: (m W/cm ^2)	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
	(MHz)	(dBm)	(dB)	(dBd)	(dB)	(dB)	(dB)	%	(W)	(m W)	(m W/cm ^2)	(m W/cm ^2)	(m W/cm ^2)		
GSM (1Slot)	824,2	32,5	1,5	0,64	2,8	0,25	32,09	12,5%	1,618	202	0,5495	0,0660	0,4835	0,1201	0,1201
	837	32,5	1,5	0,64	2,8	0,25	32,09		1,618	202	0,5580	0,0660	0,4920	0,1183	
	848,8	32,5	1,5	0,64	2,8	0,25	32,09		1,618	202	0,5659	0,0660	0,4999	0,1166	
GPRS (4Slots)	824,2	32,0	1,5	0,64	2,8	0,25	31,59	50%	1,442	721	0,5495	0,2353	0,3142	0,4282	0,4282
	837	32,0	1,5	0,64	2,8	0,25	31,59		1,442	721	0,5580	0,2353	0,3227	0,4216	
	848,8	32,0	1,5	0,64	2,8	0,25	31,59		1,442	721	0,5659	0,2353	0,3306	0,4157	
EDGE (1Slot)	824,2	26,5	2,5	0,64	2,8	0,25	27,09	12,5%	0,512	64	0,5495	0,0209	0,5286	0,0380	0,0380
	837	26,5	2,5	0,64	2,8	0,25	27,09		0,512	64	0,5580	0,0209	0,5371	0,0374	
	848,8	26,5	2,5	0,64	2,8	0,25	27,09		0,512	64	0,5659	0,0209	0,5450	0,0369	
EDGE (4Slots)	824,2	26,5	2,5	0,64	2,8	0,25	27,09	50%	0,512	256	0,5495	0,0835	0,4660	0,1519	0,1519
	837	26,5	2,5	0,64	2,8	0,25	27,09		0,512	256	0,5580	0,0835	0,4745	0,1496	
	848,8	26,5	2,5	0,64	2,8	0,25	27,09		0,512	256	0,5659	0,0835	0,4824	0,1475	
WCDMA FDD Band 5 (RMS-Value)	826,4	23,0	2,0	0,64	2,8	0,25	23,09	100%	0,204	204	0,5509	0,0665	0,4845	0,1206	0,1206
	836,4	23,0	2,0	0,64	2,8	0,25	23,09		0,204	204	0,5576	0,0665	0,4911	0,1192	
	846,6	23,0	2,0	0,64	2,8	0,25	23,09		0,204	204	0,5644	0,0665	0,4979	0,1178	
LTE Band 17 (QPSK, #RB=1, RMS-Value)	706,5	23,0	2,0	-0,34	2,4	0,25	22,51	100%	0,178	178	0,4710	0,0582	0,4128	0,1235	0,1235
	710	23,0	2,0	-0,34	2,4	0,25	22,51		0,178	178	0,4733	0,0582	0,4152	0,1229	
	713,5	23,0	2,0	-0,34	2,4	0,25	22,51		0,178	178	0,4757	0,0582	0,4175	0,1223	
LTE Band 17 (16QAM, #RB=1, RMS-Value)	706,5	23,0	2,0	-0,34	2,4	0,25	22,51	100%	0,178	178	0,4710	0,0582	0,4128	0,1235	0,1235
	710	23,0	2,0	-0,34	2,4	0,25	22,51		0,178	178	0,4733	0,0582	0,4152	0,1229	
	713,5	23,0	2,0	-0,34	2,4	0,25	22,51		0,178	178	0,4757	0,0582	0,4175	0,1223	
LTE Band 5 (QPSK, #RB=1, RMS-Value)	824,7	23,0	2,0	0,64	2,8	0,25	23,09	100%	0,204	204	0,5498	0,0665	0,4833	0,1209	0,1209
	836,5	23,0	2,0	0,64	2,8	0,25	23,09		0,204	204	0,5577	0,0665	0,4912	0,1192	
	848,3	23,0	2,0	0,64	2,8	0,25	23,09		0,204	204	0,5655	0,0665	0,4991	0,1175	
LTE Band 5 (16QAM, #RB=1, RMS-Value)	824,7	23,0	2,0	0,64	2,8	0,25	23,09	100%	0,204	204	0,5498	0,0665	0,4833	0,1209	0,1209
	836,5	23,0	2,0	0,64	2,8	0,25	23,09		0,204	204	0,5577	0,0665	0,4912	0,1192	
	848,3	23,0	2,0	0,64	2,8	0,25	23,09		0,204	204	0,5655	0,0665	0,4991	0,1175	

Maximum calculated MPE value:		
Lowest MPE-Limit in Frequency-Band:	0,4710	[m W/cm ^2]
Highest MPE value in frequency-band:	0,2353	[m W/cm ^2]
Lowest margin to limit in frequency band:	0,3142	[m W/cm ^2]

### 4.2.1.5. MPE results, set-up 5 (Trunk Version-External Antenna)

Distance	20	cm														
Operating Mode	Frequency on channel	Declared maximum conducted output power	Max. positive tolerance according manufacturer	Antenna Gain	Path Loss Module to external MIMO1 connector	Uncertainty of RF-path loss data	Path Loss due cable connection to external antenna	Calculated maximum ERP (declared+ Tune-up+ antenna Gain) (dBm)	Duty cycle	Declared Maximum ERP	Equivalent ERP (maximum ERP x duty cycle) (m W)	MPE Limit accord. Table 1 (m W/cm ^2)	MPE-Value (m W/cm ^2)	Margin to limit: (m W/cm ^2)	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
	(MHz)	(dBm)	(dB)	(dBd)	(dB)	(dB)	(dB)	(dBm)	%	(W)	(m W)	(m W/cm ^2)	(m W/cm ^2)	(m W/cm ^2)		
GSM (1Slot)	824.2	32.5	1.5	-1.15	0.65	0.25	1.2	31.25	12.5%	1.334	167	0.5495	0.0544	0.4951	0.0990	0,0990
	837	32.5	1.5	-1.15	0.65	0.25	1.2	31.25		1.334	167	0.5580	0.0544	0.5036	0,0975	
	848.8	32.5	1.5	-1.15	0.65	0.25	1.2	31.25		1.334	167	0.5659	0.0544	0.5115	0,0961	
GPRS (4Slots)	824.2	32.0	1.5	-1.15	0.65	0.25	1.2	30.75	50%	1.189	594	0.5495	0.1939	0.3556	0,3529	0,3529
	837	32.0	1.5	-1.15	0.65	0.25	1.2	30.75		1.189	594	0.5580	0.1939	0.3641	0,3475	
	848.8	32.0	1.5	-1.15	0.65	0.25	1.2	30.75		1.189	594	0.5659	0.1939	0.3720	0,3426	
EDGE (1Slot)	824.2	26.5	2.5	-1.15	0.65	0.25	1.2	26.25	12.5%	0.422	53	0.5495	0.0172	0.5323	0,0313	0,0313
	837	26.5	2.5	-1.15	0.65	0.25	1.2	26.25		0.422	53	0.5580	0.0172	0.5408	0,0308	
	848.8	26.5	2.5	-1.15	0.65	0.25	1.2	26.25		0.422	53	0.5659	0.0172	0.5487	0,0304	
EDGE (4Slots)	824.2	26.5	2.5	-1.15	0.65	0.25	1.2	26.25	50%	0.422	211	0.5495	0.0688	0.4807	0,1252	0,1252
	837	26.5	2.5	-1.15	0.65	0.25	1.2	26.25		0.422	211	0.5580	0.0688	0.4892	0,1233	
	848.8	26.5	2.5	-1.15	0.65	0.25	1.2	26.25		0.422	211	0.5659	0.0688	0.4971	0,1216	
WCDMA FDD Band 5 (RMS-Value)	826.4	23.0	2.0	-1.15	0.65	0.25	1.2	22.25	100%	0.168	168	0.5509	0.0548	0.4962	0,0994	0,0994
	836.4	23.0	2.0	-1.15	0.65	0.25	1.2	22.25		0.168	168	0.5576	0.0548	0.5029	0,0982	
	846.6	23.0	2.0	-1.15	0.65	0.25	1.2	22.25		0.168	168	0.5644	0.0548	0.5096	0,0970	
LTE Band 17 (QPSK, #RB=1, RMS-Value)	706.5	23.0	2.0	-1.15	0.7	0.25	1.2	22.2	100%	0.166	166	0.4710	0.0541	0.4169	0,1150	0,1150
	710	23.0	2.0	-1.15	0.7	0.25	1.2	22.2		0.166	166	0.4733	0.0541	0.4192	0,1144	
	713.5	23.0	2.0	-1.15	0.7	0.25	1.2	22.2		0.166	166	0.4757	0.0541	0.4215	0,1138	
LTE Band 17 (16QAM, #RB=1, RMS-Value)	706.5	23.0	2.0	-1.15	0.7	0.25	1.2	22.2	100%	0.166	166	0.4710	0.0541	0.4169	0,1150	0,1150
	710	23.0	2.0	-1.15	0.7	0.25	1.2	22.2		0.166	166	0.4733	0.0541	0.4192	0,1144	
	713.5	23.0	2.0	-1.15	0.7	0.25	1.2	22.2		0.166	166	0.4757	0.0541	0.4215	0,1138	
LTE Band 5 (QPSK, #RB=1, RMS-Value)	824.7	23.0	2.0	-1.15	0.65	0.25	1.2	22.25	100%	0.168	168	0.5498	0.0548	0.4950	0,0996	0,0996
	836.5	23.0	2.0	-1.15	0.65	0.25	1.2	22.25		0.168	168	0.5577	0.0548	0.5029	0,0982	
	848.3	23.0	2.0	-1.15	0.65	0.25	1.2	22.25		0.168	168	0.5655	0.0548	0.5108	0,0969	
LTE Band 5 (16QAM, #RB=1, RMS-Value)	824.7	23.0	2.0	-1.15	0.65	0.25	1.2	22.25	100%	0.168	168	0.5498	0.0548	0.4950	0,0996	0,0996
	836.5	23.0	2.0	-1.15	0.65	0.25	1.2	22.25		0.168	168	0.5577	0.0548	0.5029	0,0982	
	848.3	23.0	2.0	-1.15	0.65	0.25	1.2	22.3		0.168	168	0.5655	0.0548	0.5108	0,0969	

Maximum calculated MPE value:		
Lowest MPE-Limit in Frequency-Band:	0,4710	[m W/cm ^2]
Highest MPE value in frequency-band:	0,1939	[m W/cm ^2]
Lowest margin to limit in frequency band:	0,3556	[m W/cm ^2]

### 4.2.2. Results for upper operational band: LTE band 4

#### 4.2.2.1. MPE results for set-up 2

Distance:		20	cm										
Operating Mode	Frequency on channel (MHz)	Declared maximum conducted output power (dBm)	Max. positive tolerance according manufacturer (dB)	Antenna Gain (dBi)	Calculated maximum ERP (declared+ Tune-up+ antenna Gain) (dBm)	Duty cycle (%)	Declared Maximum ERP (W)	Equivalent ERP (maximum ERP x duty cycle) (mW)	MPE Limit accord. Table 1 (mW/cm <sup>2</sup> )	MPE-Value (mW/cm <sup>2</sup> )	Margin to limit: (mW/cm <sup>2</sup> )	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
LTE Band 4 (QPSK, #1RB, RMS-Value)	1710,7	23,0	2,0	0,0	25,00	100%	0,3162	316,2	1,0000	0,0629	0,9371	0,062912	0,0629115
	1732,5	23,0	2,0	0,0	25,00		0,3162	316,2	1,0000	0,0629	0,9371	0,062912	
	1754,3	23,0	2,0	0,0	25,00		0,3162	316,2	1,0000	0,0629	0,9371	0,062912	
LTE Band 4 (16QAM, #1RB, RMS-Value)	1710,7	23,0	2,0	0,0	25,00	100%	0,3162	316,2	1,0000	0,0629	0,9371	0,062912	0,0629115
	1732,5	23,0	2,0	0,0	25,00		0,3162	316,2	1,0000	0,0629	0,9371	0,062912	
	1754,3	23,0	2,0	0,0	25,00		0,3162	316,2	1,0000	0,0629	0,9371	0,062912	

Maximum calculated MPE value:		
Lowest MPE-Limit in frequency-band:	1,0000	[mW/cm <sup>2</sup> ]
Highest MPE value in frequency-band:	0,0629	[mW/cm <sup>2</sup> ]
Lowest margin to limit in frequency-band:	0,94	[mW/cm <sup>2</sup> ]

#### 4.2.2.2. Max. Antenna gain considerations results for set-up 2

**Maximum antenna gain considerations for fixed/mobile operations for complying with limits:**

P	Maximum power input to the antenna incl. Duty cycle (mW): (Avg. Burst Power or RMS)	316
R	Distance (cm):	20
S	MPE limit acc. §1.1310 for uncontrolled exposure (mW/cm <sup>2</sup> ): (FCC use mW)	1,00
G <sub>1</sub>	Maximum Antenna gain to comply with MPE limit (dBi):	12,01

(For G1 the lowest measured channel to reach minimum ant. Gain selected)

G <sub>2</sub>	ERP power limit according to §2.1091 [W]: (Avg. Burst Power or RMS)	3,00
	Max. Antenna gain to comply with this limit incl. Duty cycle (dBi):	11,92

(For G2 select the max. Avg. Burst Power or RMS value incl. Duty cycle)

G <sub>3</sub>	ERP power limit according to §27.50(d) [W]:	1,00
	Max. Antenna gain to comply with this limit (dBi):	5,00

(For G3 select the max. Average burst power value excluding Duty cycle)

	Min (G <sub>1</sub> , G <sub>2</sub> , G <sub>3</sub> ) (dBi)	5,00
--	---	------

Summarized results:	The max. ant. gain for mobile operation at 1700 MHz band to comply with MPE and ERP limits incl. path loss shall not exceed (dBi):	5,00
---------------------	--	------

### 4.2.2.3. MPE results, set-up 3 ATM Roof Internal Cellular antenna

Distance:			20	cm												
Operating Mode	Frequency on channel	Declared maximum conducted output power	Max. positive tolerance according manufacturer	Antenna Gain	Path Loss Module to Internal antenna	Uncertainty of RF-path loss data	Calculated maximum ERP (declared+ Tune-up+ antenna Gain)	Duty cycle	Declared Maximum ERP	Equivalent ERP (maximum ERP x duty cycle)	MPE Limit accord. Table 1	MPE-Value	Margin to limit:	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band	
	(MHz)	(dBm)	(dB)	(dBi)	(dB)	(dB)	(dBm)	%	(W)	(mW)	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )			
LTE Band 4 (QPSK, #1RB, RMS-Value)	1710,7	23,0	2,0	1,80	1,10	0,25	25,95	100%	0,3936	393,6	1,0000	0,0783	0,9217	0,078294	0,0782943	
	1732,5	23,0	2,0	1,80	1,10	0,25	25,95		0,3936	393,6	1,0000	0,0783	0,9217	0,078294		
	1754,3	23,0	2,0	1,80	1,10	0,25	25,95		0,3936	393,6	1,0000	0,0783	0,9217	0,078294		
LTE Band 4 (16QAM, #1RB, RMS-Value)	1710,7	23,0	2,0	1,80	1,10	0,25	25,95	100%	0,3936	393,6	1,0000	0,0783	0,9217	0,078294	0,0782943	
	1732,5	23,0	2,0	1,80	1,10	0,25	25,95		0,3936	393,6	1,0000	0,0783	0,9217	0,078294		
	1754,3	23,0	2,0	1,80	1,10	0,25	25,95		0,3936	393,6	1,0000	0,0783	0,9217	0,078294		

Maximum calculated MPE value:		
Lowest MPE-Limit in frequency-band:	1,0000	[mW/cm <sup>2</sup> ]
Highest MPE value in frequency-band:	0,0783	[mW/cm <sup>2</sup> ]
Lowest margin to limit in frequency-band:	0,92	[mW/cm <sup>2</sup> ]

### 4.2.2.4. MPE results, set-up 4 ATM Roof External Cellular antenna

Distance:			20	cm												
Operating Mode	Frequency on channel	Declared maximum conducted output power	Max. positive tolerance according manufacturer	Antenna Gain	Path Loss Module to ext. Antenna (MIMO1)	Uncertainty of RF-path loss data	Calculated maximum ERP (declared+ Tune-up+ antenna Gain)	Duty cycle	Declared Maximum ERP	Equivalent ERP (maximum ERP x duty cycle)	MPE Limit accord. Table 1	MPE-Value	Margin to limit:	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band	
	(MHz)	(dBm)	(dB)	(dBi)	(dB)	(dB)	(dBm)	%	(W)	(mW)	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )			
LTE Band 4 (QPSK, #1RB, RMS-Value)	1710,7	23,0	2,0	2,40	4,90	0,25	22,75	100%	0,1884	188,4	1,0000	0,0375	0,9625	0,037474	0,0374740	
	1732,5	23,0	2,0	2,40	4,90	0,25	22,75		0,1884	188,4	1,0000	0,0375	0,9625	0,037474		
	1754,3	23,0	2,0	2,40	4,90	0,25	22,75		0,1884	188,4	1,0000	0,0375	0,9625	0,037474		
LTE Band 4 (16QAM, #1RB, RMS-Value)	1710,7	23,0	2,0	2,40	4,90	0,25	22,75	100%	0,1884	188,4	1,0000	0,0375	0,9625	0,037474	0,0374740	
	1732,5	23,0	2,0	2,40	4,90	0,25	22,75		0,1884	188,4	1,0000	0,0375	0,9625	0,037474		
	1754,3	23,0	2,0	2,40	4,90	0,25	22,75		0,1884	188,4	1,0000	0,0375	0,9625	0,037474		

Maximum calculated MPE value:		
Lowest MPE-Limit in frequency-band:	1,0000	[mW/cm <sup>2</sup> ]
Highest MPE value in frequency-band:	0,0375	[mW/cm <sup>2</sup> ]
Lowest margin to limit in frequency-band:	0,96	[mW/cm <sup>2</sup> ]

### 4.2.2.5. MPE results, set-up 5 (Trunk Version-External Antenna)

Distance:			20	cm												
Operating Mode	Frequency on channel	Declared maximum conducted output power	Max. positive tolerance according manufacturer	Antenna Gain	Path Loss Module to external MIMO1 connector	Uncertainty of RF-path loss data	Path Loss due cable connection to external antenna	Calculated maximum ERP (declared+ Tune-up+ antenna Gain)	Duty cycle	Declared Maximum ERP	Equivalent ERP (maximum ERP x duty cycle)	MPE Limit accord. Table 1	MPE-Value	Margin to limit:	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
	(MHz)	(dBm)	(dB)	(dBi)	(dB)	(dB)	(dB)	(dBm)	%	(W)	(mW)	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )		
LTE Band 4 (QPSK, #1RB, RMS-Value)	1710,7	23,0	2,0	1,0	0,87	0,25	2,16	23,22	100%	0,2099	209,9	1,0000	0,0418	0,9582	0,041757	0,0417571
	1732,5	23,0	2,0	1,0	0,87	0,25	2,16	23,22		0,2099	209,9	1,0000	0,0418	0,9582	0,041757	
	1754,3	23,0	2,0	1,0	0,87	0,25	2,16	23,22		0,2099	209,9	1,0000	0,0418	0,9582	0,041757	
LTE Band 4 (16QAM, #1RB, RMS-Value)	1710,7	23,0	2,0	1,0	0,87	0,25	2,16	23,22	100%	0,2099	209,9	1,0000	0,0418	0,9582	0,041757	0,0417571
	1732,5	23,0	2,0	1,0	0,87	0,25	2,16	23,22		0,2099	209,9	1,0000	0,0418	0,9582	0,041757	
	1754,3	23,0	2,0	1,0	0,87	0,25	2,16	23,22		0,2099	209,9	1,0000	0,0418	0,9582	0,041757	

Maximum calculated MPE value:		
Lowest MPE-Limit in frequency-band:	1,0000	[mW/cm <sup>2</sup> ]
Highest MPE value in frequency-band:	0,0418	[mW/cm <sup>2</sup> ]
Lowest margin to limit in frequency-band:	0,96	[mW/cm <sup>2</sup> ]

### 4.2.3. Results for upper operational band: FDD 2, LTE 2 and GSM1900

#### 4.2.3.1. MPE results set-up 2

Safety-Distance		20	cm										
Operation Mode	Frequency on channel (MHz)	Declared maximum conducted output power (dBm)	Max. positive tolerance according manufacturer (dB)	Antenna Gain	Declared maximum ERP (Measured+ Tune-up+ Antenna Gain) (dBm)	Duty cycle (%)	Declared Maximum ERP (W)	Equivalent ERP (maximum ERP x duty cycle) (mW)	MPE Limit accord. Table 1 (mW/cm <sup>2</sup> )	MPE-Value (mW/cm <sup>2</sup> )	Margin to limit: (W/m <sup>2</sup> )	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
GSM (1Slot)	1850,2	29,5	1,50	0,0	31,00	12,5%	1,259	157	1,0000	0,0313	0,9687	0,031307	0,0313069
	1880,0	29,5		0,0	31,00		1,259	157	1,0000	0,0313	0,9687	0,031307	
	1909,8	29,5		0,0	31,00		1,259	157	1,0000	0,0313	0,9687	0,031307	
GPRS (4Slots)	1850,2	29,5	1,50	0,0	31,00	50%	1,259	629	1,0000	0,1252	0,8748	0,125228	0,1252276
	1880,0	29,5		0,0	31,00		1,259	629	1,0000	0,1252	0,8748	0,125228	
	1909,8	29,5		0,0	31,00		1,259	629	1,0000	0,1252	0,8748	0,125228	
EDGE (1Slot)	1850,2	25,5	2,50	0,0	28,00	12,5%	0,631	79	1,0000	0,0157	0,9843	0,015691	0,0156906
	1880,0	25,5		0,0	28,00		0,631	79	1,0000	0,0157	0,9843	0,015691	
	1909,8	25,5		0,0	28,00		0,631	79	1,0000	0,0157	0,9843	0,015691	
EDGE (4Slots)	1850,2	25,5	2,50	0,0	28,00	50%	0,631	315	1,0000	0,0628	0,9372	0,062762	0,0627625
	1880,0	25,5		0,0	28,00		0,631	315	1,0000	0,0628	0,9372	0,062762	
	1909,8	25,5		0,0	28,00		0,631	315	1,0000	0,0628	0,9372	0,062762	
W-CDMA FDD Band 2 (RMS-Value)	1852,4	23,0	2,00	0,0	25,00	100%	0,316	316	1,0000	0,0629	0,9371	0,062912	0,0629115
	1880,0	23,0		0,0	25,00		0,316	316	1,0000	0,0629	0,9371	0,062912	
	1907,6	23,0		0,0	25,00		0,316	316	1,0000	0,0629	0,9371	0,062912	
LTE Band 2 (QPSK, #1RB, RMS-Value)	1850,7	23,0	2,00	0,0	25,00	100%	0,316	316	1,0000	0,0629	0,9371	0,062912	0,0629115
	1880,0	23,0		0,0	25,00		0,316	316	1,0000	0,0629	0,9371	0,062912	
	1909,3	23,0		0,0	25,00		0,316	316	1,0000	0,0629	0,9371	0,062912	
LTE Band 2 (16QAM, #1RB, RMS-Value)	1850,7	23,0	2,00	0,0	25,00	100%	0,316	316	1,0000	0,0629	0,9371	0,062912	0,0629115
	1880,0	23,0		0,0	25,00		0,316	316	1,0000	0,0629	0,9371	0,062912	
	1909,3	23,0		0,0	25,00		0,316	316	1,0000	0,0629	0,9371	0,062912	

Maximum calculated MPE value:		
Lowest MPE-Limit in frequency-band:	1,0000	[mW/cm <sup>2</sup> ]
Highest MPE value in frequency-band:	0,1252	[mW/cm <sup>2</sup> ]
Margin to limit in frequency-band:	0,8748	[mW/cm <sup>2</sup> ]

#### 4.2.3.2. Max. Antenna Gain considerations for set-up 2

Maximum antenna gain considerations for fixed/mobile operations for complying with limits:				
P	Maximum power input to the antenna incl. Duty cycle (mW): (Avg. Burst Power or RMS)			629
R	Distance (cm):			20
S	MPE limit acc. §1.1310 for uncontrolled exposure (mW/cm <sup>2</sup> ): (FCC use mW/cm <sup>2</sup> )			1,00
G <sub>1</sub>	Maximum Antenna gain to comply with MPE limit (dBi):			9,02

(For G1 the lowest measured channel to reach minimum ant. Gain selected)

ERP power limit according to §2.1091 [W]: (Avg. Burst Power or RMS)				
G <sub>2</sub>	Max. Antenna gain to comply with this limit incl. Duty cycle (dBi):			8,93

(For G2 select the max. Avg. Burst Power or RMS value incl. Duty cycle)

ERP power limit according to §24.232 [W]:				
G <sub>3</sub>	Max. Antenna gain to comply with this limit (dBi):			2,01

(For G3 select the max. Average burst power value excluding Duty cycle)

Min (G <sub>1</sub> , G <sub>2</sub> , G <sub>3</sub> ) (dBi)				2,01
---	--	--	--	------

Summarized results:	The max. ant. gain for mobile operation at 1900 MHz band to comply with MPE and ERP limits incl. path loss shall not exceed (dBi):			2,01
---------------------	--	--	--	------

4.2.3.3. MPE results, set-up 3 (ATM Roof Internal Cellular antenna)

Safety-Distance		20	cm												
Operation Mode	Frequency on channel (MHz)	Declared maximum conducted output power (dBm)	Max. positive tolerance according manufacturer (dB)	Antenna Gain (dBi)	Path Loss Module to internal antenna (dB)	Uncertainty of RF-path loss data (dB)	Declared maximum ERP (Measured+ Tune-up+ Antenna Gain) (dBm)	Duty cycle (%)	Declared Maximum ERP (W)	Equivalent ERP (maximum ERP x duty cycle) (mW)	MPE Limit accord. Table 1 (mW/cm <sup>2</sup> )	MPE-Value (mW/cm <sup>2</sup> )	Margin to limit: (W/m <sup>2</sup> )	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
GSM (1Slot)	1850,2	29,5	1,50	2,0	1,1	0,25	32,15	12,5%	1,641	205	1,0000	0,0408	0,9592	0,040798	0,0407981
	1880,0	29,5		2,0	1,1	0,25	32,15		1,641	205	1,0000	0,0408	0,9592	0,040798	
	1909,8	29,5		2,0	1,1	0,25	32,15		1,641	205	1,0000	0,0408	0,9592	0,040798	
GPRS (4Slots)	1850,2	29,5	1,50	2,0	1,1	0,25	32,15	50%	1,641	820	1,0000	0,1632	0,8368	0,163192	0,1631925
	1880,0	29,5		2,0	1,1	0,25	32,15		1,641	820	1,0000	0,1632	0,8368	0,163192	
	1909,8	29,5		2,0	1,1	0,25	32,15		1,641	820	1,0000	0,1632	0,8368	0,163192	
EDGE (1Slot)	1850,2	25,5	2,50	2,0	1,1	0,25	29,15	12,5%	0,822	103	1,0000	0,0204	0,9796	0,020447	0,0204475
	1880,0	25,5		2,0	1,1	0,25	29,15		0,822	103	1,0000	0,0204	0,9796	0,020447	
	1909,8	25,5		2,0	1,1	0,25	29,15		0,822	103	1,0000	0,0204	0,9796	0,020447	
EDGE (4Slots)	1850,2	25,5	2,50	2,0	1,1	0,25	29,15	50%	0,822	411	1,0000	0,0818	0,9182	0,081790	0,0817900
	1880,0	25,5		2,0	1,1	0,25	29,15		0,822	411	1,0000	0,0818	0,9182	0,081790	
	1909,8	25,5		2,0	1,1	0,25	29,15		0,822	411	1,0000	0,0818	0,9182	0,081790	
W-CDMA FDD Band 2 (RMS-Value)	1852,4	23,0	2,00	2,0	1,1	0,25	26,15	100%	0,412	412	1,0000	0,0820	0,9180	0,081984	0,0819842
	1880,0	23,0		2,0	1,1	0,25	26,15		0,412	412	1,0000	0,0820	0,9180	0,081984	
	1907,6	23,0		2,0	1,1	0,25	26,15		0,412	412	1,0000	0,0820	0,9180	0,081984	
LTE Band 2 (QPSK, #1RB, RMS-Value)	1850,7	23,0	2,00	2,0	1,1	0,25	26,15	100%	0,412	412	1,0000	0,0820	0,9180	0,081984	0,0819842
	1880,0	23,0		2,0	1,1	0,25	26,15		0,412	412	1,0000	0,0820	0,9180	0,081984	
	1909,3	23,0		2,0	1,1	0,25	26,15		0,412	412	1,0000	0,0820	0,9180	0,081984	
LTE Band 2 (16QAM, #1RB, RMS-Value)	1850,7	23,0	2,00	2,0	1,1	0,25	26,15	100%	0,412	412	1,0000	0,0820	0,9180	0,081984	0,0819842
	1880,0	23,0		2,0	1,1	0,25	26,15		0,412	412	1,0000	0,0820	0,9180	0,081984	
	1909,3	23,0		2,0	1,1	0,25	26,15		0,412	412	1,0000	0,0820	0,9180	0,081984	
Maximum calculated MPE value:															
Lowest MPE-Limit in frequency-band:	1,0000	[mW/cm <sup>2</sup> ]													
Highest MPE value in frequency-band:	0,1632	[mW/cm <sup>2</sup> ]													
Margin to limit in frequency-band:	0,8368	[mW/cm <sup>2</sup> ]													

4.2.3.4. MPE results, set-up 4 (ATM Roof External Cellular antenna)

Safety-Distance		20	cm												
Operation Mode	Frequency on channel (MHz)	Declared maximum conducted output power (dBm)	Max. positive tolerance according manufacturer (dB)	Antenna Gain (dBi)	Path Loss Module to internal antenna (dB)	Uncertainty of RF-path loss data (dB)	Declared maximum ERP (Measured+ Tune-up+ Antenna Gain) (dBm)	Duty cycle (%)	Declared Maximum ERP (W)	Equivalent ERP (maximum ERP x duty cycle) (mW)	MPE Limit accord. Table 1 (mW/cm <sup>2</sup> )	MPE-Value (mW/cm <sup>2</sup> )	Margin to limit: (W/m <sup>2</sup> )	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
GSM (1Slot)	1850,2	29,5	1,50	1,9	5,0	0,25	28,15	12,5%	0,653	82	1,0000	0,0162	0,9838	0,016242	0,0162420
	1880,0	29,5		1,9	5,0	0,25	28,15		0,653	82	1,0000	0,0162	0,9838	0,016242	
	1909,8	29,5		1,9	5,0	0,25	28,15		0,653	82	1,0000	0,0162	0,9838	0,016242	
GPRS (4Slots)	1850,2	29,5	1,50	1,9	5,0	0,25	28,15	50%	0,653	327	1,0000	0,0650	0,9350	0,064968	0,0649681
	1880,0	29,5		1,9	5,0	0,25	28,15		0,653	327	1,0000	0,0650	0,9350	0,064968	
	1909,8	29,5		1,9	5,0	0,25	28,15		0,653	327	1,0000	0,0650	0,9350	0,064968	
EDGE (1Slot)	1850,2	25,5	2,50	1,9	5,0	0,25	25,15	12,5%	0,327	41	1,0000	0,0081	0,9919	0,008140	0,0081403
	1880,0	25,5		1,9	5,0	0,25	25,15		0,327	41	1,0000	0,0081	0,9919	0,008140	
	1909,8	25,5		1,9	5,0	0,25	25,15		0,327	41	1,0000	0,0081	0,9919	0,008140	
EDGE (4Slots)	1850,2	25,5	2,50	1,9	5,0	0,25	25,15	50%	0,327	164	1,0000	0,0326	0,9674	0,032561	0,0325612
	1880,0	25,5		1,9	5,0	0,25	25,15		0,327	164	1,0000	0,0326	0,9674	0,032561	
	1909,8	25,5		1,9	5,0	0,25	25,15		0,327	164	1,0000	0,0326	0,9674	0,032561	
W-CDMA FDD Band 2 (RMS-Value)	1852,4	23,0	2,00	1,9	5,0	0,25	22,15	100%	0,164	164	1,0000	0,0326	0,9674	0,032638	0,0326385
	1880,0	23,0		1,9	5,0	0,25	22,15		0,164	164	1,0000	0,0326	0,9674	0,032638	
	1907,6	23,0		1,9	5,0	0,25	22,15		0,164	164	1,0000	0,0326	0,9674	0,032638	
LTE Band 2 (QPSK, #1RB, RMS-Value)	1850,7	23,0	2,00	1,9	5,0	0,25	22,15	100%	0,164	164	1,0000	0,0326	0,9674	0,032638	0,0326385
	1880,0	23,0		1,9	5,0	0,25	22,15		0,164	164	1,0000	0,0326	0,9674	0,032638	
	1909,3	23,0		1,9	5,0	0,25	22,15		0,164	164	1,0000	0,0326	0,9674	0,032638	
LTE Band 2 (16QAM, #1RB, RMS-Value)	1850,7	23,0	2,00	1,9	5,0	0,25	22,15	100%	0,164	164	1,0000	0,0326	0,9674	0,032638	0,0326385
	1880,0	23,0		1,9	5,0	0,25	22,15		0,164	164	1,0000	0,0326	0,9674	0,032638	
	1909,3	23,0		1,9	5,0	0,25	22,15		0,164	164	1,0000	0,0326	0,9674	0,032638	
Maximum calculated MPE value:															
Lowest MPE-Limit in frequency-band:	1,0000	[mW/cm <sup>2</sup> ]													
Highest MPE value in frequency-band:	0,0650	[mW/cm <sup>2</sup> ]													
Margin to limit in frequency-band:	0,9350	[mW/cm <sup>2</sup> ]													



4.2.3.5. MPE results, set-up 5 (Trunk Version-External Antenna)

Safety-Distance		20	cm													
Operation Mode	Frequency on channel	Declared maximum conducted output power	Max. positive tolerance according manufacturer	Antenna Gain	Path Loss Module to external MIMO1 connector	Uncertainty of RF-path loss data	Path Loss due cable connection to external antenna	Declared maximum ERP (Measured+ Tune-up+ Antenna Gain)	Duty cycle	Declared Maximum ERP	Equivalent ERP (maximum ERP x duty cycle)	MPE Limit accord. Table 1	MPE-Value	Margin to limit:	Fraction for Co-Location calculations	Max. Fraction-Value within Frequency-Band
	(MHz)	(dBm)														
GSM (1Slot)	1850.2	29.5	1.50	1.00	0.90	0.25	2.16	29.19	12.5%	0.830	104	1.0000	0.0206	0.9794	0.020637	0.0206367
	1880.0	29.5		1.00	0.90	0.25	2.16	29.19		0.830	104	1.0000	0.0206	0.9794	0.020637	
	1909.8	29.5		1.00	0.90	0.25	2.16	29.19		0.830	104	1.0000	0.0206	0.9794	0.020637	
GPRS (4Slots)	1850.2	29.5	1.50	1.00	0.90	0.25	2.16	29.19	50%	0.830	415	1.0000	0.0825	0.9175	0.082547	0.0825468
	1880.0	29.5		1.00	0.90	0.25	2.16	29.19		0.830	415	1.0000	0.0825	0.9175	0.082547	
	1909.8	29.5		1.00	0.90	0.25	2.16	29.19		0.830	415	1.0000	0.0825	0.9175	0.082547	
EDGE (1Slot)	1850.2	25.5	2.50	1.00	0.90	0.25	2.16	26.19	12.5%	0.416	52	1.0000	0.0103	0.9897	0.010343	0.0103428
	1880.0	25.5		1.00	0.90	0.25	2.16	26.19		0.416	52	1.0000	0.0103	0.9897	0.010343	
	1909.8	25.5		1.00	0.90	0.25	2.16	26.19		0.416	52	1.0000	0.0103	0.9897	0.010343	
EDGE (4Slots)	1850.2	25.5	2.50	1.00	0.90	0.25	2.16	26.19	50%	0.416	208	1.0000	0.0414	0.9586	0.041371	0.0413714
	1880.0	25.5		1.00	0.90	0.25	2.16	26.19		0.416	208	1.0000	0.0414	0.9586	0.041371	
	1909.8	25.5		1.00	0.90	0.25	2.16	26.19		0.416	208	1.0000	0.0414	0.9586	0.041371	
W-CDMA FDD Band 2 (RMS-Value)	1852.4	23.0	2.00	1.00	0.90	0.25	2.16	23.19	100%	0.208	208	1.0000	0.0415	0.9585	0.041470	0.0414696
	1880.0	23.0		1.00	0.90	0.25	2.16	23.19		0.208	208	1.0000	0.0415	0.9585	0.041470	
	1907.6	23.0		1.00	0.90	0.25	2.16	23.19		0.208	208	1.0000	0.0415	0.9585	0.041470	
LTE Band 2 (QPSK, #1 RB, RMS-Value)	1850.7	23.0	2.00	1.00	0.90	0.25	2.16	23.19	100%	0.208	208	1.0000	0.0415	0.9585	0.041470	0.0414696
	1880.0	23.0		1.00	0.90	0.25	2.16	23.19		0.208	208	1.0000	0.0415	0.9585	0.041470	
	1909.3	23.0		1.00	0.90	0.25	2.16	23.19		0.208	208	1.0000	0.0415	0.9585	0.041470	
LTE Band 2 (16QAM, #1 RB, RMS-Value)	1850.7	23.0	2.00	1.00	0.90	0.25	2.16	23.19	100%	0.208	208	1.0000	0.0415	0.9585	0.041470	0.0414696
	1880.0	23.0		1.00	0.90	0.25	2.16	23.19		0.208	208	1.0000	0.0415	0.9585	0.041470	
	1909.3	23.0		1.00	0.90	0.25	2.16	23.19		0.208	208	1.0000	0.0415	0.9585	0.041470	

Maximum calculated MPE value:		
Lowest MPE-Limit in frequency-band:	1.0000	[mW/cm <sup>2</sup> ]
Highest MPE value in frequency-band:	0.0825	[mW/cm <sup>2</sup> ]
Margin to limit in frequency-band:	0.9175	[mW/cm <sup>2</sup> ]

### 4.3. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%					Remarks
Conducted emissions (U <sub>CISPR</sub> )	CISPR 16-2-1	9 kHz - 150 kHz	4.0 dB					-
		150 kHz - 30 MHz	3.6 dB					
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz	4.2 dB					E-Field
		1 GHz - 18 GHz	5.1 dB					
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-					-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB					Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	-
		9 kHz - 12.75 GHz	N/A	0.60	--	--	--	
		12.75 - 26.5GHz	N/A	0.82	--	--	--	
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	--	--	--	N/A - not applicable
		2.8 GHz - 12.75GHz	1.48	N/A	--	--	--	
		12.75 GHz - 18GHz	1.81	N/A	--	--	--	
		18 GHz - 26.5GHz	1.83	N/A	--	--	--	
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)					Frequency error
			1.0 dB					Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)					Frequency error
			See above: 0.70 dB					Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm					-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB					Magnetic field E-field Substitution
		30 MHz - 1 GHz	4.2 dB					
		1 GHz - 20 GHz	3.17 dB					

**Table: measurement uncertainties, valid for conducted/radiated measurements**

## 5. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

## 6. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkKS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	MRA US-EU 0003	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurment.	FCC, Federal Communications Commission Laboratory Division, USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
487 550 348 348	R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurment.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room

## 7. Instruments and Ancillary

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

### 7.0.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
140	Signal Generator	SMHU	831314/006	Firm.= 3.21
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
264	Spectrum Analyzer	FSEK 30	826939/005	Bios=2.1, Analyzer= 3.20
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	TSI 1.53
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	Power Meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm. = 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	EMC 32 Ver. 9.15.00
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software-Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)

### 7.0.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	30.04.2016
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	30.04.2016
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	30.04.2016
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	30.04.2017
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	31.03.2016
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.03.2017
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.04.2018
030	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	30.04.2018
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	30.04.2017
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	30.09.2016
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
090	Helmholtz coil: 2x10 coils in series	Helmholtz coil: 2x10 coils in	-	RWTÜV	24 M	4	31.03.2016
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	30.04.2018
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.04.2018
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	31.03.2016
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	30.04.2018
140	Signal Generator	SMHU	831314/006	Rohde & Schwarz	24 M	-	31.03.2016
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	31.03.2016
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	31.03.2016
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	31.03.2016
264	Spectrum Analyzer	FSEK 30	826939/005	Rohde & Schwarz	12 M	-	30.04.2016
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	31.03.2016
266	Peak Power Sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	31.03.2016
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	30.09.2016
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	30.09.2016
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	30.04.2016
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	31.03.2017
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	31.03.2017
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	30.12.2016
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	31.03.2016
342	Digital Multimeter	Volcraft M-4660A	IB 255466	Volcraft	24 M	-	30.04.2017
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
355	Power Meter	URV 5	891310/027	Rohde & Schwarz	24 M	-	31.03.2016
356	power sensor	NRV-Z1	882322/014	Rohde & Schwarz	24 M	-	31.03.2015
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	30.04.2017
371	Bluetooth Tester	CBT32	100153	R&S	24 M	-	31.03.2016
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	24 M	-	30.04.2017
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	30.04.2016
389	Digital Multimeter	Keithley 2000	0583926	Keithley	24 M	-	30.04.2017
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	30.04.2016
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	30.04.2016
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	-	31.03.2017

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR) Cable	-	CETECOM	12 M	5	30.01.2016
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	ETS-Lindgren / CETECOM	12 M	5	30.09.2016
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-	5	Wainwright Instruments GmbH	12 M	1c	30.09.2016
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	30.09.2016
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	30.04.2016
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	31.03.2016
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	36 M	-	30.04.2018
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	36 M	-	30.04.2018
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	30.04.2017
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	30.09.2016
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	31.07.2017
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	30.04.2016
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwright	12 M	1c	30.09.2016
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	30.04.2017
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	30.04.2016
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	30.04.2016
548	Digital-Barometer	GBP 2300	without	Greisinger GmbH	-	-	
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36 M	-	31.07.2018
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	30.09.2016
557	System CTC-OTA-2	R&S TS8991	-	Rohde & Schwarz	12 M	5	30.09.2016
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	30.09.2016
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2016
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	
594	Wideband Radio Communication Tester	CMW 500	101757	Rohde & Schwarz	12 M	-	30.04.2016
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	36 M	-	31.03.2016
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Rohde & Schwarz	24 M	-	30.04.2017
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	30.04.2017
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	30.04.2017
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	31.03.2016
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.4 3	G. Lufft GmbH	24 M	-	30.04.2017
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	Kogilink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	12 M	-	30.04.2016
644	Amplifierer	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	31.03.2016
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	
678	Power Meter	NRP	101638	Rohde&Schwarz	pre-m	-	
683	Spectrum Analyzer	FSU 26	200571	Rohde & Schwarz	12 M	-	30.04.2016
686	Field Analyzer	EHP-200A	160WX30702	Narda Safety Test	24 M	-	30.04.2017

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
				Solutions			
687	Signal Generator	SMF 100A	102073	Rohde&Schwarz	12 M	-	30.04.2016
688	Pre Amp	JS-18004000-40-8P	1750117	Miteq	pre-m	-	
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	24 M	-	31.03.2016
697	Power Splitter	ZN4PD-642W-S+	165001445	Mini-Circuits	-	2	

### 7.0.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No . 443)
	1d	System CTC-SAR-EMI (Ref.-No . 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No . 420)
	1 g	System CTC-FAR-EMS (Ref.-No . 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

Version	Applied changes	Date of release
--	Initial release	2015-12-15
--	--	--