




## Appendix B

RF Power Output



Marker 1 [T1] RBW 3 MHz RF Att 60 dB  
Ref Lvl 25.86 dBm VBW 3 MHz  
37 dBm 1.85016994 GHz SWT 5 ms Unit dBm

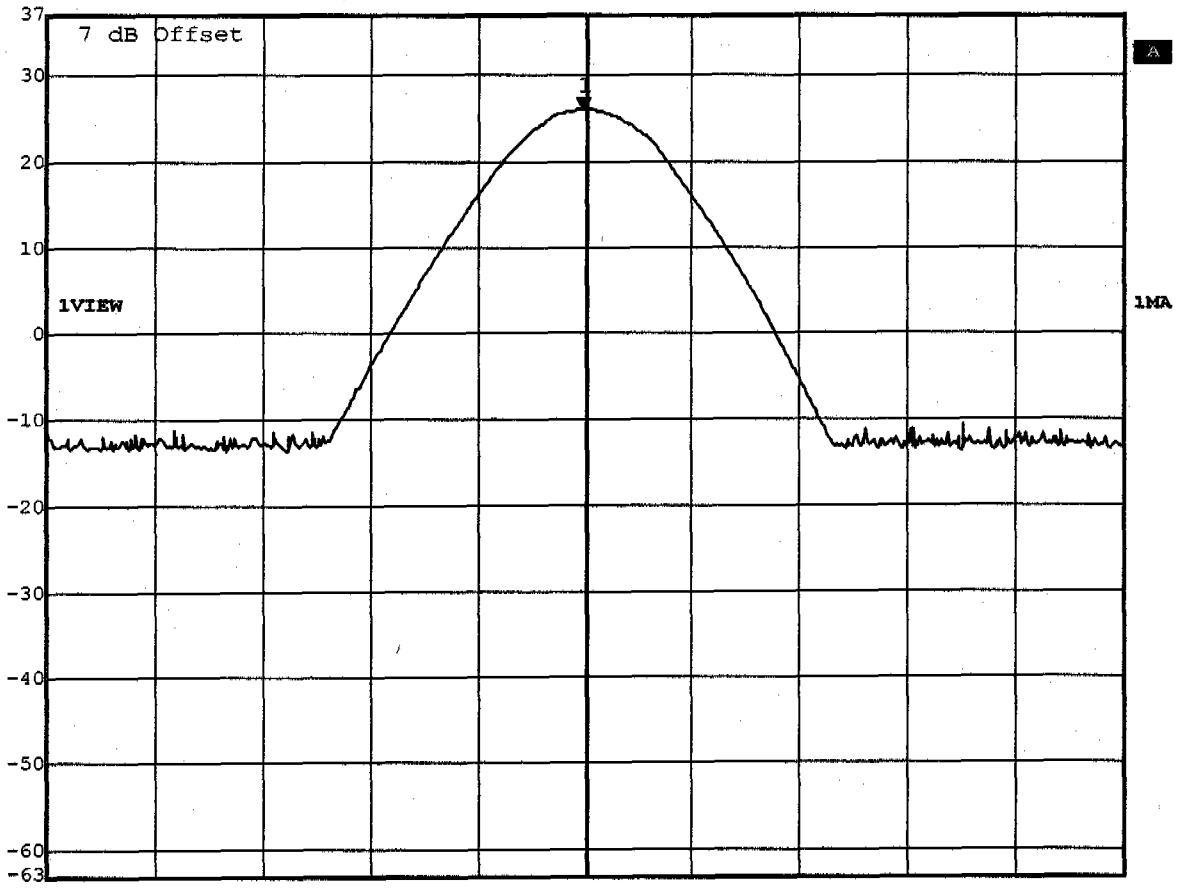


Center 1.8502 GHz 3 MHz/ Span 30 MHz

Title: Output Power Conducted Channel 512  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 11:03:28




Marker 1 [T1]      RBW    3 MHz    RF Att    60 dB  
Ref Lvl            26.30 dBm    VBW    3 MHz  
37 dBm            1.88009018 GHz    SWT    5 ms    Unit            dBm

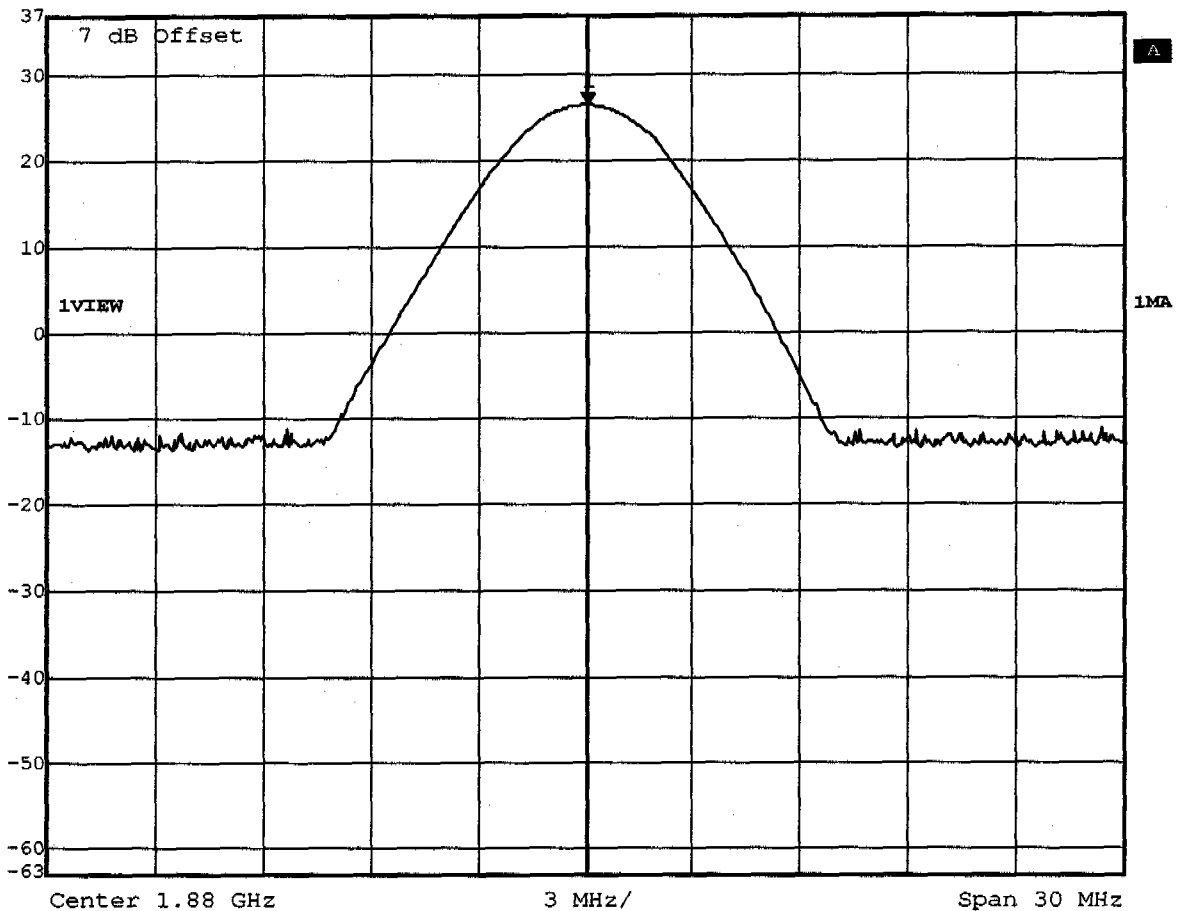

Title:      Output Power Conducted    Channel 661  
Comment A: Peiker -- TPU-Q2426  
Date:      15.JUL.2004 11:05:14




Marker 1 [T1] REW 3 MHz RF Att 60 dB  
Ref Lvl 26.31 dBm VBW 3 MHz  
37 dBm 1.90970982 GHz SWT 5 ms Unit dBm

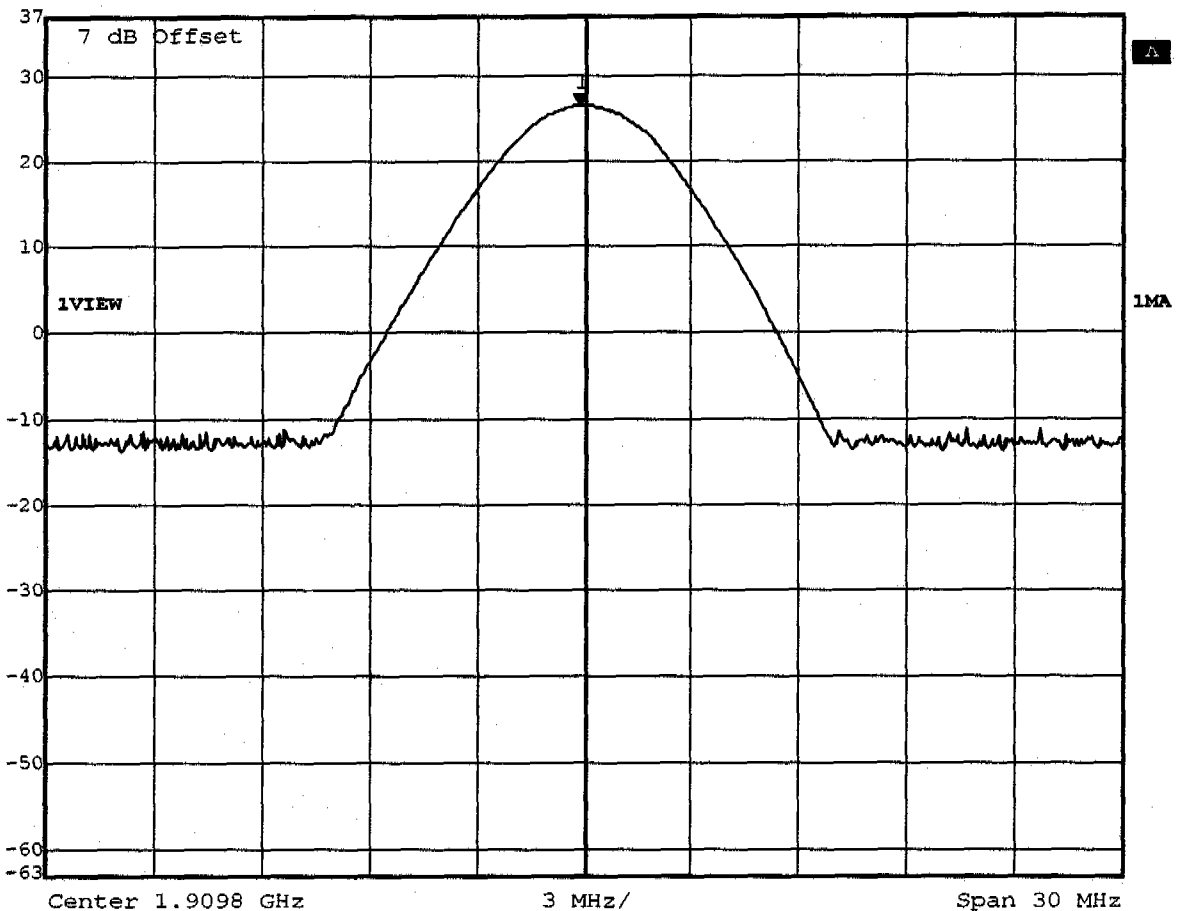

Title: Output Power Conducted Channel 810  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 11:16:18



Marker 1 [T1]      RBW    3 MHz    RF Att    50 dB  
Ref Lvl            30.86 dBm    VBW    3 MHz  
36 dBm            824.16993988 MHz    SWT    5 ms    Unit            dBm

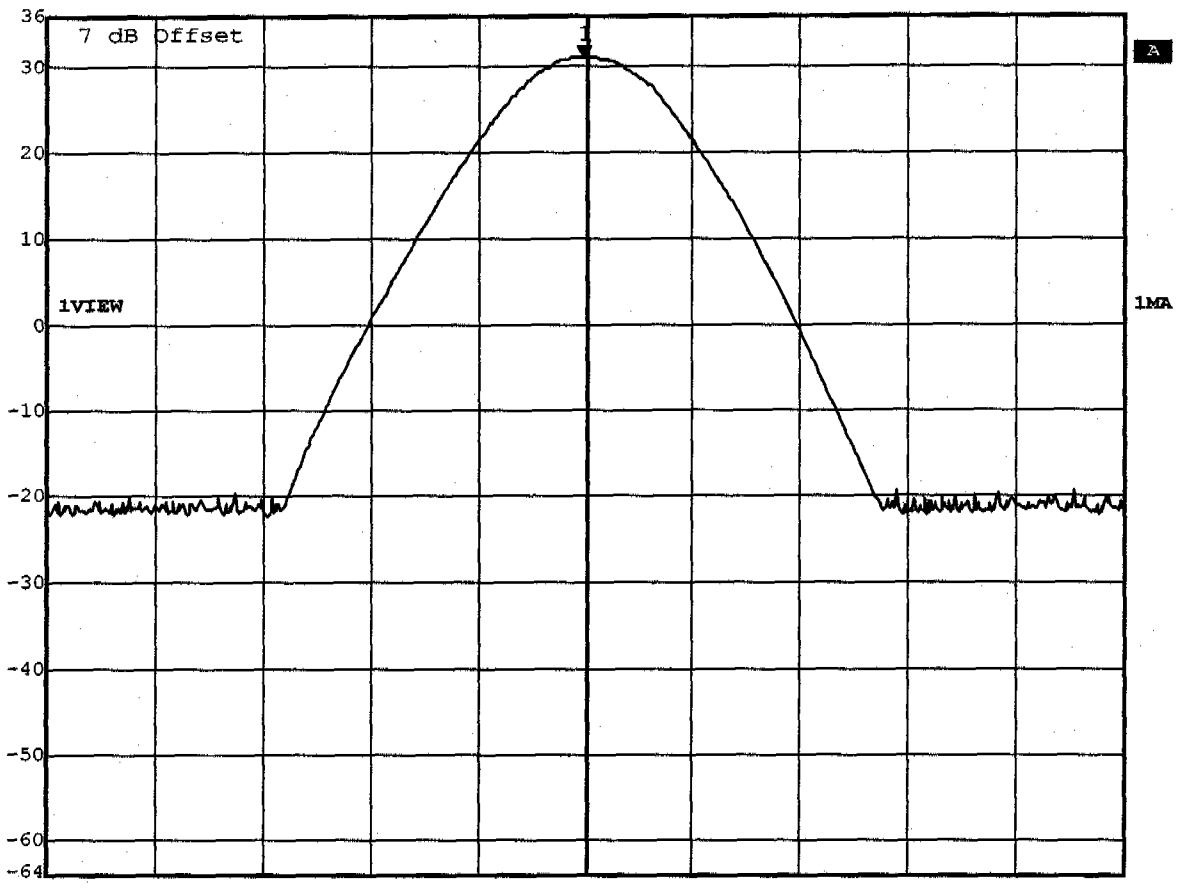


Center 824.2 MHz      3 MHz/      Span 30 MHz

Title:      Output Power Conducted Channel 128  
Comment A: Peiker -- TPU-Q2426  
Date:      15.JUL.2004 10:10:03




|               |                  |       |        |          |
|---------------|------------------|-------|--------|----------|
| Marker 1 [T1] | RBW              | 3 MHz | RF Att | 50 dB    |
| Ref Lvl       | 30.72 dBm        | VBW   | 3 MHz  |          |
| 36 dBm        | 836.16993988 MHz | SWT   | 5 ms   | Unit dBm |

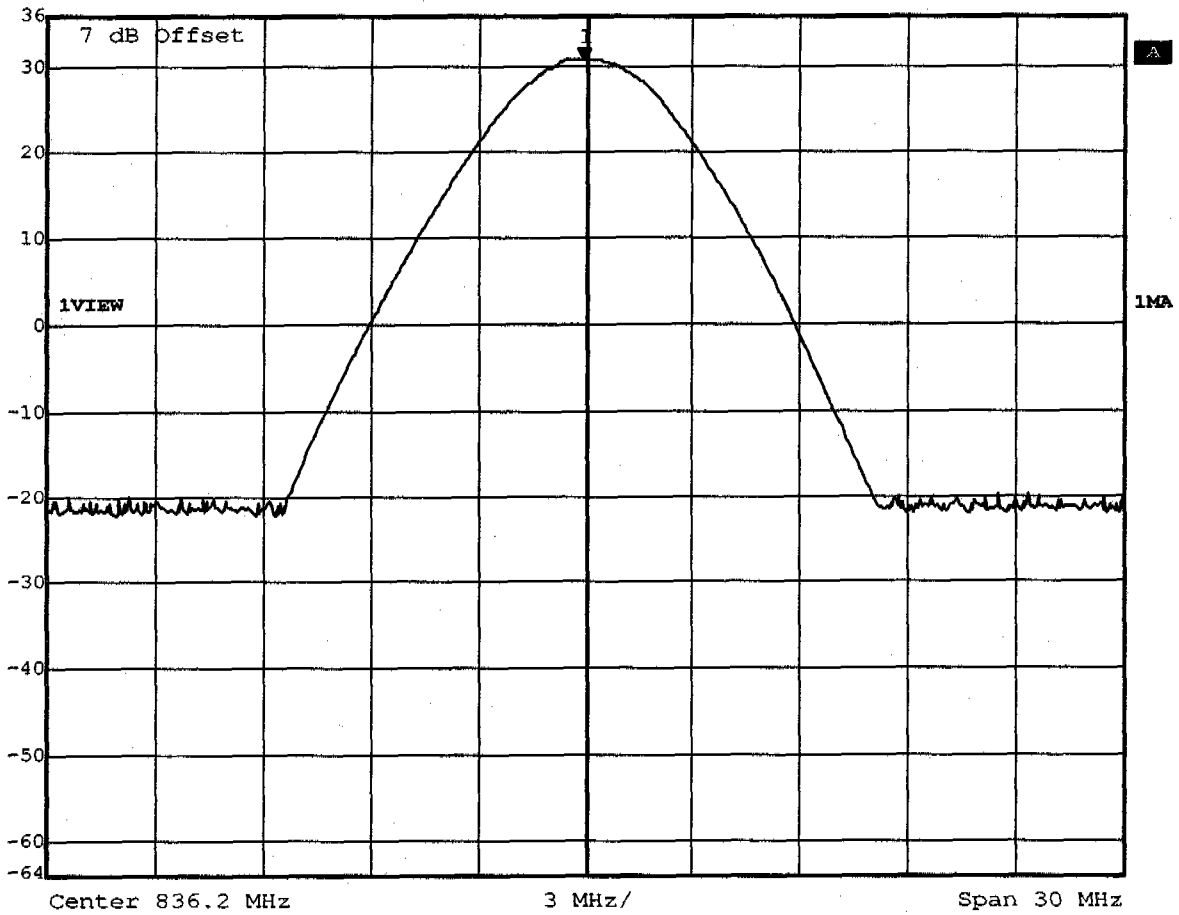

Title: Output Power Conducted Channel 188  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:32:52



Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 30.58 dBm VBW 3 MHz  
36 dBm 848.52945892 MHz SWT 5 ms Unit dBm

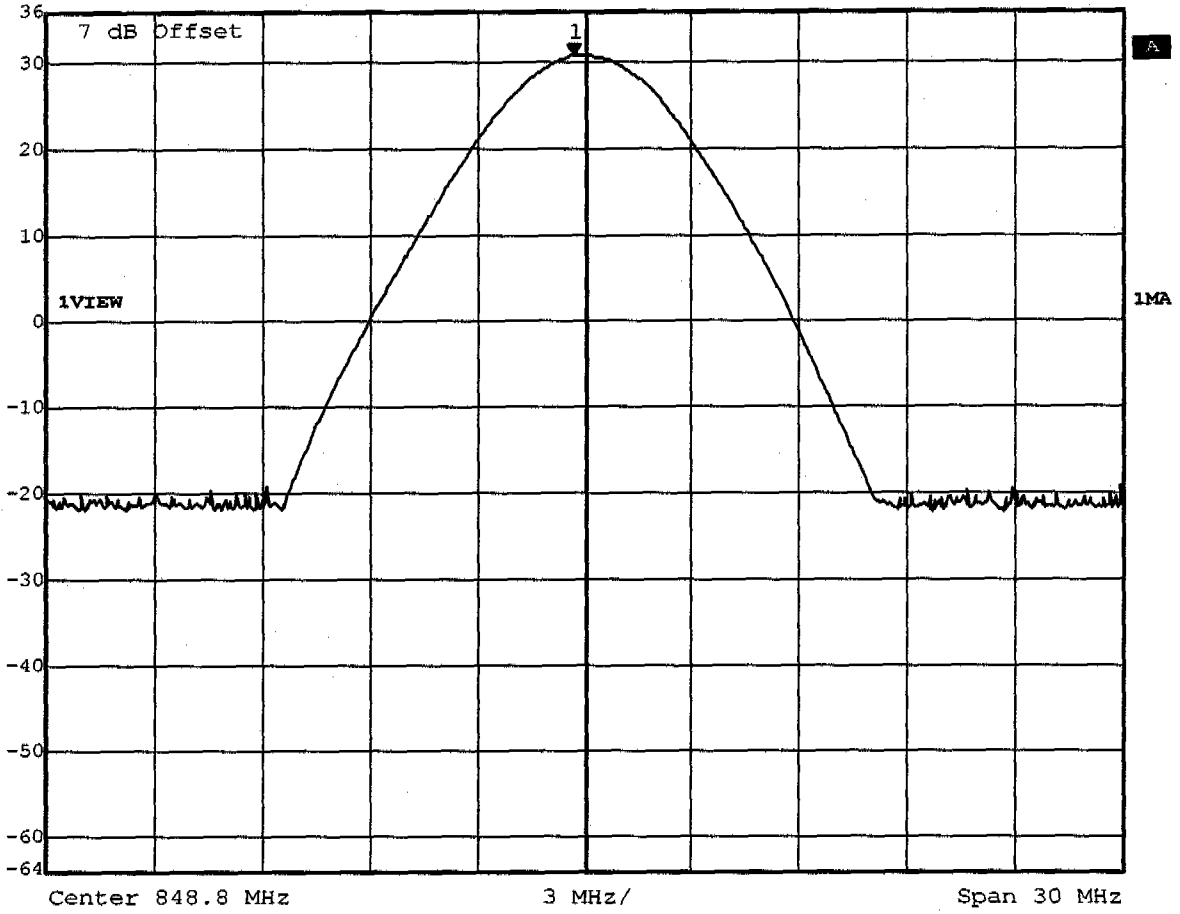

Title: Output Power Conducted Channel 251  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:31:32




## Appendix C

ERP, EIRP




**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.232  
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0  
Comment 2: Freq: 1.850GHz, Pmax: 24.25dBm, RBW: 3MHz

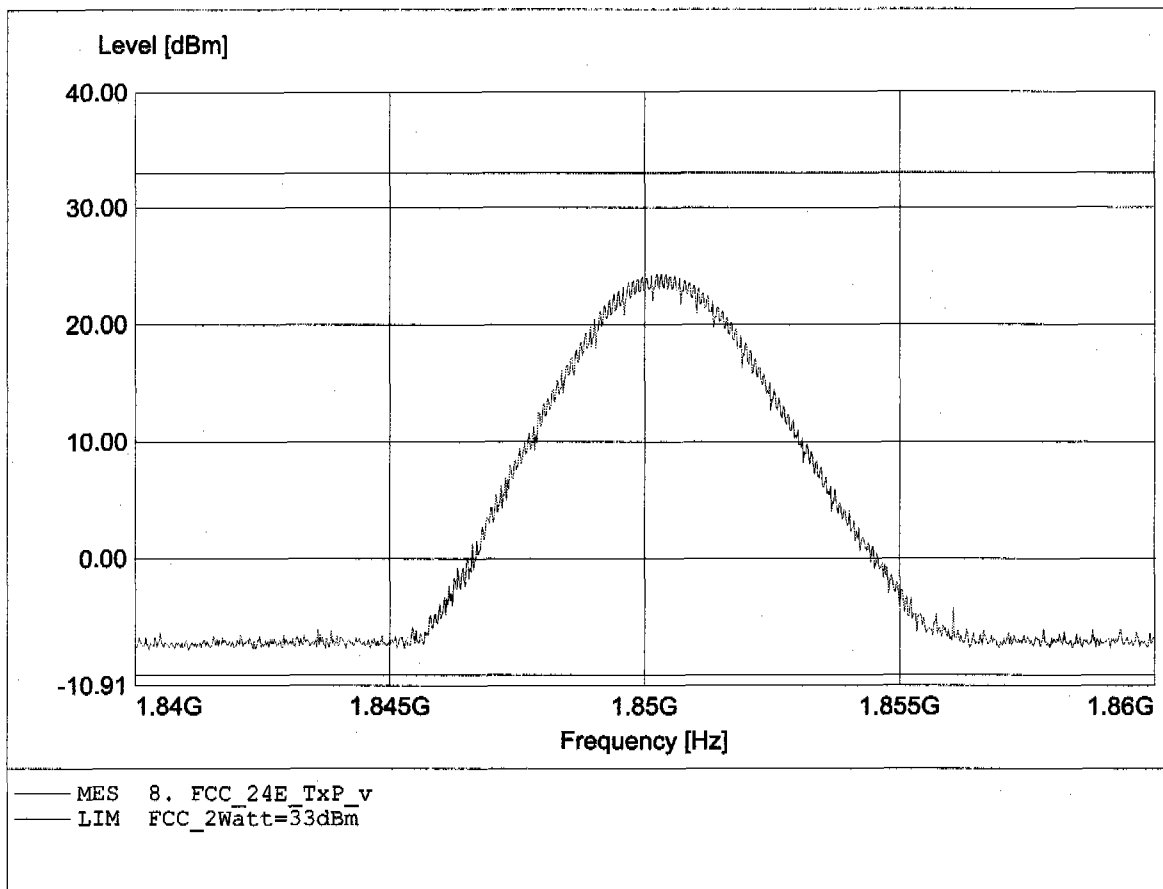


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C; Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.232  
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0  
Comment 2: Freq: 1.850GHz, Pmax: 21.88dBm, RBW: 3MHz

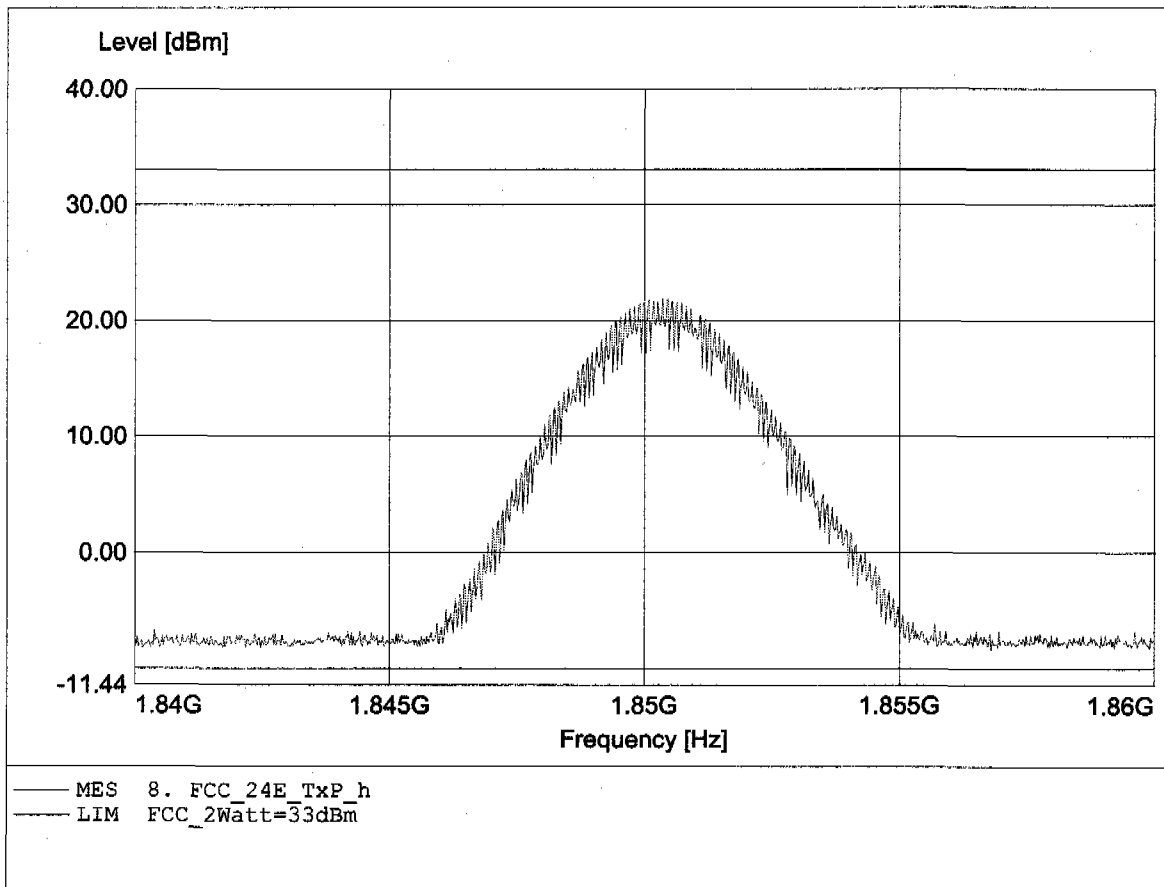


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.232  
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0  
Comment 2: Freq: 1.880GHz, Pmax: 26.28dBm, RBW: 3MHz

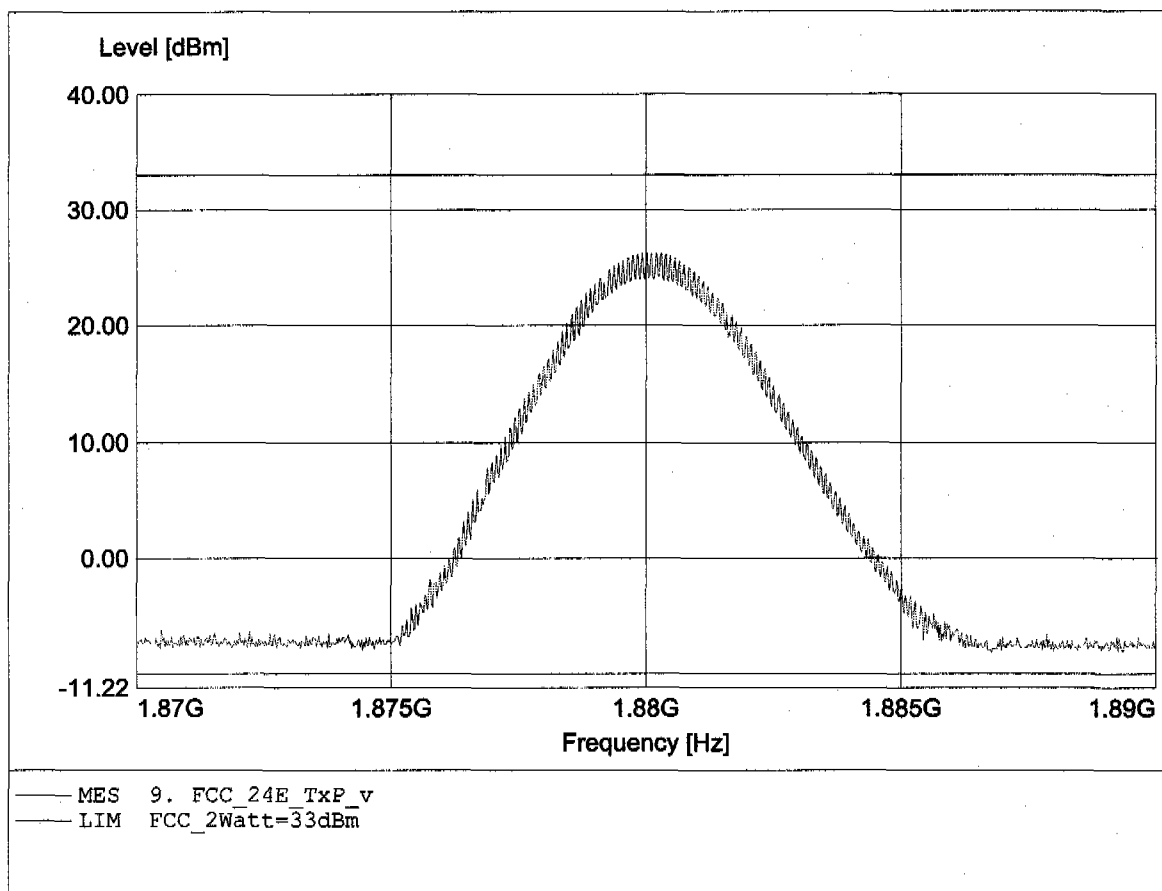


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.232  
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0  
Comment 2: Freq: 1.880GHz, Pmax: 23.03dBm, RBW: 3MHz

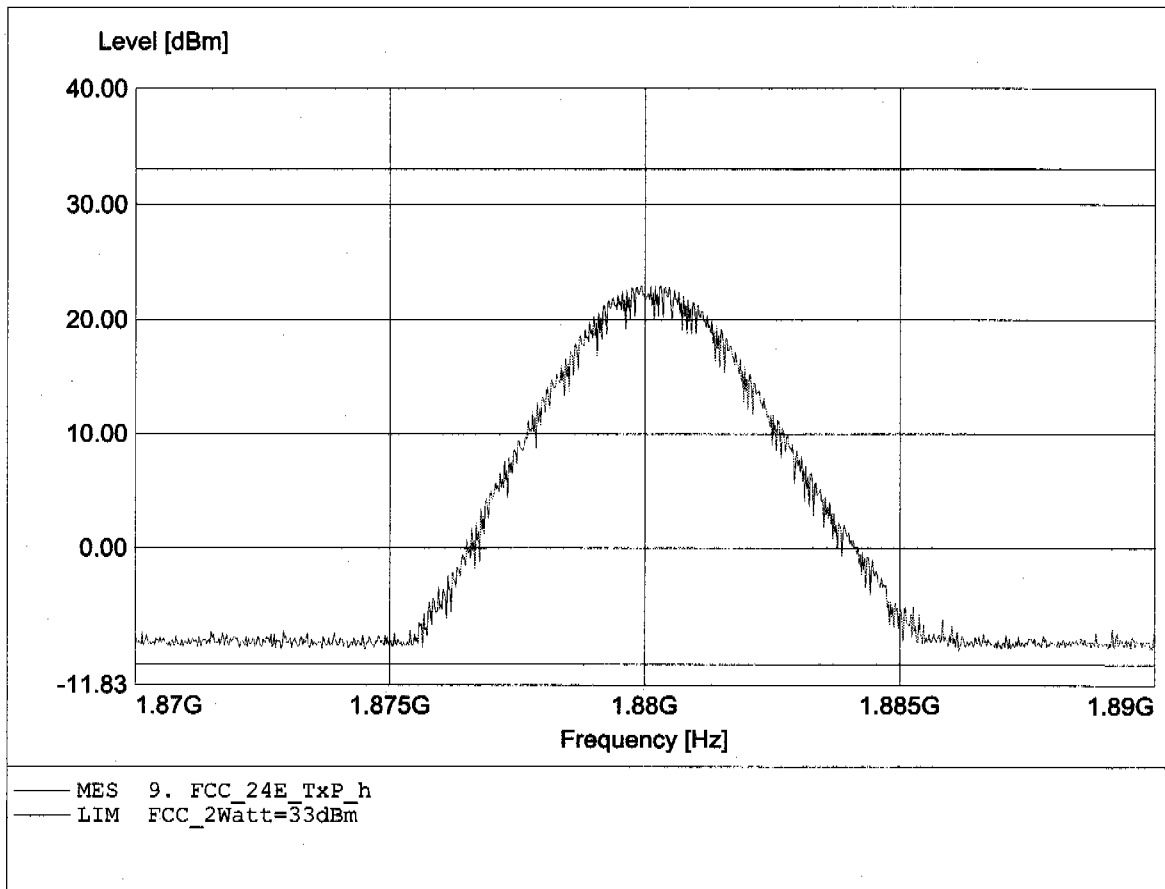


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.232  
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0  
Comment 2: Freq: 1.910GHz, Pmax: 23.70dBm, RBW: 3MHz

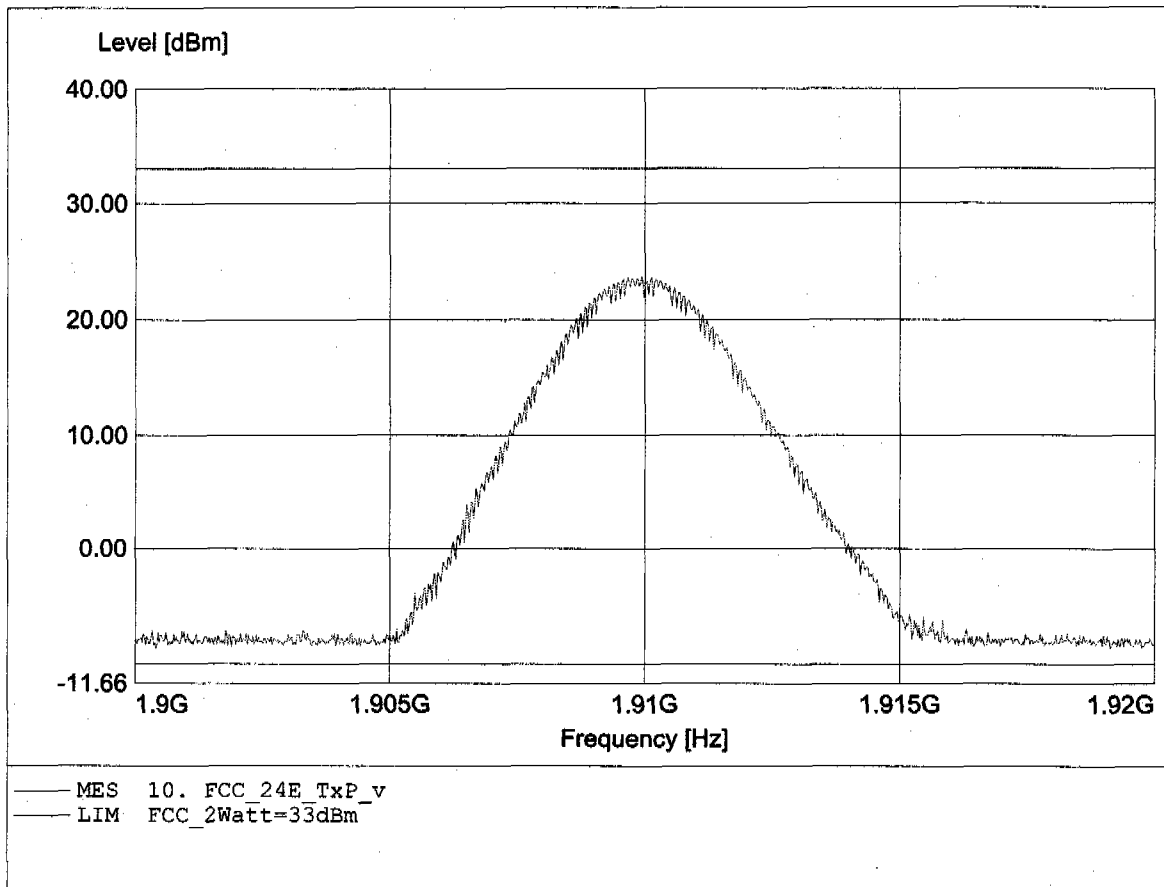


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.232  
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0  
Comment 2: Freq: 1.910GHz, Pmax: 22.96dBm, RBW: 3MHz

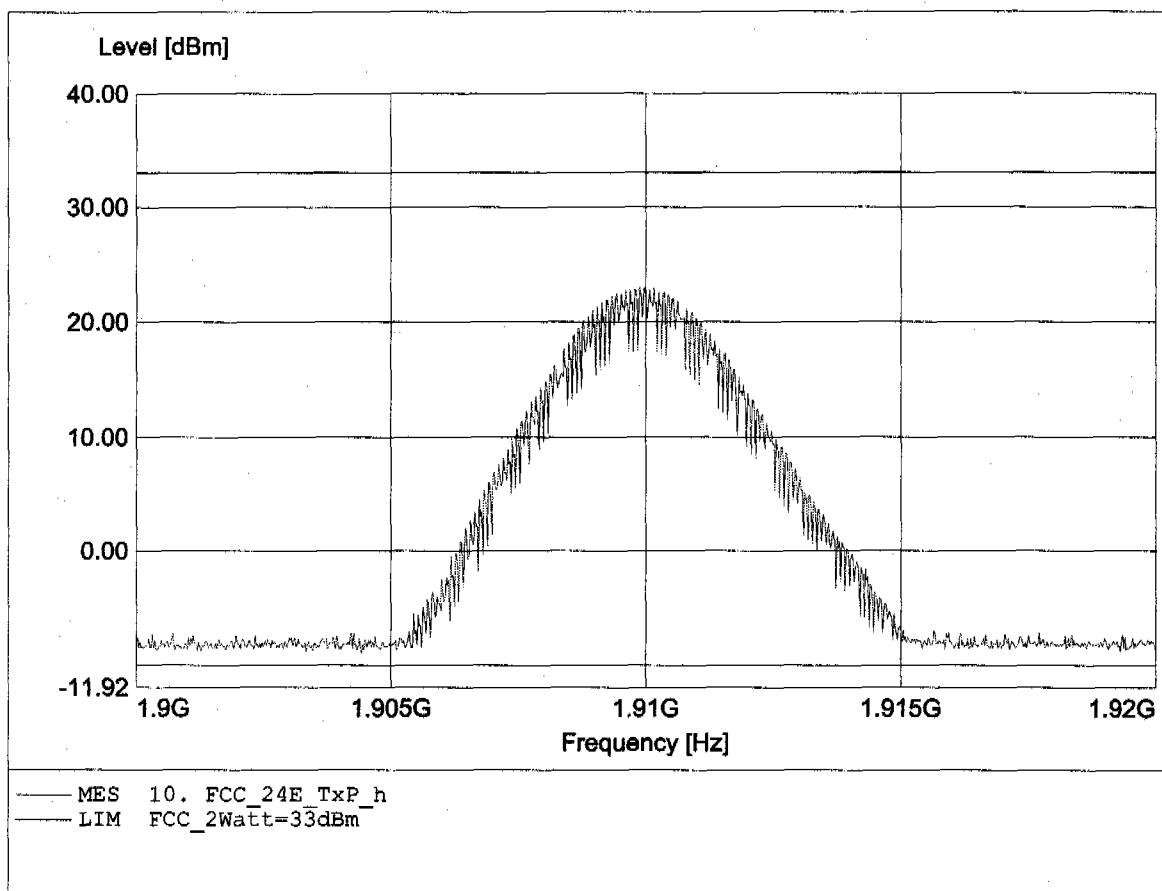


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 824.389MHz, Pmax: 27.27dBm, RBW: 3MHz

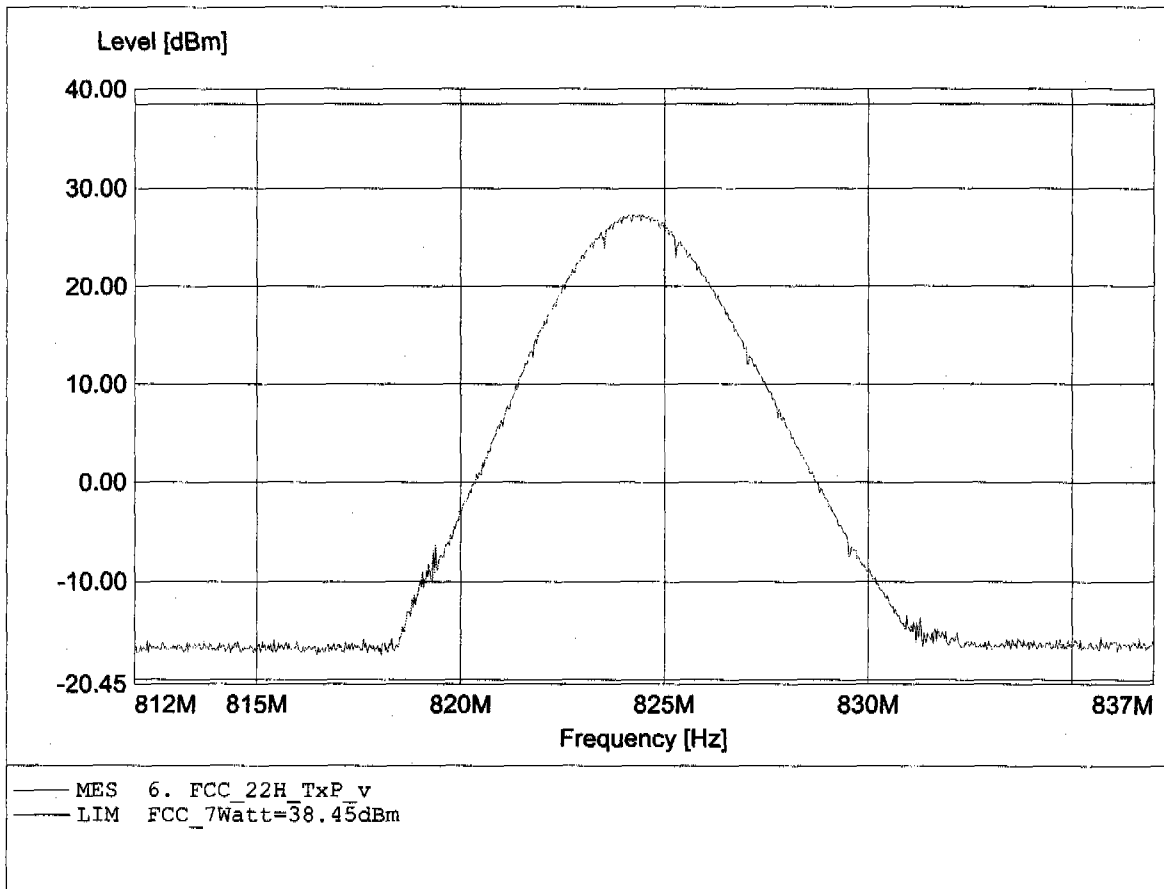

**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 824.333MHz, Pmax: 25.17dBm, RBW: 3MHz

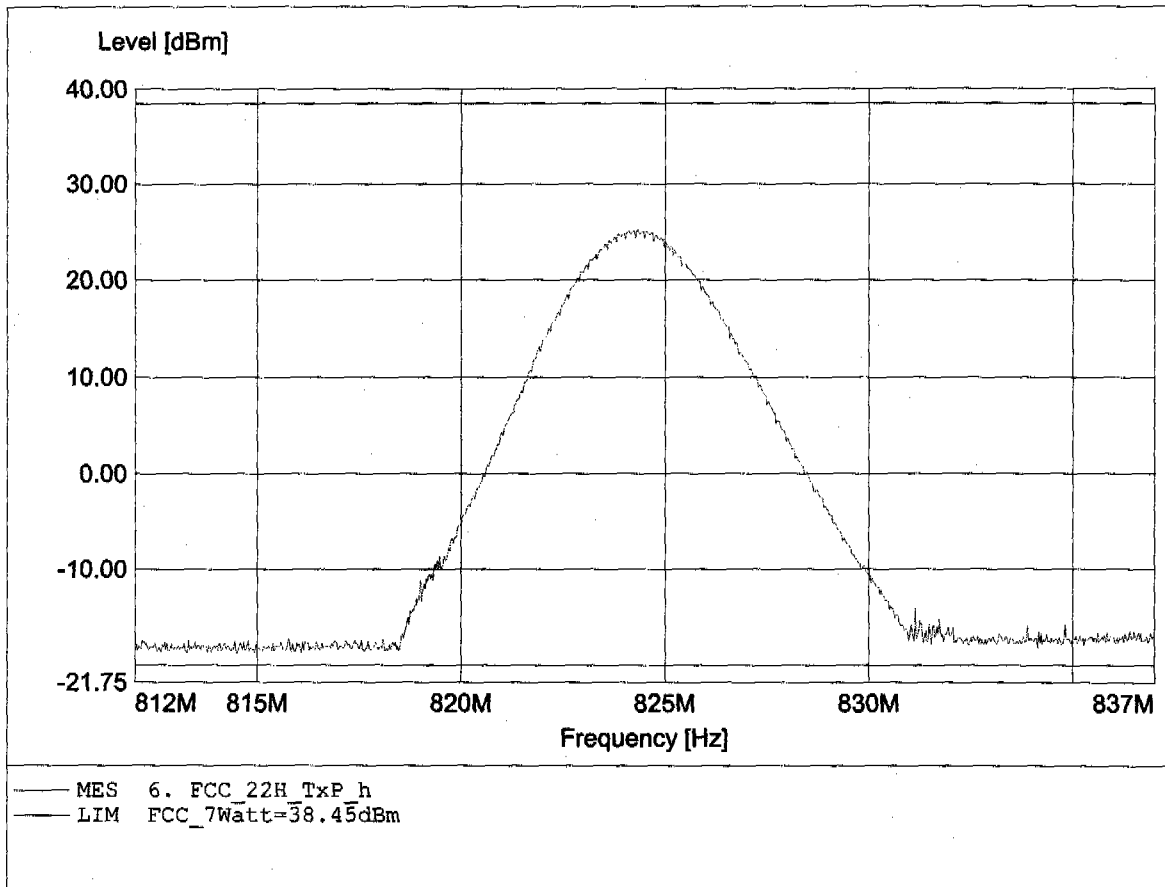




**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 836.133MHz, Pmax: 28.37dBm, RBW: 3MHz

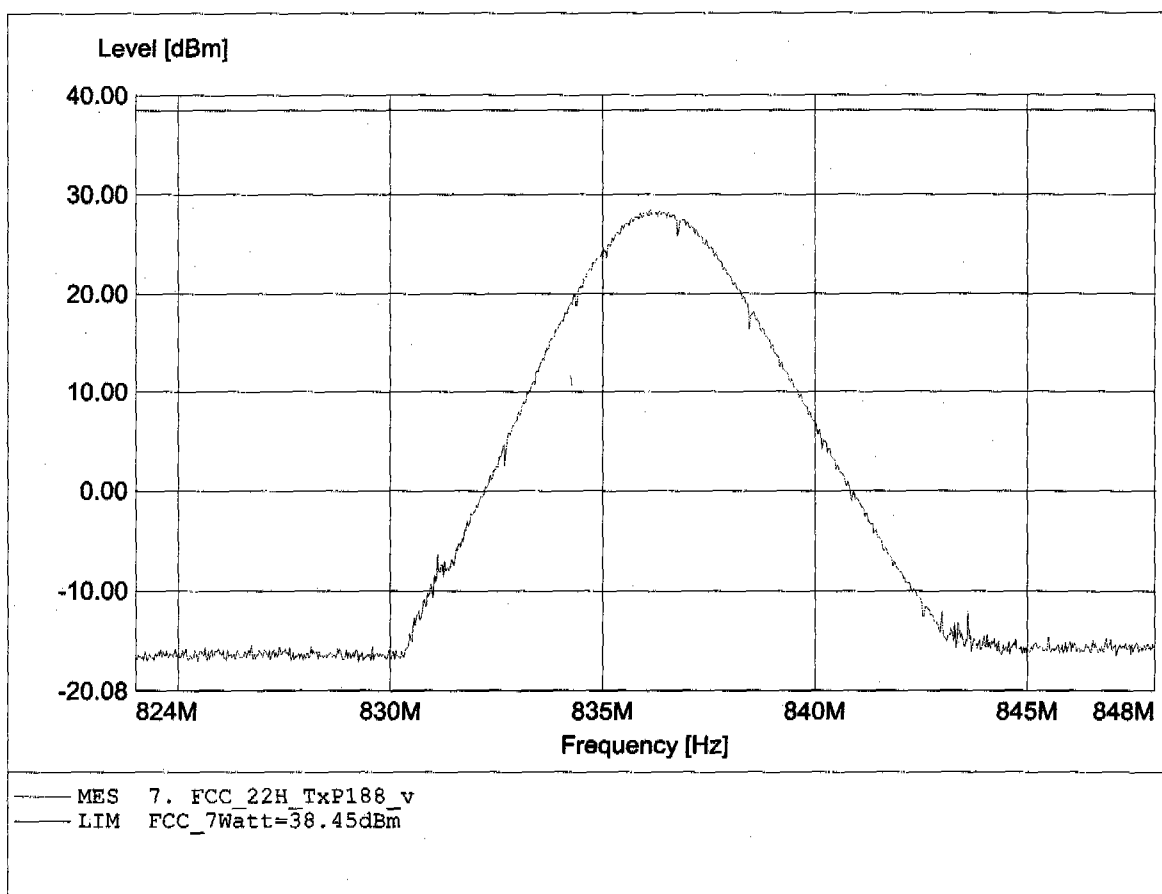


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 836.187MHz, Pmax: 25.03dBm, RBW: 3MHz

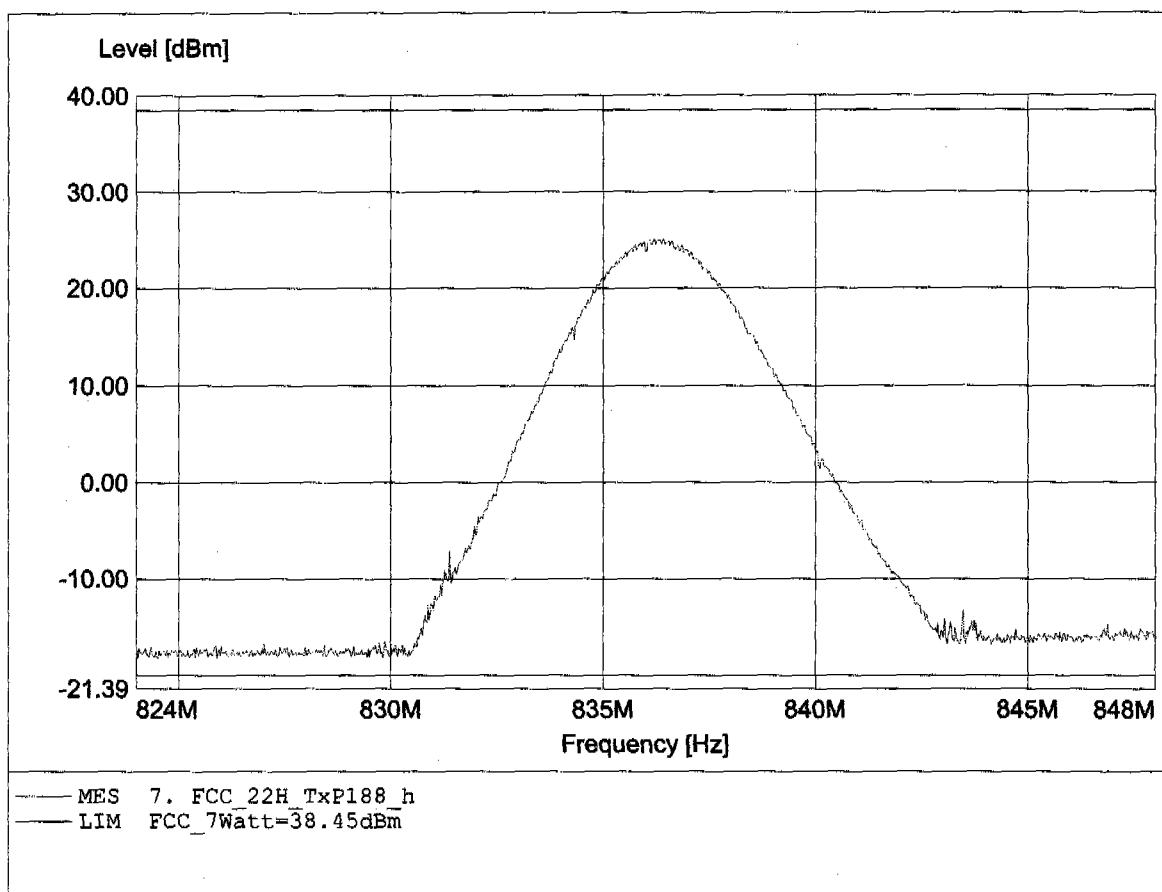


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 849.000MHz, Pmax: 29.14dBm, RBW: 3MHz

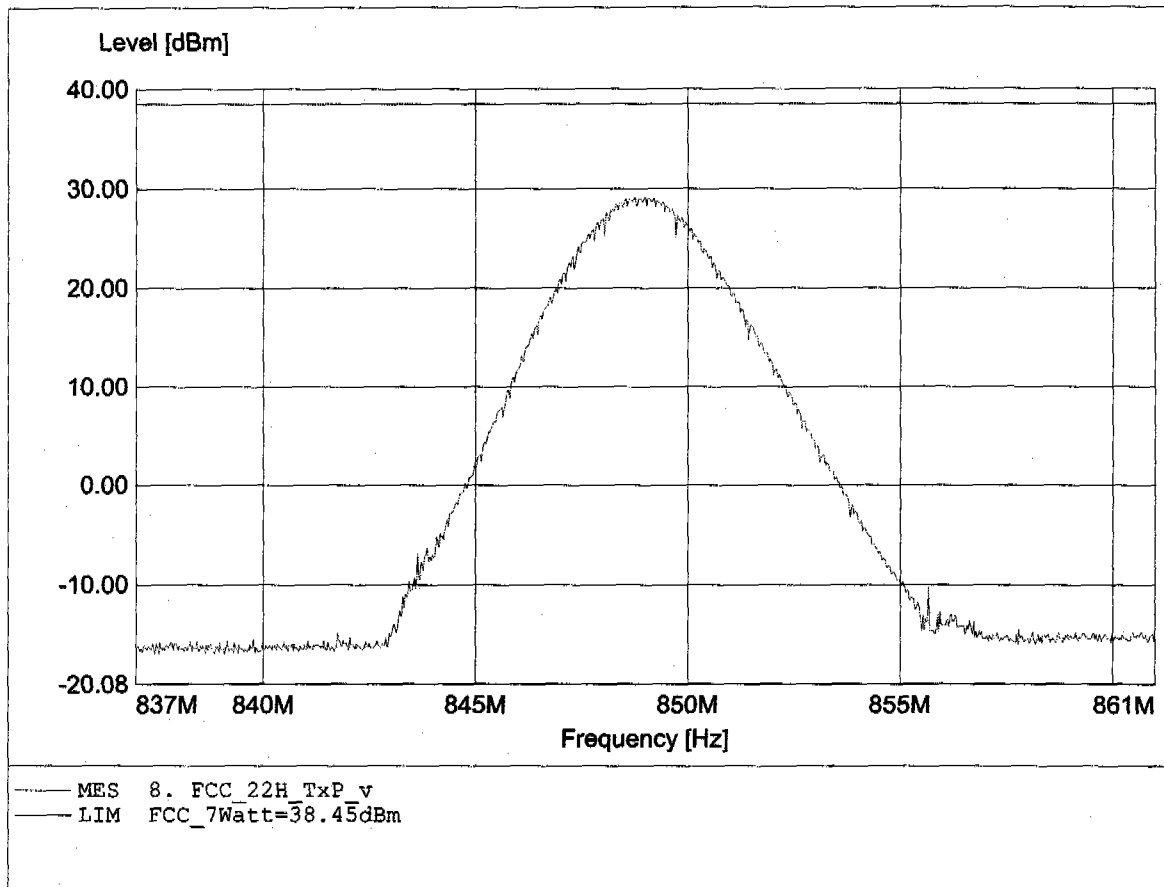

**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 848.947MHz, Pmax: 26.48dBm, RBW: 3MHz

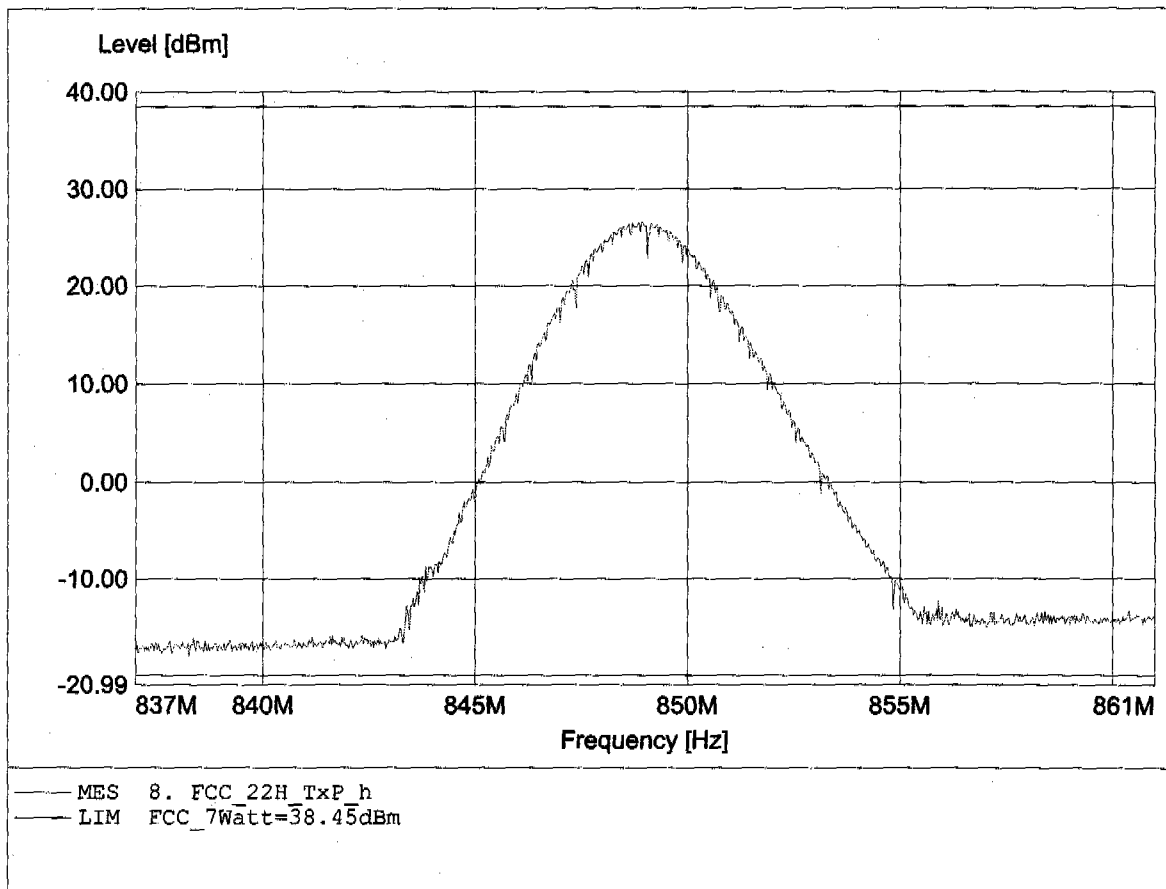



## Appendix D

### Modulation Requirements



## Appendix E

### Audio Filter Characteristics



## Appendix F

### Emission Limitation




## Appendix G

Occupied Bandwidth





Marker 1 [T1] RBW 3 kHz RF Att 60 dB  
Ref Lvl 17.67 dBm VBW 3 kHz  
37 dBm 1.85018297 GHz SWT 280 ms Unit dBm

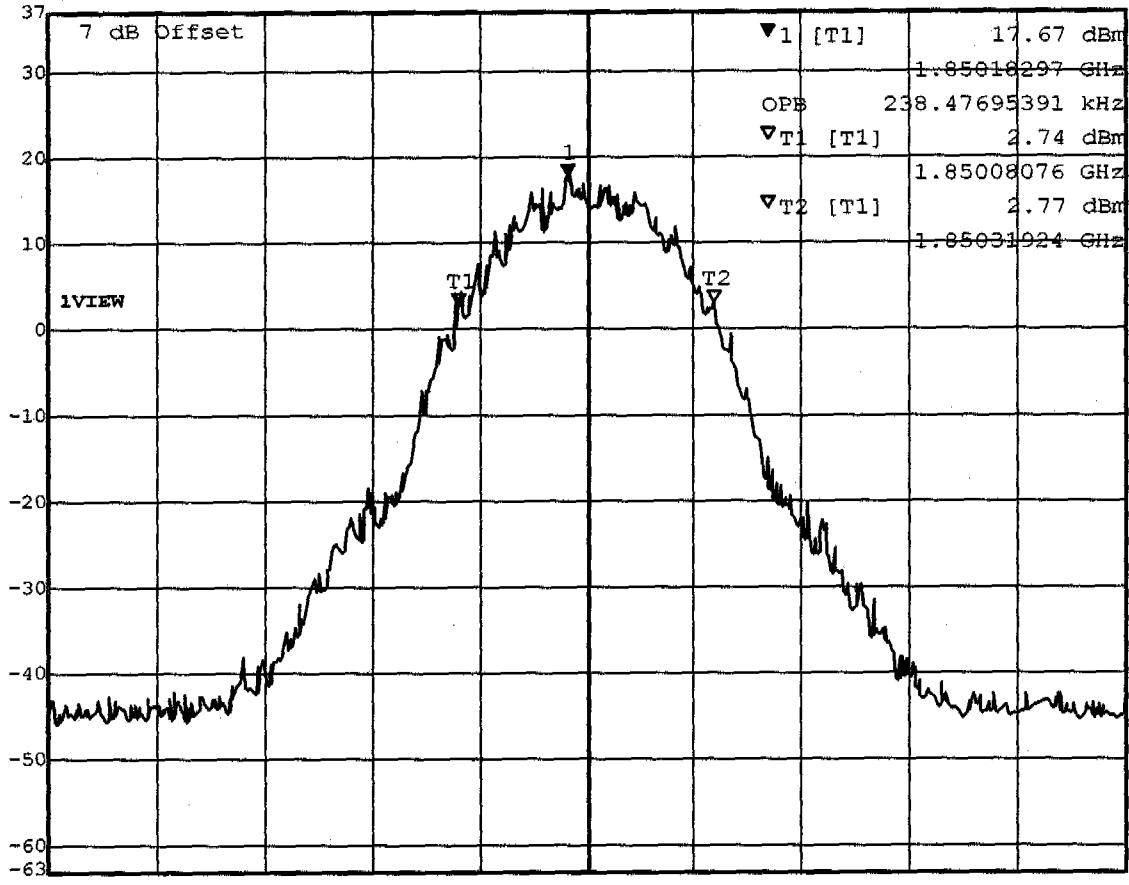


Center 1.8502 GHz 100 kHz/ Span 1 MHz

Title: Occupied Power Bandwidth Channel 512  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:59:08



Marker 1 [T1]      RBW    3 kHz    RF Att    60 dB  
 Ref Lvl            18.51 dBm    VBW    3 kHz  
 37 dBm            1.87998497 GHz    SWT    280 ms    Unit            dBm

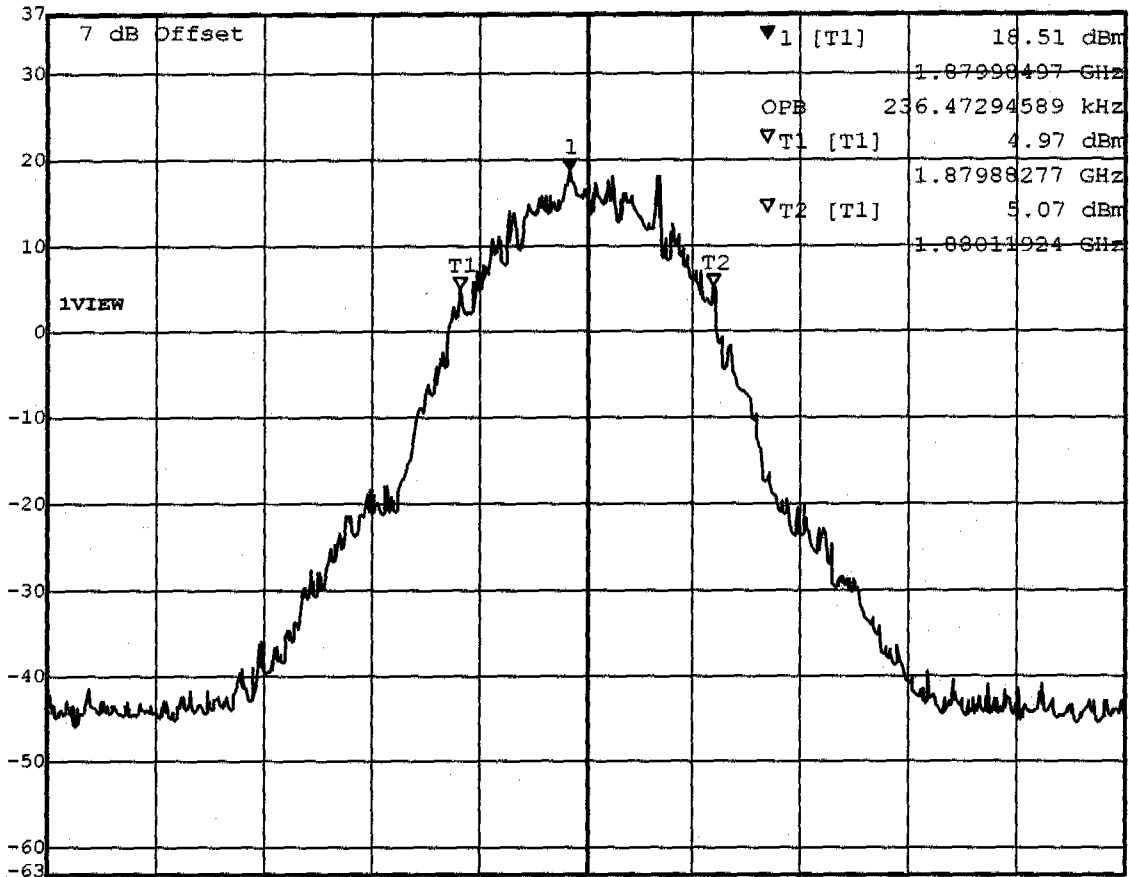


Center 1.88 GHz      100 kHz/      Span 1 MHz

Title:      Occupied Power Bandwidth Channel 661  
 Comment A: Peiker -- TPU-Q2426  
 Date:      15.JUL.2004 11:06:56




Marker 1 [T1]      RBW      3 kHz      RF Att      60 dB  
 Ref Lvl              19.04 dBm      VBW      3 kHz  
 37 dBm              1.90978697 GHz      SWT      280 ms      Unit      dBm

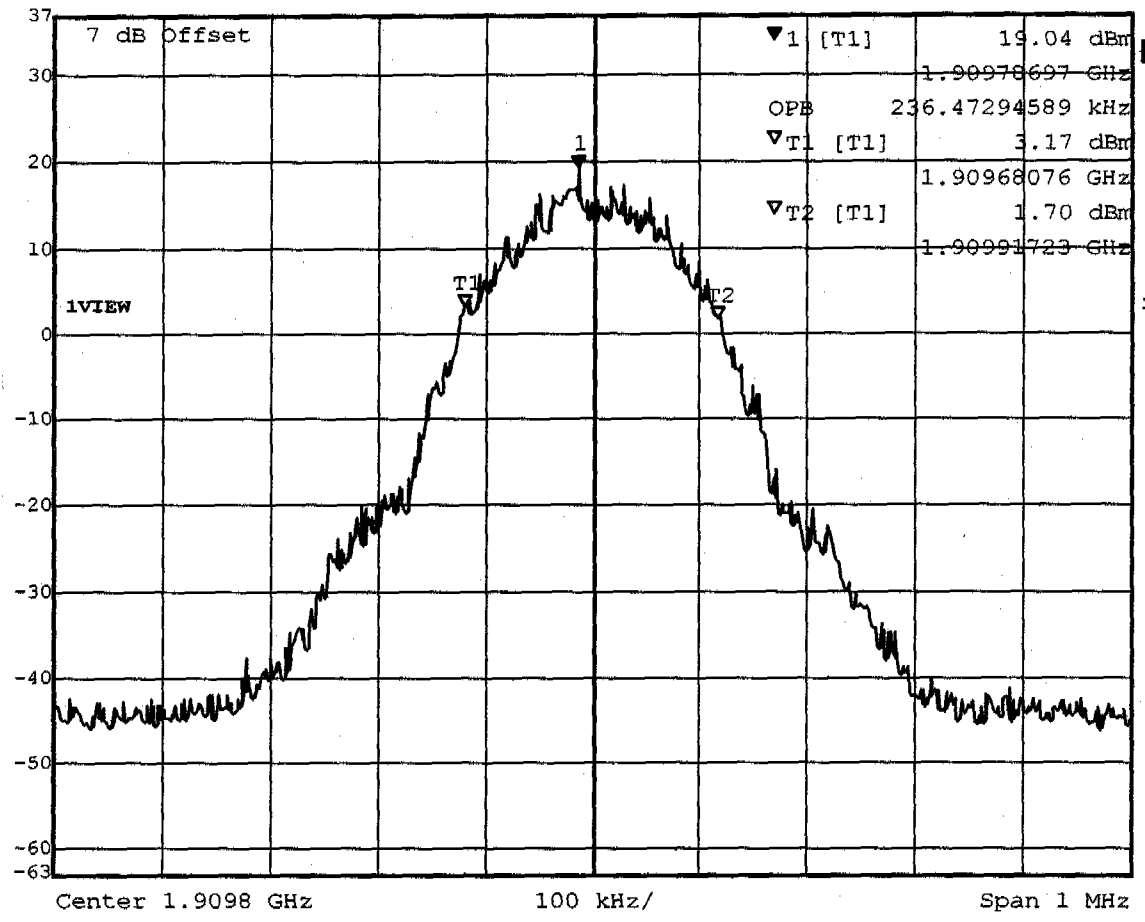

Title:      Occupied Power Bandwidth Channel 810  
 Comment A: Peiker -- TPU-Q2426  
 Date:      15.JUL.2004 11:14:54



Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB  
Ref Lvl ndB 26.00 dB VBW 3 kHz  
37 dBm BW 288.57715431 kHz SWT 280 ms Unit dBm

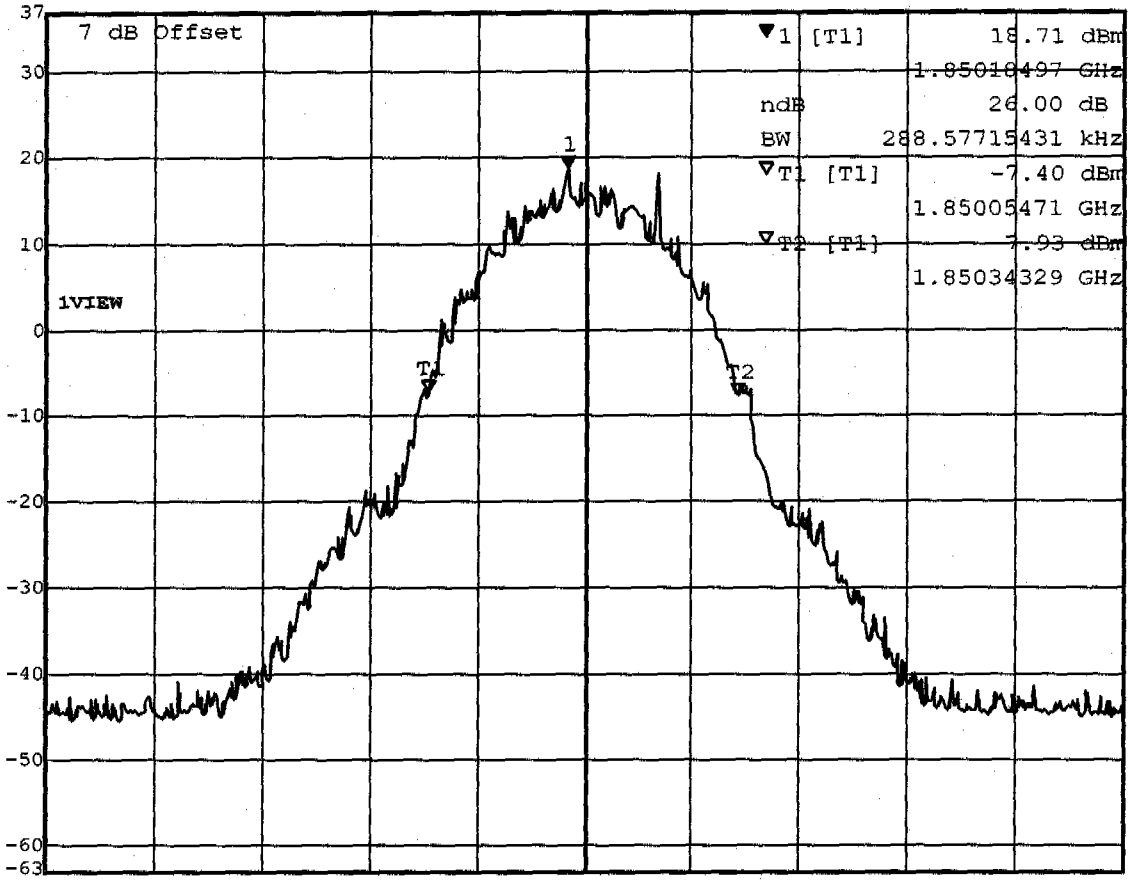


Center 1.8502 GHz 100 kHz/ Span 1 MHz

Title: -26 dBc Emission Bandwidth Channel 512  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:57:11




Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB  
Ref Lvl ndB 26.00 dB VBW 3 kHz  
37 dBm BW 292.58517034 kHz SWT 280 ms Unit dBm

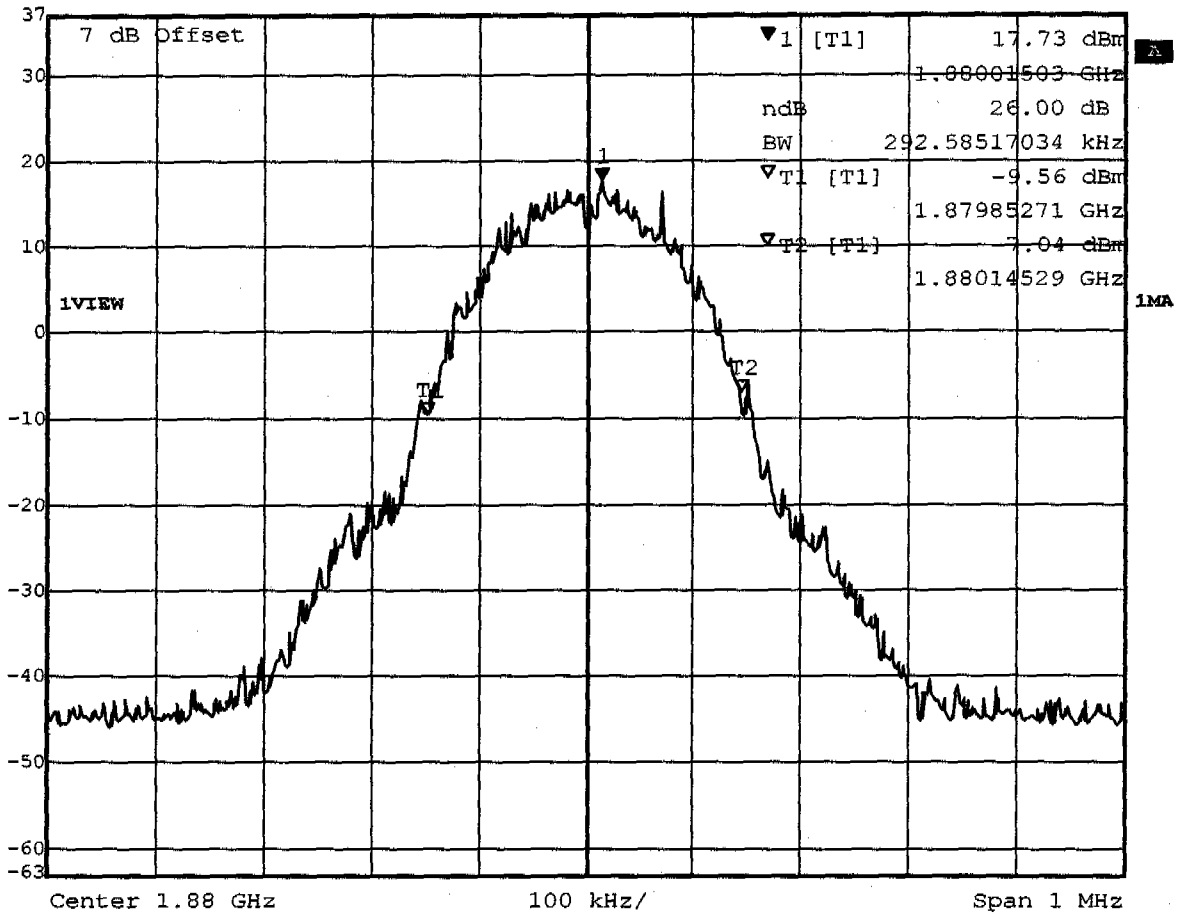

Title: -26 dBc Emission Bandwidth Channel 661  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 11:08:13



Marker 1 [T1 ndB]      RBW      3 kHz      RF Att      60 dB  
 Ref Lvl      ndB      26.00 dB      VBW      3 kHz  
 37 dBm      BW      296.59318637 kHz      SWT      280 ms      Unit      dBm

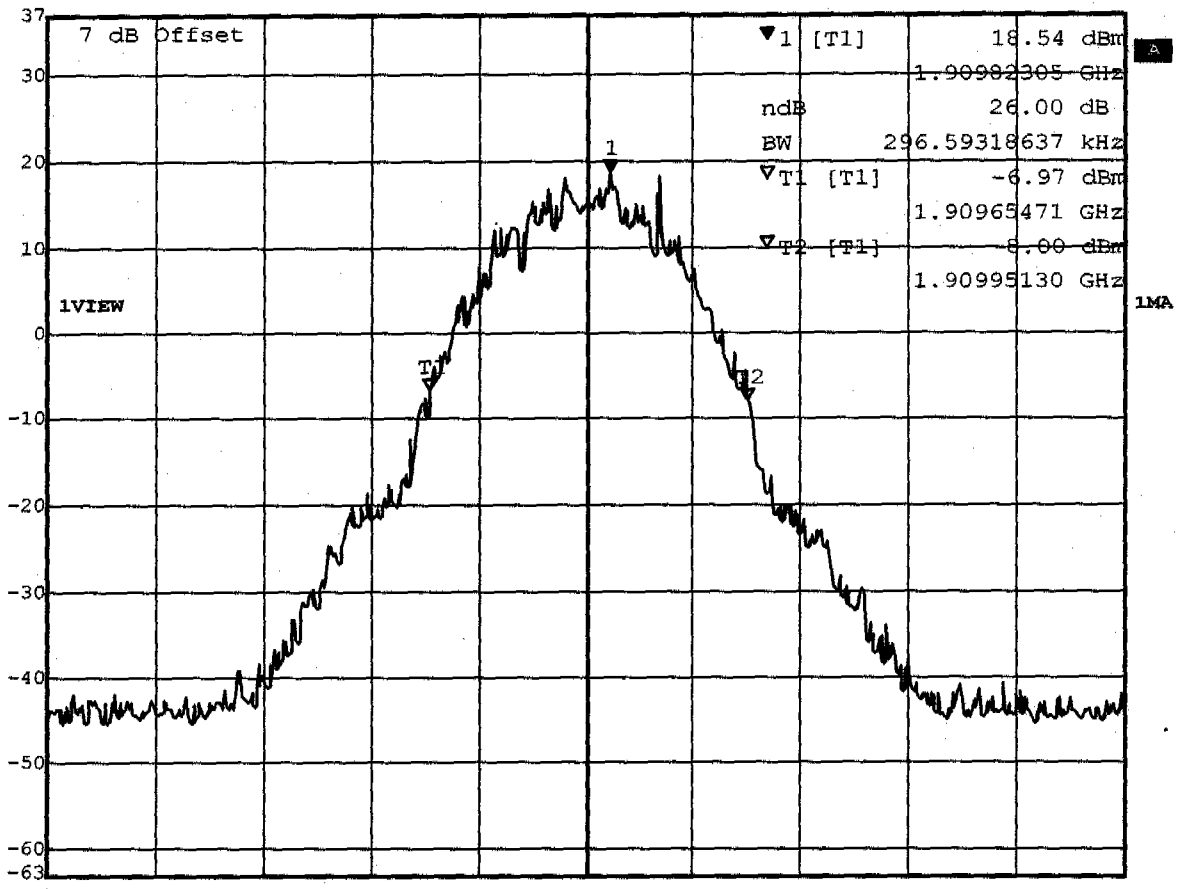


Center 1.9098 GHz      100 kHz/      Span 1 MHz

Title:      -26 dBc Emission Bandwidth Channel 810  
 Comment A: Peiker -- TPU-Q2426  
 Date:      15.JUL.2004 11:13:35




Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 22.38 dBm VBW 3 kHz  
36 dBm 836.18496994 MHz SWT 280 ms Unit dBm

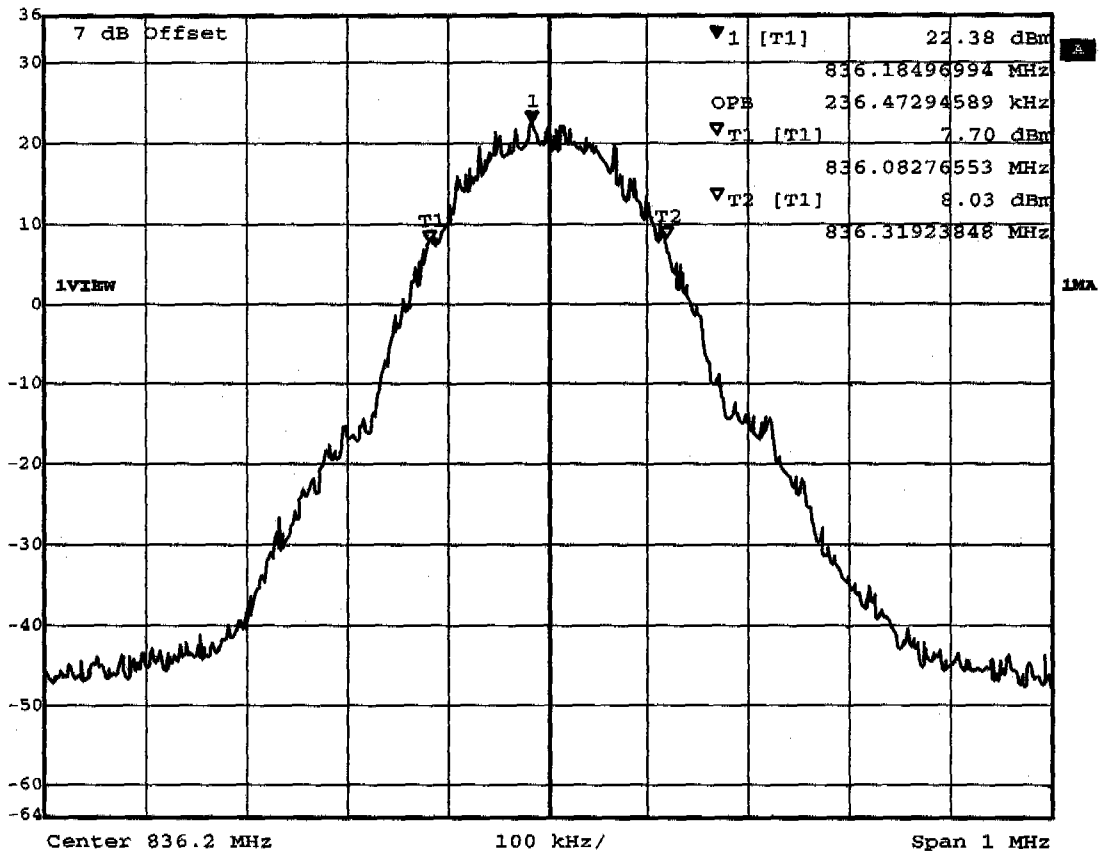

Title: Occupied Bandwidth Channel 188  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:35:03



Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 23.69 dBm VBW 3 kHz  
36 dBm 824.22104208 MHz SWT 280 ms Unit dBm

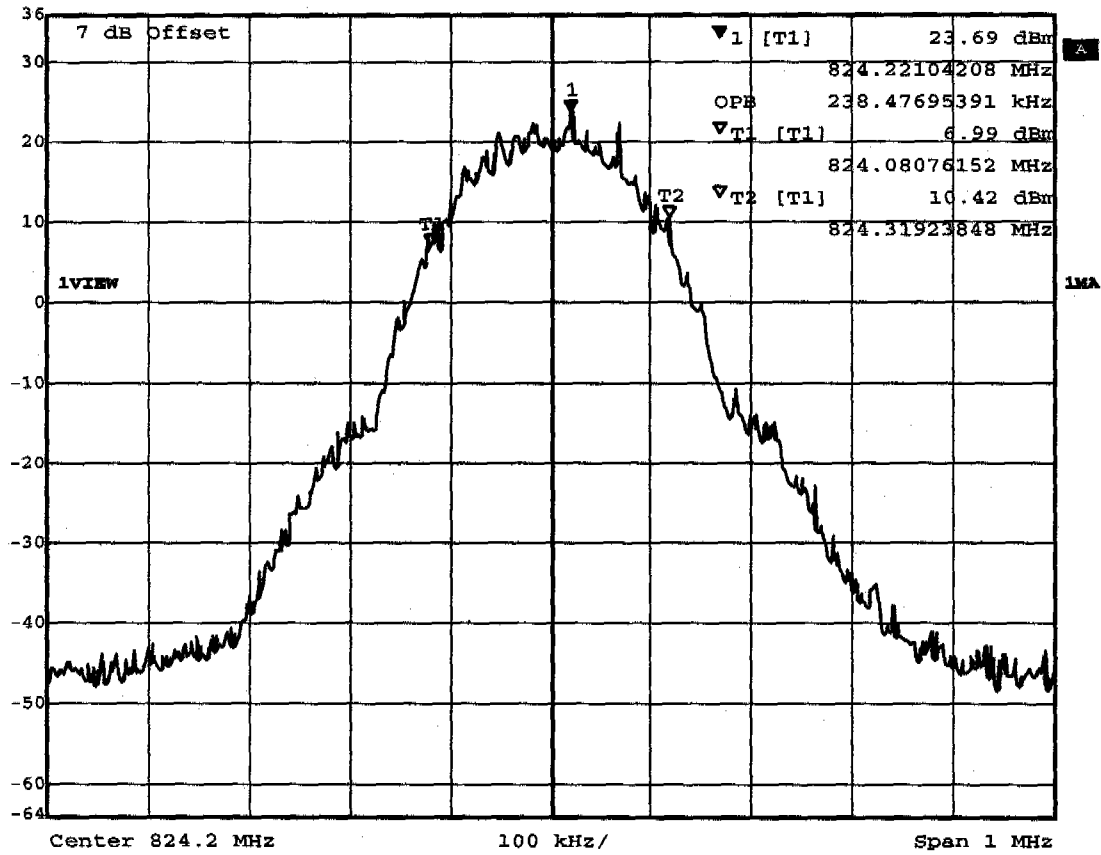


Title: Occupied Bandwidth Channel 128  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:08:42






Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 21.97 dBm VBW 3 kHz  
36 dBm 848.78296593 MHz SWT 280 ms Unit dBm

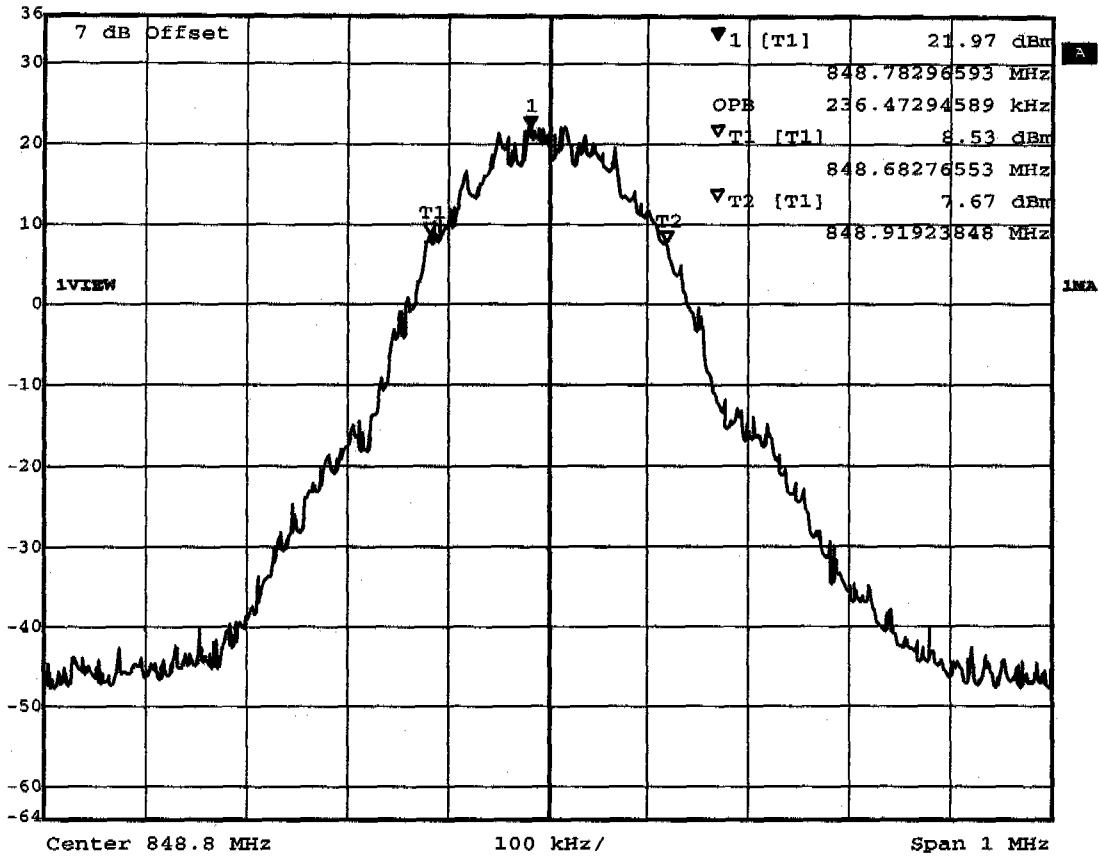

Title: Occupied Bandwidth Channel 251  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:27:37




Marker 1 [T1 ndB]      RBW      3 kHz      RF Att      50 dB  
 Ref Lvl      ndB      26.00 dB      VBW      3 kHz  
 36 dBm      BW 300.60120240 kHz      SWT      280 ms      Unit      dBm

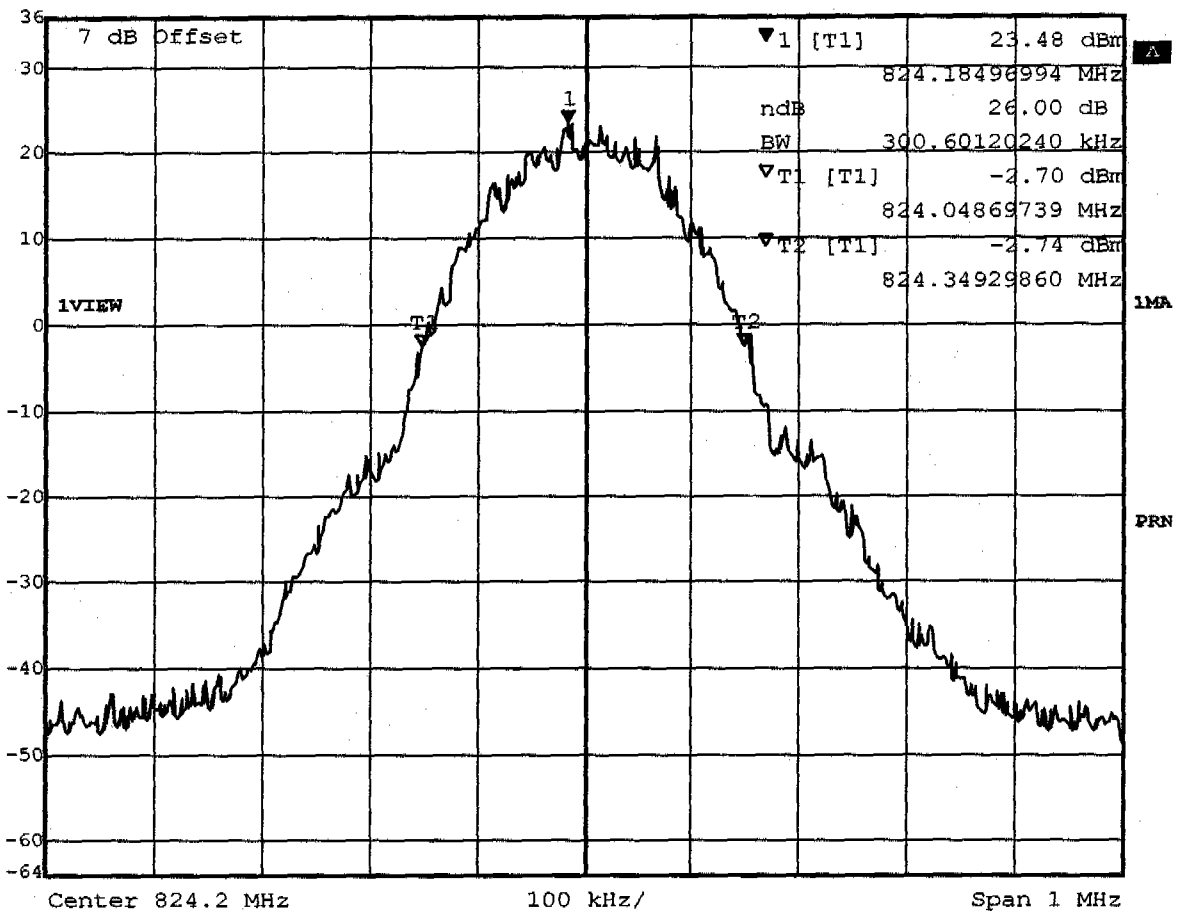

Title:      -26dBc Emission Bandwidth Channel 128  
 Comment A: Peiker -- TPU-Q2426  
 Date:      15.JUL.2004 10:06:20




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB  
Ref Lvl ndB 26.00 dB VBW 3 kHz  
36 dBm BW 294.58917836 kHz SWT 280 ms Unit dBm

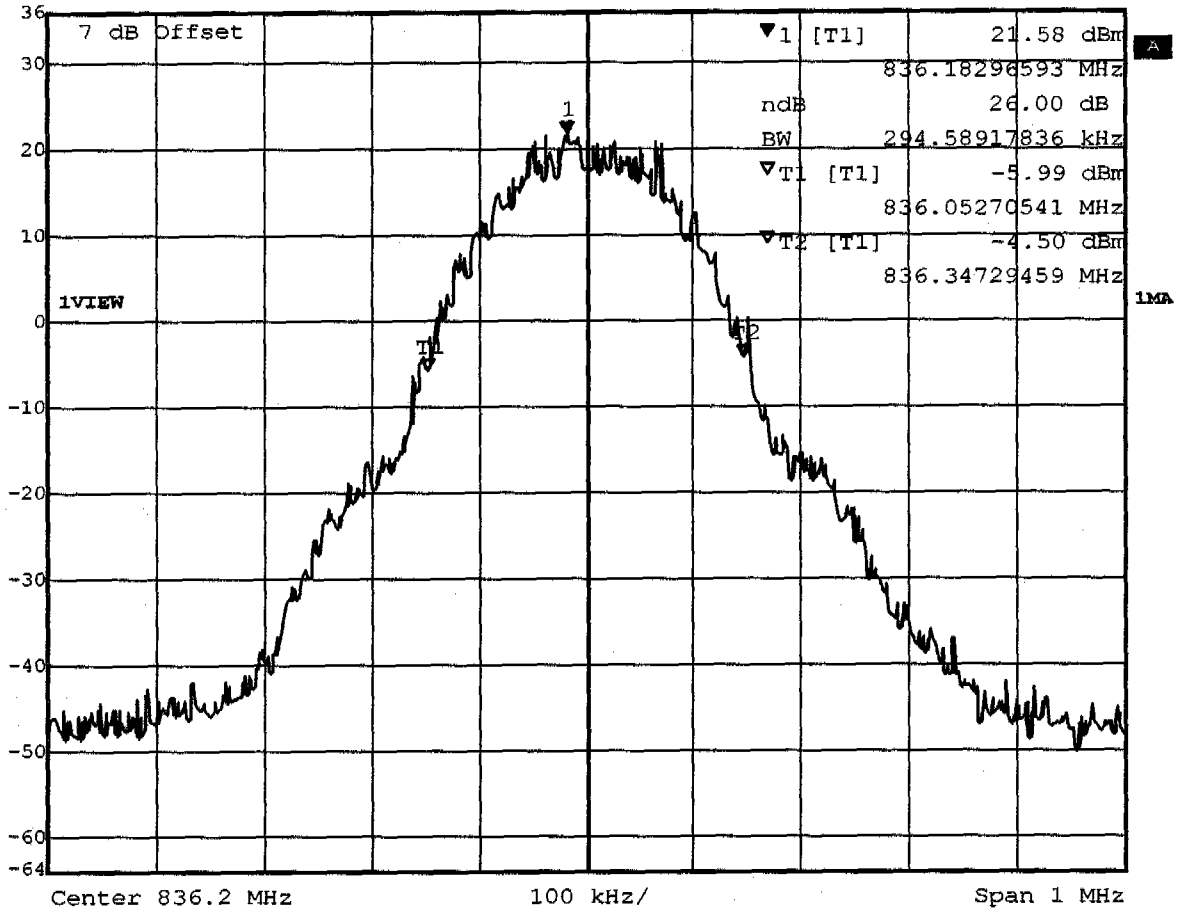

Title: -26dBc Emission Bandwidth Channel 188  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:38:16



Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB  
Ref Lvl ndB 26.00 dB VBW 3 kHz  
36 dBm BW 290.58116232 kHz SWT 280 ms Unit dBm

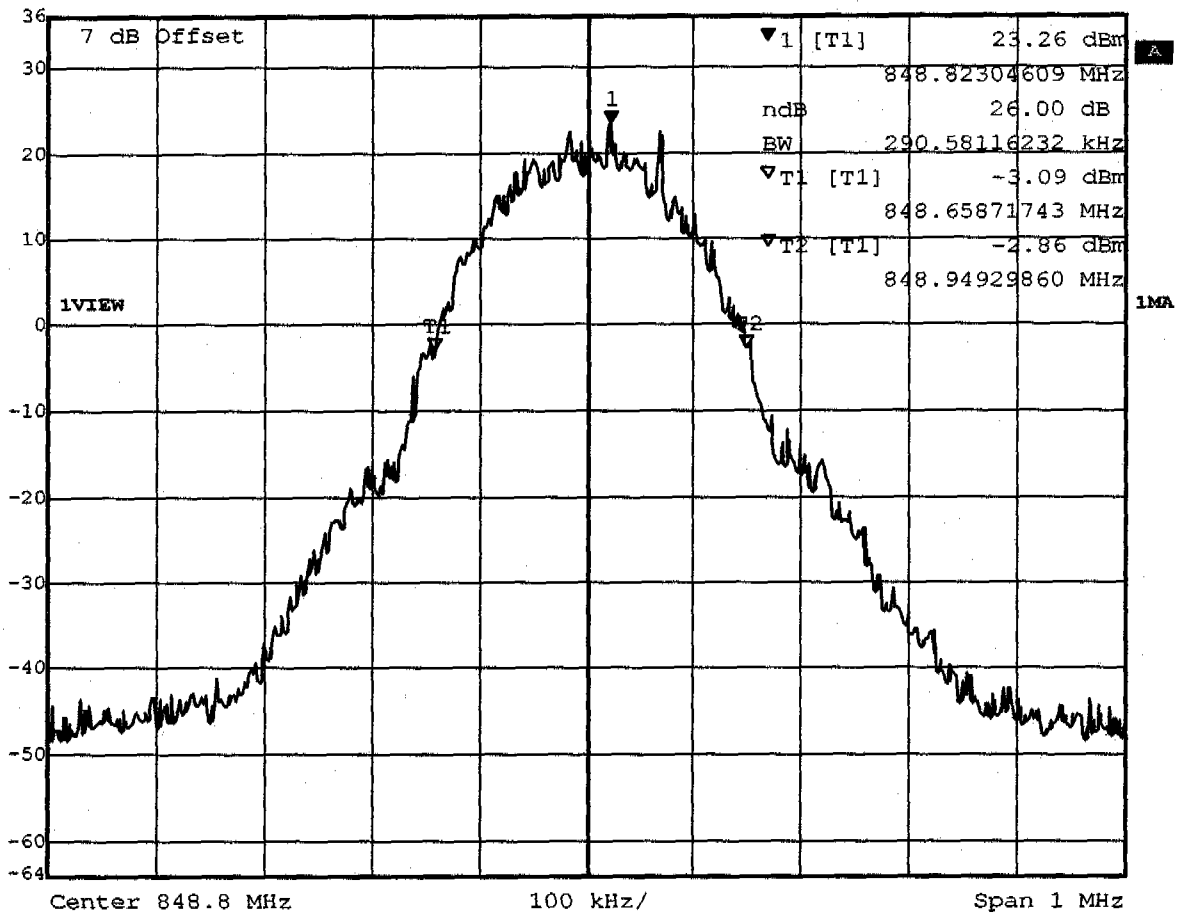

Title: -26dBc Emission Bandwidth Channel 251  
Comment A: Peiker -- TPU-Q2426  
Date: 15.JUL.2004 10:29:59



## Appendix H

Out of Band Emission at Antenna Terminals Mobile Emissions In Base Frequency Range




## Appendix I

Field Strength of Spurious Radiation


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 61.356MHz, Pmax: -53.56dBm, RBW: 1MHz

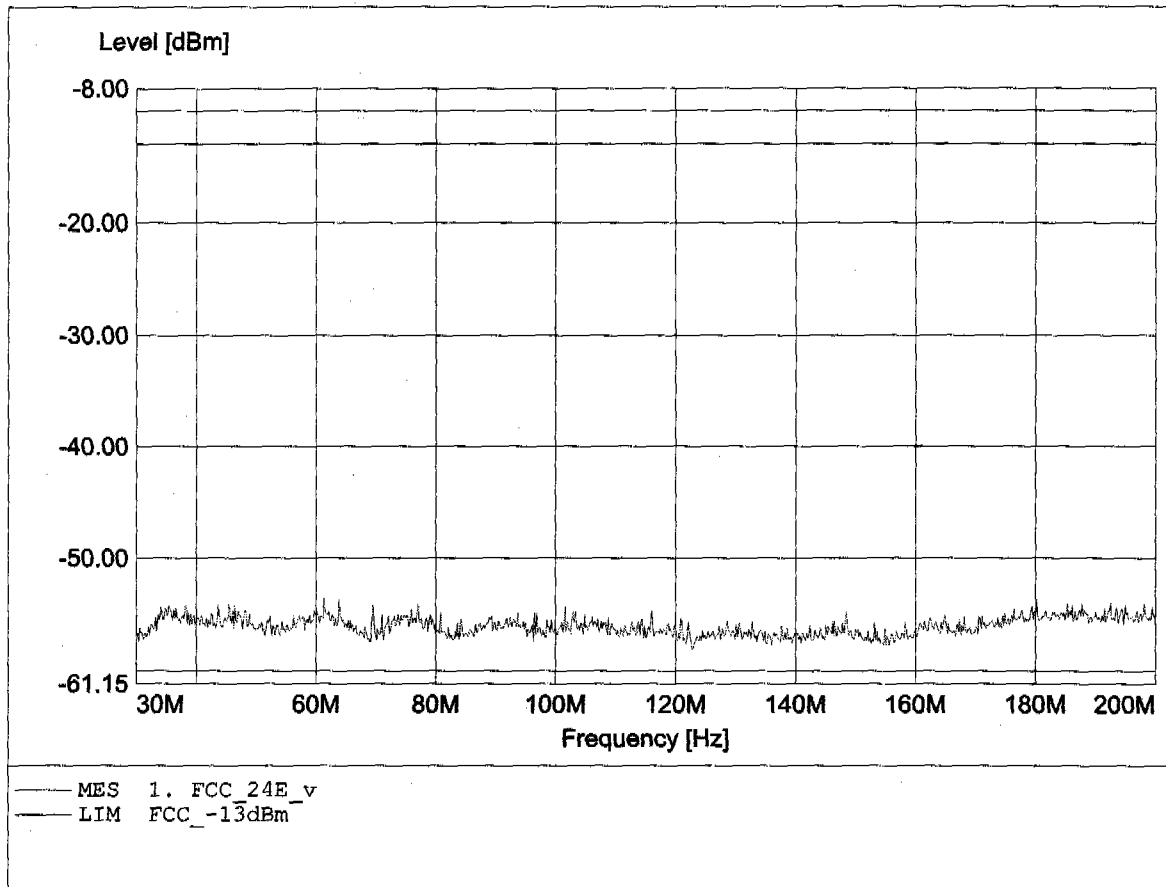

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 45.300MHz, Pmax: -52.63dBm, RBW: 1MHz

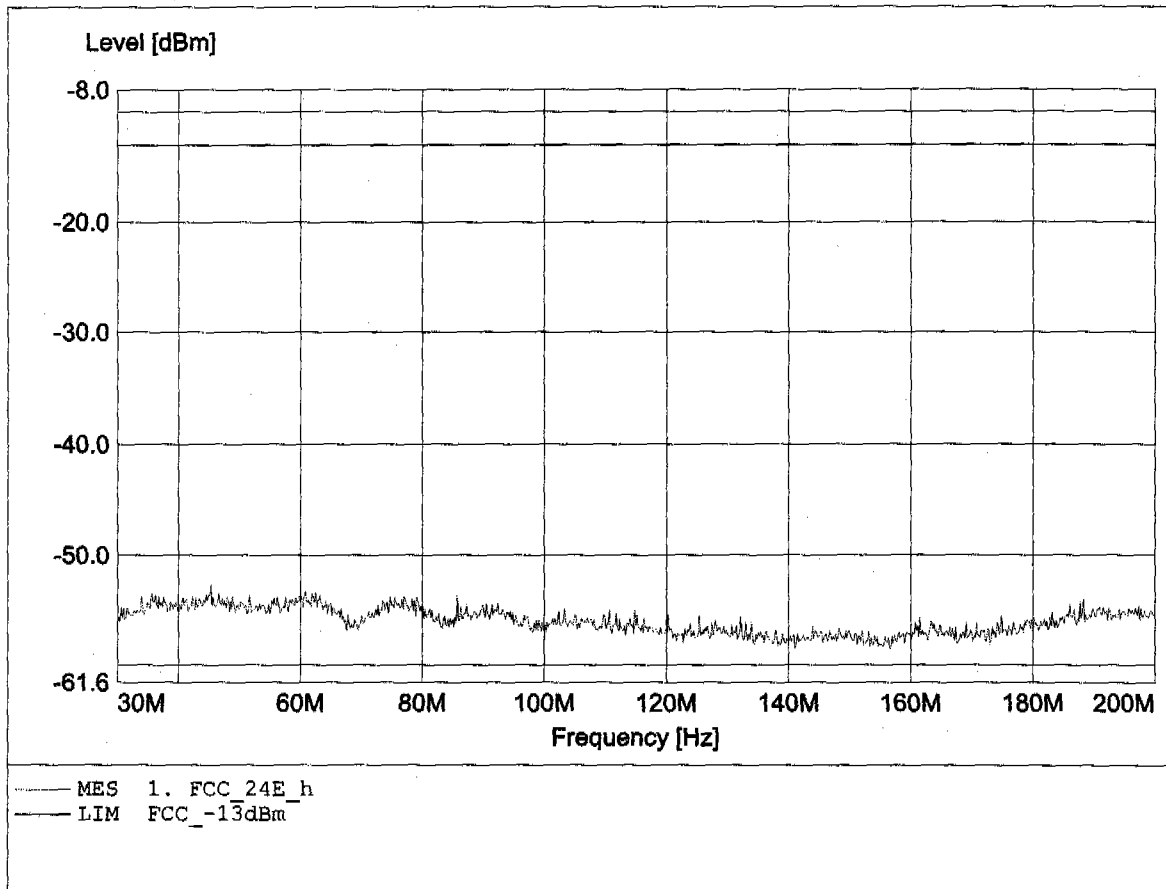




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 926.222MHz, Pmax: -40.11dBm, RBW: 1MHz

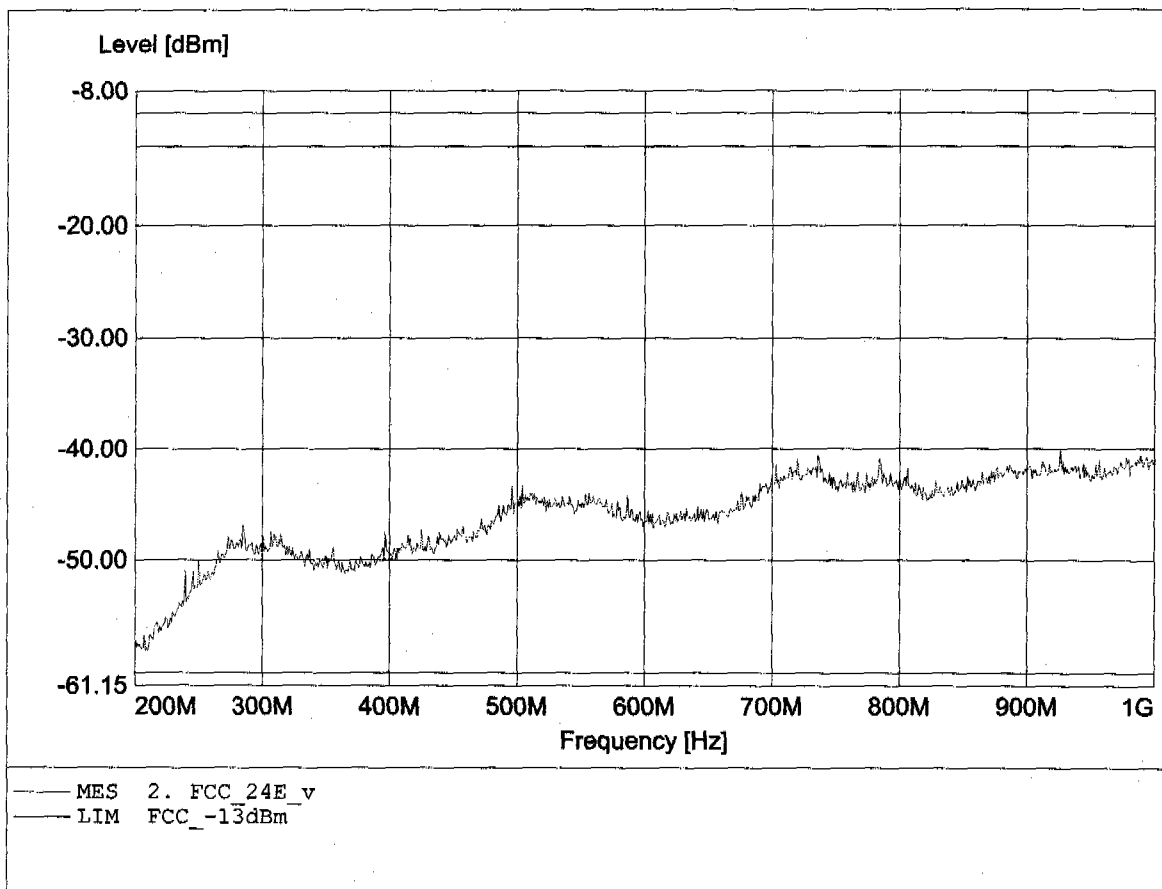


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 868.444MHz, Pmax: -36.92dBm, RBW: 1MHz

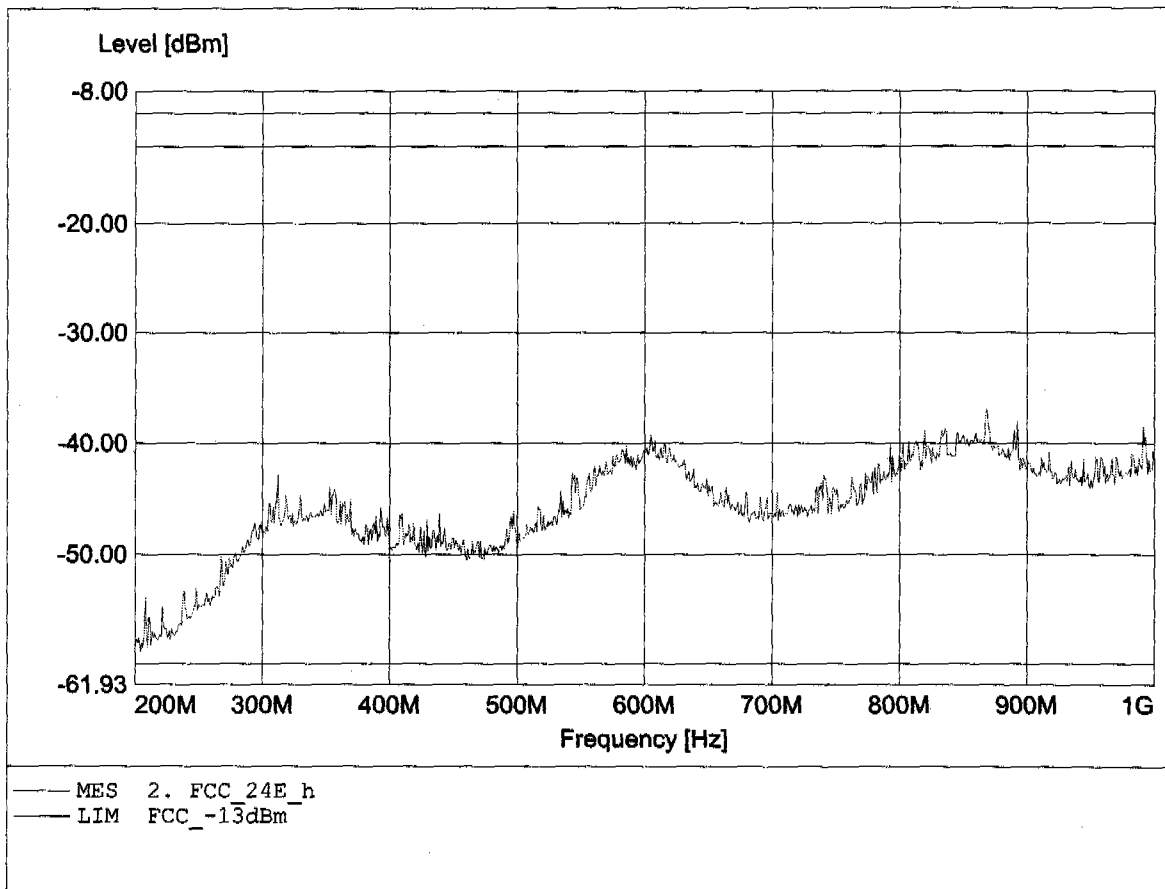


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.548GHz, Pmax: -22.88dBm, RBW: 1MHz/3kHz

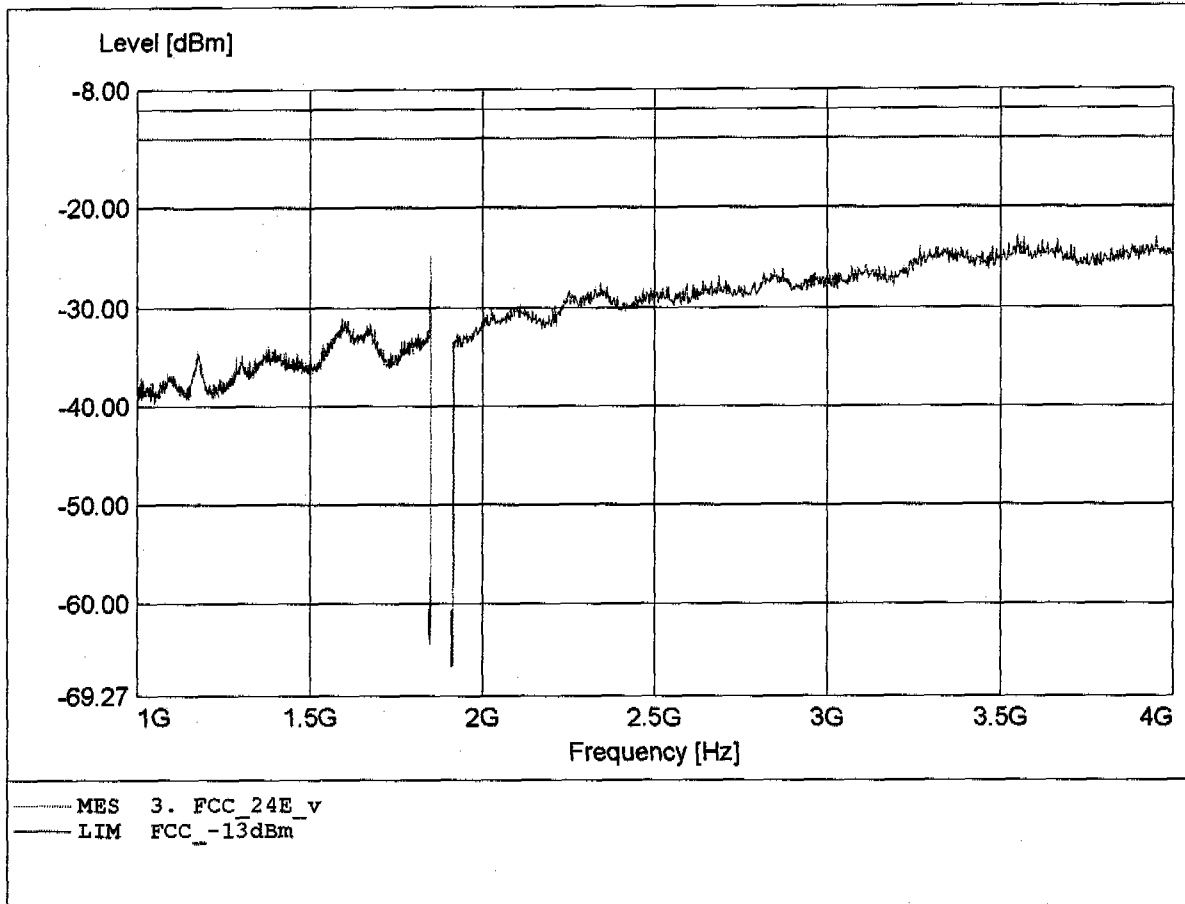


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.977GHz, Pmax: -22.60dBm, RBW: 1MHz/3kHz

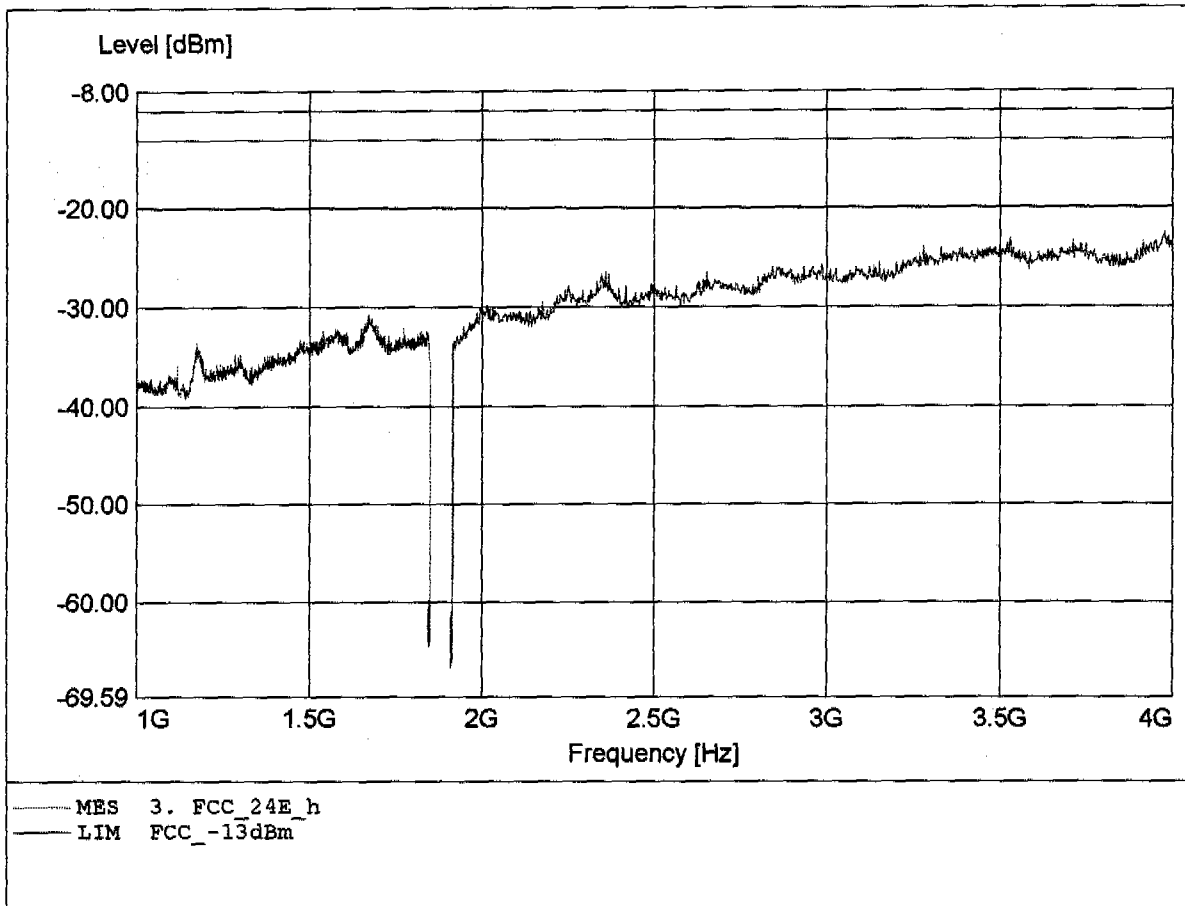


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 5.556GHz, Pmax: -20.55dBm, RBW: 1MHz

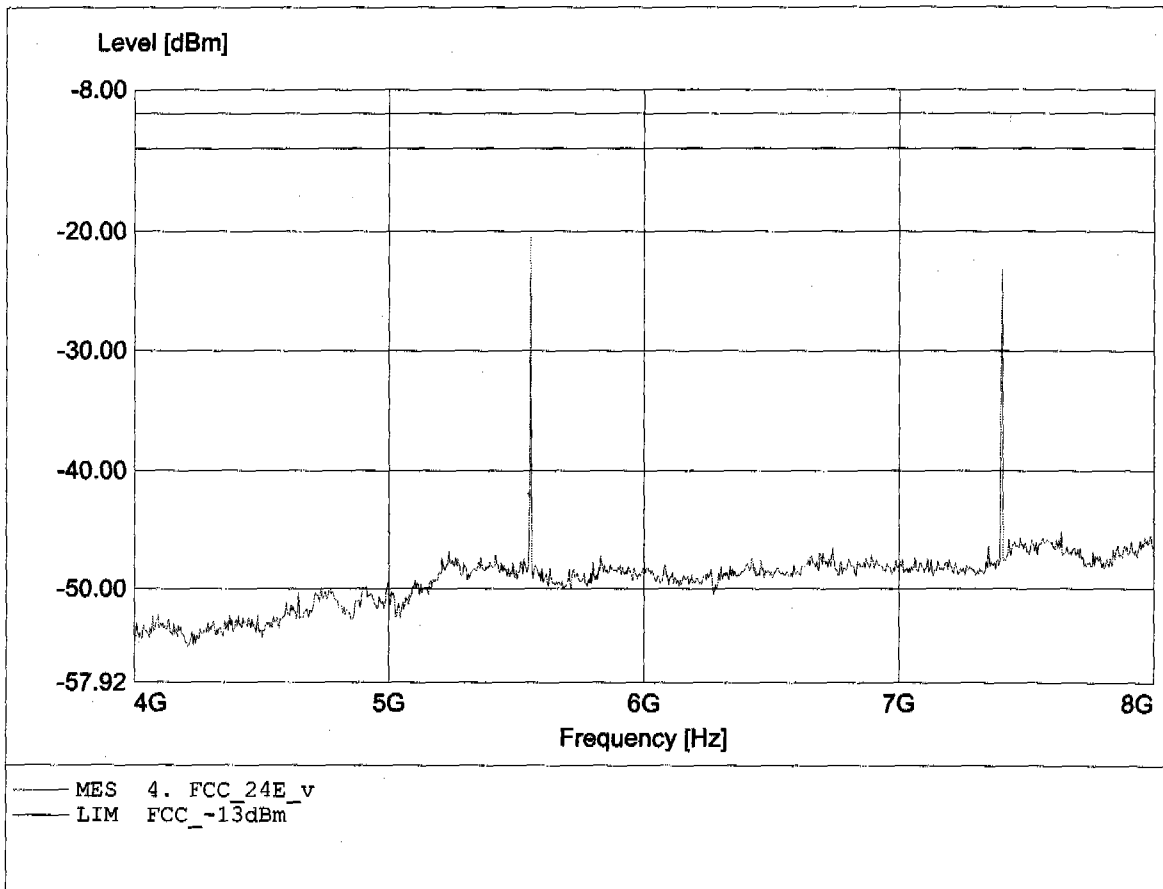


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.404GHz, Pmax: -23.00dBm, RBW: 1MHz

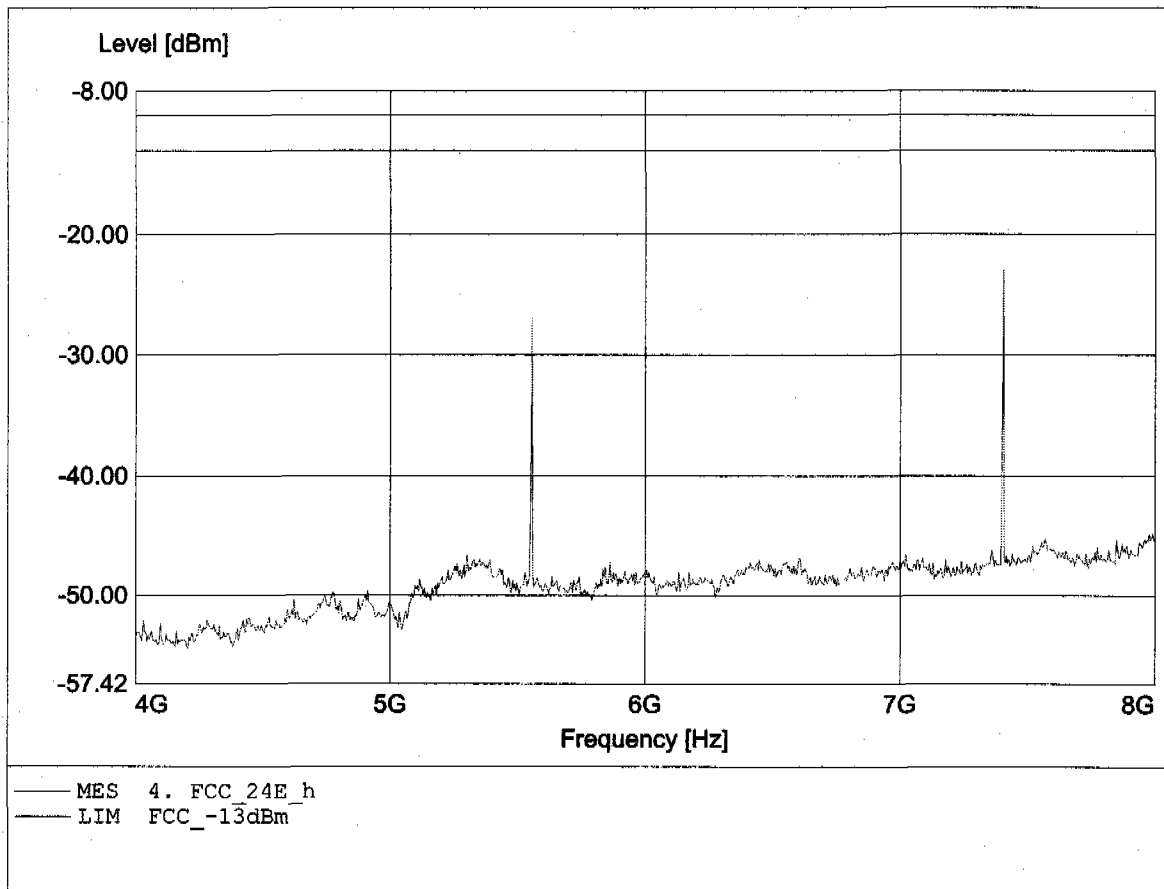


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.253GHz, Pmax: -26.56dBm, RBW: 1MHz

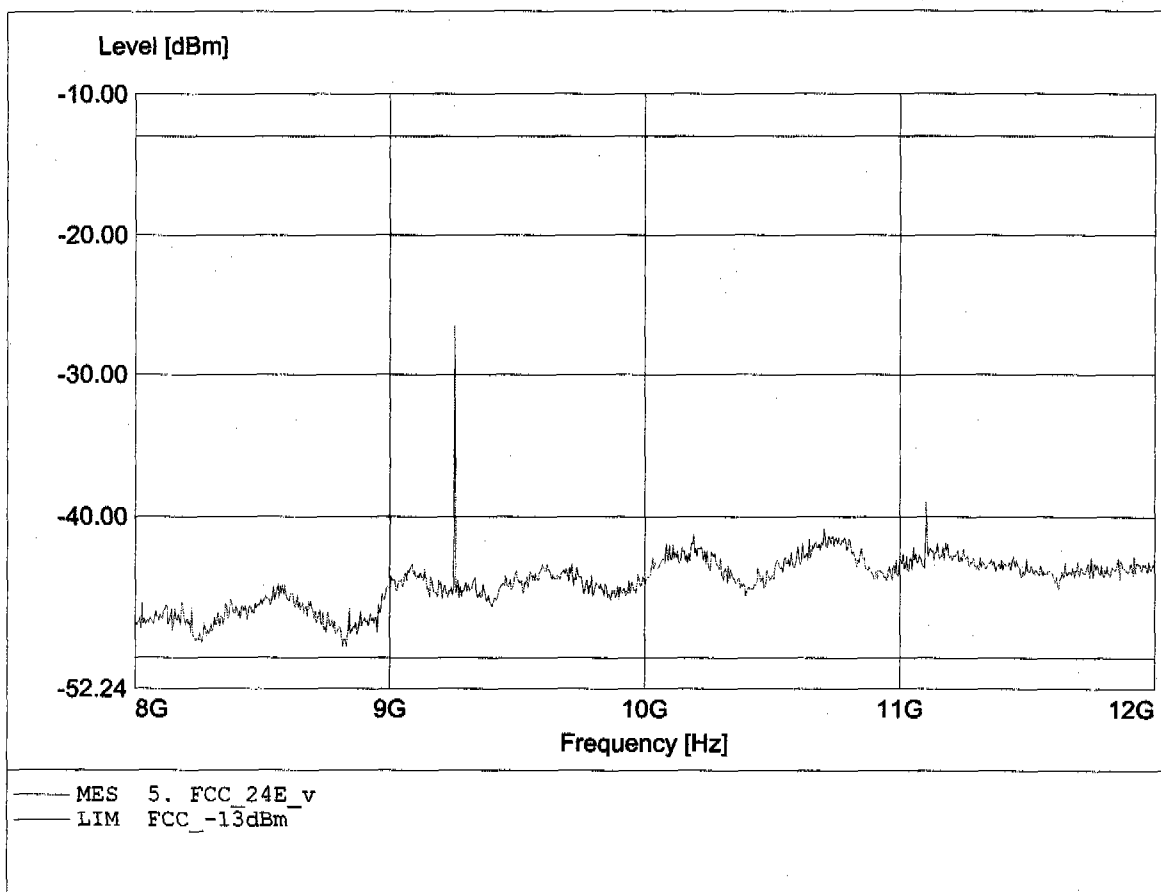

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.253GHz, Pmax: -28.12dBm, RBW: 1MHz

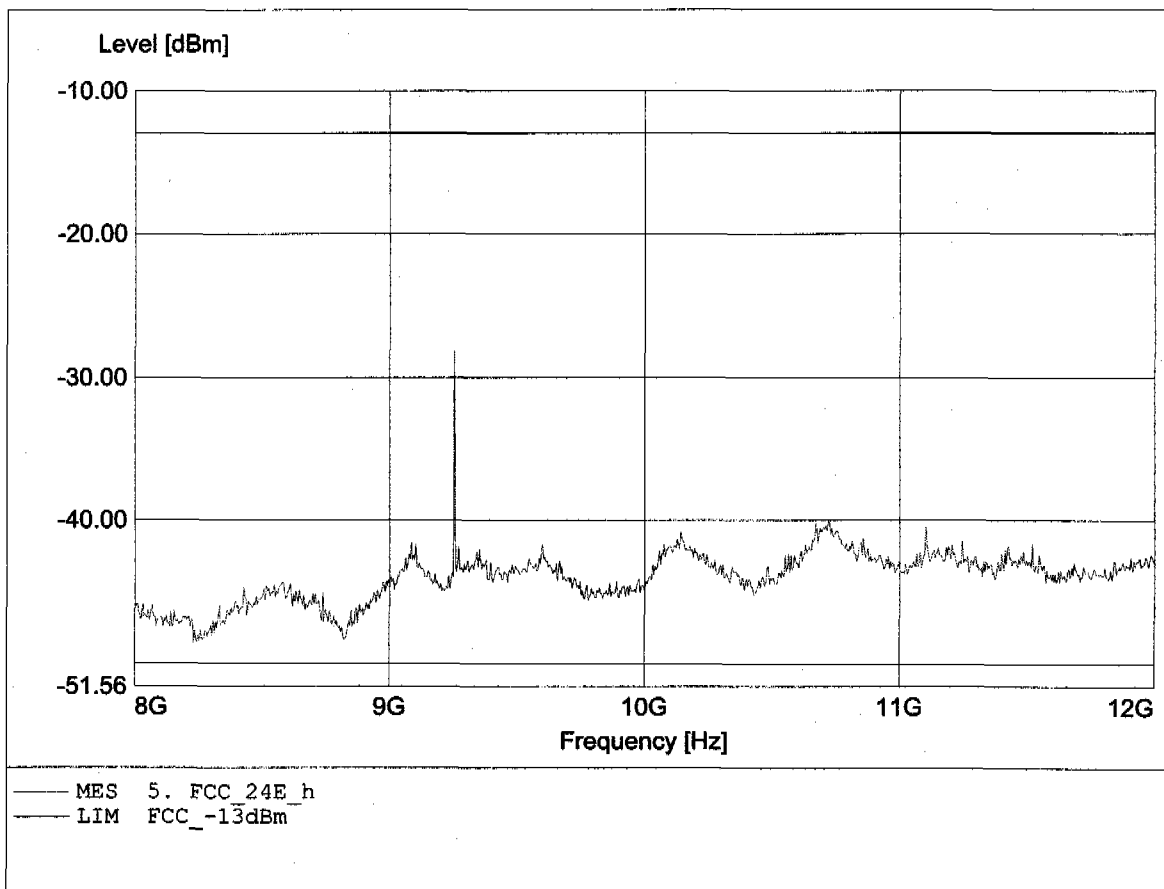




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 17.500GHz, Pmax: -32.14dBm, RBW: 1MHz

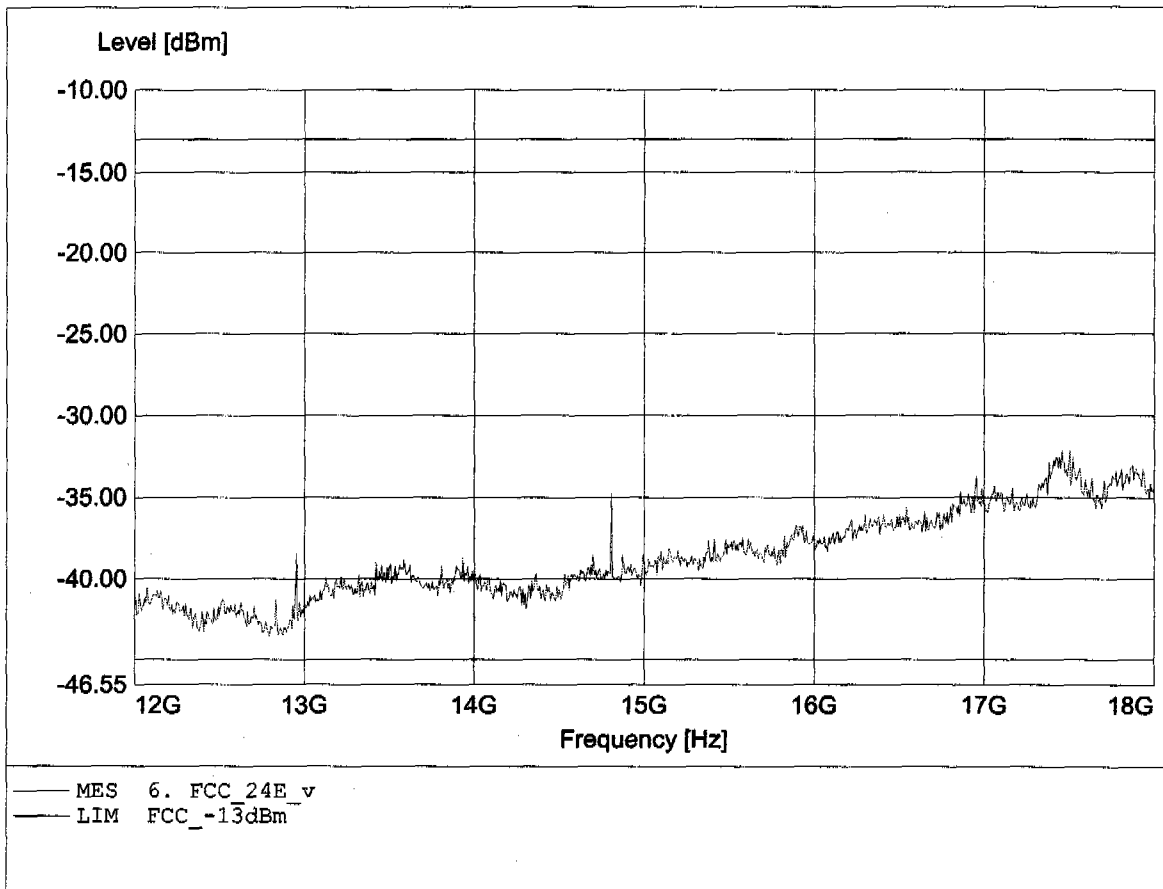


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 17.453GHz, Pmax: -31.68dBm, RBW: 1MHz

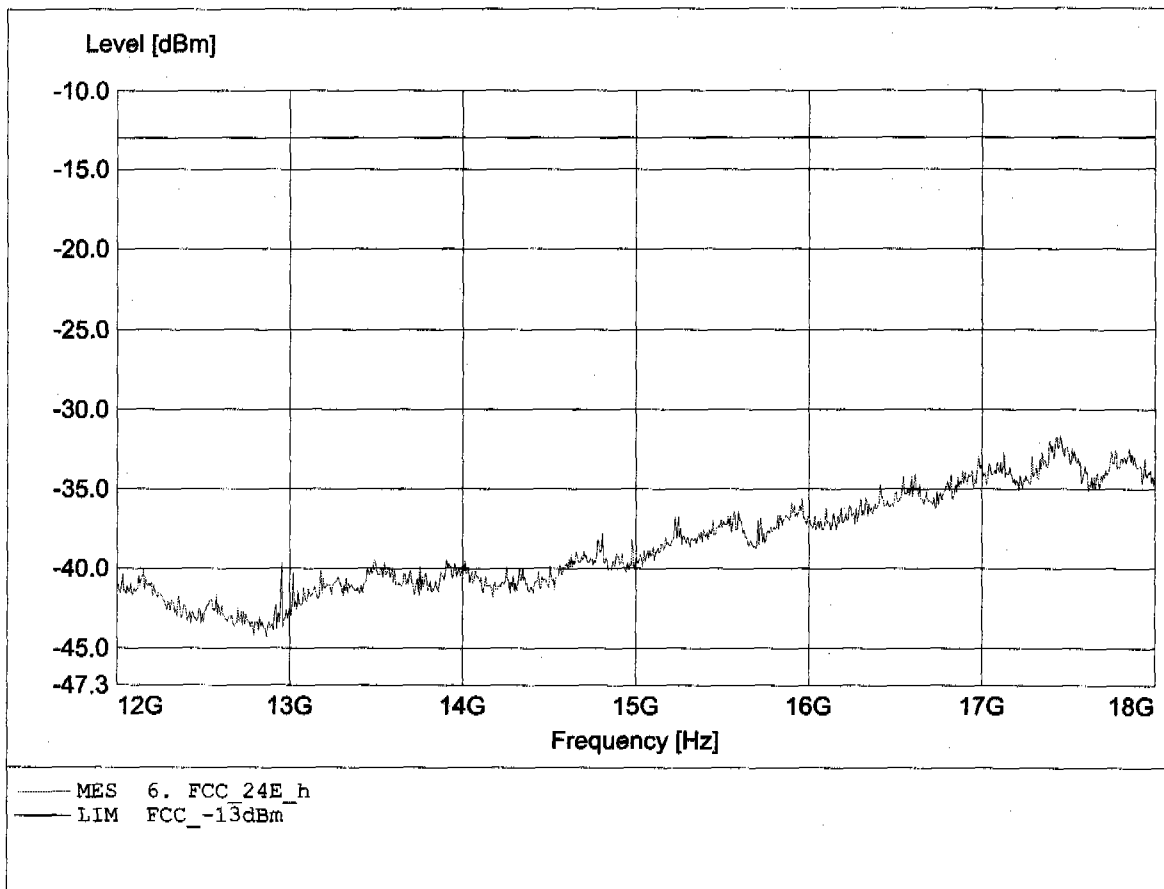


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.453GHz, Pmax: -24.64dBm, RBW: 1MHz

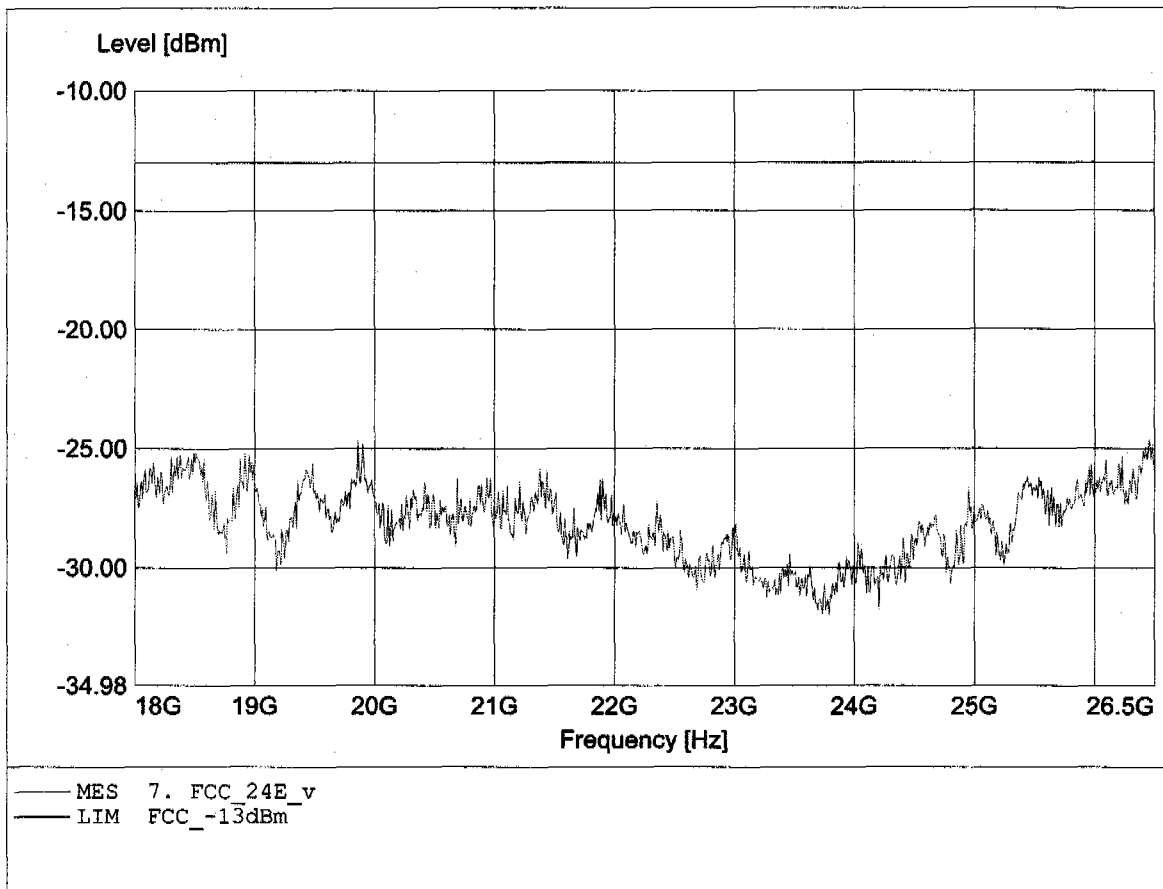


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 19.889GHz, Pmax: -24.45dBm, RBW: 1MHz

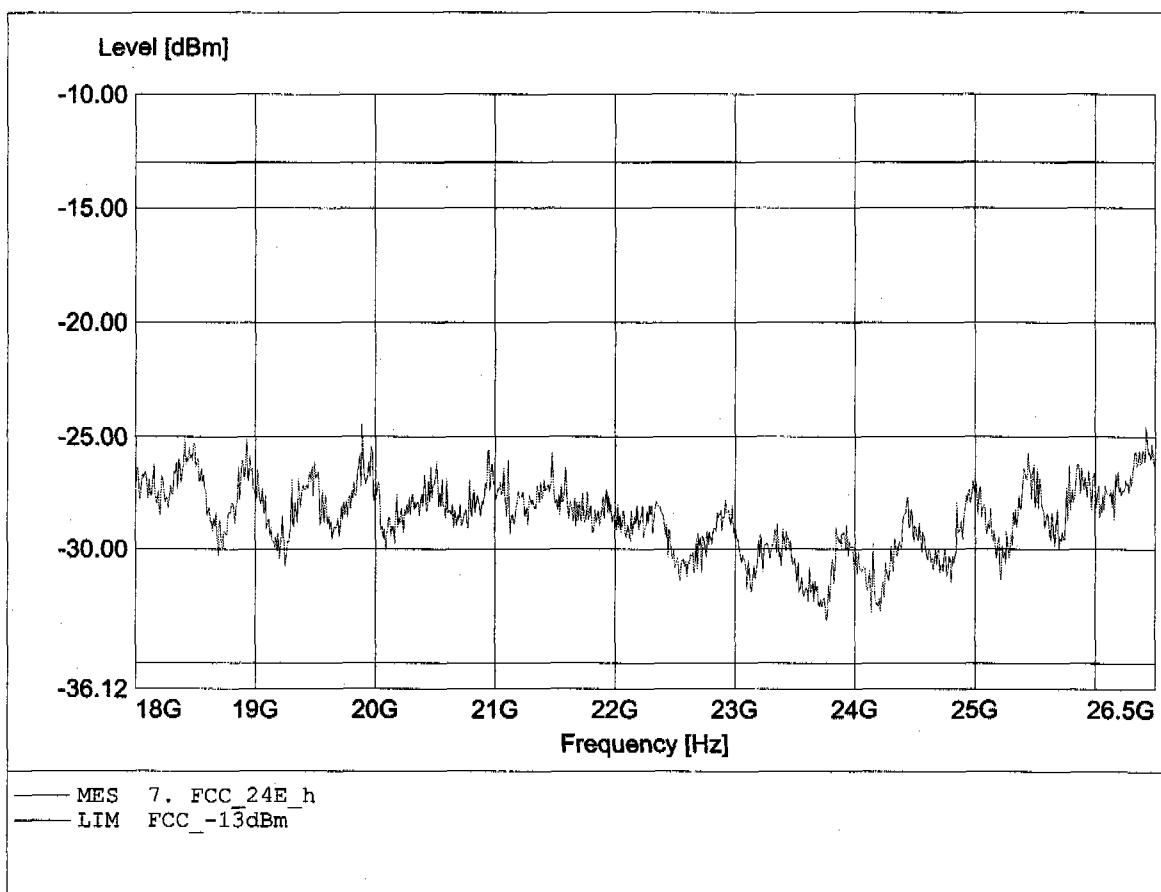


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 185.267MHz, Pmax: -53.45dBm, RBW: 1MHz

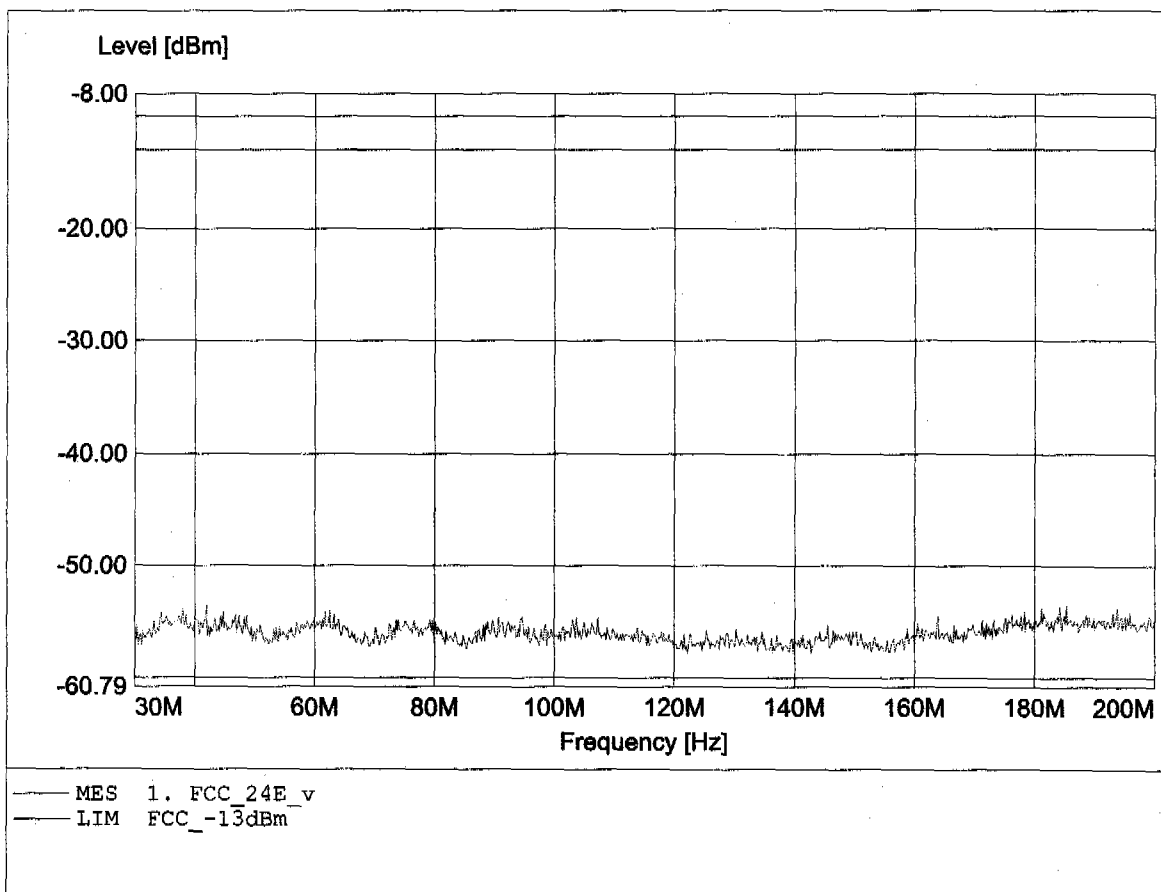


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 74.956MHz, Pmax: -53.03dBm, RBW: 1MHz

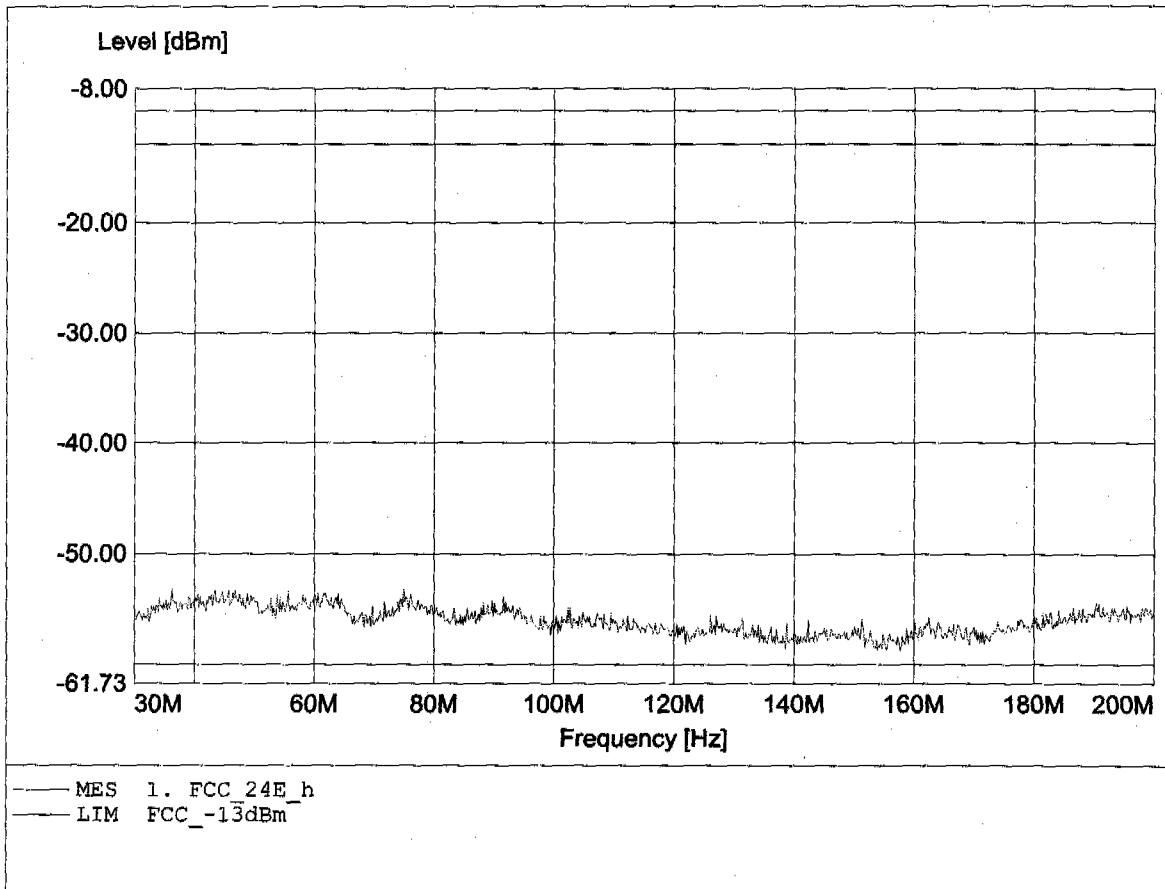


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 941.333MHz, Pmax: -39.41dBm, RBW: 1MHz

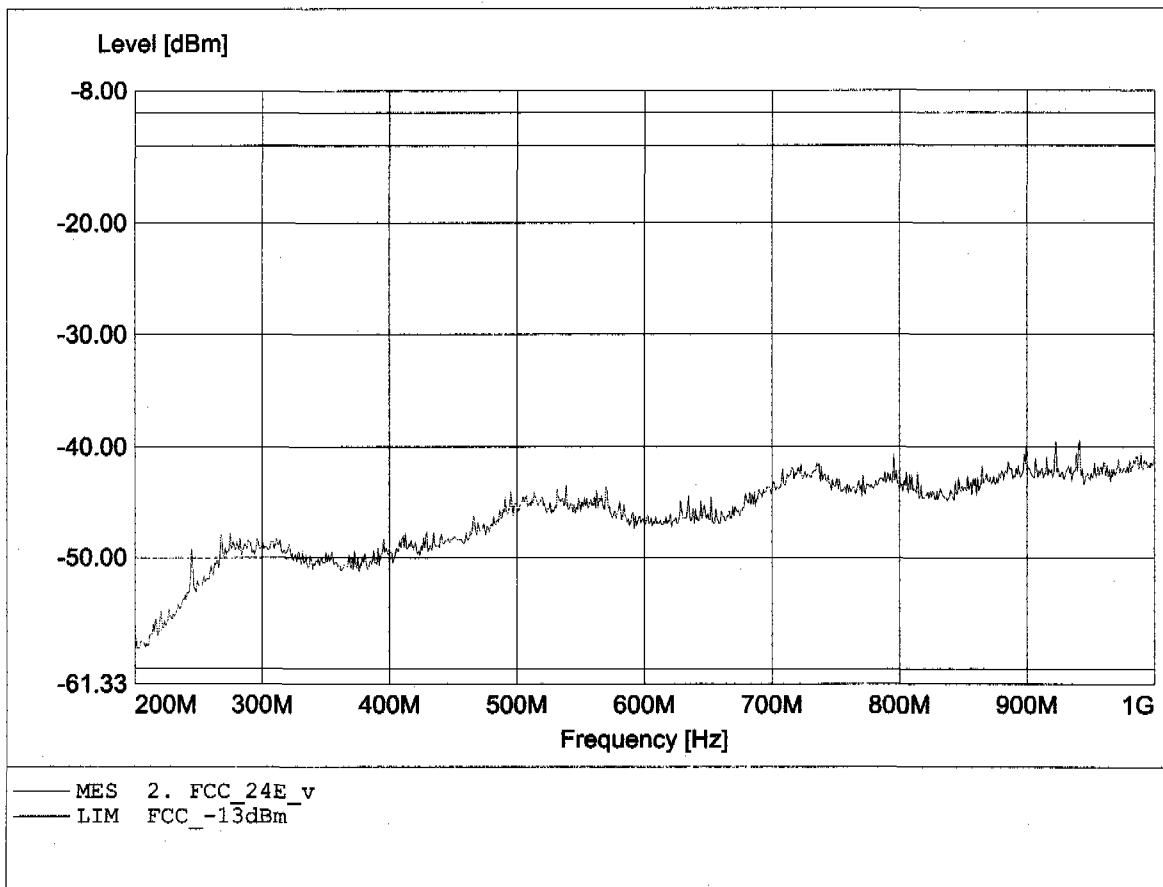

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 867.556MHz, Pmax: -39.04dBm, RBW: 1MHz

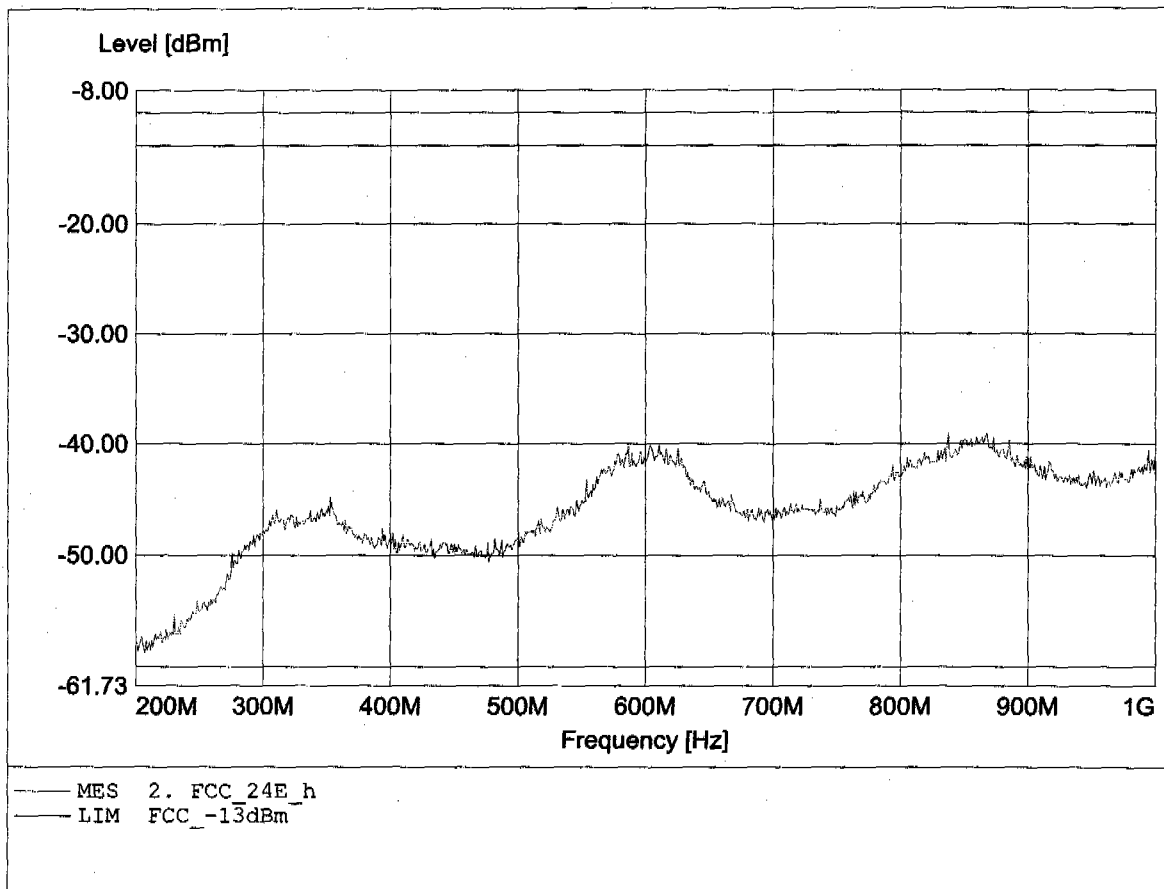




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.620GHz, Pmax: -22.18dBm, RBW: 1MHz/3kHz

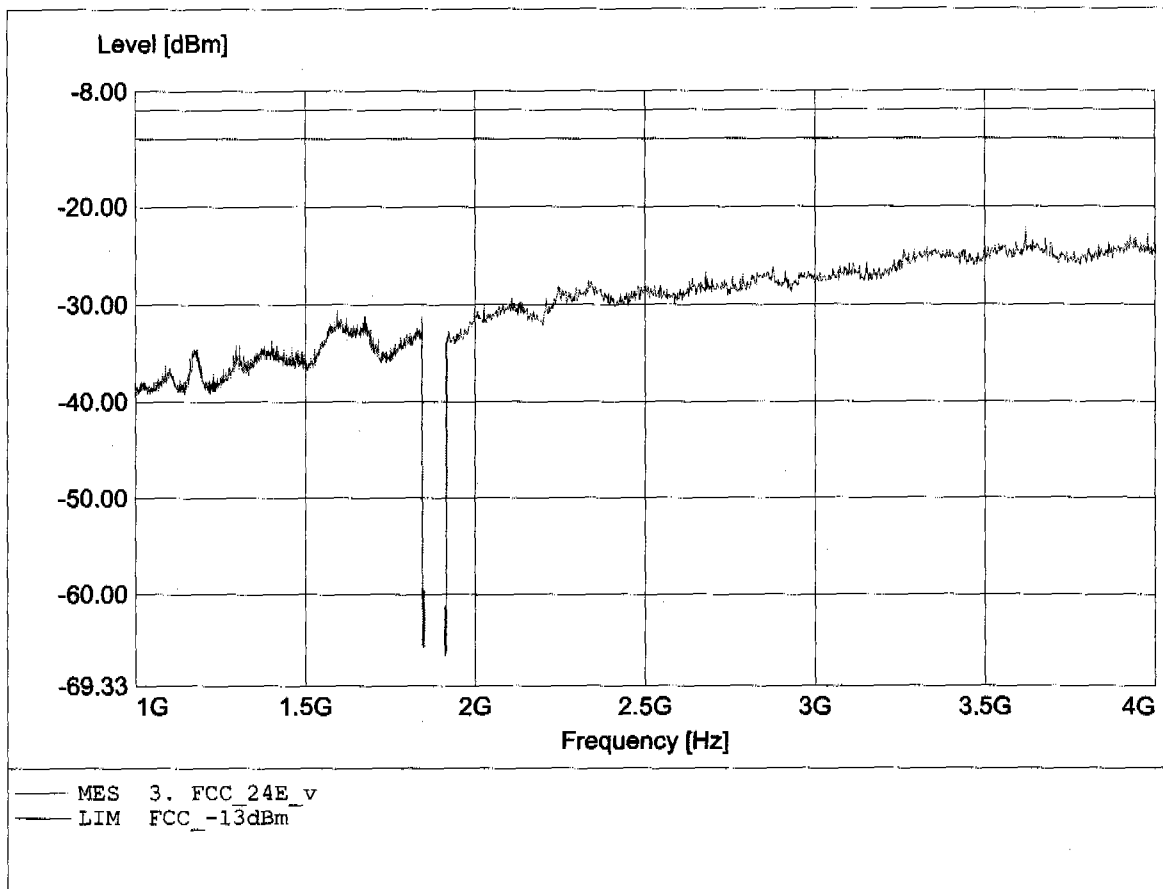


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 4.000GHz, Pmax: -22.52dBm, RBW: 1MHz/3kHz

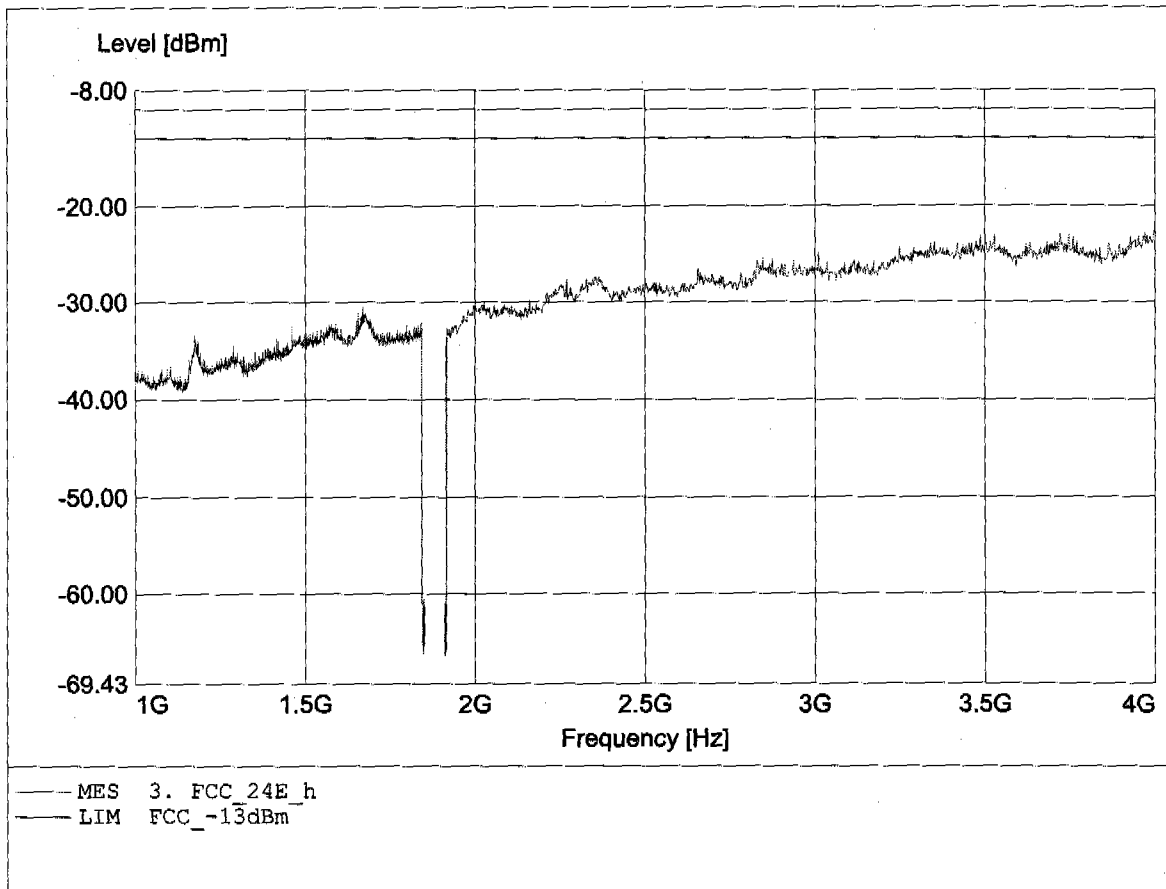


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 5.644GHz, Pmax: -24.06dBm, RBW: 1MHz

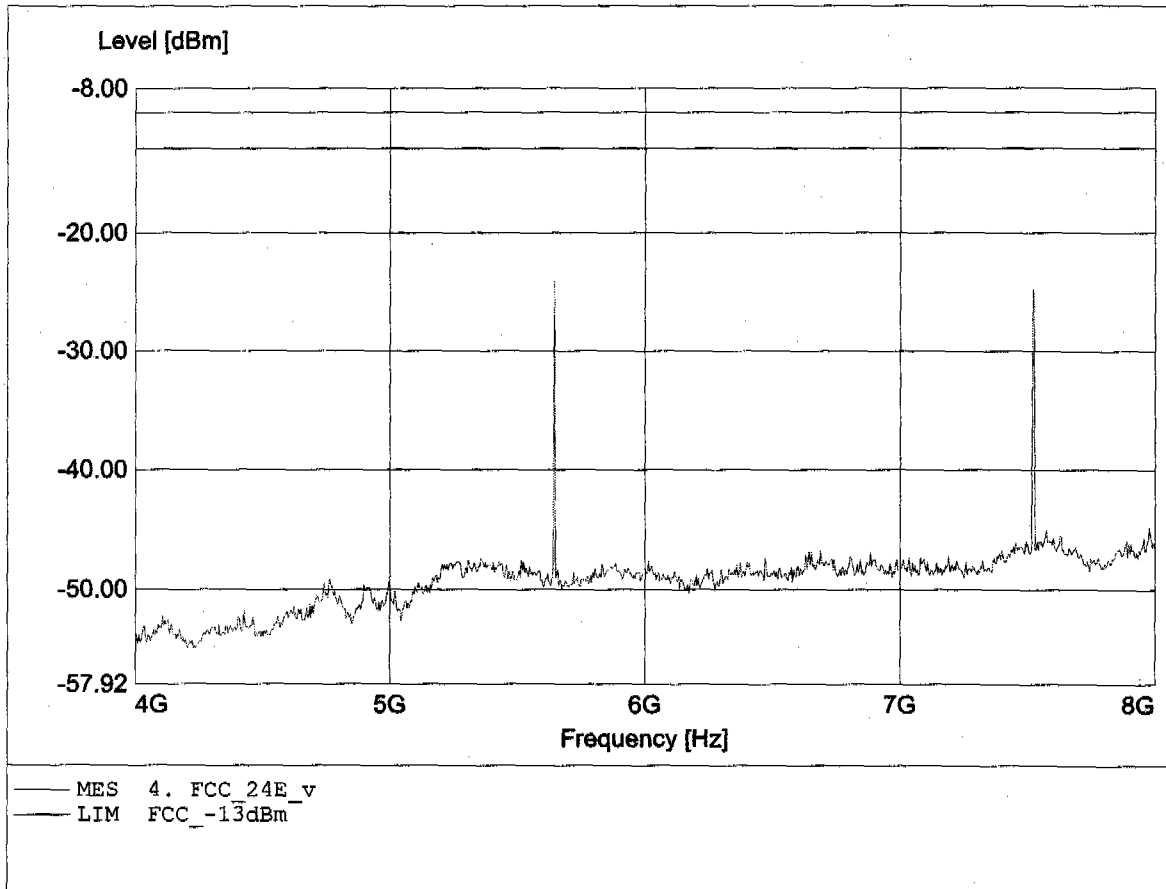


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.520GHz, Pmax: -23.72dBm, RBW: 1MHz

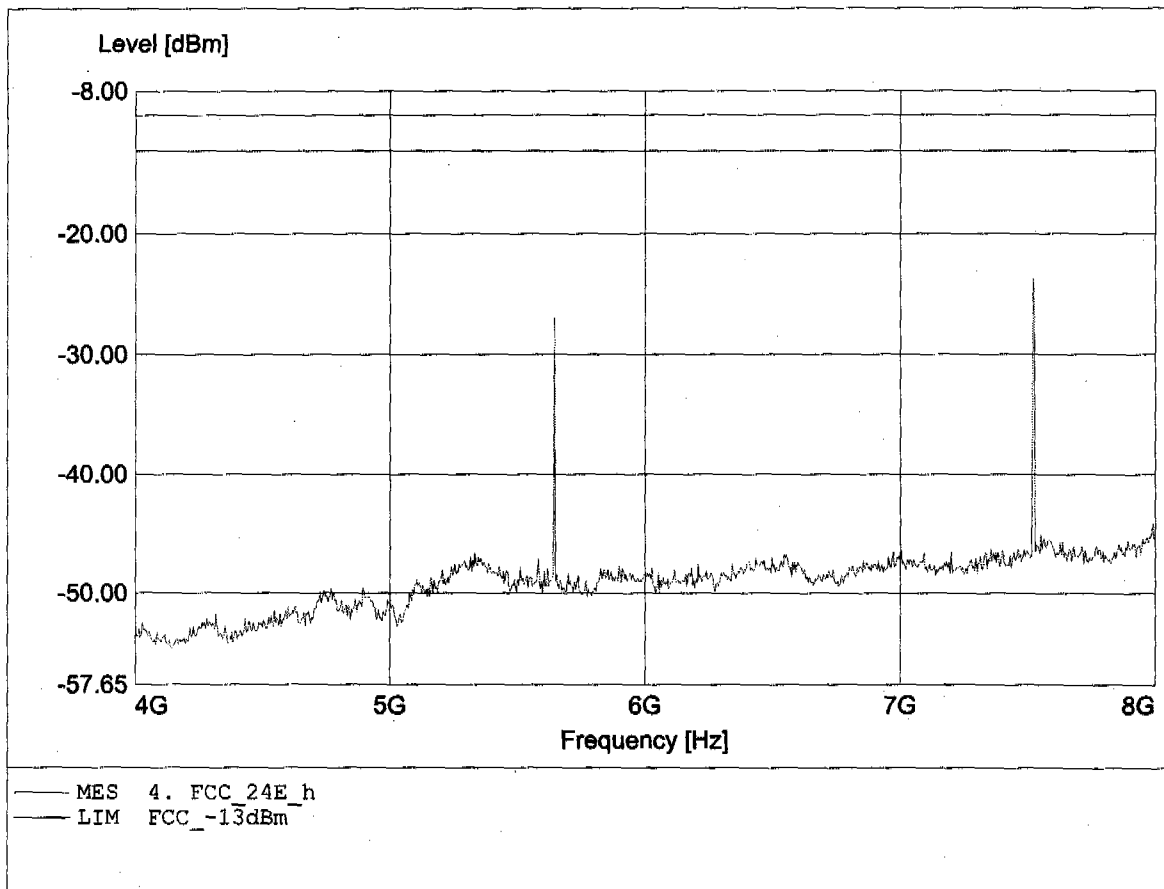


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.404GHz, Pmax: -27.42dBm, RBW: 1MHz

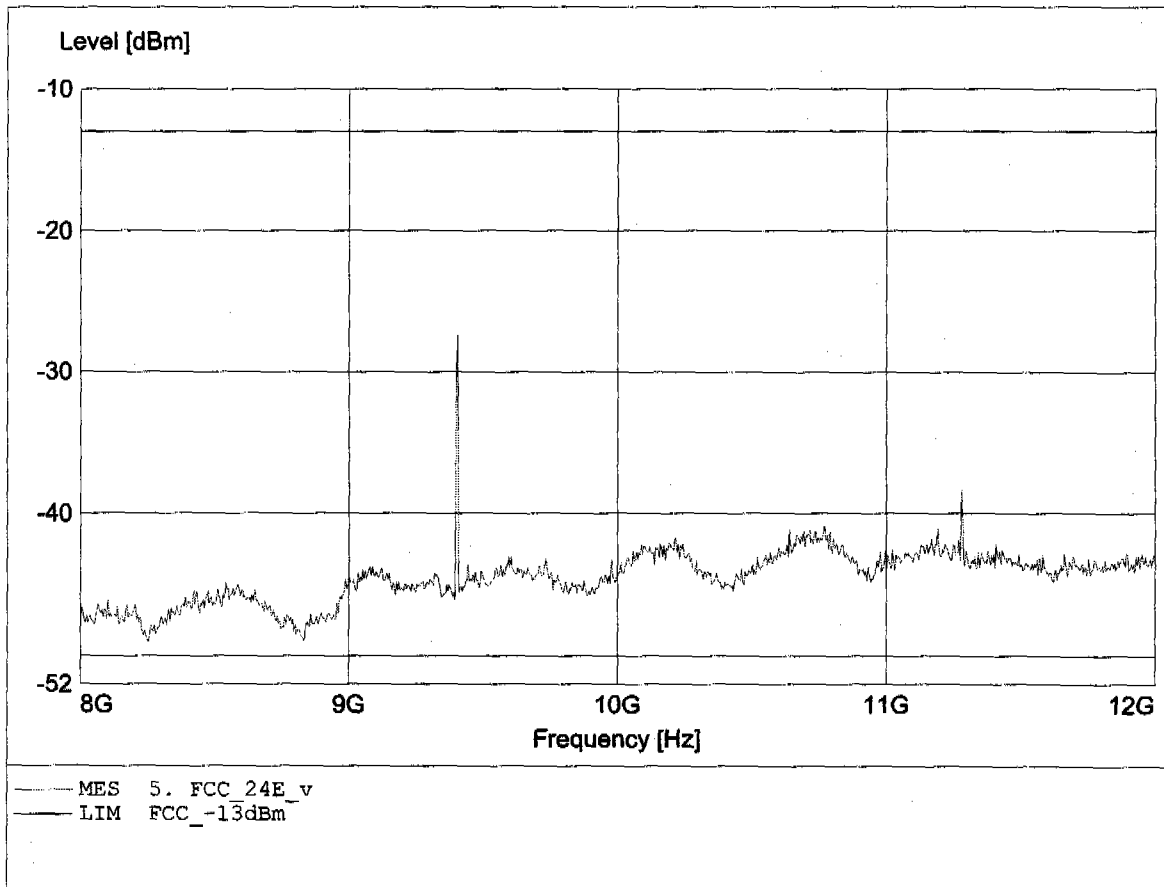


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.404GHz, Pmax: -28.93dBm, RBW: 1MHz

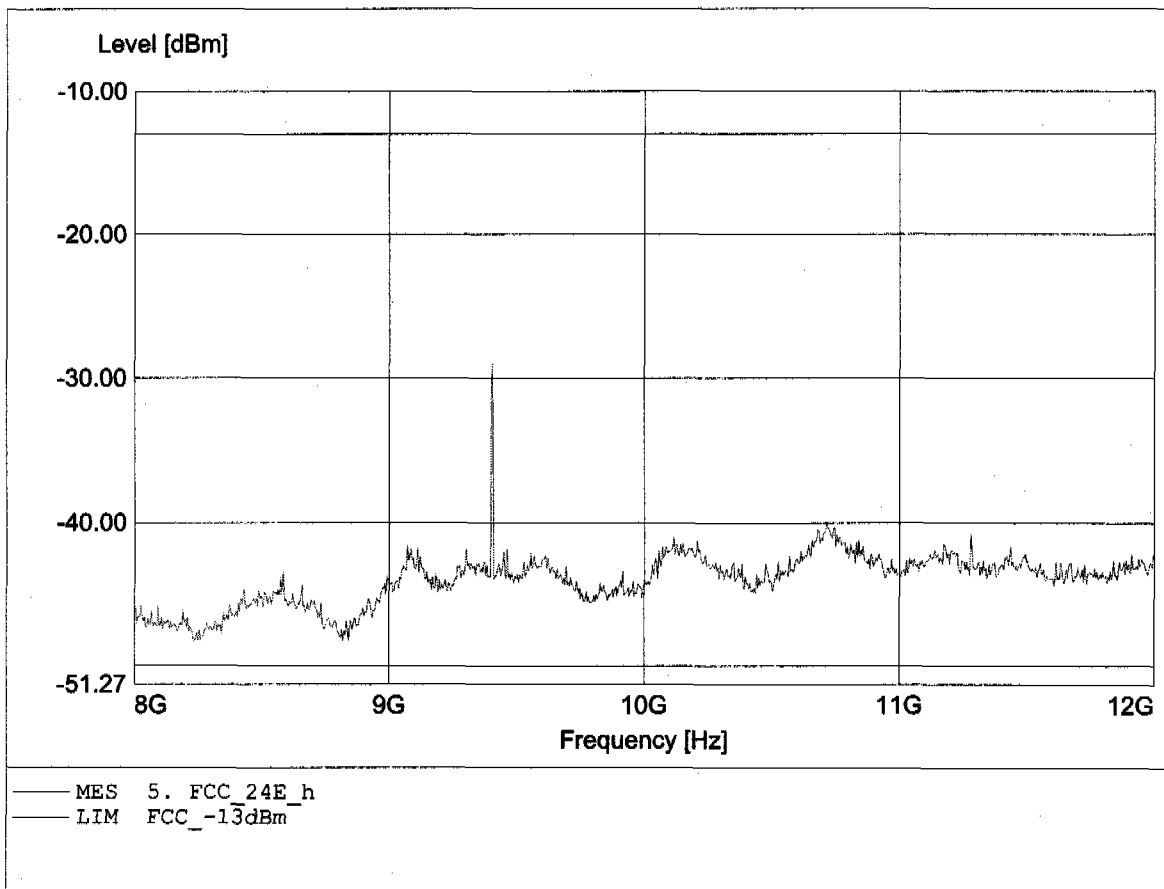


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 17.460GHz, Pmax: -32.37dBm, RBW: 1MHz

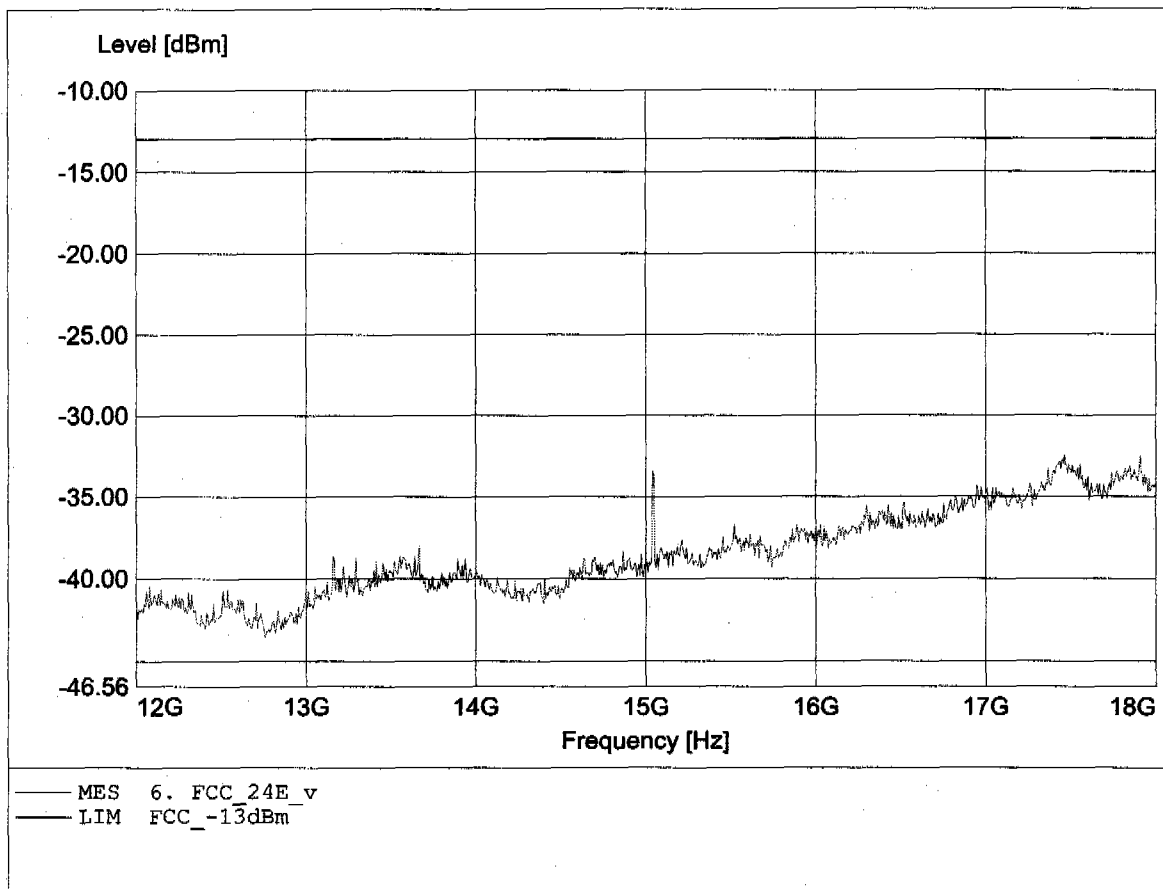

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 17.433GHz, Pmax: -31.66dBm, RBW: 1MHz

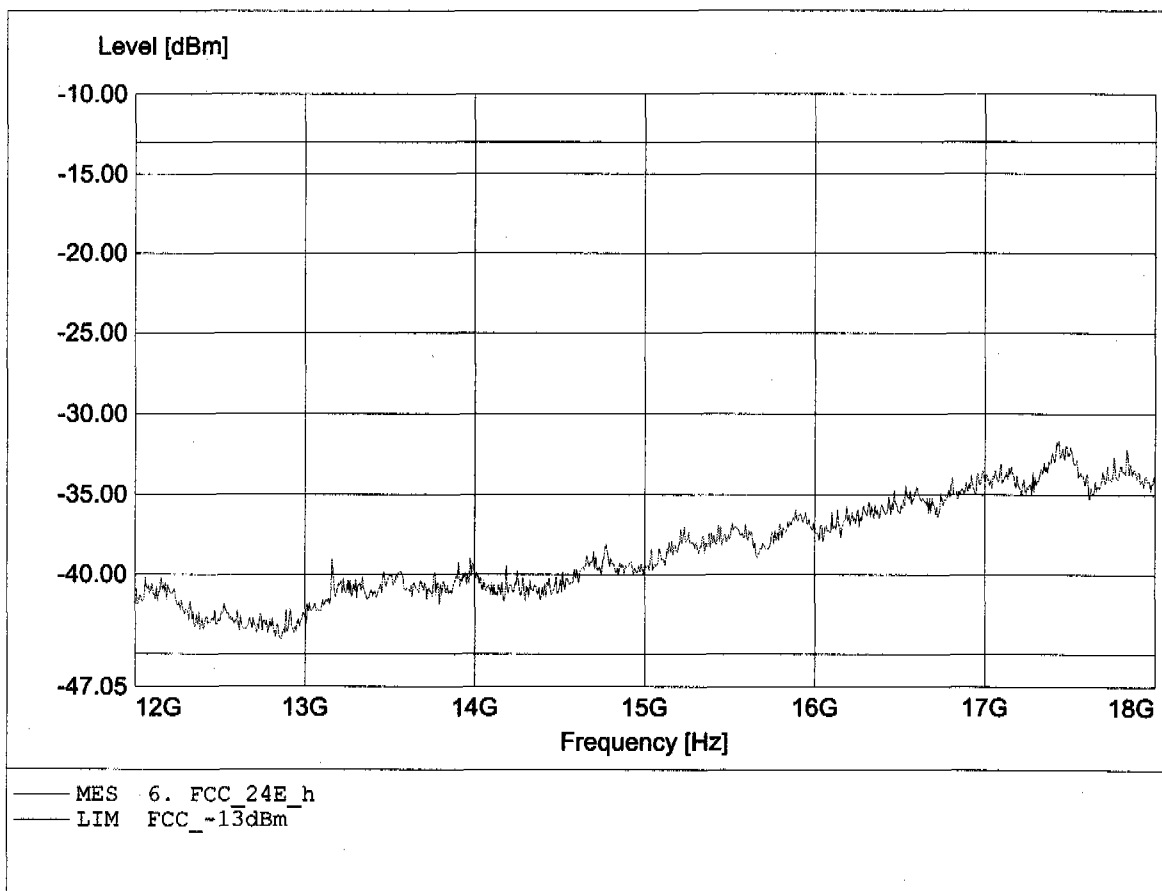




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 18.434GHz, Pmax: -24.35dBm, RBW: 1MHz

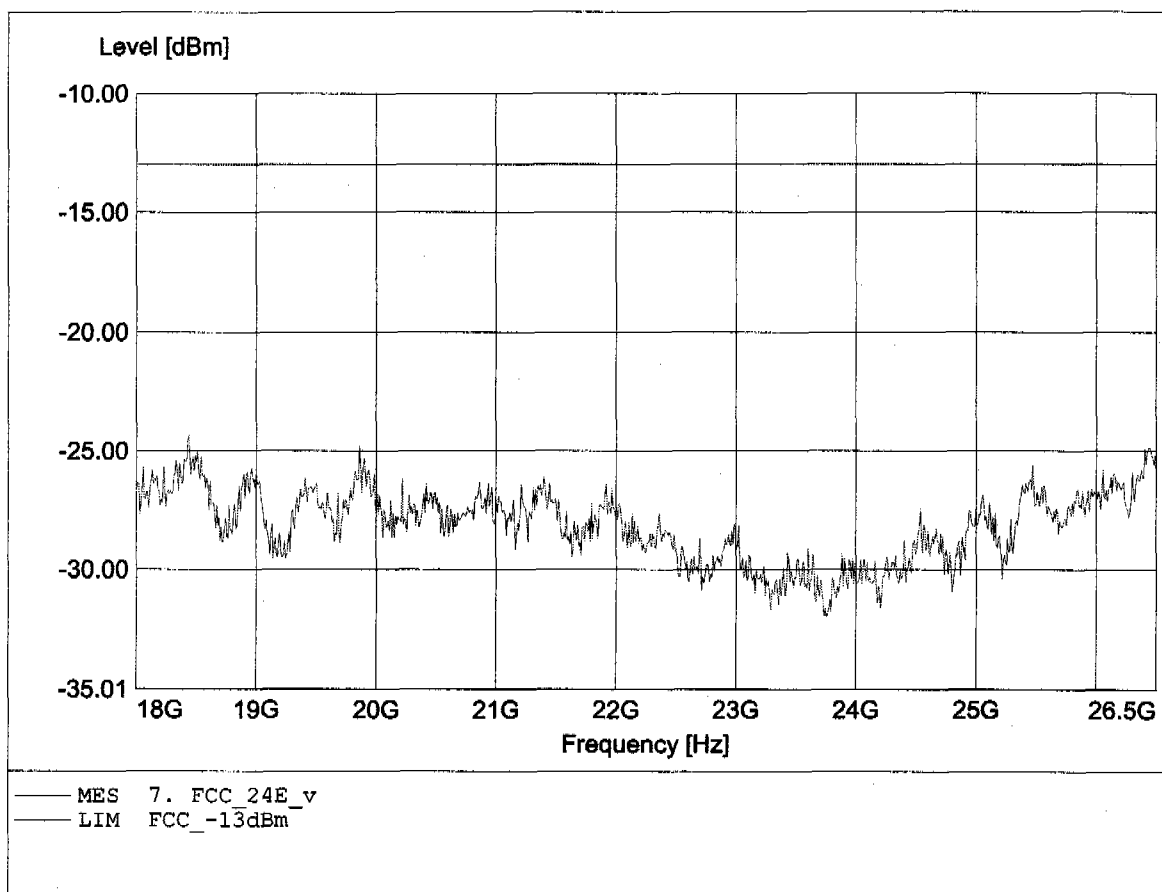


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.453GHz, Pmax: -23.95dBm, RBW: 1MHz

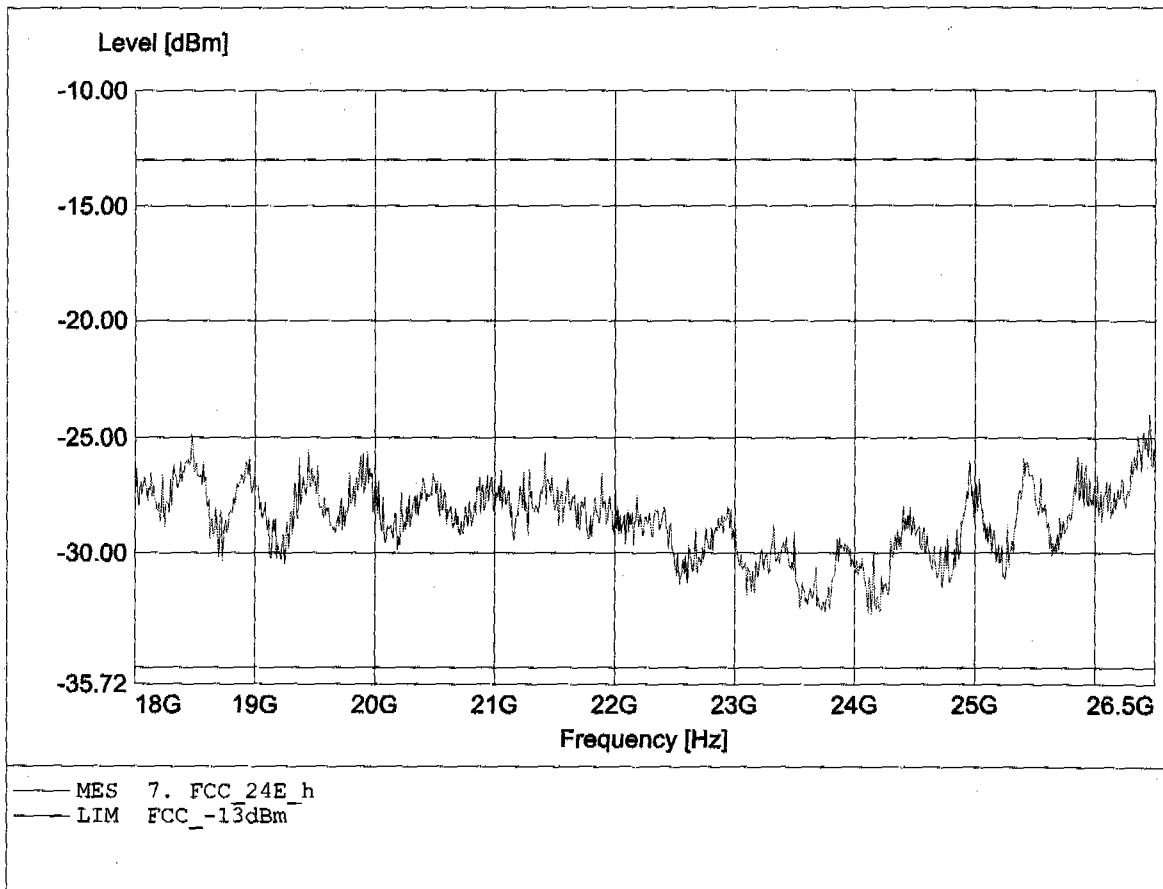


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 189.422MHz, Pmax: -53.76dBm, RBW: 1MHz

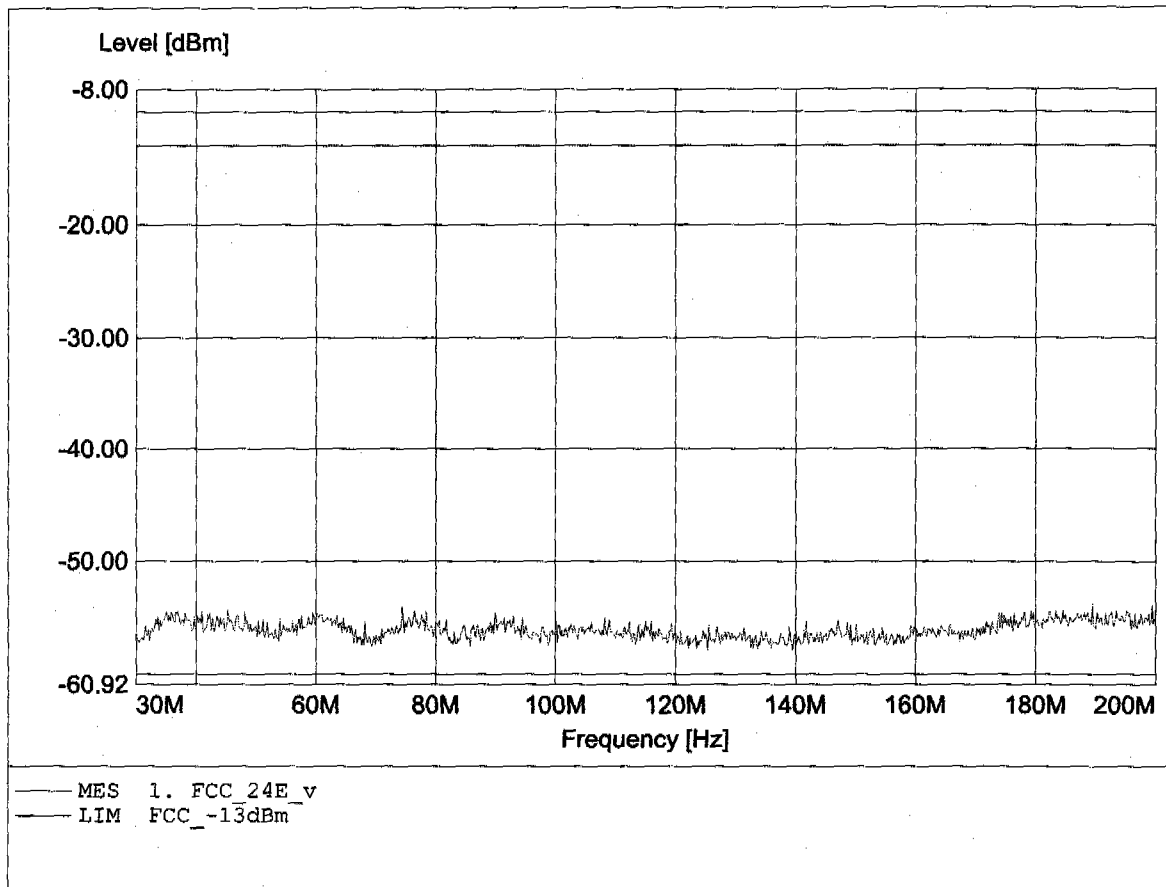


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 63.811MHz, Pmax: -52.18dBm, RBW: 1MHz

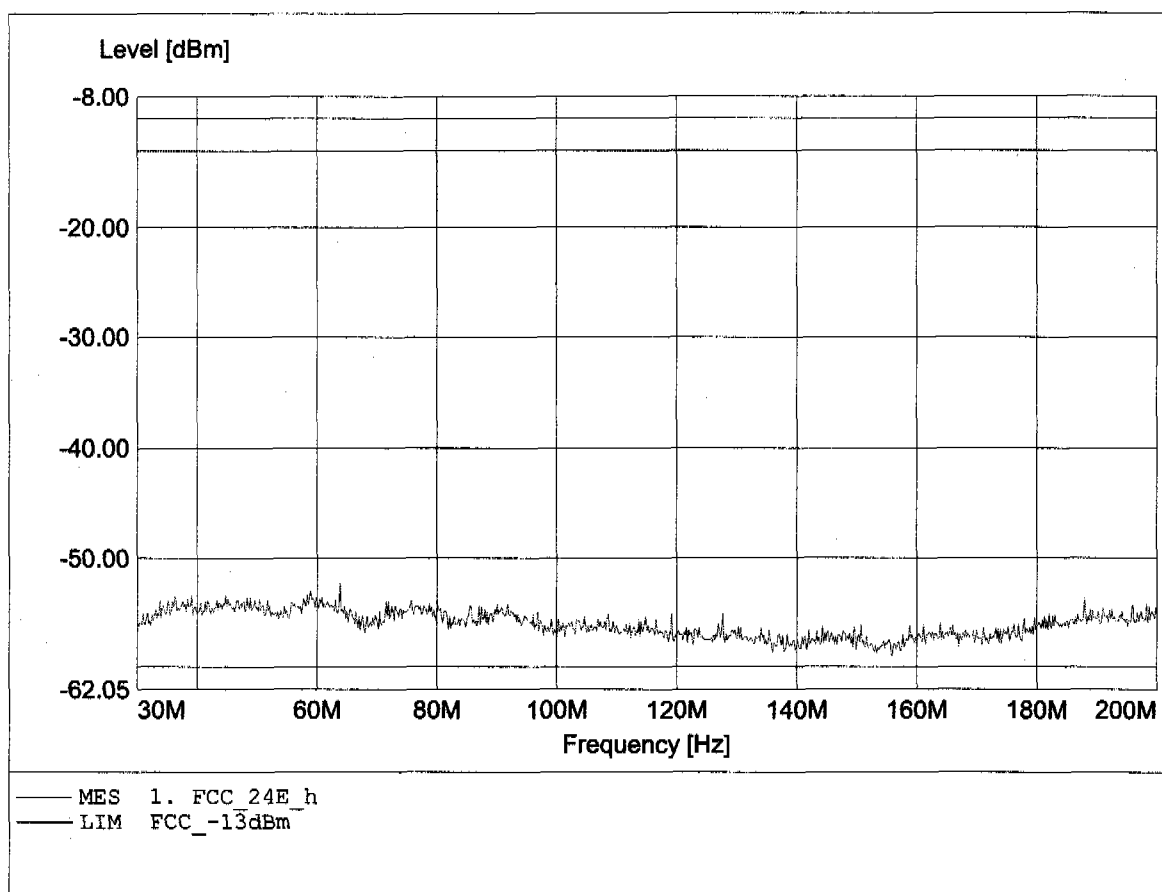


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 987.556MHz, Pmax: -39.38dBm, RBW: 1MHz

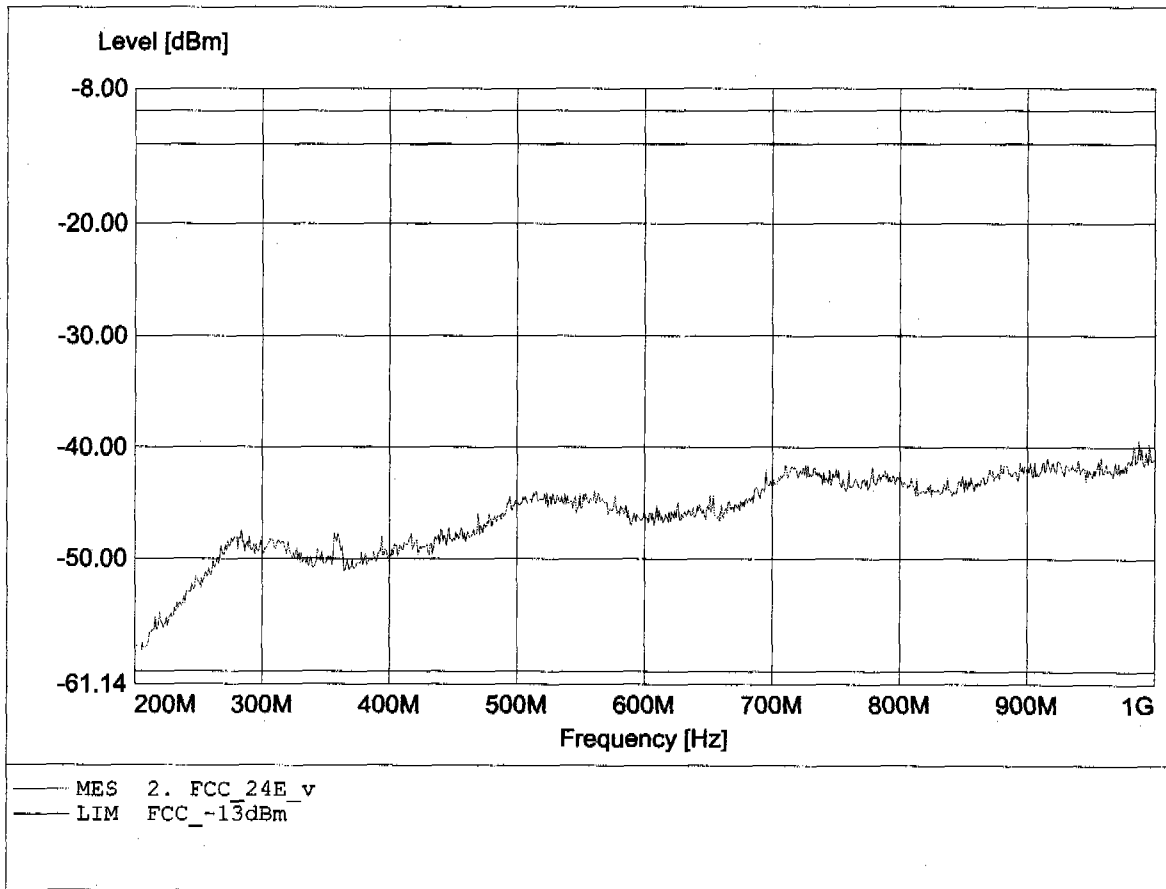


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 841.778MHz, Pmax: -38.61dBm, RBW: 1MHz

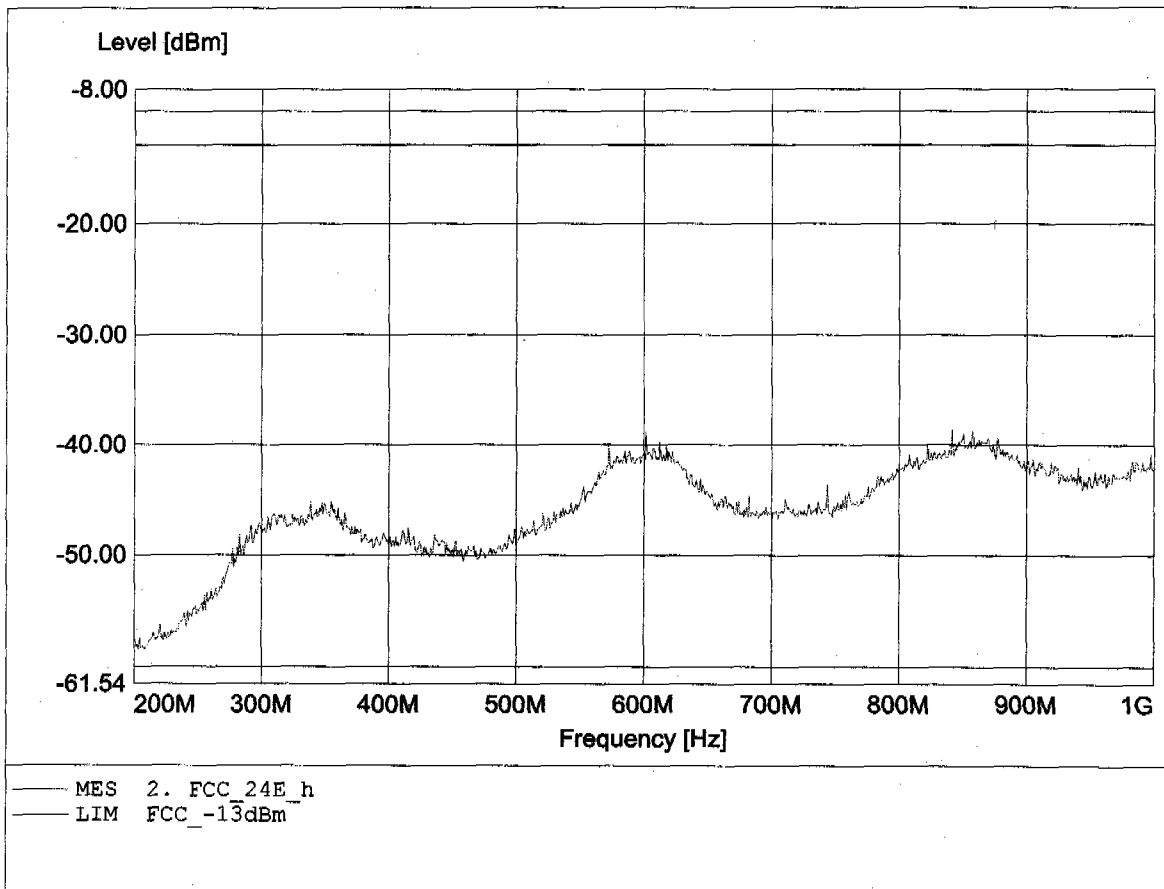


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.597GHz, Pmax: -23.16dBm, RBW: 1MHz/3kHz

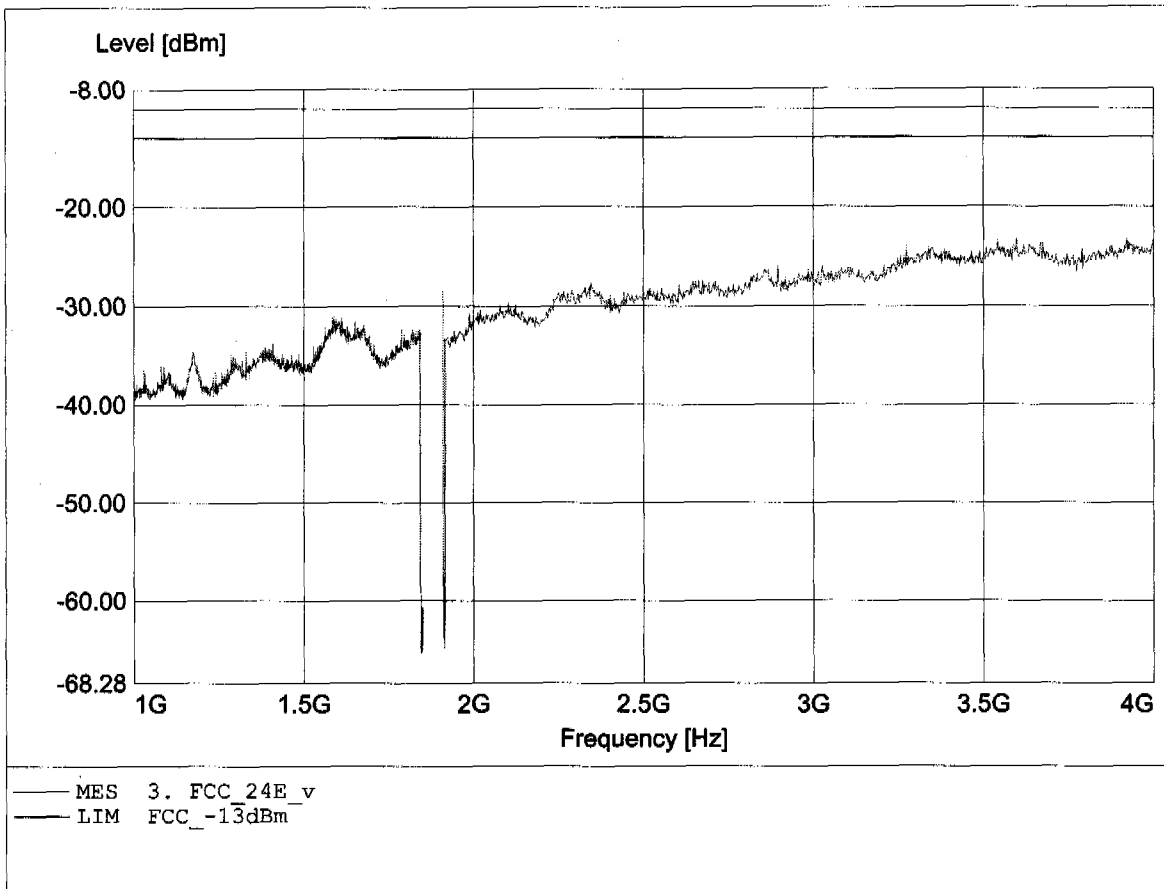

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.981GHz, Pmax: -22.29dBm, RBW: 1MHz/3kHz

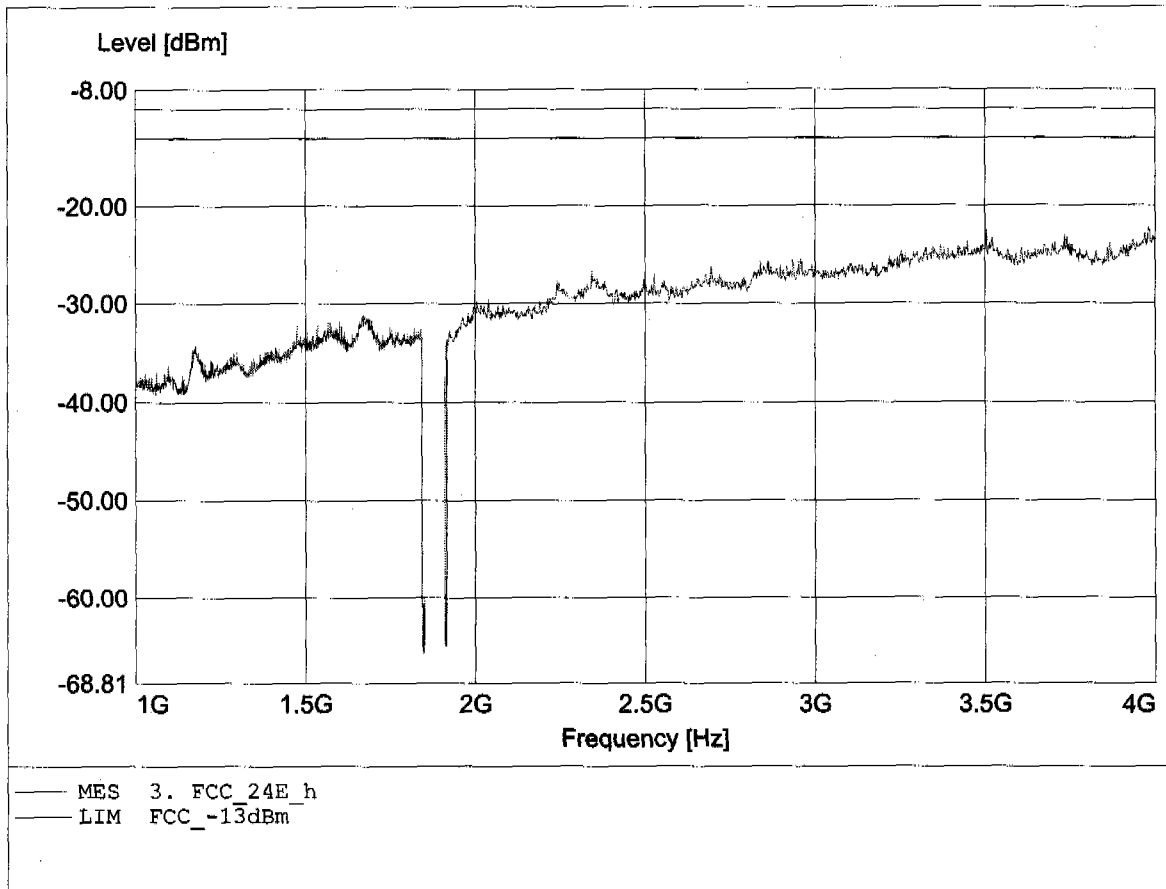




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.640GHz, Pmax: -23.19dBm, REW: 1MHz

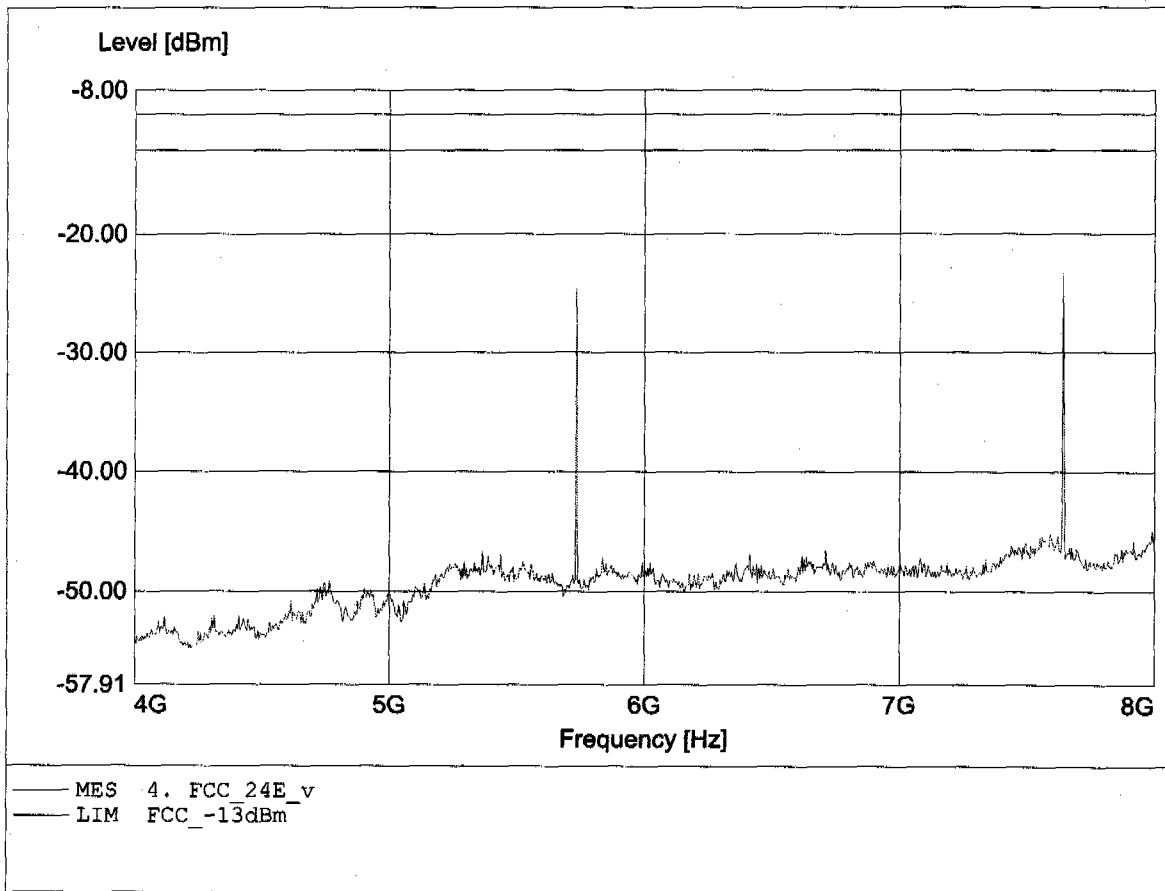


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.640GHz, Pmax: -24.80dBm, RBW: 1MHz

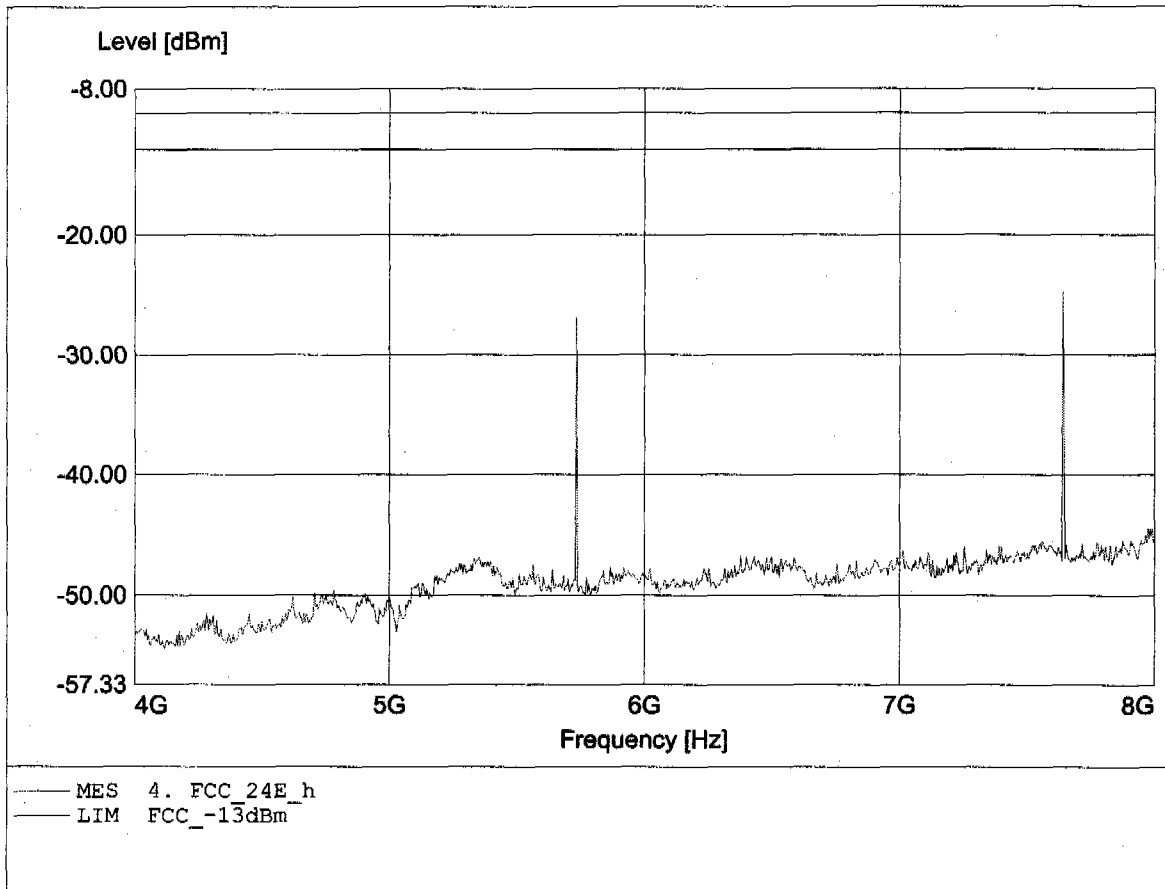


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.551GHz, Pmax: -29.85dBm, RBW: 1MHz

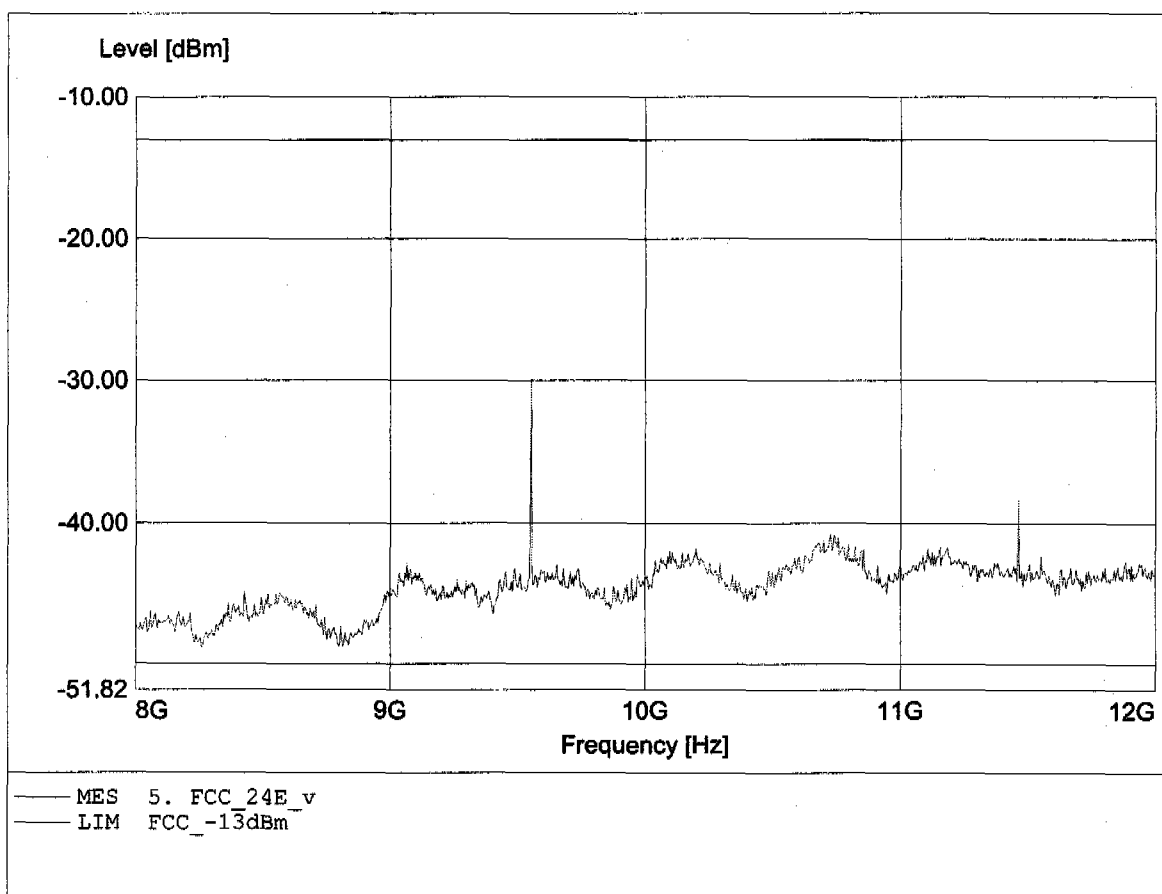


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.551GHz, Pmax: -29.83dBm, RBW: 1MHz

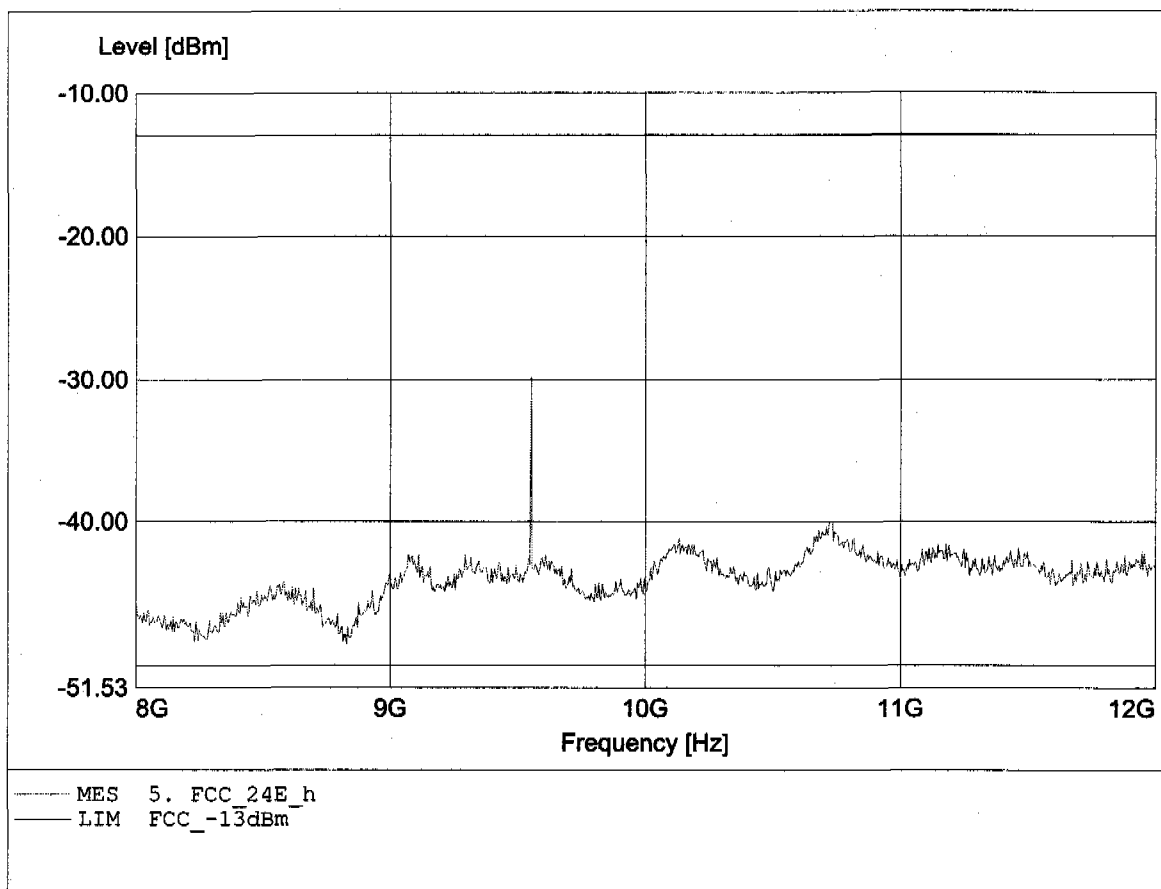


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 17.447GHz, Pmax: -31.85dBm, RBW: 1MHz

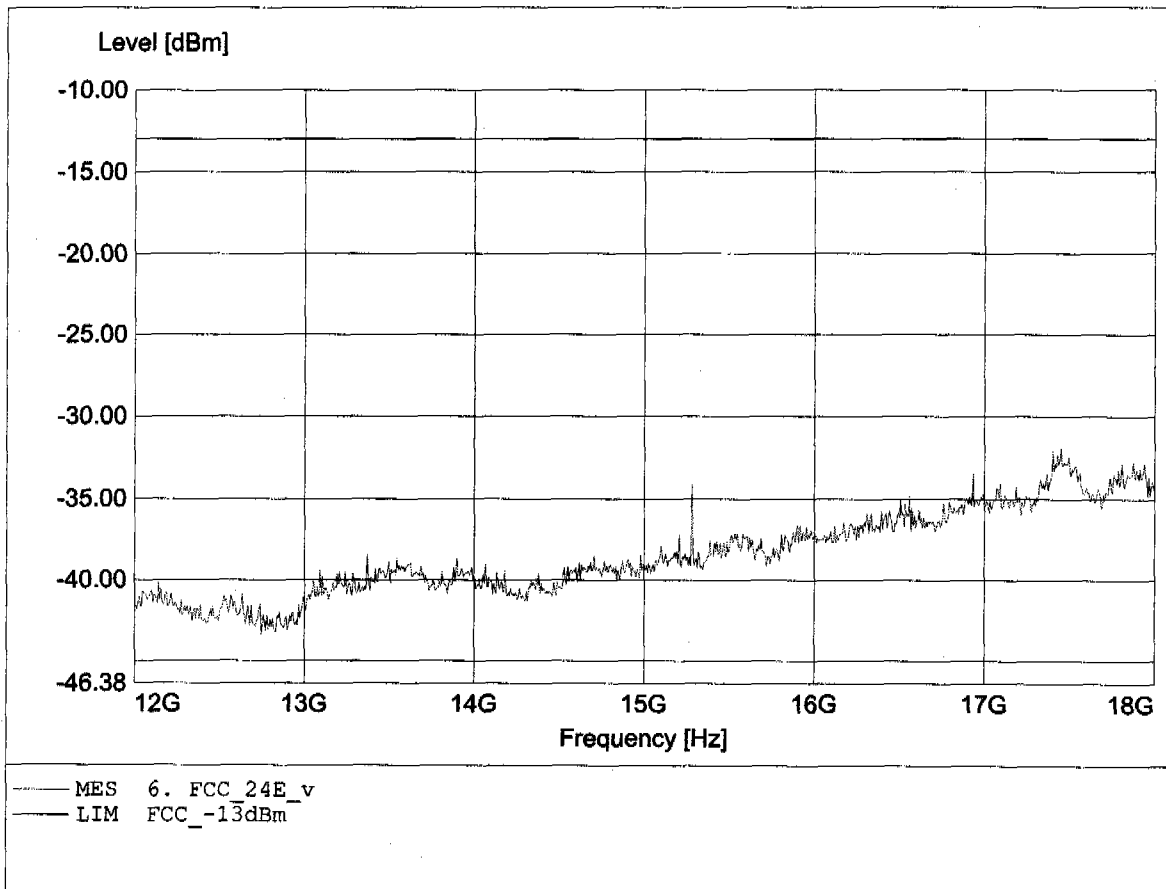


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 15.280GHz, Pmax: -31.02dBm, RBW: 1MHz

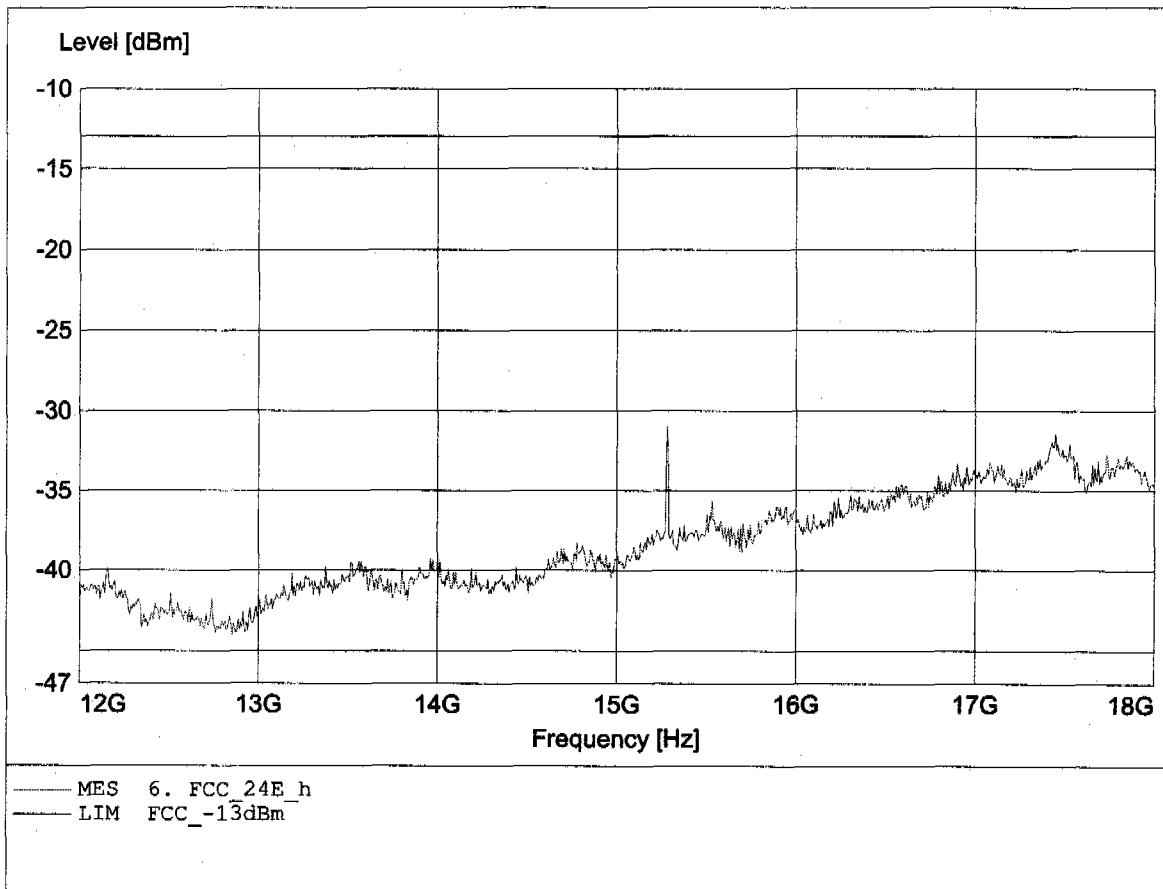


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.462GHz, Pmax: -23.82dBm, RBW: 1MHz

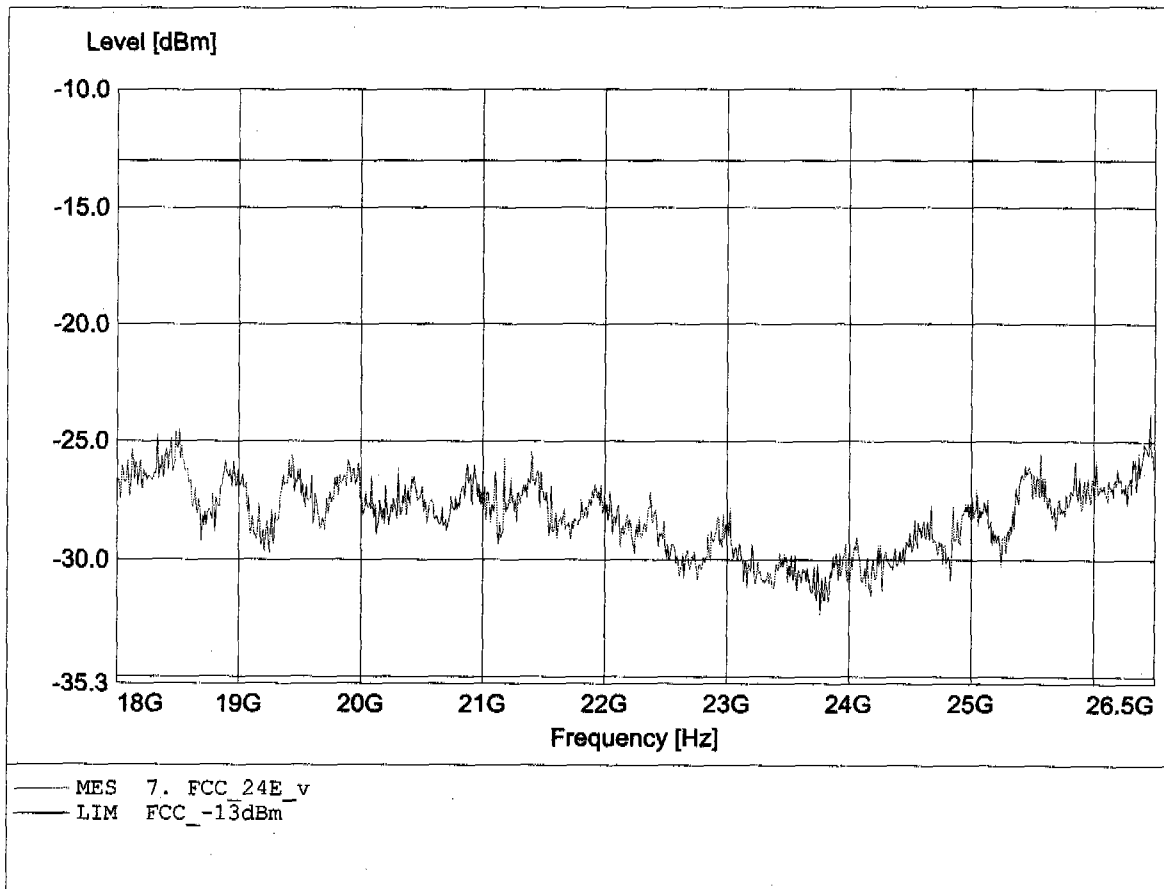

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 18.491GHz, Pmax: -24.98dBm, RBW: 1MHz

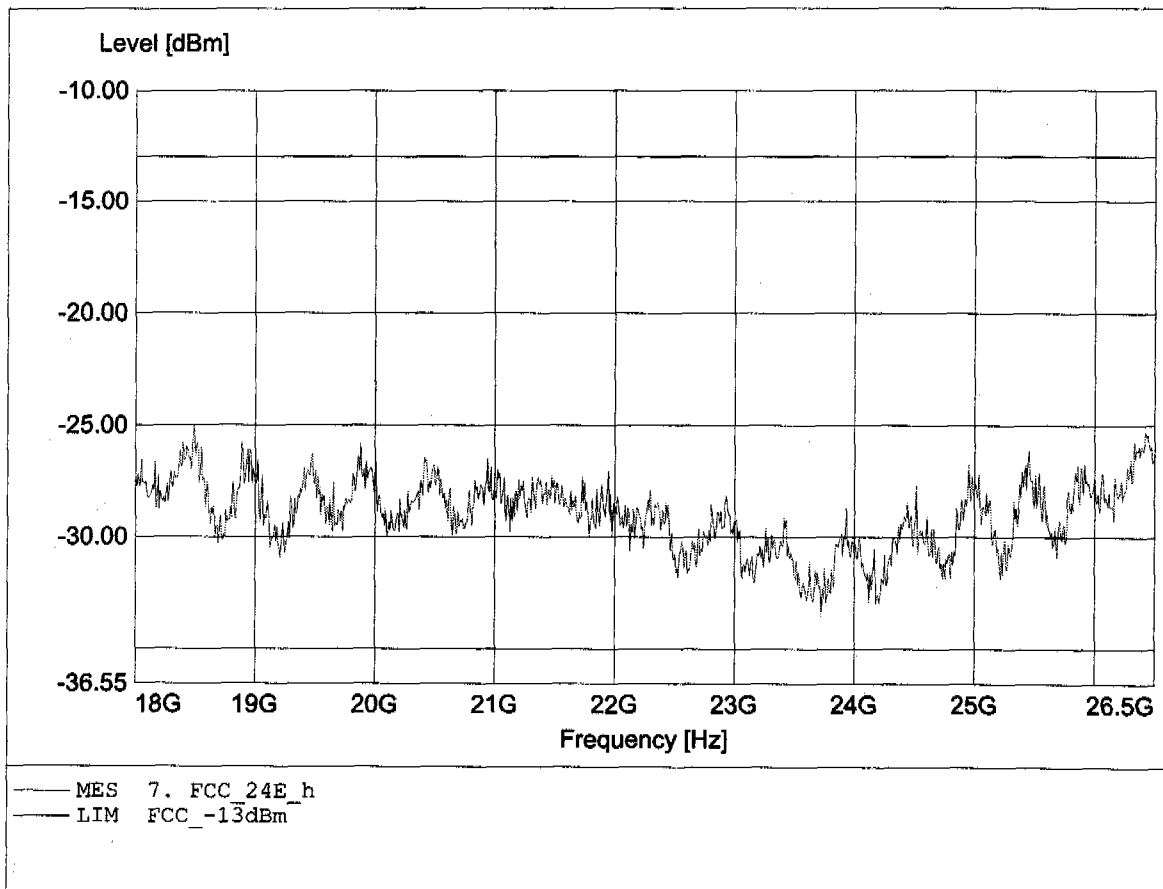




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 36.044MHz, Pmax: -52.85dBm, RBW: 1MHz

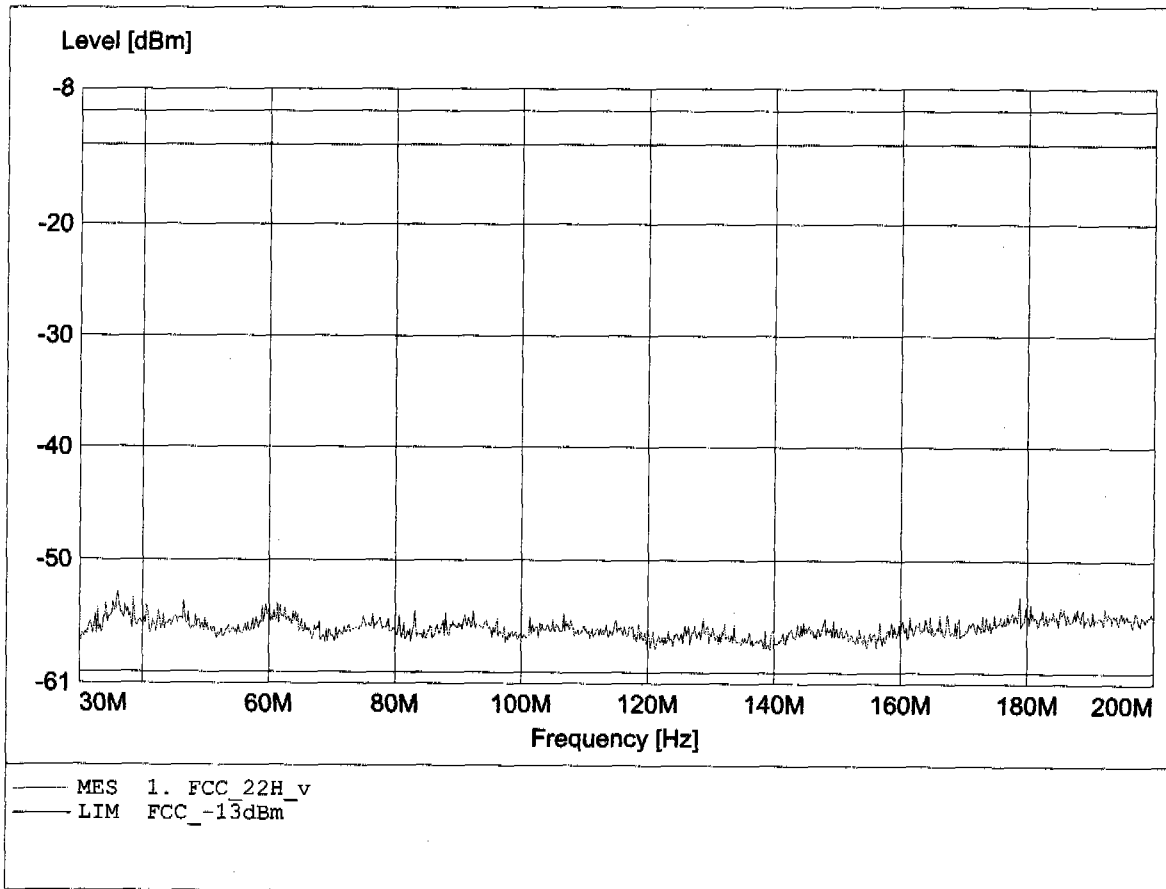


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 91.578MHz, Pmax: -52.79dBm, RBW: 1MHz

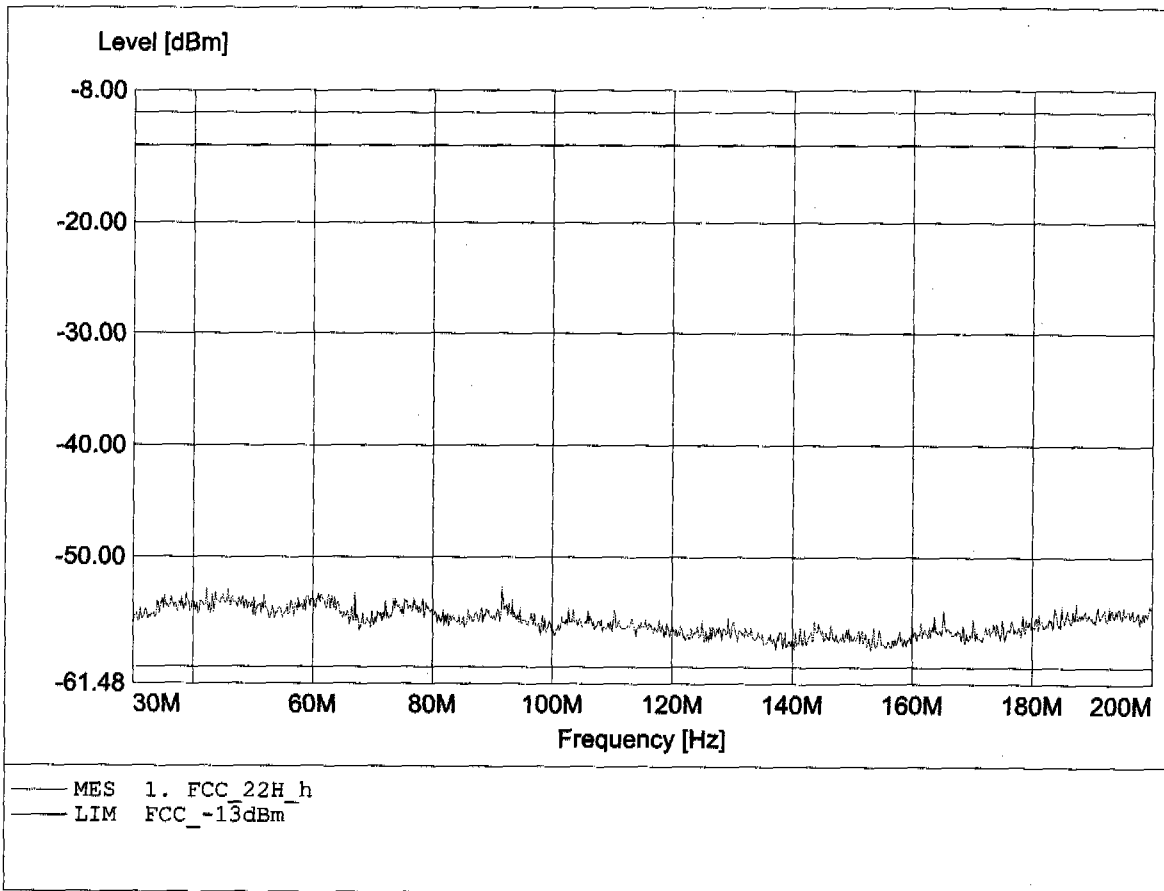


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 823.994MHz, Pmax: -31.19dBm, RBW: 1MHz

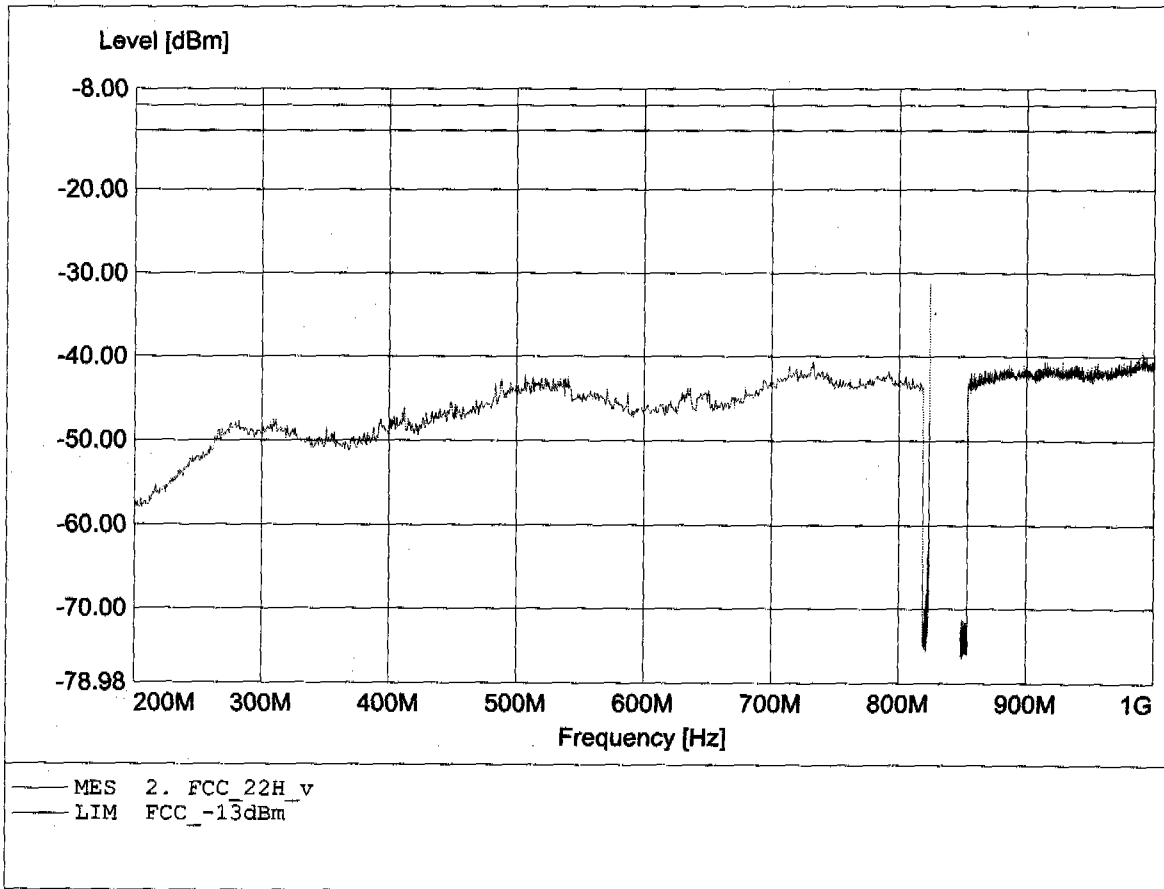


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 823.994MHz, Pmax: -32.08dBm, RBW: 1MHz

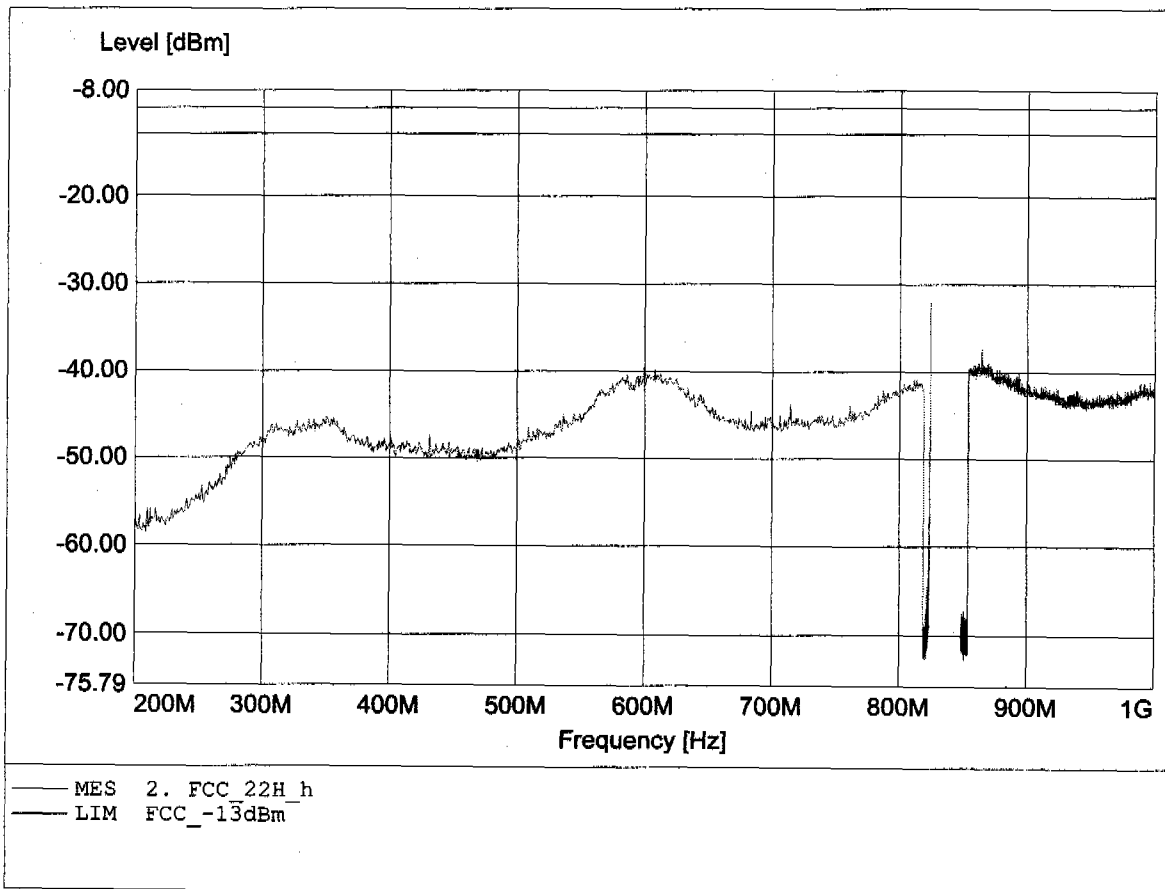


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.627GHz, Pmax: -22.62dBm, RBW: 1MHz

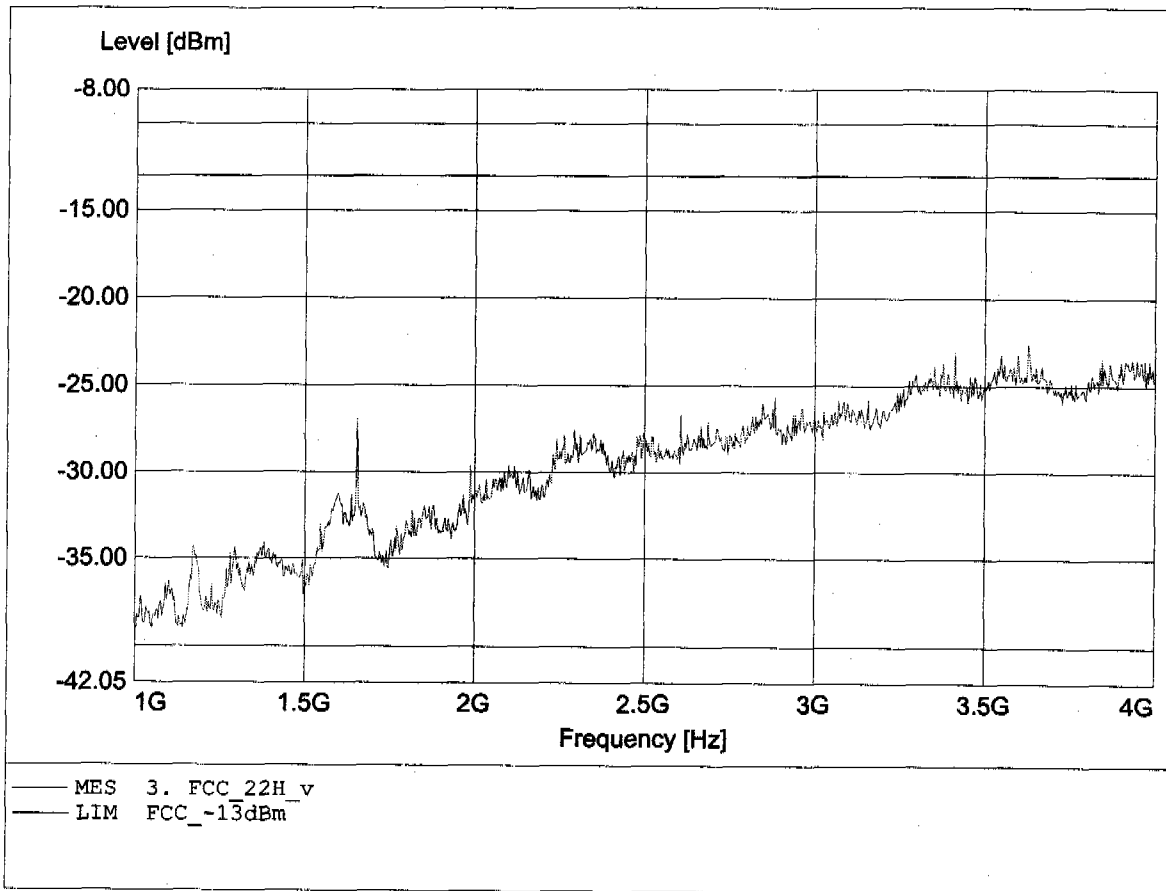


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.653GHz, Pmax: -22.48dBm, RBW: 1MHz

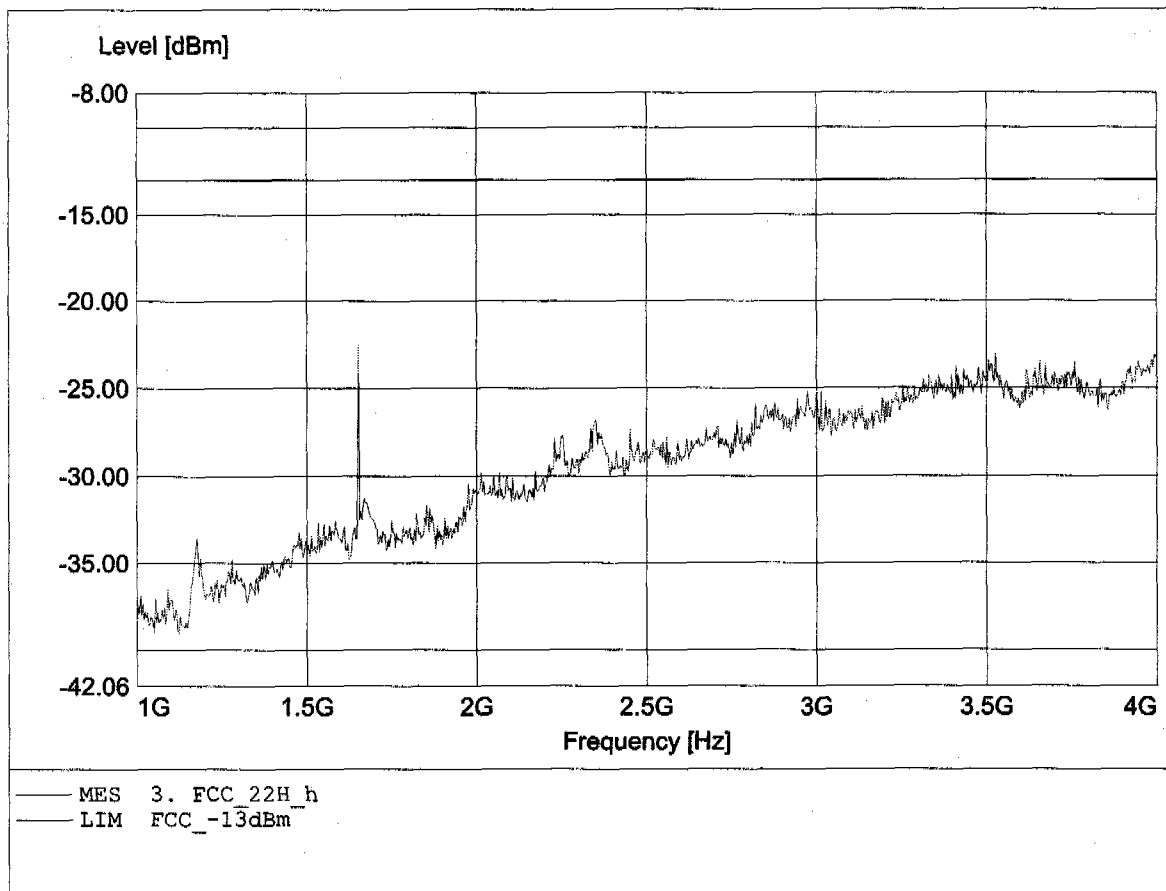


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.418GHz, Pmax: -38.28dBm, RBW: 1MHz

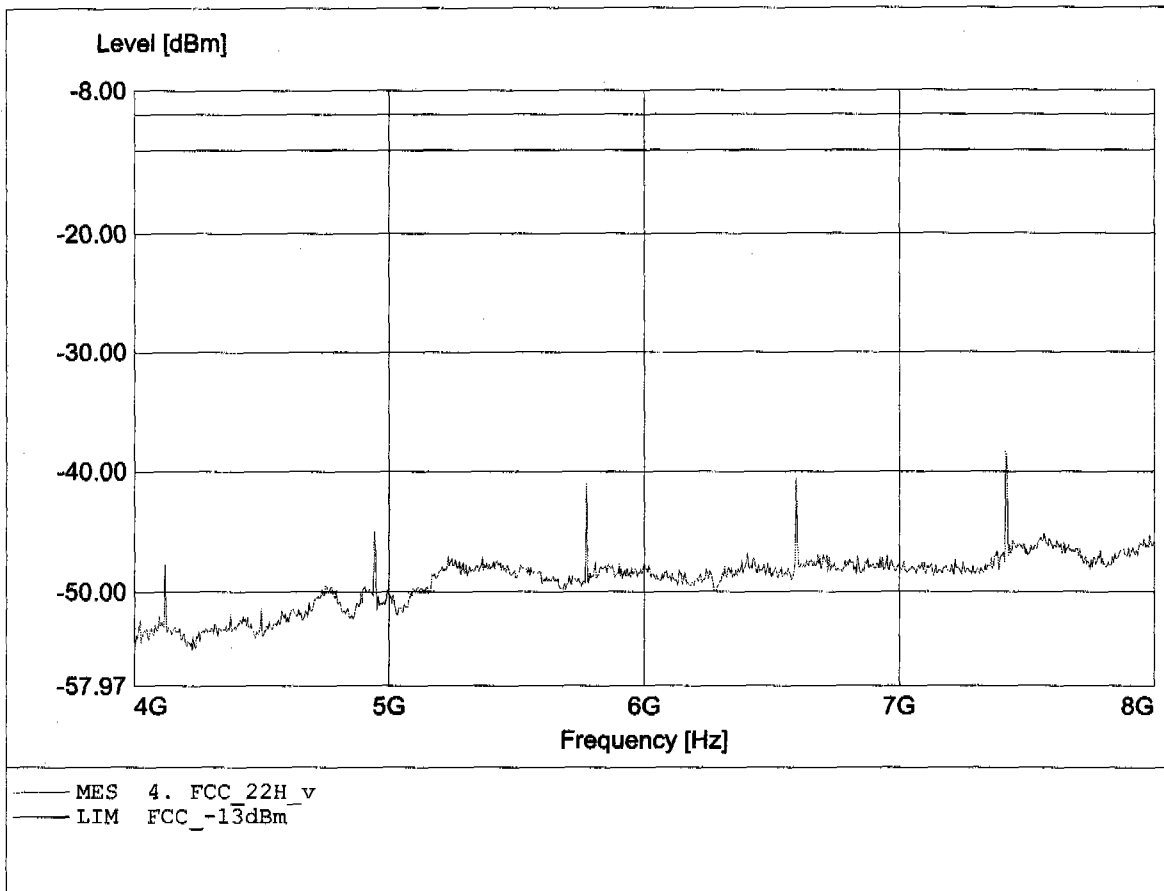

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 6.596GHz, Pmax: -40.52dBm, RBW: 1MHz

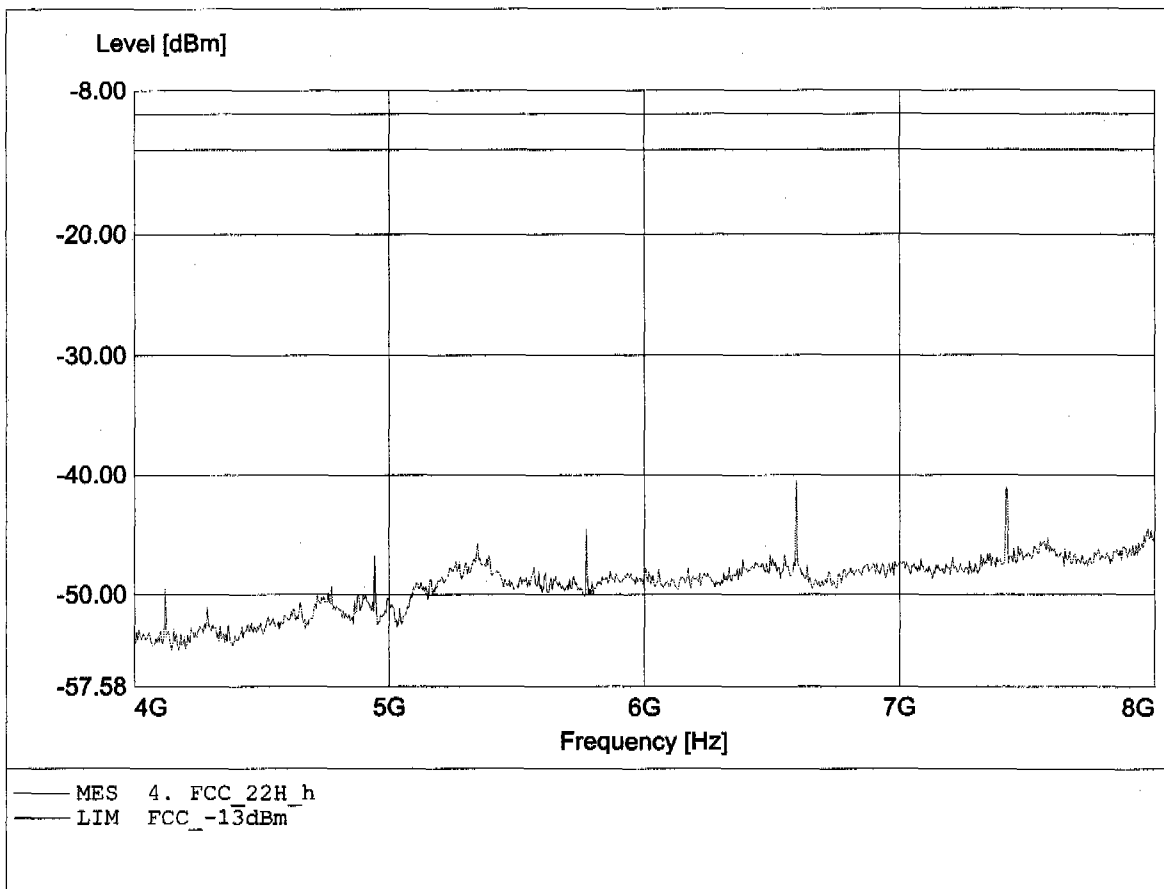




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.729GHz, Pmax: -40.50dBm, RBW: 1MHz

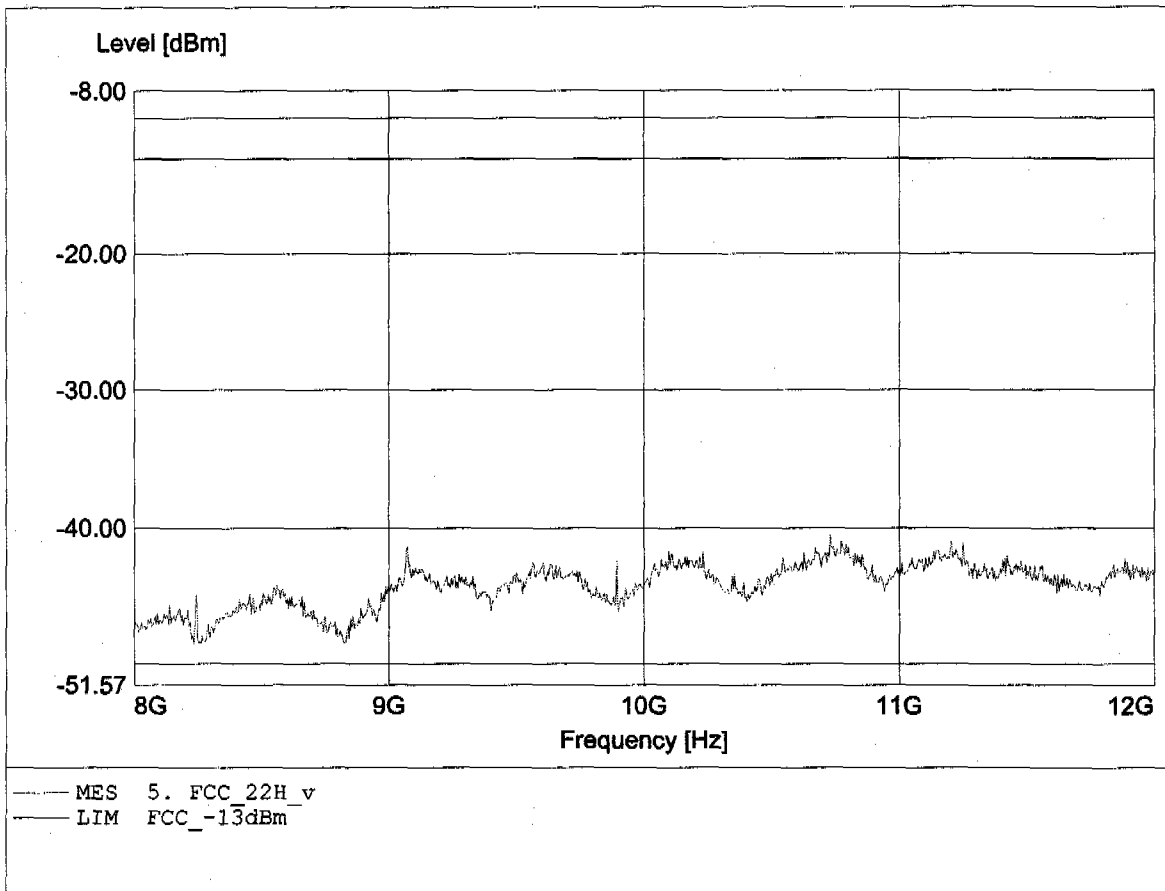


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.747GHz, Pmax: -40.00dBm, RBW: 1MHz

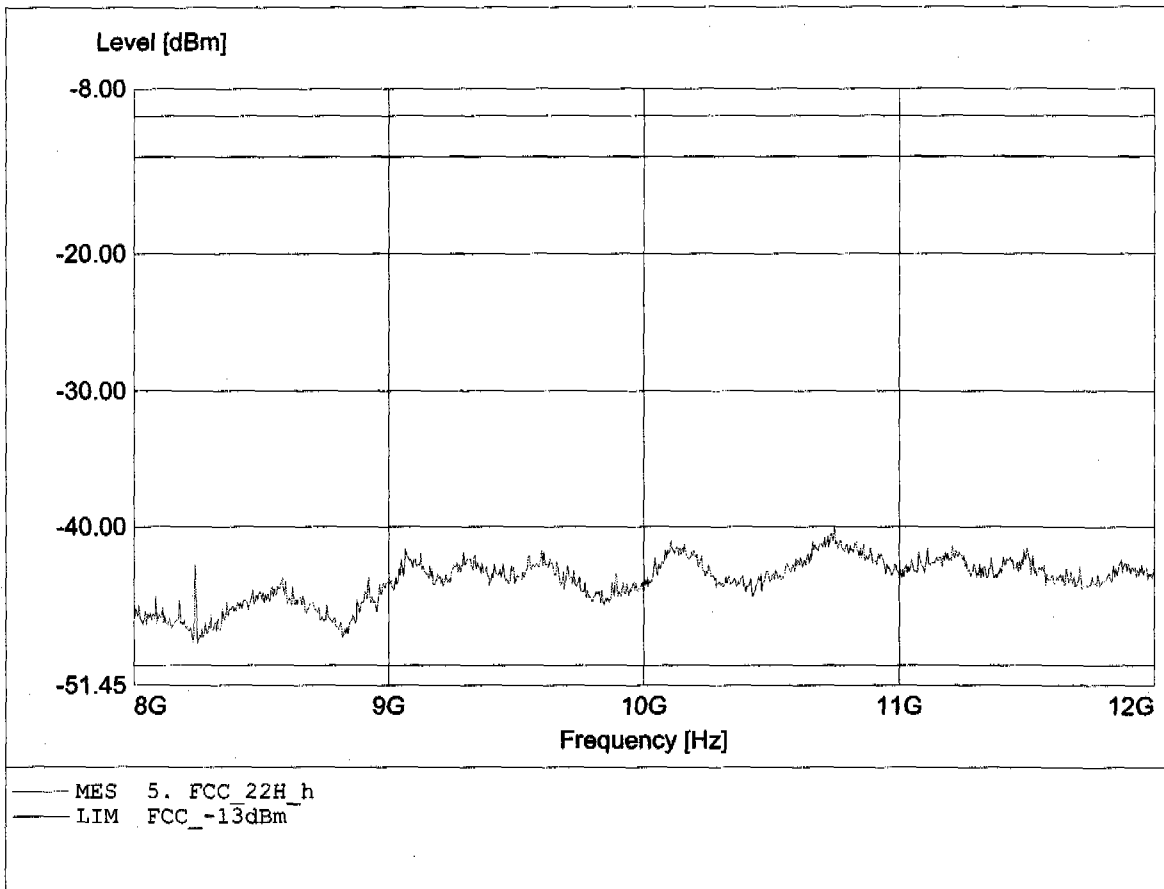


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 191.689MHz, Pmax: -53.48dBm, RBW: 1MHz

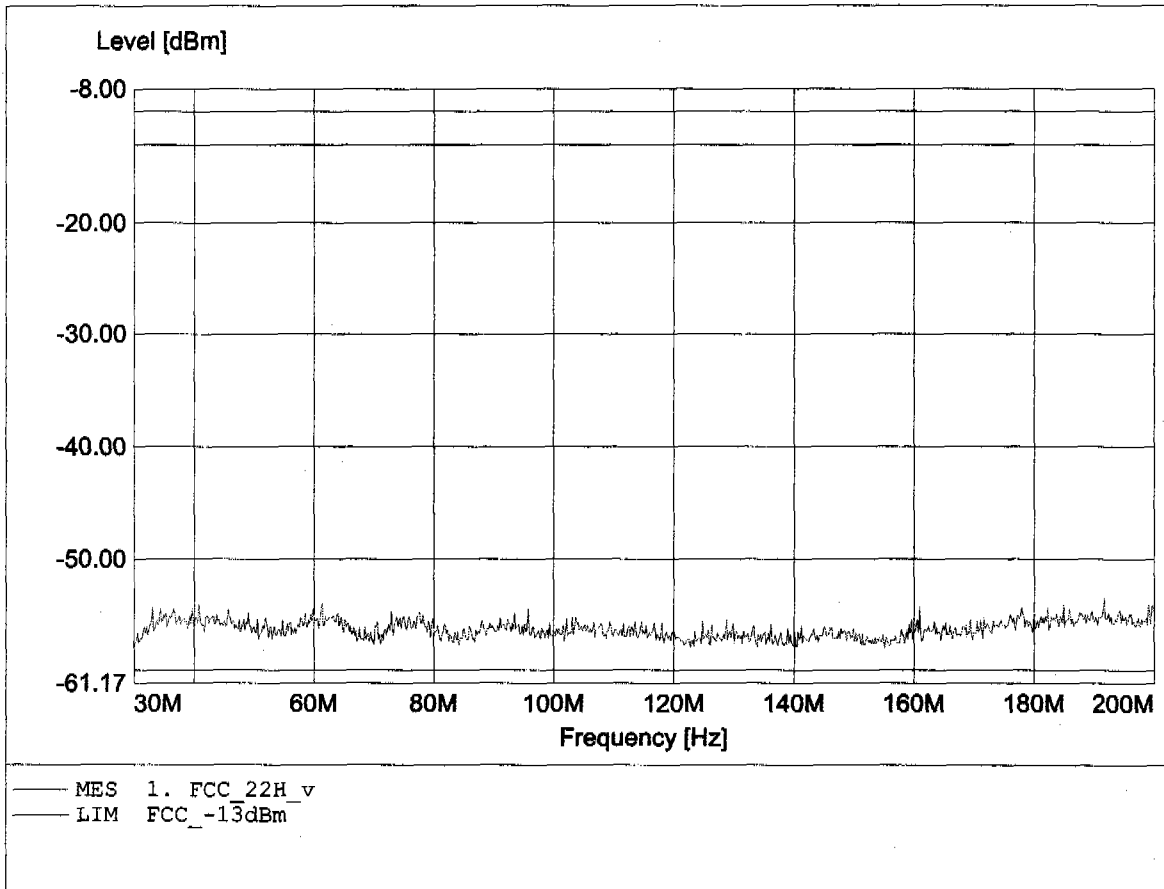


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 43.789MHz, Pmax: -52.30dBm, RBW: 1MHz

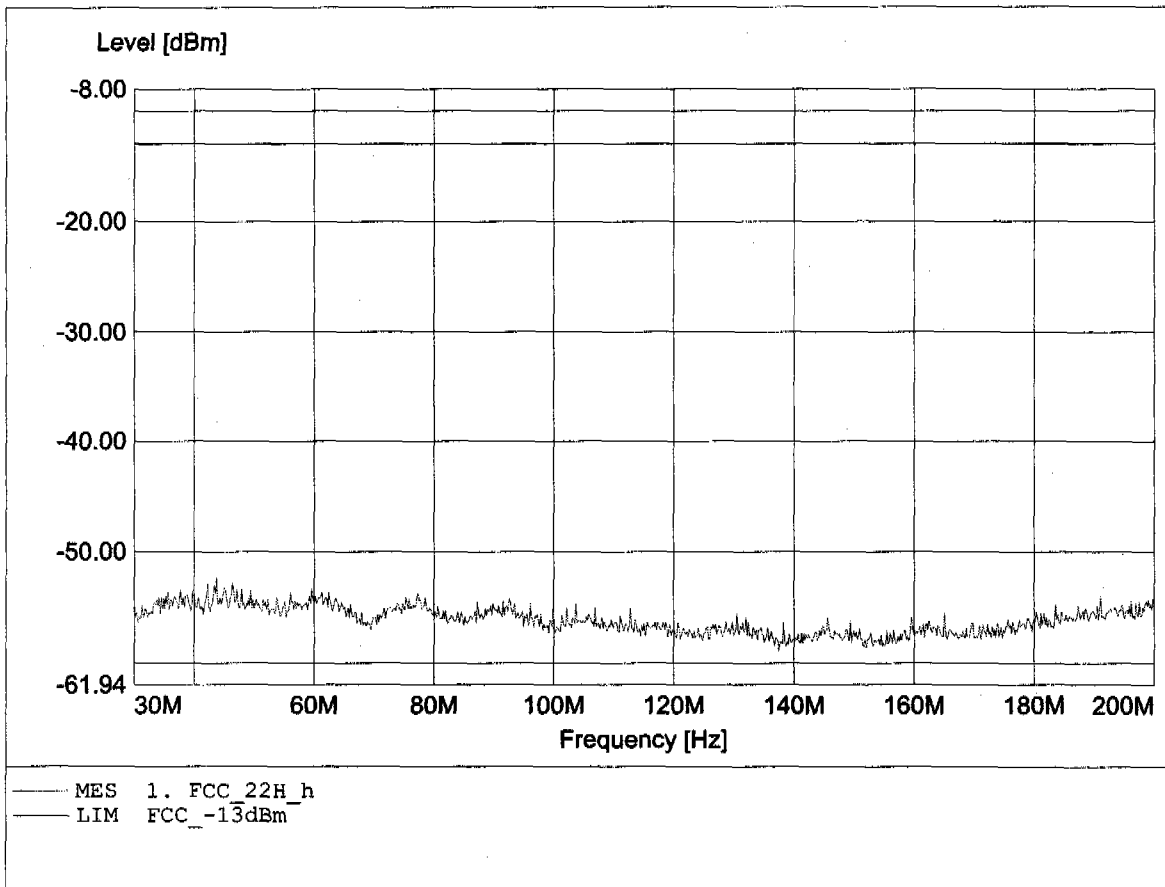


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 929.109MHz, Pmax: -38.83dBm, RBW: 1MHz

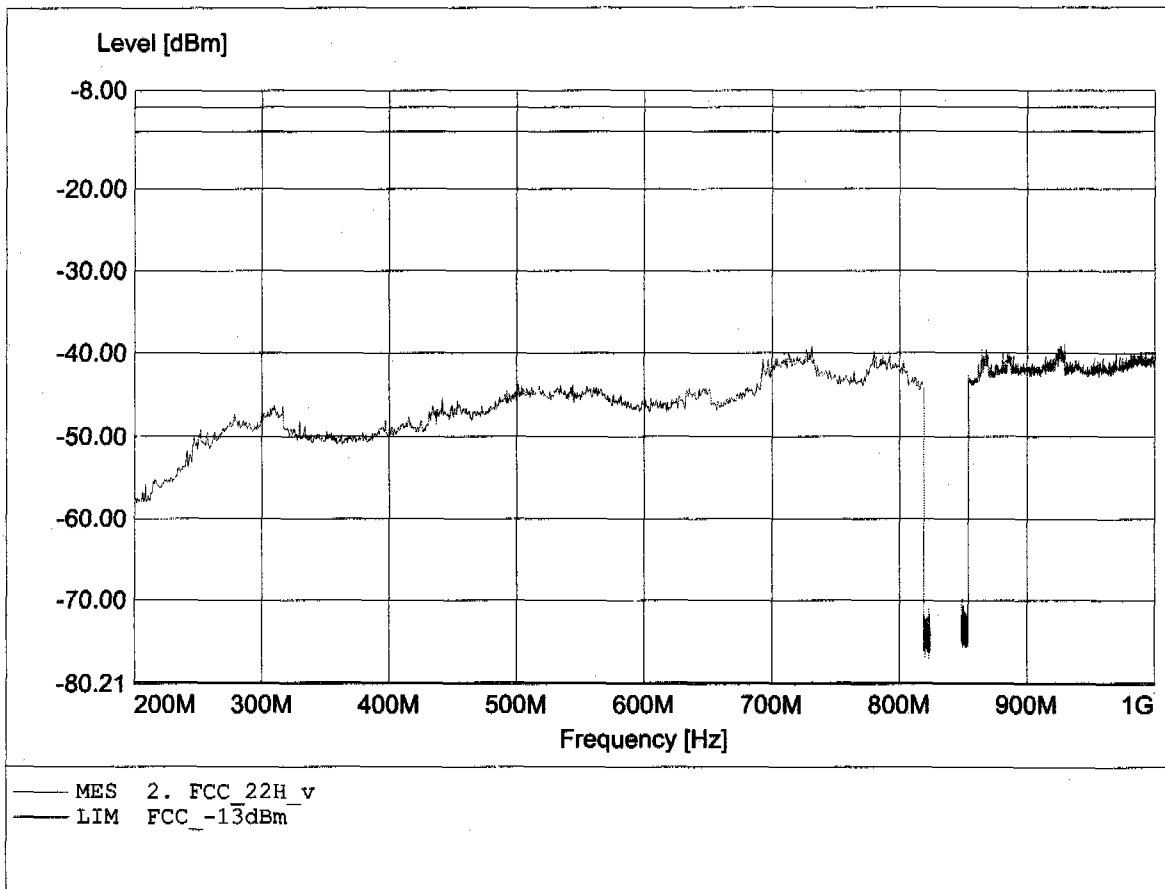


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 855.136MHz, Pmax: -38.41dBm, RBW: 1MHz

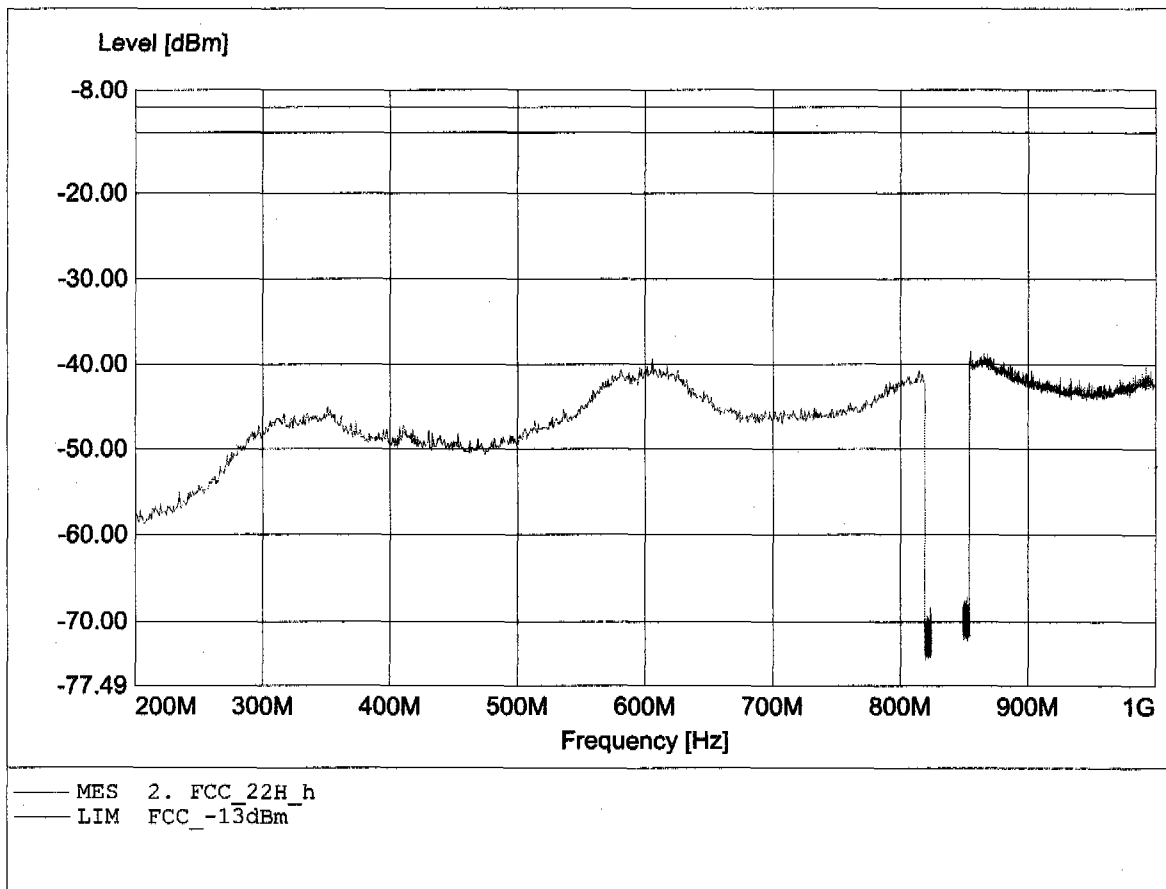


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.943GHz, Pmax: -23.04dBm, RBW: 1MHz

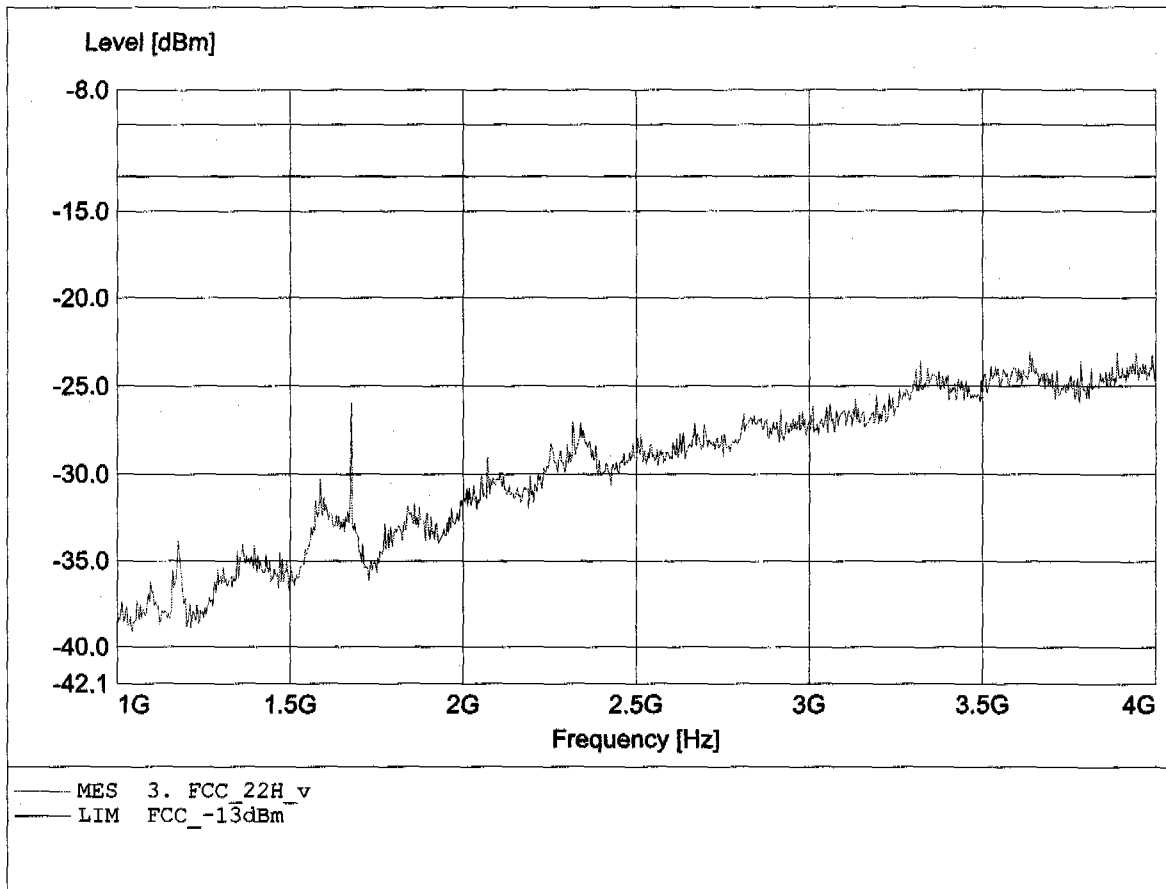

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.677GHz, Pmax: -21.75dBm, RBW: 1MHz

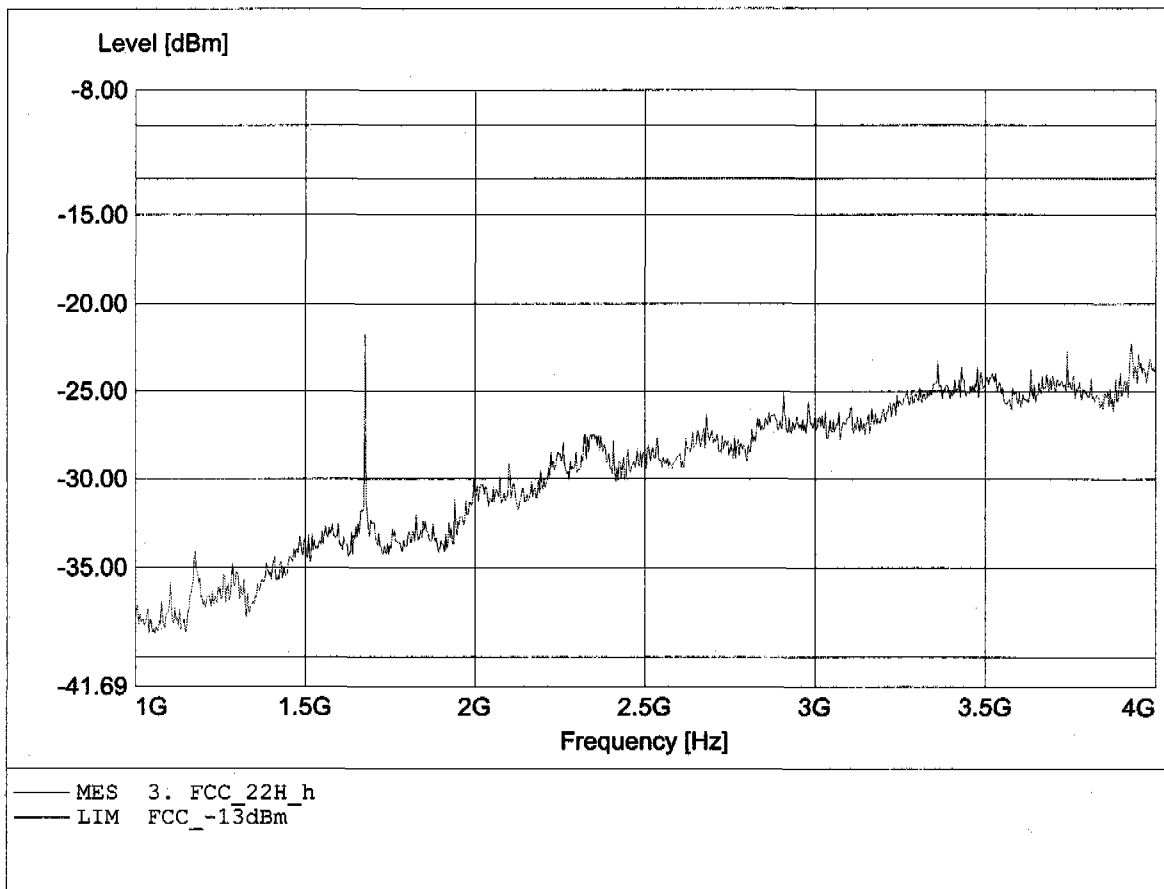




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 6.693GHz, Pmax: -38.33dBm, RBW: 1MHz

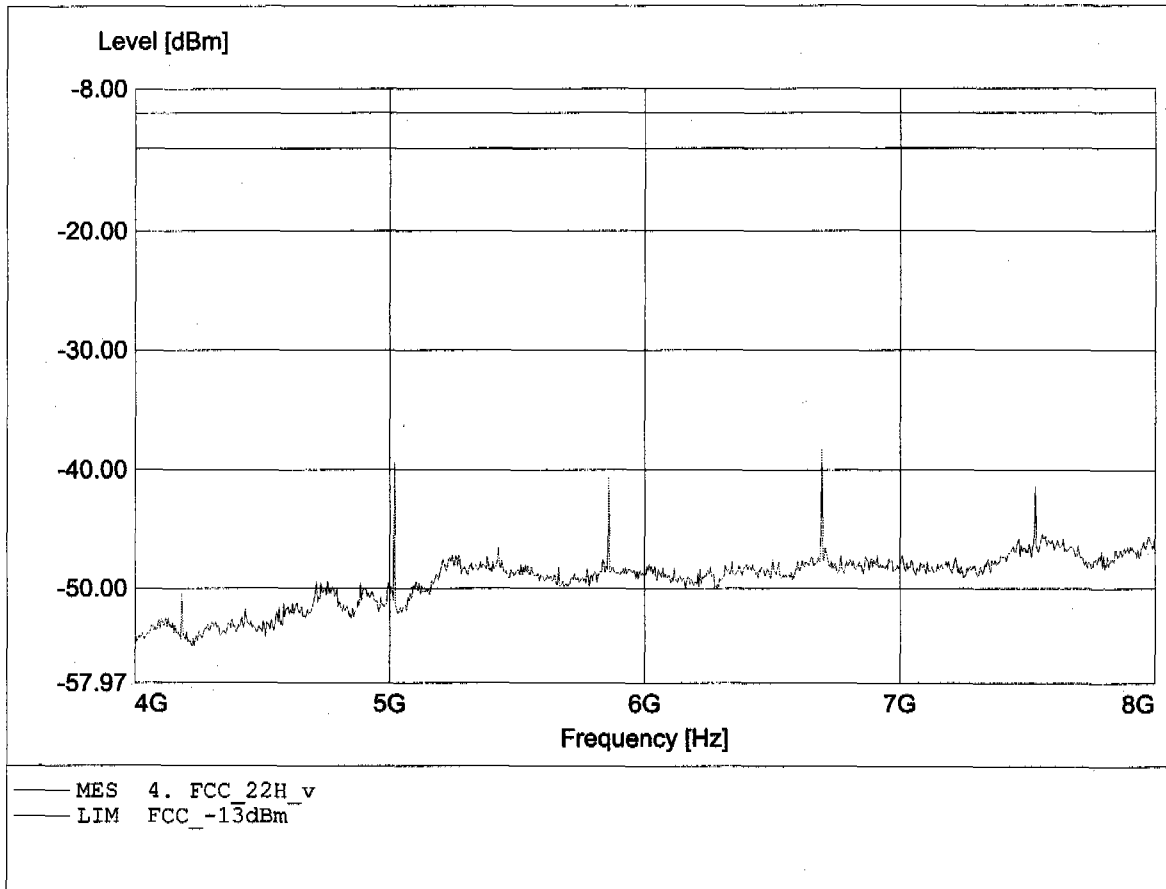


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 5.018GHz, Pmax: -41.22dBm, RBW: 1MHz

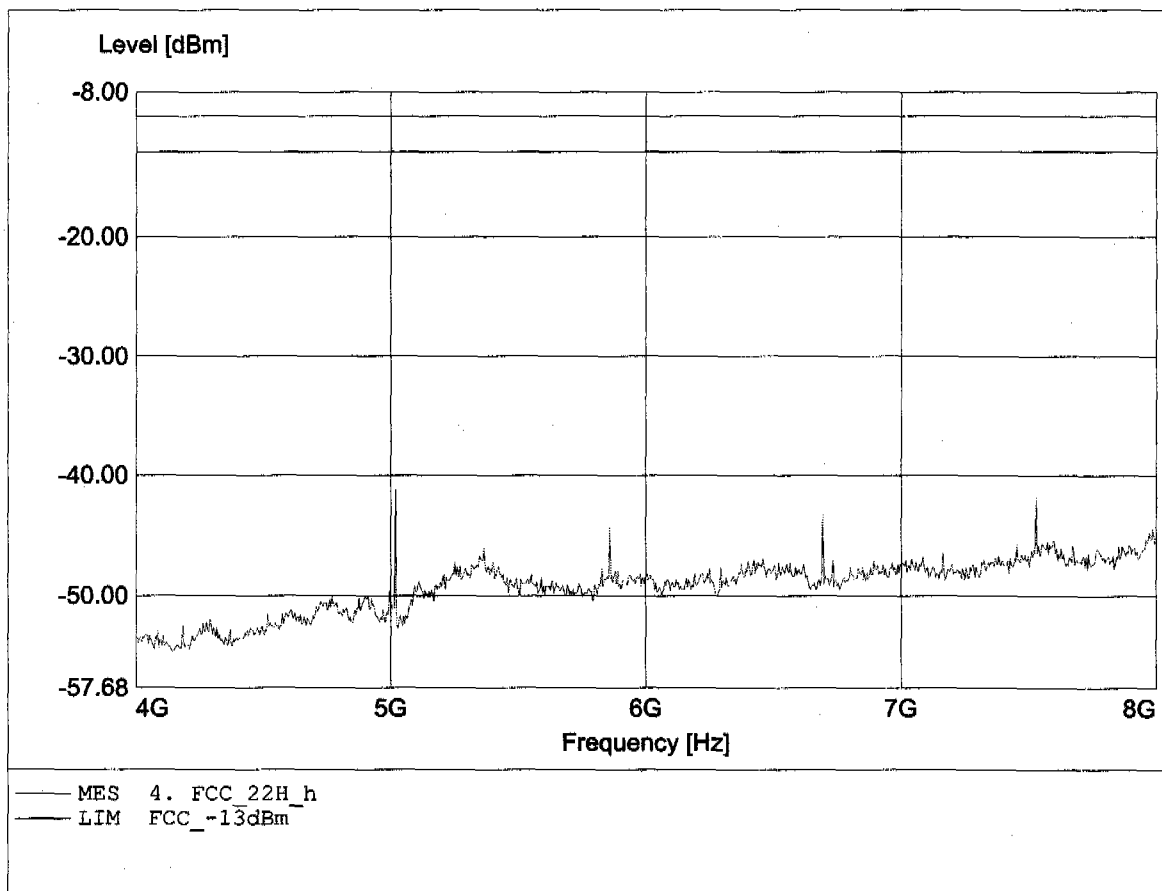


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.200GHz, Pmax: -40.07dBm, RBW: 1MHz

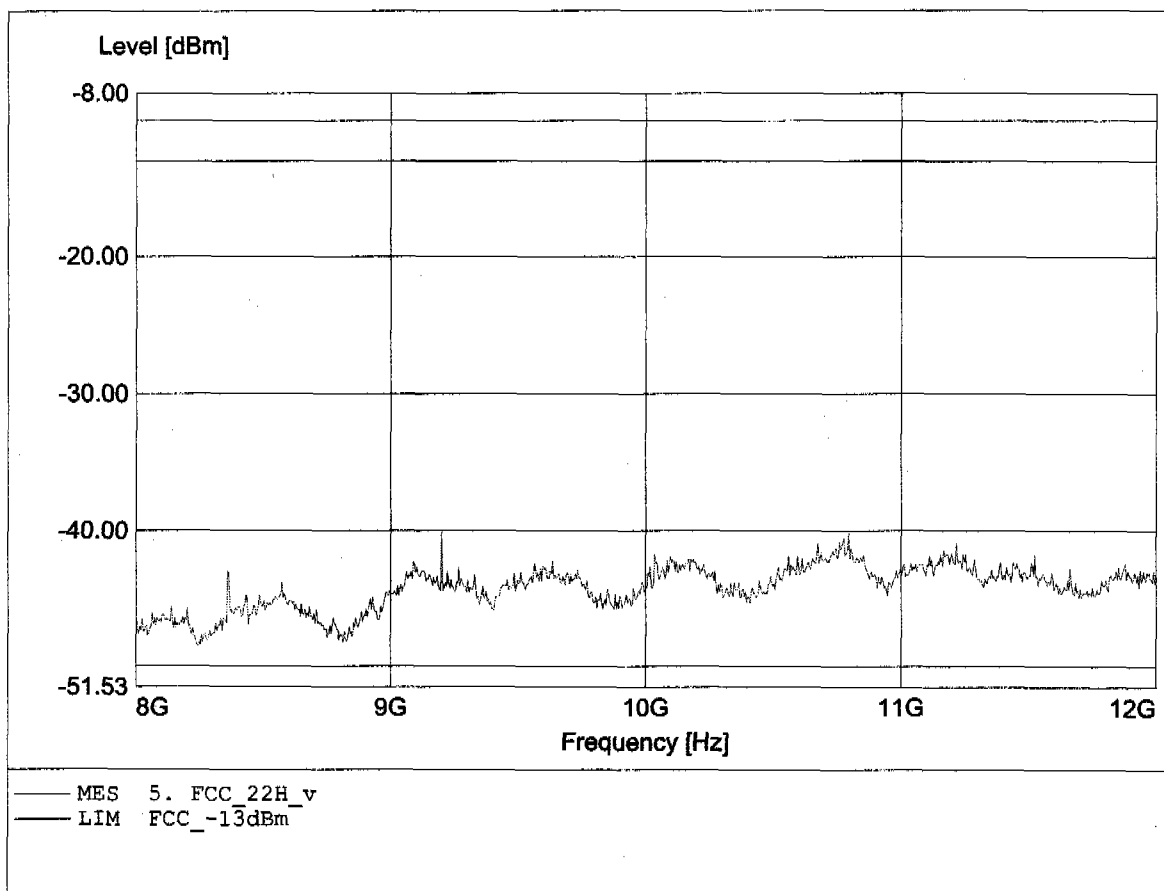


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.733GHz, Pmax: -40.15dBm, RBW: 1MHz

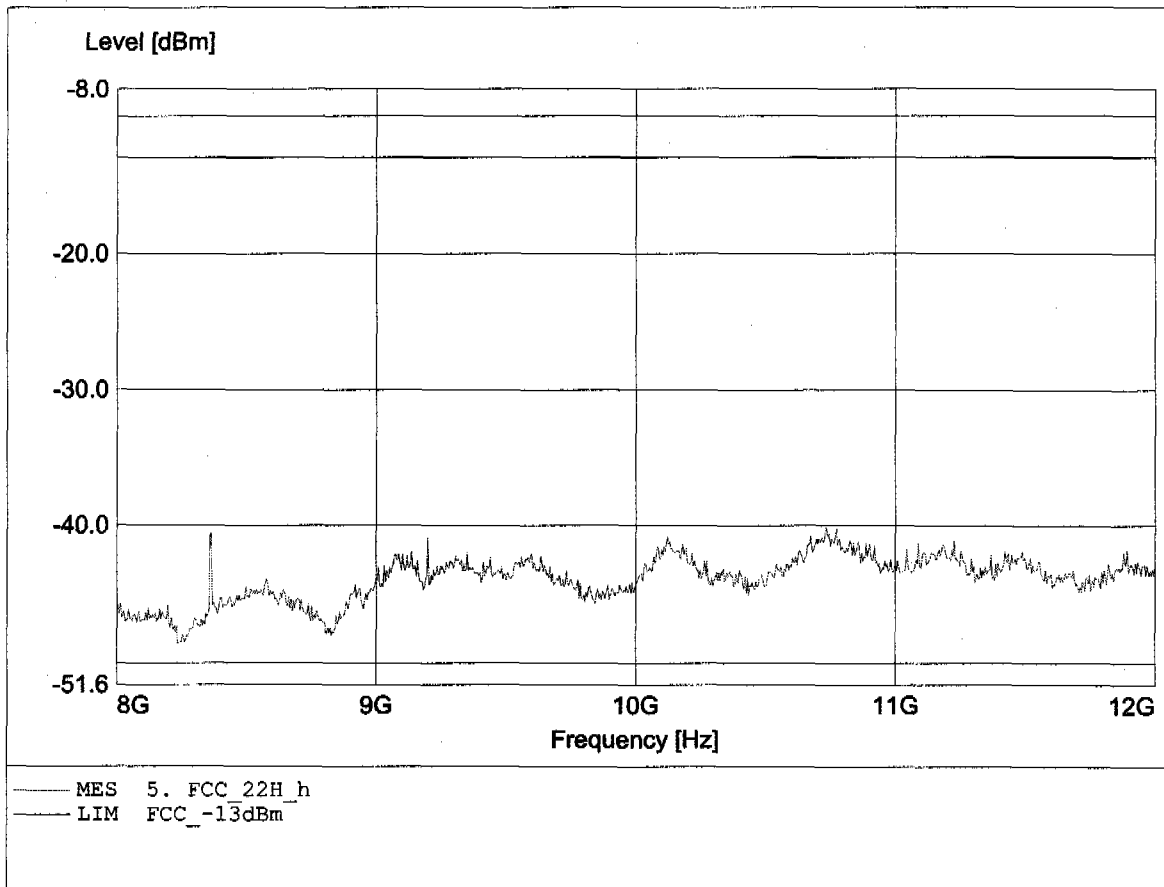


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 180.544MHz, Pmax: -53.42dBm, RBW: 1MHz

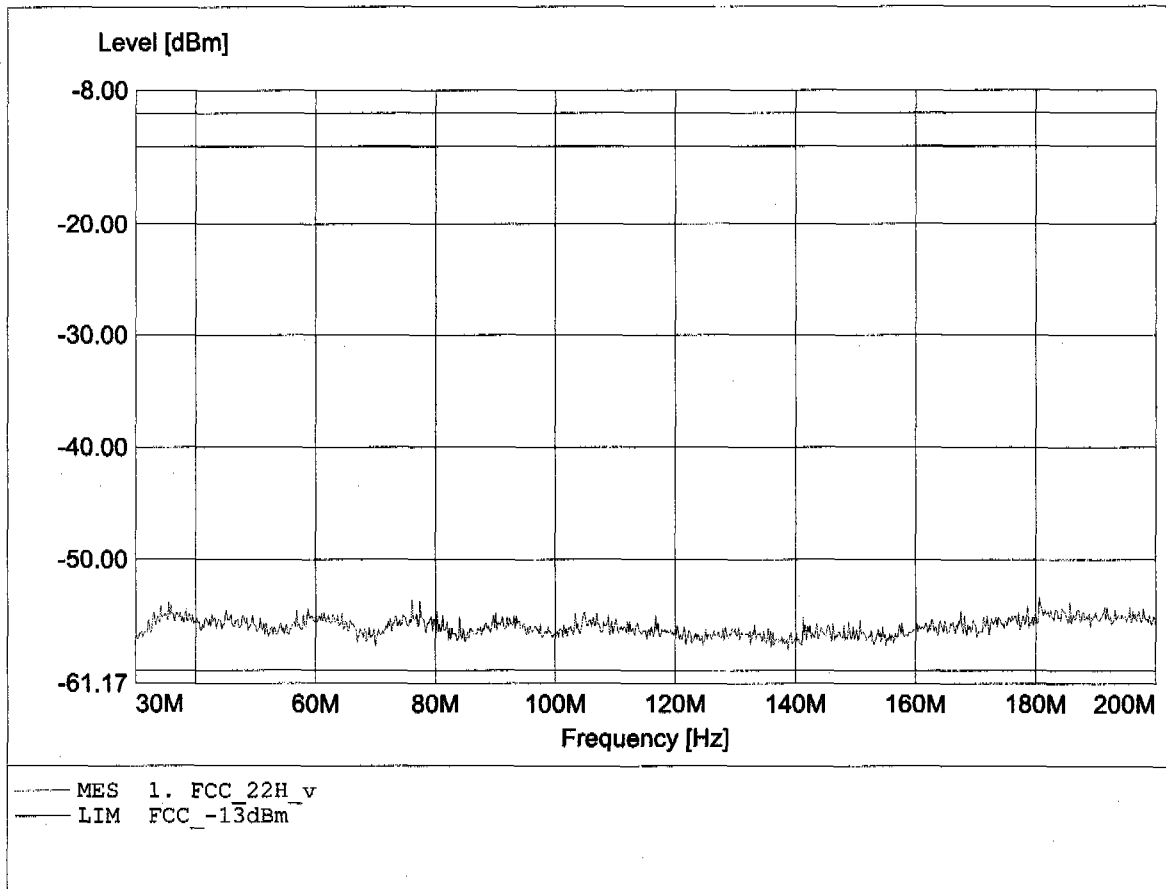


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 48.889MHz, Pmax: -53.18dBm, RBW: 1MHz

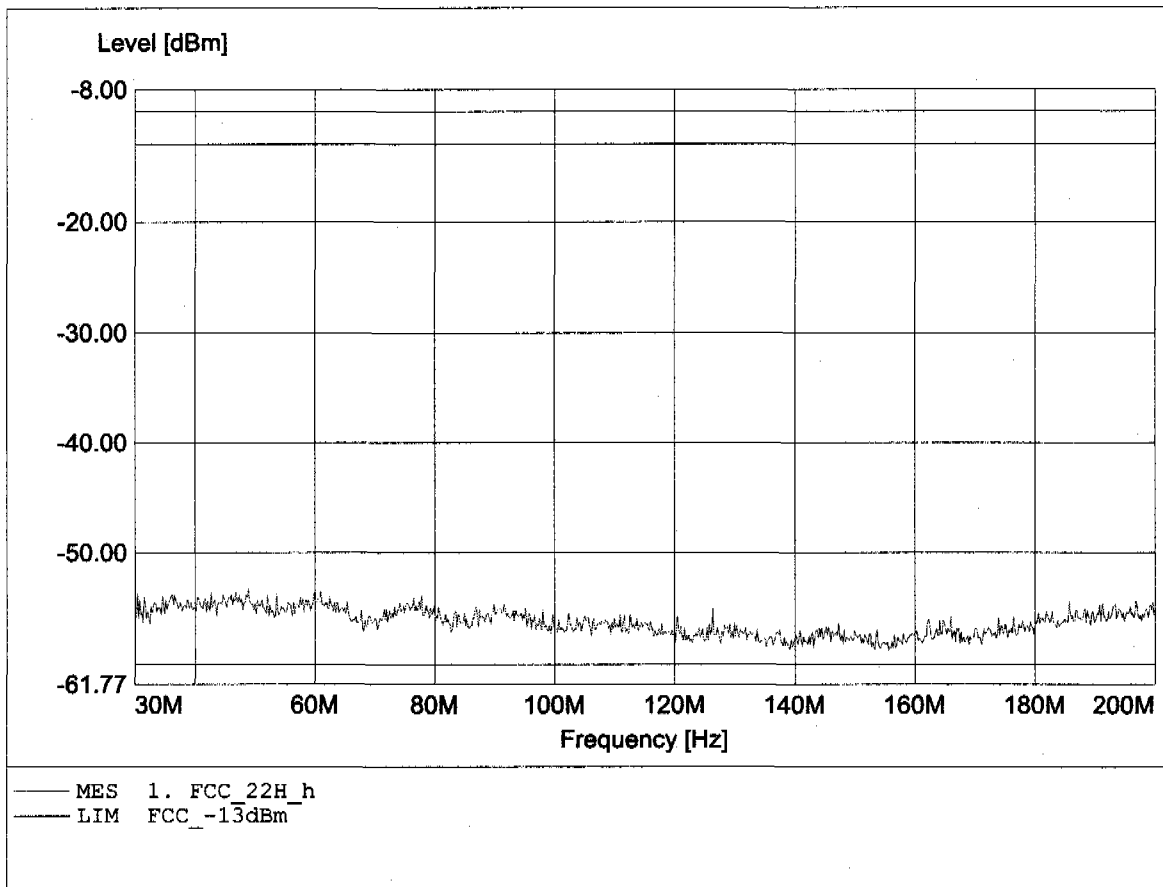


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 849.017MHz, Pmax: -23.99dBm, RBW: 1MHz

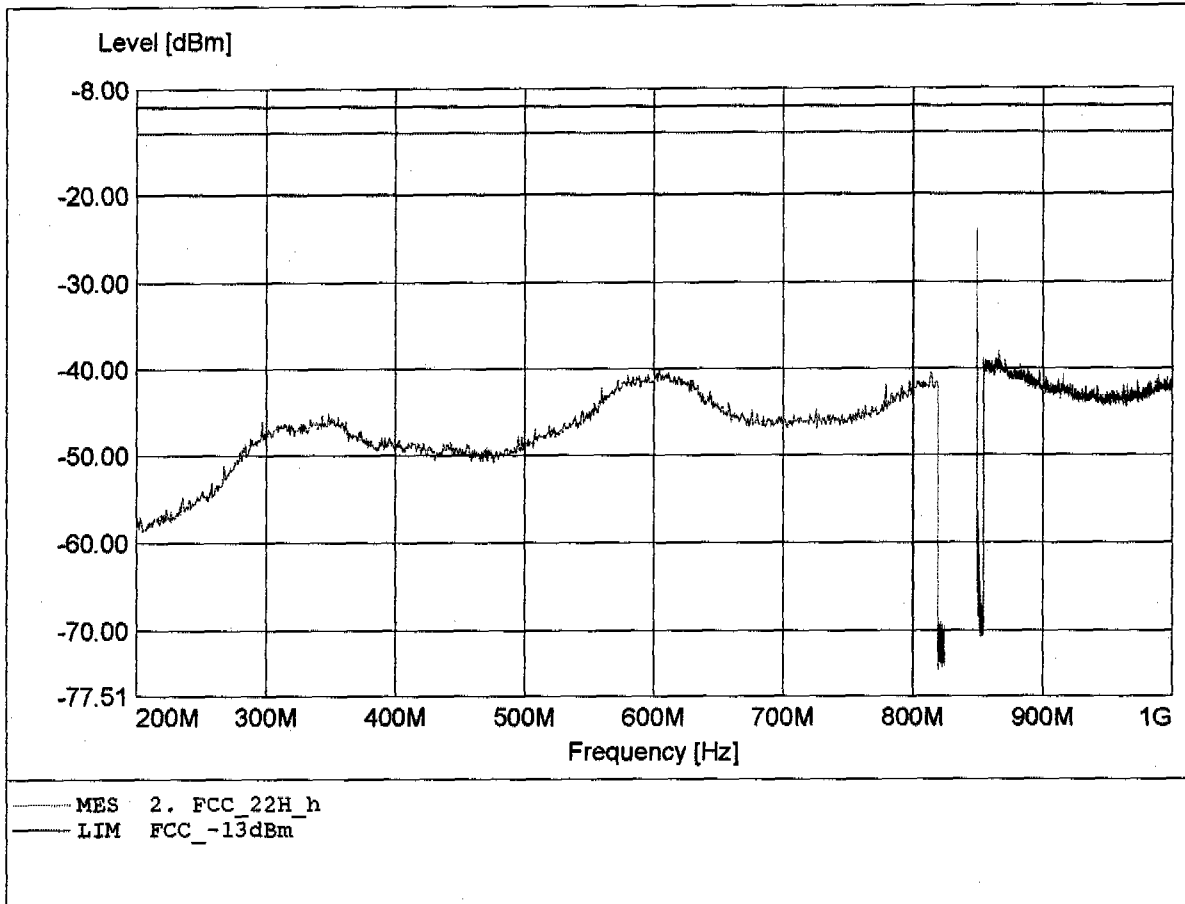

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**


Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 849.017MHz, Pmax: -25.09dBm, RBW: 1MHz

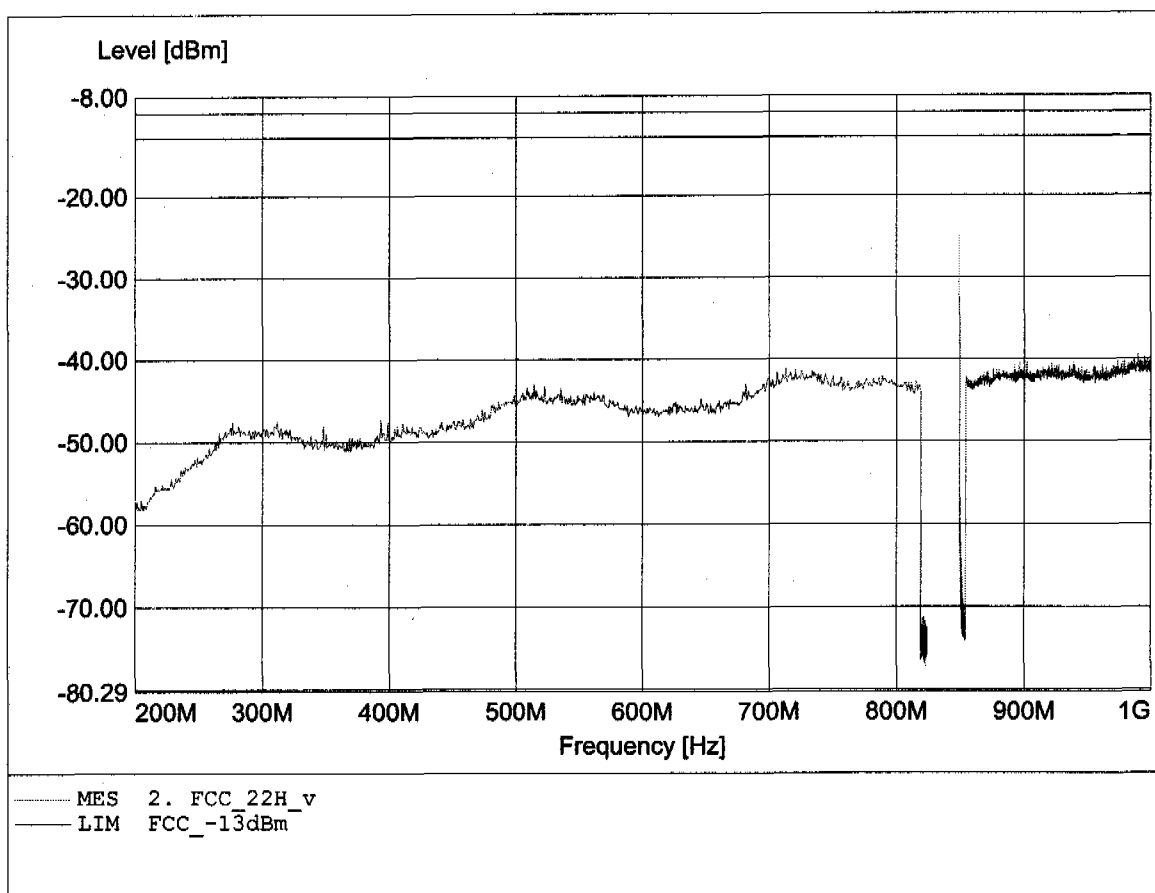




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.930GHz, Pmax: -22.99dBm, RBW: 1MHz

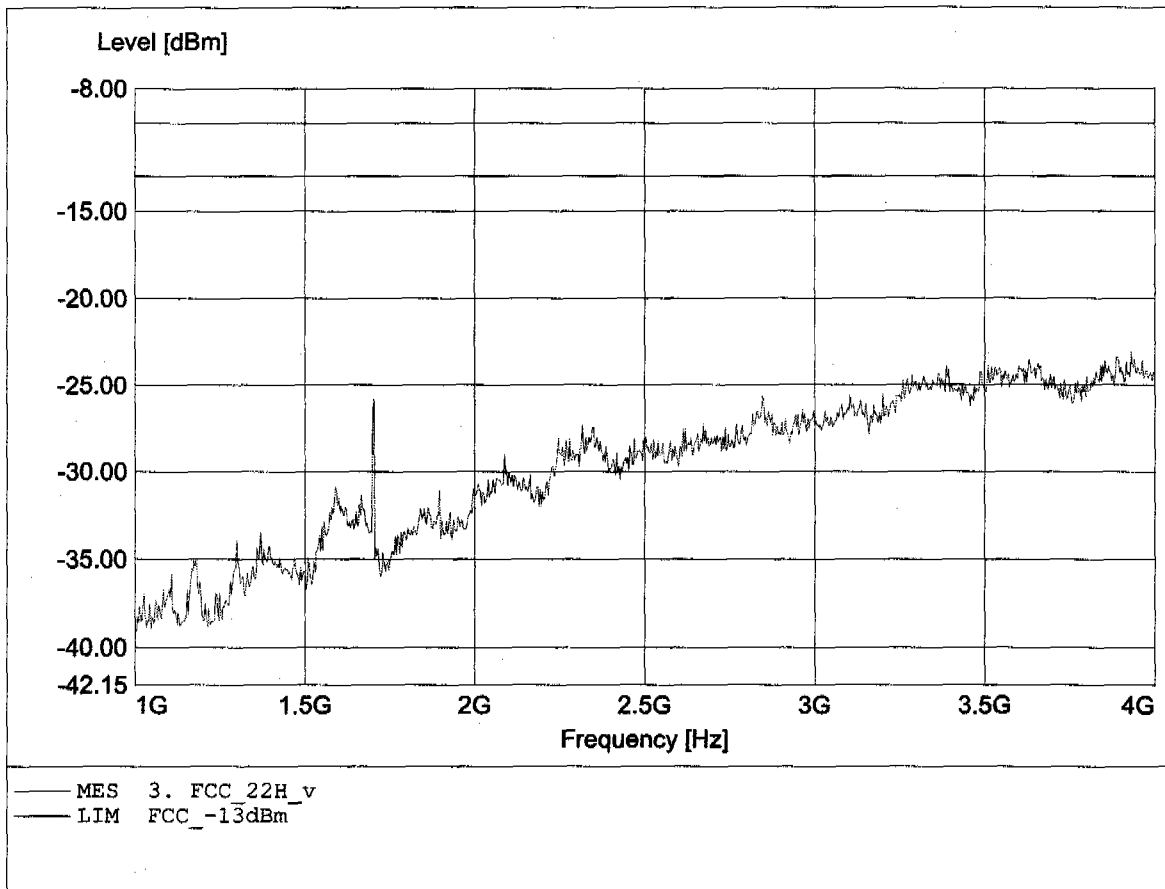


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.700GHz, Pmax: -21.71dBm, RBW: 1MHz

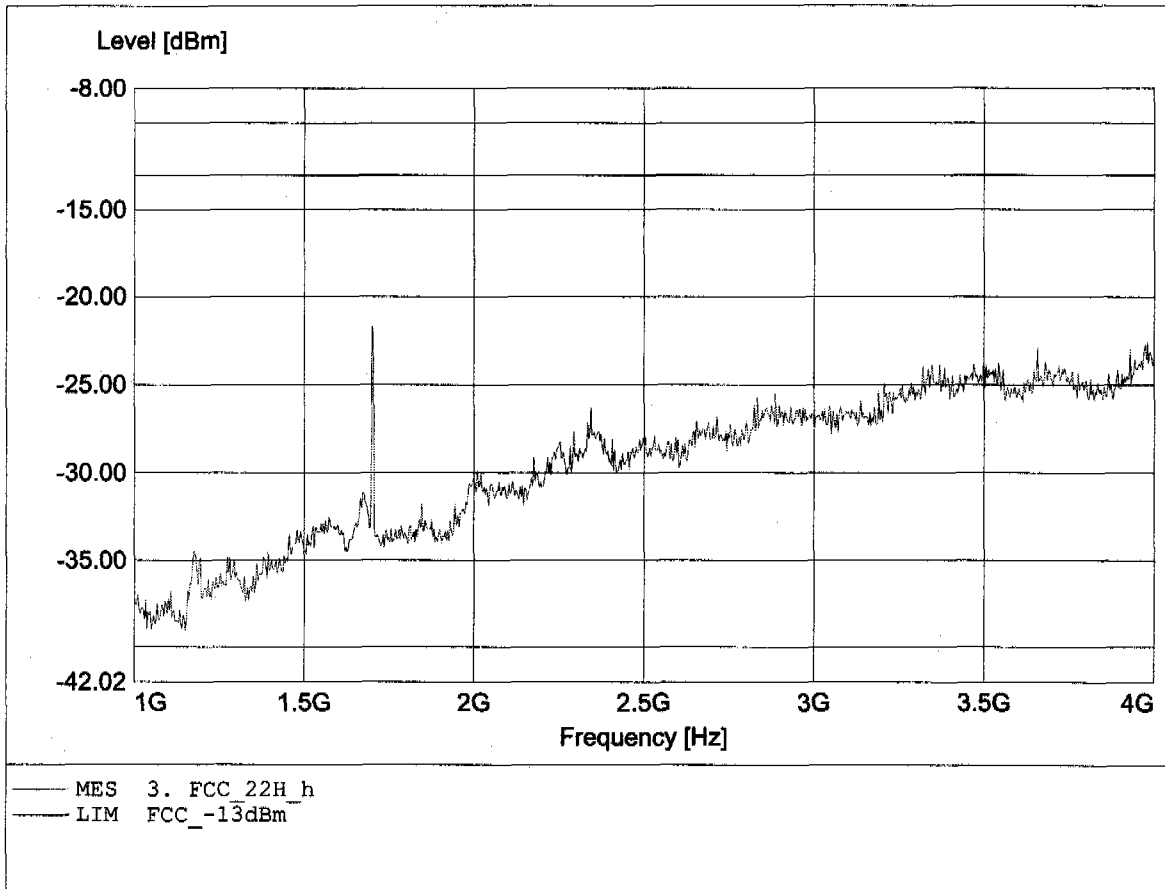


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 6.791GHz, Pmax: -37.34dBm, RBW: 1MHz

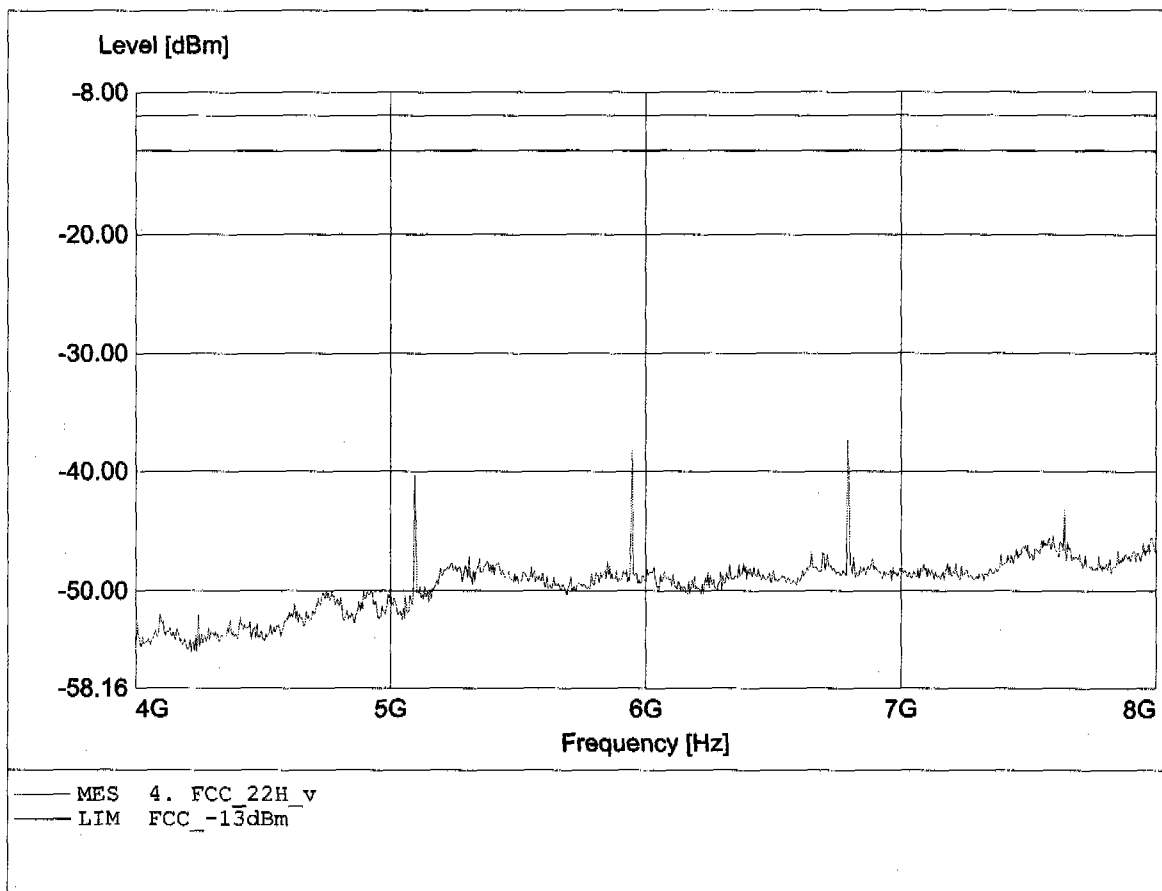


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 5.093GHz, Pmax: -39.28dBm, RBW: 1MHz

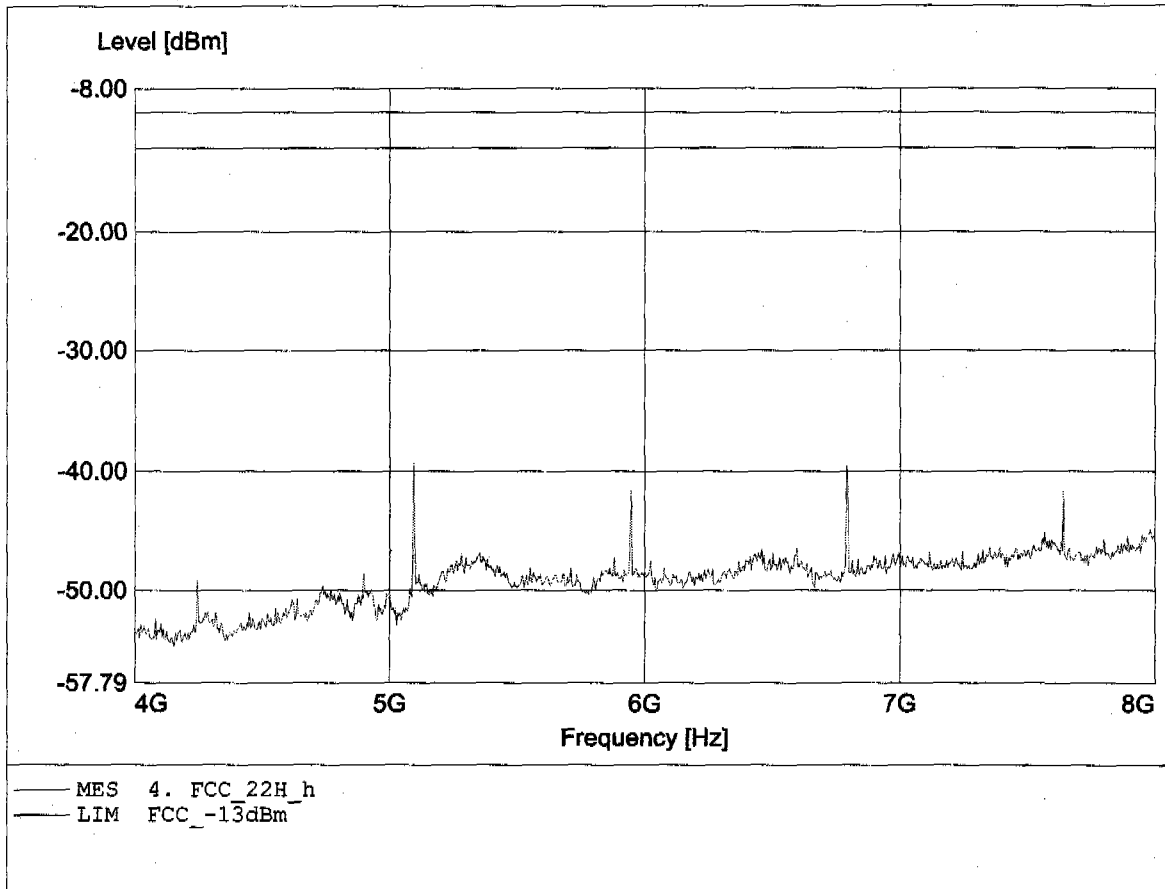


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.680GHz, Pmax: -40.37dBm, RBW: 1MHz

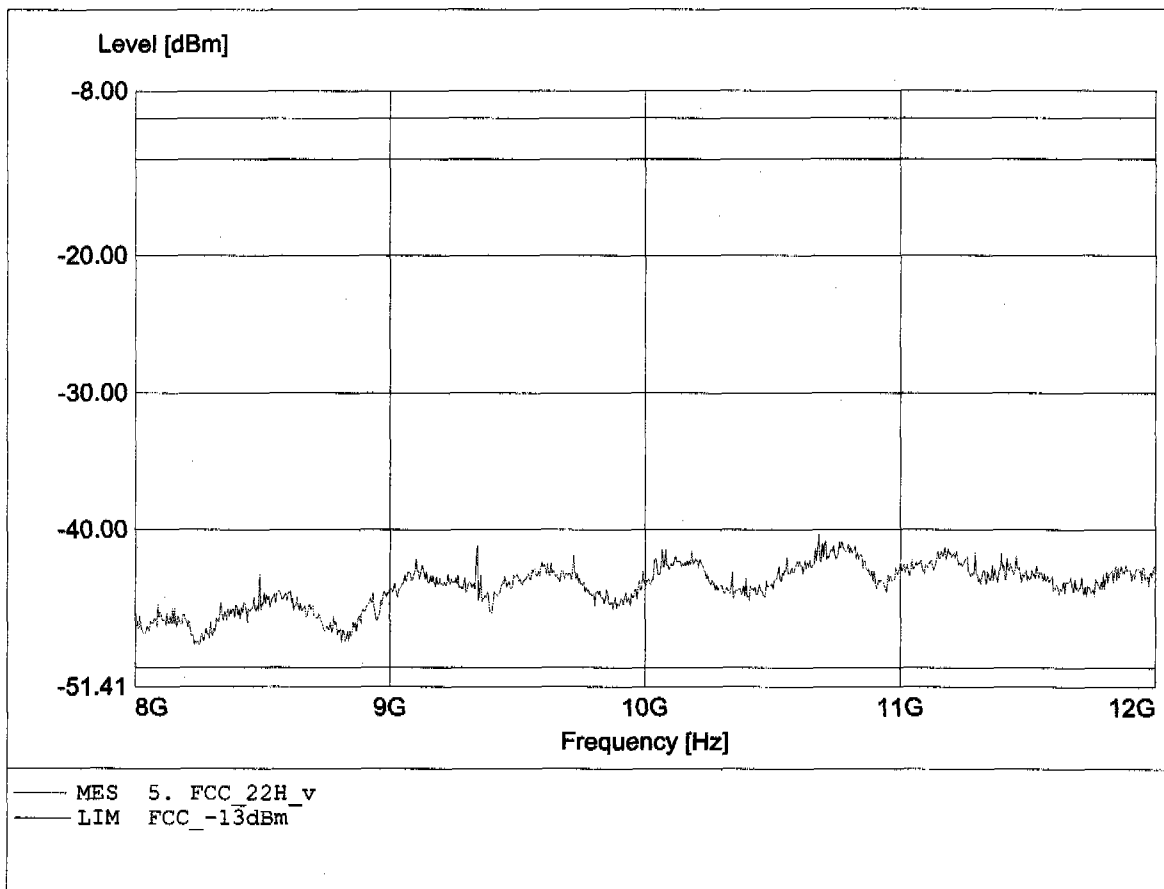

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Peiker acoustic GmbH & Co. KG  
EUT/ Model: CAN controlled GSM Phone / TPU - Q2426  
Cannel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 12.0 V DC  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.342GHz, Pmax: -38.81dBm, RBW: 1MHz

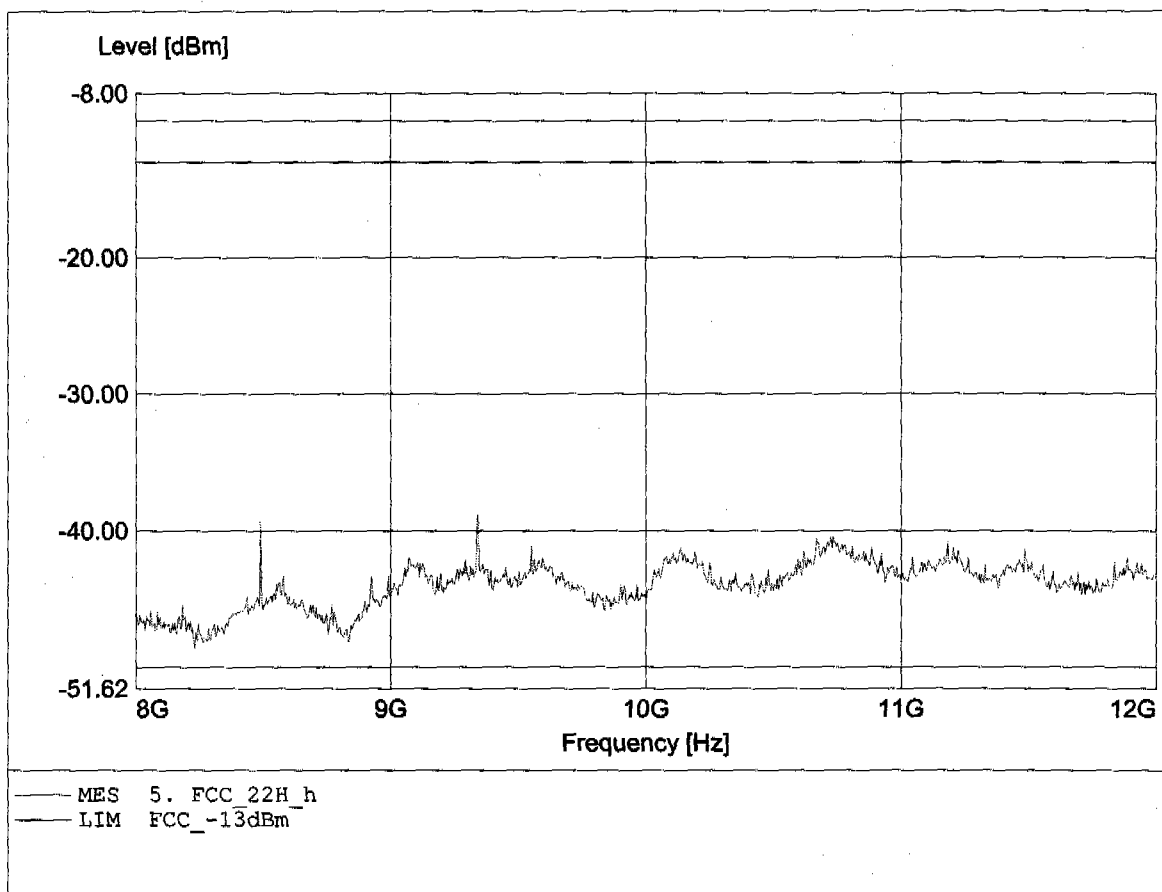



## Appendix J

### Line Conducted Emissions



## Appendix K

### Frequency Stability vs. Temperature

No diagrams  
Refer to point 13.2





## Appendix L

### Frequency Stability vs. Voltage

No diagrams  
Refer to point 14.2