



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 17, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11218.76	54.38	74.00	-19.62	41.34	9.07	38.76	34.79	225	305	HORIZONTAL
2	11220.00	41.35	54.00	-12.65	28.31	9.07	38.76	34.79	225	305	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11220.18	53.85	74.00	-20.15	40.81	9.07	38.76	34.79	237	310	VERTICAL
2	11222.37	41.09	54.00	-12.91	28.05	9.07	38.76	34.79	237	310	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 20, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	cm	deg	
1	11418.00	44.44	54.00	-9.56	28.73	10.99	35.22	39.94	HORIZONTAL	224	246	Average
2	11418.00	54.68	74.00	-19.32	38.97	10.99	35.22	39.94	HORIZONTAL	224	246	Peak

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	cm	deg	
1	11411.48	44.45	54.00	-9.55	28.72	10.99	35.22	39.96	VERTICAL	168	321	Average
2	11411.52	58.13	74.00	-15.87	42.40	10.99	35.22	39.96	VERTICAL	168	321	Peak



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 20, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg	
1	11411.92	44.65	54.00	-9.35	28.92	10.99	35.22	39.96	HORIZONTAL	199	171	Average
2	11416.72	57.63	74.00	-16.37	41.90	10.99	35.22	39.96	HORIZONTAL	199	171	Peak

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg	
1	11401.96	44.46	54.00	-9.54	28.74	10.98	35.22	39.96	VERTICAL	155	7	Average
2	11415.40	57.41	74.00	-16.59	41.68	10.99	35.22	39.96	VERTICAL	155	7	Peak



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 20, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	cm	deg	
1	11417.52	44.31	54.00	-9.69	28.60	10.99	35.22	39.94	HORIZONTAL	180	216	Average
2	11426.12	56.78	74.00	-17.22	41.06	11.00	35.22	39.94	HORIZONTAL	180	216	Peak

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	cm	deg	
1	11414.24	44.47	54.00	-9.53	28.74	10.99	35.22	39.96	VERTICAL	147	360	Average
2	11414.24	54.64	74.00	-19.36	38.91	10.99	35.22	39.96	VERTICAL	147	360	Peak



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 20, 2015 ~ Oct. 21, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	cm	deg	
1	11378.88	45.15	54.00	-8.85	29.42	10.97	35.22	39.98	HORIZONTAL	171	257	Average
2	11386.12	58.86	74.00	-15.14	43.15	10.97	35.22	39.96	HORIZONTAL	171	257	Peak

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	cm	deg	
1	11370.56	45.41	54.00	-8.59	29.69	10.96	35.22	39.98	VERTICAL	150	209	Average
2	11373.56	58.48	74.00	-15.52	42.75	10.97	35.22	39.98	VERTICAL	150	209	Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 29, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

##### Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5135.96	44.98	54.00	-9.02	39.85	6.12	34.01	35.00	Average	101	132	VERTICAL
2	5144.14	57.16	74.00	-16.84	51.99	6.13	34.04	35.00	Peak	101	132	VERTICAL
3	5257.12	123.80			118.40	6.20	34.20	35.00	Peak	101	132	VERTICAL
4	5257.60	114.20			108.80	6.20	34.20	35.00	Average	101	132	VERTICAL
5	5353.75	46.29	54.00	-7.71	40.67	6.26	34.36	35.00	Average	101	132	VERTICAL
6	5397.98	58.09	74.00	-15.91	52.35	6.29	34.44	34.99	Peak	101	132	VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

##### Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5298.40	123.40			117.89	6.23	34.28	35.00	Peak	102	133	VERTICAL
2	5299.04	113.59			108.08	6.23	34.28	35.00	Average	102	133	VERTICAL
3	5351.28	50.68	54.00	-3.32	45.06	6.26	34.36	35.00	Average	102	133	VERTICAL
4	5351.92	66.06	74.00	-7.94	60.44	6.26	34.36	35.00	Peak	102	133	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

##### Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5318.40	121.46			115.91	6.24	34.31	35.00	Peak	100	133	VERTICAL
2	5319.04	111.73			106.18	6.24	34.31	35.00	Average	100	133	VERTICAL
3	5351.41	52.54	54.00	-1.46	46.92	6.26	34.36	35.00	Average	100	133	VERTICAL
4	5352.69	66.87	74.00	-7.13	61.25	6.26	34.36	35.00	Peak	100	133	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

**Channel 100**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5458.60	66.42	74.00	-7.58	60.56	6.33	34.52	34.99 Peak	197	208	VERTICAL
2	5459.60	51.81	54.00	-2.19	45.95	6.33	34.52	34.99 Average	197	208	VERTICAL
3	5468.80	66.89	68.20	-1.31	60.99	6.34	34.55	34.99 Peak	197	208	VERTICAL
4	5500.80	109.60			103.64	6.36	34.60	35.00 Average	197	208	VERTICAL
5	5500.80	121.66			115.70	6.36	34.60	35.00 Peak	197	208	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5438.40	58.55	74.00	-15.45	52.73	6.32	34.49	34.99 Peak	200	215	VERTICAL
2	5440.00	46.40	54.00	-7.60	40.58	6.32	34.49	34.99 Average	200	215	VERTICAL
3	5470.00	57.99	68.20	-10.21	52.09	6.34	34.55	34.99 Peak	200	215	VERTICAL
4	5580.80	112.45			106.46	6.39	34.61	35.01 Average	200	215	VERTICAL
5	5580.80	123.57			117.58	6.39	34.61	35.01 Peak	200	215	VERTICAL
6	5726.40	59.33	68.20	-8.87	53.27	6.45	34.64	35.03 Peak	200	215	VERTICAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5698.20	121.21			115.17	6.43	34.64	35.03 Peak	201	217	VERTICAL
2	5699.20	109.80			103.76	6.43	34.64	35.03 Average	201	217	VERTICAL
3	5728.80	67.00	68.20	-1.20	60.94	6.45	34.64	35.03 Peak	201	217	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.





<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 29, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

**Channel 52**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5127.40	59.73	74.00	-14.27	54.60	6.12	34.01	35.00	Peak	200	136 VERTICAL
2	5150.00	45.73	54.00	-8.27	40.56	6.13	34.04	35.00	Average	200	136 VERTICAL
3	5255.80	125.72			120.32	6.20	34.20	35.00	Peak	200	136 VERTICAL
4	5256.40	114.90			109.50	6.20	34.20	35.00	Average	200	136 VERTICAL
5	5354.20	47.10	54.00	-6.90	41.48	6.26	34.36	35.00	Average	200	136 VERTICAL
6	5359.00	59.01	74.00	-14.99	53.39	6.26	34.36	35.00	Peak	200	136 VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5296.40	123.45			117.94	6.23	34.28	35.00	Peak	193	135 VERTICAL
2	5297.20	113.22			107.71	6.23	34.28	35.00	Average	193	135 VERTICAL
3	5350.00	51.59	54.00	-2.41	45.97	6.26	34.36	35.00	Average	193	135 VERTICAL
4	5350.00	66.33	74.00	-7.67	60.71	6.26	34.36	35.00	Peak	193	135 VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5317.00	120.72			115.17	6.24	34.31	35.00	Peak	192	136 VERTICAL
2	5317.40	109.98			104.43	6.24	34.31	35.00	Average	192	136 VERTICAL
3	5350.00	66.76	74.00	-7.24	61.14	6.26	34.36	35.00	Peak	192	136 VERTICAL
4	5350.20	52.62	54.00	-1.38	47.00	6.26	34.36	35.00	Average	192	136 VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

### Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5459.80	64.65	74.00	-9.35	58.79	6.33	34.52	34.99	Peak	203	210	VERTICAL
2	5460.00	49.86	54.00	-4.14	44.00	6.33	34.52	34.99	Average	203	210	VERTICAL
3	5468.20	66.89	68.20	-1.31	60.99	6.34	34.55	34.99	Peak	203	210	VERTICAL
4	5499.60	110.42			104.45	6.36	34.60	34.99	Average	203	210	VERTICAL
5	5501.40	120.91			114.95	6.36	34.60	35.00	Peak	203	210	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

### Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5454.40	58.77	74.00	-15.23	52.91	6.33	34.52	34.99	Peak	196	210	VERTICAL
2	5460.00	46.52	54.00	-7.48	40.66	6.33	34.52	34.99	Average	196	210	VERTICAL
3	5470.00	58.30	68.20	-9.90	52.40	6.34	34.55	34.99	Peak	196	210	VERTICAL
4	5580.80	113.01			107.02	6.39	34.61	35.01	Average	196	210	VERTICAL
5	5581.60	123.58			117.58	6.39	34.62	35.01	Peak	196	210	VERTICAL
6	5725.60	59.22	68.20	-8.98	53.16	6.45	34.64	35.03	Peak	196	210	VERTICAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

### Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5704.20	104.41			98.36	6.44	34.64	35.03	Average	203	248	VERTICAL
2	5705.00	115.35			109.30	6.44	34.64	35.03	Peak	203	248	VERTICAL
3	5725.00	67.08	68.20	-1.12	61.02	6.45	34.64	35.03	Peak	203	248	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 29, 2015 ~ Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

**Channel 54**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5266.40	111.56			106.12	6.21	34.23	35.00	Average	202	135	VERTICAL
2	5266.40	120.52			115.08	6.21	34.23	35.00	Peak	202	135	VERTICAL
3	5350.00	52.67	54.00	-1.33	47.05	6.26	34.36	35.00	Average	202	135	VERTICAL
4	5350.00	63.65	74.00	-10.35	58.03	6.26	34.36	35.00	Peak	202	135	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5306.40	110.90			105.39	6.23	34.28	35.00	Peak	195	133	VERTICAL
2	5306.80	101.70			96.19	6.23	34.28	35.00	Average	195	133	VERTICAL
3	5350.00	52.79	54.00	-1.21	47.17	6.26	34.36	35.00	Average	195	133	VERTICAL
4	5350.40	63.49	74.00	-10.51	57.87	6.26	34.36	35.00	Peak	195	133	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

### Channel 102

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5450.40	50.04	54.00	-3.96	44.18	6.33	34.52	34.99 Average	192	208	VERTICAL
2	5450.40	62.17	74.00	-11.83	56.31	6.33	34.52	34.99 Peak	192	208	VERTICAL
3	5469.60	66.99	68.20	-1.21	61.09	6.34	34.55	34.99 Peak	192	208	VERTICAL
4	5511.20	114.30			108.34	6.36	34.60	35.00 Peak	192	208	VERTICAL
5	5511.60	104.25			98.29	6.36	34.60	35.00 Average	192	208	VERTICAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

### Channel 110

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5451.00	61.71	74.00	-12.29	55.85	6.33	34.52	34.99 Peak	200	212	VERTICAL
2	5451.60	49.05	54.00	-4.95	43.19	6.33	34.52	34.99 Average	200	212	VERTICAL
3	5470.00	66.88	68.20	-1.32	60.98	6.34	34.55	34.99 Peak	200	212	VERTICAL
4	5551.20	108.31			102.32	6.38	34.61	35.00 Average	200	212	VERTICAL
5	5551.20	118.43			112.44	6.38	34.61	35.00 Peak	200	212	VERTICAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

### Channel 134

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5668.40	107.24			101.21	6.43	34.63	35.03 Average	201	213	VERTICAL
2	5668.80	116.84			110.81	6.43	34.63	35.03 Peak	201	213	VERTICAL
3	5728.80	66.87	68.20	-1.33	60.81	6.45	34.64	35.03 Peak	201	213	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

**Channel 58**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5138.00	57.96	74.00	-16.04	52.83	6.12	34.01	35.00	Peak	188	137	VERTICAL
2	5150.00	45.78	54.00	-8.22	40.61	6.13	34.04	35.00	Average	188	137	VERTICAL
3	5267.00	109.75			104.31	6.21	34.23	35.00	Peak	188	137	VERTICAL
4	5268.00	98.93			93.49	6.21	34.23	35.00	Average	188	137	VERTICAL
5	5356.00	52.62	54.00	-1.38	47.00	6.26	34.36	35.00	Average	188	137	VERTICAL
6	5356.00	65.28	74.00	-8.72	59.66	6.26	34.36	35.00	Peak	188	137	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

**Channel 106**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5450.00	52.58	54.00	-1.42	46.72	6.33	34.52	34.99	Average	189	210	VERTICAL
2	5450.00	65.37	74.00	-8.63	59.51	6.33	34.52	34.99	Peak	189	210	VERTICAL
3	5470.00	63.30	68.20	-4.90	57.40	6.34	34.55	34.99	Peak	189	210	VERTICAL
4	5531.00	95.77			89.79	6.37	34.61	35.00	Average	189	210	VERTICAL
5	5551.00	107.29			101.30	6.38	34.61	35.00	Peak	189	210	VERTICAL
6	5760.00	56.99	68.20	-11.21	50.93	6.46	34.65	35.05	Peak	189	210	VERTICAL

Item 4, 5 are the fundamental frequency at 5530 MHz.

**Channel 122**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5449.00	50.98	54.00	-3.02	45.12	6.33	34.52	34.99	Average	200	211	VERTICAL
2	5450.00	63.45	74.00	-10.55	57.59	6.33	34.52	34.99	Peak	200	211	VERTICAL
3	5470.00	66.93	68.20	-1.27	61.03	6.34	34.55	34.99	Peak	200	211	VERTICAL
4	5590.00	102.45			96.45	6.39	34.62	35.01	Average	200	211	VERTICAL
5	5591.00	113.78			107.78	6.39	34.62	35.01	Peak	200	211	VERTICAL
6	5732.00	64.52	68.20	-3.68	58.47	6.45	34.64	35.04	Peak	200	211	VERTICAL

Item 4, 5 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5718.20	123.93			117.87	6.45	34.64	35.03	Peak	200	216	VERTICAL
2	5718.80	112.43			106.37	6.45	34.64	35.03	Average	200	216	VERTICAL
3	5856.80	59.68	68.20	-8.52	53.57	6.50	34.67	35.06	Peak	200	216	VERTICAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5713.60	118.33			112.28	6.44	34.64	35.03	Peak	200	166 HORIZONTAL
2	5714.40	107.63			101.58	6.44	34.64	35.03	Average	200	166 HORIZONTAL
3	5853.20	58.33	68.20	-9.87	52.23	6.49	34.67	35.06	Peak	200	166 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5720 MHz.





<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

**Channel 142**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5708.40	121.88			115.83	6.44	34.64	35.03	Peak	200	216 VERTICAL
2	5709.20	111.59			105.54	6.44	34.64	35.03	Average	200	216 VERTICAL
3	5850.00	64.19	68.20	-4.01	58.09	6.49	34.67	35.06	Peak	200	216 VERTICAL

Item 1, 2 are the fundamental frequency at 5710 MHz.





<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

**Channel 138**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5668.40	105.53			99.50	6.43	34.63	35.03	Average	195	216	VERTICAL
2	5668.40	115.01			108.98	6.43	34.63	35.03	Peak	195	216	VERTICAL
3	5850.80	66.93	68.20	-1.27	60.83	6.49	34.67	35.06	Peak	195	216	VERTICAL

Item 1, 2 are the fundamental frequency at 5690 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 52**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5252.62	109.57			104.17	6.20	34.20	35.00	Average	206	358	VERTICAL
2	5253.05	119.13			113.73	6.20	34.20	35.00	Peak	206	358	VERTICAL
3	5351.30	59.03	74.00	-14.97	53.41	6.26	34.36	35.00	Peak	206	358	VERTICAL
4	5354.34	47.70	54.00	-6.30	42.08	6.26	34.36	35.00	Average	206	358	VERTICAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5294.50	120.03			114.52	6.23	34.28	35.00	Peak	140	6	HORIZONTAL
2	5294.79	109.84			104.33	6.23	34.28	35.00	Average	140	6	HORIZONTAL
3	5350.00	51.08	54.00	-2.92	45.46	6.26	34.36	35.00	Average	140	6	HORIZONTAL
4	5351.45	66.08	74.00	-7.92	60.46	6.26	34.36	35.00	Peak	140	6	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5316.82	106.65			101.10	6.24	34.31	35.00	Average	163	6	HORIZONTAL
2	5316.82	117.96			112.41	6.24	34.31	35.00	Peak	163	6	HORIZONTAL
3	5350.00	52.77	54.00	-1.23	47.15	6.26	34.36	35.00	Average	163	6	HORIZONTAL
4	5350.00	67.29	74.00	-6.71	61.67	6.26	34.36	35.00	Peak	163	6	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5457.16	48.87	54.00	-5.13	43.01	6.33	34.52	34.99	Average	149	359	VERTICAL
2	5458.32	62.01	74.00	-11.99	56.15	6.33	34.52	34.99	Peak	149	359	VERTICAL
3	5463.53	66.50	68.20	-1.70	60.60	6.34	34.55	34.99	Peak	149	359	VERTICAL
4	5503.18	108.19			102.23	6.36	34.60	35.00	Average	149	359	VERTICAL
5	5503.18	118.21			112.25	6.36	34.60	35.00	Peak	149	359	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5404.17	47.30	54.00	-6.70	41.56	6.29	34.44	34.99	Average	181	6	HORIZONTAL
2	5433.50	60.31	74.00	-13.69	54.49	6.32	34.49	34.99	Peak	181	6	HORIZONTAL
3	5467.12	61.09	68.20	-7.11	55.19	6.34	34.55	34.99	Peak	181	6	HORIZONTAL
4	5576.38	111.47			105.48	6.39	34.61	35.01	Average	181	6	HORIZONTAL
5	5577.11	122.21			116.22	6.39	34.61	35.01	Peak	181	6	HORIZONTAL
6	5759.01	60.87	68.20	-7.33	54.81	6.46	34.65	35.05	Peak	181	6	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5702.60	117.73			111.68	6.44	34.64	35.03	Peak	134	356	VERTICAL
2	5703.18	108.00			101.95	6.44	34.64	35.03	Average	134	356	VERTICAL
3	5726.05	66.29	68.20	-1.91	60.23	6.45	34.64	35.03	Peak	134	356	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 52**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5120.20	46.69	54.00	-7.31	41.59	6.11	33.99	35.00 Average	143	353	HORIZONTAL
2	5122.81	58.91	74.00	-15.09	53.78	6.12	34.01	35.00 Peak	143	353	HORIZONTAL
3	5251.75	109.35			103.95	6.20	34.20	35.00 Average	143	353	HORIZONTAL
4	5252.62	119.21			113.81	6.20	34.20	35.00 Peak	143	353	HORIZONTAL
5	5350.00	47.85	54.00	-6.15	42.23	6.26	34.36	35.00 Average	143	353	HORIZONTAL
6	5350.87	58.83	74.00	-15.17	53.21	6.26	34.36	35.00 Peak	143	353	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5291.90	109.66			104.19	6.22	34.25	35.00 Average	196	360	VERTICAL
2	5292.19	120.78			115.31	6.22	34.25	35.00 Peak	196	360	VERTICAL
3	5350.00	52.36	54.00	-1.64	46.74	6.26	34.36	35.00 Average	196	360	VERTICAL
4	5350.00	69.29	74.00	-4.71	63.67	6.26	34.36	35.00 Peak	196	360	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5313.34	104.75			99.20	6.24	34.31	35.00 Average	195	358	VERTICAL
2	5313.92	116.30			110.75	6.24	34.31	35.00 Peak	195	358	VERTICAL
3	5351.55	52.94	54.00	-1.06	47.32	6.26	34.36	35.00 Average	195	358	VERTICAL
4	5352.13	67.17	74.00	-6.83	61.55	6.26	34.36	35.00 Peak	195	358	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

### Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5444.43	61.03	74.00	-12.97	55.21	6.32	34.49	34.99	Peak	157	1	VERTICAL
2	5456.87	47.53	54.00	-6.47	41.67	6.33	34.52	34.99	Average	157	1	VERTICAL
3	5470.00	67.04	68.20	-1.16	61.14	6.34	34.55	34.99	Peak	157	1	VERTICAL
4	5502.89	106.25			100.29	6.36	34.60	35.00	Average	157	1	VERTICAL
5	5502.89	117.92			111.96	6.36	34.60	35.00	Peak	157	1	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

### Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5354.96	60.48	74.00	-13.52	54.86	6.26	34.36	35.00	Peak	164	357	VERTICAL
2	5408.51	47.33	54.00	-6.67	41.59	6.29	34.44	34.99	Average	164	357	VERTICAL
3	5464.95	59.50	68.20	-8.70	53.60	6.34	34.55	34.99	Peak	164	357	VERTICAL
4	5585.07	110.00			104.00	6.39	34.62	35.01	Average	164	357	VERTICAL
5	5585.79	120.20			114.20	6.39	34.62	35.01	Peak	164	357	VERTICAL
6	5729.34	59.62	68.20	-8.58	53.56	6.45	34.64	35.03	Peak	164	357	VERTICAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

### Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5703.04	102.95			96.90	6.44	34.64	35.03	Average	152	359	VERTICAL
2	5703.91	113.02			106.97	6.44	34.64	35.03	Peak	152	359	VERTICAL
3	5725.00	67.04	68.20	-1.16	60.98	6.45	34.64	35.03	Peak	152	359	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 54**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5263.05	105.32			99.88	6.21	34.23	35.00	Average	209	1	HORIZONTAL
2	5283.89	115.49			110.02	6.22	34.25	35.00	Peak	209	1	HORIZONTAL
3	5350.00	52.60	54.00	-1.40	46.98	6.26	34.36	35.00	Average	209	1	HORIZONTAL
4	5350.32	65.12	74.00	-8.88	59.50	6.26	34.36	35.00	Peak	209	1	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5320.42	98.00			92.45	6.24	34.31	35.00	Average	153	358	HORIZONTAL
2	5321.00	108.52			102.97	6.24	34.31	35.00	Peak	153	358	HORIZONTAL
3	5350.00	52.76	54.00	-1.24	47.14	6.26	34.36	35.00	Average	153	358	HORIZONTAL
4	5354.28	65.22	74.00	-8.78	59.60	6.26	34.36	35.00	Peak	153	358	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

### Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5417.67	60.92	74.00	-13.08	55.13	6.31	34.47	34.99	Peak	195	357	HORIZONTAL
2	5439.96	48.13	54.00	-5.87	42.31	6.32	34.49	34.99	Average	195	357	HORIZONTAL
3	5470.00	67.13	68.20	-1.07	61.23	6.34	34.55	34.99	Peak	195	357	HORIZONTAL
4	5502.76	100.00			94.04	6.36	34.60	35.00	Average	195	357	HORIZONTAL
5	5502.76	109.70			103.74	6.36	34.60	35.00	Peak	195	357	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

### Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5451.01	63.39	74.00	-10.61	57.53	6.33	34.52	34.99	Peak	171	6	HORIZONTAL
2	5458.83	50.23	54.00	-3.77	44.37	6.33	34.52	34.99	Average	171	6	HORIZONTAL
3	5465.34	66.63	68.20	-1.57	60.73	6.34	34.55	34.99	Peak	171	6	HORIZONTAL
4	5545.66	107.73			101.75	6.37	34.61	35.00	Average	171	6	HORIZONTAL
5	5546.09	118.15			112.17	6.37	34.61	35.00	Peak	171	6	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

### Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5666.09	104.15			98.13	6.42	34.63	35.03	Average	191	5	HORIZONTAL
2	5666.53	111.84			105.81	6.43	34.63	35.03	Peak	191	5	HORIZONTAL
3	5726.01	66.95	68.20	-1.25	60.89	6.45	34.64	35.03	Peak	191	5	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015 ~ Oct. 25, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 58**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5126.12	59.65	74.00	-14.35	54.52	6.12	34.01	35.00	Peak	199	359	VERTICAL
2	5147.83	46.42	54.00	-7.58	41.25	6.13	34.04	35.00	Average	199	359	VERTICAL
3	5283.49	102.18			96.71	6.22	34.25	35.00	Peak	199	359	VERTICAL
4	5302.30	92.69			87.18	6.23	34.28	35.00	Average	199	359	VERTICAL
5	5356.57	52.97	54.00	-1.03	47.35	6.26	34.36	35.00	Average	199	359	VERTICAL
6	5356.57	64.56	74.00	-9.44	58.94	6.26	34.36	35.00	Peak	199	359	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

**Channel 106**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5455.47	52.50	54.00	-1.50	46.64	6.33	34.52	34.99	Average	203	2	VERTICAL
2	5456.92	65.64	74.00	-8.36	59.78	6.33	34.52	34.99	Peak	203	2	VERTICAL
3	5461.45	65.49	68.20	-2.71	59.63	6.33	34.52	34.99	Peak	203	2	VERTICAL
4	5535.79	92.30			86.32	6.37	34.61	35.00	Average	203	2	VERTICAL
5	5536.51	102.77			96.79	6.37	34.61	35.00	Peak	203	2	VERTICAL
6	5769.14	60.47	68.20	-7.73	54.40	6.46	34.66	35.05	Peak	203	2	VERTICAL

Item 4, 5 are the fundamental frequency at 5530 MHz.

**Channel 122**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5452.26	62.69	74.00	-11.31	56.83	6.33	34.52	34.99	Peak	201	6	HORIZONTAL
2	5453.70	50.61	54.00	-3.39	44.75	6.33	34.52	34.99	Average	201	6	HORIZONTAL
3	5467.11	64.23	68.20	-3.97	58.33	6.34	34.55	34.99	Peak	201	6	HORIZONTAL
4	5588.29	101.63			95.63	6.39	34.62	35.01	Average	201	6	HORIZONTAL
5	5589.02	111.49			105.49	6.39	34.62	35.01	Peak	201	6	HORIZONTAL
6	5728.62	66.43	68.20	-1.77	60.37	6.45	34.64	35.03	Peak	201	6	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level





**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5722.89	119.70			113.64	6.45	34.64	35.03	Peak	121	354	VERTICAL
2	5723.62	109.93			103.87	6.45	34.64	35.03	Average	121	354	VERTICAL
3	5904.52	59.75	68.20	-8.45	53.62	6.52	34.68	35.07	Peak	121	354	VERTICAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5716.38	110.54			104.49	6.44	34.64	35.03	Average	194	4 HORIZONTAL
2	5716.38	119.62			113.57	6.44	34.64	35.03	Peak	194	4 HORIZONTAL
3	5861.10	58.98	68.20	-9.22	52.88	6.50	34.67	35.07	Peak	194	4 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 142**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5702.76	109.49			103.44	6.44	34.64	35.03	Average	190	355	HORIZONTAL
2	5703.49	118.82			112.77	6.44	34.64	35.03	Peak	190	355	HORIZONTAL
3	5942.27	60.45	68.20	-7.75	54.31	6.53	34.69	35.08	Peak	190	355	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5710 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 25, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

**Channel 138**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5662.50	115.98			109.96	6.42	34.63	35.03	Peak	202	358	HORIZONTAL
2	5702.30	105.54			99.49	6.44	34.64	35.03	Average	202	358	HORIZONTAL
3	5864.38	66.89	68.20	-1.31	60.79	6.50	34.67	35.07	Peak	202	358	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5690 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 27, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Channel 52**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5253.27	109.98			104.58	6.20	34.20	35.00	Average	184	352	HORIZONTAL
2	5253.75	120.44			115.04	6.20	34.20	35.00	Peak	184	352	HORIZONTAL
3	5350.00	46.02	54.00	-7.98	40.40	6.26	34.36	35.00	Average	184	352	HORIZONTAL
4	5350.00	56.53	74.00	-17.47	50.91	6.26	34.36	35.00	Peak	184	352	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5300.64	119.52			114.01	6.23	34.28	35.00	Peak	187	10	VERTICAL
2	5300.96	109.90			104.39	6.23	34.28	35.00	Average	187	10	VERTICAL
3	5350.00	48.40	54.00	-5.60	42.78	6.26	34.36	35.00	Average	187	10	VERTICAL
4	5350.64	61.48	74.00	-12.52	55.86	6.26	34.36	35.00	Peak	187	10	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5321.12	107.72			102.17	6.24	34.31	35.00	Average	163	3	VERTICAL
2	5321.44	117.90			112.35	6.24	34.31	35.00	Peak	163	3	VERTICAL
3	5350.00	52.83	54.00	-1.17	47.21	6.26	34.36	35.00	Average	163	3	VERTICAL
4	5350.00	68.17	74.00	-5.83	62.55	6.26	34.36	35.00	Peak	163	3	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 27, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5454.07	60.66	74.00	-13.34	54.80	6.33	34.52	34.99	Peak	187	352	HORIZONTAL
2	5460.00	47.05	54.00	-6.95	41.19	6.33	34.52	34.99	Average	187	352	HORIZONTAL
3	5470.00	52.98	54.00	-1.02	47.08	6.34	34.55	34.99	Average	187	352	HORIZONTAL
4	5470.00	64.18	74.00	-9.82	58.28	6.34	34.55	34.99	Peak	187	352	HORIZONTAL
5	5493.43	108.30			102.37	6.35	34.57	34.99	Average	187	352	HORIZONTAL
6	5493.75	119.29			113.36	6.35	34.57	34.99	Peak	187	352	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5456.64	56.30	74.00	-17.70	50.44	6.33	34.52	34.99	Peak	200	347	HORIZONTAL
2	5460.00	45.74	54.00	-8.26	39.88	6.33	34.52	34.99	Average	200	347	HORIZONTAL
3	5468.56	56.85	74.00	-17.15	50.95	6.34	34.55	34.99	Peak	200	347	HORIZONTAL
4	5470.00	46.06	54.00	-7.94	40.16	6.34	34.55	34.99	Average	200	347	HORIZONTAL
5	5574.23	122.92			116.93	6.39	34.61	35.01	Peak	200	347	HORIZONTAL
6	5574.71	111.72			105.73	6.39	34.61	35.01	Average	200	347	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5702.56	107.56			101.51	6.44	34.64	35.03	Average	212	346	VERTICAL
2	5702.72	117.93			111.88	6.44	34.64	35.03	Peak	212	346	VERTICAL
3	5725.00	52.11	54.00	-1.89	46.05	6.45	34.64	35.03	Average	212	346	VERTICAL
4	5725.16	66.31	74.00	-7.69	60.25	6.45	34.64	35.03	Peak	212	346	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 28, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5119.62	44.49	54.00	-9.51	39.39	6.11	33.99	35.00	Average	165	350	HORIZONTAL
2	5139.33	57.10	74.00	-16.90	51.97	6.12	34.01	35.00	Peak	165	350	HORIZONTAL
3	5253.75	119.27			113.87	6.20	34.20	35.00	Peak	165	350	HORIZONTAL
4	5254.23	108.38			102.98	6.20	34.20	35.00	Average	165	350	HORIZONTAL
5	5350.00	45.01	54.00	-8.99	39.39	6.26	34.36	35.00	Average	165	350	HORIZONTAL
6	5352.79	57.32	74.00	-16.68	51.70	6.26	34.36	35.00	Peak	165	350	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5293.27	108.97			103.46	6.23	34.28	35.00	Average	186	351	HORIZONTAL
2	5293.59	120.40			114.89	6.23	34.28	35.00	Peak	186	351	HORIZONTAL
3	5350.00	47.48	54.00	-6.52	41.86	6.26	34.36	35.00	Average	186	351	HORIZONTAL
4	5350.00	60.09	74.00	-13.91	54.47	6.26	34.36	35.00	Peak	186	351	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5313.27	104.74			99.19	6.24	34.31	35.00	Average	175	354	HORIZONTAL
2	5313.91	115.88			110.33	6.24	34.31	35.00	Peak	175	354	HORIZONTAL
3	5350.00	66.90	74.00	-7.10	61.28	6.26	34.36	35.00	Peak	175	354	HORIZONTAL
4	5351.41	52.68	54.00	-1.32	47.06	6.26	34.36	35.00	Average	175	354	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 28, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5452.89	58.36	74.00	-15.64	52.50	6.33	34.52	34.99	Peak	210	351	HORIZONTAL
2	5453.53	46.49	54.00	-7.51	40.63	6.33	34.52	34.99	Average	210	351	HORIZONTAL
3	5470.00	66.56	68.20	-1.64	60.66	6.34	34.55	34.99	Peak	210	351	HORIZONTAL
4	5493.27	106.73			100.80	6.35	34.57	34.99	Average	210	351	HORIZONTAL
5	5493.59	117.62			111.69	6.35	34.57	34.99	Peak	210	351	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

### Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5413.33	44.60	54.00	-9.40	38.81	6.31	34.47	34.99	Average	208	348	HORIZONTAL
2	5453.72	56.69	74.00	-17.31	50.83	6.33	34.52	34.99	Peak	208	348	HORIZONTAL
3	5463.85	56.95	68.20	-11.25	51.05	6.34	34.55	34.99	Peak	208	348	HORIZONTAL
4	5573.59	121.31			115.32	6.39	34.61	35.01	Peak	208	348	HORIZONTAL
5	5574.87	110.92			104.93	6.39	34.61	35.01	Average	208	348	HORIZONTAL
6	5768.46	59.33	68.20	-8.87	53.27	6.46	34.65	35.05	Peak	208	348	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

### Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5701.76	115.01			108.96	6.44	34.64	35.03	Peak	214	348	VERTICAL
2	5702.24	103.64			97.59	6.44	34.64	35.03	Average	214	348	VERTICAL
3	5725.16	66.66	68.20	-1.54	60.60	6.45	34.64	35.03	Peak	214	348	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.





<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 28, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Channel 54**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5271.92	105.14			99.70	6.21	34.23	35.00	Average	166	359	VERTICAL
2	5271.92	114.36			108.92	6.21	34.23	35.00	Peak	166	359	VERTICAL
3	5350.00	63.54	74.00	-10.46	57.92	6.26	34.36	35.00	Peak	166	359	VERTICAL
4	5351.44	52.64	54.00	-1.36	47.02	6.26	34.36	35.00	Average	166	359	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5311.92	100.61			95.06	6.24	34.31	35.00	Average	180	357	VERTICAL
2	5312.24	110.14			104.59	6.24	34.31	35.00	Peak	180	357	VERTICAL
3	5351.60	64.47	74.00	-9.53	58.85	6.26	34.36	35.00	Peak	180	357	VERTICAL
4	5353.21	52.38	54.00	-1.62	46.76	6.26	34.36	35.00	Average	180	357	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 28, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Channel 102**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	47.81	54.00	-6.19	41.95	6.33	34.52	34.99	Average	202	351	HORIZONTAL
2	5460.00	59.26	74.00	-14.74	53.40	6.33	34.52	34.99	Peak	202	351	HORIZONTAL
3	5470.00	52.41	54.00	-1.59	46.51	6.34	34.55	34.99	Average	202	351	HORIZONTAL
4	5470.00	66.20	74.00	-7.80	60.30	6.34	34.55	34.99	Peak	202	351	HORIZONTAL
5	5502.63	112.47			106.51	6.36	34.60	35.00	Peak	202	351	HORIZONTAL
6	5502.95	100.87			94.91	6.36	34.60	35.00	Average	202	351	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5510 MHz.

**Channel 110**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5450.87	48.64	54.00	-5.36	42.78	6.33	34.52	34.99	Average	196	2	VERTICAL
2	5451.35	61.33	74.00	-12.67	55.47	6.33	34.52	34.99	Peak	196	2	VERTICAL
3	5470.00	52.92	54.00	-1.08	47.02	6.34	34.55	34.99	Average	196	2	VERTICAL
4	5470.00	66.29	74.00	-7.71	60.39	6.34	34.55	34.99	Peak	196	2	VERTICAL
5	5551.44	105.78			99.79	6.38	34.61	35.00	Average	196	2	VERTICAL
6	5551.44	115.32			109.33	6.38	34.61	35.00	Peak	196	2	VERTICAL

Item 5, 6 are the fundamental frequency at 5550 MHz.

**Channel 134**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5662.95	105.57			99.55	6.42	34.63	35.03	Average	221	343	HORIZONTAL
2	5663.59	115.18			109.16	6.42	34.63	35.03	Peak	221	343	HORIZONTAL
3	5725.00	52.97	54.00	-1.03	46.91	6.45	34.64	35.03	Average	221	343	HORIZONTAL
4	5725.00	66.41	74.00	-7.59	60.35	6.45	34.64	35.03	Peak	221	343	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 28, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Channel 58

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5254.90	95.81			90.41	6.20	34.20	35.00	Average	181	333	VERTICAL
2	5255.39	105.34			99.94	6.20	34.20	35.00	Peak	181	333	VERTICAL
3	5350.00	52.88	54.00	-1.12	47.26	6.26	34.36	35.00	Average	181	333	VERTICAL
4	5356.25	66.04	74.00	-7.96	60.42	6.26	34.36	35.00	Peak	181	333	VERTICAL

Item 1, 2 are the fundamental frequency at 5290 MHz.

### Channel 106

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5443.17	52.31	54.00	-1.69	46.49	6.32	34.49	34.99	Average	200	348	HORIZONTAL
2	5444.14	66.28	74.00	-7.72	60.46	6.32	34.49	34.99	Peak	200	348	HORIZONTAL
3	5463.27	52.97	54.00	-1.03	47.07	6.34	34.55	34.99	Average	200	348	HORIZONTAL
4	5463.75	65.73	74.00	-8.27	59.83	6.34	34.55	34.99	Peak	200	348	HORIZONTAL
5	5542.50	105.76			99.78	6.37	34.61	35.00	Peak	200	348	HORIZONTAL
6	5543.46	95.36			89.38	6.37	34.61	35.00	Average	200	348	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5530 MHz.

### Channel 122

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5451.99	50.95	54.00	-3.05	45.09	6.33	34.52	34.99	Average	204	351	VERTICAL
2	5453.59	64.65	74.00	-9.35	58.79	6.33	34.52	34.99	Peak	204	351	VERTICAL
3	5470.00	63.37	68.20	-4.83	57.47	6.34	34.55	34.99	Peak	204	351	VERTICAL
4	5612.40	111.31			105.30	6.40	34.62	35.01	Peak	204	351	VERTICAL
5	5613.21	101.69			95.68	6.40	34.62	35.01	Average	204	351	VERTICAL
6	5733.01	66.69	68.20	-1.51	60.64	6.45	34.64	35.04	Peak	204	351	VERTICAL

Item 4, 5 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 27, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5713.59	111.89			105.84	6.44	34.64	35.03	Average	205	345	HORIZONTAL
2	5714.23	122.15			116.10	6.44	34.64	35.03	Peak	205	345	HORIZONTAL
3	5850.00	45.91	54.00	-8.09	39.81	6.49	34.67	35.06	Average	205	345	HORIZONTAL
4	5855.77	56.79	74.00	-17.21	50.68	6.50	34.67	35.06	Peak	205	345	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 28, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5713.59	110.79			104.74	6.44	34.64	35.03	Average	216	346	HORIZONTAL
2	5714.39	121.10			115.05	6.44	34.64	35.03	Peak	216	346	HORIZONTAL
3	5927.53	58.44	68.20	-9.76	52.31	6.52	34.69	35.08	Peak	216	346	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 28, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Channel 142**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5713.21	107.66			101.61	6.44	34.64	35.03	Average	233	341	VERTICAL
2	5714.01	117.45			111.40	6.44	34.64	35.03	Peak	233	341	VERTICAL
3	5854.81	58.52	74.00	-15.48	52.41	6.50	34.67	35.06	Peak	233	341	VERTICAL
4	5856.41	47.12	54.00	-6.88	41.01	6.50	34.67	35.06	Average	233	341	VERTICAL

Item 1, 2 are the fundamental frequency at 5710 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 28, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Channel 138**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5693.21	103.59			97.55	6.43	34.64	35.03	Average	215	344	VERTICAL
2	5693.21	112.97			106.93	6.43	34.64	35.03	Peak	215	344	VERTICAL
3	5854.01	66.91	68.20	-1.29	60.80	6.50	34.67	35.06	Peak	215	344	VERTICAL

Item 1, 2 are the fundamental frequency at 5690 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 29, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

**Channel 52**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5142.69	58.09	74.00	-15.91	53.45	5.84	33.27	34.47	182	109	Peak	HORIZONTAL
2	5145.10	45.80	54.00	-8.20	41.16	5.84	33.27	34.47	182	109	Average	HORIZONTAL
3	5262.40	115.09			110.30	5.78	33.48	34.47	182	109	Average	HORIZONTAL
4	5262.89	124.92			120.13	5.78	33.48	34.47	182	109	Peak	HORIZONTAL
5	5361.92	59.12	74.00	-14.88	54.20	5.73	33.66	34.47	182	109	Peak	HORIZONTAL
6	5362.89	46.92	54.00	-7.08	42.00	5.73	33.66	34.47	182	109	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5301.60	111.27			106.44	5.76	33.54	34.47	356	148	Average	HORIZONTAL
2	5301.92	121.10			116.27	5.76	33.54	34.47	356	148	Peak	HORIZONTAL
3	5350.00	59.87	74.00	-14.13	54.98	5.73	33.63	34.47	356	148	Peak	HORIZONTAL
4	5350.32	48.54	54.00	-5.46	43.65	5.73	33.63	34.47	356	148	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5317.12	121.73			116.88	5.75	33.57	34.47	205	168	Peak	VERTICAL
2	5317.76	111.45			106.60	5.75	33.57	34.47	205	168	Average	VERTICAL
3	5350.00	52.88	54.00	-1.12	47.99	5.73	33.63	34.47	205	168	Average	VERTICAL
4	5351.09	65.98	74.00	-8.02	61.09	5.73	33.63	34.47	205	168	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 29, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5459.30	63.32	74.00	-10.68	58.30	5.68	33.81	34.47	179	118	Peak	HORIZONTAL
2	5459.62	49.83	54.00	-4.17	44.81	5.68	33.81	34.47	179	118	Average	HORIZONTAL
3	5470.00	66.90	68.20	-1.30	61.85	5.68	33.84	34.47	179	118	Peak	HORIZONTAL
4	5500.96	111.16			106.08	5.66	33.90	34.48	179	118	Average	HORIZONTAL
5	5501.28	121.26			116.18	5.66	33.90	34.48	179	118	Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5406.92	57.30	74.00	-16.70	52.34	5.71	33.72	34.47	183	186	Peak	VERTICAL
2	5439.78	45.53	54.00	-8.47	40.53	5.69	33.78	34.47	183	186	Average	VERTICAL
3	5459.58	56.86	74.00	-17.14	51.84	5.68	33.81	34.47	183	186	Peak	VERTICAL
4	5575.99	124.15			118.83	5.70	34.11	34.49	183	186	Peak	VERTICAL
5	5576.80	114.83			109.51	5.70	34.11	34.49	183	186	Average	VERTICAL
6	5778.72	59.74	68.20	-8.46	53.71	5.83	34.73	34.53	183	186	Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5700.80	119.71			113.92	5.78	34.52	34.51	179	198	Peak	HORIZONTAL
2	5700.96	109.77			103.98	5.78	34.52	34.51	179	198	Average	HORIZONTAL
3	5725.00	66.90	68.20	-1.30	61.05	5.79	34.57	34.51	179	198	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 29, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

### Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5120.10	45.63	54.00	-8.37	41.04	5.85	33.21	34.47	190	165 Average	HORIZONTAL
2	5145.58	57.45	74.00	-16.55	52.81	5.84	33.27	34.47	190	165 Peak	HORIZONTAL
3	5251.83	113.67			108.91	5.78	33.45	34.47	190	165 Average	HORIZONTAL
4	5252.79	123.53			118.77	5.78	33.45	34.47	190	165 Peak	HORIZONTAL
5	5353.75	47.03	54.00	-6.97	42.14	5.73	33.63	34.47	190	165 Average	HORIZONTAL
6	5354.23	59.14	74.00	-14.86	54.25	5.73	33.63	34.47	190	165 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5297.44	113.83			109.00	5.76	33.54	34.47	3	216 Average	VERTICAL
2	5298.08	122.96			118.13	5.76	33.54	34.47	3	216 Peak	VERTICAL
3	5350.00	60.67	74.00	-13.33	55.78	5.73	33.63	34.47	3	216 Peak	VERTICAL
4	5350.00	49.47	54.00	-4.53	44.58	5.73	33.63	34.47	3	216 Average	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5321.60	121.11			116.26	5.75	33.57	34.47	179	127 Peak	HORIZONTAL
2	5322.40	110.12			105.27	5.75	33.57	34.47	179	127 Average	HORIZONTAL
3	5350.00	66.19	74.00	-7.81	61.30	5.73	33.63	34.47	179	127 Peak	HORIZONTAL
4	5350.00	52.87	54.00	-1.13	47.98	5.73	33.63	34.47	179	127 Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 29, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

#### Channel 100

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5459.62	62.67	74.00	-11.33	57.65	5.68	33.81	34.47	179	199 Peak	HORIZONTAL
2	5460.00	51.37	54.00	-2.63	46.35	5.68	33.81	34.47	179	199 Average	HORIZONTAL
3	5469.55	67.01	68.20	-1.19	61.96	5.68	33.84	34.47	179	199 Peak	HORIZONTAL
4	5501.28	121.09			116.01	5.66	33.90	34.48	179	199 Peak	HORIZONTAL
5	5501.60	111.36			106.28	5.66	33.90	34.48	179	199 Average	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

#### Channel 116

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5426.96	57.93	74.00	-16.07	52.95	5.70	33.75	34.47	179	205 Peak	HORIZONTAL
2	5433.37	45.45	54.00	-8.55	40.45	5.69	33.78	34.47	179	205 Average	HORIZONTAL
3	5465.61	56.30	68.20	-11.90	51.25	5.68	33.84	34.47	179	205 Peak	HORIZONTAL
4	5582.40	114.69			109.31	5.71	34.16	34.49	179	205 Average	HORIZONTAL
5	5583.21	124.67			119.29	5.71	34.16	34.49	179	205 Peak	HORIZONTAL
6	5737.85	58.50	68.20	-9.70	52.60	5.80	34.62	34.52	179	205 Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

#### Channel 140

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5704.97	117.81			112.02	5.78	34.52	34.51	174	180 Peak	VERTICAL
2	5705.45	107.17			101.38	5.78	34.52	34.51	174	180 Average	VERTICAL
3	5725.16	66.72	68.20	-1.48	60.87	5.79	34.57	34.51	174	180 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

**Channel 54**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5266.15	121.52			116.73	5.78	33.48	34.47	204	179 Peak	VERTICAL
2	5266.64	111.95			107.16	5.78	33.48	34.47	204	179 Average	VERTICAL
3	5350.00	65.29	74.00	-8.71	60.40	5.73	33.63	34.47	204	179 Peak	VERTICAL
4	5350.00	52.57	54.00	-1.43	47.68	5.73	33.63	34.47	204	179 Average	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5308.40	102.84			98.01	5.76	33.54	34.47	166	198 Average	VERTICAL
2	5308.72	112.27			107.44	5.76	33.54	34.47	166	198 Peak	VERTICAL
3	5350.00	52.71	54.00	-1.29	47.82	5.73	33.63	34.47	166	198 Average	VERTICAL
4	5350.39	64.43	74.00	-9.57	59.54	5.73	33.63	34.47	166	198 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

### Channel 102

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5460.00	63.09	74.00	-10.91	58.07	5.68	33.81	34.47	179	197 Peak	HORIZONTAL
2	5460.00	50.52	54.00	-3.48	45.50	5.68	33.81	34.47	179	197 Average	HORIZONTAL
3	5462.24	66.98	68.20	-1.22	61.96	5.68	33.81	34.47	179	197 Peak	HORIZONTAL
4	5511.28	115.07			109.99	5.66	33.90	34.48	179	197 Peak	HORIZONTAL
5	5511.60	105.29			100.21	5.66	33.90	34.48	179	197 Average	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

### Channel 110

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5456.25	65.50	74.00	-8.50	60.48	5.68	33.81	34.47	176	184 Peak	VERTICAL
2	5458.17	50.96	54.00	-3.04	45.94	5.68	33.81	34.47	176	184 Average	VERTICAL
3	5470.00	66.83	68.20	-1.37	61.78	5.68	33.84	34.47	176	184 Peak	VERTICAL
4	5556.73	108.80			103.54	5.69	34.06	34.49	176	184 Average	VERTICAL
5	5557.21	119.04			113.78	5.69	34.06	34.49	176	184 Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

### Channel 134

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5664.71	118.20			112.59	5.75	34.37	34.51	182	181 Peak	VERTICAL
2	5664.71	107.41			101.80	5.75	34.37	34.51	182	181 Average	VERTICAL
3	5725.00	66.88	68.20	-1.32	61.03	5.79	34.57	34.51	182	181 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

**Channel 58**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5098.49	56.06	74.00	-17.94	51.49	5.86	33.18	34.47	344	216	Peak	VERTICAL
2	5119.33	44.67	54.00	-9.33	40.08	5.85	33.21	34.47	344	216	Average	VERTICAL
3	5287.60	97.59			92.78	5.77	33.51	34.47	344	216	Average	VERTICAL
4	5308.43	108.71			103.88	5.76	33.54	34.47	344	216	Peak	VERTICAL
5	5350.00	52.85	54.00	-1.15	47.96	5.73	33.63	34.47	344	216	Average	VERTICAL
6	5355.71	66.33	74.00	-7.67	61.44	5.73	33.63	34.47	344	216	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

**Channel 106**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5457.08	66.21	74.00	-7.79	61.19	5.68	33.81	34.47	353	194	Peak	VERTICAL
2	5457.89	52.98	54.00	-1.02	47.96	5.68	33.81	34.47	353	194	Average	VERTICAL
3	5465.99	48.63	54.00	-5.37	43.58	5.68	33.84	34.47	353	194	Average	VERTICAL
4	5470.00	60.30	74.00	-13.70	55.25	5.68	33.84	34.47	353	194	Peak	VERTICAL
5	5517.18	95.72			90.58	5.67	33.95	34.48	353	194	Average	VERTICAL
6	5557.24	106.58			101.32	5.69	34.06	34.49	353	194	Peak	VERTICAL

Item 5, 6 are the fundamental frequency at 5530 MHz.

**Channel 122**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5453.75	66.00	74.00	-8.00	60.98	5.68	33.81	34.47	13	142	Peak	VERTICAL
2	5454.55	52.31	54.00	-1.69	47.29	5.68	33.81	34.47	13	142	Average	VERTICAL
3	5470.00	62.93	74.00	-11.07	57.88	5.68	33.84	34.47	13	142	Peak	VERTICAL
4	5470.00	50.36	54.00	-3.64	45.31	5.68	33.84	34.47	13	142	Average	VERTICAL
5	5594.78	103.17			97.79	5.71	34.16	34.49	13	142	Average	VERTICAL
6	5595.58	113.13			107.75	5.71	34.16	34.49	13	142	Peak	VERTICAL
7	5735.80	64.01	74.00	-9.99	58.11	5.80	34.62	34.52	13	142	Peak	VERTICAL
8	5735.80	52.69	54.00	-1.31	46.79	5.80	34.62	34.52	13	142	Average	VERTICAL

Item 5, 6 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level





**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 29, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5720.80	122.80			116.95	5.79	34.57	34.51	178	187	Peak	HORIZONTAL
2	5720.80	113.53			107.68	5.79	34.57	34.51	178	187	Average	HORIZONTAL
3	5889.07	58.89	68.20	-9.31	52.45	5.90	35.09	34.55	178	187	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5720 MHz.





<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 29, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5711.99	121.16			115.37	5.78	34.52	34.51	171	183	Peak	HORIZONTAL
2	5711.99	112.54			106.75	5.78	34.52	34.51	171	183	Average	HORIZONTAL
3	5957.98	58.95	68.20	-9.25	52.27	5.94	35.30	34.56	171	183	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

**Channel 142**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5714.81	111.87			106.08	5.78	34.52	34.51	173	190	Average	VERTICAL
2	5715.61	121.56			115.77	5.78	34.52	34.51	173	190	Peak	VERTICAL
3	5857.44	59.25	68.20	-8.95	52.92	5.88	34.99	34.54	173	190	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5710 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 30, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

**Channel 138**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5696.41	115.99			110.26	5.77	34.47	34.51	12	161	Peak	VERTICAL
2	5696.41	104.91			99.18	5.77	34.47	34.51	12	161	Average	VERTICAL
3	5855.06	67.19	68.20	-1.01	60.86	5.88	34.99	34.54	12	161	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5690 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

**Channel 52**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5127.00	59.13	74.00	-14.87	54.00	6.12	34.01	35.00	Peak	114	195 VERTICAL
2	5150.00	45.35	54.00	-8.65	40.18	6.13	34.04	35.00	Average	114	195 VERTICAL
3	5256.50	106.59			101.19	6.20	34.20	35.00	Average	114	195 VERTICAL
4	5257.00	118.87			113.47	6.20	34.20	35.00	Peak	114	195 VERTICAL
5	5350.00	46.30	54.00	-7.70	40.68	6.26	34.36	35.00	Average	114	195 VERTICAL
6	5350.50	59.24	74.00	-14.76	53.62	6.26	34.36	35.00	Peak	114	195 VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5301.00	104.47			98.96	6.23	34.28	35.00	Average	100	181 VERTICAL
2	5307.33	117.08			111.57	6.23	34.28	35.00	Peak	100	181 VERTICAL
3	5350.00	52.41	54.00	-1.59	46.79	6.26	34.36	35.00	Average	100	181 VERTICAL
4	5354.33	65.76	74.00	-8.24	60.14	6.26	34.36	35.00	Peak	100	181 VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5316.67	104.91			99.36	6.24	34.31	35.00	Average	245	174 HORIZONTAL
2	5316.67	117.39			111.84	6.24	34.31	35.00	Peak	245	174 HORIZONTAL
3	5350.00	52.96	54.00	-1.04	47.34	6.26	34.36	35.00	Average	245	174 HORIZONTAL
4	5350.00	67.65	74.00	-6.35	62.03	6.26	34.36	35.00	Peak	245	174 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	49.72	54.00	-4.28	43.86	6.33	34.52	34.99	Average	100	183	VERTICAL
2	5460.00	64.01	74.00	-9.99	58.15	6.33	34.52	34.99	Peak	100	183	VERTICAL
3	5467.00	67.83	74.00	-6.17	61.93	6.34	34.55	34.99	Peak	100	183	VERTICAL
4	5467.67	52.32	54.00	-1.68	46.42	6.34	34.55	34.99	Average	100	183	VERTICAL
5	5501.00	103.92			97.96	6.36	34.60	35.00	Average	100	183	VERTICAL
6	5501.00	115.83			109.87	6.36	34.60	35.00	Peak	100	183	VERTICAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5456.00	58.30	74.00	-15.70	52.44	6.33	34.52	34.99	Peak	164	180	VERTICAL
2	5460.00	46.01	54.00	-7.99	40.15	6.33	34.52	34.99	Average	164	180	VERTICAL
3	5466.00	58.47	74.00	-15.53	52.57	6.34	34.55	34.99	Peak	164	180	VERTICAL
4	5470.00	46.09	54.00	-7.91	40.19	6.34	34.55	34.99	Average	164	180	VERTICAL
5	5573.33	107.90			101.91	6.39	34.61	35.01	Average	164	180	VERTICAL
6	5573.33	119.63			113.64	6.39	34.61	35.01	Peak	164	180	VERTICAL
7	5725.00	45.91	54.00	-8.09	39.85	6.45	34.64	35.03	Average	164	180	VERTICAL
8	5727.00	59.12	74.00	-14.88	53.06	6.45	34.64	35.03	Peak	164	180	VERTICAL

Item 5, 6 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5693.00	114.89			108.85	6.43	34.64	35.03	Peak	114	180	VERTICAL
2	5693.33	102.72			96.68	6.43	34.64	35.03	Average	114	180	VERTICAL
3	5727.67	52.87	54.00	-1.13	46.81	6.45	34.64	35.03	Average	114	180	VERTICAL
4	5727.67	68.28	74.00	-5.72	62.22	6.45	34.64	35.03	Peak	114	180	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

### Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5125.00	58.00	74.00	-16.00	52.87	6.12	34.01	35.00	Peak	247	174	HORIZONTAL
2	5150.00	45.19	54.00	-8.81	40.02	6.13	34.04	35.00	Average	247	174	HORIZONTAL
3	5257.00	110.16			104.76	6.20	34.20	35.00	Average	247	174	HORIZONTAL
4	5257.00	120.43			115.03	6.20	34.20	35.00	Peak	247	174	HORIZONTAL
5	5350.00	46.30	54.00	-7.70	40.68	6.26	34.36	35.00	Average	247	174	HORIZONTAL
6	5357.00	57.65	74.00	-16.35	52.03	6.26	34.36	35.00	Peak	247	174	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5296.00	119.36			113.85	6.23	34.28	35.00	Peak	242	174	HORIZONTAL
2	5297.33	109.59			104.08	6.23	34.28	35.00	Average	242	174	HORIZONTAL
3	5350.00	52.62	54.00	-1.38	47.00	6.26	34.36	35.00	Average	242	174	HORIZONTAL
4	5350.00	66.88	74.00	-7.12	61.26	6.26	34.36	35.00	Peak	242	174	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5316.83	116.66			111.11	6.24	34.31	35.00	Peak	248	173	HORIZONTAL
2	5317.33	106.08			100.53	6.24	34.31	35.00	Average	248	173	HORIZONTAL
3	5350.00	52.61	54.00	-1.39	46.99	6.26	34.36	35.00	Average	248	173	HORIZONTAL
4	5350.33	67.12	74.00	-6.88	61.50	6.26	34.36	35.00	Peak	248	173	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

#### Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5455.67	66.79	74.00	-7.21	60.93	6.33	34.52	34.99	Peak	232	170	HORIZONTAL
2	5457.33	52.85	54.00	-1.15	46.99	6.33	34.52	34.99	Average	232	170	HORIZONTAL
3	5470.00	65.33	68.20	-2.87	59.43	6.34	34.55	34.99	Peak	232	170	HORIZONTAL
4	5496.33	116.64			110.71	6.35	34.57	34.99	Peak	232	170	HORIZONTAL
5	5497.33	106.31			100.34	6.36	34.60	34.99	Average	232	170	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

#### Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5408.00	59.05	74.00	-14.95	53.31	6.29	34.44	34.99	Peak	261	171	HORIZONTAL
2	5428.00	46.67	54.00	-7.33	40.88	6.31	34.47	34.99	Average	261	171	HORIZONTAL
3	5466.00	59.42	68.20	-8.78	53.52	6.34	34.55	34.99	Peak	261	171	HORIZONTAL
4	5574.67	108.12			102.13	6.39	34.61	35.01	Average	261	171	HORIZONTAL
5	5576.00	118.22			112.23	6.39	34.61	35.01	Peak	261	171	HORIZONTAL
6	5757.33	59.08	68.20	-9.12	53.02	6.46	34.65	35.05	Peak	261	171	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

#### Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5693.17	102.49			96.45	6.43	34.64	35.03	Average	106	180	VERTICAL
2	5693.67	113.89			107.85	6.43	34.64	35.03	Peak	106	180	VERTICAL
3	5725.17	66.85	68.20	-1.35	60.79	6.45	34.64	35.03	Peak	106	180	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.





<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

**Channel 54**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5265.83	116.62			111.18	6.21	34.23	35.00	Peak	246	173	HORIZONTAL
2	5266.67	106.24			100.80	6.21	34.23	35.00	Average	246	173	HORIZONTAL
3	5350.00	52.17	54.00	-1.83	46.55	6.26	34.36	35.00	Average	246	173	HORIZONTAL
4	5350.00	63.42	74.00	-10.58	57.80	6.26	34.36	35.00	Peak	246	173	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5303.40	107.54			102.03	6.23	34.28	35.00	Peak	184	7	VERTICAL
2	5304.00	96.92			91.41	6.23	34.28	35.00	Average	184	7	VERTICAL
3	5350.00	52.70	54.00	-1.30	47.08	6.26	34.36	35.00	Average	184	7	VERTICAL
4	5352.00	64.53	74.00	-9.47	58.91	6.26	34.36	35.00	Peak	184	7	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

### Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5446.00	47.63	54.00	-6.37	41.77	6.33	34.52	34.99	Average	250	167	HORIZONTAL
2	5447.00	59.34	74.00	-14.66	53.48	6.33	34.52	34.99	Peak	250	167	HORIZONTAL
3	5468.50	66.92	68.20	-1.28	61.02	6.34	34.55	34.99	Peak	250	167	HORIZONTAL
4	5506.00	107.17			101.21	6.36	34.60	35.00	Peak	250	167	HORIZONTAL
5	5507.00	96.99			91.03	6.36	34.60	35.00	Average	250	167	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

### Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5444.00	63.62	74.00	-10.38	57.80	6.32	34.49	34.99	Peak	231	171	HORIZONTAL
2	5446.00	51.72	54.00	-2.28	45.86	6.33	34.52	34.99	Average	231	171	HORIZONTAL
3	5466.00	64.33	68.20	-3.87	58.43	6.34	34.55	34.99	Peak	231	171	HORIZONTAL
4	5546.67	105.40			99.42	6.37	34.61	35.00	Average	231	171	HORIZONTAL
5	5547.33	115.24			109.26	6.37	34.61	35.00	Peak	231	171	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

### Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5663.50	101.23			95.21	6.42	34.63	35.03	Average	250	168	HORIZONTAL
2	5665.00	111.78			105.76	6.42	34.63	35.03	Peak	250	168	HORIZONTAL
3	5725.50	66.61	68.20	-1.59	60.55	6.45	34.64	35.03	Peak	250	168	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

**Channel 58**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5147.50	58.41	74.00	-15.59	53.24	6.13	34.04	35.00	Peak	252	173	HORIZONTAL
2	5150.00	45.54	54.00	-8.46	40.37	6.13	34.04	35.00	Average	252	173	HORIZONTAL
3	5265.83	94.63			89.19	6.21	34.23	35.00	Average	252	173	HORIZONTAL
4	5266.67	105.80			100.36	6.21	34.23	35.00	Peak	252	173	HORIZONTAL
5	5350.00	52.62	54.00	-1.38	47.00	6.26	34.36	35.00	Average	252	173	HORIZONTAL
6	5369.17	64.44	74.00	-9.56	58.78	6.27	34.39	35.00	Peak	252	173	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

**Channel 106**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5445.00	52.69	54.00	-1.31	46.87	6.32	34.49	34.99	Average	248	170	HORIZONTAL
2	5446.67	65.25	74.00	-8.75	59.39	6.33	34.52	34.99	Peak	248	170	HORIZONTAL
3	5465.83	63.18	68.20	-5.02	57.28	6.34	34.55	34.99	Peak	248	170	HORIZONTAL
4	5526.67	91.75			85.78	6.37	34.60	35.00	Average	248	170	HORIZONTAL
5	5546.67	102.24			96.26	6.37	34.61	35.00	Peak	248	170	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5530 MHz.

**Channel 122**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5455.83	50.99	54.00	-3.01	45.13	6.33	34.52	34.99	Average	241	157	HORIZONTAL
2	5455.83	65.60	74.00	-8.40	59.74	6.33	34.52	34.99	Peak	241	157	HORIZONTAL
3	5470.00	62.22	68.20	-5.98	56.32	6.34	34.55	34.99	Peak	241	157	HORIZONTAL
4	5595.83	108.37			102.37	6.39	34.62	35.01	Peak	241	157	HORIZONTAL
5	5615.83	97.44			91.42	6.41	34.62	35.01	Average	241	157	HORIZONTAL
6	5735.83	67.04	68.20	-1.16	60.98	6.45	34.65	35.04	Peak	241	157	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5715.00	106.70			100.65	6.44	34.64	35.03	Average	253	168	HORIZONTAL
2	5715.00	118.54			112.49	6.44	34.64	35.03	Peak	253	168	HORIZONTAL
3	5852.00	58.64	68.20	-9.56	52.54	6.49	34.67	35.06	Peak	253	168	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5712.67	106.16			100.11	6.44	34.64	35.03	Average	103	178	VERTICAL
2	5714.00	117.08			111.03	6.44	34.64	35.03	Peak	103	178	VERTICAL
3	5868.00	59.25	68.20	-8.95	53.15	6.50	34.67	35.07	Peak	103	178	VERTICAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

**Channel 142**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5704.17	104.82			98.77	6.44	34.64	35.03 Average	256	168	HORIZONTAL
2	5705.00	115.46			109.41	6.44	34.64	35.03 Peak	256	168	HORIZONTAL
3	5861.00	59.26	68.20	-8.94	53.16	6.50	34.67	35.07 Peak	256	168	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5710 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 31, 2015		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

**Channel 138**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5701.67	98.75			92.70	6.44	34.64	35.03	Average	102	174	VERTICAL
2	5702.50	109.70			103.65	6.44	34.64	35.03	Peak	102	174	VERTICAL
3	5855.00	66.94	68.20	-1.26	60.83	6.50	34.67	35.06	Peak	102	174	VERTICAL

Item 1, 2 are the fundamental frequency at 5690 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

### Channel 52

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5134.60	61.46	74.00	-12.54	56.85	5.84	33.24	34.47	358	189	Peak	HORIZONTAL
2	5137.00	48.71	54.00	-5.29	44.10	5.84	33.24	34.47	358	189	Average	HORIZONTAL
3	5263.00	124.99			120.20	5.78	33.48	34.47	358	189	Peak	HORIZONTAL
4	5263.00	114.68			109.89	5.78	33.48	34.47	358	189	Average	HORIZONTAL
5	5363.20	49.90	54.00	-4.10	44.98	5.73	33.66	34.47	358	189	Average	HORIZONTAL
6	5392.00	61.88	74.00	-12.12	56.94	5.72	33.69	34.47	358	189	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5292.80	124.64			119.81	5.76	33.54	34.47	358	187	Peak	VERTICAL
2	5293.20	114.82			109.99	5.76	33.54	34.47	358	187	Average	VERTICAL
3	5350.00	64.20	74.00	-9.80	59.31	5.73	33.63	34.47	358	187	Peak	VERTICAL
4	5350.00	52.59	54.00	-1.41	47.70	5.73	33.63	34.47	358	187	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5312.80	119.25			114.40	5.75	33.57	34.47	357	188	Peak	VERTICAL
2	5313.20	109.48			104.63	5.75	33.57	34.47	357	188	Average	VERTICAL
3	5350.00	51.81	54.00	-2.19	46.92	5.73	33.63	34.47	357	188	Average	VERTICAL
4	5350.80	63.32	74.00	-10.68	58.43	5.73	33.63	34.47	357	188	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

#### Channel 100

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5438.80	63.12	74.00	-10.88	58.12	5.69	33.78	34.47	356	177	Peak	VERTICAL
2	5447.60	50.22	54.00	-3.78	45.20	5.68	33.81	34.47	356	177	Average	VERTICAL
3	5470.00	66.25	68.20	-1.95	61.20	5.68	33.84	34.47	356	177	Peak	VERTICAL
4	5492.80	109.67			104.60	5.67	33.87	34.47	356	177	Average	VERTICAL
5	5493.20	119.78			114.71	5.67	33.87	34.47	356	177	Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

#### Channel 116

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5455.80	49.29	54.00	-4.71	44.27	5.68	33.81	34.47	356	184	Average	VERTICAL
2	5459.40	60.99	74.00	-13.01	55.97	5.68	33.81	34.47	356	184	Peak	VERTICAL
3	5461.80	60.06	68.20	-8.14	55.04	5.68	33.81	34.47	356	184	Peak	VERTICAL
4	5572.80	113.84			108.52	5.70	34.11	34.49	356	184	Average	VERTICAL
5	5573.40	123.60			118.28	5.70	34.11	34.49	356	184	Peak	VERTICAL
6	5725.00	62.36	68.20	-5.84	56.51	5.79	34.57	34.51	356	184	Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

#### Channel 140

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5702.00	118.58			112.79	5.78	34.52	34.51	353	185	Peak	HORIZONTAL
2	5702.20	108.03			102.24	5.78	34.52	34.51	353	185	Average	HORIZONTAL
3	5726.20	67.08	68.20	-1.12	61.23	5.79	34.57	34.51	353	185	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

### Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5122.60	49.36	54.00	-4.64	44.75	5.84	33.24	34.47	357	187 Average	HORIZONTAL
2	5128.60	62.04	74.00	-11.96	57.43	5.84	33.24	34.47	357	187 Peak	HORIZONTAL
3	5263.00	125.06			120.27	5.78	33.48	34.47	357	187 Peak	HORIZONTAL
4	5263.00	115.48			110.69	5.78	33.48	34.47	357	187 Average	HORIZONTAL
5	5360.20	62.09	74.00	-11.91	57.20	5.73	33.63	34.47	357	187 Peak	HORIZONTAL
6	5360.80	50.40	54.00	-3.60	45.48	5.73	33.66	34.47	357	187 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5293.20	114.47			109.64	5.76	33.54	34.47	356	192 Average	VERTICAL
2	5294.00	124.36			119.53	5.76	33.54	34.47	356	192 Peak	VERTICAL
3	5350.80	52.94	54.00	-1.06	48.05	5.73	33.63	34.47	356	192 Average	VERTICAL
4	5351.20	64.62	74.00	-9.38	59.73	5.73	33.63	34.47	356	192 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5313.20	120.27			115.42	5.75	33.57	34.47	1	192 Peak	VERTICAL
2	5313.20	109.78			104.93	5.75	33.57	34.47	1	192 Average	VERTICAL
3	5350.80	64.13	74.00	-9.87	59.24	5.73	33.63	34.47	1	192 Peak	VERTICAL
4	5351.60	52.71	54.00	-1.29	47.82	5.73	33.63	34.47	1	192 Average	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

### Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5445.20	62.82	74.00	-11.18	57.82	5.69	33.78	34.47	353	188	Peak	VERTICAL
2	5452.80	50.33	54.00	-3.67	45.31	5.68	33.81	34.47	353	188	Average	VERTICAL
3	5468.40	65.41	74.00	-8.59	60.36	5.68	33.84	34.47	353	188	Peak	VERTICAL
4	5470.00	52.74	54.00	-1.26	47.69	5.68	33.84	34.47	353	188	Average	VERTICAL
5	5493.20	108.98			103.91	5.67	33.87	34.47	353	188	Average	VERTICAL
6	5493.60	120.63			115.56	5.67	33.87	34.47	353	188	Peak	VERTICAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

### Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5455.20	62.77	74.00	-11.23	57.75	5.68	33.81	34.47	357	175	Peak	HORIZONTAL
2	5460.00	49.60	54.00	-4.40	44.58	5.68	33.81	34.47	357	175	Average	HORIZONTAL
3	5465.20	61.08	74.00	-12.92	56.03	5.68	33.84	34.47	357	175	Peak	HORIZONTAL
4	5470.00	49.66	54.00	-4.34	44.61	5.68	33.84	34.47	357	175	Average	HORIZONTAL
5	5583.20	125.60			120.22	5.71	34.16	34.49	357	175	Peak	HORIZONTAL
6	5583.20	115.33			109.95	5.71	34.16	34.49	357	175	Average	HORIZONTAL
7	5725.00	49.97	54.00	-4.03	44.12	5.79	34.57	34.51	357	175	Average	HORIZONTAL
8	5734.60	63.30	74.00	-10.70	57.40	5.80	34.62	34.52	357	175	Peak	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5580 MHz.

### Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5701.60	118.29			112.50	5.78	34.52	34.51	356	177	Peak	HORIZONTAL
2	5701.60	107.13			101.34	5.78	34.52	34.51	356	177	Average	HORIZONTAL
3	5725.60	67.19	68.20	-1.01	61.34	5.79	34.57	34.51	356	177	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

**Channel 54**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5262.20	121.06			116.27	5.78	33.48	34.47	357	187 Peak	VERTICAL
2	5262.80	110.85			106.06	5.78	33.48	34.47	357	187 Average	VERTICAL
3	5350.00	52.74	54.00	-1.26	47.85	5.73	33.63	34.47	357	187 Average	VERTICAL
4	5352.20	65.23	74.00	-8.77	60.34	5.73	33.63	34.47	357	187 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5312.80	103.21			98.36	5.75	33.57	34.47	359	198 Average	VERTICAL
2	5313.60	113.15			108.30	5.75	33.57	34.47	359	198 Peak	VERTICAL
3	5351.20	52.96	54.00	-1.04	48.07	5.73	33.63	34.47	359	198 Average	VERTICAL
4	5351.60	65.45	74.00	-8.55	60.56	5.73	33.63	34.47	359	198 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

**Channel 102**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5459.20	64.53	74.00	-9.47	59.51	5.68	33.81	34.47	356	194 Peak	VERTICAL
2	5460.00	51.75	54.00	-2.25	46.73	5.68	33.81	34.47	356	194 Average	VERTICAL
3	5464.00	52.88	54.00	-1.12	47.83	5.68	33.84	34.47	356	194 Average	VERTICAL
4	5464.80	65.07	74.00	-8.93	60.02	5.68	33.84	34.47	356	194 Peak	VERTICAL
5	5502.80	114.59			109.51	5.66	33.90	34.48	356	194 Peak	VERTICAL
6	5502.80	104.72			99.64	5.66	33.90	34.48	356	194 Average	VERTICAL

Item 5, 6 are the fundamental frequency at 5510 MHz.

**Channel 110**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5453.40	64.46	74.00	-9.54	59.44	5.68	33.81	34.47	359	190 Peak	HORIZONTAL
2	5460.00	51.49	54.00	-2.51	46.47	5.68	33.81	34.47	359	190 Average	HORIZONTAL
3	5470.00	64.55	74.00	-9.45	59.50	5.68	33.84	34.47	359	190 Peak	HORIZONTAL
4	5470.00	52.95	54.00	-1.05	47.90	5.68	33.84	34.47	359	190 Average	HORIZONTAL
5	5552.40	119.26			114.00	5.69	34.06	34.49	359	190 Peak	HORIZONTAL
6	5553.00	110.00			104.74	5.69	34.06	34.49	359	190 Average	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5550 MHz.

**Channel 134**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5671.60	117.83			112.16	5.76	34.42	34.51	356	178 Peak	HORIZONTAL
2	5671.60	108.06			102.39	5.76	34.42	34.51	356	178 Average	HORIZONTAL
3	5732.40	67.10	68.20	-1.10	61.26	5.79	34.57	34.52	356	178 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015 ~ Nov. 09, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

### Channel 58

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5265.96	92.91			87.47	6.21	34.23	35.00 Average	179	352	VERTICAL
2	5265.96	103.00			97.56	6.21	34.23	35.00 Peak	179	352	VERTICAL
3	5350.00	52.79	54.00	-1.21	47.17	6.26	34.36	35.00 Average	179	352	VERTICAL
4	5350.48	64.02	74.00	-9.98	58.40	6.26	34.36	35.00 Peak	179	352	VERTICAL

Item 1, 2 are the fundamental frequency at 5290 MHz.

### Channel 106

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5451.00	52.57	54.00	-1.43	46.71	6.33	34.52	34.99 Average	176	0	HORIZONTAL
2	5451.00	66.02	74.00	-7.98	60.16	6.33	34.52	34.99 Peak	176	0	HORIZONTAL
3	5470.00	65.22	68.20	-2.98	59.32	6.34	34.55	34.99 Peak	176	0	HORIZONTAL
4	5532.00	94.64			88.66	6.37	34.61	35.00 Average	176	0	HORIZONTAL
5	5532.00	104.61			98.63	6.37	34.61	35.00 Peak	176	0	HORIZONTAL
6	5743.00	56.05	68.20	-12.15	49.99	6.45	34.65	35.04 Peak	176	0	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5530 MHz.

### Channel 122

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5453.00	65.60	74.00	-8.40	60.58	5.68	33.81	34.47	354	166 Peak	HORIZONTAL
2	5453.00	65.20	74.00	-8.80	60.18	5.68	33.81	34.47	354	166 Peak	HORIZONTAL
3	5454.00	52.44	54.00	-1.56	47.42	5.68	33.81	34.47	354	166 Average	HORIZONTAL
4	5593.00	113.05			107.67	5.71	34.16	34.49	354	166 Peak	HORIZONTAL
5	5614.00	103.54			98.11	5.72	34.21	34.50	354	166 Average	HORIZONTAL
6	5735.00	65.66	68.20	-2.54	59.76	5.80	34.62	34.52	354	166 Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level





**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5713.00	121.85			116.06	5.78	34.52	34.51	348	183	Peak	VERTICAL
2	5713.00	112.67			106.88	5.78	34.52	34.51	348	183	Average	VERTICAL
3	5926.00	62.68	68.20	-5.52	56.13	5.92	35.19	34.56	348	183	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5722.40	123.62			117.77	5.79	34.57	34.51	356	179 Peak	HORIZONTAL
2	5722.40	113.79			107.94	5.79	34.57	34.51	356	179 Average	HORIZONTAL
3	5850.00	50.26	54.00	-3.74	44.00	5.87	34.93	34.54	356	179 Average	HORIZONTAL
4	5856.40	63.97	74.00	-10.03	57.64	5.88	34.99	34.54	356	179 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

**Channel 142**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5711.60	121.35			115.56	5.78	34.52	34.51	357	189 Peak	HORIZONTAL
2	5711.60	111.25			105.46	5.78	34.52	34.51	357	189 Average	HORIZONTAL
3	5860.40	65.84	68.20	-2.36	59.51	5.88	34.99	34.54	357	189 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5710 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 22, 2015		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

**Channel 138**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5671.00	116.53			110.86	5.76	34.42	34.51	0	183 Peak	HORIZONTAL
2	5671.00	106.33			100.66	5.76	34.42	34.51	0	183 Average	HORIZONTAL
3	5852.00	66.85	68.20	-1.35	60.59	5.87	34.93	34.54	0	183 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5690 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

**Channel 52**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5133.23	59.38	74.00	-14.62	54.25	6.12	34.01	35.00	Peak	202	314 VERTICAL
2	5135.40	46.90	54.00	-7.10	41.77	6.12	34.01	35.00	Average	202	314 VERTICAL
3	5257.83	111.43			106.03	6.20	34.20	35.00	Average	202	314 VERTICAL
4	5258.70	121.66			116.22	6.21	34.23	35.00	Peak	202	314 VERTICAL
5	5353.91	60.26	74.00	-13.74	54.64	6.26	34.36	35.00	Peak	202	314 VERTICAL
6	5356.95	48.18	54.00	-5.82	42.56	6.26	34.36	35.00	Average	202	314 VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5302.60	112.66			107.15	6.23	34.28	35.00	Average	207	17 VERTICAL
2	5303.18	122.68			117.17	6.23	34.28	35.00	Peak	207	17 VERTICAL
3	5350.00	51.06	54.00	-2.94	45.44	6.26	34.36	35.00	Average	207	17 VERTICAL
4	5351.81	62.28	74.00	-11.72	56.66	6.26	34.36	35.00	Peak	207	17 VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5322.32	110.15			104.60	6.24	34.31	35.00	Average	218	284 VERTICAL
2	5322.60	120.48			114.93	6.24	34.31	35.00	Peak	218	284 VERTICAL
3	5350.00	52.60	54.00	-1.40	46.98	6.26	34.36	35.00	Average	218	284 VERTICAL
4	5350.00	66.31	74.00	-7.69	60.69	6.26	34.36	35.00	Peak	218	284 VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	50.83	54.00	-3.17	44.97	6.33	34.52	34.99	Average	200	192	VERTICAL
2	5460.00	64.70	74.00	-9.30	58.84	6.33	34.52	34.99	Peak	200	192	VERTICAL
3	5463.53	67.07	68.20	-1.13	61.17	6.34	34.55	34.99	Peak	200	192	VERTICAL
4	5502.32	111.40			105.44	6.36	34.60	35.00	Average	200	192	VERTICAL
5	5502.60	121.80			115.84	6.36	34.60	35.00	Peak	200	192	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5444.11	60.15	74.00	-13.85	54.33	6.32	34.49	34.99	Peak	199	308	VERTICAL
2	5452.79	47.62	54.00	-6.38	41.76	6.33	34.52	34.99	Average	199	308	VERTICAL
3	5462.17	59.93	68.20	-8.27	54.07	6.33	34.52	34.99	Peak	199	308	VERTICAL
4	5582.60	112.62			106.62	6.39	34.62	35.01	Average	199	308	VERTICAL
5	5583.04	122.85			116.85	6.39	34.62	35.01	Peak	199	308	VERTICAL
6	5727.60	60.35	68.20	-7.85	54.29	6.45	34.64	35.03	Peak	199	308	VERTICAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5705.21	108.88			102.83	6.44	34.64	35.03	Average	206	136	VERTICAL
2	5705.79	119.43			113.38	6.44	34.64	35.03	Peak	206	136	VERTICAL
3	5726.63	66.39	68.20	-1.81	60.33	6.45	34.64	35.03	Peak	206	136	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

### Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5112.39	46.56	54.00	-7.44	41.47	6.11	33.99	35.01 Average	208	28	VERTICAL
2	5122.37	58.68	74.00	-15.32	53.58	6.11	33.99	35.00 Peak	208	28	VERTICAL
3	5251.75	111.30			105.90	6.20	34.20	35.00 Average	208	28	VERTICAL
4	5253.05	120.43			115.03	6.20	34.20	35.00 Peak	208	28	VERTICAL
5	5350.43	47.93	54.00	-6.07	42.31	6.26	34.36	35.00 Average	208	28	VERTICAL
6	5351.74	60.02	74.00	-13.98	54.40	6.26	34.36	35.00 Peak	208	28	VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5301.74	123.01			117.50	6.23	34.28	35.00 Peak	211	284	VERTICAL
2	5302.60	112.52			107.01	6.23	34.28	35.00 Average	211	284	VERTICAL
3	5350.00	51.77	54.00	-2.23	46.15	6.26	34.36	35.00 Average	211	284	VERTICAL
4	5350.00	63.78	74.00	-10.22	58.16	6.26	34.36	35.00 Peak	211	284	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5321.88	120.61			115.06	6.24	34.31	35.00 Peak	206	284	VERTICAL
2	5322.75	109.83			104.28	6.24	34.31	35.00 Average	206	284	VERTICAL
3	5350.00	52.93	54.00	-1.07	47.31	6.26	34.36	35.00 Average	206	284	VERTICAL
4	5350.25	66.15	74.00	-7.85	60.53	6.26	34.36	35.00 Peak	206	284	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

#### Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	50.18	54.00	-3.82	44.32	6.33	34.52	34.99	Average	211	194	VERTICAL
2	5460.00	64.61	74.00	-9.39	58.75	6.33	34.52	34.99	Peak	211	194	VERTICAL
3	5463.53	66.66	68.20	-1.54	60.76	6.34	34.55	34.99	Peak	211	194	VERTICAL
4	5501.74	121.89			115.93	6.36	34.60	35.00	Peak	211	194	VERTICAL
5	5502.03	109.84			103.88	6.36	34.60	35.00	Average	211	194	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

#### Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5394.04	60.60	74.00	-13.40	54.90	6.28	34.41	34.99	Peak	217	308	VERTICAL
2	5417.50	47.82	54.00	-6.18	42.03	6.31	34.47	34.99	Average	217	308	VERTICAL
3	5464.34	60.14	68.20	-8.06	54.24	6.34	34.55	34.99	Peak	217	308	VERTICAL
4	5582.89	112.11			106.11	6.39	34.62	35.01	Average	217	308	VERTICAL
5	5583.62	122.60			116.60	6.39	34.62	35.01	Peak	217	308	VERTICAL
6	5734.41	60.95	68.20	-7.25	54.90	6.45	34.64	35.04	Peak	217	308	VERTICAL

Item 4, 5 are the fundamental frequency at 5580 MHz.

#### Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5705.07	117.50			111.45	6.44	34.64	35.03	Peak	204	134	VERTICAL
2	5705.21	106.61			100.56	6.44	34.64	35.03	Average	204	134	VERTICAL
3	5725.00	67.14	68.20	-1.06	61.08	6.45	34.64	35.03	Peak	204	134	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

**Channel 54**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5260.45	107.37			101.93	6.21	34.23	35.00	Average	219	221	VERTICAL
2	5261.32	117.53			112.09	6.21	34.23	35.00	Peak	219	221	VERTICAL
3	5350.00	52.06	54.00	-1.94	46.44	6.26	34.36	35.00	Average	219	221	VERTICAL
4	5350.00	63.61	74.00	-10.39	57.99	6.26	34.36	35.00	Peak	219	221	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5312.32	101.47			95.92	6.24	34.31	35.00	Average	216	284	VERTICAL
2	5313.18	111.04			105.49	6.24	34.31	35.00	Peak	216	284	VERTICAL
3	5351.10	52.25	54.00	-1.75	46.63	6.26	34.36	35.00	Average	216	284	VERTICAL
4	5351.97	64.19	74.00	-9.81	58.57	6.26	34.36	35.00	Peak	216	284	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

### Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5452.60	52.25	54.00	-1.75	46.39	6.33	34.52	34.99	Average	213	193	VERTICAL
2	5452.98	64.19	74.00	-9.81	58.33	6.33	34.52	34.99	Peak	213	193	VERTICAL
3	5469.48	65.31	68.20	-2.89	59.41	6.34	34.55	34.99	Peak	213	193	VERTICAL
4	5511.45	115.29			109.33	6.36	34.60	35.00	Peak	213	193	VERTICAL
5	5511.74	105.64			99.68	6.36	34.60	35.00	Average	213	193	VERTICAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

### Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5451.01	64.64	74.00	-9.36	58.78	6.33	34.52	34.99	Peak	206	195	VERTICAL
2	5451.88	50.54	54.00	-3.46	44.68	6.33	34.52	34.99	Average	206	195	VERTICAL
3	5470.00	66.55	68.20	-1.65	60.65	6.34	34.55	34.99	Peak	206	195	VERTICAL
4	5551.74	108.37			102.38	6.38	34.61	35.00	Average	206	195	VERTICAL
5	5551.74	118.04			112.05	6.38	34.61	35.00	Peak	206	195	VERTICAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

### Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5662.76	115.11			109.09	6.42	34.63	35.03	Peak	204	10	VERTICAL
2	5663.63	105.57			99.55	6.42	34.63	35.03	Average	204	10	VERTICAL
3	5725.86	66.57	68.20	-1.63	60.51	6.45	34.64	35.03	Peak	204	10	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

### Channel 58

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5129.02	59.31	74.00	-14.69	54.18	6.12	34.01	35.00	Peak	212	284	VERTICAL
2	5145.66	46.68	54.00	-7.32	41.51	6.13	34.04	35.00	Average	212	284	VERTICAL
3	5292.17	95.37			89.90	6.22	34.25	35.00	Average	212	284	VERTICAL
4	5313.88	105.40			99.85	6.24	34.31	35.00	Peak	212	284	VERTICAL
5	5352.95	52.60	54.00	-1.40	46.98	6.26	34.36	35.00	Average	212	284	VERTICAL
6	5352.95	64.14	74.00	-9.86	58.52	6.26	34.36	35.00	Peak	212	284	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

### Channel 106

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5451.85	65.79	74.00	-8.21	59.93	6.33	34.52	34.99	Peak	215	193	VERTICAL
2	5452.72	52.78	54.00	-1.22	46.92	6.33	34.52	34.99	Average	215	193	VERTICAL
3	5470.00	62.74	68.20	-5.46	56.84	6.34	34.55	34.99	Peak	215	193	VERTICAL
4	5531.74	106.59			100.61	6.37	34.61	35.00	Peak	215	193	VERTICAL
5	5532.17	96.72			90.74	6.37	34.61	35.00	Average	215	193	VERTICAL
6	5742.37	60.45	68.20	-7.75	54.39	6.45	34.65	35.04	Peak	215	193	VERTICAL

Item 4, 5 are the fundamental frequency at 5530 MHz.

### Channel 122

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5453.70	52.70	54.00	-1.30	46.84	6.33	34.52	34.99	Average	210	310	VERTICAL
2	5453.70	65.51	74.00	-8.49	59.65	6.33	34.52	34.99	Peak	210	310	VERTICAL
3	5467.11	63.29	68.20	-4.91	57.39	6.34	34.55	34.99	Peak	210	310	VERTICAL
4	5613.62	102.97			96.96	6.40	34.62	35.01	Average	210	310	VERTICAL
5	5615.07	112.30			106.29	6.40	34.62	35.01	Peak	210	310	VERTICAL
6	5734.41	66.22	68.20	-1.98	60.17	6.45	34.64	35.04	Peak	210	310	VERTICAL

Item 4, 5 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5725.07	112.87			106.81	6.45	34.64	35.03	Average	200	135	VERTICAL
2	5726.51	122.21			116.15	6.45	34.64	35.03	Peak	200	135	VERTICAL
3	5891.49	61.06	68.20	-7.14	54.94	6.51	34.68	35.07	Peak	200	135	VERTICAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

**Channel 144**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5725.07	112.43			106.37	6.45	34.64	35.03	Average	203	136	VERTICAL
2	5726.51	122.31			116.25	6.45	34.64	35.03	Peak	203	136	VERTICAL
3	5918.26	60.22	68.20	-7.98	54.10	6.52	34.68	35.08	Peak	203	136	VERTICAL

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 23, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

**Channel 142**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5715.79	110.25			104.20	6.44	34.64	35.03	Average	217	278	VERTICAL
2	5717.96	119.97			113.91	6.45	34.64	35.03	Peak	217	278	VERTICAL
3	5858.34	60.36	68.20	-7.84	54.26	6.50	34.67	35.07	Peak	217	278	VERTICAL

Item 1, 2 are the fundamental frequency at 5710 MHz.





<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 24, 2015		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

**Channel 138**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5695.79	105.27			99.23	6.43	34.64	35.03	Average	208	134	VERTICAL
2	5696.51	114.83			108.79	6.43	34.64	35.03	Peak	208	134	VERTICAL
3	5857.87	66.65	68.20	-1.55	60.55	6.50	34.67	35.07	Peak	208	134	VERTICAL

Item 1, 2 are the fundamental frequency at 5690 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 16, 2015 ~ Oct. 17, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

### Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5145.22	58.59	74.00	-15.41	53.42	6.13	34.04	35.00	Peak	300	303 HORIZONTAL
2	5150.00	45.80	54.00	-8.20	40.63	6.13	34.04	35.00	Average	300	303 HORIZONTAL
3	5265.21	110.43			104.99	6.21	34.23	35.00	Average	300	303 HORIZONTAL
4	5265.21	120.68			115.24	6.21	34.23	35.00	Peak	300	303 HORIZONTAL
5	5350.00	46.72	54.00	-7.28	41.10	6.26	34.36	35.00	Average	300	303 HORIZONTAL
6	5351.74	57.75	74.00	-16.25	52.13	6.26	34.36	35.00	Peak	300	303 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5304.92	121.24			115.73	6.23	34.28	35.00	Peak	300	308 HORIZONTAL
2	5305.21	110.75			105.24	6.23	34.28	35.00	Average	300	308 HORIZONTAL
3	5352.03	51.46	54.00	-2.54	45.84	6.26	34.36	35.00	Average	300	308 HORIZONTAL
4	5352.03	67.83	74.00	-6.17	62.21	6.26	34.36	35.00	Peak	300	308 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5322.75	106.29			100.74	6.24	34.31	35.00	Average	296	307 HORIZONTAL
2	5322.75	116.83			111.28	6.24	34.31	35.00	Peak	296	307 HORIZONTAL
3	5350.00	48.33	54.00	-5.67	42.71	6.26	34.36	35.00	Average	296	307 HORIZONTAL
4	5350.29	60.24	74.00	-13.76	54.62	6.26	34.36	35.00	Peak	296	307 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 17, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5456.24	60.14	74.00	-13.86	54.28	6.33	34.52	34.99	Peak	282	300	HORIZONTAL
2	5456.70	47.45	54.00	-6.55	41.59	6.33	34.52	34.99	Average	282	300	HORIZONTAL
3	5465.08	49.35	54.00	-4.65	43.45	6.34	34.55	34.99	Average	282	300	HORIZONTAL
4	5465.22	63.29	74.00	-10.71	57.39	6.34	34.55	34.99	Peak	282	300	HORIZONTAL
5	5502.75	117.56			111.60	6.36	34.60	35.00	Peak	282	300	HORIZONTAL
6	5503.33	106.90			100.94	6.36	34.60	35.00	Average	282	300	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5459.13	59.73	74.00	-14.27	53.87	6.33	34.52	34.99	Peak	277	304	HORIZONTAL
2	5460.00	46.49	54.00	-7.51	40.63	6.33	34.52	34.99	Average	277	304	HORIZONTAL
3	5469.13	59.99	74.00	-14.01	54.09	6.34	34.55	34.99	Peak	277	304	HORIZONTAL
4	5470.00	47.03	54.00	-6.97	41.13	6.34	34.55	34.99	Average	277	304	HORIZONTAL
5	5582.60	111.30			105.30	6.39	34.62	35.01	Average	277	304	HORIZONTAL
6	5583.04	121.21			115.21	6.39	34.62	35.01	Peak	277	304	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5702.60	116.31			110.26	6.44	34.64	35.03	Peak	274	300	HORIZONTAL
2	5702.89	104.14			98.09	6.44	34.64	35.03	Average	274	300	HORIZONTAL
3	5725.00	52.84	54.00	-1.16	46.78	6.45	34.64	35.03	Average	274	300	HORIZONTAL
4	5725.00	70.57	74.00	-3.43	64.51	6.45	34.64	35.03	Peak	274	300	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 16, 2015 ~ Oct. 17, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

### Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5148.26	57.87	74.00	-16.13	52.70	6.13	34.04	35.00	Peak	299	303	HORIZONTAL
2	5150.00	45.45	54.00	-8.55	40.28	6.13	34.04	35.00	Average	299	303	HORIZONTAL
3	5263.91	120.90			115.46	6.21	34.23	35.00	Peak	299	303	HORIZONTAL
4	5265.21	109.25			103.81	6.21	34.23	35.00	Average	299	303	HORIZONTAL
5	5359.99	46.32	54.00	-7.68	40.70	6.26	34.36	35.00	Average	299	303	HORIZONTAL
6	5362.16	58.61	74.00	-15.39	52.95	6.27	34.39	35.00	Peak	299	303	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5305.21	109.51			104.00	6.23	34.28	35.00	Average	300	304	HORIZONTAL
2	5305.21	120.45			114.94	6.23	34.28	35.00	Peak	300	304	HORIZONTAL
3	5351.16	50.90	54.00	-3.10	45.28	6.26	34.36	35.00	Average	300	304	HORIZONTAL
4	5351.16	65.74	74.00	-8.26	60.12	6.26	34.36	35.00	Peak	300	304	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5322.60	116.64			111.09	6.24	34.31	35.00	Peak	295	308	HORIZONTAL
2	5322.75	104.72			99.17	6.24	34.31	35.00	Average	295	308	HORIZONTAL
3	5350.00	47.80	54.00	-6.20	42.18	6.26	34.36	35.00	Average	295	308	HORIZONTAL
4	5350.87	61.41	74.00	-12.59	55.79	6.26	34.36	35.00	Peak	295	308	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 17, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5456.38	60.84	74.00	-13.16	54.98	6.33	34.52	34.99	Peak	248	307	HORIZONTAL
2	5460.00	46.99	54.00	-7.01	41.13	6.33	34.52	34.99	Average	248	307	HORIZONTAL
3	5462.89	48.20	54.00	-5.80	42.30	6.34	34.55	34.99	Average	248	307	HORIZONTAL
4	5469.57	62.41	74.00	-11.59	56.51	6.34	34.55	34.99	Peak	248	307	HORIZONTAL
5	5502.60	105.58			99.62	6.36	34.60	35.00	Average	248	307	HORIZONTAL
6	5502.75	117.13			111.17	6.36	34.60	35.00	Peak	248	307	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5456.09	59.89	74.00	-14.11	54.03	6.33	34.52	34.99	Peak	291	303	HORIZONTAL
2	5460.00	46.02	54.00	-7.98	40.16	6.33	34.52	34.99	Average	291	303	HORIZONTAL
3	5469.57	59.20	74.00	-14.80	53.30	6.34	34.55	34.99	Peak	291	303	HORIZONTAL
4	5470.00	46.24	54.00	-7.76	40.34	6.34	34.55	34.99	Average	291	303	HORIZONTAL
5	5581.74	120.59			114.59	6.39	34.62	35.01	Peak	291	303	HORIZONTAL
6	5582.17	108.77			102.77	6.39	34.62	35.01	Average	291	303	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5702.89	116.25			110.20	6.44	34.64	35.03	Peak	274	303	HORIZONTAL
2	5703.18	104.16			98.11	6.44	34.64	35.03	Average	274	303	HORIZONTAL
3	5725.00	52.98	54.00	-1.02	46.92	6.45	34.64	35.03	Average	274	303	HORIZONTAL
4	5725.00	67.47	74.00	-6.53	61.41	6.45	34.64	35.03	Peak	274	303	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 16, 2015 ~ Oct. 17, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Channel 54**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5141.32	58.76	74.00	-15.24	53.59	6.13	34.04	35.00	Peak	295	304	HORIZONTAL
2	5150.00	45.36	54.00	-8.64	40.19	6.13	34.04	35.00	Average	295	304	HORIZONTAL
3	5275.21	105.58			100.14	6.21	34.23	35.00	Average	295	304	HORIZONTAL
4	5275.64	116.29			110.82	6.22	34.25	35.00	Peak	295	304	HORIZONTAL
5	5354.34	67.08	74.00	-6.92	61.46	6.26	34.36	35.00	Peak	295	304	HORIZONTAL
6	5355.21	52.88	54.00	-1.12	47.26	6.26	34.36	35.00	Average	295	304	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5314.63	96.49			90.94	6.24	34.31	35.00	Average	287	297	HORIZONTAL
2	5314.92	107.38			101.83	6.24	34.31	35.00	Peak	287	297	HORIZONTAL
3	5351.16	59.90	74.00	-14.10	54.28	6.26	34.36	35.00	Peak	287	297	HORIZONTAL
4	5354.05	47.07	54.00	-6.93	41.45	6.26	34.36	35.00	Average	287	297	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 17, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

### Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5451.32	61.09	74.00	-12.91	55.23	6.33	34.52	34.99	Peak	247	309	VERTICAL
2	5451.90	46.95	54.00	-7.05	41.09	6.33	34.52	34.99	Average	247	309	VERTICAL
3	5470.00	49.26	54.00	-4.74	43.36	6.34	34.55	34.99	Average	247	309	VERTICAL
4	5470.00	61.18	74.00	-12.82	55.28	6.34	34.55	34.99	Peak	247	309	VERTICAL
5	5511.45	105.85			99.89	6.36	34.60	35.00	Peak	247	309	VERTICAL
6	5511.74	95.07			89.11	6.36	34.60	35.00	Average	247	309	VERTICAL

Item 5, 6 are the fundamental frequency at 5510 MHz.

### Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5452.62	63.22	74.00	-10.78	57.36	6.33	34.52	34.99	Peak	270	302	HORIZONTAL
2	5453.05	52.41	54.00	-1.59	46.55	6.33	34.52	34.99	Average	270	302	HORIZONTAL
3	5470.00	52.98	54.00	-1.02	47.08	6.34	34.55	34.99	Average	270	302	HORIZONTAL
4	5470.00	67.52	74.00	-6.48	61.62	6.34	34.55	34.99	Peak	270	302	HORIZONTAL
5	5553.04	115.67			109.69	6.38	34.61	35.01	Peak	270	302	HORIZONTAL
6	5553.47	104.70			98.72	6.38	34.61	35.01	Average	270	302	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5550 MHz.

### Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5672.03	100.74			94.71	6.43	34.63	35.03	Average	278	299	HORIZONTAL
2	5672.03	112.06			106.03	6.43	34.63	35.03	Peak	278	299	HORIZONTAL
3	5727.60	52.86	54.00	-1.14	46.80	6.45	34.64	35.03	Average	278	299	HORIZONTAL
4	5727.60	67.71	74.00	-6.29	61.65	6.45	34.64	35.03	Peak	278	299	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 16, 2015 ~ Oct. 20, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

### Channel 58

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5120.33	59.39	74.00	-14.61	54.29	6.11	33.99	35.00	Peak	285	58	HORIZONTAL
2	5149.28	45.75	54.00	-8.25	40.58	6.13	34.04	35.00	Average	285	58	HORIZONTAL
3	5270.46	103.30			97.86	6.21	34.23	35.00	Peak	285	58	HORIZONTAL
4	5288.55	93.90			88.43	6.22	34.25	35.00	Average	285	58	HORIZONTAL
5	5350.00	50.35	54.00	-3.65	44.73	6.26	34.36	35.00	Average	285	58	HORIZONTAL
6	5352.89	63.66	74.00	-10.34	58.04	6.26	34.36	35.00	Peak	285	58	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

### Channel 106

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5434.67	66.20	74.00	-7.80	60.38	6.32	34.49	34.99	Peak	280	304	HORIZONTAL
2	5454.21	52.48	54.00	-1.52	46.62	6.33	34.52	34.99	Average	280	304	HORIZONTAL
3	5460.72	47.27	54.00	-6.73	41.41	6.33	34.52	34.99	Average	280	304	HORIZONTAL
4	5464.21	61.09	74.00	-12.91	55.19	6.34	34.55	34.99	Peak	280	304	HORIZONTAL
5	5533.62	94.30			88.32	6.37	34.61	35.00	Average	280	304	HORIZONTAL
6	5534.34	103.97			97.99	6.37	34.61	35.00	Peak	280	304	HORIZONTAL
7	5725.72	44.27	54.00	-9.73	38.21	6.45	34.64	35.03	Average	280	304	HORIZONTAL
8	5769.14	59.71	74.00	-14.29	53.64	6.46	34.66	35.05	Peak	280	304	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5530 MHz.

### Channel 122

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5450.59	49.77	54.00	-4.23	43.91	6.33	34.52	34.99	Average	268	305	HORIZONTAL
2	5451.32	64.16	74.00	-9.84	58.30	6.33	34.52	34.99	Peak	268	305	HORIZONTAL
3	5470.00	52.73	54.00	-1.27	46.83	6.34	34.55	34.99	Average	268	305	HORIZONTAL
4	5470.00	67.60	74.00	-6.40	61.70	6.34	34.55	34.99	Peak	268	305	HORIZONTAL
5	5591.19	99.53			93.53	6.39	34.62	35.01	Average	268	305	HORIZONTAL
6	5591.91	112.19			106.19	6.39	34.62	35.01	Peak	268	305	HORIZONTAL
7	5726.45	51.51	54.00	-2.49	45.45	6.45	34.64	35.03	Average	268	305	HORIZONTAL
8	5727.17	65.02	74.00	-8.98	58.96	6.45	34.64	35.03	Peak	268	305	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



**Straddle Channel**

<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 20, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Channel 144**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg	
1	5727.00	98.97			92.11	7.79	33.01	32.08	VERTICAL	166	286	Average
2	5727.00	110.96			104.10	7.79	33.01	32.08	VERTICAL	166	286	Peak
3	5850.00	45.82	54.00	-8.18	38.78	7.87	33.05	32.22	VERTICAL	166	286	Average
4	5850.00	57.96	74.00	-16.04	50.92	7.87	33.05	32.22	VERTICAL	166	286	Peak

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 20, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Channel 144**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg	
1	5725.00	106.74			99.87	7.79	33.00	32.08	HORIZONTAL	258	68	Average
2	5726.00	116.90			110.03	7.79	33.00	32.08	HORIZONTAL	258	68	Peak
3	5850.00	46.43	54.00	-7.57	39.39	7.87	33.05	32.22	HORIZONTAL	258	68	Average
4	5851.00	58.61	74.00	-15.39	51.57	7.87	33.05	32.22	HORIZONTAL	258	68	Peak

Item 1, 2 are the fundamental frequency at 5720 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 20, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Channel 142**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg	
1	5718.00	100.04			93.19	7.79	33.00	32.06	VERTICAL	312	54	Average
2	5719.00	109.90			103.05	7.79	33.00	32.06	VERTICAL	312	54	Peak
3	5850.00	46.68	54.00	-7.32	39.64	7.87	33.05	32.22	VERTICAL	312	54	Average
4	5853.00	57.80	74.00	-16.20	50.76	7.87	33.05	32.22	VERTICAL	312	54	Peak

Item 1, 2 are the fundamental frequency at 5710 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
<b>Test Date</b>	Oct. 20, 2015		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

**Channel 138**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		cm	deg	
1	5676.00	111.08			104.29	7.76	32.99	32.02	HORIZONTAL	261		58 Peak
2	5696.00	100.67			93.85	7.78	33.00	32.04	HORIZONTAL	261		58 Average
3	5857.00	52.98	54.00	-1.02	45.92	7.87	33.05	32.24	HORIZONTAL	261		58 Average
4	5857.00	66.63	74.00	-7.37	59.57	7.87	33.05	32.24	HORIZONTAL	261		58 Peak

Item 1, 2 are the fundamental frequency at 5690 MHz.

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is  $-20^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

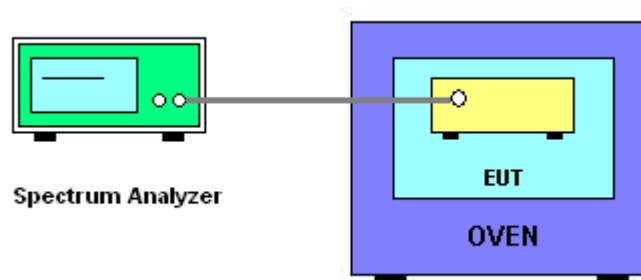

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.



#### 4.8.7. Test Result of Frequency Stability

<b>Temperature</b>	25°C	<b>Humidity</b>	50%
<b>Test Engineer</b>	Eddie Weng & Lucas Huang	<b>Test Date</b>	Oct. 23, 2015 ~ Nov. 05, 2015
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

Mode: 20 MHz / Chain 3

#### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5300.0077	5300.0063	5300.0045	5300.0024
110.00	5300.0065	5300.0052	5300.0036	5300.0017
93.50	5300.0051	5300.0040	5300.0028	5300.0006
Max. Deviation (MHz)	0.0077	0.0063	0.0045	0.0024
Max. Deviation (ppm)	1.45	1.19	0.85	0.45
Result	Complies			

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5300.0119	5300.0106	5300.0089	5300.0065
-10	5300.0104	5300.0092	5300.0076	5300.0057
0	5300.0090	5300.0078	5300.0059	5300.0037
10	5300.0077	5300.0064	5300.0049	5300.0031
20	5300.0065	5300.0052	5300.0036	5300.0017
30	5300.0051	5300.0040	5300.0026	5300.0010
40	5300.0035	5300.0020	5300.0004	5299.9984
50	5300.0018	5300.0006	5299.9991	5299.9964
Max. Deviation (MHz)	0.0119	0.0106	0.0089	0.0065
Max. Deviation (ppm)	2.25	2.00	1.68	1.23
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5580.0042	5580.0028	5580.0010	5579.9989
110.00	5580.0030	5580.0017	5580.0001	5579.9982
93.50	5580.0016	5580.0005	5579.9993	5579.9971
Max. Deviation (MHz)	0.0042	0.0028	0.0010	0.0029
Max. Deviation (ppm)	0.75	0.50	0.18	0.52
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5580.0084	5580.0071	5580.0054	5580.0030
-10	5580.0069	5580.0057	5580.0041	5580.0022
0	5580.0055	5580.0043	5580.0024	5580.0002
10	5580.0042	5580.0029	5580.0014	5579.9996
20	5580.0030	5580.0017	5580.0001	5579.9982
30	5580.0016	5580.0005	5579.9991	5579.9975
40	5580.0000	5579.9985	5579.9969	5579.9949
50	5579.9983	5579.9971	5579.9956	5579.9929
Max. Deviation (MHz)	0.0084	0.0071	0.0054	0.0071
Max. Deviation (ppm)	1.51	1.27	0.97	1.27
Result	Complies			

Mode: 40 MHz / Chain 3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5310.0085	5310.0071	5310.0053	5310.0032
110.00	5310.0073	5310.0060	5310.0044	5310.0025
93.50	5310.0059	5310.0048	5310.0036	5310.0014
Max. Deviation (MHz)	0.0085	0.0071	0.0053	0.0032
Max. Deviation (ppm)	1.60	1.34	1.00	0.60
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5310.0127	5310.0114	5310.0097	5310.0073
-10	5310.0112	5310.0100	5310.0084	5310.0065
0	5310.0098	5310.0086	5310.0067	5310.0045
10	5310.0085	5310.0072	5310.0057	5310.0039
20	5310.0073	5310.0060	5310.0044	5310.0025
30	5310.0059	5310.0048	5310.0034	5310.0018
40	5310.0043	5310.0028	5310.0012	5309.9992
50	5310.0026	5310.0014	5309.9999	5309.9972
Max. Deviation (MHz)	0.0127	0.0114	0.0097	0.0073
Max. Deviation (ppm)	2.39	2.15	1.83	1.37
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5550.0033	5550.0019	5550.0001	5549.9980
110.00	5550.0021	5550.0008	5549.9992	5549.9973
93.50	5550.0007	5549.9996	5549.9984	5549.9962
Max. Deviation (MHz)	0.0033	0.0019	0.0016	0.0038
Max. Deviation (ppm)	0.59	0.34	0.29	0.68
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5550.0075	5550.0062	5550.0045	5550.0021
-10	5550.0060	5550.0048	5550.0032	5550.0013
0	5550.0046	5550.0034	5550.0015	5549.9993
10	5550.0033	5550.0020	5550.0005	5549.9987
20	5550.0021	5550.0008	5549.9992	5549.9973
30	5550.0007	5549.9996	5549.9982	5549.9966
40	5549.9991	5549.9976	5549.9960	5549.9940
50	5549.9974	5549.9962	5549.9947	5549.9920
Max. Deviation (MHz)	0.0075	0.0062	0.0053	0.0080
Max. Deviation (ppm)	1.35	1.12	0.95	1.44
Result	Complies			

Mode: 80 MHz / Chain 3

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5290.0038	5290.0024	5290.0006	5289.9985
110.00	5290.0026	5290.0013	5289.9997	5289.9978
93.50	5290.0012	5290.0001	5289.9989	5289.9967
Max. Deviation (MHz)	0.0038	0.0024	0.0011	0.0033
Max. Deviation (ppm)	0.72	0.45	0.21	0.62
Result	Complies			

## Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5290.0080	5290.0067	5290.0050	5290.0026
-10	5290.0065	5290.0053	5290.0037	5290.0018
0	5290.0051	5290.0039	5290.0020	5289.9998
10	5290.0038	5290.0025	5290.0010	5289.9992
20	5290.0026	5290.0013	5289.9997	5289.9978
30	5290.0012	5290.0001	5289.9987	5289.9971
40	5289.9996	5289.9981	5289.9965	5289.9945
50	5289.9979	5289.9967	5289.9952	5289.9925
Max. Deviation (MHz)	0.0080	0.0067	0.0050	0.0075
Max. Deviation (ppm)	1.51	1.27	0.95	1.42
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5530.0025	5530.0011	5529.9993	5529.9972
110.00	5530.0013	5530.0000	5529.9984	5529.9965
93.50	5529.9999	5529.9988	5529.9976	5529.9954
Max. Deviation (MHz)	0.0025	0.0012	0.0024	0.0046
Max. Deviation (ppm)	0.45	0.22	0.43	0.83
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5530.0067	5530.0054	5530.0037	5530.0013
-10	5530.0052	5530.0040	5530.0024	5530.0005
0	5530.0038	5530.0026	5530.0007	5529.9985
10	5530.0025	5530.0012	5529.9997	5529.9979
20	5530.0013	5530.0000	5529.9984	5529.9965
30	5529.9999	5529.9988	5529.9974	5529.9958
40	5529.9983	5529.9968	5529.9952	5529.9932
50	5529.9966	5529.9954	5529.9939	5529.9912
Max. Deviation (MHz)	0.0067	0.0054	0.0061	0.0088
Max. Deviation (ppm)	1.21	0.98	1.10	1.59
Result	Complies			

<b>Temperature</b>	25°C	<b>Humidity</b>	50%
<b>Test Engineer</b>	Eddie Weng & Lucas Huang	<b>Test Date</b>	Oct. 20, 2015
<b>Test Mode</b>	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Mode: 20 MHz / Chain 4

#### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5300.0481	5300.0467	5300.0449	5300.0428
110.00	5300.0469	5300.0456	5300.0440	5300.0421
93.50	5300.0455	5300.0444	5300.0432	5300.0410
Max. Deviation (MHz)	0.0481	0.0467	0.0449	0.0428
Max. Deviation (ppm)	9.08	8.81	8.47	8.08
Result	Complies			

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5300.0523	5300.0510	5300.0493	5300.0469
-10	5300.0508	5300.0496	5300.0480	5300.0461
0	5300.0494	5300.0482	5300.0463	5300.0441
10	5300.0481	5300.0468	5300.0453	5300.0435
20	5300.0469	5300.0456	5300.0440	5300.0421
30	5300.0455	5300.0444	5300.0430	5300.0414
40	5300.0439	5300.0424	5300.0408	5300.0388
50	5300.0422	5300.0410	5300.0395	5300.0368
Max. Deviation (MHz)	0.0523	0.0510	0.0493	0.0469
Max. Deviation (ppm)	9.87	9.62	9.30	8.85
Result	Complies			



**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5580.0599	5580.0585	5580.0567	5580.0546
110.00	5580.0587	5580.0574	5580.0558	5580.0539
93.50	5580.0573	5580.0562	5580.0550	5580.0528
Max. Deviation (MHz)	0.0599	0.0585	0.0567	0.0546
Max. Deviation (ppm)	10.73	10.48	10.16	9.78
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5580.0641	5580.0628	5580.0611	5580.0587
-10	5580.0626	5580.0614	5580.0598	5580.0579
0	5580.0612	5580.0600	5580.0581	5580.0559
10	5580.0599	5580.0586	5580.0571	5580.0553
20	5580.0587	5580.0574	5580.0558	5580.0539
30	5580.0573	5580.0562	5580.0548	5580.0532
40	5580.0557	5580.0542	5580.0526	5580.0506
50	5580.0540	5580.0528	5580.0513	5580.0486
Max. Deviation (MHz)	0.0641	0.0628	0.0611	0.0587
Max. Deviation (ppm)	11.49	11.25	10.95	10.52
Result	Complies			

Mode: 40 MHz / Chain 4

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5310.0557	5310.0543	5310.0525	5310.0504
110.00	5310.0545	5310.0532	5310.0516	5310.0497
93.50	5310.0531	5310.0520	5310.0508	5310.0486
Max. Deviation (MHz)	0.0557	0.0543	0.0525	0.0504
Max. Deviation (ppm)	10.49	10.23	9.89	9.50
Result	Complies			

## Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5310.0599	5310.0586	5310.0569	5310.0545
-10	5310.0584	5310.0572	5310.0556	5310.0537
0	5310.0570	5310.0558	5310.0539	5310.0517
10	5310.0557	5310.0544	5310.0529	5310.0511
20	5310.0545	5310.0532	5310.0516	5310.0497
30	5310.0531	5310.0520	5310.0506	5310.0490
40	5310.0515	5310.0500	5310.0484	5310.0464
50	5310.0498	5310.0486	5310.0471	5310.0444
Max. Deviation (MHz)	0.0599	0.0586	0.0569	0.0545
Max. Deviation (ppm)	11.28	11.04	10.72	10.26
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5550.0589	5550.0575	5550.0557	5550.0536
110.00	5550.0577	5550.0564	5550.0548	5550.0529
93.50	5550.0563	5550.0552	5550.0540	5550.0518
Max. Deviation (MHz)	0.0589	0.0575	0.0557	0.0536
Max. Deviation (ppm)	10.61	10.36	10.04	9.66
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5550.0631	5550.0618	5550.0601	5550.0577
-10	5550.0616	5550.0604	5550.0588	5550.0569
0	5550.0602	5550.0590	5550.0571	5550.0549
10	5550.0589	5550.0576	5550.0561	5550.0543
20	5550.0577	5550.0564	5550.0548	5550.0529
30	5550.0563	5550.0552	5550.0538	5550.0522
40	5550.0547	5550.0532	5550.0516	5550.0496
50	5550.0530	5550.0518	5550.0503	5550.0476
Max. Deviation (MHz)	0.0631	0.0618	0.0601	0.0577
Max. Deviation (ppm)	11.37	11.14	10.83	10.40
Result	Complies			

Mode: 80 MHz / Chain 4

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5290.0574	5290.0560	5290.0542	5290.0521
110.00	5290.0562	5290.0549	5290.0533	5290.0514
93.50	5290.0548	5290.0537	5290.0525	5290.0503
Max. Deviation (MHz)	0.0574	0.0560	0.0542	0.0521
Max. Deviation (ppm)	10.85	10.59	10.25	9.85
Result	Complies			

## Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5290.0616	5290.0603	5290.0586	5290.0562
-10	5290.0601	5290.0589	5290.0573	5290.0554
0	5290.0587	5290.0575	5290.0556	5290.0534
10	5290.0574	5290.0561	5290.0546	5290.0528
20	5290.0562	5290.0549	5290.0533	5290.0514
30	5290.0548	5290.0537	5290.0523	5290.0507
40	5290.0532	5290.0517	5290.0501	5290.0481
50	5290.0515	5290.0503	5290.0488	5290.0461
Max. Deviation (MHz)	0.0616	0.0603	0.0586	0.0562
Max. Deviation (ppm)	11.64	11.40	11.08	10.62
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5530.0383	5530.0369	5530.0351	5530.0330
110.00	5530.0371	5530.0358	5530.0342	5530.0323
93.50	5530.0357	5530.0346	5530.0334	5530.0312
Max. Deviation (MHz)	0.0383	0.0369	0.0351	0.0330
Max. Deviation (ppm)	6.93	6.67	6.35	5.97
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5530.0425	5530.0412	5530.0395	5530.0371
-10	5530.0410	5530.0398	5530.0382	5530.0363
0	5530.0396	5530.0384	5530.0365	5530.0343
10	5530.0383	5530.0370	5530.0355	5530.0337
20	5530.0371	5530.0358	5530.0342	5530.0323
30	5530.0357	5530.0346	5530.0332	5530.0316
40	5530.0341	5530.0326	5530.0310	5530.0290
50	5530.0324	5530.0312	5530.0297	5530.0270
Max. Deviation (MHz)	0.0425	0.0412	0.0395	0.0371
Max. Deviation (ppm)	7.69	7.45	7.14	6.71
Result	Complies			

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Feb.10, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)





Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%