

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $-20^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

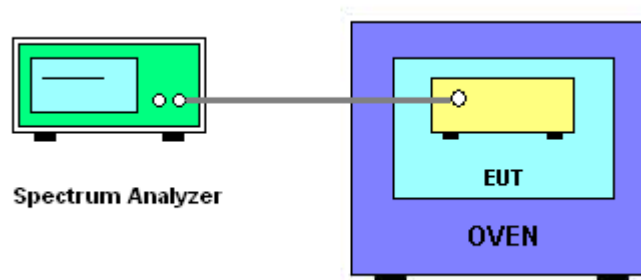

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 23, 2015 ~ Nov. 05, 2015
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

Mode: 20 MHz / Chain 3

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5300.0077	5300.0063	5300.0045	5300.0024
110.00	5300.0065	5300.0052	5300.0036	5300.0017
93.50	5300.0051	5300.0040	5300.0028	5300.0006
Max. Deviation (MHz)	0.0077	0.0063	0.0045	0.0024
Max. Deviation (ppm)	1.45	1.19	0.85	0.45
Result	Complies			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5300.0119	5300.0106	5300.0089	5300.0065
-10	5300.0104	5300.0092	5300.0076	5300.0057
0	5300.0090	5300.0078	5300.0059	5300.0037
10	5300.0077	5300.0064	5300.0049	5300.0031
20	5300.0065	5300.0052	5300.0036	5300.0017
30	5300.0051	5300.0040	5300.0026	5300.0010
40	5300.0035	5300.0020	5300.0004	5299.9984
50	5300.0018	5300.0006	5299.9991	5299.9964
Max. Deviation (MHz)	0.0119	0.0106	0.0089	0.0065
Max. Deviation (ppm)	2.25	2.00	1.68	1.23
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5580.0042	5580.0028	5580.0010	5579.9989
110.00	5580.0030	5580.0017	5580.0001	5579.9982
93.50	5580.0016	5580.0005	5579.9993	5579.9971
Max. Deviation (MHz)	0.0042	0.0028	0.0010	0.0029
Max. Deviation (ppm)	0.75	0.50	0.18	0.52
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5580.0084	5580.0071	5580.0054	5580.0030
-10	5580.0069	5580.0057	5580.0041	5580.0022
0	5580.0055	5580.0043	5580.0024	5580.0002
10	5580.0042	5580.0029	5580.0014	5579.9996
20	5580.0030	5580.0017	5580.0001	5579.9982
30	5580.0016	5580.0005	5579.9991	5579.9975
40	5580.0000	5579.9985	5579.9969	5579.9949
50	5579.9983	5579.9971	5579.9956	5579.9929
Max. Deviation (MHz)	0.0084	0.0071	0.0054	0.0071
Max. Deviation (ppm)	1.51	1.27	0.97	1.27
Result	Complies			

Mode: 40 MHz / Chain 3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5310.0085	5310.0071	5310.0053	5310.0032
110.00	5310.0073	5310.0060	5310.0044	5310.0025
93.50	5310.0059	5310.0048	5310.0036	5310.0014
Max. Deviation (MHz)	0.0085	0.0071	0.0053	0.0032
Max. Deviation (ppm)	1.60	1.34	1.00	0.60
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5310.0127	5310.0114	5310.0097	5310.0073
-10	5310.0112	5310.0100	5310.0084	5310.0065
0	5310.0098	5310.0086	5310.0067	5310.0045
10	5310.0085	5310.0072	5310.0057	5310.0039
20	5310.0073	5310.0060	5310.0044	5310.0025
30	5310.0059	5310.0048	5310.0034	5310.0018
40	5310.0043	5310.0028	5310.0012	5309.9992
50	5310.0026	5310.0014	5309.9999	5309.9972
Max. Deviation (MHz)	0.0127	0.0114	0.0097	0.0073
Max. Deviation (ppm)	2.39	2.15	1.83	1.37
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5550.0033	5550.0019	5550.0001	5549.9980
110.00	5550.0021	5550.0008	5549.9992	5549.9973
93.50	5550.0007	5549.9996	5549.9984	5549.9962
Max. Deviation (MHz)	0.0033	0.0019	0.0016	0.0038
Max. Deviation (ppm)	0.59	0.34	0.29	0.68
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5550.0075	5550.0062	5550.0045	5550.0021
-10	5550.0060	5550.0048	5550.0032	5550.0013
0	5550.0046	5550.0034	5550.0015	5549.9993
10	5550.0033	5550.0020	5550.0005	5549.9987
20	5550.0021	5550.0008	5549.9992	5549.9973
30	5550.0007	5549.9996	5549.9982	5549.9966
40	5549.9991	5549.9976	5549.9960	5549.9940
50	5549.9974	5549.9962	5549.9947	5549.9920
Max. Deviation (MHz)	0.0075	0.0062	0.0053	0.0080
Max. Deviation (ppm)	1.35	1.12	0.95	1.44
Result	Complies			

Mode: 80 MHz / Chain 3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5290.0038	5290.0024	5290.0006	5289.9985
110.00	5290.0026	5290.0013	5289.9997	5289.9978
93.50	5290.0012	5290.0001	5289.9989	5289.9967
Max. Deviation (MHz)	0.0038	0.0024	0.0011	0.0033
Max. Deviation (ppm)	0.72	0.45	0.21	0.62
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5290.0080	5290.0067	5290.0050	5290.0026
-10	5290.0065	5290.0053	5290.0037	5290.0018
0	5290.0051	5290.0039	5290.0020	5289.9998
10	5290.0038	5290.0025	5290.0010	5289.9992
20	5290.0026	5290.0013	5289.9997	5289.9978
30	5290.0012	5290.0001	5289.9987	5289.9971
40	5289.9996	5289.9981	5289.9965	5289.9945
50	5289.9979	5289.9967	5289.9952	5289.9925
Max. Deviation (MHz)	0.0080	0.0067	0.0050	0.0075
Max. Deviation (ppm)	1.51	1.27	0.95	1.42
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5530.0025	5530.0011	5529.9993	5529.9972
110.00	5530.0013	5530.0000	5529.9984	5529.9965
93.50	5529.9999	5529.9988	5529.9976	5529.9954
Max. Deviation (MHz)	0.0025	0.0012	0.0024	0.0046
Max. Deviation (ppm)	0.45	0.22	0.43	0.83
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5530.0067	5530.0054	5530.0037	5530.0013
-10	5530.0052	5530.0040	5530.0024	5530.0005
0	5530.0038	5530.0026	5530.0007	5529.9985
10	5530.0025	5530.0012	5529.9997	5529.9979
20	5530.0013	5530.0000	5529.9984	5529.9965
30	5529.9999	5529.9988	5529.9974	5529.9958
40	5529.9983	5529.9968	5529.9952	5529.9932
50	5529.9966	5529.9954	5529.9939	5529.9912
Max. Deviation (MHz)	0.0067	0.0054	0.0061	0.0088
Max. Deviation (ppm)	1.21	0.98	1.10	1.59
Result	Complies			

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 20, 2015
Test Mode	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Mode: 20 MHz / Chain 4

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5300.0481	5300.0467	5300.0449	5300.0428
110.00	5300.0469	5300.0456	5300.0440	5300.0421
93.50	5300.0455	5300.0444	5300.0432	5300.0410
Max. Deviation (MHz)	0.0481	0.0467	0.0449	0.0428
Max. Deviation (ppm)	9.08	8.81	8.47	8.08
Result	Complies			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5300.0523	5300.0510	5300.0493	5300.0469
-10	5300.0508	5300.0496	5300.0480	5300.0461
0	5300.0494	5300.0482	5300.0463	5300.0441
10	5300.0481	5300.0468	5300.0453	5300.0435
20	5300.0469	5300.0456	5300.0440	5300.0421
30	5300.0455	5300.0444	5300.0430	5300.0414
40	5300.0439	5300.0424	5300.0408	5300.0388
50	5300.0422	5300.0410	5300.0395	5300.0368
Max. Deviation (MHz)	0.0523	0.0510	0.0493	0.0469
Max. Deviation (ppm)	9.87	9.62	9.30	8.85
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5580.0599	5580.0585	5580.0567	5580.0546
110.00	5580.0587	5580.0574	5580.0558	5580.0539
93.50	5580.0573	5580.0562	5580.0550	5580.0528
Max. Deviation (MHz)	0.0599	0.0585	0.0567	0.0546
Max. Deviation (ppm)	10.73	10.48	10.16	9.78
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5580 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5580.0641	5580.0628	5580.0611	5580.0587
-10	5580.0626	5580.0614	5580.0598	5580.0579
0	5580.0612	5580.0600	5580.0581	5580.0559
10	5580.0599	5580.0586	5580.0571	5580.0553
20	5580.0587	5580.0574	5580.0558	5580.0539
30	5580.0573	5580.0562	5580.0548	5580.0532
40	5580.0557	5580.0542	5580.0526	5580.0506
50	5580.0540	5580.0528	5580.0513	5580.0486
Max. Deviation (MHz)	0.0641	0.0628	0.0611	0.0587
Max. Deviation (ppm)	11.49	11.25	10.95	10.52
Result	Complies			

Mode: 40 MHz / Chain 4

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5310.0557	5310.0543	5310.0525	5310.0504
110.00	5310.0545	5310.0532	5310.0516	5310.0497
93.50	5310.0531	5310.0520	5310.0508	5310.0486
Max. Deviation (MHz)	0.0557	0.0543	0.0525	0.0504
Max. Deviation (ppm)	10.49	10.23	9.89	9.50
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5310.0599	5310.0586	5310.0569	5310.0545
-10	5310.0584	5310.0572	5310.0556	5310.0537
0	5310.0570	5310.0558	5310.0539	5310.0517
10	5310.0557	5310.0544	5310.0529	5310.0511
20	5310.0545	5310.0532	5310.0516	5310.0497
30	5310.0531	5310.0520	5310.0506	5310.0490
40	5310.0515	5310.0500	5310.0484	5310.0464
50	5310.0498	5310.0486	5310.0471	5310.0444
Max. Deviation (MHz)	0.0599	0.0586	0.0569	0.0545
Max. Deviation (ppm)	11.28	11.04	10.72	10.26
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5550.0589	5550.0575	5550.0557	5550.0536
110.00	5550.0577	5550.0564	5550.0548	5550.0529
93.50	5550.0563	5550.0552	5550.0540	5550.0518
Max. Deviation (MHz)	0.0589	0.0575	0.0557	0.0536
Max. Deviation (ppm)	10.61	10.36	10.04	9.66
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5550 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5550.0631	5550.0618	5550.0601	5550.0577
-10	5550.0616	5550.0604	5550.0588	5550.0569
0	5550.0602	5550.0590	5550.0571	5550.0549
10	5550.0589	5550.0576	5550.0561	5550.0543
20	5550.0577	5550.0564	5550.0548	5550.0529
30	5550.0563	5550.0552	5550.0538	5550.0522
40	5550.0547	5550.0532	5550.0516	5550.0496
50	5550.0530	5550.0518	5550.0503	5550.0476
Max. Deviation (MHz)	0.0631	0.0618	0.0601	0.0577
Max. Deviation (ppm)	11.37	11.14	10.83	10.40
Result	Complies			

Mode: 80 MHz / Chain 4

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5290.0574	5290.0560	5290.0542	5290.0521
110.00	5290.0562	5290.0549	5290.0533	5290.0514
93.50	5290.0548	5290.0537	5290.0525	5290.0503
Max. Deviation (MHz)	0.0574	0.0560	0.0542	0.0521
Max. Deviation (ppm)	10.85	10.59	10.25	9.85
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5290.0616	5290.0603	5290.0586	5290.0562
-10	5290.0601	5290.0589	5290.0573	5290.0554
0	5290.0587	5290.0575	5290.0556	5290.0534
10	5290.0574	5290.0561	5290.0546	5290.0528
20	5290.0562	5290.0549	5290.0533	5290.0514
30	5290.0548	5290.0537	5290.0523	5290.0507
40	5290.0532	5290.0517	5290.0501	5290.0481
50	5290.0515	5290.0503	5290.0488	5290.0461
Max. Deviation (MHz)	0.0616	0.0603	0.0586	0.0562
Max. Deviation (ppm)	11.64	11.40	11.08	10.62
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5530.0383	5530.0369	5530.0351	5530.0330
110.00	5530.0371	5530.0358	5530.0342	5530.0323
93.50	5530.0357	5530.0346	5530.0334	5530.0312
Max. Deviation (MHz)	0.0383	0.0369	0.0351	0.0330
Max. Deviation (ppm)	6.93	6.67	6.35	5.97
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5530 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5530.0425	5530.0412	5530.0395	5530.0371
-10	5530.0410	5530.0398	5530.0382	5530.0363
0	5530.0396	5530.0384	5530.0365	5530.0343
10	5530.0383	5530.0370	5530.0355	5530.0337
20	5530.0371	5530.0358	5530.0342	5530.0323
30	5530.0357	5530.0346	5530.0332	5530.0316
40	5530.0341	5530.0326	5530.0310	5530.0290
50	5530.0324	5530.0312	5530.0297	5530.0270
Max. Deviation (MHz)	0.0425	0.0412	0.0395	0.0371
Max. Deviation (ppm)	7.69	7.45	7.14	6.71
Result	Complies			

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Feb.10, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%