



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Extreme Networks, Inc.
Applicant Address	9 Northeastern Blvd. Salem, NH 03079 USA
FCC ID	QXO-4411OAC
Manufacturer's company	Senao Networks, Inc.
Manufacturer Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

Product Name	Wireless 802.11a/AC+ b/g/n Access Point
Brand Name	Extreme Networks
Model No.	31016, 31018, 31017, 31019
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Nov. 17, 2015
Final Test Date	Dec. 30, 2015
Submission Type	Original Equipment

### Statement

**Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03 and KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	6
3.3. Table for Filed Antenna.....	7
3.4. Table for Carrier Frequencies .....	9
3.5. Table for Test Modes .....	10
3.6. Table for Testing Locations.....	12
3.7. Table for Multiple Listing.....	12
3.8. Table for Supporting Units .....	13
3.9. Table for Parameters of Test Software Setting .....	14
3.10. EUT Operation during Test .....	17
3.11. Duty Cycle.....	17
3.12. Test Configurations .....	18
<b>4. TEST RESULT</b> .....	<b>21</b>
4.1. AC Power Line Conducted Emissions Measurement.....	21
4.2. Maximum Conducted Output Power Measurement.....	25
4.3. Power Spectral Density Measurement .....	34
4.4. 6dB Spectrum Bandwidth Measurement .....	108
4.5. Radiated Emissions Measurement .....	150
4.6. Emissions Measurement .....	253
4.7. Antenna Requirements .....	383
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>384</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>386</b>
<b>APPENDIX A. TEST PHOTOS</b> .....	<b>A1 ~ A12</b>
<b>APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT</b> .....	<b>B1 ~ B3</b>



### History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR541521-01AA	Rev. 01	Initial issue of report	Jan. 06, 2016
FR541521-01AA	Rev. 02	Adding two model names: 31017, 31019	Jan. 12, 2016

## 1. VERIFICATION OF COMPLIANCE

Product Name : Wireless 802.11a/AC+ b/g/n Access Point  
Brand Name : Extreme Networks  
Model No. : 31016, 31018, 31017, 31019  
Applicant : Extreme Networks, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 17, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	16.16 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.05 dB
4.3	15.247(e)	Power Spectral Density	Complies	0.63 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.01 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.01 dB
4.7	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From PoE
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi IEEE 802.11b: 14.24 MHz IEEE 802.11g: 21.10 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 22.75 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 35.02 MHz Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi IEEE 802.11b: 14.59 MHz IEEE 802.11g: 21.10 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 22.75 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 35.02 MHz Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi IEEE 802.11b: 13.63 MHz IEEE 802.11g: 17.28 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 19.45 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 34.88 MHz Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi IEEE 802.11b: 14.24 MHz IEEE 802.11g: 21.10 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 22.75 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 35.02 MHz

	<p>Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi          IEEE 802.11b: 14.15 MHz          IEEE 802.11g: 21.10 MHz          IEEE 802.11ac MCS0/Nss1 (VHT20): 22.75 MHz          IEEE 802.11ac MCS0/Nss1 (VHT40): 34.88 MHz          Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi          IEEE 802.11b: 13.02 MHz          IEEE 802.11g: 16.93 MHz          IEEE 802.11ac MCS0/Nss1 (VHT20): 18.23 MHz          IEEE 802.11ac MCS0/Nss1 (VHT40): 34.73 MHz          Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi          IEEE 802.11b: 14.24 MHz          IEEE 802.11g: 22.40 MHz          IEEE 802.11ac MCS0/Nss1 (VHT20): 23.79 MHz          IEEE 802.11ac MCS0/Nss1 (VHT40): 35.02 MHz          Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi          IEEE 802.11b: 14.41 MHz          IEEE 802.11g: 16.32 MHz          IEEE 802.11ac MCS0/Nss1 (VHT20): 18.15 MHz          IEEE 802.11ac MCS0/Nss1 (VHT40): 36.47 MHz</p>
<p>Maximum Conducted Output Power</p>	<p>Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi          IEEE 802.11b: 26.75 dBm          IEEE 802.11g: 27.16 dBm          IEEE 802.11ac MCS0/Nss1 (VHT20): 27.04 dBm          IEEE 802.11ac MCS0/Nss1 (VHT40): 21.33 dBm          Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi          IEEE 802.11b: 26.97 dBm          IEEE 802.11g: 27.16 dBm          IEEE 802.11ac MCS0/Nss1 (VHT20): 27.04 dBm          IEEE 802.11ac MCS0/Nss1 (VHT40): 20.73 dBm          Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi          IEEE 802.11b: 25.45 dBm          IEEE 802.11g: 25.43 dBm          IEEE 802.11ac MCS0/Nss1 (VHT20): 25.26 dBm          IEEE 802.11ac MCS0/Nss1 (VHT40): 18.63 dBm</p>

	<p>Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi</p> <p>IEEE 802.11b: 26.67 dBm</p> <p>IEEE 802.11g: 27.16 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 27.04 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 21.33 dBm</p> <p>Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi</p> <p>IEEE 802.11b: 26.58 dBm</p> <p>IEEE 802.11g: 27.16 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 27.04 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 22.77 dBm</p> <p>Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi</p> <p>IEEE 802.11b: 22.01 dBm</p> <p>IEEE 802.11g: 22.91 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 22.76 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 19.55 dBm</p> <p>Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi</p> <p>IEEE 802.11b: 26.75 dBm</p> <p>IEEE 802.11g: 27.42 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 27.44 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 21.11 dBm</p> <p>Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi</p> <p>IEEE 802.11b: 26.84 dBm</p> <p>IEEE 802.11g: 27.45 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 28.63 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 22.19 dBm</p>
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3



**Antenna and Band width**

Antenna	Four (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20 and VHT40 in 2.4GHz.

Note 3: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac

**3.2. Accessories**

Antenna cable, Non-Shielded, 1.5m

### 3.3. Table for Filed Antenna

Set.	Brand Holder	Model Number (Part No.)	Extreme Part No. (Short Description)	Antenna Type	Connector	Polarized Antenna	Gain (dBi)	
							2.4GHz	5GHz
1	PCTEL Inc.	908412-10	30714 (WS-AO-DE07025N)	Sector Antenna	N Male	V	7.5	6.5
2	PCTEL Inc.	908414-10	30716 (WS-AO-5Q05025N)	Sector Antenna	N Male	V	-	4.5
3	PCTEL Inc.	908409-10	30711 (WS-AO-DQ05120N)	Sector Antenna	N Male	V	5.5	5.5
4	PCTEL Inc.	908416-10	30718 (WS-AO-DE10055N)	Sector Antenna	N Male	V	10.5	7.5
5	PCTEL Inc.	908418-10	30720 (WS-AO-DE07100N)	Panel Antenna	N Male	X	7	6
6	PCTEL Inc.	908411-10	30713 (WS-AO-2Q05060N)	Sector Antenna	N Male Plug	V	5	-
7	PCTEL Inc.	908415-10	30717 (WS-AO-5Q11025N)	Sector Antenna	N Male	V	-	11.5
8	PCTEL Inc.	908413-10	30715 (WS-AO-DE13025N)	Sector Antenna	N Male	V	13	12
9	PCTEL Inc.	908410-10	30712 (WS-AO-5Q04060N)	Sector Antenna	N Male Plug	V	-	4
10	PCTEL Inc.	-	WS-AO-5D23009N	Panel Antenna	N Type	V	-	23
11	PCTEL Inc.	908550-10	30724 (WS-AO-DQ04360N)	Omni Antenna	N Male	X	5.5	6
12	Senao Networks, Inc.	AP3965i	-	PIFA Antenna	MMCX	X	Note 1	

Note 1:

Set.	Antenna Gain (dBi)							
	2.4GHz				5GHz			
	Chain 1	Chain 2	Chain 3	Chain 4	Chain 1	Chain 2	Chain 3	Chain 4
12	6.25	5.77	6.45	5.60	5.96	5.97	6.25	6.08

Note 2:

The EUT has twelve sets of antennas.

Note 3:

Antenna cable only for Set 5 and Set 10 use.

<For 2.4GHz Function>

For IEEE 802.11b/g/n/ac mode (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

<For 5GHz Function>


For IEEE 802.11a/n/ac mode (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

For EUT 1:



For EUT 2:

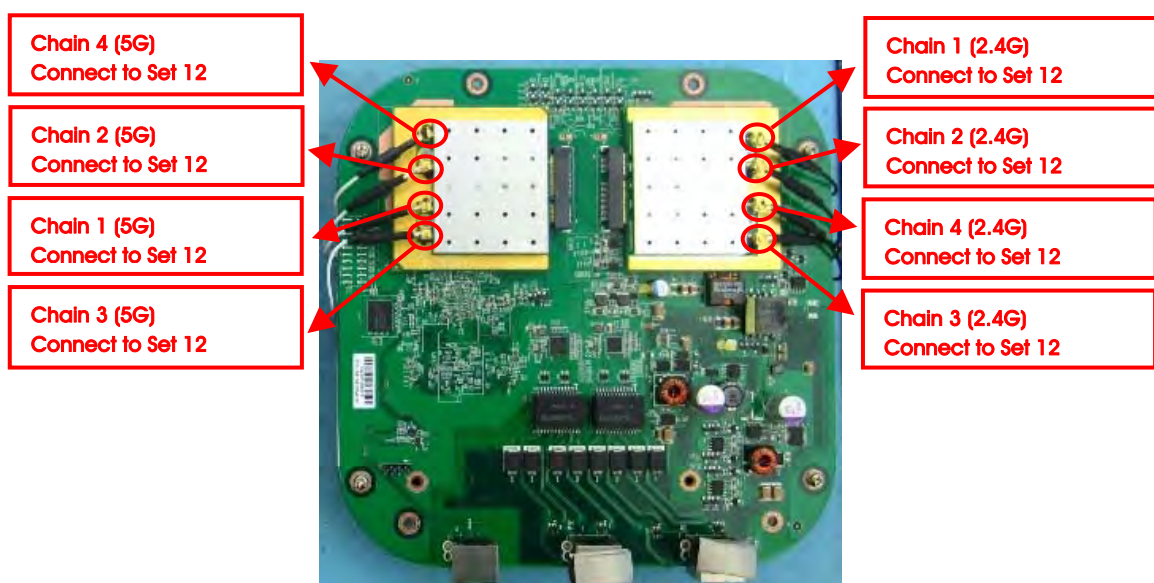

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4

Note1: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

Note2:

The PoE is for measurement only, would not be marketed.

The PoE information as below:

Power	Brand	Model
PoE	Microsemi	PD-9001GR

Note3: All the specification of test configurations and test modes were based on customer's request.

Note4: The console port can not be used by end user. It is generally used for updating FW by professional installer.

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Normal Link - EUT 1 + Set 8 + Set 10

Mode 2. Normal Link - EUT 2 + Set 12

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission Below 1GHz test:**

Mode 1. Place EUT 1 in Y axis + Set 8 + Set 10

Mode 2. Place EUT 1 in Z axis + Set 8 + Set 10

Mode 3. Place EUT 2 in Y axis + Set 12

Mode 4. Place EUT 2 in Z axis + Set 12

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission Above 1GHz test:**

The EUT 1 was performed at Y axis and Z axis position. Z axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

The EUT 2 was performed at Y axis and Z axis position. Y axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

Mode 1. Place EUT 1 in Z axis + Set 1

Mode 2. Place EUT 1 in Z axis + Set 3

Mode 3. Place EUT 1 in Z axis + Set 4

Mode 4. Place EUT 1 in Z axis + Set 5

Mode 5. Place EUT 1 in Z axis + Set 6

Mode 6. Place EUT 1 in Z axis + Set 8

Mode 7. Place EUT 1 in Z axis + Set 11

Mode 8. Place EUT 2 in Y axis + Set 12

**For Co-location MPE and Radiated Emission Co-location Test:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA541521-01) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Multiple Listing

The model names are identical to each other in all aspects except for the following table:

Equipment	EUT	Product Name	Model Name	Internal Antenna	External Antenna	Equipped Antenna
Wireless 802.11a/AC+ b/g/n Access Point	1	WS-AP3965e-FCC	31018	X	V	Set 1~11
		WS-AP3965e-ROW	31019			
	2	WS-AP3965i-FCC	31016	V	X	Set 12
		WS-AP3965i-ROW	31017			

Note: Different model names for EUT 1 (31018 and 31019) and EUT 2 (31016 and 31017) served as marketing strategy.

### 3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (For Below 1GHz)

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E4300	DoC
PoE Load	Senao	LT4321UF	N/A
PoE	Microsemi	PD-9001GR	N/A

For Test Site No: 03CH01-CB (For Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
PoE	Microsemi	PD-9001GR	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
PoE Load	Senao	LT4321UF	N/A
PoE	Microsemi	PD-9001GR	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
PoE	Microsemi	PD-9001GR	N/A



### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	19	21	19.5	-	-	-
802.11g	15.5	22	15.5	-	-	-
802.11ac MCS0/Nss1 VHT20	15.5	22	15.5	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	12.5	15.5	12.5

#### Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	21	20.5	20	-	-	-
802.11g	17	22	16	-	-	-
802.11ac MCS0/Nss1 VHT20	15	22	16	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	12	14.5	11

#### Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	16.5	19.5	16.5	-	-	-
802.11g	15.5	20	14.5	-	-	-
802.11ac MCS0/Nss1 VHT20	15	20	13	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	9	12.5	9

**Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi**

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	18.5	21	19	-	-	-
802.11g	15	22	15.5	-	-	-
802.11ac MCS0/Nss1 VHT20	14.5	22	15	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	12	15.5	10.5

**Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi**

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	20.5	20.5	19.5	-	-	-
802.11g	18.5	22	15	-	-	-
802.11ac MCS0/Nss1 VHT20	19	22	16	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	12.5	16.5	14

**Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi**

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	16	15.5	15.5	-	-	-
802.11g	14.5	17.5	13.5	-	-	-
802.11ac MCS0/Nss1 VHT20	13	17.5	13	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	9.5	13.5	8.5

**Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi**

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	19	21	19.5	-	-	-
802.11g	18	22.5	16.5	-	-	-
802.11ac MCS0/Nss1 VHT20	17	22.5	16	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	13.5	15	11.5

**Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi**

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	20.5	21	20	-	-	-
802.11g	15	22.5	14.5	-	-	-
802.11ac MCS0/Nss1 VHT20	13.5	23	14.5	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	11	16	12

### 3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 3.11. Duty Cycle

#### Mode 1 ~ Mode 7


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100	0.00	0.01
802.11g	2.064	2.128	96.99	0.13	0.48
802.11ac MCS0/Nss1 VHT20	5.004	5.088	98.35	0.07	0.01
802.11ac MCS0/Nss1 VHT40	2.432	2.528	96.20	0.17	0.41

#### Mode 8

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.	0.00	0.01
802.11g	2.068	2.129	97.14	0.13	0.48
802.11ac MCS0/Nss1 VHT20	5.022	5.065	99.14	0.04	0.01
802.11ac MCS0/Nss1 VHT40	2.419	2.500	96.75	0.14	0.41

### 3.12. Test Configurations


#### 3.12.1. AC Power Line Conduction Emissions Test Configuration

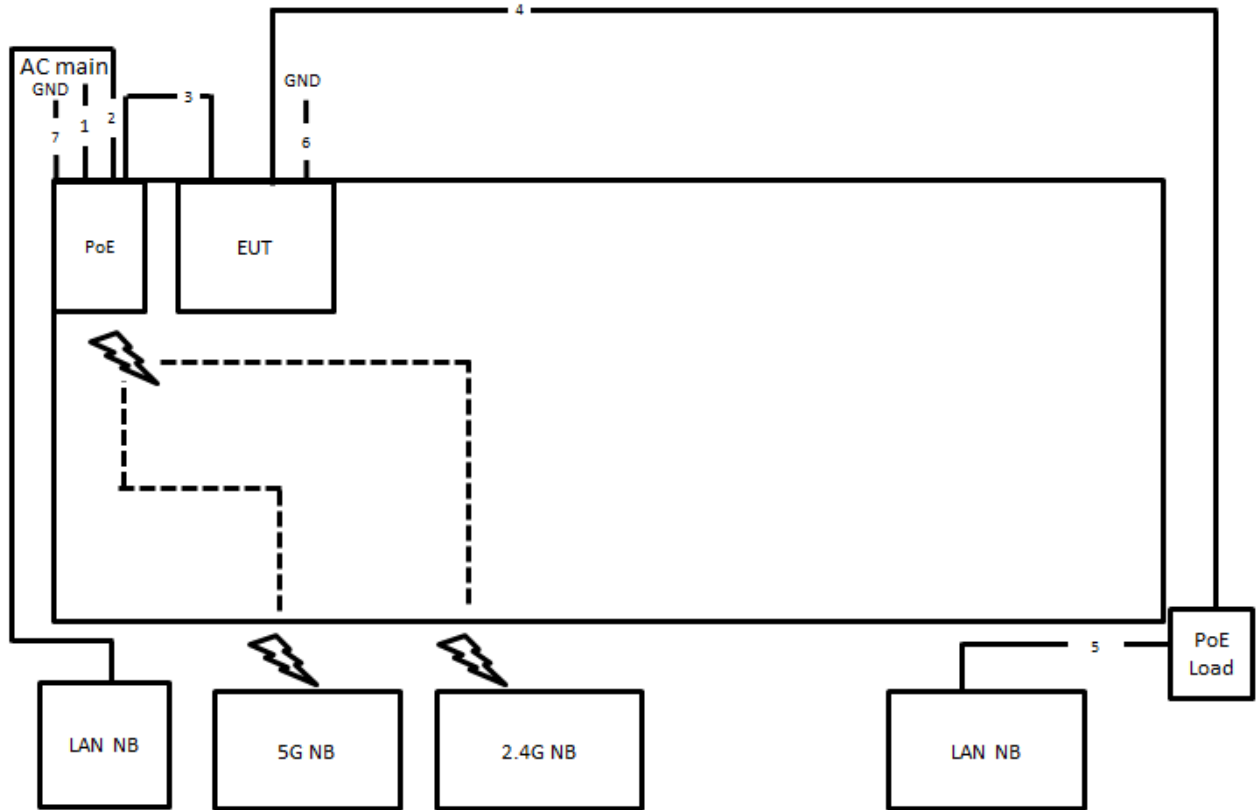

Item	Connection	Shielded	Length(m)
1	Power cable	No	4.6m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	1.5m
6	Ground cable	No	1.5m
7	Ground cable	No	1.5m


### 3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

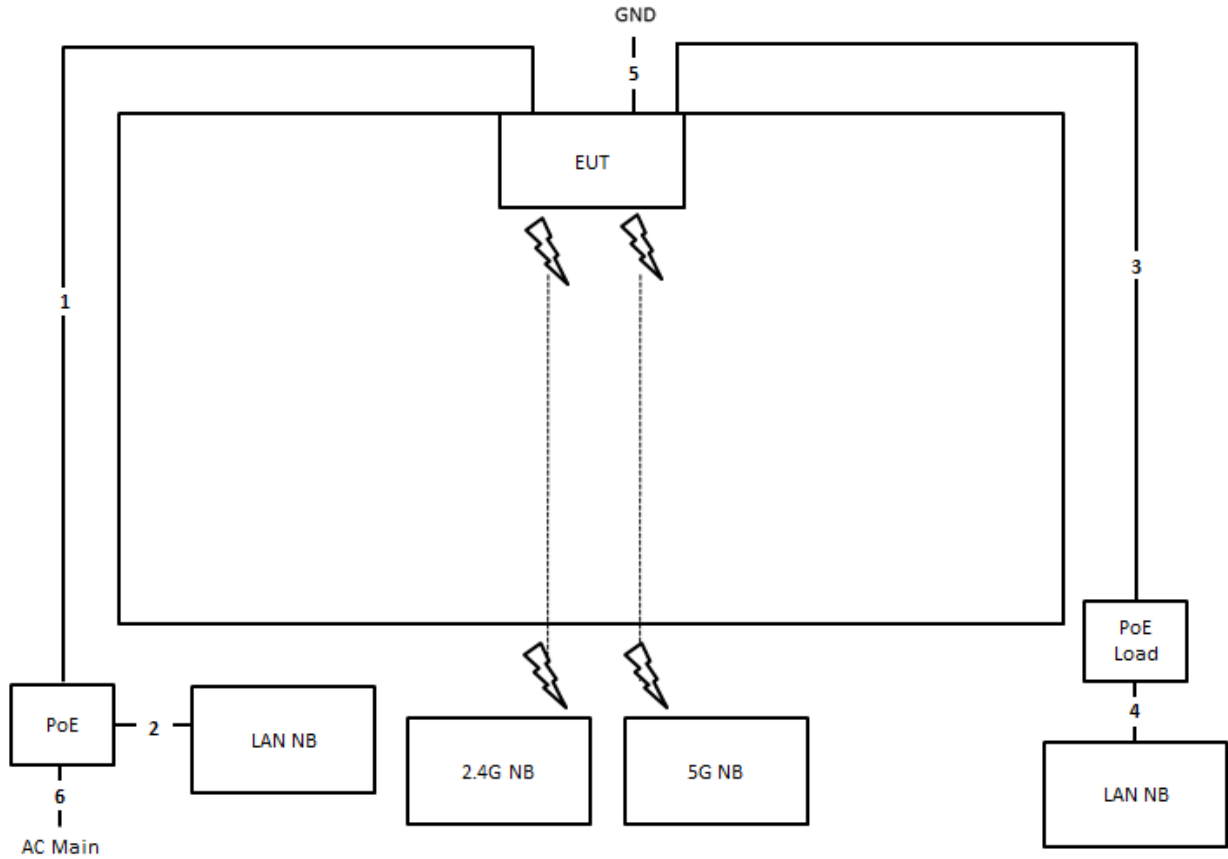

Item	Connection	Shielded	Length(m)
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	1.5m
5	Ground cable	No	1.5m
6	Power cable	No	4.6m

Test Configuration: above 1GHz

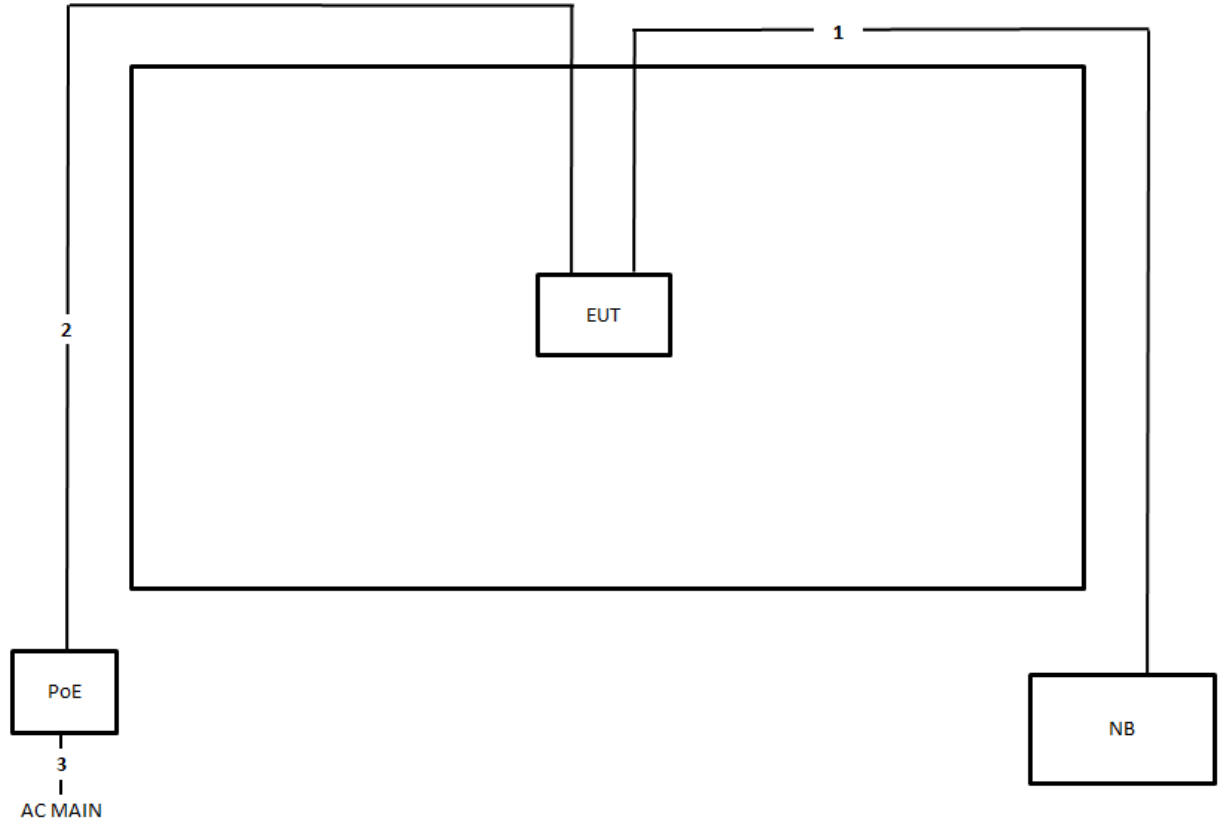

Item	Connection	Shielded	Length(m)
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	10m
3	Power cable	No	4.6m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.






4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	58%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

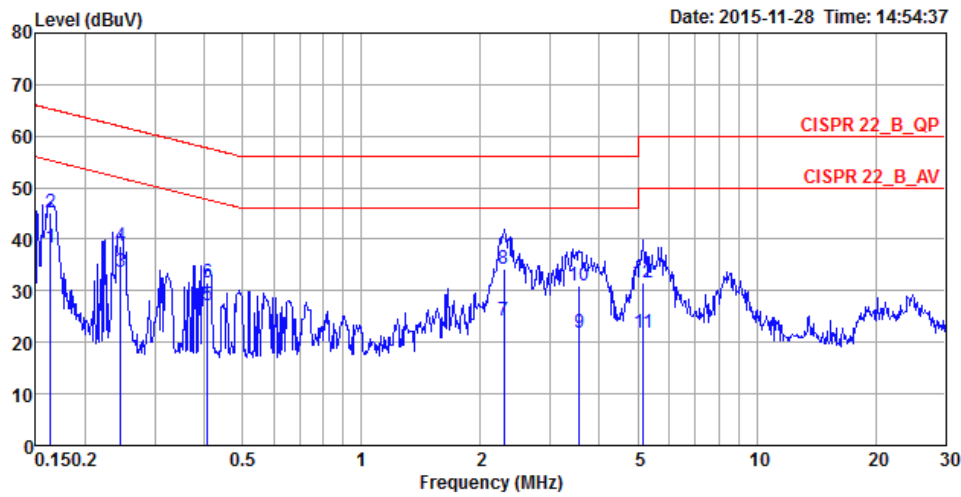

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1633	38.32	-16.98	55.30	28.37	9.93	0.02	LINE	Average
2	0.1633	45.02	-20.28	65.30	35.07	9.93	0.02	LINE	QP
3	0.2455	33.58	-18.33	51.91	23.62	9.93	0.03	LINE	Average
4	0.2455	38.68	-23.23	61.91	28.72	9.93	0.03	LINE	QP
5	0.4083	27.03	-20.65	47.68	17.06	9.93	0.04	LINE	Average
6	0.4083	31.63	-26.05	57.68	21.66	9.93	0.04	LINE	QP
7	2.2968	24.19	-21.81	46.00	14.13	10.00	0.06	LINE	Average
8	2.2968	34.32	-21.68	56.00	24.26	10.00	0.06	LINE	QP
9	3.5654	21.82	-24.18	46.00	11.75	10.01	0.06	LINE	Average
10	3.5654	30.85	-25.15	56.00	20.78	10.01	0.06	LINE	QP
11	5.1663	21.83	-28.17	50.00	11.67	10.06	0.10	LINE	Average
12	5.1663	31.49	-28.51	60.00	21.33	10.06	0.10	LINE	QP

Temperature	23°C	Humidity	58%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

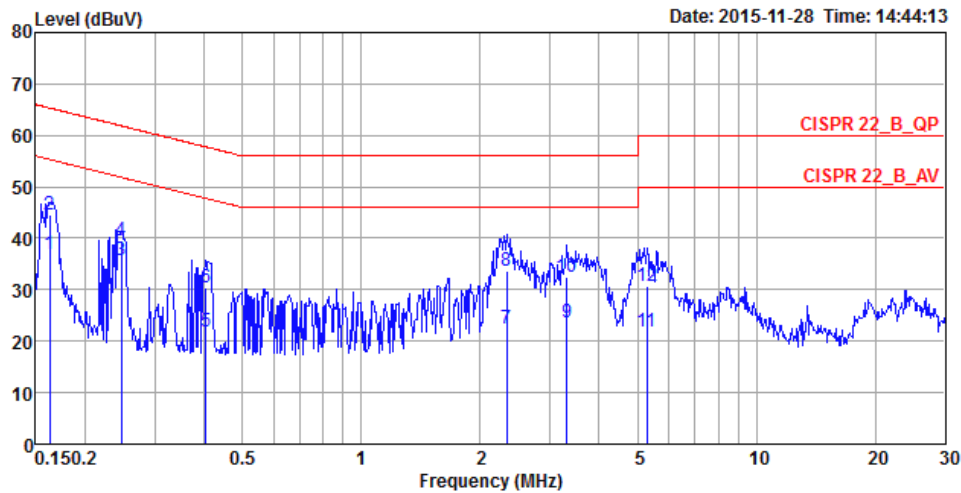

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1624	36.93	-18.41	55.34	27.13	9.78	0.02	NEUTRAL	Average
2	0.1624	44.62	-20.72	65.34	34.82	9.78	0.02	NEUTRAL	QP
3	0.2468	35.70	-16.16	51.86	25.88	9.79	0.03	NEUTRAL	Average
4	0.2468	39.56	-22.30	61.86	29.74	9.79	0.03	NEUTRAL	QP
5	0.4040	21.74	-26.03	47.77	11.91	9.79	0.04	NEUTRAL	Average
6	0.4040	30.52	-27.25	57.77	20.69	9.79	0.04	NEUTRAL	QP
7	2.3336	22.34	-23.66	46.00	12.43	9.85	0.06	NEUTRAL	Average
8	2.3336	33.76	-22.24	56.00	23.85	9.85	0.06	NEUTRAL	QP
9	3.3105	23.57	-22.43	46.00	13.65	9.86	0.06	NEUTRAL	Average
10	3.3105	32.50	-23.50	56.00	22.58	9.86	0.06	NEUTRAL	QP
11	5.2770	21.74	-28.26	50.00	11.73	9.91	0.10	NEUTRAL	Average
12	5.2770	30.79	-29.21	60.00	20.78	9.91	0.10	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

The limit for output power is 30dBm.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

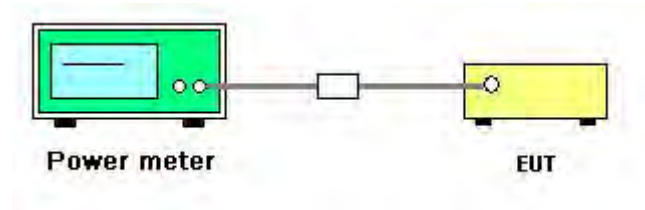

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Dec. 06, 2015
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	19.57	20.02	18.42	18.87	25.28	28.50	Complies
	2437 MHz	20.62	21.44	20.14	20.63	26.75	28.50	Complies
	2462 MHz	19.63	18.45	20.03	19.24	25.40	28.50	Complies
802.11g	2412 MHz	15.36	15.44	14.47	14.88	21.08	28.50	Complies
	2437 MHz	21.32	21.66	20.52	20.96	27.16	28.50	Complies
	2462 MHz	15.19	15.33	14.28	14.96	20.98	28.50	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	15.42	15.35	14.45	14.98	21.09	28.50	Complies
	2437 MHz	21.13	21.56	20.24	21.03	27.04	28.50	Complies
	2462 MHz	15.05	14.43	15.18	14.62	20.85	28.50	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	12.76	13.22	12.27	12.37	18.69	28.50	Complies
	2437 MHz	15.39	15.87	14.95	14.94	21.33	28.50	Complies
	2452 MHz	13.01	13.32	12.62	12.91	18.99	28.50	Complies

Note: Antenna gain=7.50dBi > 6dBi, So Limit =30-(7.50-6)=28.50dBm.

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Nov. 30, 2015 ~ Dec. 06, 2015
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	21.17	21.57	20.11	20.83	26.97	30.00	Complies
	2437 MHz	20.72	21.32	19.23	20.72	26.58	30.00	Complies
	2462 MHz	20.41	20.43	20.03	19.87	26.21	30.00	Complies
802.11g	2412 MHz	16.81	16.88	15.84	16.39	22.52	30.00	Complies
	2437 MHz	21.32	21.66	20.52	20.96	27.16	30.00	Complies
	2462 MHz	15.78	15.84	14.86	15.49	21.53	30.00	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	15.54	14.66	13.65	14.24	20.60	30.00	Complies
	2437 MHz	21.13	21.56	20.24	21.03	27.04	30.00	Complies
	2462 MHz	15.26	14.65	15.55	14.85	21.11	30.00	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	12.35	12.63	11.82	11.91	18.21	30.00	Complies
	2437 MHz	14.77	15.28	14.41	14.29	20.73	30.00	Complies
	2452 MHz	11.39	11.63	10.84	11.07	17.26	30.00	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Nov. 30, 2015 ~ Dec. 06, 2015
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	16.95	17.32	15.42	16.61	22.65	25.50	Complies
	2437 MHz	19.78	20.04	18.46	19.27	25.45	25.50	Complies
	2462 MHz	17.12	17.11	16.79	16.53	22.91	25.50	Complies
802.11g	2412 MHz	15.36	15.44	14.47	14.88	21.08	25.50	Complies
	2437 MHz	19.63	19.88	18.65	19.37	25.43	25.50	Complies
	2462 MHz	14.16	14.39	13.45	13.92	20.01	25.50	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	15.54	14.66	13.65	14.24	20.60	25.50	Complies
	2437 MHz	19.35	19.79	18.44	19.27	25.26	25.50	Complies
	2462 MHz	12.65	11.52	12.62	11.95	18.23	25.50	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	9.03	9.67	8.94	9.12	15.22	25.50	Complies
	2437 MHz	12.65	13.22	12.21	12.29	18.63	25.50	Complies
	2452 MHz	9.31	9.78	8.49	9.13	15.22	25.50	Complies

Note: Antenna gain=10.50dBi > 6dBi, So Limit =30-(10.50-6)=25.50dBm.

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Nov. 30, 2015 ~ Dec. 06, 2015
<b>Test Mode</b>	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	18.41	19.24	18.49	18.28	24.64	29.00	Complies
	2437 MHz	20.64	21.29	20.11	20.46	26.67	29.00	Complies
	2462 MHz	18.62	19.43	18.17	18.72	24.78	29.00	Complies
802.11g	2412 MHz	14.45	14.42	13.81	13.96	20.19	29.00	Complies
	2437 MHz	21.32	21.66	20.52	20.96	27.16	29.00	Complies
	2462 MHz	15.19	15.33	14.28	14.96	20.98	29.00	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	13.74	13.86	12.94	13.17	19.46	29.00	Complies
	2437 MHz	21.13	21.56	20.24	21.03	27.04	29.00	Complies
	2462 MHz	14.05	14.29	13.53	13.78	19.94	29.00	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	12.35	12.63	11.82	11.91	18.21	29.00	Complies
	2437 MHz	15.39	15.87	14.95	14.94	21.33	29.00	Complies
	2452 MHz	10.37	10.84	9.93	10.17	16.36	29.00	Complies

Note: Antenna gain=7.00dBi > 6dBi, So Limit =30-(7.00-6)=29.00dBm.



<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Nov. 30, 2015 ~ Dec. 06, 2015
<b>Test Mode</b>	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	20.82	21.23	19.06	20.71	26.55	30.00	Complies
	2437 MHz	20.72	21.32	19.23	20.72	26.58	30.00	Complies
	2462 MHz	19.63	18.45	20.03	19.24	25.40	30.00	Complies
802.11g	2412 MHz	18.35	18.15	17.35	17.91	23.98	30.00	Complies
	2437 MHz	21.32	21.66	20.52	20.96	27.16	30.00	Complies
	2462 MHz	14.81	14.93	13.95	14.32	20.54	30.00	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	18.39	18.52	17.58	18.21	24.21	30.00	Complies
	2437 MHz	21.13	21.56	20.24	21.03	27.04	30.00	Complies
	2462 MHz	15.26	14.65	15.55	14.85	21.11	30.00	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	12.76	13.22	12.27	12.37	18.69	30.00	Complies
	2437 MHz	16.91	17.12	16.43	16.52	22.77	30.00	Complies
	2452 MHz	14.32	14.55	13.99	14.02	20.25	30.00	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Nov. 30, 2015 ~ Dec. 06, 2015
<b>Test Mode</b>	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	16.68	15.60	15.63	15.96	22.01	23.00	Complies
	2437 MHz	15.33	15.10	16.29	15.34	21.56	23.00	Complies
	2462 MHz	16.03	15.71	15.71	15.19	21.69	23.00	Complies
802.11g	2412 MHz	14.47	13.63	14.11	13.63	20.00	23.00	Complies
	2437 MHz	17.21	16.20	17.34	16.71	22.91	23.00	Complies
	2462 MHz	13.26	12.44	13.31	12.73	18.97	23.00	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	12.54	11.66	12.56	12.07	18.24	23.00	Complies
	2437 MHz	17.02	16.16	17.22	16.49	22.76	23.00	Complies
	2462 MHz	12.65	11.52	12.62	11.95	18.23	23.00	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	9.64	9.42	10.12	9.37	15.67	23.00	Complies
	2437 MHz	13.59	13.17	14.02	13.28	19.55	23.00	Complies
	2452 MHz	8.96	8.33	9.07	8.47	14.74	23.00	Complies

Note: Antenna gain=13.00dBi > 6dBi, So Limit =30-(13.00-6)=23.00dBm.

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Nov. 30, 2015 ~ Dec. 06, 2015
<b>Test Mode</b>	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	19.57	20.02	18.42	18.87	25.28	30.00	Complies
	2437 MHz	20.62	21.44	20.14	20.63	26.75	30.00	Complies
	2462 MHz	19.63	20.03	18.45	19.24	25.40	30.00	Complies
802.11g	2412 MHz	17.90	17.36	17.02	17.31	23.43	30.00	Complies
	2437 MHz	21.67	21.92	20.83	21.07	27.42	30.00	Complies
	2462 MHz	16.13	16.15	15.47	15.56	21.86	30.00	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	16.57	16.58	15.76	16.09	22.28	30.00	Complies
	2437 MHz	21.62	21.88	20.77	21.33	27.44	30.00	Complies
	2462 MHz	15.26	15.55	14.65	14.85	21.11	30.00	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	13.70	14.15	13.23	13.17	19.60	30.00	Complies
	2437 MHz	15.20	15.63	14.83	14.64	21.11	30.00	Complies
	2452 MHz	11.63	12.18	11.32	11.47	17.68	30.00	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Dec. 07, 2015
<b>Test Mode</b>	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	20.46	20.45	19.55	21.23	26.48	29.55	Complies
	2437 MHz	20.97	20.77	19.67	21.65	26.84	29.55	Complies
	2462 MHz	20.03	19.70	19.12	20.78	25.97	29.55	Complies
802.11g	2412 MHz	14.34	14.61	13.96	14.55	20.39	29.55	Complies
	2437 MHz	21.72	21.86	20.74	21.32	27.45	29.55	Complies
	2462 MHz	14.13	14.25	13.42	14.05	19.99	29.55	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	12.72	12.96	12.28	12.94	18.75	29.55	Complies
	2437 MHz	21.83	23.44	23.20	21.68	28.63	29.55	Complies
	2462 MHz	13.71	13.97	12.81	13.95	19.66	29.55	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	10.91	10.69	10.88	11.38	16.99	29.55	Complies
	2437 MHz	16.05	16.19	15.97	16.44	22.19	29.55	Complies
	2452 MHz	12.06	12.05	11.94	12.56	18.18	29.55	Complies

Note: Antenna gain=6.45dBi > 6dBi, So Limit =30-(6.45-6)=29.55dBm.

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

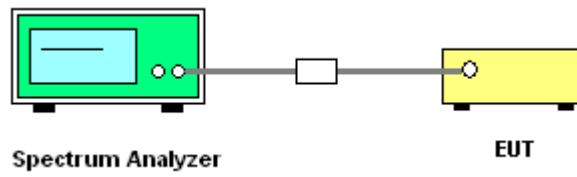

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-12.38	-13.50	-12.02	-12.05	-6.43	3.49	Complies
	2437 MHz	-10.35	-11.03	-10.26	-10.82	-4.58	3.49	Complies
	2462 MHz	-11.97	-12.89	-11.12	-12.15	-5.97	3.49	Complies
802.11g	2412 MHz	-11.08	-11.76	-11.17	-11.19	-5.27	3.49	Complies
	2437 MHz	-4.52	-6.36	-5.03	-5.23	0.79	3.49	Complies
	2462 MHz	-11.05	-12.25	-11.59	-11.79	-5.63	3.49	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-10.97	-11.62	-11.84	-11.70	-5.50	3.49	Complies
	2437 MHz	-4.61	-5.63	-5.89	-5.51	0.64	3.49	Complies
	2462 MHz	-11.15	-11.63	-10.47	-11.39	-5.12	3.49	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-16.42	-17.84	-15.31	-16.13	-10.31	3.49	Complies
	2437 MHz	-12.97	-13.33	-13.40	-13.51	-7.28	3.49	Complies
	2452 MHz	-15.38	-15.23	-15.83	-15.62	-9.49	3.49	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$ , So Limit =  $8 - (10.51 - 6) = 3.49 \text{ dBm/3kHz}$ .

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-10.46	-10.92	-9.86	-10.99	-4.51	5.49	Complies
	2437 MHz	-11.25	-12.00	-10.40	-10.85	-5.07	5.49	Complies
	2462 MHz	-10.95	-11.85	-10.97	-11.83	-5.36	5.49	Complies
802.11g	2412 MHz	-9.18	-9.67	-10.41	-9.61	-3.67	5.49	Complies
	2437 MHz	-4.52	-6.36	-5.03	-5.23	0.79	5.49	Complies
	2462 MHz	-10.83	-12.08	-11.07	-10.84	-5.16	5.49	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-11.24	-11.67	-11.15	-11.47	-5.36	5.49	Complies
	2437 MHz	-4.61	-5.63	-5.89	-5.51	0.64	5.49	Complies
	2462 MHz	-10.94	-10.93	-10.15	-11.52	-4.84	5.49	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-17.33	-19.15	-17.01	-17.97	-11.77	5.49	Complies
	2437 MHz	-15.42	-15.75	-15.10	-14.27	-9.08	5.49	Complies
	2452 MHz	-18.30	-18.15	-17.69	-18.04	-12.02	5.49	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$ , So Limit = 8-(8.51-6)=5.49dBm/3kHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-14.06	-15.02	-15.09	-14.74	-8.69	0.49	Complies
	2437 MHz	-10.69	-10.41	-11.81	-11.26	-4.99	0.49	Complies
	2462 MHz	-13.99	-14.96	-13.84	-14.67	-8.32	0.49	Complies
802.11g	2412 MHz	-11.08	-11.76	-11.17	-11.19	-5.27	0.49	Complies
	2437 MHz	-10.86	-11.93	-9.84	-10.27	-4.64	0.49	Complies
	2462 MHz	-11.69	-13.01	-12.18	-12.69	-6.34	0.49	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-11.92	-12.56	-11.55	-12.88	-6.18	0.49	Complies
	2437 MHz	-6.60	-8.23	-6.70	-7.34	-1.15	0.49	Complies
	2462 MHz	-15.66	-16.43	-14.28	-15.50	-9.38	0.49	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-19.40	-19.90	-19.22	-19.60	-13.50	0.49	Complies
	2437 MHz	-17.20	-16.83	-16.96	-15.90	-10.67	0.49	Complies
	2452 MHz	-21.06	-20.99	-20.09	-19.94	-14.47	0.49	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 13.51 \text{ dBi} > 6 \text{ dBi}$ , So Limit =  $8 - (13.51 - 6) = 0.49 \text{ dBm/3kHz}$ .

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-12.17	-13.89	-12.65	-12.43	-6.72	0.98	Complies
	2437 MHz	-10.25	-10.93	-10.80	-10.63	-4.62	0.98	Complies
	2462 MHz	-11.71	-12.59	-11.87	-12.47	-6.12	0.98	Complies
802.11g	2412 MHz	-12.27	-13.99	-12.42	-11.38	-6.40	0.98	Complies
	2437 MHz	-5.63	-6.29	-5.16	-5.67	0.35	0.98	Complies
	2462 MHz	-11.05	-12.25	-11.59	-11.79	-5.63	0.98	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-11.55	-14.10	-12.97	-12.87	-6.76	0.98	Complies
	2437 MHz	-6.58	-7.23	-6.16	-5.81	-0.39	0.98	Complies
	2462 MHz	-11.85	-11.82	-12.71	-12.15	-6.10	0.98	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-16.51	-16.99	-16.40	-18.09	-10.93	0.98	Complies
	2437 MHz	-12.97	-13.33	-13.40	-13.51	-7.28	0.98	Complies
	2452 MHz	-18.05	-18.42	-18.50	-17.33	-12.03	0.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 13.02\text{dBi} > 6\text{dBi}$ , So Limit =  $8 - (13.02 - 6) = 0.98\text{dBm}/3\text{kHz}$ .

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-11.12	-12.05	-10.51	-10.93	-5.10	5.99	Complies
	2437 MHz	-10.77	-11.31	-10.33	-11.17	-4.86	5.99	Complies
	2462 MHz	-11.97	-12.89	-11.12	-12.15	-5.97	5.99	Complies
802.11g	2412 MHz	-9.17	-9.84	-8.43	-8.79	-3.01	5.99	Complies
	2437 MHz	-5.63	-6.29	-5.16	-5.67	0.35	5.99	Complies
	2462 MHz	-12.51	-12.11	-11.74	-10.94	-5.77	5.99	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-7.99	-9.03	-8.85	-8.30	-2.50	5.99	Complies
	2437 MHz	-5.92	-6.07	-6.16	-6.46	-0.13	5.99	Complies
	2462 MHz	-11.81	-11.67	-11.73	-10.56	-5.39	5.99	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-16.42	-17.84	-15.31	-16.13	-10.31	5.99	Complies
	2437 MHz	-12.25	-12.30	-11.41	-11.71	-5.88	5.99	Complies
	2452 MHz	-15.11	-15.86	-15.26	-15.85	-9.49	5.99	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.01 \text{ dBi} > 6 \text{ dBi}$ , So Limit = 8-(8.01-6)=5.99dBm/3kHz.

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-15.27	-15.96	-14.58	-15.33	-9.24	-2.01	Complies
	2437 MHz	-15.31	-16.40	-14.96	-16.03	-9.62	-2.01	Complies
	2462 MHz	-15.89	-16.62	-14.70	-15.59	-9.62	-2.01	Complies
802.11g	2412 MHz	-14.25	-14.51	-13.73	-13.87	-8.06	-2.01	Complies
	2437 MHz	-10.86	-11.93	-9.84	-10.27	-4.64	-2.01	Complies
	2462 MHz	-14.67	-15.10	-13.67	-15.12	-8.58	-2.01	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-16.15	-16.80	-15.58	-14.76	-9.74	-2.01	Complies
	2437 MHz	-10.18	-11.09	-9.45	-9.92	-4.10	-2.01	Complies
	2462 MHz	-15.66	-16.43	-14.28	-15.50	-9.38	-2.01	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-19.64	-19.48	-19.66	-19.41	-13.53	-2.01	Complies
	2437 MHz	-15.26	-16.41	-16.73	-16.52	-10.17	-2.01	Complies
	2452 MHz	-18.53	-20.81	-20.14	-19.74	-13.70	-2.01	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 16.01 \text{ dBi} > 6 \text{ dBi}$ , So Limit =  $8 - (16.01 - 6) = -2.01 \text{ dBm/3kHz}$ .

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-12.38	-13.50	-12.02	-12.05	-6.43	2.48	Complies
	2437 MHz	-10.35	-11.03	-10.26	-10.82	-4.58	2.48	Complies
	2462 MHz	-11.97	-12.89	-11.12	-12.15	-5.97	2.48	Complies
802.11g	2412 MHz	-9.08	-9.81	-8.34	-8.22	-2.80	2.48	Complies
	2437 MHz	-5.06	-6.16	-5.48	-4.41	0.79	2.48	Complies
	2462 MHz	-10.33	-11.93	-10.64	-11.00	-4.91	2.48	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-10.95	-11.77	-10.71	-10.58	-4.96	2.48	Complies
	2437 MHz	-5.26	-6.99	-4.04	-4.85	0.86	2.48	Complies
	2462 MHz	-11.81	-11.73	-11.67	-10.56	-5.39	2.48	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-15.42	-16.67	-14.90	-15.83	-9.64	2.48	Complies
	2437 MHz	-13.72	-13.98	-13.08	-13.45	-7.52	2.48	Complies
	2452 MHz	-16.72	-17.86	-17.75	-17.36	-11.38	2.48	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.52\text{dBi} > 6\text{dBi}$ , So Limit =  $8 - (11.52 - 6) = 2.48\text{dBm}/3\text{kHz}$ .

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-12.26	-10.14	-10.85	-11.77	-5.16	1.96	Complies
	2437 MHz	-11.52	-11.78	-13.01	-12.30	-6.10	1.96	Complies
	2462 MHz	-12.51	-13.20	-12.53	-12.36	-6.62	1.96	Complies
802.11g	2412 MHz	-14.89	-15.64	-15.04	-14.28	-8.91	1.96	Complies
	2437 MHz	-6.84	-7.62	-4.64	-7.01	-0.35	1.96	Complies
	2462 MHz	-15.08	-14.49	-15.57	-13.84	-8.68	1.96	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-16.16	-15.11	-15.80	-15.65	-9.64	1.96	Complies
	2437 MHz	-10.71	-7.06	-6.37	-5.94	-1.08	1.96	Complies
	2462 MHz	-10.71	-7.06	-6.37	-5.94	-1.15	1.96	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-21.03	-20.33	-20.27	-20.52	-14.51	1.96	Complies
	2437 MHz	-15.43	-16.12	-14.63	-13.31	-8.72	1.96	Complies
	2452 MHz	-14.58	-14.60	-15.33	-15.34	-8.93	1.96	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.04\text{dBi} > 6\text{dBi}$ , So Limit =  $8 - (12.04 - 6) = 1.96\text{dBm}/3\text{kHz}$ .

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

**Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi**

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1**



Date: 6.DEC.2015 03:42:01

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2**



Date: 6.DEC.2015 03:40:37

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3**



Date: 6.DEC.2015 03:41:32


**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4**



Date: 6.DEC.2015 03:42:39




**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

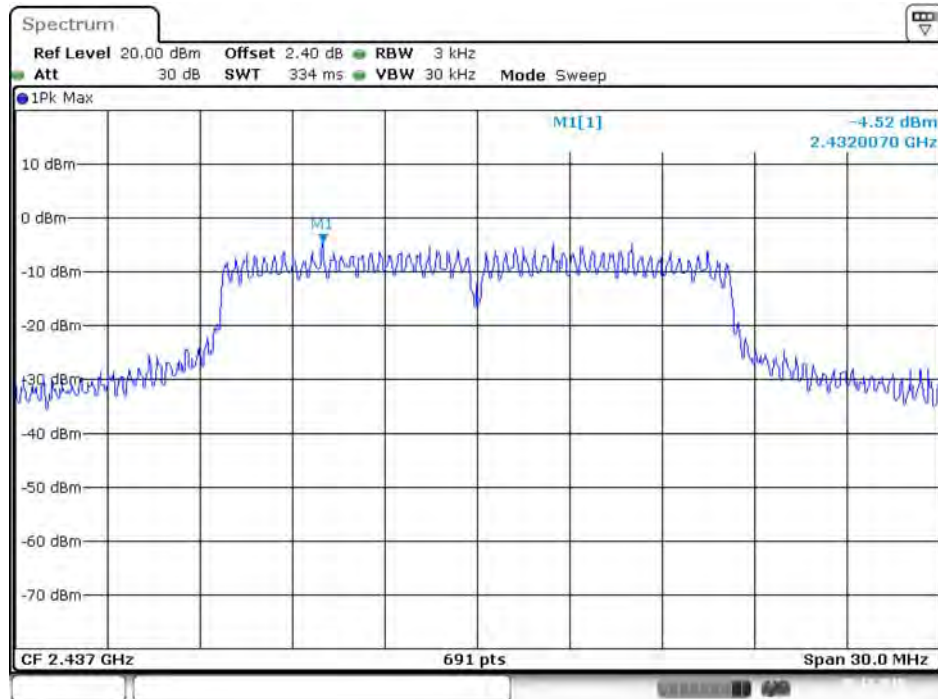


Date: 5.DEC.2015 22:10:16

**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

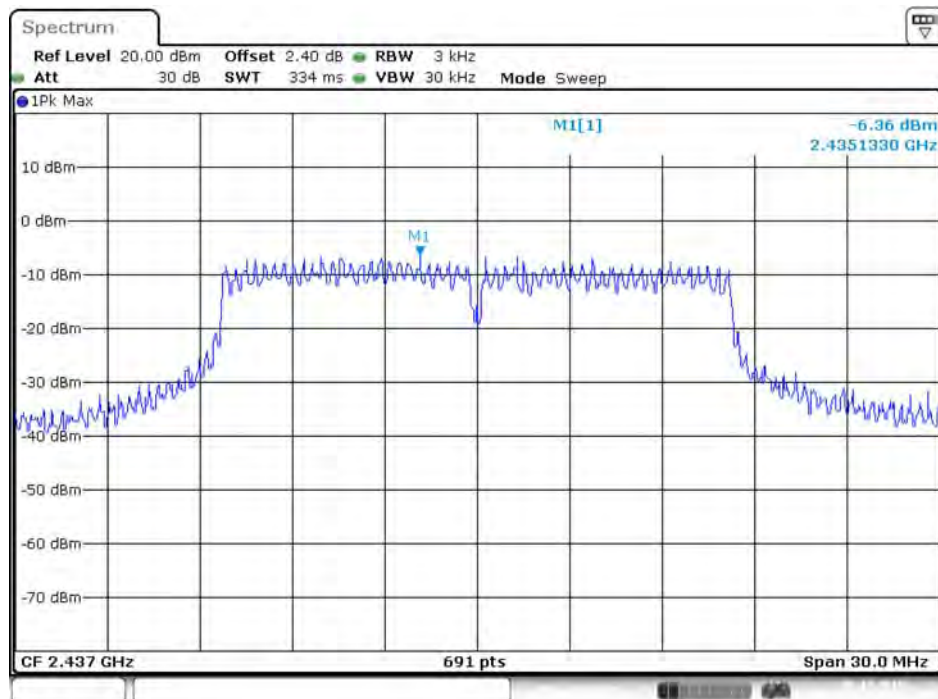


Date: 5.DEC.2015 22:12:05

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

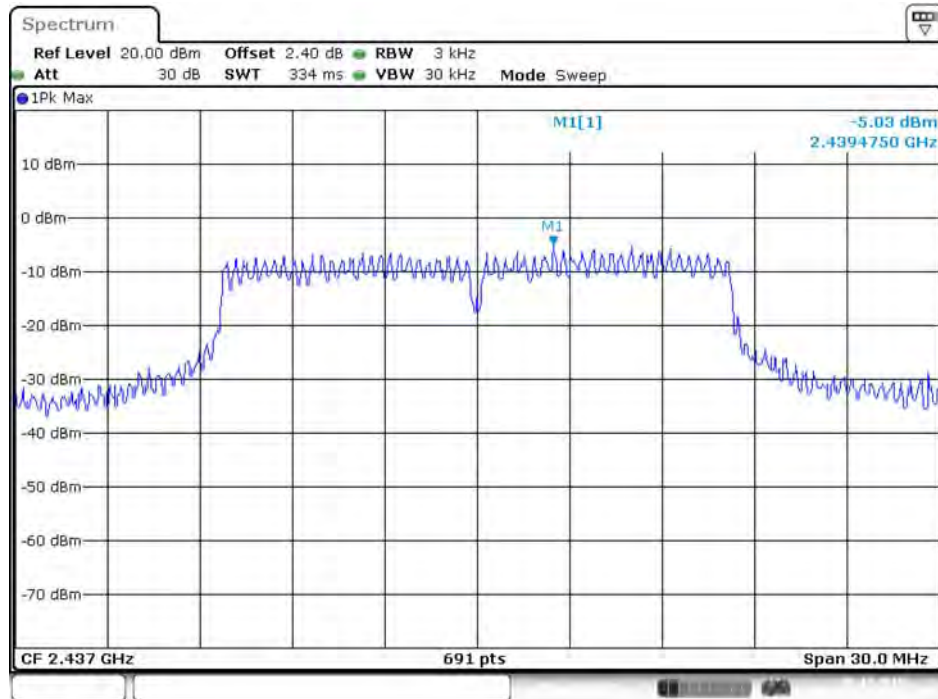


Date: 5.DEC.2015 22:11:32

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

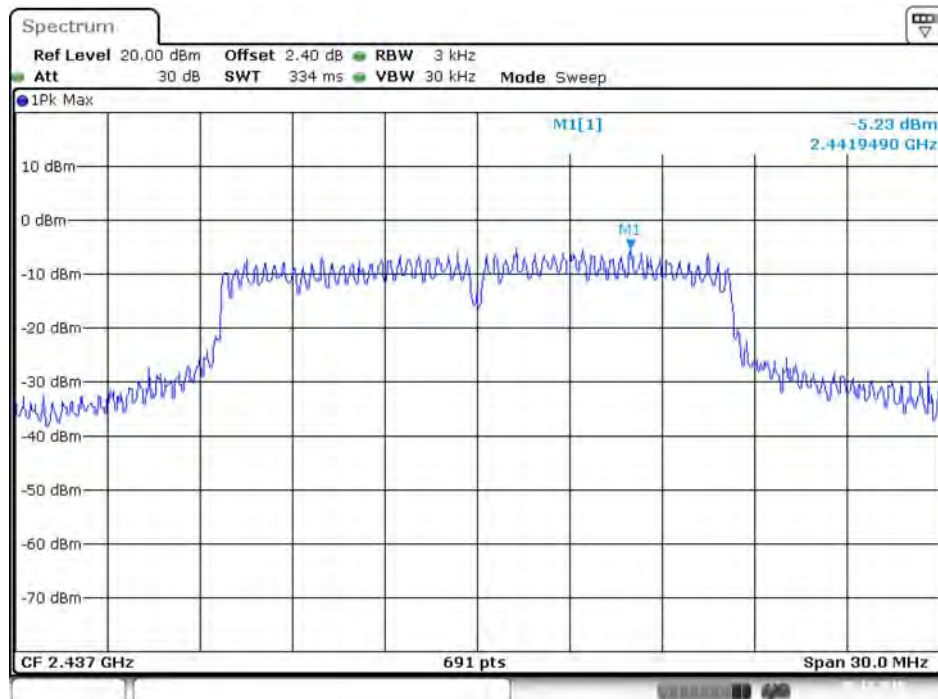


Date: 5.DEC.2015 22:12:59

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

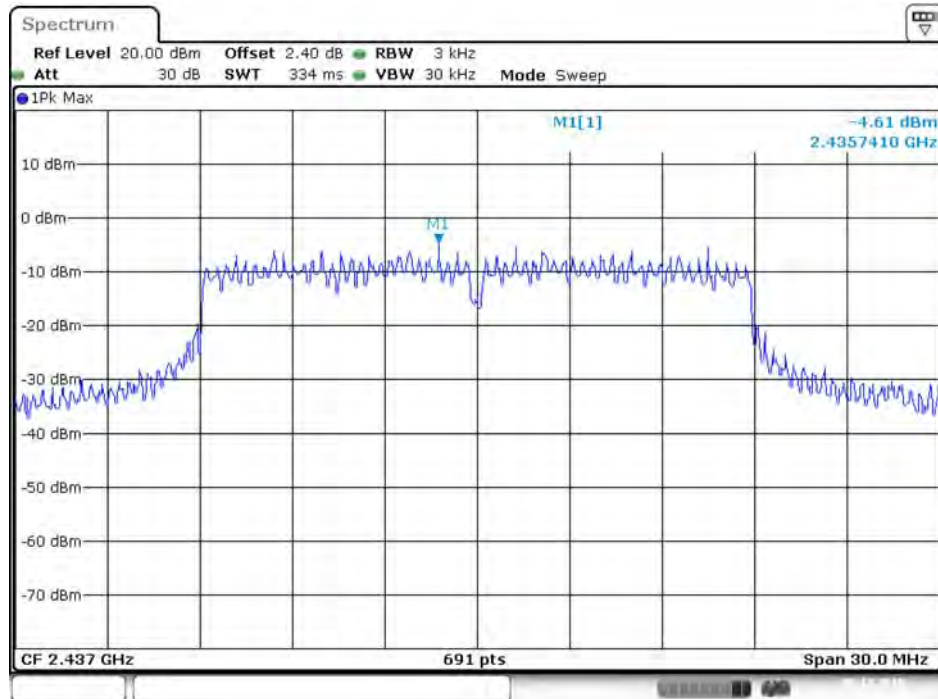


Date: 5 DEC.2015 22:31:15

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

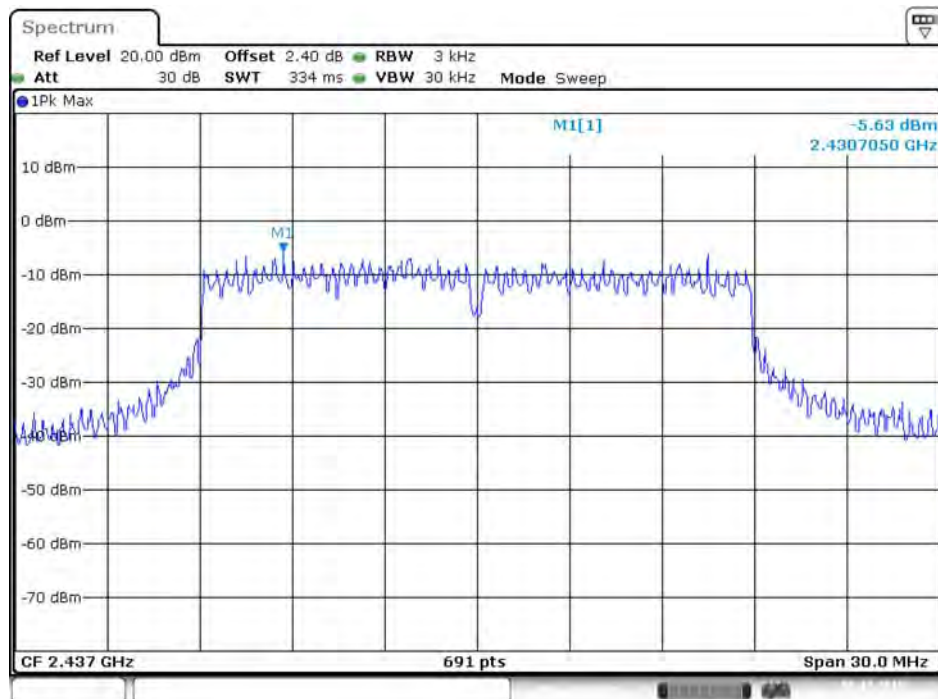


Date: 5 DEC.2015 22:29:57

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

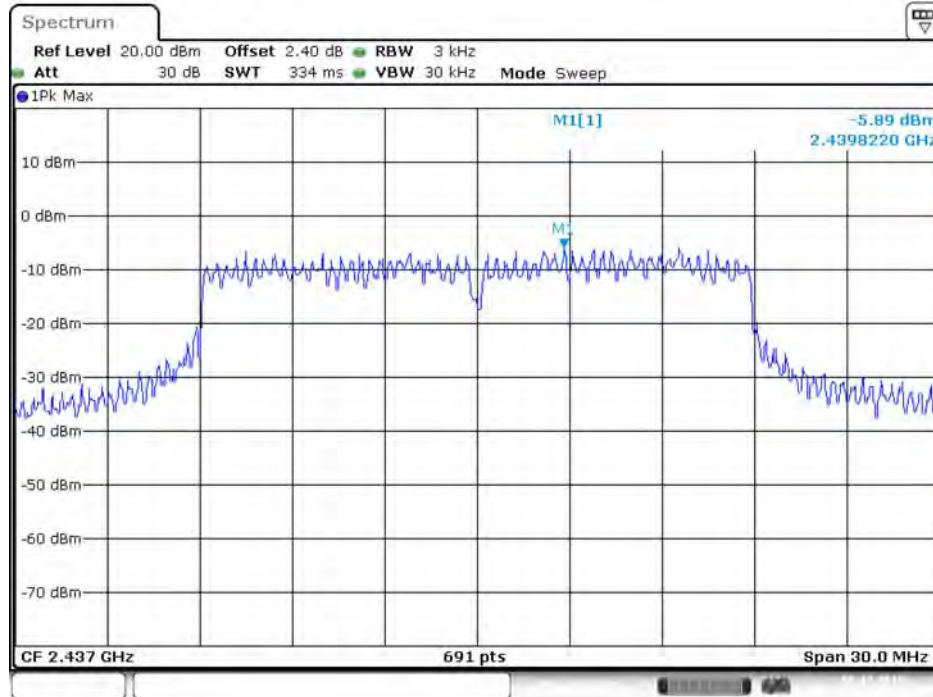

Date: 5 DEC.2015 22:30:43


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

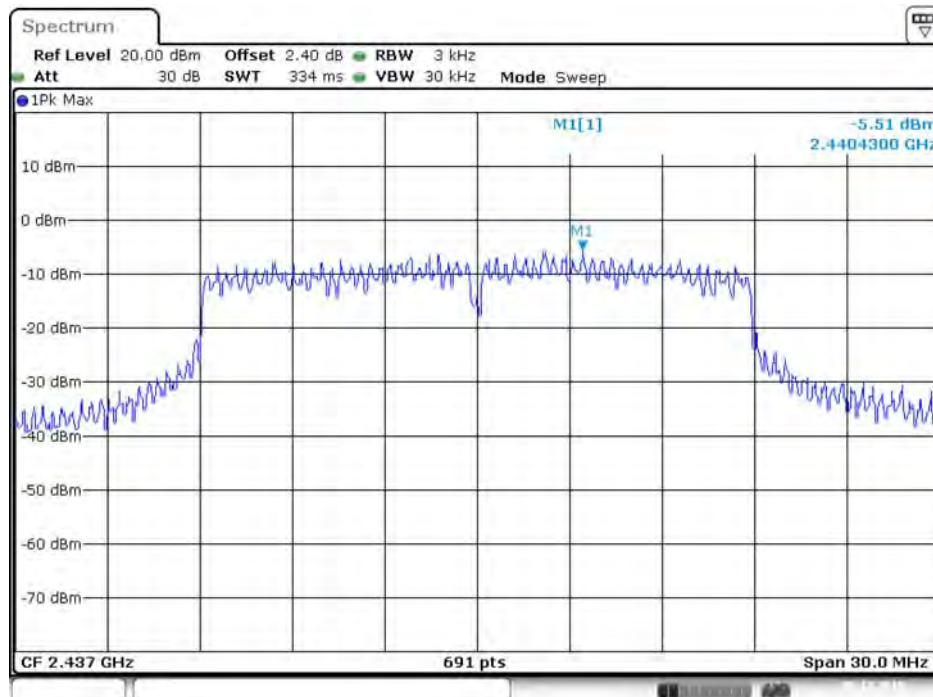

Date: 5 DEC.2015 22:29:22




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

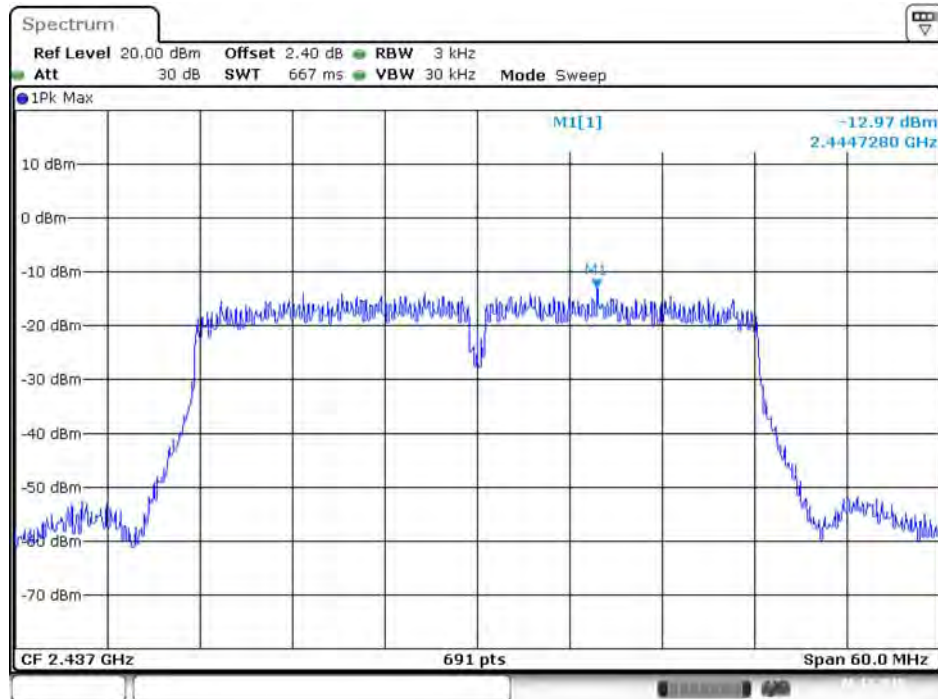


Date: 6 DEC.2015 02:44:46

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

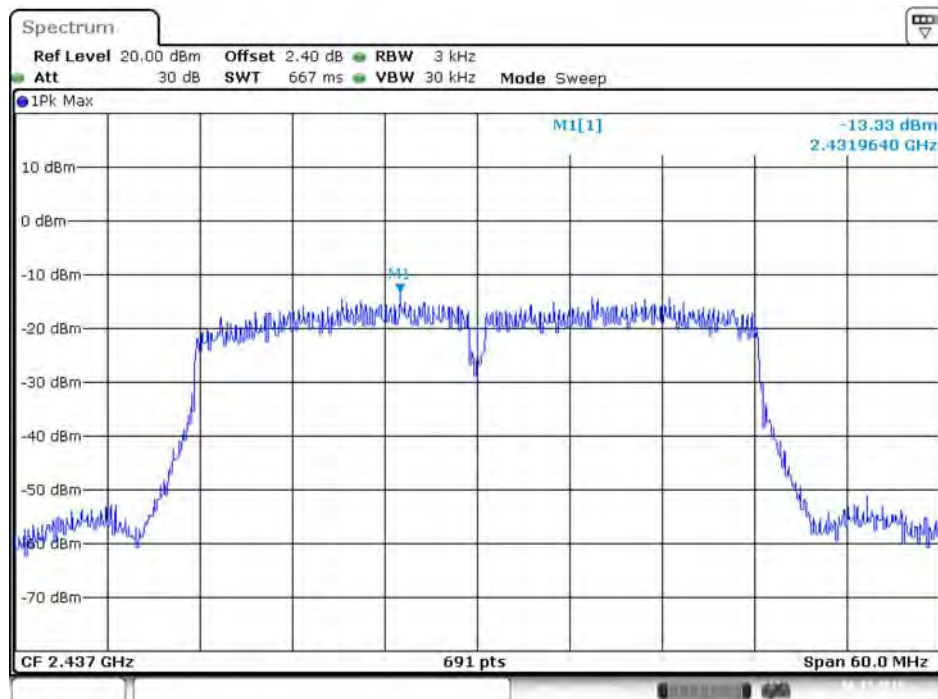


Date: 6 DEC.2015 02:45:39

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3**

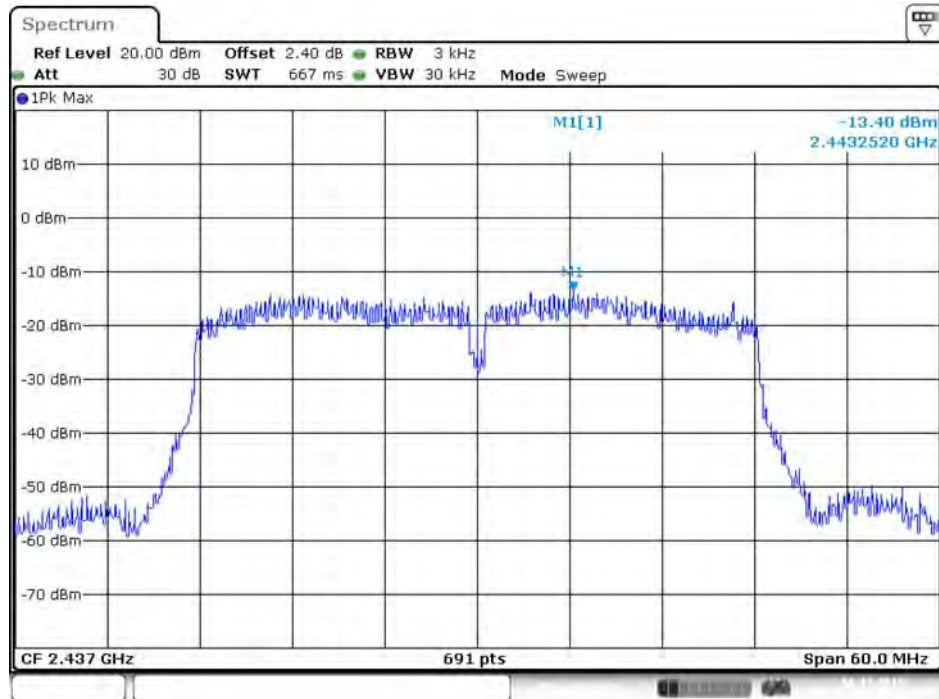

Date: 6.DEC.2015 02:45:07

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4**

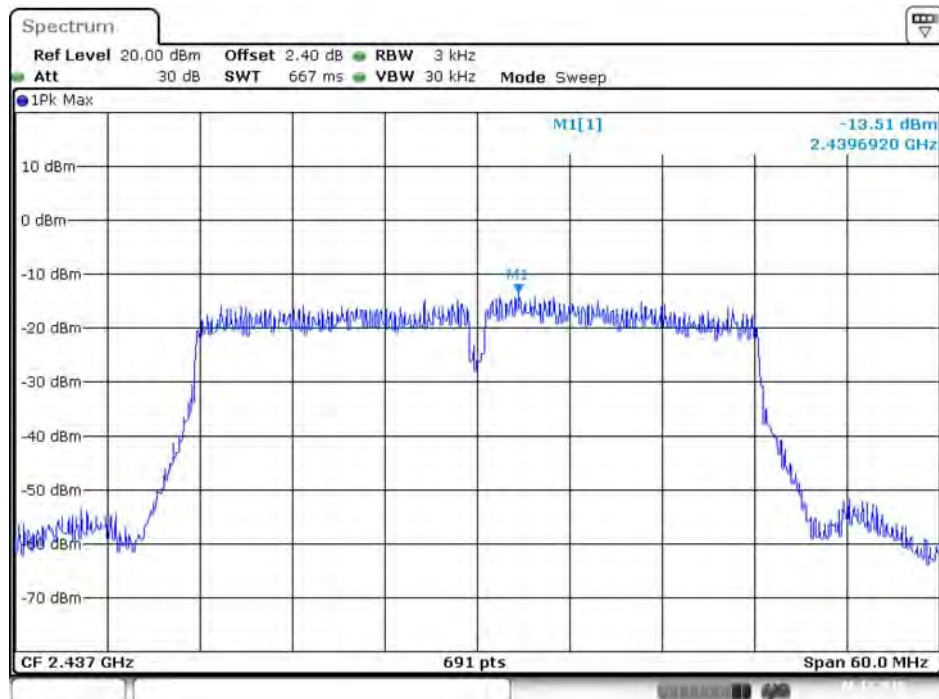

Date: 6.DEC.2015 02:46:03

**Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi**

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1**



Date: 5.DEC.2015 21:45:04

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2**



Date: 5.DEC.2015 21:46:49

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3**



Date: 5.DEC.2015 21:46:17


**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 4**



Date: 5.DEC.2015 21:47:28




**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

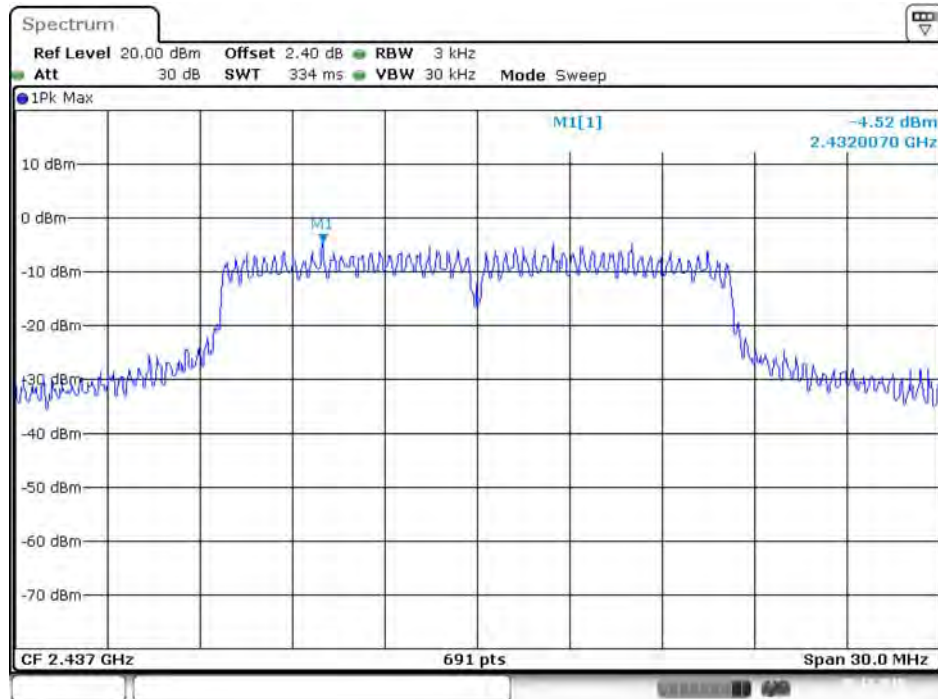


Date: 5.DEC.2015 22:10:16

**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

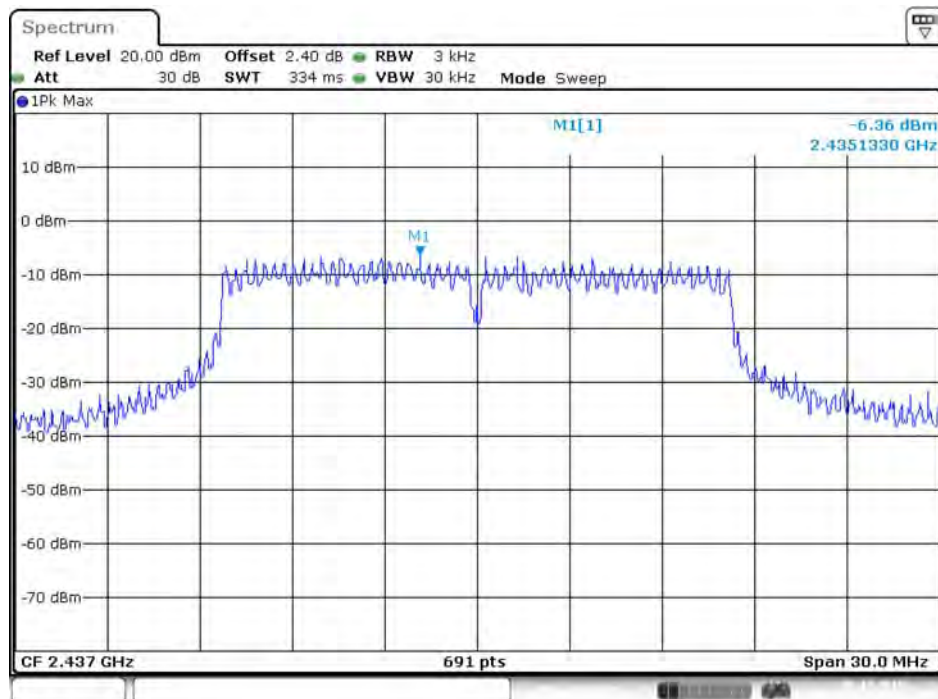


Date: 5.DEC.2015 22:12:05

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

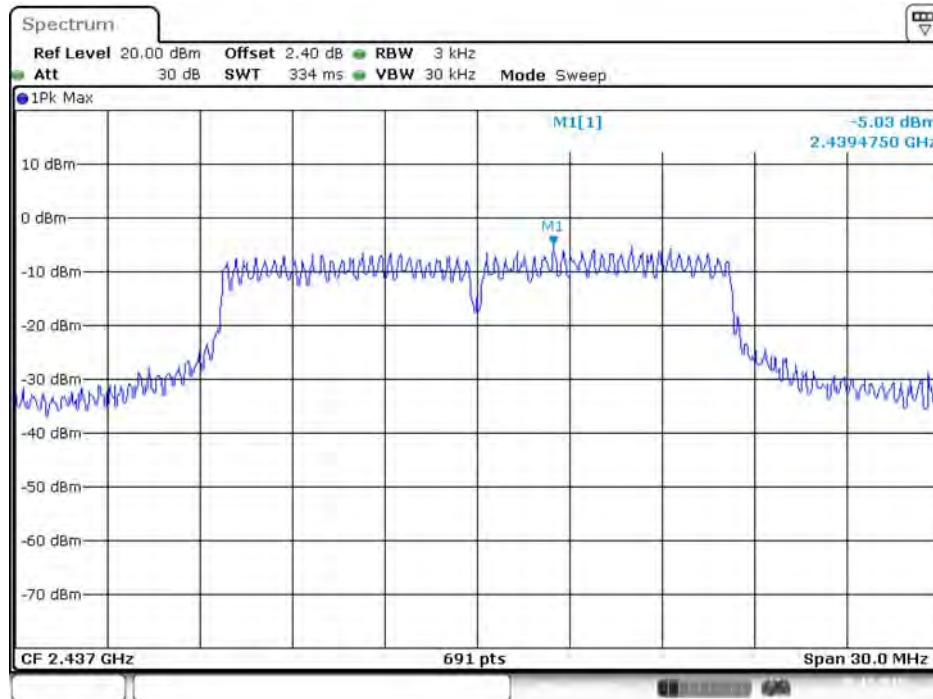


Date: 5.DEC.2015 22:11:32

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

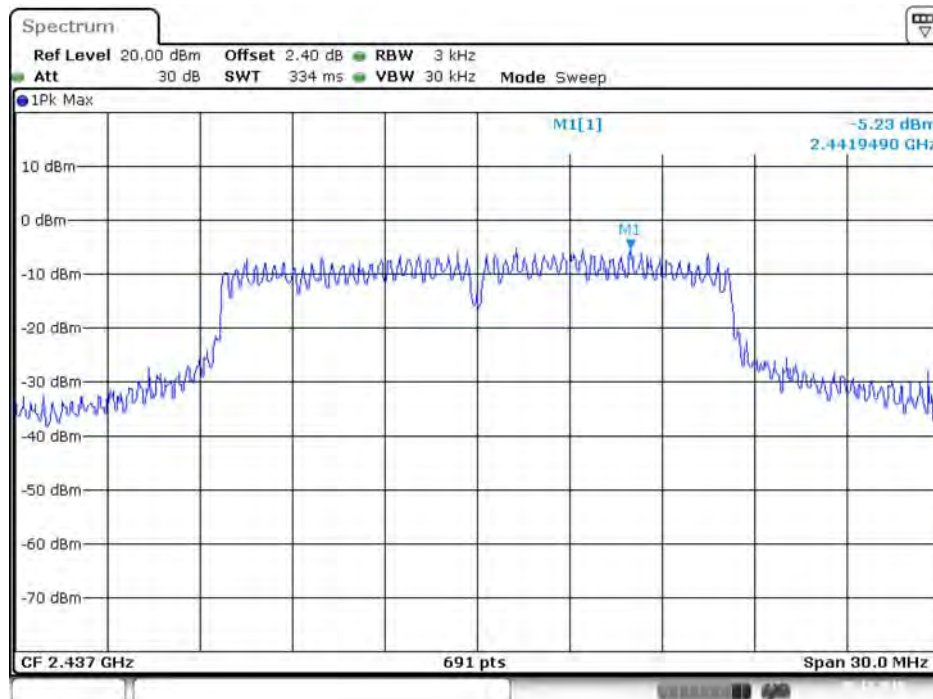


Date: 5.DEC.2015 22:12:59

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

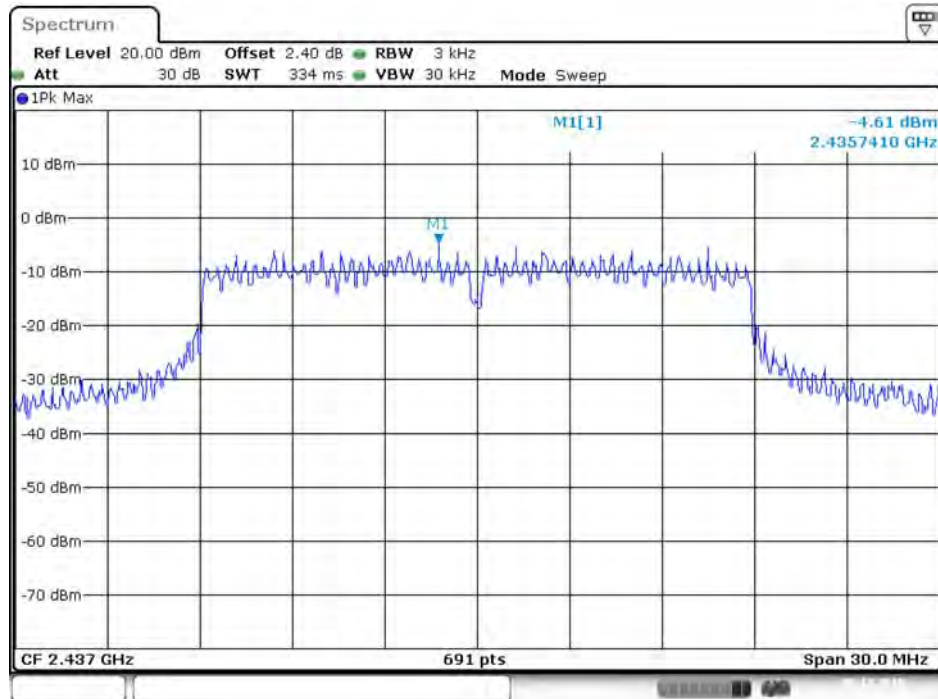


Date: 5 DEC.2015 22:31:15

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

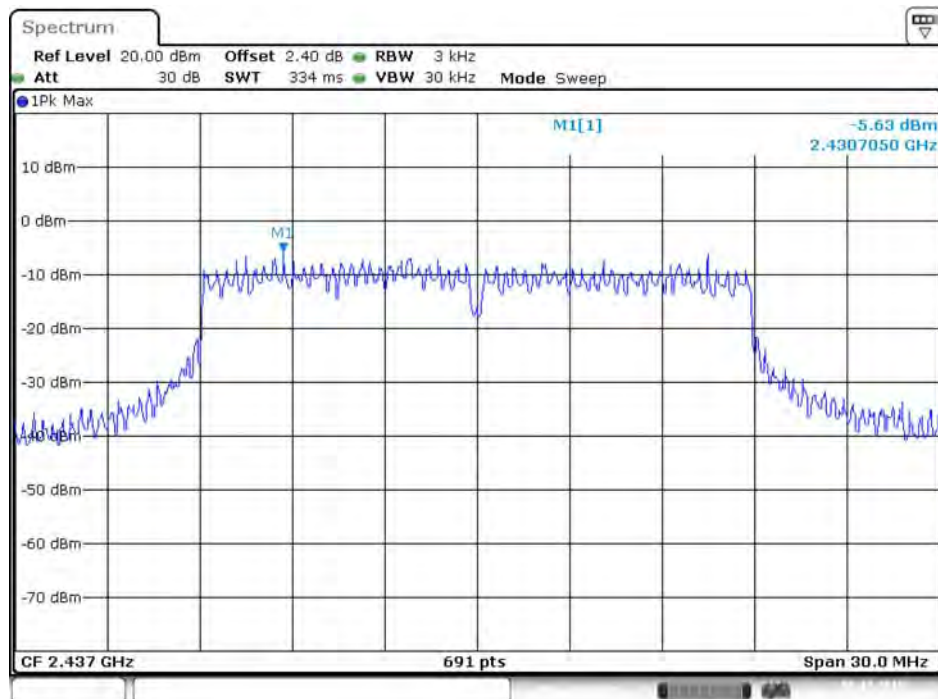


Date: 5 DEC.2015 22:29:57

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3**

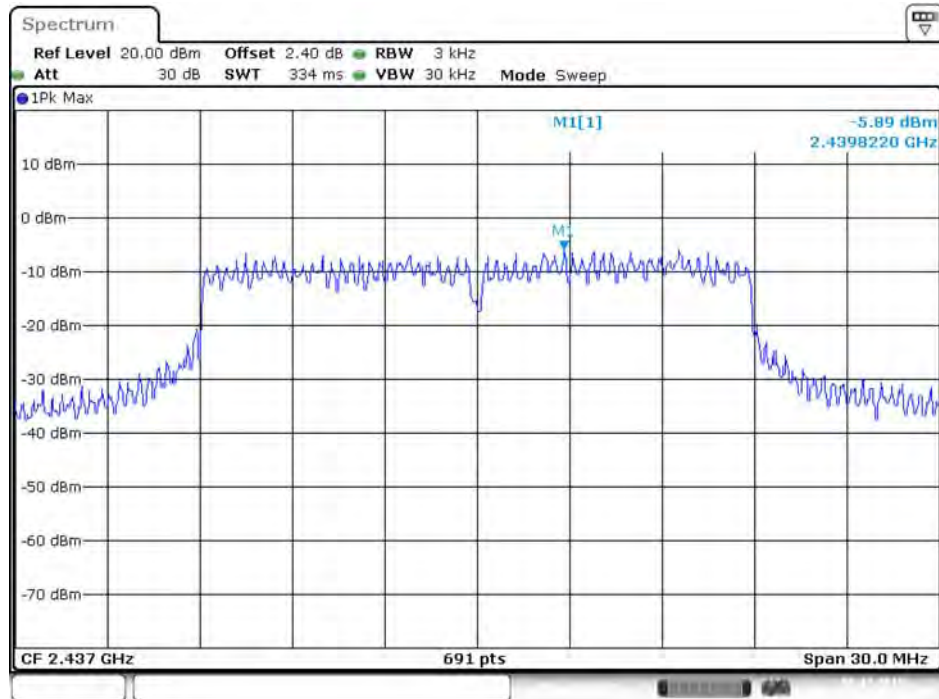

Date: 5 DEC.2015 22:30:43


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4**

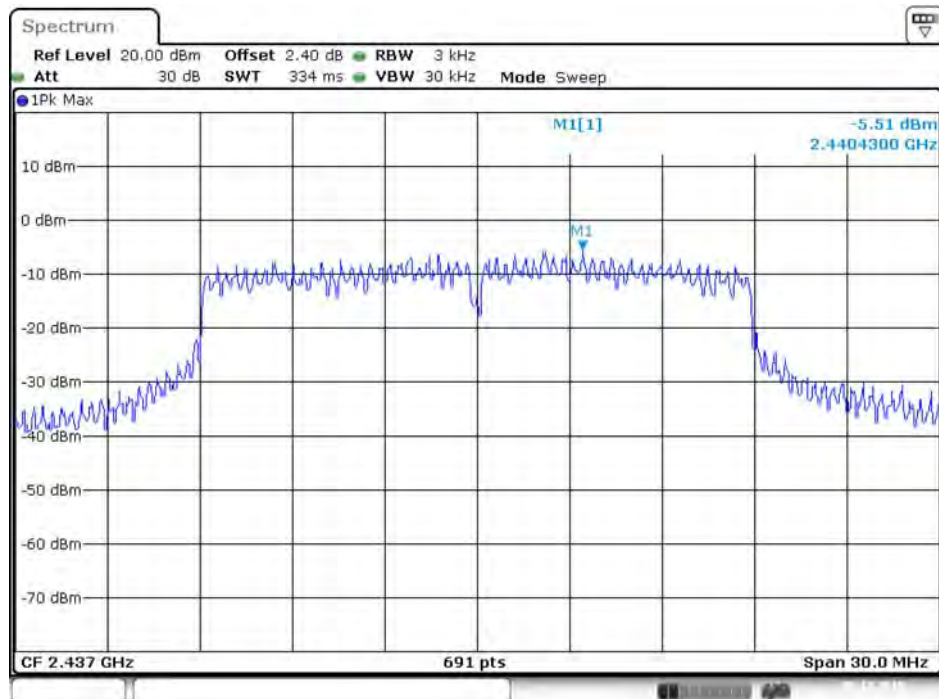

Date: 5 DEC.2015 22:29:22




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

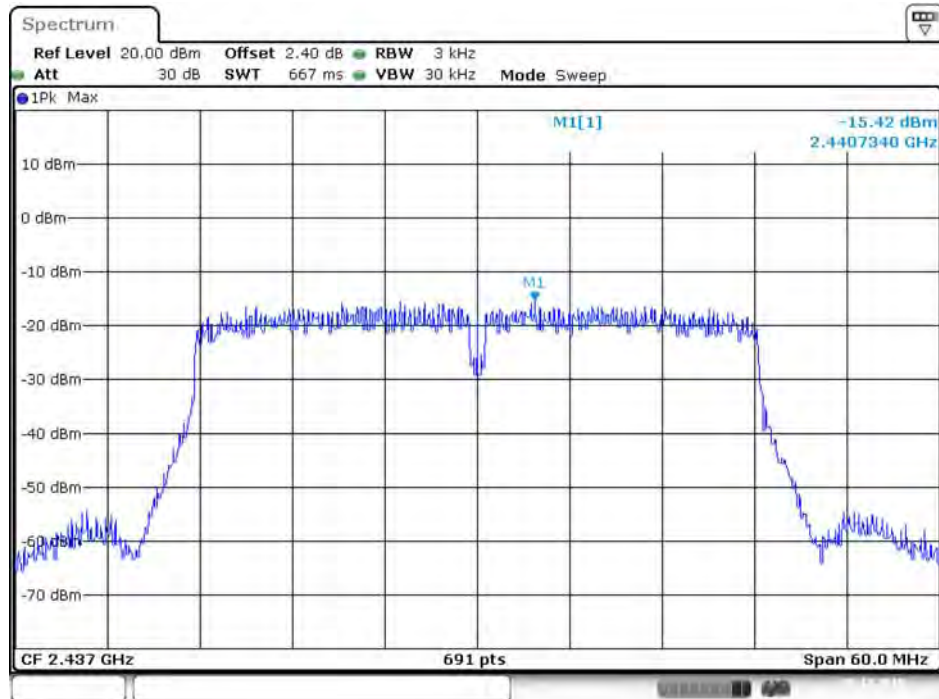


Date: 5.DEC.2015 21:21:49

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

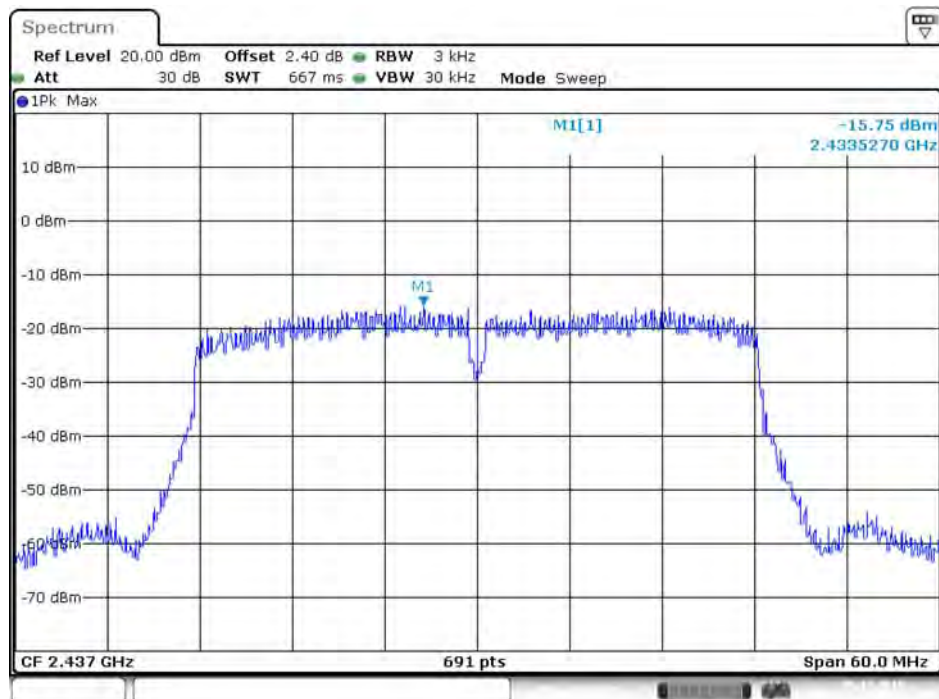


Date: 5.DEC.2015 21:23:11

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3**

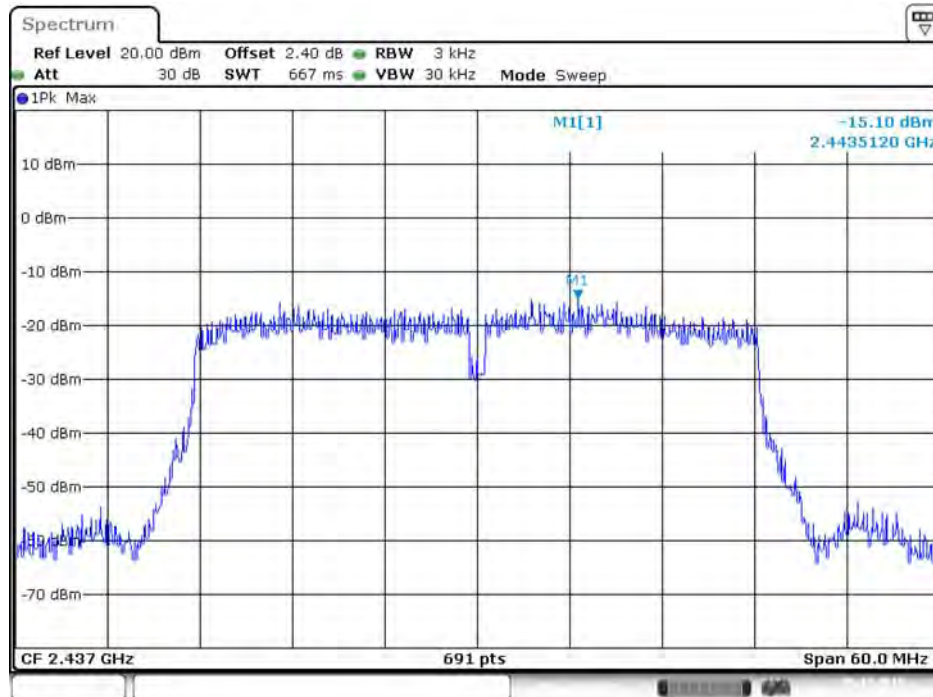

Date: 5.DEC.2015 21:22:26

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4**

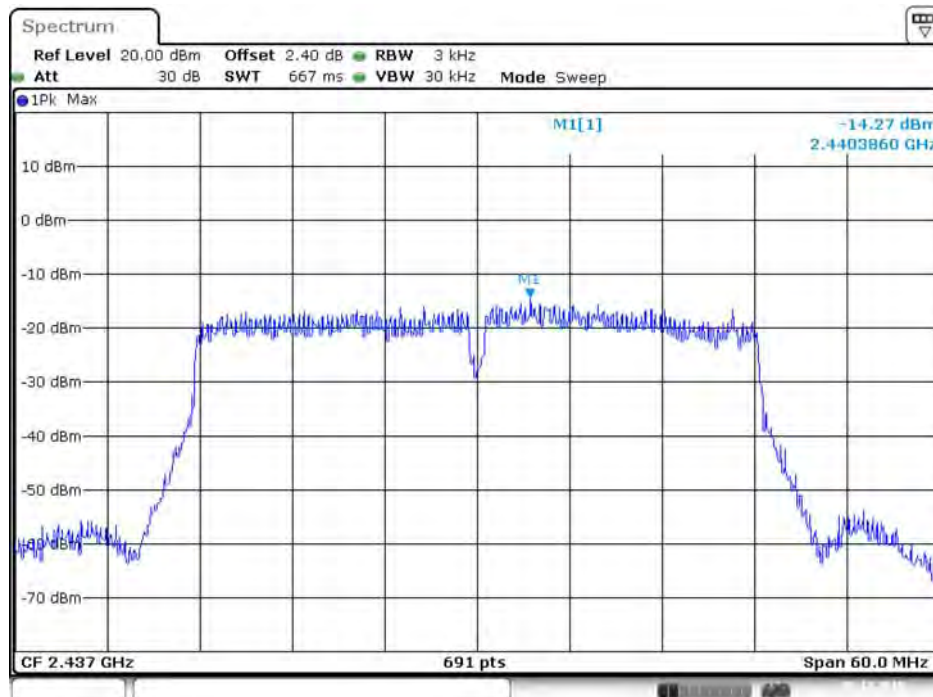

Date: 5.DEC.2015 21:23:57

**Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi**

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1**



Date: 30.DEC.2015 18:12:00

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2**



Date: 30.DEC.2015 18:12:16

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3**



Date: 30.DEC.2015 18:11:11


**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4**



Date: 30.DEC.2015 18:11:36




**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

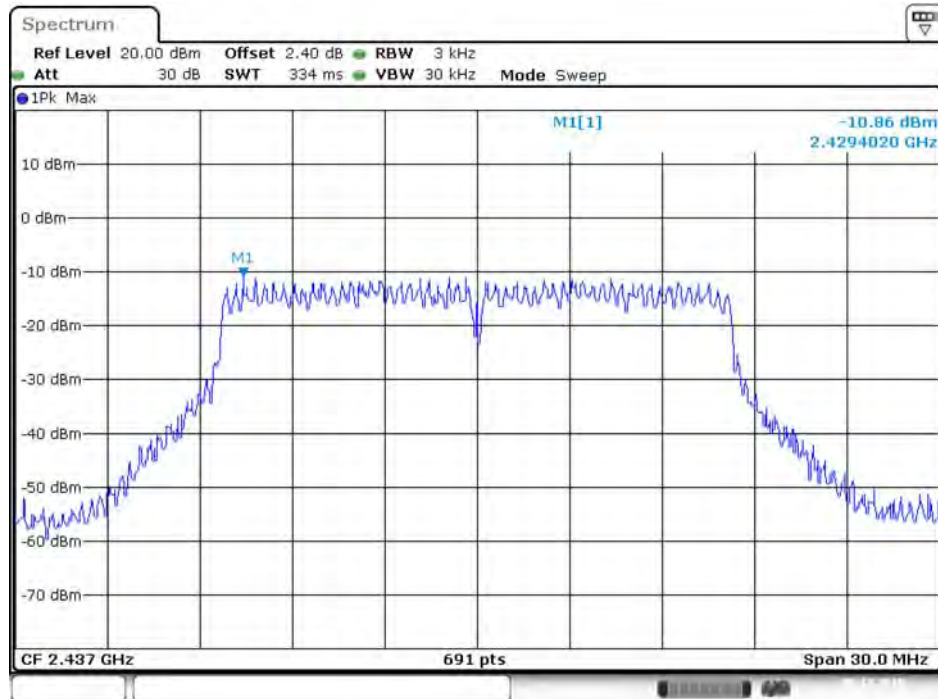


Date: 5.DEC.2015 20:37:26

**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

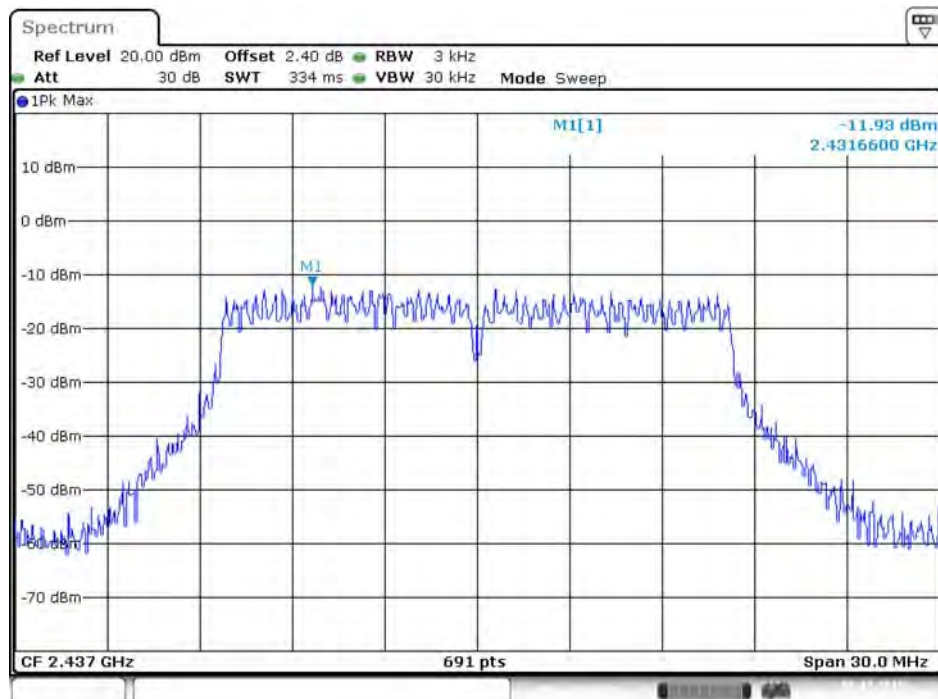


Date: 5.DEC.2015 20:38:49

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

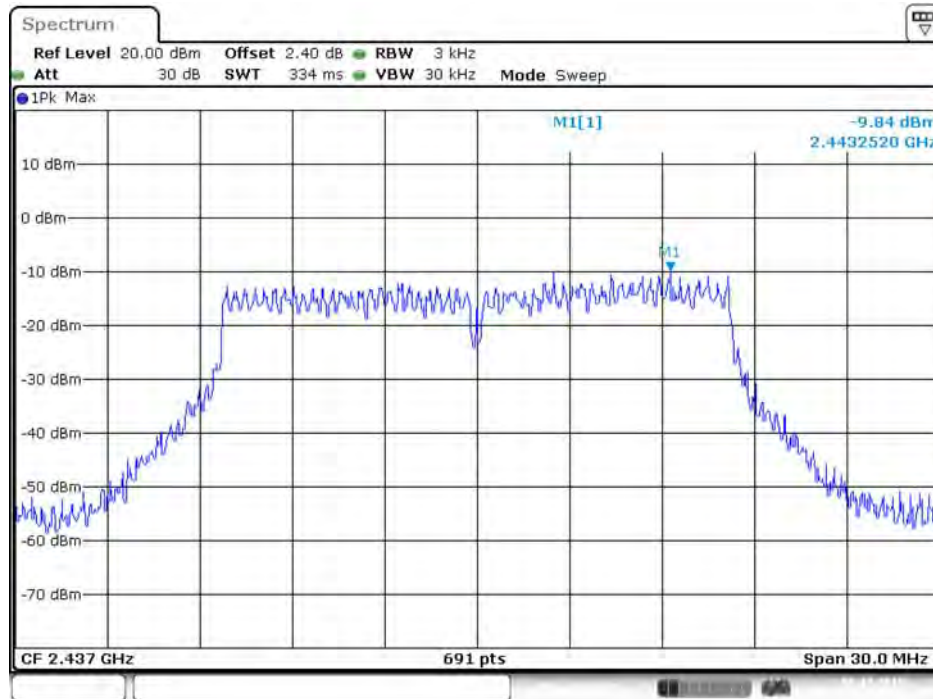


Date: 5.DEC.2015 20:38:10

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

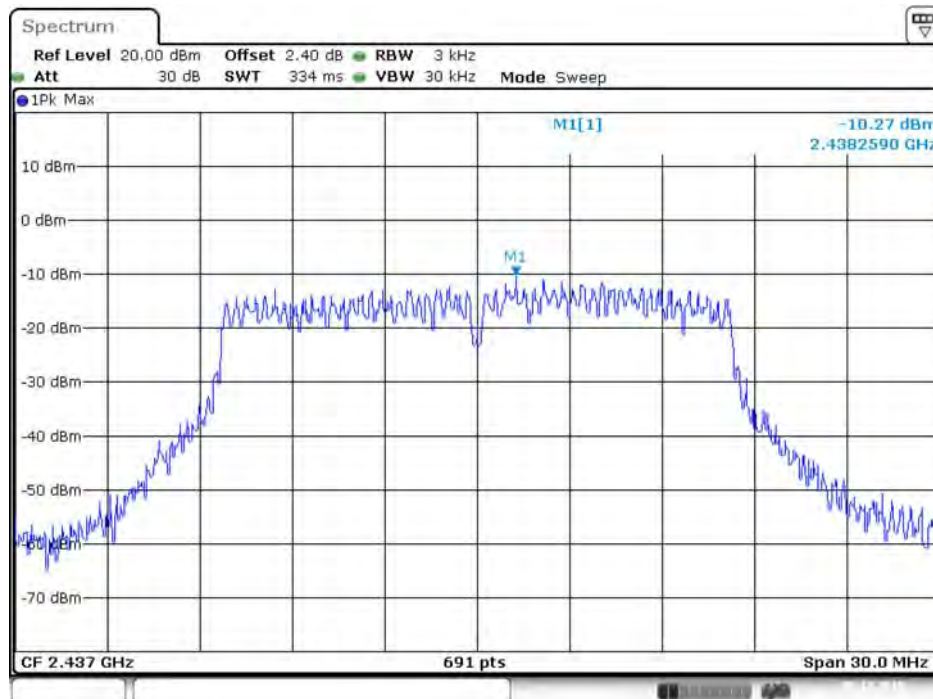


Date: 5.DEC.2015 20:39:11

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

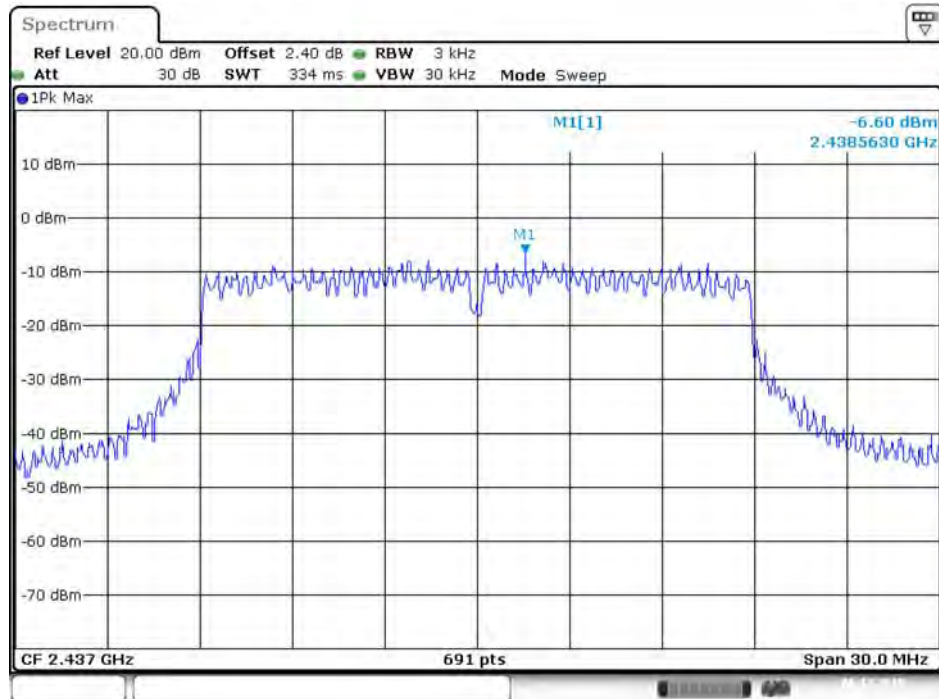


Date: 6.DEC.2015 01:17:06

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

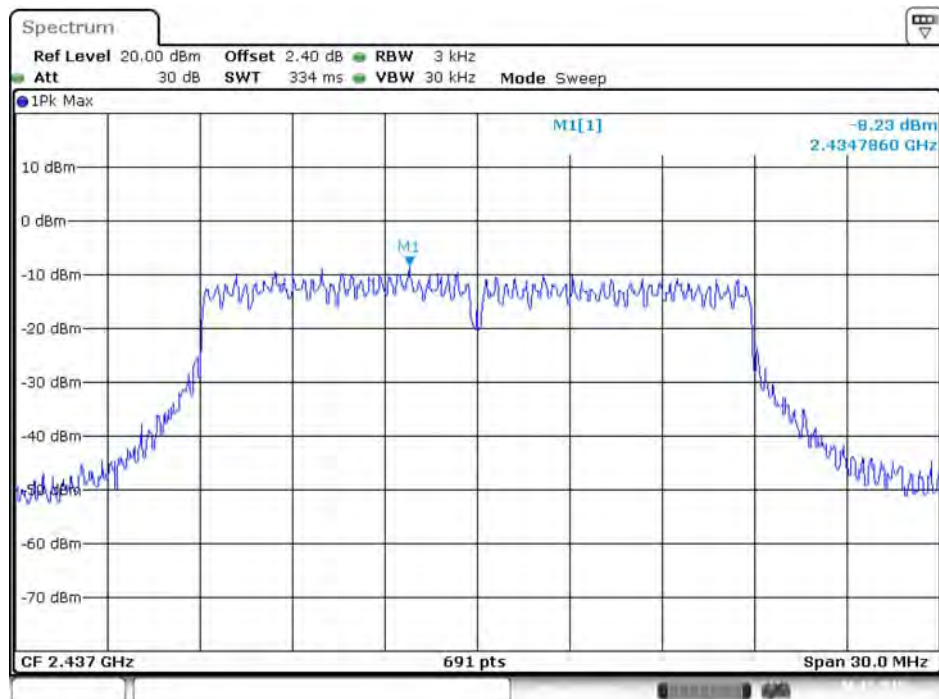


Date: 6.DEC.2015 01:14:59

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3**

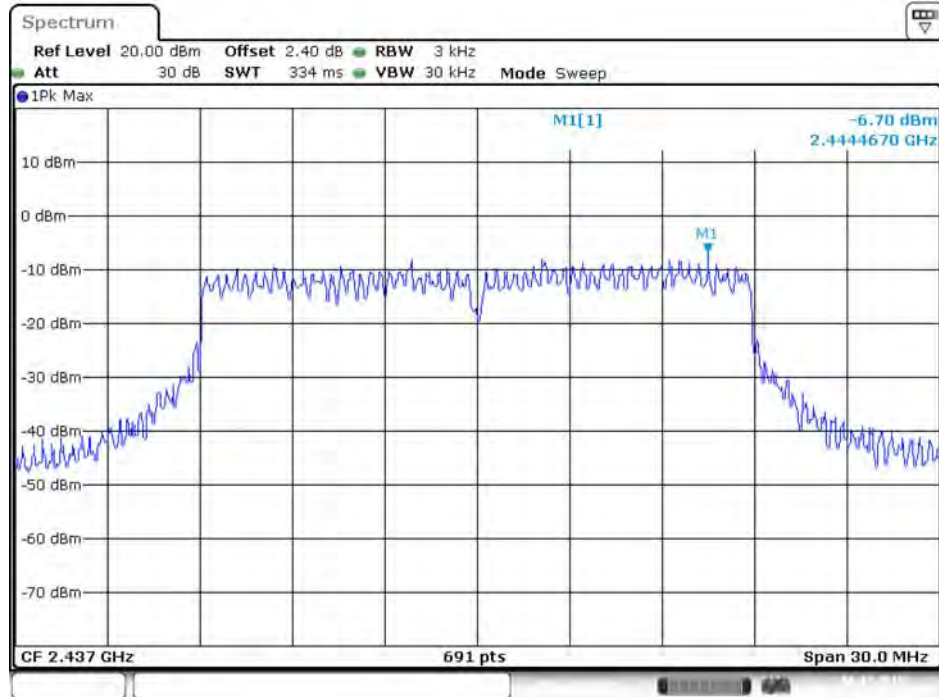

Date: 6.DEC.2015 01:10:58


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4**

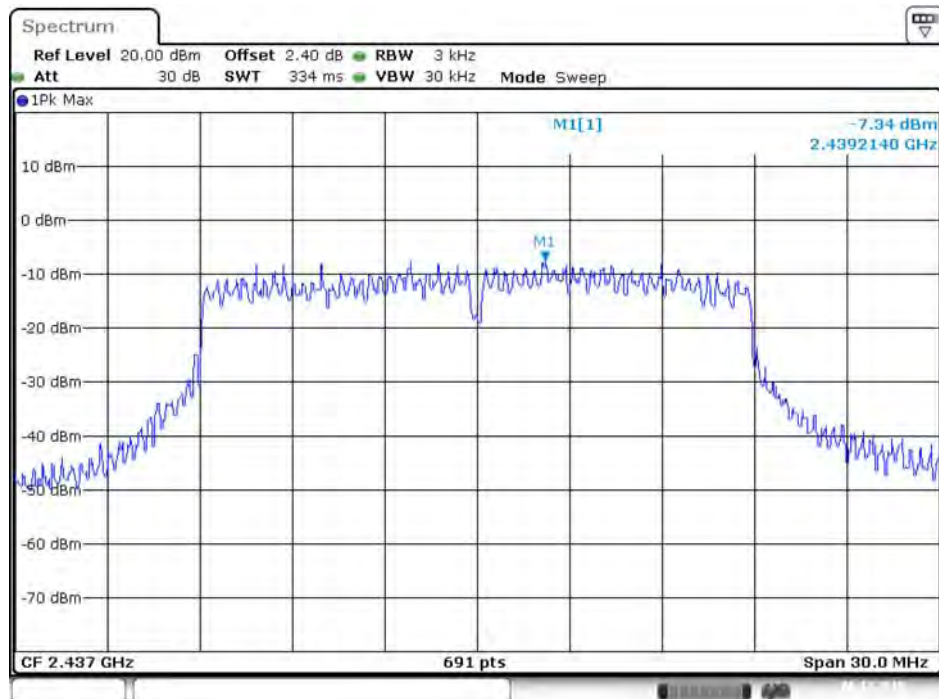

Date: 6.DEC.2015 01:15:23




**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1**

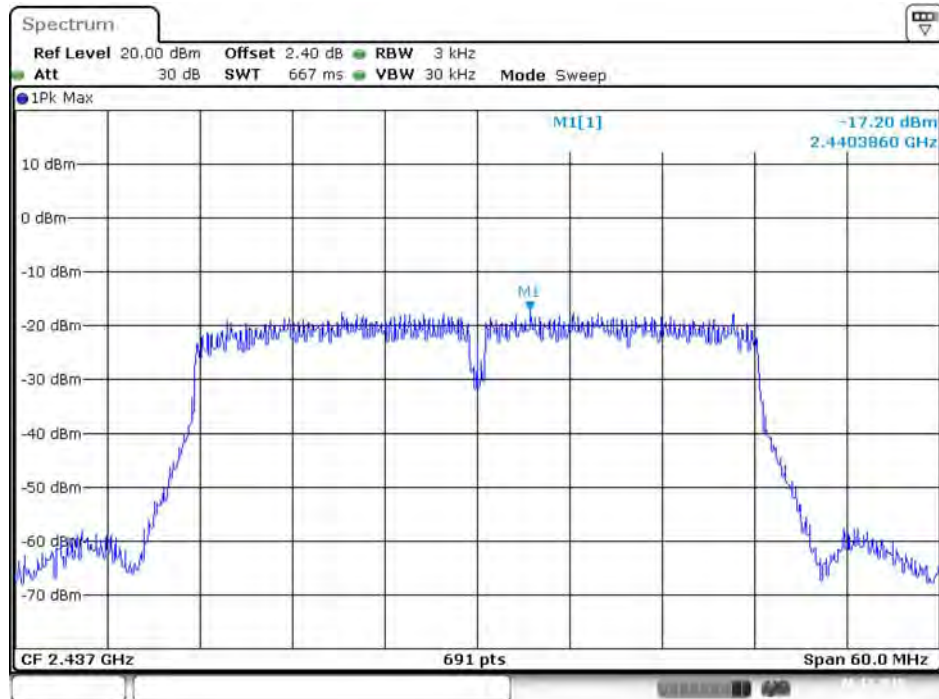


Date: 6.DEC.2015 01:00:30

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2**

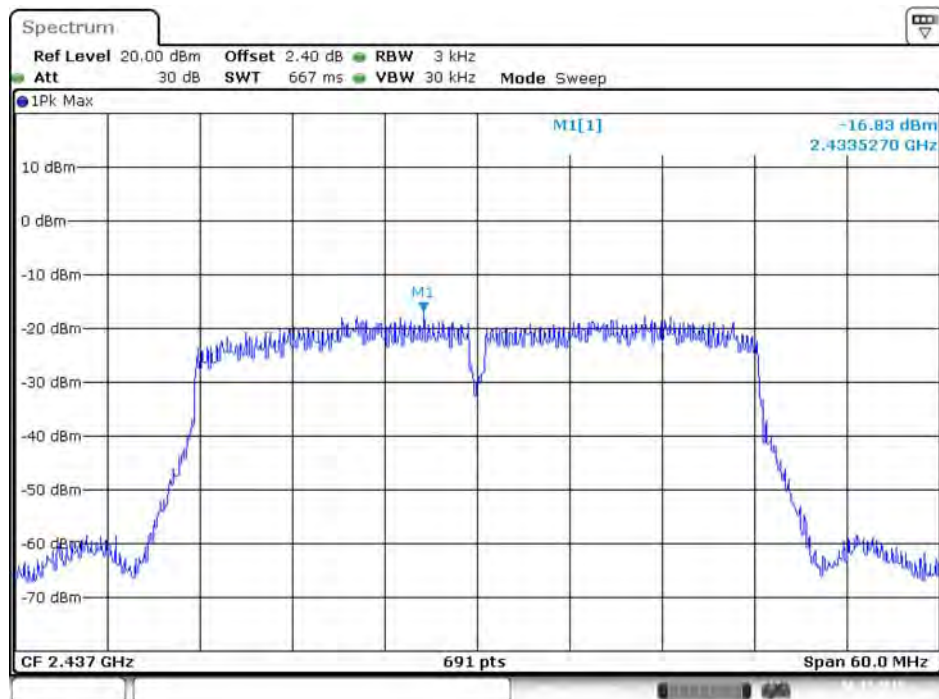


Date: 6.DEC.2015 00:58:54

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3**

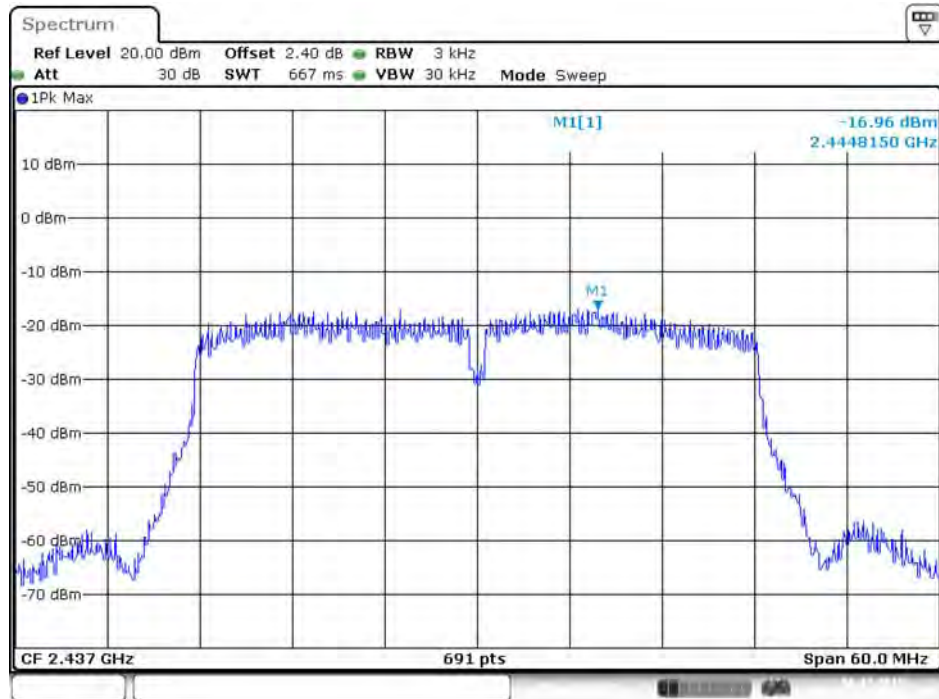

Date: 6.DEC.2015 01:00:12

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4**

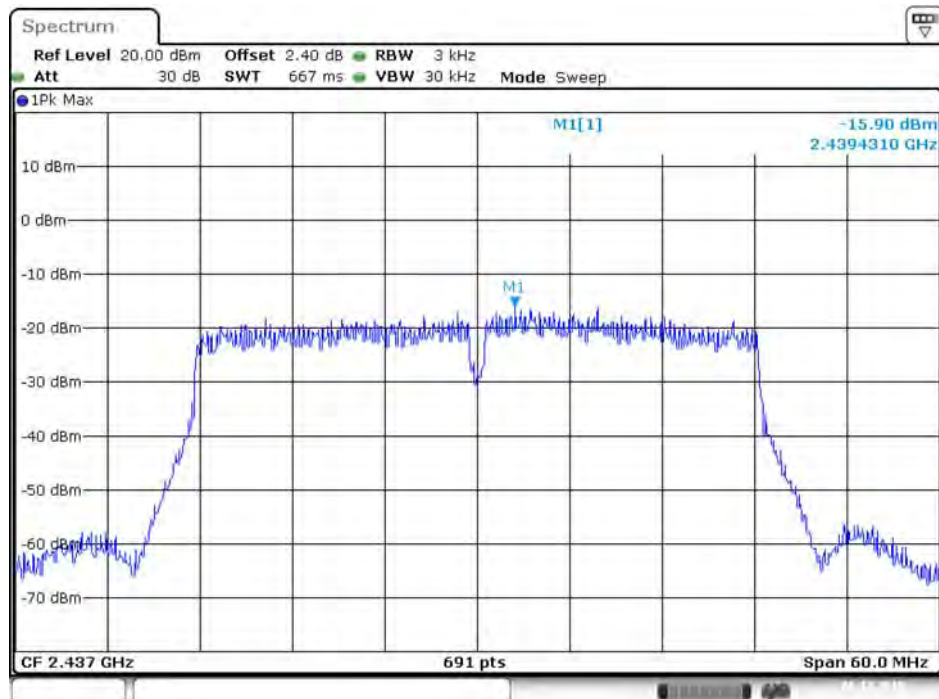

Date: 6.DEC.2015 00:59:43

**Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi**

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1**



Date: 6.DEC.2015 02:03:03

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2**



Date: 6.DEC.2015 02:02:20

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3



Date: 6.DEC.2015 02:02:42


Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4



Date: 6.DEC.2015 01:54:42




**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

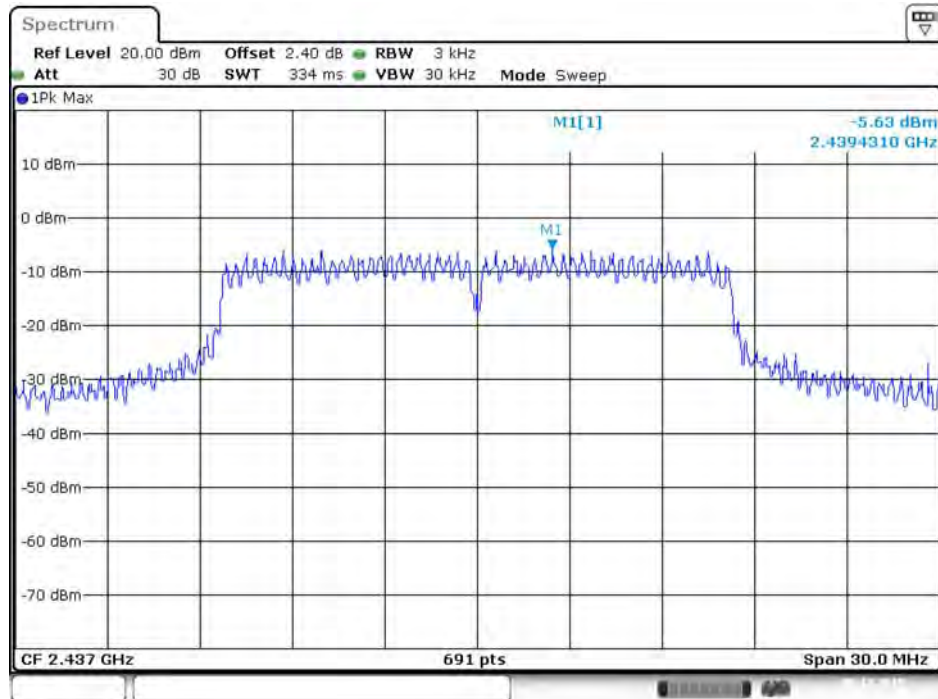


Date: 5.DEC.2015 23:27:55

**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

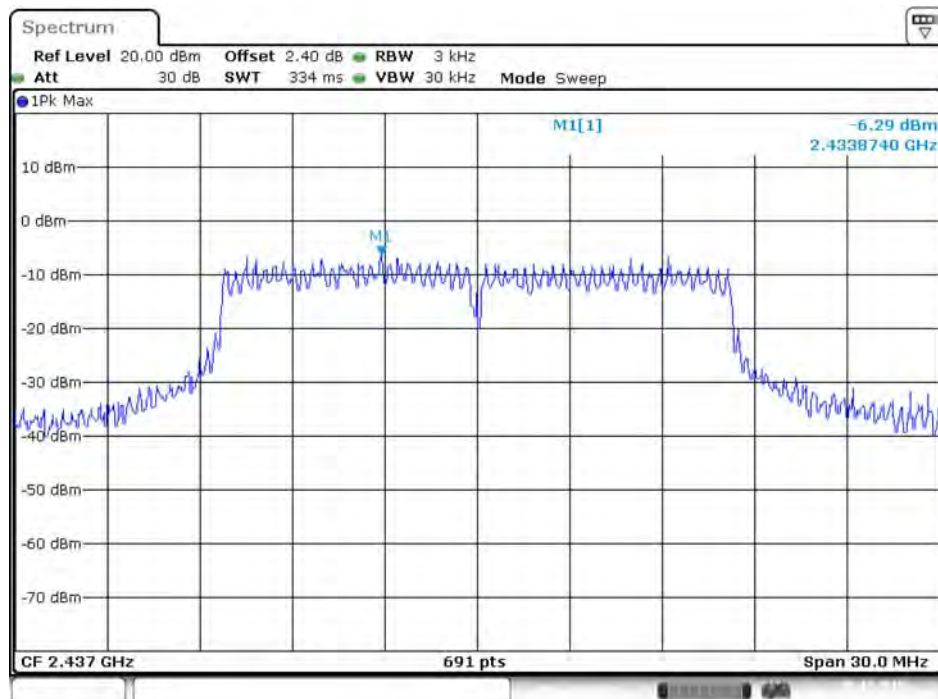


Date: 5.DEC.2015 23:29:36

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

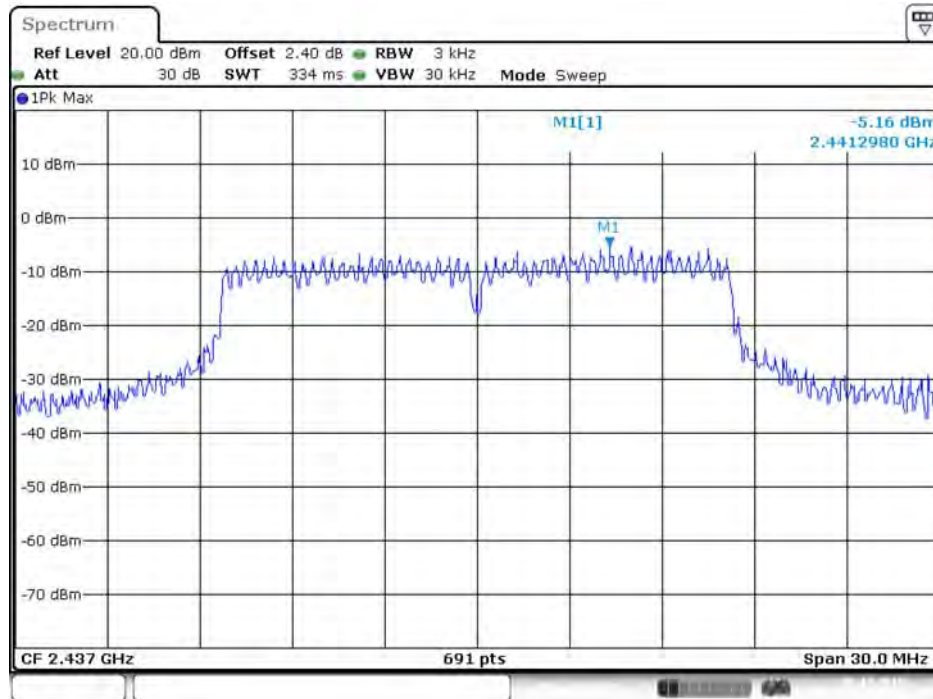


Date: 5.DEC.2015 23:29:02

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

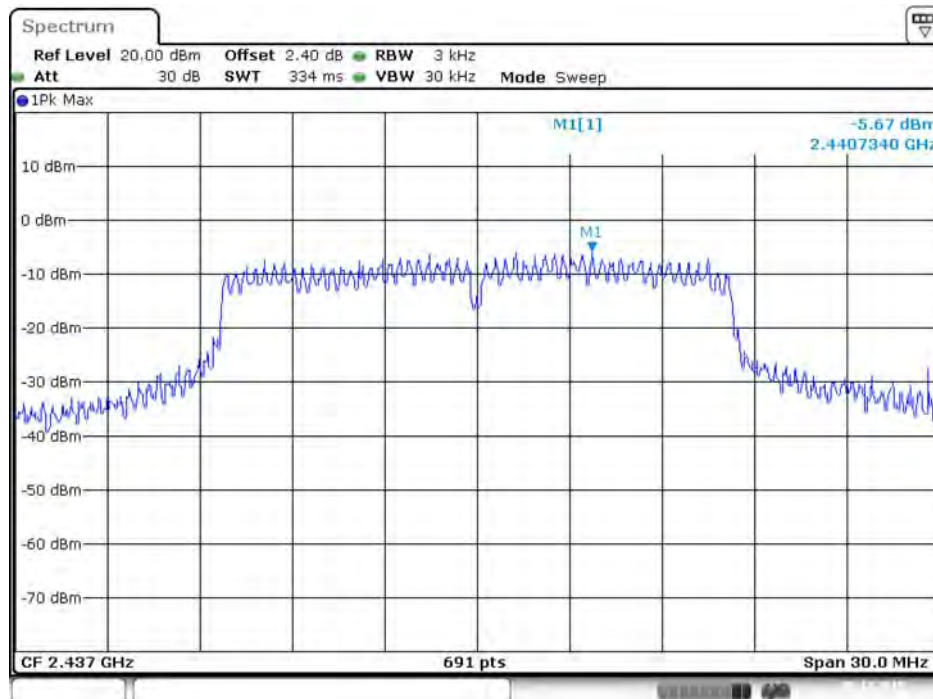


Date: 5.DEC.2015 23:30:04

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

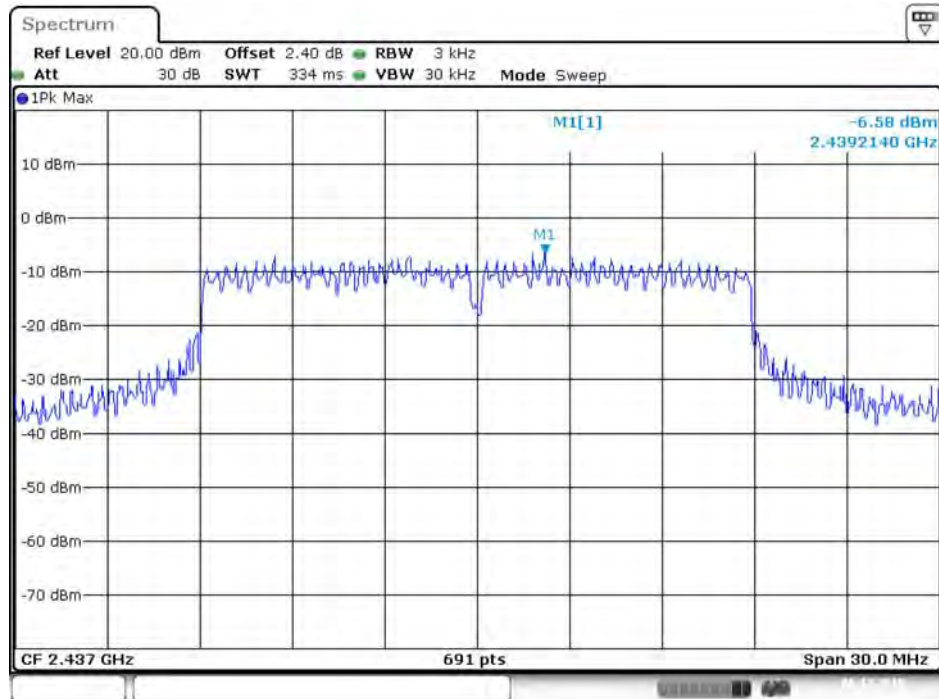


Date: 6.DEC.2015 02:27:31

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

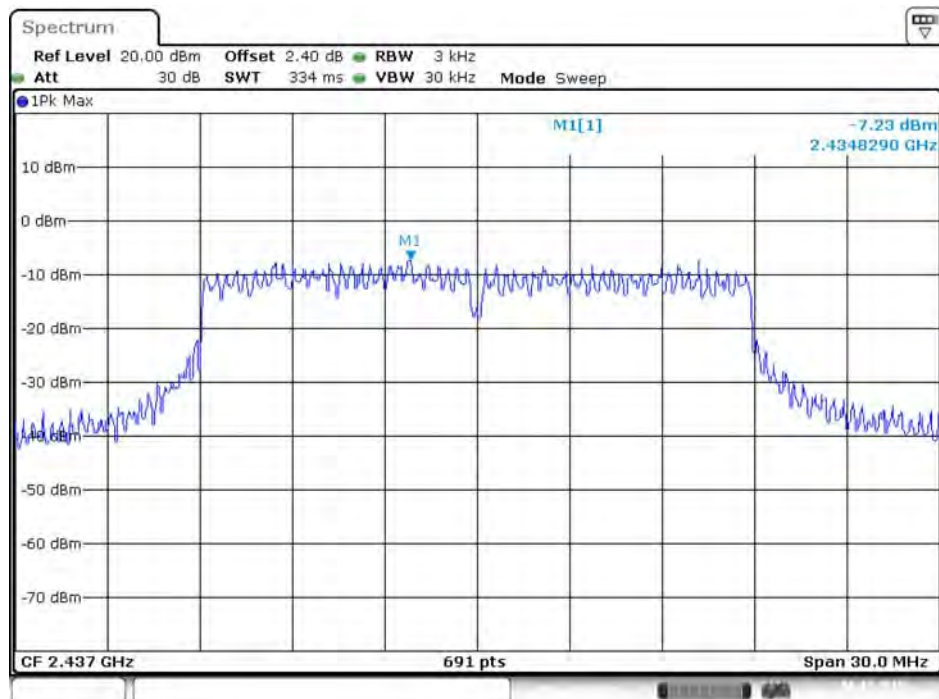


Date: 6.DEC.2015 02:26:59

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3**

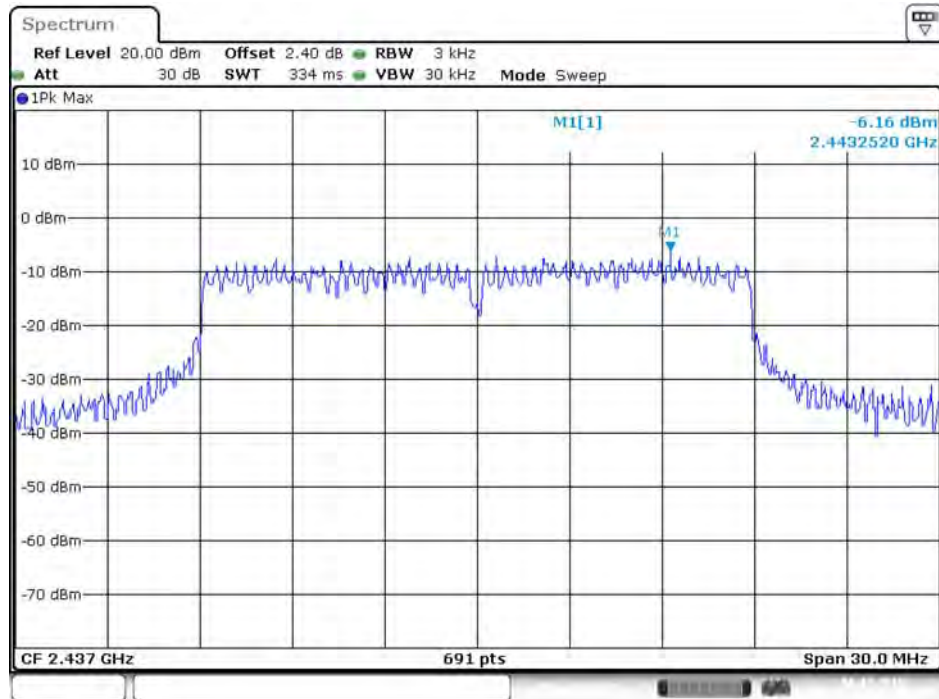

Date: 6.DEC.2015 02:27:17


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4**

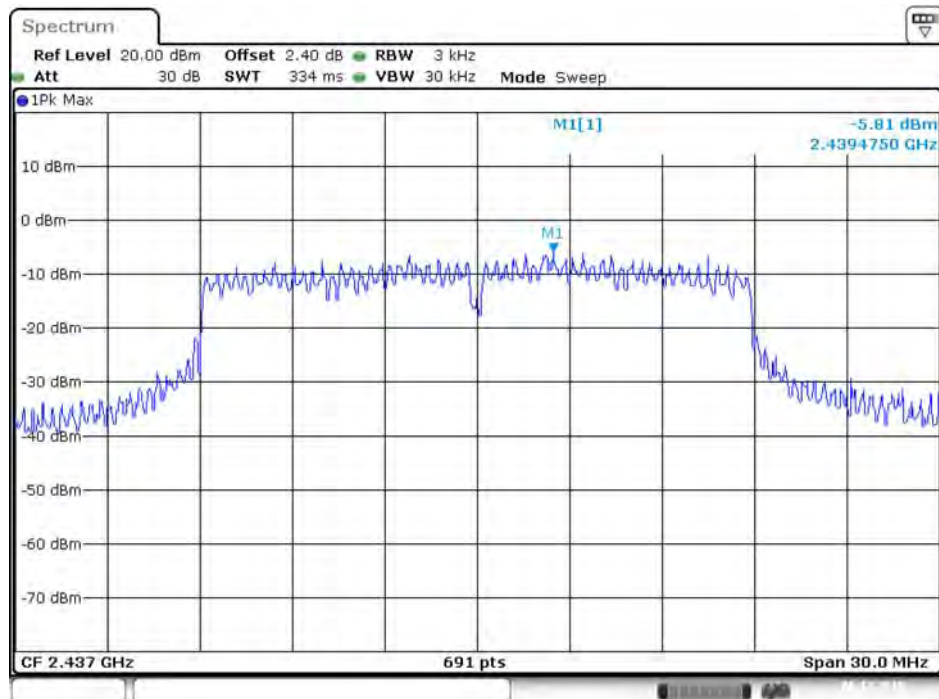

Date: 6.DEC.2015 02:26:37




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

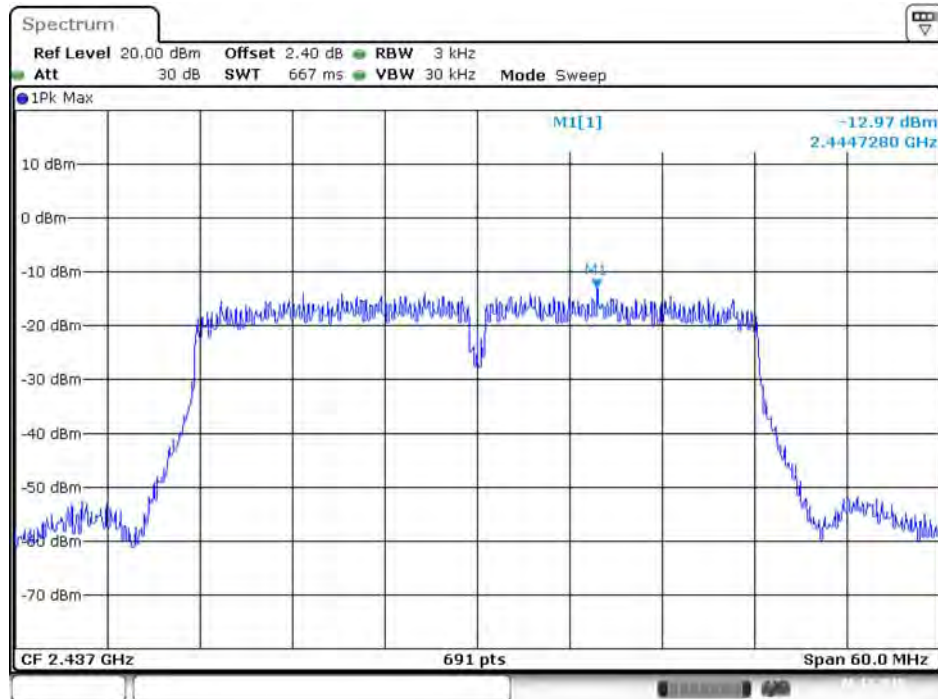


Date: 6.DEC.2015 02:44:46

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

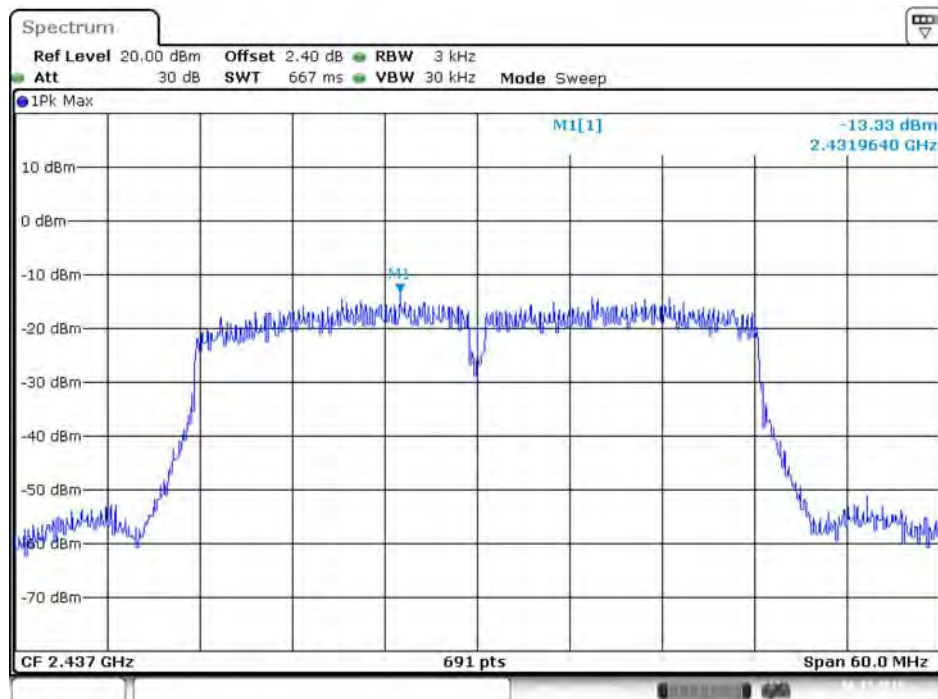


Date: 6.DEC.2015 02:45:39

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3**

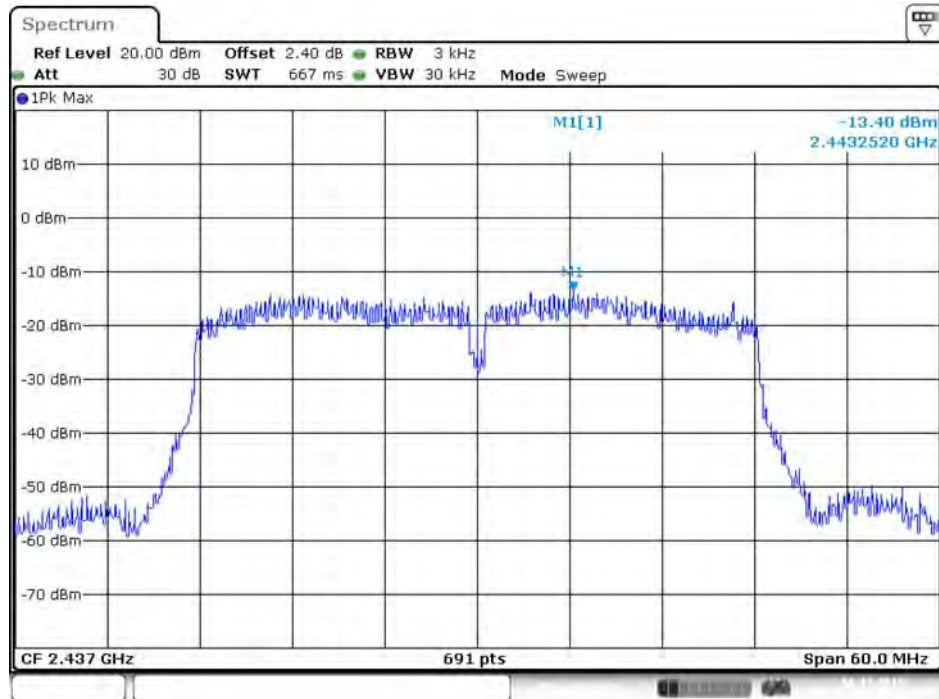

Date: 6.DEC.2015 02:45:07

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4**

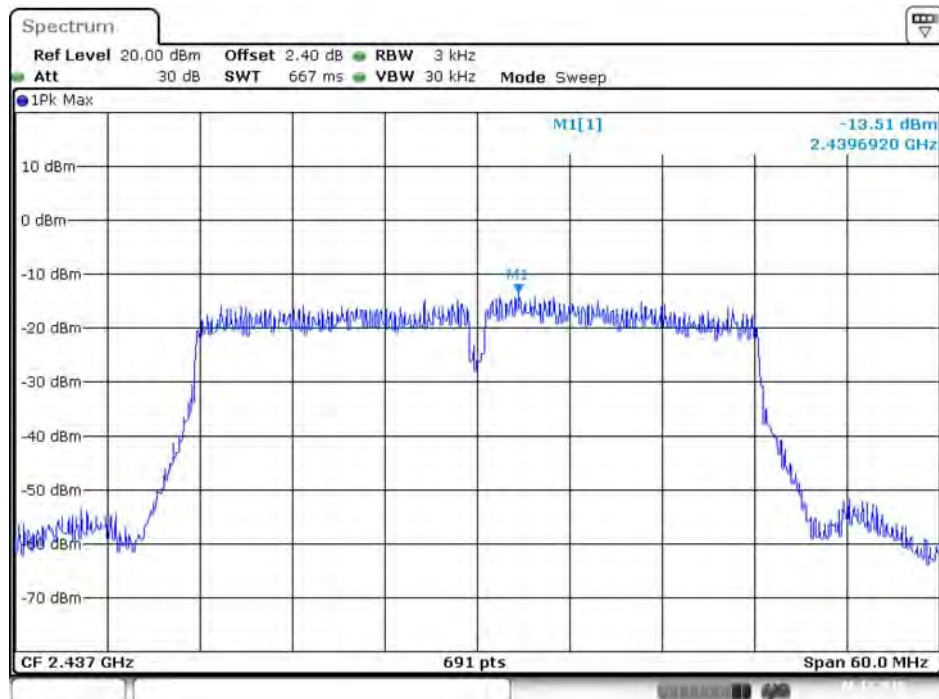

Date: 6.DEC.2015 02:46:03

**Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi**

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1**



Date: 5.DEC.2015 23:06:07

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2**



Date: 5.DEC.2015 23:05:18

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3**



Date: 5.DEC.2015 23:05:34


**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4**



Date: 5.DEC.2015 23:07:26




**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

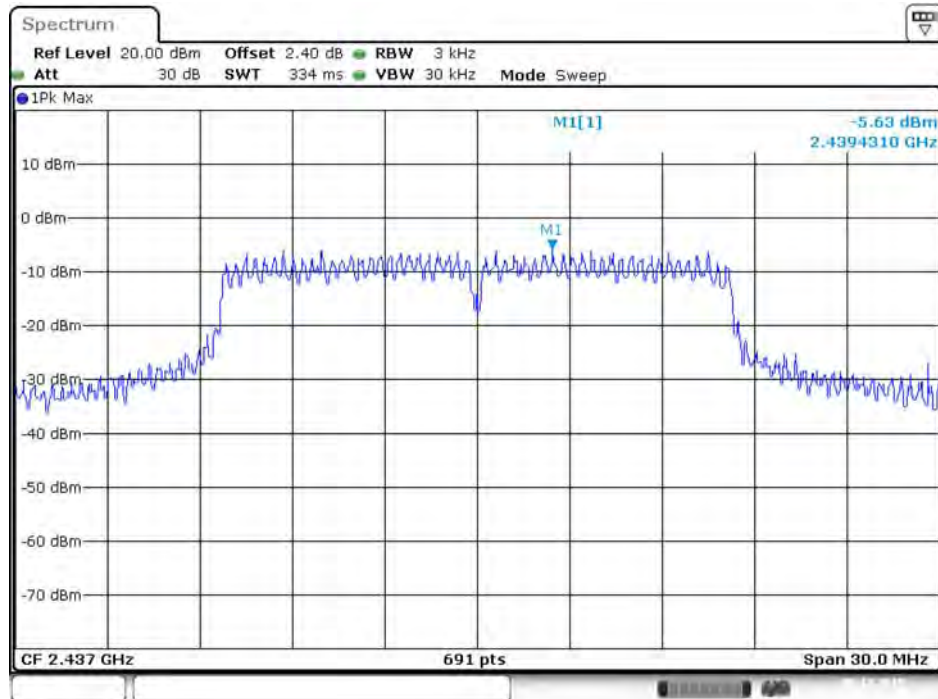


Date: 5 DEC.2015 23:27:55

**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

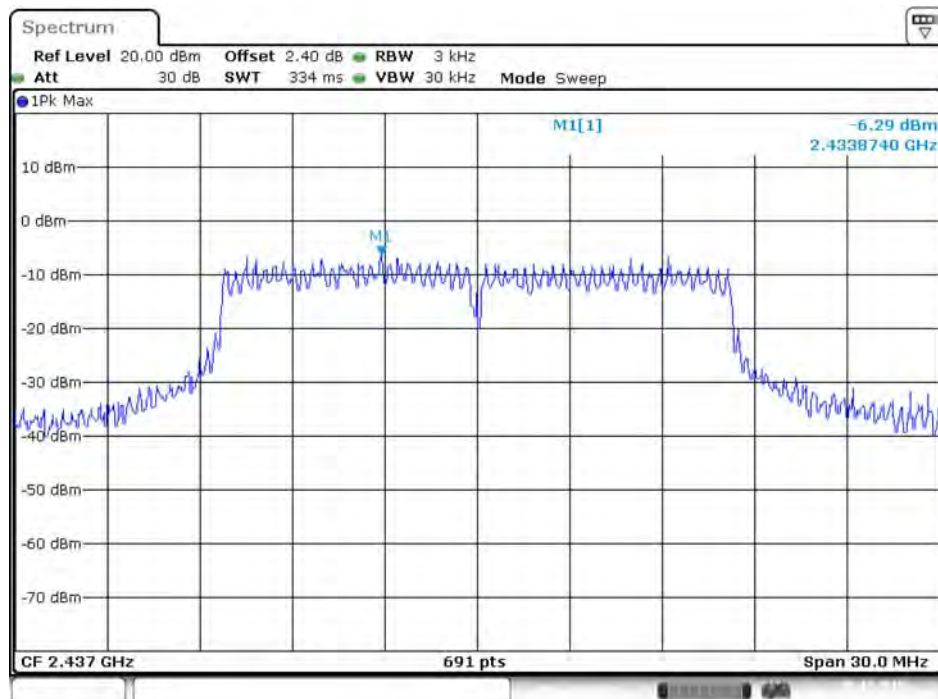


Date: 5 DEC.2015 23:29:36

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

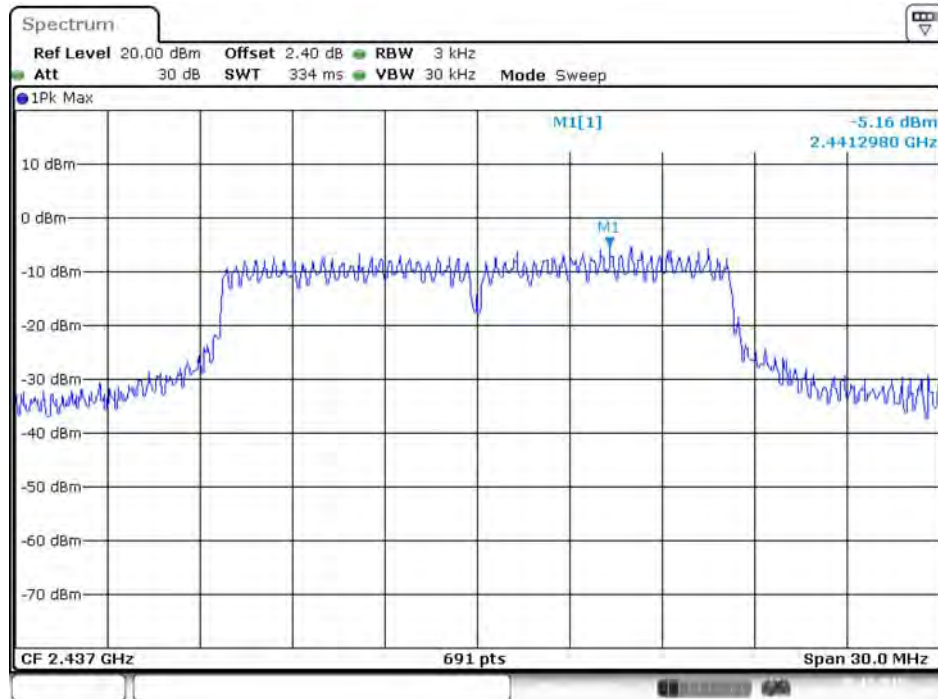


Date: 5.DEC.2015 23:29:02

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

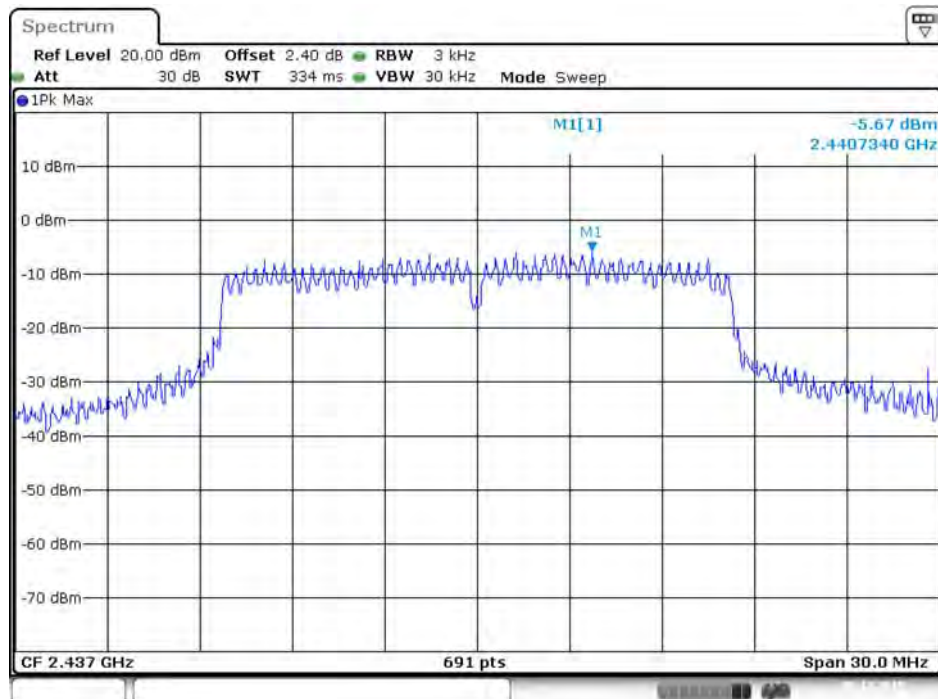


Date: 5.DEC.2015 23:30:04

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

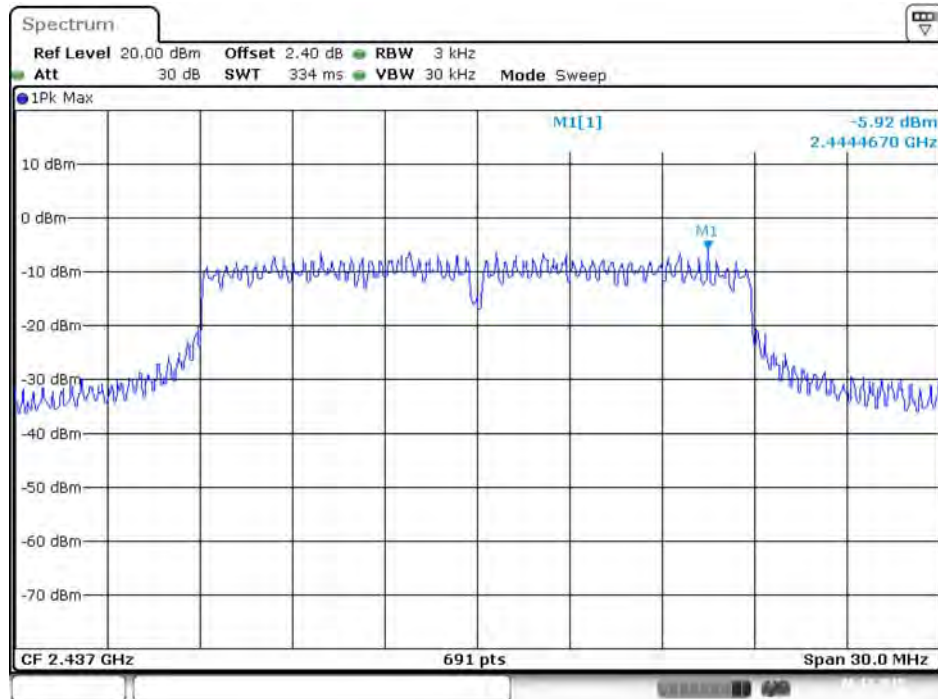


Date: 6 DEC.2015 00:09:55

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

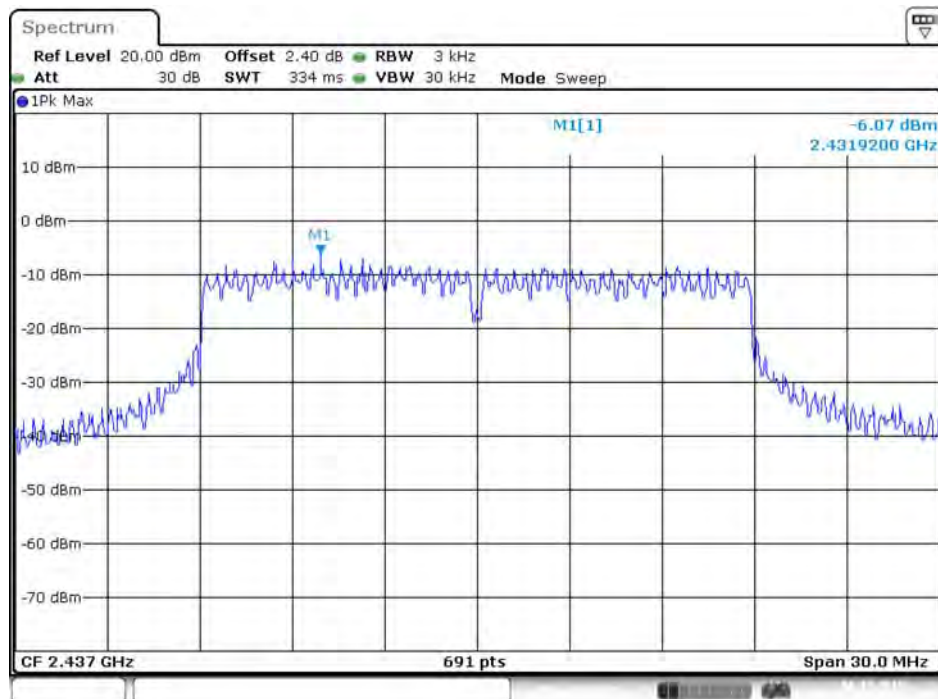


Date: 6 DEC.2015 00:10:57

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

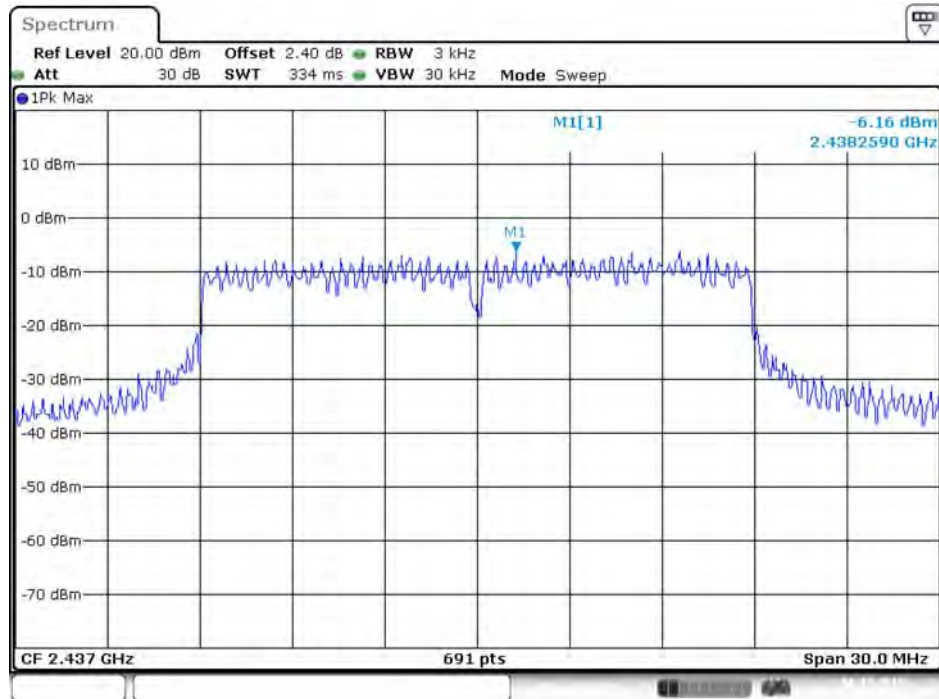

Date: 6 DEC.2015 00:10:36


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

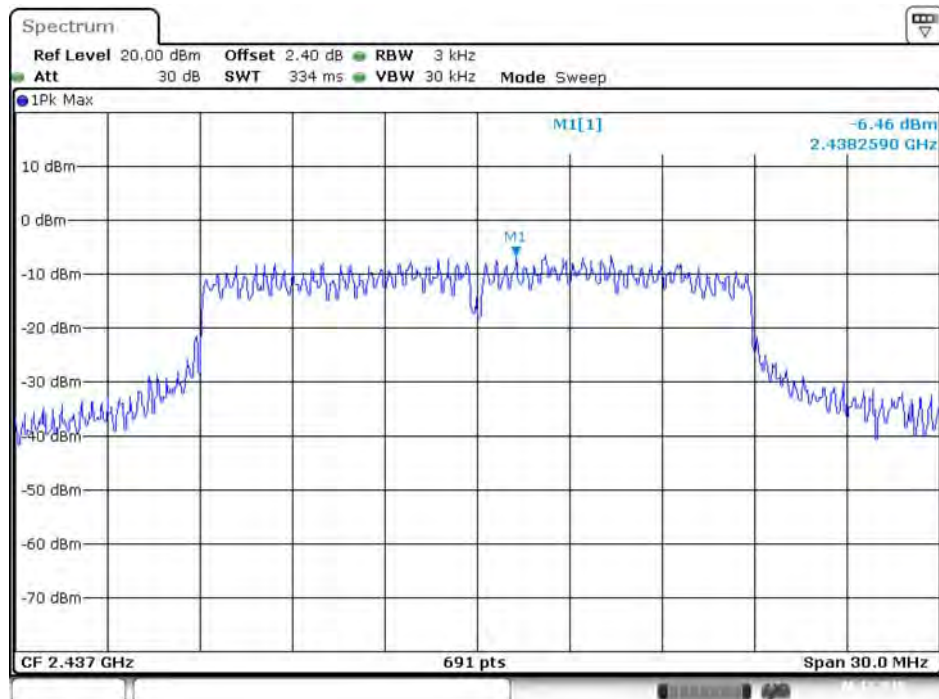

Date: 6 DEC.2015 00:11:19




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

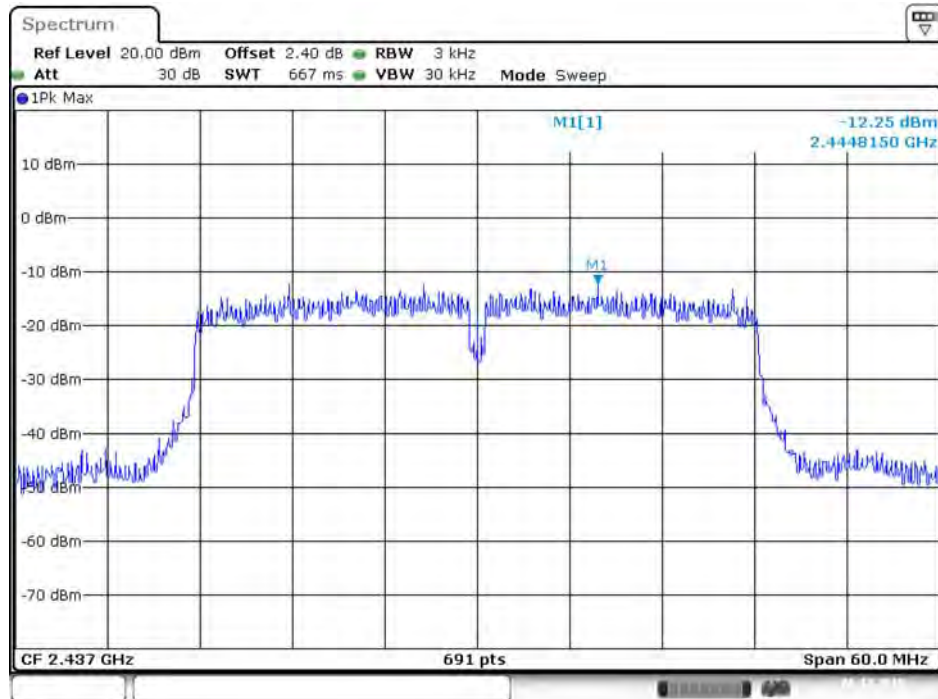


Date: 6 DEC.2015 00:23:17

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

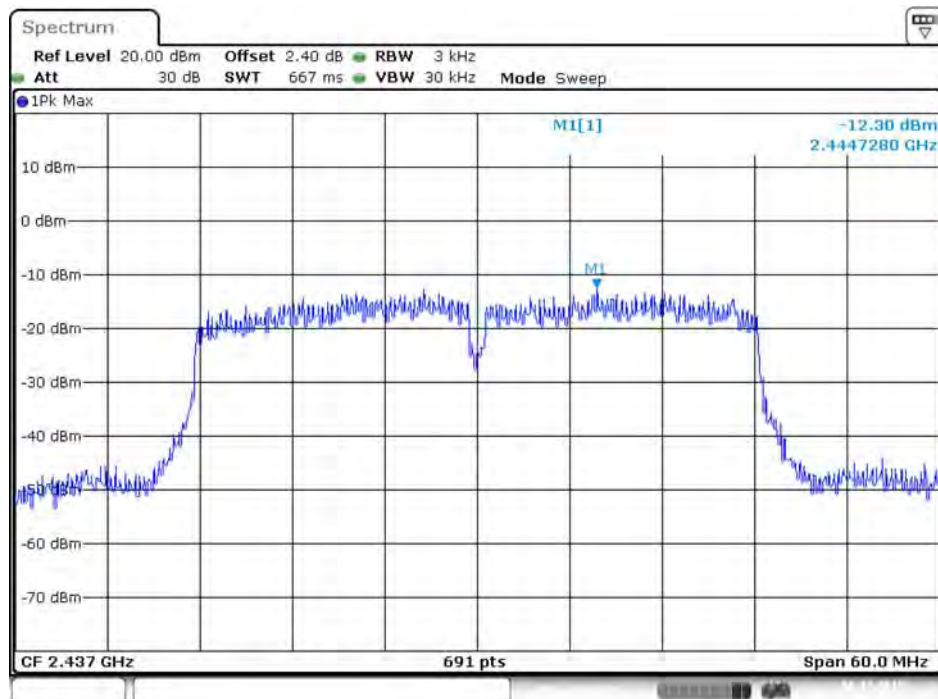


Date: 6 DEC.2015 00:22:19

## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

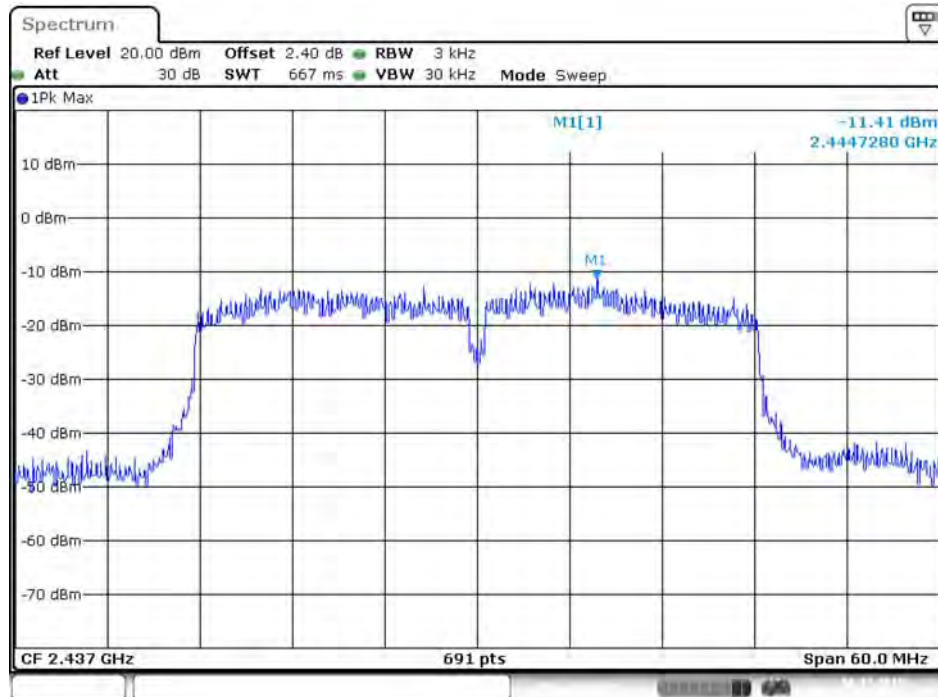

Date: 6.DEC.2015 00:22:52

## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

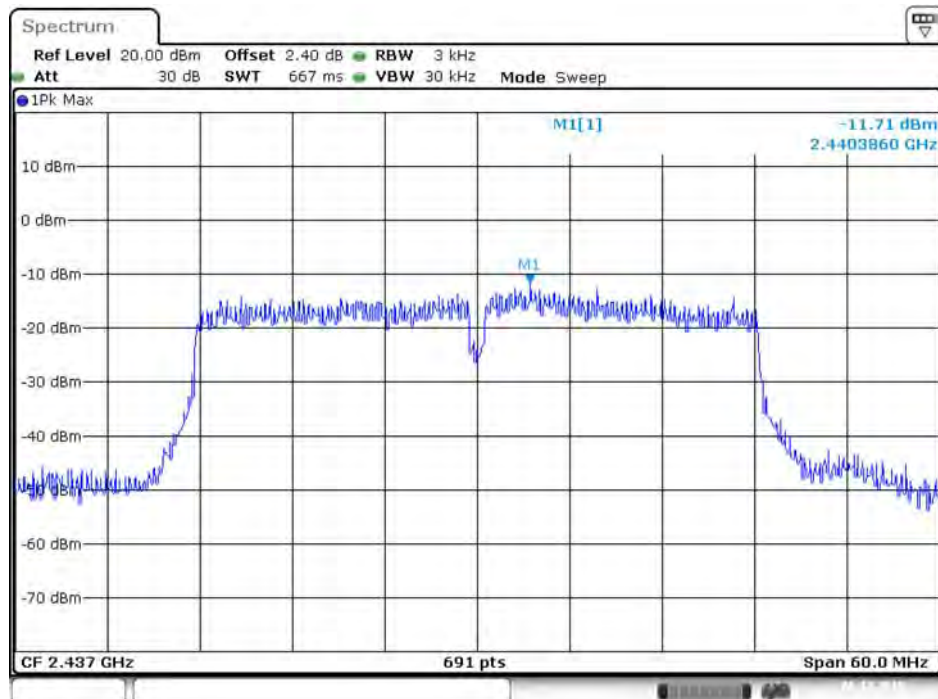

Date: 6.DEC.2015 00:21:22


**Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi**

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1**



Date: 5.DEC.2015 22:47:50

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2**

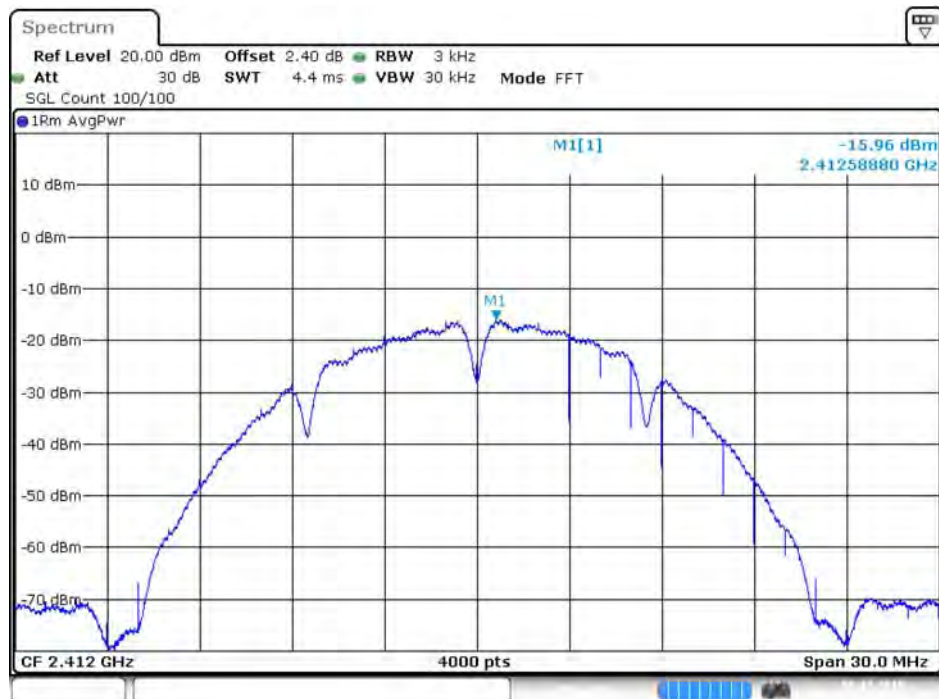

Date: 5.DEC.2015 22:46:55



**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3**




Date: 5.DEC.2015 22:47:26

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 4**




Date: 5.DEC.2015 22:48:22

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

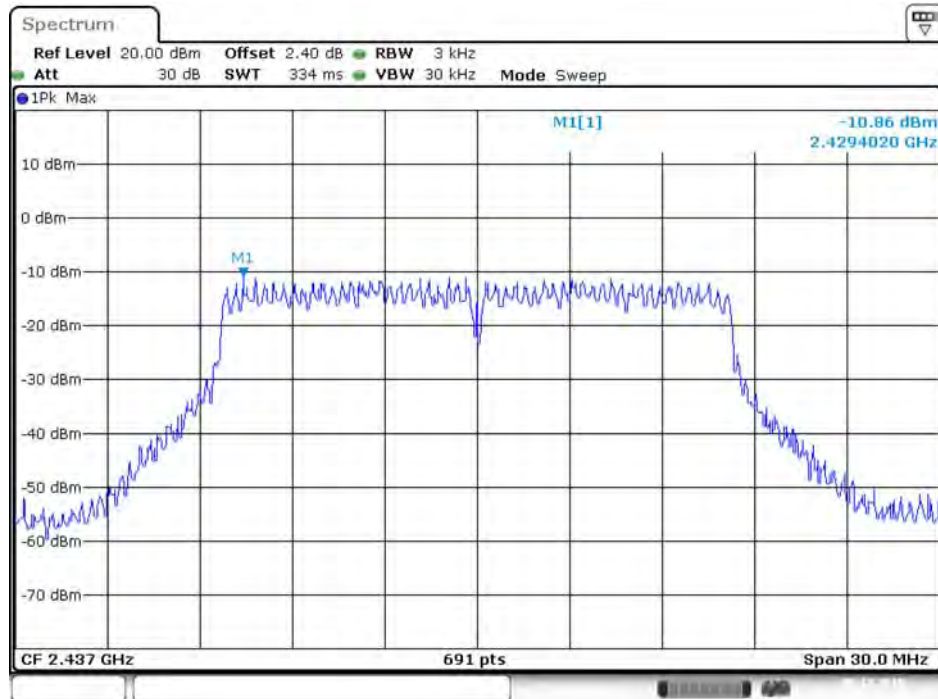


Date: 5.DEC.2015 20:37:26

**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

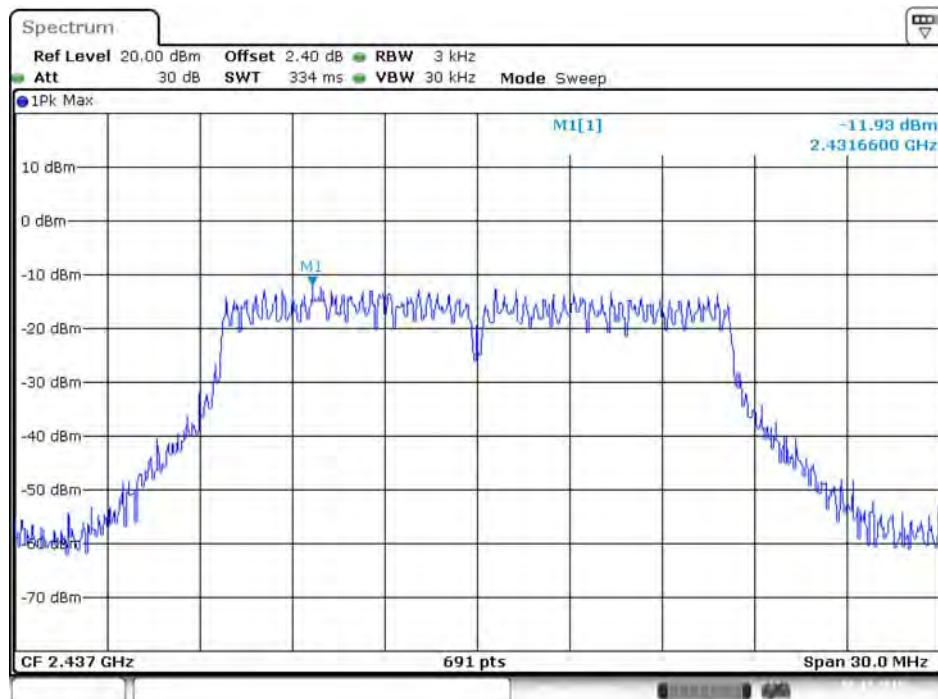


Date: 5.DEC.2015 20:38:49

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

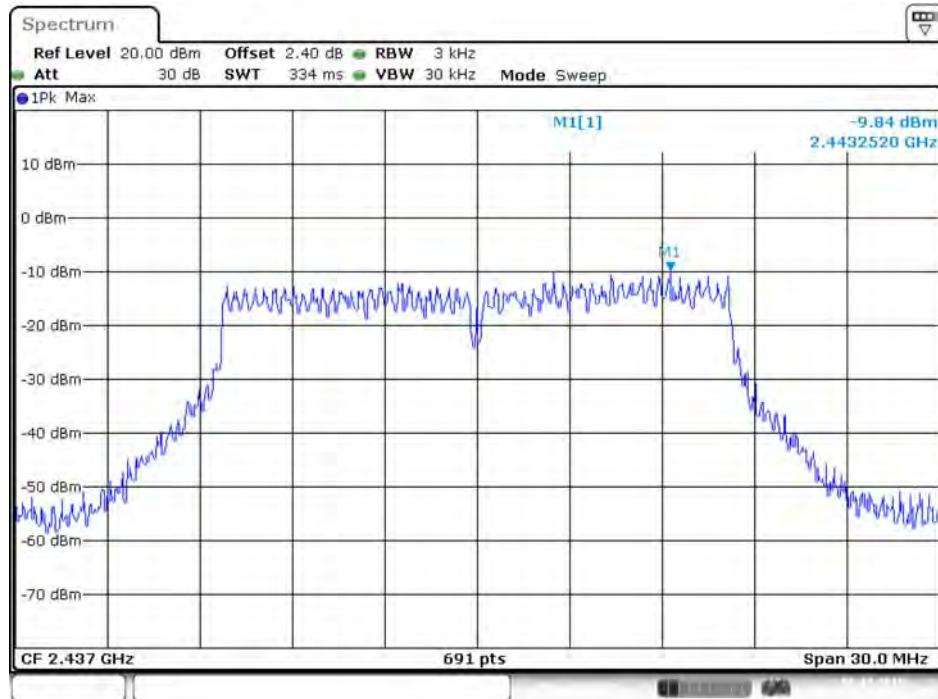


Date: 5.DEC.2015 20:38:10

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

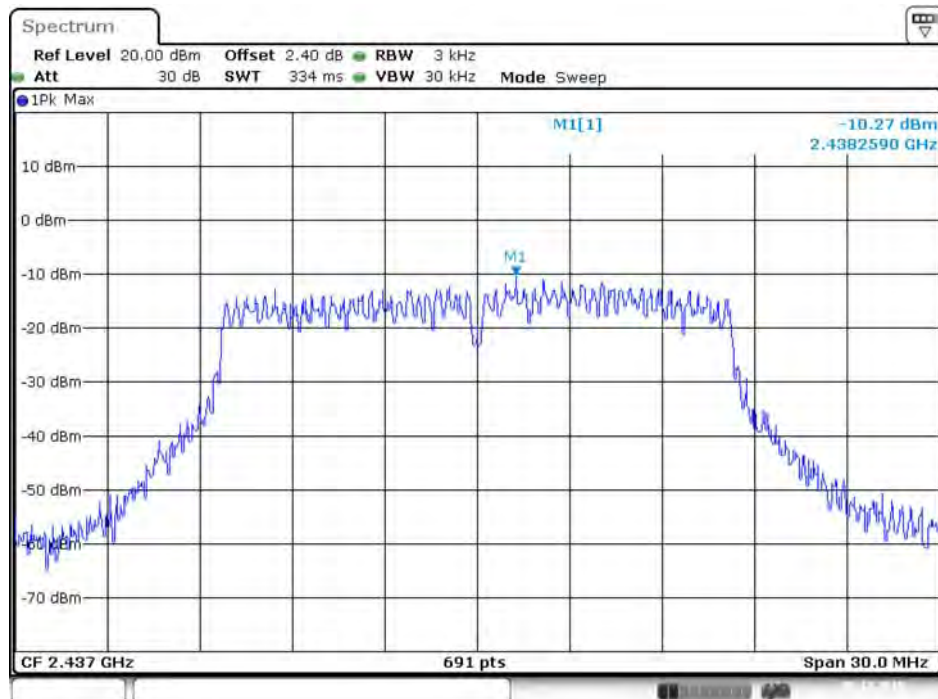


Date: 5.DEC.2015 20:39:11

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

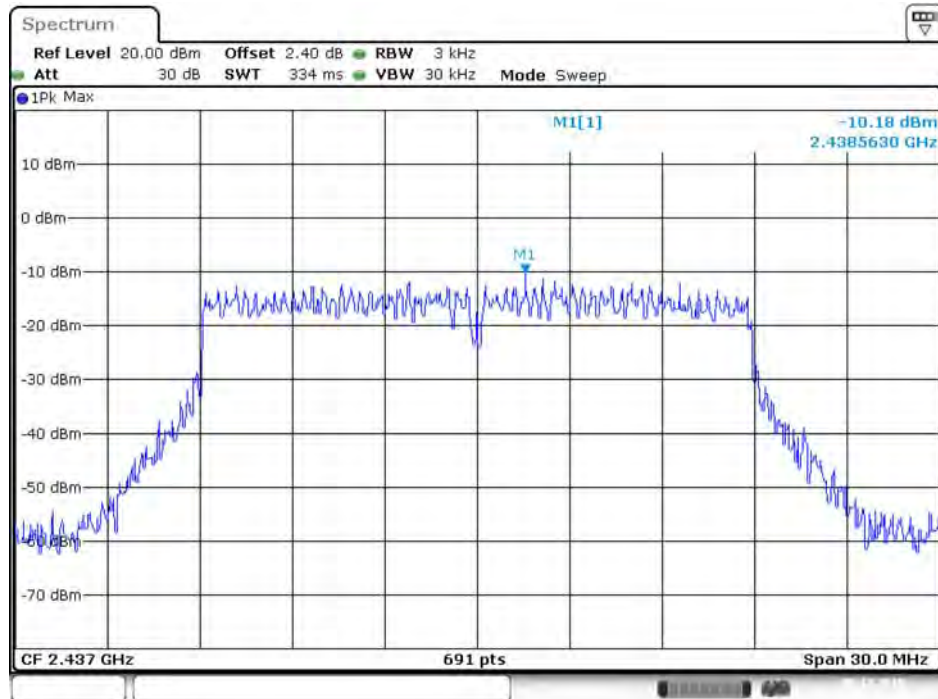

Date: 5 DEC.2015 20:48:23


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

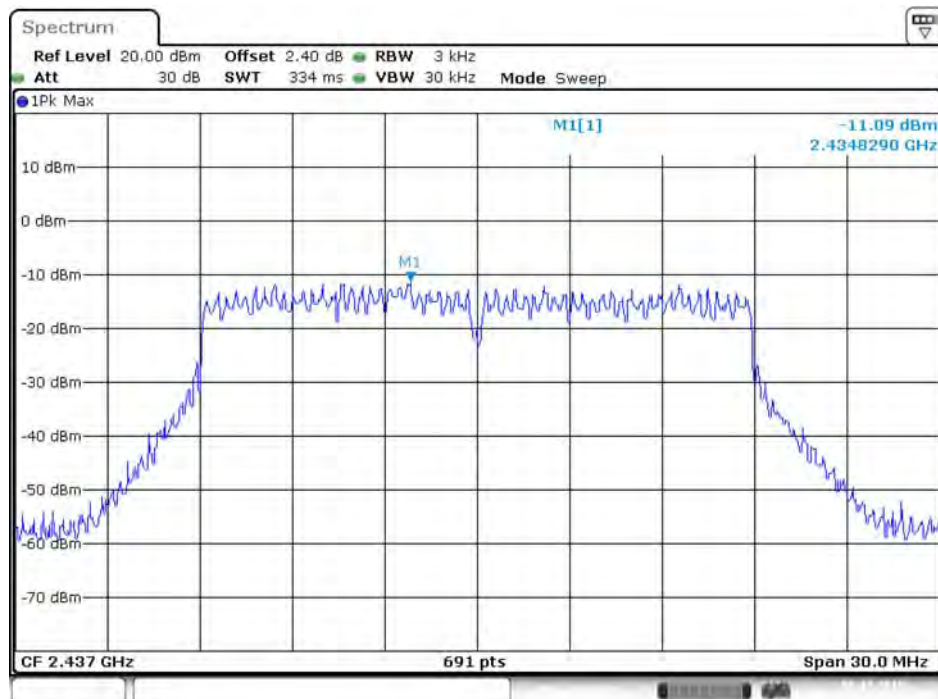

Date: 5 DEC.2015 20:47:29




**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3**

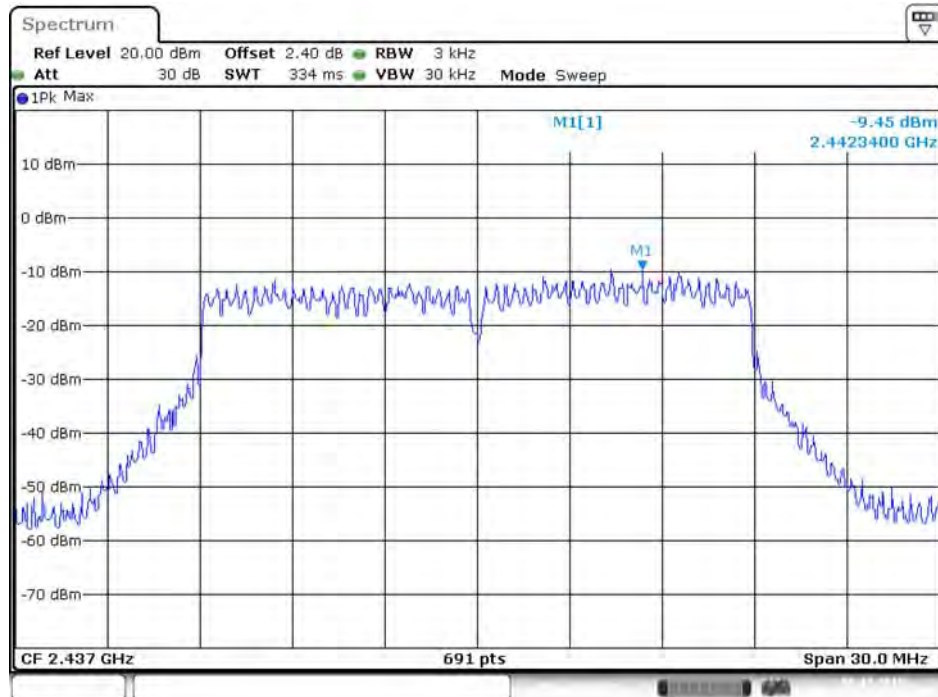


Date: 5.DEC.2015 20:47:56

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4**

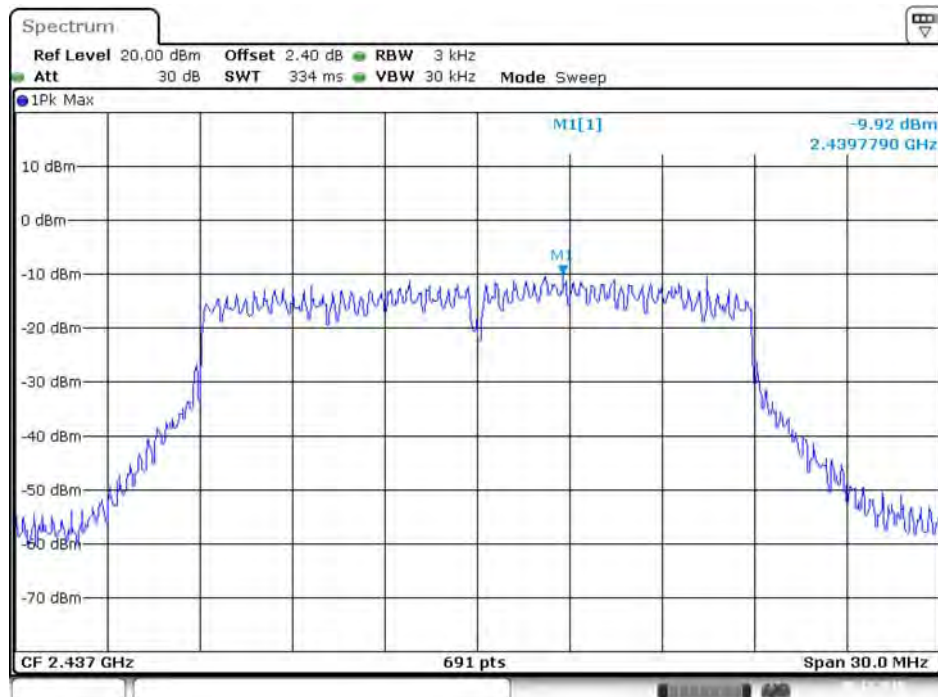


Date: 5.DEC.2015 20:48:52

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

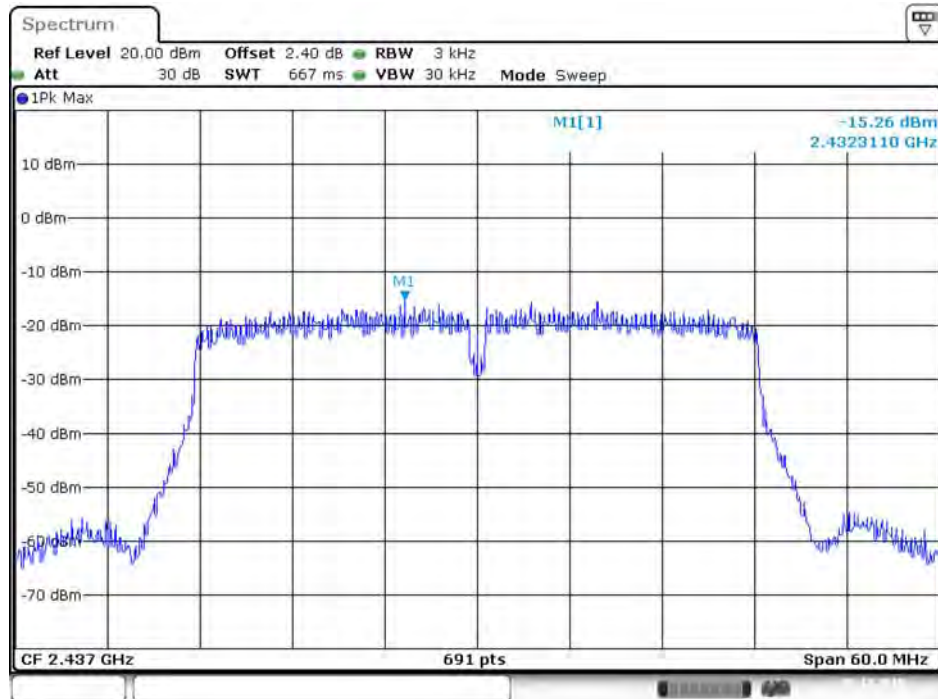


Date: 5.DEC.2015 20:58:17

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

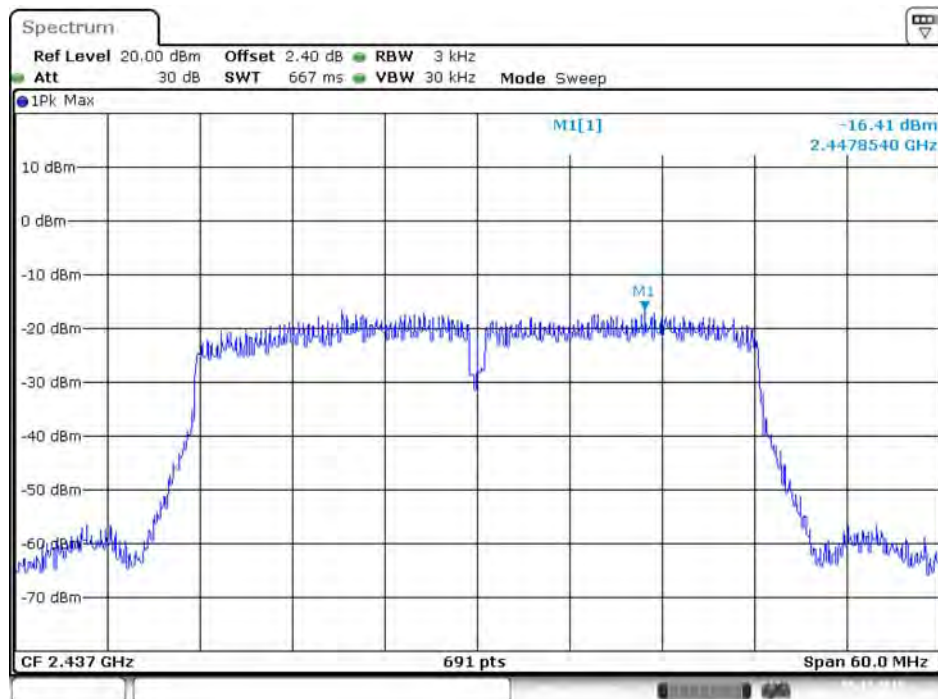


Date: 5.DEC.2015 20:55:51

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3**

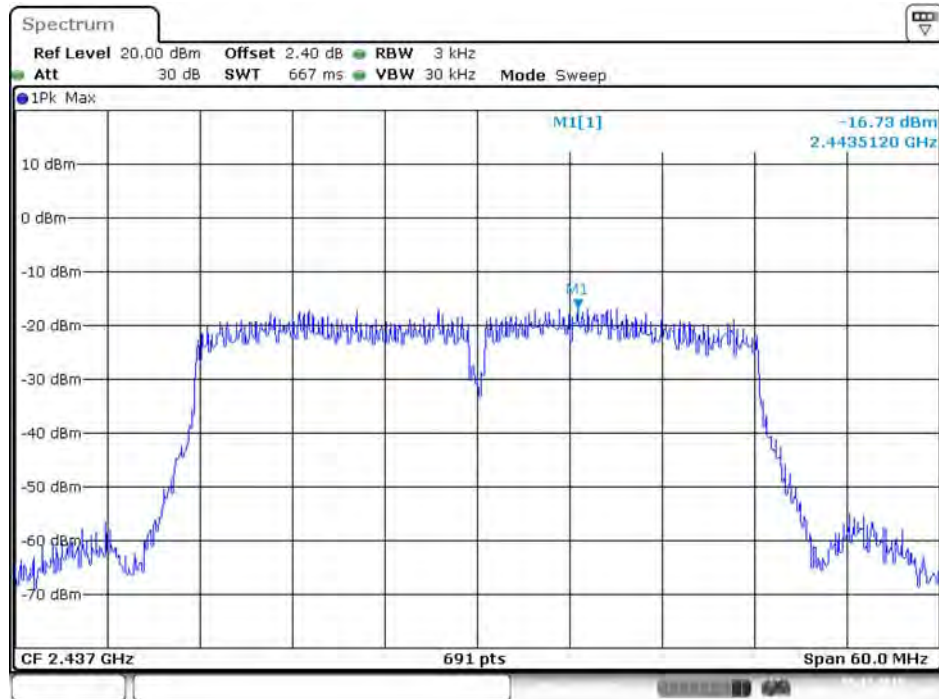

Date: 5.DEC.2015 20:56:19

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4**

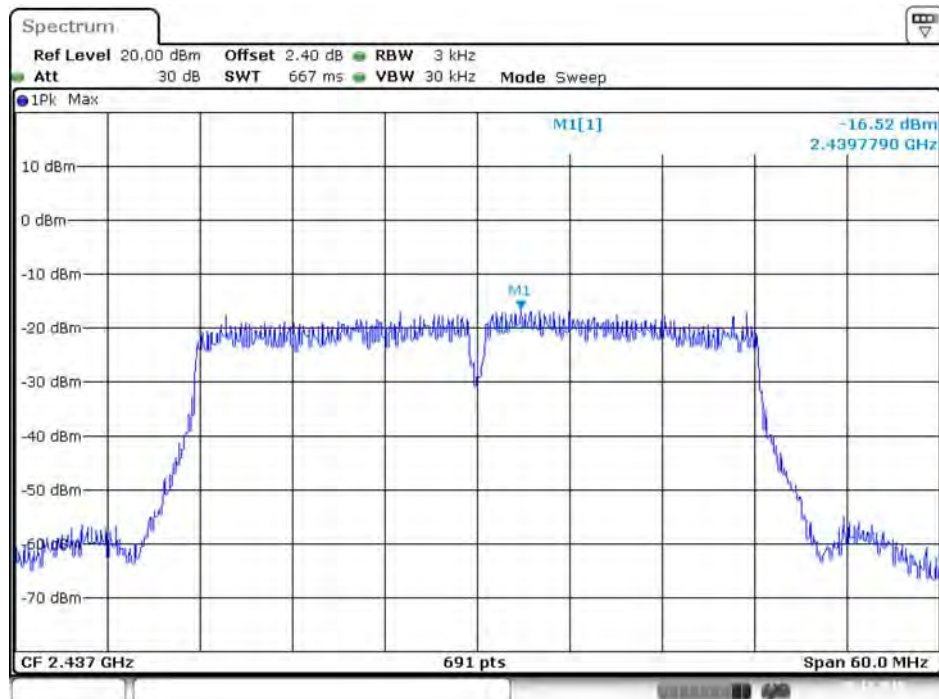

Date: 5.DEC.2015 20:54:47




Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1



Date: 6.DEC.2015 03:42:01

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

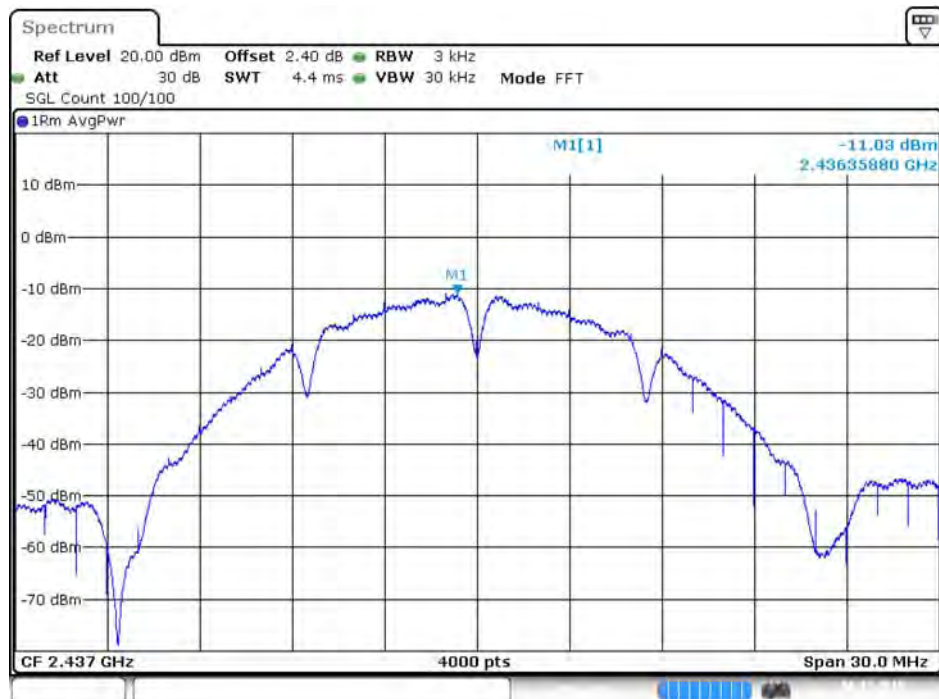


Date: 6.DEC.2015 03:40:37

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3**




Date: 6.DEC.2015 03:41:32

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4**

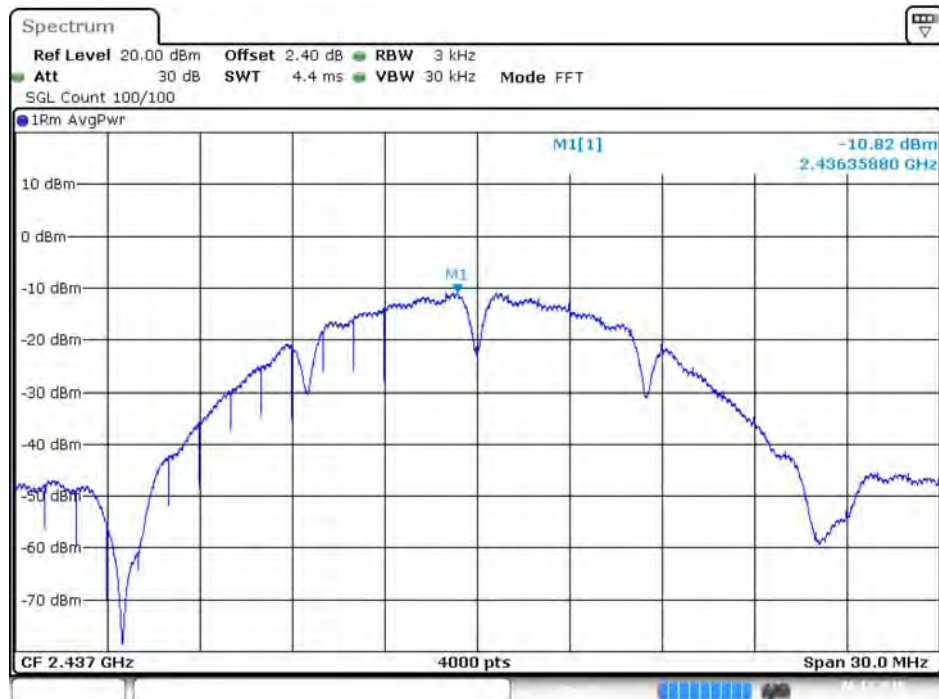


Date: 6.DEC.2015 03:42:39

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

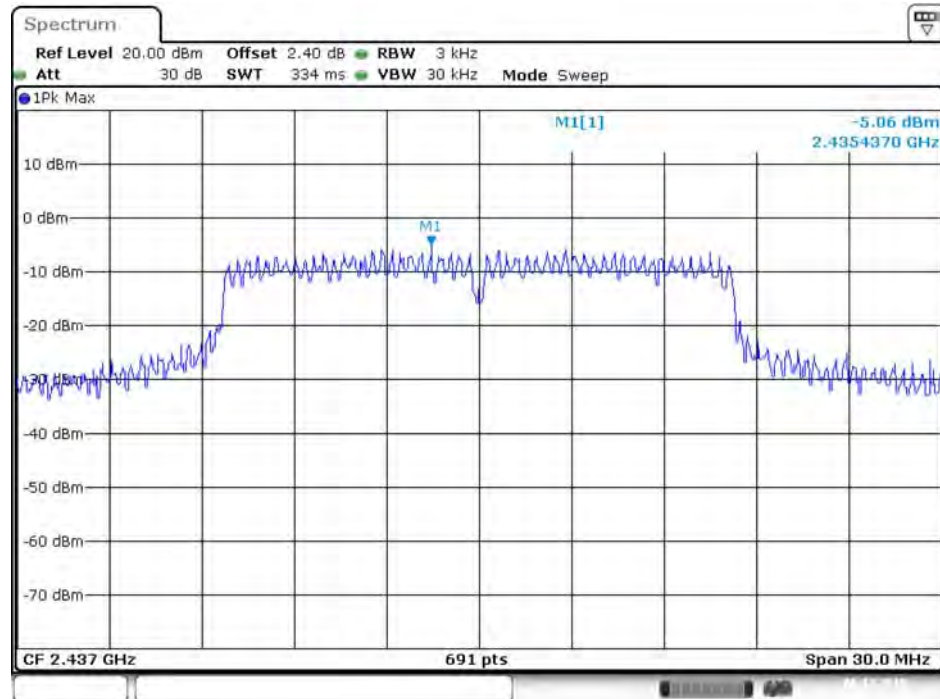


Date: 6.DEC.2015 03:30:16

**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

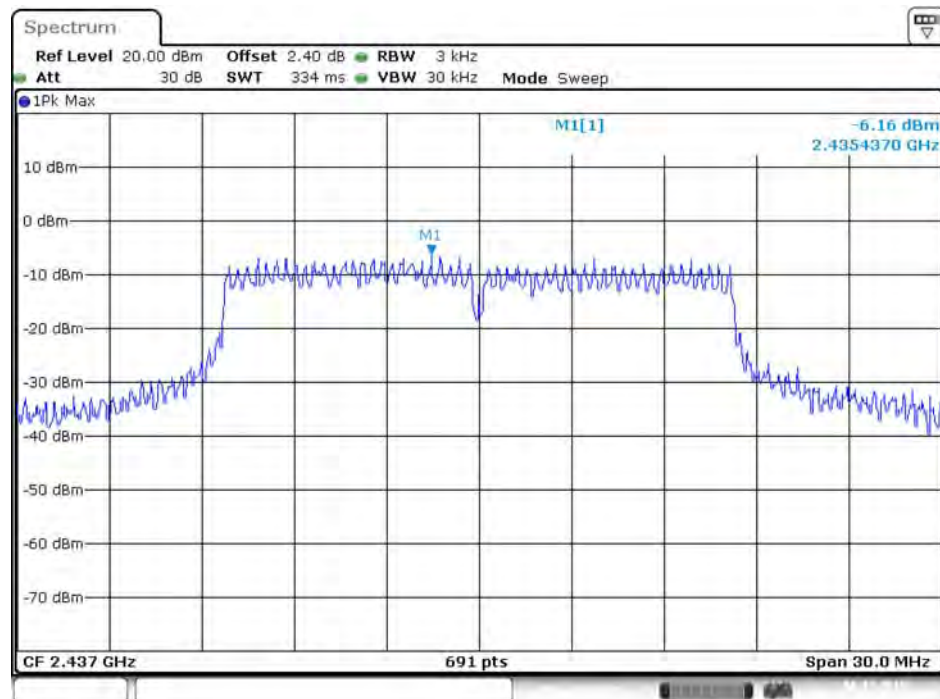


Date: 6.DEC.2015 03:30:47

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

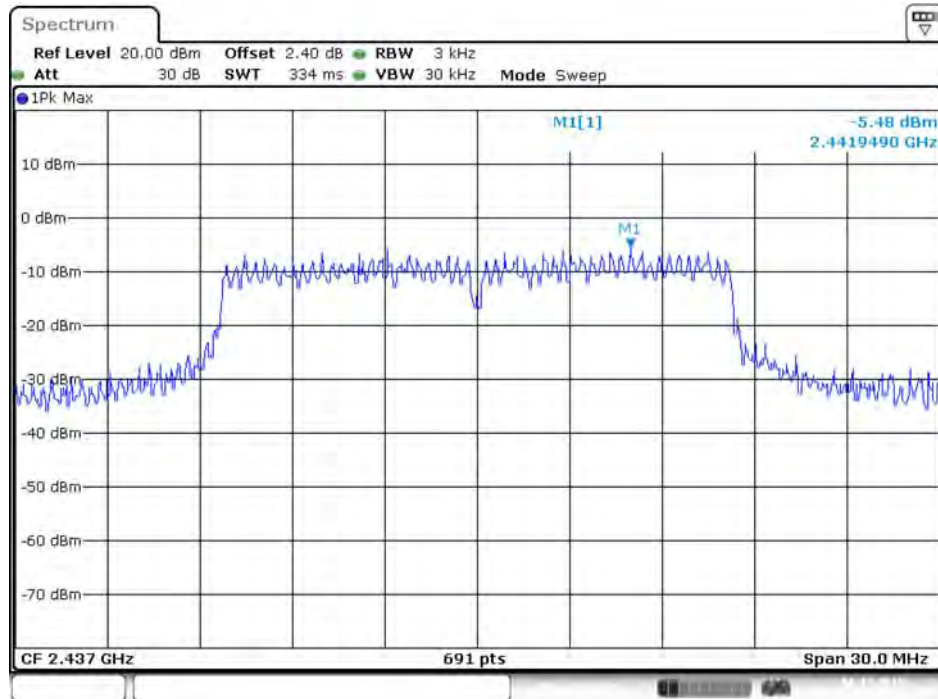

Date: 6.DEC.2015 03:30:32


**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

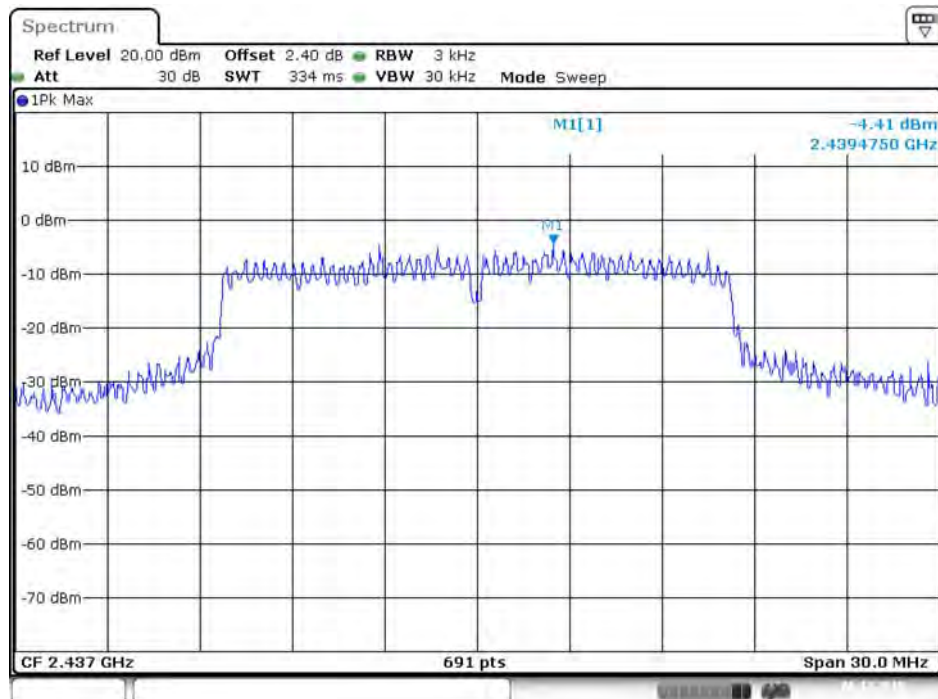

Date: 6.DEC.2015 03:31:13




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

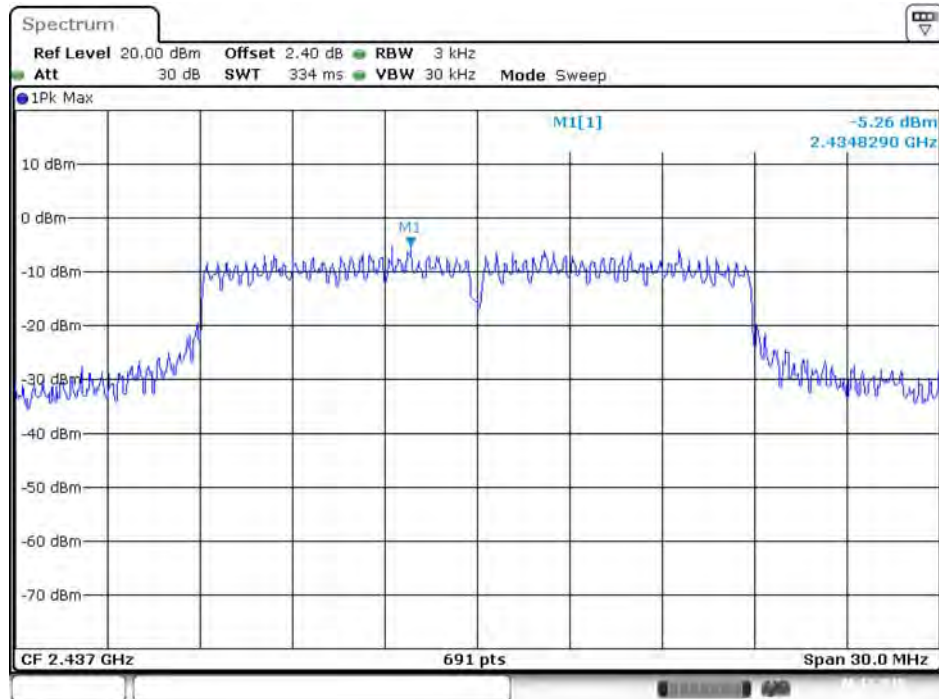


Date: 6.DEC.2015 03:21:42

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

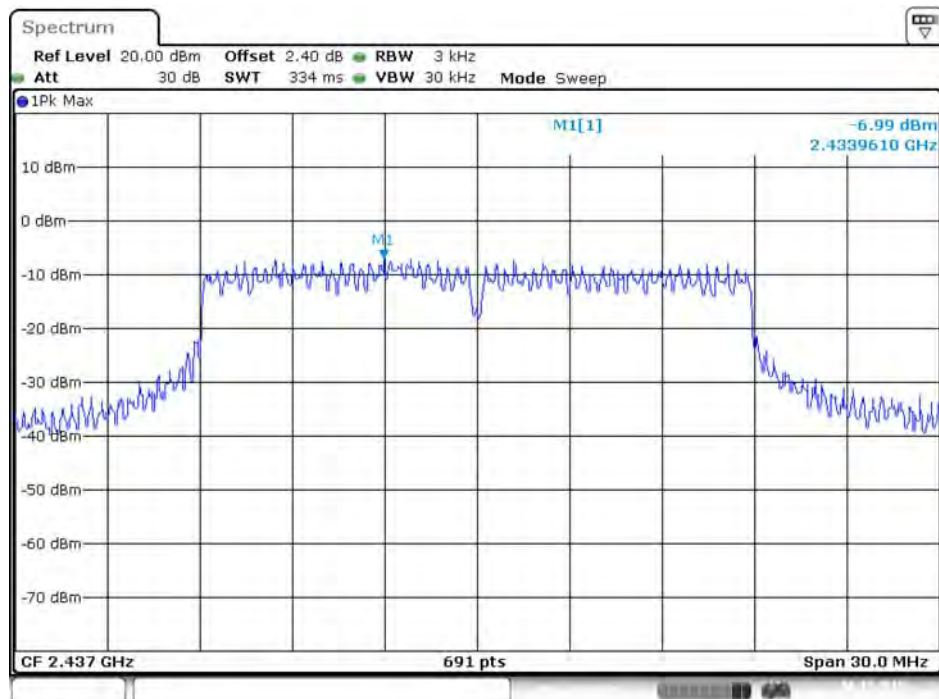


Date: 6.DEC.2015 03:19:53

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3**

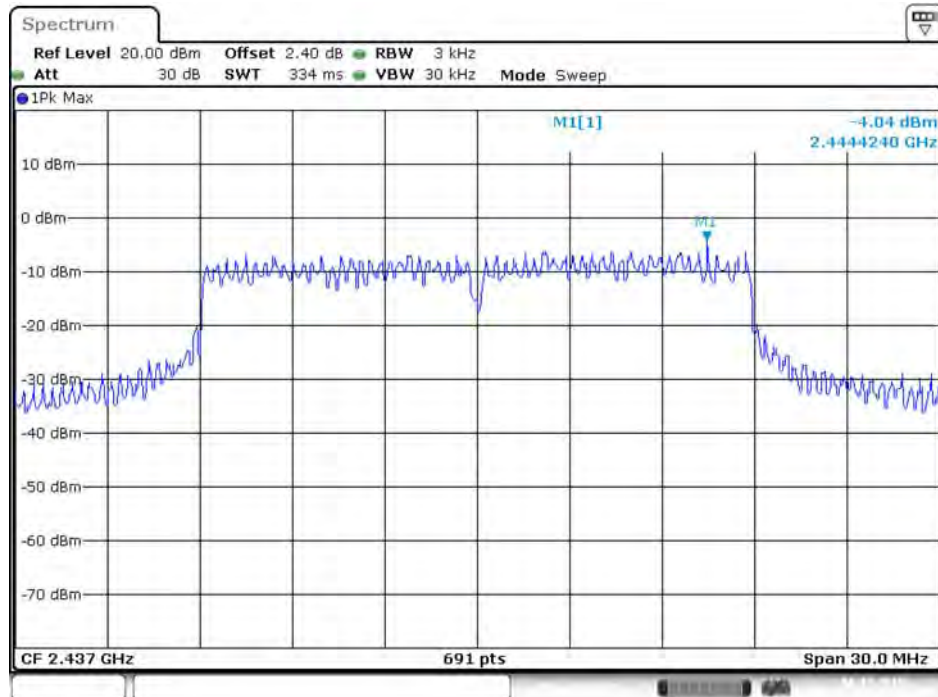


Date: 6.DEC.2015 03:21:08

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4**

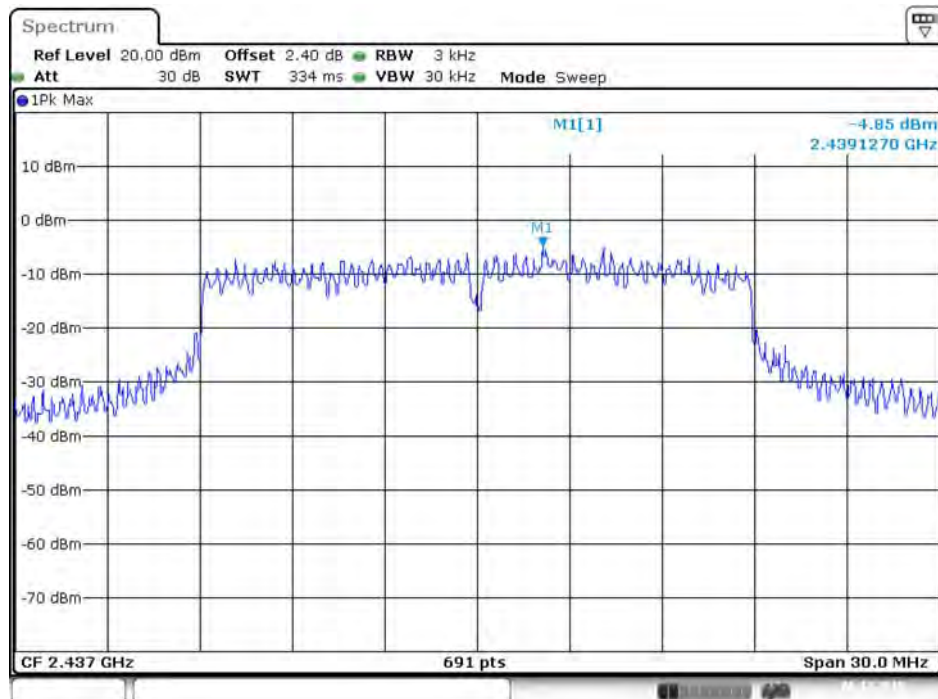


Date: 6.DEC.2015 03:20:41

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

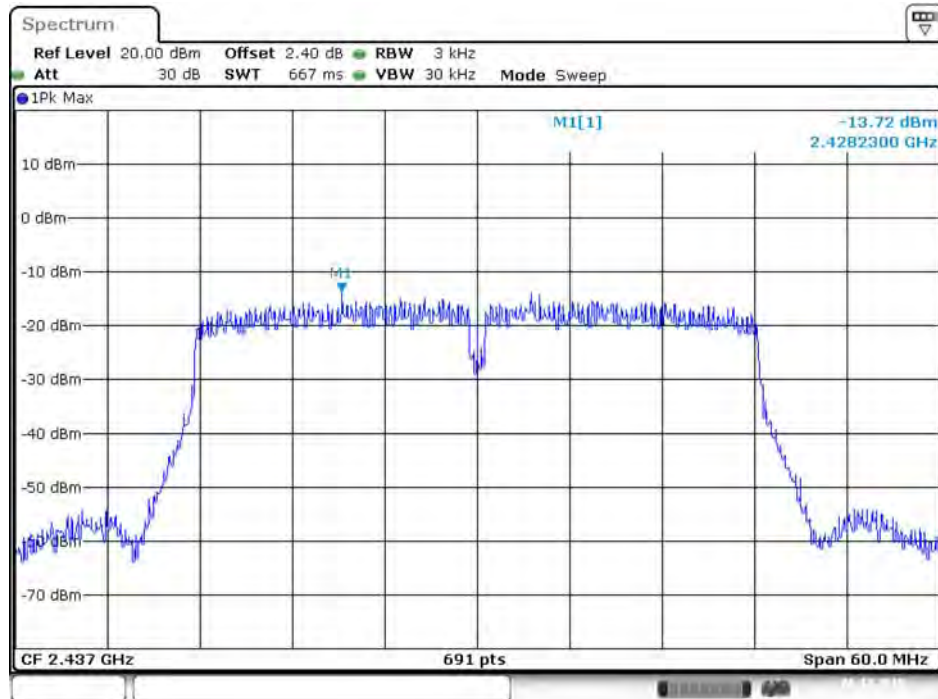

Date: 6.DEC.2015 03:02:43


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

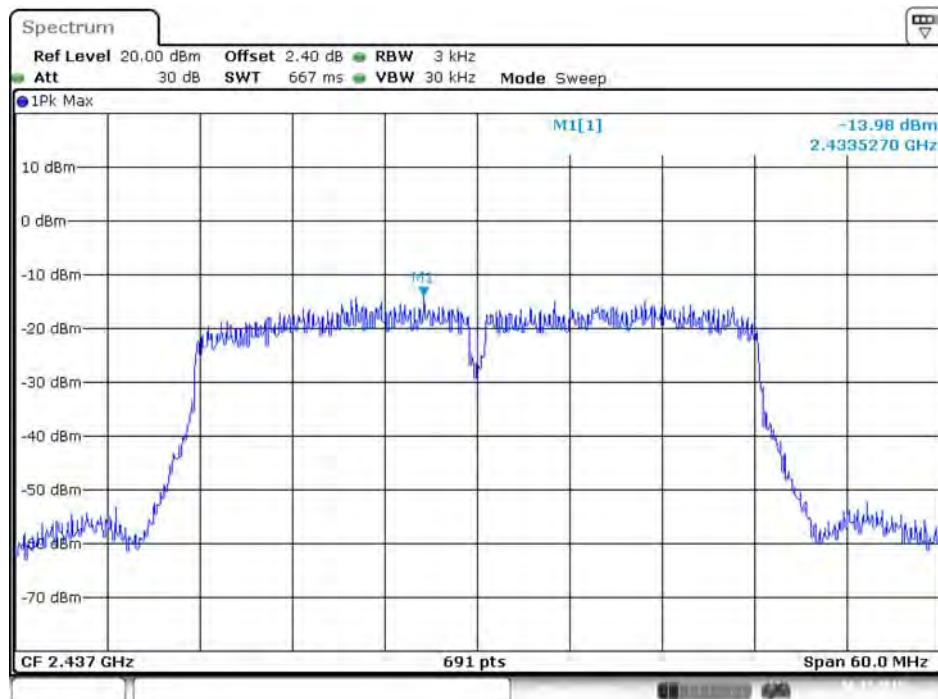

Date: 6.DEC.2015 03:01:56




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

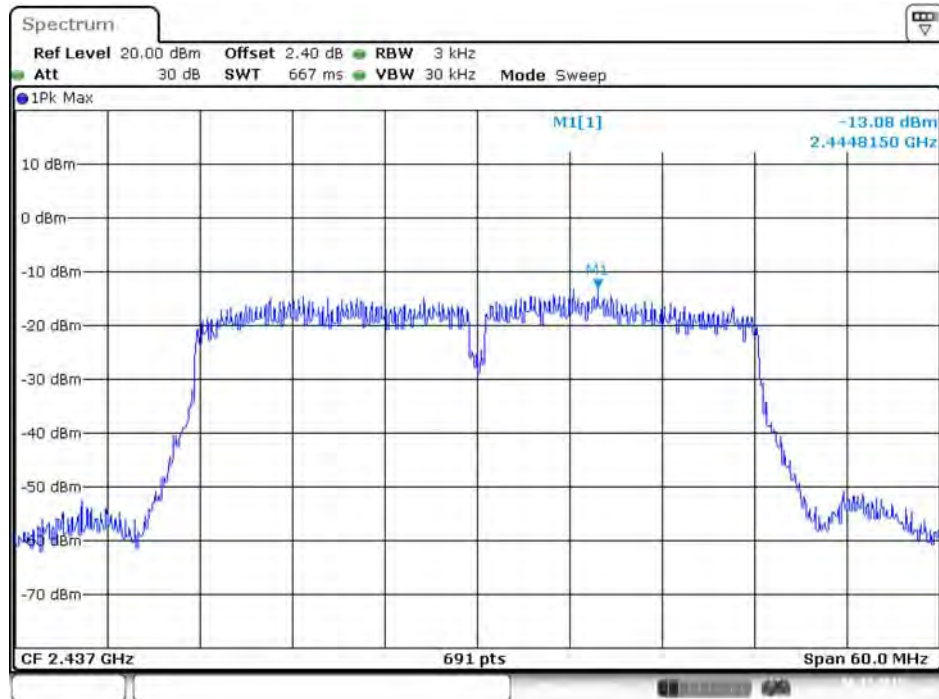

Date: 6.DEC.2015 03:02:23

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

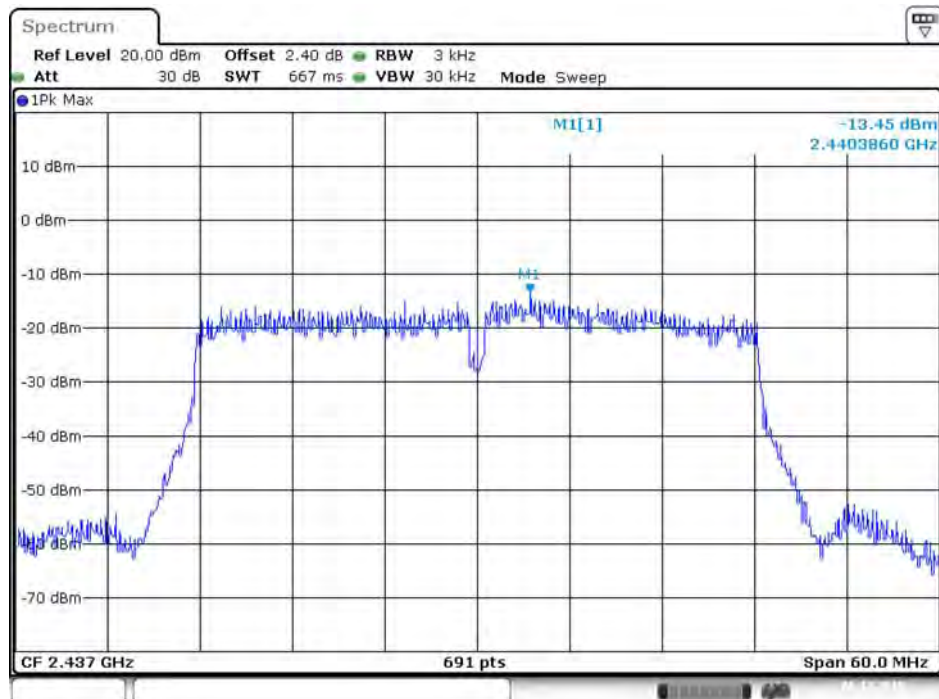

Date: 6.DEC.2015 03:01:22


Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1



Date: 7.DEC.2015 19:54:51

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2

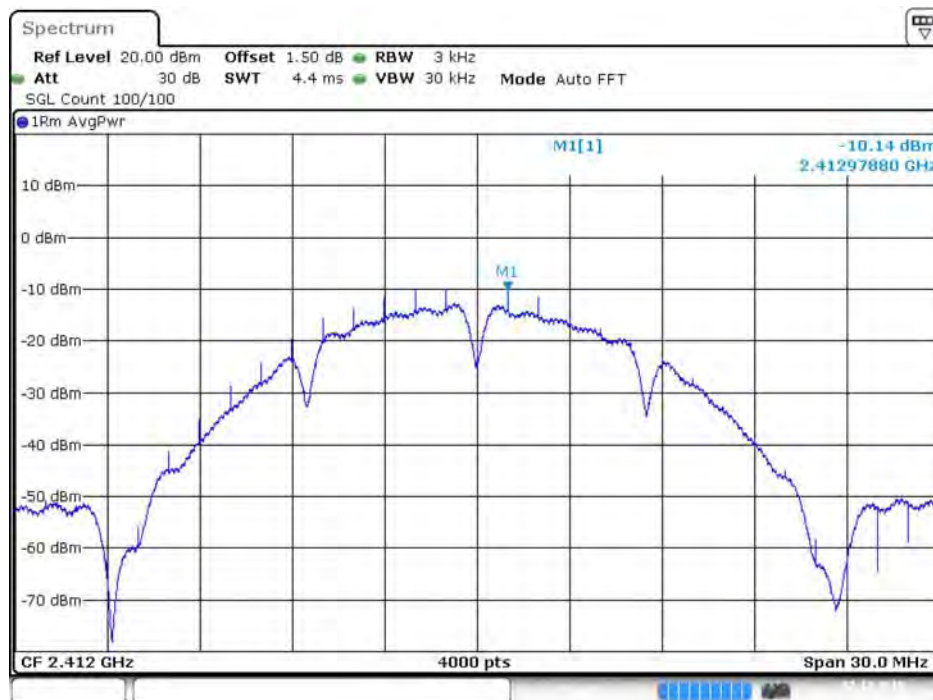

Date: 7.DEC.2015 19:54:35

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3**




Date: 7.DEC.2015 19:55:01

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 4**




Date: 7.DEC.2015 19:55:10

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

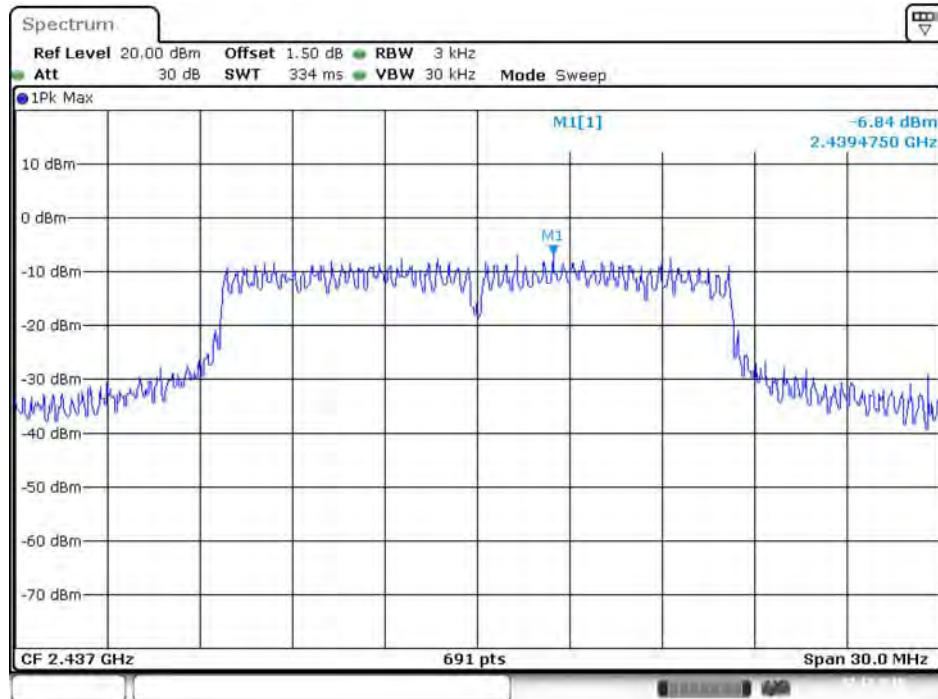

Date: 7.DEC.2015 19:59:31


**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

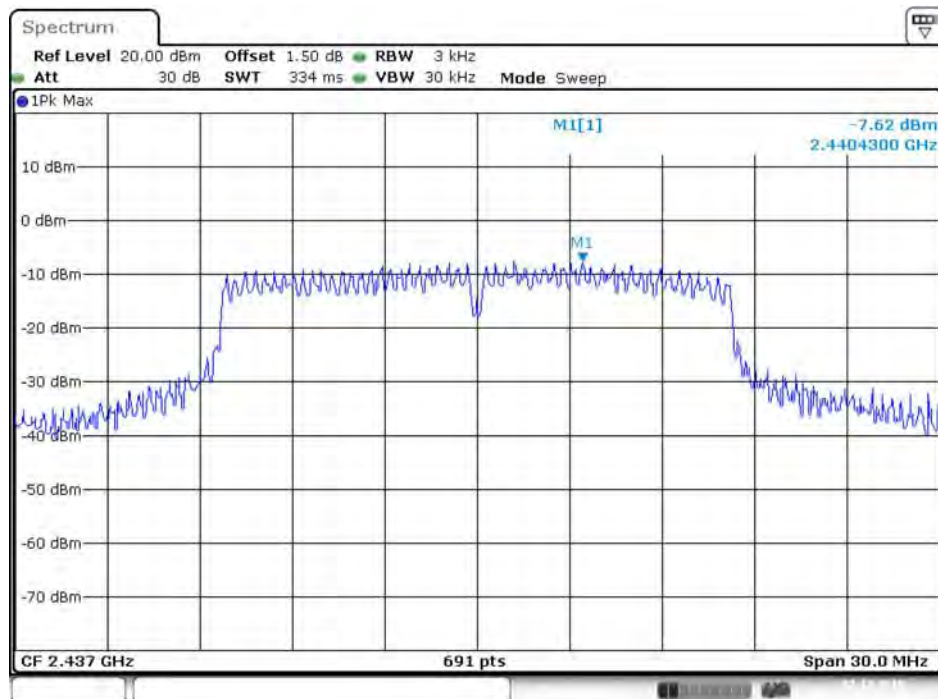

Date: 7.DEC.2015 19:59:52




**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

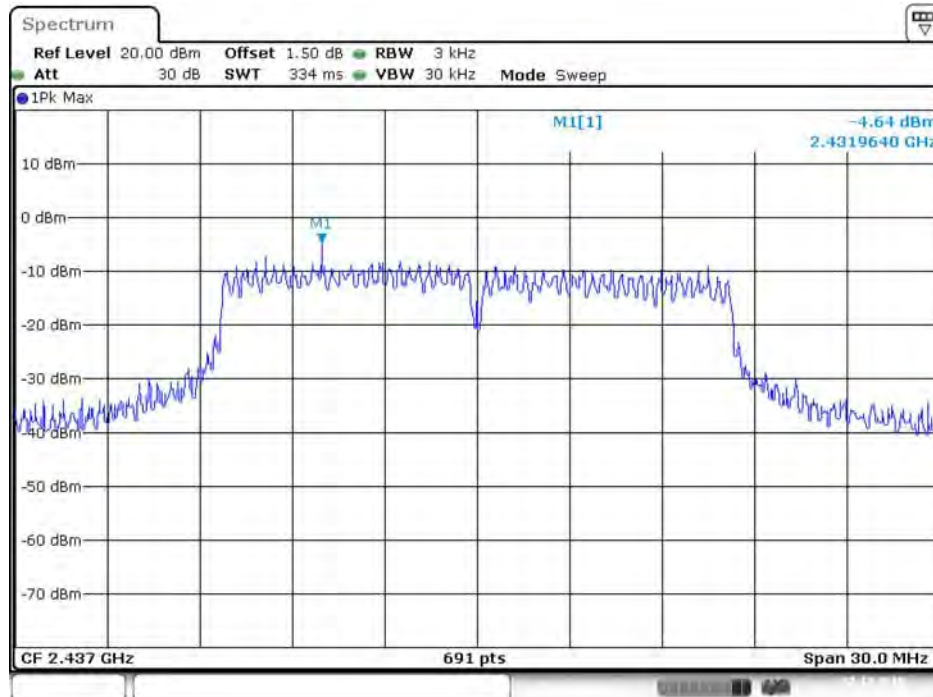


Date: 7.DEC.2015 20:00:01

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

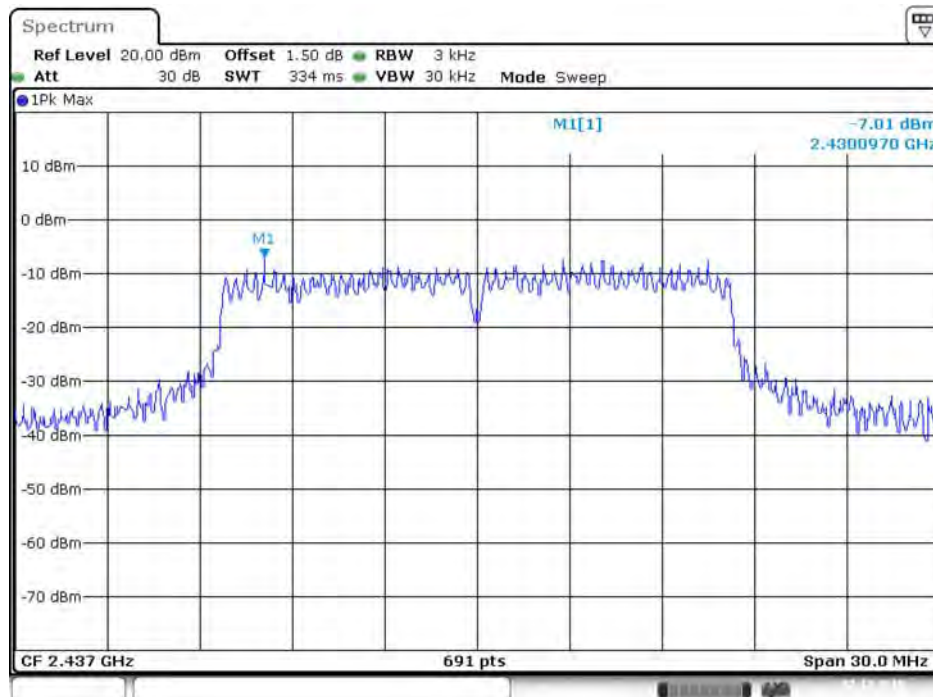


Date: 7.DEC.2015 20:00:07

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

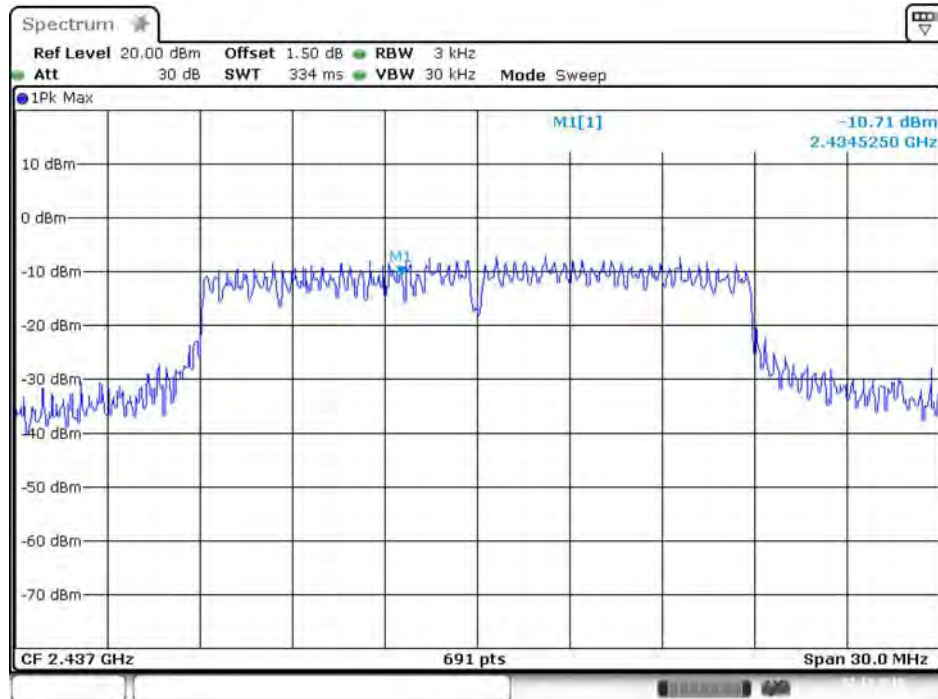

Date: 7.DEC.2015 20:04:35


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

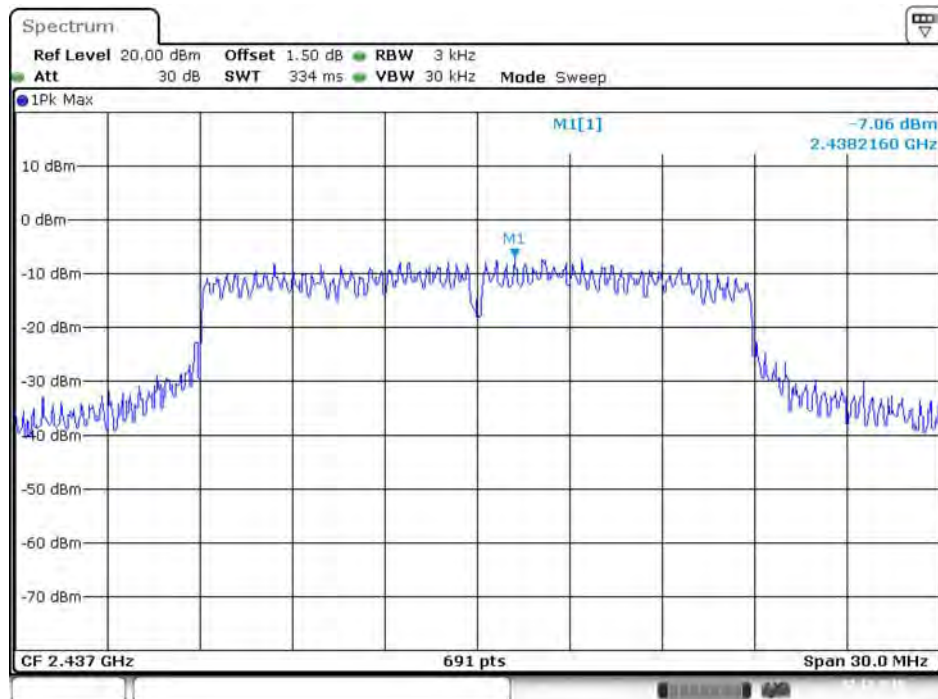

Date: 7.DEC.2015 20:04:43




**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3**

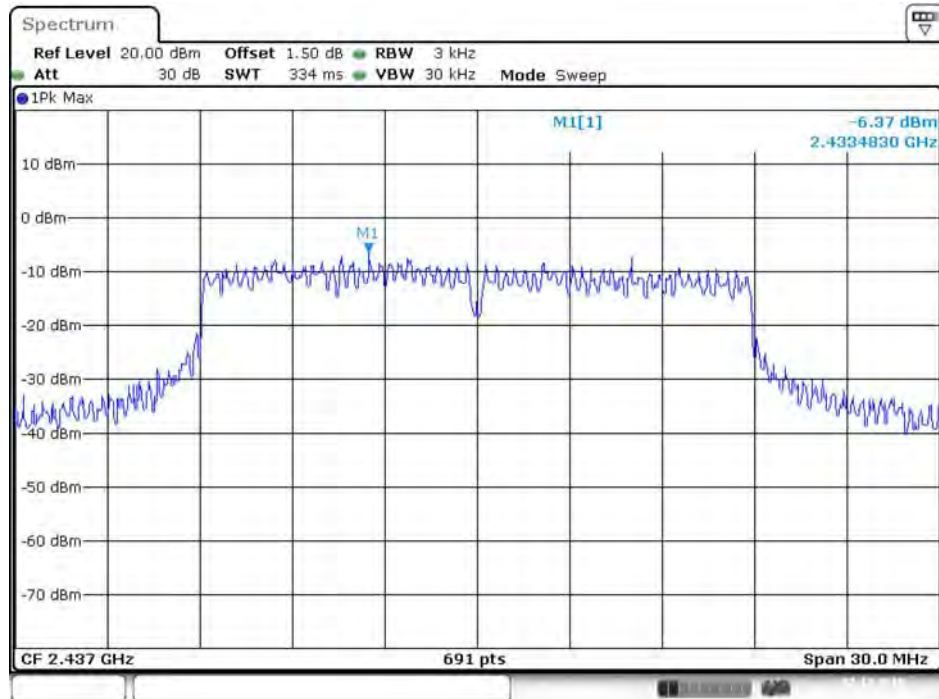


Date: 7.DEC.2015 20:05:01

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4**

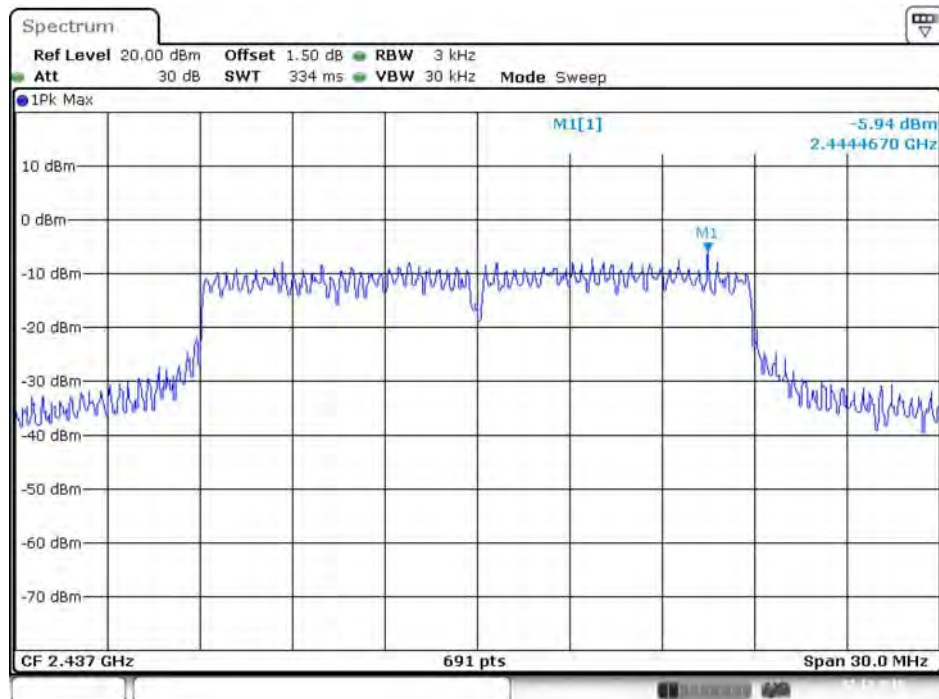


Date: 7.DEC.2015 20:05:12

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

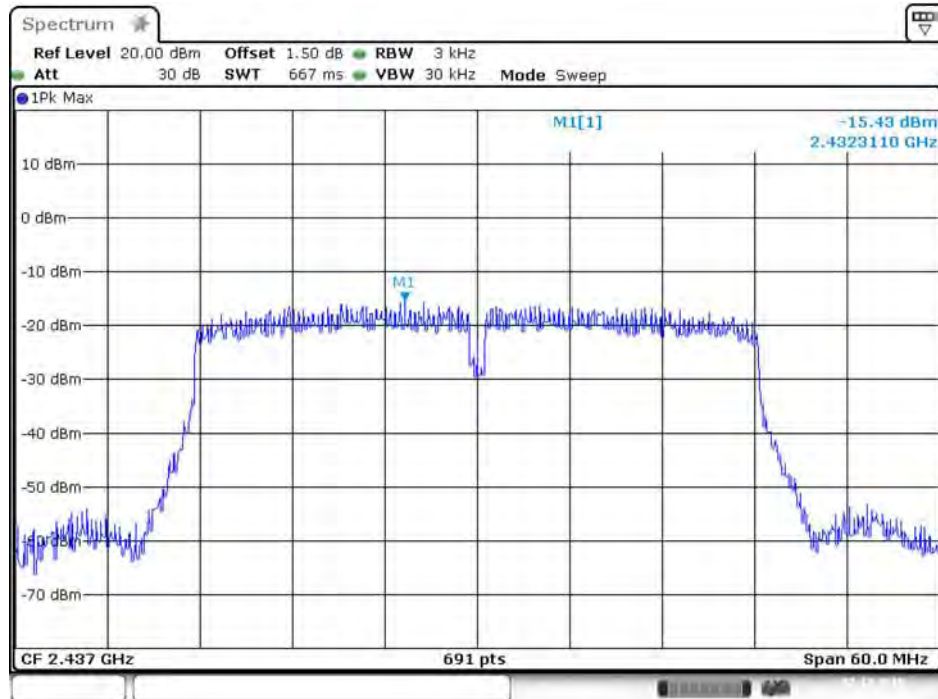


Date: 7.DEC.2015 20:08:06

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

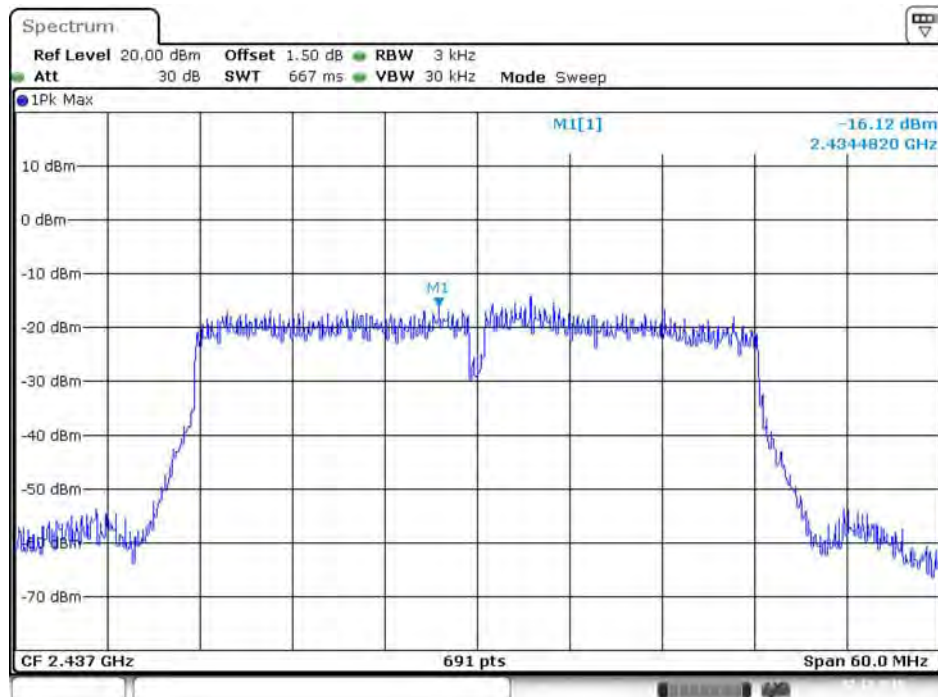


Date: 7.DEC.2015 20:08:12

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3**

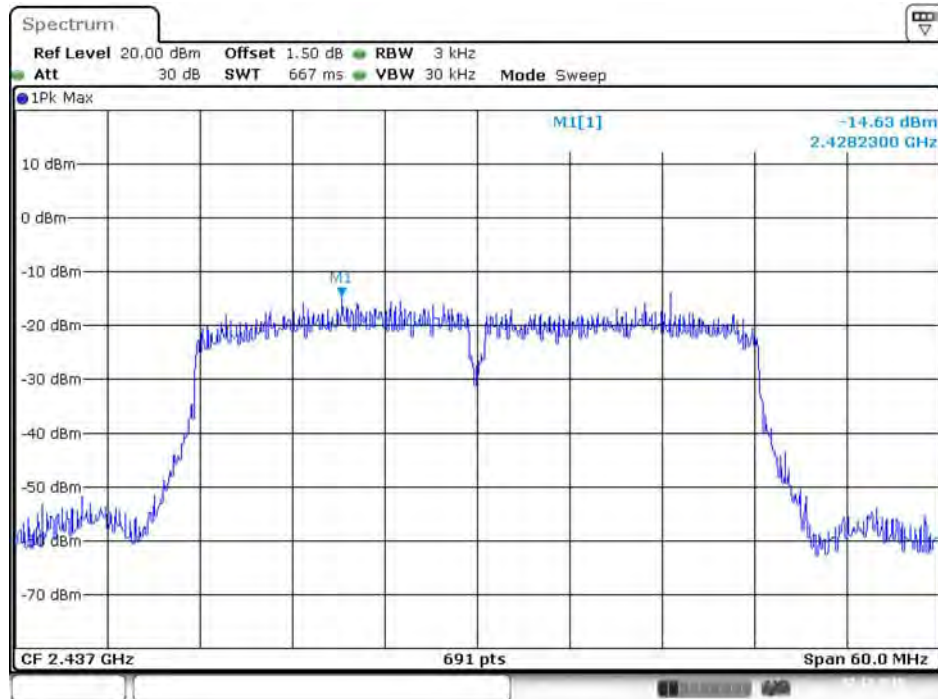

Date: 7.DEC.2015 20:08:22

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4**

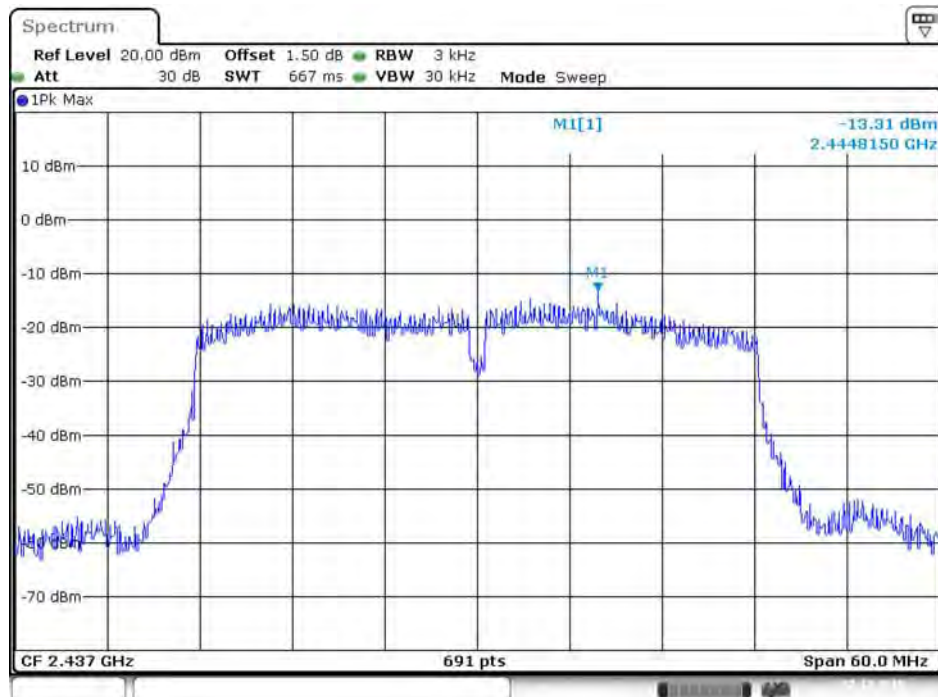

Date: 7.DEC.2015 20:08:32

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth = > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	7.59	13.63	500	Complies
	2437 MHz	8.75	14.24	500	Complies
	2462 MHz	9.10	13.63	500	Complies
802.11g	2412 MHz	15.71	17.11	500	Complies
	2437 MHz	16.41	21.10	500	Complies
	2462 MHz	16.35	16.93	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.74	17.80	500	Complies
	2437 MHz	17.68	22.75	500	Complies
	2462 MHz	17.80	18.06	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	23.88	34.88	500	Complies
	2437 MHz	25.04	35.02	500	Complies
	2452 MHz	25.04	34.59	500	Complies



<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	7.54	13.72	500	Complies
	2437 MHz	8.58	14.59	500	Complies
	2462 MHz	8.64	14.07	500	Complies
802.11g	2412 MHz	15.65	17.11	500	Complies
	2437 MHz	16.41	21.10	500	Complies
	2462 MHz	16.41	16.85	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.68	18.15	500	Complies
	2437 MHz	17.68	22.75	500	Complies
	2462 MHz	17.68	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	24.93	34.88	500	Complies
	2437 MHz	23.77	35.02	500	Complies
	2452 MHz	24.46	34.30	500	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	8.06	12.68	500	Complies
	2437 MHz	8.70	12.85	500	Complies
	2462 MHz	8.58	13.63	500	Complies
802.11g	2412 MHz	15.71	17.11	500	Complies
	2437 MHz	16.35	17.28	500	Complies
	2462 MHz	16.35	16.85	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.68	18.06	500	Complies
	2437 MHz	17.86	19.45	500	Complies
	2462 MHz	17.80	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	23.54	34.88	500	Complies
	2437 MHz	24.46	34.59	500	Complies
	2452 MHz	24.46	34.44	500	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	8.06	12.85	500	Complies
	2437 MHz	8.75	14.24	500	Complies
	2462 MHz	8.64	13.81	500	Complies
802.11g	2412 MHz	15.94	16.93	500	Complies
	2437 MHz	16.41	21.10	500	Complies
	2462 MHz	16.35	16.93	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.57	17.80	500	Complies
	2437 MHz	17.68	22.75	500	Complies
	2462 MHz	17.57	18.06	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	24.93	34.88	500	Complies
	2437 MHz	25.04	35.02	500	Complies
	2452 MHz	23.77	34.73	500	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	7.07	14.15	500	Complies
	2437 MHz	8.75	14.07	500	Complies
	2462 MHz	9.10	13.63	500	Complies
802.11g	2412 MHz	15.71	17.11	500	Complies
	2437 MHz	16.41	21.10	500	Complies
	2462 MHz	16.29	16.85	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.57	18.32	500	Complies
	2437 MHz	17.68	22.75	500	Complies
	2462 MHz	17.68	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	23.88	34.88	500	Complies
	2437 MHz	25.04	34.59	500	Complies
	2452 MHz	23.77	34.73	500	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	9.04	12.24	500	Complies
	2437 MHz	8.75	13.02	500	Complies
	2462 MHz	8.58	13.02	500	Complies
802.11g	2412 MHz	15.71	16.93	500	Complies
	2437 MHz	16.35	16.93	500	Complies
	2462 MHz	16.41	16.85	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.57	17.80	500	Complies
	2437 MHz	17.80	18.23	500	Complies
	2462 MHz	17.80	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	25.97	34.73	500	Complies
	2437 MHz	24.35	34.59	500	Complies
	2452 MHz	23.88	34.44	500	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	7.59	13.63	500	Complies
	2437 MHz	8.75	14.24	500	Complies
	2462 MHz	9.10	13.63	500	Complies
802.11g	2412 MHz	15.71	17.11	500	Complies
	2437 MHz	16.35	22.40	500	Complies
	2462 MHz	16.35	16.93	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.74	17.89	500	Complies
	2437 MHz	17.80	23.79	500	Complies
	2462 MHz	17.68	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	24.46	35.02	500	Complies
	2437 MHz	23.77	35.02	500	Complies
	2452 MHz	23.77	34.30	500	Complies



<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	11.65	14.41	500	Complies
	2437 MHz	11.71	14.41	500	Complies
	2462 MHz	10.09	14.15	500	Complies
802.11g	2412 MHz	4.99	15.98	500	Complies
	2437 MHz	3.83	16.32	500	Complies
	2462 MHz	10.67	15.54	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	6.03	16.67	500	Complies
	2437 MHz	5.45	18.15	500	Complies
	2462 MHz	4.41	16.32	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	22.49	36.47	500	Complies
	2437 MHz	23.19	36.32	500	Complies
	2452 MHz	22.96	36.32	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


**Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi**

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

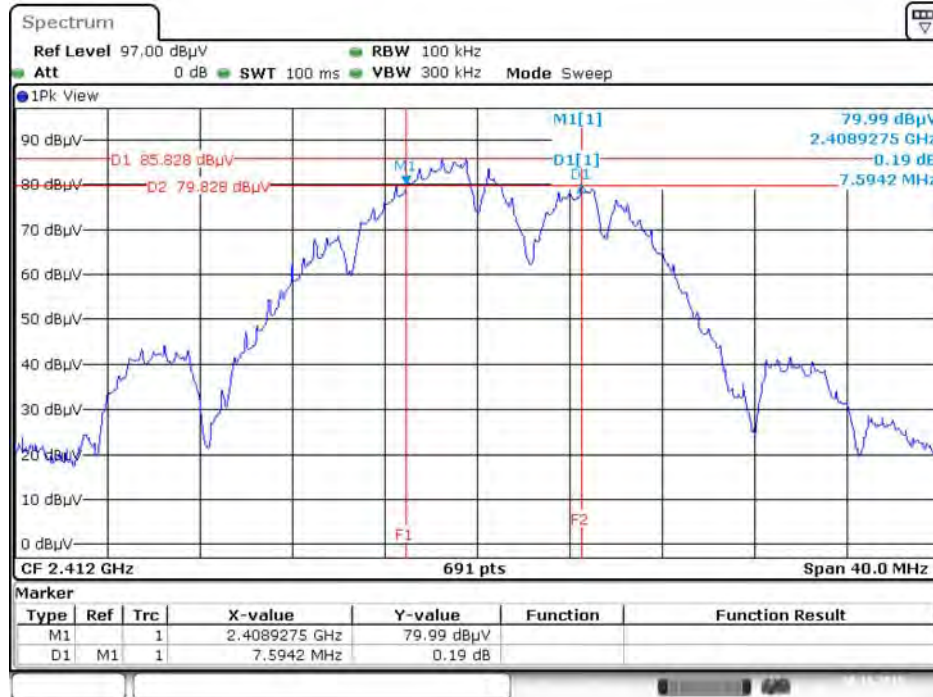


Date: 30.NOV.2015 15:04:12

**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

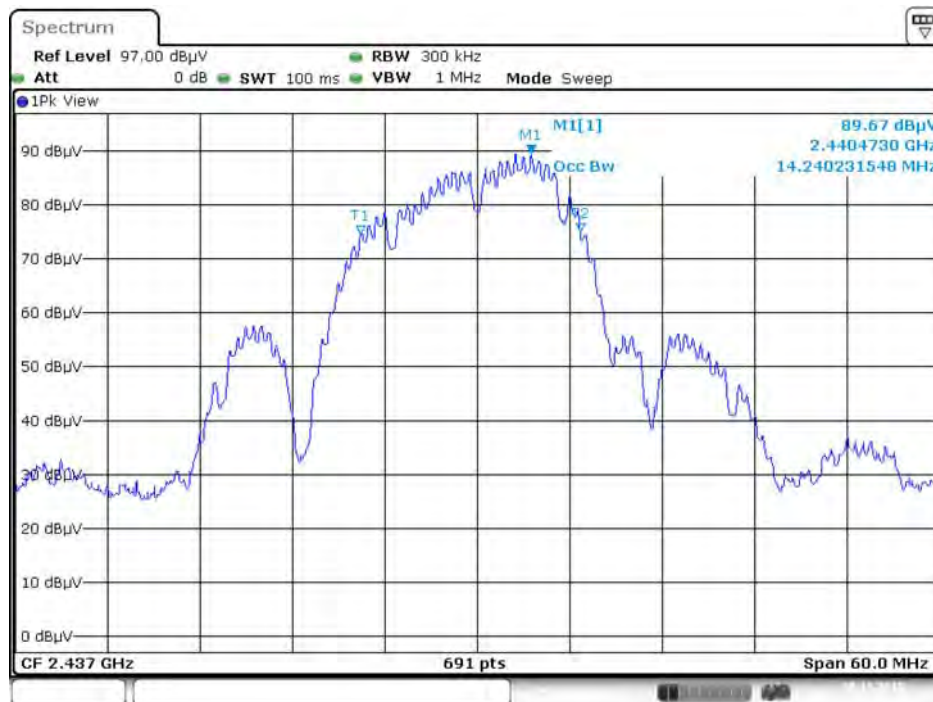

Date: 30.NOV.2015 21:48:06

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

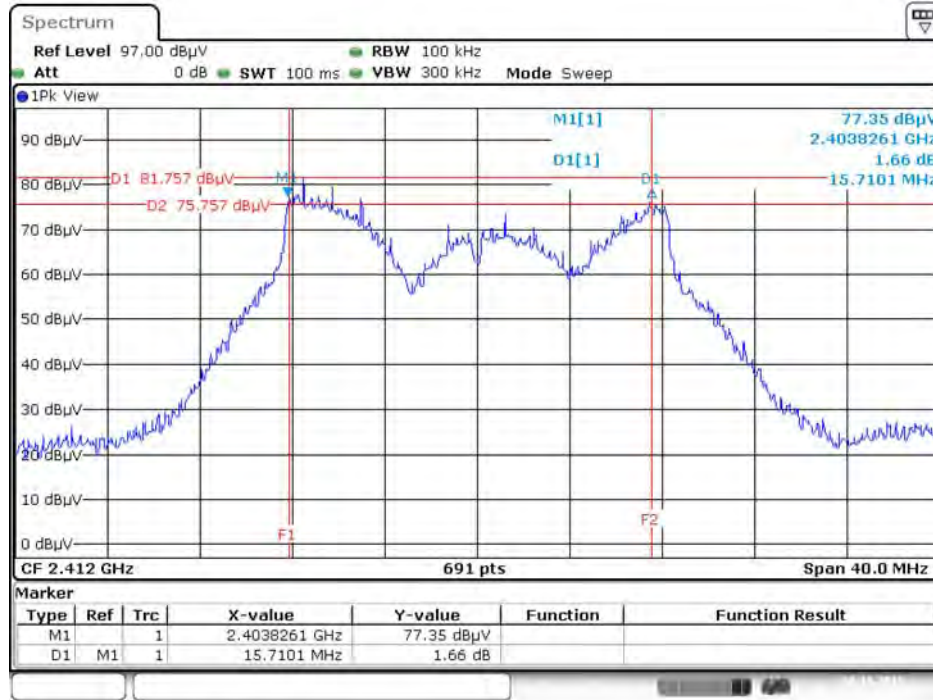


Date: 30.NOV.2015 15:59:00

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 22:22:49

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

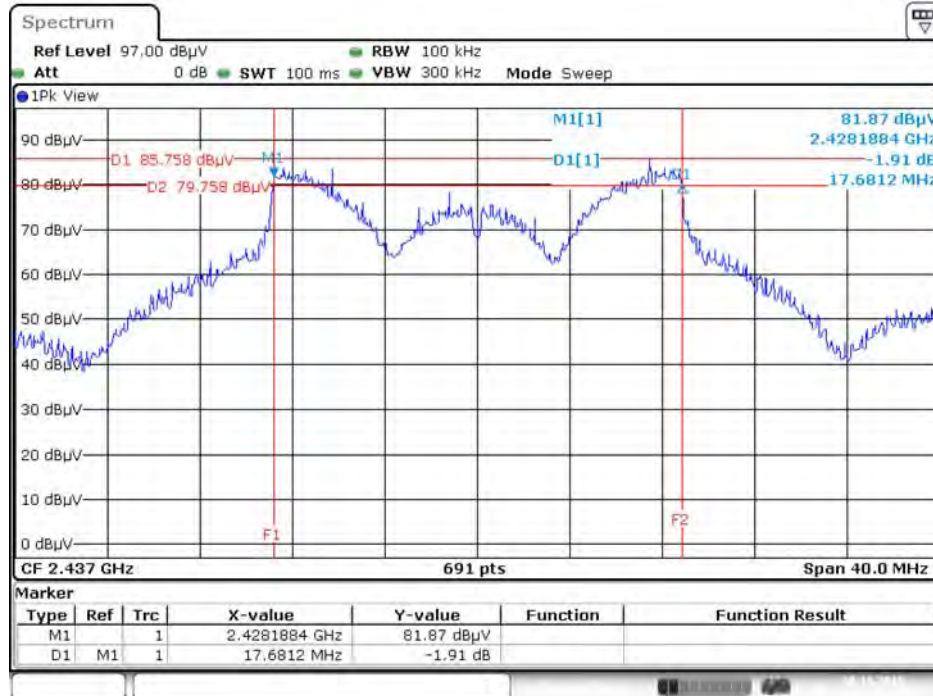

Date: 30.NOV.2015 16:44:14


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

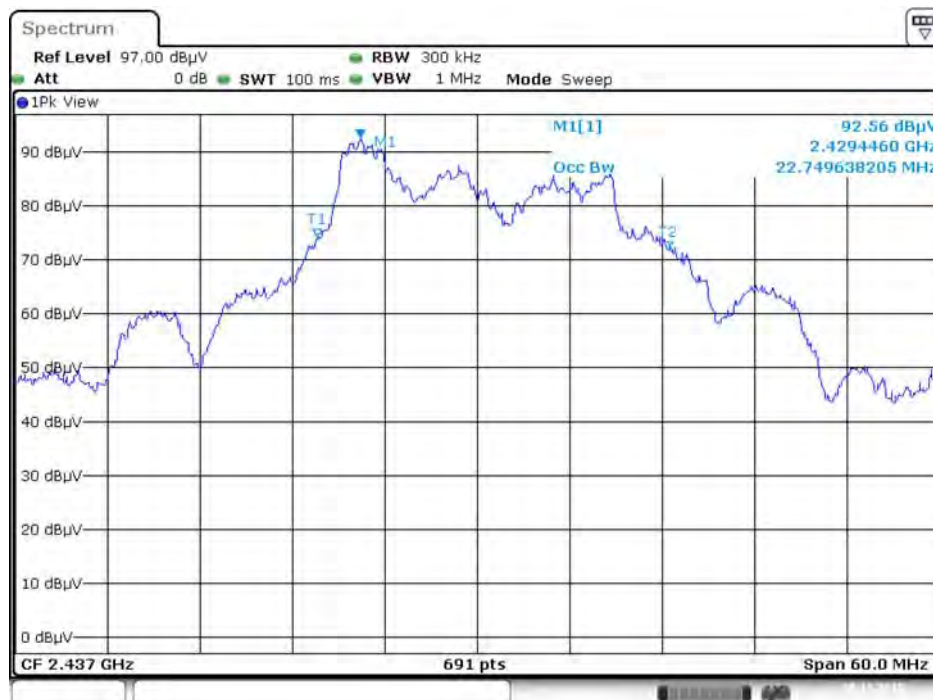

Date: 30.NOV.2015 23:42:17




6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

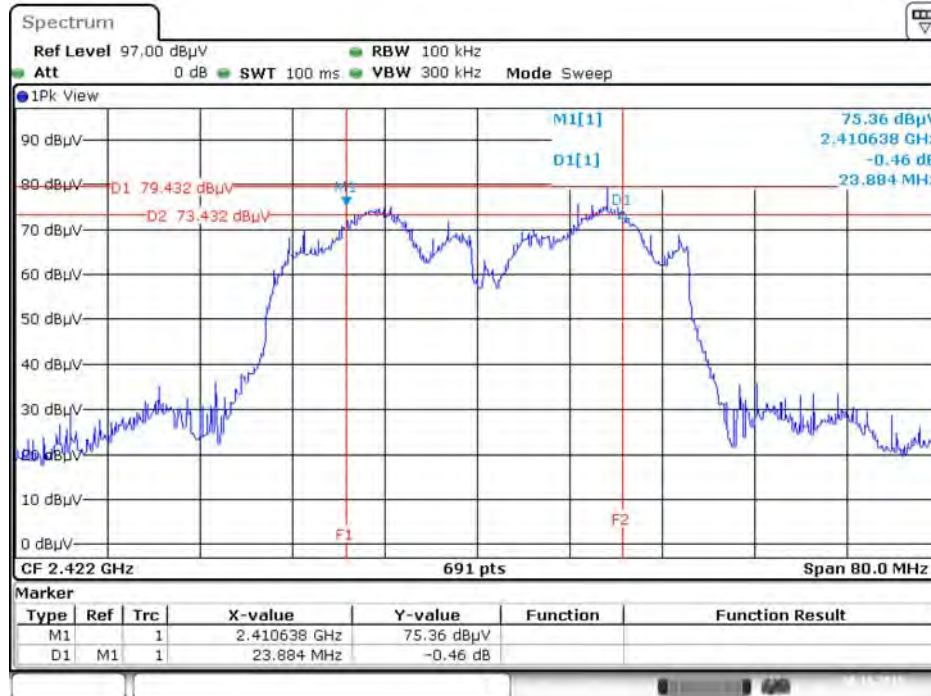

Date: 30.NOV.2015 17:11:30


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

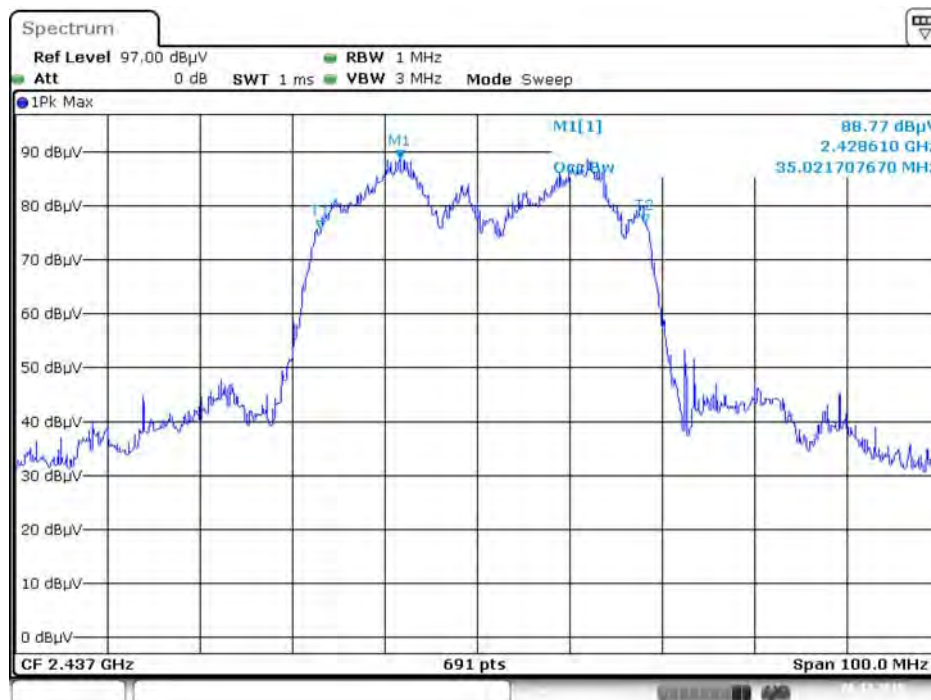

Date: 6.DEC.2015 04:27:55


**Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi**

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

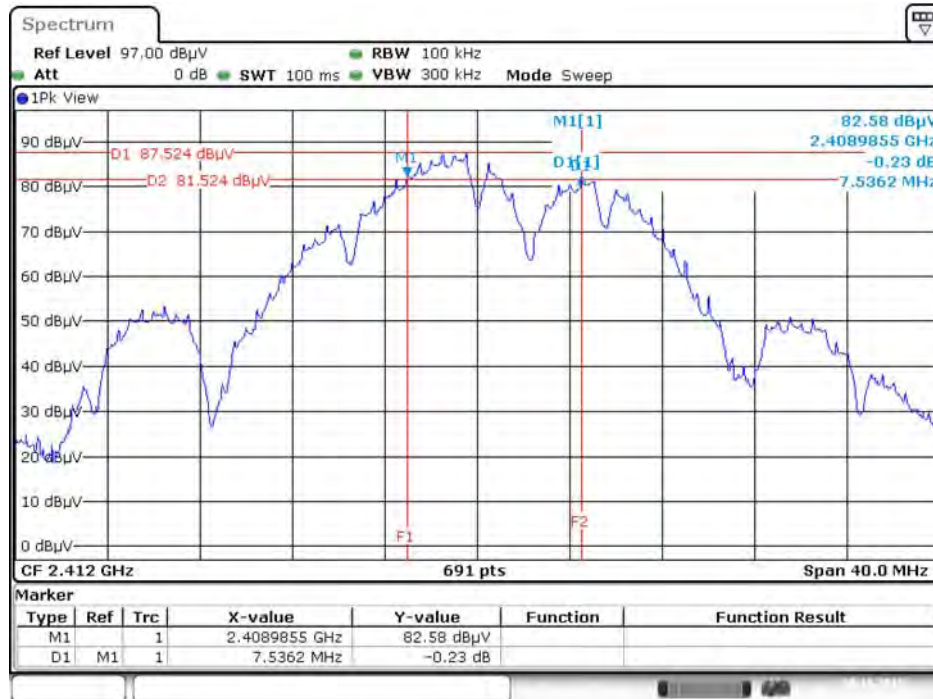

Date: 30.NOV.2015 14:59:34


**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

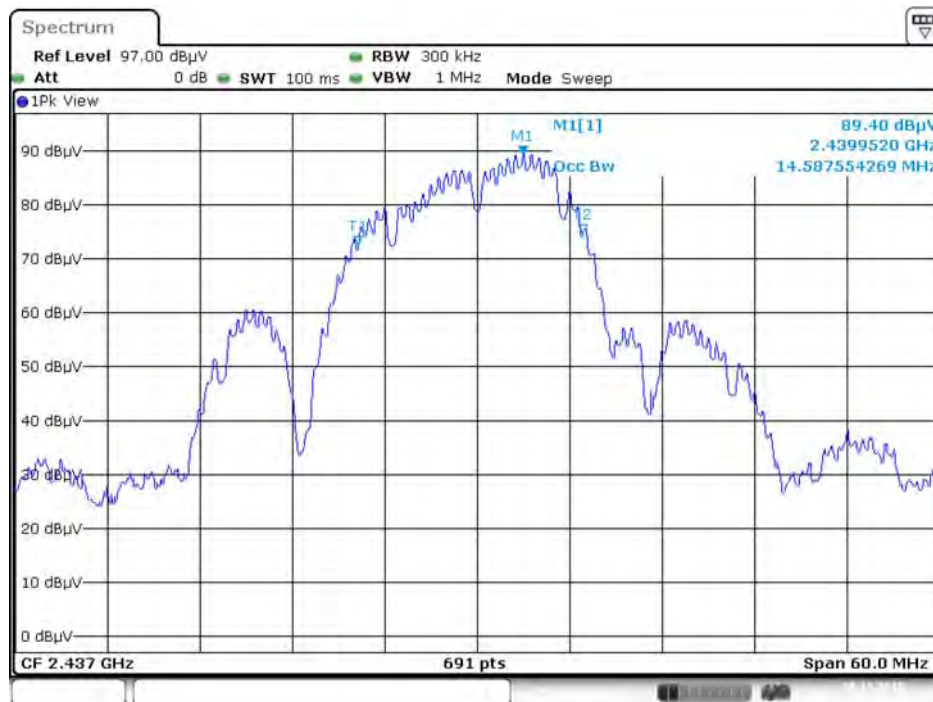

Date: 30.NOV.2015 21:45:06



6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

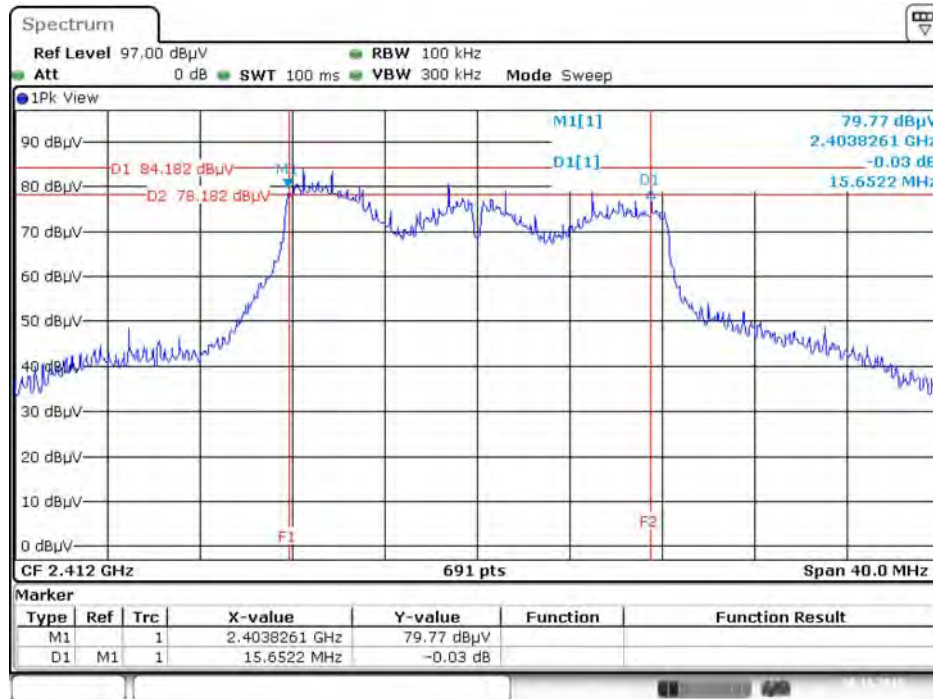


Date: 30.NOV.2015 15:48:22

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 30.NOV.2015 22:22:49

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

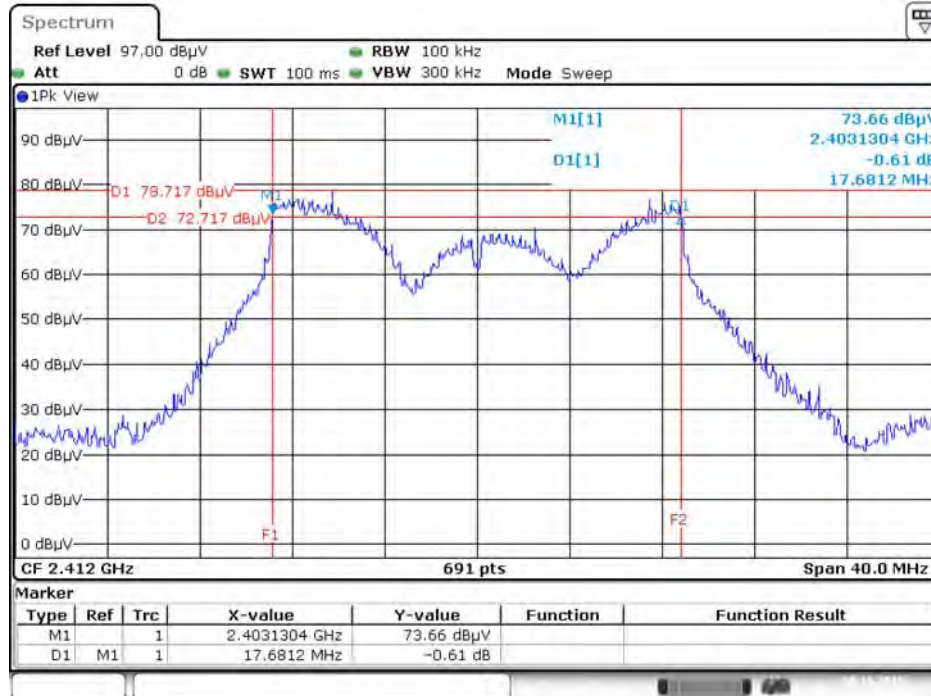


Date: 30.NOV.2015 16:37:39

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 23:42:17

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

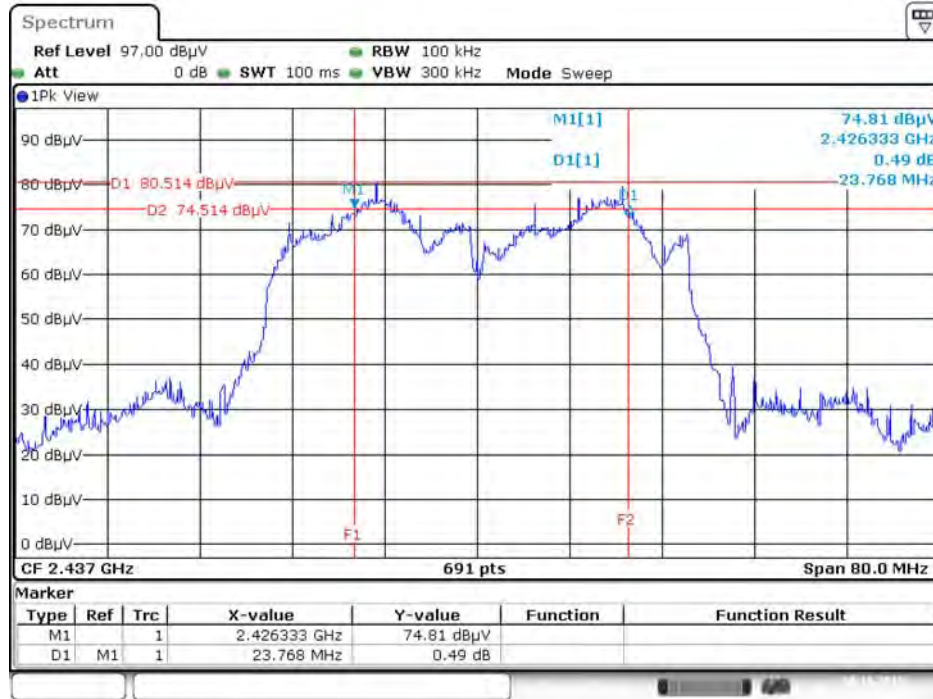

Date: 30.NOV.2015 18:29:26


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

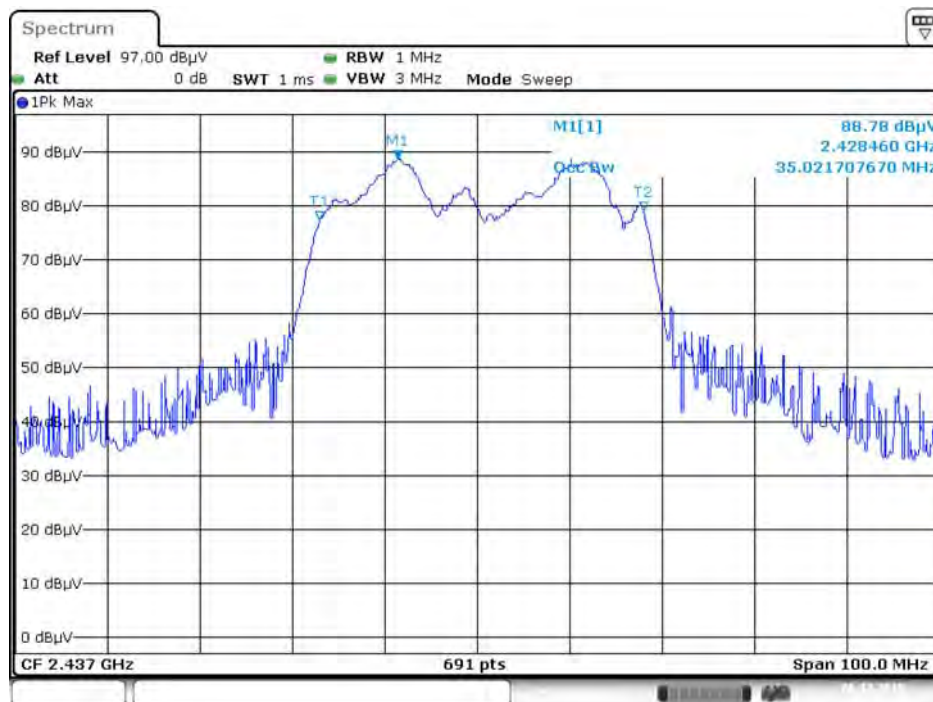

Date: 6.DEC.2015 04:49:50

**Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi**

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

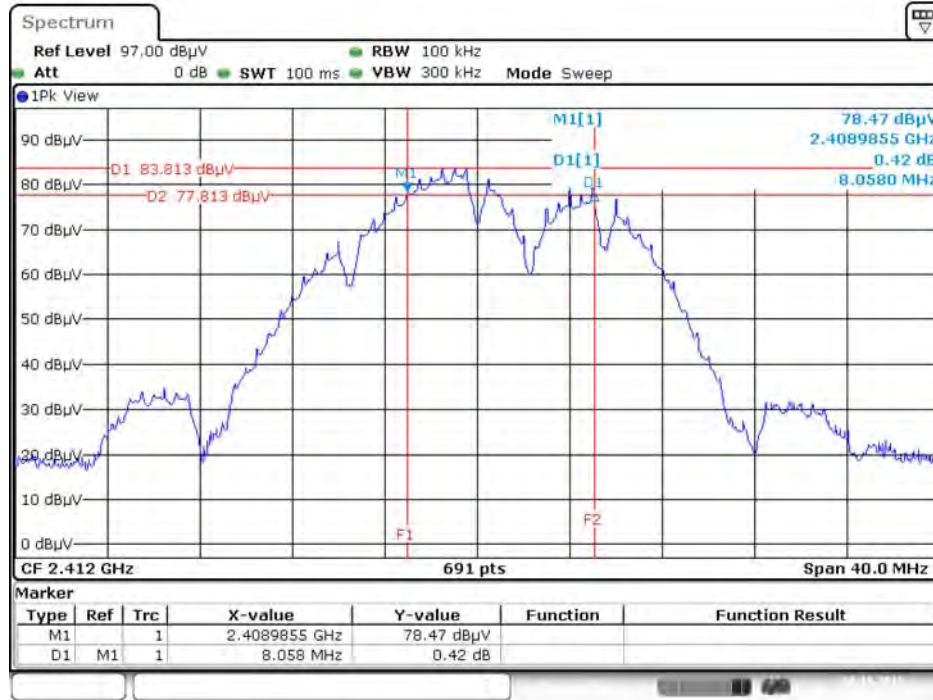

Date: 30.NOV.2015 15:07:16


**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**



Date: 30.NOV.2015 22:04:49



6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

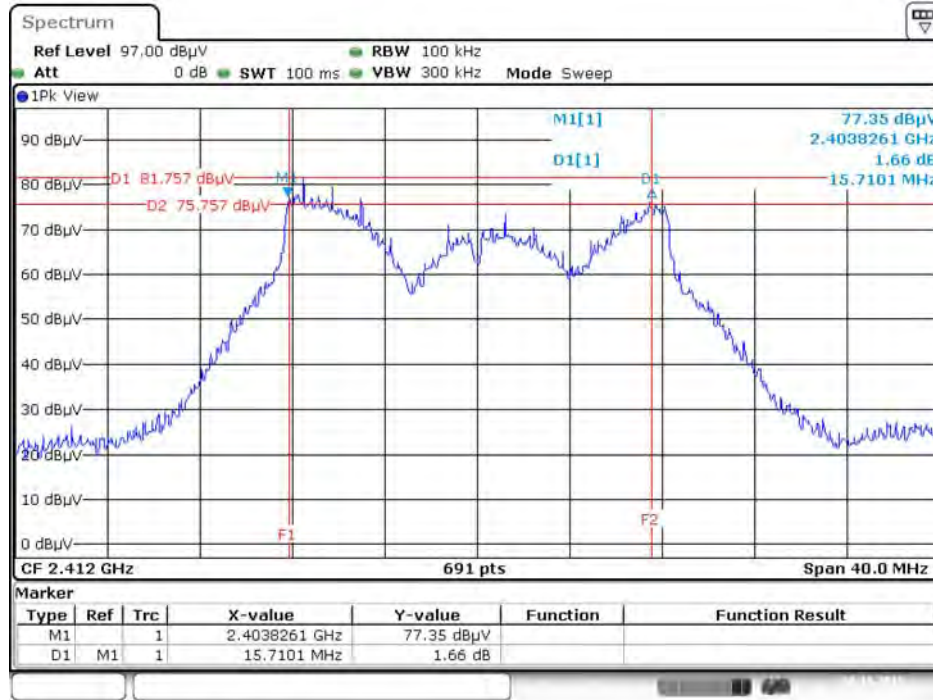


Date: 30.NOV.2015 15:59:00

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 30.NOV.2015 22:26:38

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

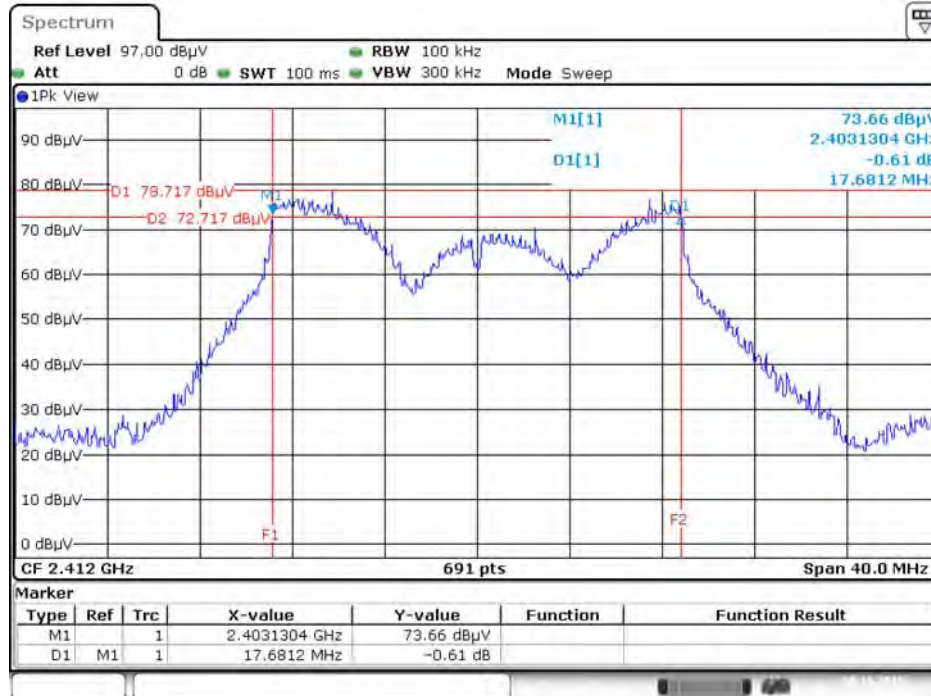

Date: 30.NOV.2015 16:37:39


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 30.NOV.2015 23:48:13




6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

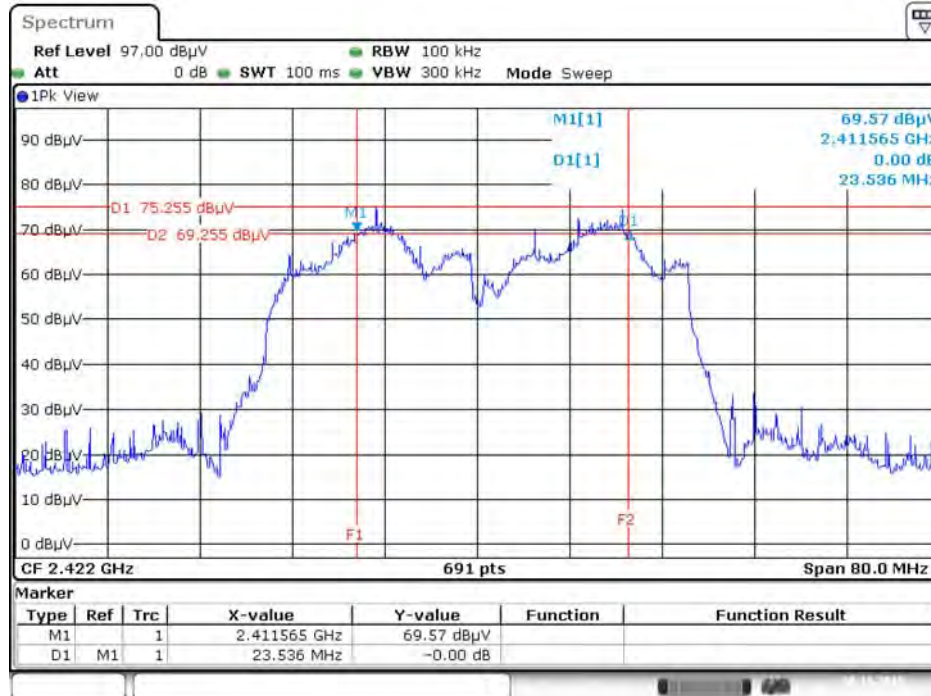

Date: 30.NOV.2015 18:20:14


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

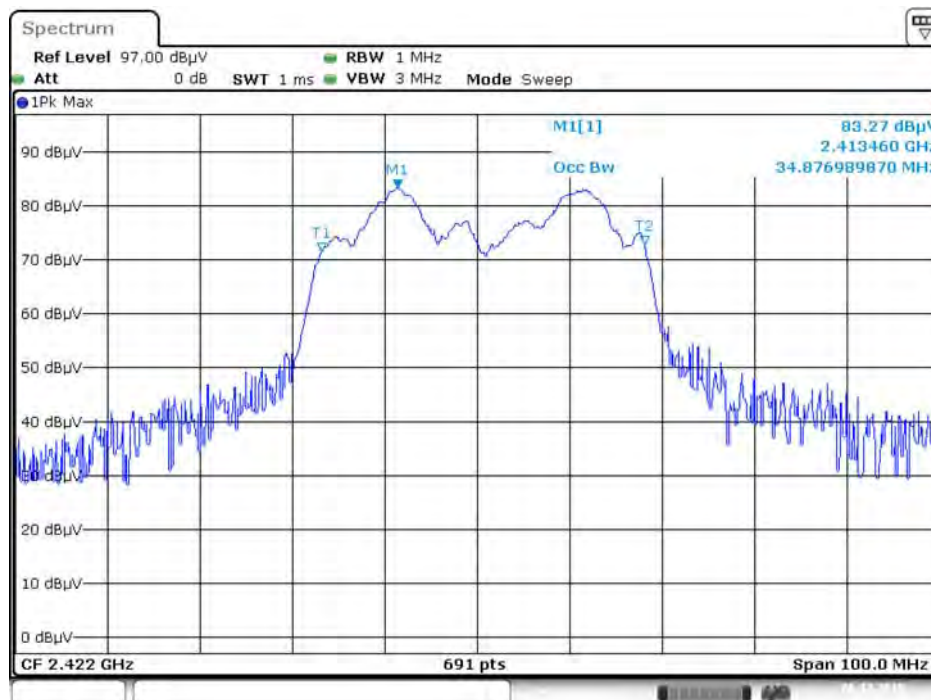

Date: 6.DEC.2015 04:31:07


**Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi**

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

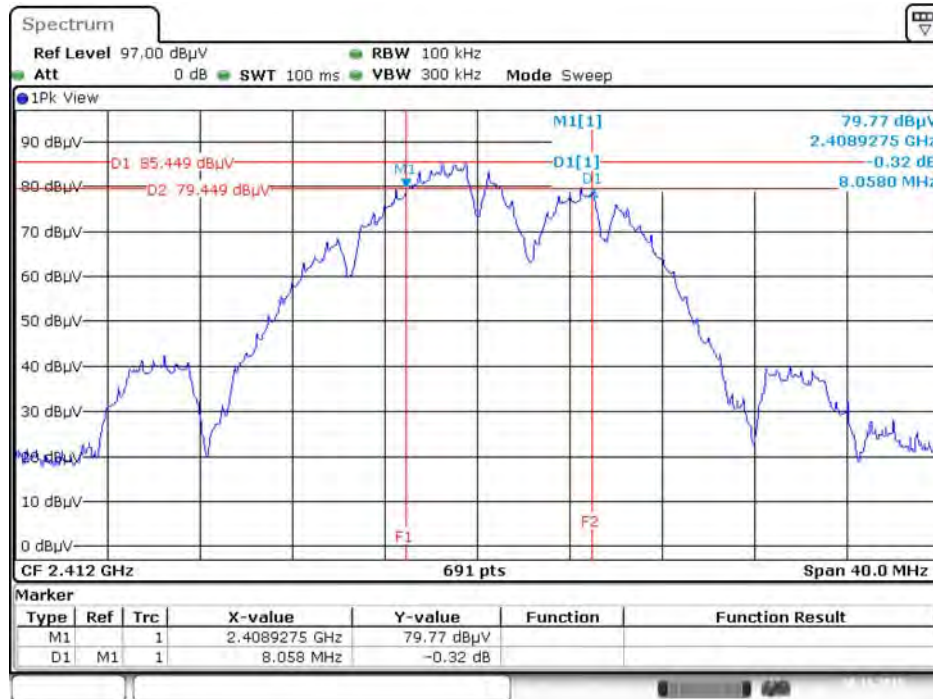


Date: 30.NOV.2015 15:05:32

**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

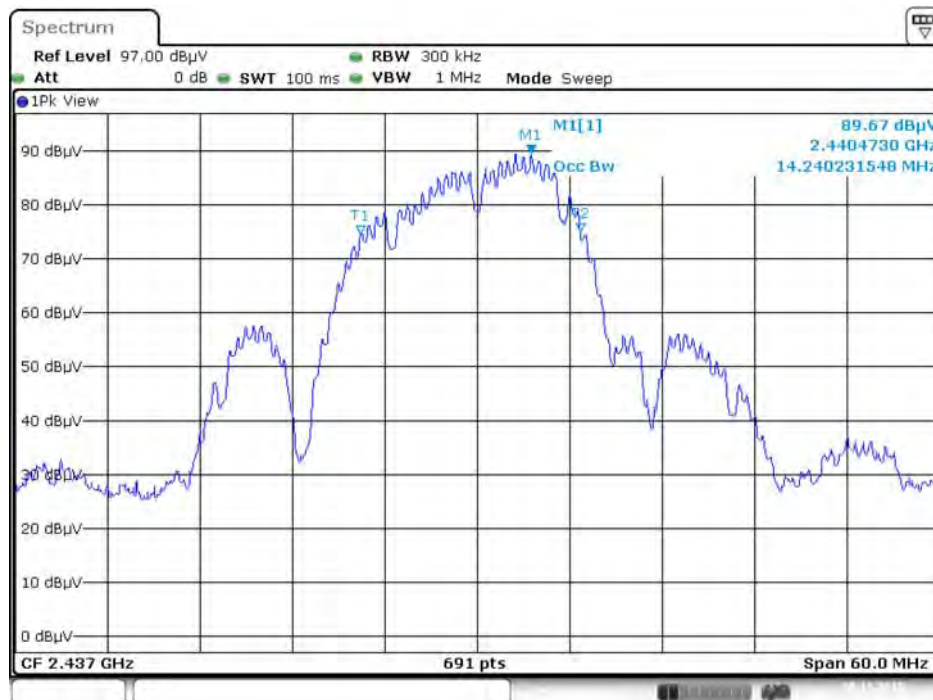

Date: 30.NOV.2015 21:48:06

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

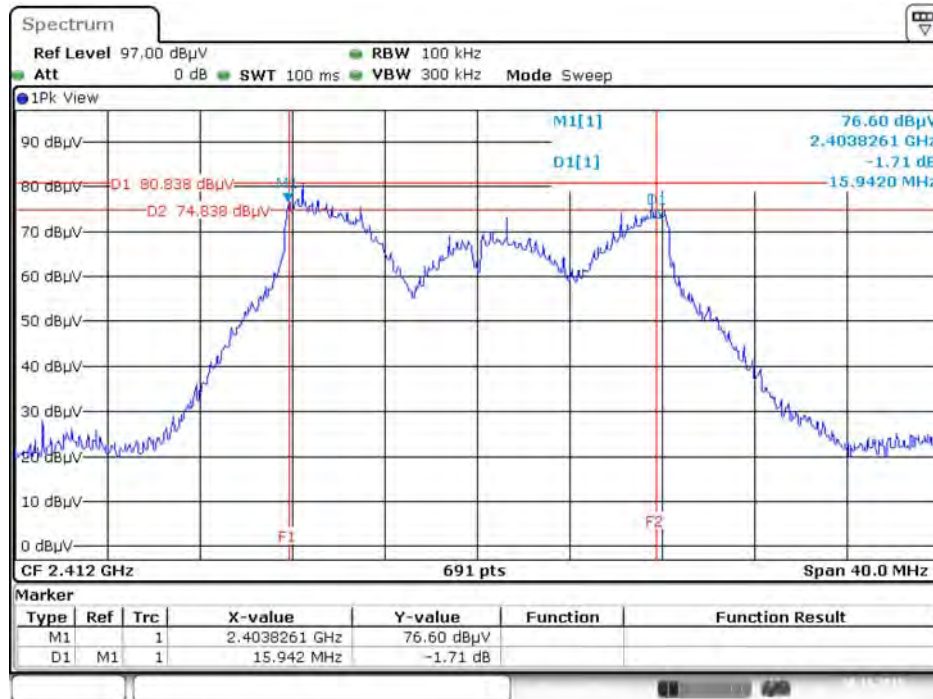


Date: 30.NOV.2015 16:03:07

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 22:22:49

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

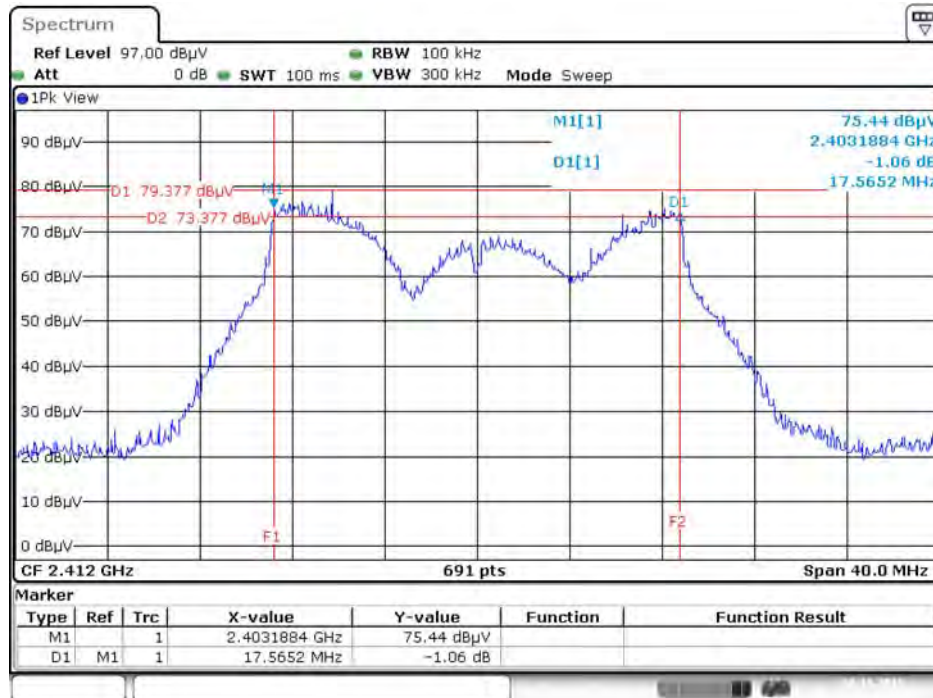

Date: 30.NOV.2015 16:40:30


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

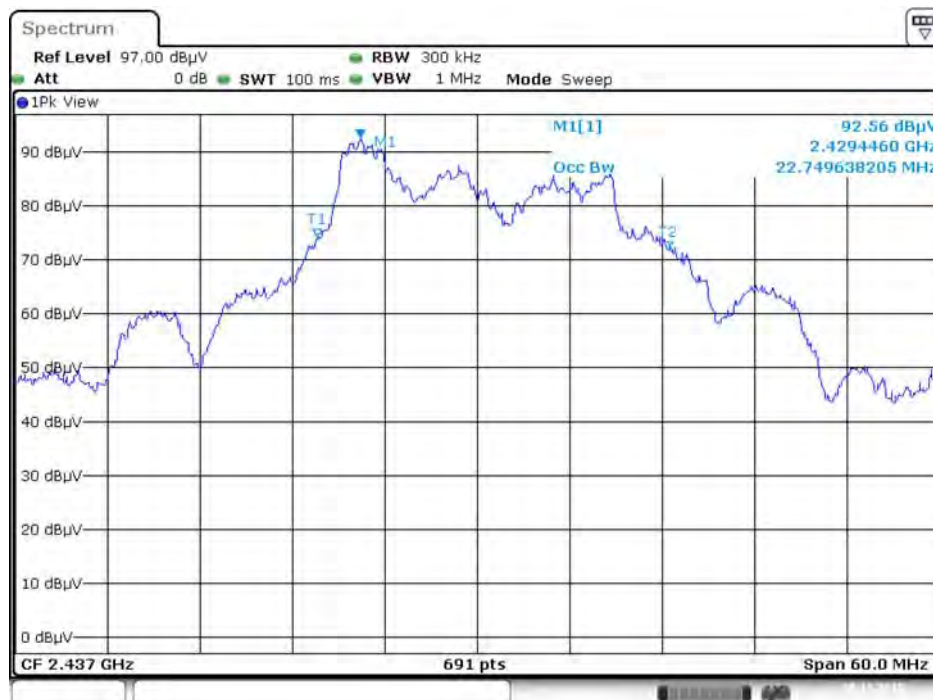

Date: 30.NOV.2015 23:42:17




6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

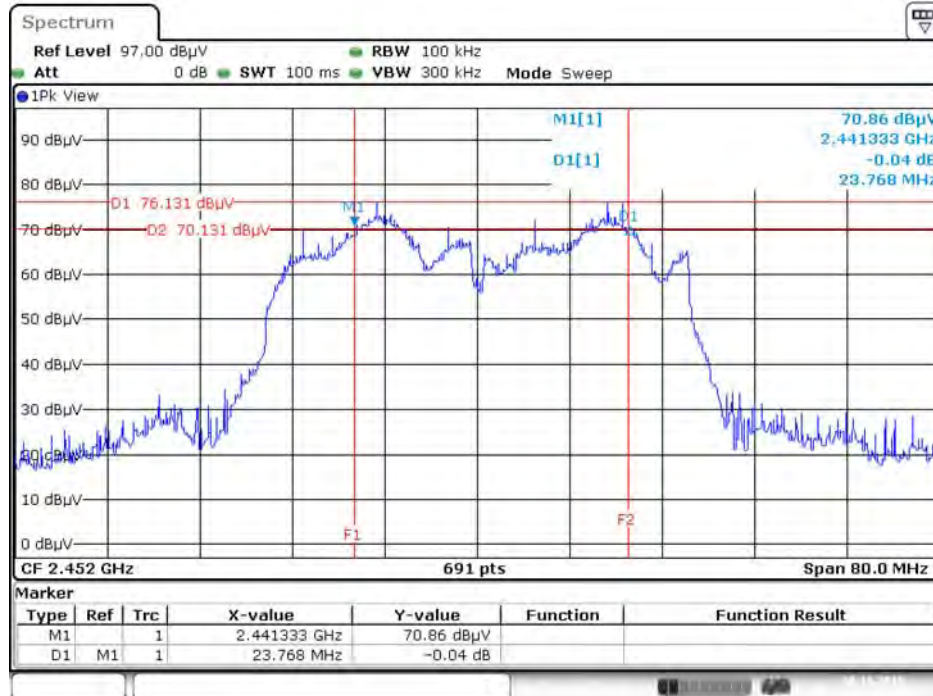

Date: 30.NOV.2015 19:08:04


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

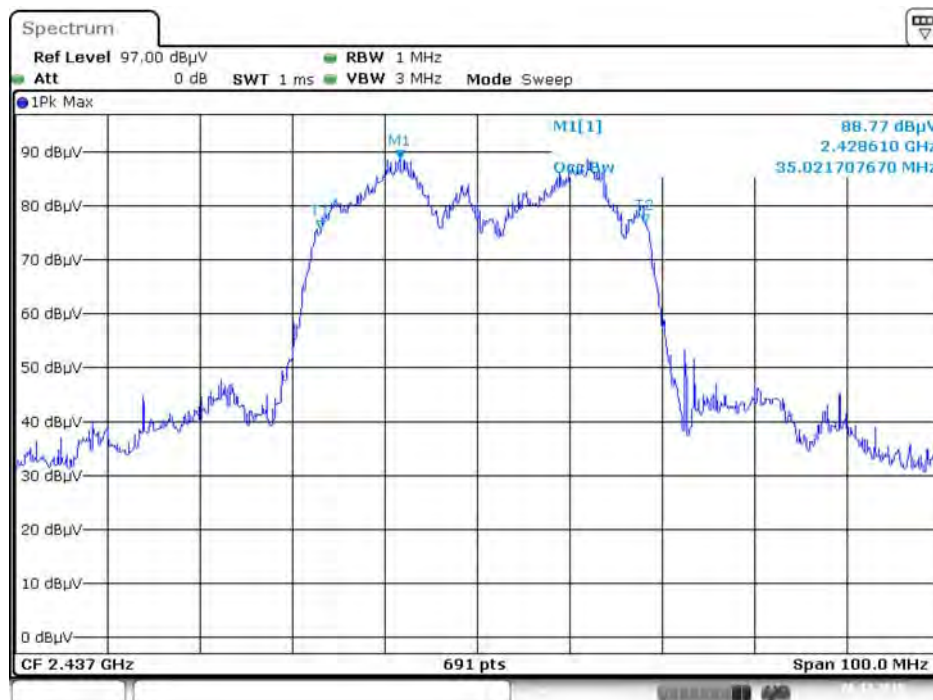

Date: 6.DEC.2015 04:27:55


**Mode 5: EUT 1 + Set 6 Sector Antenna / 5 dBi**

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

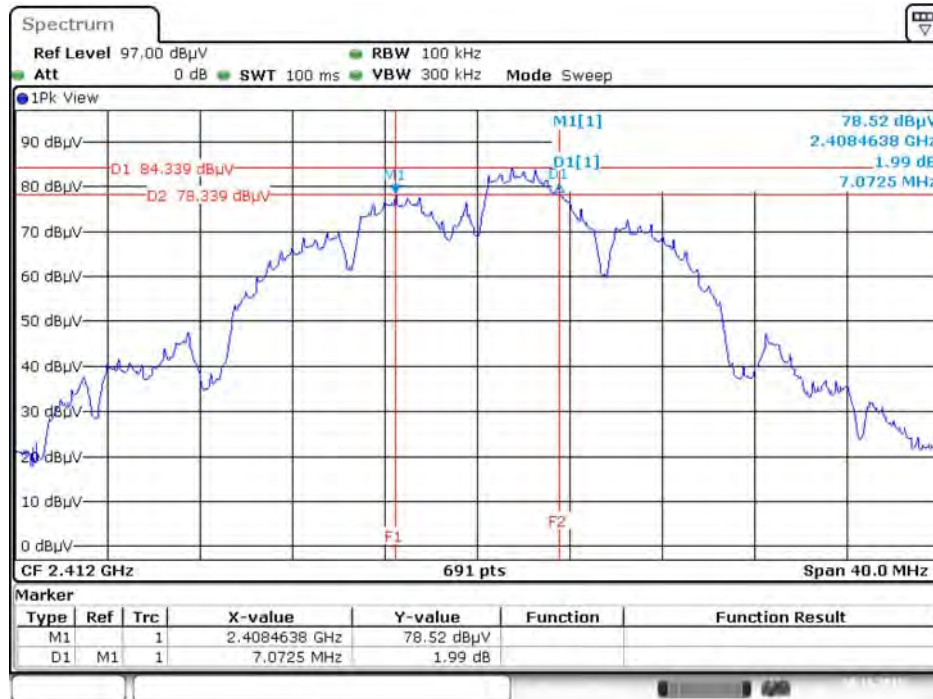

Date: 30.NOV.2015 15:01:31


**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

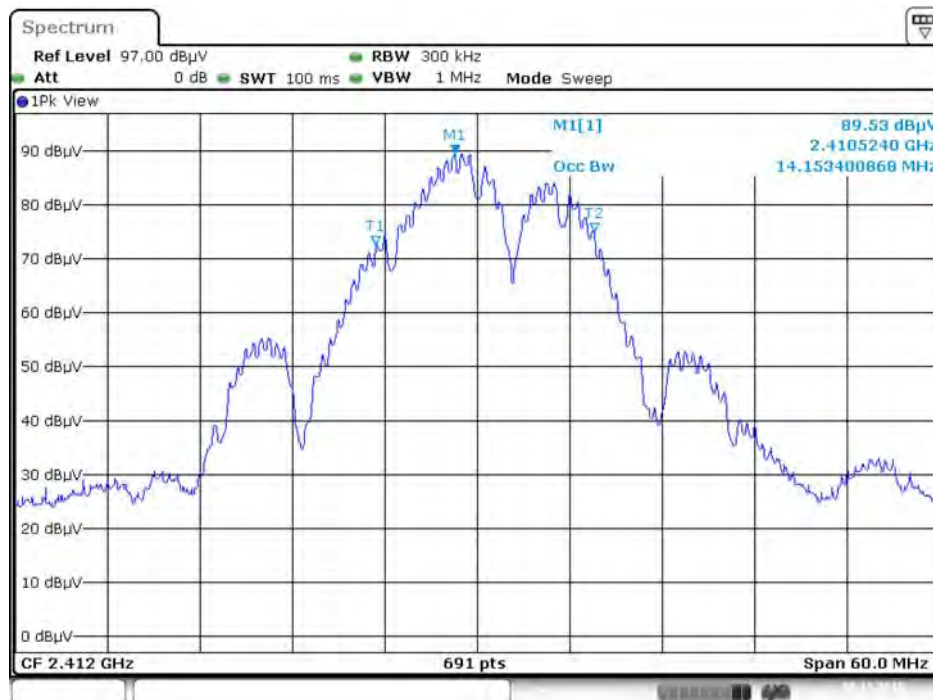

Date: 30.NOV.2015 21:29:01



6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

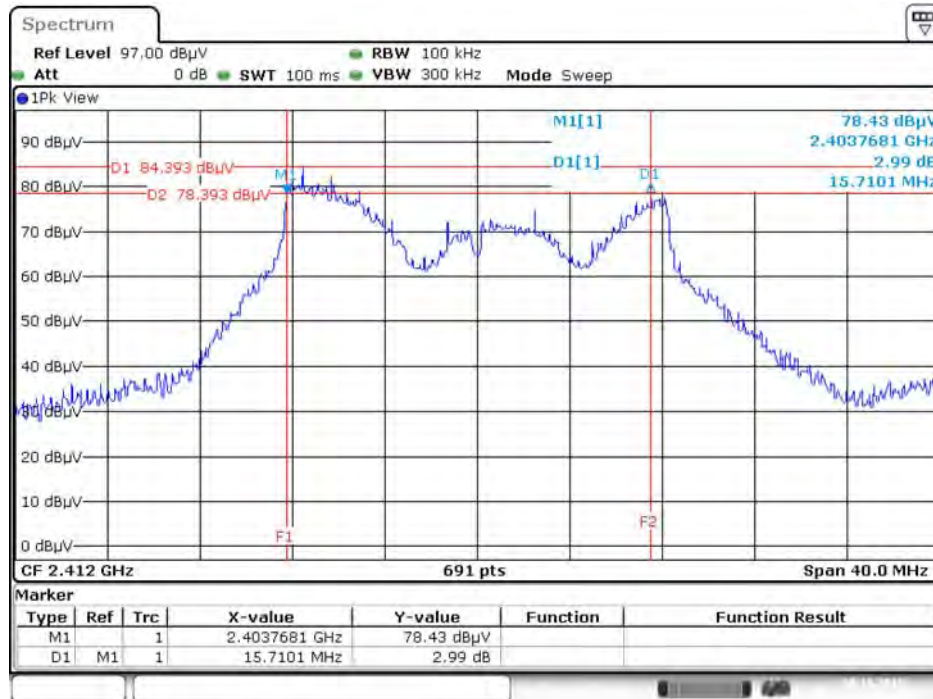


Date: 30.NOV.2015 15:52:10

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 30.NOV.2015 22:22:49

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

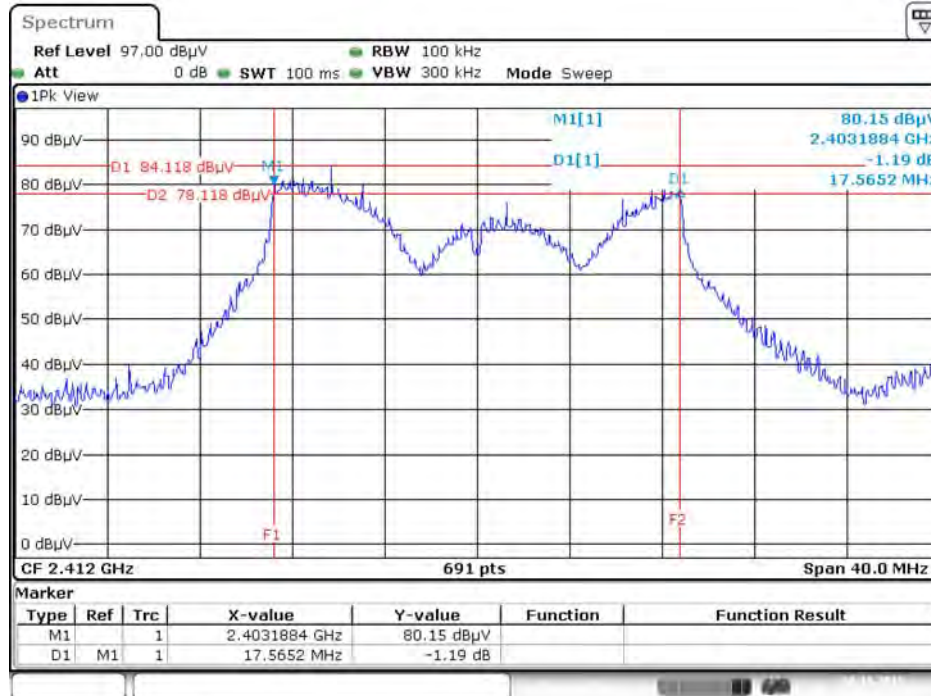


Date: 30.NOV.2015 16:31:45

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 23:42:17

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

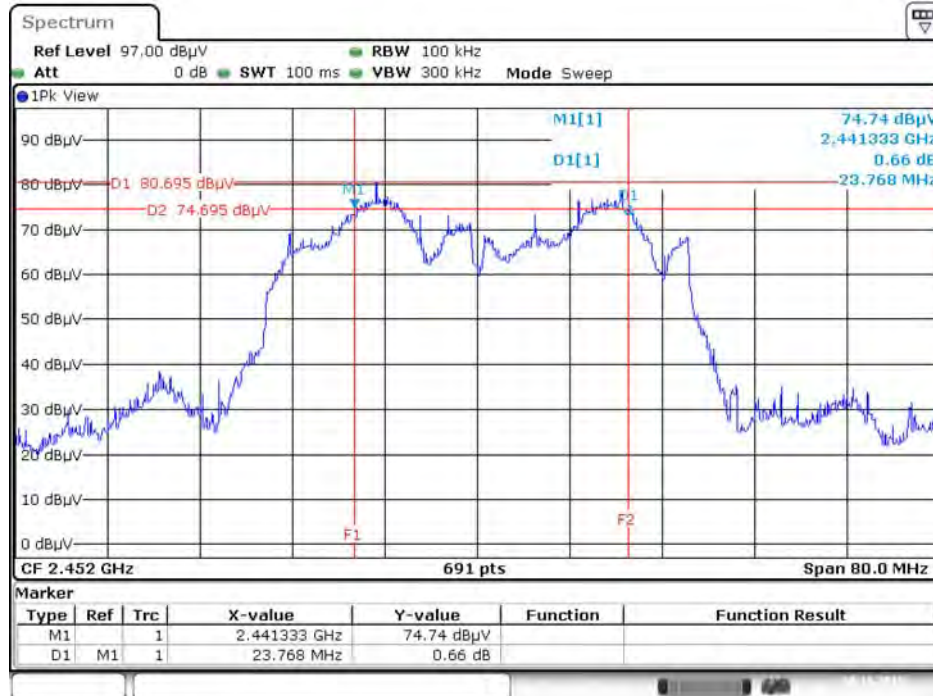

Date: 30.NOV.2015 19:00:58


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

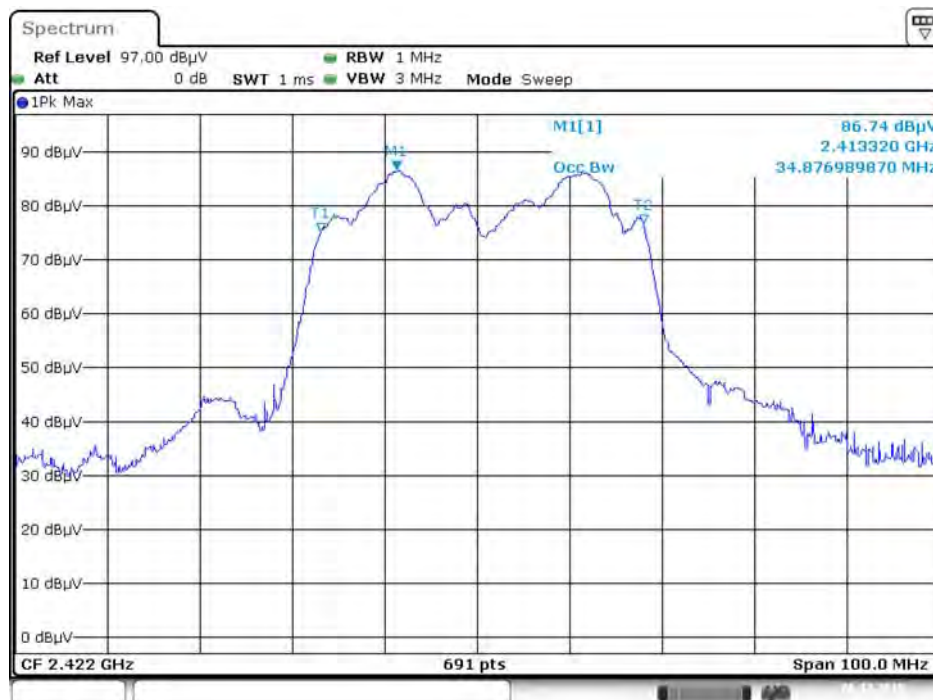

Date: 6.DEC.2015 04:43:18


**Mode 6: EUT 1 + Set 8 Sector Antenna / 13 dBi**

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

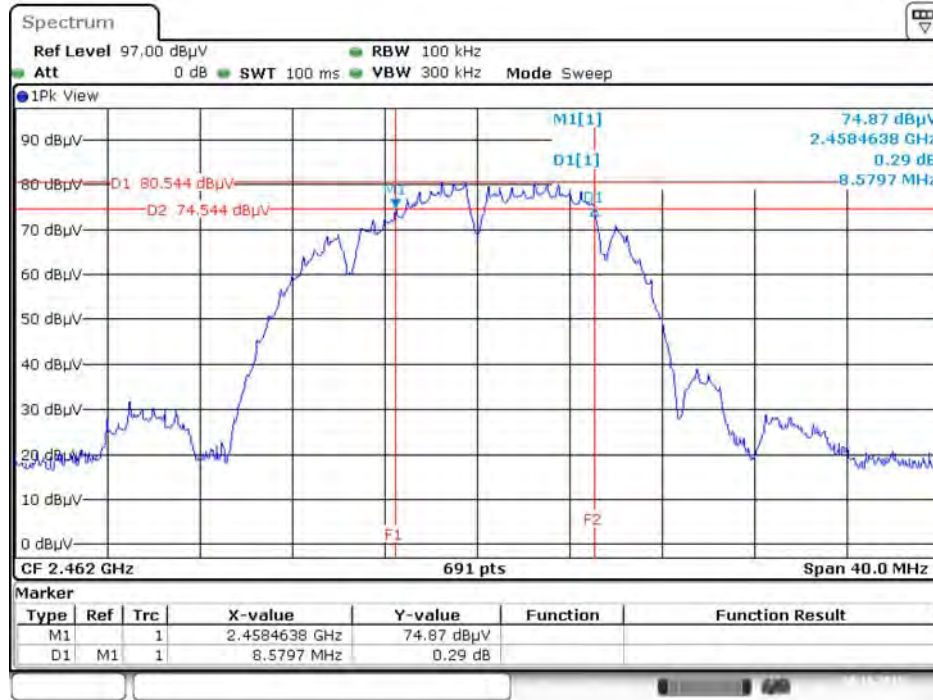

Date: 30.NOV.2015 15:40:09


**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

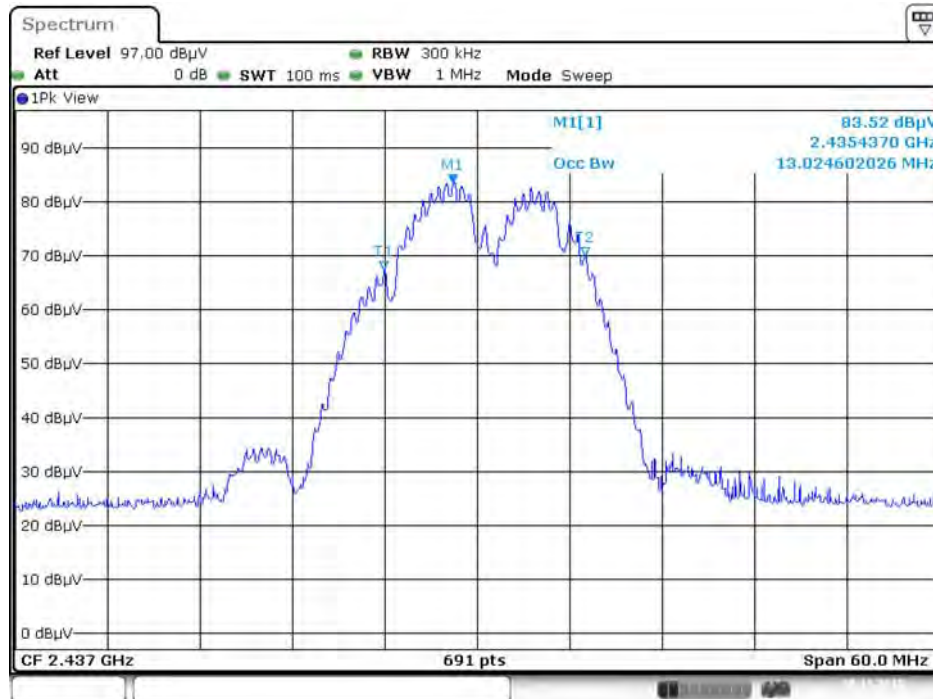

Date: 30.NOV.2015 21:54:28




6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

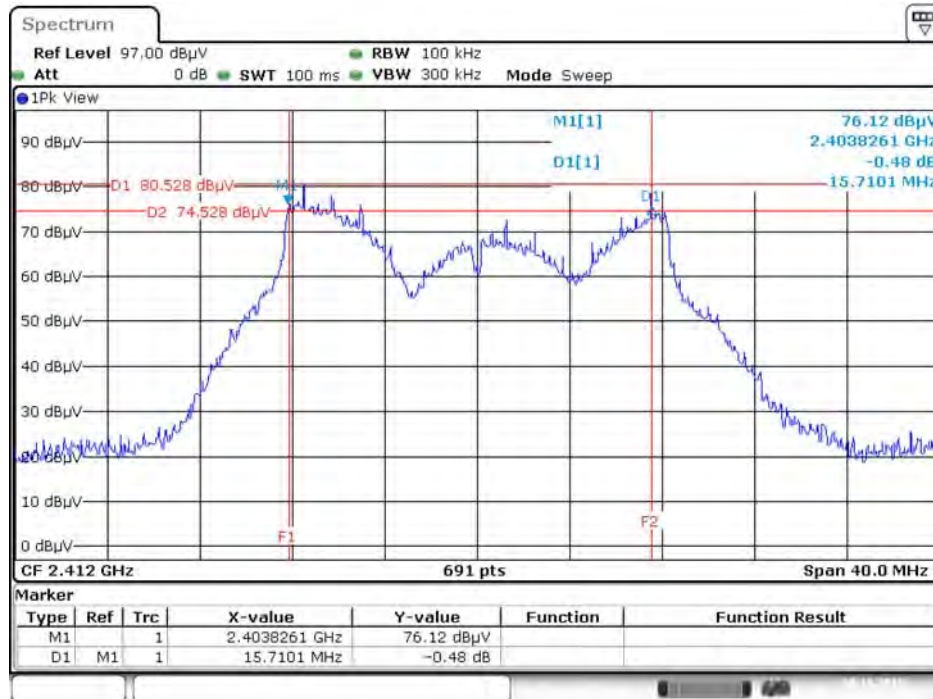


Date: 30.NOV.2015 16:00:23

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

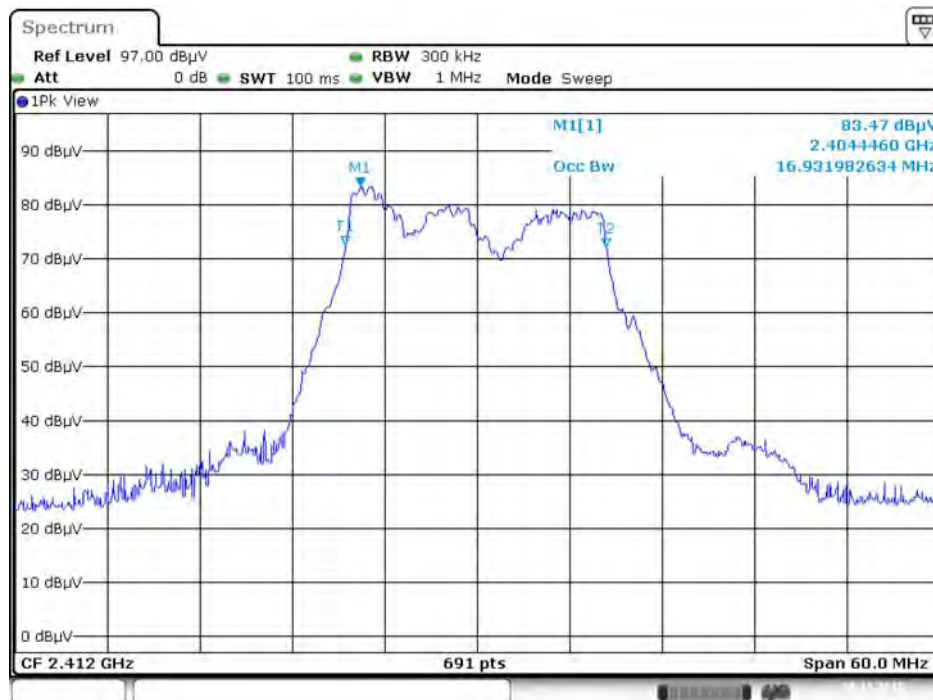

Date: 30.NOV.2015 22:17:06

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20/ 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

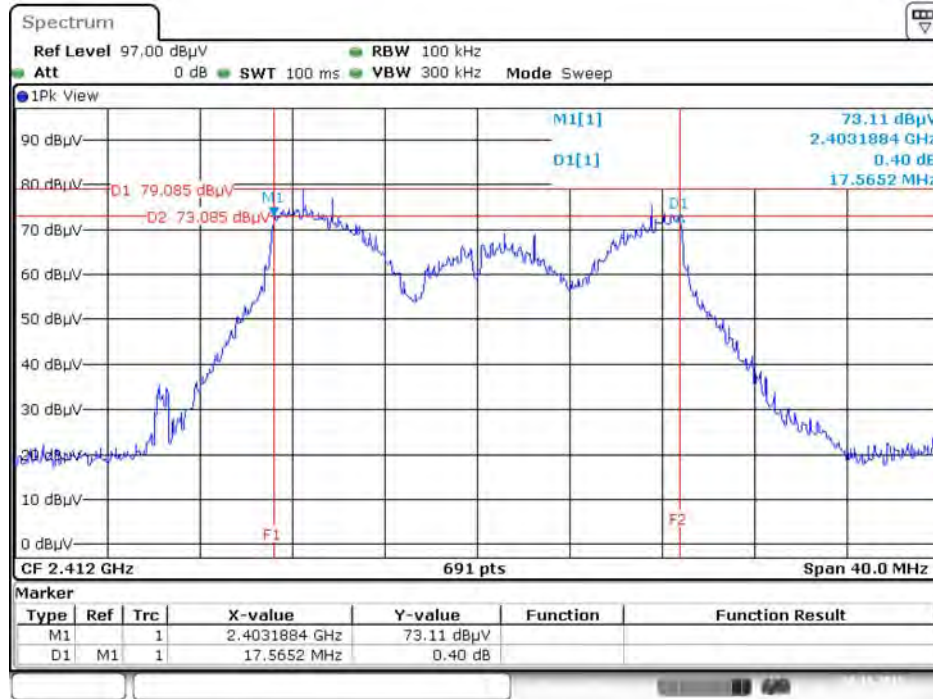

Date: 30.NOV.2015 16:41:55


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 30.NOV.2015 23:50:27




6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

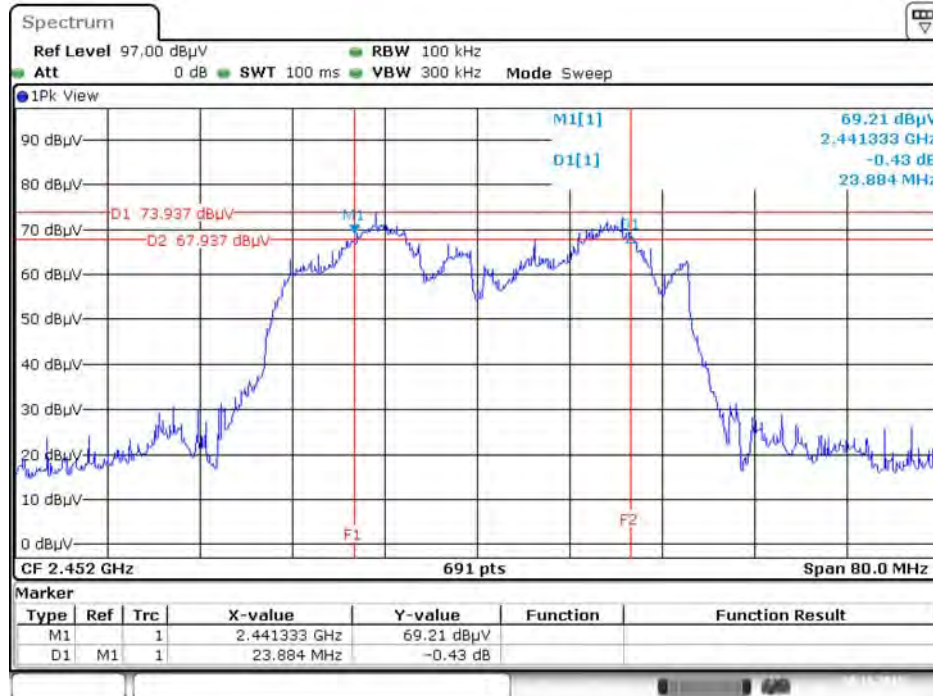

Date: 30.NOV.2015 19:11:34


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

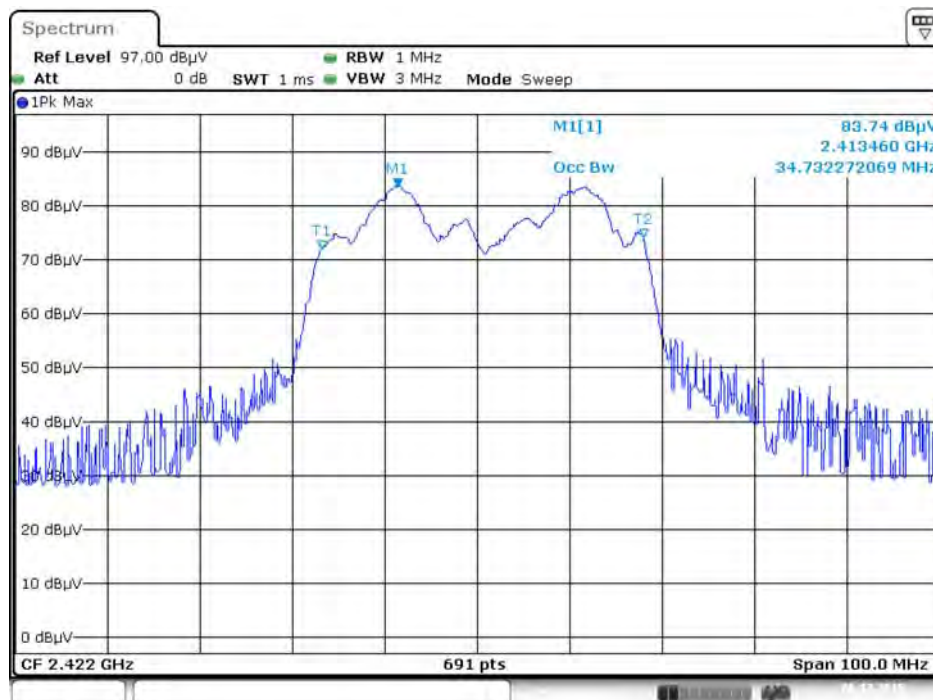

Date: 6.DEC.2015 04:41:48


**Mode 7: EUT 1 + Set 11 Omni Antenna / 5.5 dBi**

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

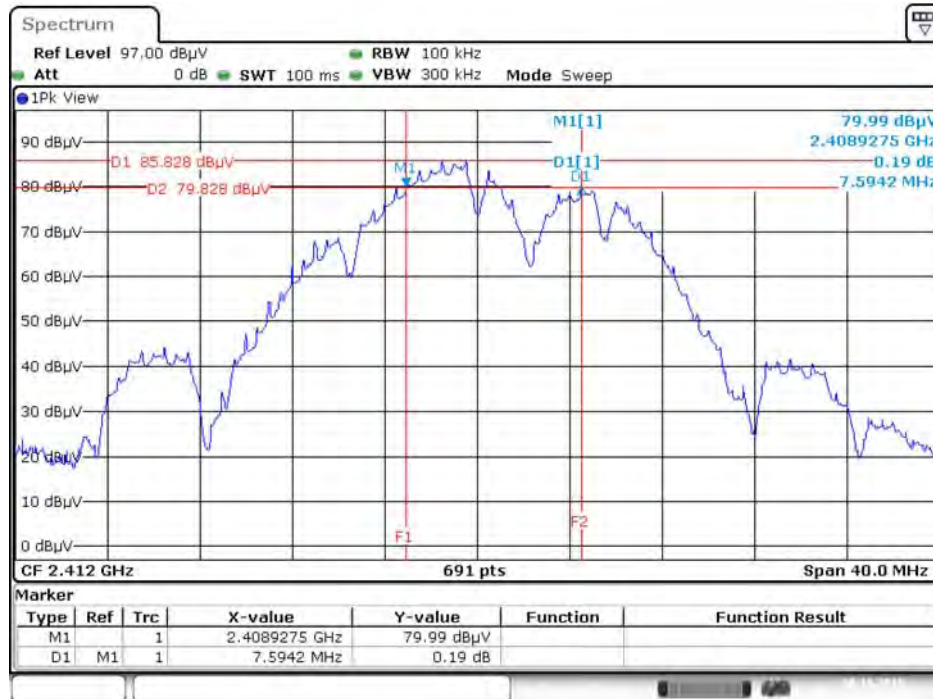


Date: 30.NOV.2015 15:04:12

**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

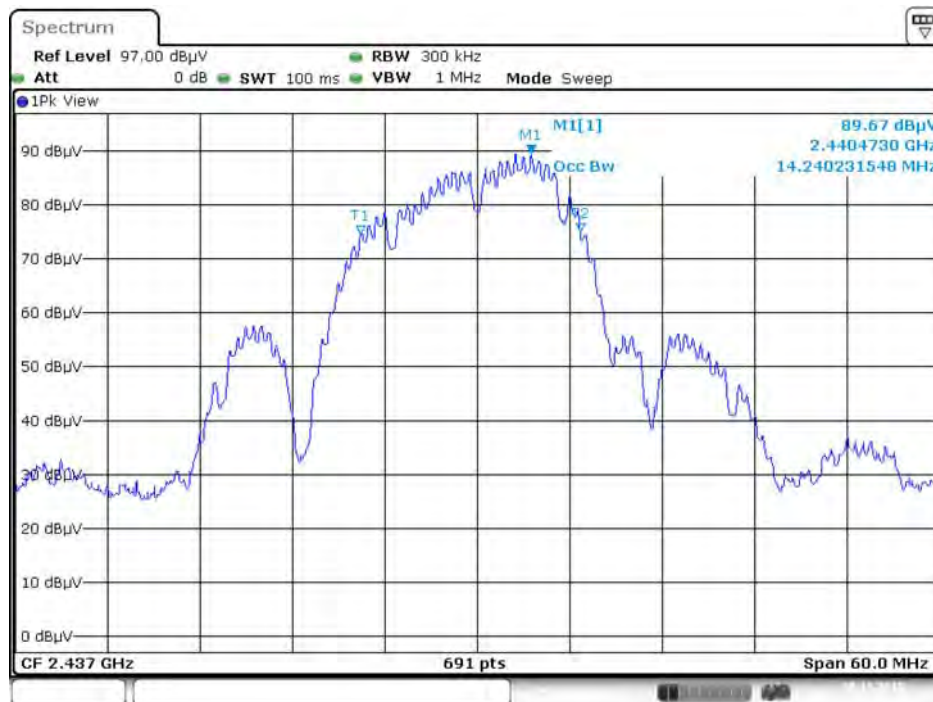

Date: 30.NOV.2015 21:48:06

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

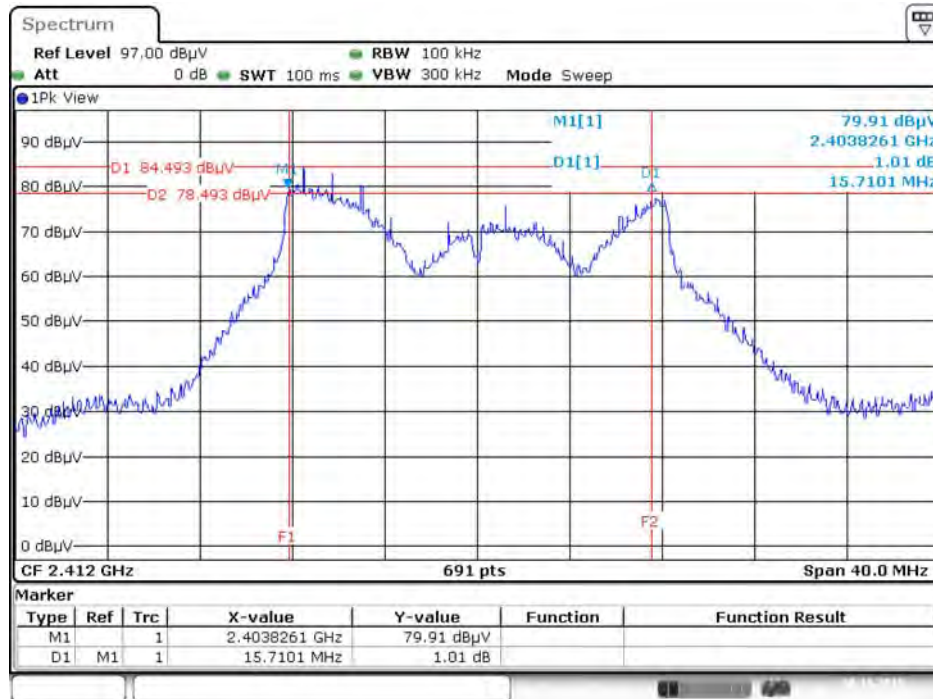


Date: 30.NOV.2015 15:54:06

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 30.NOV.2015 22:20:57

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

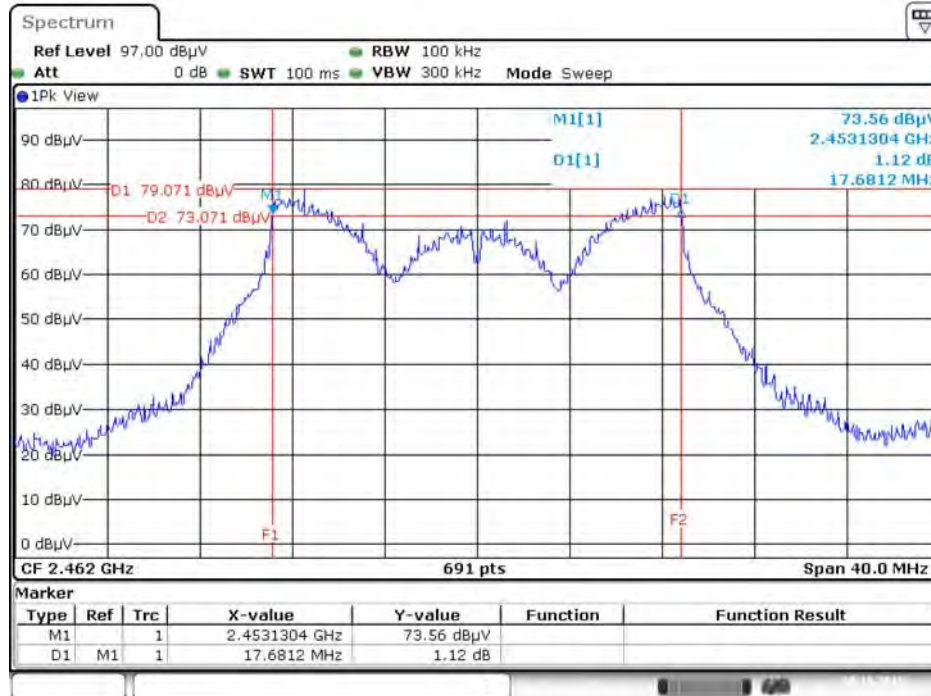

Date: 30.NOV.2015 16:54:44


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

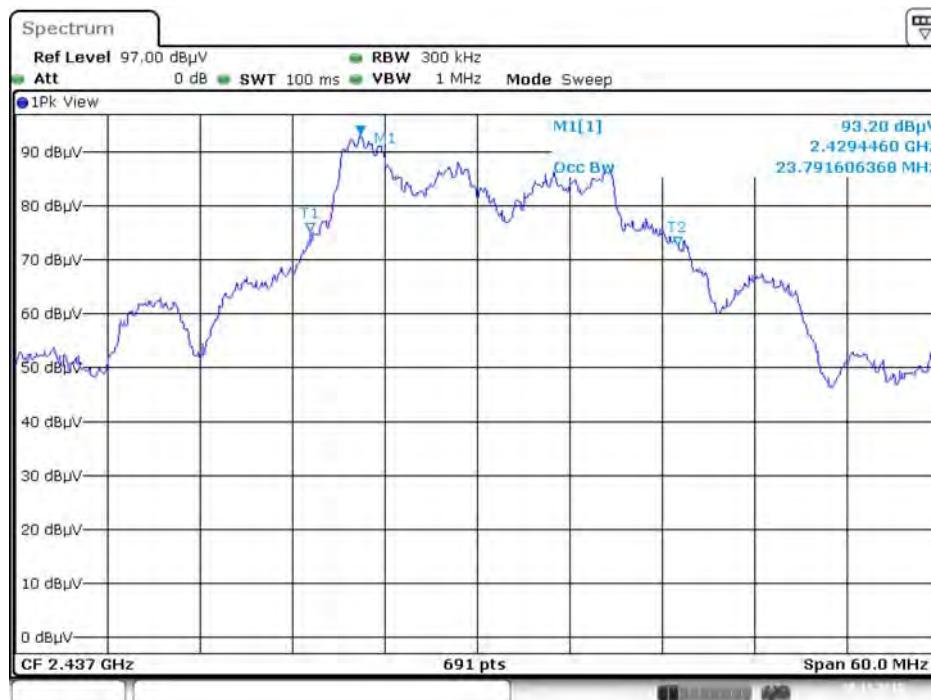

Date: 30.NOV.2015 23:36:14




6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

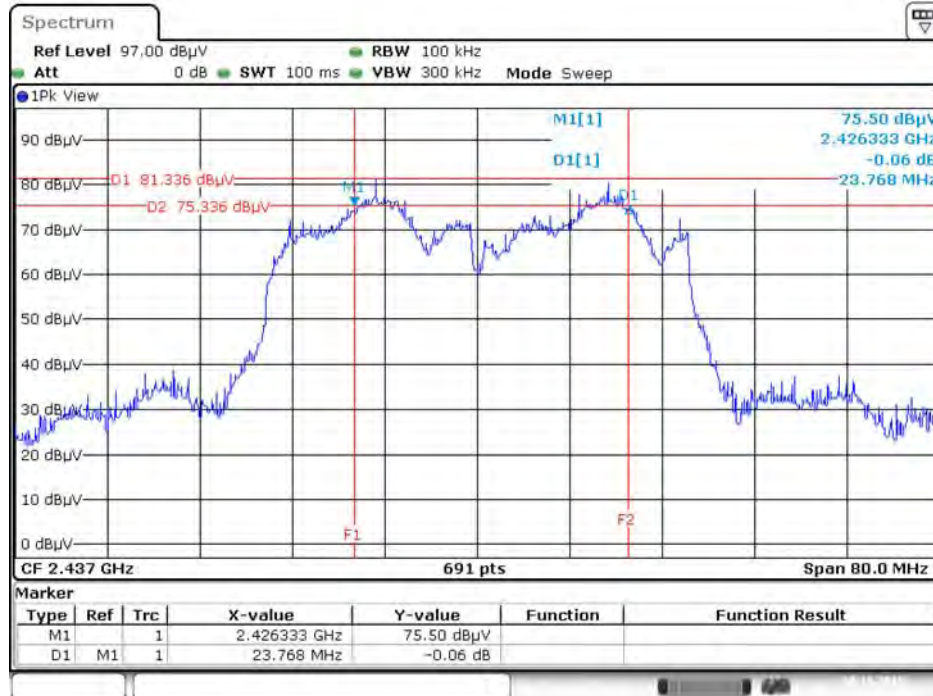

Date: 30.NOV.2015 18:27:18

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

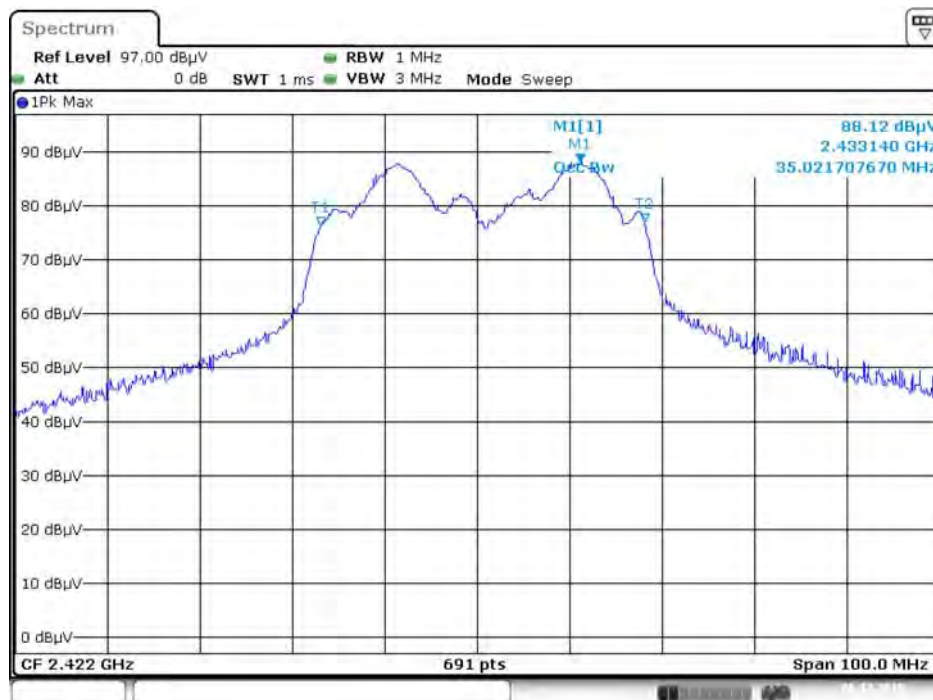

Date: 6.DEC.2015 04:02:28



Mode 8: EUT 2 + Set 12 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 7.DEC.2015 20:32:23

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 7.DEC.2015 20:38:57

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

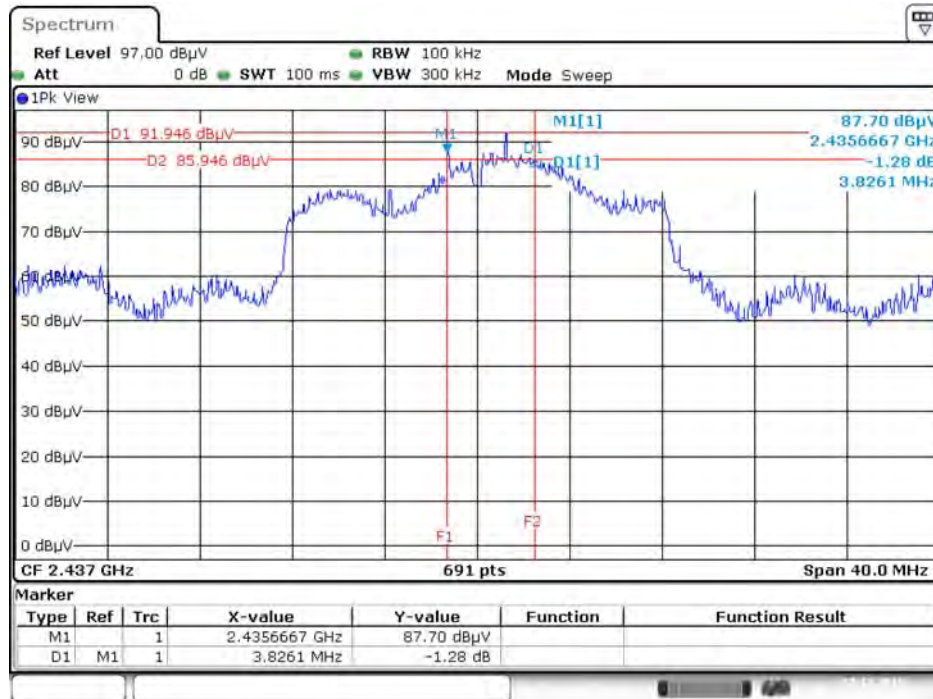


Date: 7.DEC.2015 20:33:16

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 7.DEC.2015 20:40:49

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

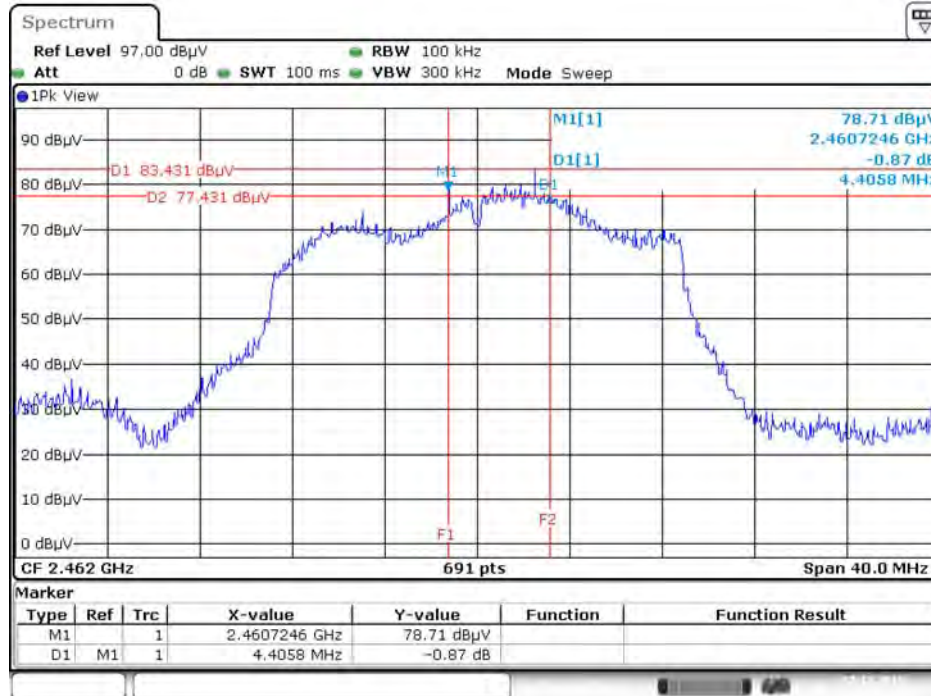


Date: 7.DEC.2015 20:34:53

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 7.DEC.2015 20:42:16

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

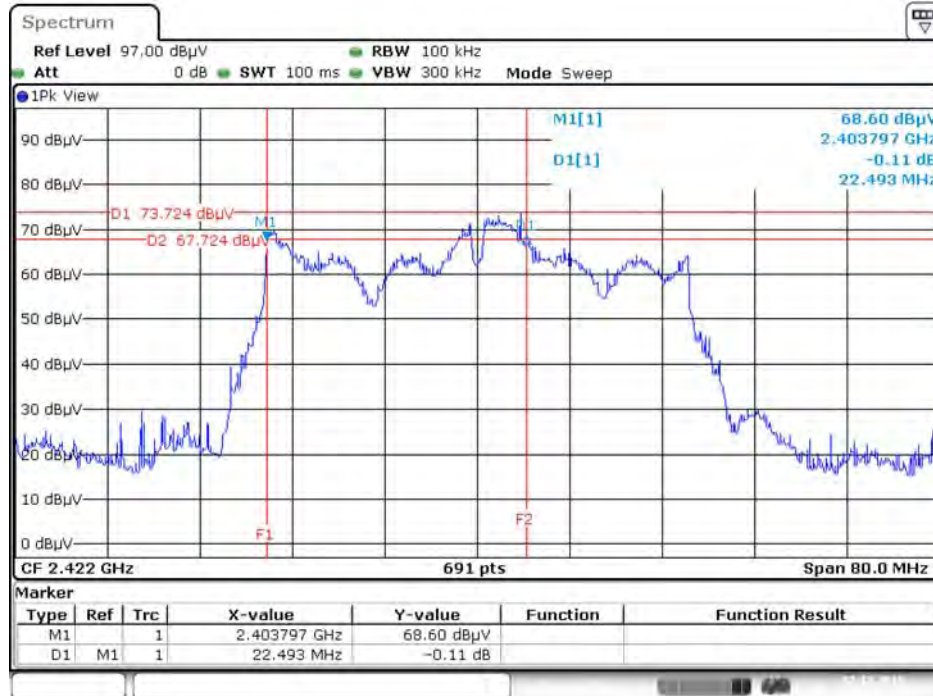

Date: 7.DEC.2015 20:35:25

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 7.DEC.2015 20:38:10



## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP




#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

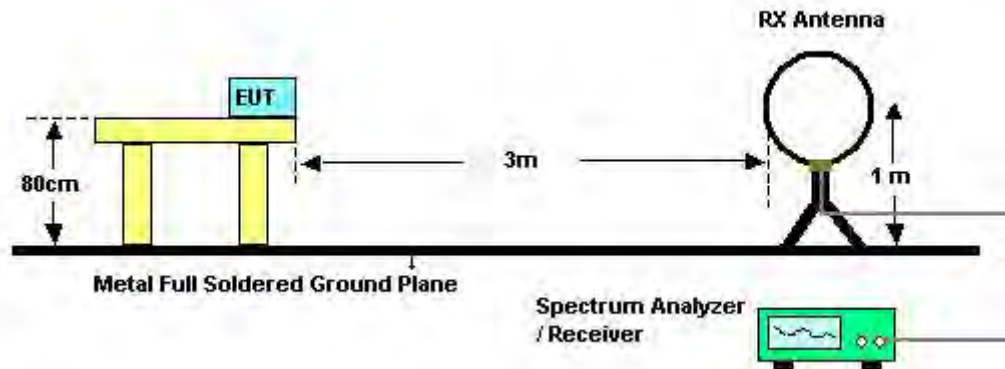

For Radiated Emissions: 30MHz~1GHz

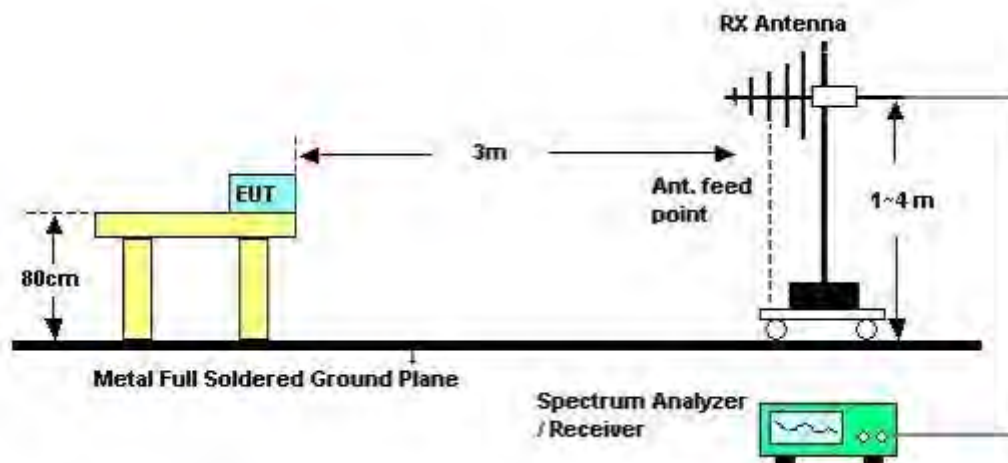

For Radiated Emissions: Above 1GHz

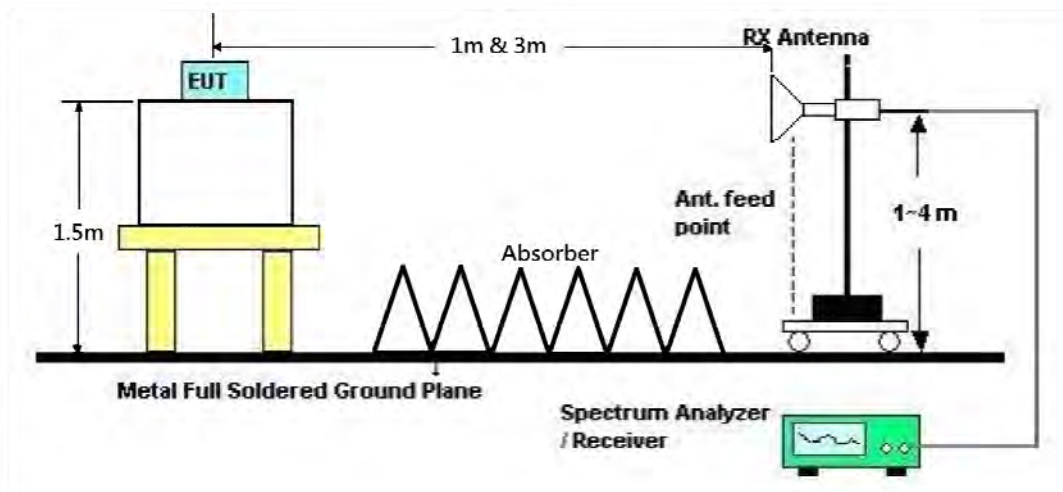

#### **4.5.5. Test Deviation**

There is no deviation with the original standard.

#### **4.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Nov. 19, 2015	<b>Test Mode</b>	Mode 2

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu & Owen Hsu	Configurations	Normal Link
Test Mode	Mode 2		


Horizontal

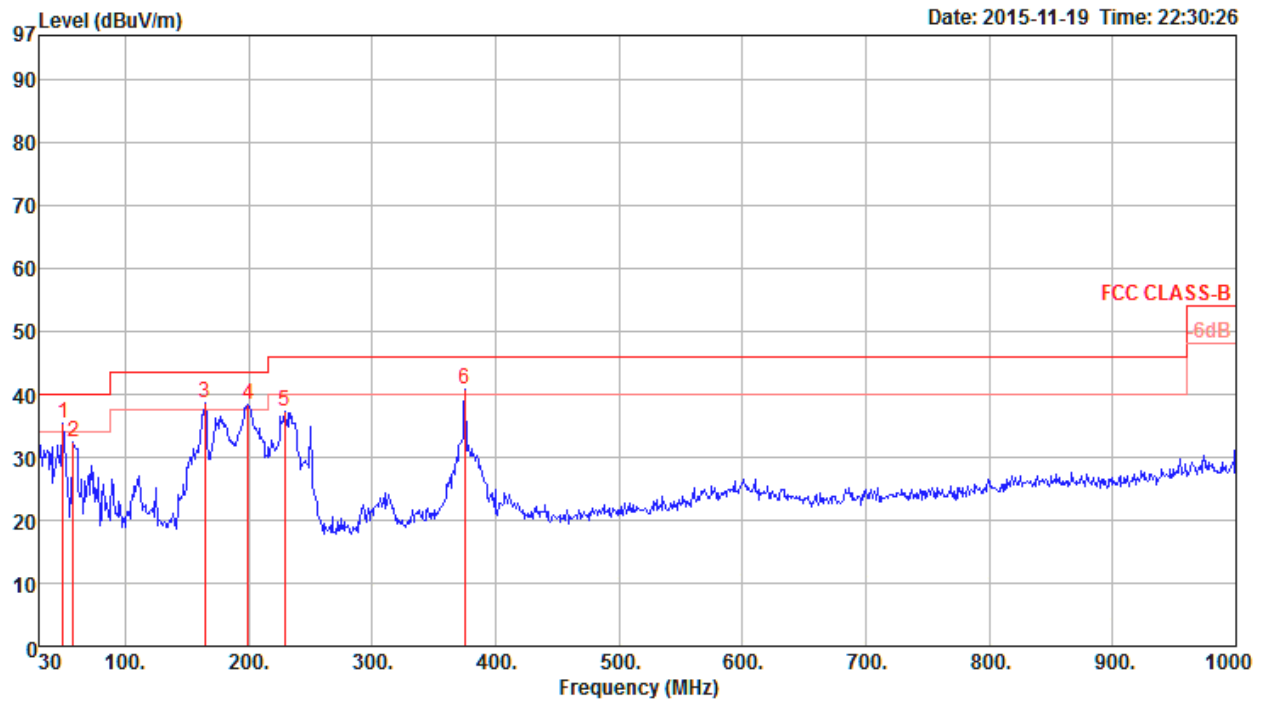

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	49.40	35.33	40.00	-4.67	55.34	0.37	9.08	29.46	360	100 Peak	HORIZONTAL
2	58.13	32.42	40.00	-7.58	54.09	0.44	7.31	29.42	256	125 Peak	HORIZONTAL
3	164.83	38.68	43.50	-4.82	56.14	0.99	10.50	28.95	360	100 Peak	HORIZONTAL
4	199.75	38.49	43.50	-5.01	55.69	1.13	10.50	28.83	152	150 Peak	HORIZONTAL
5	228.85	37.20	46.00	-8.80	53.41	1.24	11.21	28.66	351	125 Peak	HORIZONTAL
6	375.32	40.91	46.00	-5.09	52.09	1.73	15.98	28.89	259	150 Peak	HORIZONTAL



**Vertical**

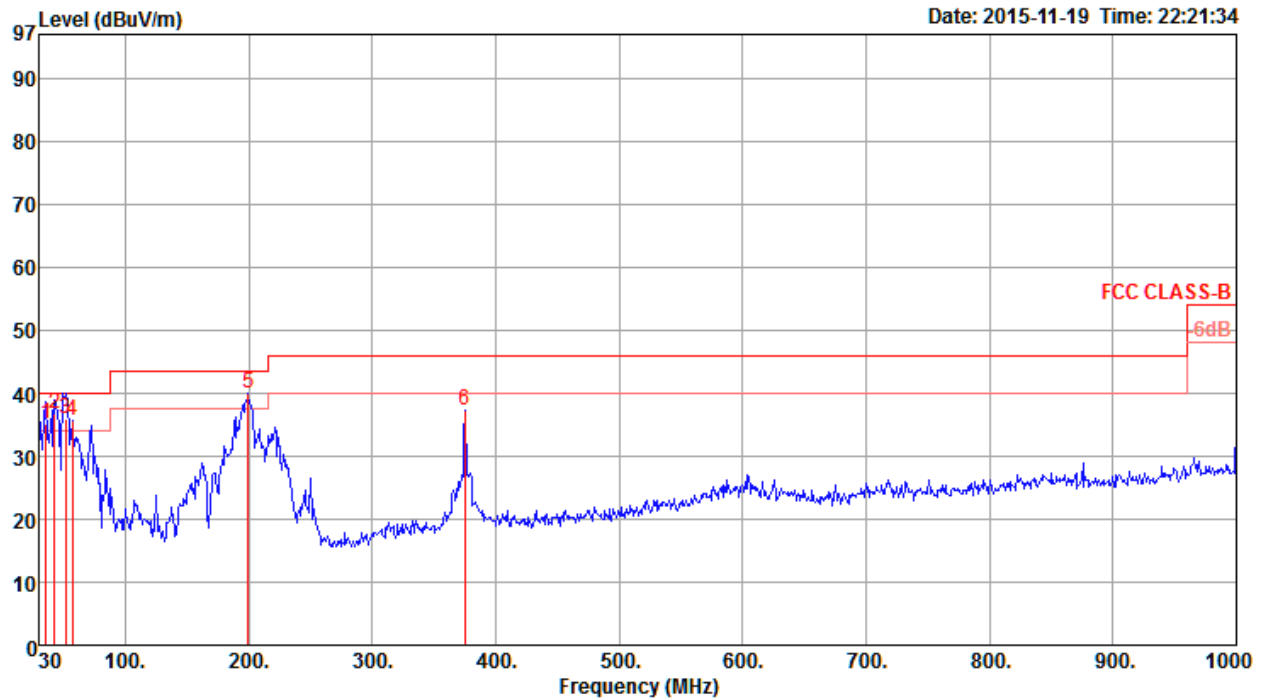

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	35.82	35.08	40.00	-4.92	48.10	0.23	16.23	29.48	326	150 QP	VERTICAL
2	42.61	36.75	40.00	-3.25	53.69	0.31	12.22	29.47	257	125 QP	VERTICAL
3	51.34	35.99	40.00	-4.01	56.49	0.39	8.56	29.45	354	150 QP	VERTICAL
4	57.16	35.65	40.00	-4.35	57.16	0.43	7.48	29.42	351	150 Peak	VERTICAL
5	199.75	39.93	43.50	-3.57	57.13	1.13	10.50	28.83	354	100 Peak	VERTICAL
6	375.32	37.18	46.00	-8.82	48.36	1.73	15.98	28.89	316	158 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)**

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.94	50.61	54.00	-3.39	43.12	8.11	33.11	33.73	138	54	Average	HORIZONTAL
2	4824.08	58.28	74.00	-15.72	50.79	8.11	33.11	33.73	138	54	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.89	58.35	74.00	-15.65	50.86	8.11	33.11	33.73	156	47	Peak	VERTICAL
2	4823.96	50.97	54.00	-3.03	43.48	8.11	33.11	33.73	156	47	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.05	52.93	54.00	-1.07	45.47	7.94	33.23	33.71	151	90 Average	HORIZONTAL
2	4873.96	61.34	74.00	-12.66	53.88	7.94	33.23	33.71	151	90 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.12	51.82	54.00	-2.18	44.36	7.94	33.23	33.71	165	102 Average	VERTICAL
2	4873.80	61.19	74.00	-12.81	53.73	7.94	33.23	33.71	165	102 Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4924.31	49.01	54.00	-4.99	41.56	7.78	33.35	33.68	174	103	Average	HORIZONTAL
2	4924.51	58.49	74.00	-15.51	51.04	7.78	33.35	33.68	174	103	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.02	50.26	54.00	-3.74	42.80	7.82	33.32	33.68	173	100	Average	VERTICAL
2	4924.30	60.11	74.00	-13.89	52.66	7.78	33.35	33.68	173	100	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4819.70	49.71	74.00	-24.29	42.22	8.11	33.11	33.73	170	51	Peak	HORIZONTAL
2	4828.16	36.10	54.00	-17.90	28.62	8.07	33.14	33.73	170	51	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4819.30	36.18	54.00	-17.82	28.69	8.11	33.11	33.73	156	70	Average	VERTICAL
2	4823.06	48.65	74.00	-25.35	41.16	8.11	33.11	33.73	156	70	Peak	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4869.02	51.13	74.00	-22.87	43.67	7.94	33.23	33.71	184	44	Peak	HORIZONTAL
2	4870.92	38.07	54.00	-15.93	30.61	7.94	33.23	33.71	184	44	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.94	38.05	54.00	-15.95	30.59	7.94	33.23	33.71	160	30	Average	VERTICAL
2	4876.20	49.37	74.00	-24.63	41.91	7.94	33.23	33.71	160	30	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4924.30	36.02	54.00	-17.98	28.57	7.78	33.35	33.68	170	175	Average	HORIZONTAL
2	4925.48	48.76	74.00	-25.24	41.31	7.78	33.35	33.68	170	175	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4922.74	36.13	54.00	-17.87	28.67	7.82	33.32	33.68	161	170	Average	VERTICAL
2	4924.06	49.80	74.00	-24.20	42.35	7.78	33.35	33.68	161	170	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4825.06	48.85	74.00	-25.15	41.37	8.07	33.14	33.73	148	145	Peak	HORIZONTAL
2	4827.66	36.40	54.00	-17.60	28.92	8.07	33.14	33.73	148	145	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4819.46	36.38	54.00	-17.62	28.89	8.11	33.11	33.73	132	135	Average	VERTICAL
2	4820.34	49.88	74.00	-24.12	42.39	8.11	33.11	33.73	132	135	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4871.36	49.31	74.00	-24.69	41.85	7.94	33.23	33.71	138	152	Peak	HORIZONTAL
2	4872.10	36.13	54.00	-17.87	28.67	7.94	33.23	33.71	138	152	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.46	36.04	54.00	-17.96	28.58	7.94	33.23	33.71	122	145	Average	VERTICAL
2	4876.30	48.67	74.00	-25.33	41.21	7.94	33.23	33.71	122	145	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.84	36.45	54.00	-17.55	29.00	7.78	33.35	33.68	137	126	Average	HORIZONTAL
2	4927.56	49.12	74.00	-24.88	41.67	7.78	33.35	33.68	137	126	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.40	49.34	74.00	-24.66	41.88	7.82	33.32	33.68	144	122	Peak	VERTICAL
2	4924.58	36.55	54.00	-17.45	29.10	7.78	33.35	33.68	144	122	Average	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4846.42	36.45	54.00	-17.55	28.96	8.03	33.17	33.71	193	136	Average	HORIZONTAL
2	4848.36	48.66	74.00	-25.34	41.17	8.03	33.17	33.71	193	136	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4848.54	49.74	74.00	-24.26	42.25	8.03	33.17	33.71	150	124	Peak	VERTICAL
2	4848.76	36.42	54.00	-17.58	28.93	8.03	33.17	33.71	150	124	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	cm	deg		
1	4871.94	36.31	54.00	-17.69	28.85	7.94	33.23	220	152	Average	HORIZONTAL
2	4877.44	48.94	74.00	-25.06	41.47	7.94	33.23	220	152	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	cm	deg		
1	4870.40	36.38	54.00	-17.62	28.92	7.94	33.23	226	174	Average	VERTICAL
2	4870.56	49.52	74.00	-24.48	42.06	7.94	33.23	226	174	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 04, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Sector Antenna / 7.5 dBi		

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4906.10	36.73	54.00	-17.27	29.27	7.86	33.29	33.69	186	228	Average	HORIZONTAL
2	4907.82	49.32	74.00	-24.68	41.86	7.86	33.29	33.69	186	228	Peak	HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4904.62	48.88	74.00	-25.12	41.42	7.86	33.29	33.69	184	213	Peak	VERTICAL
2	4904.66	36.57	54.00	-17.43	29.11	7.86	33.29	33.69	184	213	Average	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 17, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4826.07	41.73	54.00	-12.27	37.41	6.94	31.11	33.73	157	186	Average	HORIZONTAL
2	4826.91	52.69	74.00	-21.31	48.37	6.94	31.11	33.73	157	186	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4826.93	51.54	54.00	-2.46	47.22	6.94	31.11	33.73	216	202	Average	VERTICAL
2	4826.95	60.87	74.00	-13.13	56.55	6.94	31.11	33.73	216	202	Peak	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 17, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.90	51.13	74.00	-22.87	46.73	6.96	31.15	33.71	233	211	Peak	HORIZONTAL
2	4873.96	46.52	54.00	-7.48	42.12	6.96	31.15	33.71	233	211	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.81	52.97	54.00	-1.03	48.57	6.96	31.15	33.71	190	206	Average	VERTICAL
2	4873.81	61.20	74.00	-12.80	56.80	6.96	31.15	33.71	190	206	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 17, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.92	50.03	74.00	-23.97	45.51	6.98	31.22	33.68	217	191 Peak	HORIZONTAL
2	4926.28	39.69	54.00	-14.31	35.17	6.98	31.22	33.68	217	191 Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4925.36	59.89	74.00	-14.11	55.37	6.98	31.22	33.68	244	204 Peak	VERTICAL
2	4926.08	50.54	54.00	-3.46	46.02	6.98	31.22	33.68	244	204 Average	VERTICAL





<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4824.64	45.97	74.00	-28.03	41.67	6.94	31.09	33.73	150	144	Peak	HORIZONTAL
2	4827.14	35.43	54.00	-18.57	31.11	6.94	31.11	33.73	150	144	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4826.03	50.82	74.00	-23.18	46.50	6.94	31.11	33.73	176	205	Peak	VERTICAL
2	4826.43	36.64	54.00	-17.36	32.32	6.94	31.11	33.73	176	205	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4875.26	49.23	74.00	-24.77	44.83	6.96	31.15	33.71	178	208 Peak	HORIZONTAL
2	4876.02	36.52	54.00	-17.48	32.12	6.96	31.15	33.71	178	208 Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.72	54.96	74.00	-19.04	50.56	6.96	31.15	33.71	204	196 Peak	VERTICAL
2	4875.84	41.09	54.00	-12.91	36.69	6.96	31.15	33.71	204	196 Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4919.92	45.82	74.00	-28.18	41.33	6.97	31.20	33.68	177	246	Peak	HORIZONTAL
2	4926.60	33.29	54.00	-20.71	28.77	6.98	31.22	33.68	177	246	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.98	35.48	54.00	-18.52	30.96	6.98	31.22	33.68	205	195	Average	VERTICAL
2	4925.12	48.45	74.00	-25.55	43.93	6.98	31.22	33.68	205	195	Peak	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4826.42	45.66	74.00	-28.34	41.34	6.94	31.11	33.73	231	238	Peak	HORIZONTAL
2	4826.72	33.12	54.00	-20.88	28.80	6.94	31.11	33.73	231	238	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4826.54	51.54	74.00	-22.46	47.22	6.94	31.11	33.73	233	205	Peak	VERTICAL
2	4827.08	36.95	54.00	-17.05	32.63	6.94	31.11	33.73	233	205	Average	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4876.22	35.19	54.00	-18.81	30.79	6.96	31.15	33.71	226	210	Average	HORIZONTAL
2	4876.62	49.87	74.00	-24.13	45.47	6.96	31.15	33.71	226	210	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4875.64	42.24	54.00	-11.76	37.84	6.96	31.15	33.71	245	205	Average	VERTICAL
2	4876.42	56.78	74.00	-17.22	52.38	6.96	31.15	33.71	245	205	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.78	33.09	54.00	-20.91	28.57	6.98	31.22	33.68	211	229	Average	HORIZONTAL
2	4928.00	45.17	74.00	-28.83	40.65	6.98	31.22	33.68	211	229	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.90	34.67	54.00	-19.33	30.15	6.98	31.22	33.68	224	194	Average	VERTICAL
2	4925.40	47.74	74.00	-26.26	43.22	6.98	31.22	33.68	224	194	Peak	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4844.58	32.01	54.00	-21.99	27.66	6.95	31.12	33.72	201	214	Average	HORIZONTAL
2	4846.92	44.77	74.00	-29.23	40.41	6.95	31.12	33.71	201	214	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4844.34	33.78	54.00	-20.22	29.43	6.95	31.12	33.72	237	203	Average	VERTICAL
2	4845.28	46.22	74.00	-27.78	41.86	6.95	31.12	33.71	237	203	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4875.36	32.26	54.00	-21.74	27.86	6.96	31.15	33.71	179	302 Average	HORIZONTAL
2	4878.88	44.87	74.00	-29.13	40.46	6.96	31.15	33.70	179	302 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.50	34.76	54.00	-19.24	30.36	6.96	31.15	33.71	220	208 Average	VERTICAL
2	4874.92	47.24	74.00	-26.76	42.84	6.96	31.15	33.71	220	208 Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 2: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4904.54	32.18	54.00	-21.82	27.71	6.97	31.19	33.69	212	239	Average	HORIZONTAL
2	4904.66	45.86	74.00	-28.14	41.39	6.97	31.19	33.69	212	239	Peak	HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.68	44.78	74.00	-29.22	40.31	6.97	31.19	33.69	200	194	Peak	VERTICAL
2	4903.92	33.19	54.00	-20.81	28.72	6.97	31.19	33.69	200	194	Average	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.84	52.45	74.00	-21.55	44.31	8.11	33.11	33.08	269	207	Peak	HORIZONTAL
2	4823.96	45.59	54.00	-8.41	37.45	8.11	33.11	33.08	269	207	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.86	56.65	74.00	-17.35	48.51	8.11	33.11	33.08	260	200	Peak	VERTICAL
2	4823.94	50.93	54.00	-3.07	42.79	8.11	33.11	33.08	260	200	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Dec. 01, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.88	57.09	74.00	-16.91	49.00	7.94	33.23	33.08	215	241	Peak	HORIZONTAL
2	4873.96	52.56	54.00	-1.44	44.47	7.94	33.23	33.08	215	241	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.92	57.93	74.00	-16.07	49.84	7.94	33.23	33.08	251	195	Peak	VERTICAL
2	4873.93	52.99	54.00	-1.01	44.90	7.94	33.23	33.08	251	195	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 18, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.96	53.97	74.00	-20.03	45.91	7.78	33.35	33.07	321	205	Peak	HORIZONTAL
2	4923.99	47.96	54.00	-6.04	39.90	7.78	33.35	33.07	321	205	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.92	50.61	54.00	-3.39	42.55	7.78	33.35	33.07	337	192	Average	VERTICAL
2	4923.98	54.66	74.00	-19.34	46.60	7.78	33.35	33.07	337	192	Peak	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4824.17	35.92	54.00	-18.08	27.78	8.11	33.11	33.08	134	132	Average	HORIZONTAL
2	4824.71	49.39	74.00	-24.61	41.25	8.11	33.11	33.08	134	132	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.89	36.10	54.00	-17.90	27.96	8.11	33.11	33.08	137	129	Average	VERTICAL
2	4824.33	48.83	74.00	-25.17	40.69	8.11	33.11	33.08	137	129	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.07	36.07	54.00	-17.93	27.98	7.94	33.23	33.08	130	148	Average	HORIZONTAL
2	4873.86	49.40	74.00	-24.60	41.31	7.94	33.23	33.08	130	148	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.17	49.89	74.00	-24.11	41.80	7.94	33.23	33.08	132	142	Peak	VERTICAL
2	4874.56	36.11	54.00	-17.89	28.02	7.94	33.23	33.08	132	142	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.45	36.26	54.00	-17.74	28.20	7.78	33.35	33.07	130	159 Average	HORIZONTAL
2	4924.56	49.45	74.00	-24.55	41.39	7.78	33.35	33.07	130	159 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.56	49.41	74.00	-24.59	41.34	7.82	33.32	33.07	129	151 Peak	VERTICAL
2	4924.84	36.49	54.00	-17.51	28.43	7.78	33.35	33.07	129	151 Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.41	48.88	74.00	-25.12	40.74	8.11	33.11	33.08	127	168	Peak	HORIZONTAL
2	4824.57	35.61	54.00	-18.39	27.47	8.11	33.11	33.08	127	168	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4824.79	35.80	54.00	-18.20	27.66	8.11	33.11	33.08	129	161	Average	VERTICAL
2	4824.84	48.88	74.00	-25.12	40.74	8.11	33.11	33.08	129	161	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.45	50.41	74.00	-23.59	42.32	7.94	33.23	33.08	128	179	Peak	HORIZONTAL
2	4873.95	36.86	54.00	-17.14	28.77	7.94	33.23	33.08	128	179	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.93	49.66	74.00	-24.34	41.57	7.94	33.23	33.08	130	171	Peak	VERTICAL
2	4874.05	36.17	54.00	-17.83	28.08	7.94	33.23	33.08	130	171	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.04	49.36	74.00	-24.64	41.29	7.82	33.32	33.07	124	187 Peak	HORIZONTAL
2	4924.25	36.09	54.00	-17.91	28.03	7.78	33.35	33.07	124	187 Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.13	36.38	54.00	-17.62	28.32	7.78	33.35	33.07	126	182 Average	VERTICAL
2	4924.96	49.19	74.00	-24.81	41.13	7.78	33.35	33.07	126	182 Peak	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.00	35.71	54.00	-18.29	27.59	8.03	33.17	33.08	118	168	Average	HORIZONTAL
2	4843.82	49.39	74.00	-24.61	41.27	8.03	33.17	33.08	118	168	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.68	48.70	74.00	-25.30	40.58	8.03	33.17	33.08	121	179	Peak	VERTICAL
2	4844.11	35.88	54.00	-18.12	27.76	8.03	33.17	33.08	121	179	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.64	38.61	54.00	-15.39	30.52	7.94	33.23	33.08	123	183	Average	HORIZONTAL
2	4874.48	53.26	74.00	-20.74	45.17	7.94	33.23	33.08	123	183	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.77	38.10	54.00	-15.90	30.01	7.94	33.23	33.08	121	181	Average	VERTICAL
2	4874.01	51.88	74.00	-22.12	43.79	7.94	33.23	33.08	121	181	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 19, 2015		
<b>Test Mode</b>	Mode 3: EUT 1 + Set 4 Sector Antenna / 10.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.87	49.45	74.00	-24.55	41.37	7.86	33.29	33.07	135	201	Peak	HORIZONTAL
2	4904.10	36.18	54.00	-17.82	28.10	7.86	33.29	33.07	135	201	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4903.03	36.32	54.00	-17.68	28.24	7.86	33.29	33.07	130	192	Average	VERTICAL
2	4903.17	49.68	74.00	-24.32	41.60	7.86	33.29	33.07	130	192	Peak	VERTICAL

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 27, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4823.86	50.42	74.00	-23.58	45.94	6.18	32.82	34.52	240	219 Peak	HORIZONTAL
2	4823.96	42.66	54.00	-11.34	38.18	6.18	32.82	34.52	240	219 Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4824.02	46.40	54.00	-7.60	41.92	6.18	32.82	34.52	332	237 Average	VERTICAL
2	4824.10	52.71	74.00	-21.29	48.23	6.18	32.82	34.52	332	237 Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 27, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.92	50.67	54.00	-3.33	46.21	6.06	32.91	34.51	202	260	Average	HORIZONTAL
2	4874.26	55.66	74.00	-18.34	51.20	6.06	32.91	34.51	202	260	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.96	58.71	74.00	-15.29	54.25	6.06	32.91	34.51	206	245	Peak	VERTICAL
2	4874.02	52.99	54.00	-1.01	48.53	6.06	32.91	34.51	206	245	Average	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 27, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.88	53.12	74.00	-20.88	48.68	5.94	32.99	34.49	234	296	Peak	HORIZONTAL
2	4923.92	48.27	54.00	-5.73	43.83	5.94	32.99	34.49	234	296	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.92	54.94	74.00	-19.06	50.50	5.94	32.99	34.49	197	241	Peak	VERTICAL
2	4923.96	50.91	54.00	-3.09	46.47	5.94	32.99	34.49	197	241	Average	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 27, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.72	33.74	54.00	-20.26	29.27	6.15	32.84	34.52	189	159	Average	HORIZONTAL
2	4827.30	46.35	74.00	-27.65	41.88	6.15	32.84	34.52	189	159	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.24	37.17	54.00	-16.83	32.70	6.15	32.84	34.52	205	176	Average	VERTICAL
2	4826.92	50.53	74.00	-23.47	46.06	6.15	32.84	34.52	205	176	Peak	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Peter Wu & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 27, 2015		
<b>Test Mode</b>	Mode 4: EUT 1 + Set 5 Panel Antenna / 7 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.20	51.68	74.00	-22.32	47.22	6.06	32.91	34.51	217	168	Peak	HORIZONTAL
2	4876.20	38.15	54.00	-15.85	33.69	6.06	32.91	34.51	217	168	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.60	54.37	74.00	-19.63	49.91	6.06	32.91	34.51	193	164	Peak	VERTICAL
2	4875.70	40.87	54.00	-13.13	36.41	6.06	32.91	34.51	193	164	Average	VERTICAL