


Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal	Test Configuration	6

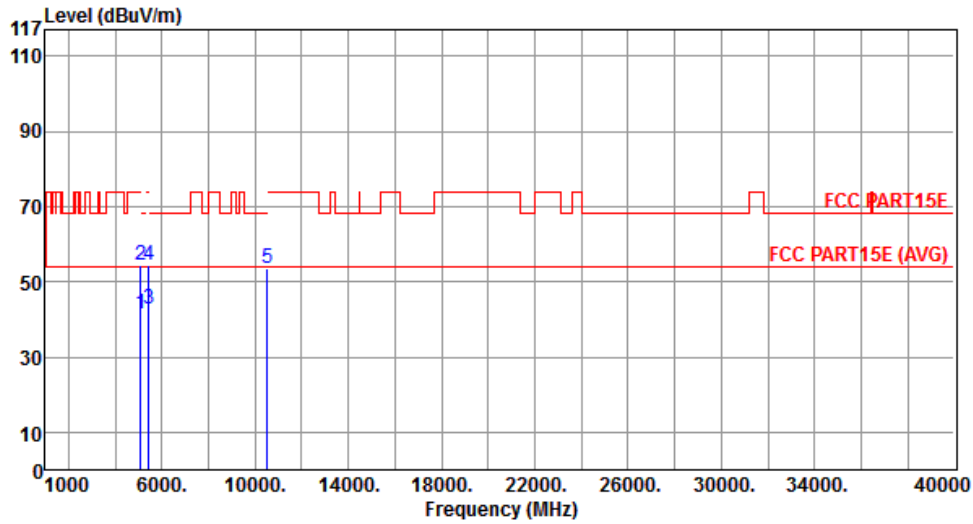


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.66	54.00	-12.34	36.83	4.83	Average	---	---
2	5097.00	54.39	74.00	-19.61	49.56	4.83	Peak	---	---
3	5427.00	42.66	54.00	-11.34	37.52	5.14	Average	---	---
4	5427.00	54.29	74.00	-19.71	49.15	5.14	Peak	---	---
5	10520.00	53.38	68.30	-14.92	38.51	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical	Test Configuration	6

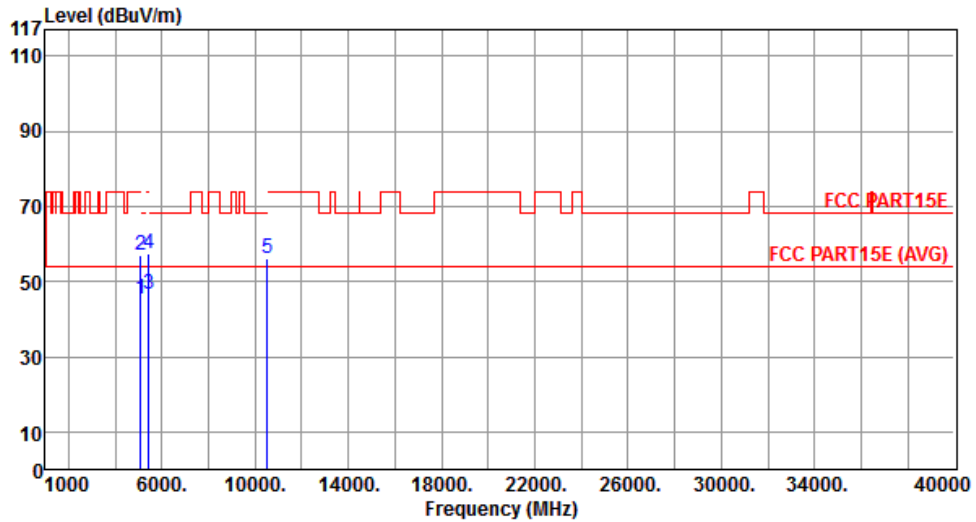


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.35	54.00	-8.65	40.52	4.83	Average	---	---
2	5097.00	56.95	74.00	-17.05	52.12	4.83	Peak	---	---
3	5427.00	46.52	54.00	-7.48	41.38	5.14	Average	---	---
4	5427.00	57.53	74.00	-16.47	52.39	5.14	Peak	---	---
5	10520.00	56.15	68.30	-12.15	41.28	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal	Test Configuration	6

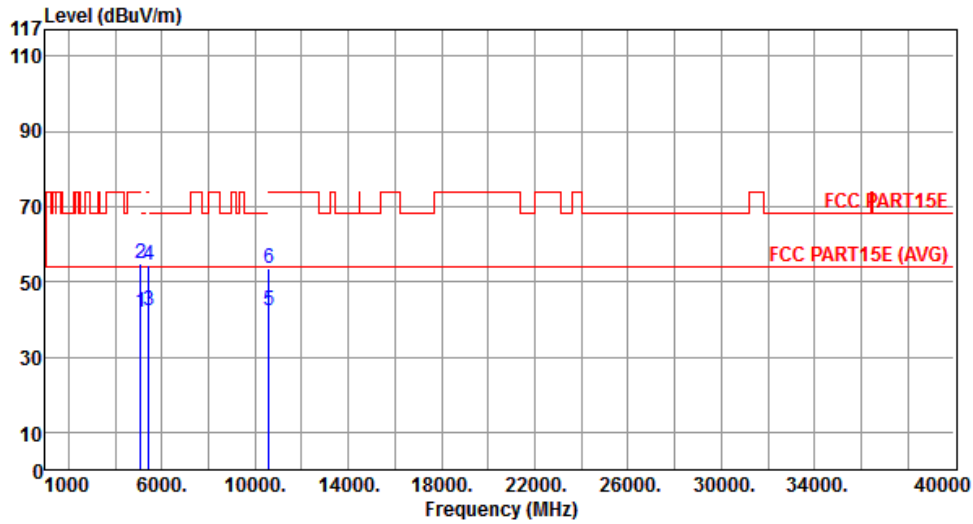


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.98	54.00	-12.02	37.15	4.83	Average	---	---
2	5097.00	54.75	74.00	-19.25	49.92	4.83	Peak	---	---
3	5427.00	42.23	54.00	-11.77	37.09	5.14	Average	---	---
4	5427.00	54.39	74.00	-19.61	49.25	5.14	Peak	---	---
5	10600.00	42.39	54.00	-11.61	27.45	14.94	Average	---	---
6	10600.00	53.72	74.00	-20.28	38.78	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical	Test Configuration	6

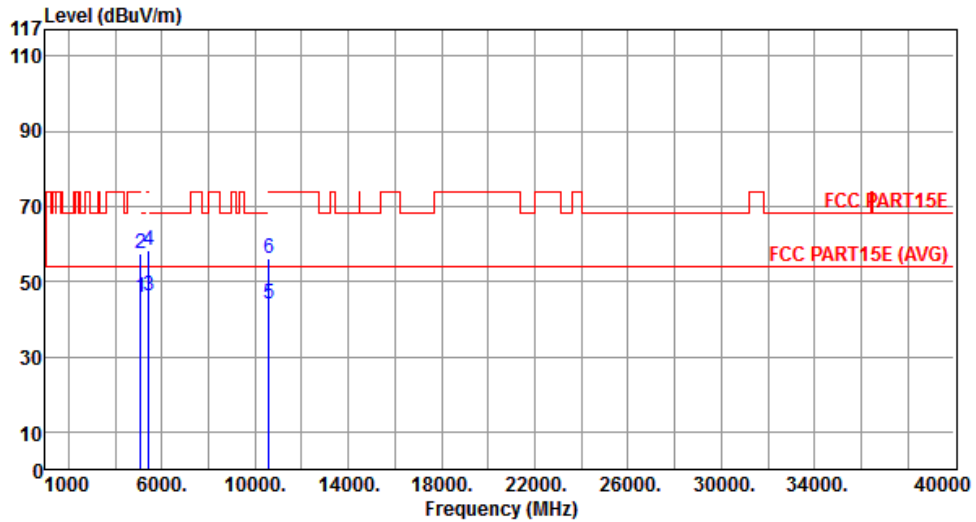

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.66	54.00	-8.34	40.83	4.83	Average	---	---
2	5097.00	57.29	74.00	-16.71	52.46	4.83	Peak	---	---
3	5427.00	46.39	54.00	-7.61	41.25	5.14	Average	---	---
4	5427.00	58.21	74.00	-15.79	53.07	5.14	Peak	---	---
5	10600.00	44.10	54.00	-9.90	29.16	14.94	Average	---	---
6	10600.00	56.33	74.00	-17.67	41.39	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal	Test Configuration	6

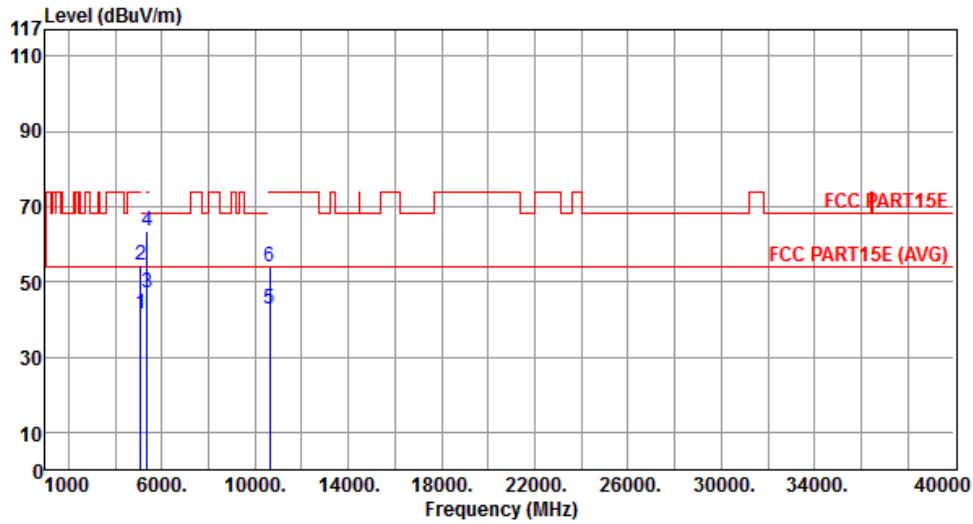


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.55	54.00	-12.45	36.72	4.83	Average	---	---
2	5097.00	54.39	74.00	-19.61	49.56	4.83	Peak	---	---
3	5350.00	47.24	54.00	-6.76	42.15	5.09	Average	---	---
4	5350.00	63.30	74.00	-10.70	58.21	5.09	Peak	---	---
5	10640.00	42.58	54.00	-11.42	27.60	14.98	Average	---	---
6	10640.00	53.98	74.00	-20.02	39.00	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical	Test Configuration	6

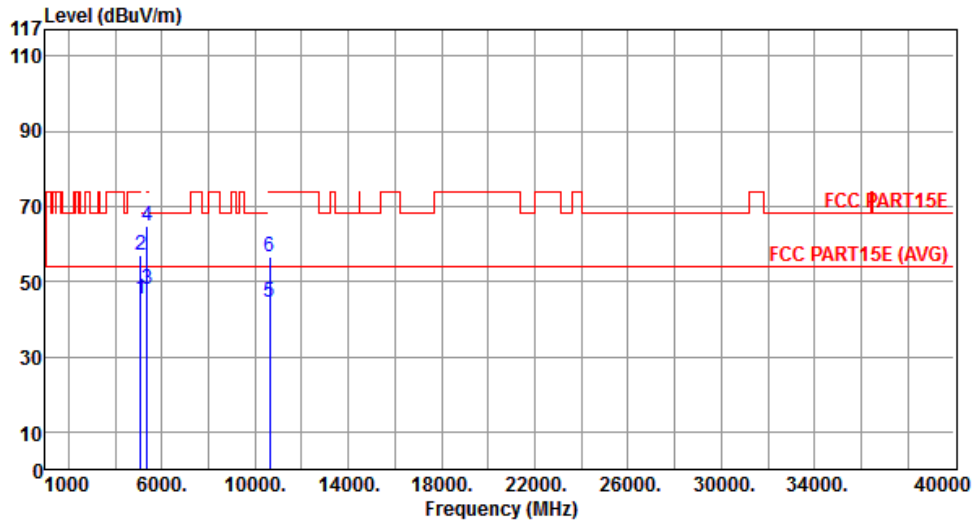


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.52	54.00	-8.48	40.69	4.83	Average	---	---
2	5097.00	56.95	74.00	-17.05	52.12	4.83	Peak	---	---
3	5350.00	48.10	54.00	-5.90	43.01	5.09	Average	---	---
4	5350.00	64.70	74.00	-9.30	59.61	5.09	Peak	---	---
5	10640.00	44.33	54.00	-9.67	29.35	14.98	Average	---	---
6	10640.00	56.70	74.00	-17.30	41.72	14.98	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal	Test Configuration	6

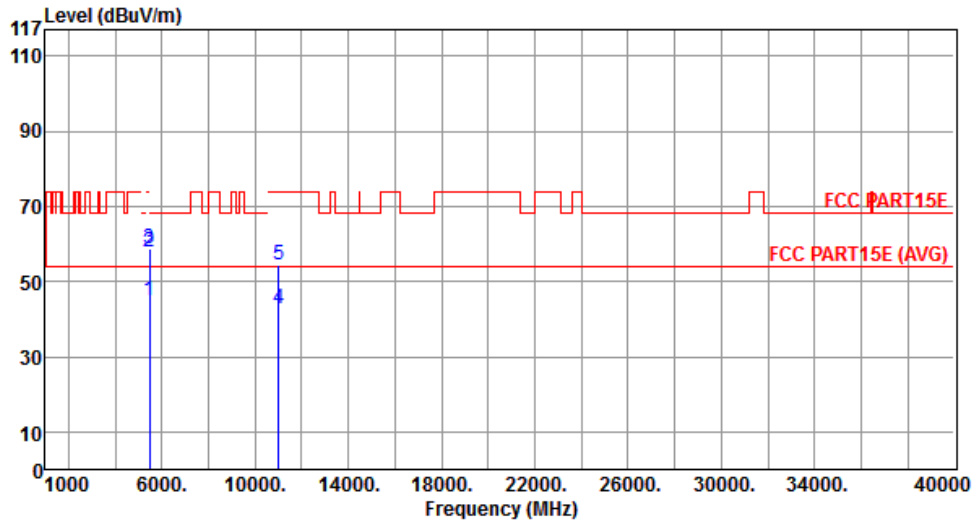


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.08	54.00	-8.92	39.90	5.18	Average	---	---
2	5460.00	57.91	74.00	-16.09	52.73	5.18	Peak	---	---
3	5470.00	58.75	68.30	-9.55	53.56	5.19	Peak	---	---
4	11000.00	42.93	54.00	-11.07	27.65	15.28	Average	---	---
5	11000.00	54.38	74.00	-19.62	39.10	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical	Test Configuration	6

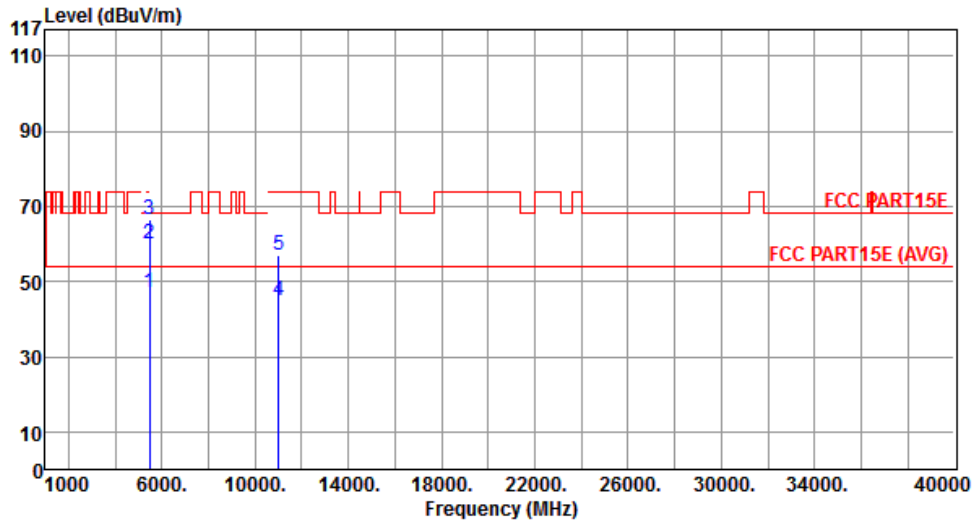


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.88	54.00	-7.12	41.70	5.18	Average	---	---
2	5460.00	60.18	74.00	-13.82	55.00	5.18	Peak	---	---
3	5470.00	66.54	68.30	-1.76	61.35	5.19	Peak	---	---
4	11000.00	44.89	54.00	-9.11	29.61	15.28	Average	---	---
5	11000.00	57.13	74.00	-16.87	41.85	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal	Test Configuration	6

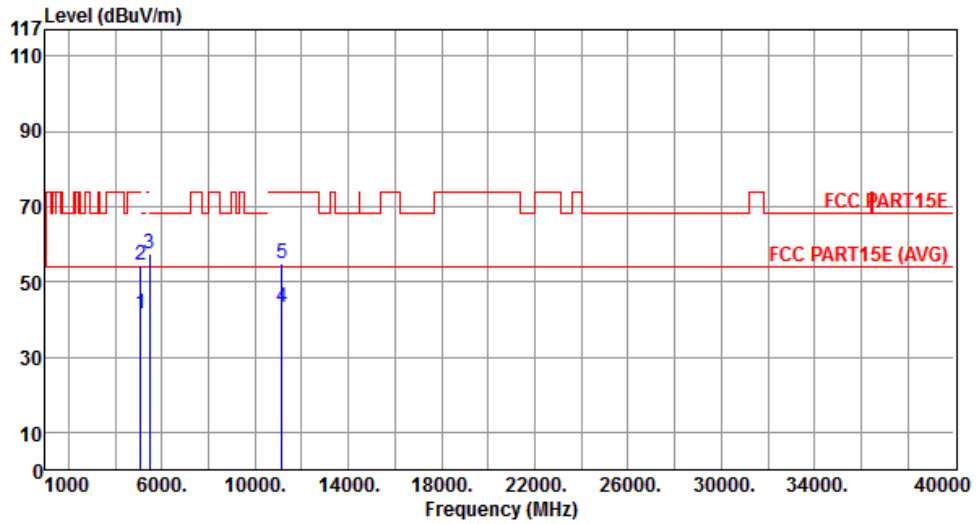


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.66	54.00	-12.34	36.83	4.83	Average	---	---
2	5097.00	54.43	74.00	-19.57	49.60	4.83	Peak	---	---
3	5470.00	57.36	68.30	-10.94	52.17	5.19	Peak	---	---
4	11160.00	43.31	54.00	-10.69	28.13	15.18	Average	---	---
5	11160.00	54.79	74.00	-19.21	39.61	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical	Test Configuration	6

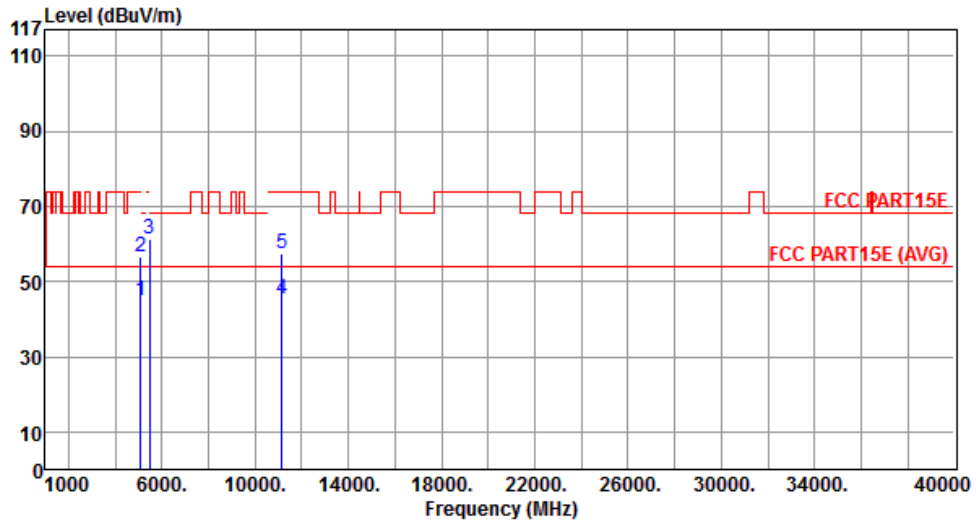


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.80	54.00	-9.20	39.97	4.83	Average	---	---
2	5097.00	56.52	74.00	-17.48	51.69	4.83	Peak	---	---
3	5470.00	61.32	68.30	-6.98	56.13	5.19	Peak	---	---
4	11160.00	45.12	54.00	-8.88	29.94	15.18	Average	---	---
5	11160.00	57.43	74.00	-16.57	42.25	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal	Test Configuration	6

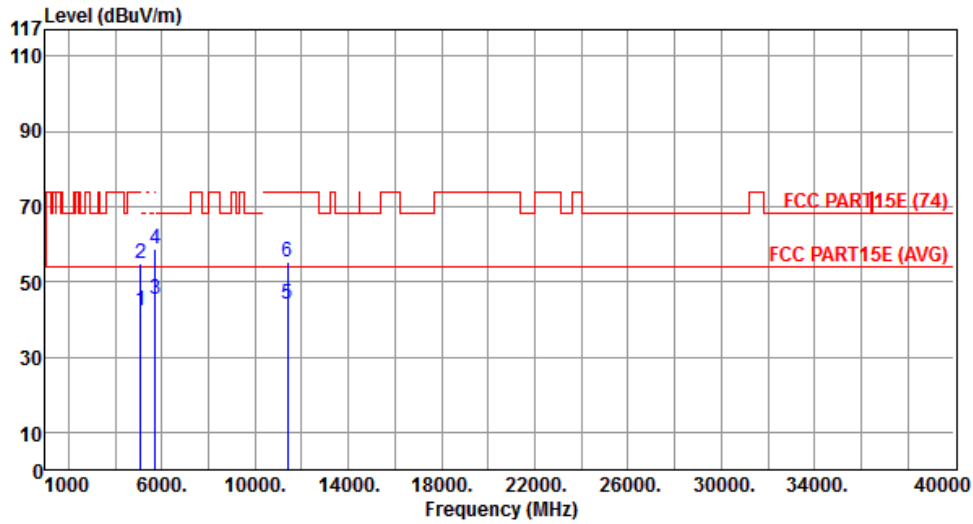


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.10	54.00	-11.90	37.27	4.83	Average	---	---
2	5097.00	54.75	74.00	-19.25	49.92	4.83	Peak	---	---
3	5725.00	45.29	54.00	-8.71	39.73	5.56	Average	---	---
4	5725.00	58.74	74.00	-15.26	53.18	5.56	Peak	---	---
5	11400.00	43.83	54.00	-10.17	28.80	15.03	Average	---	---
6	11400.00	55.20	74.00	-18.80	40.17	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical	Test Configuration	6

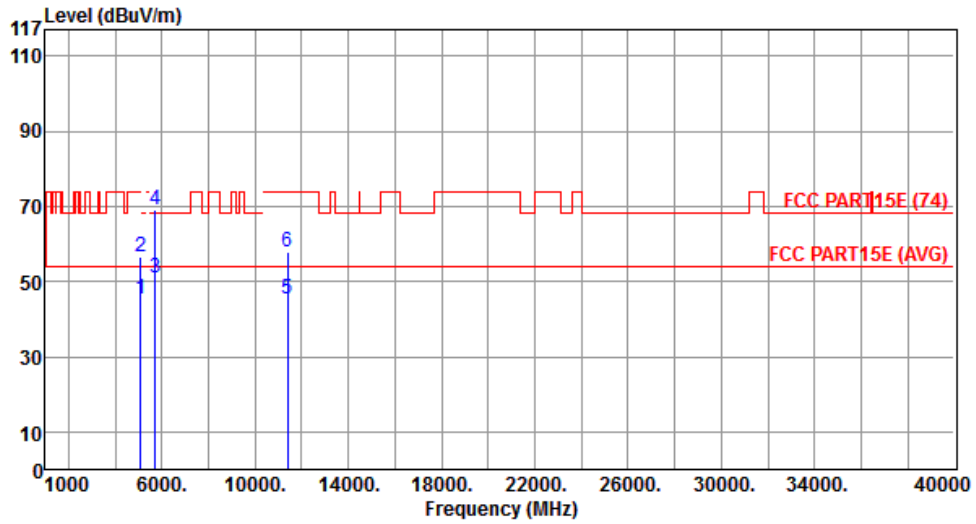


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.21	54.00	-8.79	40.38	4.83	Average	---	---
2	5097.00	56.73	74.00	-17.27	51.90	4.83	Peak	---	---
3	5725.00	50.90	54.00	-3.10	45.34	5.56	Average	---	---
4	5725.00	68.90	74.00	-5.10	63.34	5.56	Peak	---	---
5	11400.00	45.43	54.00	-8.57	30.40	15.03	Average	---	---
6	11400.00	57.69	74.00	-16.31	42.66	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal	Test Configuration	6

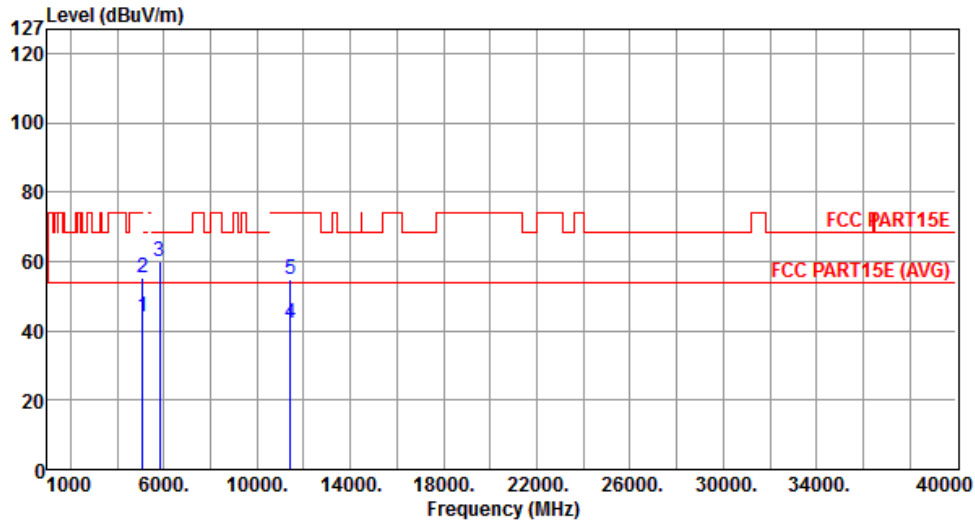


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.18	54.00	-9.82	38.69	5.49	Average	---	---
2	5097.00	55.32	74.00	-18.68	49.83	5.49	Peak	---	---
3	5825.00	59.76	68.20	-8.44	54.14	5.62	Peak	---	---
4	11440.00	42.11	54.00	-11.89	27.45	14.66	Average	---	---
5	11440.00	55.01	74.00	-18.99	40.35	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical	Test Configuration	6

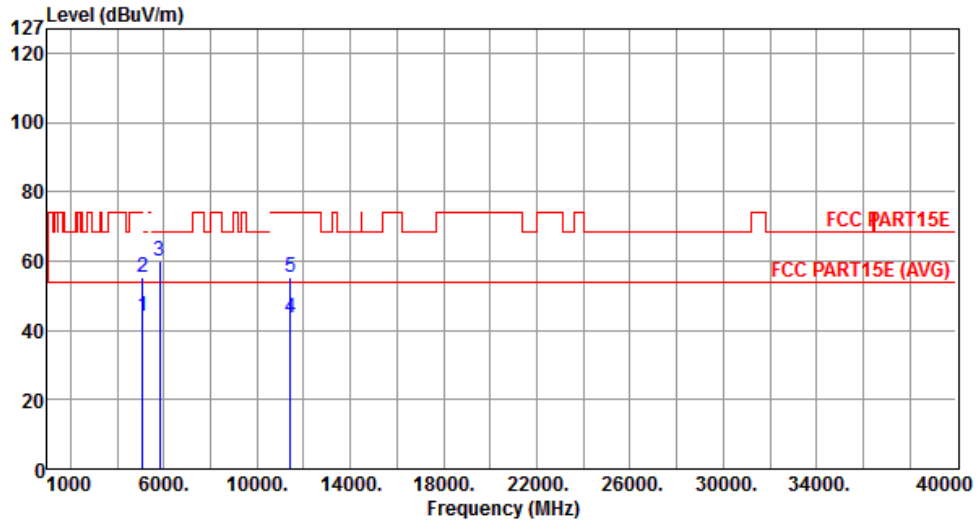

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.14	54.00	-9.86	38.65	5.49	Average	---	---
2	5097.00	55.27	74.00	-18.73	49.78	5.49	Peak	---	---
3	5825.00	60.19	68.20	-8.01	54.57	5.62	Peak	---	---
4	11440.00	43.38	54.00	-10.62	28.72	14.66	Average	---	---
5	11440.00	55.30	74.00	-18.70	40.64	14.66	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal	Test Configuration	1

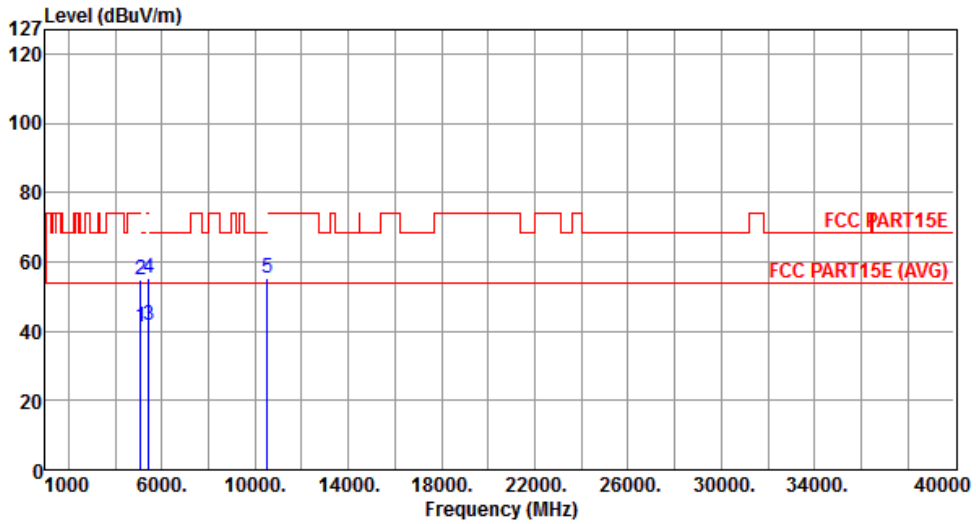


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.30	54.00	-12.70	36.47	4.83	Average	---	---
2	5097.00	55.05	74.00	-18.95	50.22	4.83	Peak	---	---
3	5427.00	41.91	54.00	-12.09	36.77	5.14	Average	---	---
4	5427.00	55.27	74.00	-18.73	50.13	5.14	Peak	---	---
5	10520.00	55.45	68.30	-12.85	40.58	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical	Test Configuration	1

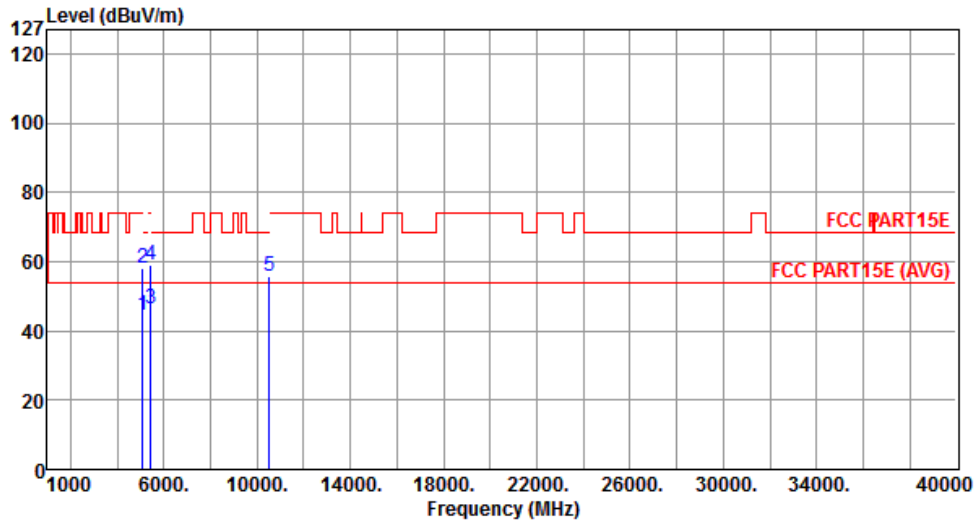


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.42	54.00	-9.58	39.59	4.83	Average	---	---
2	5097.00	58.24	74.00	-15.76	53.41	4.83	Peak	---	---
3	5427.00	46.37	54.00	-7.63	41.23	5.14	Average	---	---
4	5427.00	59.12	74.00	-14.88	53.98	5.14	Peak	---	---
5	10520.00	55.63	68.30	-12.67	40.76	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal	Test Configuration	1

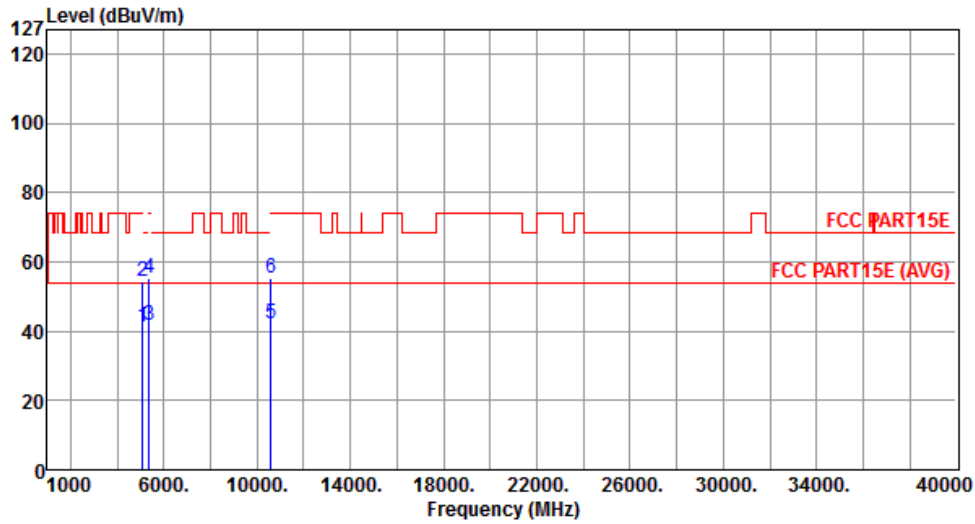


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.27	54.00	-12.73	36.44	4.83	Average	---	---
2	5097.00	54.35	74.00	-19.65	49.52	4.83	Peak	---	---
3	5350.00	41.87	54.00	-12.13	36.78	5.09	Average	---	---
4	5350.00	55.44	74.00	-18.56	50.35	5.09	Peak	---	---
5	10600.00	42.17	54.00	-11.83	27.23	14.94	Average	---	---
6	10600.00	55.31	74.00	-18.69	40.37	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical	Test Configuration	1

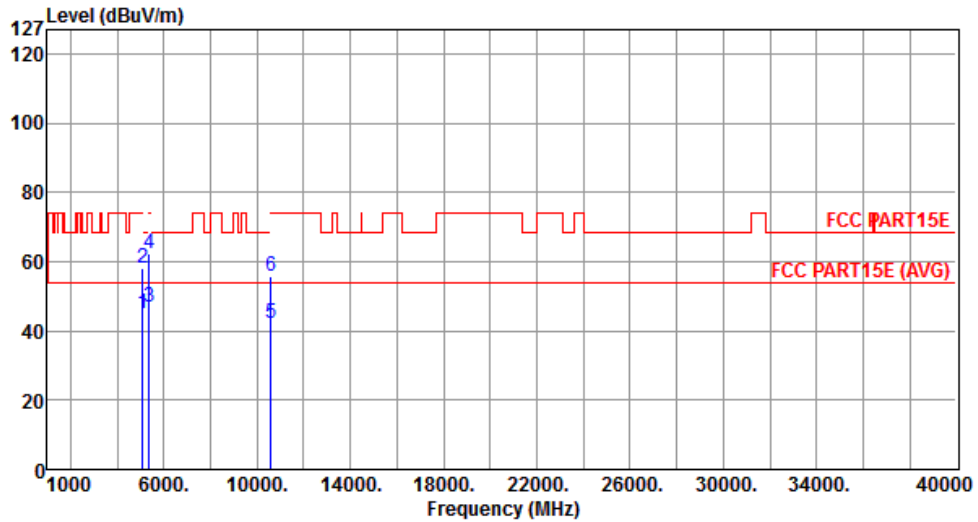


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.95	54.00	-9.05	40.12	4.83	Average	---	---
2	5097.00	57.90	74.00	-16.10	53.07	4.83	Peak	---	---
3	5350.00	46.70	54.00	-7.30	41.61	5.09	Average	---	---
4	5350.00	62.53	74.00	-11.47	57.44	5.09	Peak	---	---
5	10600.00	42.39	54.00	-11.61	27.45	14.94	Average	---	---
6	10600.00	55.92	74.00	-18.08	40.98	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal	Test Configuration	1

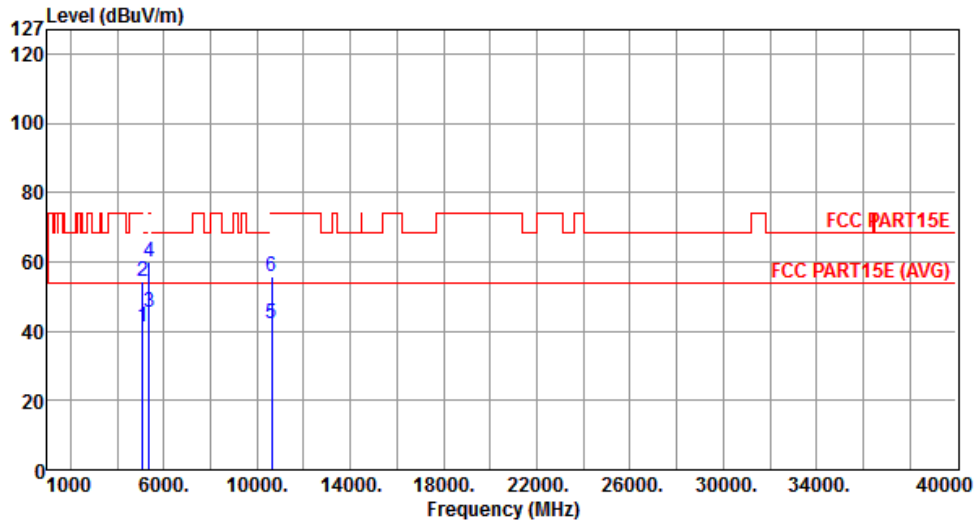


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.30	54.00	-12.70	36.47	4.83	Average	---	---
2	5097.00	54.39	74.00	-19.61	49.56	4.83	Peak	---	---
3	5350.00	45.38	54.00	-8.62	40.29	5.09	Average	---	---
4	5350.00	60.12	74.00	-13.88	55.03	5.09	Peak	---	---
5	10640.00	42.24	54.00	-11.76	27.26	14.98	Average	---	---
6	10640.00	55.71	74.00	-18.29	40.73	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical	Test Configuration	1

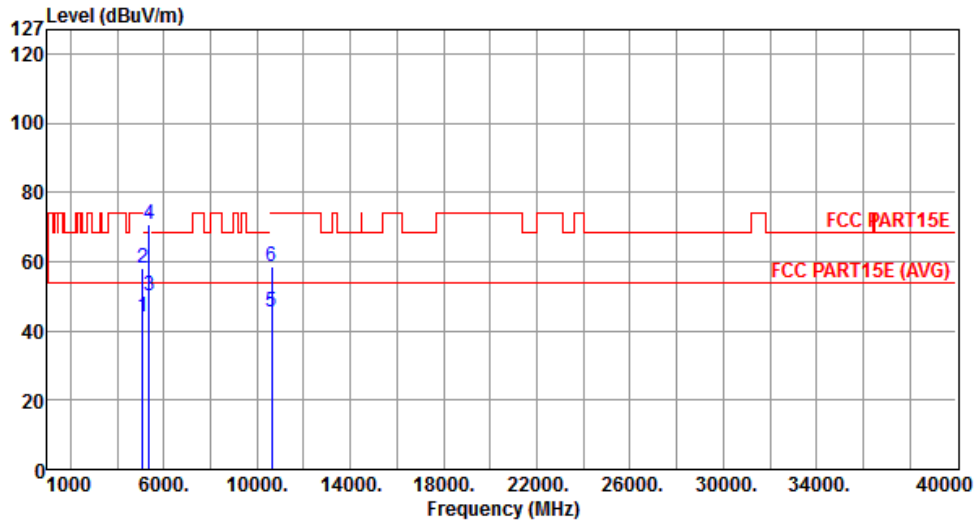


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.10	54.00	-9.90	39.27	4.83	Average	---	---
2	5097.00	57.97	74.00	-16.03	53.14	4.83	Peak	---	---
3	5350.00	50.23	54.00	-3.77	45.14	5.09	Average	---	---
4	5350.00	70.61	74.00	-3.39	65.52	5.09	Peak	---	---
5	10640.00	45.63	54.00	-8.37	30.65	14.98	Average	---	---
6	10640.00	58.45	74.00	-15.55	43.47	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal	Test Configuration	1

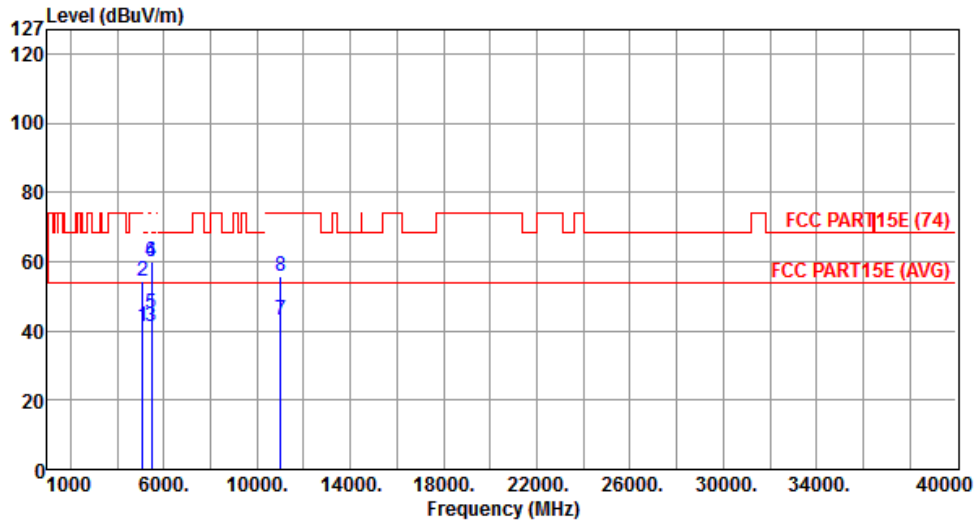


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.04	54.00	-12.96	36.21	4.83	Average	---	---
2	5097.00	54.35	74.00	-19.65	49.52	4.83	Peak	---	---
3	5460.00	41.34	54.00	-12.66	36.16	5.18	Average	---	---
4	5460.00	59.82	74.00	-14.18	54.64	5.18	Peak	---	---
5	5470.00	44.93	54.00	-9.07	39.74	5.19	Average	---	---
6	5470.00	60.04	74.00	-13.96	54.85	5.19	Peak	---	---
7	11000.00	42.92	54.00	-11.08	27.64	15.28	Average	---	---
8	11000.00	55.99	74.00	-18.01	40.71	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical	Test Configuration	1

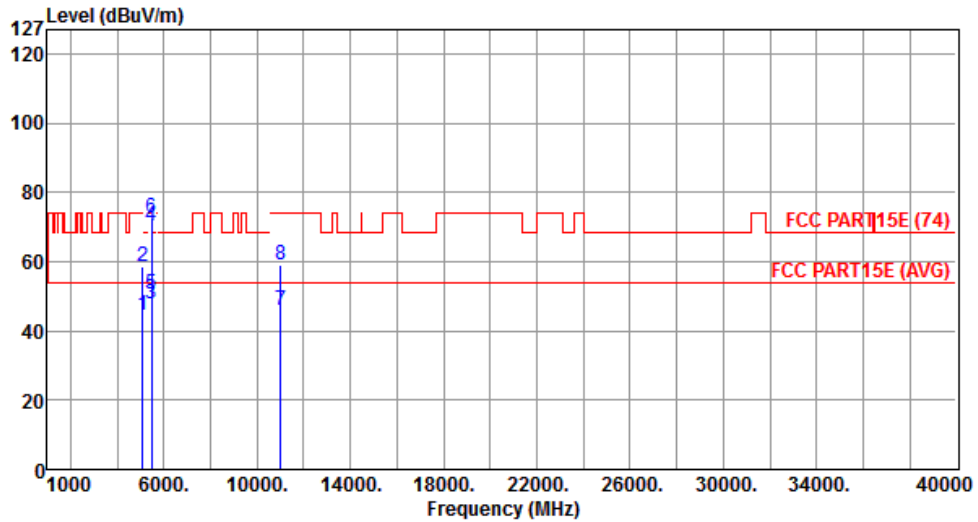


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.63	54.00	-9.37	39.80	4.83	Average	---	---
2	5097.00	58.47	74.00	-15.53	53.64	4.83	Peak	---	---
3	5460.00	47.93	54.00	-6.07	42.75	5.18	Average	---	---
4	5460.00	70.06	74.00	-3.94	64.88	5.18	Peak	---	---
5	5470.00	50.77	54.00	-3.23	45.58	5.19	Average	---	---
6	5470.00	72.85	74.00	-1.15	67.66	5.19	Peak	---	---
7	11000.00	45.91	54.00	-8.09	30.63	15.28	Average	---	---
8	11000.00	59.20	74.00	-14.80	43.92	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal	Test Configuration	1

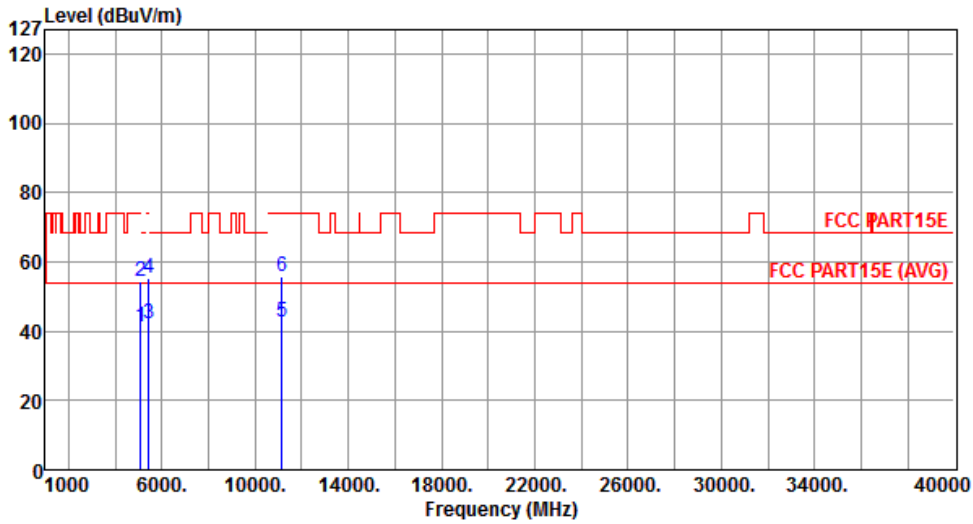


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.26	54.00	-12.74	36.43	4.83	Average	---	---
2	5097.00	54.40	74.00	-19.60	49.57	4.83	Peak	---	---
3	5427.00	42.26	54.00	-11.74	37.12	5.14	Average	---	---
4	5427.00	55.27	74.00	-18.73	50.13	5.14	Peak	---	---
5	11160.00	42.53	54.00	-11.47	27.35	15.18	Average	---	---
6	11160.00	55.62	74.00	-18.38	40.44	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical	Test Configuration	1

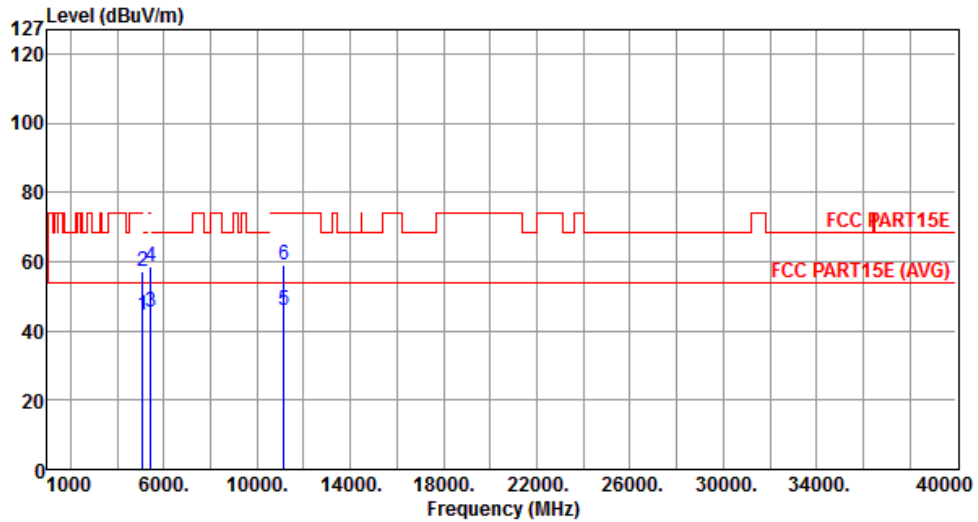


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.37	54.00	-9.63	39.54	4.83	Average	---	---
2	5097.00	57.03	74.00	-16.97	52.20	4.83	Peak	---	---
3	5427.00	45.34	54.00	-8.66	40.20	5.14	Average	---	---
4	5427.00	58.68	74.00	-15.32	53.54	5.14	Peak	---	---
5	11160.00	46.15	54.00	-7.85	30.97	15.18	Average	---	---
6	11160.00	59.02	74.00	-14.98	43.84	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal	Test Configuration	1

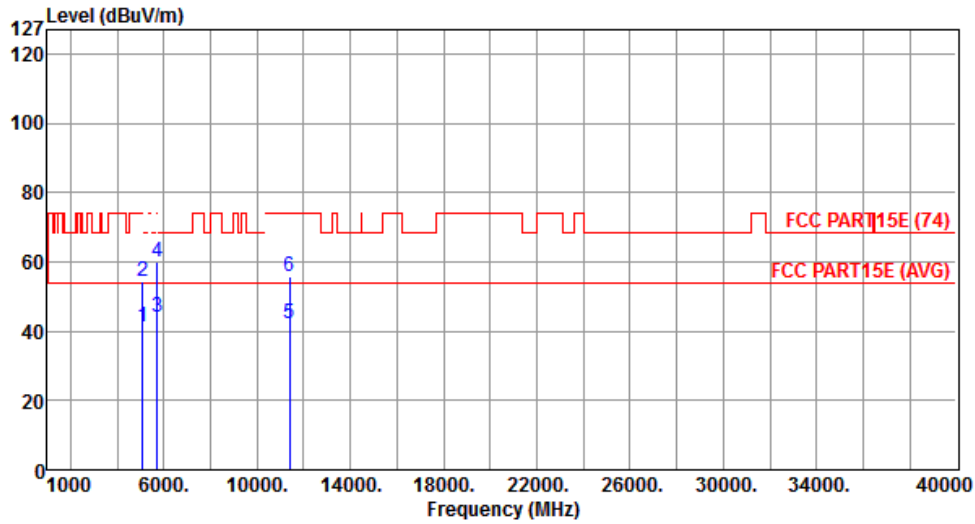


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.31	54.00	-12.69	36.48	4.83	Average	---	---
2	5097.00	54.56	74.00	-19.44	49.73	4.83	Peak	---	---
3	5725.00	44.21	54.00	-9.79	38.65	5.56	Average	---	---
4	5725.00	60.08	74.00	-13.92	54.52	5.56	Peak	---	---
5	11400.00	42.36	54.00	-11.64	27.33	15.03	Average	---	---
6	11400.00	55.59	74.00	-18.41	40.56	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical	Test Configuration	1

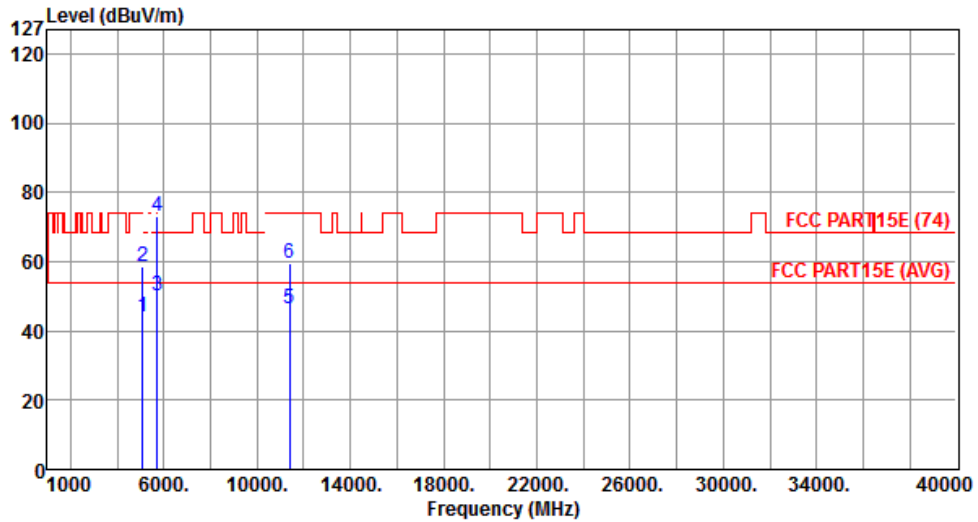


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.08	54.00	-9.92	39.25	4.83	Average	---	---
2	5097.00	58.41	74.00	-15.59	53.58	4.83	Peak	---	---
3	5725.00	49.98	54.00	-4.02	44.42	5.56	Average	---	---
4	5725.00	72.94	74.00	-1.06	67.38	5.56	Peak	---	---
5	11400.00	46.28	54.00	-7.72	31.25	15.03	Average	---	---
6	11400.00	59.60	74.00	-14.40	44.57	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal	Test Configuration	1

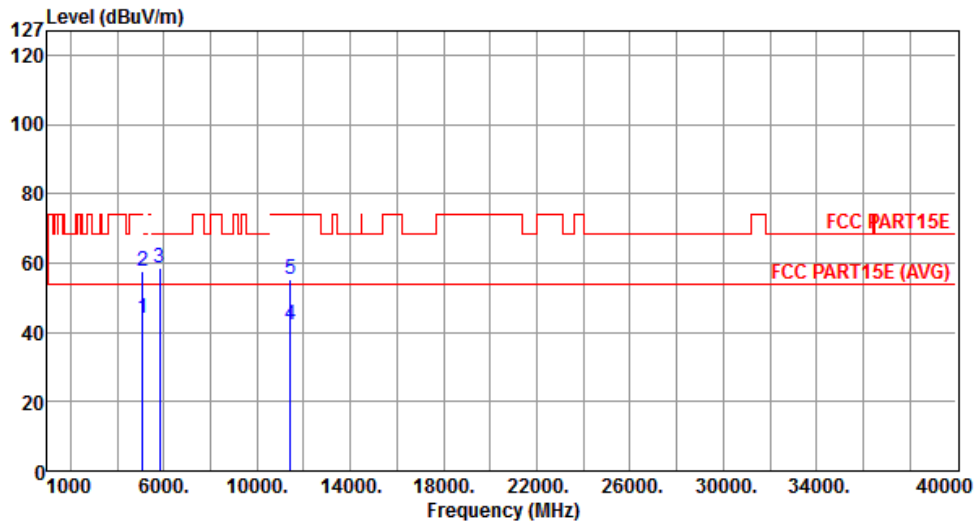


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.17	54.00	-9.83	38.68	5.49	Average	---	---
2	5097.00	57.64	74.00	-16.36	52.15	5.49	Peak	---	---
3	5825.00	58.37	68.20	-9.83	52.75	5.62	Peak	---	---
4	11440.00	42.30	54.00	-11.70	27.64	14.66	Average	---	---
5	11440.00	55.24	74.00	-18.76	40.58	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical	Test Configuration	1

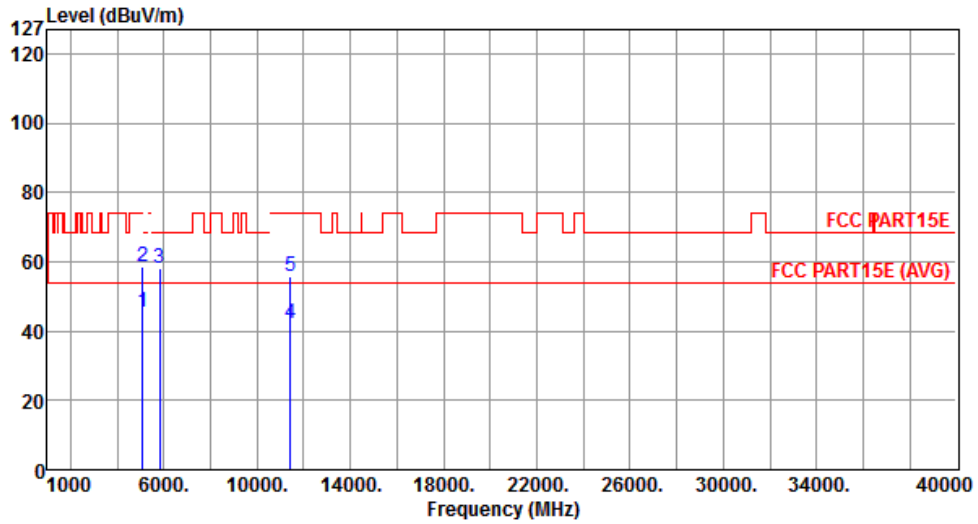


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.31	54.00	-8.69	39.82	5.49	Average	---	---
2	5097.00	58.35	74.00	-15.65	52.86	5.49	Peak	---	---
3	5825.00	58.32	68.20	-9.88	52.70	5.62	Peak	---	---
4	11440.00	42.30	54.00	-11.70	27.64	14.66	Average	---	---
5	11440.00	55.92	74.00	-18.08	41.26	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal	Test Configuration	2

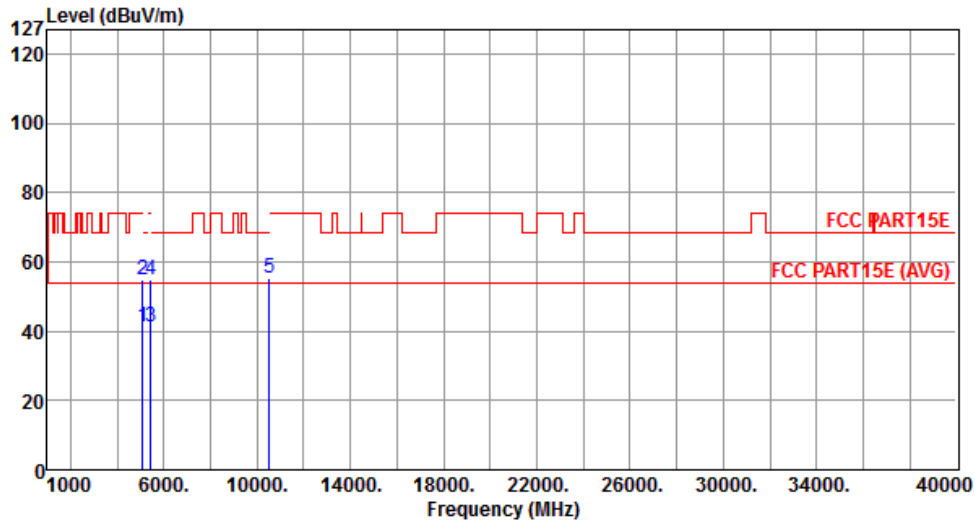


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.27	54.00	-12.73	36.44	4.83	Average	---	---
2	5097.00	54.66	74.00	-19.34	49.83	4.83	Peak	---	---
3	5427.00	41.47	54.00	-12.53	36.33	5.14	Average	---	---
4	5427.00	54.73	74.00	-19.27	49.59	5.14	Peak	---	---
5	10520.00	55.19	68.30	-13.11	40.32	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical	Test Configuration	2

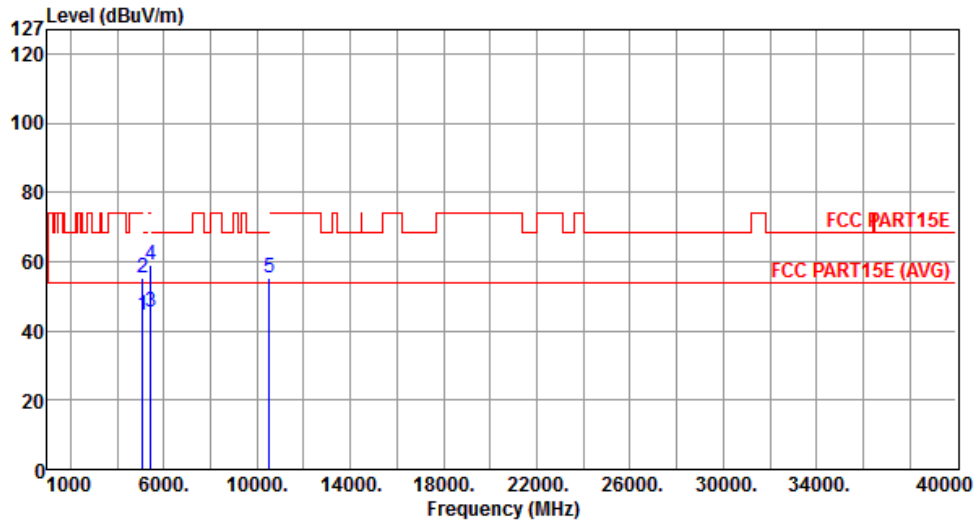


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.34	54.00	-9.66	39.51	4.83	Average	---	---
2	5097.00	55.25	74.00	-18.75	50.42	4.83	Peak	---	---
3	5427.00	45.57	54.00	-8.43	40.43	5.14	Average	---	---
4	5427.00	58.82	74.00	-15.18	53.68	5.14	Peak	---	---
5	10520.00	55.44	68.30	-12.86	40.57	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal	Test Configuration	2

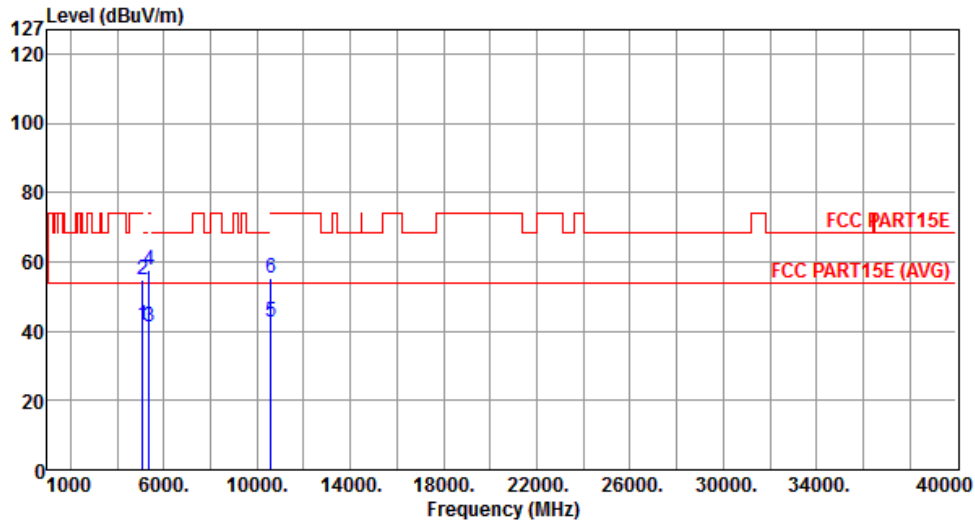


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.63	54.00	-12.37	36.80	4.83	Average	---	---
2	5097.00	55.06	74.00	-18.94	50.23	4.83	Peak	---	---
3	5350.00	41.33	54.00	-12.67	36.24	5.09	Average	---	---
4	5350.00	57.69	74.00	-16.31	52.60	5.09	Peak	---	---
5	10600.00	42.47	54.00	-11.53	27.53	14.94	Average	---	---
6	10600.00	55.21	74.00	-18.79	40.27	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical	Test Configuration	2

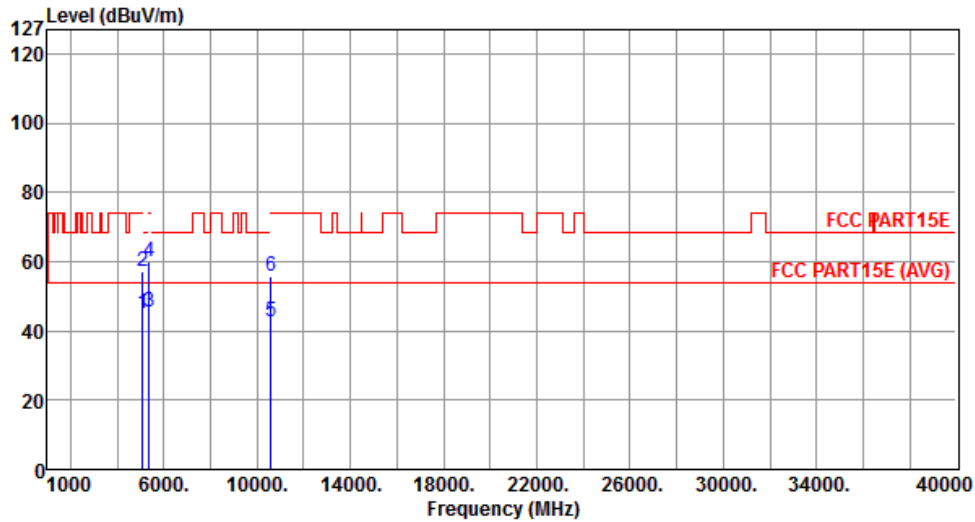


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.77	54.00	-9.23	39.94	4.83	Average	---	---
2	5097.00	57.05	74.00	-16.95	52.22	4.83	Peak	---	---
3	5350.00	45.65	54.00	-8.35	40.56	5.09	Average	---	---
4	5350.00	59.97	74.00	-14.03	54.88	5.09	Peak	---	---
5	10600.00	42.62	54.00	-11.38	27.68	14.94	Average	---	---
6	10600.00	55.56	74.00	-18.44	40.62	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal	Test Configuration	2

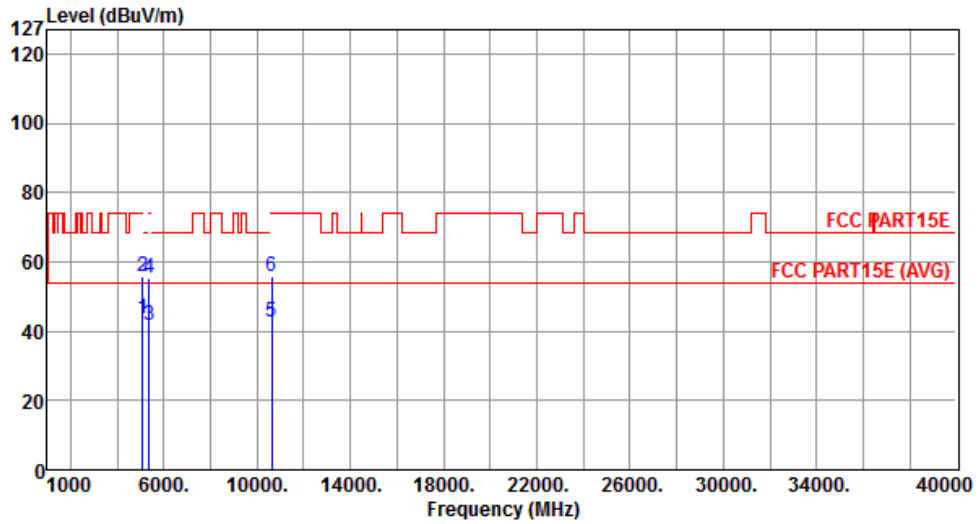


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.48	54.00	-10.52	38.65	4.83	Average	---	---
2	5097.00	55.67	74.00	-18.33	50.84	4.83	Peak	---	---
3	5350.00	41.57	54.00	-12.43	36.48	5.09	Average	---	---
4	5350.00	55.23	74.00	-18.77	50.14	5.09	Peak	---	---
5	10640.00	42.46	54.00	-11.54	27.48	14.98	Average	---	---
6	10640.00	55.65	74.00	-18.35	40.67	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical	Test Configuration	2

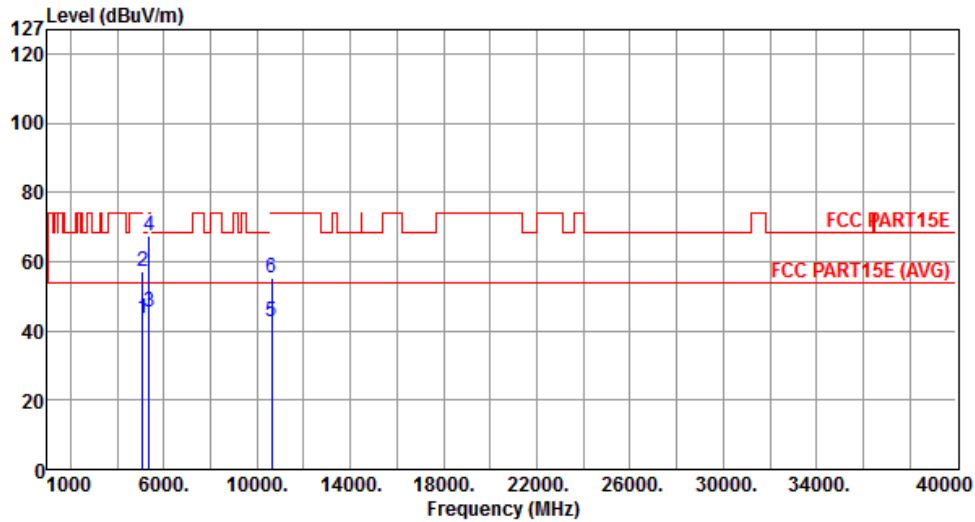


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.43	54.00	-10.57	38.60	4.83	Average	---	---
2	5097.00	57.04	74.00	-16.96	52.21	4.83	Peak	---	---
3	5350.00	45.25	54.00	-8.75	40.16	5.09	Average	---	---
4	5350.00	67.50	74.00	-6.50	62.41	5.09	Peak	---	---
5	10640.00	42.60	54.00	-11.40	27.62	14.98	Average	---	---
6	10640.00	55.33	74.00	-18.67	40.35	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal	Test Configuration	2

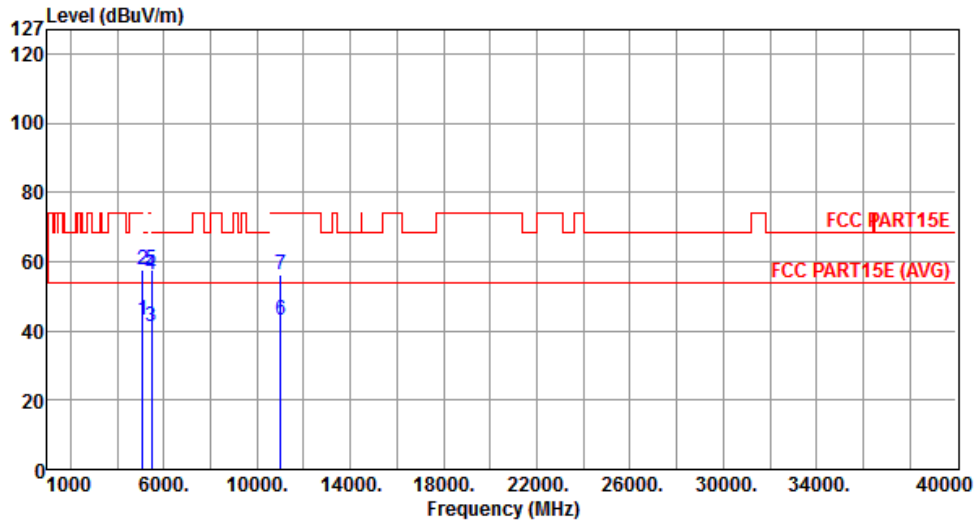


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.23	54.00	-10.77	38.40	4.83	Average	---	---
2	5097.00	57.49	74.00	-16.51	52.66	4.83	Peak	---	---
3	5460.00	41.41	54.00	-12.59	36.23	5.18	Average	---	---
4	5460.00	56.40	74.00	-17.60	51.22	5.18	Peak	---	---
5	5470.00	57.63	68.30	-10.67	52.44	5.19	Peak	---	---
6	11000.00	42.93	54.00	-11.07	27.65	15.28	Average	---	---
7	11000.00	56.10	74.00	-17.90	40.82	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical	Test Configuration	2

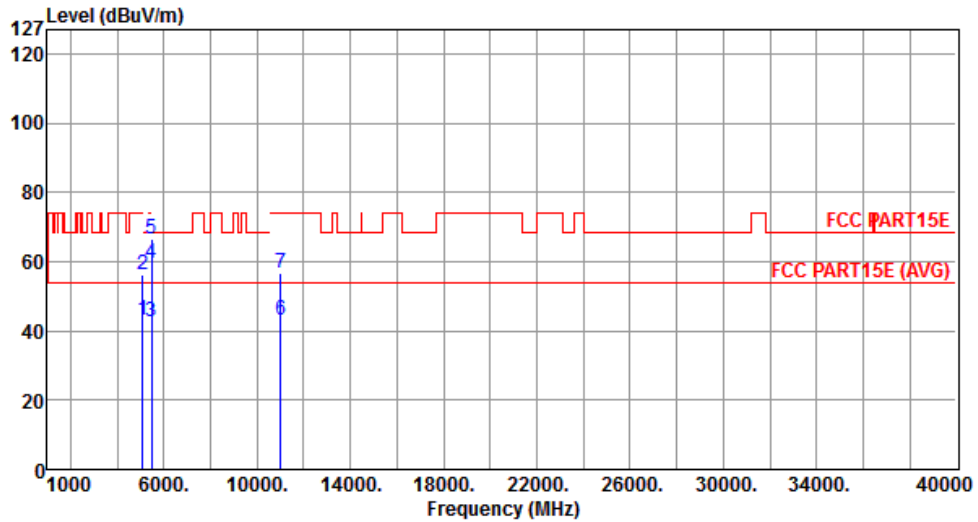


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.27	54.00	-10.73	38.44	4.83	Average	---	---
2	5097.00	56.29	74.00	-17.71	51.46	4.83	Peak	---	---
3	5460.00	42.82	54.00	-11.18	37.64	5.18	Average	---	---
4	5460.00	59.46	74.00	-14.54	54.28	5.18	Peak	---	---
5	5470.00	66.31	68.30	-1.99	61.12	5.19	Peak	---	---
6	11000.00	42.92	54.00	-11.08	27.64	15.28	Average	---	---
7	11000.00	56.55	74.00	-17.45	41.27	15.28	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal	Test Configuration	2

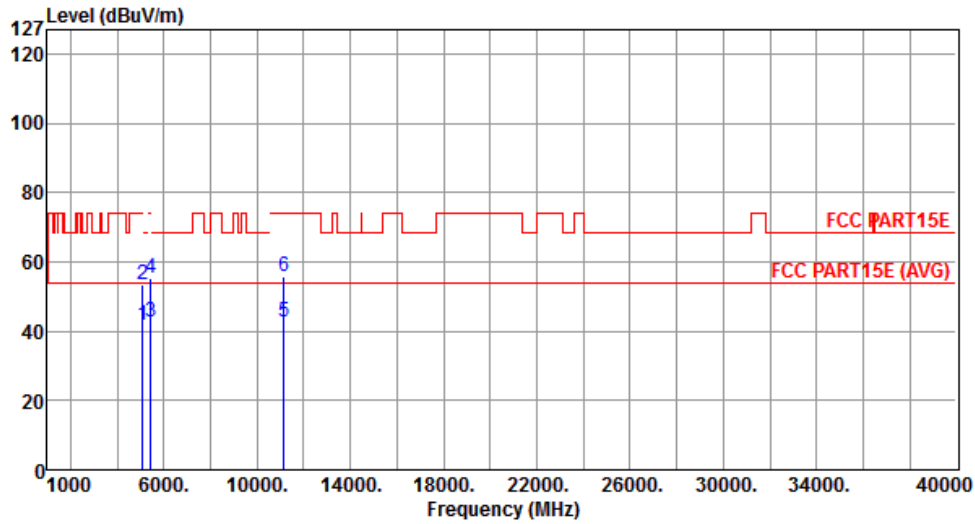


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.71	54.00	-12.29	36.88	4.83	Average	---	---
2	5097.00	53.54	74.00	-20.46	48.71	4.83	Peak	---	---
3	5427.00	42.67	54.00	-11.33	37.53	5.14	Average	---	---
4	5427.00	55.18	74.00	-18.82	50.04	5.14	Peak	---	---
5	11160.00	42.51	54.00	-11.49	27.33	15.18	Average	---	---
6	11160.00	55.75	74.00	-18.25	40.57	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical	Test Configuration	2

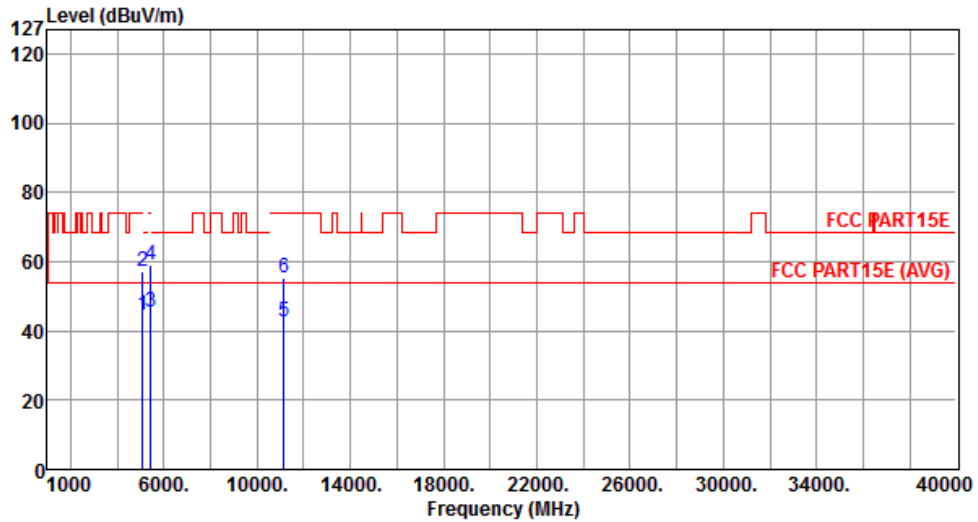


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.40	54.00	-9.60	39.57	4.83	Average	---	---
2	5097.00	57.29	74.00	-16.71	52.46	4.83	Peak	---	---
3	5427.00	45.26	54.00	-8.74	40.12	5.14	Average	---	---
4	5427.00	59.10	74.00	-14.90	53.96	5.14	Peak	---	---
5	11160.00	42.45	54.00	-11.55	27.27	15.18	Average	---	---
6	11160.00	55.47	74.00	-18.53	40.29	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal	Test Configuration	2

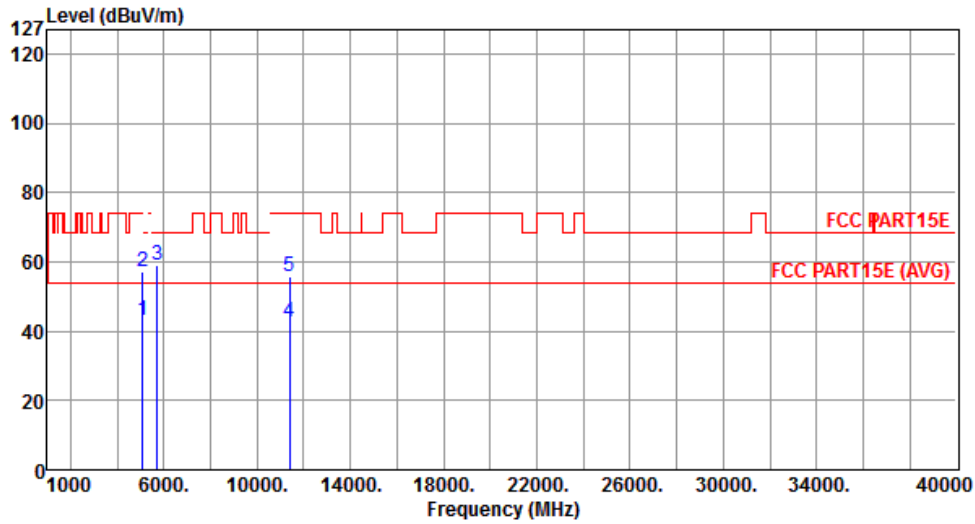


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.24	54.00	-10.76	38.41	4.83	Average	---	---
2	5097.00	57.00	74.00	-17.00	52.17	4.83	Peak	---	---
3	5725.00	58.83	68.30	-9.47	53.27	5.56	Peak	---	---
4	11400.00	42.51	54.00	-11.49	27.48	15.03	Average	---	---
5	11400.00	55.95	74.00	-18.05	40.92	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical	Test Configuration	2

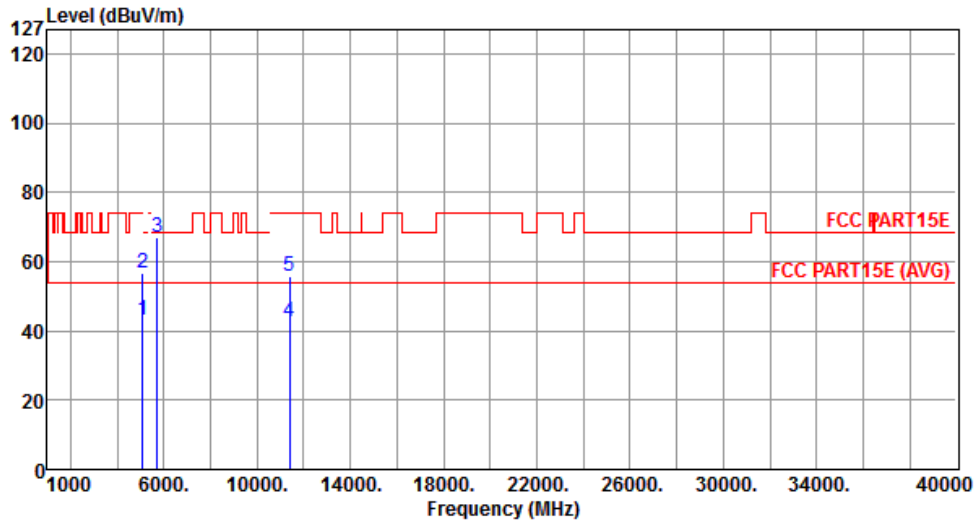


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.31	54.00	-10.69	38.48	4.83	Average	---	---
2	5097.00	56.51	74.00	-17.49	51.68	4.83	Peak	---	---
3	5725.00	67.15	68.30	-1.15	61.59	5.56	Peak	---	---
4	11400.00	42.71	54.00	-11.29	27.68	15.03	Average	---	---
5	11400.00	55.62	74.00	-18.38	40.59	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal	Test Configuration	2

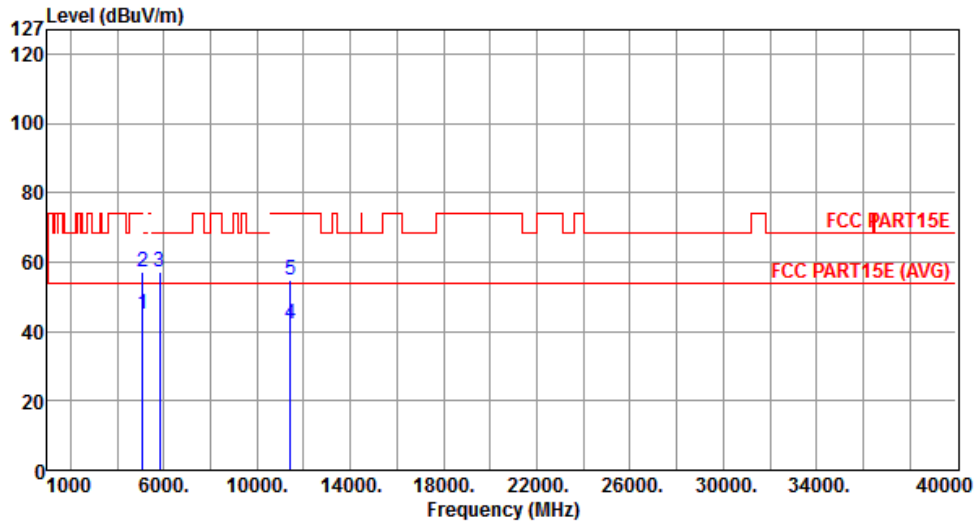


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.82	54.00	-9.18	39.33	5.49	Average	---	---
2	5097.00	57.14	74.00	-16.86	51.65	5.49	Peak	---	---
3	5825.00	57.06	68.20	-11.14	51.44	5.62	Peak	---	---
4	11440.00	42.32	54.00	-11.68	27.66	14.66	Average	---	---
5	11440.00	55.04	74.00	-18.96	40.38	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical	Test Configuration	2

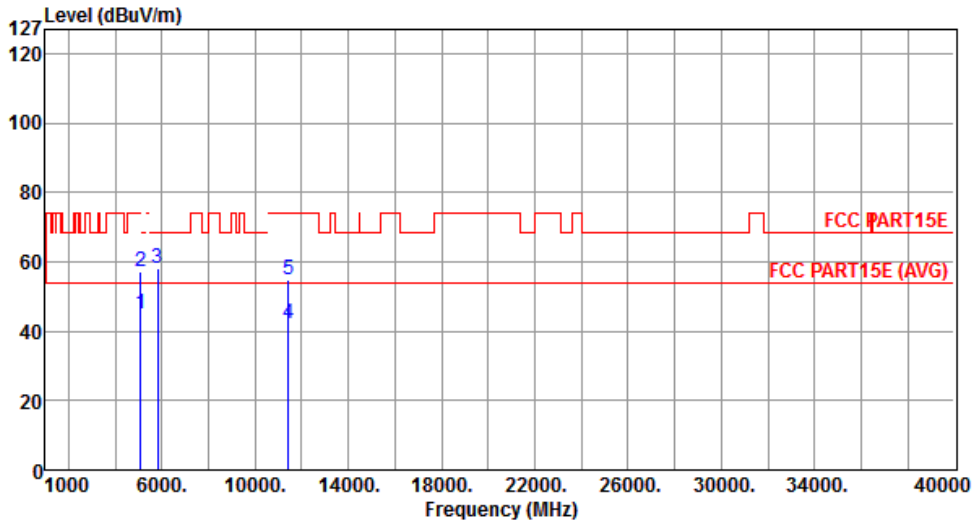


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.12	54.00	-8.88	39.63	5.49	Average	---	---
2	5097.00	56.96	74.00	-17.04	51.47	5.49	Peak	---	---
3	5825.00	58.15	68.20	-10.05	52.53	5.62	Peak	---	---
4	11440.00	42.20	54.00	-11.80	27.54	14.66	Average	---	---
5	11440.00	54.91	74.00	-19.09	40.25	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal	Test Configuration	3

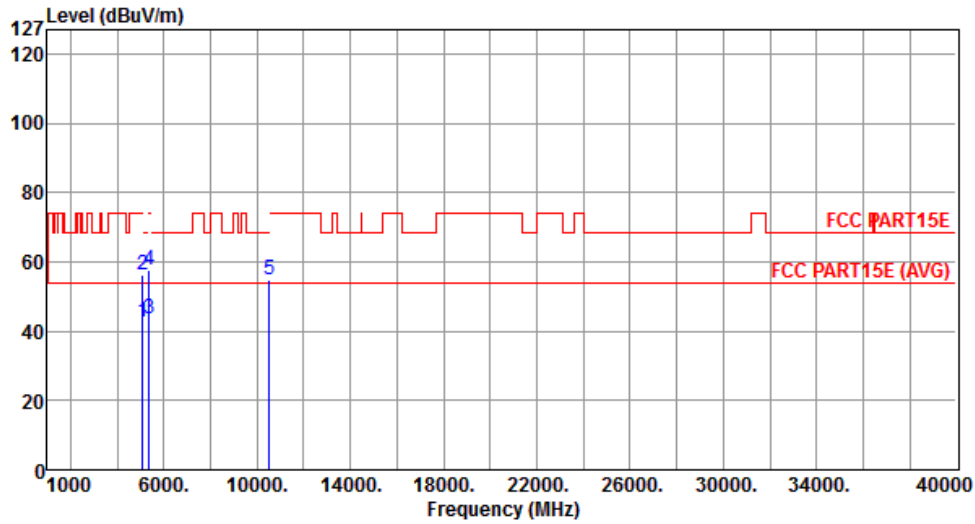


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.78	54.00	-11.22	37.95	4.83	Average	---	---
2	5097.00	56.20	74.00	-17.80	51.37	4.83	Peak	---	---
3	5350.00	43.81	54.00	-10.19	38.72	5.09	Average	---	---
4	5350.00	57.55	74.00	-16.45	52.46	5.09	Peak	---	---
5	10520.00	54.91	68.30	-13.39	40.04	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical	Test Configuration	3

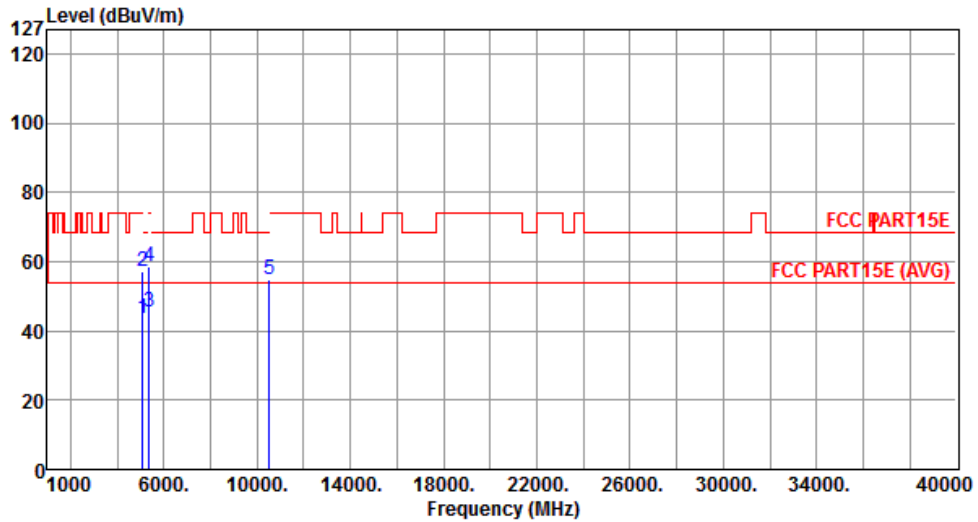


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.41	54.00	-10.59	38.58	4.83	Average	---	---
2	5097.00	57.13	74.00	-16.87	52.30	4.83	Peak	---	---
3	5350.00	45.24	54.00	-8.76	40.15	5.09	Average	---	---
4	5350.00	58.35	74.00	-15.65	53.26	5.09	Peak	---	---
5	10520.00	55.06	68.30	-13.24	40.19	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal	Test Configuration	3

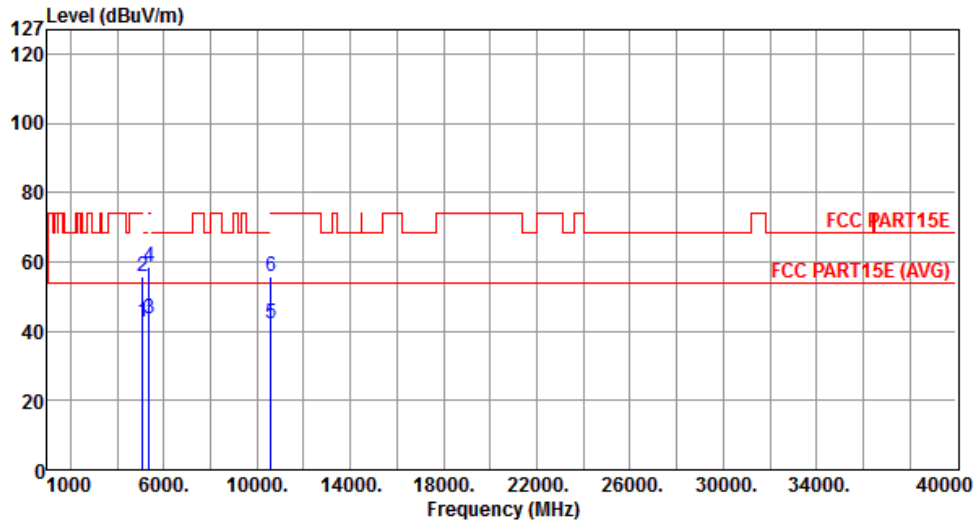


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.44	54.00	-11.56	37.61	4.83	Average	---	---
2	5097.00	55.96	74.00	-18.04	51.13	4.83	Peak	---	---
3	5350.00	43.55	54.00	-10.45	38.46	5.09	Average	---	---
4	5350.00	58.36	74.00	-15.64	53.27	5.09	Peak	---	---
5	10600.00	42.27	54.00	-11.73	27.33	14.94	Average	---	---
6	10600.00	55.62	74.00	-18.38	40.68	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical	Test Configuration	3

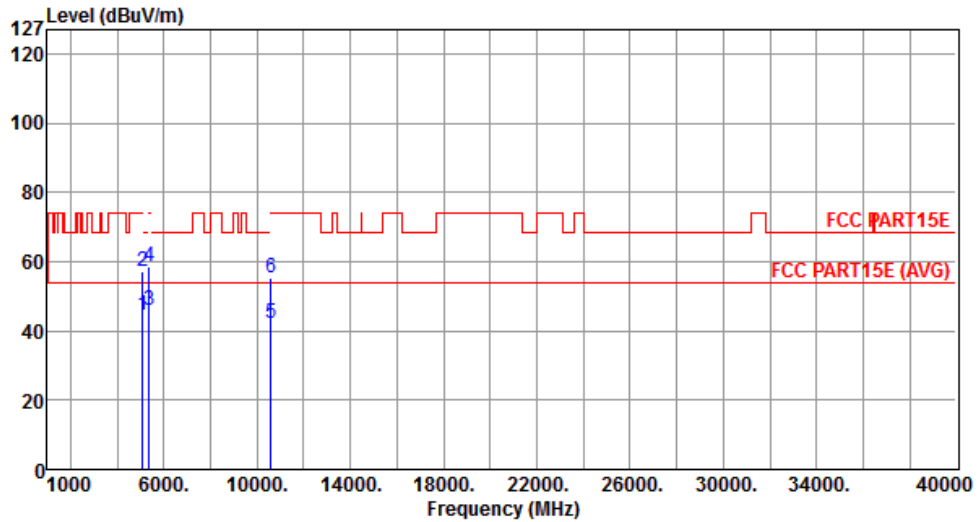


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.31	54.00	-9.69	39.48	4.83	Average	---	---
2	5097.00	57.20	74.00	-16.80	52.37	4.83	Peak	---	---
3	5350.00	45.76	54.00	-8.24	40.67	5.09	Average	---	---
4	5350.00	58.54	74.00	-15.46	53.45	5.09	Peak	---	---
5	10600.00	42.20	54.00	-11.80	27.26	14.94	Average	---	---
6	10600.00	55.28	74.00	-18.72	40.34	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal	Test Configuration	3

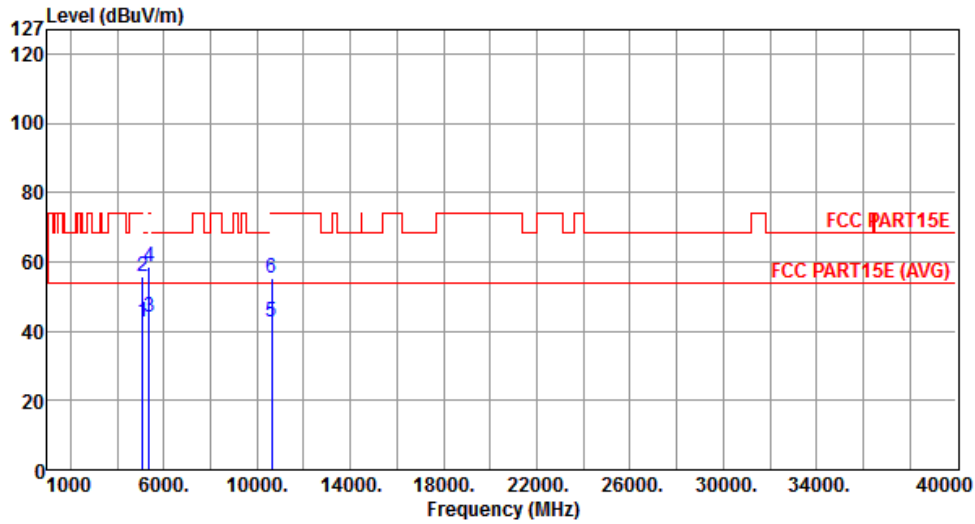


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.50	54.00	-11.50	37.67	4.83	Average	---	---
2	5097.00	55.71	74.00	-18.29	50.88	4.83	Peak	---	---
3	5350.00	43.85	54.00	-10.15	38.76	5.09	Average	---	---
4	5350.00	58.65	74.00	-15.35	53.56	5.09	Peak	---	---
5	10640.00	42.46	54.00	-11.54	27.48	14.98	Average	---	---
6	10640.00	55.41	74.00	-18.59	40.43	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical	Test Configuration	3

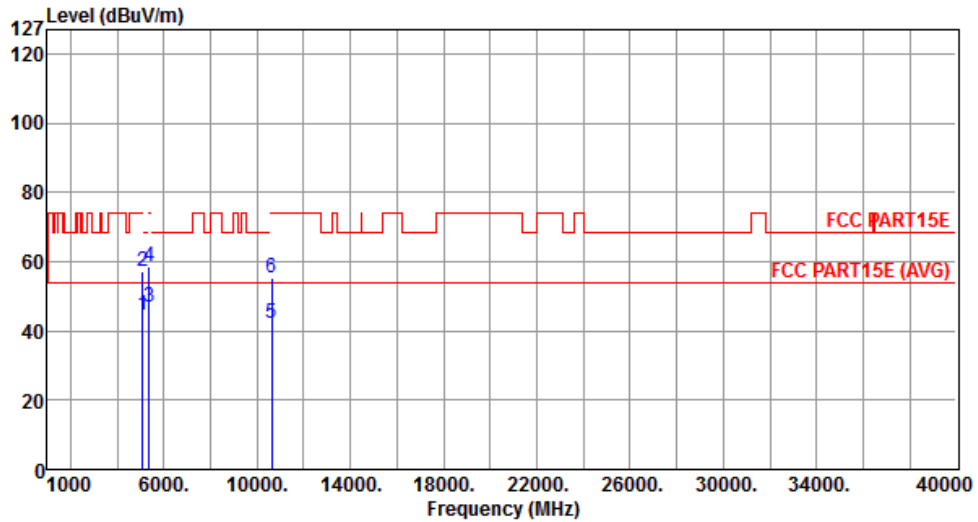


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.46	54.00	-9.54	39.63	4.83	Average	---	---
2	5097.00	57.13	74.00	-16.87	52.30	4.83	Peak	---	---
3	5350.00	46.66	54.00	-7.34	41.57	5.09	Average	---	---
4	5350.00	58.55	74.00	-15.45	53.46	5.09	Peak	---	---
5	10640.00	42.01	54.00	-11.99	27.03	14.98	Average	---	---
6	10640.00	55.19	74.00	-18.81	40.21	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal	Test Configuration	3

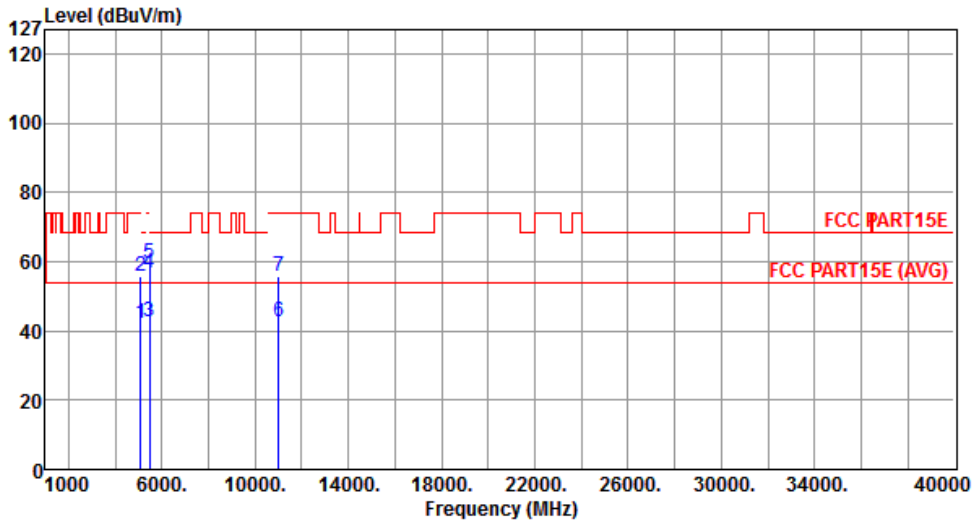


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.07	54.00	-11.93	37.24	4.83	Average	---	---
2	5097.00	55.85	74.00	-18.15	51.02	4.83	Peak	---	---
3	5460.00	42.82	54.00	-11.18	37.64	5.18	Average	---	---
4	5460.00	56.73	74.00	-17.27	51.55	5.18	Peak	---	---
5	5470.00	59.55	68.30	-8.75	54.36	5.19	Peak	---	---
6	11000.00	42.44	54.00	-11.56	27.16	15.28	Average	---	---
7	11000.00	55.83	74.00	-18.17	40.55	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical	Test Configuration	3

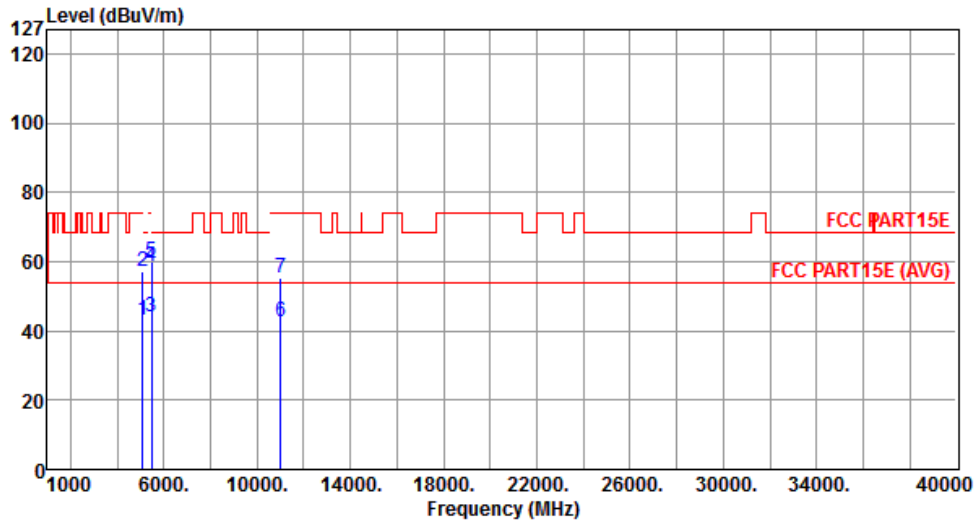


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.24	54.00	-10.76	38.41	4.83	Average	---	---
2	5097.00	57.23	74.00	-16.77	52.40	4.83	Peak	---	---
3	5460.00	44.20	54.00	-9.80	39.02	5.18	Average	---	---
4	5460.00	58.67	74.00	-15.33	53.49	5.18	Peak	---	---
5	5470.00	59.87	68.30	-8.43	54.68	5.19	Peak	---	---
6	11000.00	42.47	54.00	-11.53	27.19	15.28	Average	---	---
7	11000.00	55.52	74.00	-18.48	40.24	15.28	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal	Test Configuration	3

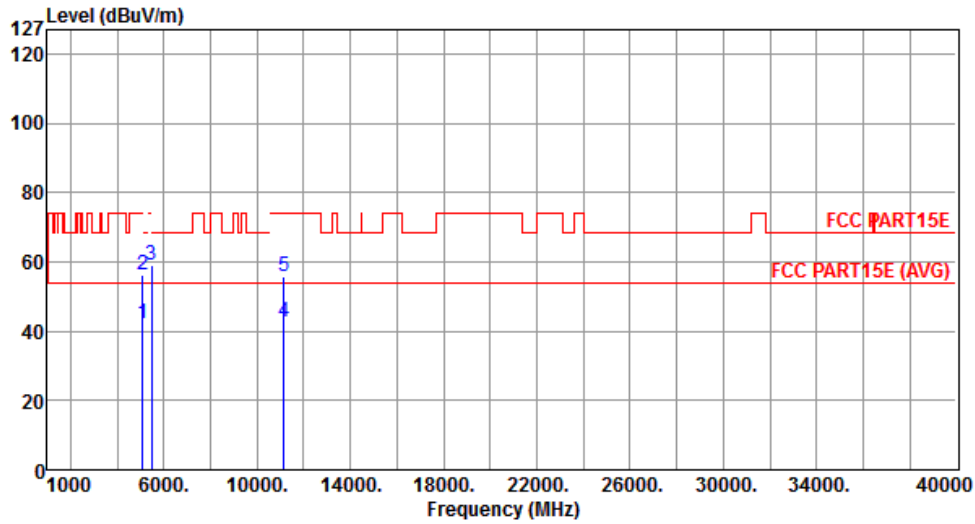


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.35	54.00	-11.65	37.52	4.83	Average	---	---
2	5097.00	56.08	74.00	-17.92	51.25	4.83	Peak	---	---
3	5470.00	58.83	68.30	-9.47	53.64	5.19	Peak	---	---
4	11160.00	42.54	54.00	-11.46	27.36	15.18	Average	---	---
5	11160.00	55.73	74.00	-18.27	40.55	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical	Test Configuration	3

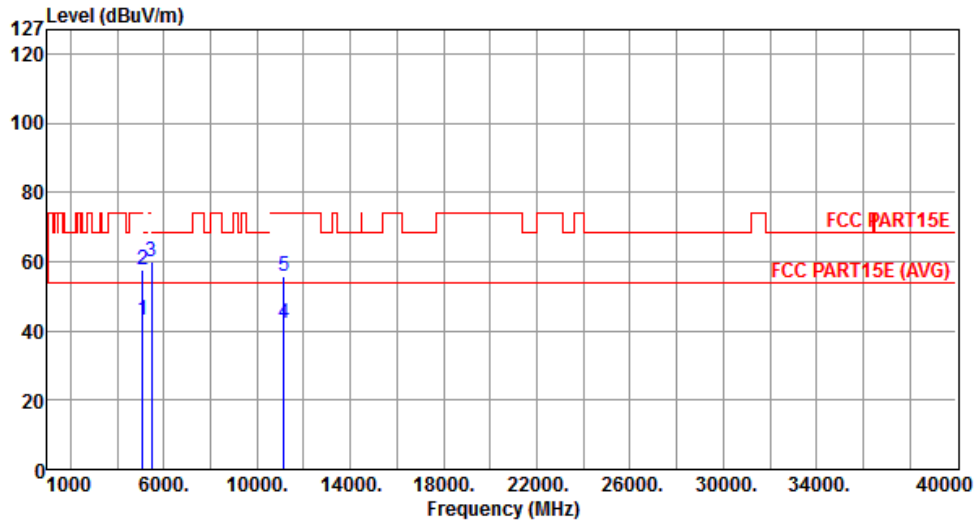


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.28	54.00	-10.72	38.45	4.83	Average	---	---
2	5097.00	57.51	74.00	-16.49	52.68	4.83	Peak	---	---
3	5470.00	60.01	68.30	-8.29	54.82	5.19	Peak	---	---
4	11160.00	42.31	54.00	-11.69	27.13	15.18	Average	---	---
5	11160.00	55.61	74.00	-18.39	40.43	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal	Test Configuration	3

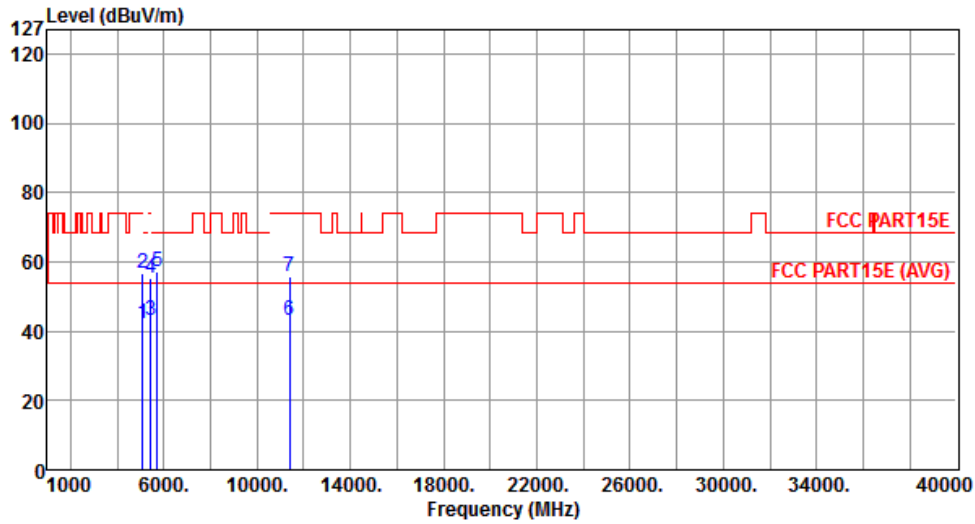


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.11	54.00	-11.89	37.28	4.83	Average	---	---
2	5097.00	56.64	74.00	-17.36	51.81	4.83	Peak	---	---
3	5427.00	43.08	54.00	-10.92	37.94	5.14	Average	---	---
4	5427.00	55.46	74.00	-18.54	50.32	5.14	Peak	---	---
5	5725.00	57.19	68.30	-11.11	51.63	5.56	Peak	---	---
6	11400.00	42.92	54.00	-11.08	27.89	15.03	Average	---	---
7	11400.00	55.59	74.00	-18.41	40.56	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical	Test Configuration	3

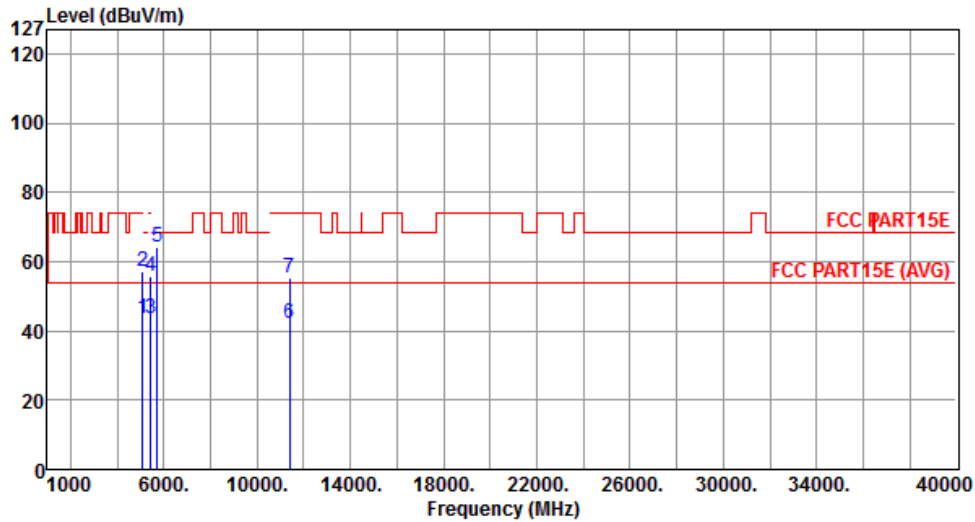


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.56	54.00	-10.44	38.73	4.83	Average	---	---
2	5097.00	57.23	74.00	-16.77	52.40	4.83	Peak	---	---
3	5427.00	43.57	54.00	-10.43	38.43	5.14	Average	---	---
4	5427.00	55.72	74.00	-18.28	50.58	5.14	Peak	---	---
5	5725.00	64.01	68.30	-4.29	58.45	5.56	Peak	---	---
6	11400.00	42.36	54.00	-11.64	27.33	15.03	Average	---	---
7	11400.00	55.27	74.00	-18.73	40.24	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal	Test Configuration	3

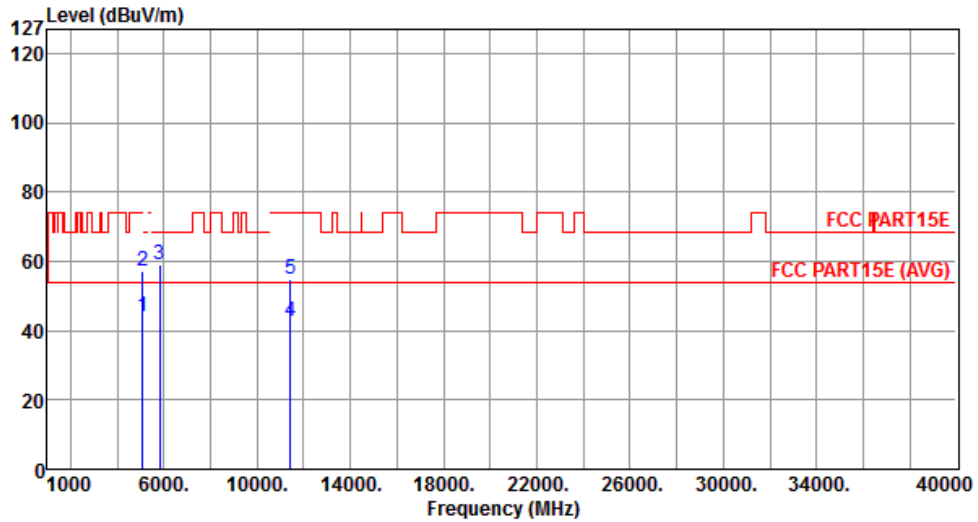


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.01	54.00	-9.99	38.52	5.49	Average	---	---
2	5097.00	57.17	74.00	-16.83	51.68	5.49	Peak	---	---
3	5825.00	58.94	68.20	-9.26	53.32	5.62	Peak	---	---
4	11440.00	42.79	54.00	-11.21	28.13	14.66	Average	---	---
5	11440.00	55.04	74.00	-18.96	40.38	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical	Test Configuration	3

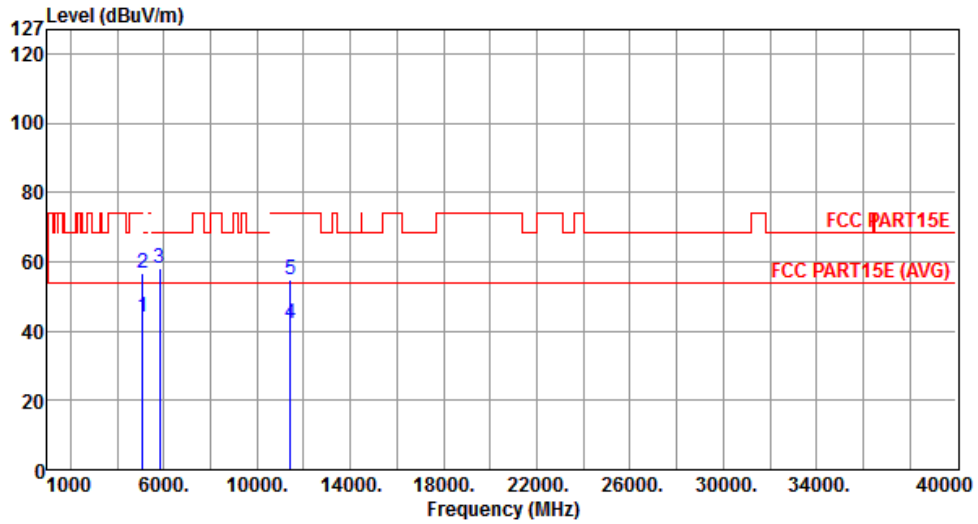


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.94	54.00	-10.06	38.45	5.49	Average	---	---
2	5097.00	56.77	74.00	-17.23	51.28	5.49	Peak	---	---
3	5825.00	58.17	68.20	-10.03	52.55	5.62	Peak	---	---
4	11440.00	42.10	54.00	-11.90	27.44	14.66	Average	---	---
5	11440.00	54.92	74.00	-19.08	40.26	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal	Test Configuration	4

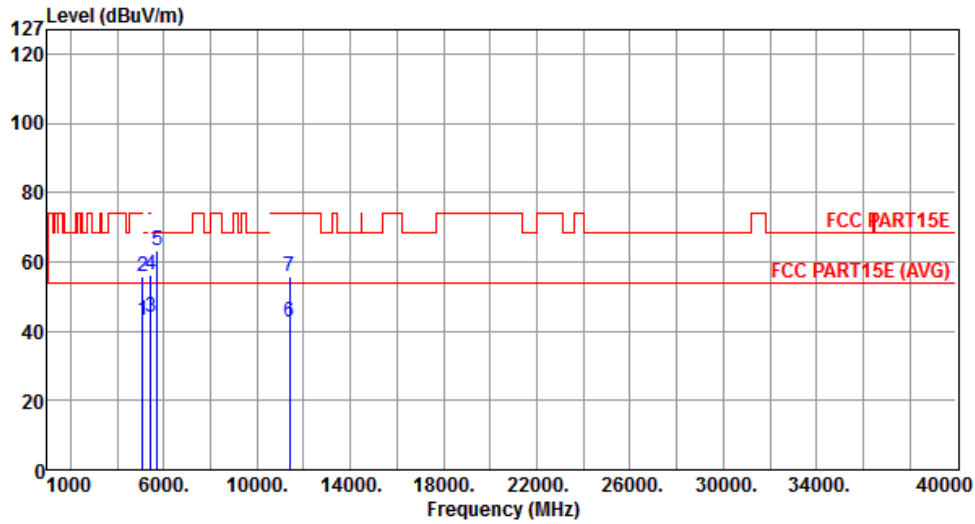


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.98	54.00	-11.02	38.15	4.83	Average	---	---
2	5097.00	55.71	74.00	-18.29	50.88	4.83	Peak	---	---
3	5427.00	43.89	54.00	-10.11	38.75	5.14	Average	---	---
4	5427.00	56.13	74.00	-17.87	50.99	5.14	Peak	---	---
5	5725.00	63.33	68.30	-4.97	57.77	5.56	Peak	---	---
6	11400.00	42.46	54.00	-11.54	27.43	15.03	Average	---	---
7	11400.00	55.62	74.00	-18.38	40.59	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical	Test Configuration	4

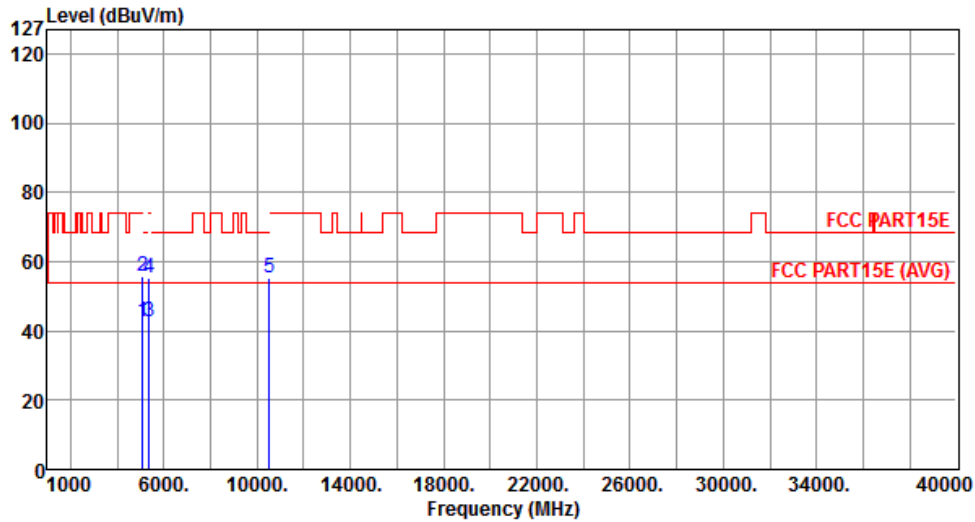


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.47	54.00	-11.53	37.64	4.83	Average	---	---
2	5097.00	55.65	74.00	-18.35	50.82	4.83	Peak	---	---
3	5350.00	42.76	54.00	-11.24	37.67	5.09	Average	---	---
4	5350.00	55.43	74.00	-18.57	50.34	5.09	Peak	---	---
5	10520.00	55.36	68.30	-12.94	40.49	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal	Test Configuration	4

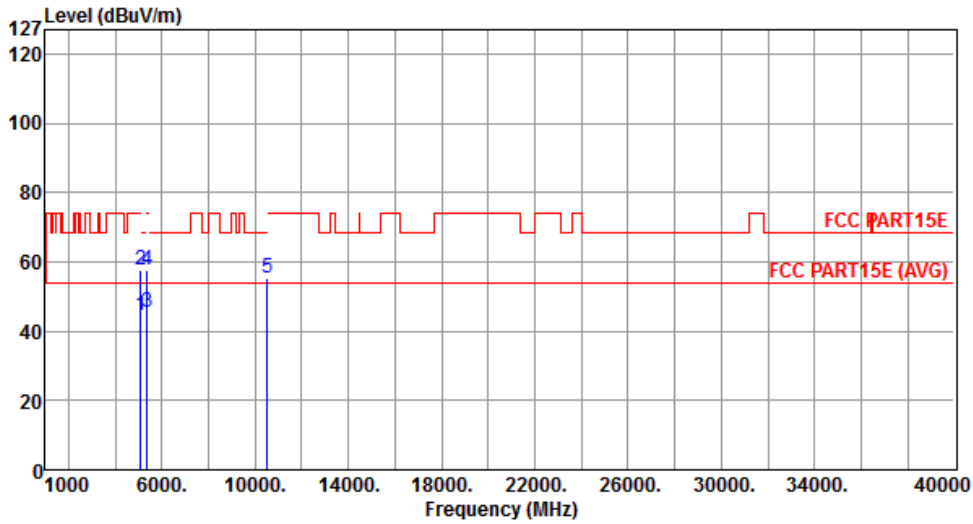


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.70	54.00	-9.30	39.87	4.83	Average	---	---
2	5097.00	57.77	74.00	-16.23	52.94	4.83	Peak	---	---
3	5350.00	45.62	54.00	-8.38	40.53	5.09	Average	---	---
4	5350.00	57.57	74.00	-16.43	52.48	5.09	Peak	---	---
5	10520.00	55.46	68.30	-12.84	40.59	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical	Test Configuration	4

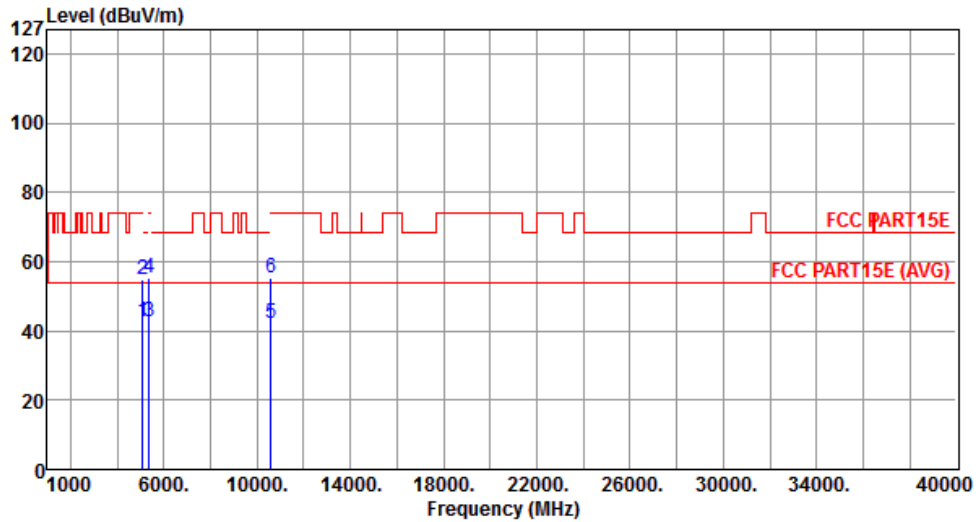


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.46	54.00	-11.54	37.63	4.83	Average	---	---
2	5097.00	54.99	74.00	-19.01	50.16	4.83	Peak	---	---
3	5350.00	42.73	54.00	-11.27	37.64	5.09	Average	---	---
4	5350.00	55.32	74.00	-18.68	50.23	5.09	Peak	---	---
5	10600.00	42.25	54.00	-11.75	27.31	14.94	Average	---	---
6	10600.00	55.35	74.00	-18.65	40.41	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal	Test Configuration	4

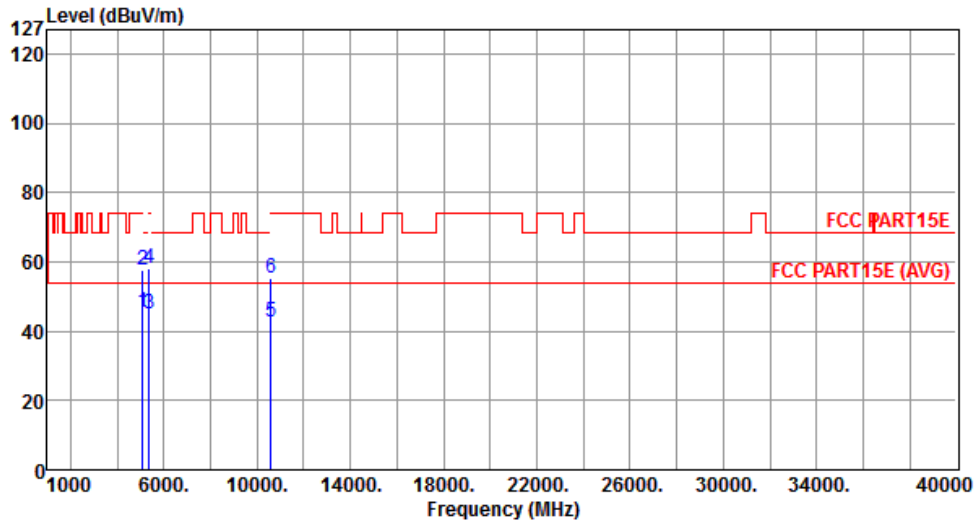


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.47	54.00	-8.53	40.64	4.83	Average	---	---
2	5097.00	57.75	74.00	-16.25	52.92	4.83	Peak	---	---
3	5350.00	45.21	54.00	-8.79	40.12	5.09	Average	---	---
4	5350.00	58.27	74.00	-15.73	53.18	5.09	Peak	---	---
5	10600.00	42.56	54.00	-11.44	27.62	14.94	Average	---	---
6	10600.00	55.47	74.00	-18.53	40.53	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical	Test Configuration	4

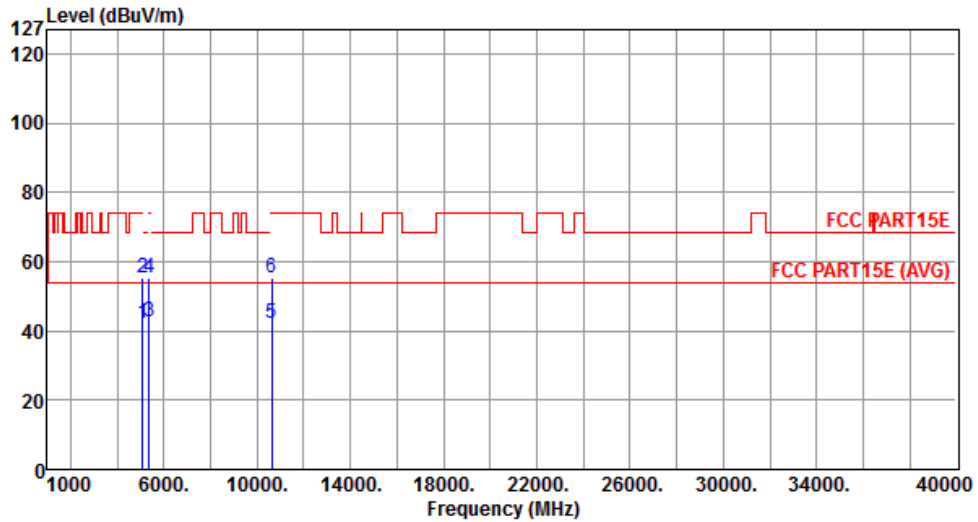


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.16	54.00	-11.84	37.33	4.83	Average	---	---
2	5097.00	55.12	74.00	-18.88	50.29	4.83	Peak	---	---
3	5350.00	42.65	54.00	-11.35	37.56	5.09	Average	---	---
4	5350.00	55.22	74.00	-18.78	50.13	5.09	Peak	---	---
5	10640.00	42.33	54.00	-11.67	27.35	14.98	Average	---	---
6	10640.00	55.50	74.00	-18.50	40.52	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal	Test Configuration	4

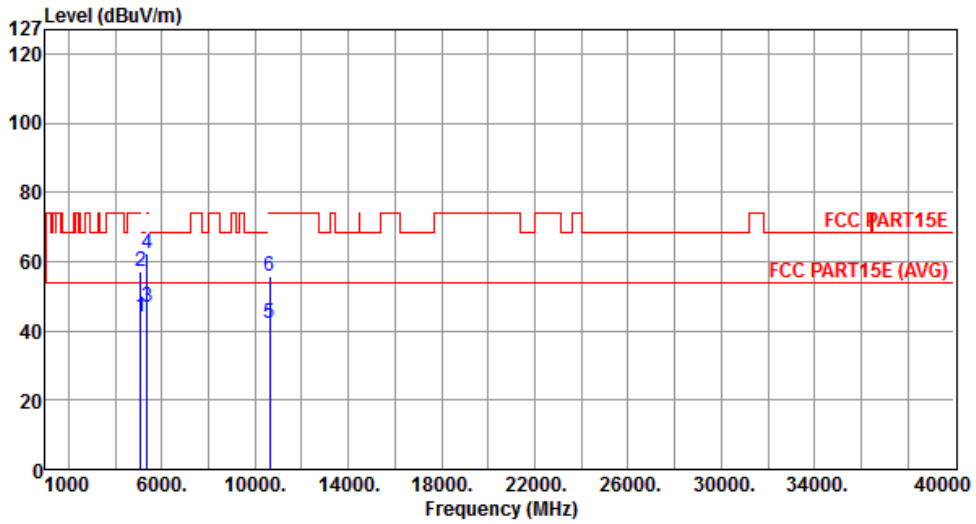


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.21	54.00	-9.79	39.38	4.83	Average	---	---
2	5097.00	57.19	74.00	-16.81	52.36	4.83	Peak	---	---
3	5350.00	47.09	54.00	-6.91	42.00	5.09	Average	---	---
4	5350.00	62.11	74.00	-11.89	57.02	5.09	Peak	---	---
5	10640.00	42.39	54.00	-11.61	27.41	14.98	Average	---	---
6	10640.00	55.56	74.00	-18.44	40.58	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical	Test Configuration	4

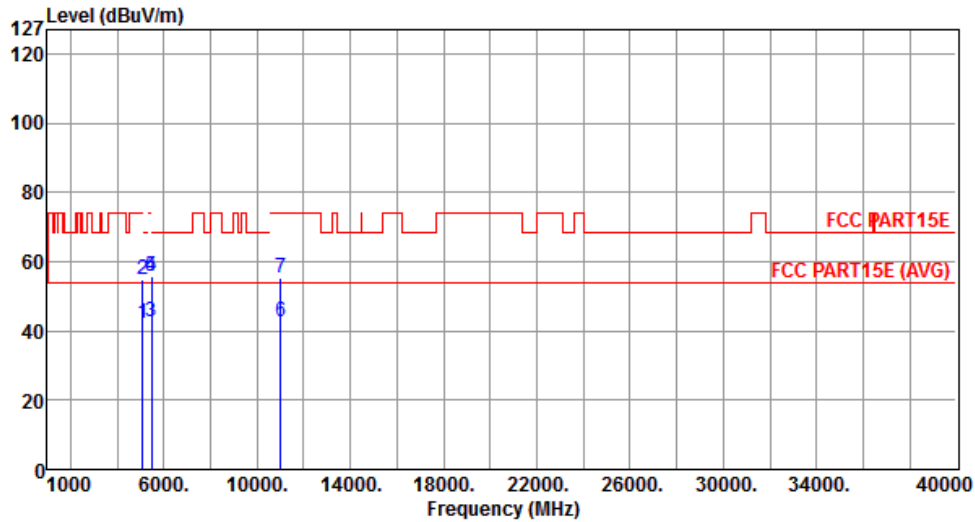


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.10	54.00	-11.90	37.27	4.83	Average	---	---
2	5097.00	54.76	74.00	-19.24	49.93	4.83	Peak	---	---
3	5460.00	42.71	54.00	-11.29	37.53	5.18	Average	---	---
4	5460.00	55.60	74.00	-18.40	50.42	5.18	Peak	---	---
5	5470.00	55.68	68.30	-12.62	50.49	5.19	Peak	---	---
6	11000.00	42.48	54.00	-11.52	27.20	15.28	Average	---	---
7	11000.00	55.35	74.00	-18.65	40.07	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal	Test Configuration	4

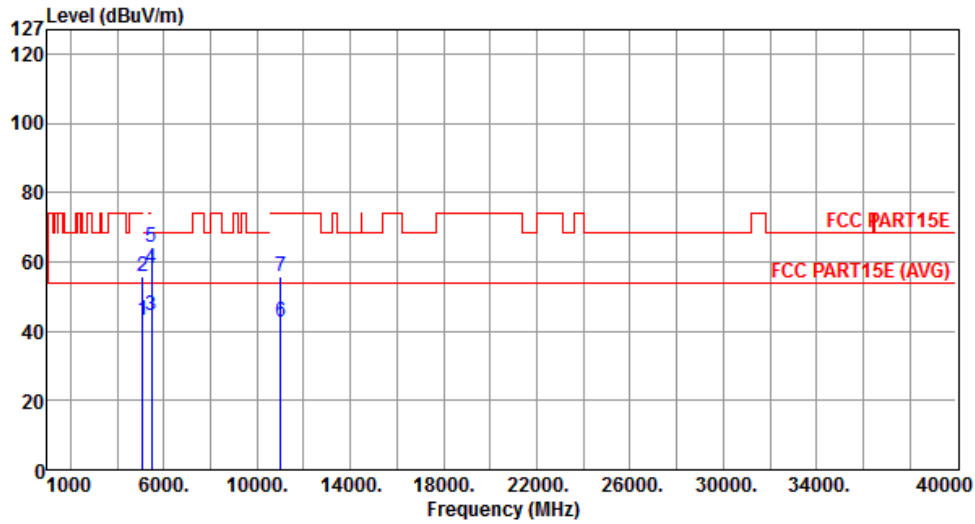


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.96	54.00	-11.04	38.13	4.83	Average	---	---
2	5097.00	55.82	74.00	-18.18	50.99	4.83	Peak	---	---
3	5460.00	44.57	54.00	-9.43	39.39	5.18	Average	---	---
4	5460.00	58.03	74.00	-15.97	52.85	5.18	Peak	---	---
5	5470.00	64.23	68.30	-4.07	59.04	5.19	Peak	---	---
6	11000.00	42.74	54.00	-11.26	27.46	15.28	Average	---	---
7	11000.00	55.61	74.00	-18.39	40.33	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical	Test Configuration	4

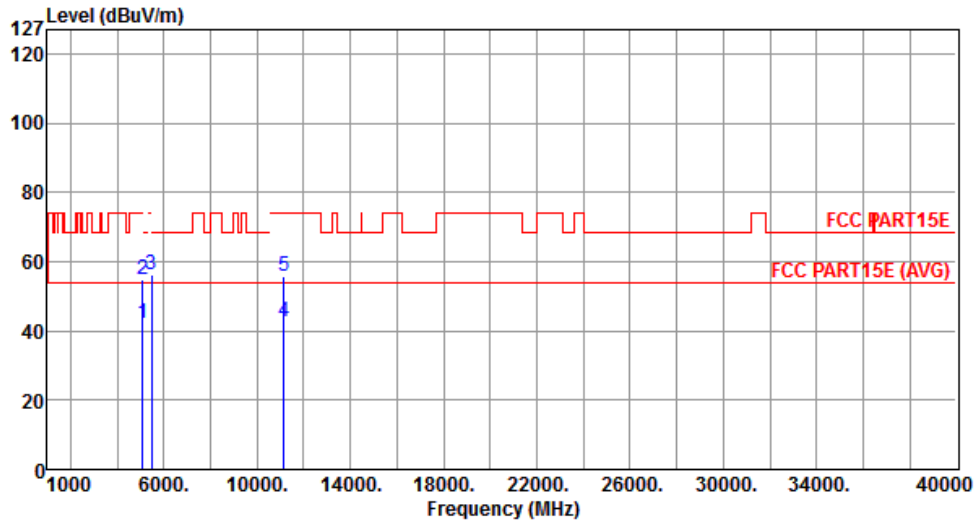

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.33	54.00	-11.67	37.50	4.83	Average	---	---
2	5097.00	54.81	74.00	-19.19	49.98	4.83	Peak	---	---
3	5470.00	56.17	68.30	-12.13	50.98	5.19	Peak	---	---
4	11160.00	42.52	54.00	-11.48	27.34	15.18	Average	---	---
5	11160.00	55.71	74.00	-18.29	40.53	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal	Test Configuration	4

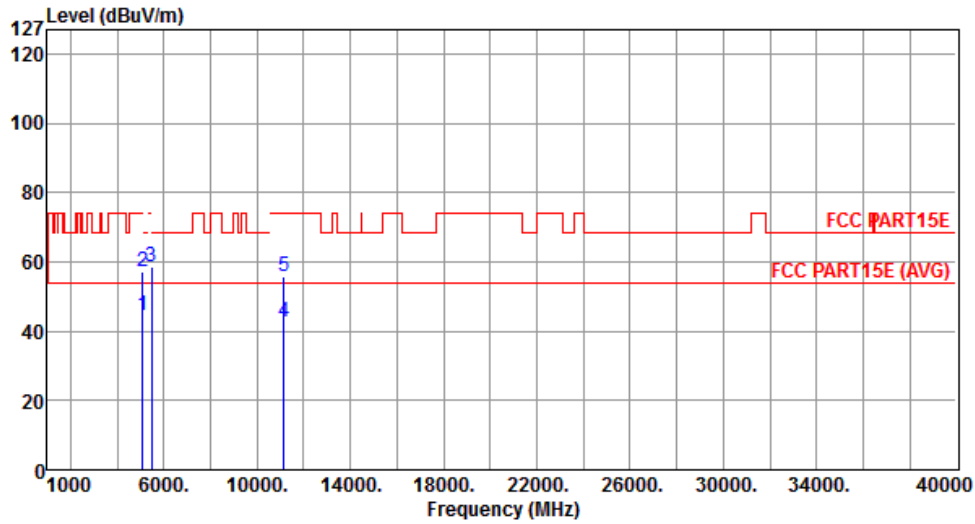


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.63	54.00	-9.37	39.80	4.83	Average	---	---
2	5097.00	57.30	74.00	-16.70	52.47	4.83	Peak	---	---
3	5470.00	58.74	68.30	-9.56	53.55	5.19	Peak	---	---
4	11160.00	42.61	54.00	-11.39	27.43	15.18	Average	---	---
5	11160.00	55.56	74.00	-18.44	40.38	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical	Test Configuration	4

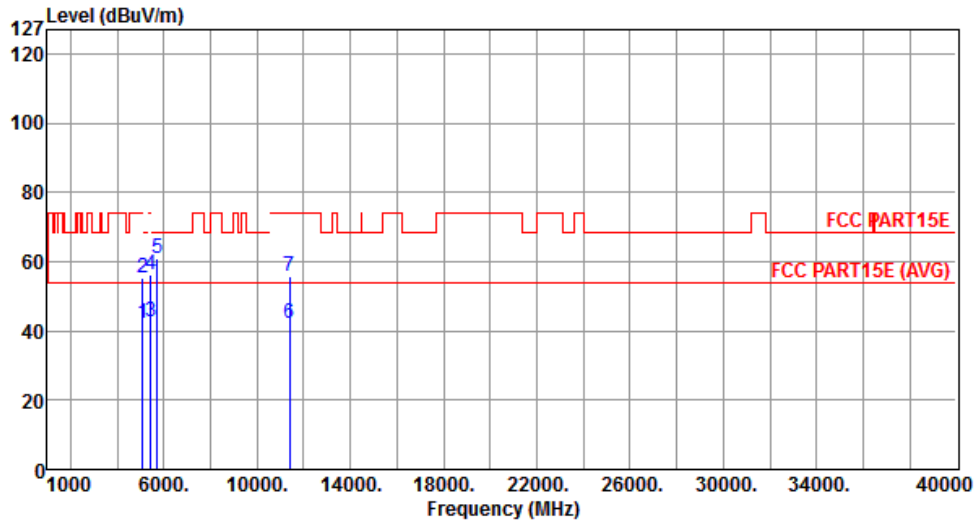


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.15	54.00	-11.85	37.32	4.83	Average	---	---
2	5097.00	55.22	74.00	-18.78	50.39	4.83	Peak	---	---
3	5427.00	42.62	54.00	-11.38	37.48	5.14	Average	---	---
4	5427.00	56.01	74.00	-17.99	50.87	5.14	Peak	---	---
5	5725.00	60.73	68.30	-7.57	55.17	5.56	Peak	---	---
6	11400.00	42.37	54.00	-11.63	27.34	15.03	Average	---	---
7	11400.00	55.60	74.00	-18.40	40.57	15.03	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal	Test Configuration	4

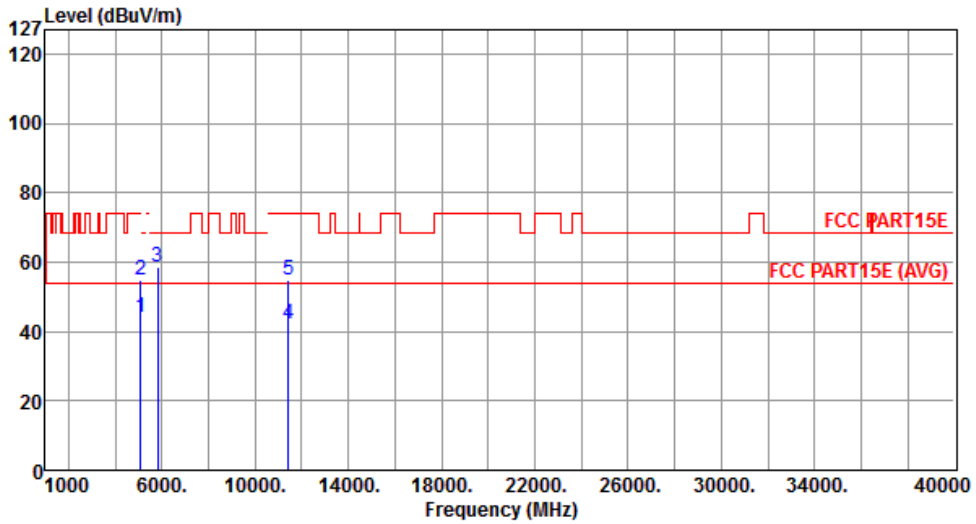


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.94	54.00	-10.06	38.45	5.49	Average	---	---
2	5097.00	54.76	74.00	-19.24	49.27	5.49	Peak	---	---
3	5825.00	58.56	68.20	-9.64	52.94	5.62	Peak	---	---
4	11440.00	42.33	54.00	-11.67	27.67	14.66	Average	---	---
5	11440.00	55.00	74.00	-19.00	40.34	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical	Test Configuration	4

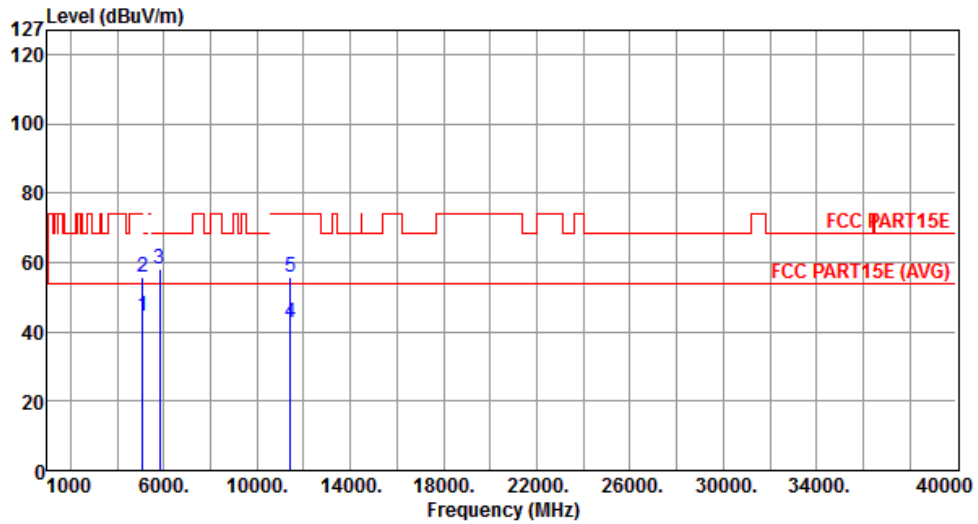


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.74	54.00	-9.26	39.25	5.49	Average	---	---
2	5097.00	55.77	74.00	-18.23	50.28	5.49	Peak	---	---
3	5825.00	58.04	68.20	-10.16	52.42	5.62	Peak	---	---
4	11440.00	42.81	54.00	-11.19	28.15	14.66	Average	---	---
5	11440.00	55.75	74.00	-18.25	41.09	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal	Test Configuration	5

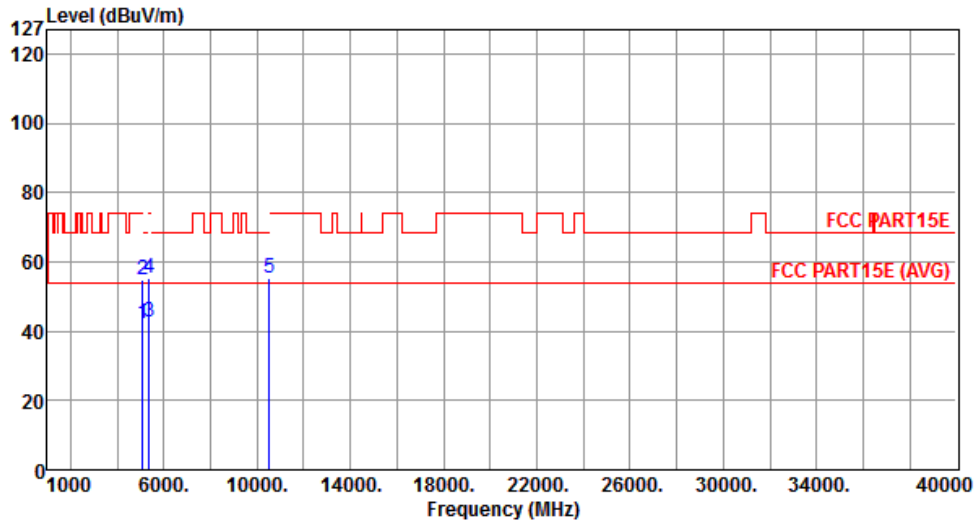


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.17	54.00	-11.83	37.34	4.83	Average	---	---
2	5097.00	55.06	74.00	-18.94	50.23	4.83	Peak	---	---
3	5350.00	42.68	54.00	-11.32	37.59	5.09	Average	---	---
4	5350.00	55.33	74.00	-18.67	50.24	5.09	Peak	---	---
5	10520.00	55.13	68.30	-13.17	40.26	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical	Test Configuration	5

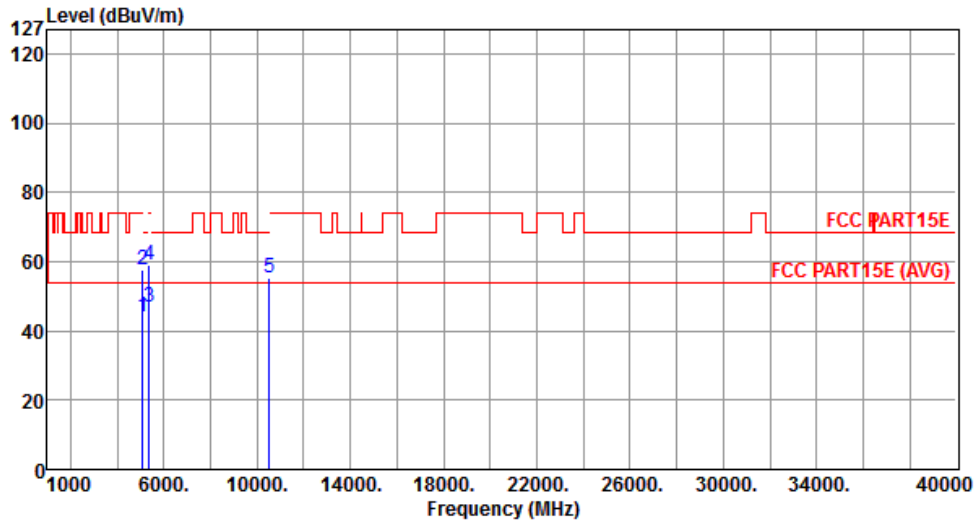


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.97	54.00	-10.03	39.14	4.83	Average	---	---
2	5097.00	57.77	74.00	-16.23	52.94	4.83	Peak	---	---
3	5350.00	46.67	54.00	-7.33	41.58	5.09	Average	---	---
4	5350.00	59.02	74.00	-14.98	53.93	5.09	Peak	---	---
5	10520.00	55.23	68.30	-13.07	40.36	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal	Test Configuration	5

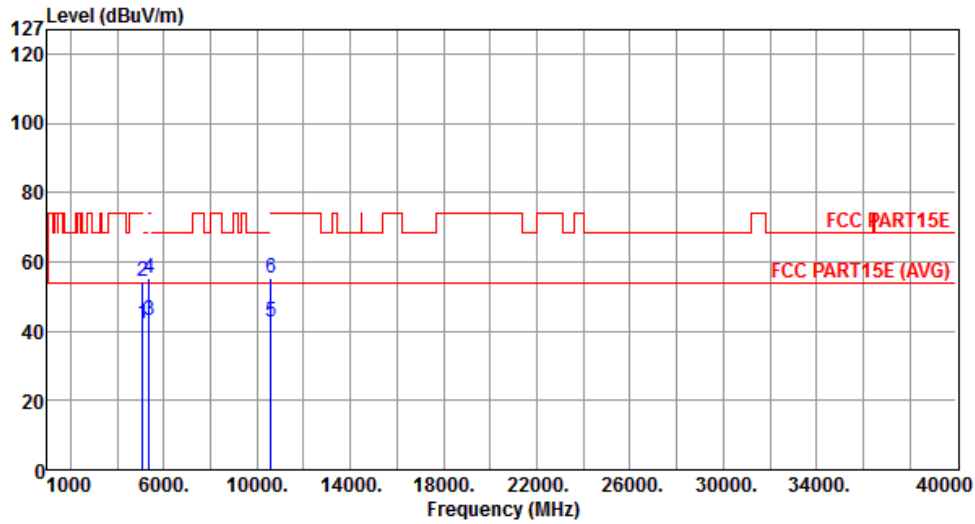


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.26	54.00	-11.74	37.43	4.83	Average	---	---
2	5097.00	54.33	74.00	-19.67	49.50	4.83	Peak	---	---
3	5350.00	43.31	54.00	-10.69	38.22	5.09	Average	---	---
4	5350.00	55.40	74.00	-18.60	50.31	5.09	Peak	---	---
5	10600.00	42.47	54.00	-11.53	27.53	14.94	Average	---	---
6	10600.00	55.36	74.00	-18.64	40.42	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical	Test Configuration	5

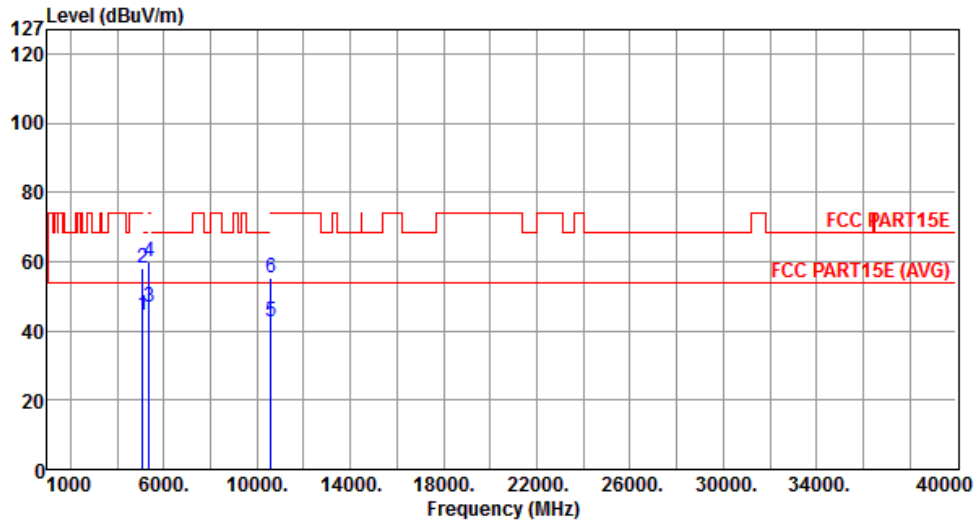


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.44	54.00	-9.56	39.61	4.83	Average	---	---
2	5097.00	58.13	74.00	-15.87	53.30	4.83	Peak	---	---
3	5350.00	46.94	54.00	-7.06	41.85	5.09	Average	---	---
4	5350.00	59.77	74.00	-14.23	54.68	5.09	Peak	---	---
5	10600.00	42.47	54.00	-11.53	27.53	14.94	Average	---	---
6	10600.00	55.31	74.00	-18.69	40.37	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal	Test Configuration	5

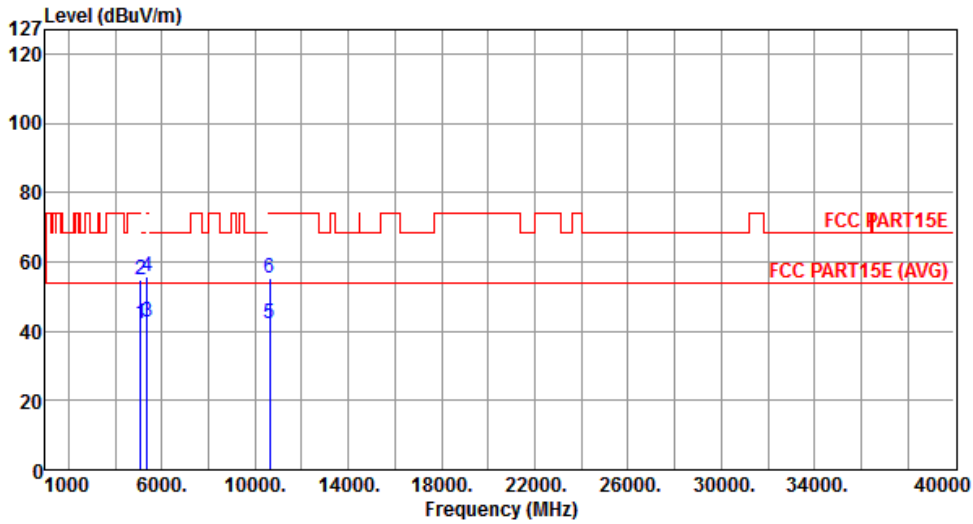


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.98	54.00	-12.02	37.15	4.83	Average	---	---
2	5097.00	54.97	74.00	-19.03	50.14	4.83	Peak	---	---
3	5350.00	42.64	54.00	-11.36	37.55	5.09	Average	---	---
4	5350.00	55.73	74.00	-18.27	50.64	5.09	Peak	---	---
5	10640.00	42.26	54.00	-11.74	27.28	14.98	Average	---	---
6	10640.00	55.11	74.00	-18.89	40.13	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical	Test Configuration	5

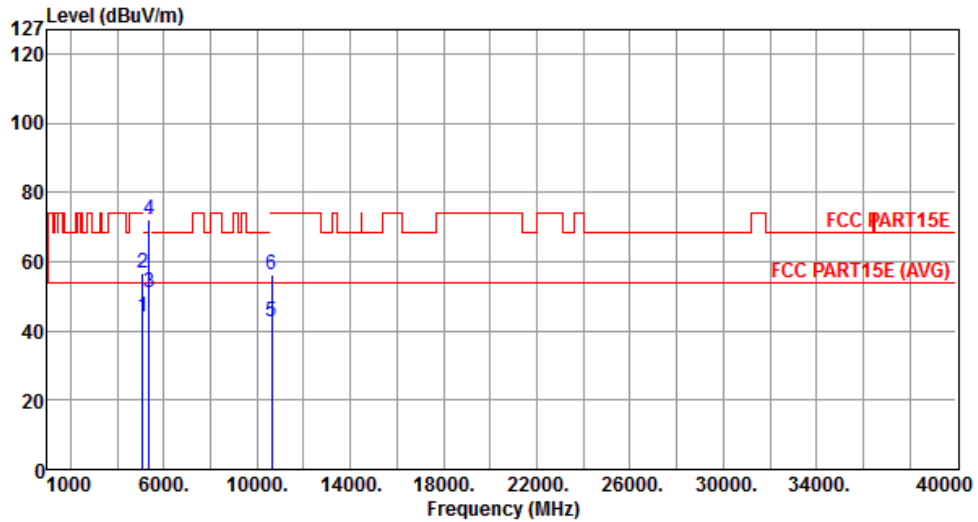


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.94	54.00	-10.06	39.11	4.83	Average	---	---
2	5097.00	56.82	74.00	-17.18	51.99	4.83	Peak	---	---
3	5350.00	51.25	54.00	-2.75	46.16	5.09	Average	---	---
4	5350.00	72.35	74.00	-1.65	67.26	5.09	Peak	---	---
5	10640.00	42.66	54.00	-11.34	27.68	14.98	Average	---	---
6	10640.00	56.23	74.00	-17.77	41.25	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal	Test Configuration	5

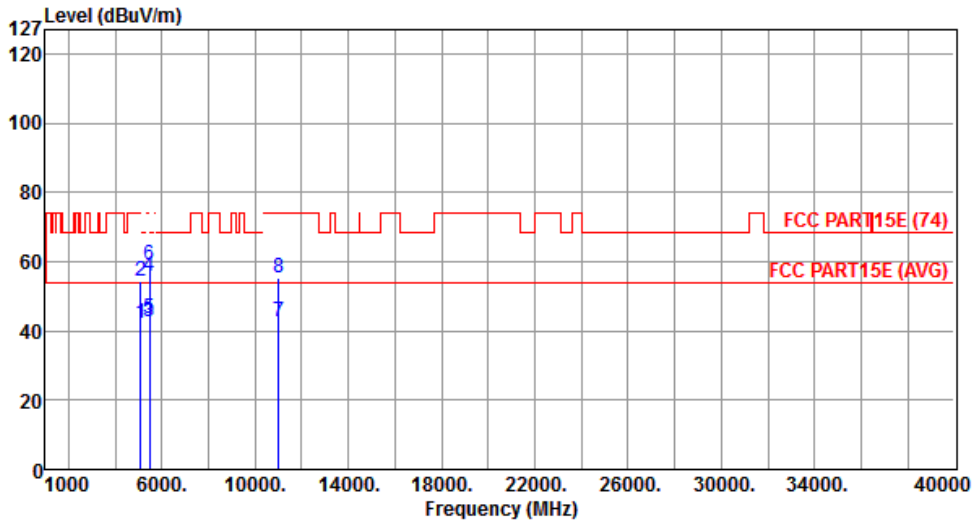


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.20	54.00	-11.80	37.37	4.83	Average	---	---
2	5097.00	54.28	74.00	-19.72	49.45	4.83	Peak	---	---
3	5460.00	42.70	54.00	-11.30	37.52	5.18	Average	---	---
4	5460.00	55.75	74.00	-18.25	50.57	5.18	Peak	---	---
5	5470.00	43.63	54.00	-10.37	38.44	5.19	Average	---	---
6	5470.00	59.04	74.00	-14.96	53.85	5.19	Peak	---	---
7	11000.00	42.62	54.00	-11.38	27.34	15.28	Average	---	---
8	11000.00	55.50	74.00	-18.50	40.22	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical	Test Configuration	5

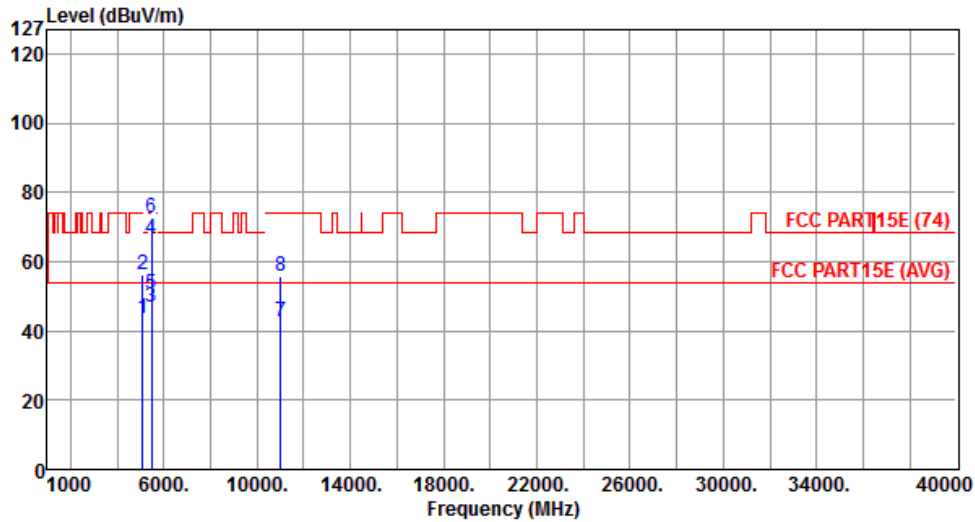


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.63	54.00	-10.37	38.80	4.83	Average	---	---
2	5097.00	56.27	74.00	-17.73	51.44	4.83	Peak	---	---
3	5460.00	47.03	54.00	-6.97	41.85	5.18	Average	---	---
4	5460.00	66.48	74.00	-7.52	61.30	5.18	Peak	---	---
5	5470.00	50.81	54.00	-3.19	45.62	5.19	Average	---	---
6	5470.00	72.53	74.00	-1.47	67.34	5.19	Peak	---	---
7	11000.00	42.56	54.00	-11.44	27.28	15.28	Average	---	---
8	11000.00	55.80	74.00	-18.20	40.52	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal	Test Configuration	5

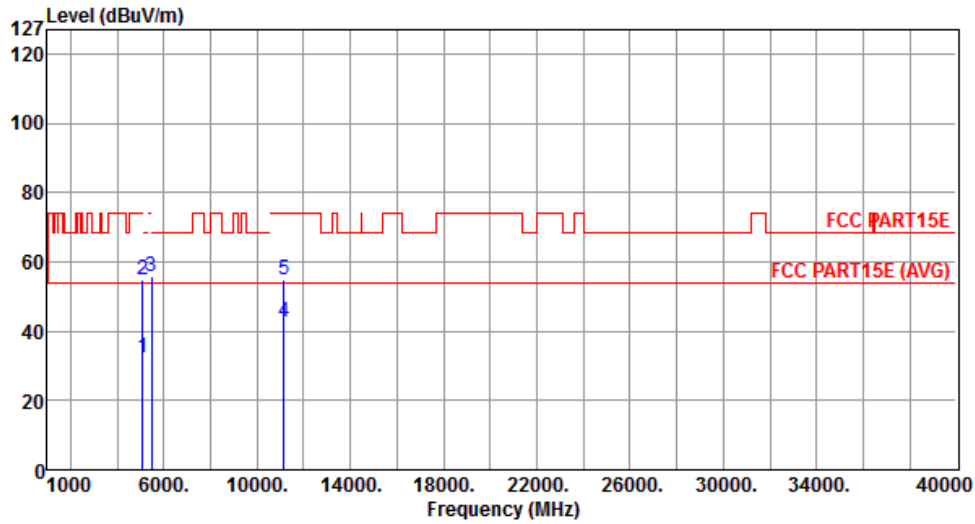


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	32.22	54.00	-21.78	27.39	4.83	Average	---	---
2	5097.00	54.60	74.00	-19.40	49.77	4.83	Peak	---	---
3	5470.00	55.64	68.30	-12.66	50.45	5.19	Peak	---	---
4	11160.00	42.46	54.00	-11.54	27.28	15.18	Average	---	---
5	11160.00	55.03	74.00	-18.97	39.85	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical	Test Configuration	5

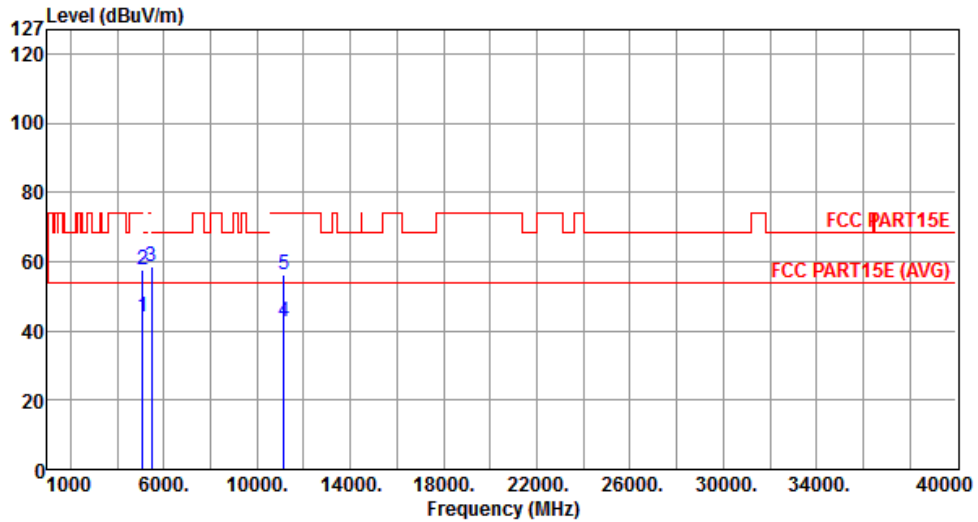


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.27	54.00	-9.73	39.44	4.83	Average	---	---
2	5097.00	57.66	74.00	-16.34	52.83	4.83	Peak	---	---
3	5470.00	58.47	68.30	-9.83	53.28	5.19	Peak	---	---
4	11160.00	42.71	54.00	-11.29	27.53	15.18	Average	---	---
5	11160.00	56.05	74.00	-17.95	40.87	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal	Test Configuration	5

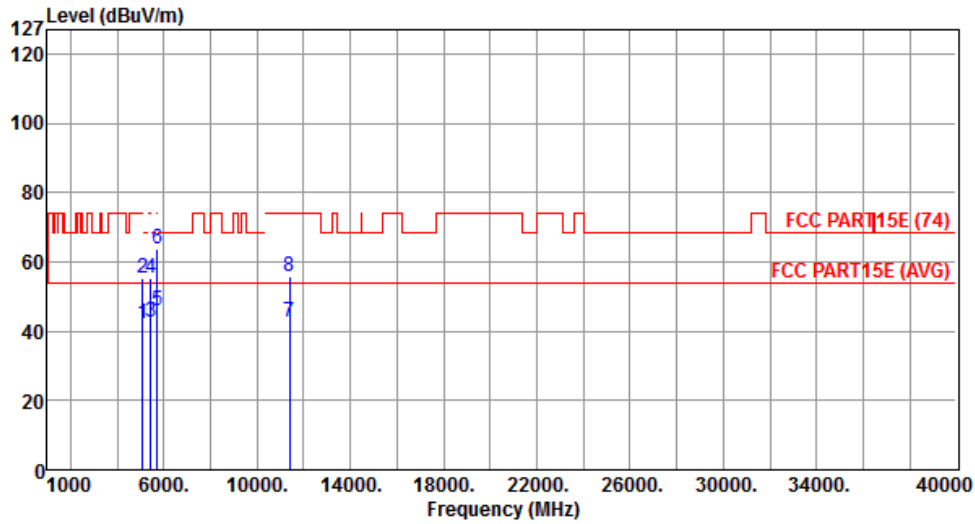


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.23	54.00	-11.77	37.40	4.83	Average	---	---
2	5097.00	55.40	74.00	-18.60	50.57	4.83	Peak	---	---
3	5427.00	42.64	54.00	-11.36	37.50	5.14	Average	---	---
4	5427.00	55.42	74.00	-18.58	50.28	5.14	Peak	---	---
5	5725.00	46.10	54.00	-7.90	40.54	5.56	Average	---	---
6	5725.00	63.53	74.00	-10.47	57.97	5.56	Peak	---	---
7	11400.00	42.46	54.00	-11.54	27.43	15.03	Average	---	---
8	11400.00	55.54	74.00	-18.46	40.51	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical	Test Configuration	5

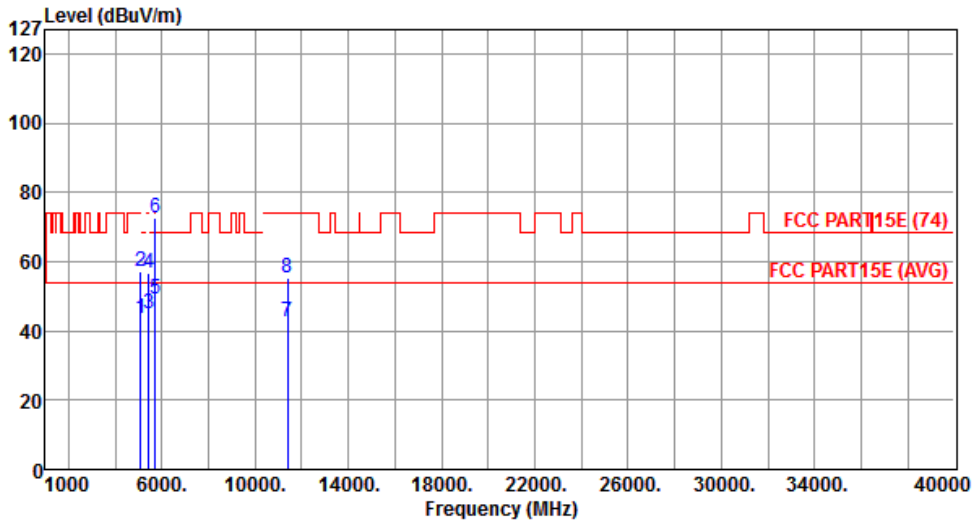


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.52	54.00	-10.48	38.69	4.83	Average	---	---
2	5097.00	56.99	74.00	-17.01	52.16	4.83	Peak	---	---
3	5427.00	44.90	54.00	-9.10	39.76	5.14	Average	---	---
4	5427.00	56.87	74.00	-17.13	51.73	5.14	Peak	---	---
5	5725.00	49.42	54.00	-4.58	43.86	5.56	Average	---	---
6	5725.00	72.46	74.00	-1.54	66.90	5.56	Peak	---	---
7	11400.00	42.45	54.00	-11.55	27.42	15.03	Average	---	---
8	11400.00	55.21	74.00	-18.79	40.18	15.03	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal	Test Configuration	5

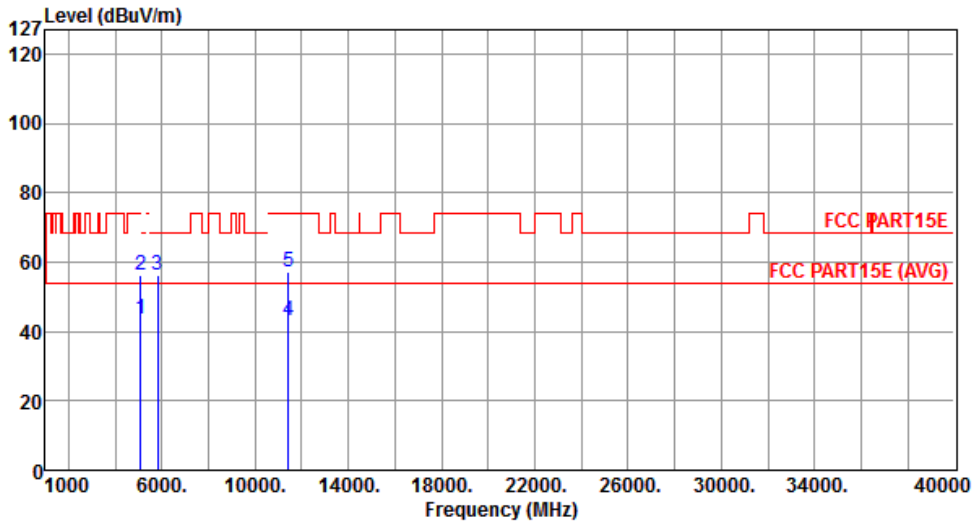


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.47	54.00	-10.53	37.98	5.49	Average	---	---
2	5097.00	56.21	74.00	-17.79	50.72	5.49	Peak	---	---
3	5825.00	56.42	68.20	-11.78	50.80	5.62	Peak	---	---
4	11440.00	43.05	54.00	-10.95	28.39	14.66	Average	---	---
5	11440.00	57.12	74.00	-16.88	42.46	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical	Test Configuration	5

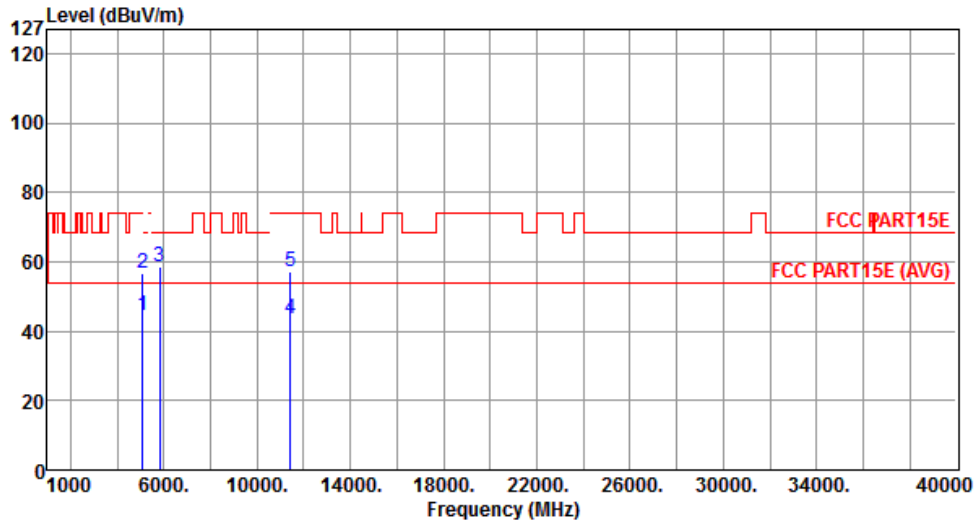


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.57	54.00	-9.43	39.08	5.49	Average	---	---
2	5097.00	56.92	74.00	-17.08	51.43	5.49	Peak	---	---
3	5825.00	58.40	68.20	-9.80	52.78	5.62	Peak	---	---
4	11440.00	43.51	54.00	-10.49	28.85	14.66	Average	---	---
5	11440.00	57.15	74.00	-16.85	42.49	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Horizontal	Test Configuration	6

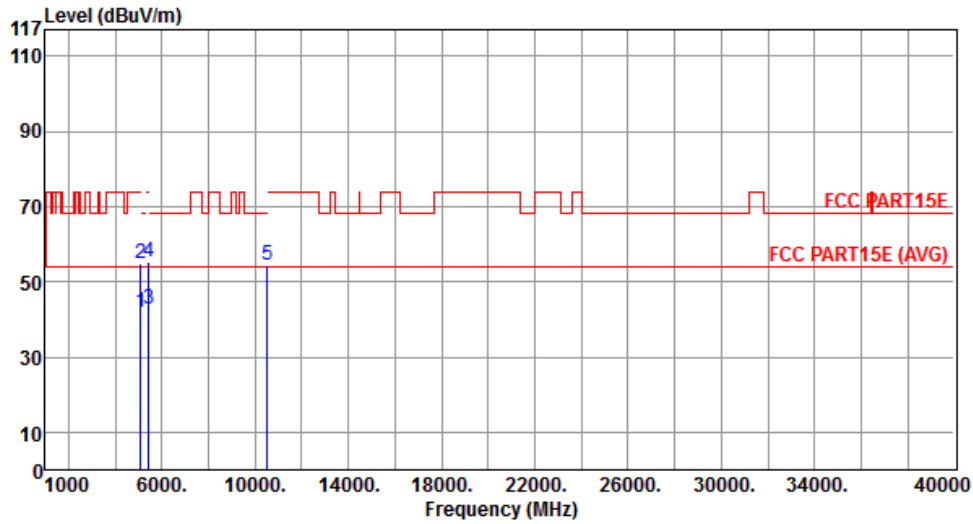


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.04	54.00	-11.96	37.21	4.83	Average	---	---
2	5097.00	54.98	74.00	-19.02	50.15	4.83	Peak	---	---
3	5427.00	42.80	54.00	-11.20	37.66	5.14	Average	---	---
4	5427.00	55.11	74.00	-18.89	49.97	5.14	Peak	---	---
5	10520.00	54.56	68.30	-13.74	39.69	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	VHT20	Test Freq. (MHz)	5260
Polarization	Vertical	Test Configuration	6

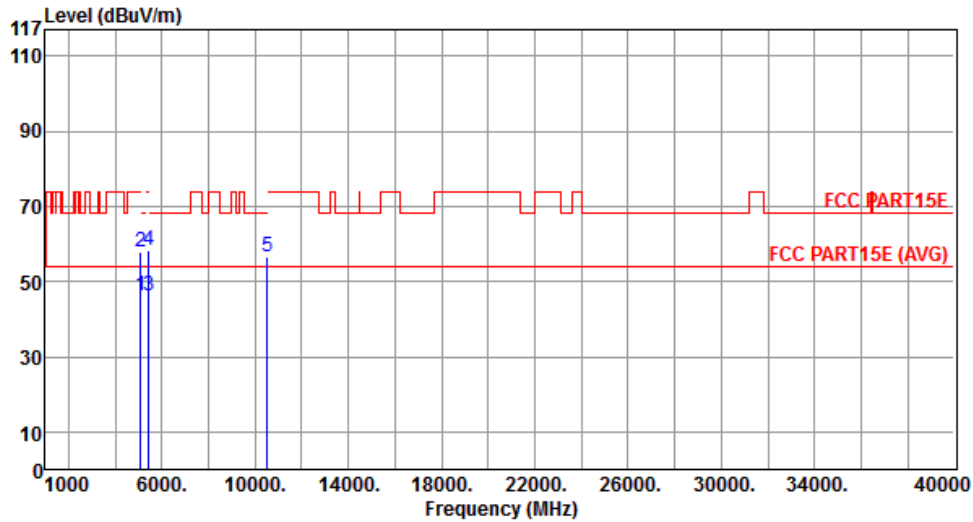

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	46.04	54.00	-7.96	41.21	4.83	Average	---	---
2	5097.00	57.98	74.00	-16.02	53.15	4.83	Peak	---	---
3	5427.00	46.40	54.00	-7.60	41.26	5.14	Average	---	---
4	5427.00	58.12	74.00	-15.88	52.98	5.14	Peak	---	---
5	10520.00	56.46	68.30	-11.84	41.59	14.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Horizontal	Test Configuration	6

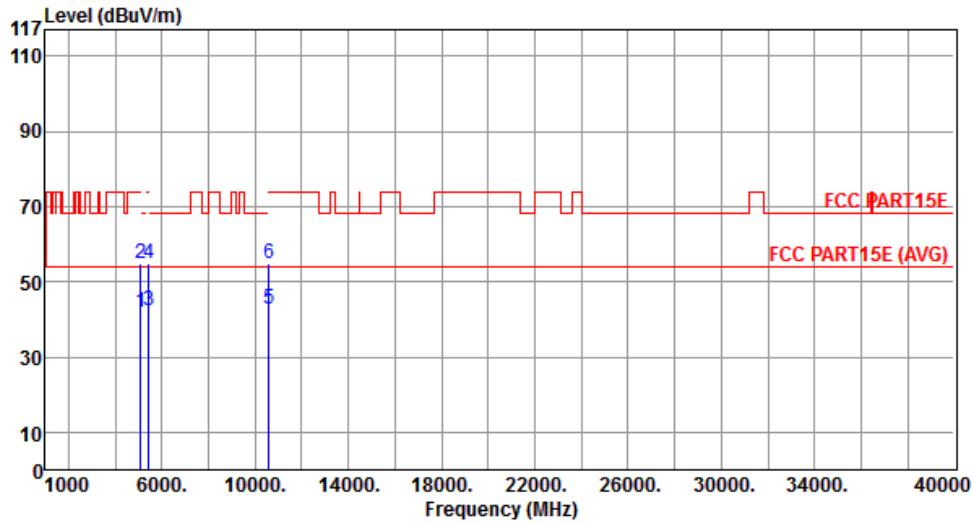


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.08	54.00	-11.92	37.25	4.83	Average	---	---
2	5097.00	54.70	74.00	-19.30	49.87	4.83	Peak	---	---
3	5427.00	42.45	54.00	-11.55	37.31	5.14	Average	---	---
4	5427.00	54.69	74.00	-19.31	49.55	5.14	Peak	---	---
5	10600.00	42.58	54.00	-11.42	27.64	14.94	Average	---	---
6	10600.00	54.79	74.00	-19.21	39.85	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	VHT20	Test Freq. (MHz)	5300
Polarization	Vertical	Test Configuration	6

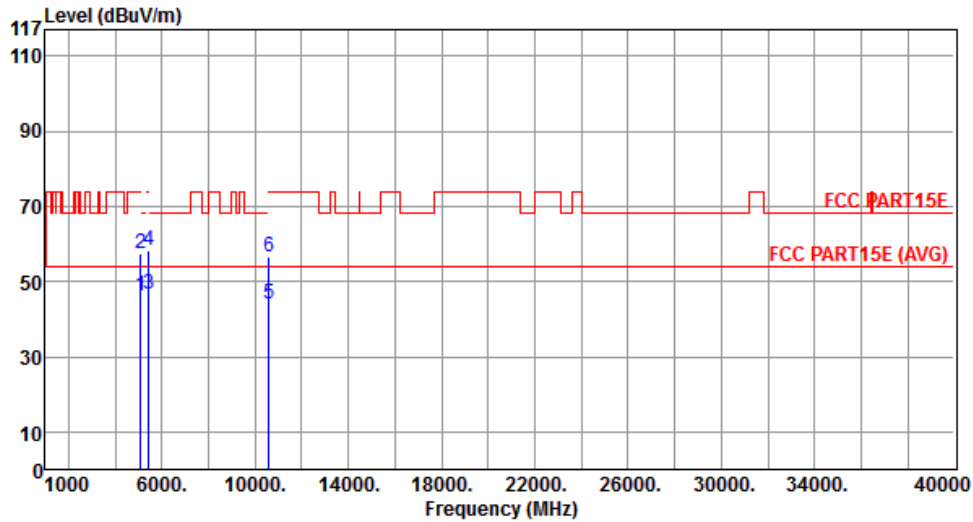

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	46.06	54.00	-7.94	41.23	4.83	Average	---	---
2	5097.00	57.36	74.00	-16.64	52.53	4.83	Peak	---	---
3	5427.00	46.49	54.00	-7.51	41.35	5.14	Average	---	---
4	5427.00	58.40	74.00	-15.60	53.26	5.14	Peak	---	---
5	10600.00	44.16	54.00	-9.84	29.22	14.94	Average	---	---
6	10600.00	56.62	74.00	-17.38	41.68	14.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Horizontal	Test Configuration	6

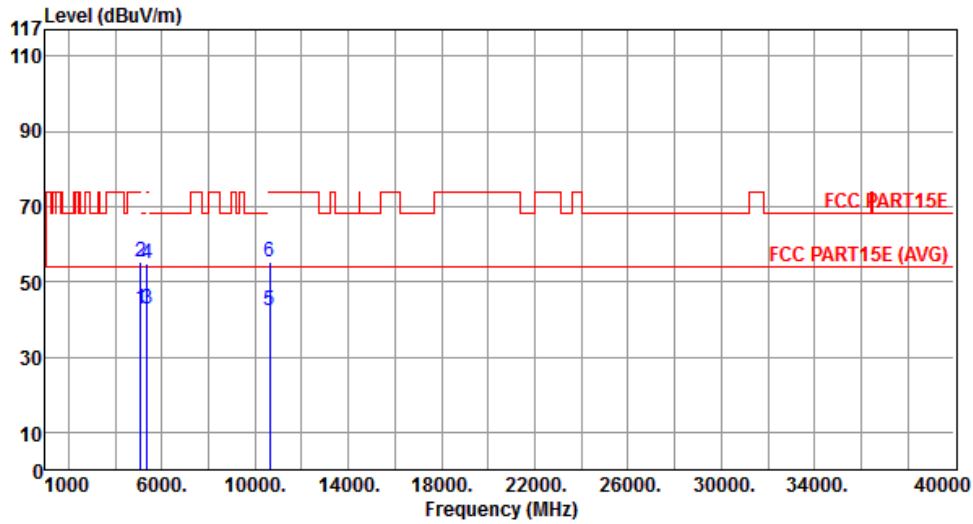


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.83	54.00	-11.17	38.00	4.83	Average	---	---
2	5097.00	55.12	74.00	-18.88	50.29	4.83	Peak	---	---
3	5350.00	42.64	54.00	-11.36	37.55	5.09	Average	---	---
4	5350.00	54.91	74.00	-19.09	49.82	5.09	Peak	---	---
5	10640.00	42.46	54.00	-11.54	27.48	14.98	Average	---	---
6	10640.00	55.10	74.00	-18.90	40.12	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5320
Polarization	Vertical	Test Configuration	6

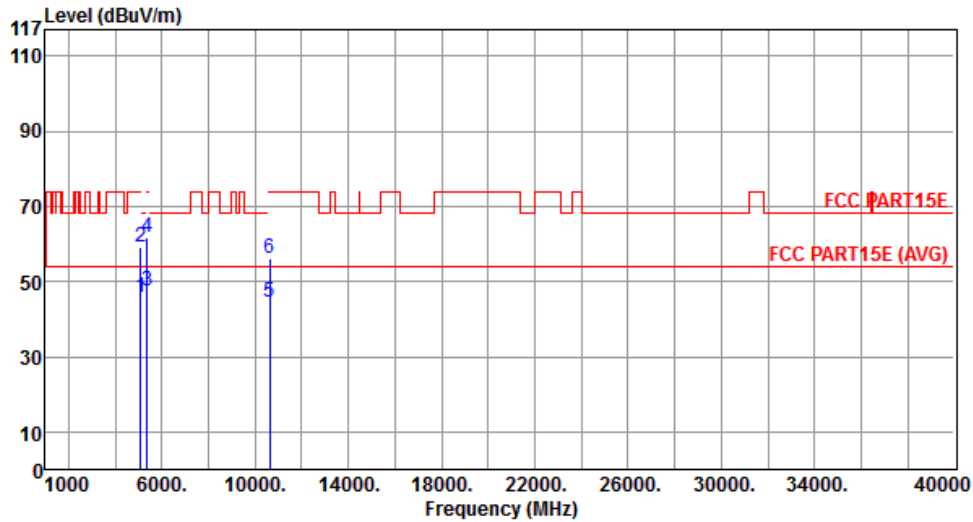


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.78	54.00	-8.22	40.95	4.83	Average	---	---
2	5097.00	59.27	74.00	-14.73	54.44	4.83	Peak	---	---
3	5350.00	47.30	54.00	-6.70	42.21	5.09	Average	---	---
4	5350.00	61.57	74.00	-12.43	56.48	5.09	Peak	---	---
5	10640.00	44.42	54.00	-9.58	29.44	14.98	Average	---	---
6	10640.00	56.30	74.00	-17.70	41.32	14.98	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Horizontal	Test Configuration	6

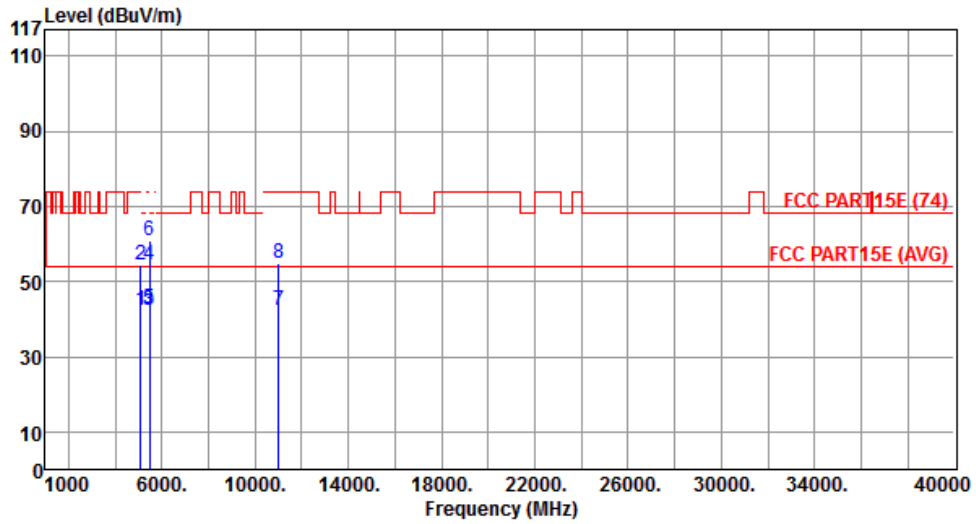


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.27	54.00	-11.73	37.44	4.83	Average	---	---
2	5097.00	54.21	74.00	-19.79	49.38	4.83	Peak	---	---
3	5460.00	42.44	54.00	-11.56	37.26	5.18	Average	---	---
4	5460.00	54.53	74.00	-19.47	49.35	5.18	Peak	---	---
5	5470.00	42.87	54.00	-11.13	37.68	5.19	Average	---	---
6	5470.00	60.71	74.00	-13.29	55.52	5.19	Peak	---	---
7	11000.00	42.51	54.00	-11.49	27.23	15.28	Average	---	---
8	11000.00	54.96	74.00	-19.04	39.68	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5500
Polarization	Vertical	Test Configuration	6

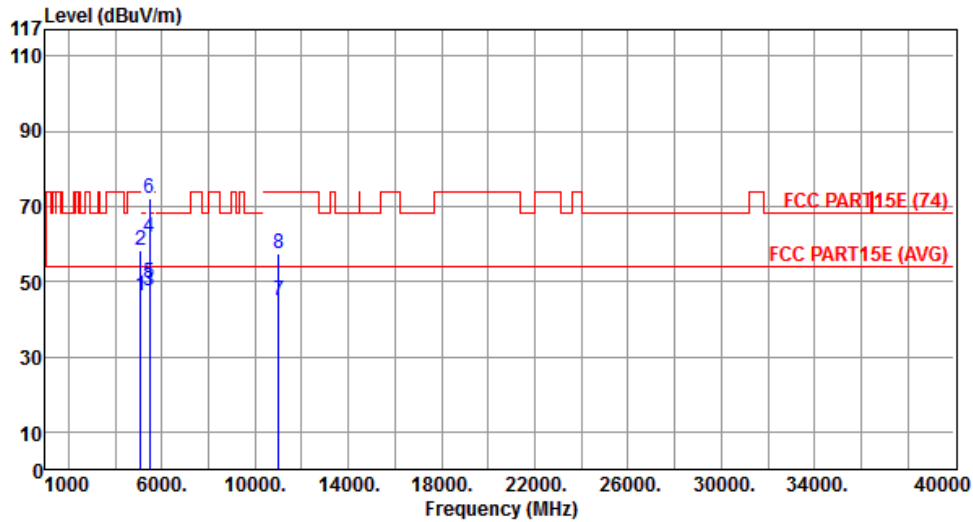


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	46.34	54.00	-7.66	41.51	4.83	Average	---	---
2	5097.00	58.10	74.00	-15.90	53.27	4.83	Peak	---	---
3	5460.00	47.32	54.00	-6.68	42.14	5.18	Average	---	---
4	5460.00	61.84	74.00	-12.16	56.66	5.18	Peak	---	---
5	5470.00	49.55	54.00	-4.45	44.36	5.19	Average	---	---
6	5470.00	72.18	74.00	-1.82	66.99	5.19	Peak	---	---
7	11000.00	44.83	54.00	-9.17	29.55	15.28	Average	---	---
8	11000.00	57.61	74.00	-16.39	42.33	15.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Horizontal	Test Configuration	6

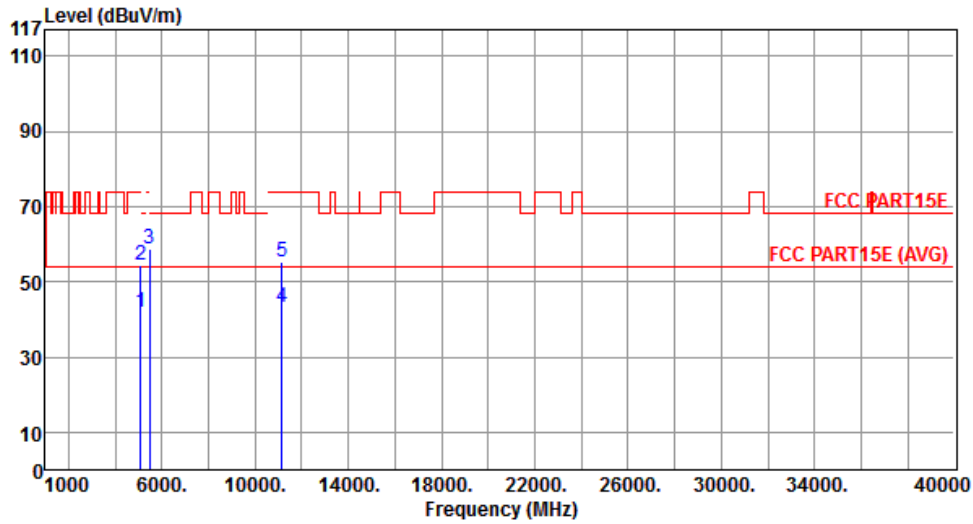


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.03	54.00	-11.97	37.20	4.83	Average	---	---
2	5097.00	54.55	74.00	-19.45	49.72	4.83	Peak	---	---
3	5470.00	58.63	68.30	-9.67	53.44	5.19	Peak	---	---
4	11160.00	42.97	54.00	-11.03	27.79	15.18	Average	---	---
5	11160.00	55.14	74.00	-18.86	39.96	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5580
Polarization	Vertical	Test Configuration	6

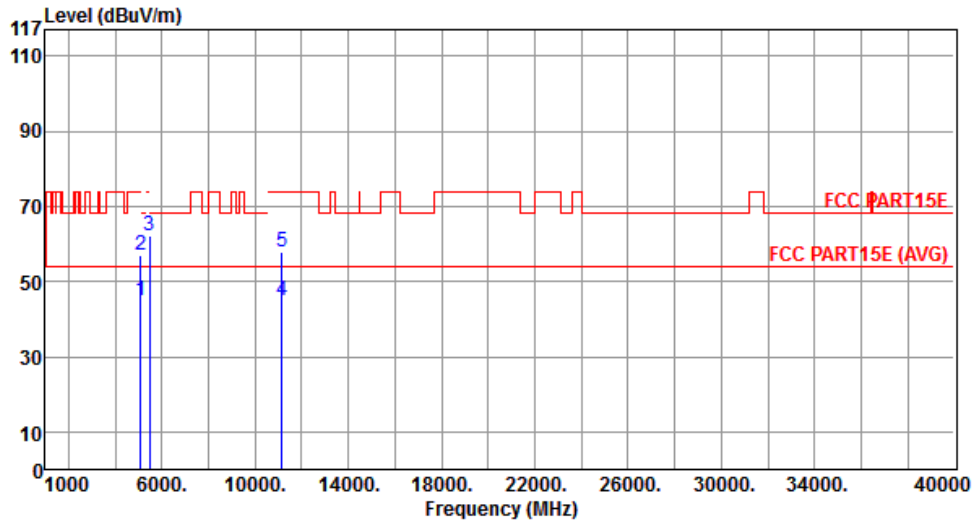


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.04	54.00	-8.96	40.21	4.83	Average	---	---
2	5097.00	57.10	74.00	-16.90	52.27	4.83	Peak	---	---
3	5470.00	62.17	68.30	-6.13	56.98	5.19	Peak	---	---
4	11160.00	45.03	54.00	-8.97	29.85	15.18	Average	---	---
5	11160.00	57.85	74.00	-16.15	42.67	15.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Horizontal	Test Configuration	6

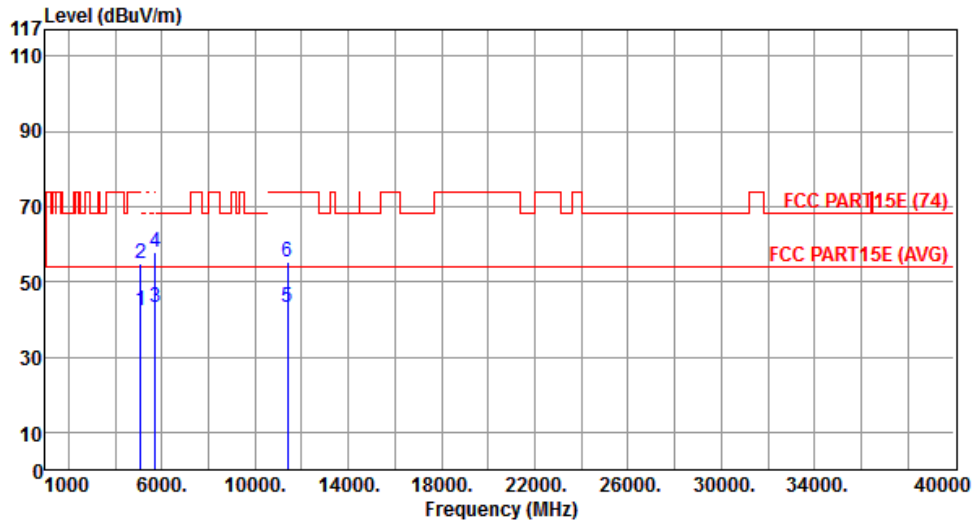


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.36	54.00	-11.64	37.53	4.83	Average	---	---
2	5097.00	54.70	74.00	-19.30	49.87	4.83	Peak	---	---
3	5725.00	43.01	54.00	-10.99	37.45	5.56	Average	---	---
4	5725.00	58.03	74.00	-15.97	52.47	5.56	Peak	---	---
5	11400.00	42.96	54.00	-11.04	27.93	15.03	Average	---	---
6	11400.00	55.43	74.00	-18.57	40.40	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	VHT20	Test Freq. (MHz)	5700
Polarization	Vertical	Test Configuration	6

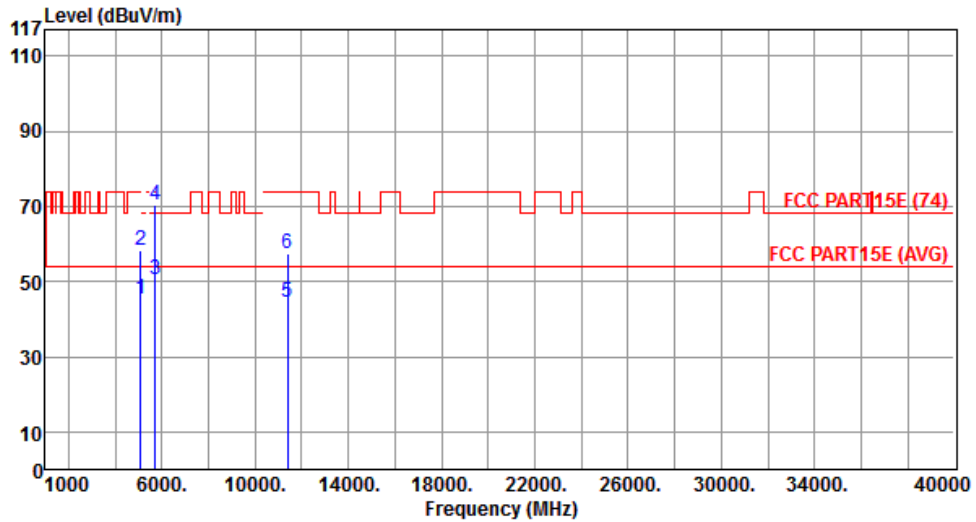

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.34	54.00	-8.66	40.51	4.83	Average	---	---
2	5097.00	58.30	74.00	-15.70	53.47	4.83	Peak	---	---
3	5725.00	50.54	54.00	-3.46	44.98	5.56	Average	---	---
4	5725.00	70.38	74.00	-3.62	64.82	5.56	Peak	---	---
5	11400.00	44.51	54.00	-9.49	29.48	15.03	Average	---	---
6	11400.00	57.52	74.00	-16.48	42.49	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Horizontal	Test Configuration	6

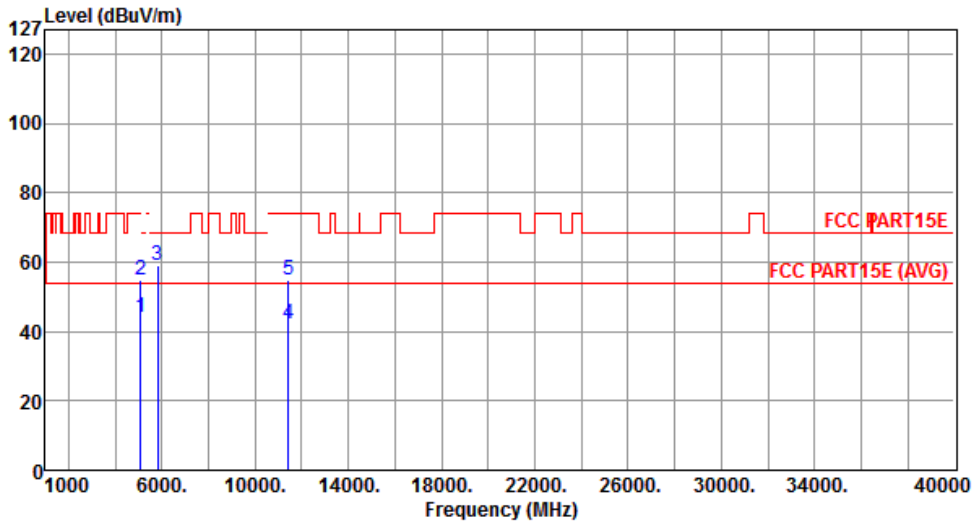


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.12	54.00	-9.88	38.63	5.49	Average	---	---
2	5097.00	55.03	74.00	-18.97	49.54	5.49	Peak	---	---
3	5825.00	59.09	68.20	-9.11	53.47	5.62	Peak	---	---
4	11440.00	42.32	54.00	-11.68	27.66	14.66	Average	---	---
5	11440.00	54.85	74.00	-19.15	40.19	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5720
Polarization	Vertical	Test Configuration	6

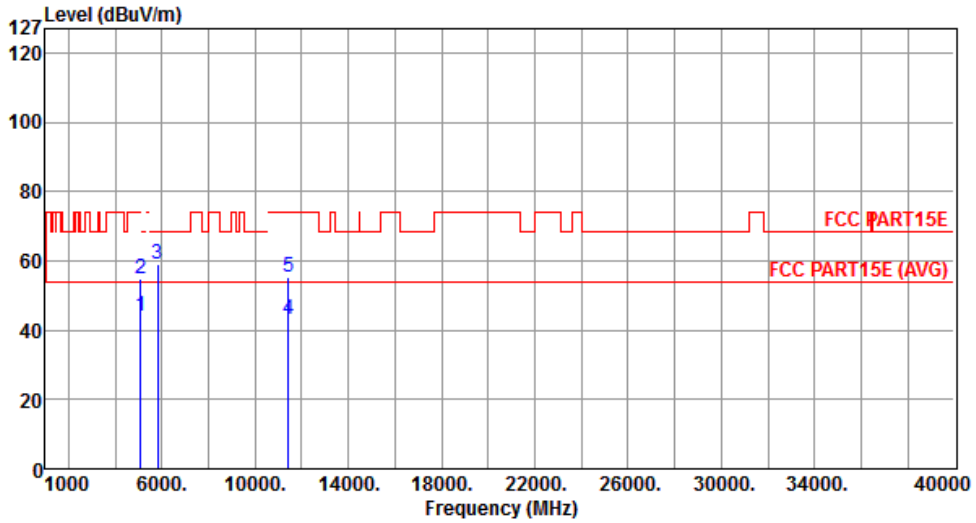

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.91	54.00	-10.09	38.42	5.49	Average	---	---
2	5097.00	54.64	74.00	-19.36	49.15	5.49	Peak	---	---
3	5825.00	58.90	68.20	-9.30	53.28	5.62	Peak	---	---
4	11440.00	43.30	54.00	-10.70	28.64	14.66	Average	---	---
5	11440.00	55.26	74.00	-18.74	40.60	14.66	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal	Test Configuration	1

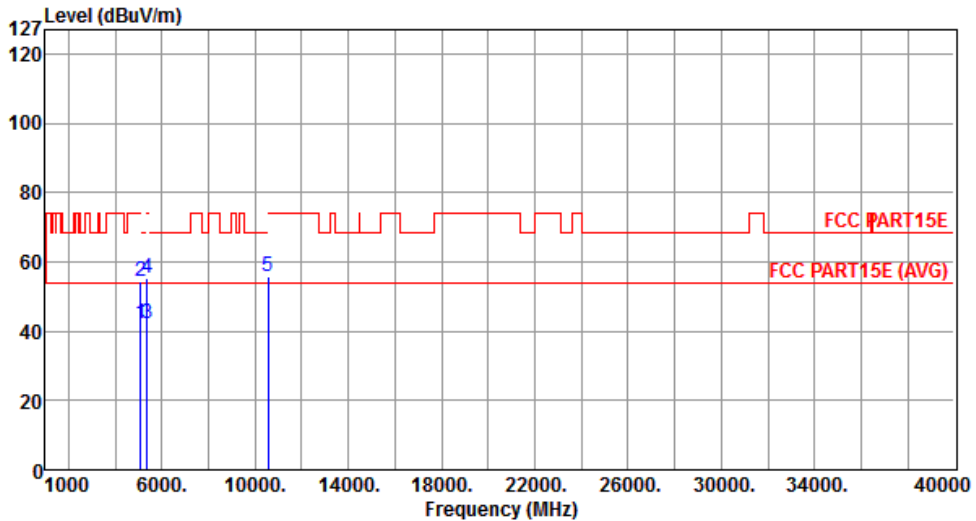


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.12	54.00	-11.88	37.29	4.83	Average	---	---
2	5097.00	54.36	74.00	-19.64	49.53	4.83	Peak	---	---
3	5350.00	42.23	54.00	-11.77	37.14	5.09	Average	---	---
4	5350.00	55.29	74.00	-18.71	50.20	5.09	Peak	---	---
5	10540.00	55.77	68.30	-12.53	40.87	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical	Test Configuration	1

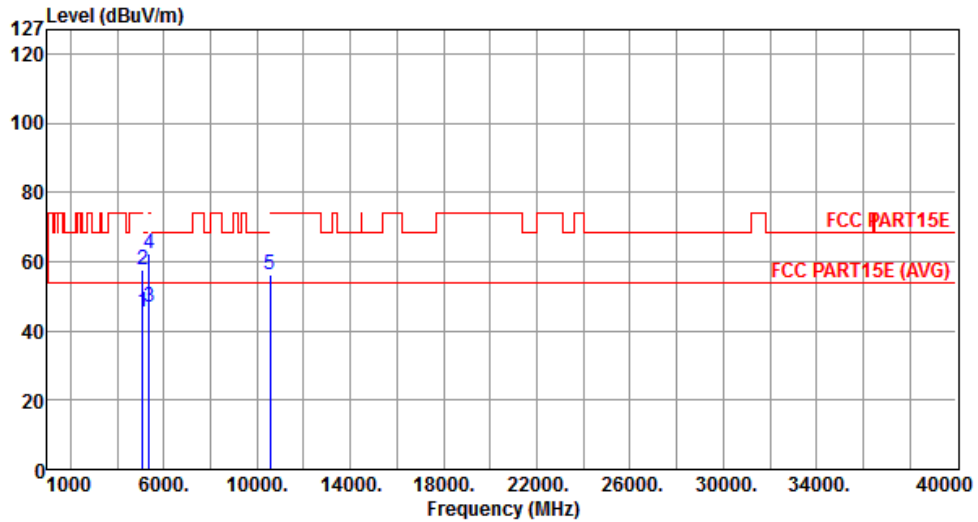


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.28	54.00	-8.72	40.45	4.83	Average	---	---
2	5097.00	57.82	74.00	-16.18	52.99	4.83	Peak	---	---
3	5350.00	47.01	54.00	-6.99	41.92	5.09	Average	---	---
4	5350.00	62.24	74.00	-11.76	57.15	5.09	Peak	---	---
5	10540.00	56.44	68.30	-11.86	41.54	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal	Test Configuration	1

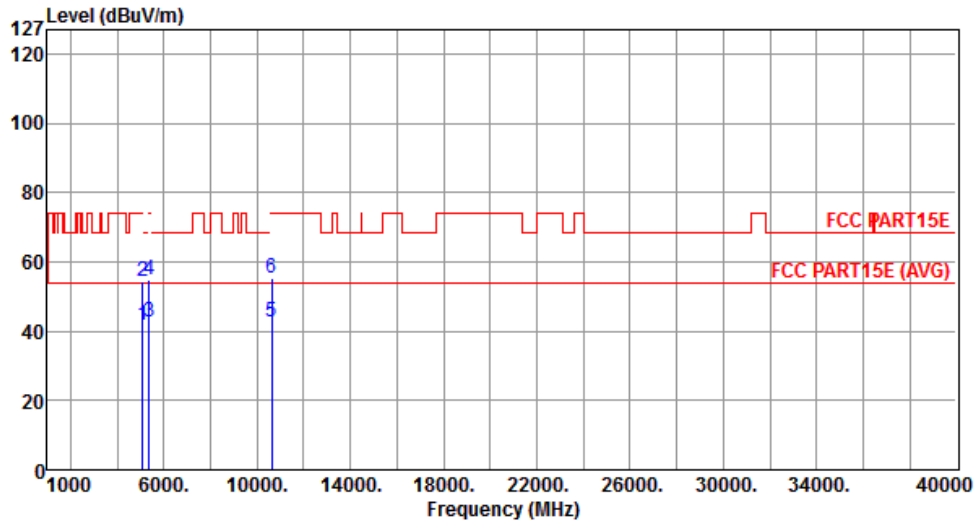


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.83	54.00	-12.17	37.00	4.83	Average	---	---
2	5097.00	54.33	74.00	-19.67	49.50	4.83	Peak	---	---
3	5350.00	42.69	54.00	-11.31	37.60	5.09	Average	---	---
4	5350.00	54.73	74.00	-19.27	49.64	5.09	Peak	---	---
5	10620.00	42.44	54.00	-11.56	27.48	14.96	Average	---	---
6	10620.00	55.53	74.00	-18.47	40.57	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical	Test Configuration	1

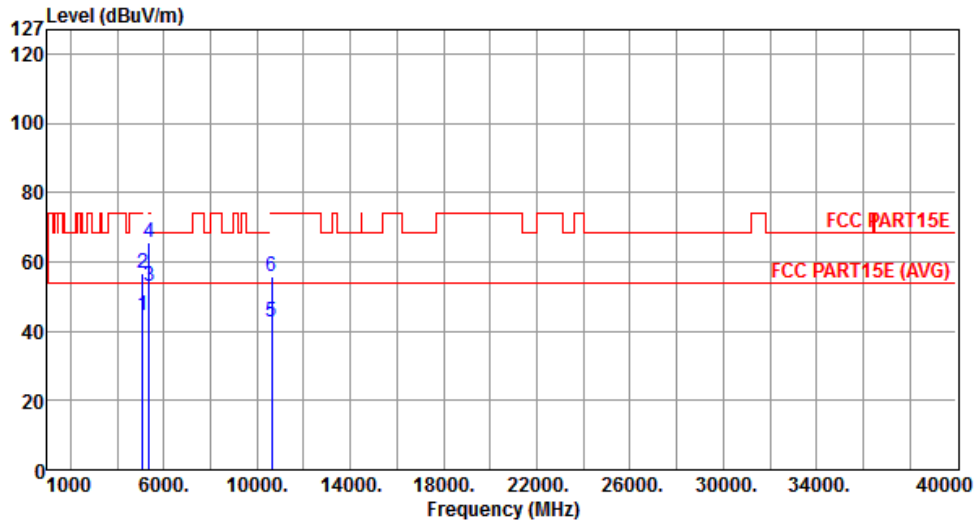


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.66	54.00	-9.34	39.83	4.83	Average	---	---
2	5097.00	56.89	74.00	-17.11	52.06	4.83	Peak	---	---
3	5350.00	53.00	54.00	-1.00	47.91	5.09	Average	---	---
4	5350.00	65.68	74.00	-8.32	60.59	5.09	Peak	---	---
5	10620.00	42.81	54.00	-11.19	27.85	14.96	Average	---	---
6	10620.00	55.87	74.00	-18.13	40.91	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal	Test Configuration	1

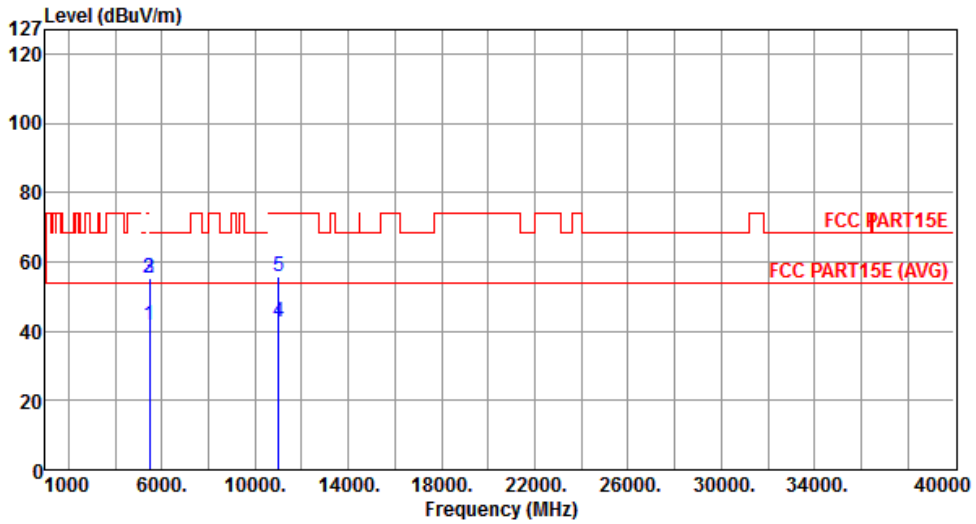


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	41.66	54.00	-12.34	36.48	5.18	Average	---	---
2	5460.00	55.16	74.00	-18.84	49.98	5.18	Peak	---	---
3	5470.00	55.34	68.30	-12.96	50.15	5.19	Peak	---	---
4	11020.00	42.69	54.00	-11.31	27.42	15.27	Average	---	---
5	11020.00	56.00	74.00	-18.00	40.73	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical	Test Configuration	1

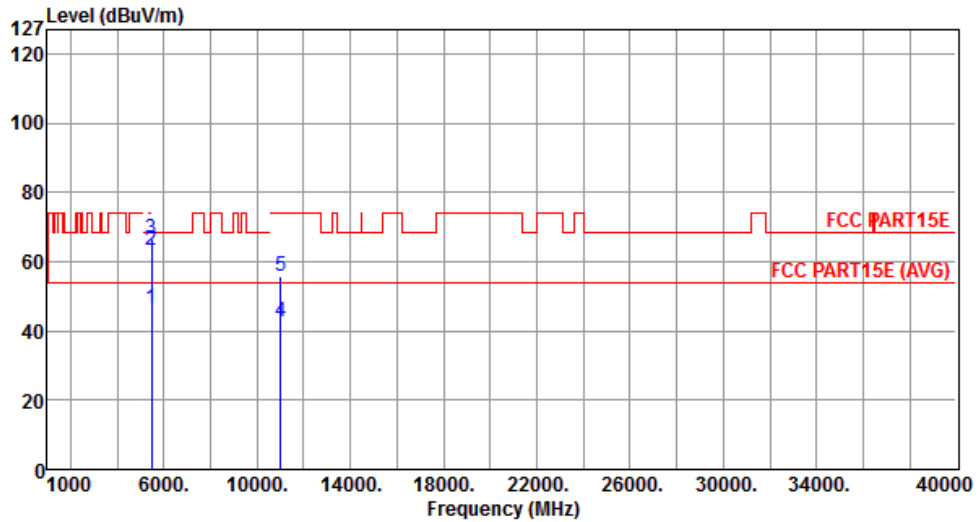


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.38	54.00	-7.62	41.20	5.18	Average	---	---
2	5460.00	63.08	74.00	-10.92	57.90	5.18	Peak	---	---
3	5470.00	66.74	68.30	-1.56	61.55	5.19	Peak	---	---
4	11020.00	42.71	54.00	-11.29	27.44	15.27	Average	---	---
5	11020.00	55.85	74.00	-18.15	40.58	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Horizontal	Test Configuration	1

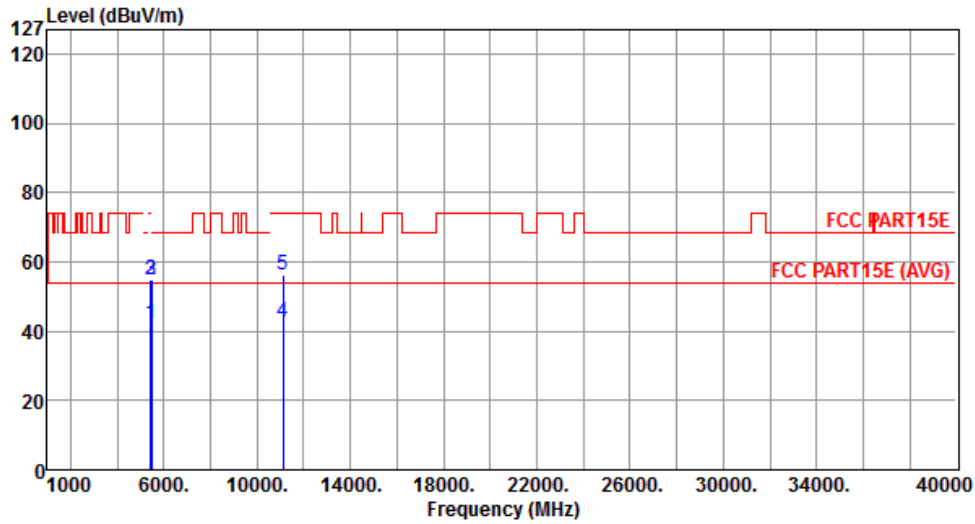


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5427.00	42.02	54.00	-11.98	36.88	5.14	Average	---	---
2	5427.00	54.70	74.00	-19.30	49.56	5.14	Peak	---	---
3	5470.00	54.65	68.30	-13.65	49.46	5.19	Peak	---	---
4	11100.00	42.70	54.00	-11.30	27.48	15.22	Average	---	---
5	11100.00	56.17	74.00	-17.83	40.95	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Vertical	Test Configuration	1

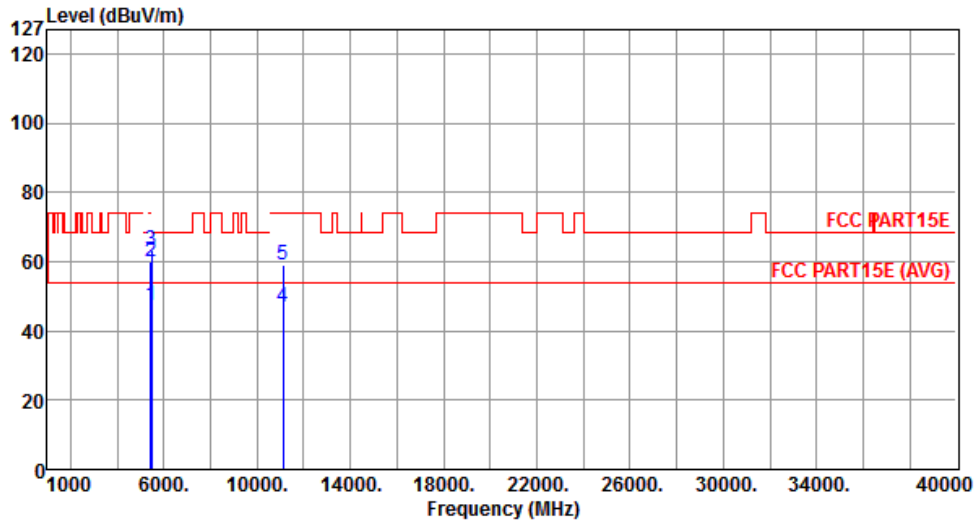


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5427.00	47.12	54.00	-6.88	41.98	5.14	Average	---	---
2	5427.00	59.98	74.00	-14.02	54.84	5.14	Peak	---	---
3	5470.00	63.25	68.30	-5.05	58.06	5.19	Peak	---	---
4	11100.00	46.87	54.00	-7.13	31.65	15.22	Average	---	---
5	11100.00	59.21	74.00	-14.79	43.99	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal	Test Configuration	1

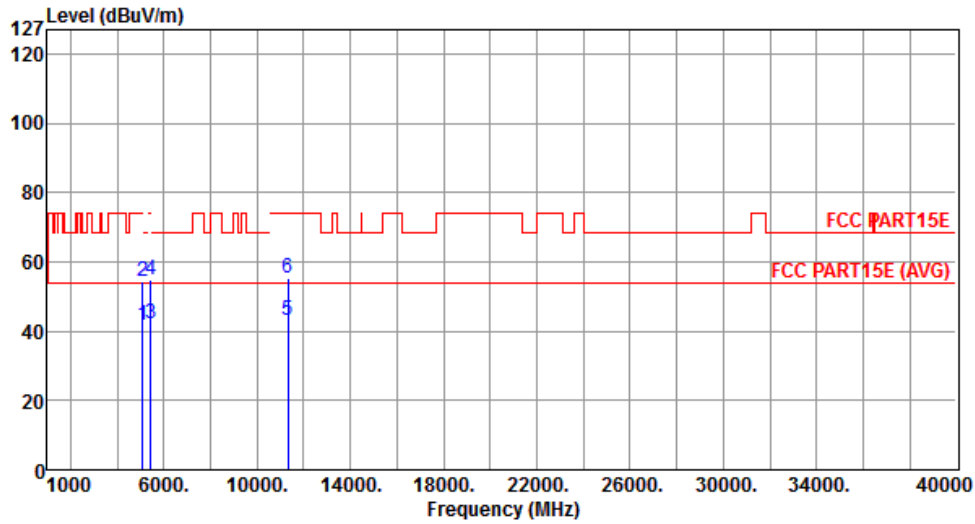


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.84	54.00	-12.16	37.01	4.83	Average	---	---
2	5097.00	54.20	74.00	-19.80	49.37	4.83	Peak	---	---
3	5427.00	42.09	54.00	-11.91	36.95	5.14	Average	---	---
4	5427.00	54.70	74.00	-19.30	49.56	5.14	Peak	---	---
5	11340.00	42.94	54.00	-11.06	27.87	15.07	Average	---	---
6	11340.00	55.51	74.00	-18.49	40.44	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical	Test Configuration	1

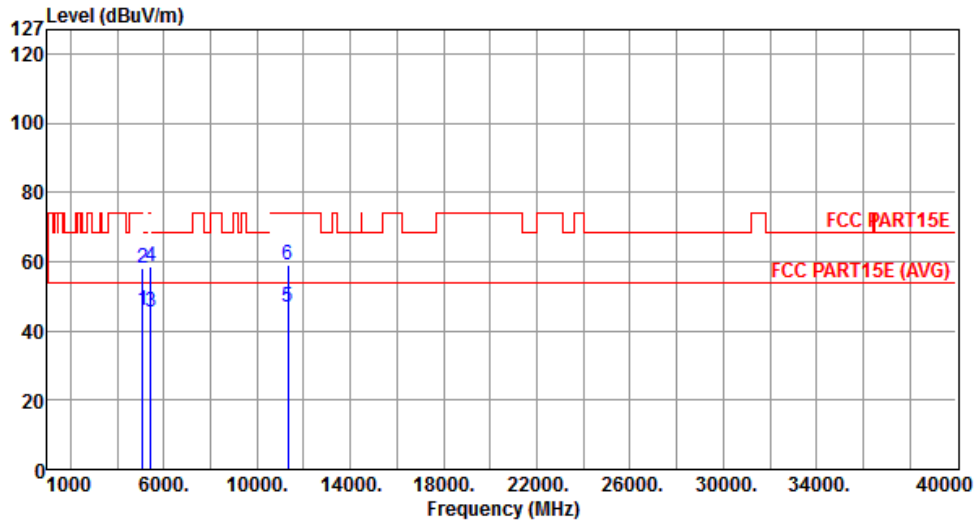


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.77	54.00	-8.23	40.94	4.83	Average	---	---
2	5097.00	57.92	74.00	-16.08	53.09	4.83	Peak	---	---
3	5427.00	45.36	54.00	-8.64	40.22	5.14	Average	---	---
4	5427.00	58.36	74.00	-15.64	53.22	5.14	Peak	---	---
5	11340.00	47.06	54.00	-6.94	31.99	15.07	Average	---	---
6	11340.00	59.14	74.00	-14.86	44.07	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal	Test Configuration	1

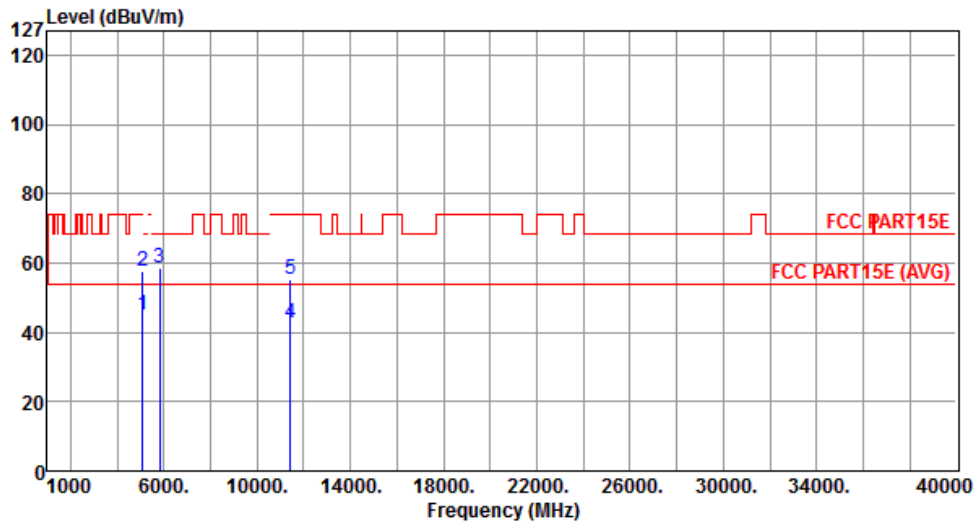


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.02	54.00	-8.98	39.53	5.49	Average	---	---
2	5097.00	57.73	74.00	-16.27	52.24	5.49	Peak	---	---
3	5825.00	58.80	68.20	-9.40	53.18	5.62	Peak	---	---
4	11420.00	42.87	54.00	-11.13	28.17	14.70	Average	---	---
5	11420.00	55.28	74.00	-18.72	40.58	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical	Test Configuration	1

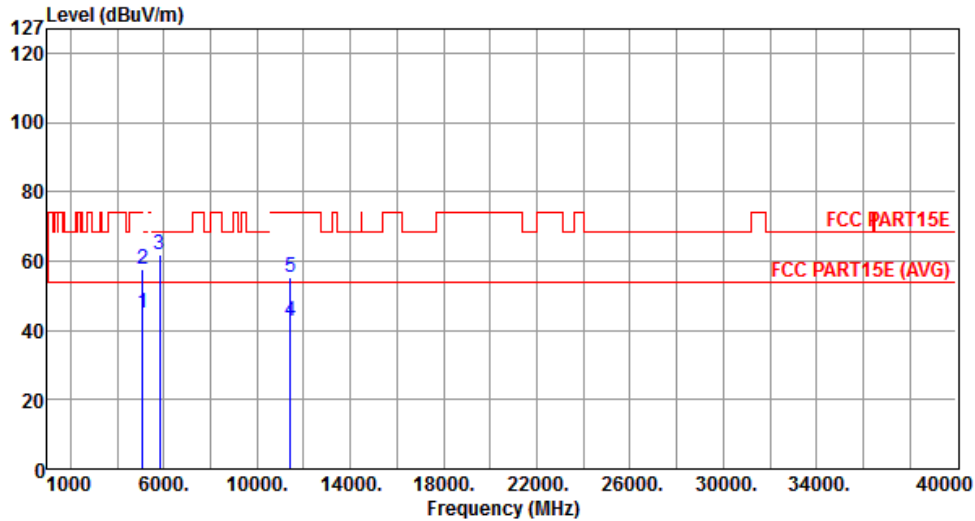


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.17	54.00	-8.83	39.68	5.49	Average	---	---
2	5097.00	57.74	74.00	-16.26	52.25	5.49	Peak	---	---
3	5825.00	61.93	68.20	-6.27	56.31	5.62	Peak	---	---
4	11420.00	42.80	54.00	-11.20	28.10	14.70	Average	---	---
5	11420.00	55.39	74.00	-18.61	40.69	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal	Test Configuration	2

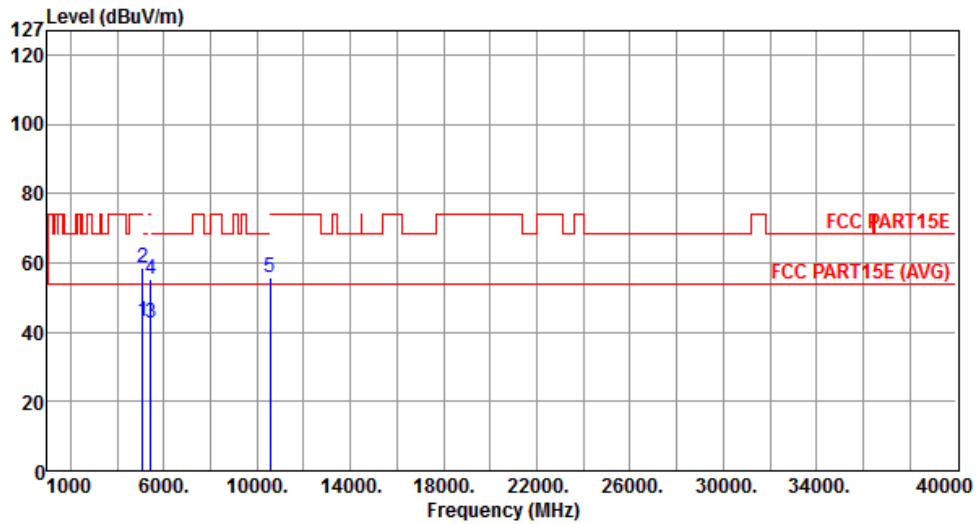


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.07	54.00	-10.93	38.24	4.83	Average	---	---
2	5097.00	58.66	74.00	-15.34	53.83	4.83	Peak	---	---
3	5427.00	42.82	54.00	-11.18	37.68	5.14	Average	---	---
4	5427.00	55.25	74.00	-18.75	50.11	5.14	Peak	---	---
5	10540.00	55.57	68.30	-12.73	40.67	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical	Test Configuration	2

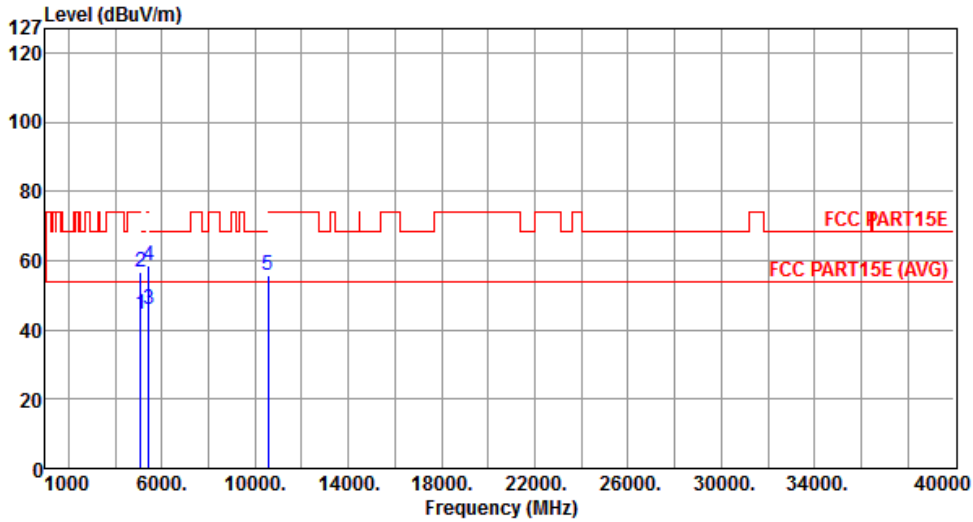


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.66	54.00	-9.34	39.83	4.83	Average	---	---
2	5097.00	56.75	74.00	-17.25	51.92	4.83	Peak	---	---
3	5427.00	45.90	54.00	-8.10	40.76	5.14	Average	---	---
4	5427.00	58.70	74.00	-15.30	53.56	5.14	Peak	---	---
5	10540.00	55.76	68.30	-12.54	40.86	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal	Test Configuration	2

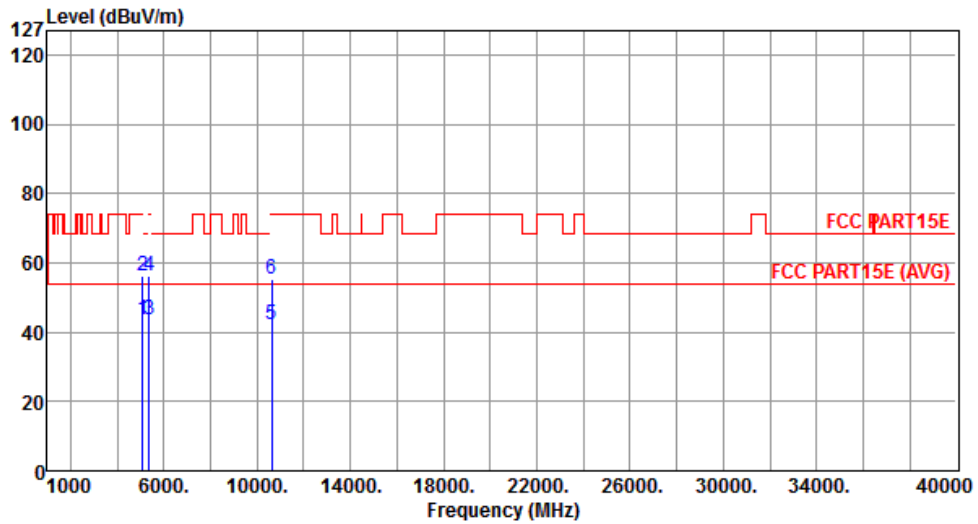


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.49	54.00	-10.51	38.66	4.83	Average	---	---
2	5097.00	56.15	74.00	-17.85	51.32	4.83	Peak	---	---
3	5350.00	43.71	54.00	-10.29	38.62	5.09	Average	---	---
4	5350.00	56.22	74.00	-17.78	51.13	5.09	Peak	---	---
5	10620.00	42.24	54.00	-11.76	27.28	14.96	Average	---	---
6	10620.00	55.33	74.00	-18.67	40.37	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical	Test Configuration	2

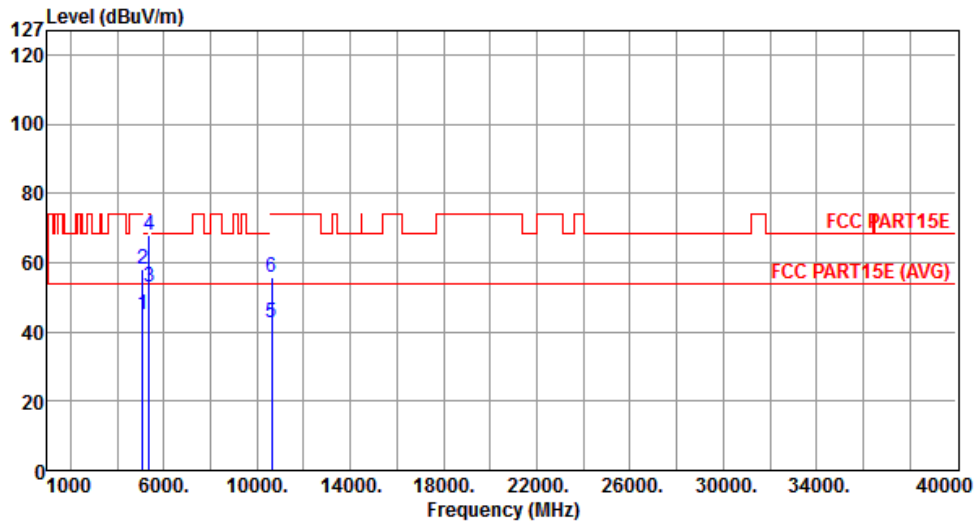


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.06	54.00	-8.94	40.23	4.83	Average	---	---
2	5097.00	58.00	74.00	-16.00	53.17	4.83	Peak	---	---
3	5350.00	52.98	54.00	-1.02	47.89	5.09	Average	---	---
4	5350.00	67.77	74.00	-6.23	62.68	5.09	Peak	---	---
5	10620.00	42.45	54.00	-11.55	27.49	14.96	Average	---	---
6	10620.00	55.81	74.00	-18.19	40.85	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal	Test Configuration	2

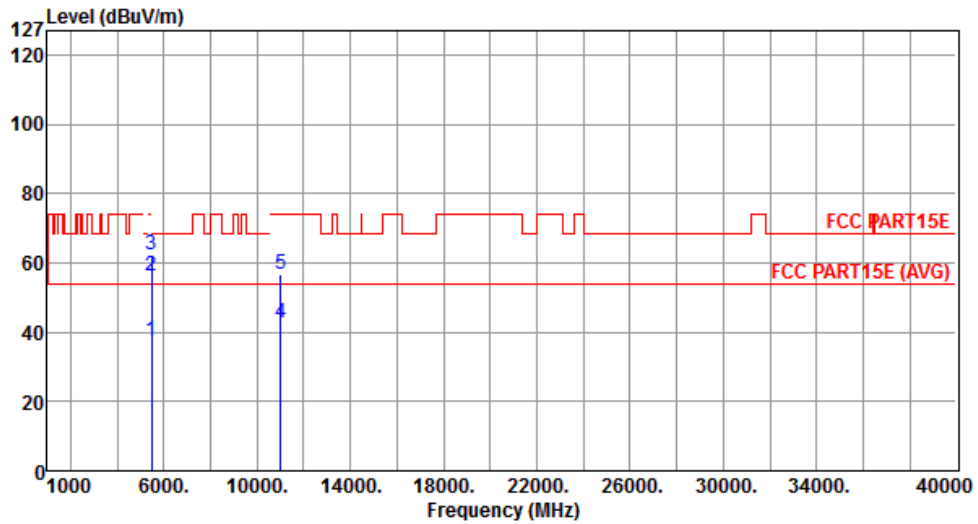


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	37.43	54.00	-16.57	32.25	5.18	Average	---	---
2	5460.00	56.33	74.00	-17.67	51.15	5.18	Peak	---	---
3	5470.00	62.37	68.30	-5.93	57.18	5.19	Peak	---	---
4	11020.00	42.83	54.00	-11.17	27.56	15.27	Average	---	---
5	11020.00	56.50	74.00	-17.50	41.23	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical	Test Configuration	2

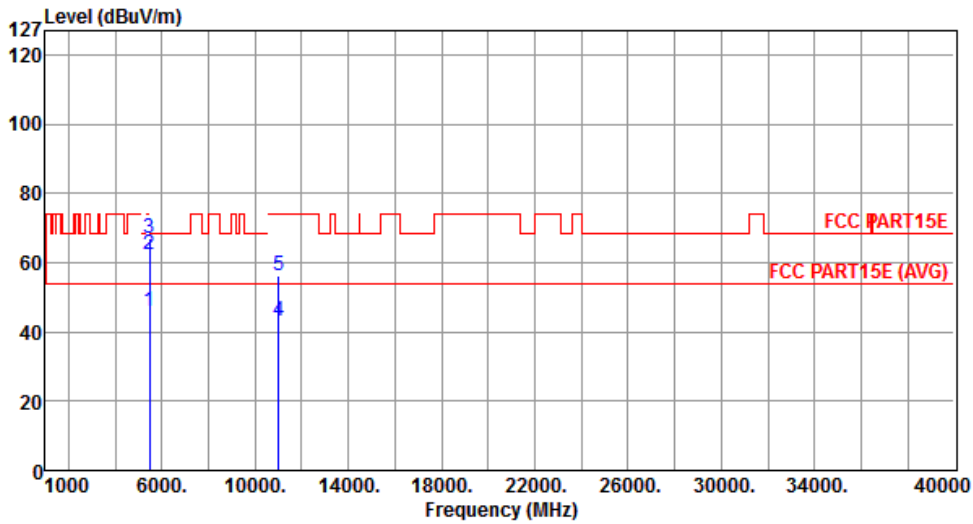


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.91	54.00	-8.09	40.73	5.18	Average	---	---
2	5460.00	62.52	74.00	-11.48	57.34	5.18	Peak	---	---
3	5470.00	66.97	68.30	-1.33	61.78	5.19	Peak	---	---
4	11020.00	43.21	54.00	-10.79	27.94	15.27	Average	---	---
5	11020.00	56.10	74.00	-17.90	40.83	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Horizontal	Test Configuration	2

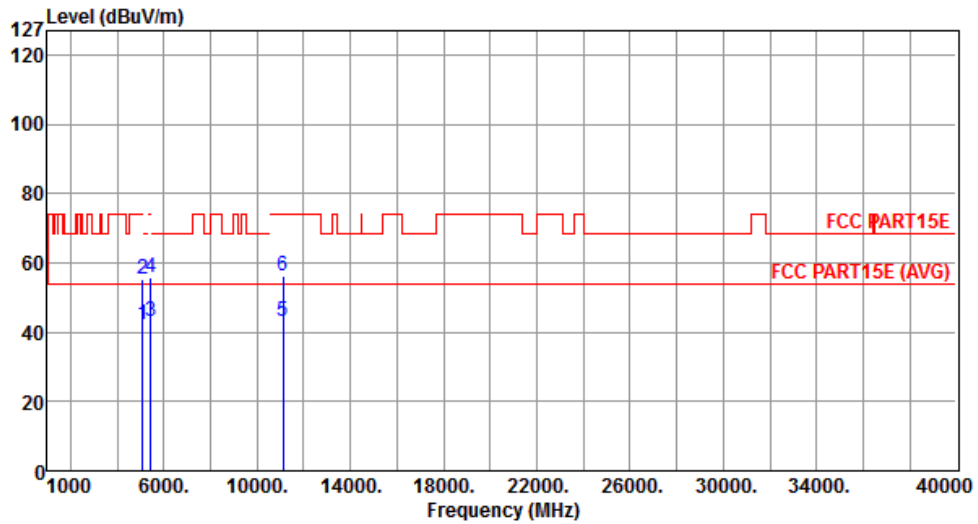


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.33	54.00	-11.67	37.50	4.83	Average	---	---
2	5097.00	55.10	74.00	-18.90	50.27	4.83	Peak	---	---
3	5427.00	43.08	54.00	-10.92	37.94	5.14	Average	---	---
4	5427.00	55.97	74.00	-18.03	50.83	5.14	Peak	---	---
5	11100.00	43.34	54.00	-10.66	28.12	15.22	Average	---	---
6	11100.00	56.19	74.00	-17.81	40.97	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Vertical	Test Configuration	2

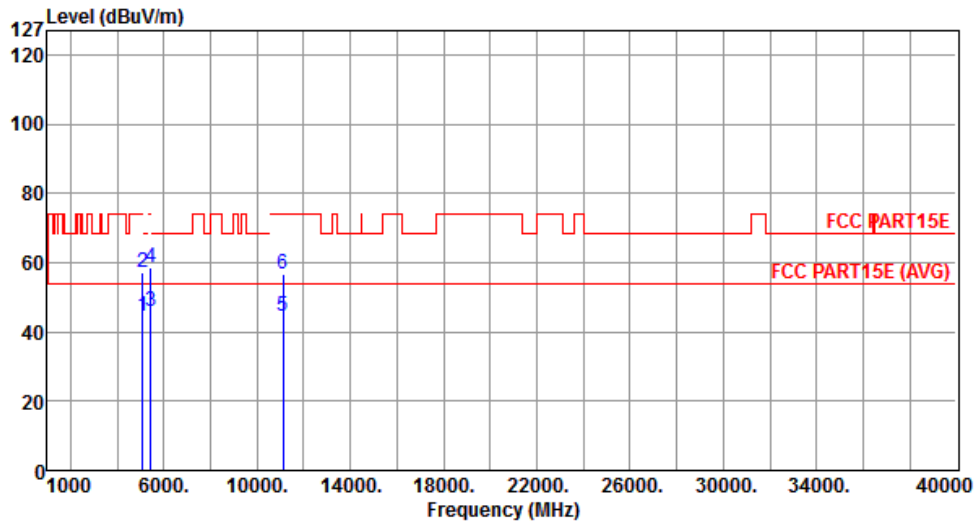


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.61	54.00	-9.39	39.78	4.83	Average	---	---
2	5097.00	57.18	74.00	-16.82	52.35	4.83	Peak	---	---
3	5427.00	45.97	54.00	-8.03	40.83	5.14	Average	---	---
4	5427.00	58.63	74.00	-15.37	53.49	5.14	Peak	---	---
5	11100.00	44.38	54.00	-9.62	29.16	15.22	Average	---	---
6	11100.00	56.56	74.00	-17.44	41.34	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal	Test Configuration	2

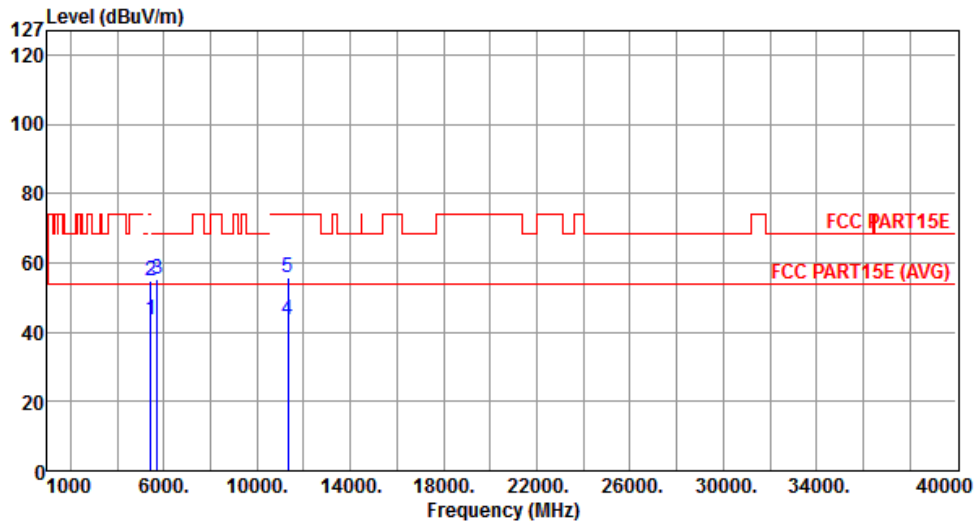


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5427.00	43.40	54.00	-10.60	38.26	5.14	Average	---	---
2	5427.00	54.65	74.00	-19.35	49.51	5.14	Peak	---	---
3	5725.00	55.24	68.30	-13.06	49.68	5.56	Peak	---	---
4	11340.00	43.75	54.00	-10.25	28.68	15.07	Average	---	---
5	11340.00	55.86	74.00	-18.14	40.79	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical	Test Configuration	2

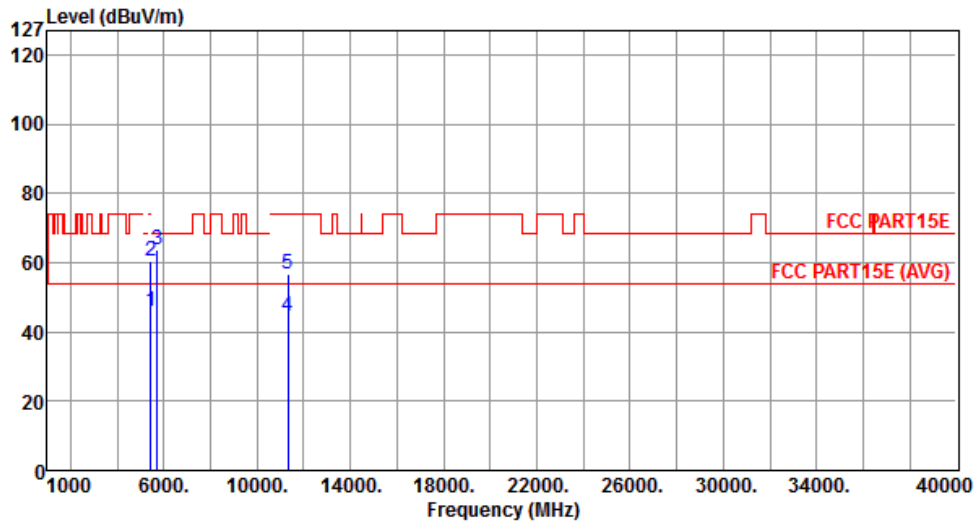


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5427.00	45.99	54.00	-8.01	40.85	5.14	Average	---	---
2	5427.00	60.46	74.00	-13.54	55.32	5.14	Peak	---	---
3	5725.00	63.94	68.30	-4.36	58.38	5.56	Peak	---	---
4	11340.00	44.59	54.00	-9.41	29.52	15.07	Average	---	---
5	11340.00	56.80	74.00	-17.20	41.73	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal	Test Configuration	2

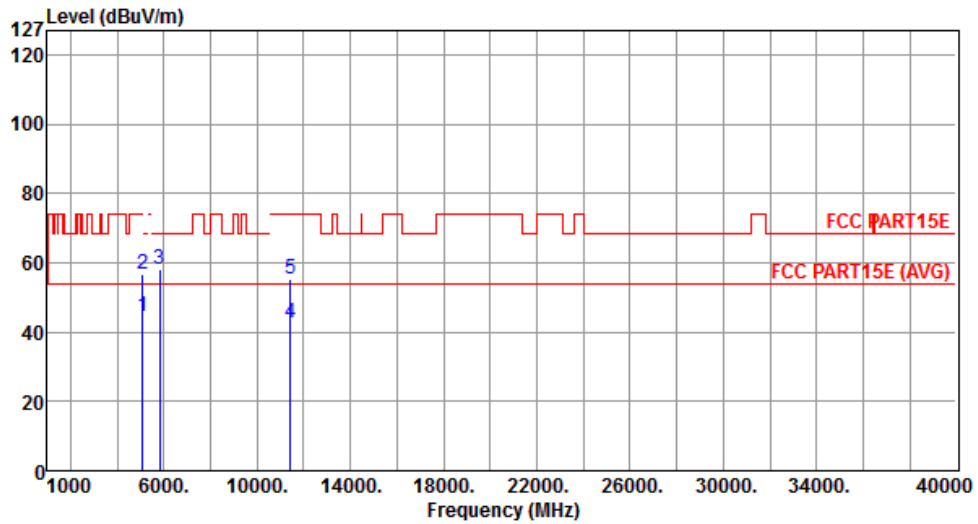


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.64	54.00	-9.36	39.15	5.49	Average	---	---
2	5097.00	56.51	74.00	-17.49	51.02	5.49	Peak	---	---
3	5825.00	58.15	68.20	-10.05	52.53	5.62	Peak	---	---
4	11420.00	42.53	54.00	-11.47	27.83	14.70	Average	---	---
5	11420.00	55.24	74.00	-18.76	40.54	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical	Test Configuration	2

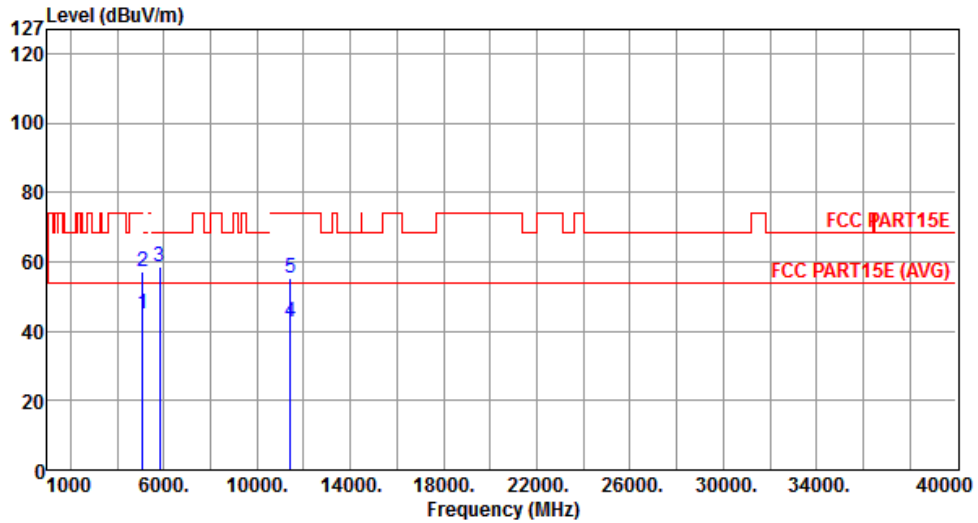


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.94	54.00	-9.06	39.45	5.49	Average	---	---
2	5097.00	56.97	74.00	-17.03	51.48	5.49	Peak	---	---
3	5825.00	58.63	68.20	-9.57	53.01	5.62	Peak	---	---
4	11420.00	42.56	54.00	-11.44	27.86	14.70	Average	---	---
5	11420.00	55.08	74.00	-18.92	40.38	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal	Test Configuration	3

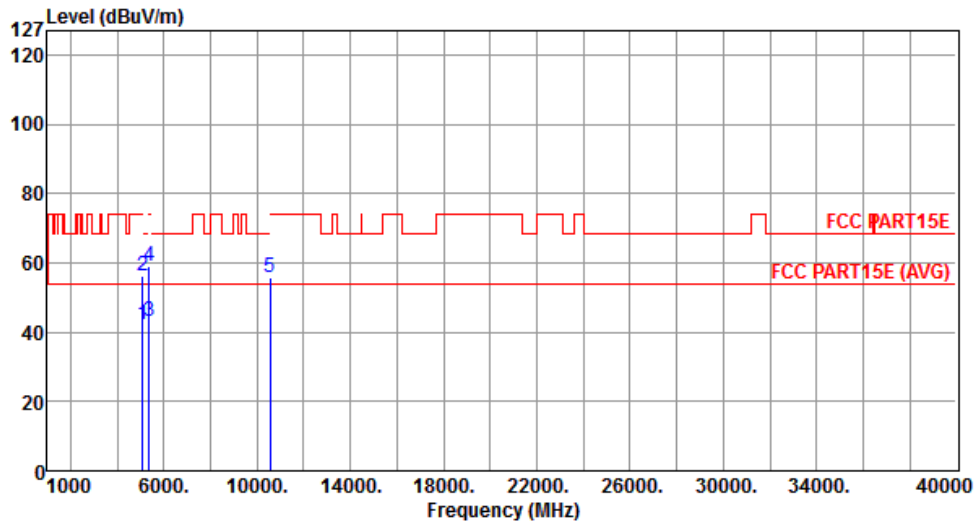


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.28	54.00	-11.72	37.45	4.83	Average	---	---
2	5097.00	56.45	74.00	-17.55	51.62	4.83	Peak	---	---
3	5350.00	43.29	54.00	-10.71	38.20	5.09	Average	---	---
4	5350.00	59.07	74.00	-14.93	53.98	5.09	Peak	---	---
5	10540.00	55.61	68.30	-12.69	40.71	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical	Test Configuration	3

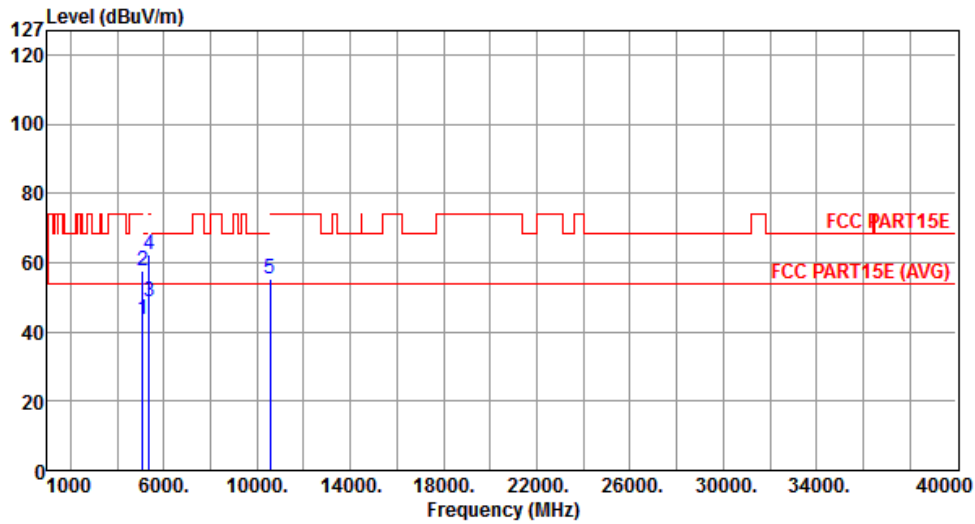


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.71	54.00	-10.29	38.88	4.83	Average	---	---
2	5097.00	57.45	74.00	-16.55	52.62	4.83	Peak	---	---
3	5350.00	48.56	54.00	-5.44	43.47	5.09	Average	---	---
4	5350.00	62.48	74.00	-11.52	57.39	5.09	Peak	---	---
5	10540.00	55.33	68.30	-12.97	40.43	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal	Test Configuration	3

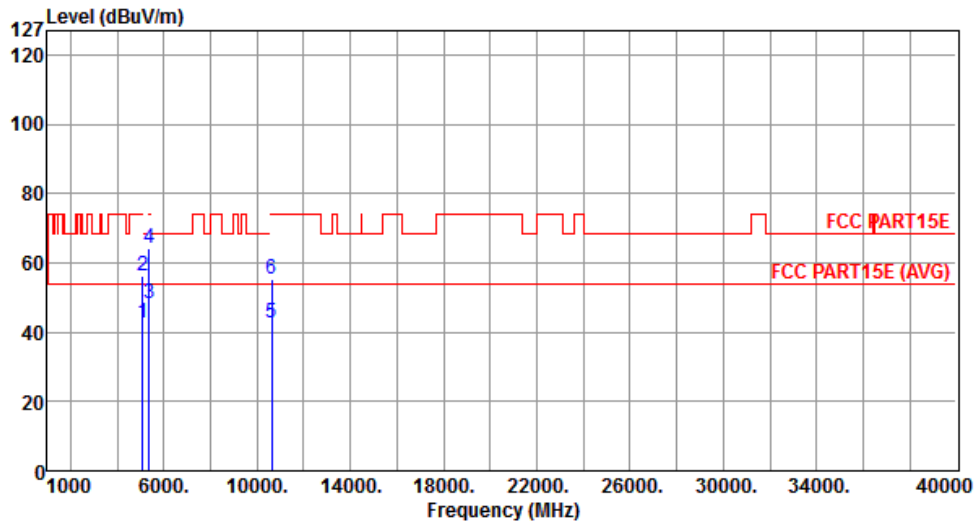


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.44	54.00	-11.56	37.61	4.83	Average	---	---
2	5097.00	56.20	74.00	-17.80	51.37	4.83	Peak	---	---
3	5350.00	48.23	54.00	-5.77	43.14	5.09	Average	---	---
4	5350.00	64.08	74.00	-9.92	58.99	5.09	Peak	---	---
5	10620.00	42.64	54.00	-11.36	27.68	14.96	Average	---	---
6	10620.00	55.49	74.00	-18.51	40.53	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical	Test Configuration	3

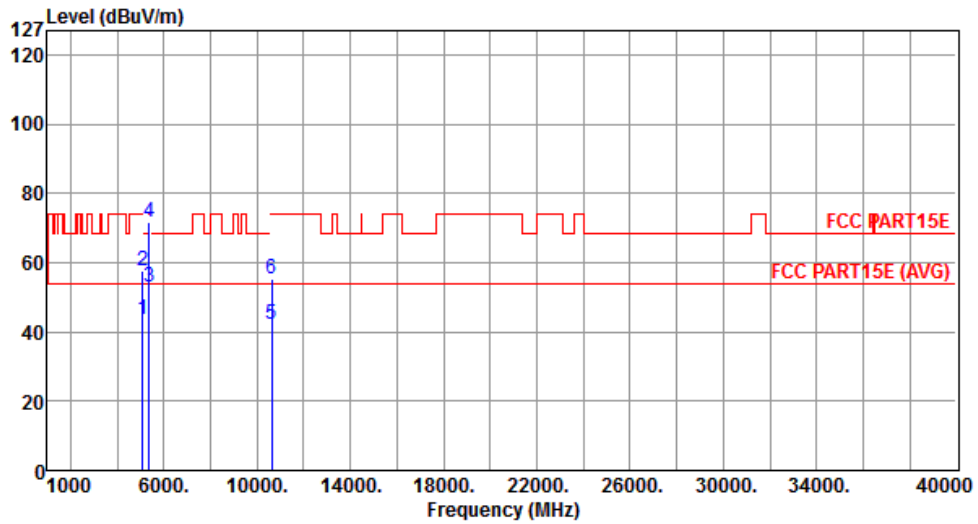


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.45	54.00	-10.55	38.62	4.83	Average	---	---
2	5097.00	57.55	74.00	-16.45	52.72	4.83	Peak	---	---
3	5350.00	52.98	54.00	-1.02	47.89	5.09	Average	---	---
4	5350.00	71.78	74.00	-2.22	66.69	5.09	Peak	---	---
5	10620.00	42.23	54.00	-11.77	27.27	14.96	Average	---	---
6	10620.00	55.50	74.00	-18.50	40.54	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal	Test Configuration	3

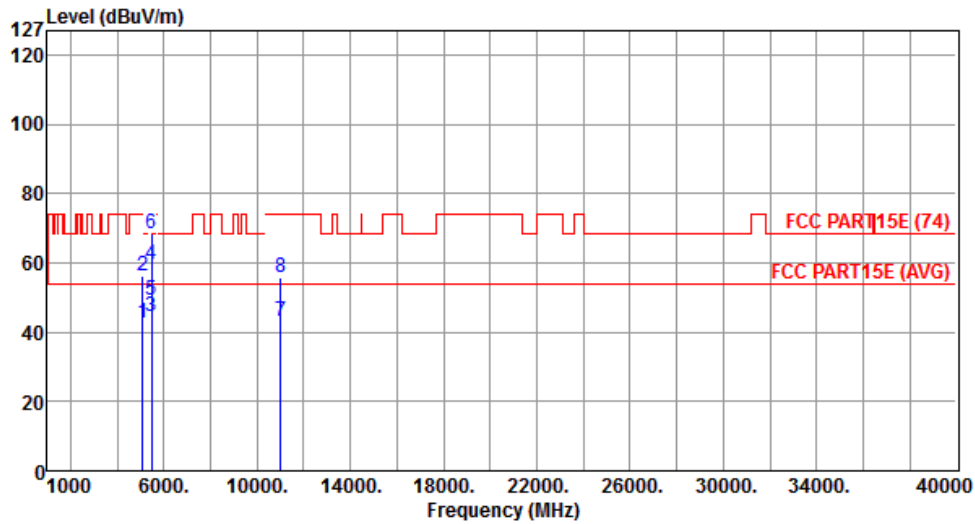


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.44	54.00	-11.56	37.61	4.83	Average	---	---
2	5097.00	56.30	74.00	-17.70	51.47	4.83	Peak	---	---
3	5460.00	44.42	54.00	-9.58	39.24	5.18	Average	---	---
4	5460.00	59.53	74.00	-14.47	54.35	5.18	Peak	---	---
5	5470.00	49.22	54.00	-4.78	44.03	5.19	Average	---	---
6	5470.00	68.58	74.00	-5.42	63.39	5.19	Peak	---	---
7	11020.00	43.00	54.00	-11.00	27.73	15.27	Average	---	---
8	11020.00	55.95	74.00	-18.05	40.68	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical	Test Configuration	3

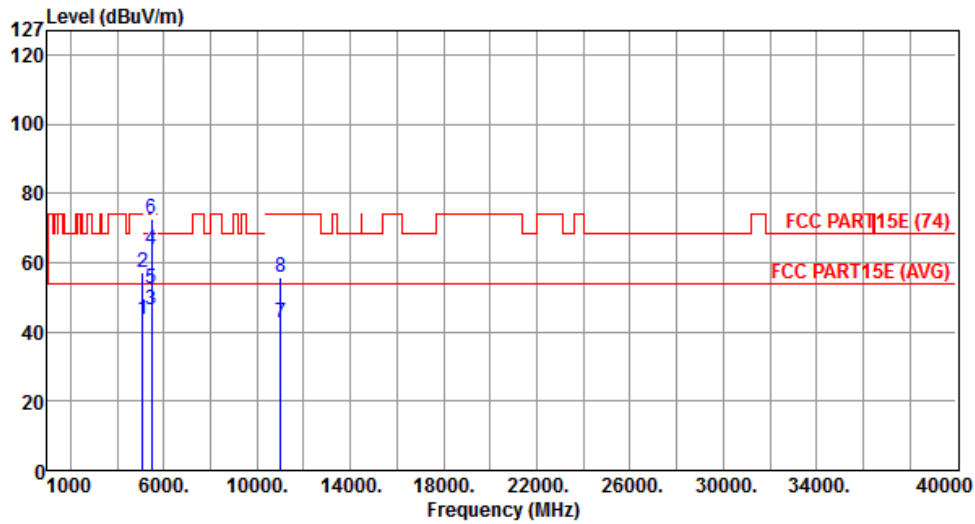


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.71	54.00	-10.29	38.88	4.83	Average	---	---
2	5097.00	57.40	74.00	-16.60	52.57	4.83	Peak	---	---
3	5460.00	46.30	54.00	-7.70	41.12	5.18	Average	---	---
4	5460.00	63.60	74.00	-10.40	58.42	5.18	Peak	---	---
5	5470.00	52.70	54.00	-1.30	47.51	5.19	Average	---	---
6	5470.00	72.63	74.00	-1.37	67.44	5.19	Peak	---	---
7	11020.00	42.76	54.00	-11.24	27.49	15.27	Average	---	---
8	11020.00	55.79	74.00	-18.21	40.52	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Horizontal	Test Configuration	3

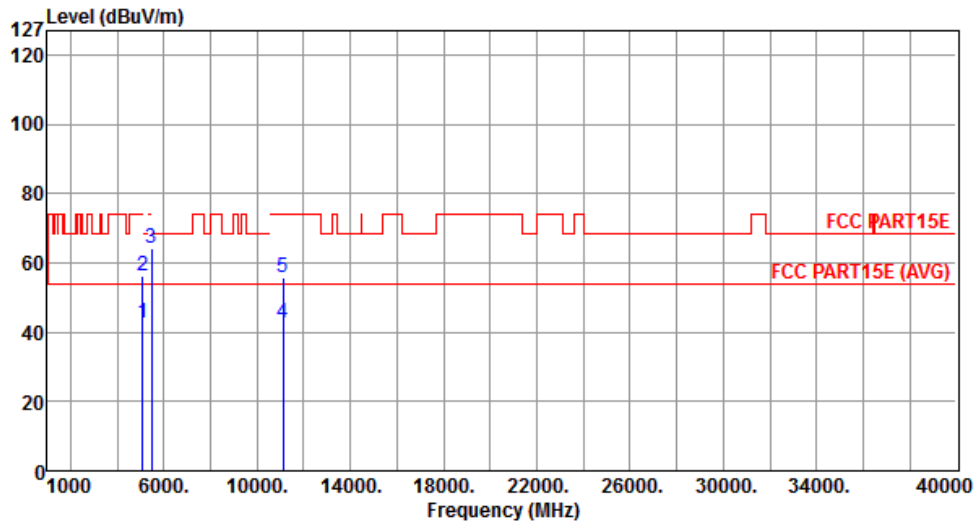


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.46	54.00	-11.54	37.63	4.83	Average	---	---
2	5097.00	56.30	74.00	-17.70	51.47	4.83	Peak	---	---
3	5470.00	64.27	68.30	-4.03	59.08	5.19	Peak	---	---
4	11100.00	42.55	54.00	-11.45	27.33	15.22	Average	---	---
5	11100.00	55.78	74.00	-18.22	40.56	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Vertical	Test Configuration	3

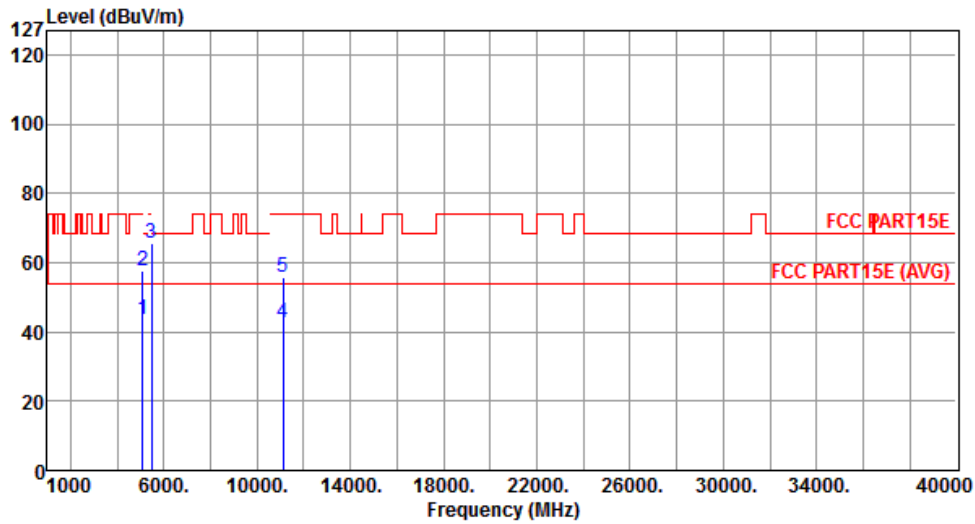


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.45	54.00	-10.55	38.62	4.83	Average	---	0
2	5097.00	57.76	74.00	-16.24	52.93	4.83	Peak	---	0
3	5470.00	65.81	68.30	-2.49	60.62	5.19	Peak	---	0
4	11100.00	42.54	54.00	-11.46	27.32	15.22	Average	---	0
5	11100.00	55.89	74.00	-18.11	40.67	15.22	Peak	---	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal	Test Configuration	3

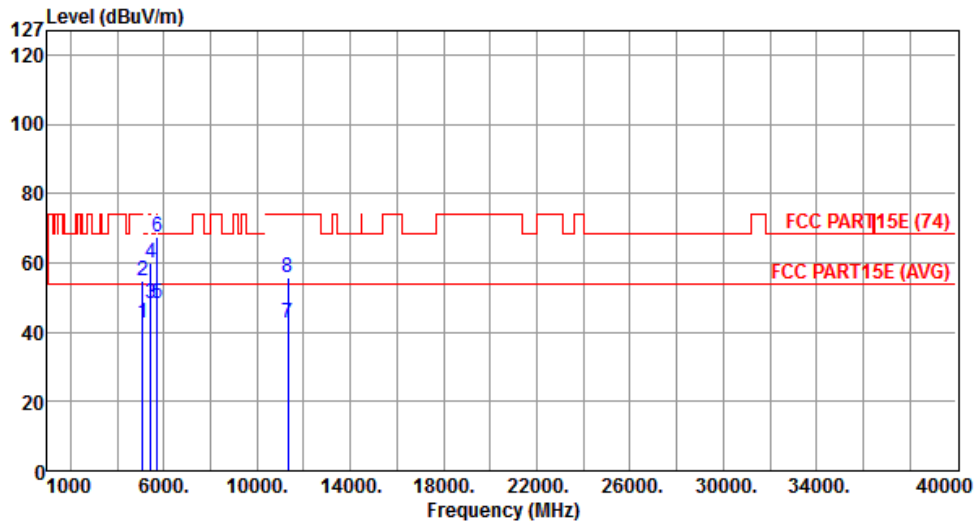


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.65	54.00	-11.35	37.82	4.83	Average	---	---
2	5097.00	54.98	74.00	-19.02	50.15	4.83	Peak	---	---
3	5427.00	48.08	54.00	-5.92	42.94	5.14	Average	---	---
4	5427.00	60.13	74.00	-13.87	54.99	5.14	Peak	---	---
5	5725.00	48.13	54.00	-5.87	42.57	5.56	Average	---	---
6	5725.00	67.63	74.00	-6.37	62.07	5.56	Peak	---	---
7	11340.00	42.58	54.00	-11.42	27.51	15.07	Average	---	---
8	11340.00	55.74	74.00	-18.26	40.67	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical	Test Configuration	3

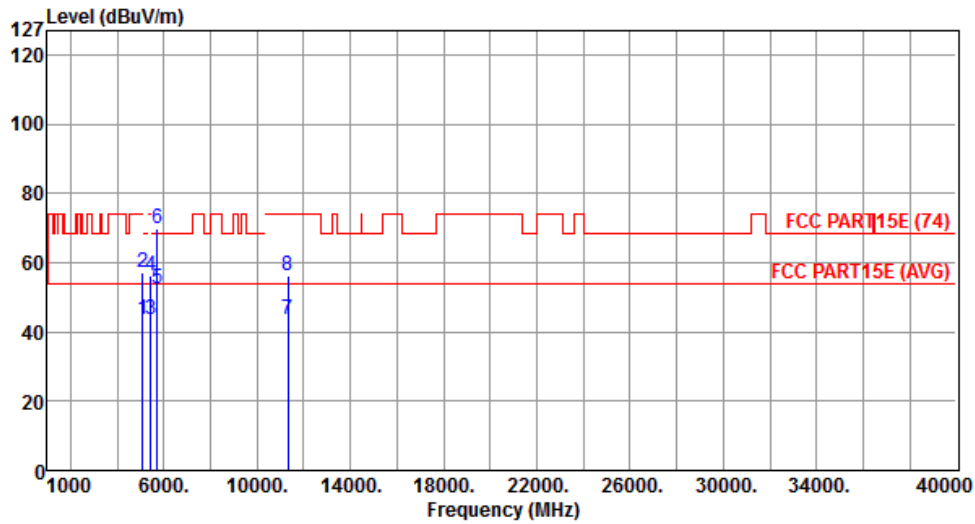


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.45	54.00	-10.55	38.62	4.83	Average	---	---
2	5097.00	57.33	74.00	-16.67	52.50	4.83	Peak	---	---
3	5427.00	43.80	54.00	-10.20	38.66	5.14	Average	---	---
4	5427.00	56.08	74.00	-17.92	50.94	5.14	Peak	---	---
5	5725.00	52.46	54.00	-1.54	46.90	5.56	Average	---	---
6	5725.00	69.79	74.00	-4.21	64.23	5.56	Peak	---	---
7	11340.00	43.71	54.00	-10.29	28.64	15.07	Average	---	---
8	11340.00	56.45	74.00	-17.55	41.38	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal	Test Configuration	3

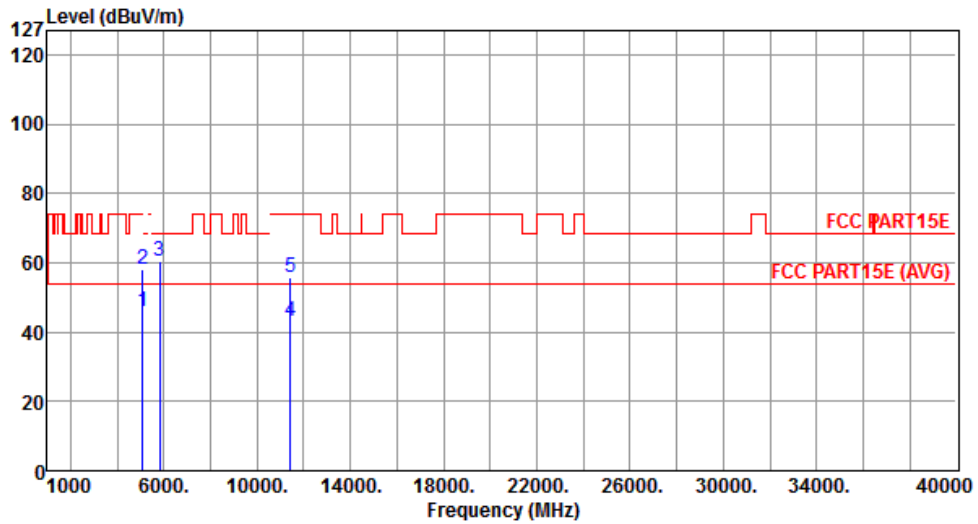


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.71	54.00	-8.29	40.22	5.49	Average	---	---
2	5097.00	57.93	74.00	-16.07	52.44	5.49	Peak	---	---
3	5825.00	60.23	68.20	-7.97	54.61	5.62	Peak	---	---
4	11420.00	42.91	54.00	-11.09	28.21	14.70	Average	---	---
5	11420.00	55.68	74.00	-18.32	40.98	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical	Test Configuration	3

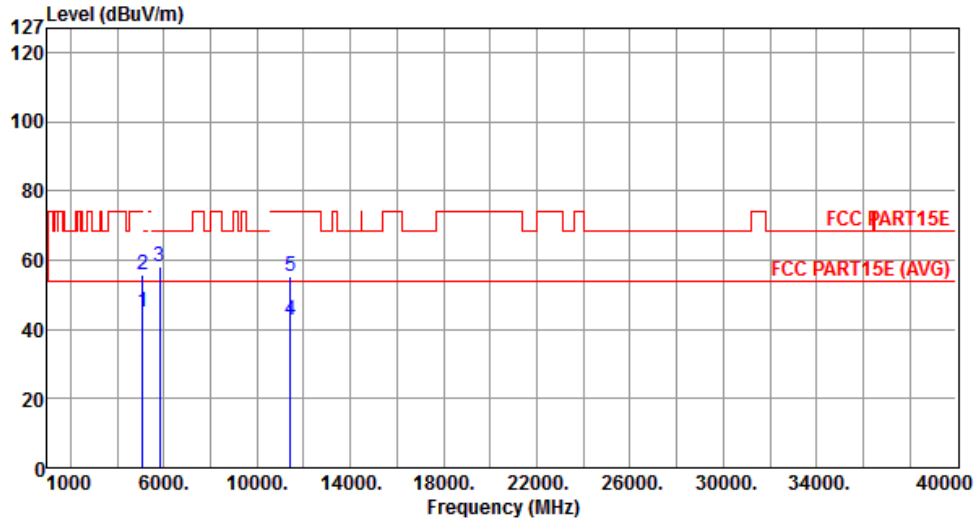


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.92	54.00	-9.08	39.43	5.49	Average	---	---
2	5097.00	55.96	74.00	-18.04	50.47	5.49	Peak	---	---
3	5825.00	58.33	68.20	-9.87	52.71	5.62	Peak	---	---
4	11420.00	42.87	54.00	-11.13	28.17	14.70	Average	---	---
5	11420.00	55.08	74.00	-18.92	40.38	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal	Test Configuration	4

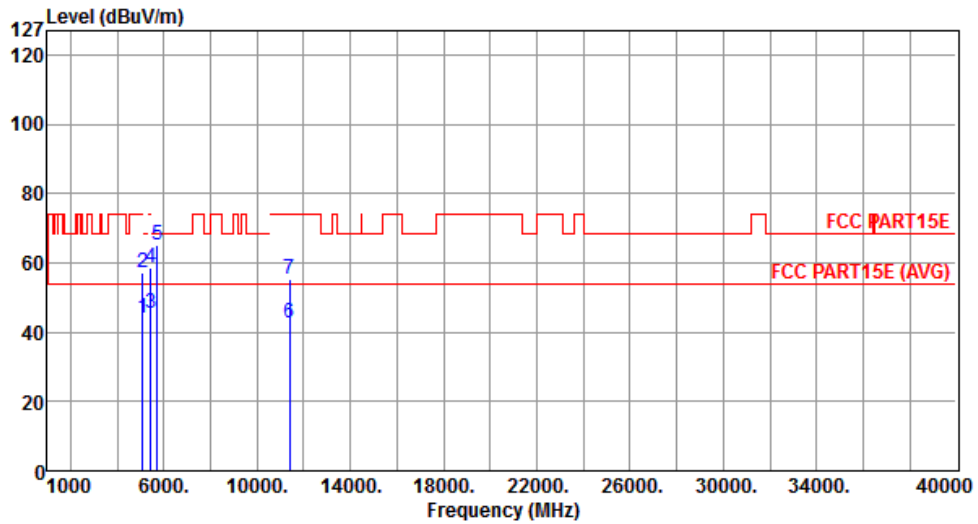


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.14	54.00	-9.86	39.31	4.83	Average	---	---
2	5097.00	57.01	74.00	-16.99	52.18	4.83	Peak	---	---
3	5427.00	45.34	54.00	-8.66	40.20	5.14	Average	---	---
4	5427.00	58.45	74.00	-15.55	53.31	5.14	Peak	---	---
5	5725.00	65.09	68.30	-3.21	59.53	5.56	Peak	---	---
6	11400.00	42.51	54.00	-11.49	27.48	15.03	Average	---	---
7	11400.00	55.42	74.00	-18.58	40.39	15.03	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical	Test Configuration	4

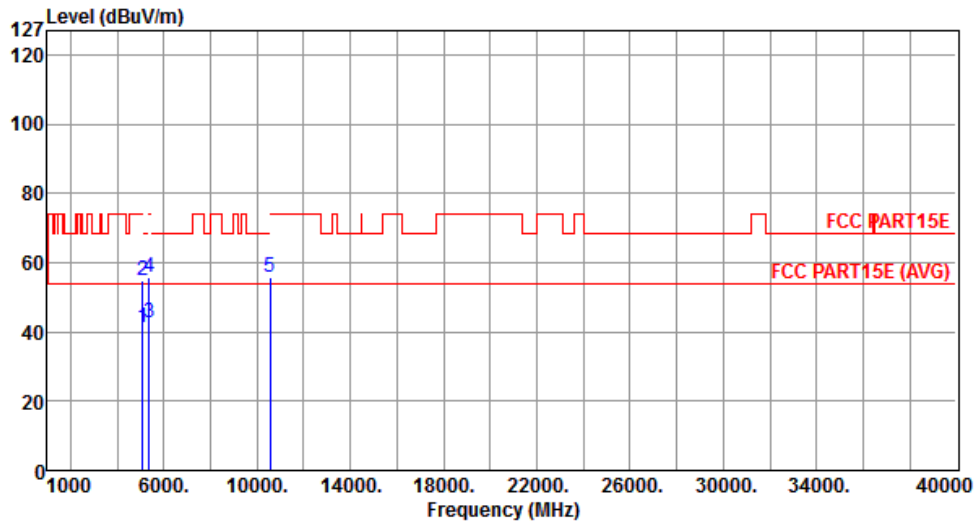


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.37	54.00	-12.63	36.54	4.83	Average	---	---
2	5097.00	55.06	74.00	-18.94	50.23	4.83	Peak	---	---
3	5350.00	42.42	54.00	-11.58	37.33	5.09	Average	---	---
4	5350.00	55.77	74.00	-18.23	50.68	5.09	Peak	---	---
5	10540.00	55.54	68.30	-12.76	40.64	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal	Test Configuration	4

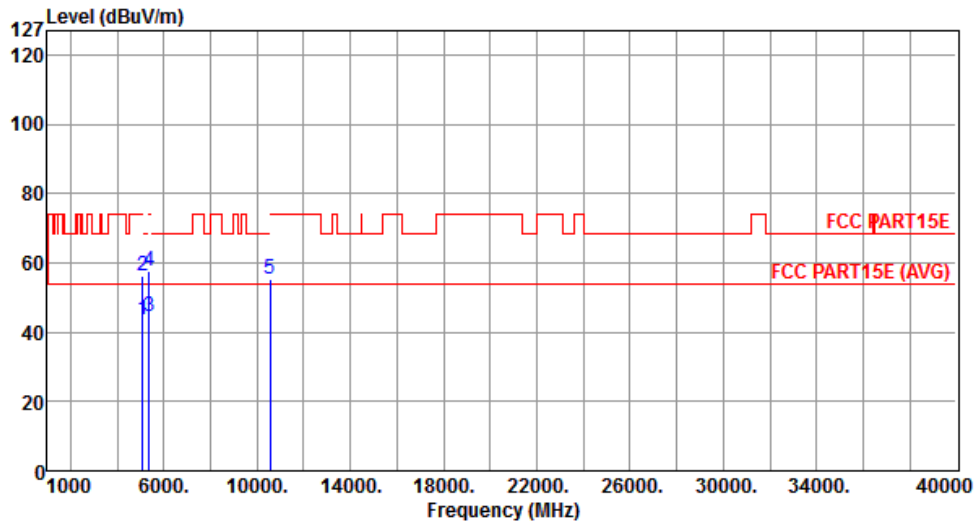


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.69	54.00	-10.31	38.86	4.83	Average	---	---
2	5097.00	56.37	74.00	-17.63	51.54	4.83	Peak	---	---
3	5350.00	44.47	54.00	-9.53	39.38	5.09	Average	---	---
4	5350.00	57.55	74.00	-16.45	52.46	5.09	Peak	---	---
5	10540.00	55.22	68.30	-13.08	40.32	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical	Test Configuration	4

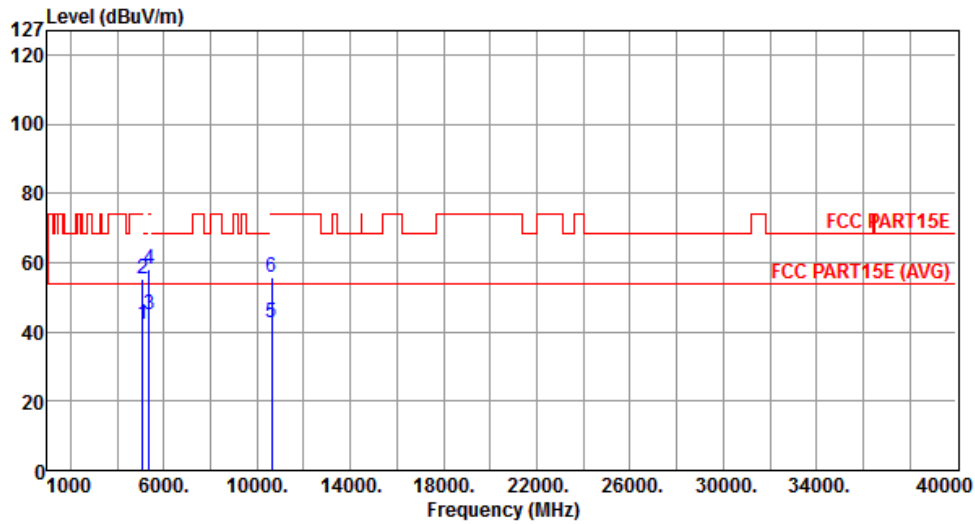


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.03	54.00	-11.97	37.20	4.83	Average	---	---
2	5097.00	55.40	74.00	-18.60	50.57	4.83	Peak	---	---
3	5350.00	44.98	54.00	-9.02	39.89	5.09	Average	---	---
4	5350.00	57.98	74.00	-16.02	52.89	5.09	Peak	---	---
5	10620.00	42.64	54.00	-11.36	27.68	14.96	Average	---	---
6	10620.00	55.57	74.00	-18.43	40.61	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal	Test Configuration	4

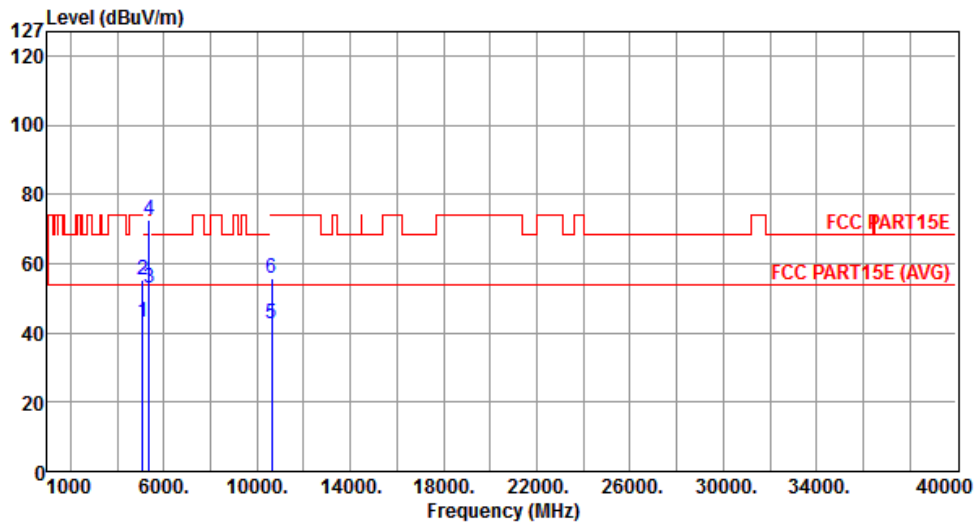


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.18	54.00	-10.82	38.35	4.83	Average	---	---
2	5097.00	55.50	74.00	-18.50	50.67	4.83	Peak	---	---
3	5350.00	53.00	54.00	-1.00	47.91	5.09	Average	---	---
4	5350.00	72.42	74.00	-1.58	67.33	5.09	Peak	---	---
5	10620.00	42.83	54.00	-11.17	27.87	14.96	Average	---	---
6	10620.00	55.62	74.00	-18.38	40.66	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical	Test Configuration	4

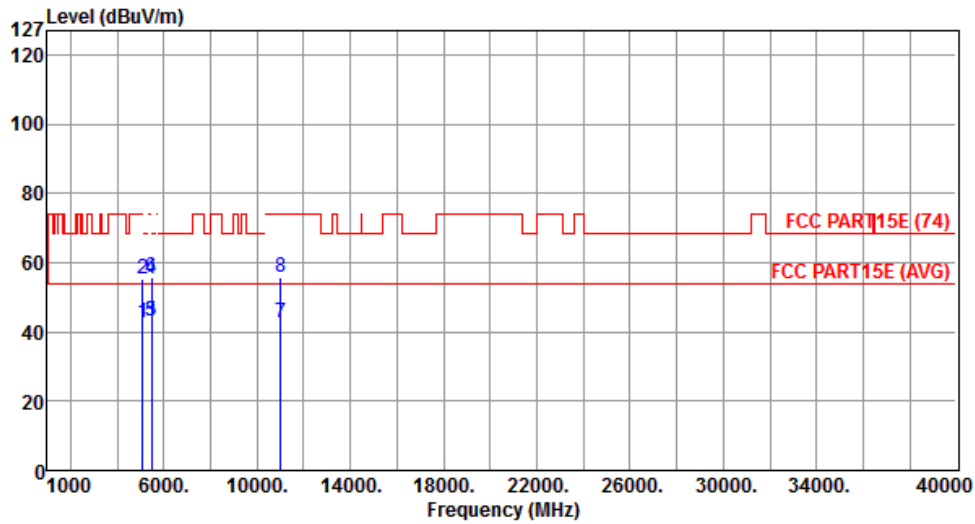


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.54	54.00	-11.46	37.71	4.83	Average	---	---
2	5097.00	55.33	74.00	-18.67	50.50	4.83	Peak	---	---
3	5460.00	42.92	54.00	-11.08	37.74	5.18	Average	---	---
4	5460.00	55.31	74.00	-18.69	50.13	5.18	Peak	---	---
5	5470.00	43.01	54.00	-10.99	37.82	5.19	Average	---	---
6	5470.00	55.90	74.00	-18.10	50.71	5.19	Peak	---	---
7	11020.00	42.75	54.00	-11.25	27.48	15.27	Average	---	---
8	11020.00	55.63	74.00	-18.37	40.36	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Horizontal	Test Configuration	4

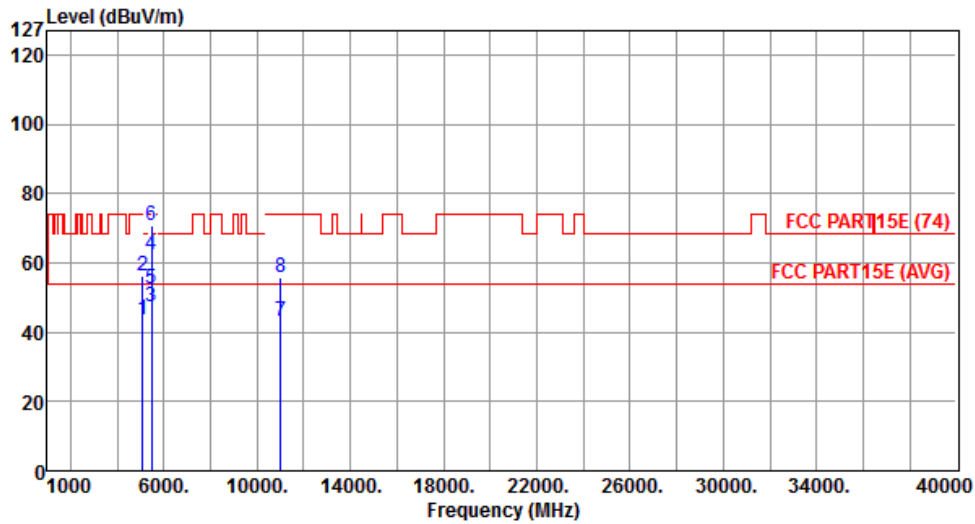


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.70	54.00	-10.30	38.87	4.83	Average	---	---
2	5097.00	56.20	74.00	-17.80	51.37	4.83	Peak	---	---
3	5460.00	47.53	54.00	-6.47	42.35	5.18	Average	---	---
4	5460.00	62.20	74.00	-11.80	57.02	5.18	Peak	---	---
5	5470.00	52.57	54.00	-1.43	47.38	5.19	Average	---	---
6	5470.00	70.70	74.00	-3.30	65.51	5.19	Peak	---	---
7	11020.00	42.89	54.00	-11.11	27.62	15.27	Average	---	---
8	11020.00	56.00	74.00	-18.00	40.73	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Vertical	Test Configuration	4

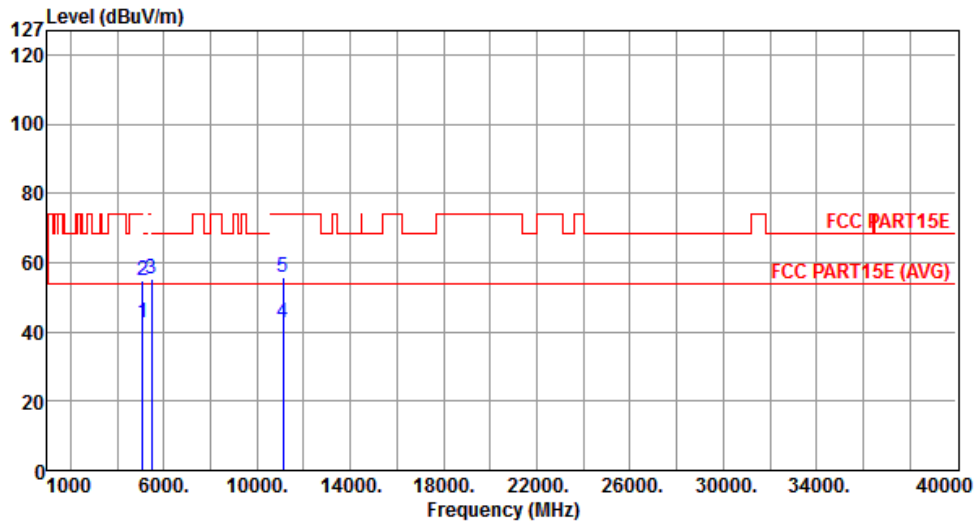


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.48	54.00	-11.52	37.65	4.83	Average	---	---
2	5097.00	54.79	74.00	-19.21	49.96	4.83	Peak	---	---
3	5470.00	55.27	68.30	-13.03	50.08	5.19	Peak	---	---
4	11100.00	42.59	54.00	-11.41	27.37	15.22	Average	---	---
5	11100.00	55.63	74.00	-18.37	40.41	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal	Test Configuration	4

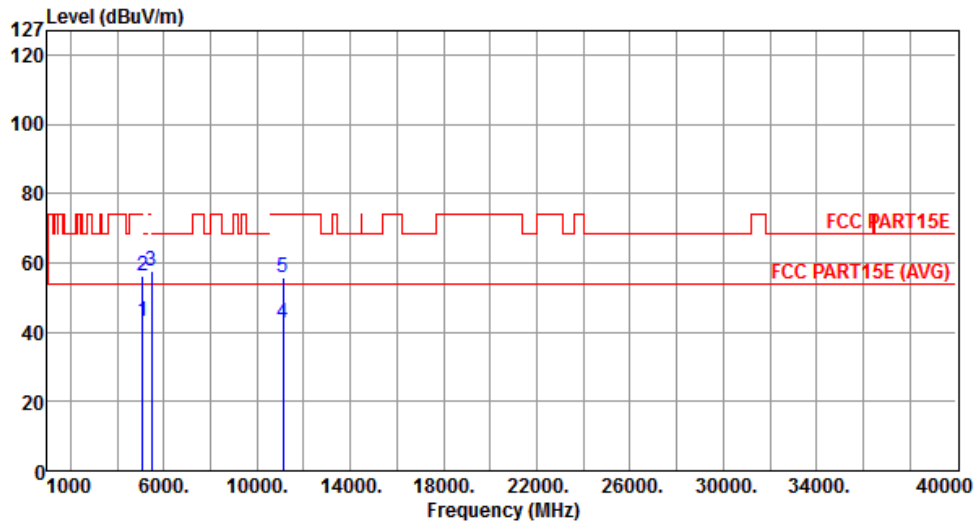


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.23	54.00	-10.77	38.40	4.83	Average	---	---
2	5097.00	56.31	74.00	-17.69	51.48	4.83	Peak	---	---
3	5470.00	57.62	68.30	-10.68	52.43	5.19	Peak	---	---
4	11100.00	42.85	54.00	-11.15	27.63	15.22	Average	---	---
5	11100.00	55.86	74.00	-18.14	40.64	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical	Test Configuration	4

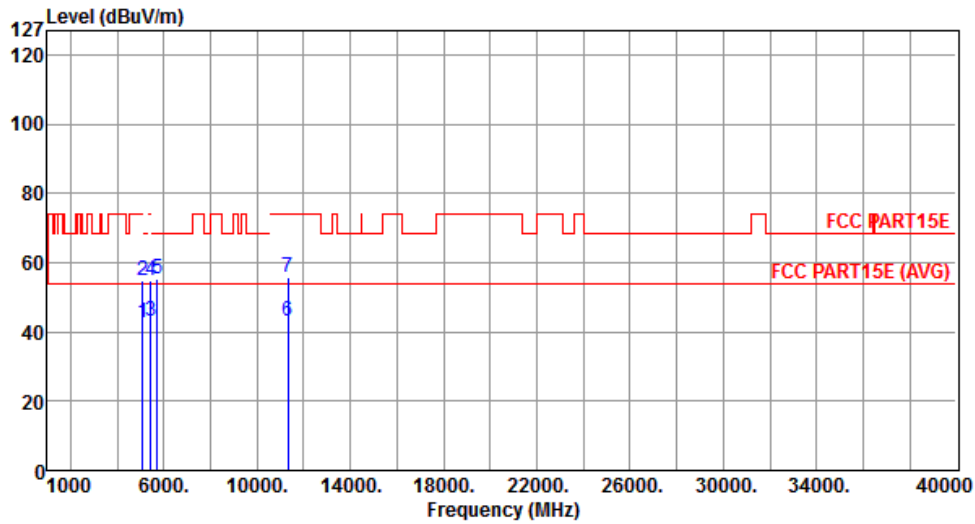


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.44	54.00	-11.56	37.61	4.83	Average	---	---
2	5097.00	54.84	74.00	-19.16	50.01	4.83	Peak	---	---
3	5427.00	42.89	54.00	-11.11	37.75	5.14	Average	---	---
4	5427.00	55.05	74.00	-18.95	49.91	5.14	Peak	---	---
5	5725.00	55.35	68.30	-12.95	49.79	5.56	Peak	---	---
6	11340.00	42.96	54.00	-11.04	27.89	15.07	Average	---	---
7	11340.00	55.54	74.00	-18.46	40.47	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal	Test Configuration	4

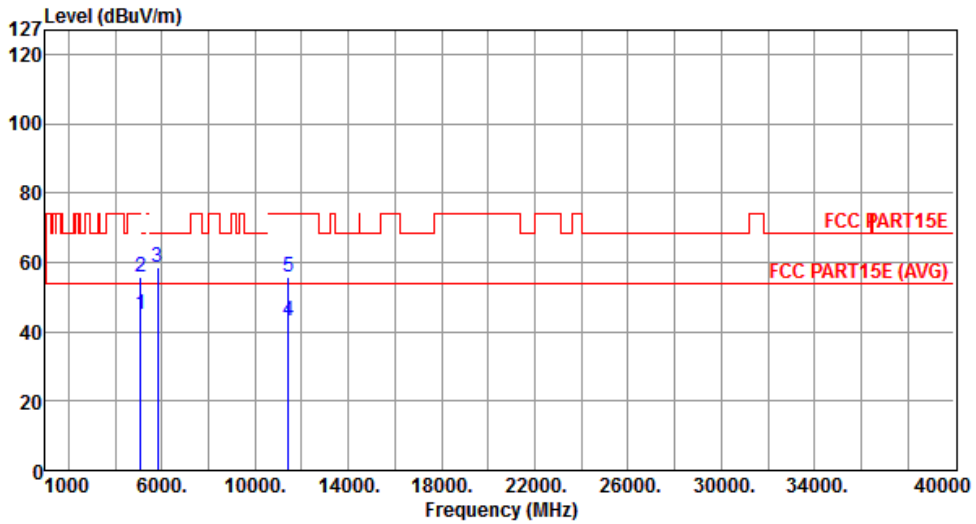

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.91	54.00	-9.09	39.42	5.49	Average	---	---
2	5097.00	55.64	74.00	-18.36	50.15	5.49	Peak	---	---
3	5825.00	58.53	68.20	-9.67	52.91	5.62	Peak	---	---
4	11420.00	42.98	54.00	-11.02	28.28	14.70	Average	---	---
5	11420.00	55.69	74.00	-18.31	40.99	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical	Test Configuration	4

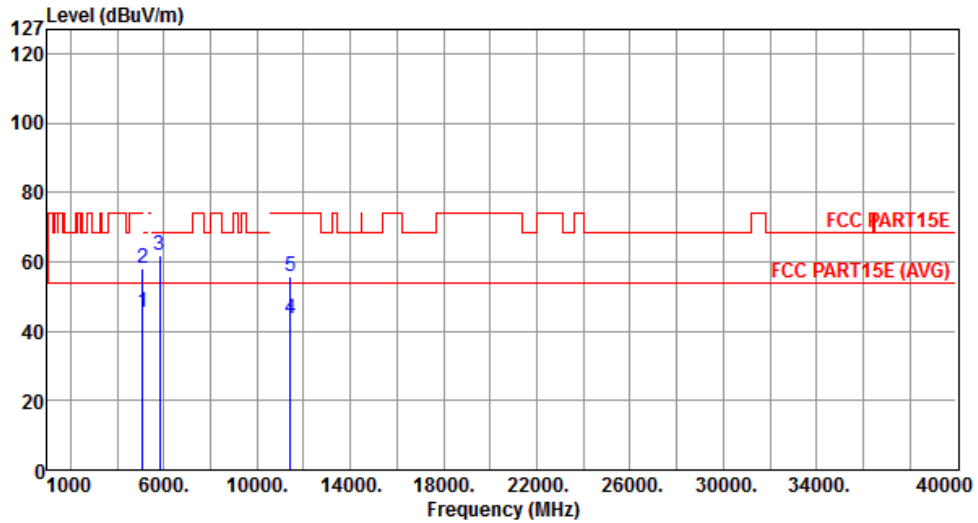


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.59	54.00	-8.41	40.10	5.49	Average	---	---
2	5097.00	57.97	74.00	-16.03	52.48	5.49	Peak	---	---
3	5825.00	61.81	68.20	-6.39	56.19	5.62	Peak	---	---
4	11420.00	43.63	54.00	-10.37	28.93	14.70	Average	---	---
5	11420.00	55.93	74.00	-18.07	41.23	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal	Test Configuration	5

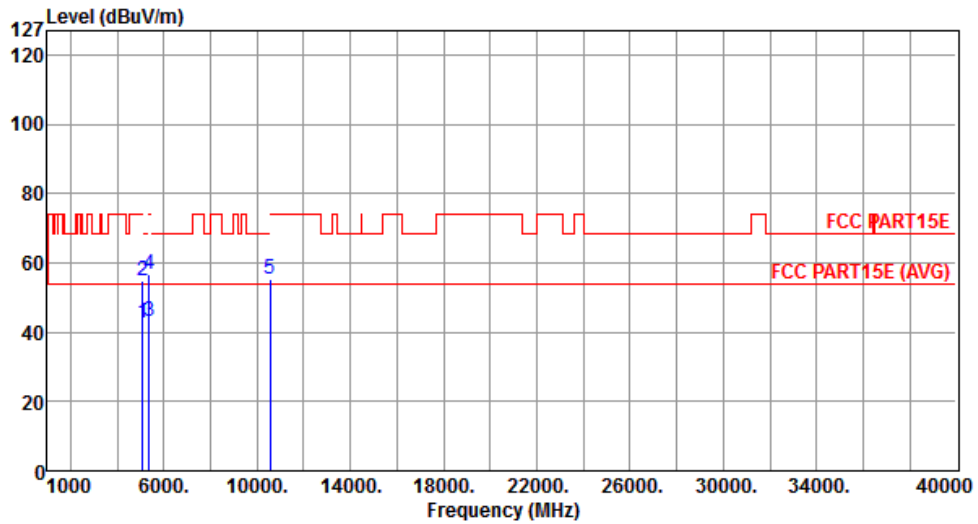


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.67	54.00	-11.33	37.84	4.83	Average	---	---
2	5097.00	54.81	74.00	-19.19	49.98	4.83	Peak	---	---
3	5350.00	43.17	54.00	-10.83	38.08	5.09	Average	---	---
4	5350.00	56.79	74.00	-17.21	51.70	5.09	Peak	---	---
5	10540.00	55.37	68.30	-12.93	40.47	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical	Test Configuration	5

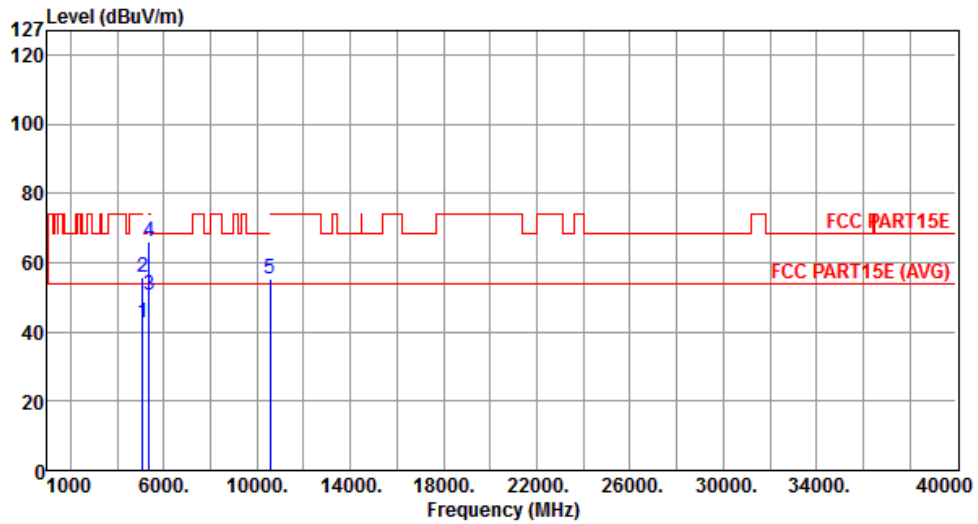


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.81	54.00	-11.19	37.98	4.83	Average	---	---
2	5097.00	55.81	74.00	-18.19	50.98	4.83	Peak	---	---
3	5350.00	50.73	54.00	-3.27	45.64	5.09	Average	---	---
4	5350.00	66.29	74.00	-7.71	61.20	5.09	Peak	---	---
5	10540.00	55.44	68.30	-12.86	40.54	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal	Test Configuration	5

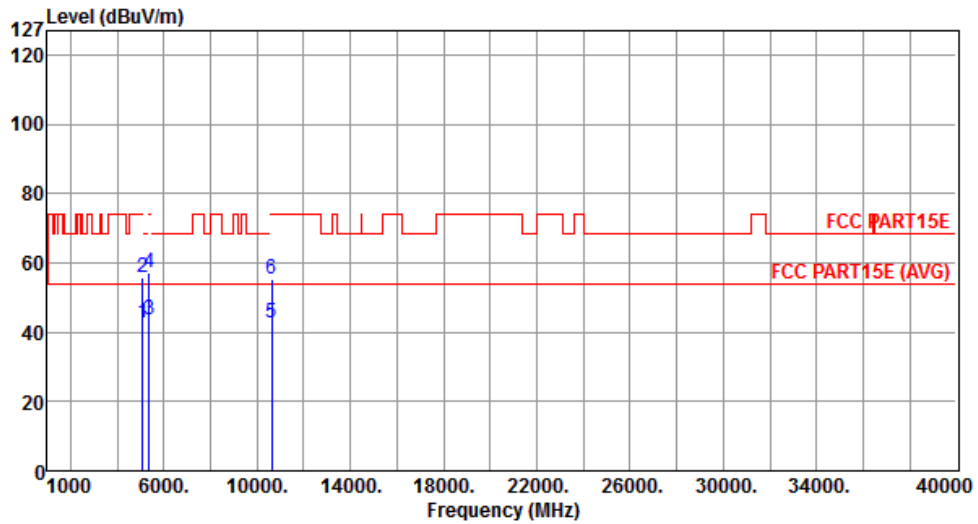


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.47	54.00	-11.53	37.64	4.83	Average	---	---
2	5097.00	55.63	74.00	-18.37	50.80	4.83	Peak	---	---
3	5350.00	43.64	54.00	-10.36	38.55	5.09	Average	---	---
4	5350.00	57.23	74.00	-16.77	52.14	5.09	Peak	---	---
5	10620.00	42.42	54.00	-11.58	27.46	14.96	Average	---	---
6	10620.00	55.49	74.00	-18.51	40.53	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical	Test Configuration	5

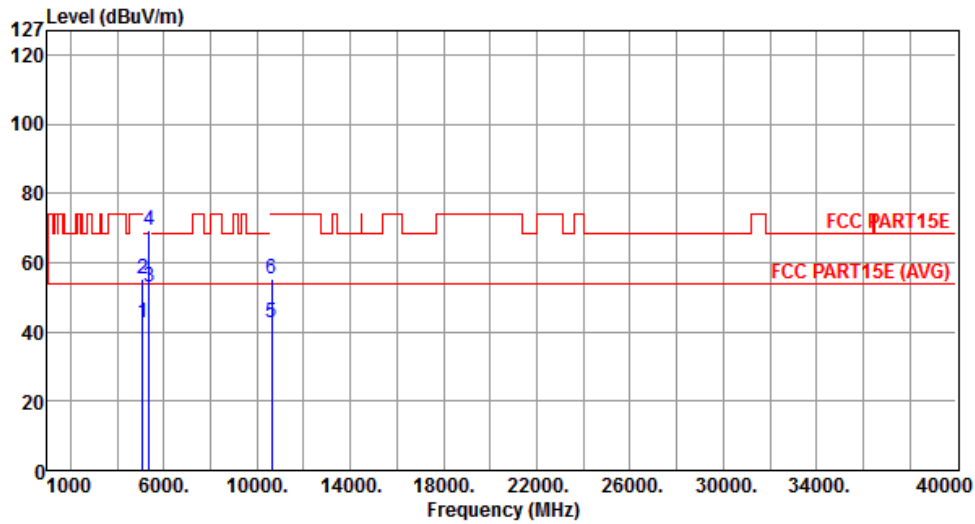


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.83	54.00	-11.17	38.00	4.83	Average	---	---
2	5097.00	55.08	74.00	-18.92	50.25	4.83	Peak	---	---
3	5350.00	52.74	54.00	-1.26	47.65	5.09	Average	---	---
4	5350.00	69.35	74.00	-4.65	64.26	5.09	Peak	---	---
5	10620.00	42.87	54.00	-11.13	27.91	14.96	Average	---	---
6	10620.00	55.48	74.00	-18.52	40.52	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal	Test Configuration	5

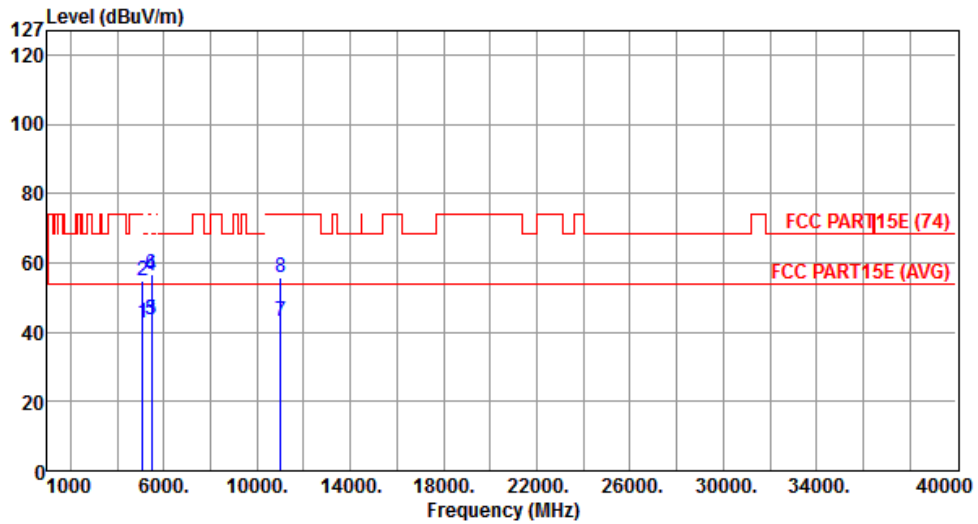


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.49	54.00	-11.51	37.66	4.83	Average	---	---
2	5097.00	54.72	74.00	-19.28	49.89	4.83	Peak	---	---
3	5460.00	43.42	54.00	-10.58	38.24	5.18	Average	---	---
4	5460.00	56.33	74.00	-17.67	51.15	5.18	Peak	---	---
5	5470.00	43.41	54.00	-10.59	38.22	5.19	Average	---	---
6	5470.00	56.76	74.00	-17.24	51.57	5.19	Peak	---	---
7	11020.00	43.12	54.00	-10.88	27.85	15.27	Average	---	---
8	11020.00	55.65	74.00	-18.35	40.38	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical	Test Configuration	5

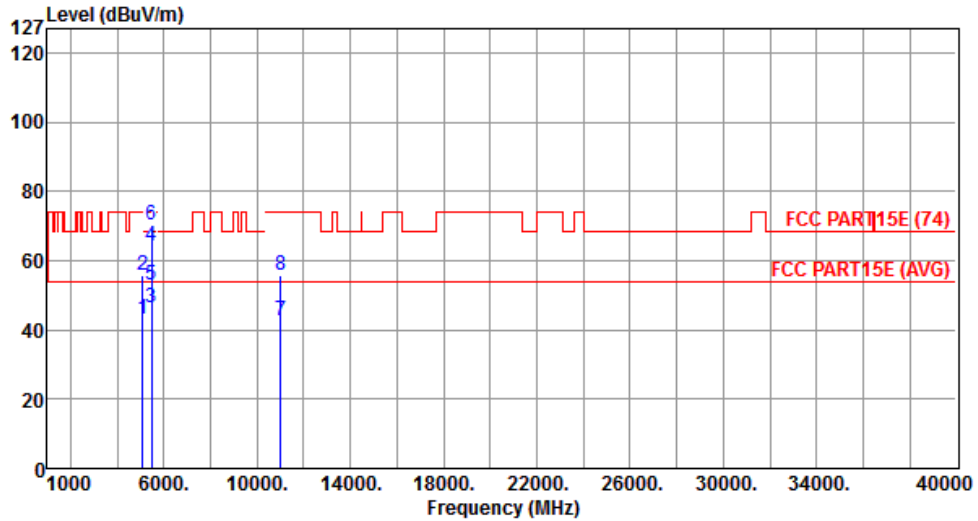


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.09	54.00	-10.91	38.26	4.83	Average	---	---
2	5097.00	55.97	74.00	-18.03	51.14	4.83	Peak	---	---
3	5460.00	46.47	54.00	-7.53	41.29	5.18	Average	---	---
4	5460.00	64.16	74.00	-9.84	58.98	5.18	Peak	---	---
5	5470.00	53.00	54.00	-1.00	47.81	5.19	Average	---	---
6	5470.00	70.09	74.00	-3.91	64.90	5.19	Peak	---	---
7	11020.00	42.66	54.00	-11.34	27.39	15.27	Average	---	---
8	11020.00	55.94	74.00	-18.06	40.67	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Horizontal	Test Configuration	5

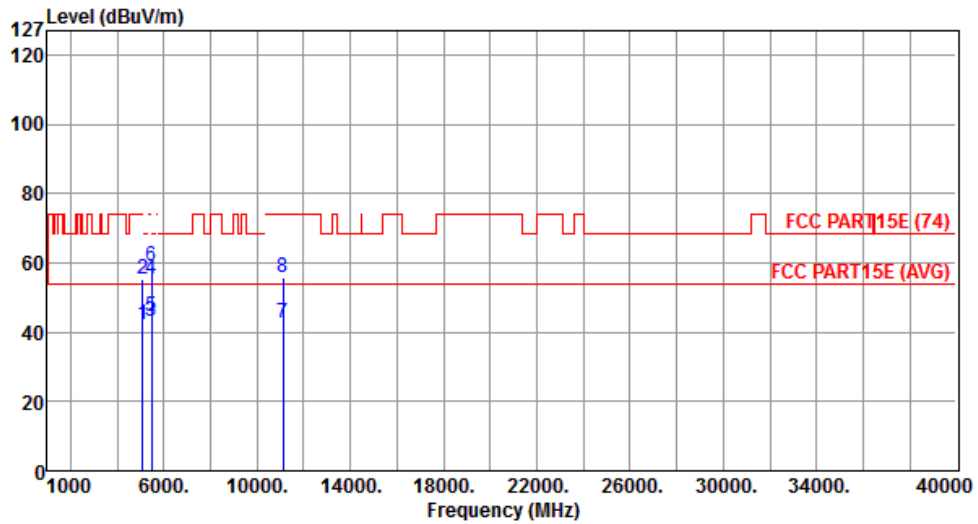


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.37	54.00	-11.63	37.54	4.83	Average	---	---
2	5097.00	55.46	74.00	-18.54	50.63	4.83	Peak	---	---
3	5460.00	43.06	54.00	-10.94	37.88	5.18	Average	---	---
4	5460.00	55.07	74.00	-18.93	49.89	5.18	Peak	---	---
5	5470.00	44.35	54.00	-9.65	39.16	5.19	Average	---	---
6	5470.00	58.87	74.00	-15.13	53.68	5.19	Peak	---	---
7	11100.00	42.86	54.00	-11.14	27.64	15.22	Average	---	---
8	11100.00	55.81	74.00	-18.19	40.59	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Vertical	Test Configuration	5

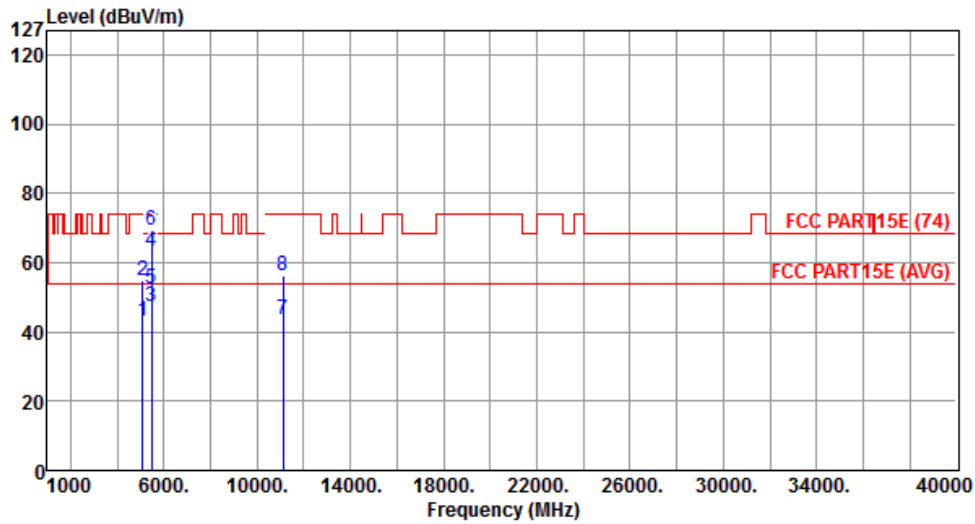


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.26	54.00	-10.74	38.43	4.83	Average	---	---
2	5097.00	55.00	74.00	-19.00	50.17	4.83	Peak	---	---
3	5460.00	47.13	54.00	-6.87	41.95	5.18	Average	---	---
4	5460.00	63.21	74.00	-10.79	58.03	5.18	Peak	---	---
5	5470.00	52.44	54.00	-1.56	47.25	5.19	Average	---	---
6	5470.00	69.14	74.00	-4.86	63.95	5.19	Peak	---	---
7	11100.00	43.44	54.00	-10.56	28.22	15.22	Average	---	---
8	11100.00	56.07	74.00	-17.93	40.85	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal	Test Configuration	5

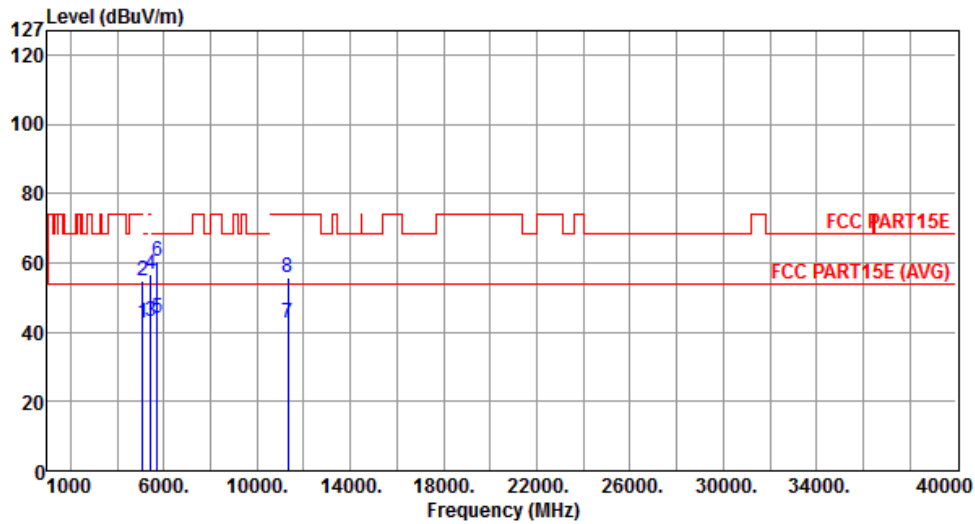


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.47	54.00	-11.53	37.64	4.83	Average	---	---
2	5097.00	54.68	74.00	-19.32	49.85	4.83	Peak	---	---
3	5427.00	43.24	54.00	-10.76	38.10	5.14	Average	---	---
4	5427.00	56.93	74.00	-17.07	51.79	5.14	Peak	---	---
5	5725.00	43.96	54.00	-10.04	38.40	5.56	Average	---	---
6	5725.00	60.66	68.30	-7.64	55.10	5.56	Peak	---	---
7	11340.00	42.53	54.00	-11.47	27.46	15.07	Average	---	---
8	11340.00	55.75	74.00	-18.25	40.68	15.07	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical	Test Configuration	5

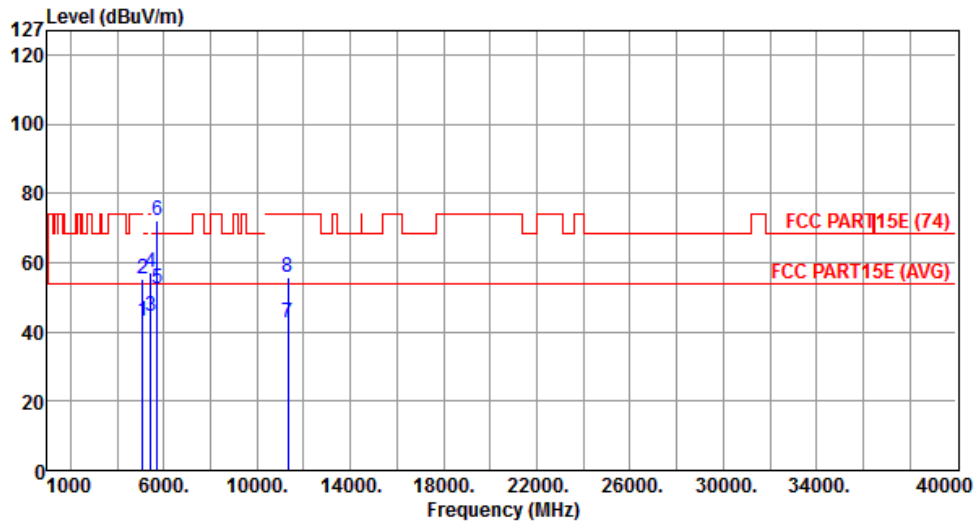


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.24	54.00	-10.76	38.41	4.83	Average	---	---
2	5097.00	55.30	74.00	-18.70	50.47	4.83	Peak	---	---
3	5427.00	44.38	54.00	-9.62	39.24	5.14	Average	---	---
4	5427.00	57.15	74.00	-16.85	52.01	5.14	Peak	---	---
5	5725.00	52.70	54.00	-1.30	47.14	5.56	Average	---	---
6	5725.00	72.40	74.00	-1.60	66.84	5.56	Peak	---	---
7	11340.00	42.72	54.00	-11.28	27.65	15.07	Average	---	---
8	11340.00	55.80	74.00	-18.20	40.73	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal	Test Configuration	5

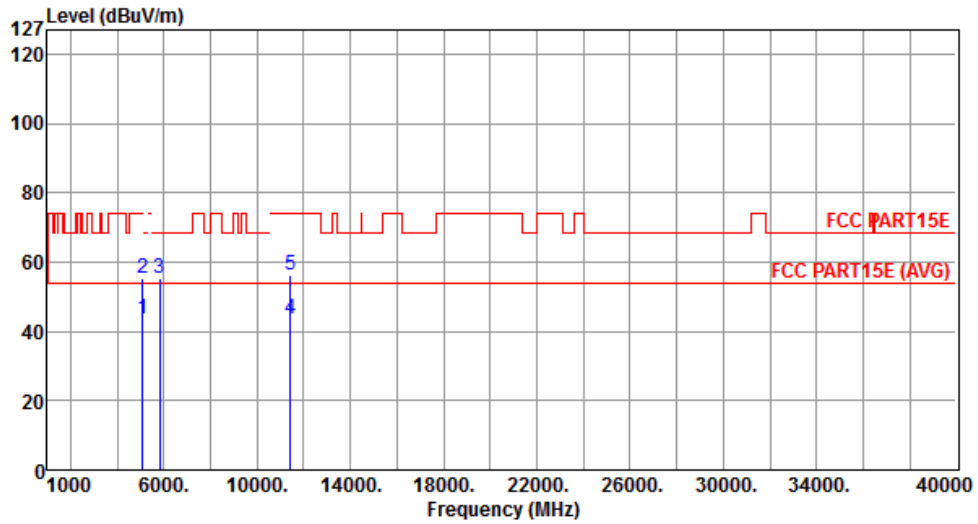


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.40	54.00	-10.60	37.91	5.49	Average	---	---
2	5097.00	55.51	74.00	-18.49	50.02	5.49	Peak	---	---
3	5825.00	55.51	68.20	-12.69	49.89	5.62	Peak	---	---
4	11420.00	43.71	54.00	-10.29	29.01	14.70	Average	---	---
5	11420.00	56.28	74.00	-17.72	41.58	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical	Test Configuration	5

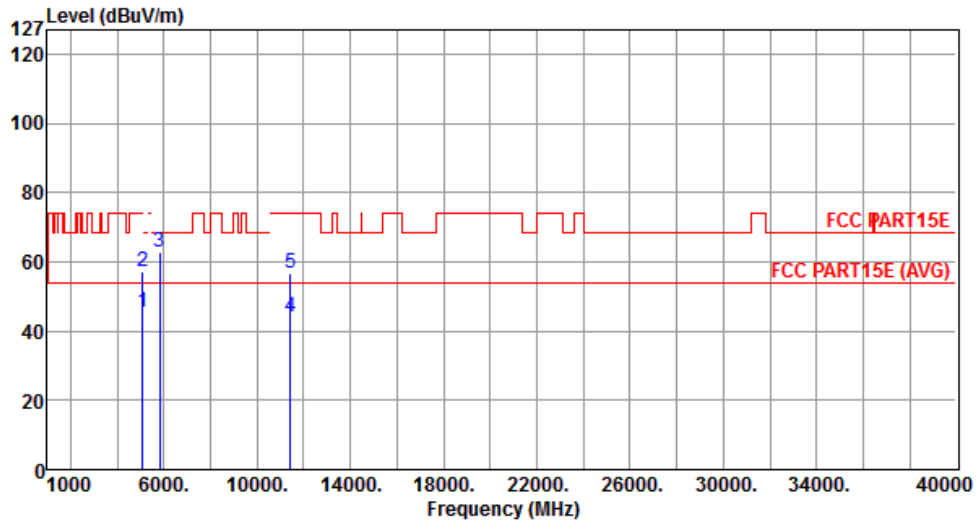


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.31	54.00	-8.69	39.82	5.49	Average	---	---
2	5097.00	57.07	74.00	-16.93	51.58	5.49	Peak	---	---
3	5825.00	63.01	68.20	-5.19	57.39	5.62	Peak	---	---
4	11420.00	44.15	54.00	-9.85	29.45	14.70	Average	---	---
5	11420.00	56.69	74.00	-17.31	41.99	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Horizontal	Test Configuration	6

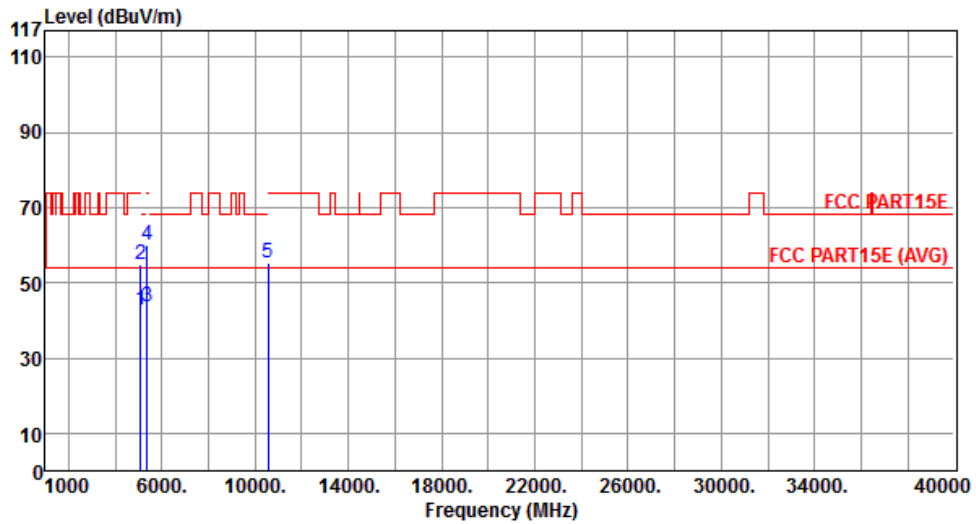


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.67	54.00	-11.33	37.84	4.83	Average	---	---
2	5097.00	54.75	74.00	-19.25	49.92	4.83	Peak	---	---
3	5350.00	43.69	54.00	-10.31	38.60	5.09	Average	---	---
4	5350.00	59.92	74.00	-14.08	54.83	5.09	Peak	---	---
5	10540.00	55.11	68.30	-13.19	40.21	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5270
Polarization	Vertical	Test Configuration	6

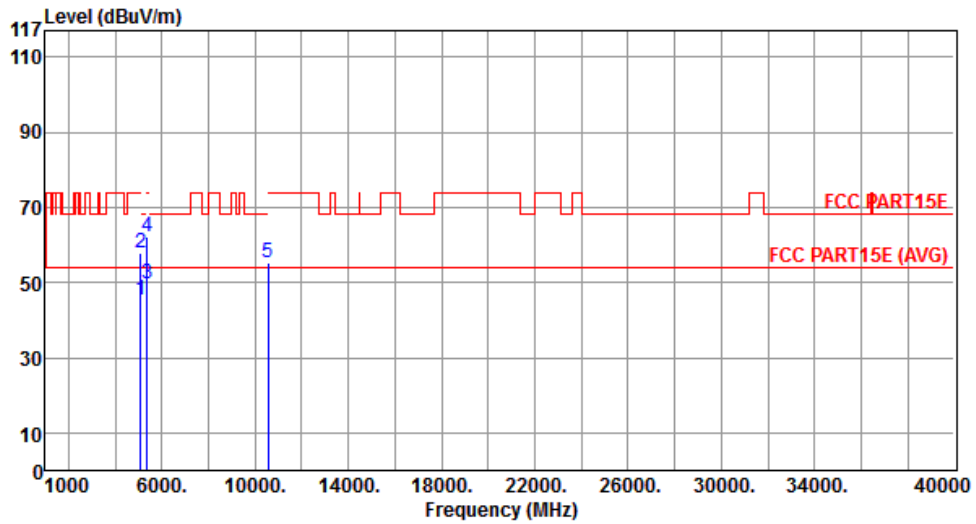


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.42	54.00	-8.58	40.59	4.83	Average	---	---
2	5097.00	57.85	74.00	-16.15	53.02	4.83	Peak	---	---
3	5350.00	49.47	54.00	-4.53	44.38	5.09	Average	---	---
4	5350.00	62.20	74.00	-11.80	57.11	5.09	Peak	---	---
5	10540.00	55.42	68.30	-12.88	40.52	14.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Horizontal	Test Configuration	6

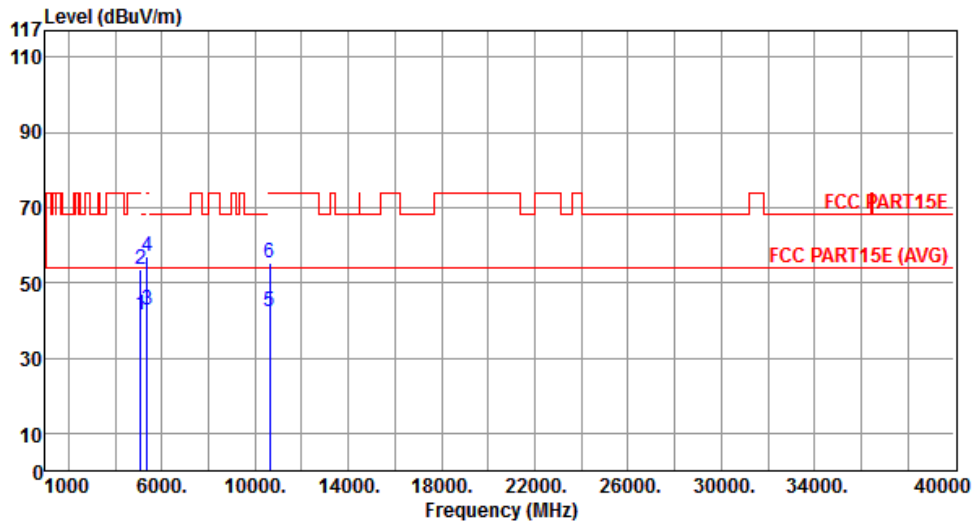


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	41.32	54.00	-12.68	36.49	4.83	Average	---	---
2	5097.00	53.55	74.00	-20.45	48.72	4.83	Peak	---	---
3	5350.00	42.76	54.00	-11.24	37.67	5.09	Average	---	---
4	5350.00	56.97	74.00	-17.03	51.88	5.09	Peak	---	---
5	10620.00	42.37	54.00	-11.63	27.41	14.96	Average	---	---
6	10620.00	55.33	74.00	-18.67	40.37	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5310
Polarization	Vertical	Test Configuration	6

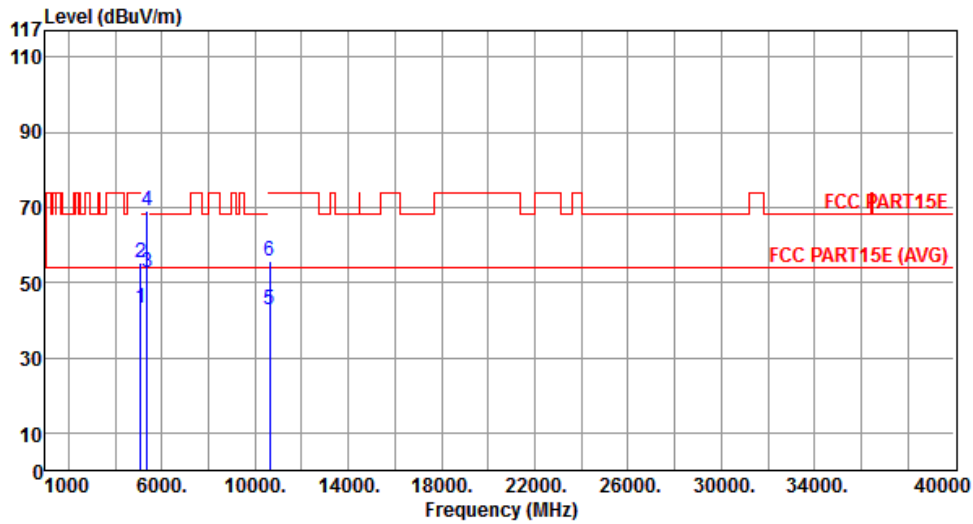


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.24	54.00	-10.76	38.41	4.83	Average	---	---
2	5097.00	55.23	74.00	-18.77	50.40	4.83	Peak	---	---
3	5350.00	52.82	54.00	-1.18	47.73	5.09	Average	---	---
4	5350.00	69.17	74.00	-4.83	64.08	5.09	Peak	---	---
5	10620.00	42.58	54.00	-11.42	27.62	14.96	Average	---	---
6	10620.00	55.54	74.00	-18.46	40.58	14.96	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Horizontal	Test Configuration	6

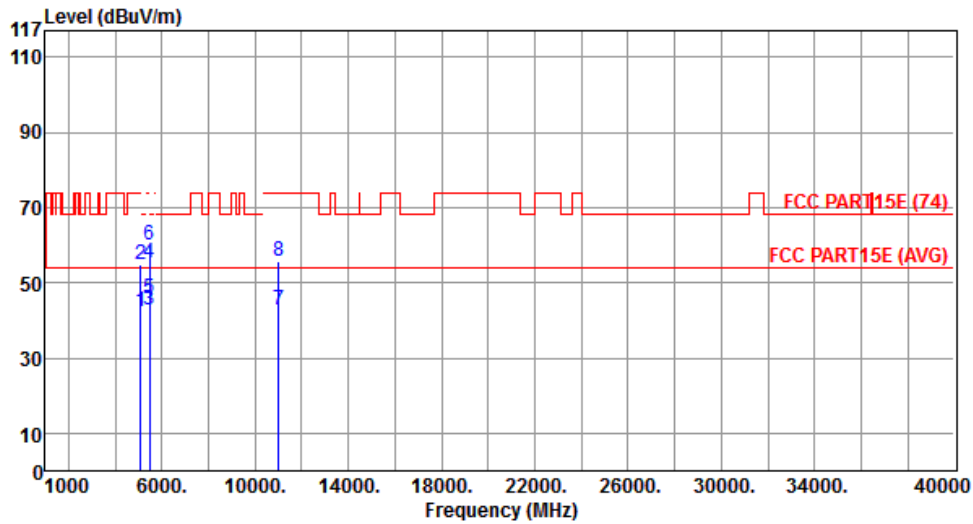


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.43	54.00	-11.57	37.60	4.83	Average	---	---
2	5097.00	54.67	74.00	-19.33	49.84	4.83	Peak	---	---
3	5460.00	42.87	54.00	-11.13	37.69	5.18	Average	---	---
4	5460.00	55.32	74.00	-18.68	50.14	5.18	Peak	---	---
5	5470.00	45.83	54.00	-8.17	40.64	5.19	Average	---	---
6	5470.00	59.95	74.00	-14.05	54.76	5.19	Peak	---	---
7	11020.00	42.75	54.00	-11.25	27.48	15.27	Average	---	---
8	11020.00	55.86	74.00	-18.14	40.59	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5510
Polarization	Vertical	Test Configuration	6

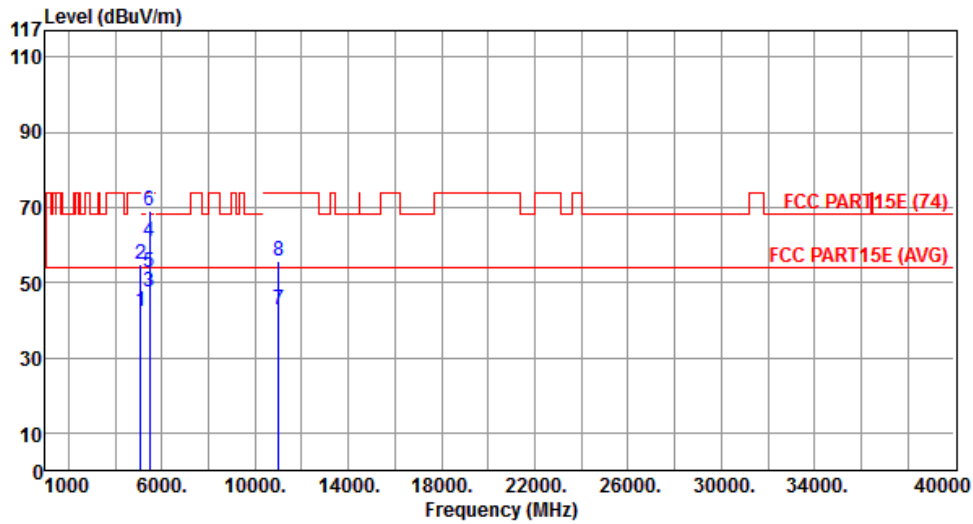


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.44	54.00	-11.56	37.61	4.83	Average	---	---
2	5097.00	54.98	74.00	-19.02	50.15	4.83	Peak	---	---
3	5460.00	47.34	54.00	-6.66	42.16	5.18	Average	---	---
4	5460.00	60.86	74.00	-13.14	55.68	5.18	Peak	---	---
5	5470.00	52.65	54.00	-1.35	47.46	5.19	Average	---	---
6	5470.00	69.22	74.00	-4.78	64.03	5.19	Peak	---	---
7	11020.00	42.79	54.00	-11.21	27.52	15.27	Average	---	---
8	11020.00	55.64	74.00	-18.36	40.37	15.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Horizontal	Test Configuration	6

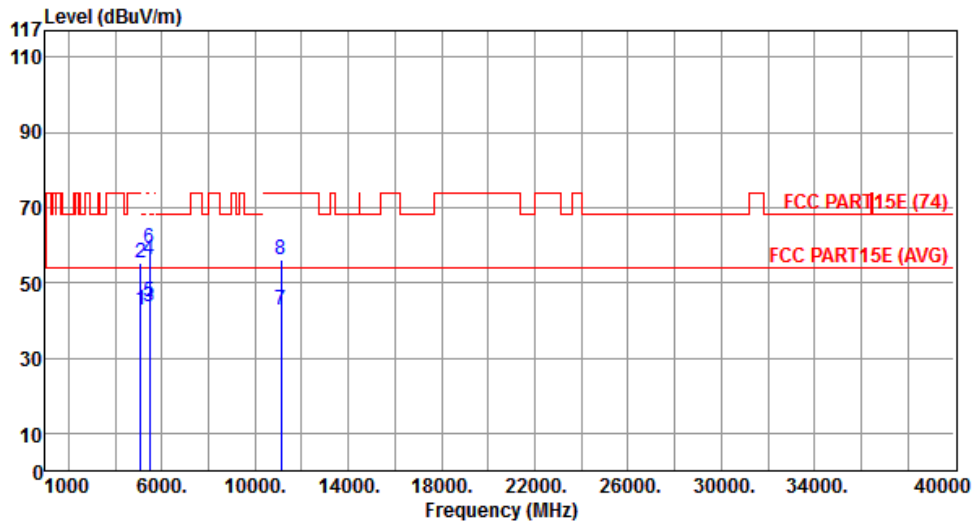


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.64	54.00	-11.36	37.81	4.83	Average	---	---
2	5097.00	55.16	74.00	-18.84	50.33	4.83	Peak	---	---
3	5460.00	43.75	54.00	-10.25	38.57	5.18	Average	---	---
4	5460.00	56.05	74.00	-17.95	50.87	5.18	Peak	---	---
5	5470.00	44.78	54.00	-9.22	39.59	5.19	Average	---	---
6	5470.00	59.33	74.00	-14.67	54.14	5.19	Peak	---	---
7	11100.00	42.91	54.00	-11.09	27.69	15.22	Average	---	---
8	11100.00	56.05	74.00	-17.95	40.83	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5550
Polarization	Vertical	Test Configuration	6

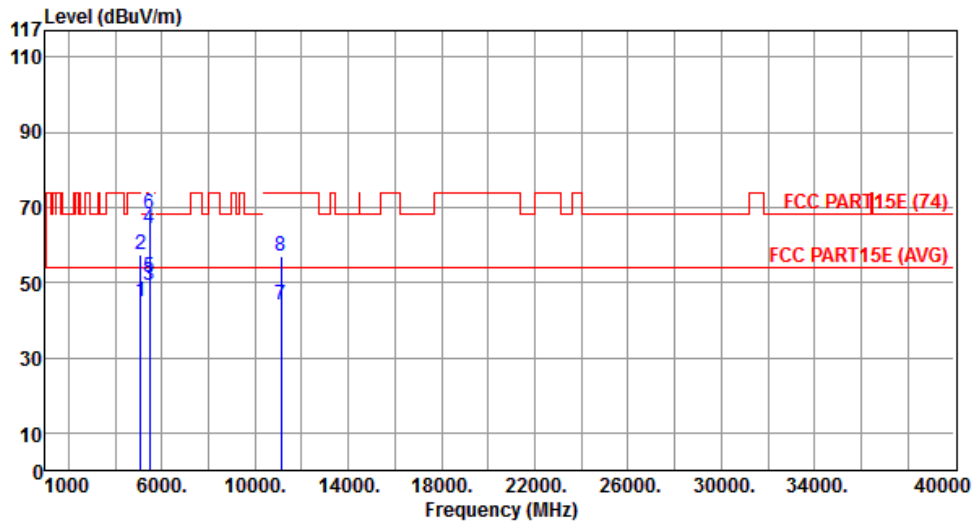


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.08	54.00	-8.92	40.25	4.83	Average	---	---
2	5097.00	57.49	74.00	-16.51	52.66	4.83	Peak	---	---
3	5460.00	49.30	54.00	-4.70	44.12	5.18	Average	---	---
4	5460.00	64.16	74.00	-9.84	58.98	5.18	Peak	---	---
5	5470.00	51.43	54.00	-2.57	46.24	5.19	Average	---	---
6	5470.00	68.02	74.00	-5.98	62.83	5.19	Peak	---	---
7	11100.00	43.83	54.00	-10.17	28.61	15.22	Average	---	---
8	11100.00	57.17	74.00	-16.83	41.95	15.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Horizontal	Test Configuration	6

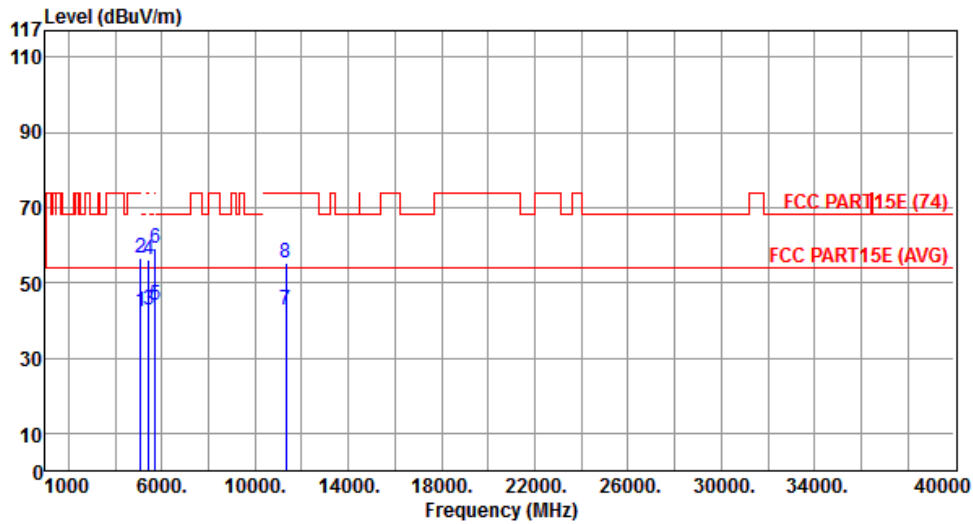


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.46	54.00	-11.54	37.63	4.83	Average	---	---
2	5097.00	56.34	74.00	-17.66	51.51	4.83	Peak	---	---
3	5427.00	42.91	54.00	-11.09	37.77	5.14	Average	---	---
4	5427.00	55.99	74.00	-18.01	50.85	5.14	Peak	---	---
5	5725.00	44.19	54.00	-9.81	38.63	5.56	Average	---	---
6	5725.00	58.99	74.00	-15.01	53.43	5.56	Peak	---	---
7	11340.00	42.63	54.00	-11.37	27.56	15.07	Average	---	---
8	11340.00	55.41	74.00	-18.59	40.34	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5670
Polarization	Vertical	Test Configuration	6

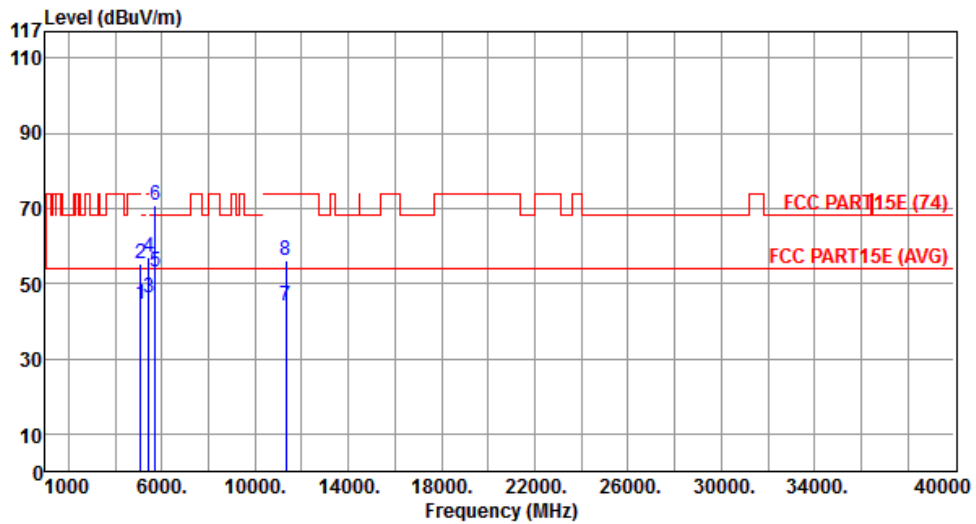


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.67	54.00	-9.33	39.84	4.83	Average	---	---
2	5097.00	55.10	74.00	-18.90	50.27	4.83	Peak	---	---
3	5427.00	46.03	54.00	-7.97	40.89	5.14	Average	---	---
4	5427.00	57.01	74.00	-16.99	51.87	5.14	Peak	---	---
5	5725.00	53.00	54.00	-1.00	47.44	5.56	Average	---	---
6	5725.00	70.92	74.00	-3.08	65.36	5.56	Peak	---	---
7	11340.00	44.03	54.00	-9.97	28.96	15.07	Average	---	---
8	11340.00	56.10	74.00	-17.90	41.03	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Horizontal	Test Configuration	6

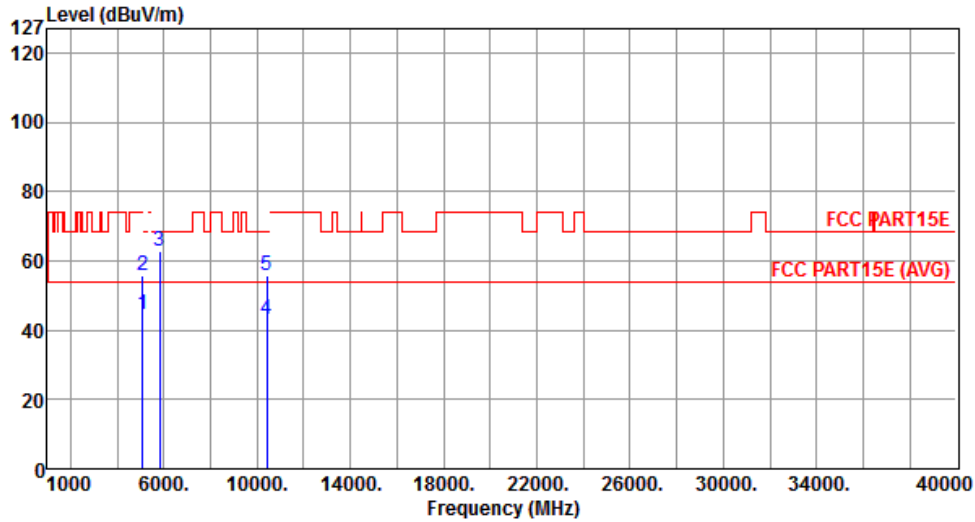


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.60	54.00	-9.40	39.11	5.49	Average	---	---
2	5097.00	55.72	74.00	-18.28	50.23	5.49	Peak	---	---
3	5825.00	62.99	68.20	-5.21	57.37	5.62	Peak	---	---
4	10420.00	43.30	54.00	-10.70	28.15	15.15	Average	---	---
5	10420.00	55.72	68.20	-12.48	40.57	15.15	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5710
Polarization	Vertical	Test Configuration	6

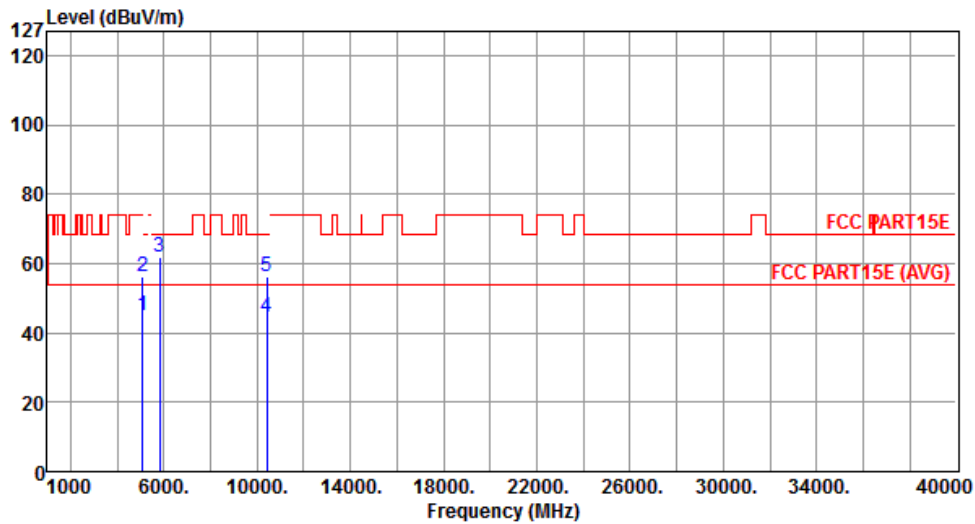

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.12	54.00	-8.88	39.63	5.49	Average	---	---
2	5097.00	56.06	74.00	-17.94	50.57	5.49	Peak	---	---
3	5825.00	61.88	68.20	-6.32	56.26	5.62	Peak	---	---
4	10420.00	44.46	54.00	-9.54	29.31	15.15	Average	---	---
5	10420.00	56.40	68.20	-11.80	41.25	15.15	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal	Test Configuration	1

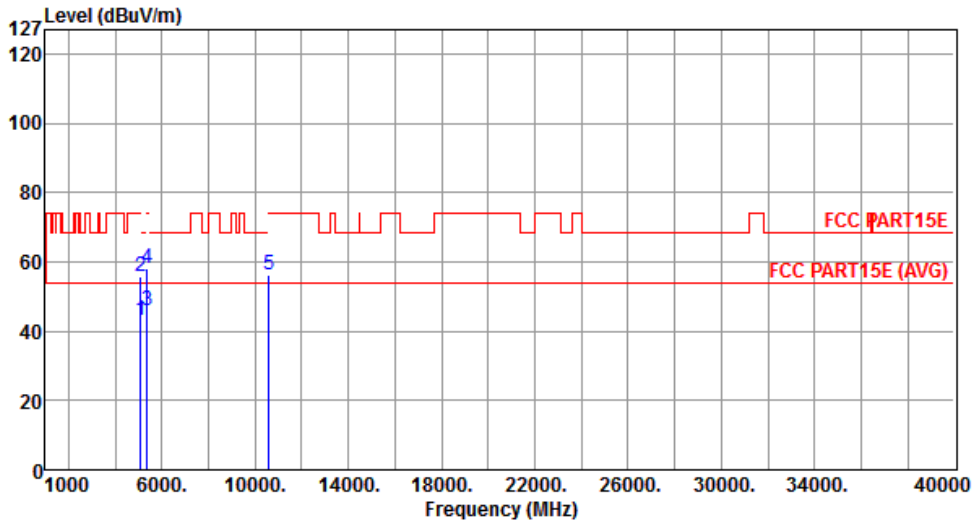


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.92	54.00	-11.08	38.09	4.83	Average	---	---
2	5097.00	55.82	74.00	-18.18	50.99	4.83	Peak	---	---
3	5350.00	46.06	54.00	-7.94	40.97	5.09	Average	---	---
4	5350.00	58.08	74.00	-15.92	52.99	5.09	Peak	---	---
5	10580.00	56.09	68.30	-12.21	41.16	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical	Test Configuration	1

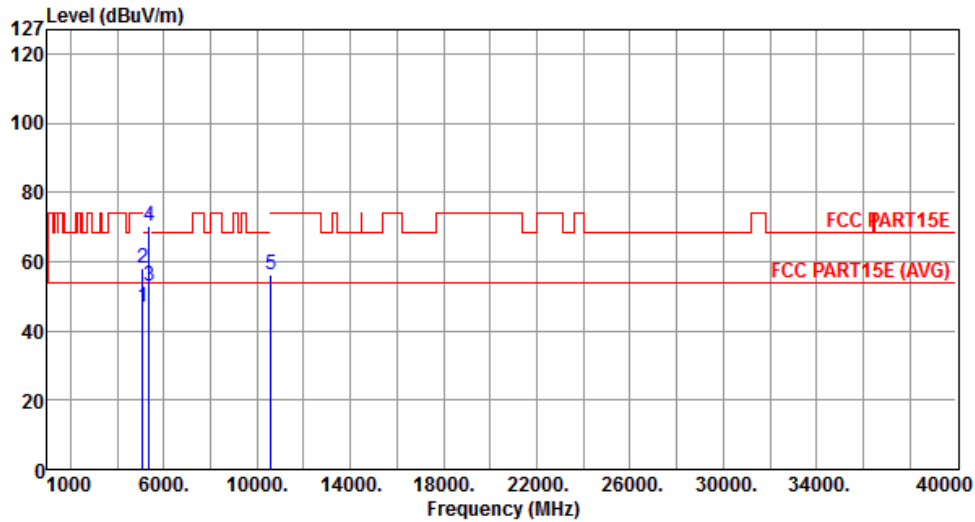


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	46.97	54.00	-7.03	42.14	4.83	Average	---	---
2	5097.00	58.22	74.00	-15.78	53.39	4.83	Peak	---	---
3	5350.00	52.90	54.00	-1.10	47.81	5.09	Average	---	---
4	5350.00	70.31	74.00	-3.69	65.22	5.09	Peak	---	---
5	10580.00	56.31	68.30	-11.99	41.38	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal	Test Configuration	1

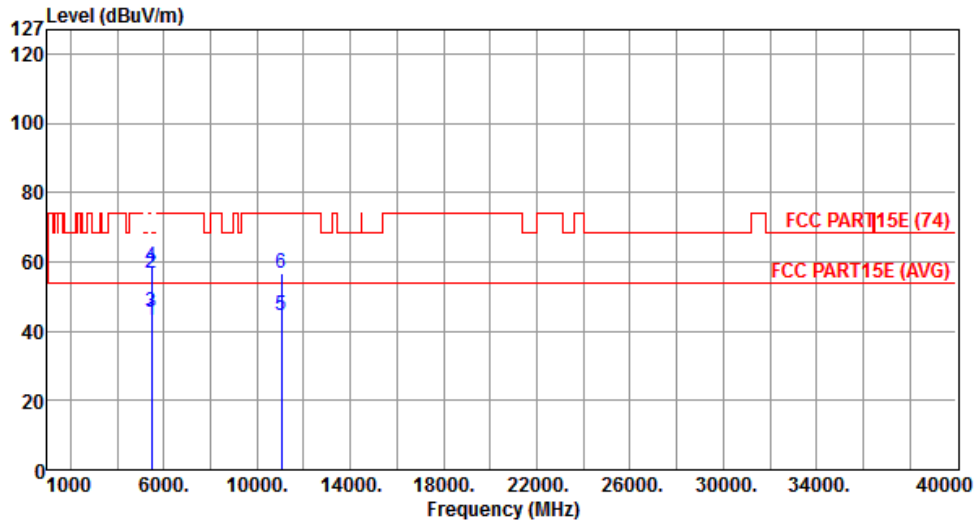


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	43.11	54.00	-10.89	43.11	0.00	Average	---	---
2	5460.00	56.78	74.00	-17.22	56.78	0.00	Peak	---	---
3	5470.00	45.63	54.00	-8.37	40.44	5.19	Average	---	---
4	5470.00	58.67	74.00	-15.33	53.48	5.19	Peak	---	---
5	11060.00	44.35	54.00	-9.65	29.11	15.24	Average	---	---
6	11060.00	56.59	74.00	-17.41	41.35	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical	Test Configuration	1

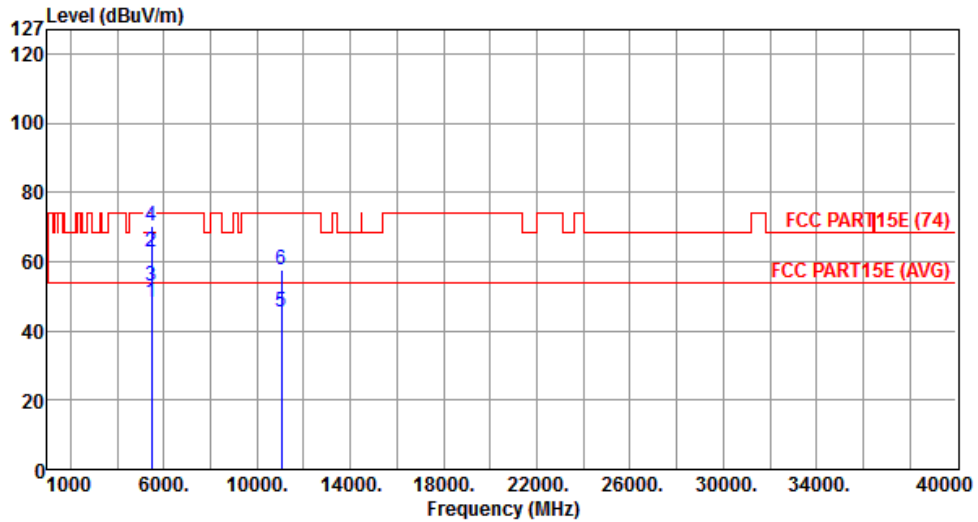


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	48.43	54.00	-5.57	43.25	5.18	Average	---	---
2	5460.00	62.86	74.00	-11.14	57.68	5.18	Peak	---	---
3	5470.00	52.97	54.00	-1.03	47.78	5.19	Average	---	---
4	5470.00	70.44	74.00	-3.56	65.25	5.19	Peak	---	---
5	11060.00	45.40	54.00	-8.60	30.16	15.24	Average	---	---
6	11060.00	57.72	74.00	-16.28	42.48	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal	Test Configuration	1

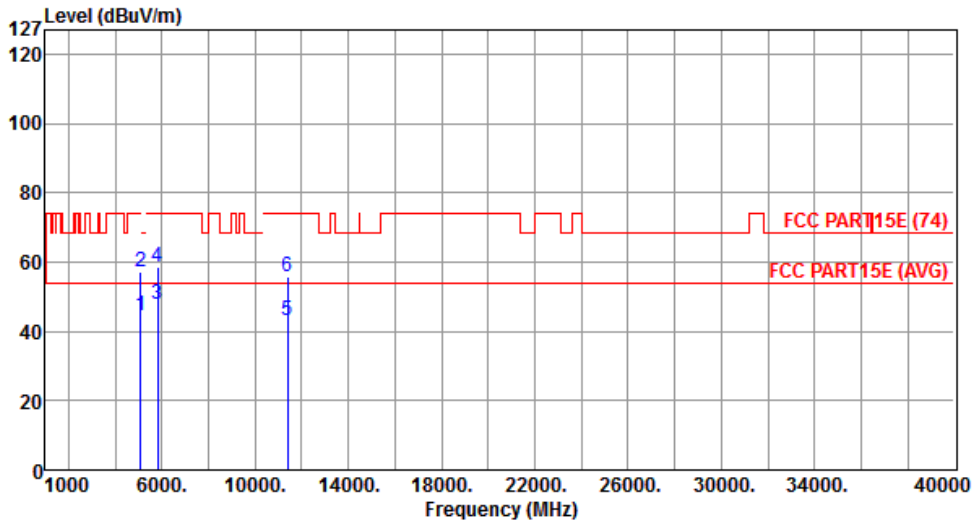


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.60	54.00	-9.40	39.11	5.49	Average	---	---
2	5097.00	57.32	74.00	-16.68	51.83	5.49	Peak	---	---
3	5825.00	47.85	54.00	-6.15	42.23	5.62	Average	---	---
4	5825.00	58.36	74.00	-15.64	52.74	5.62	Peak	---	---
5	11380.00	42.99	54.00	-11.01	28.22	14.77	Average	---	---
6	11380.00	55.53	74.00	-18.47	40.76	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical	Test Configuration	1

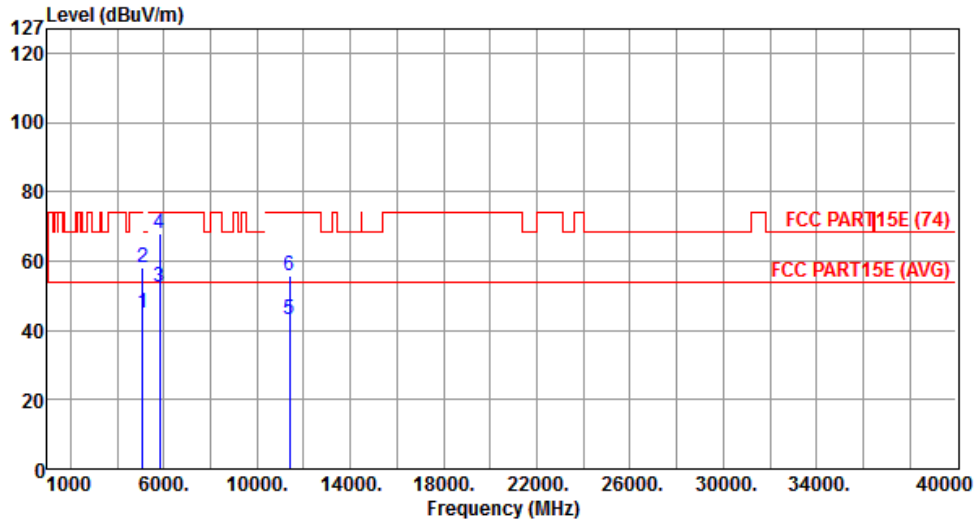


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.17	54.00	-8.83	39.68	5.49	Average	---	---
2	5097.00	58.18	74.00	-15.82	52.69	5.49	Peak	---	---
3	5825.00	52.66	54.00	-1.34	47.04	5.62	Average	---	---
4	5825.00	67.90	74.00	-6.10	62.28	5.62	Peak	---	---
5	11380.00	42.92	54.00	-11.08	28.15	14.77	Average	---	---
6	11380.00	55.59	74.00	-18.41	40.82	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal	Test Configuration	2

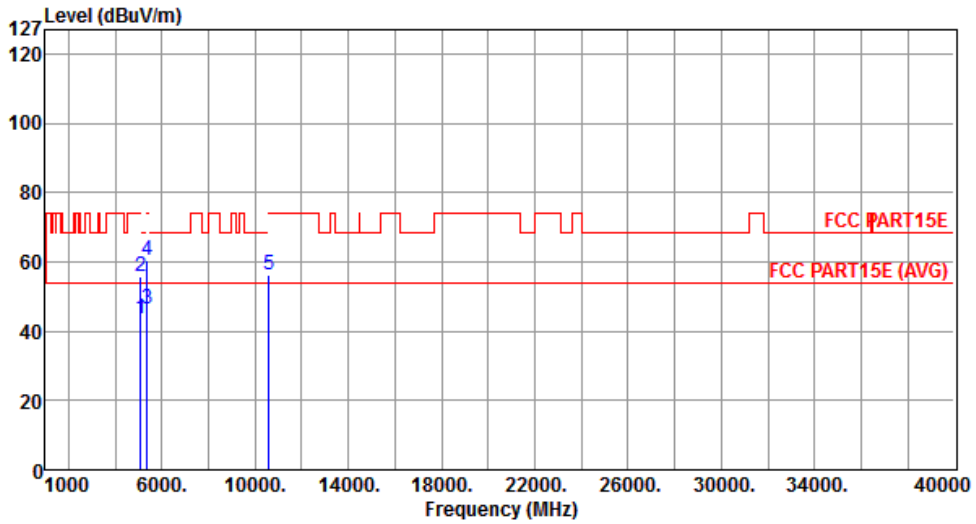


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.37	54.00	-10.63	38.54	4.83	Average	---	---
2	5097.00	55.55	74.00	-18.45	50.72	4.83	Peak	---	---
3	5350.00	46.33	54.00	-7.67	41.24	5.09	Average	---	---
4	5350.00	60.46	74.00	-13.54	55.37	5.09	Peak	---	---
5	10580.00	56.14	68.30	-12.16	41.21	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical	Test Configuration	2

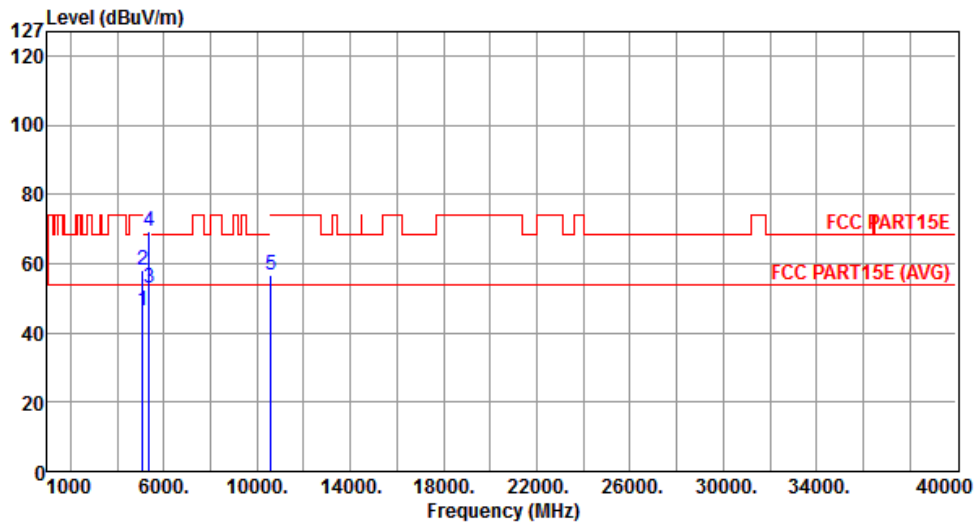


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	46.26	54.00	-7.74	41.43	4.83	Average	---	---
2	5097.00	58.03	74.00	-15.97	53.20	4.83	Peak	---	---
3	5350.00	53.00	54.00	-1.00	47.91	5.09	Average	---	---
4	5350.00	69.57	74.00	-4.43	64.48	5.09	Peak	---	---
5	10580.00	56.50	68.30	-11.80	41.57	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal	Test Configuration	2

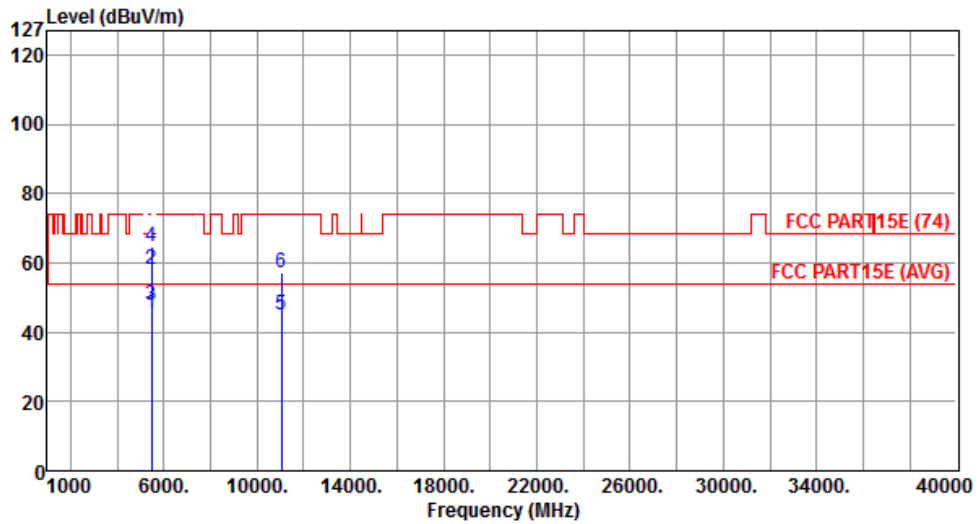


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	45.33	54.00	-8.67	40.15	5.18	Average	---	---
2	5460.00	58.33	74.00	-15.67	53.15	5.18	Peak	---	---
3	5470.00	47.67	54.00	-6.33	42.48	5.19	Average	---	---
4	5470.00	64.69	74.00	-9.31	59.50	5.19	Peak	---	---
5	11060.00	44.90	54.00	-9.10	29.66	15.24	Average	---	---
6	11060.00	57.07	74.00	-16.93	41.83	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical	Test Configuration	2

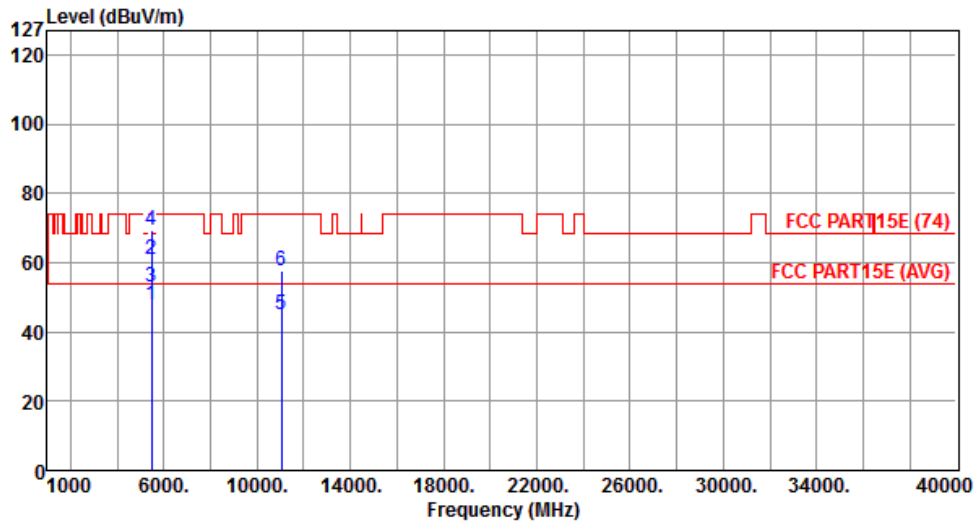


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.82	54.00	-6.18	42.64	5.18	Average	---	---
2	5460.00	61.14	74.00	-12.86	55.96	5.18	Peak	---	---
3	5470.00	52.85	54.00	-1.15	47.66	5.19	Average	---	---
4	5470.00	69.41	74.00	-4.59	64.22	5.19	Peak	---	---
5	11060.00	44.89	54.00	-9.11	29.65	15.24	Average	---	---
6	11060.00	57.48	74.00	-16.52	42.24	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal	Test Configuration	2

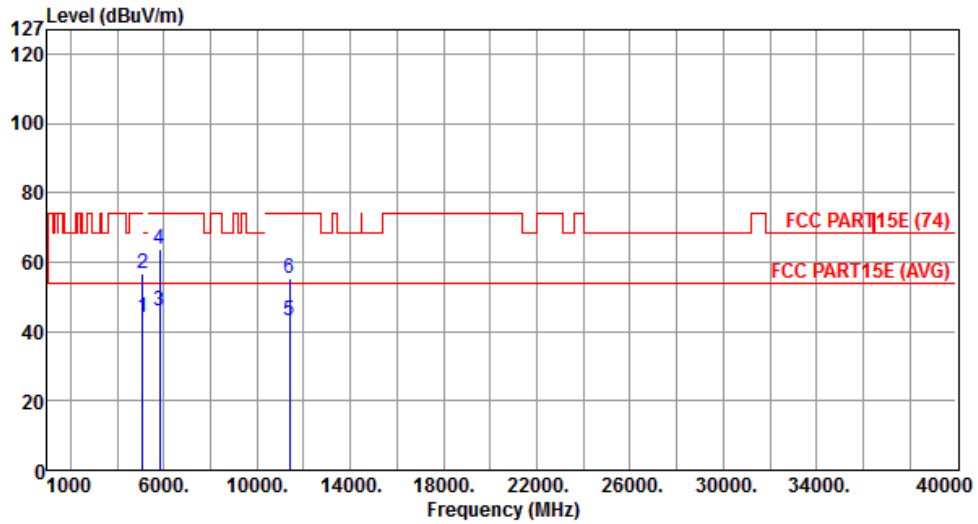


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.92	54.00	-10.08	38.43	5.49	Average	---	---
2	5097.00	56.64	74.00	-17.36	51.15	5.49	Peak	---	---
3	5825.00	46.06	54.00	-7.94	40.44	5.62	Average	---	---
4	5825.00	63.69	74.00	-10.31	58.07	5.62	Peak	---	---
5	11380.00	42.99	54.00	-11.01	28.22	14.77	Average	---	---
6	11380.00	55.12	74.00	-18.88	40.35	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical	Test Configuration	2

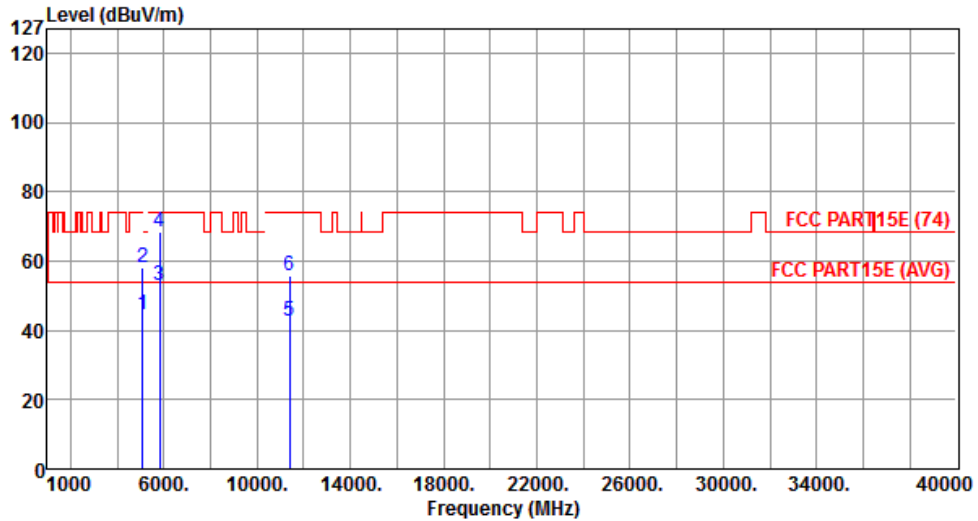


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.61	54.00	-9.39	39.12	5.49	Average	---	---
2	5097.00	58.27	74.00	-15.73	52.78	5.49	Peak	---	---
3	5825.00	52.86	54.00	-1.14	47.24	5.62	Average	---	---
4	5825.00	68.28	74.00	-5.72	62.66	5.62	Peak	---	---
5	11380.00	42.45	54.00	-11.55	27.68	14.77	Average	---	---
6	11380.00	55.60	74.00	-18.40	40.83	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal	Test Configuration	3

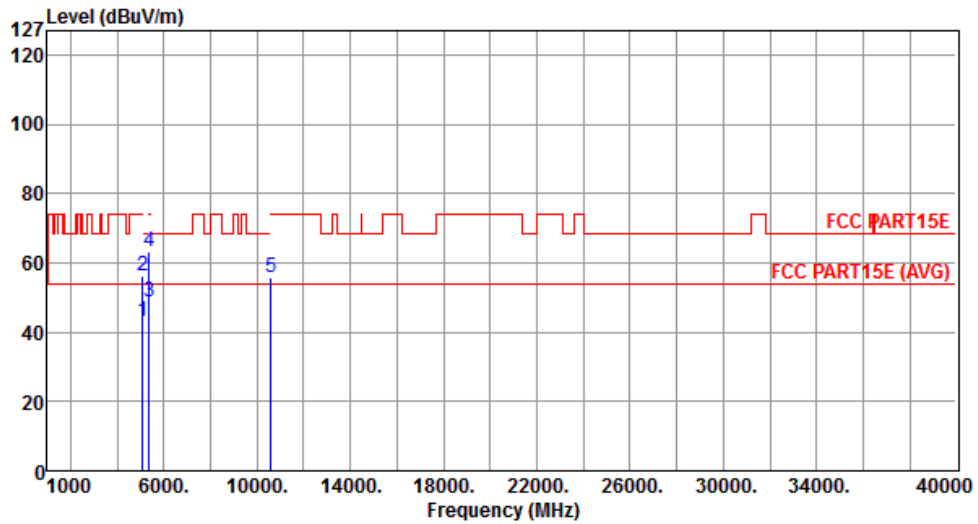


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.04	54.00	-10.96	38.21	4.83	Average	---	---
2	5097.00	56.44	74.00	-17.56	51.61	4.83	Peak	---	---
3	5350.00	48.94	54.00	-5.06	43.85	5.09	Average	---	---
4	5350.00	63.29	74.00	-10.71	58.20	5.09	Peak	---	---
5	10580.00	55.89	68.30	-12.41	40.96	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical	Test Configuration	3

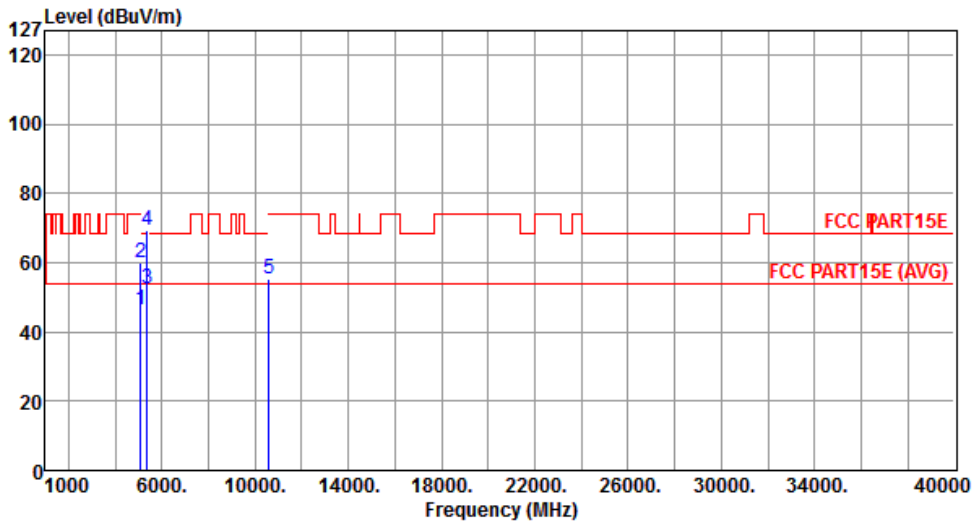


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	46.46	54.00	-7.54	41.63	4.83	Average	---	---
2	5097.00	60.00	74.00	-14.00	55.17	4.83	Peak	---	---
3	5350.00	52.69	54.00	-1.31	47.60	5.09	Average	---	---
4	5350.00	69.15	74.00	-4.85	64.06	5.09	Peak	---	---
5	10580.00	55.45	68.30	-12.85	40.52	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal	Test Configuration	3

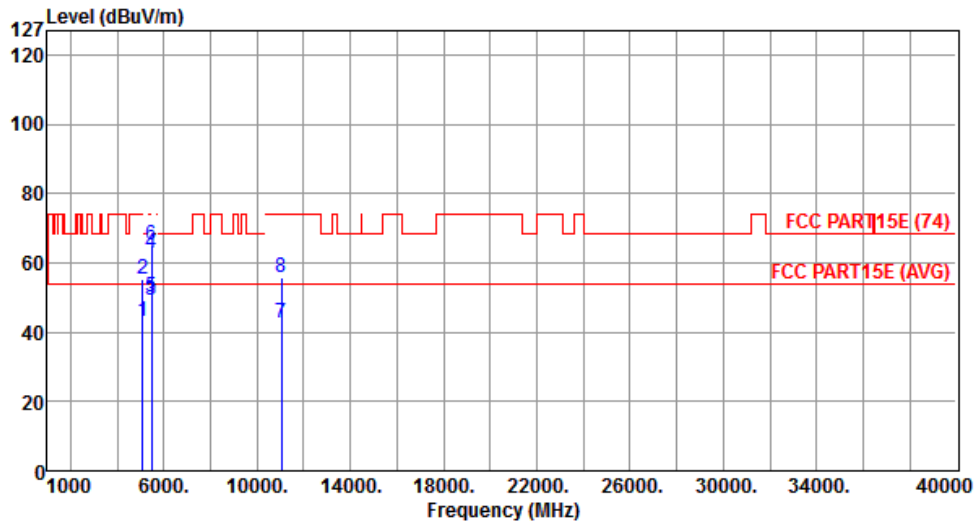


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.93	54.00	-11.07	38.10	4.83	Average	---	---
2	5097.00	55.14	74.00	-18.86	50.31	4.83	Peak	---	---
3	5460.00	49.02	54.00	-4.98	43.84	5.18	Average	---	---
4	5460.00	62.68	74.00	-11.32	57.50	5.18	Peak	---	---
5	5470.00	50.16	54.00	-3.84	44.97	5.19	Average	---	---
6	5470.00	65.33	74.00	-8.67	60.14	5.19	Peak	---	---
7	11060.00	42.80	54.00	-11.20	27.56	15.24	Average	---	---
8	11060.00	55.78	74.00	-18.22	40.54	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical	Test Configuration	3

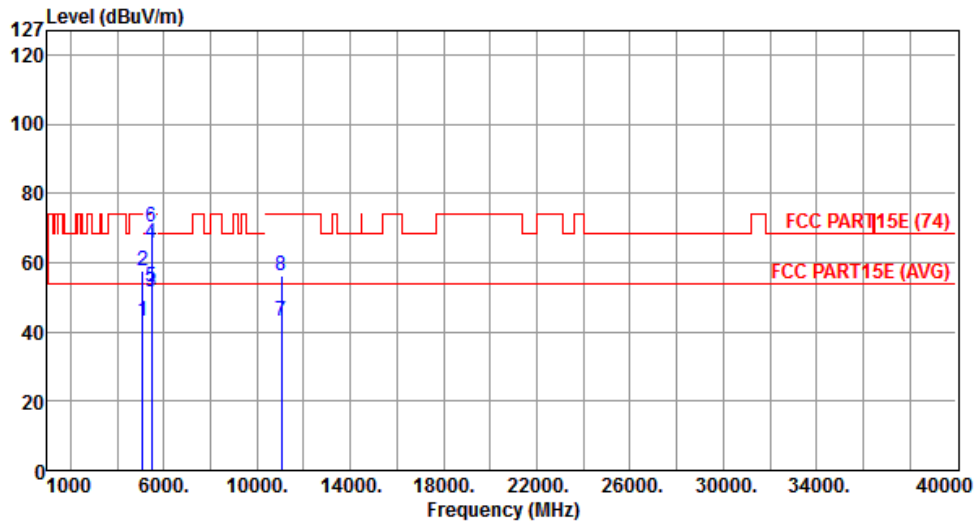


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.98	54.00	-11.02	38.15	4.83	Average	---	---
2	5097.00	57.65	74.00	-16.35	52.82	4.83	Peak	---	---
3	5460.00	51.65	54.00	-2.35	46.47	5.18	Average	---	---
4	5460.00	65.44	74.00	-8.56	60.26	5.18	Peak	---	---
5	5470.00	52.97	54.00	-1.03	47.78	5.19	Average	---	---
6	5470.00	70.11	74.00	-3.89	64.92	5.19	Peak	---	---
7	11060.00	43.16	54.00	-10.84	27.92	15.24	Average	---	---
8	11060.00	56.27	74.00	-17.73	41.03	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal	Test Configuration	3

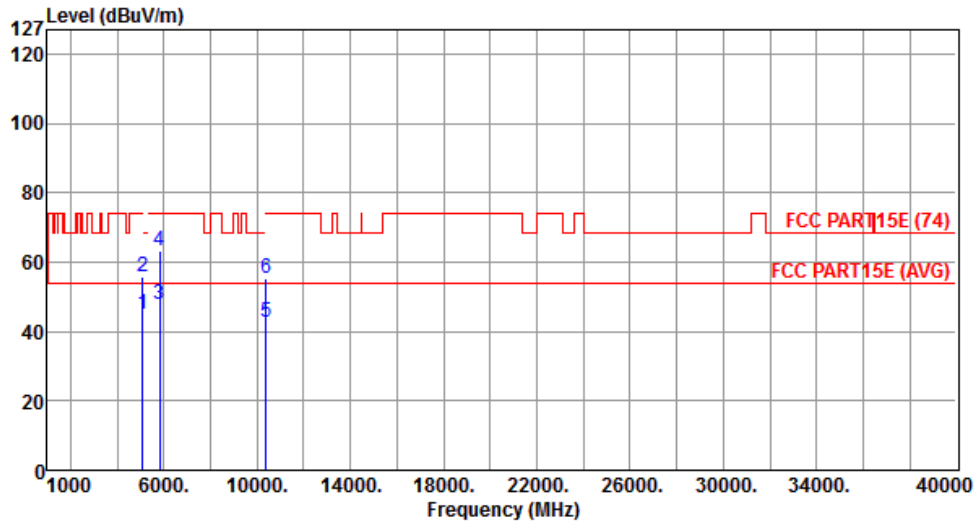


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.91	54.00	-9.09	39.42	5.49	Average	---	---
2	5097.00	55.62	74.00	-18.38	50.13	5.49	Peak	---	---
3	5825.00	47.66	54.00	-6.34	42.04	5.62	Average	---	---
4	5825.00	63.04	74.00	-10.96	57.42	5.62	Peak	---	---
5	10380.00	42.85	54.00	-11.15	27.74	15.11	Average	---	---
6	10380.00	55.07	74.00	-18.93	39.96	15.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical	Test Configuration	3

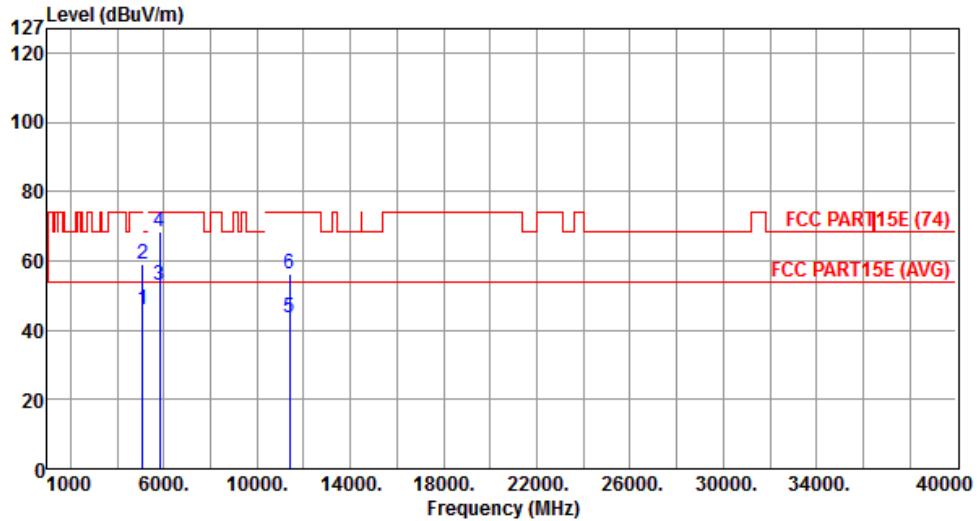


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.71	54.00	-8.29	40.22	5.49	Average	---	---
2	5097.00	58.97	74.00	-15.03	53.48	5.49	Peak	---	---
3	5825.00	52.83	54.00	-1.17	47.21	5.62	Average	---	---
4	5825.00	68.33	74.00	-5.67	62.71	5.62	Peak	---	---
5	11380.00	43.63	54.00	-10.37	28.86	14.77	Average	---	---
6	11380.00	56.09	74.00	-17.91	41.32	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal	Test Configuration	4

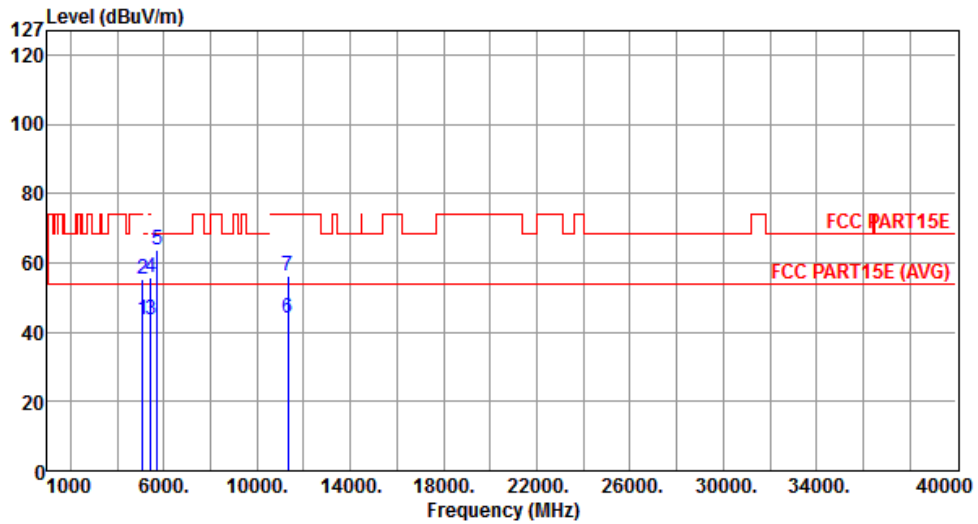


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.81	54.00	-10.19	38.98	4.83	Average	---	---
2	5097.00	55.51	74.00	-18.49	50.68	4.83	Peak	---	---
3	5427.00	43.73	54.00	-10.27	38.59	5.14	Average	---	---
4	5427.00	55.69	74.00	-18.31	50.55	5.14	Peak	---	---
5	5725.00	63.90	68.30	-4.40	58.34	5.56	Peak	---	---
6	11340.00	43.95	54.00	-10.05	28.88	15.07	Average	---	---
7	11340.00	56.32	74.00	-17.68	41.25	15.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical	Test Configuration	4

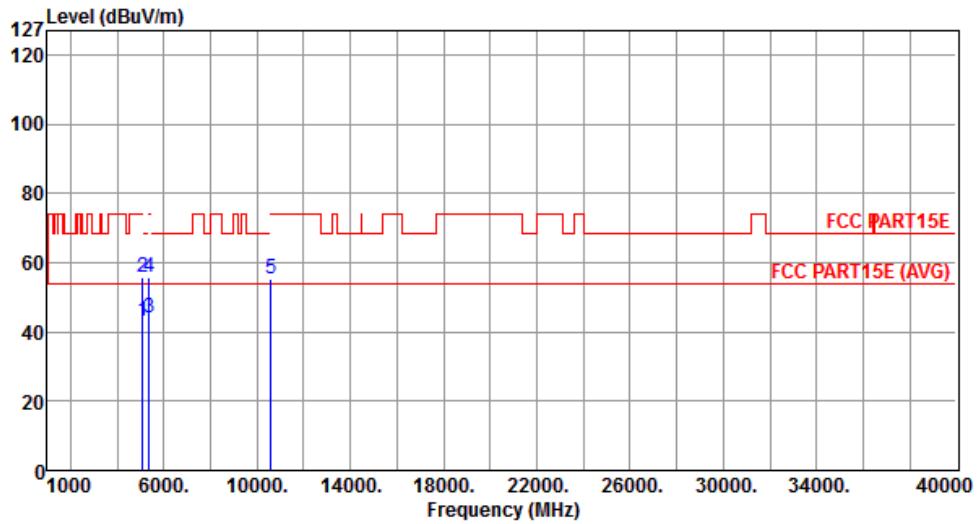


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.18	54.00	-10.82	38.35	4.83	Average	---	---
2	5097.00	55.93	74.00	-18.07	51.10	4.83	Peak	---	---
3	5350.00	44.07	54.00	-9.93	38.98	5.09	Average	---	---
4	5350.00	55.98	74.00	-18.02	50.89	5.09	Peak	---	---
5	10580.00	55.26	68.30	-13.04	40.33	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal	Test Configuration	4

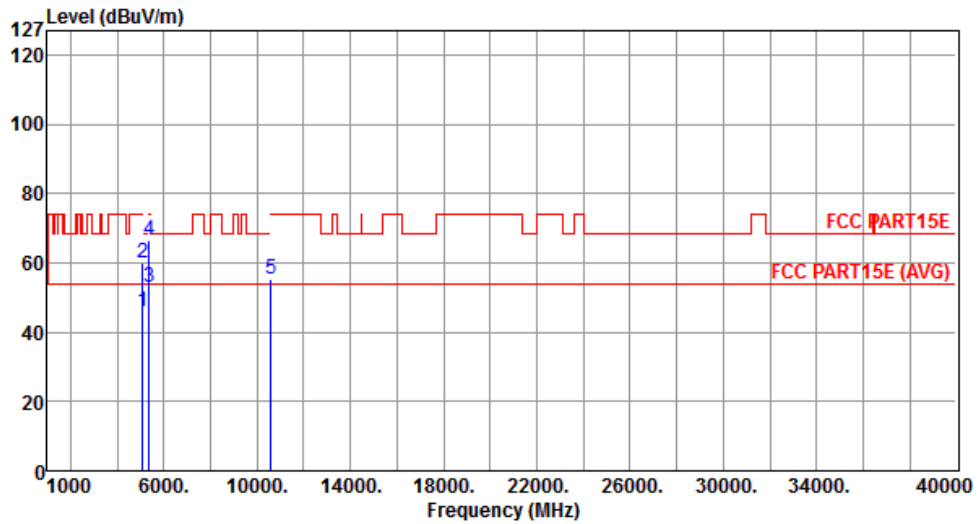


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	46.06	54.00	-7.94	41.23	4.83	Average	---	---
2	5097.00	60.09	74.00	-13.91	55.26	4.83	Peak	---	---
3	5350.00	52.80	54.00	-1.20	47.71	5.09	Average	---	---
4	5350.00	66.64	74.00	-7.36	61.55	5.09	Peak	---	---
5	10580.00	55.31	68.30	-12.99	40.38	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical	Test Configuration	4

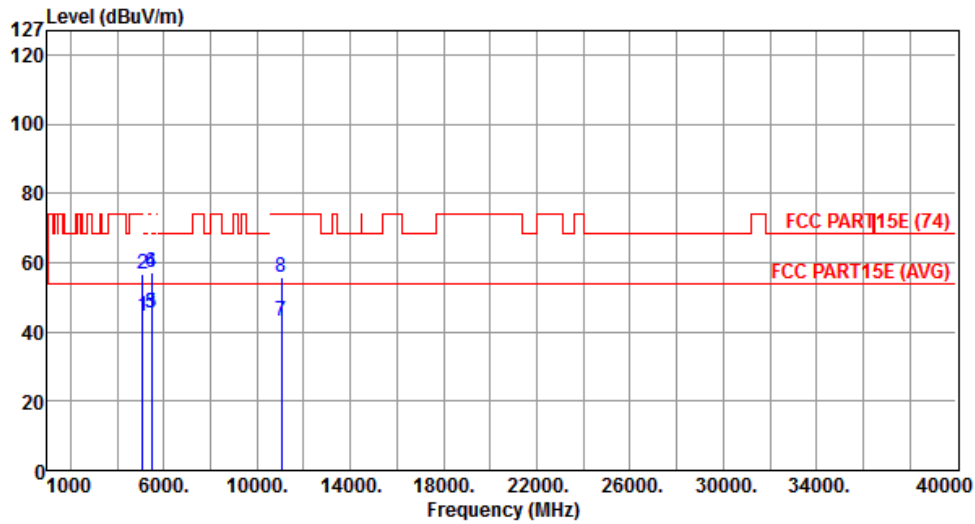


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.42	54.00	-9.58	39.59	4.83	Average	---	---
2	5097.00	56.59	74.00	-17.41	51.76	4.83	Peak	---	---
3	5460.00	45.45	54.00	-8.55	40.27	5.18	Average	---	---
4	5460.00	57.05	74.00	-16.95	51.87	5.18	Peak	---	---
5	5470.00	45.37	54.00	-8.63	40.18	5.19	Average	---	---
6	5470.00	56.96	74.00	-17.04	51.77	5.19	Peak	---	---
7	11060.00	42.96	54.00	-11.04	27.72	15.24	Average	---	---
8	11060.00	55.83	74.00	-18.17	40.59	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal	Test Configuration	4

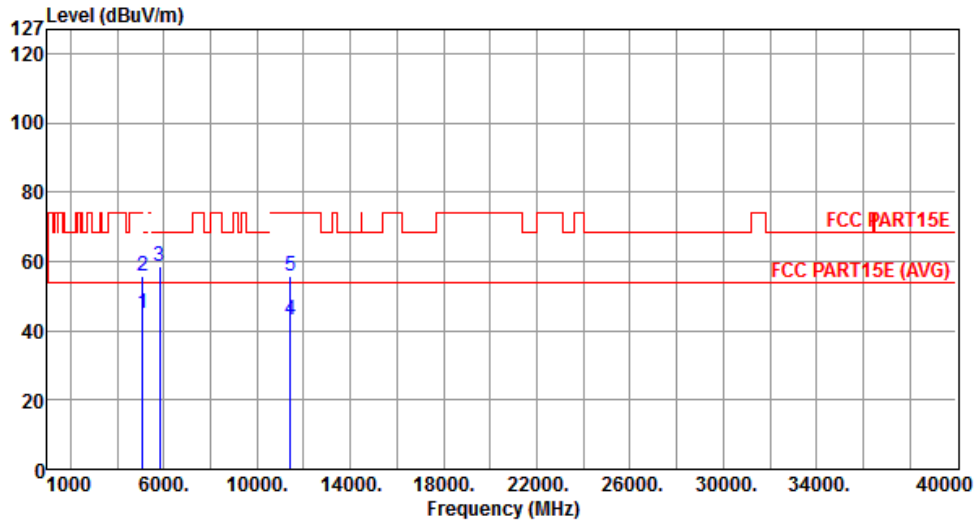


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.91	54.00	-9.09	39.42	5.49	Average	---	---
2	5097.00	55.64	74.00	-18.36	50.15	5.49	Peak	---	---
3	5825.00	58.53	68.20	-9.67	52.91	5.62	Peak	---	---
4	11420.00	42.98	54.00	-11.02	28.28	14.70	Average	---	---
5	11420.00	55.69	74.00	-18.31	40.99	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical	Test Configuration	4

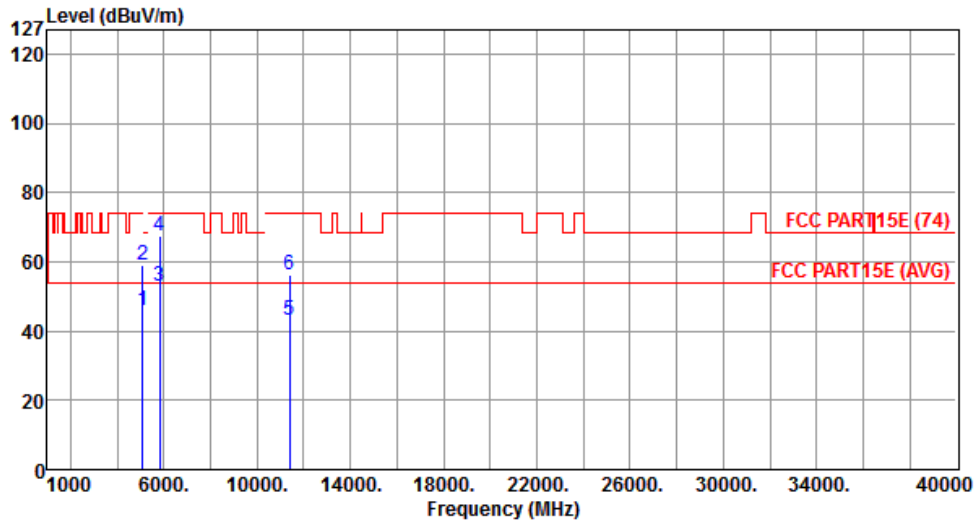


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.73	54.00	-8.27	40.24	5.49	Average	---	---
2	5097.00	58.84	74.00	-15.16	53.35	5.49	Peak	---	---
3	5825.00	52.95	54.00	-1.05	47.33	5.62	Average	---	---
4	5825.00	67.69	74.00	-6.31	62.07	5.62	Peak	---	---
5	11380.00	43.10	54.00	-10.90	28.33	14.77	Average	---	---
6	11380.00	56.34	74.00	-17.66	41.57	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal	Test Configuration	5

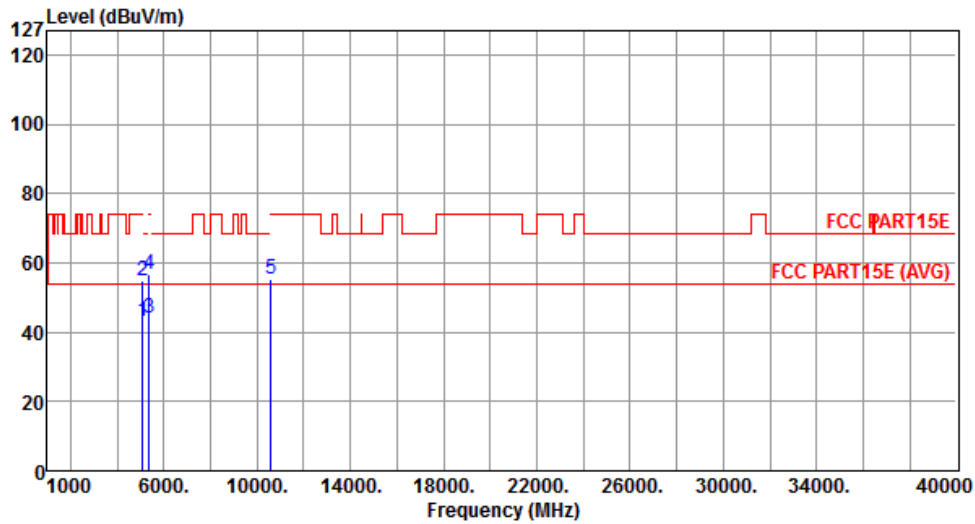


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.06	54.00	-10.94	38.23	4.83	Average	---	---
2	5097.00	54.87	74.00	-19.13	50.04	4.83	Peak	---	---
3	5350.00	44.15	54.00	-9.85	39.06	5.09	Average	---	---
4	5350.00	56.60	74.00	-17.40	51.51	5.09	Peak	---	---
5	10580.00	55.40	68.30	-12.90	40.47	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical	Test Configuration	5

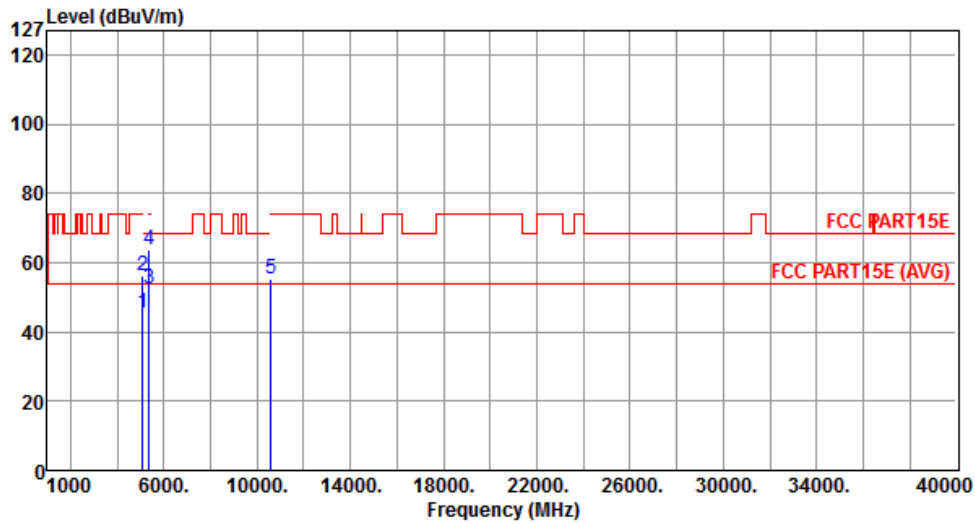


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.27	54.00	-8.73	40.44	4.83	Average	---	---
2	5097.00	56.27	74.00	-17.73	51.44	4.83	Peak	---	---
3	5350.00	52.64	54.00	-1.36	47.55	5.09	Average	---	---
4	5350.00	63.54	74.00	-10.46	58.45	5.09	Peak	---	---
5	10580.00	55.21	68.30	-13.09	40.28	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal	Test Configuration	5

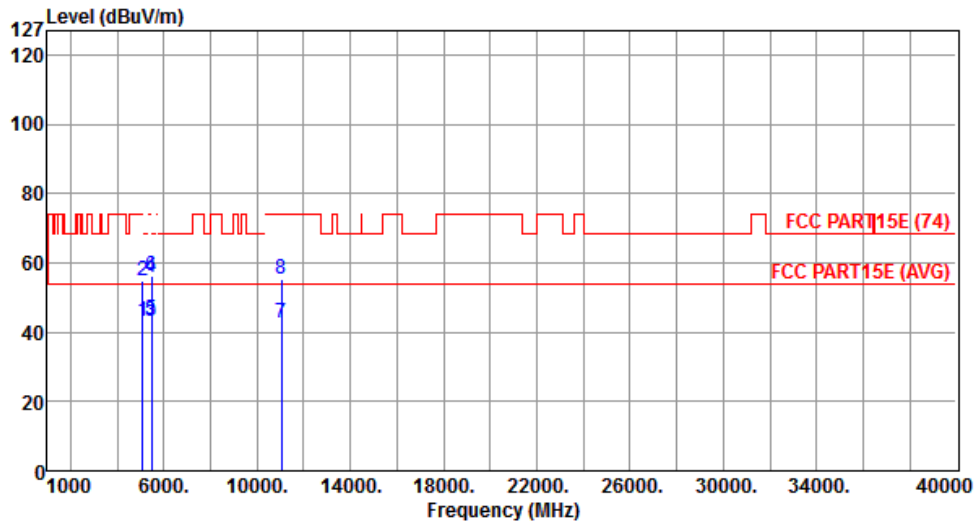


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.93	54.00	-11.07	38.10	4.83	Average	---	---
2	5097.00	54.68	74.00	-19.32	49.85	4.83	Peak	---	---
3	5460.00	43.34	54.00	-10.66	38.16	5.18	Average	---	---
4	5460.00	55.84	74.00	-18.16	50.66	5.18	Peak	---	---
5	5470.00	43.56	54.00	-10.44	38.37	5.19	Average	---	---
6	5470.00	56.16	74.00	-17.84	50.97	5.19	Peak	---	---
7	11060.00	42.65	54.00	-11.35	27.41	15.24	Average	---	---
8	11060.00	55.52	74.00	-18.48	40.28	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical	Test Configuration	5

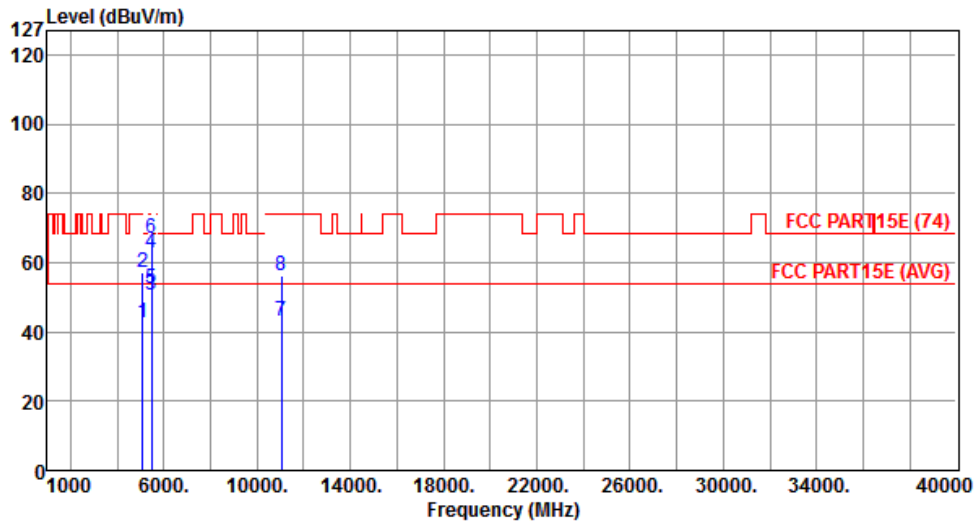


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.86	54.00	-11.14	38.03	4.83	Average	---	---
2	5097.00	57.20	74.00	-16.80	52.37	4.83	Peak	---	---
3	5460.00	50.57	54.00	-3.43	45.39	5.18	Average	---	---
4	5460.00	62.96	74.00	-11.04	57.78	5.18	Peak	---	---
5	5470.00	52.58	54.00	-1.42	47.39	5.19	Average	---	---
6	5470.00	67.19	74.00	-6.81	62.00	5.19	Peak	---	---
7	11060.00	43.00	54.00	-11.00	27.76	15.24	Average	---	---
8	11060.00	56.07	74.00	-17.93	40.83	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal	Test Configuration	5

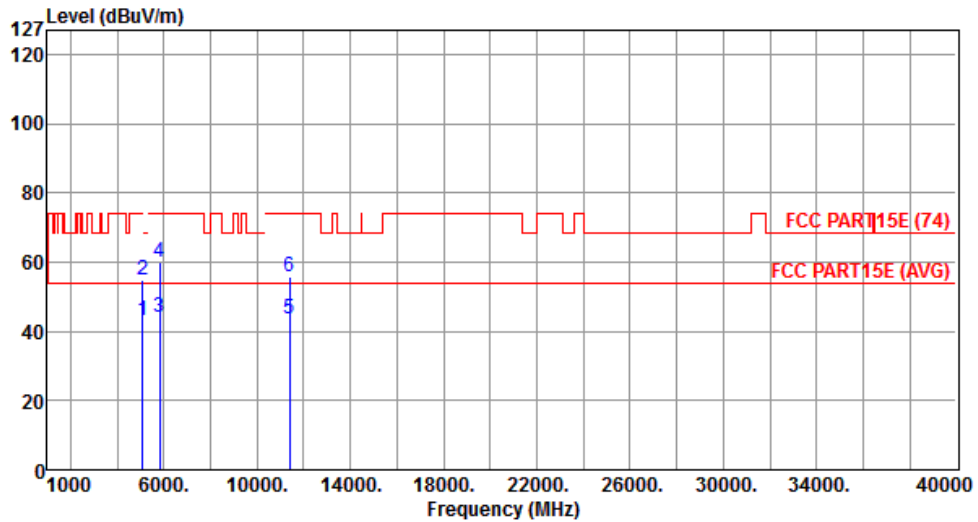


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.05	54.00	-10.95	37.56	5.49	Average	---	---
2	5097.00	54.87	74.00	-19.13	49.38	5.49	Peak	---	---
3	5825.00	44.04	54.00	-9.96	38.42	5.62	Average	---	---
4	5825.00	59.96	74.00	-14.04	54.34	5.62	Peak	---	---
5	11380.00	43.66	54.00	-10.34	28.89	14.77	Average	---	---
6	11380.00	55.56	74.00	-18.44	40.79	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical	Test Configuration	5

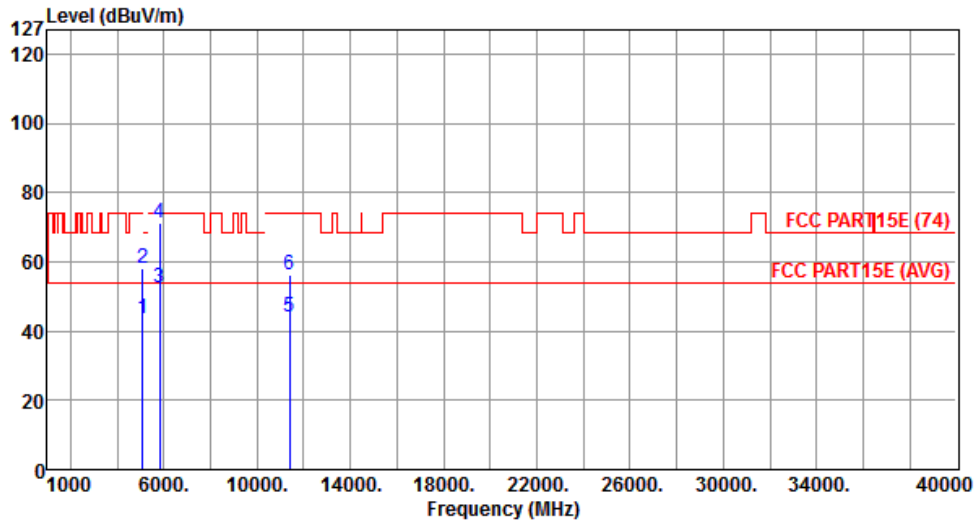


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.81	54.00	-10.19	38.32	5.49	Average	---	---
2	5097.00	58.08	74.00	-15.92	52.59	5.49	Peak	---	---
3	5825.00	52.62	54.00	-1.38	47.00	5.62	Average	---	---
4	5825.00	71.04	74.00	-2.96	65.42	5.62	Peak	---	---
5	11380.00	43.93	54.00	-10.07	29.16	14.77	Average	---	---
6	11380.00	56.02	74.00	-17.98	41.25	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Horizontal	Test Configuration	6

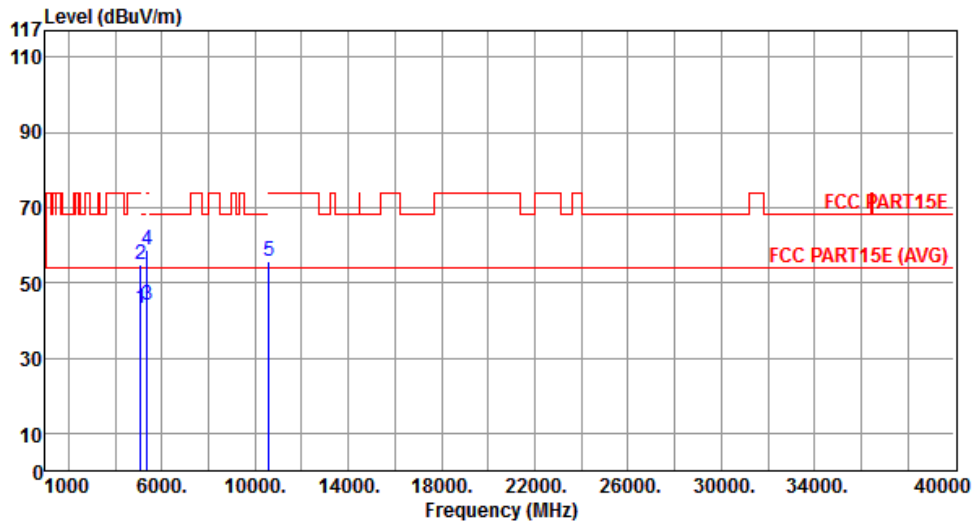


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.31	54.00	-10.69	38.48	4.83	Average	---	---
2	5097.00	54.88	74.00	-19.12	50.05	4.83	Peak	---	---
3	5350.00	44.05	54.00	-9.95	38.96	5.09	Average	---	---
4	5350.00	58.90	74.00	-15.10	53.81	5.09	Peak	---	---
5	10580.00	55.54	68.30	-12.76	40.61	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5290
Polarization	Vertical	Test Configuration	6

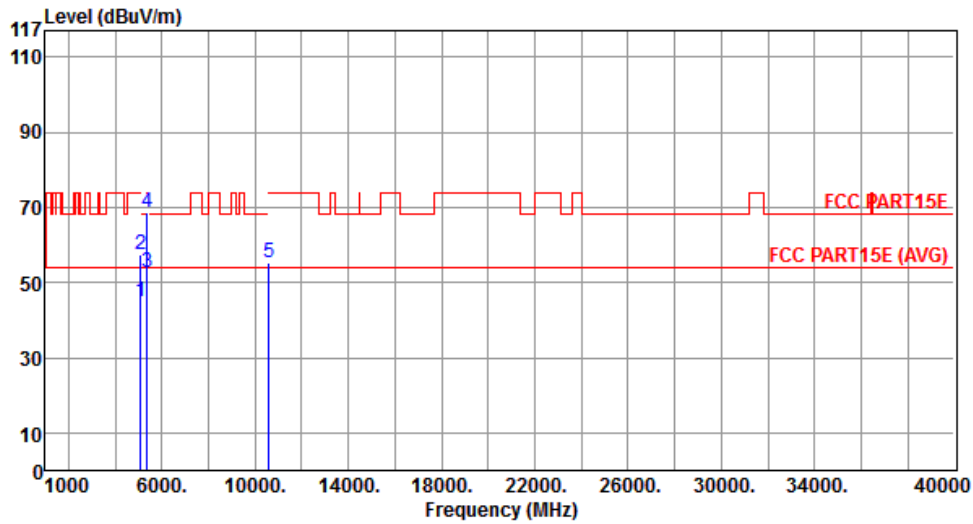


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	45.08	54.00	-8.92	40.25	4.83	Average	---	---
2	5097.00	57.24	74.00	-16.76	52.41	4.83	Peak	---	---
3	5350.00	52.52	54.00	-1.48	47.43	5.09	Average	---	---
4	5350.00	68.73	74.00	-5.27	63.64	5.09	Peak	---	---
5	10580.00	55.31	68.30	-12.99	40.38	14.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Horizontal	Test Configuration	6

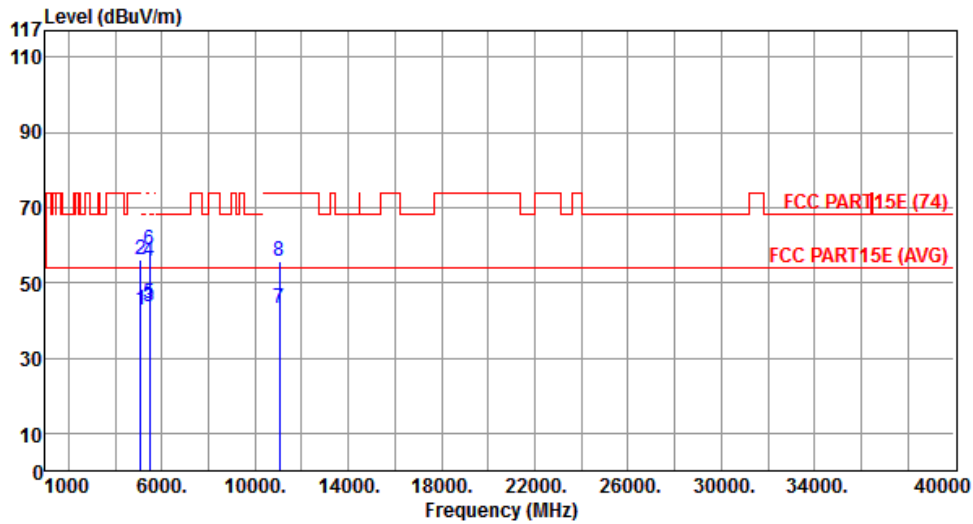


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	42.55	54.00	-11.45	37.72	4.83	Average	---	---
2	5097.00	56.09	74.00	-17.91	51.26	4.83	Peak	---	---
3	5460.00	43.70	54.00	-10.30	38.52	5.18	Average	---	---
4	5460.00	55.75	74.00	-18.25	50.57	5.18	Peak	---	---
5	5470.00	44.45	54.00	-9.55	39.26	5.19	Average	---	---
6	5470.00	58.69	74.00	-15.31	53.50	5.19	Peak	---	---
7	11060.00	43.09	54.00	-10.91	27.85	15.24	Average	---	---
8	11060.00	55.52	74.00	-18.48	40.28	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5530
Polarization	Vertical	Test Configuration	6

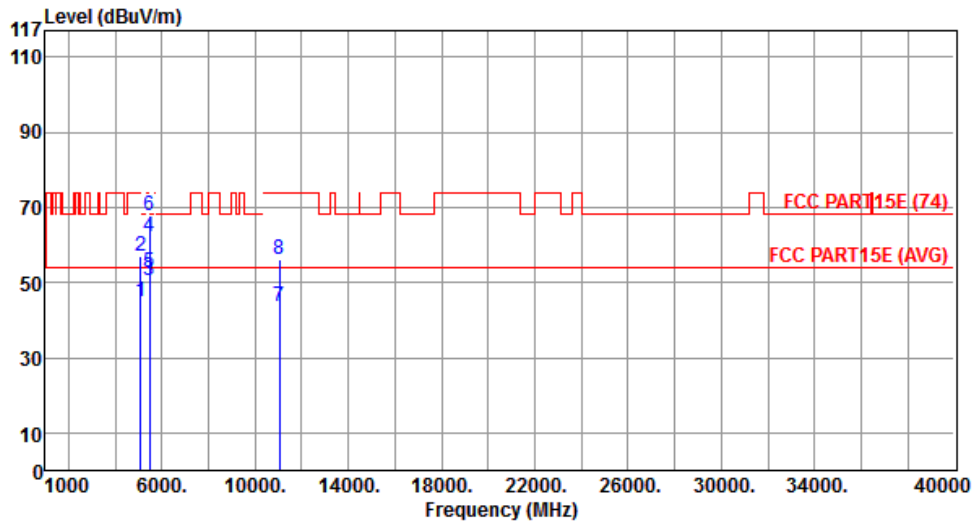


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.88	54.00	-9.12	40.05	4.83	Average	---	---
2	5097.00	57.01	74.00	-16.99	52.18	4.83	Peak	---	---
3	5460.00	50.57	54.00	-3.43	45.39	5.18	Average	---	---
4	5460.00	62.15	74.00	-11.85	56.97	5.18	Peak	---	---
5	5470.00	52.59	54.00	-1.41	47.40	5.19	Average	---	---
6	5470.00	67.76	74.00	-6.24	62.57	5.19	Peak	---	---
7	11060.00	43.46	54.00	-10.54	28.22	15.24	Average	---	---
8	11060.00	56.22	74.00	-17.78	40.98	15.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal	Test Configuration	6

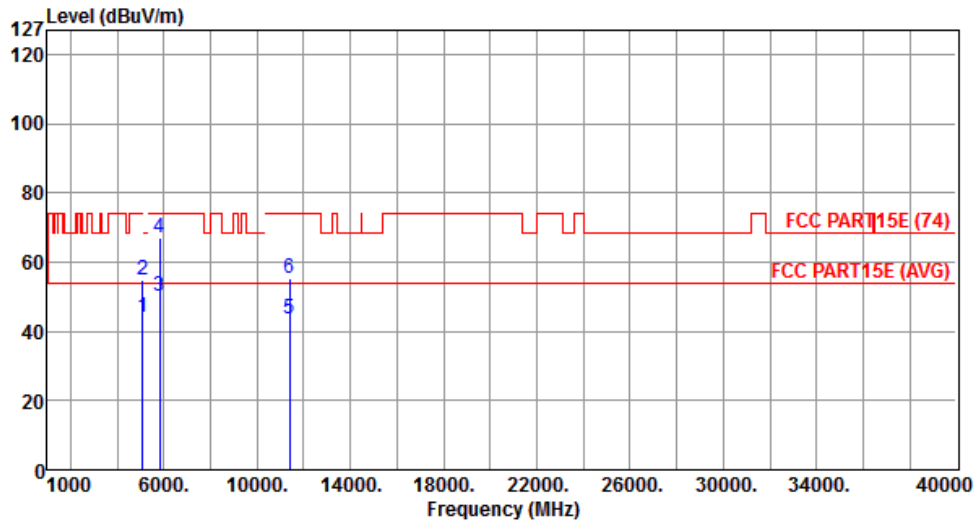


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	43.93	54.00	-10.07	38.44	5.49	Average	---	---
2	5097.00	55.02	74.00	-18.98	49.53	5.49	Peak	---	---
3	5825.00	50.30	54.00	-3.70	44.68	5.62	Average	---	---
4	5825.00	67.18	74.00	-6.82	61.56	5.62	Peak	---	---
5	11380.00	43.40	54.00	-10.60	28.63	14.77	Average	---	---
6	11380.00	55.34	74.00	-18.66	40.57	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Vertical	Test Configuration	6

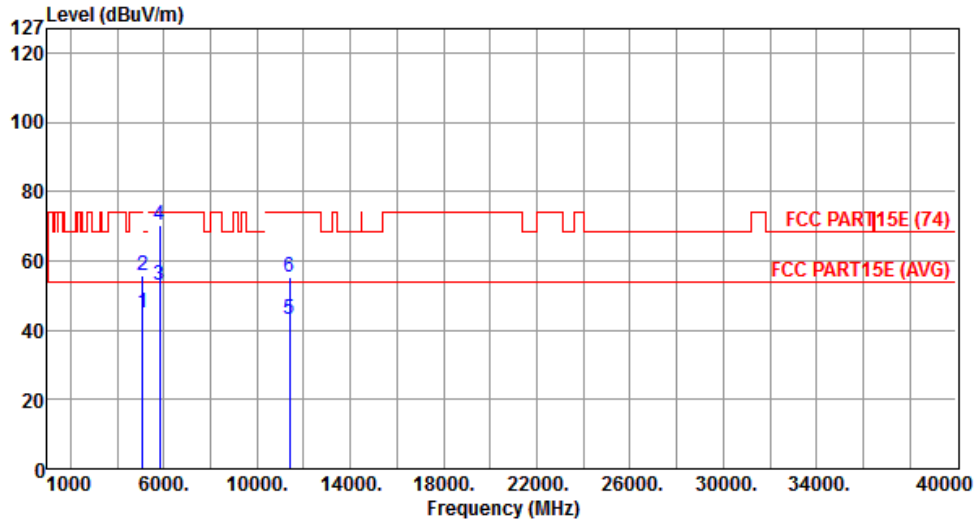

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5097.00	44.78	54.00	-9.22	39.29	5.49	Average	---	---
2	5097.00	55.87	74.00	-18.13	50.38	5.49	Peak	---	---
3	5825.00	53.00	54.00	-1.00	47.38	5.62	Average	---	---
4	5825.00	70.44	74.00	-3.56	64.82	5.62	Peak	---	---
5	11380.00	43.19	54.00	-10.81	28.42	14.77	Average	---	---
6	11380.00	55.34	74.00	-18.66	40.57	14.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.7.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.7.3 Test Setup

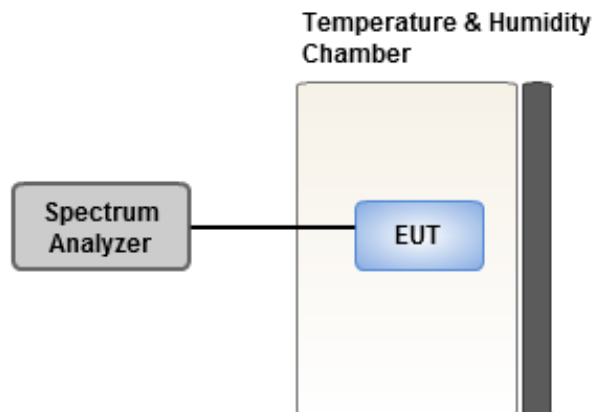

3.7.4 Test Result of Frequency Stability

Frequency: 5320 MHz	Frequency Drift (ppm)			
	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-0.15	0.31	-0.05	0.17
T20°C Vmin	4.11	4.27	4.12	4.55
T55°C Vnom	4.25	4.71	4.18	4.49
T50°C Vnom	4.12	4.59	4.79	3.99
T40°C Vnom	-2.56	-2.23	-2.89	-2.12
T30°C Vnom	0.20	0.83	0.59	0.15
T20°C Vnom	0.44	0.22	0.40	1.09
T10°C Vnom	-0.28	0.45	0.32	-0.02
T0°C Vnom	-0.23	0.17	0.11	-0.05
T-10°C Vnom	-0.51	-0.17	-0.34	-0.87
T-20°C Vnom	-0.98	-0.77	-0.36	-1.17
T-30°C Vnom	-0.52	-0.66	-0.32	-0.73
Vnom [Vdc]: 110		Vmax [Vdc]: 126.5		Vmin [Vdc]: 93.5
Tnom [°C]: 20		Tmax [°C]: 55		Tmin [°C]: -30

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==