



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
VHT20-BF_Nss1,(MCS0)_2TX	0.72
VHT40-BF_Nss1,(MCS0)_2TX	-5.12
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-0.11
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-5.47

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.57	-7.01	-5.70	-3.30	6.43
2437MHz	Pass	7.57	-2.88	-1.52	0.72	6.43
2462MHz	Pass	7.57	-7.59	-5.93	-3.76	6.43
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.57	-9.40	-8.89	-6.25	6.43
2437MHz	Pass	7.57	-8.29	-7.96	-5.12	6.43
2452MHz	Pass	7.57	-10.17	-9.17	-6.63	6.43
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.57	-7.34	-5.17	-3.41	6.43
2437MHz	Pass	7.57	-3.27	-1.08	-0.11	6.43
2462MHz	Pass	7.57	-6.89	-6.59	-3.81	6.43
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.57	-10.64	-9.30	-6.91	6.43
2437MHz	Pass	7.57	-9.29	-7.79	-5.47	6.43
2452MHz	Pass	7.57	-11.04	-9.58	-7.24	6.43




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

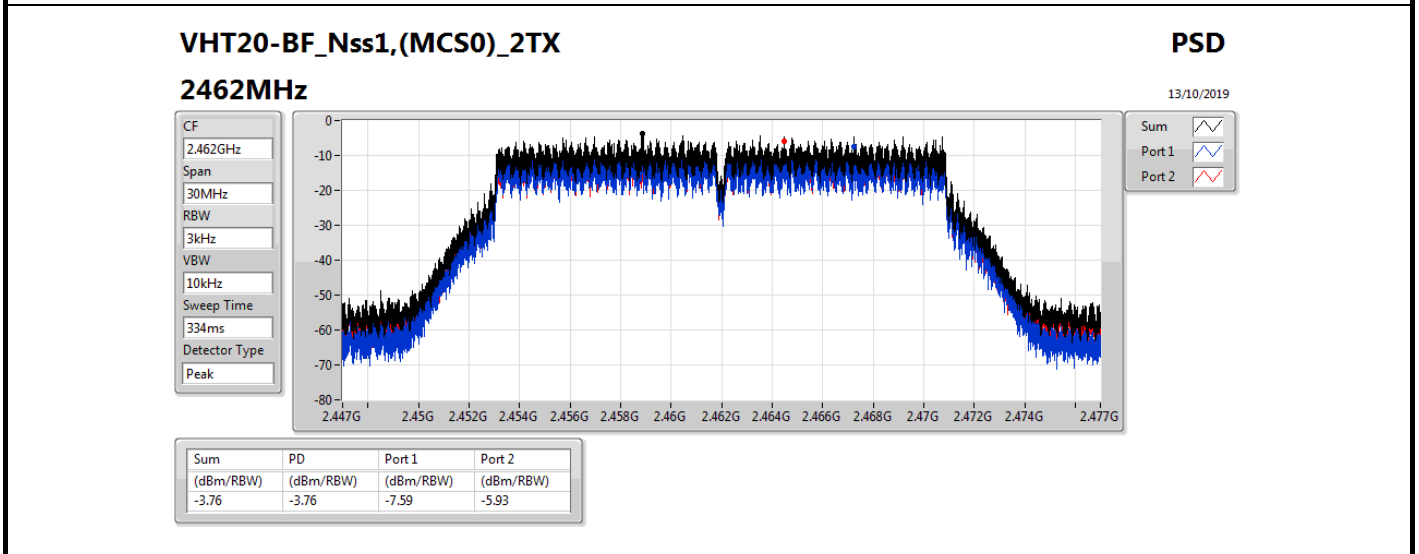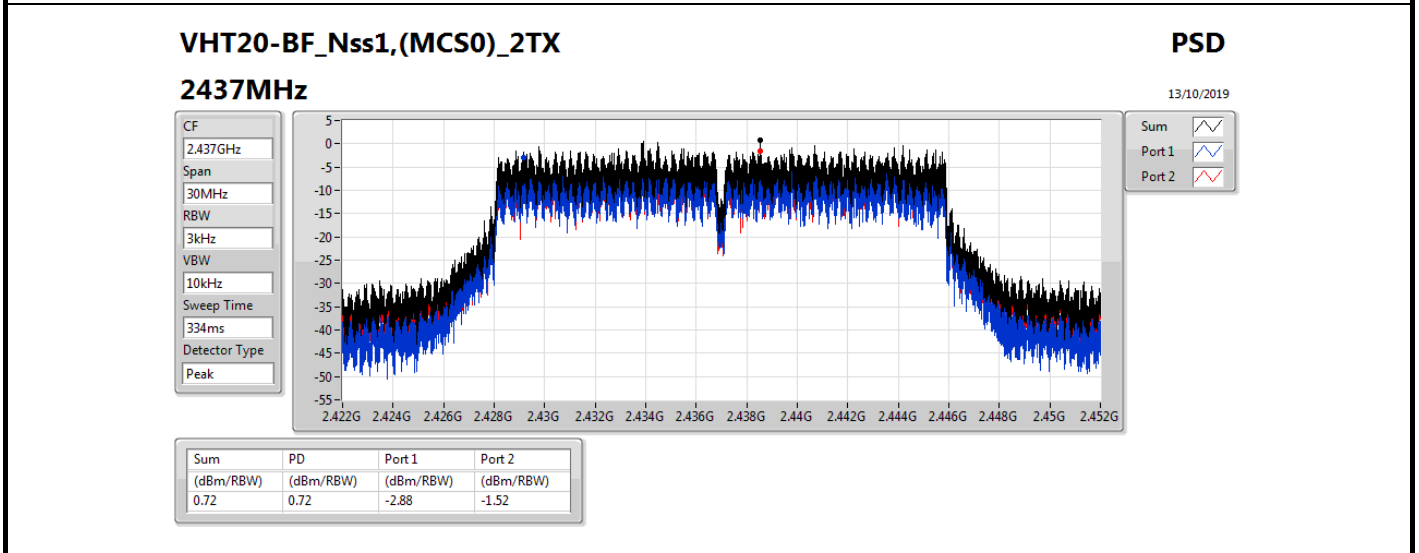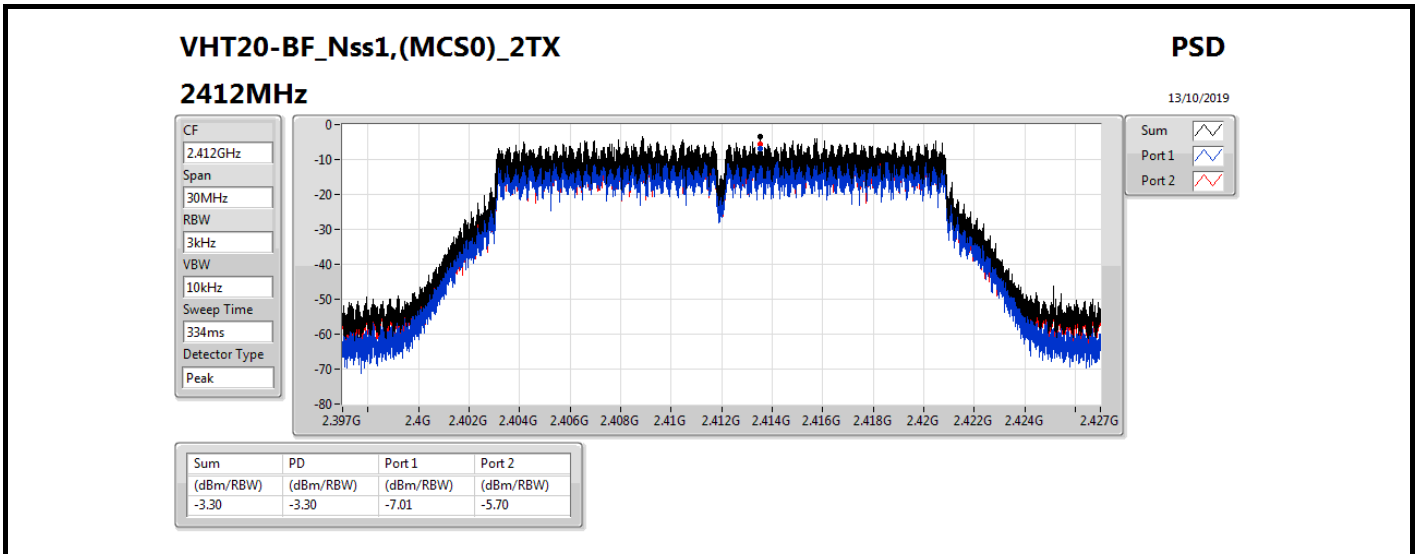

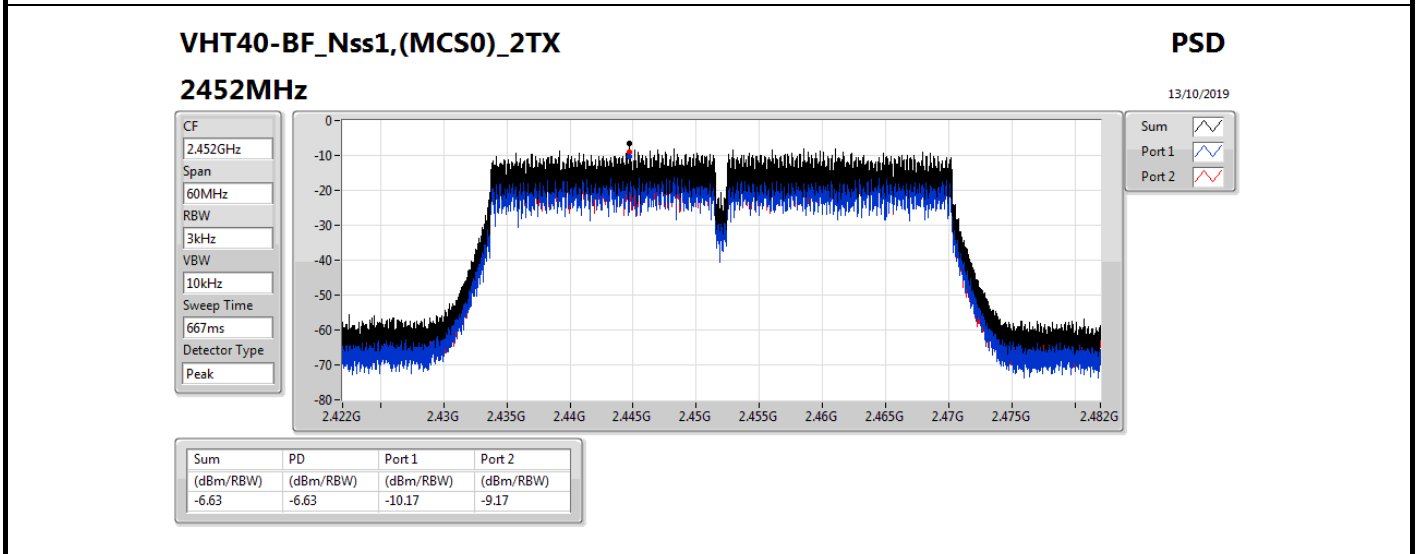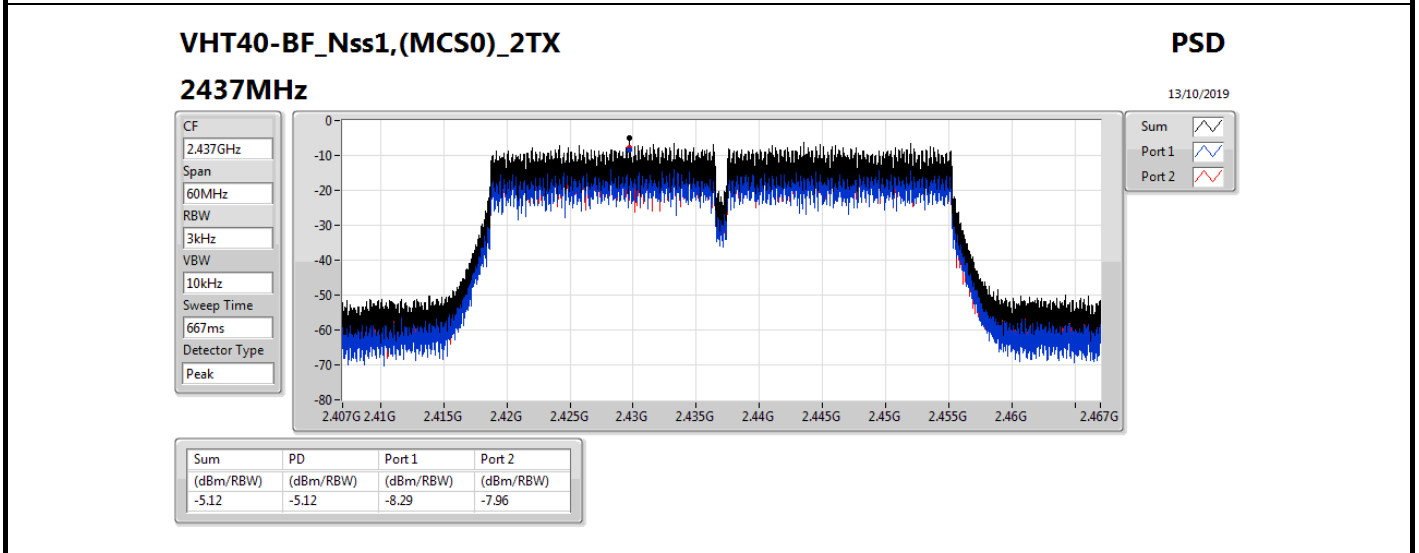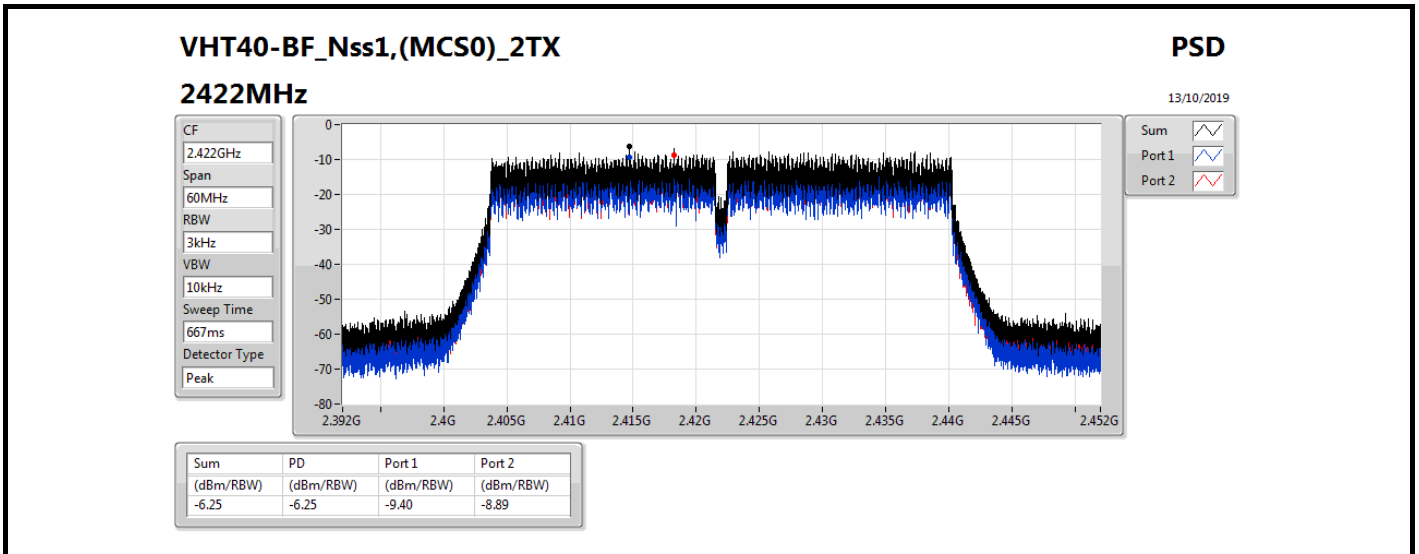

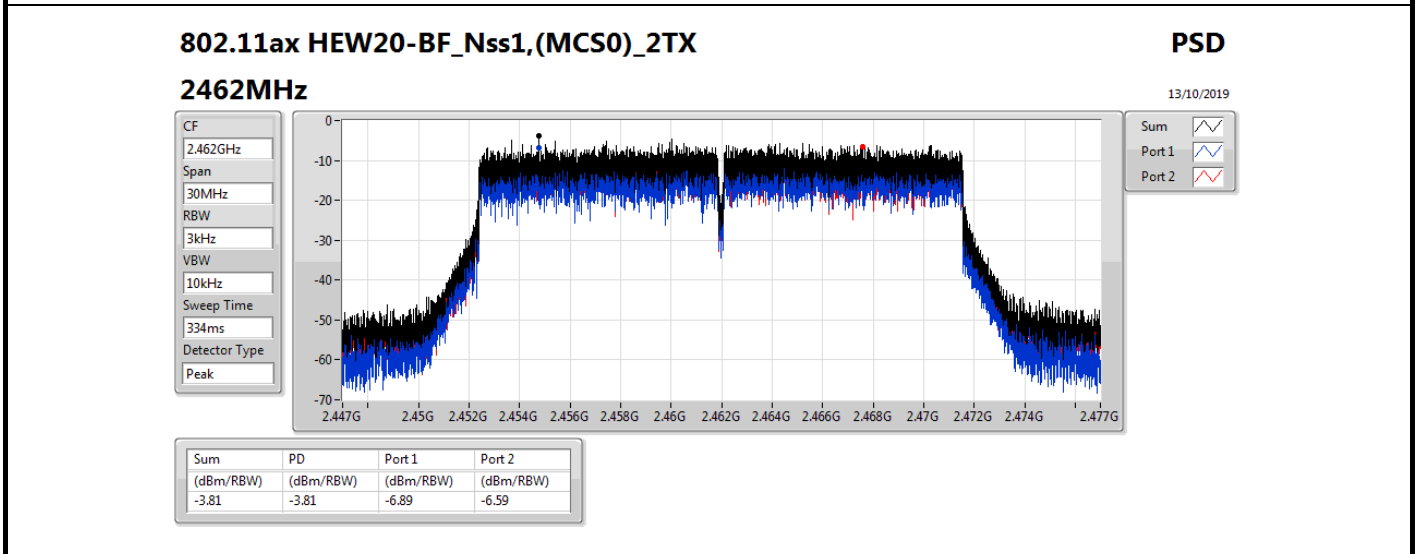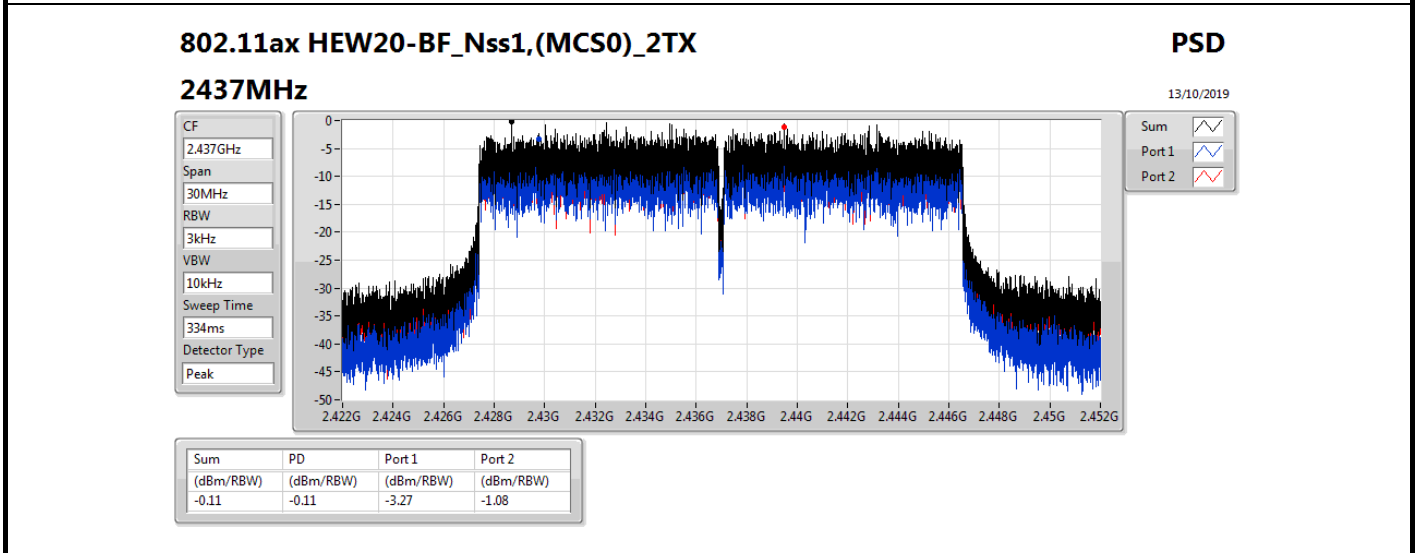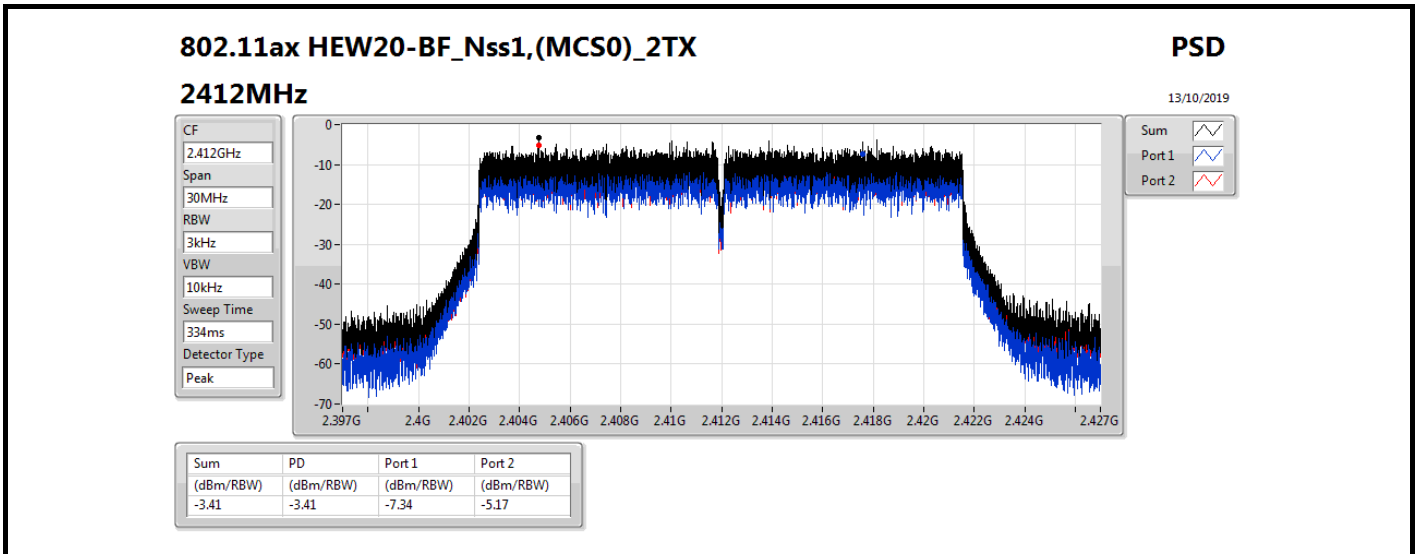

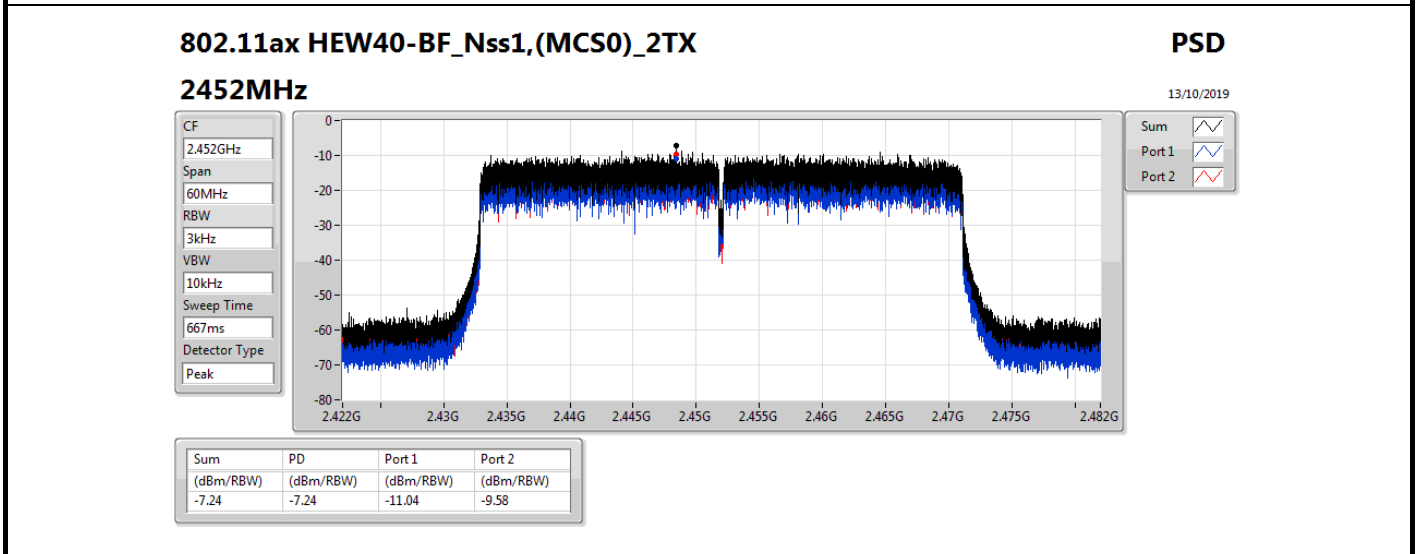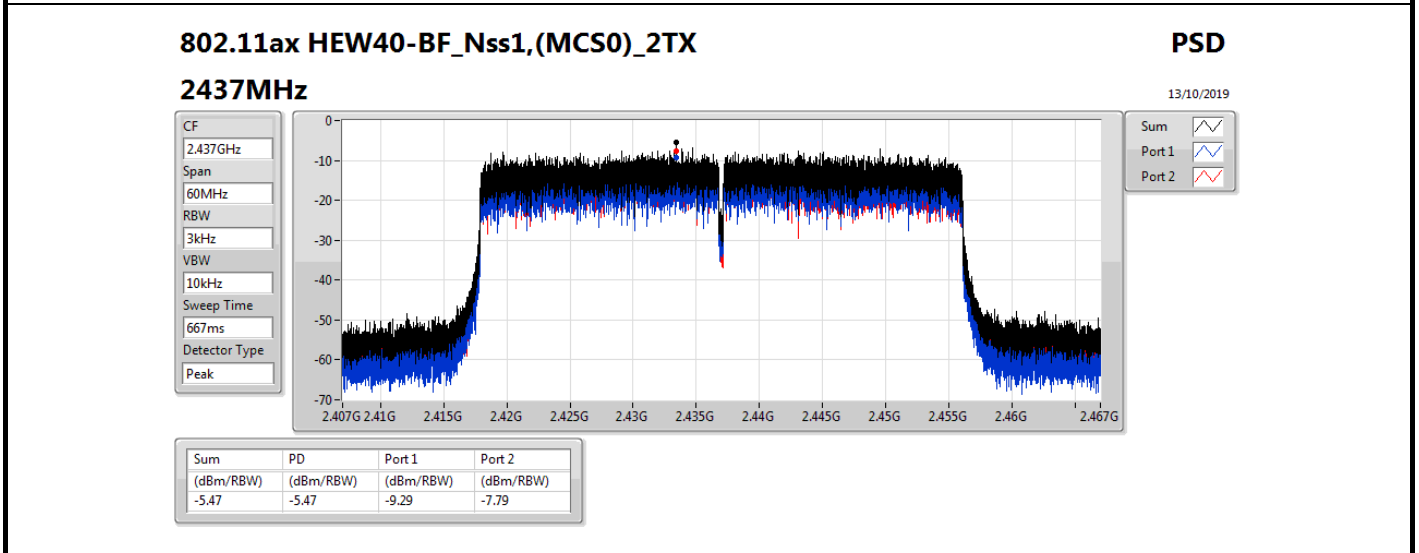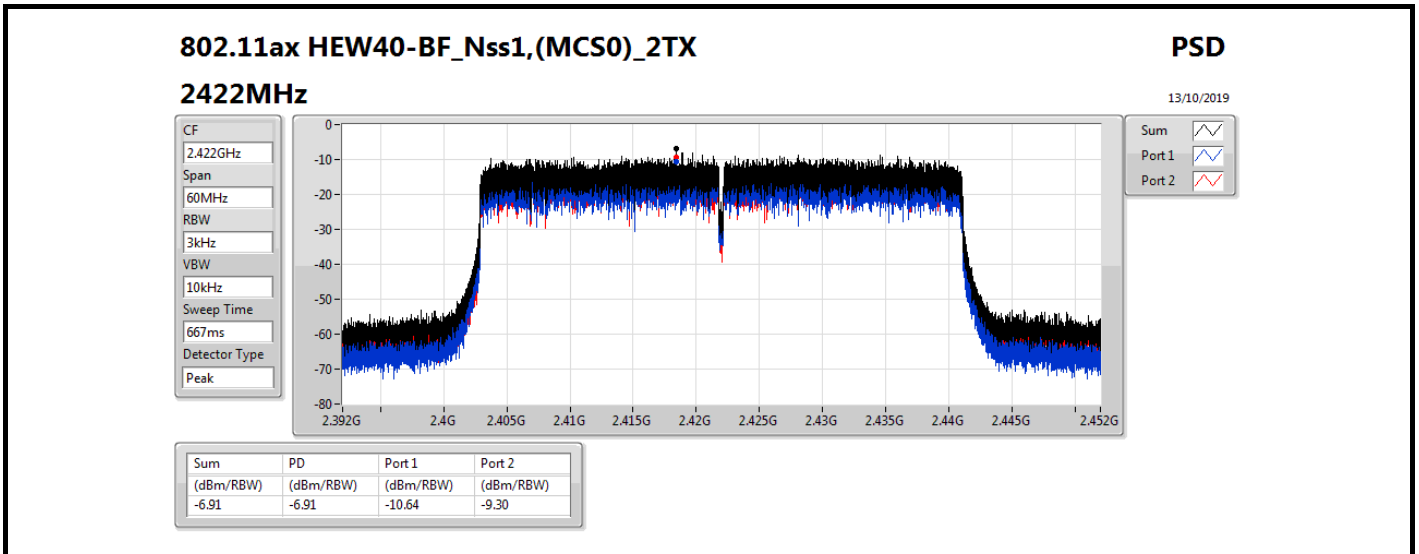



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	4.32
802.11g_Nss1,(6Mbps)_1TX	-1.79
VHT20_Nss1,(MCS0)_1TX	-2.85
VHT40_Nss1,(MCS0)_1TX	-8.82
802.11ax HEW20_Nss1,(MCS0)_1TX	-2.12
802.11ax HEW40_Nss1,(MCS0)_1TX	-9.54

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	5.00	2.19	2.19	8.00
2437MHz	Pass	5.00	4.32	4.32	8.00
2462MHz	Pass	5.00	2.45	2.45	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	5.00	-8.42	-8.42	8.00
2437MHz	Pass	5.00	-1.79	-1.79	8.00
2462MHz	Pass	5.00	-7.94	-7.94	8.00
VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	5.00	-8.44	-8.44	8.00
2437MHz	Pass	5.00	-2.85	-2.85	8.00
2462MHz	Pass	5.00	-9.17	-9.17	8.00
VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	5.00	-10.16	-10.16	8.00
2437MHz	Pass	5.00	-8.82	-8.82	8.00
2452MHz	Pass	5.00	-9.37	-9.37	8.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	5.00	-7.97	-7.97	8.00
2437MHz	Pass	5.00	-2.12	-2.12	8.00
2462MHz	Pass	5.00	-8.17	-8.17	8.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	5.00	-11.16	-11.16	8.00
2437MHz	Pass	5.00	-9.54	-9.54	8.00
2452MHz	Pass	5.00	-10.30	-10.30	8.00




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

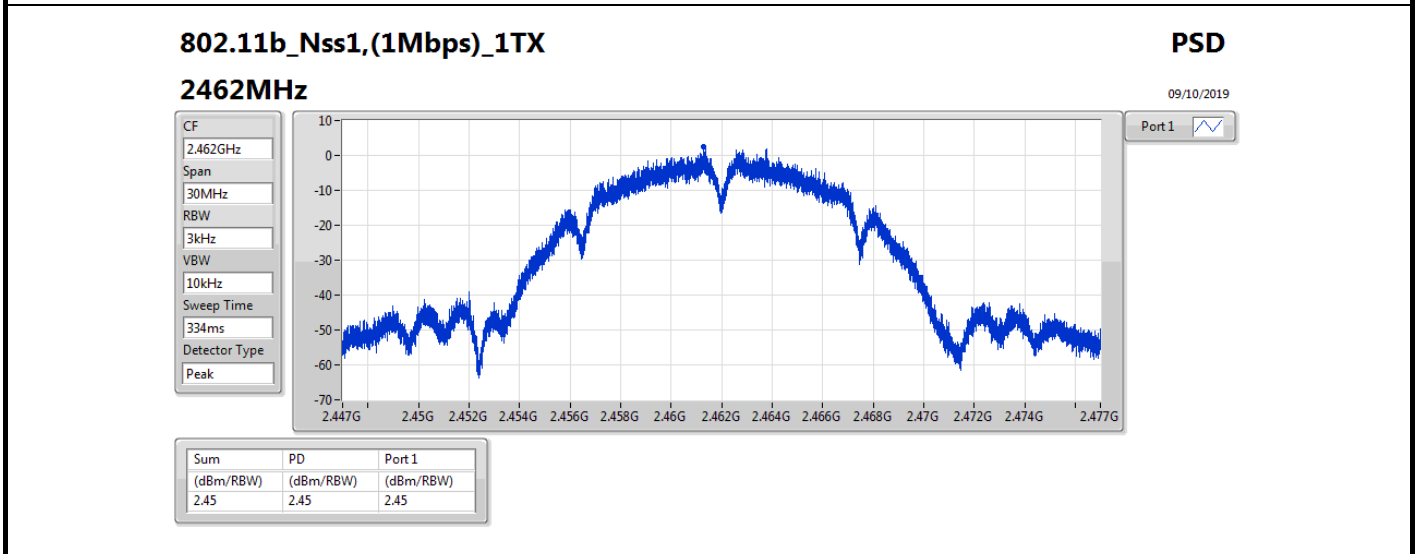
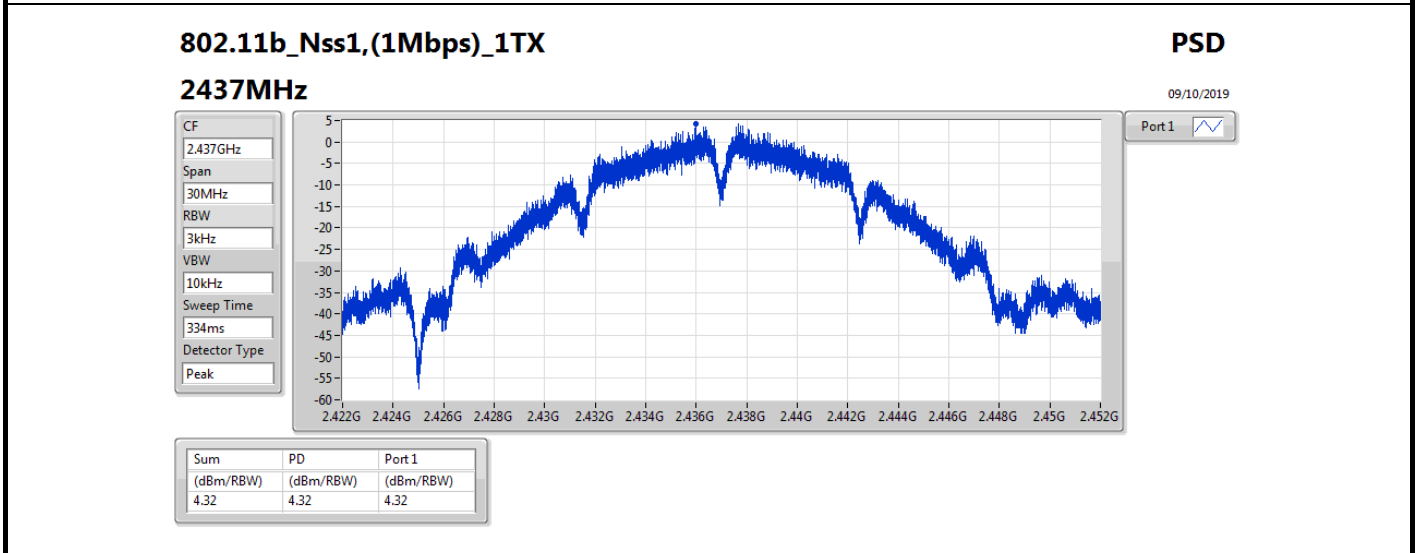
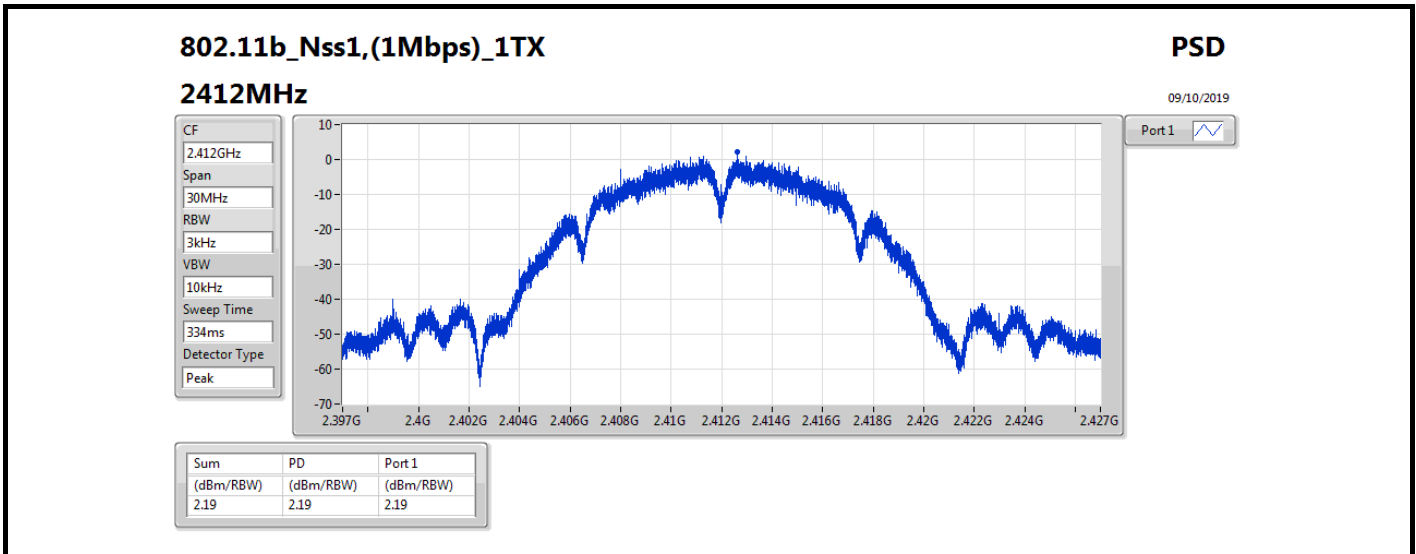


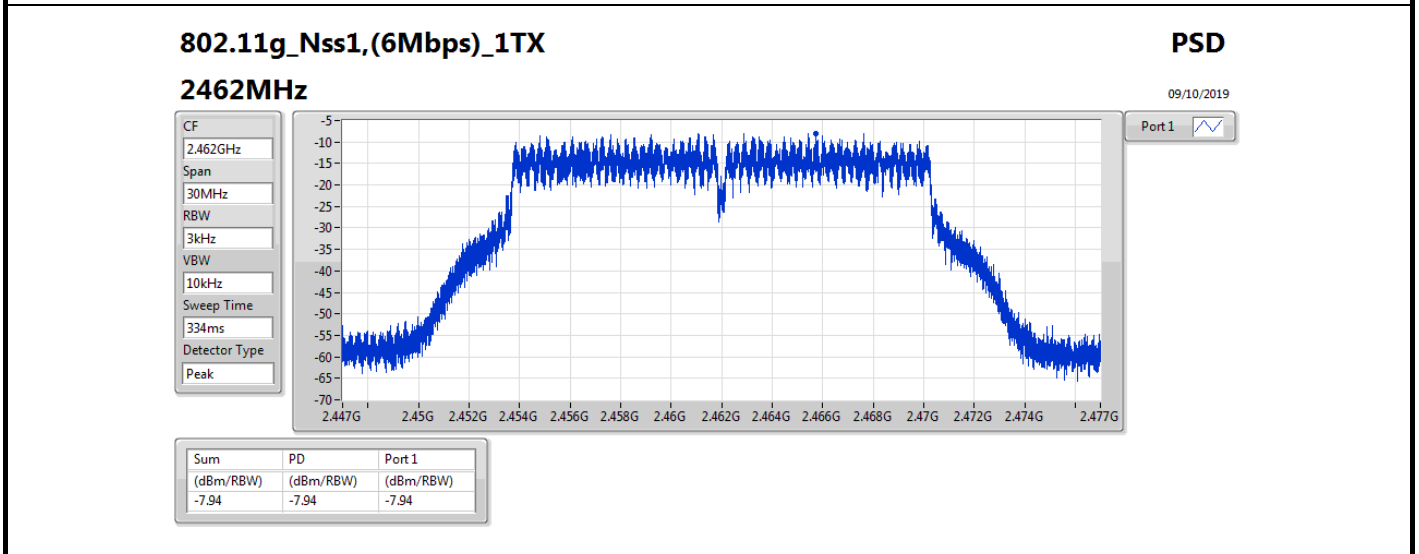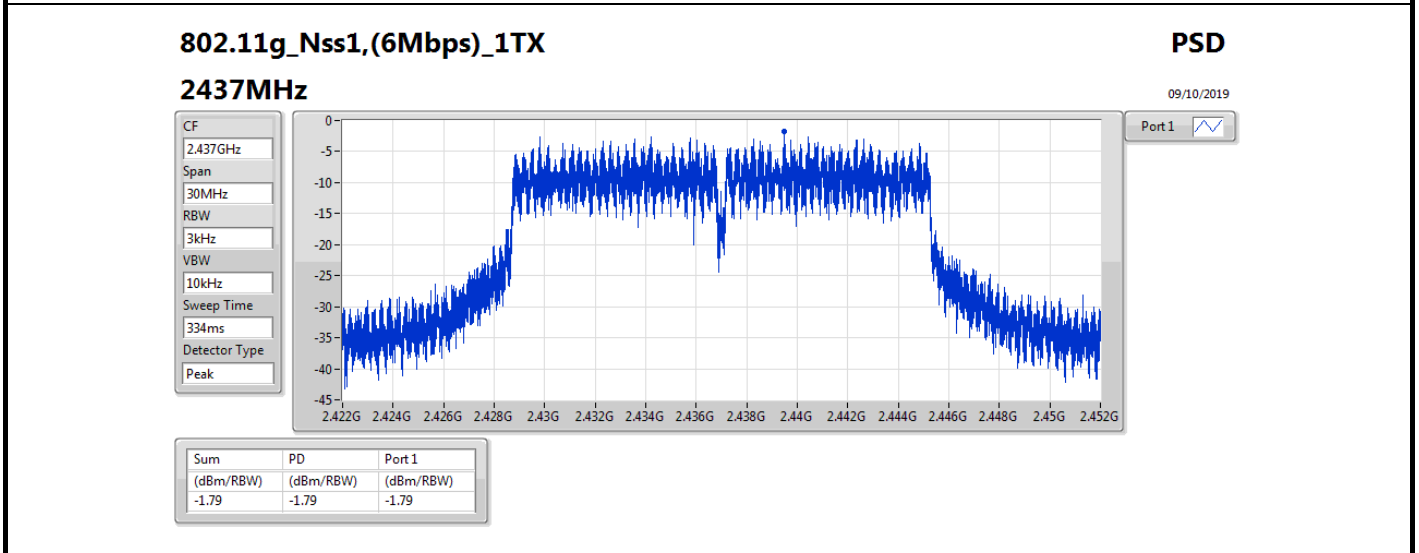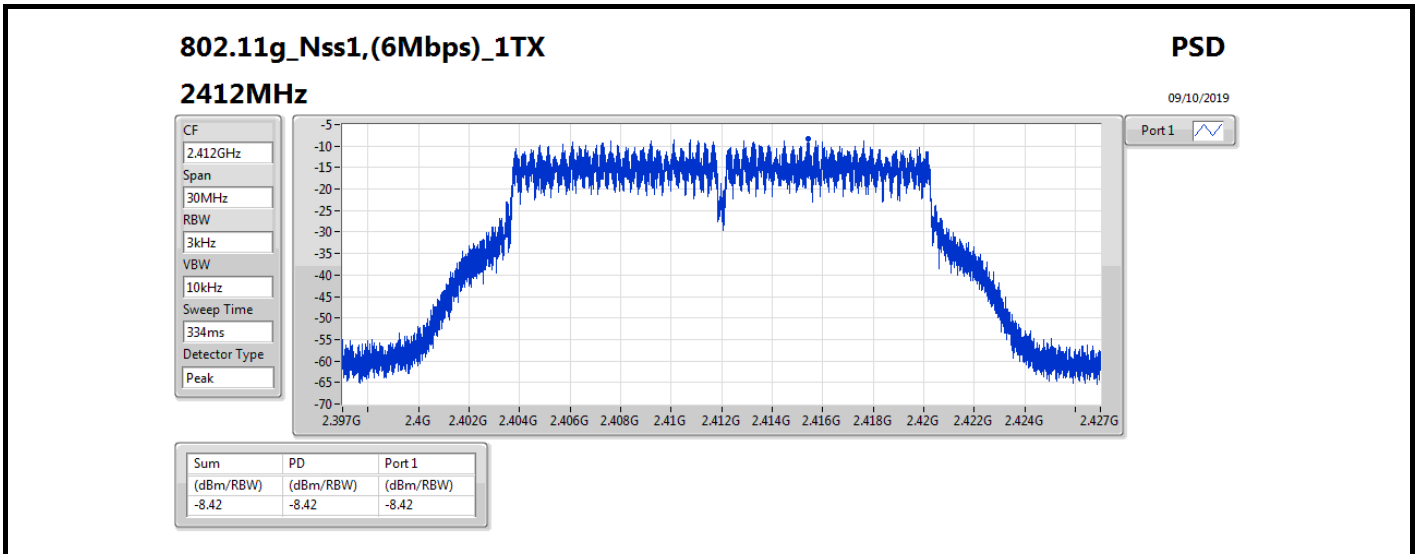

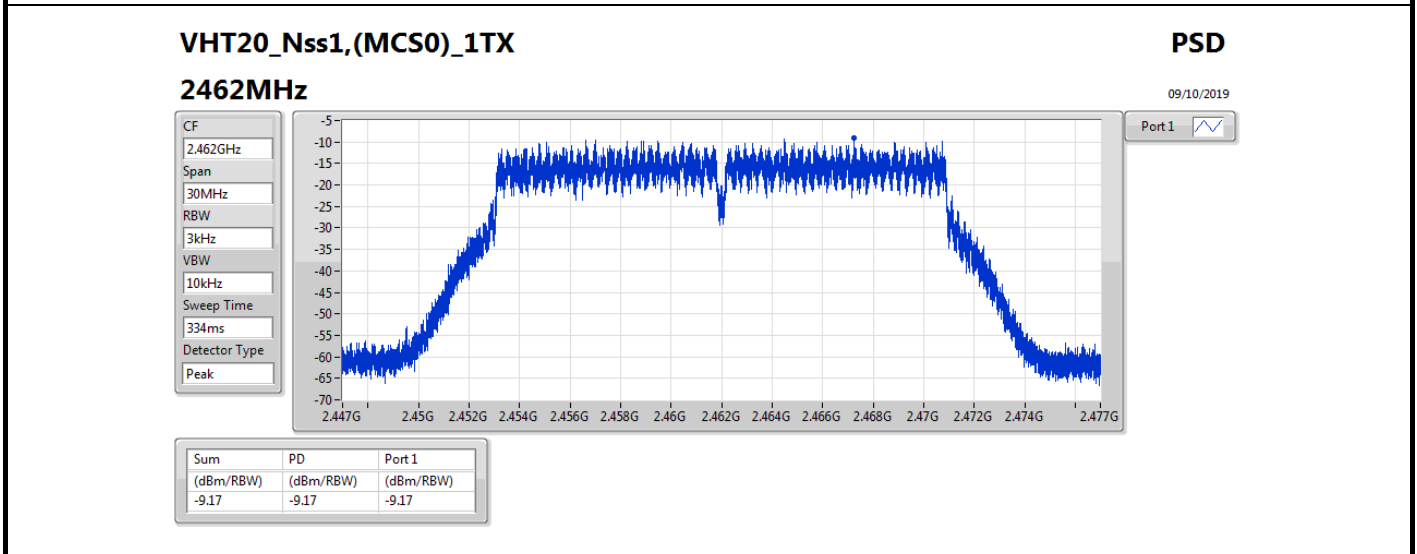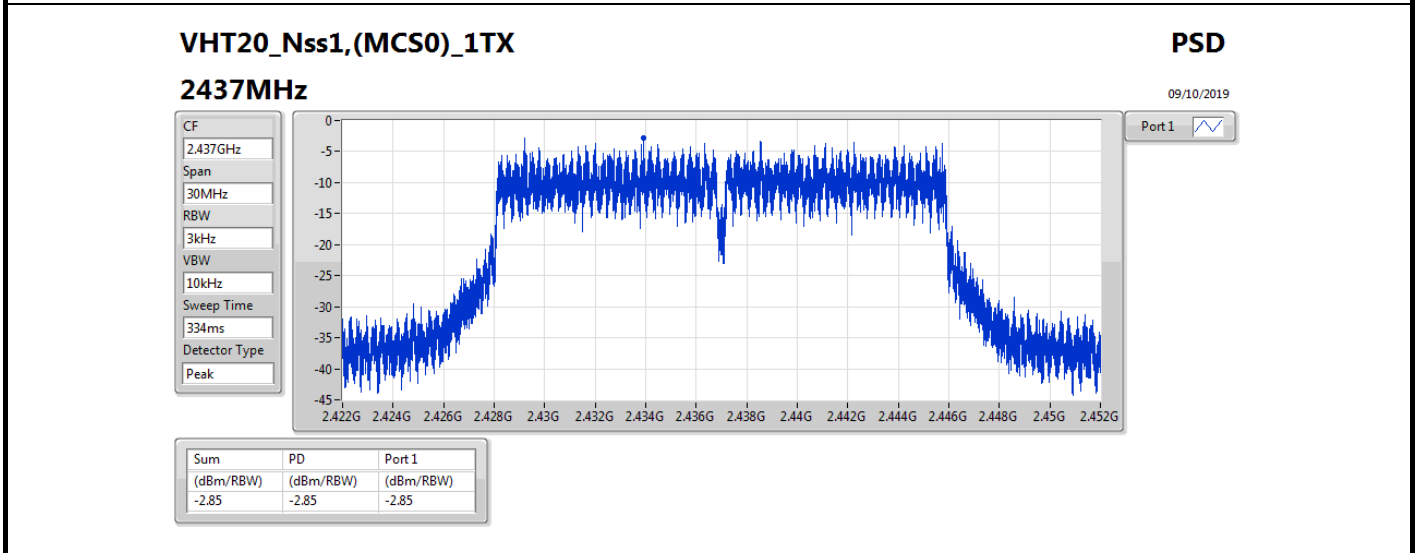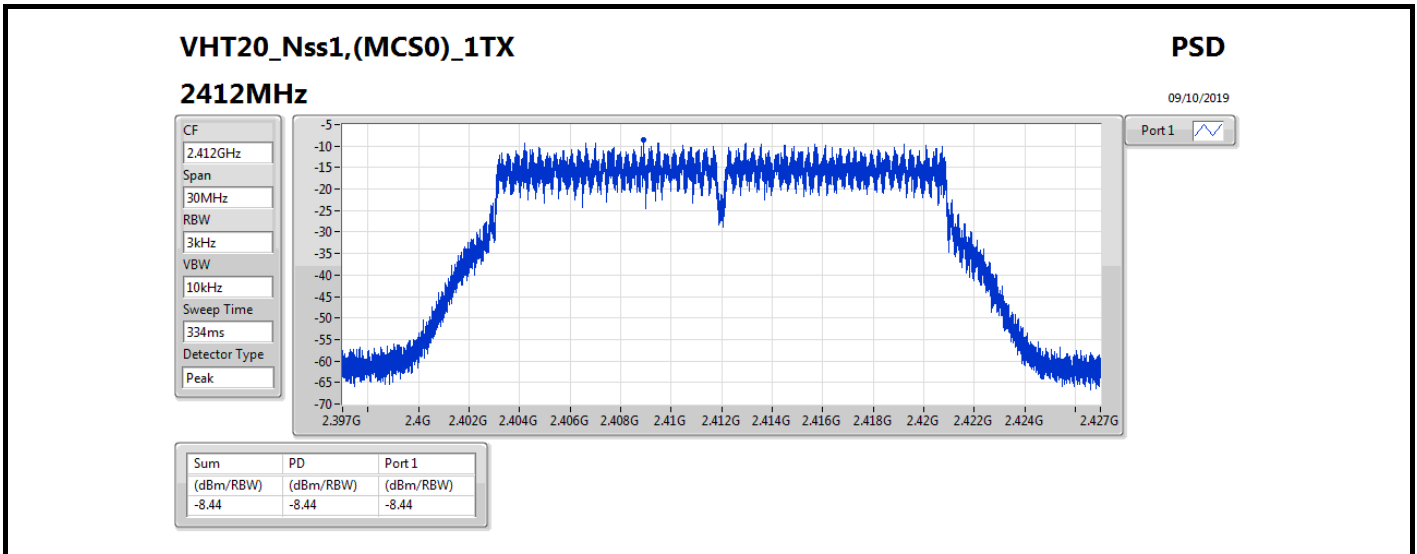

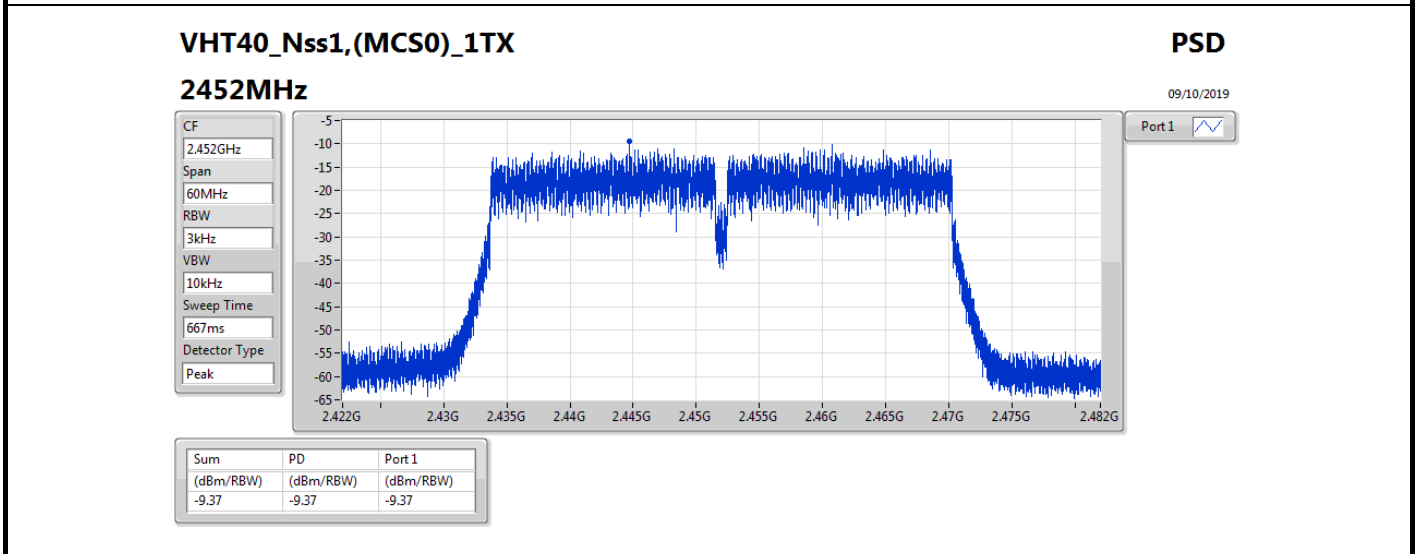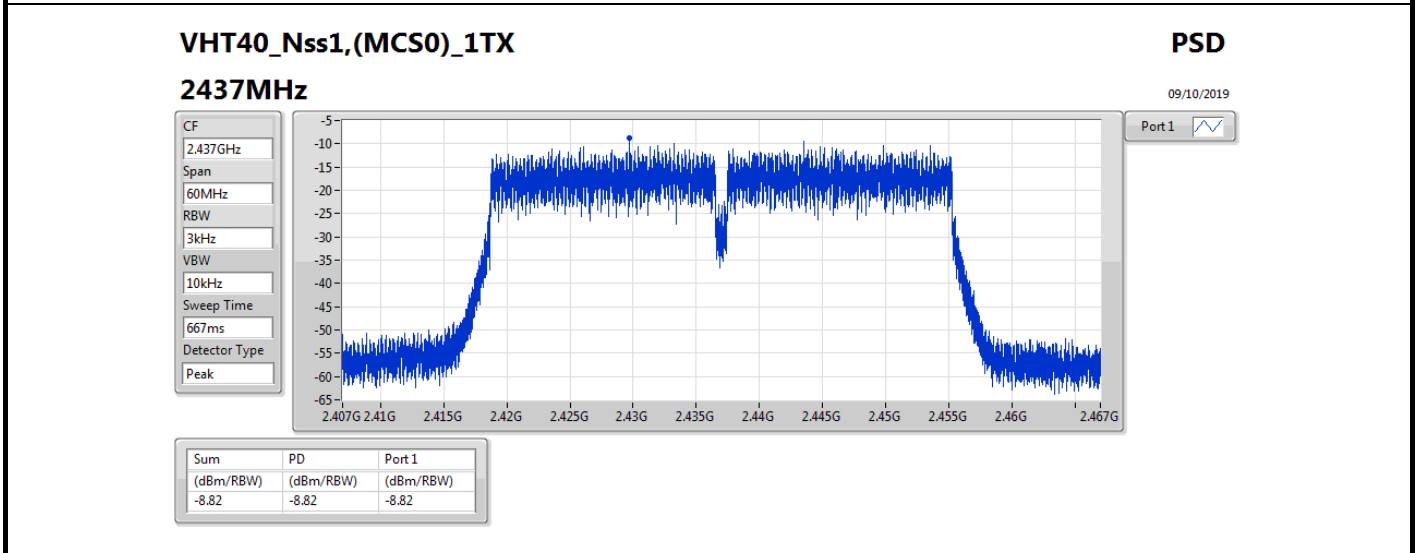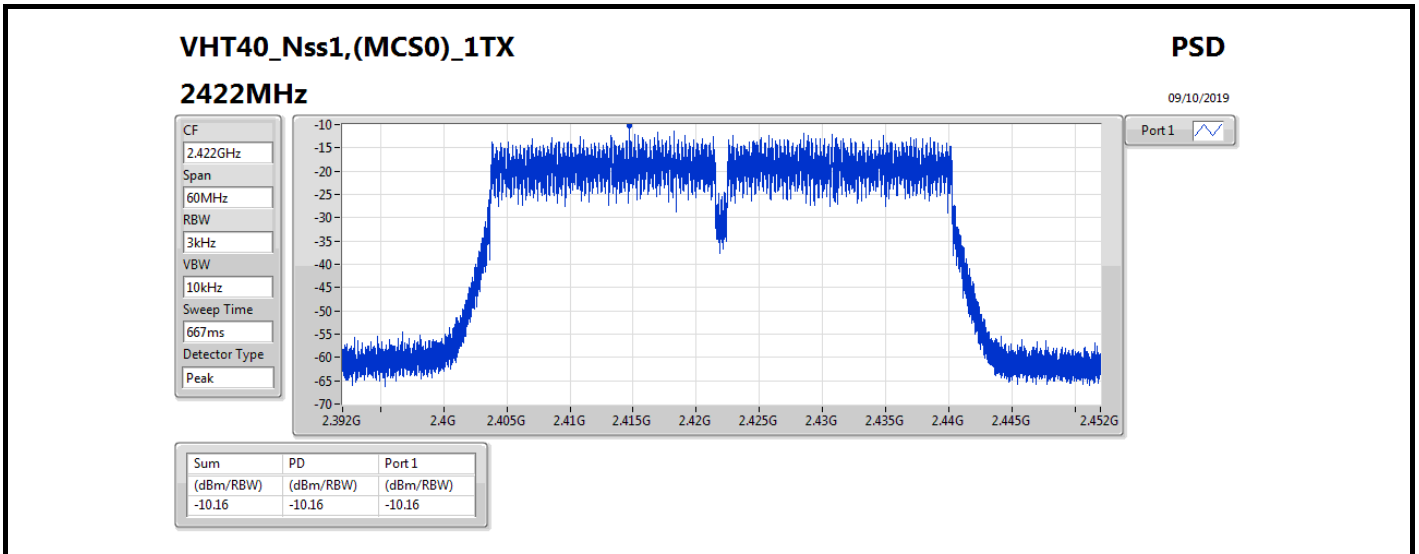

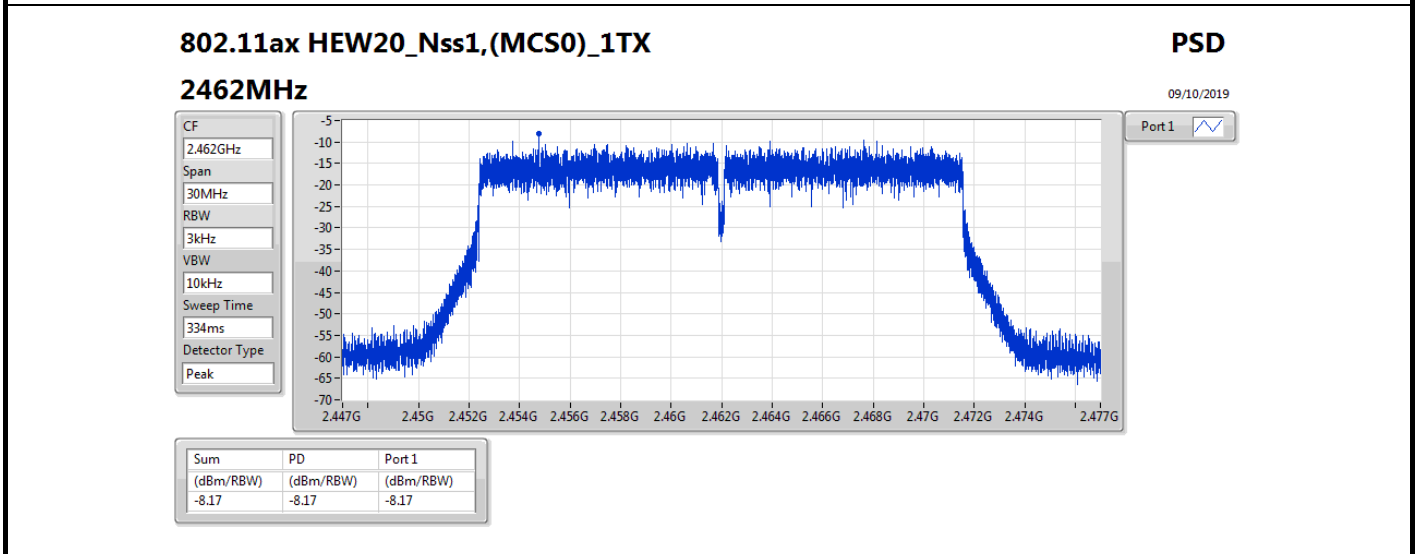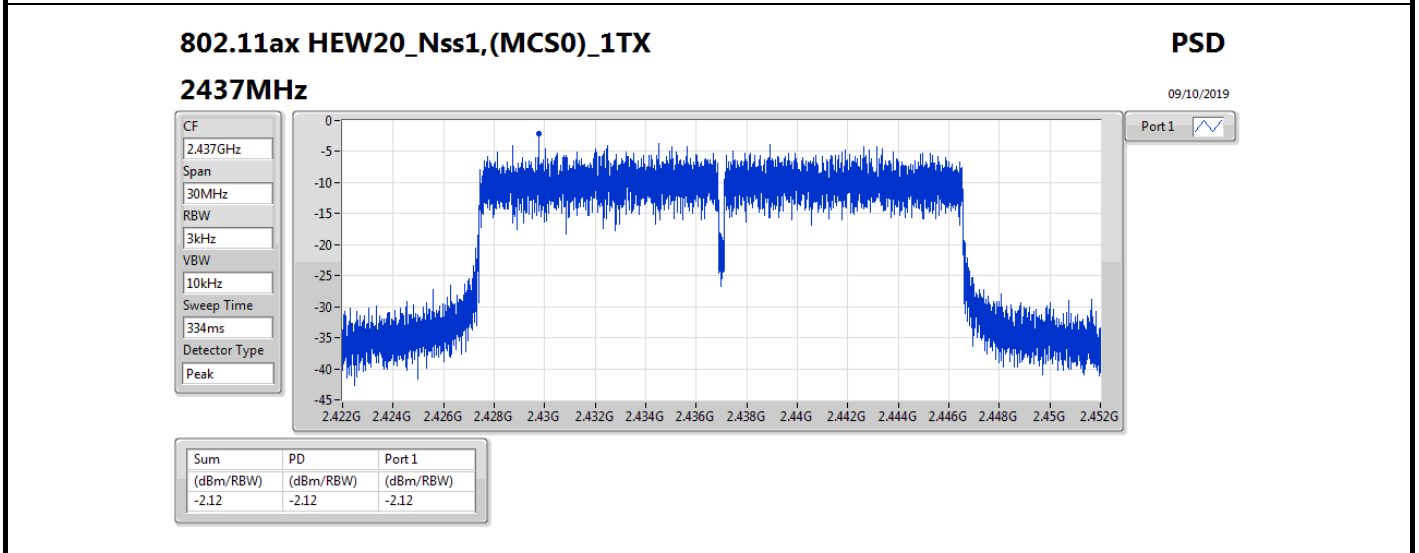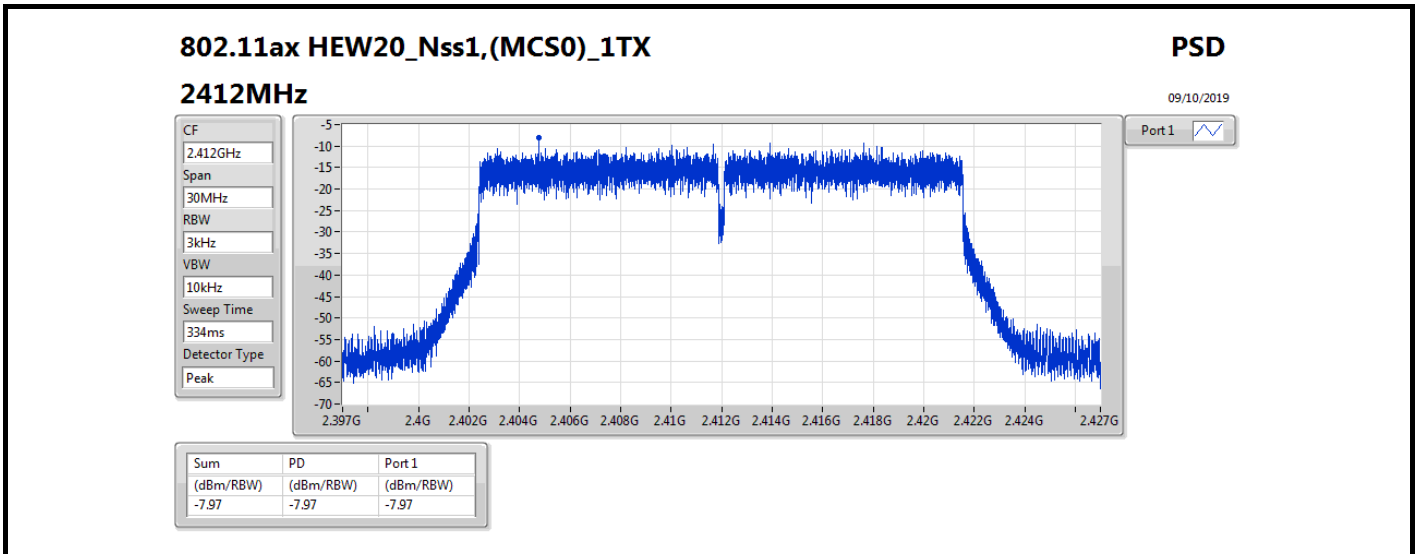

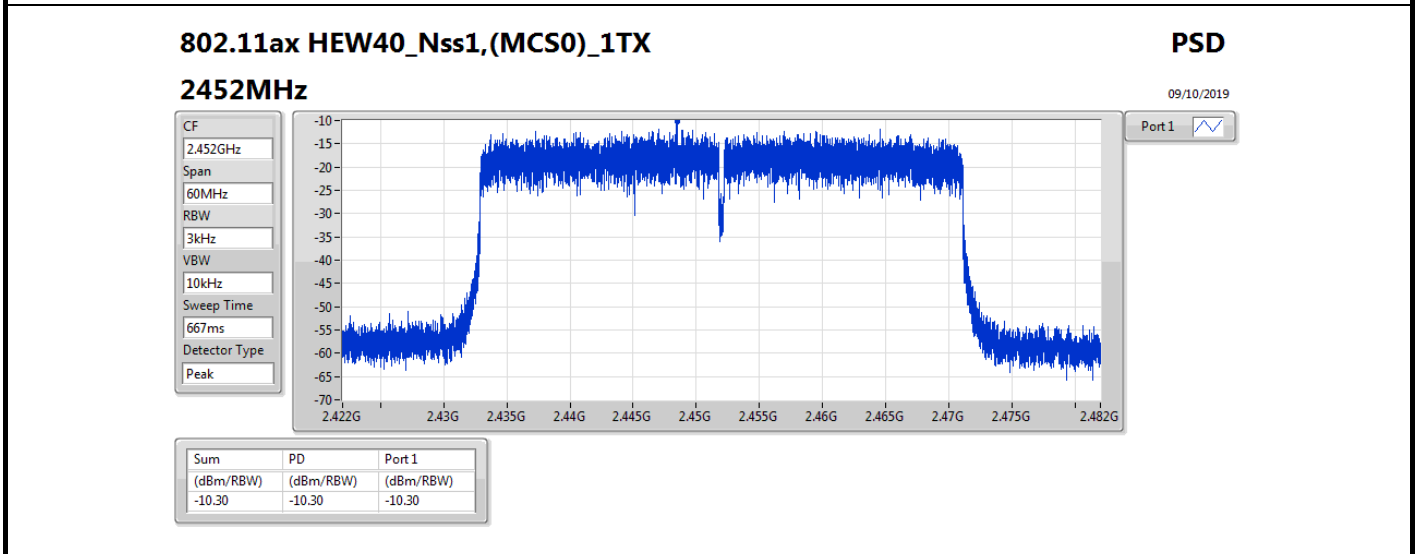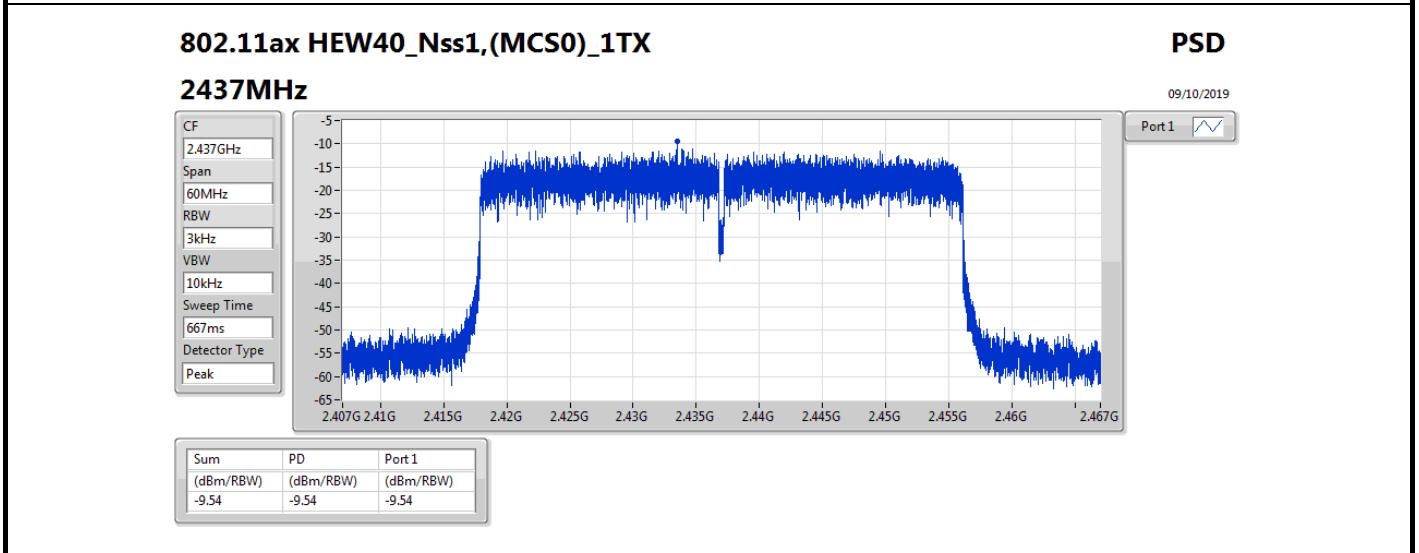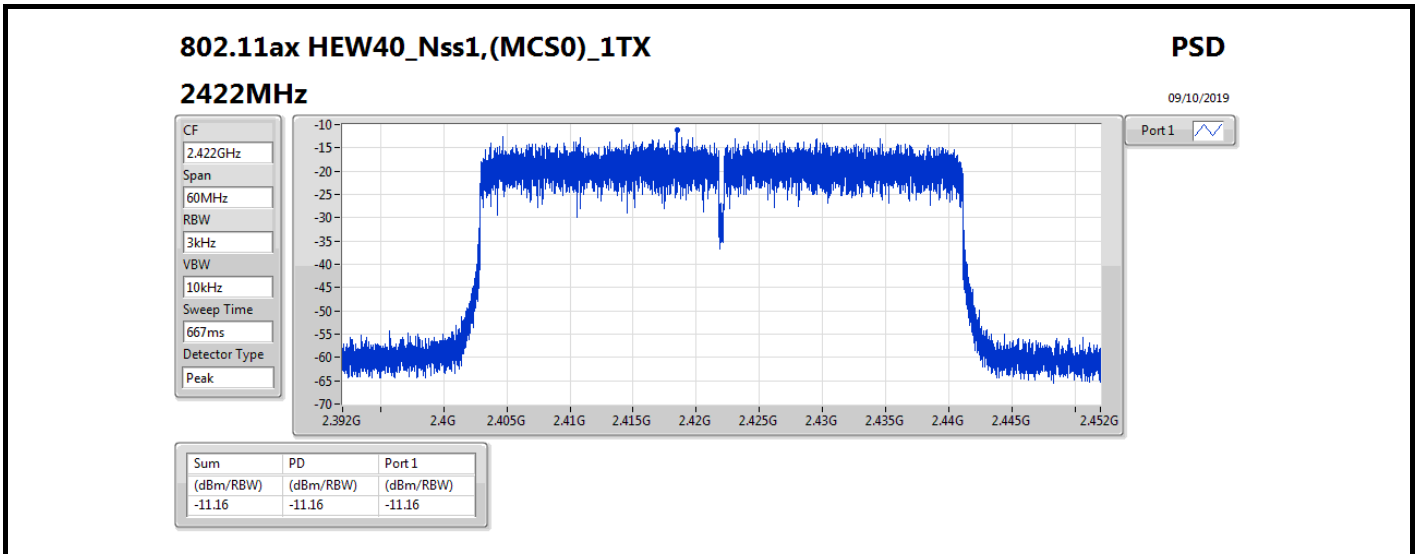



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	0.67
802.11g_Nss1,(6Mbps)_2TX	-0.85
VHT20_Nss2,(MCS0)_2TX	-3.36
VHT40_Nss2,(MCS0)_2TX	-10.07
802.11ax HEW20_Nss2,(MCS0)_2TX	-2.81
802.11ax HEW40_Nss2,(MCS0)_2TX	-11.07

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	8.01	-0.42	-2.07	0.44	5.99
2437MHz	Pass	8.01	-0.69	-1.93	0.67	5.99
2462MHz	Pass	8.01	-3.48	-3.55	-2.17	5.99
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	8.01	-9.71	-10.09	-6.89	5.99
2437MHz	Pass	8.01	-3.48	-3.75	-0.85	5.99
2462MHz	Pass	8.01	-9.29	-9.82	-6.96	5.99
VHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.00	-9.33	-8.94	-7.61	8.00
2437MHz	Pass	5.00	-4.25	-5.31	-3.36	8.00
2462MHz	Pass	5.00	-8.91	-9.17	-7.36	8.00
VHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	5.00	-12.78	-12.65	-11.67	8.00
2437MHz	Pass	5.00	-11.18	-11.46	-10.07	8.00
2452MHz	Pass	5.00	-11.44	-12.22	-11.02	8.00
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.00	-9.50	-10.59	-7.33	8.00
2437MHz	Pass	5.00	-5.13	-5.53	-2.81	8.00
2462MHz	Pass	5.00	-9.88	-9.85	-7.43	8.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	5.00	-13.48	-13.87	-12.20	8.00
2437MHz	Pass	5.00	-11.93	-12.79	-11.07	8.00
2452MHz	Pass	5.00	-12.29	-13.30	-11.63	8.00




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

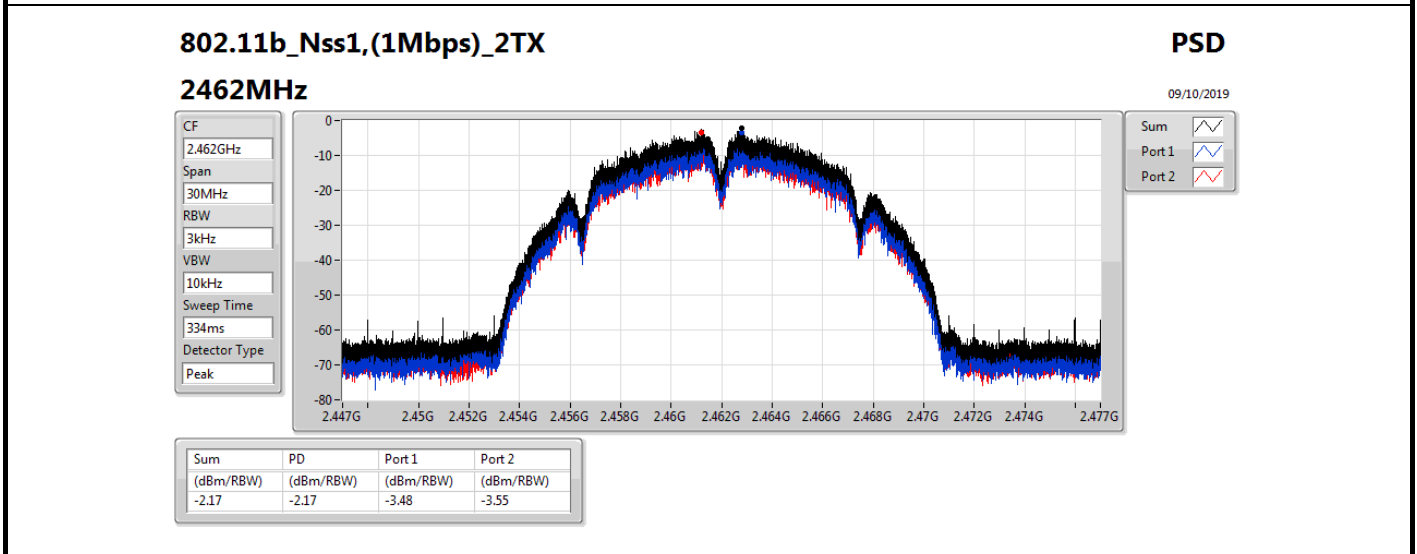
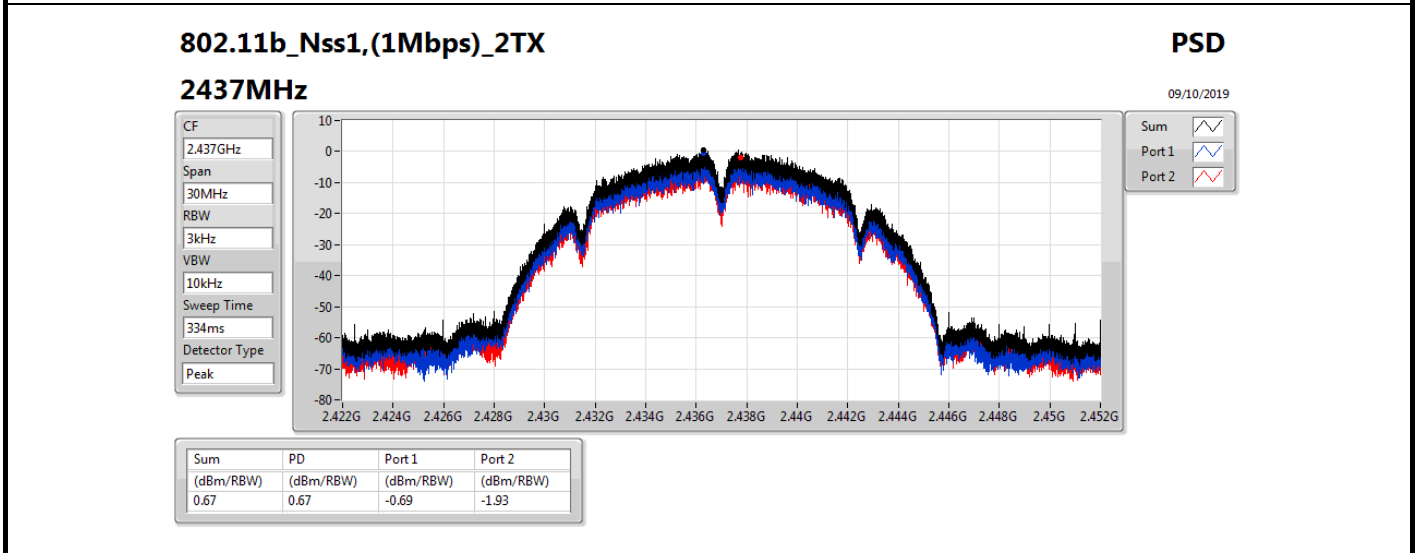
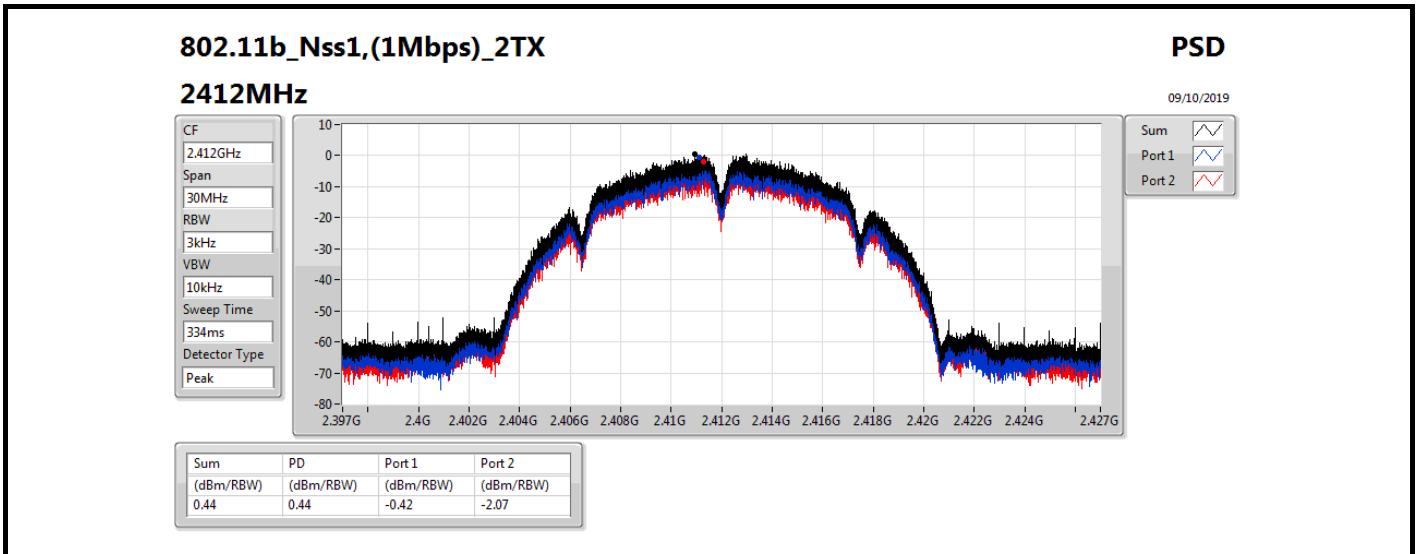


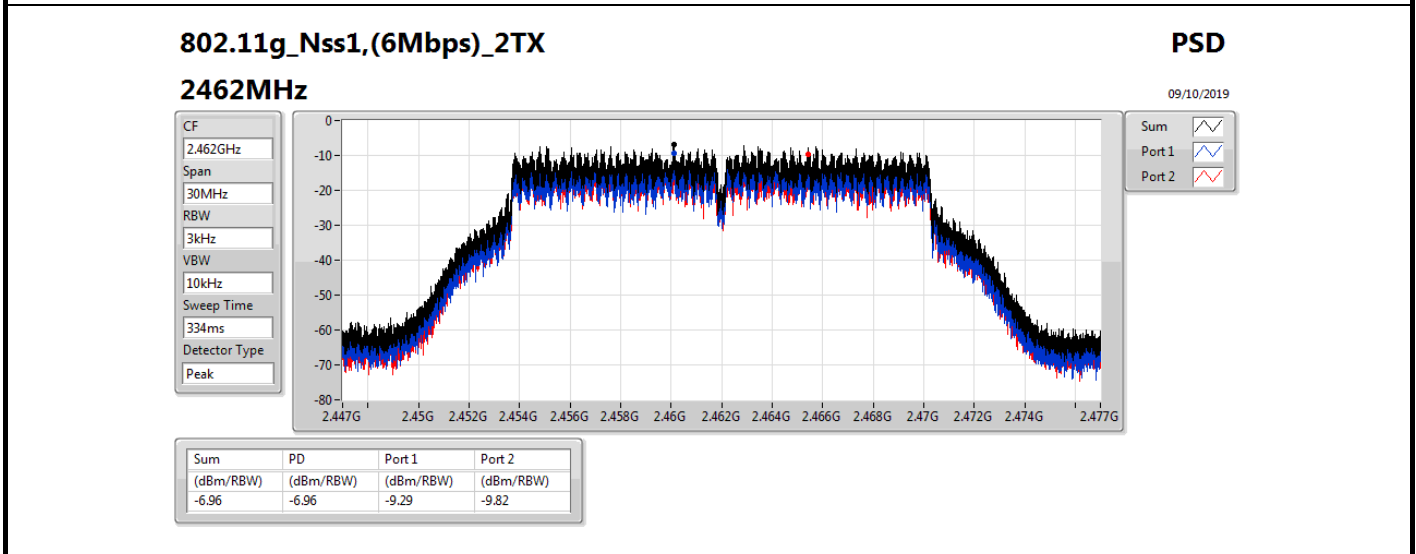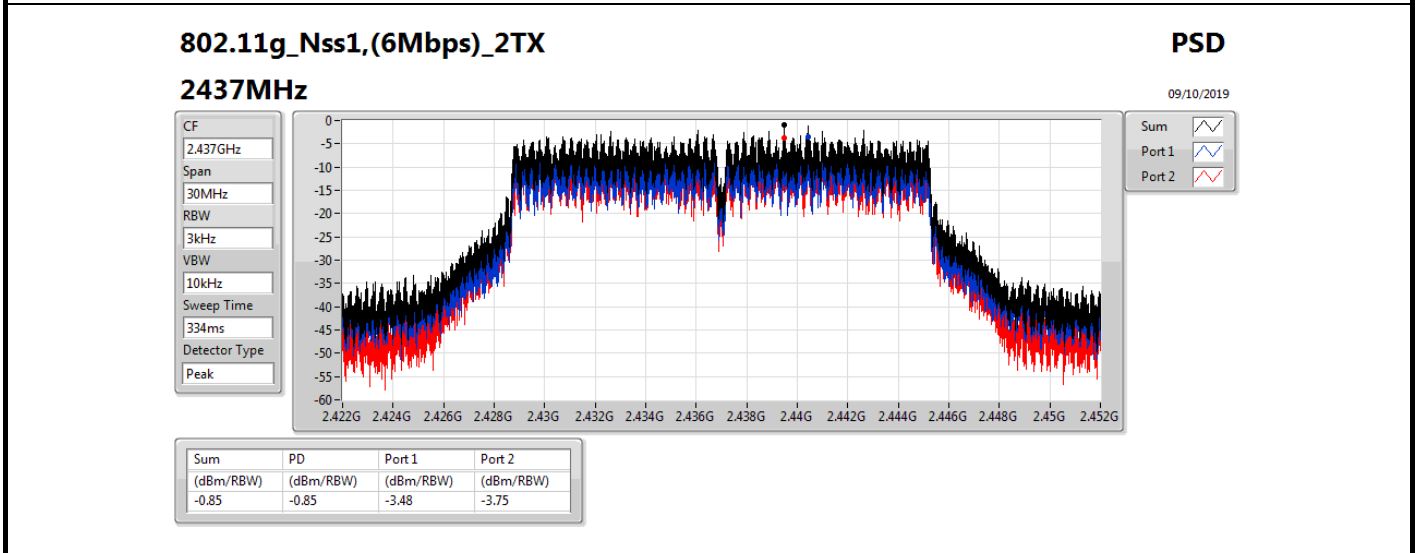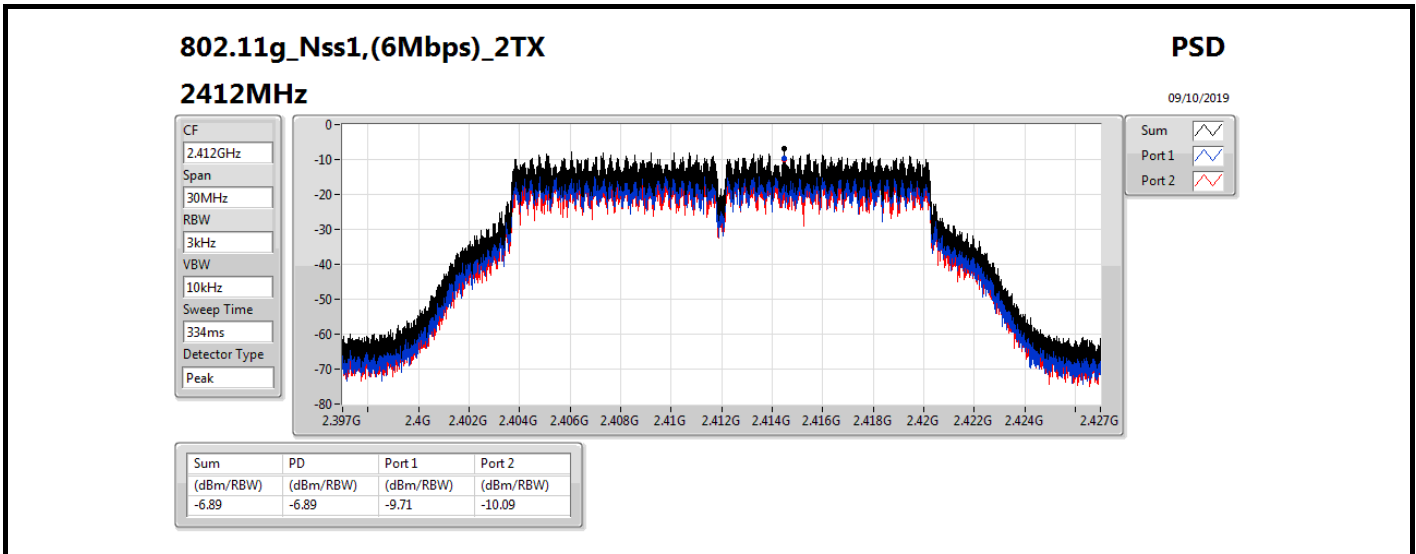

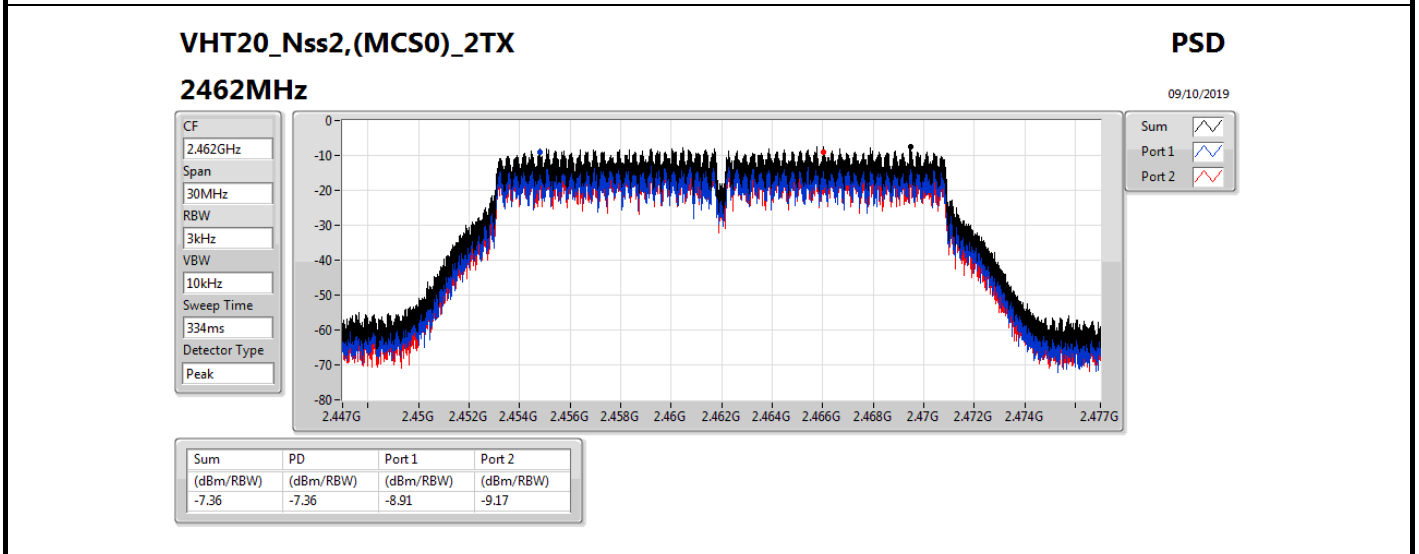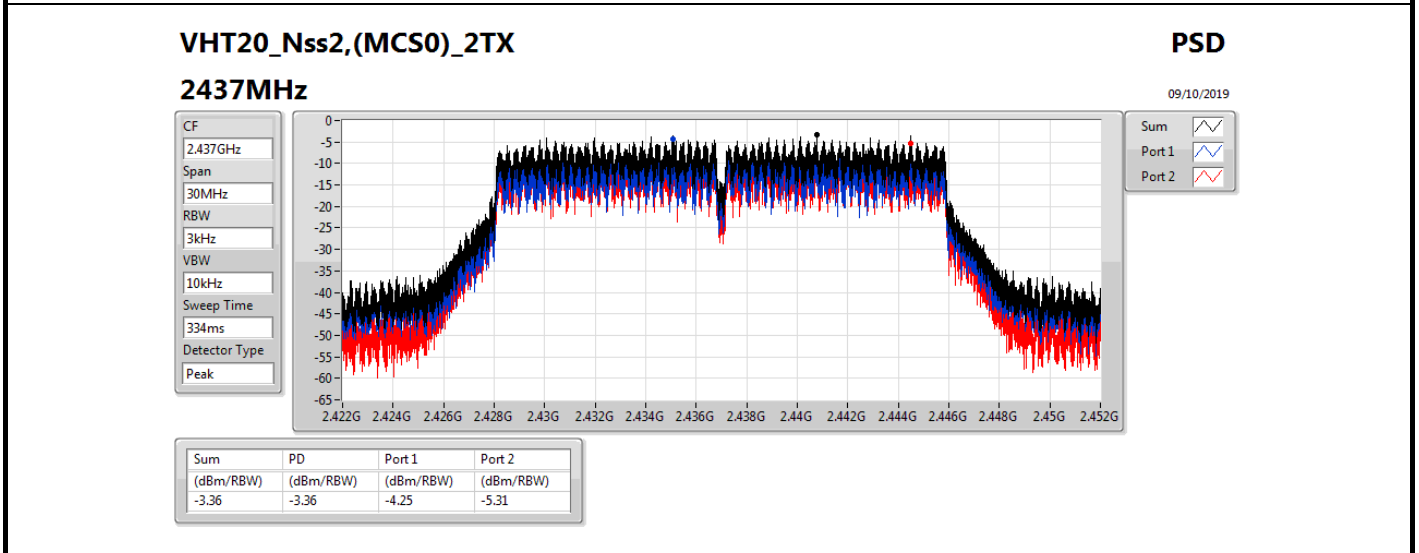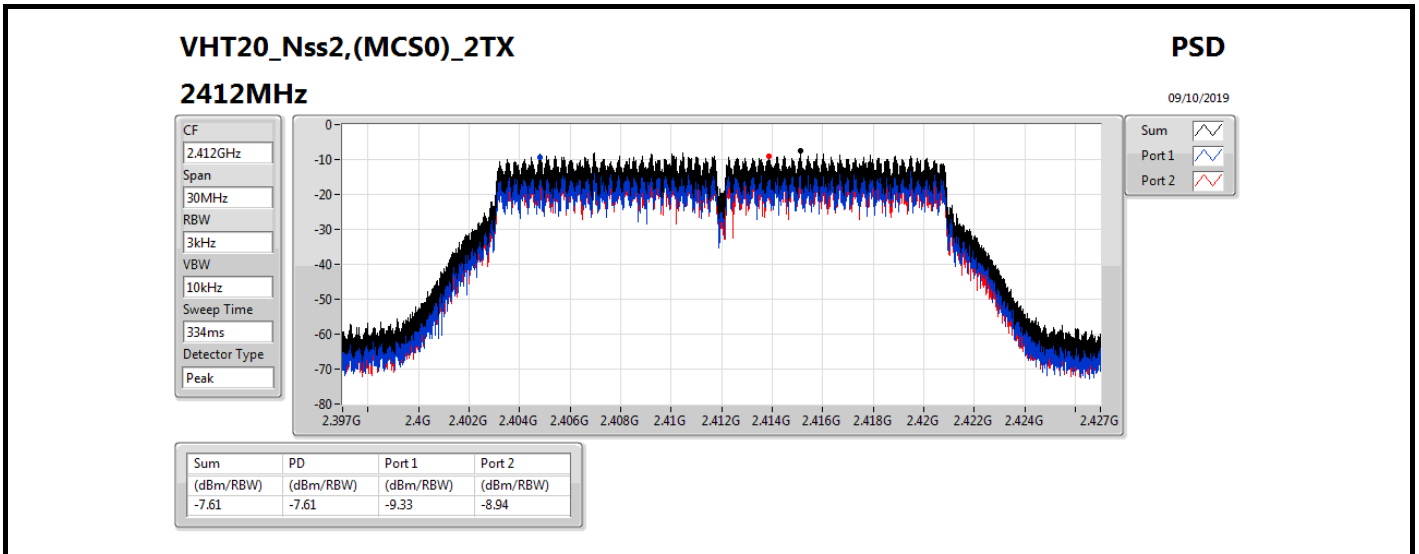

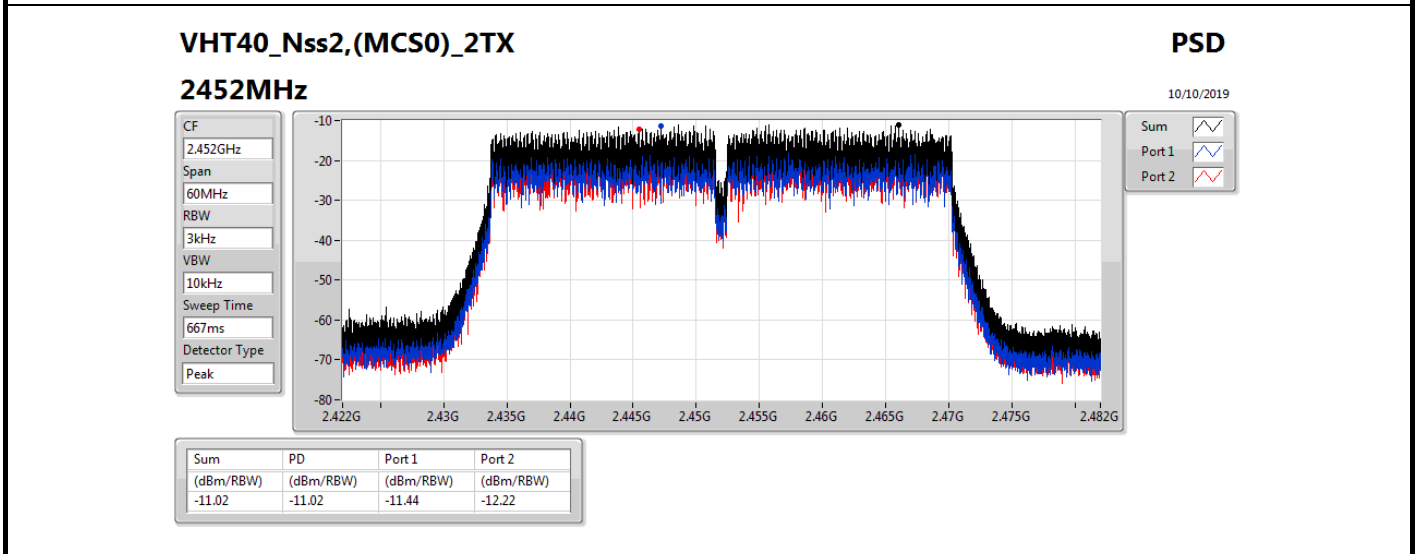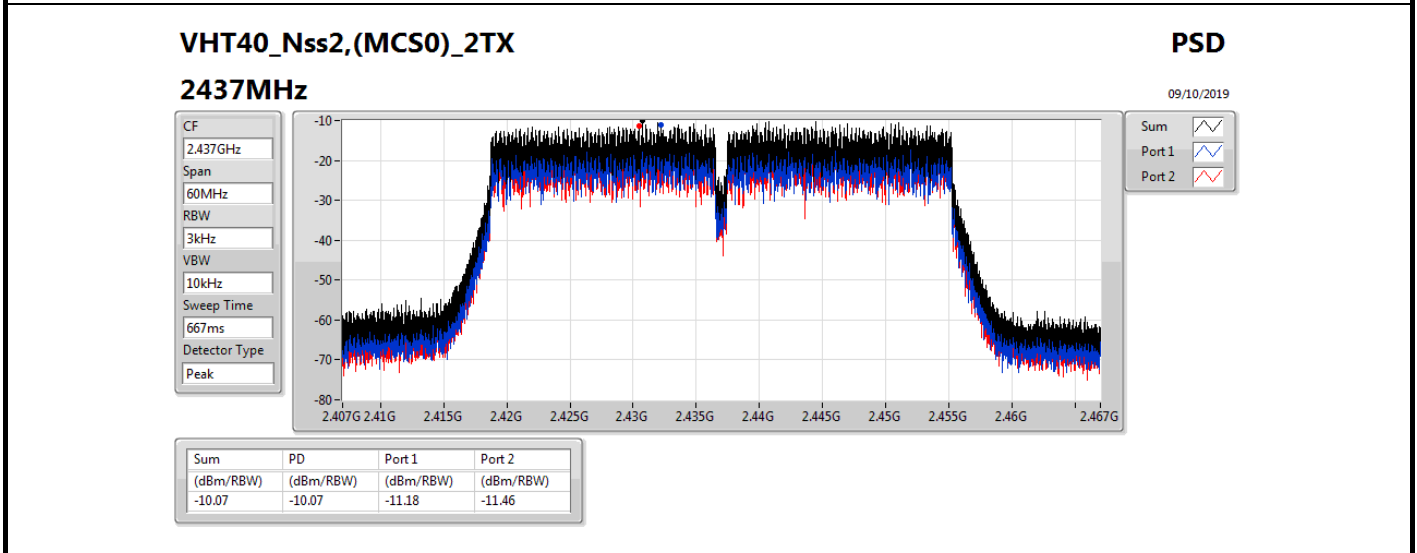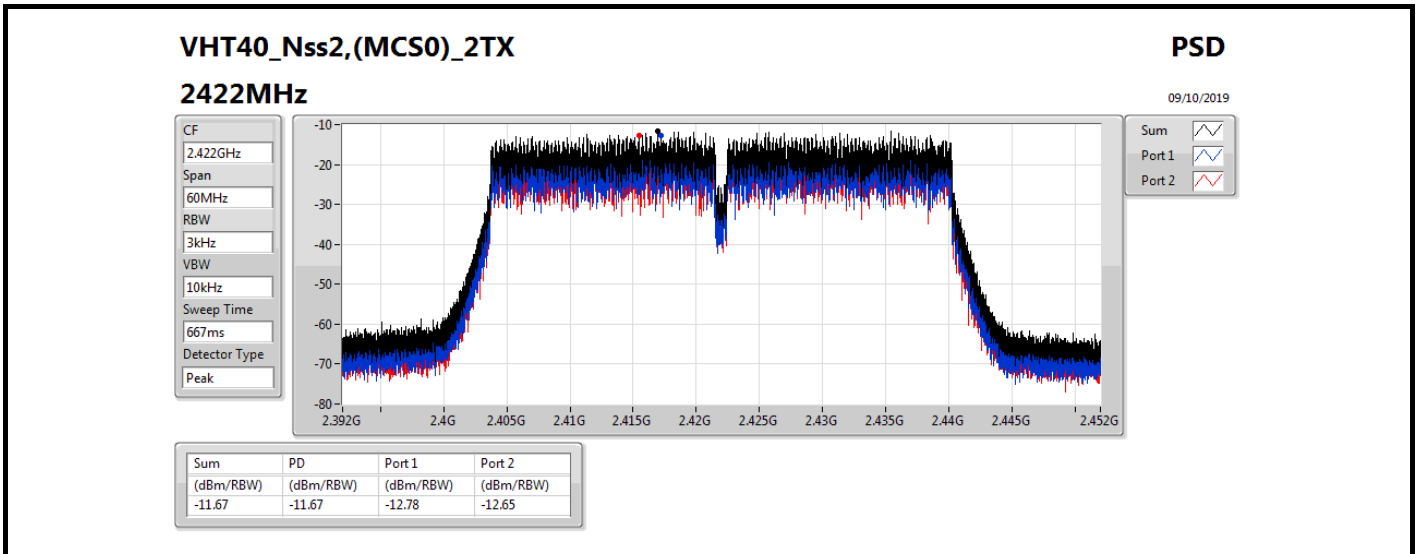

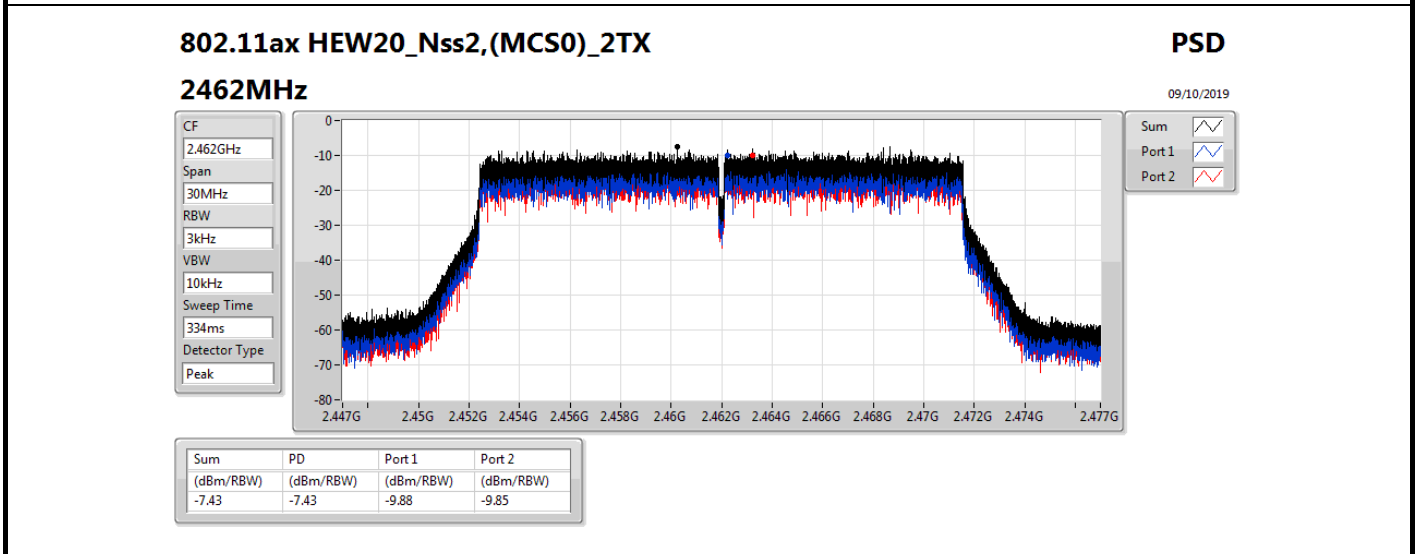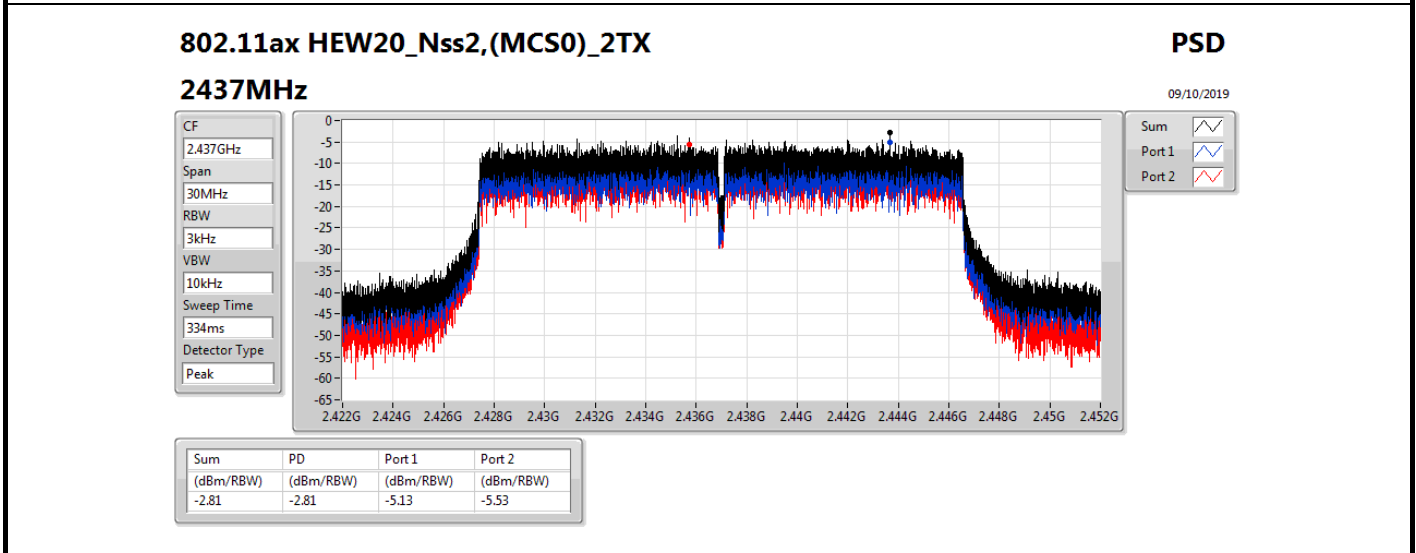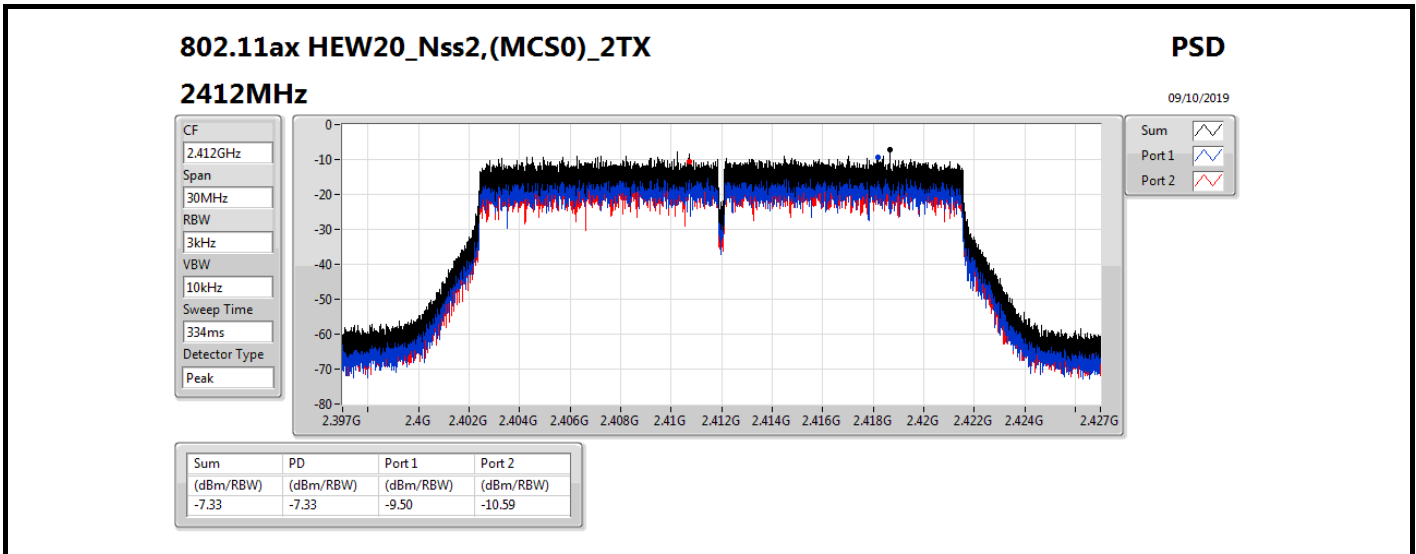

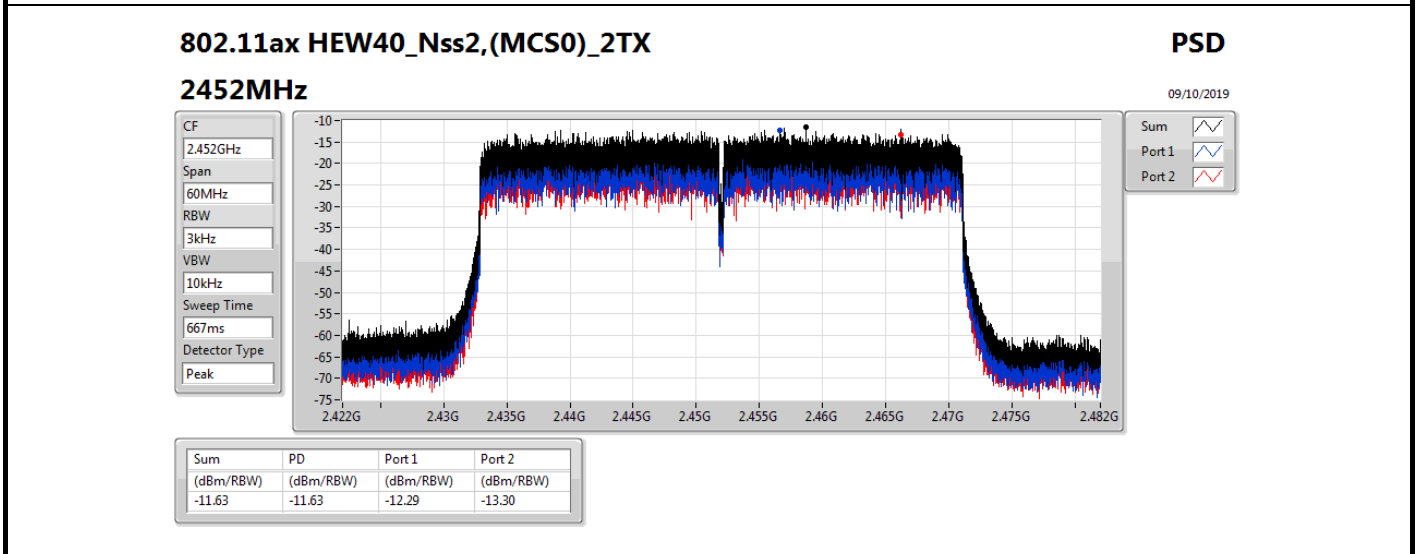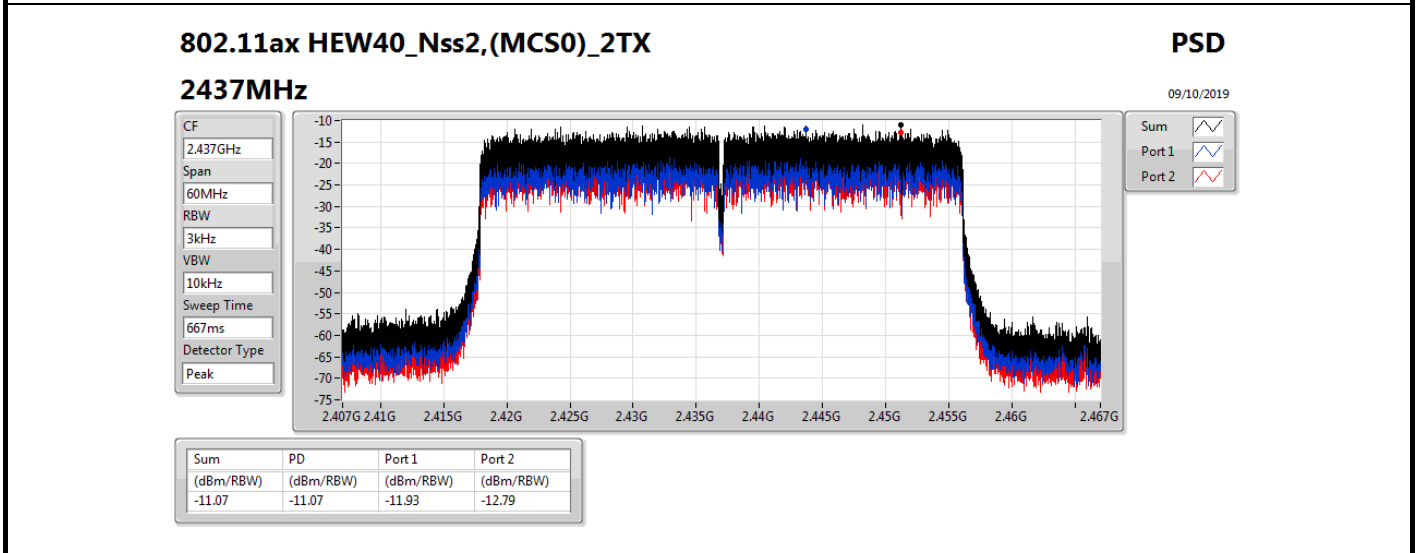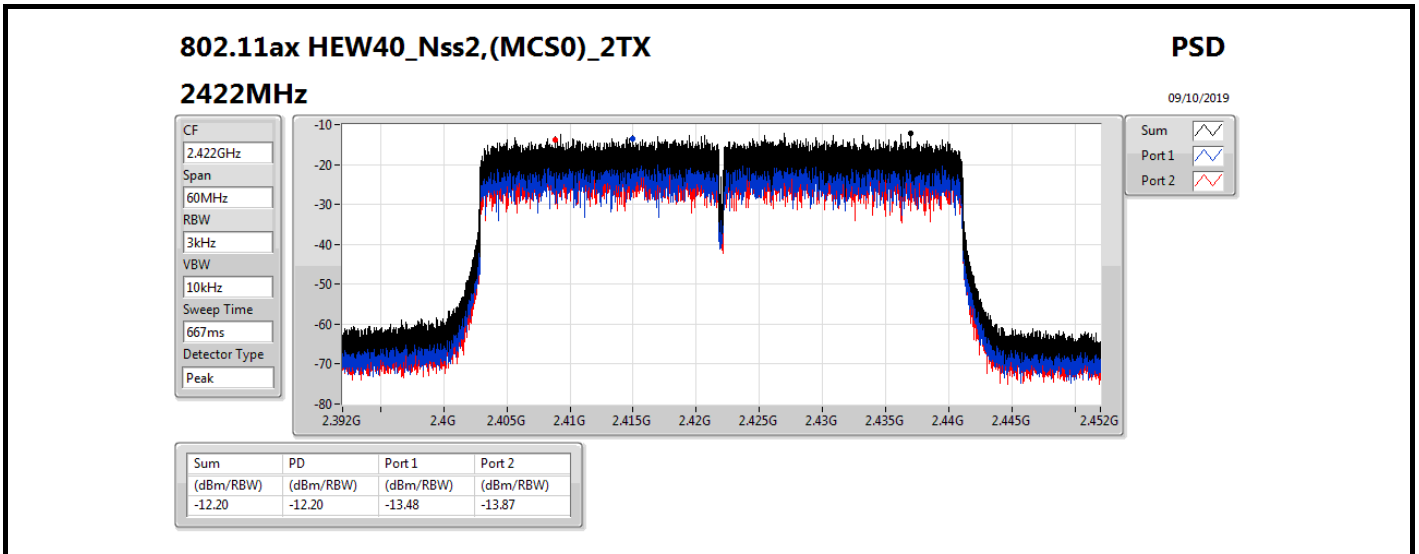



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
VHT20-BF_Nss1,(MCS0)_2TX	-2.00
VHT40-BF_Nss1,(MCS0)_2TX	-8.27
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-1.27
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-7.25

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	8.01	-11.11	-10.14	-8.53	5.99
2437MHz	Pass	8.01	-3.82	-3.97	-2.00	5.99
2462MHz	Pass	8.01	-10.69	-9.82	-7.84	5.99
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	8.01	-12.81	-11.63	-9.80	5.99
2437MHz	Pass	8.01	-11.43	-9.54	-8.27	5.99
2452MHz	Pass	8.01	-11.66	-11.60	-8.72	5.99
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	8.01	-10.42	-8.25	-7.79	5.99
2437MHz	Pass	8.01	-4.05	-3.69	-1.27	5.99
2462MHz	Pass	8.01	-8.67	-10.21	-6.36	5.99
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	8.01	-11.90	-11.55	-8.71	5.99
2437MHz	Pass	8.01	-10.49	-10.05	-7.25	5.99
2452MHz	Pass	8.01	-12.62	-11.31	-8.97	5.99




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

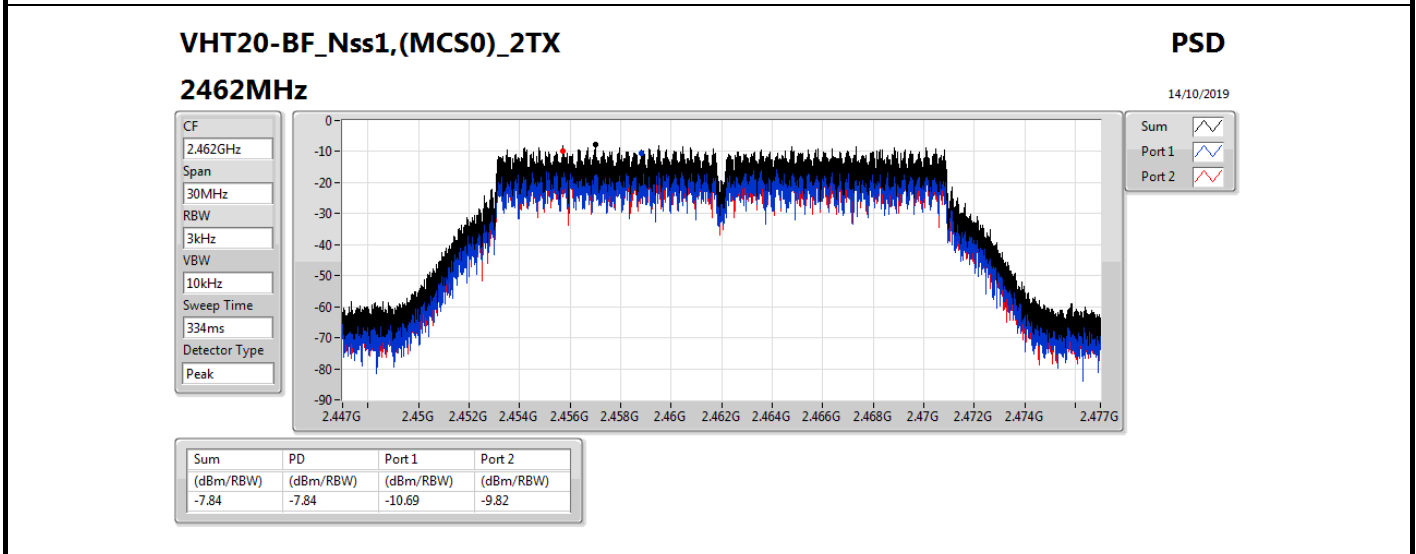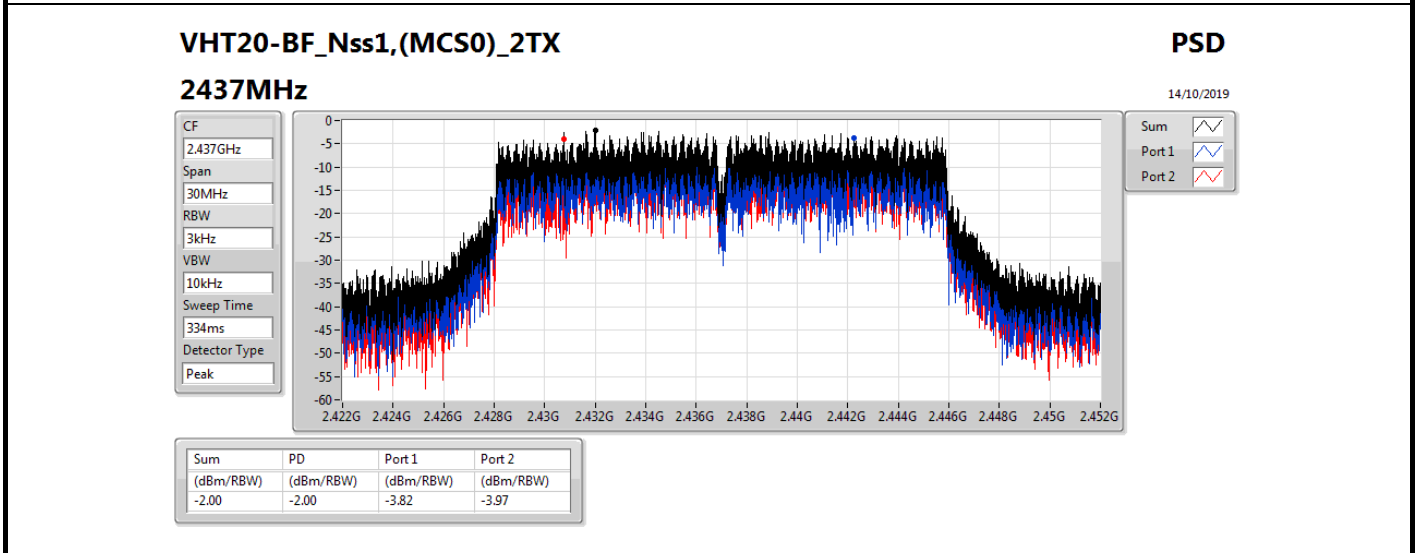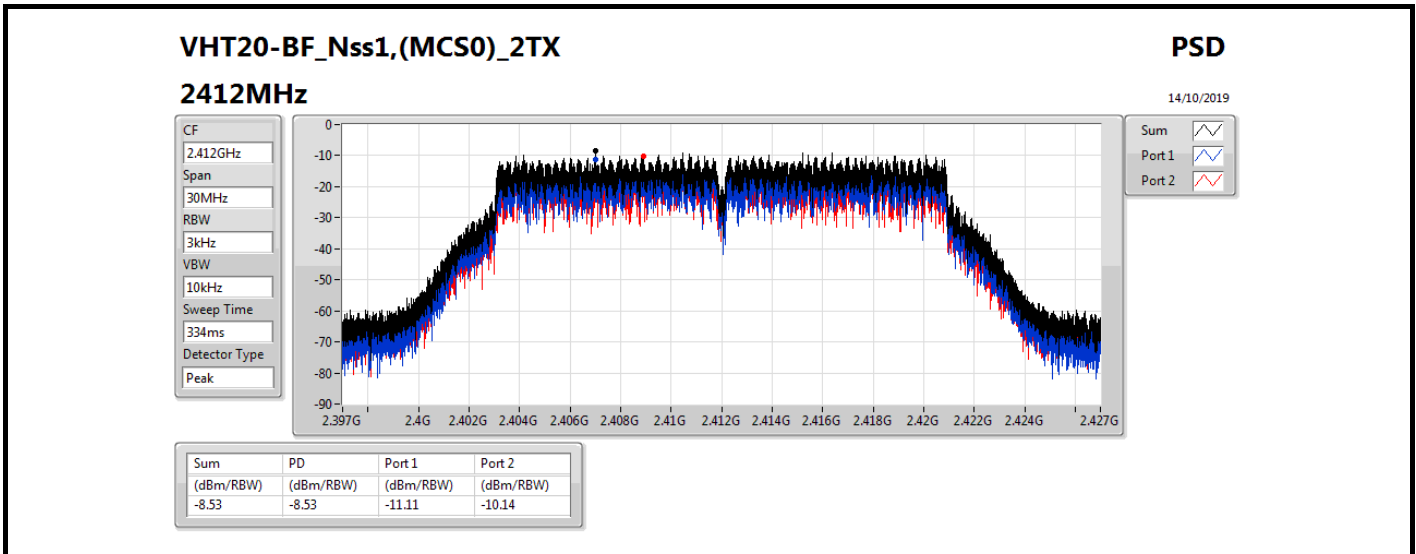

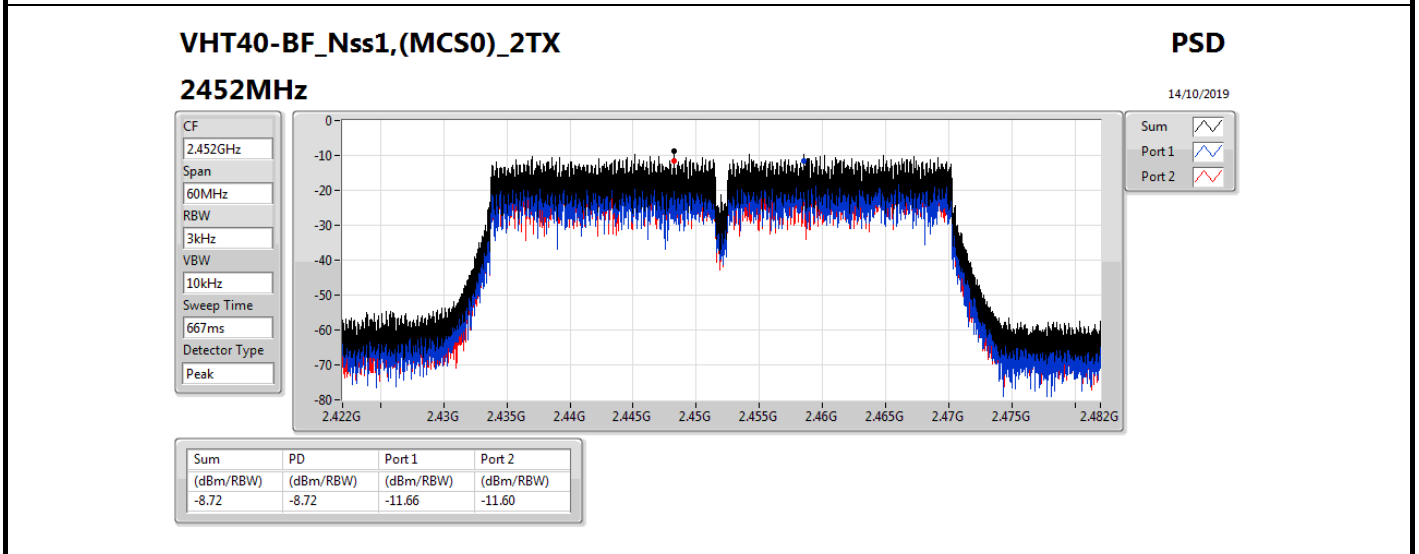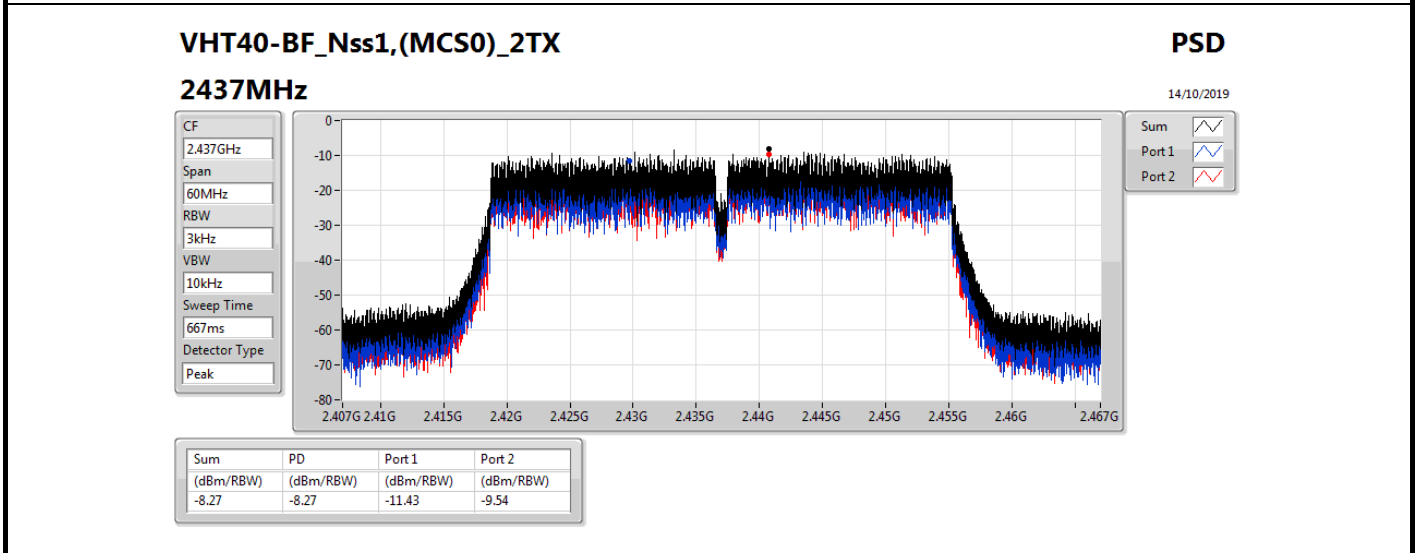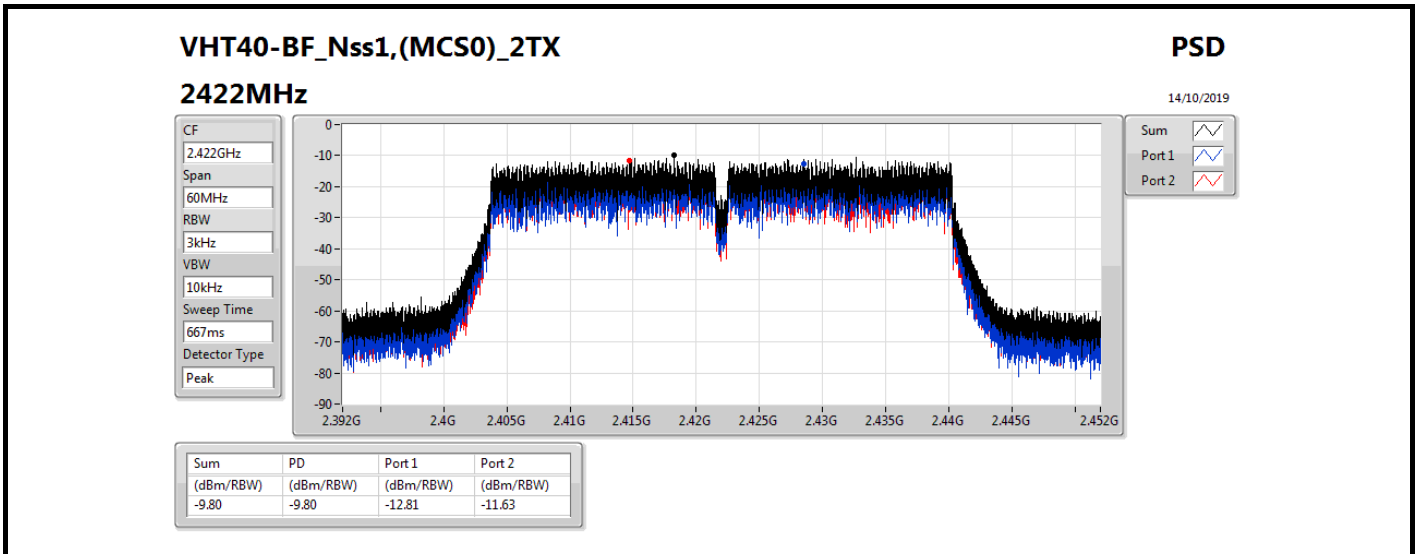

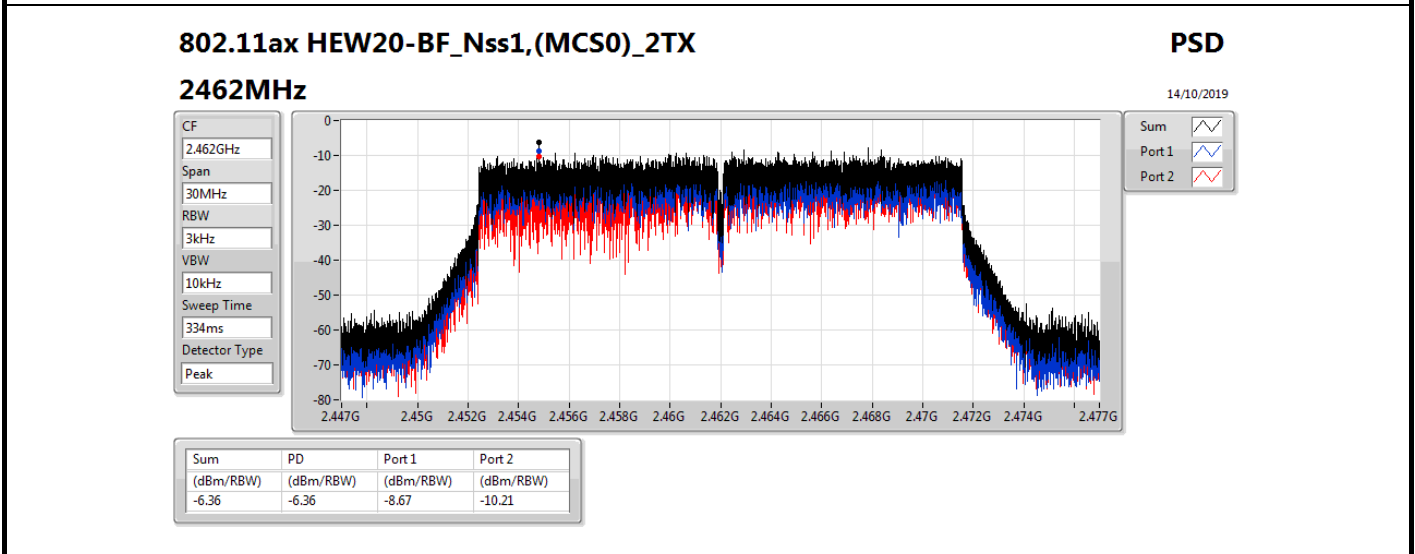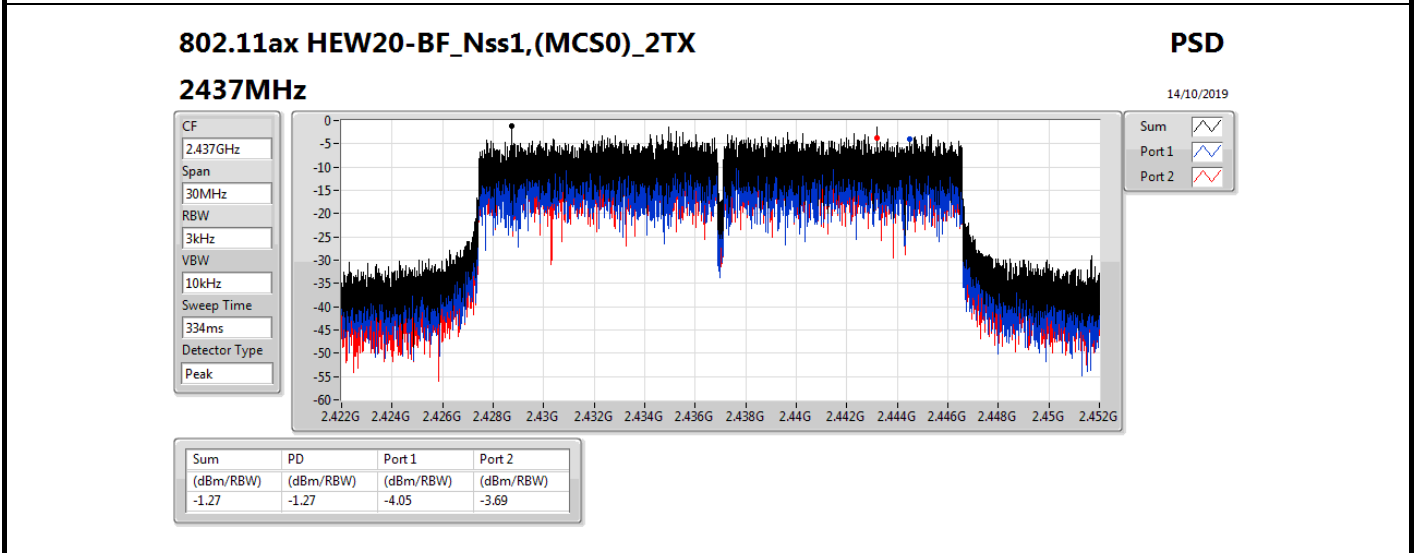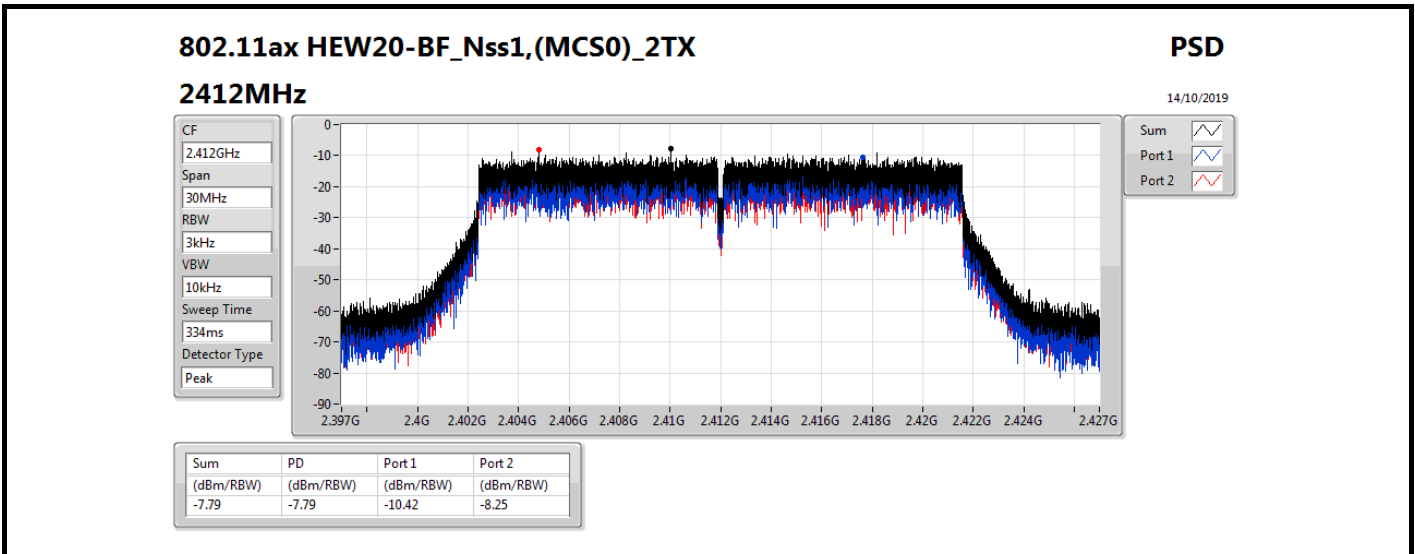

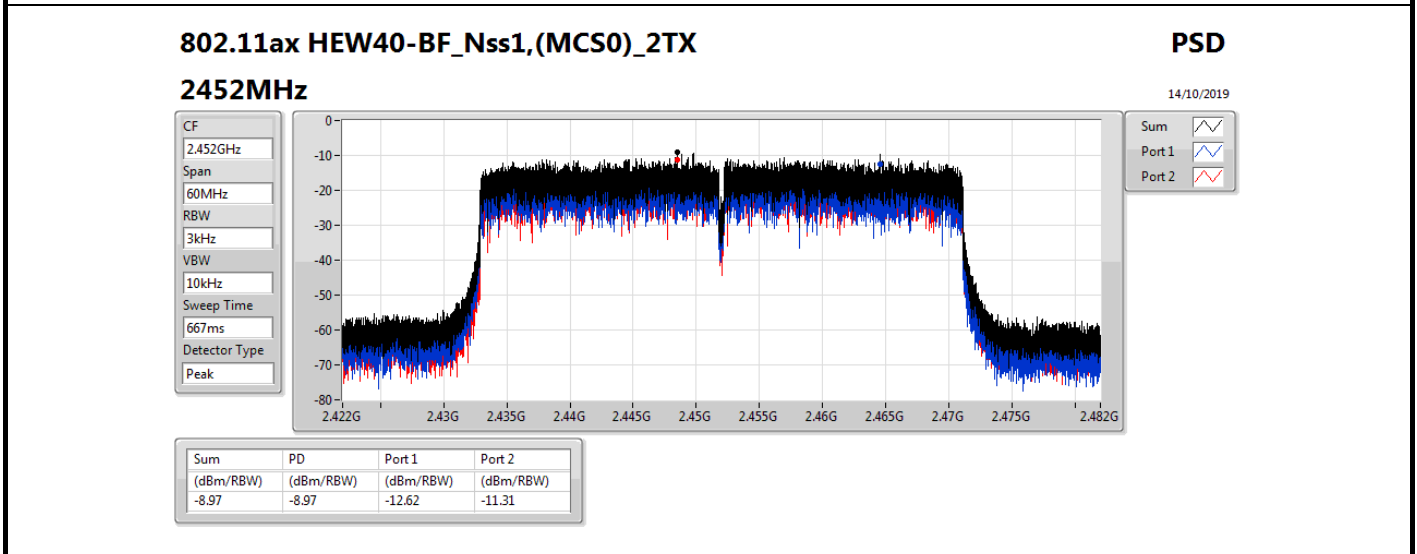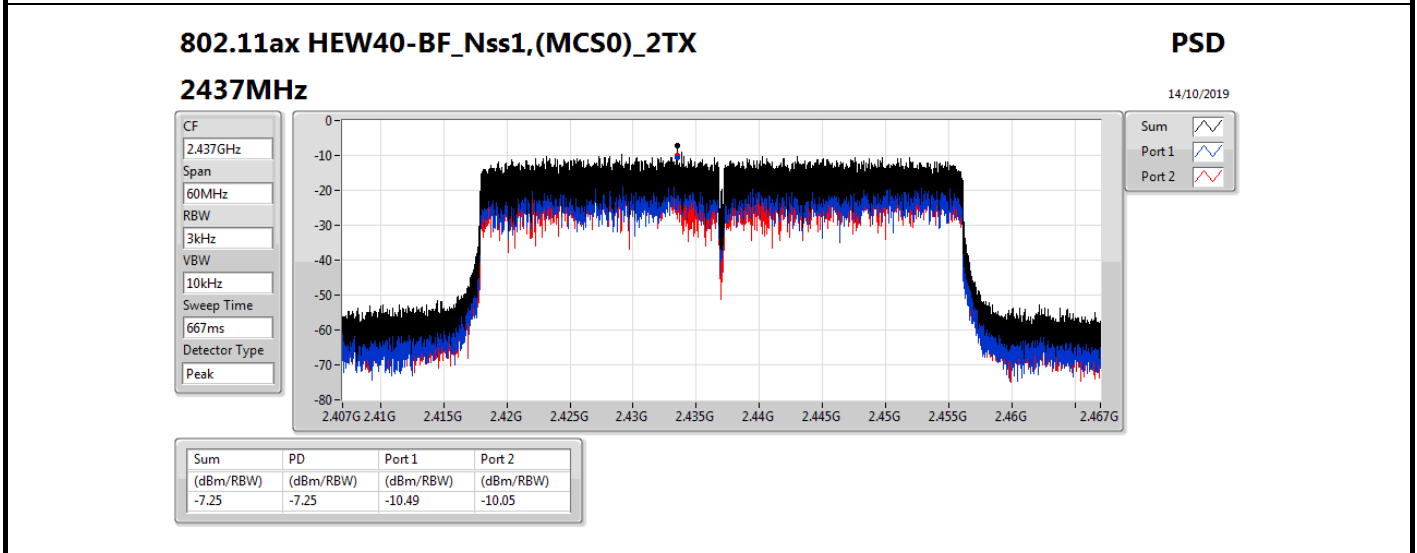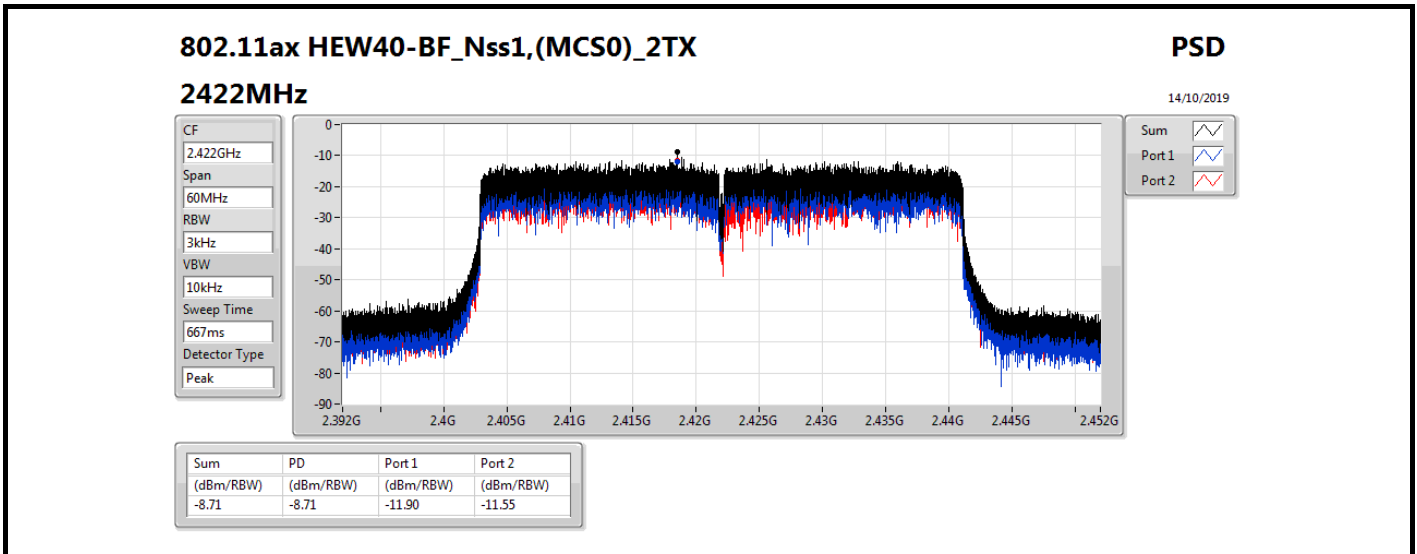



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	2.19
802.11g_Nss1,(6Mbps)_1TX	-2.44
VHT20_Nss1,(MCS0)_1TX	-3.30
VHT40_Nss1,(MCS0)_1TX	-9.08
802.11ax HEW20_Nss1,(MCS0)_1TX	-2.37
802.11ax HEW40_Nss1,(MCS0)_1TX	-9.84

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	7.80	2.19	2.19	6.20
2437MHz	Pass	7.80	2.18	2.18	6.20
2462MHz	Pass	7.80	1.01	1.01	6.20
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	7.80	-8.67	-8.67	6.20
2437MHz	Pass	7.80	-2.44	-2.44	6.20
2462MHz	Pass	7.80	-8.38	-8.38	6.20
VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	7.80	-9.44	-9.44	6.20
2437MHz	Pass	7.80	-3.30	-3.30	6.20
2462MHz	Pass	7.80	-10.56	-10.56	6.20
VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	7.80	-10.66	-10.66	6.20
2437MHz	Pass	7.80	-9.08	-9.08	6.20
2452MHz	Pass	7.80	-10.47	-10.47	6.20
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	7.80	-8.30	-8.30	6.20
2437MHz	Pass	7.80	-2.37	-2.37	6.20
2462MHz	Pass	7.80	-9.88	-9.88	6.20
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	7.80	-11.62	-11.62	6.20
2437MHz	Pass	7.80	-9.84	-9.84	6.20
2452MHz	Pass	7.80	-11.52	-11.52	6.20




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

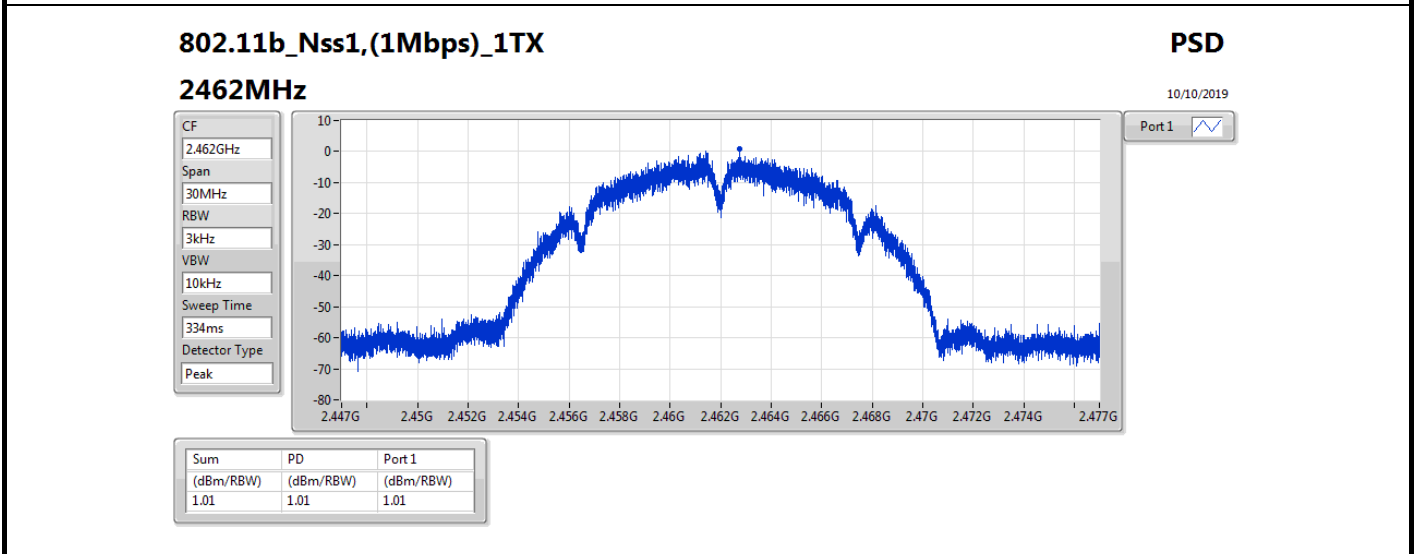
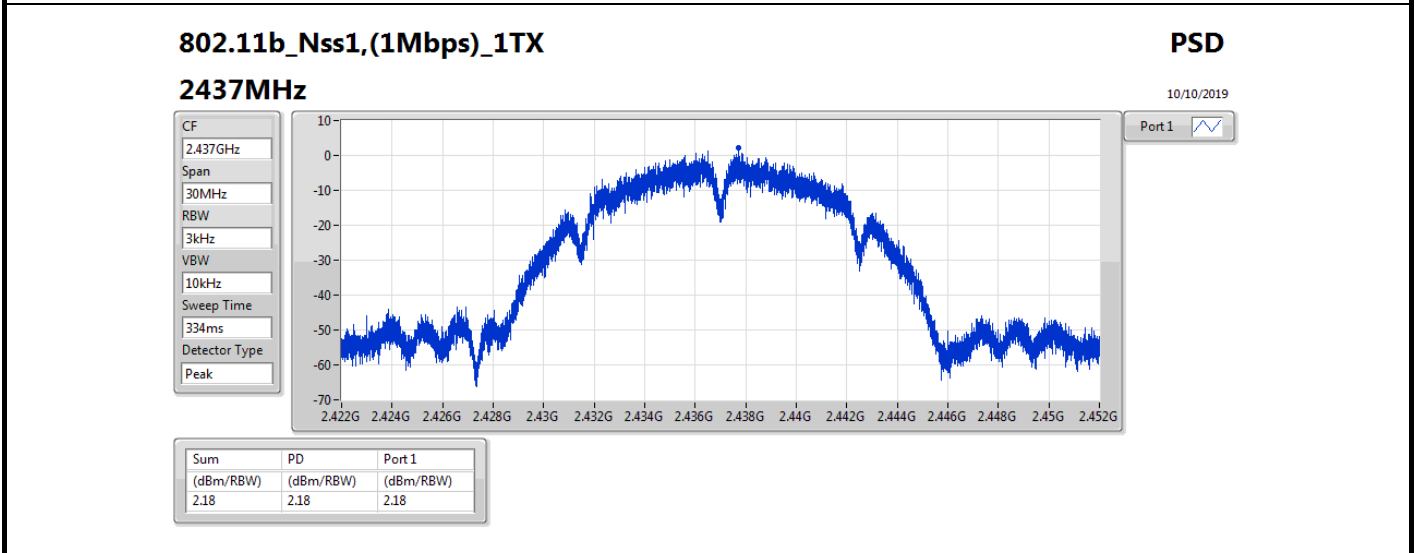
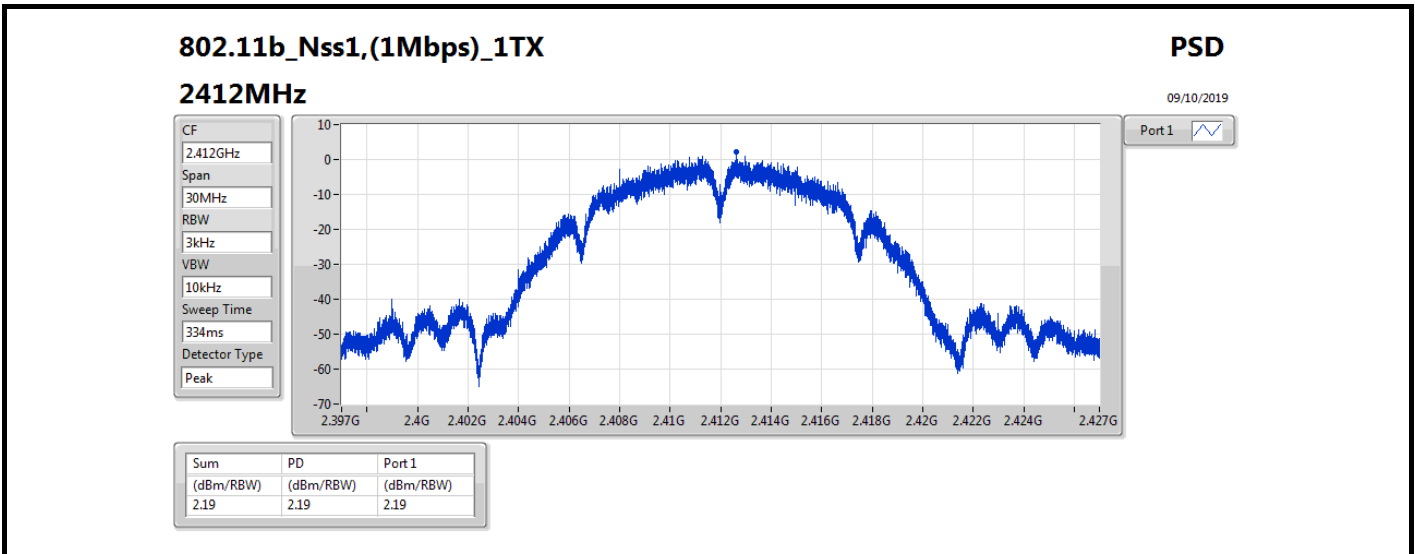


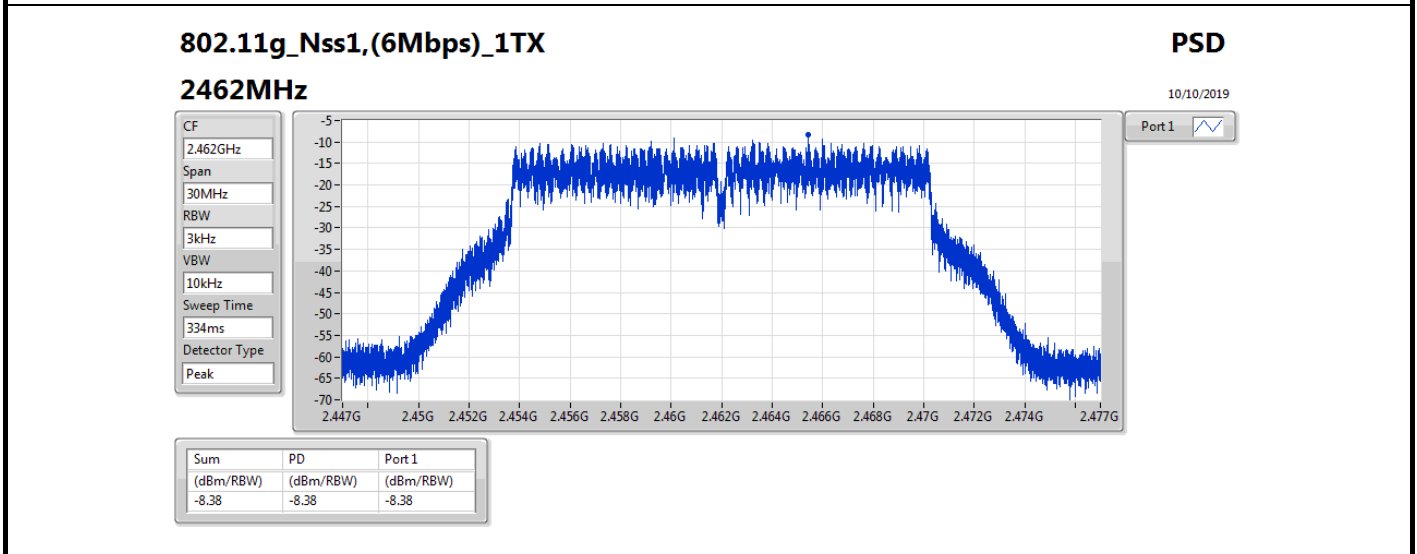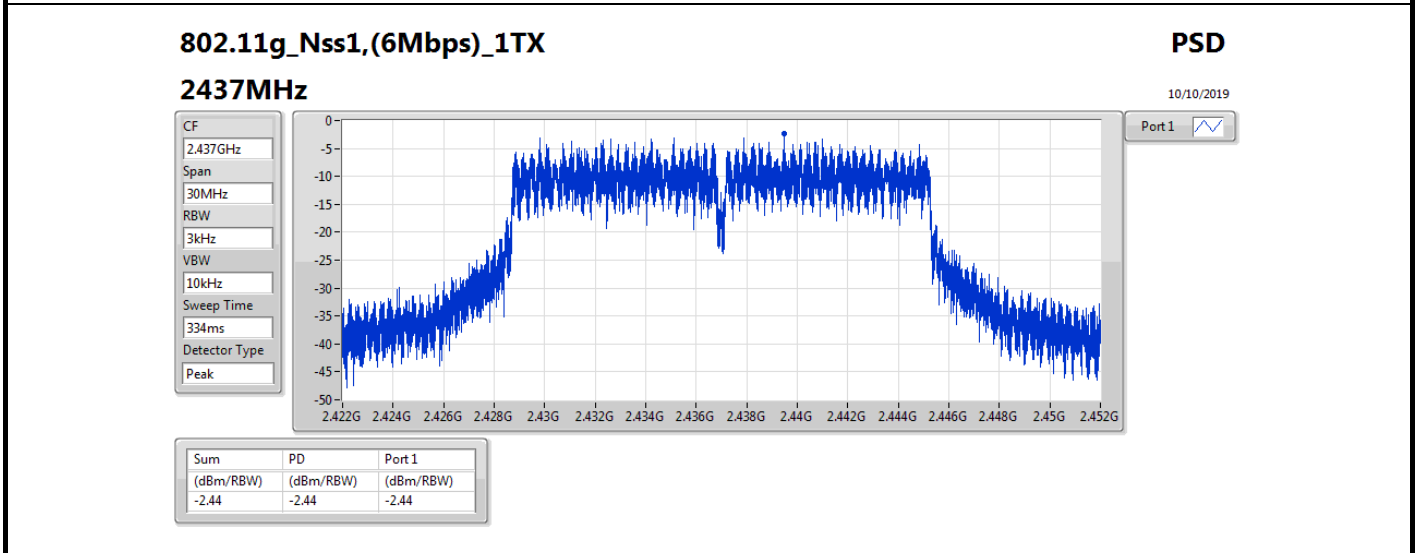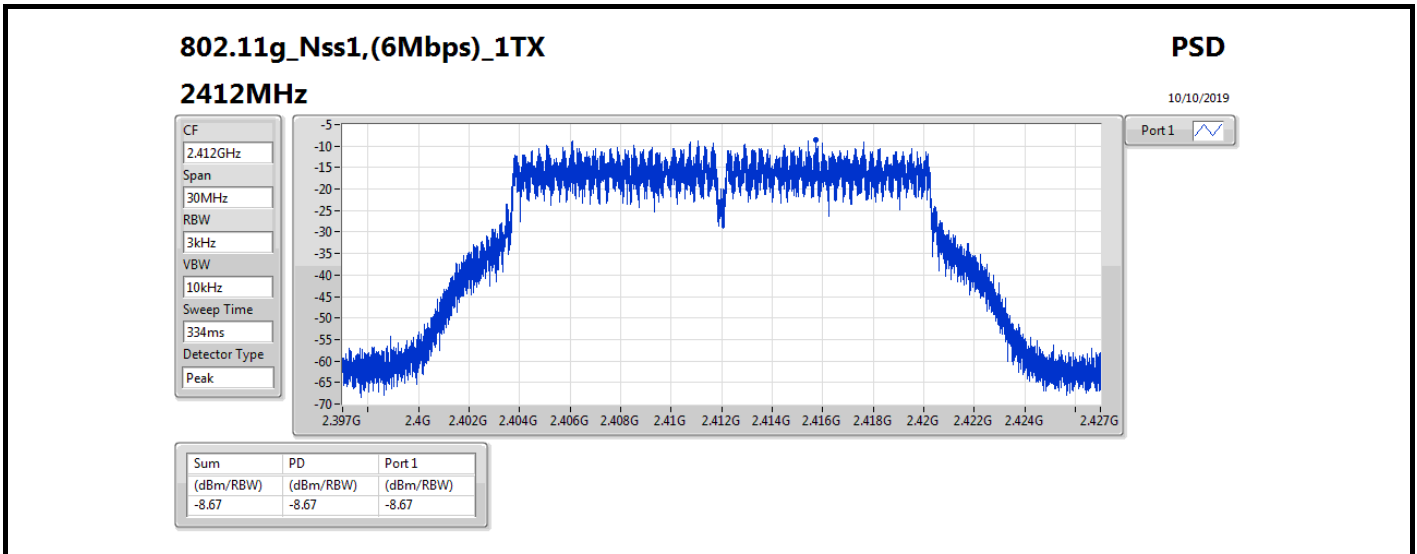

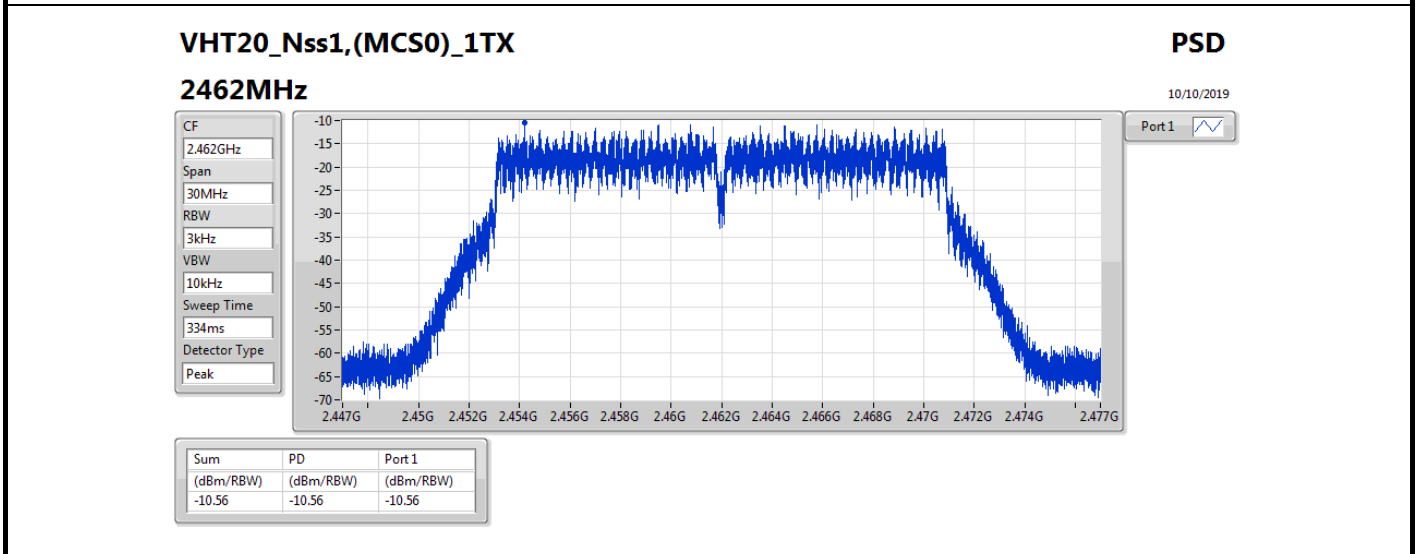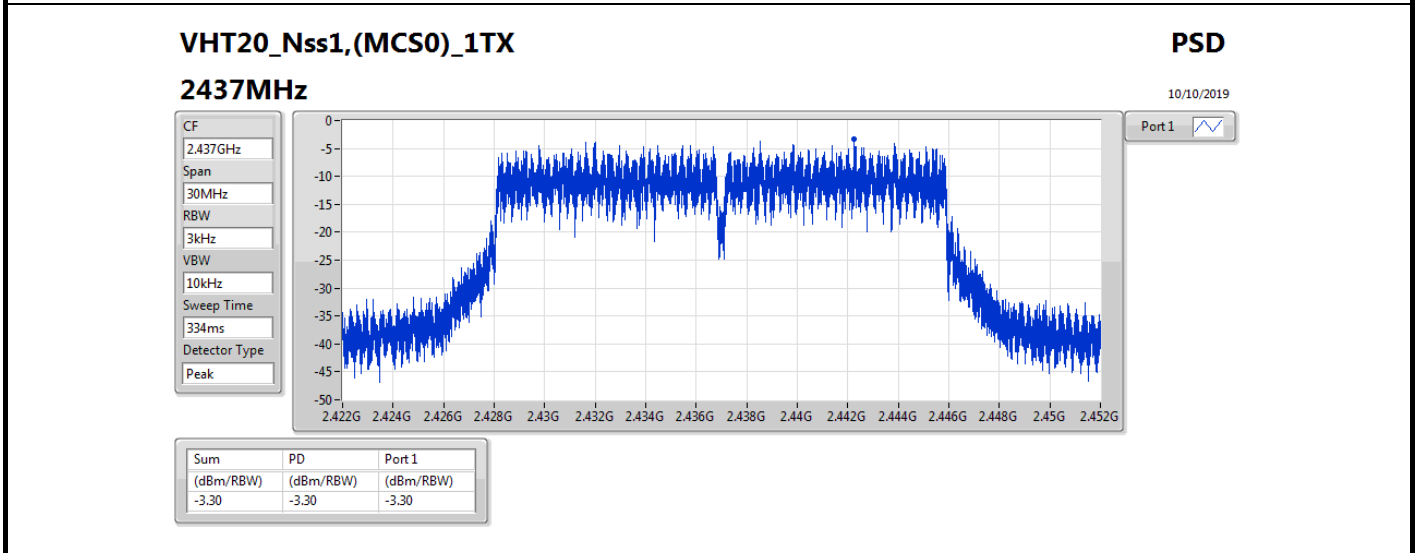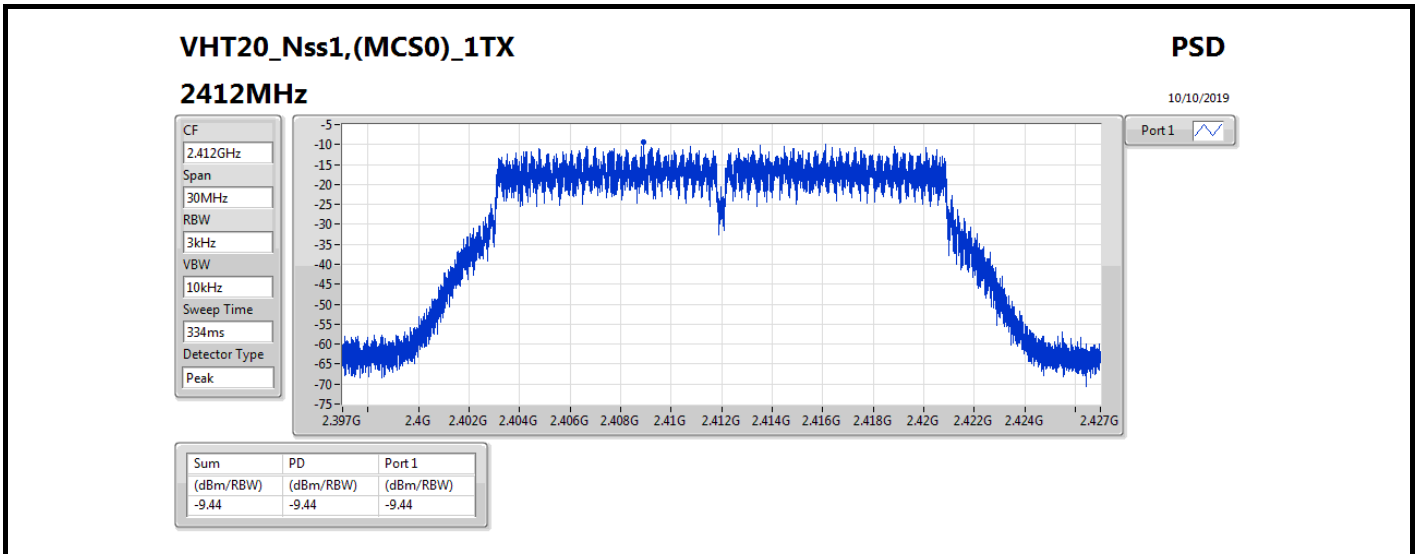

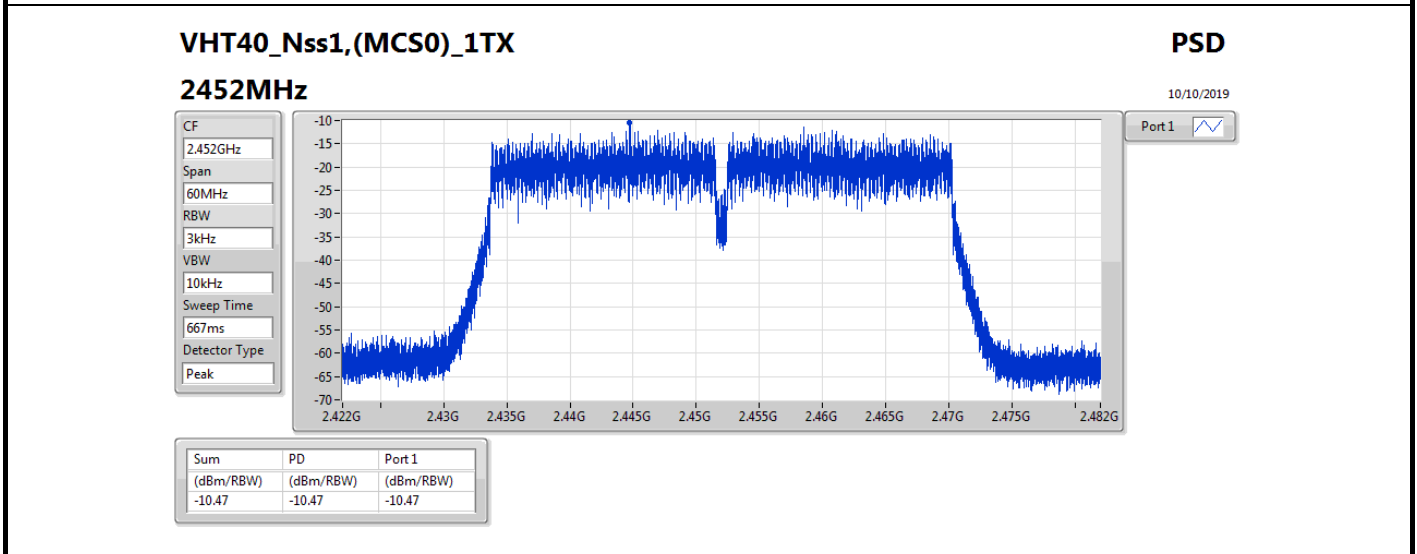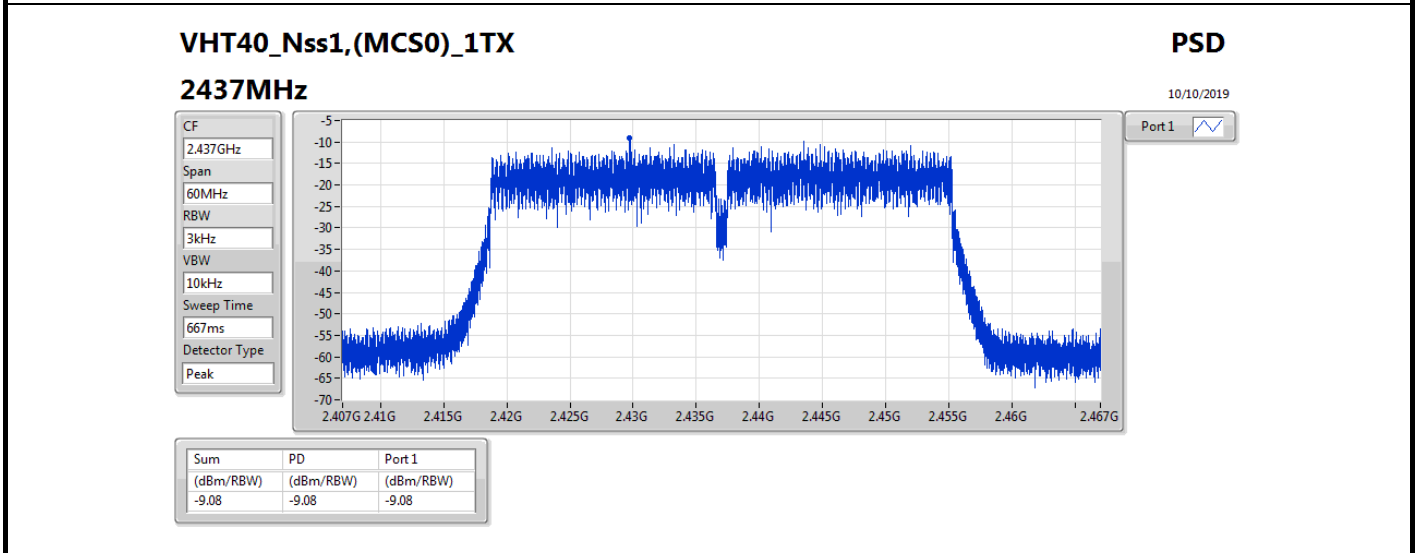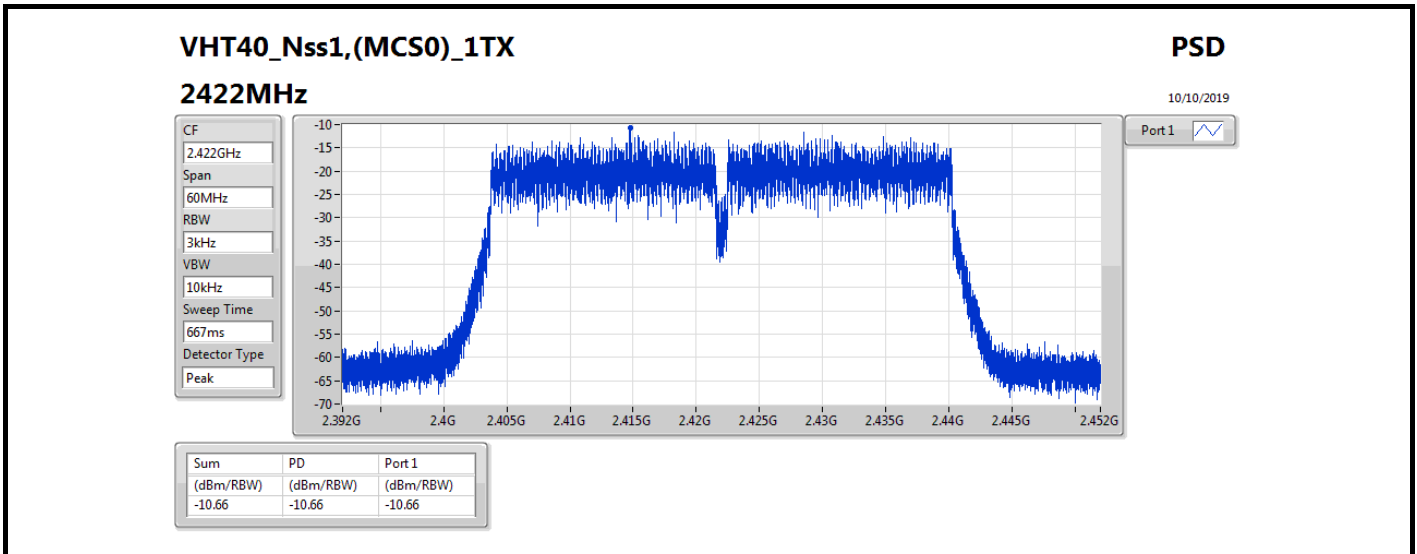

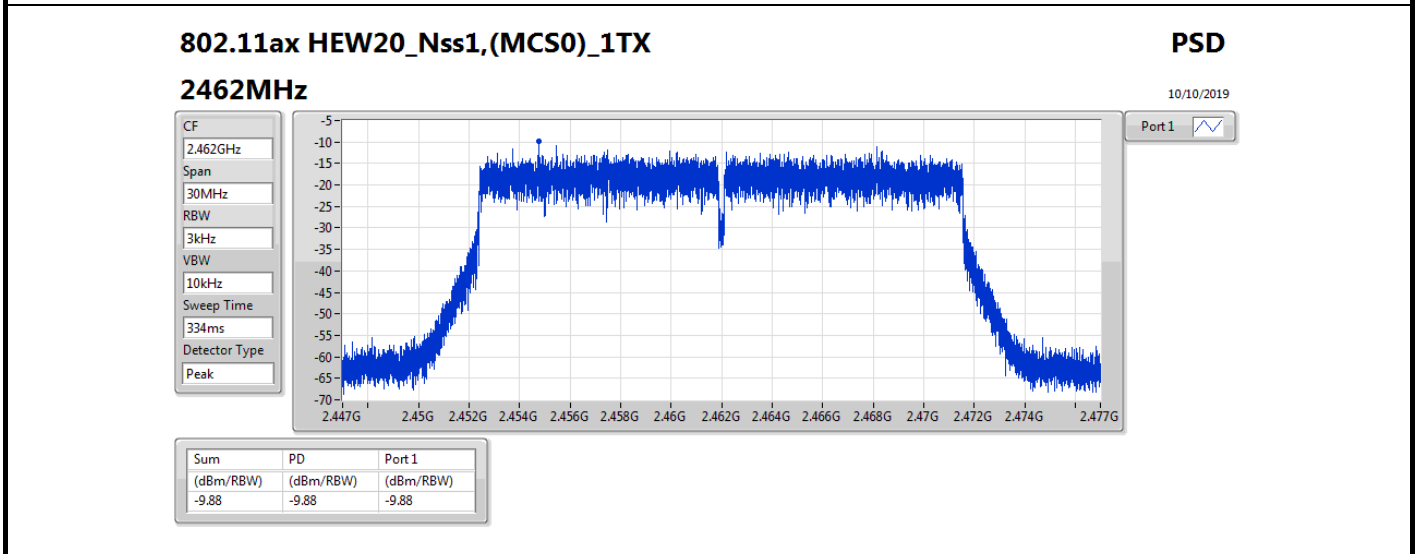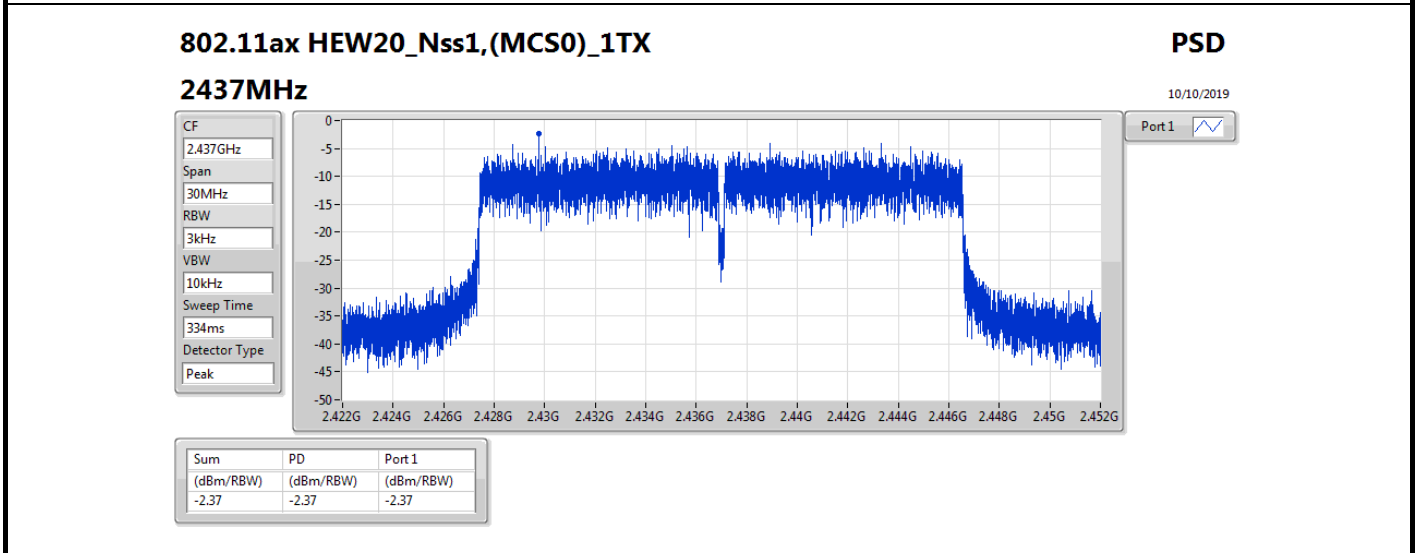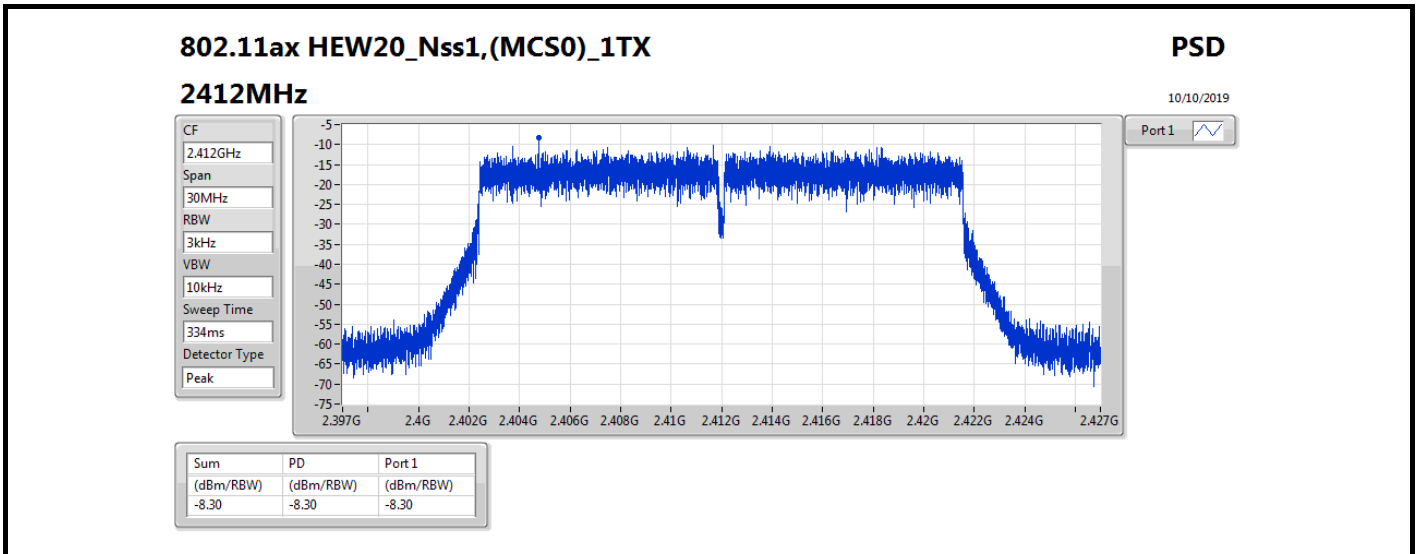

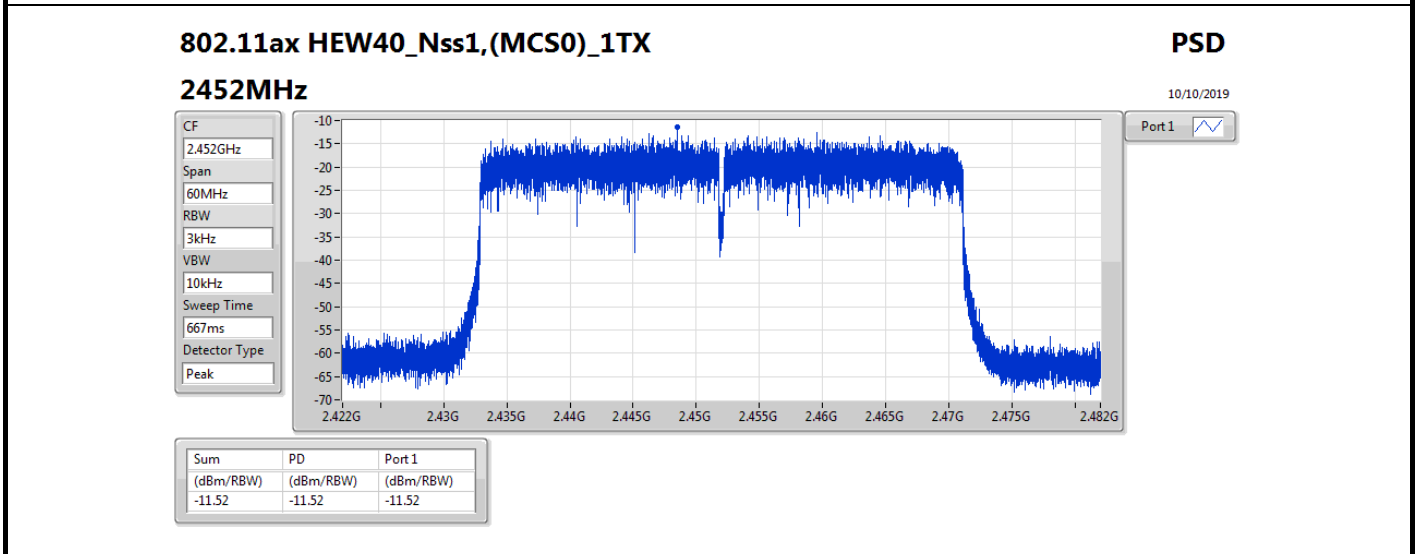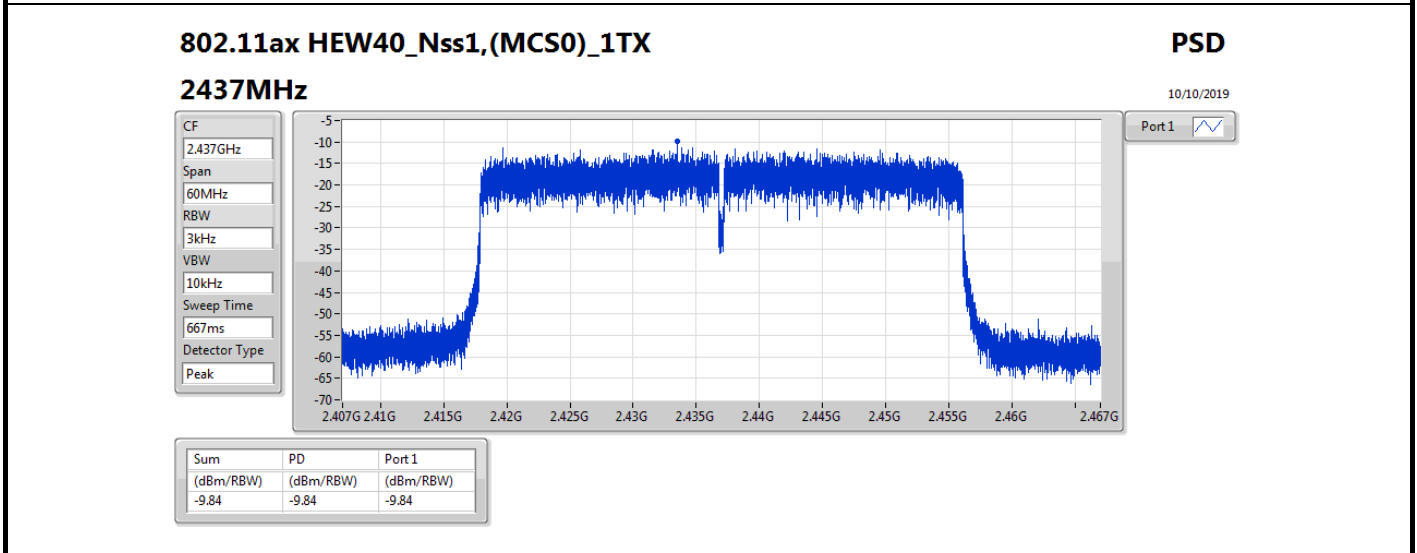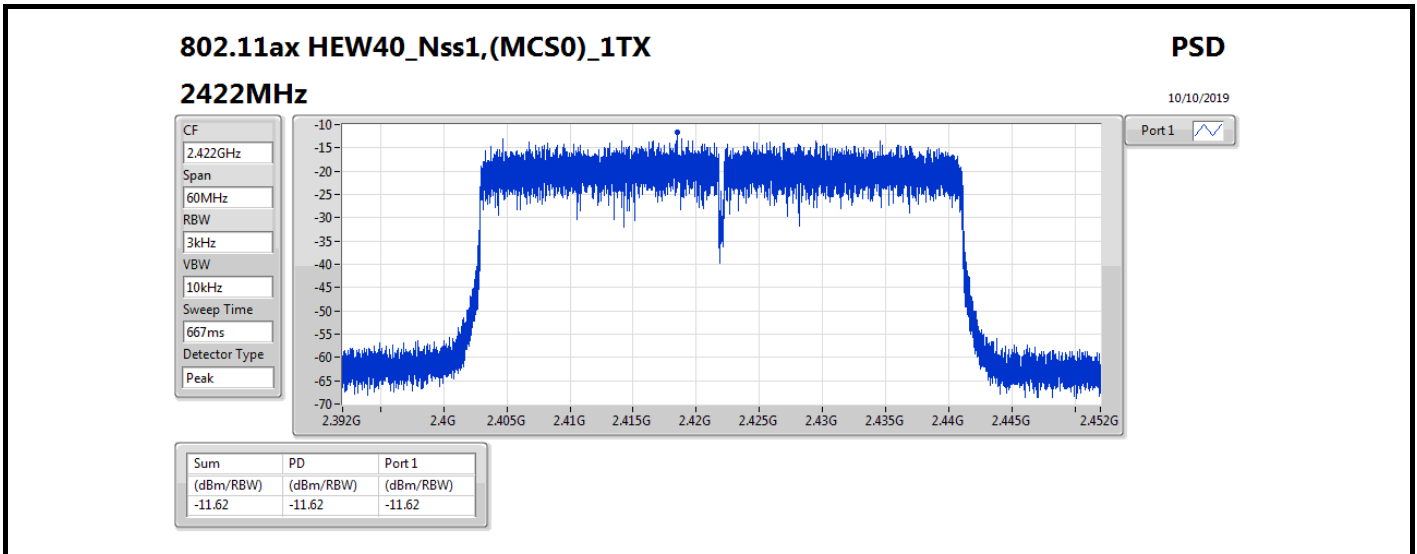



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	0.26
802.11g_Nss1,(6Mbps)_2TX	-0.85
VHT20_Nss2,(MCS0)_2TX	-3.92
VHT40_Nss2,(MCS0)_2TX	-10.19
802.11ax HEW20_Nss2,(MCS0)_2TX	-3.08
802.11ax HEW40_Nss2,(MCS0)_2TX	-11.34

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.81	-0.82	-2.22	0.26	3.19
2437MHz	Pass	10.81	-1.76	-3.99	-0.99	3.19
2462MHz	Pass	10.81	-2.67	-4.62	-1.82	3.19
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.81	-9.71	-10.09	-6.89	3.19
2437MHz	Pass	10.81	-3.48	-3.75	-0.85	3.19
2462MHz	Pass	10.81	-9.29	-9.82	-6.96	3.19
VHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.80	-9.33	-8.94	-7.61	6.20
2437MHz	Pass	7.80	-4.85	-5.44	-3.92	6.20
2462MHz	Pass	7.80	-9.11	-9.62	-7.44	6.20
VHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.80	-12.78	-12.65	-11.67	6.20
2437MHz	Pass	7.80	-11.34	-11.54	-10.19	6.20
2452MHz	Pass	7.80	-12.71	-12.94	-11.57	6.20
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.80	-9.50	-10.59	-7.33	6.20
2437MHz	Pass	7.80	-5.76	-6.35	-3.08	6.20
2462MHz	Pass	7.80	-9.82	-10.45	-7.69	6.20
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.80	-13.48	-13.87	-12.20	6.20
2437MHz	Pass	7.80	-12.85	-13.02	-11.34	6.20
2452MHz	Pass	7.80	-13.72	-13.96	-11.98	6.20




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

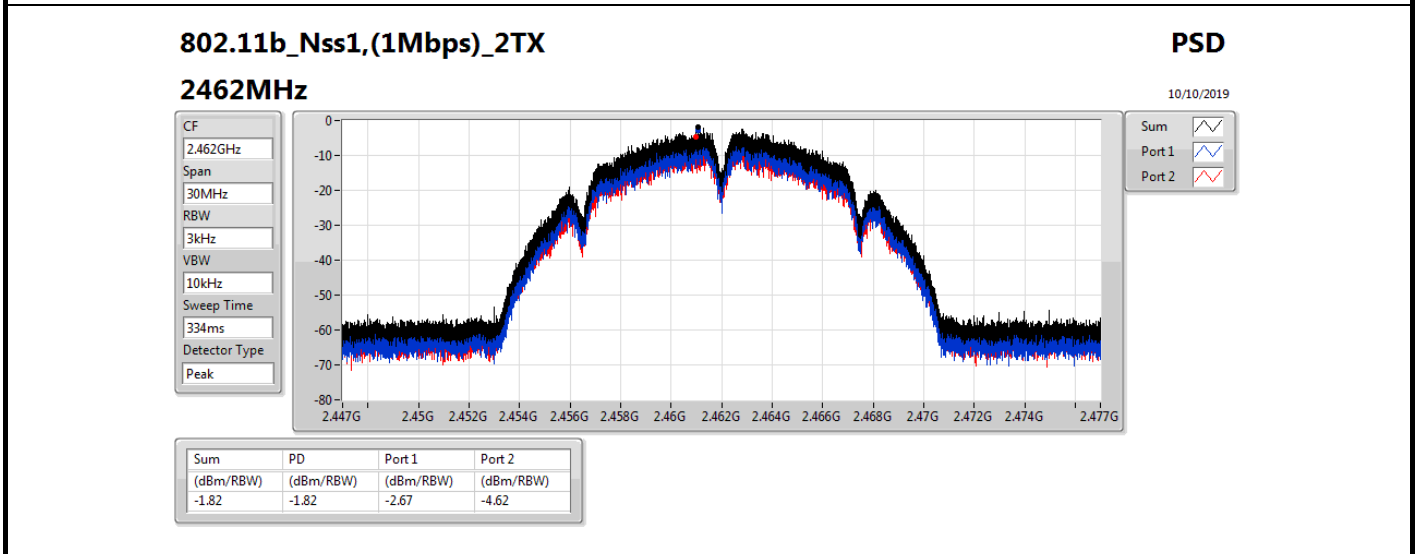
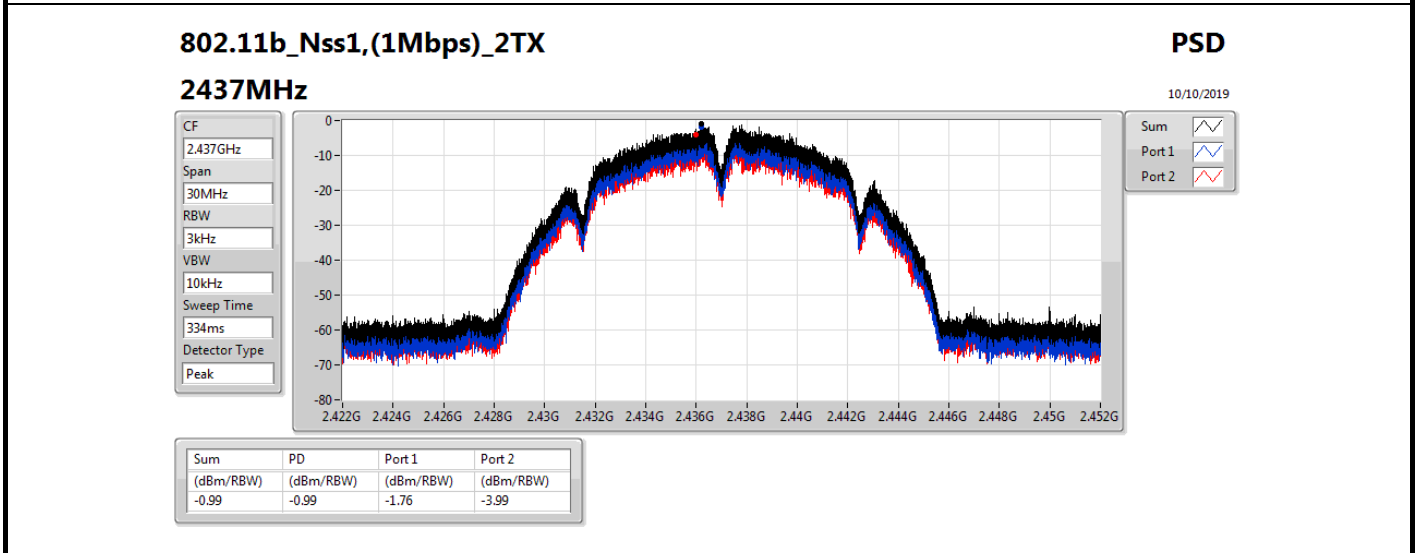
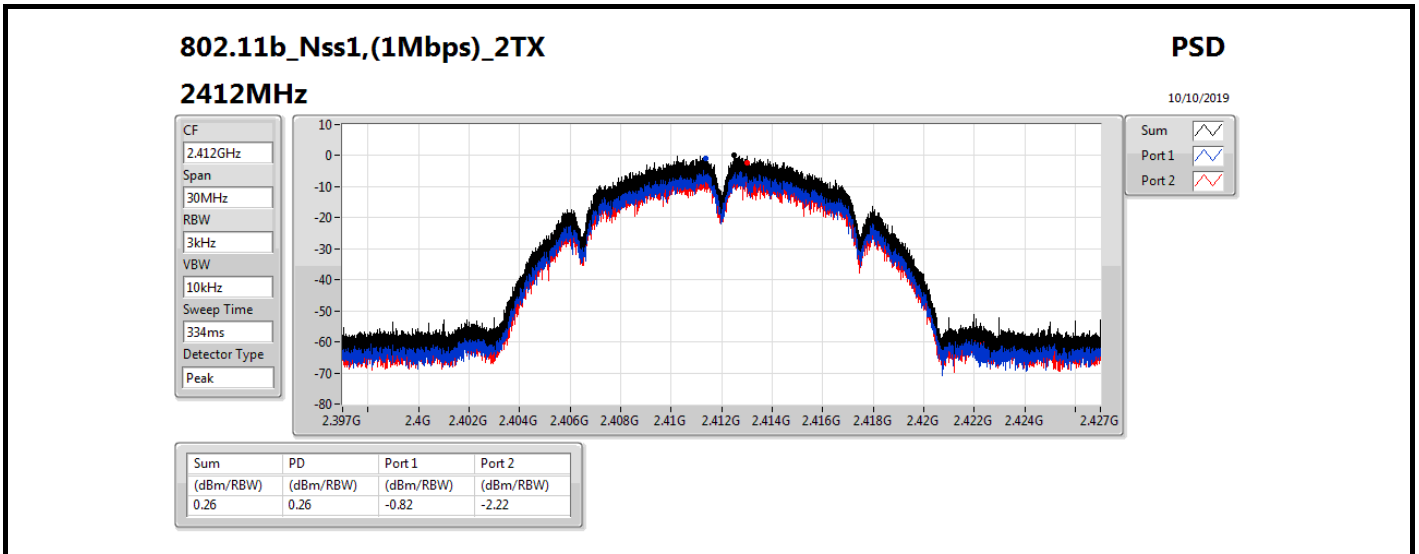


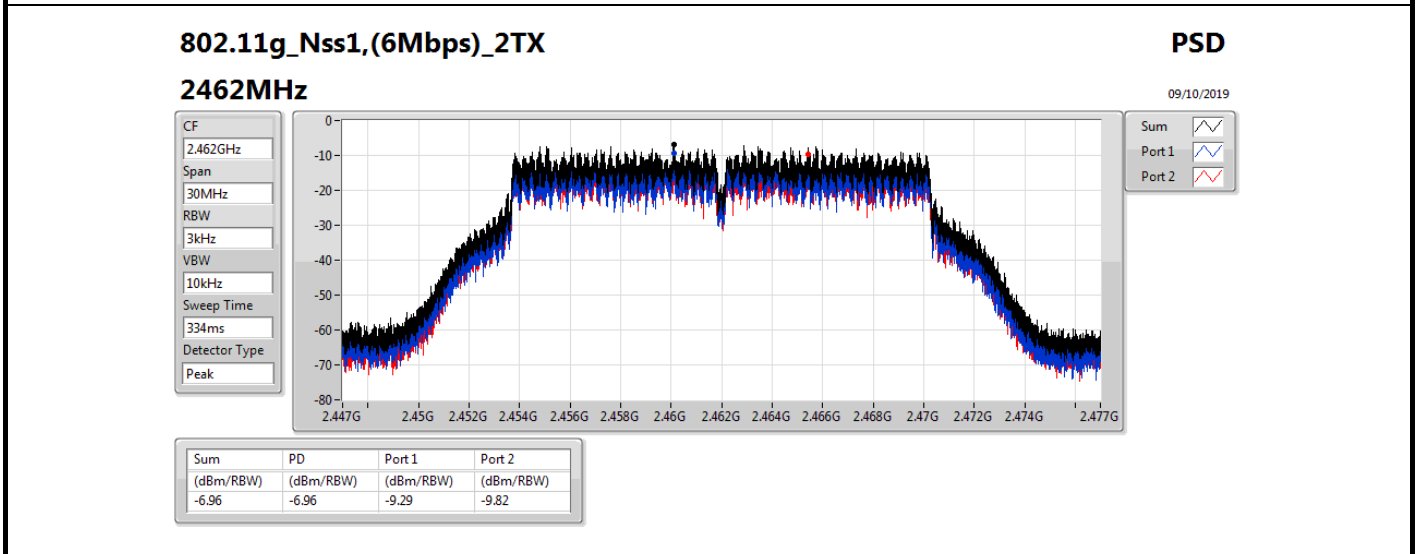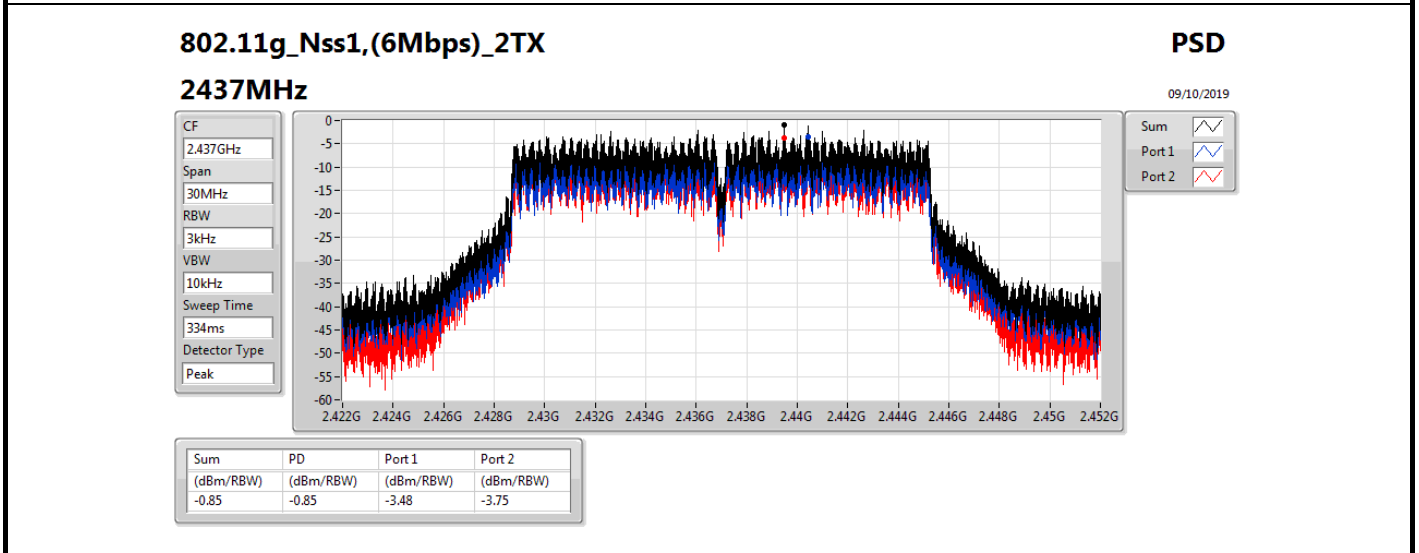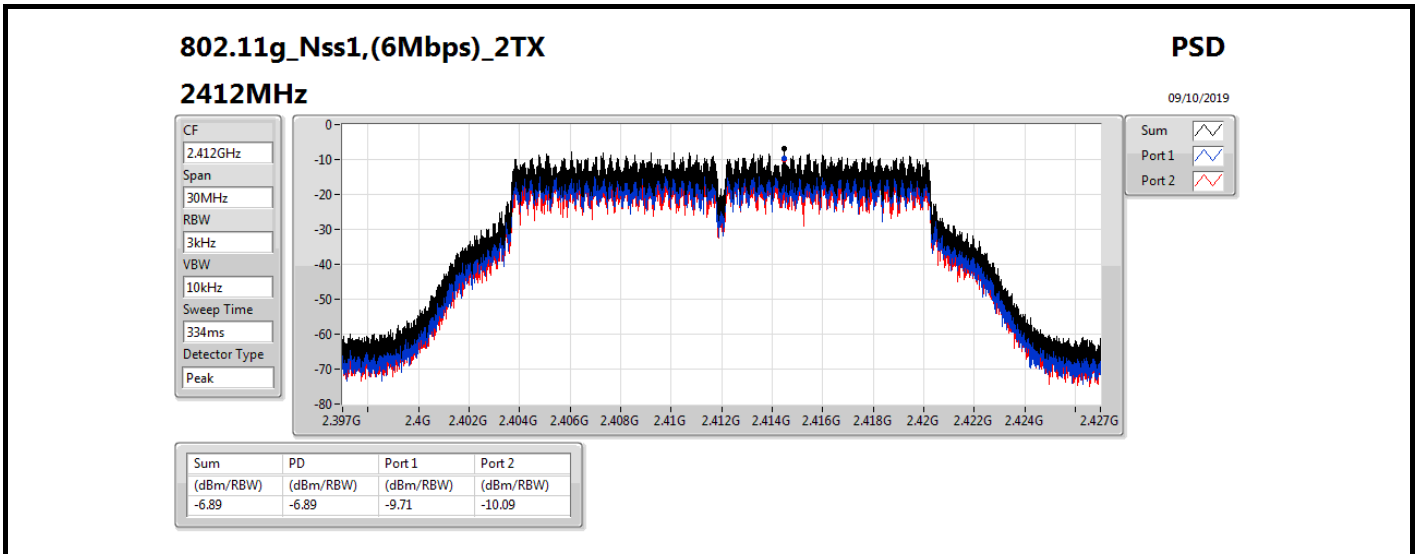

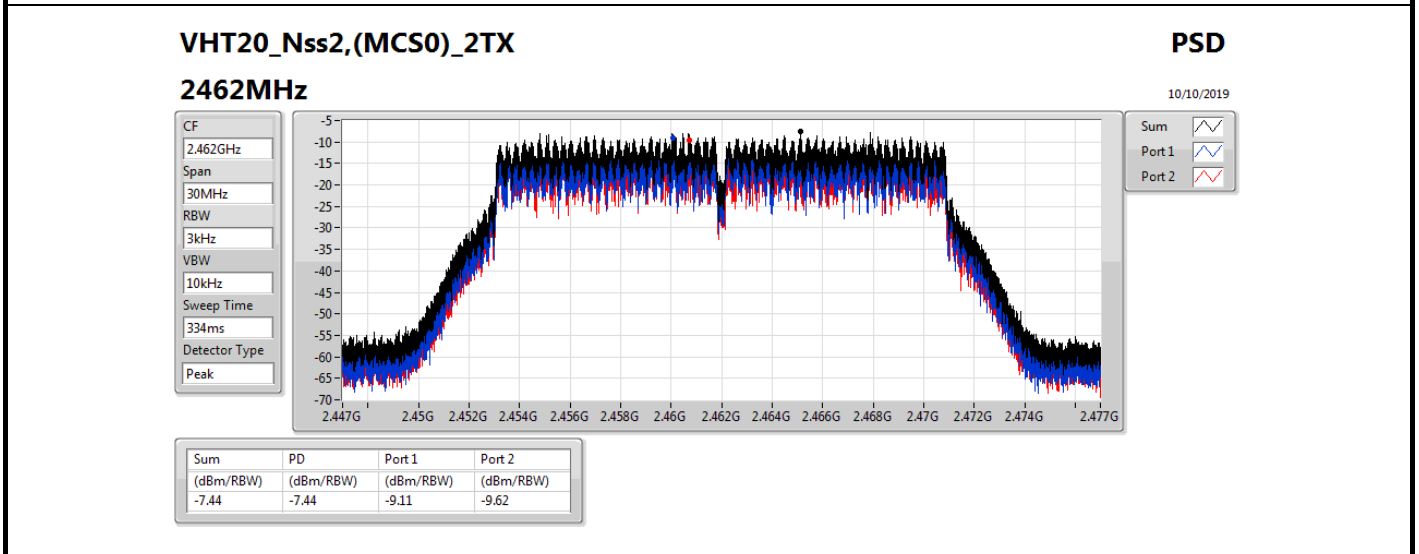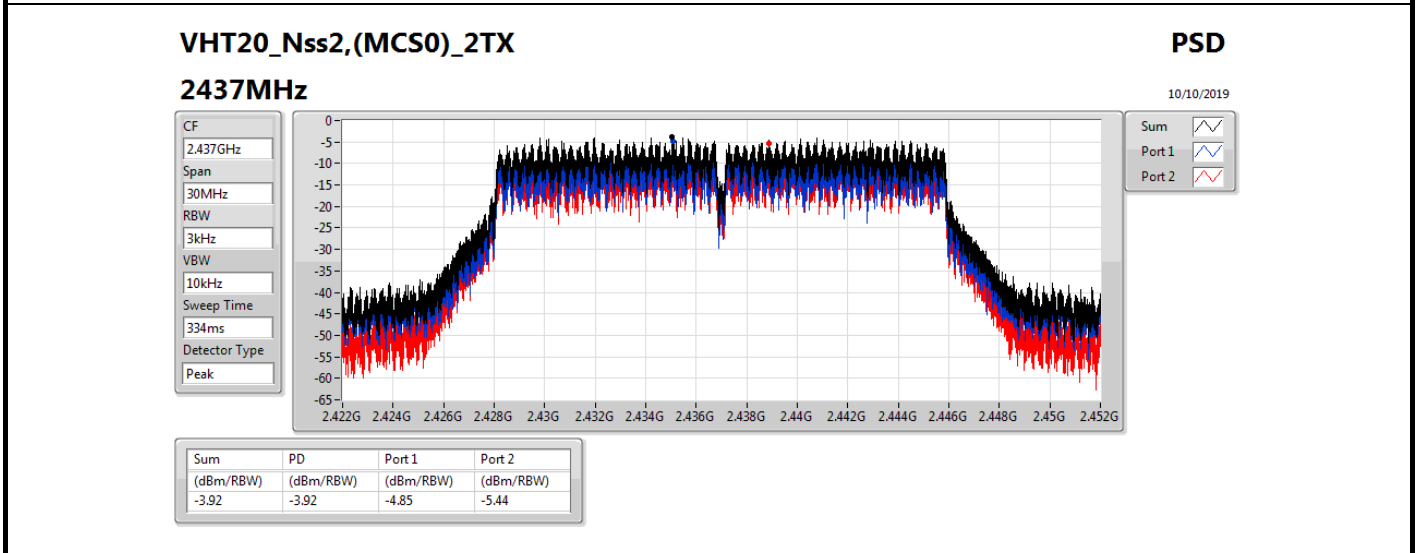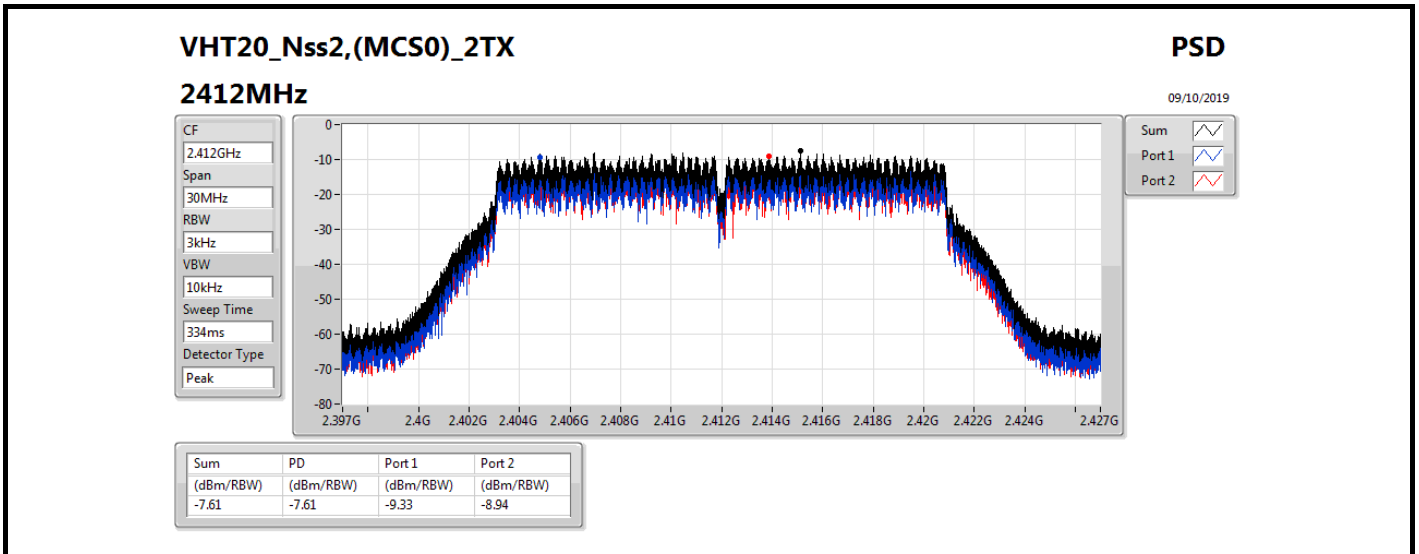

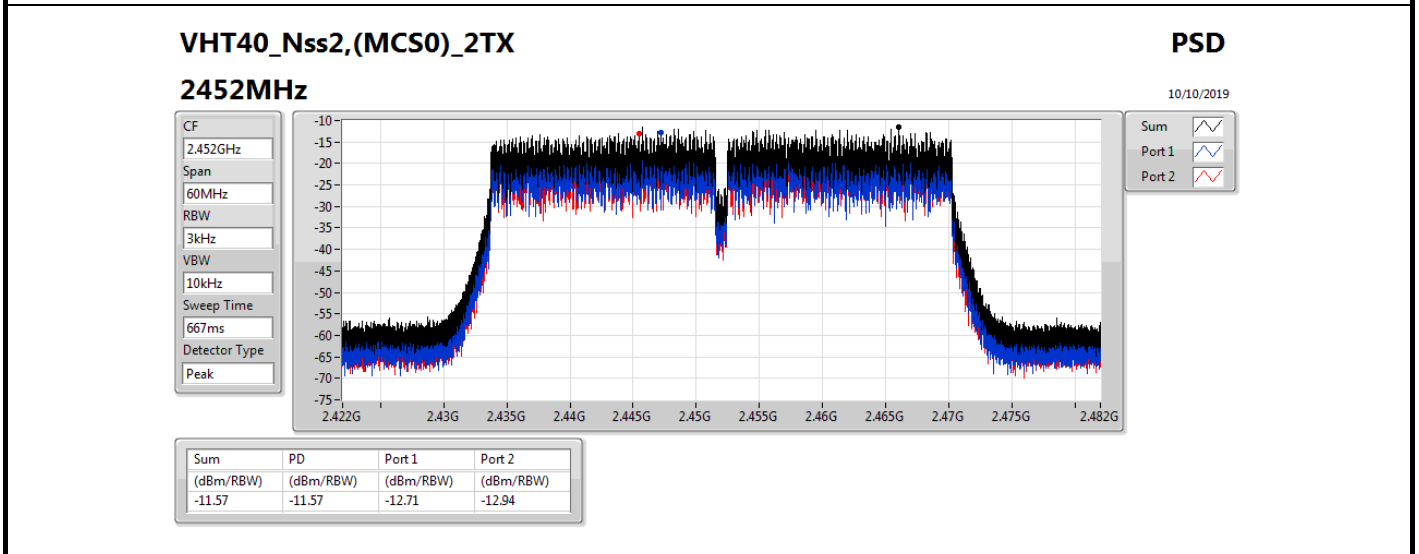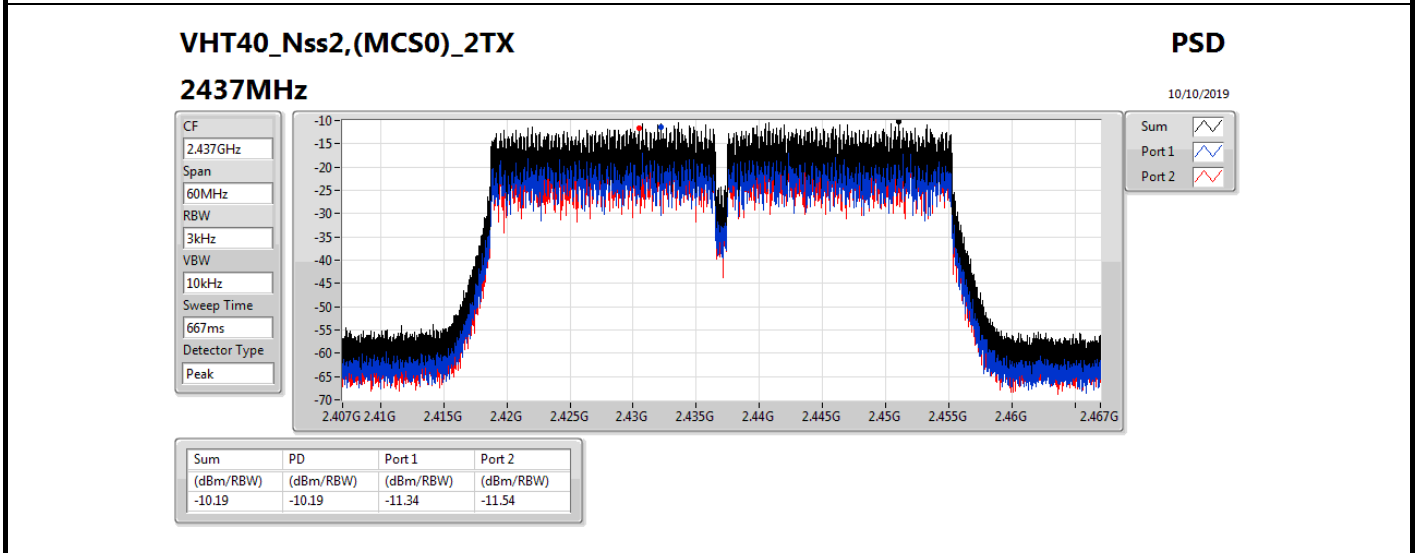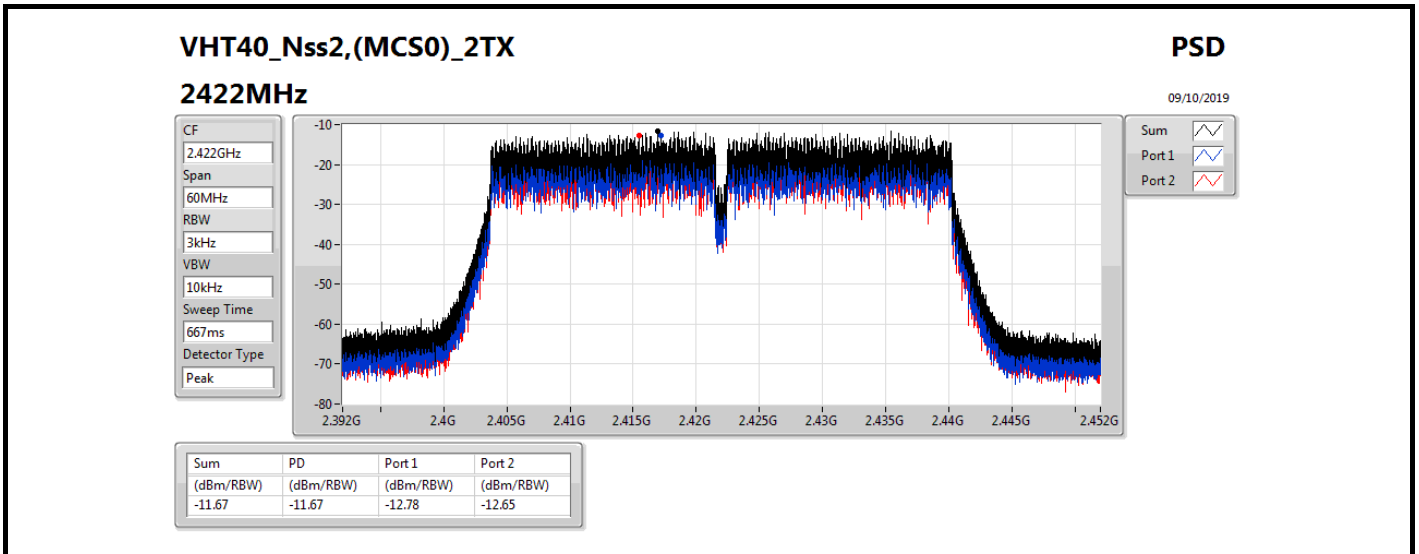

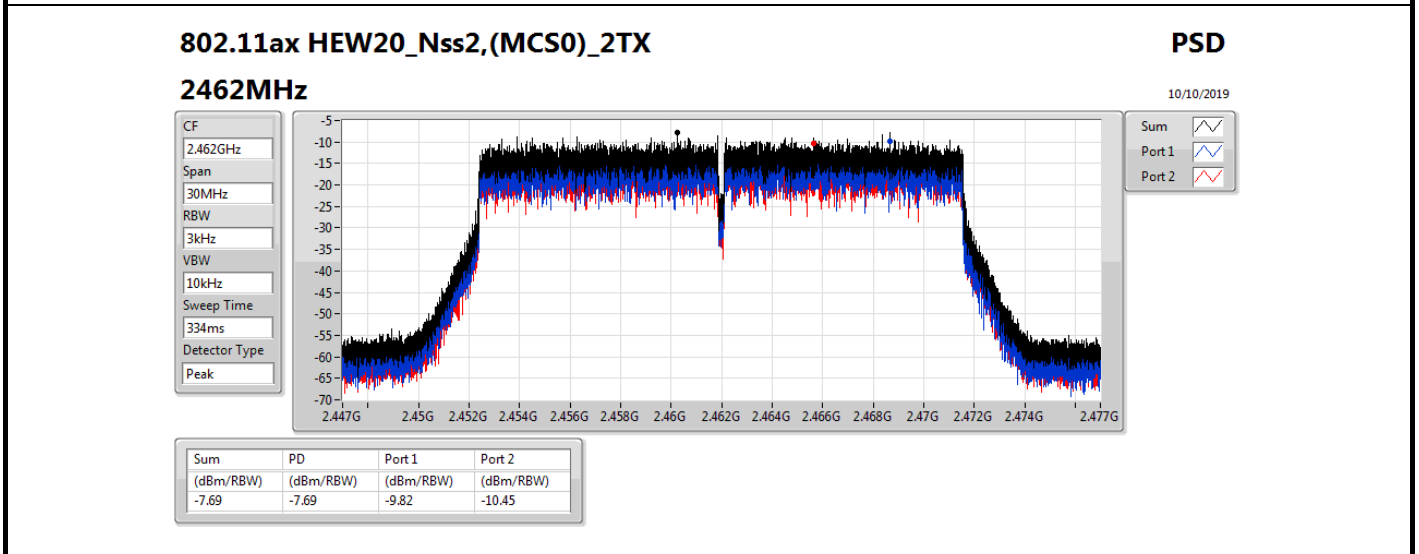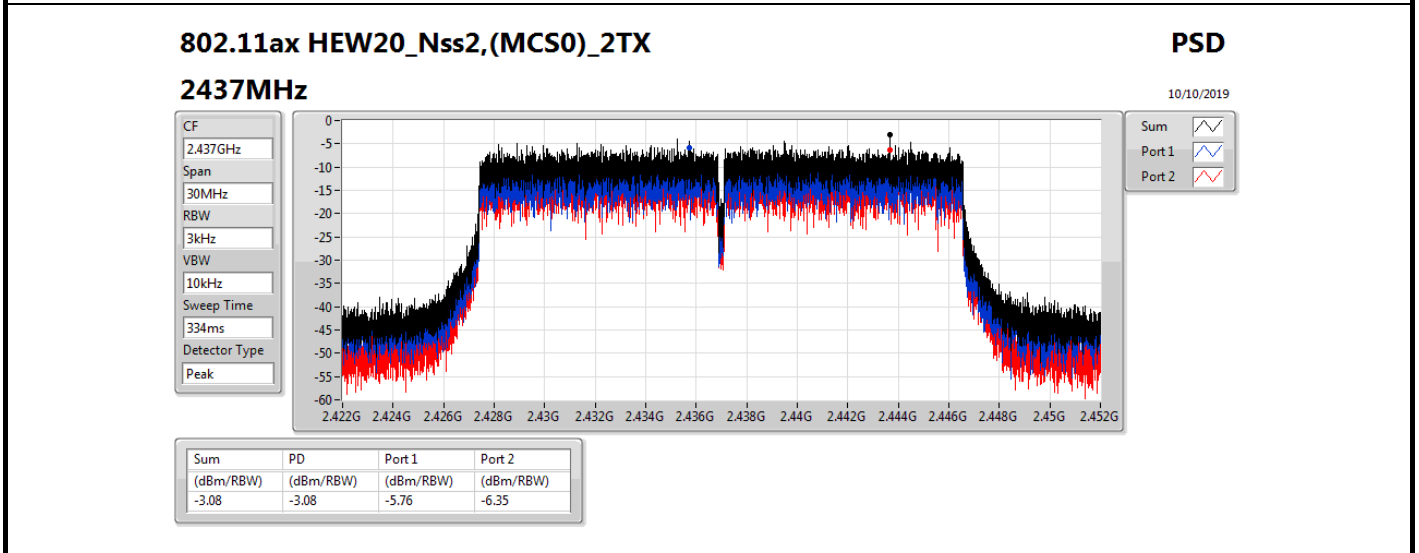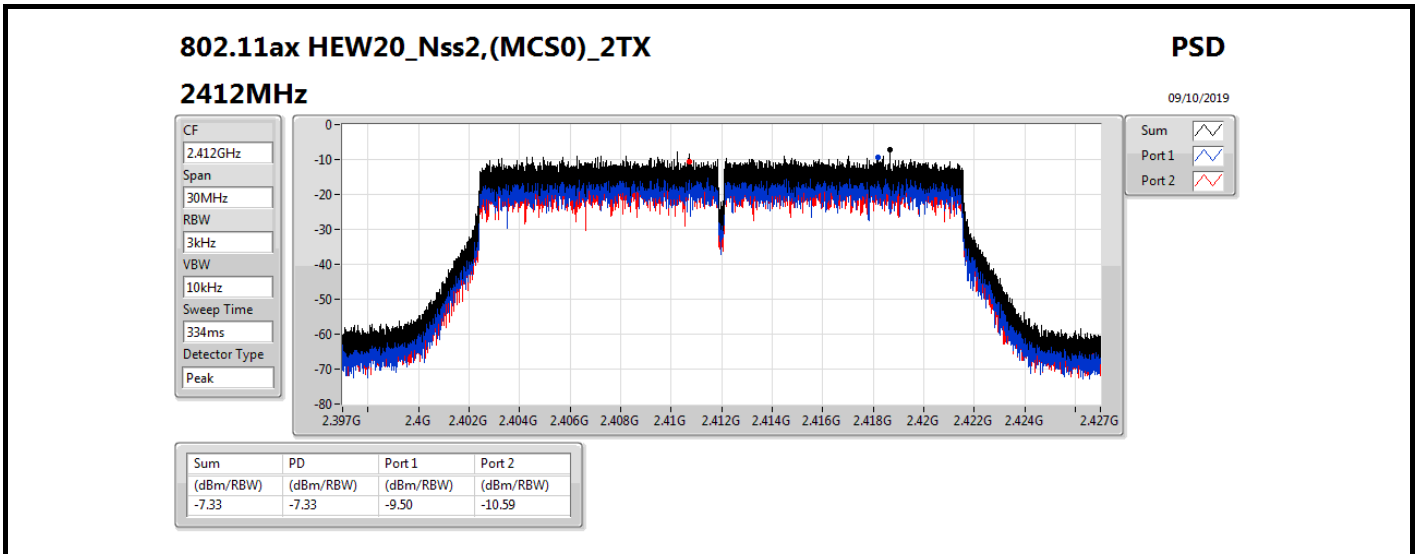

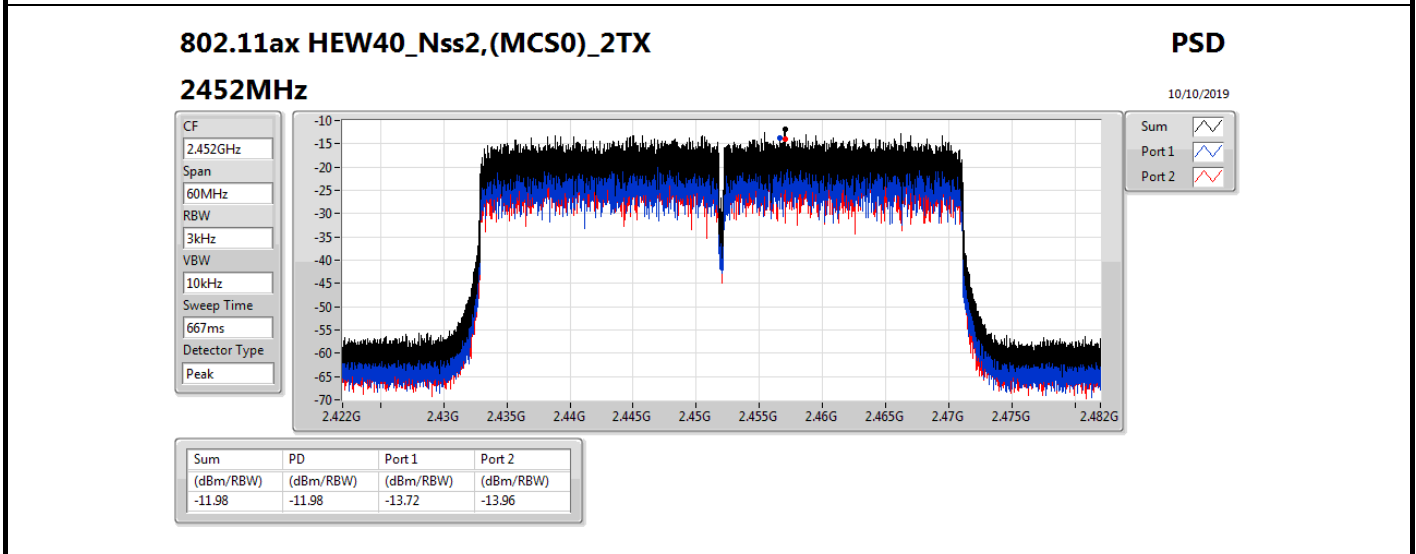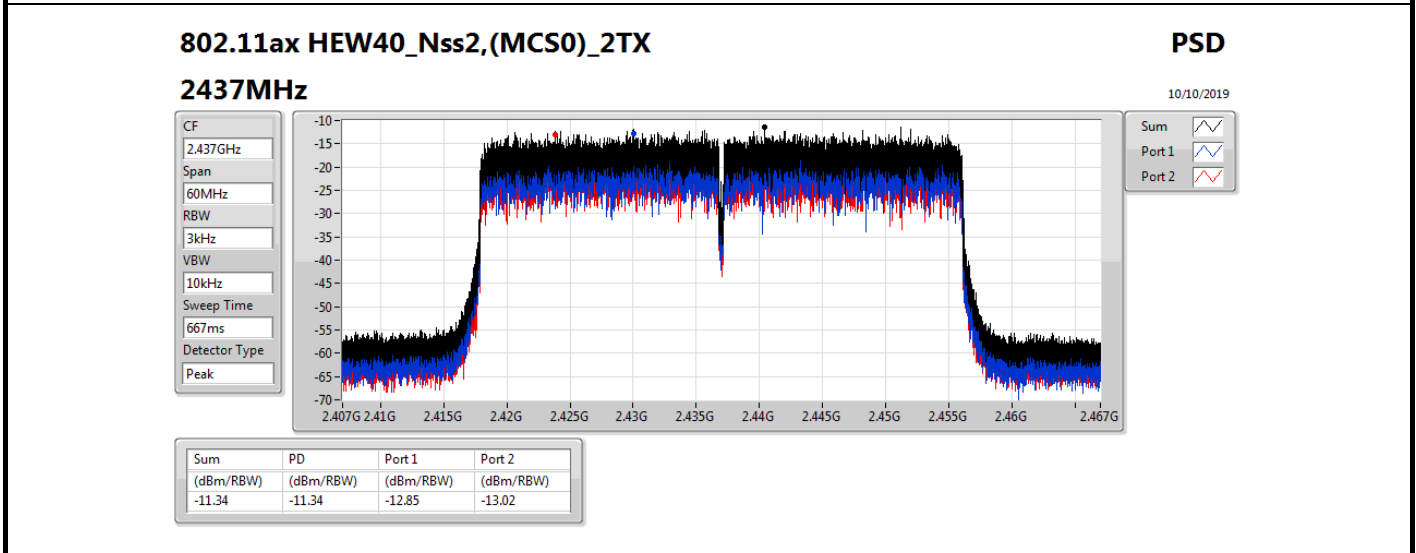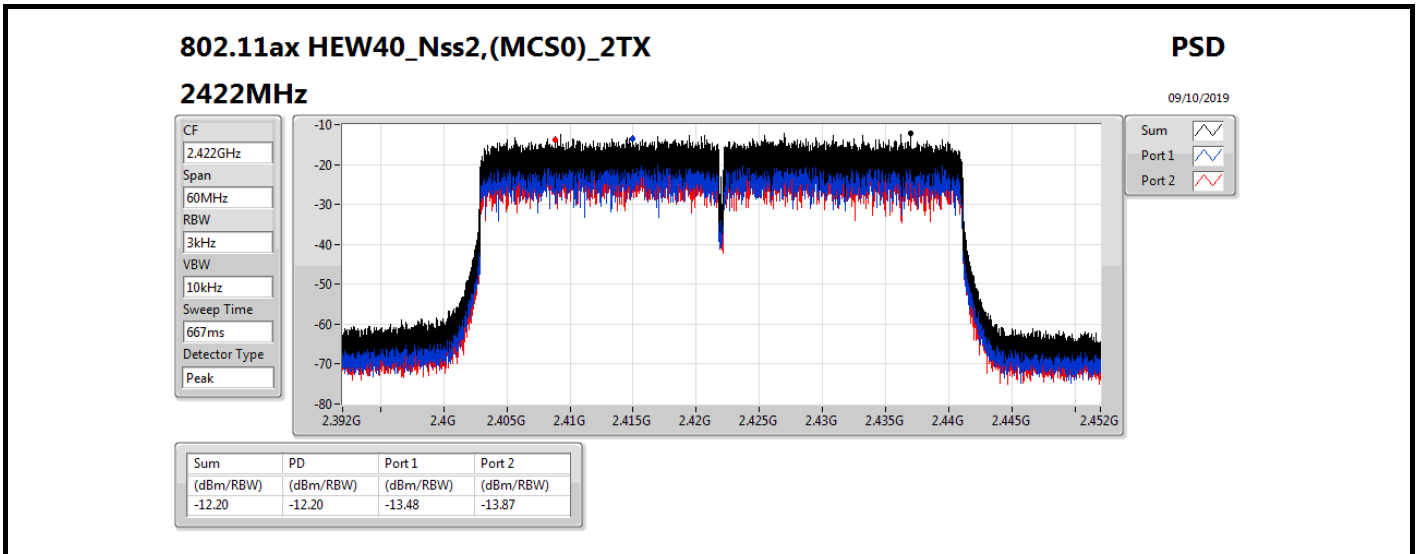



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
VHT20-BF_Nss1,(MCS0)_2TX	-2.45
VHT40-BF_Nss1,(MCS0)_2TX	-8.12
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-2.61
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-10.28

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.81	-10.34	-10.05	-7.29	3.19
2437MHz	Pass	10.81	-5.60	-4.60	-2.45	3.19
2462MHz	Pass	10.81	-10.84	-9.30	-7.68	3.19
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	10.81	-12.99	-11.61	-10.12	3.19
2437MHz	Pass	10.81	-10.43	-11.35	-8.12	3.19
2452MHz	Pass	10.81	-12.96	-12.06	-10.78	3.19
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.81	-11.57	-10.03	-8.66	3.19
2437MHz	Pass	10.81	-6.84	-3.14	-2.61	3.19
2462MHz	Pass	10.81	-10.37	-10.03	-7.50	3.19
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	10.81	-12.85	-12.26	-10.99	3.19
2437MHz	Pass	10.81	-12.95	-12.49	-10.28	3.19
2452MHz	Pass	10.81	-13.03	-13.37	-11.05	3.19




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

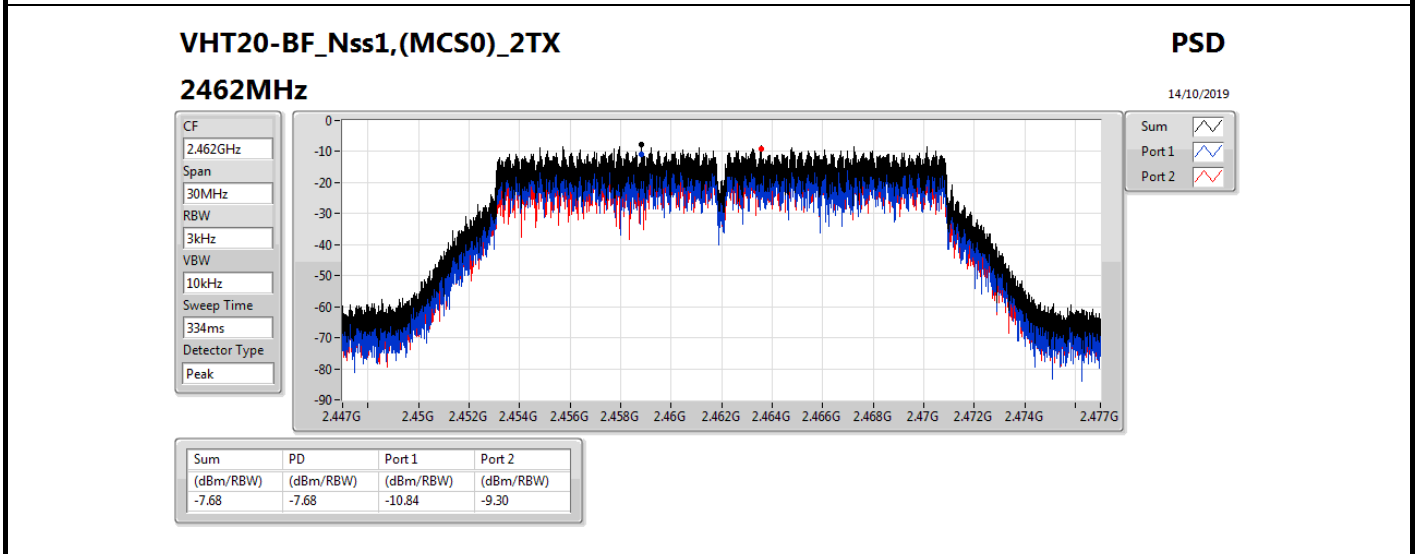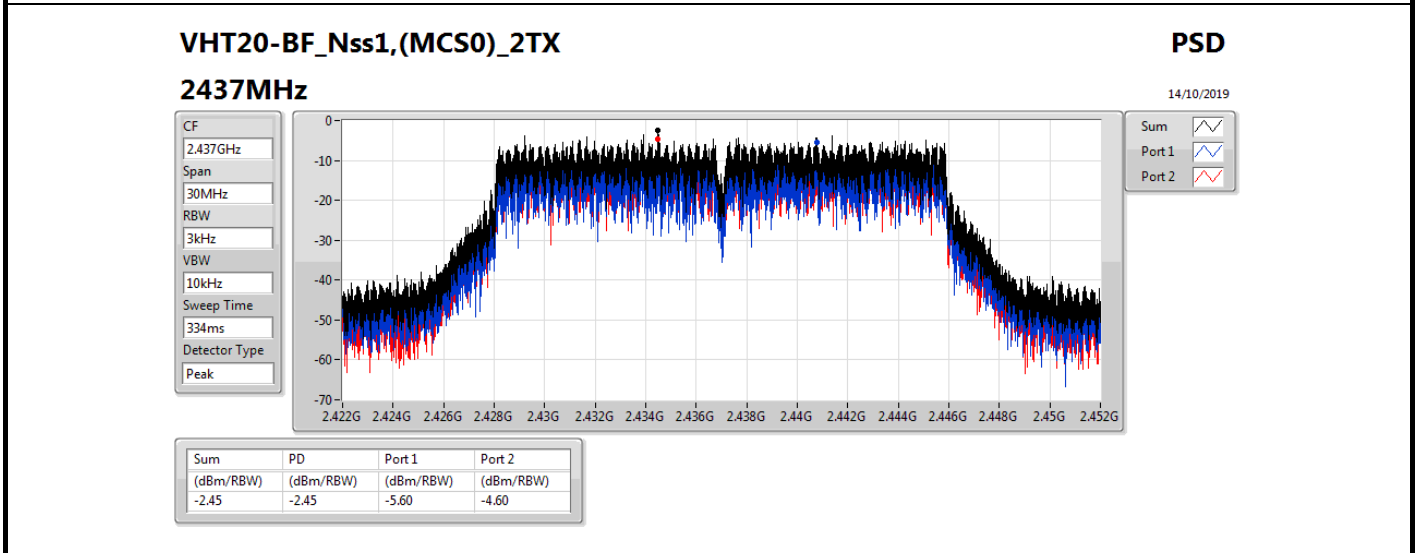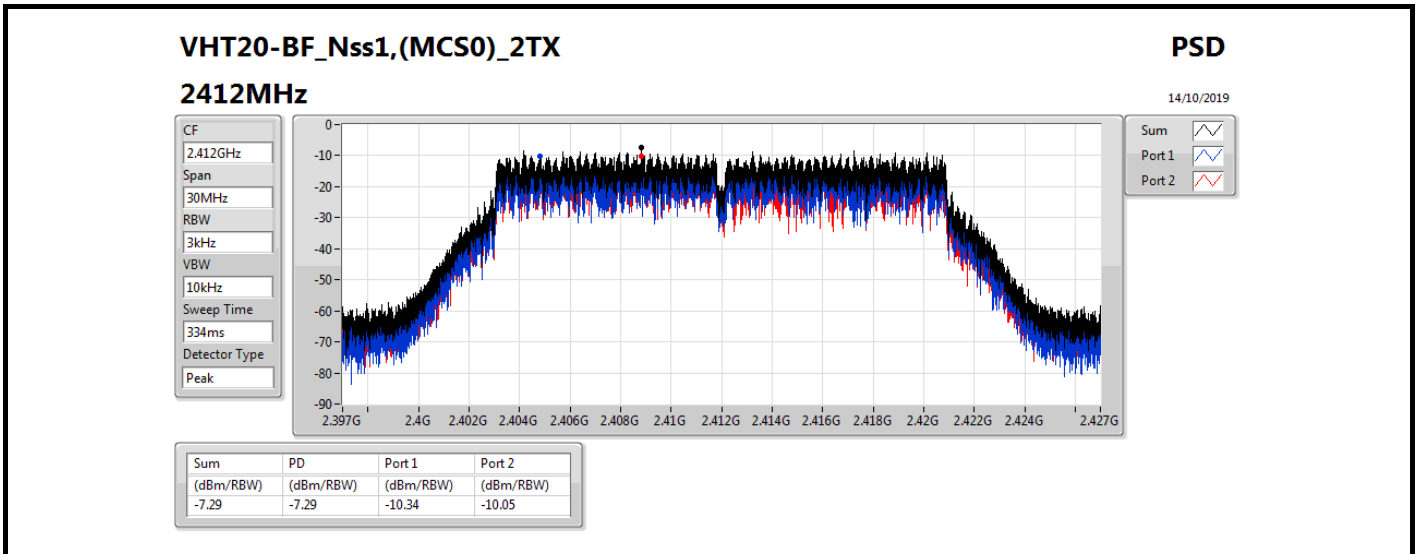

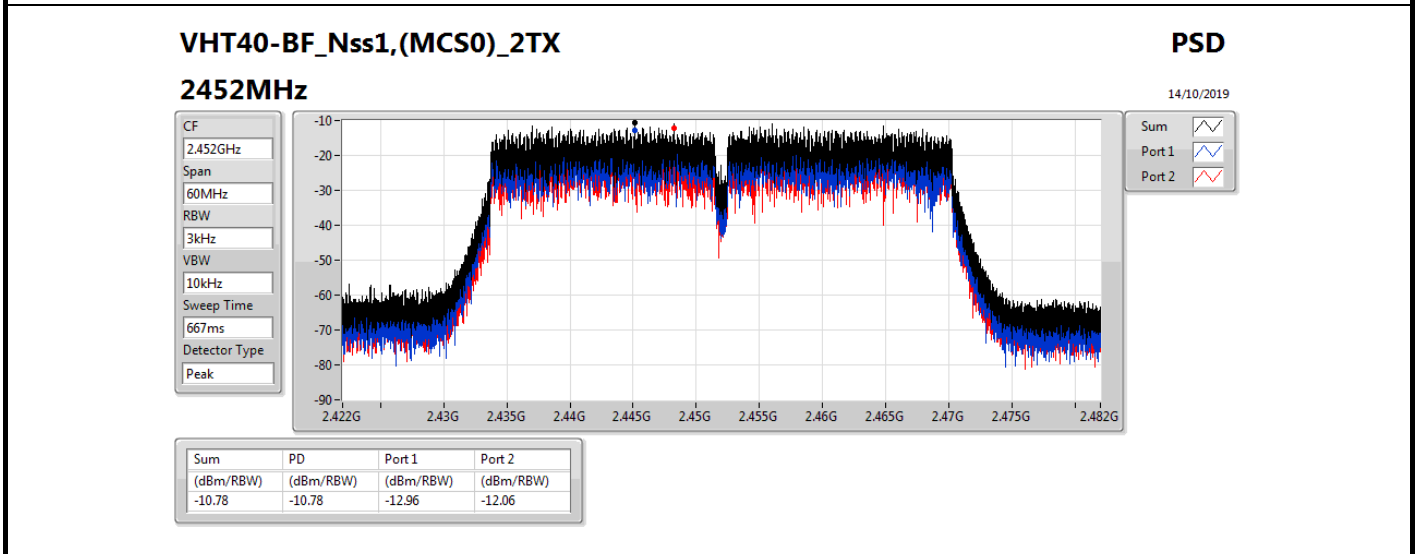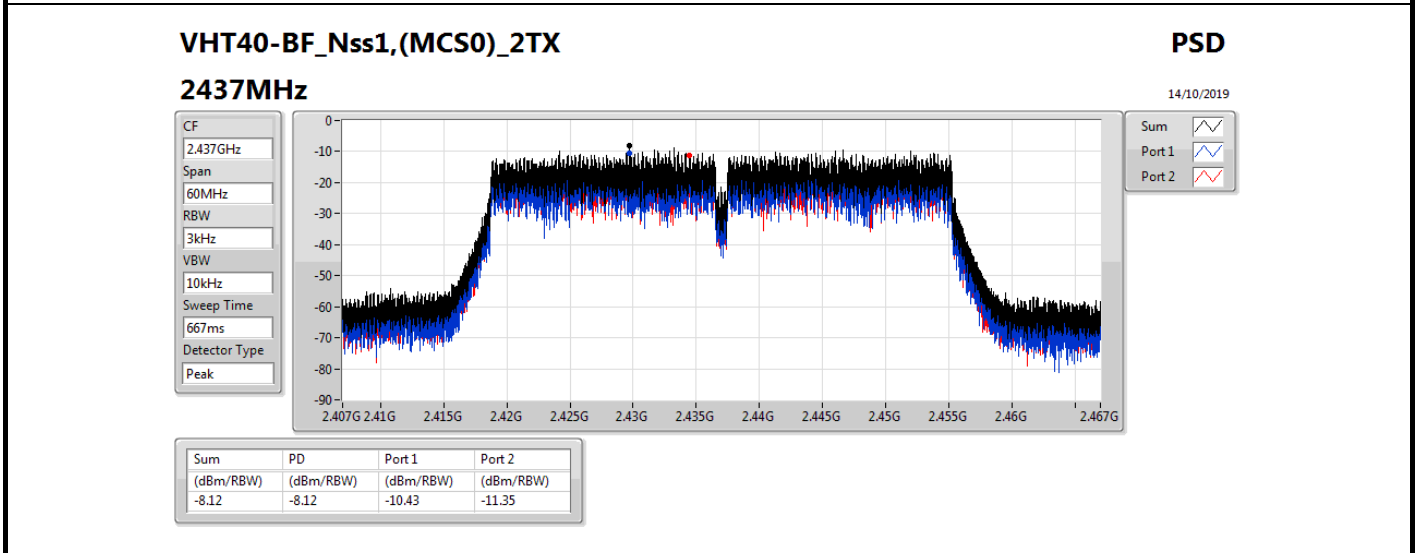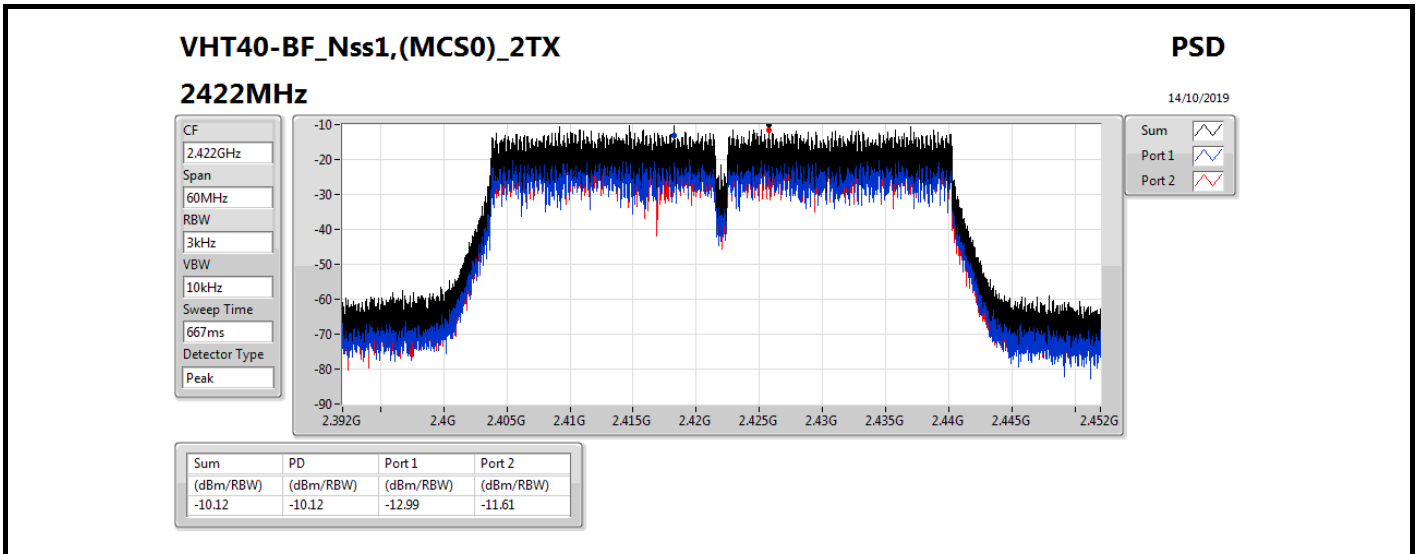

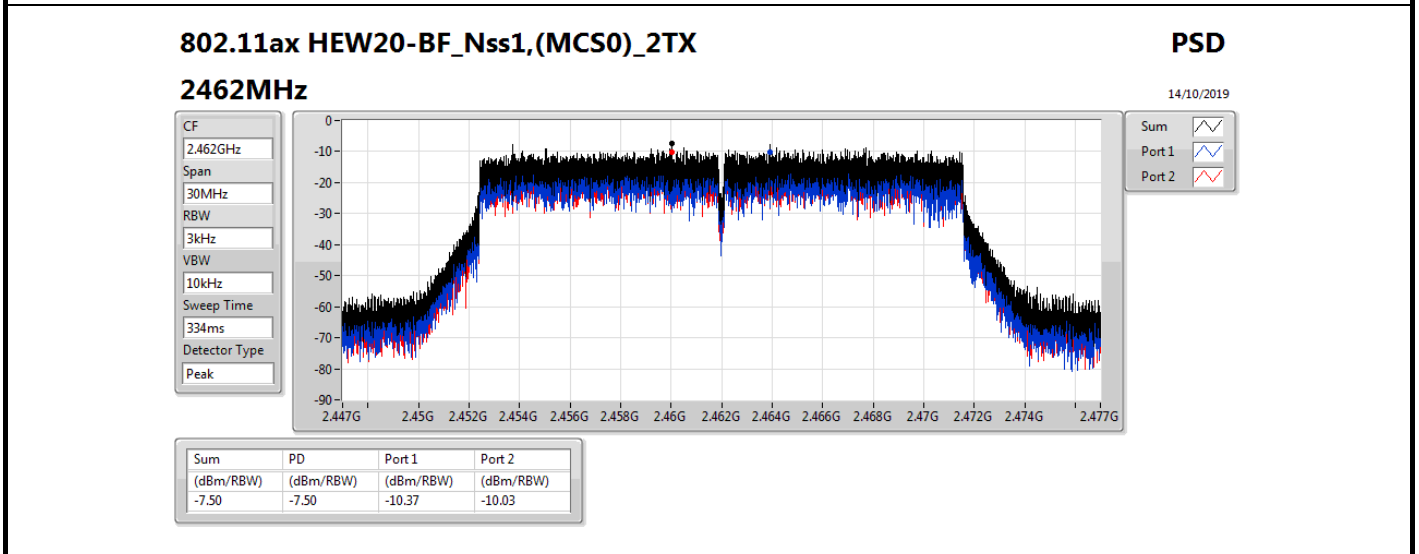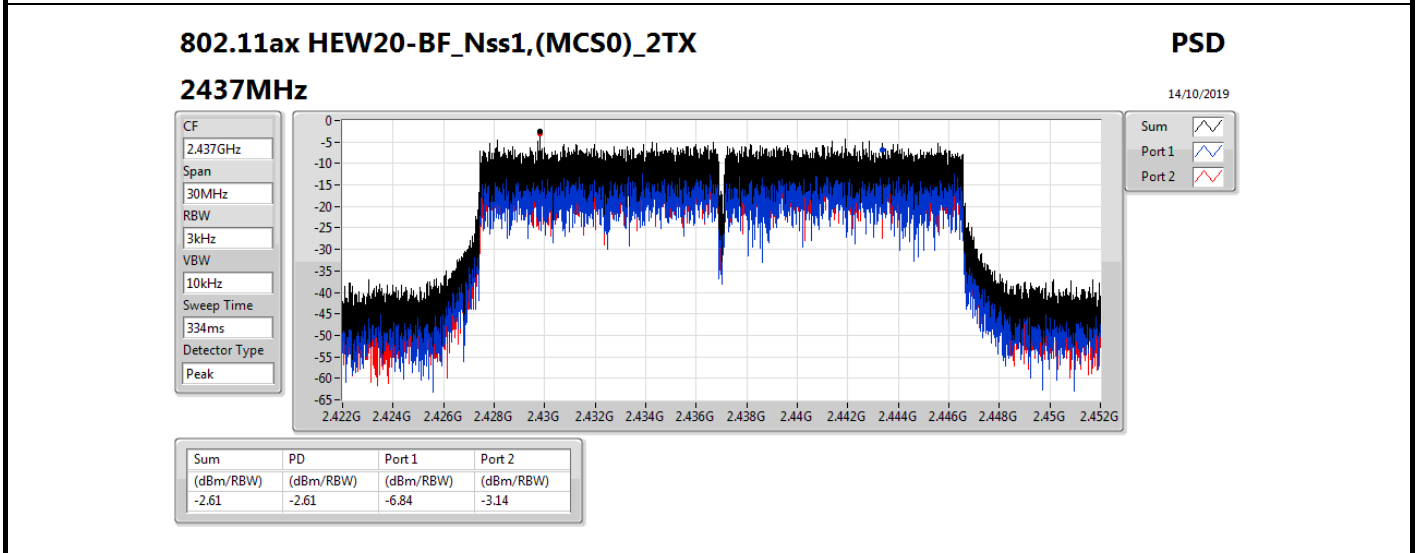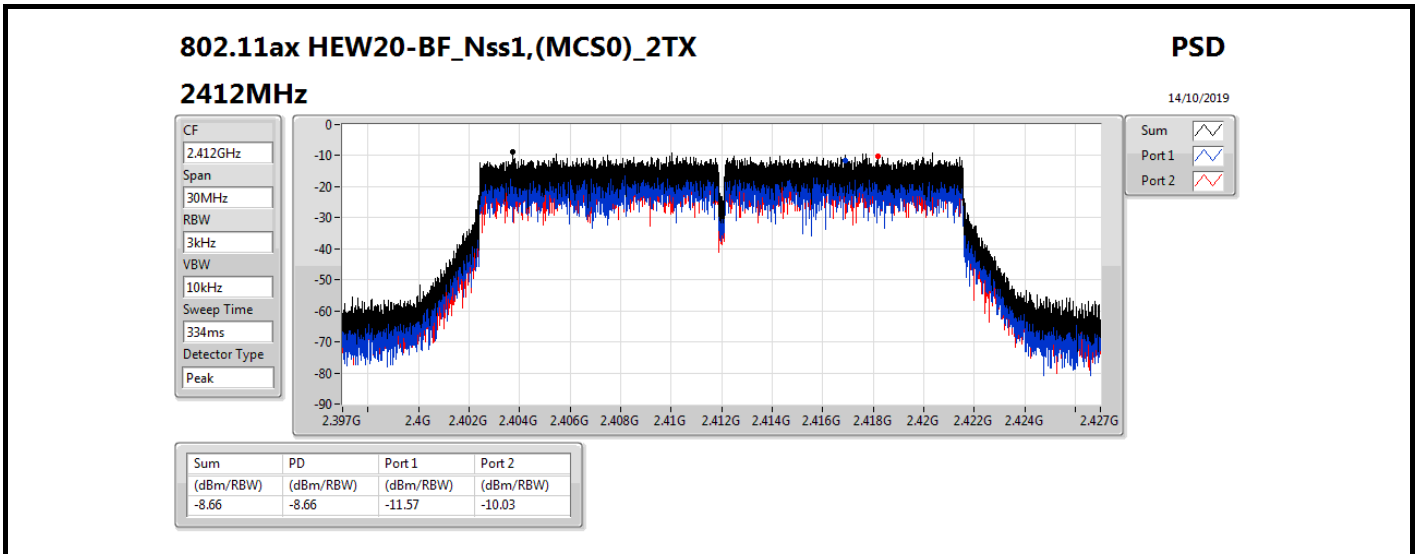

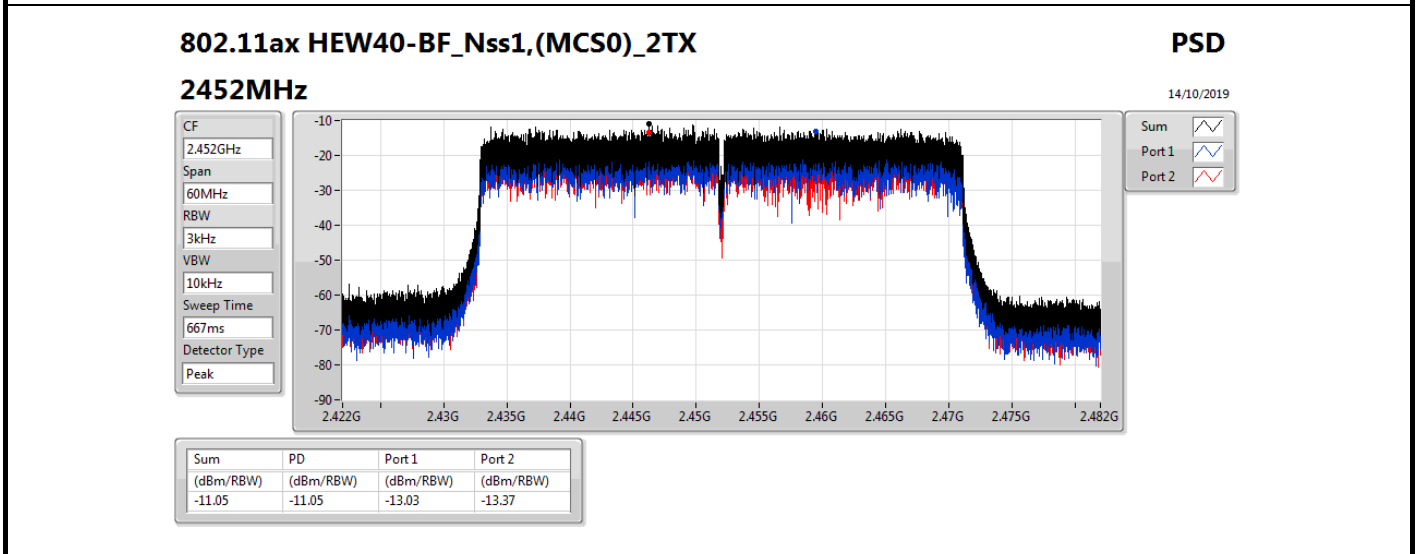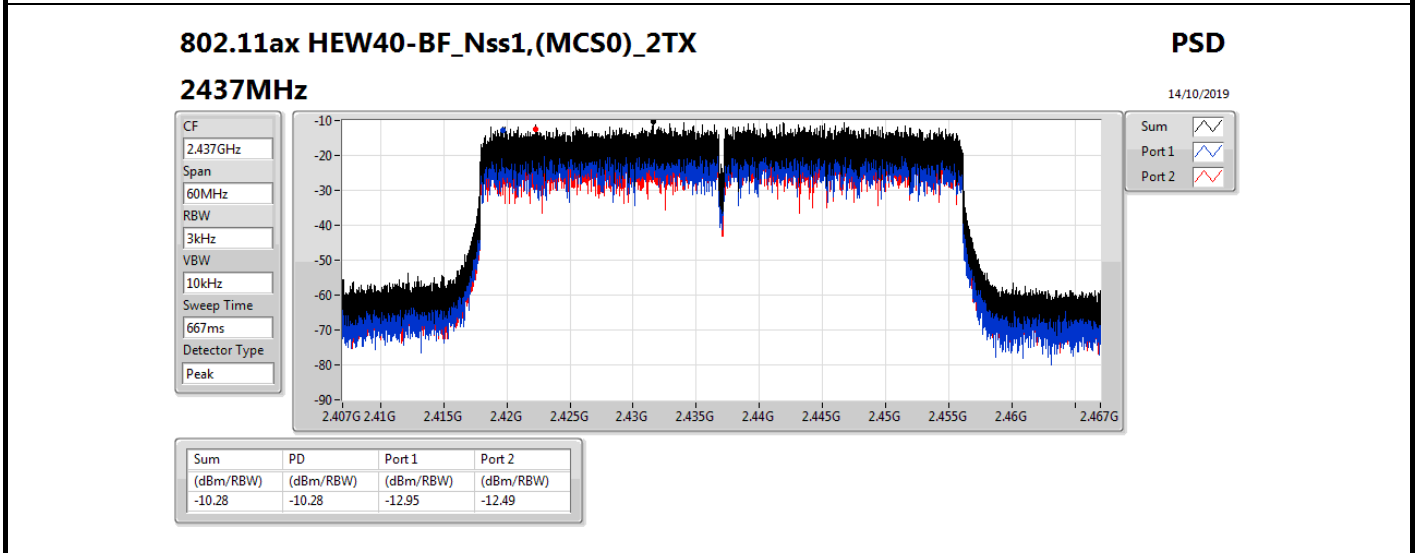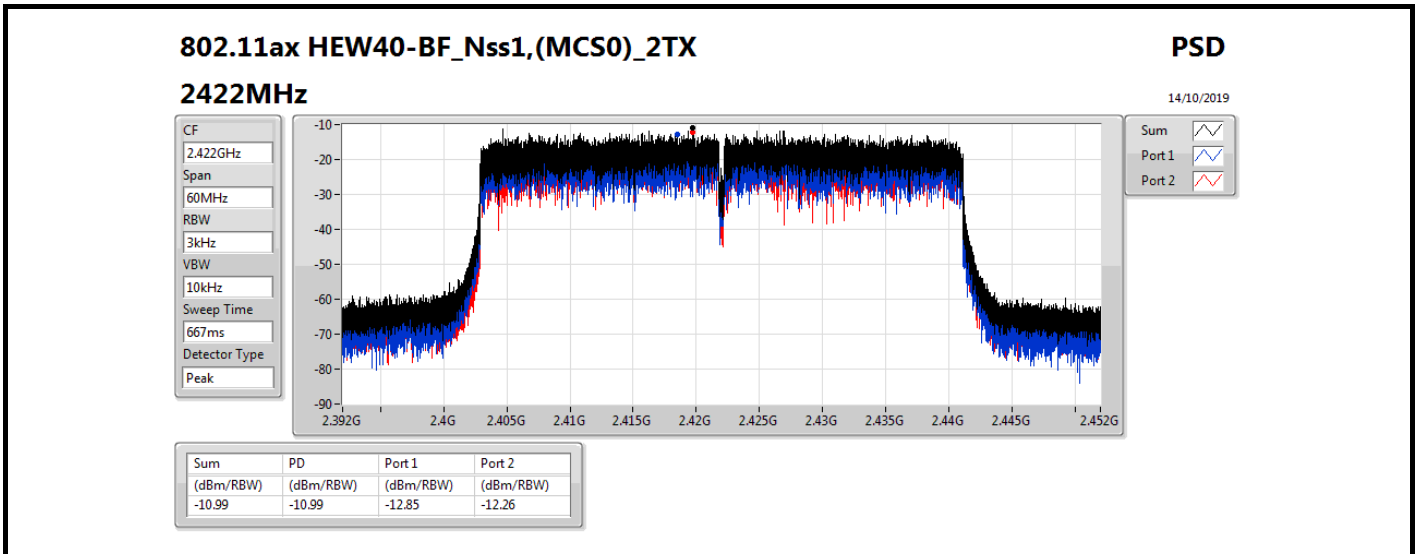



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	3.30
802.11g_Nss1,(6Mbps)_1TX	-2.44
VHT20_Nss1,(MCS0)_1TX	-3.93
VHT40_Nss1,(MCS0)_1TX	-10.29
802.11ax HEW20_Nss1,(MCS0)_1TX	-2.88
802.11ax HEW40_Nss1,(MCS0)_1TX	-11.69

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	10.50	1.57	1.57	3.50
2437MHz	Pass	10.50	3.30	3.30	3.50
2462MHz	Pass	10.50	2.04	2.04	3.50
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	10.50	-8.19	-8.19	3.50
2437MHz	Pass	10.50	-2.44	-2.44	3.50
2462MHz	Pass	10.50	-7.47	-7.47	3.50
VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	10.50	-10.31	-10.31	3.50
2437MHz	Pass	10.50	-3.93	-3.93	3.50
2462MHz	Pass	10.50	-11.03	-11.03	3.50
VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	10.50	-11.23	-11.23	3.50
2437MHz	Pass	10.50	-10.29	-10.29	3.50
2452MHz	Pass	10.50	-10.42	-10.42	3.50
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	10.50	-9.65	-9.65	3.50
2437MHz	Pass	10.50	-2.88	-2.88	3.50
2462MHz	Pass	10.50	-9.42	-9.42	3.50
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	10.50	-13.61	-13.61	3.50
2437MHz	Pass	10.50	-11.80	-11.80	3.50
2452MHz	Pass	10.50	-11.69	-11.69	3.50




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

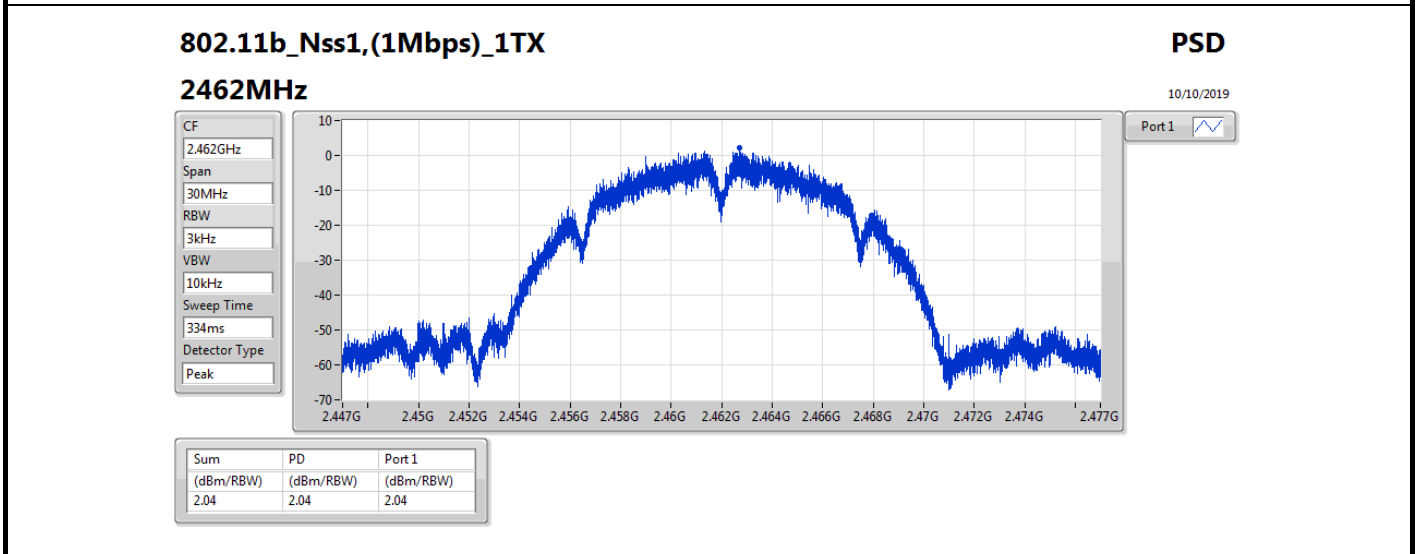
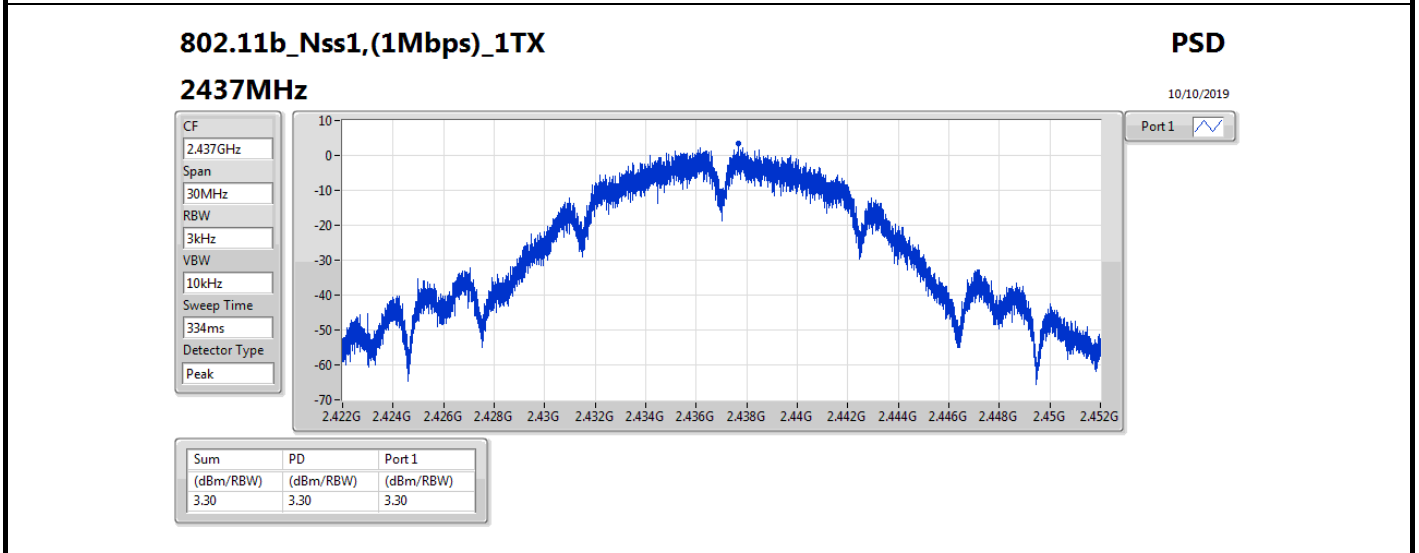
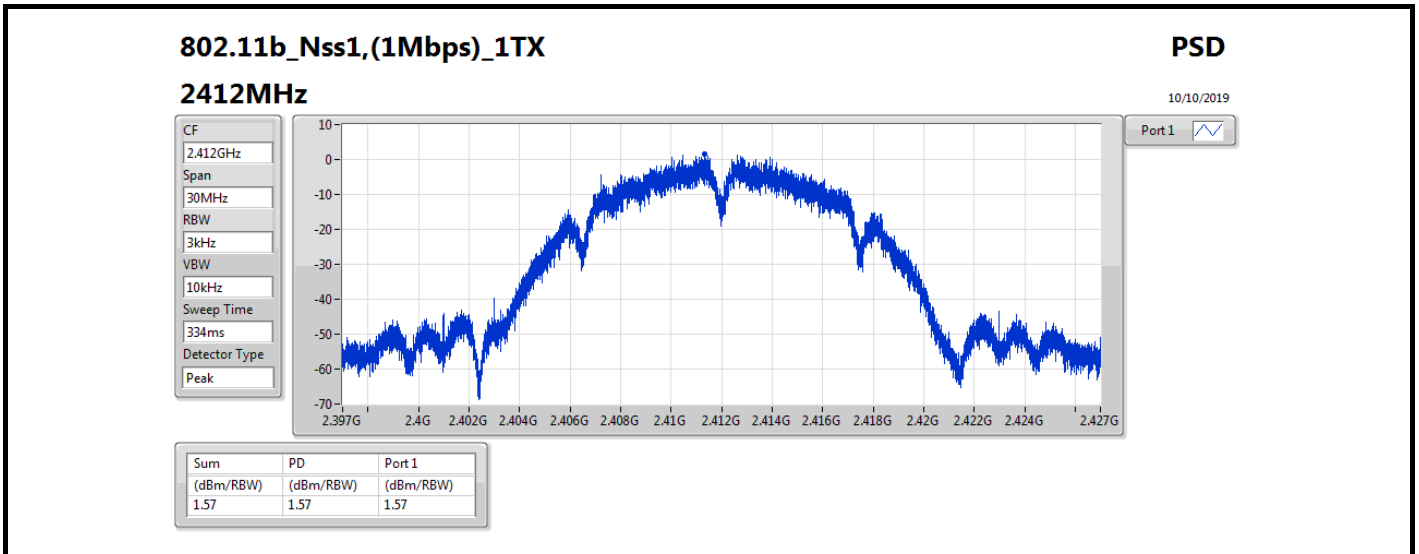


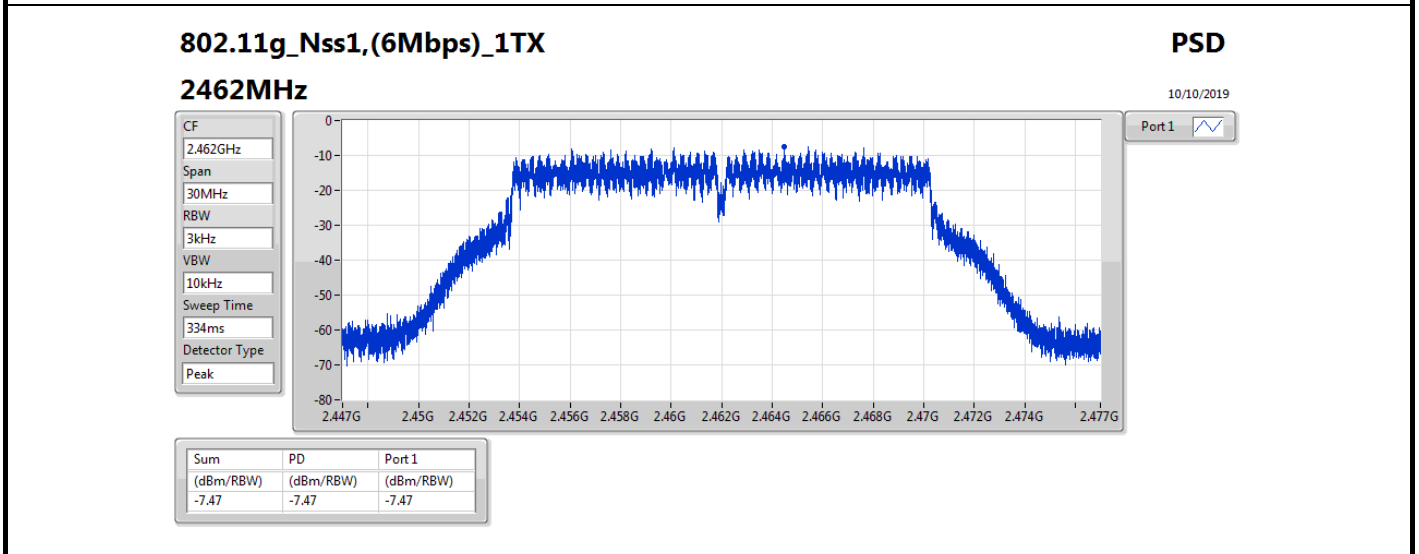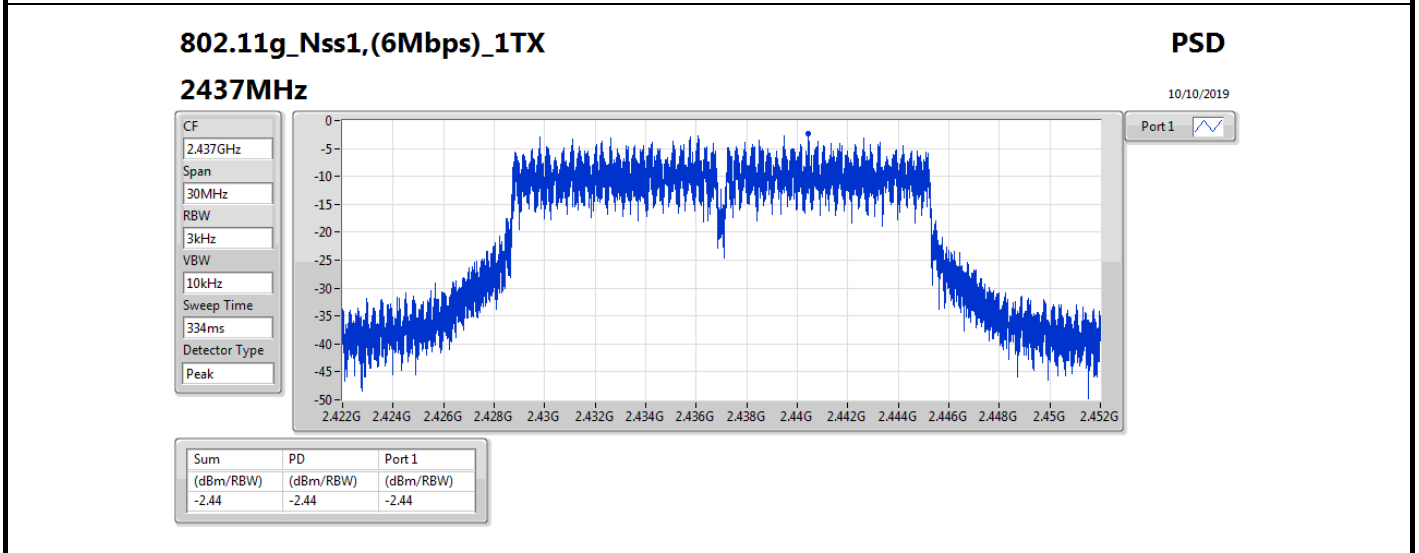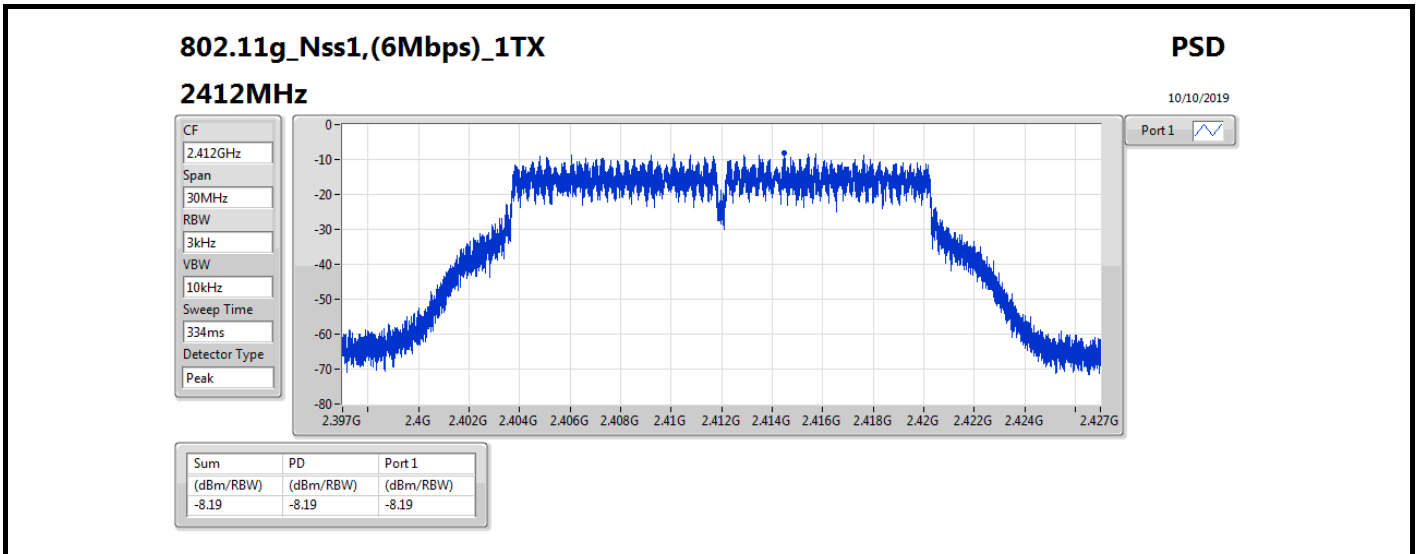

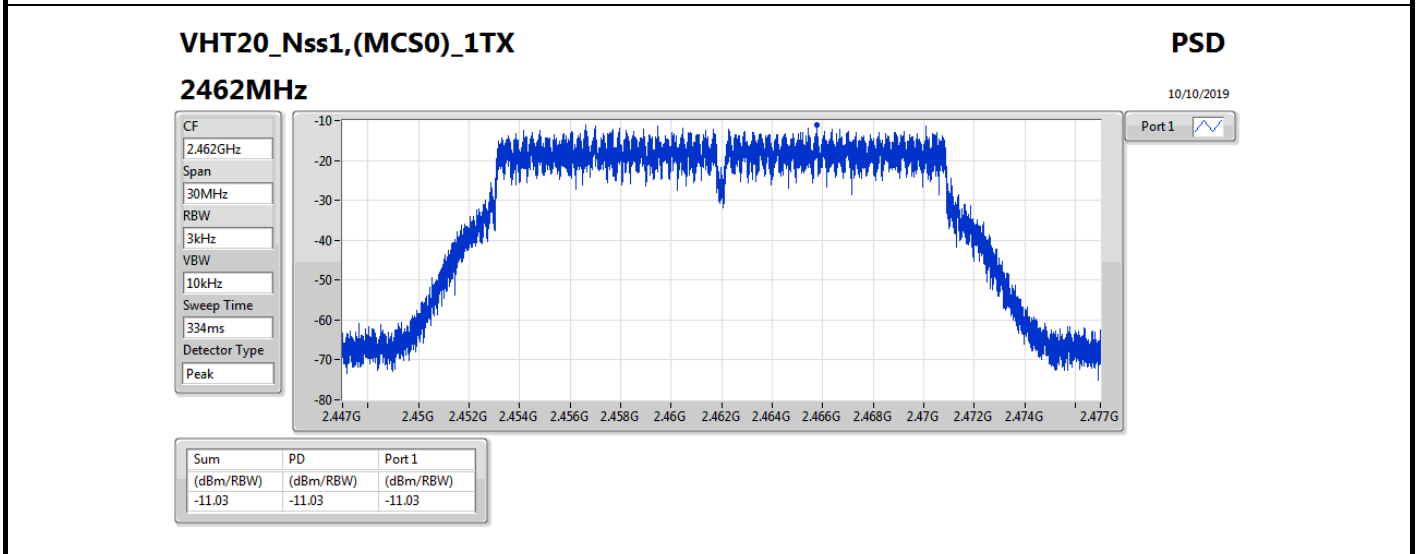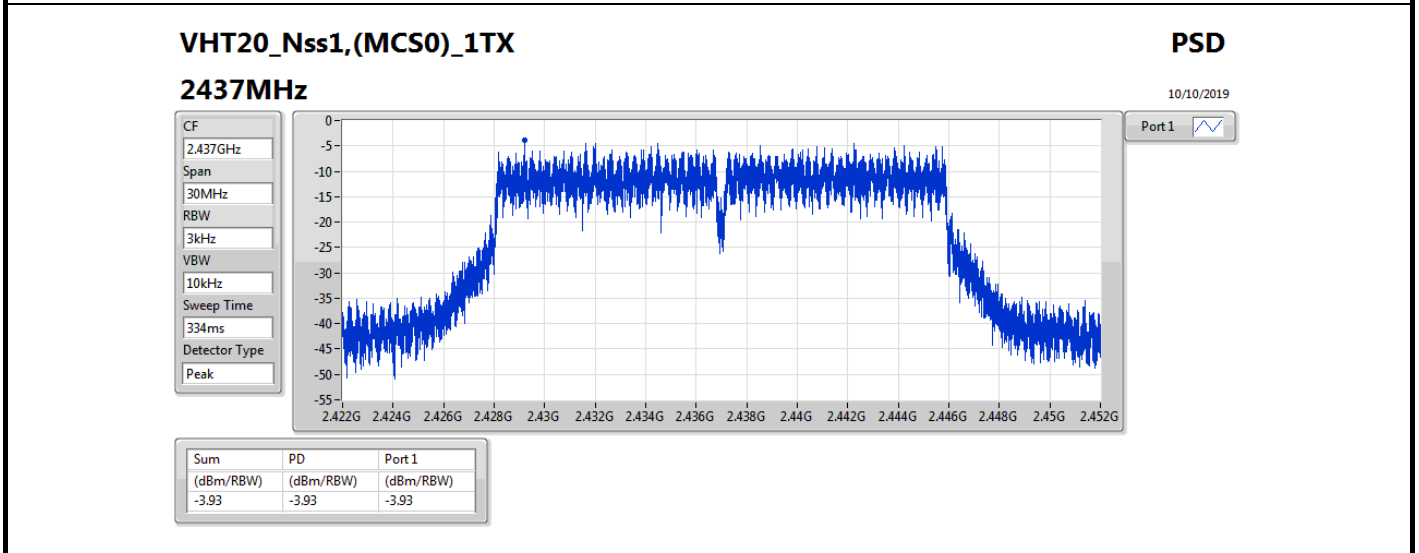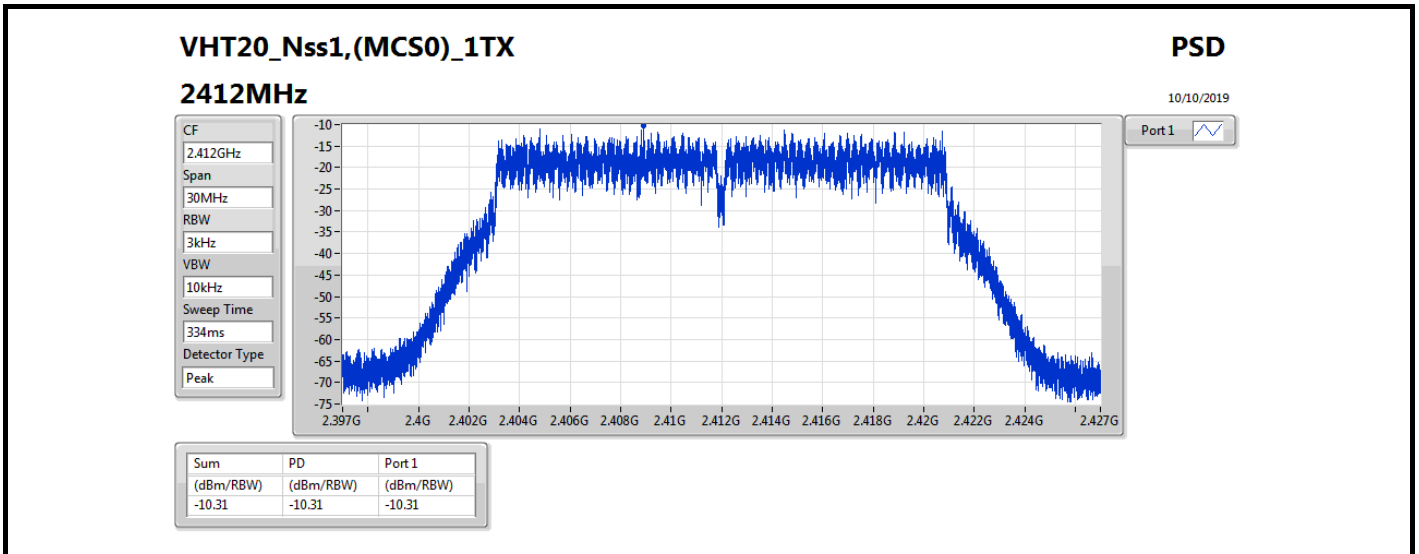

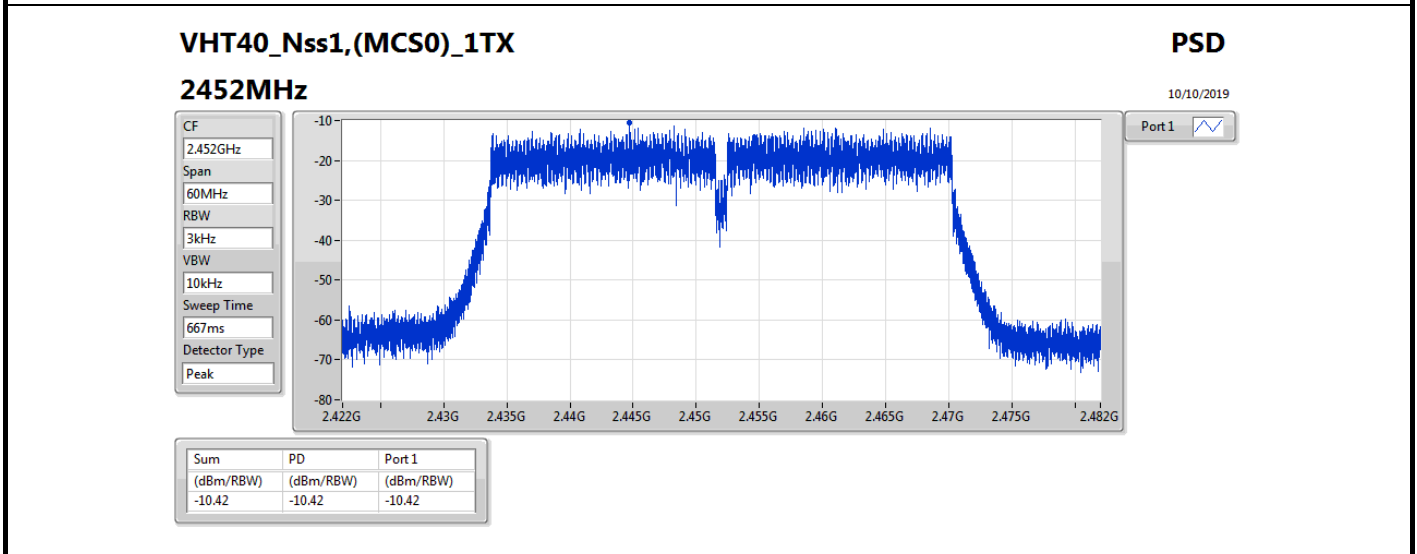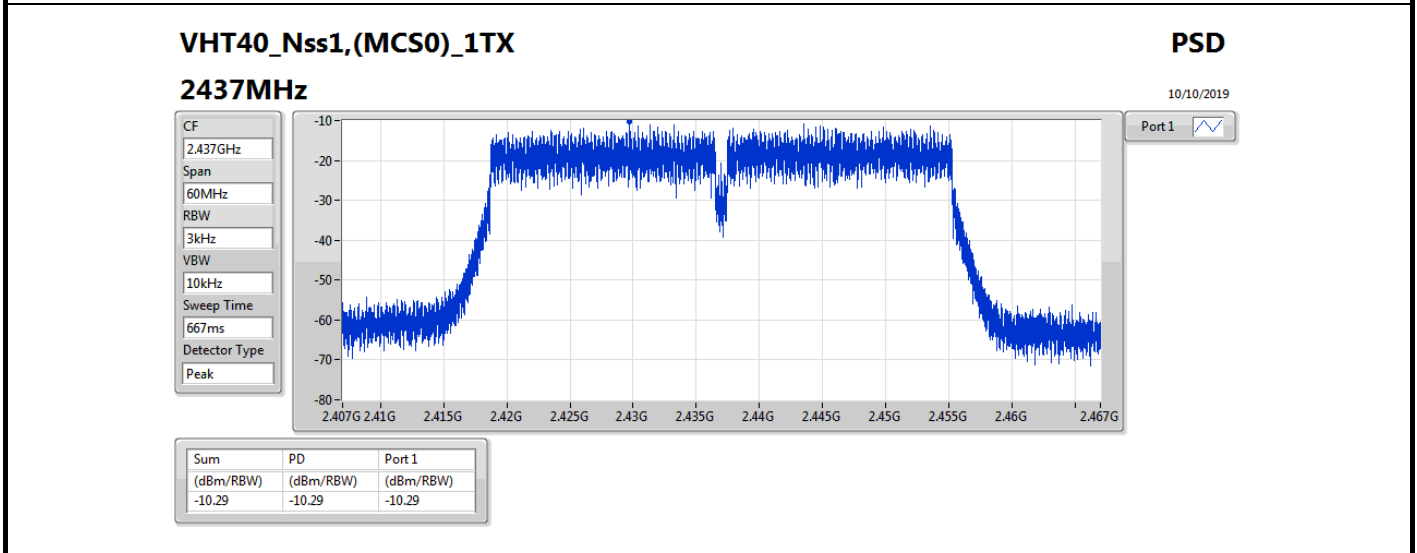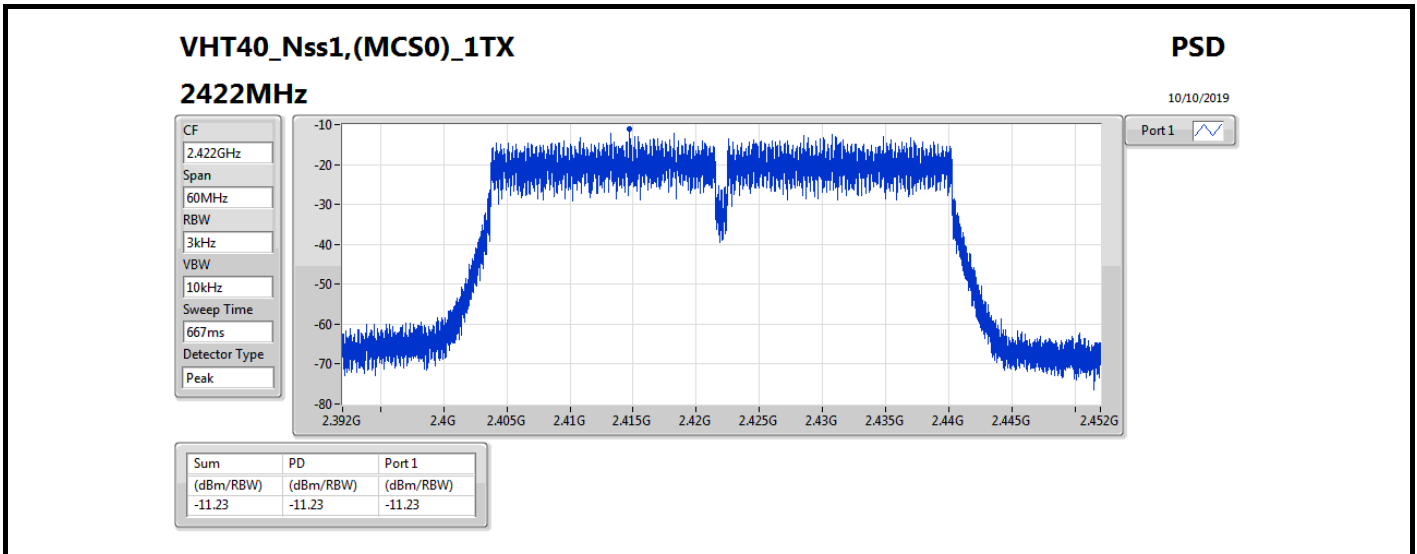

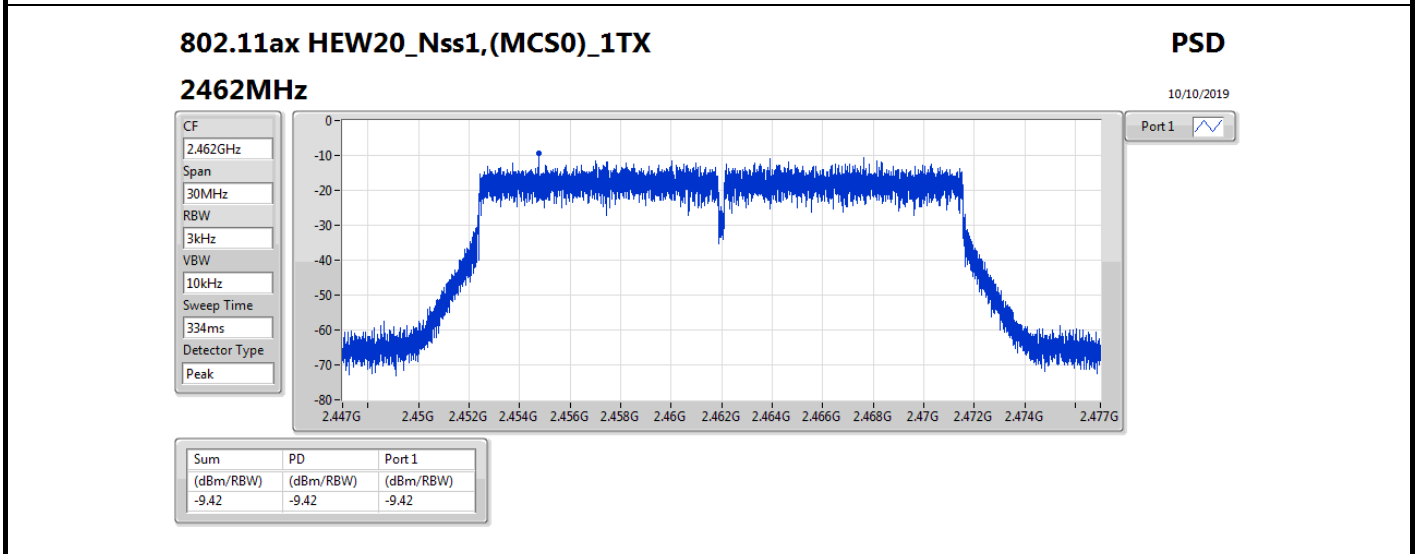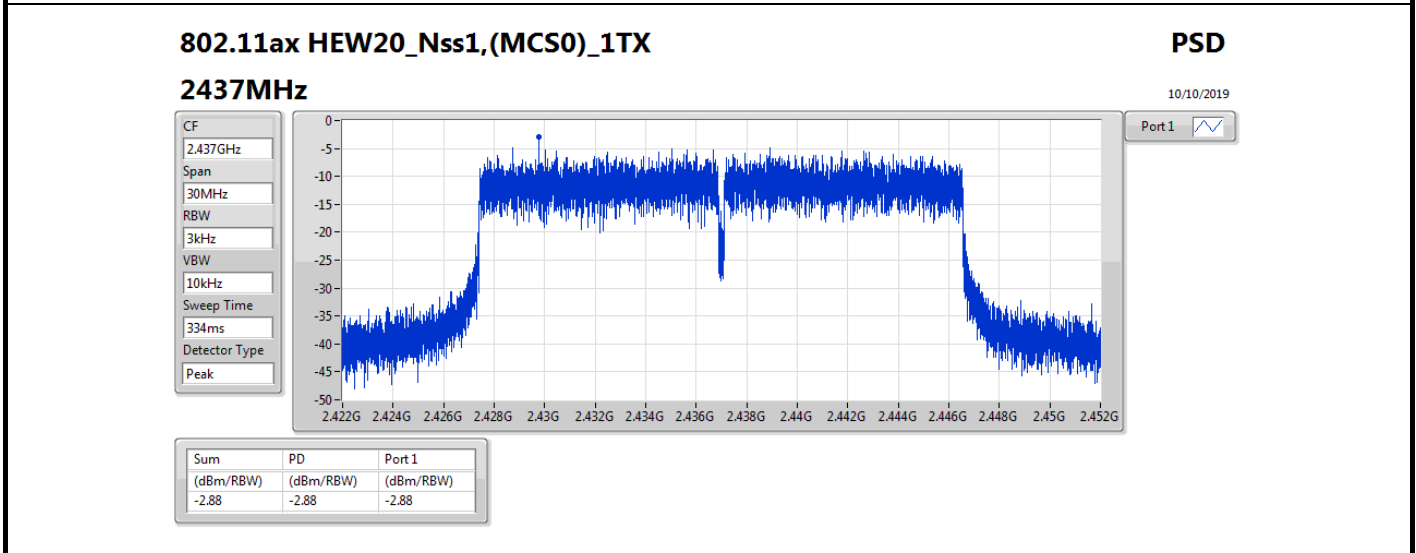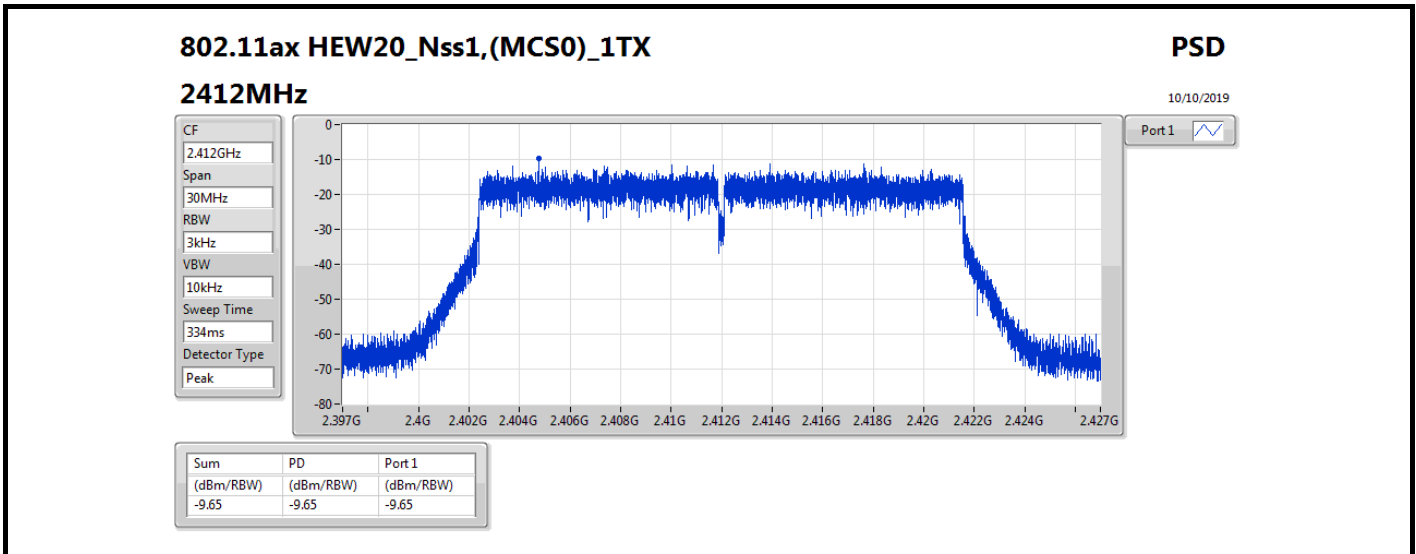

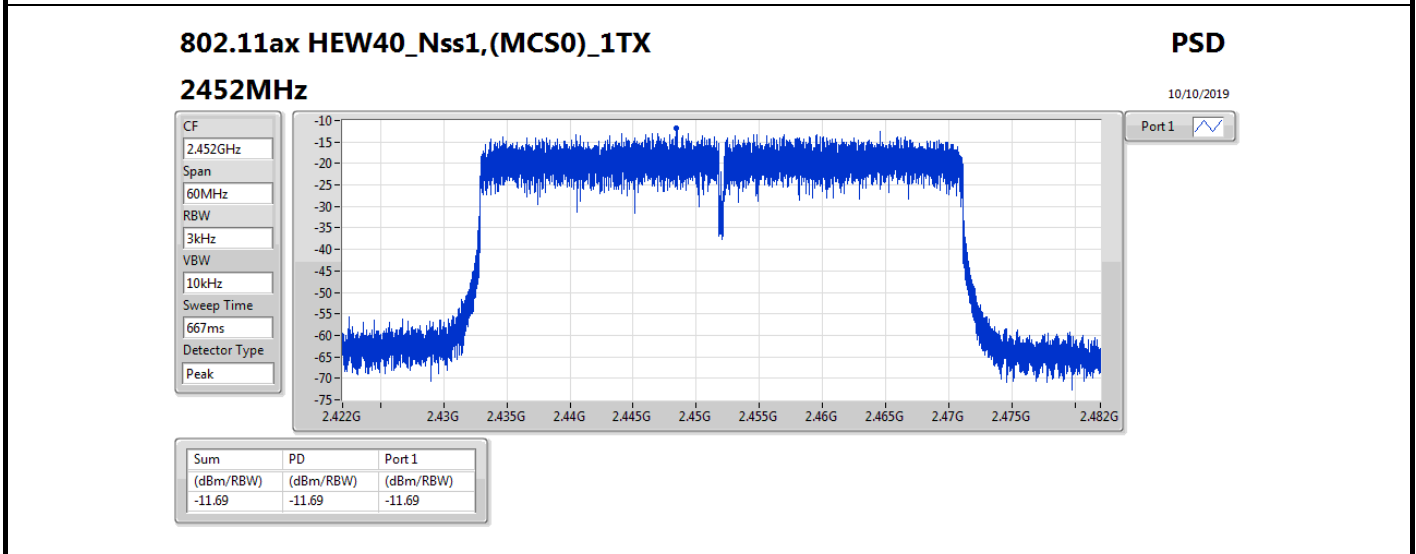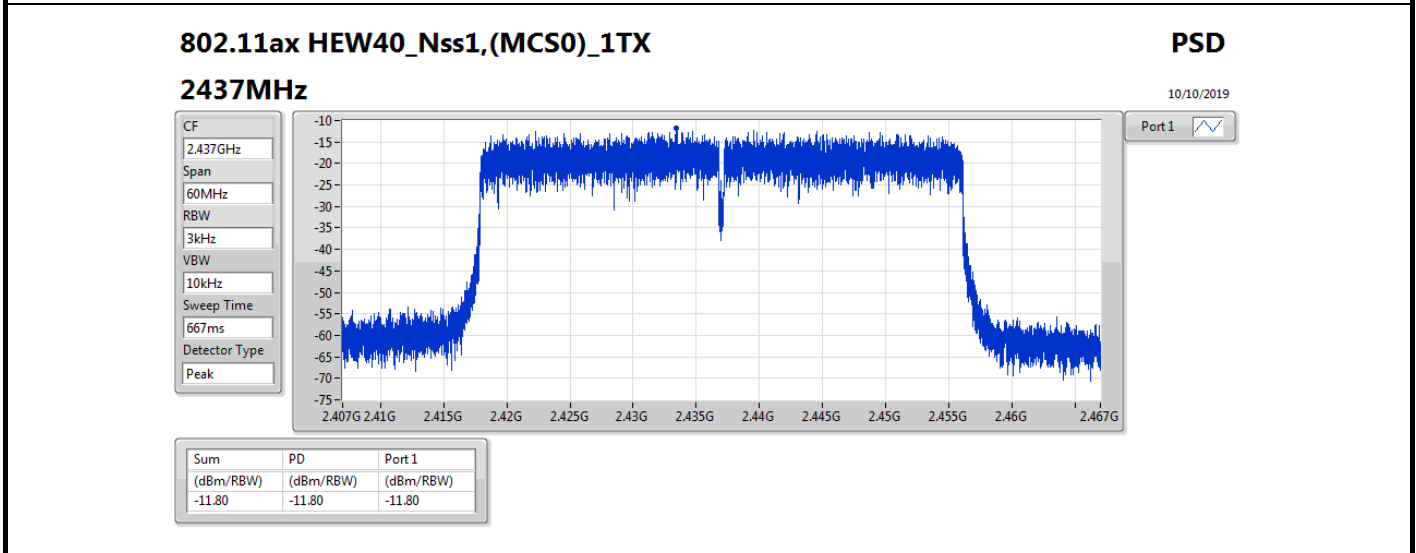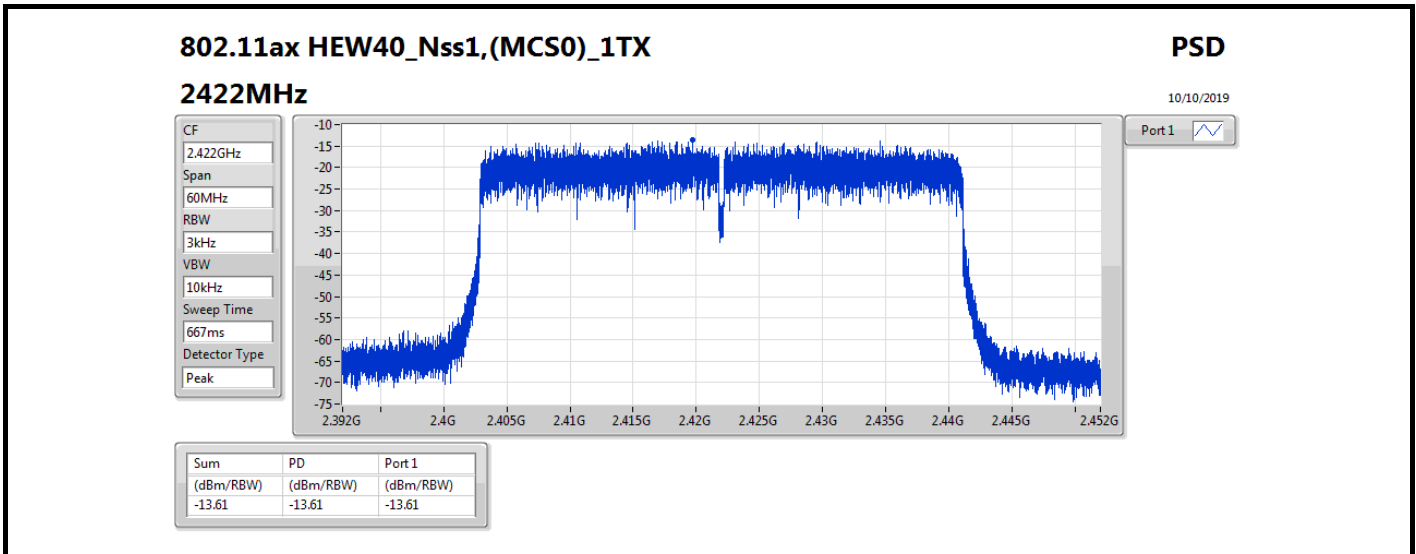



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-5.79
802.11g_Nss1,(6Mbps)_2TX	-0.67
VHT20_Nss2,(MCS0)_2TX	-3.80
VHT40_Nss2,(MCS0)_2TX	-10.45
802.11ax HEW20_Nss2,(MCS0)_2TX	-3.87
802.11ax HEW40_Nss2,(MCS0)_2TX	-11.38

RBW=3 kHz.







Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	13.51	-8.57	-8.70	-6.07	0.49
2437MHz	Pass	13.51	-8.76	-8.88	-5.89	0.49
2462MHz	Pass	13.51	-8.36	-8.48	-5.79	0.49
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	13.51	-9.96	-11.19	-7.78	0.49
2437MHz	Pass	13.51	-4.18	-3.23	-0.67	0.49
2462MHz	Pass	13.51	-9.29	-8.10	-6.45	0.49
VHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.50	-9.47	-9.92	-8.37	3.50
2437MHz	Pass	10.50	-4.87	-5.88	-3.80	3.50
2462MHz	Pass	10.50	-9.29	-9.17	-7.65	3.50
VHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	10.50	-12.95	-13.04	-11.44	3.50
2437MHz	Pass	10.50	-11.88	-11.76	-10.45	3.50
2452MHz	Pass	10.50	-12.30	-11.54	-10.74	3.50
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.50	-10.73	-10.62	-8.12	3.50
2437MHz	Pass	10.50	-6.15	-5.66	-3.87	3.50
2462MHz	Pass	10.50	-10.40	-9.38	-7.47	3.50
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	10.50	-14.22	-13.90	-12.24	3.50
2437MHz	Pass	10.50	-13.29	-12.86	-11.38	3.50
2452MHz	Pass	10.50	-13.09	-13.54	-11.72	3.50




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;



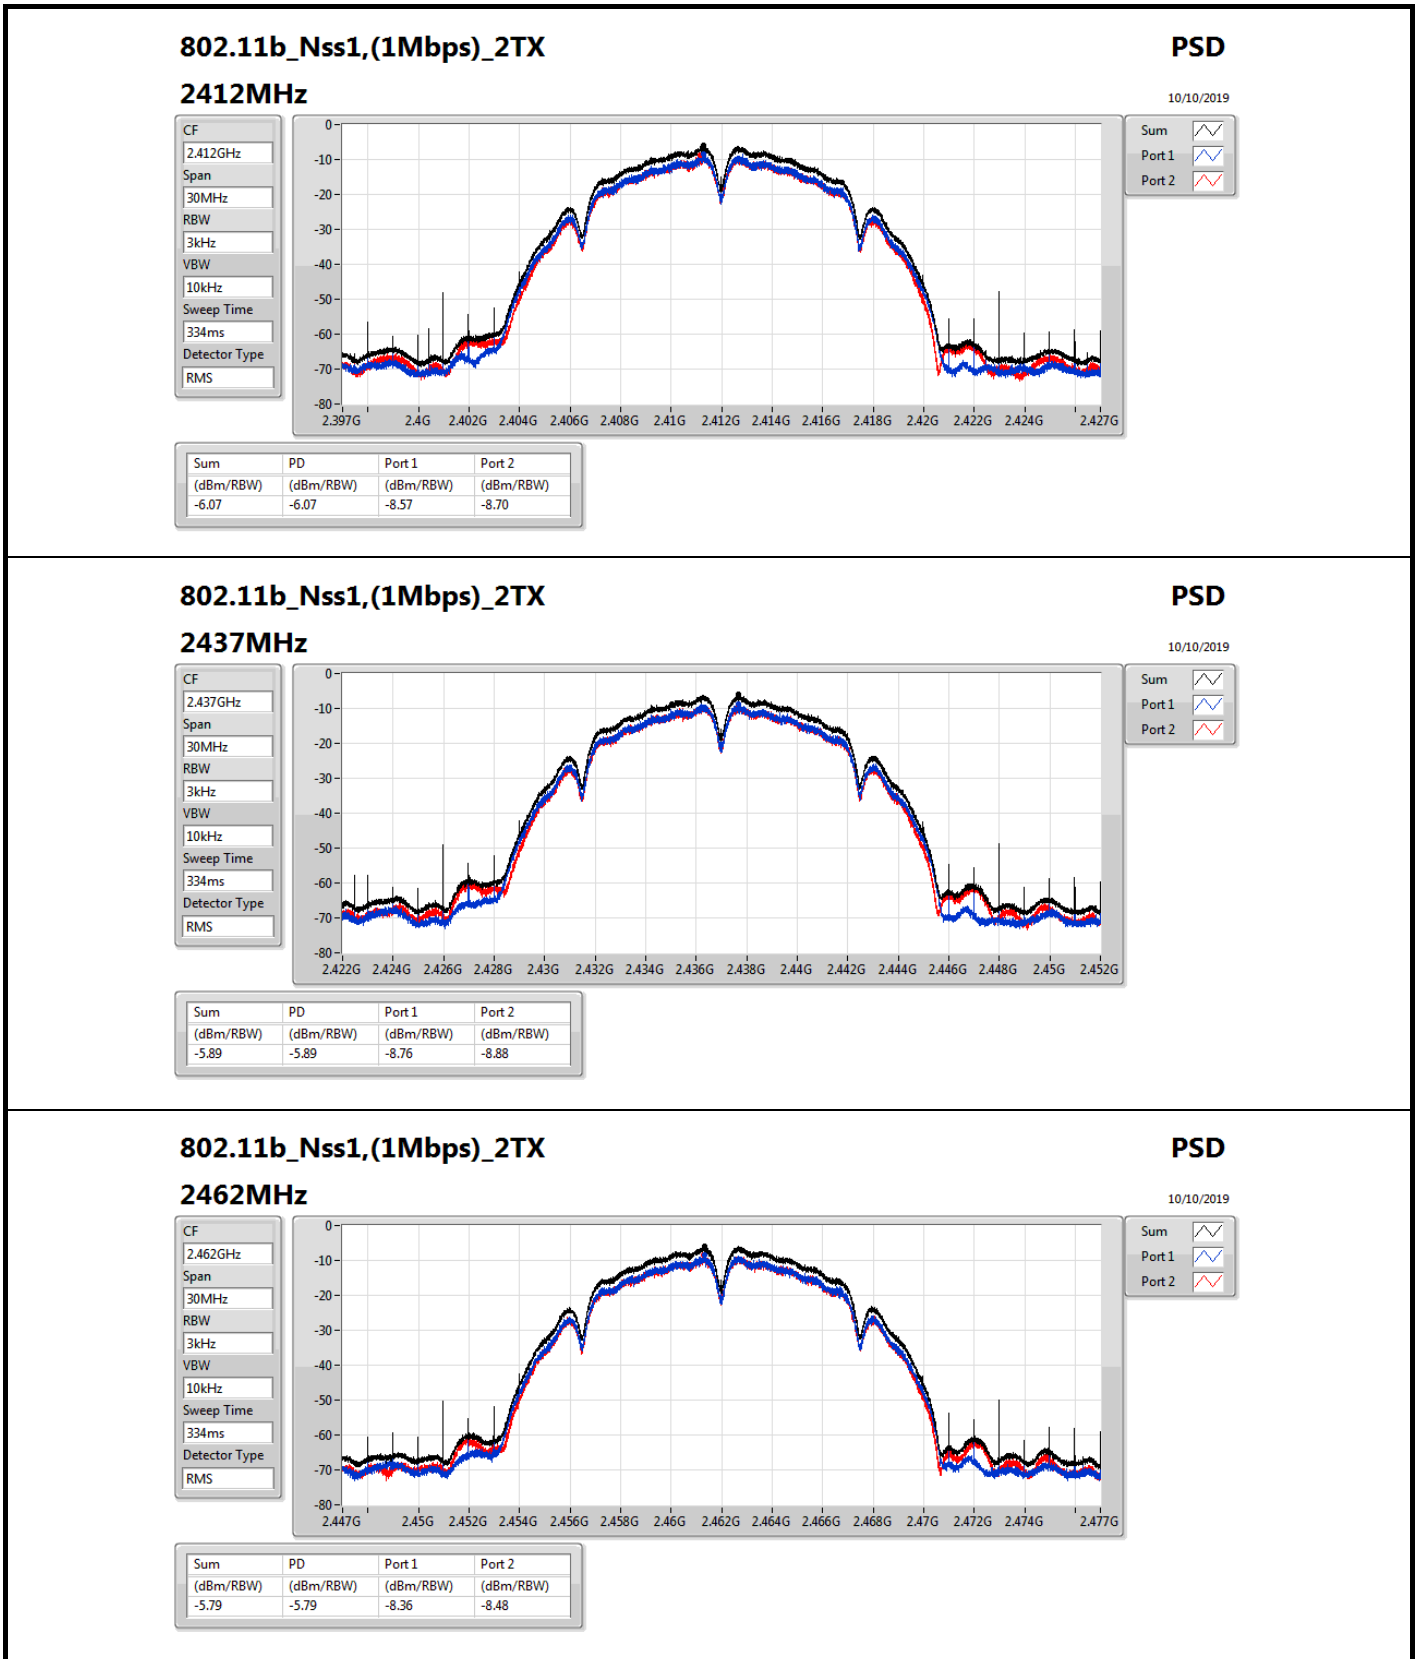


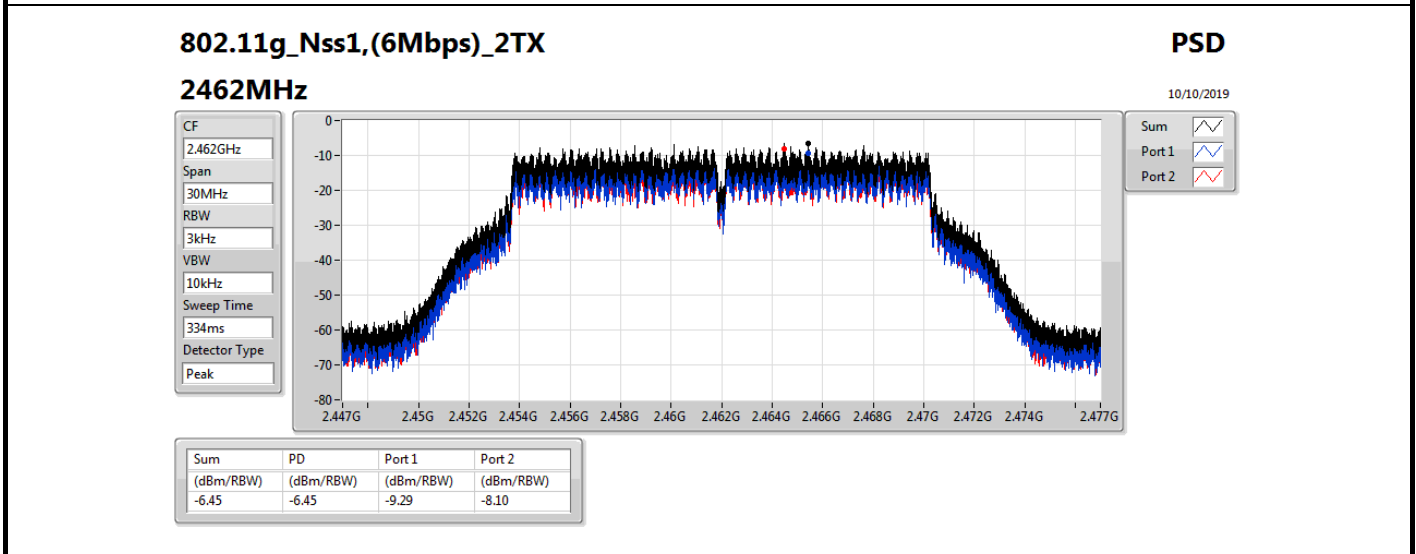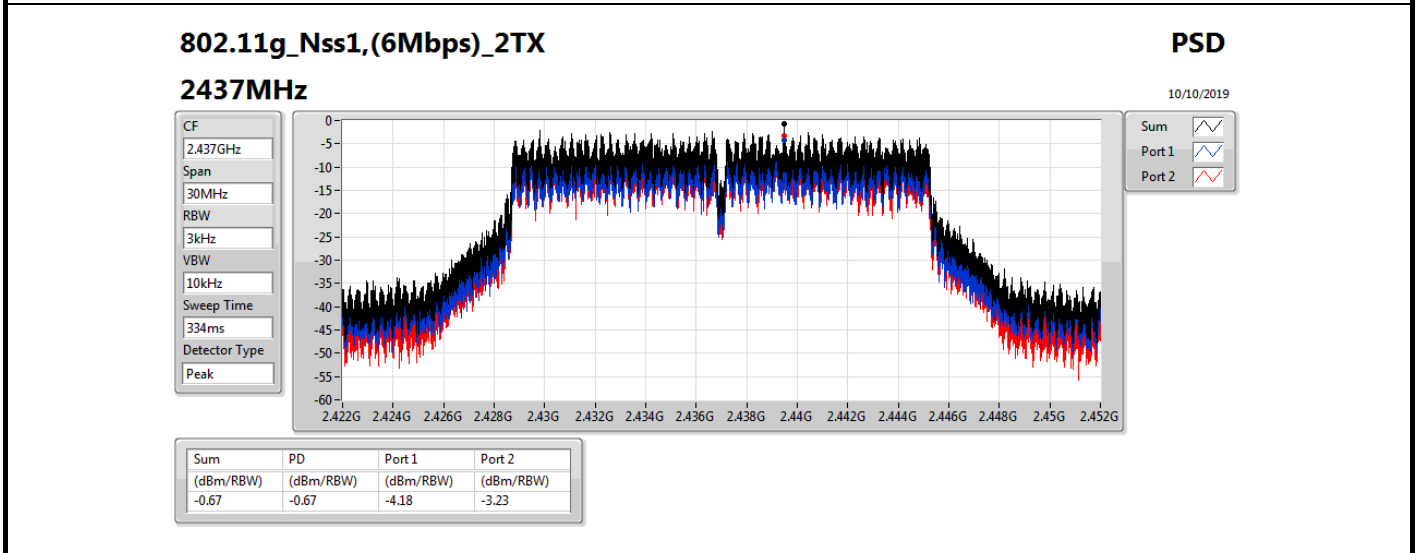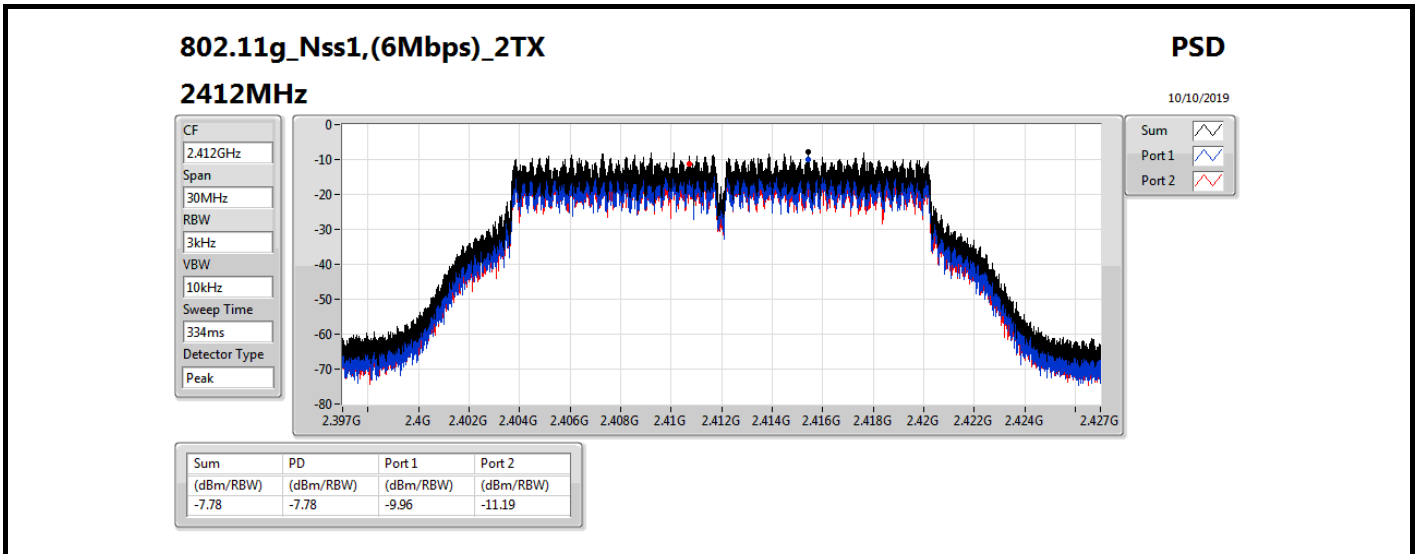

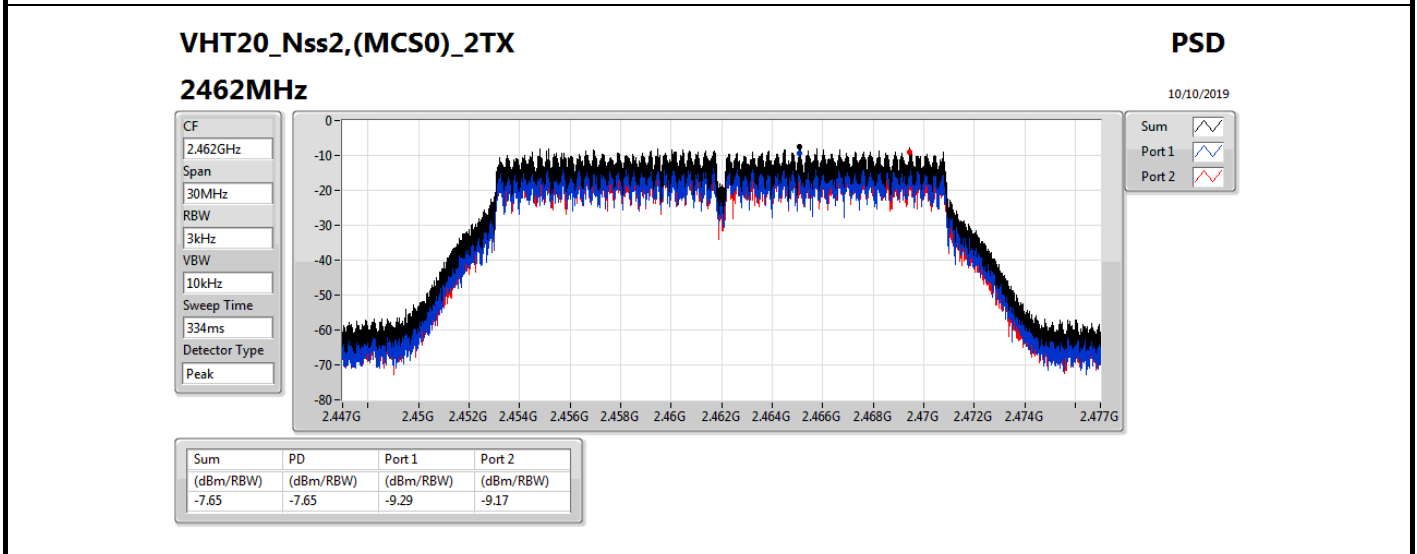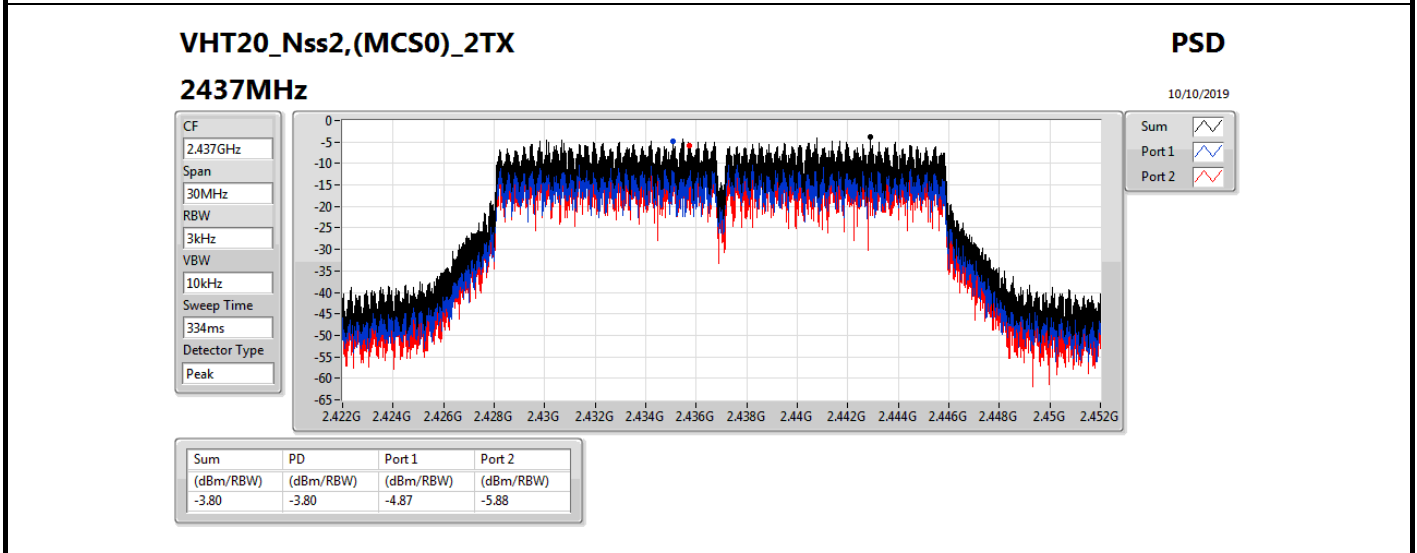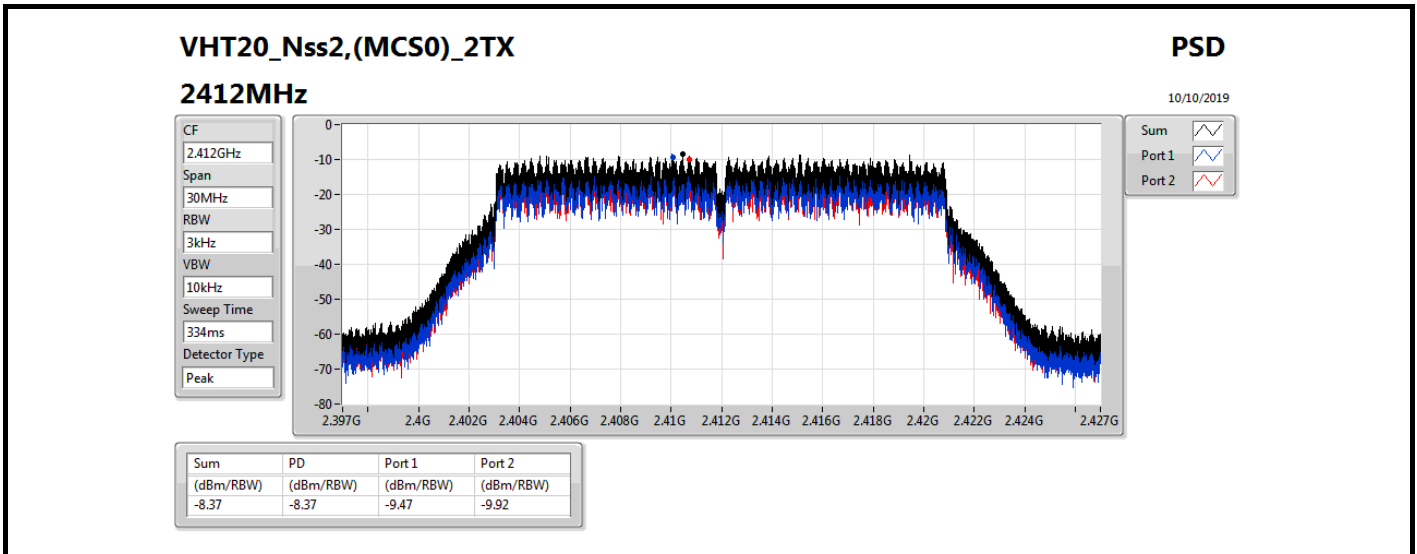

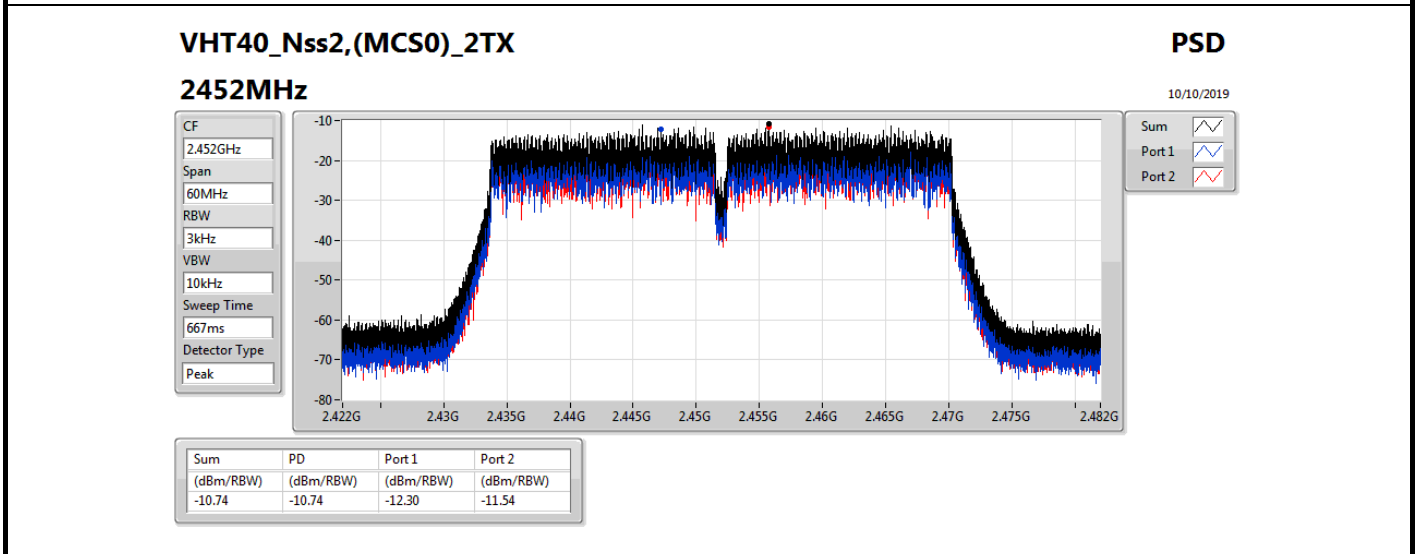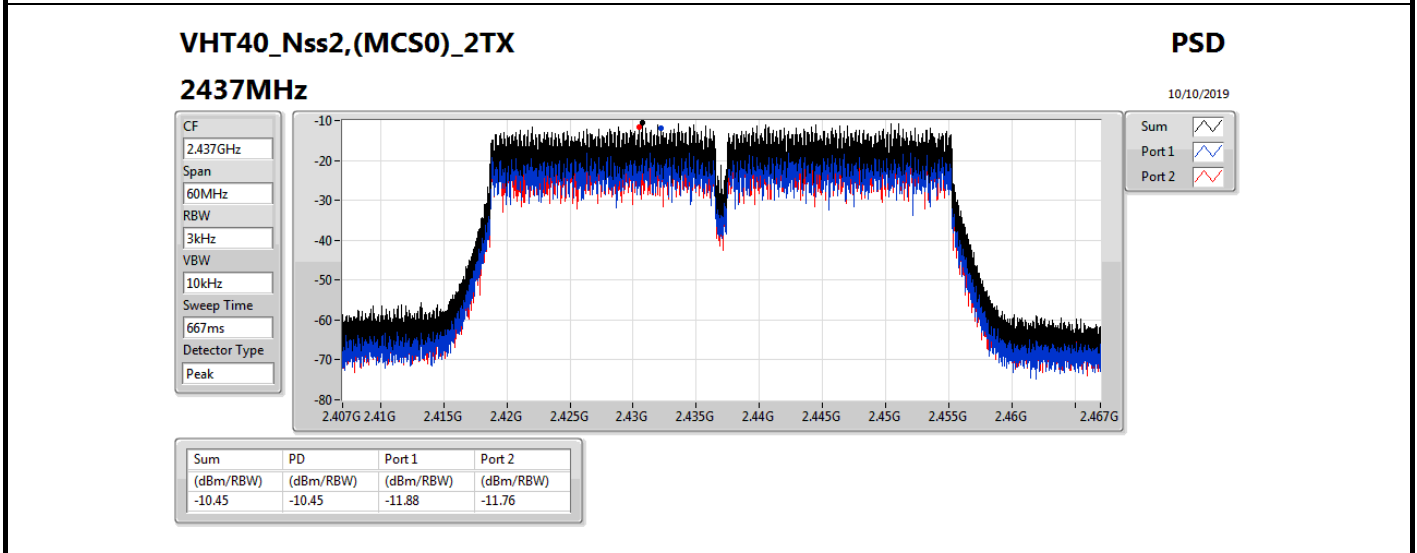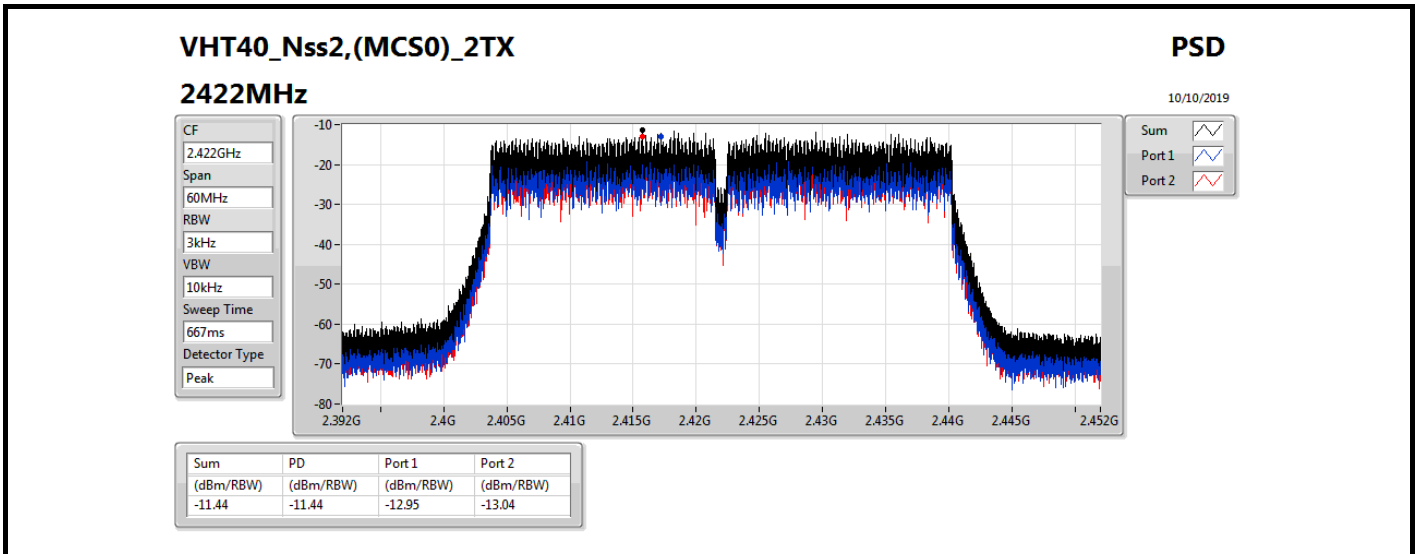

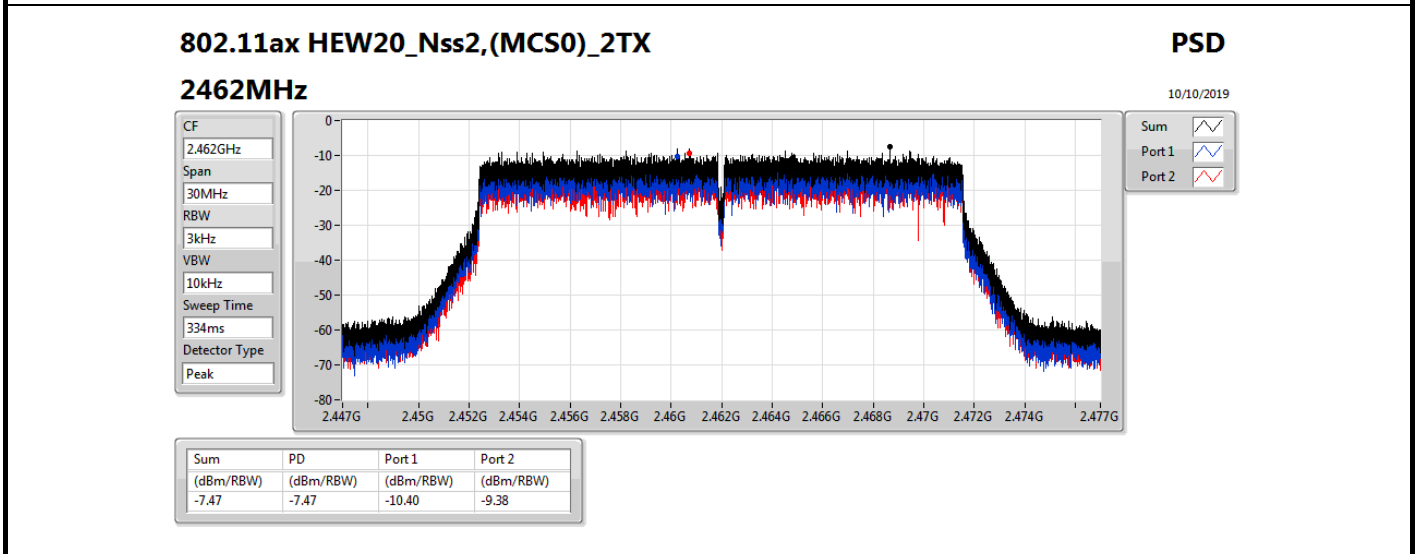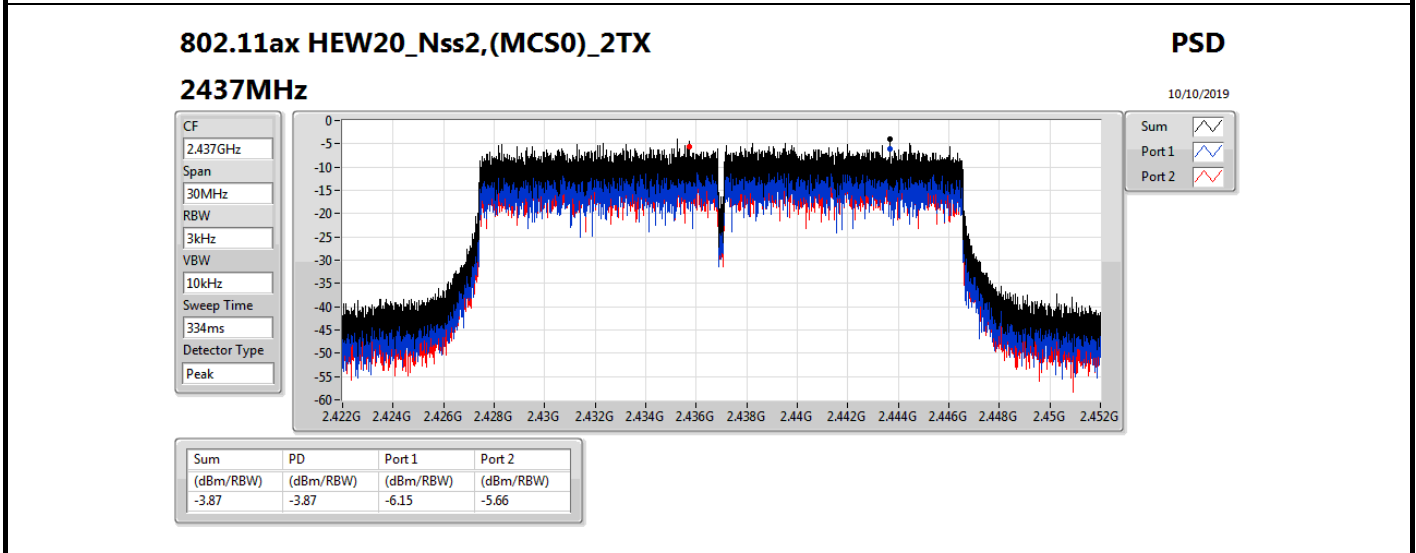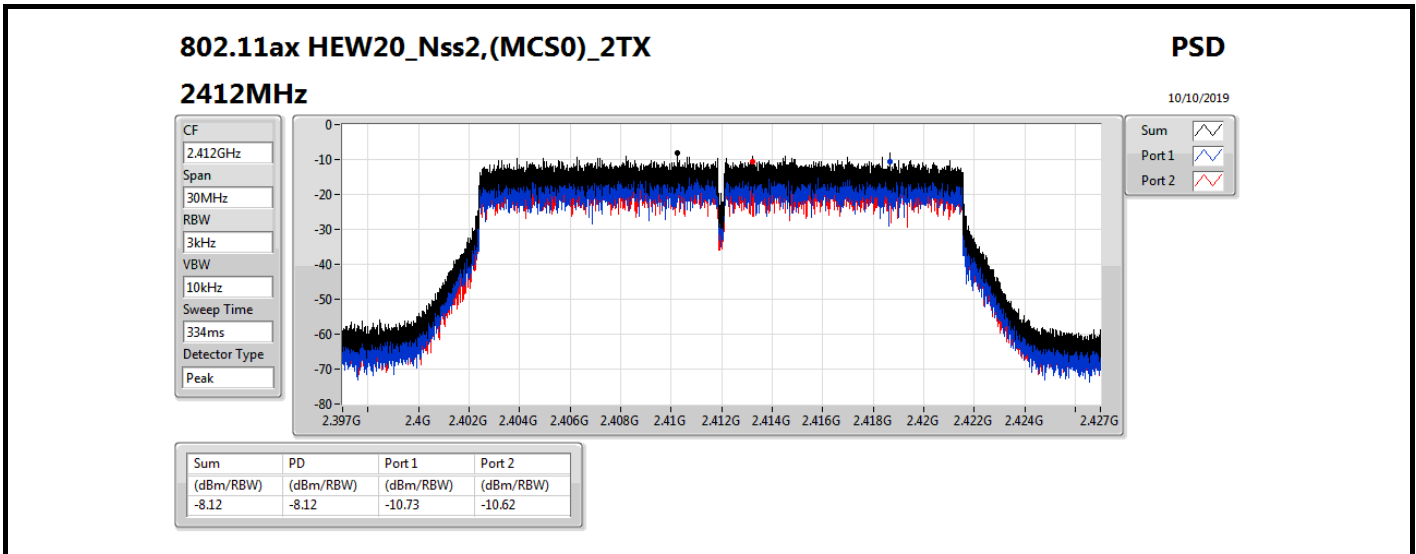

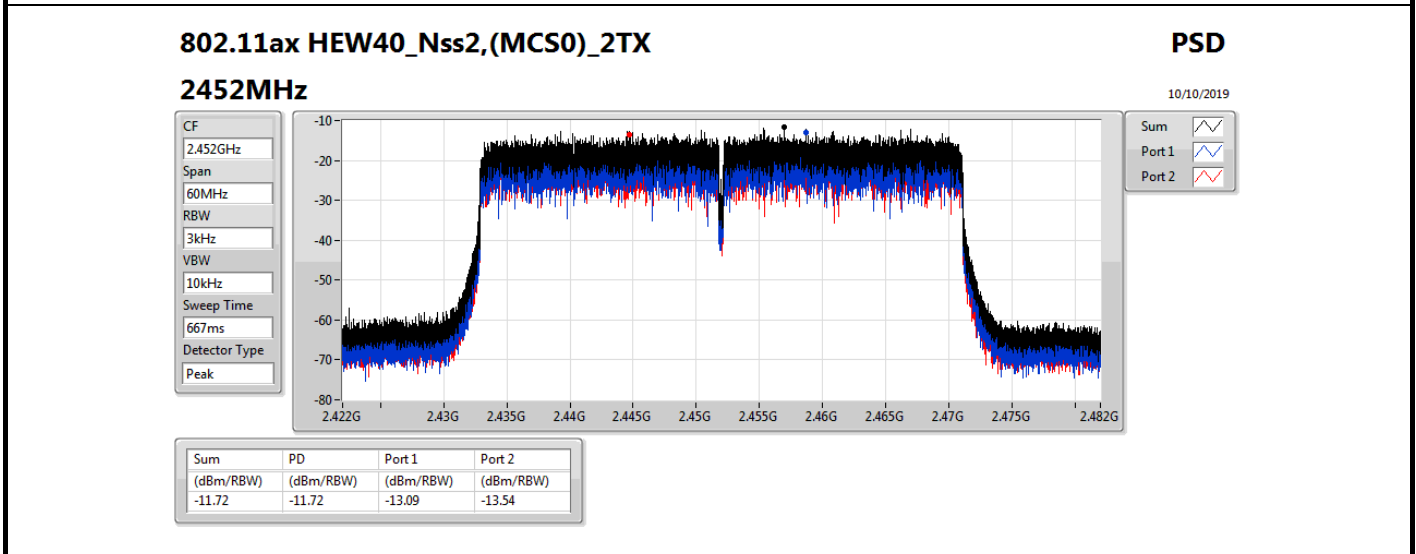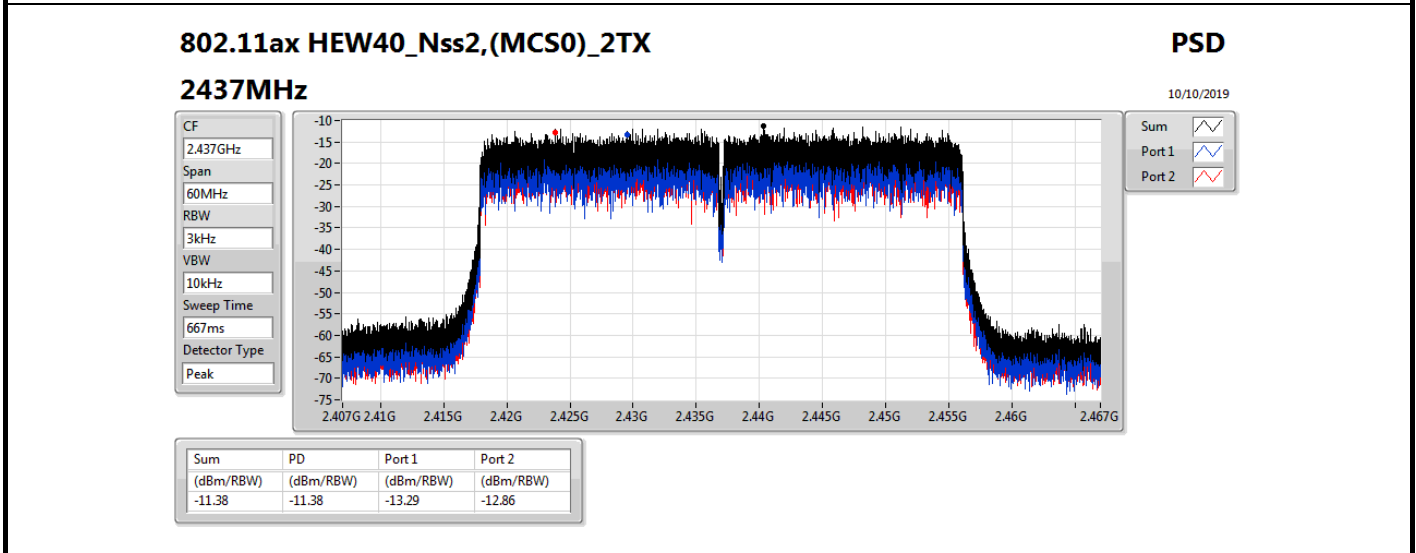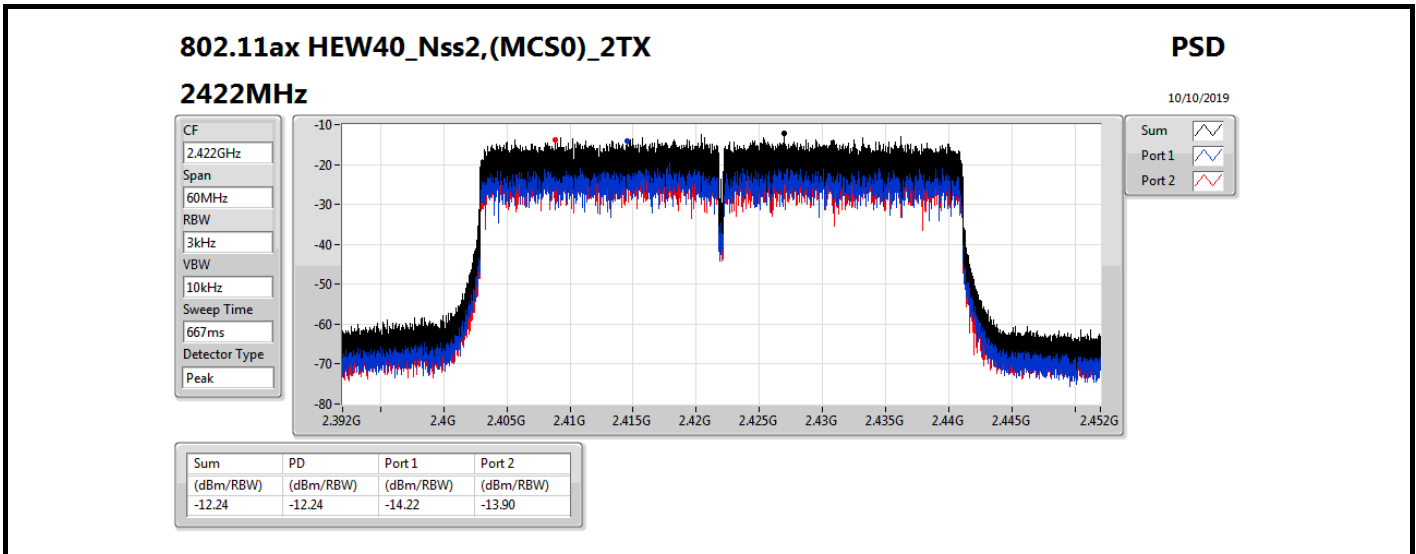



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
VHT20-BF_Nss1,(MCS0)_2TX	-4.04
VHT40-BF_Nss1,(MCS0)_2TX	-7.86
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-2.72
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-9.31

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	13.51	-10.30	-9.56	-7.09	0.49
2437MHz	Pass	13.51	-6.74	-6.57	-4.04	0.49
2462MHz	Pass	13.51	-10.60	-10.98	-7.78	0.49
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	13.51	-12.35	-13.24	-9.77	0.49
2437MHz	Pass	13.51	-11.18	-10.58	-7.86	0.49
2452MHz	Pass	13.51	-11.72	-11.77	-8.73	0.49
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	13.51	-8.70	-8.16	-5.41	0.49
2437MHz	Pass	13.51	-5.58	-5.88	-2.72	0.49
2462MHz	Pass	13.51	-9.69	-9.06	-6.35	0.49
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	13.51	-13.79	-14.10	-11.23	0.49
2437MHz	Pass	13.51	-12.84	-11.53	-9.43	0.49
2452MHz	Pass	13.51	-12.51	-12.13	-9.31	0.49




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

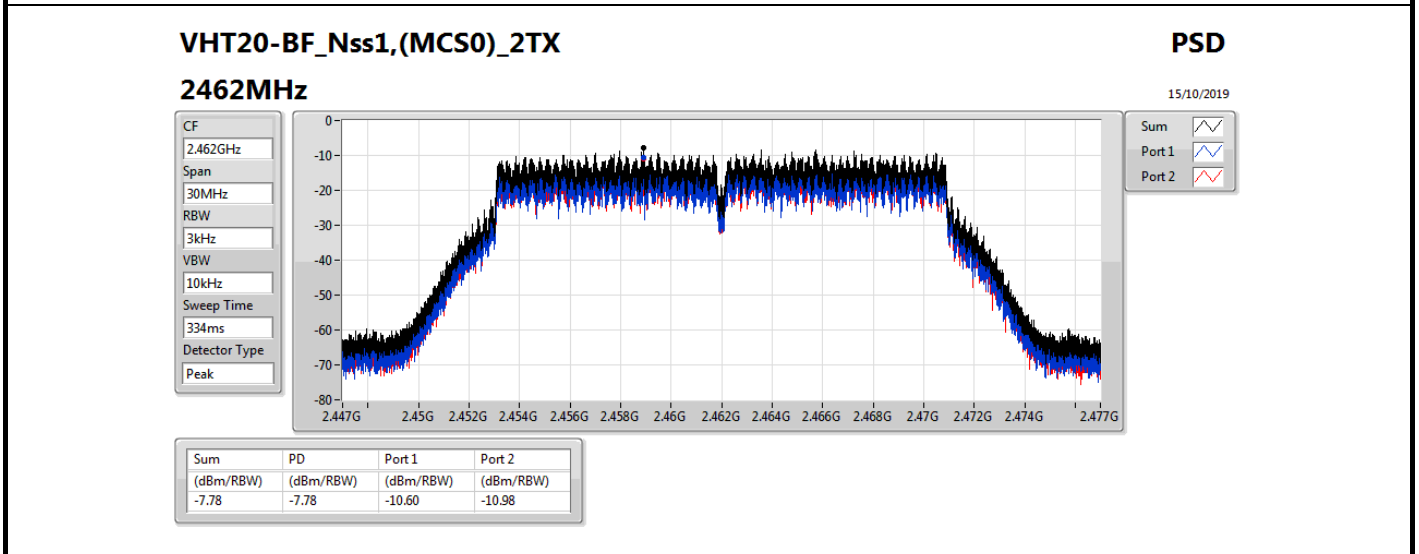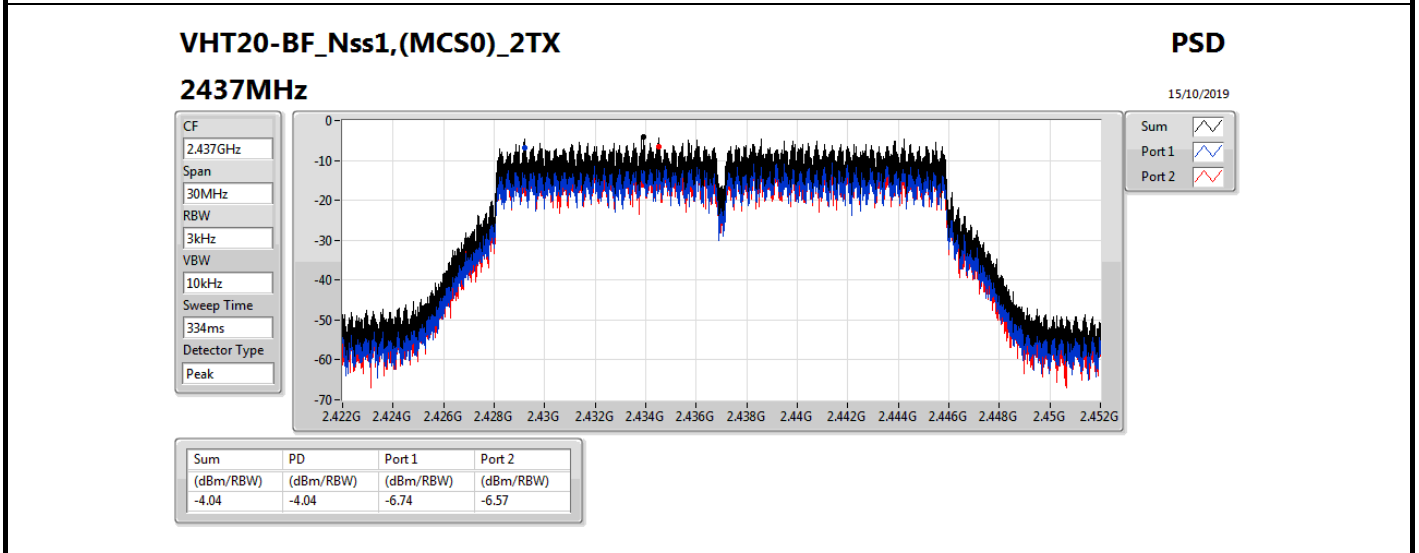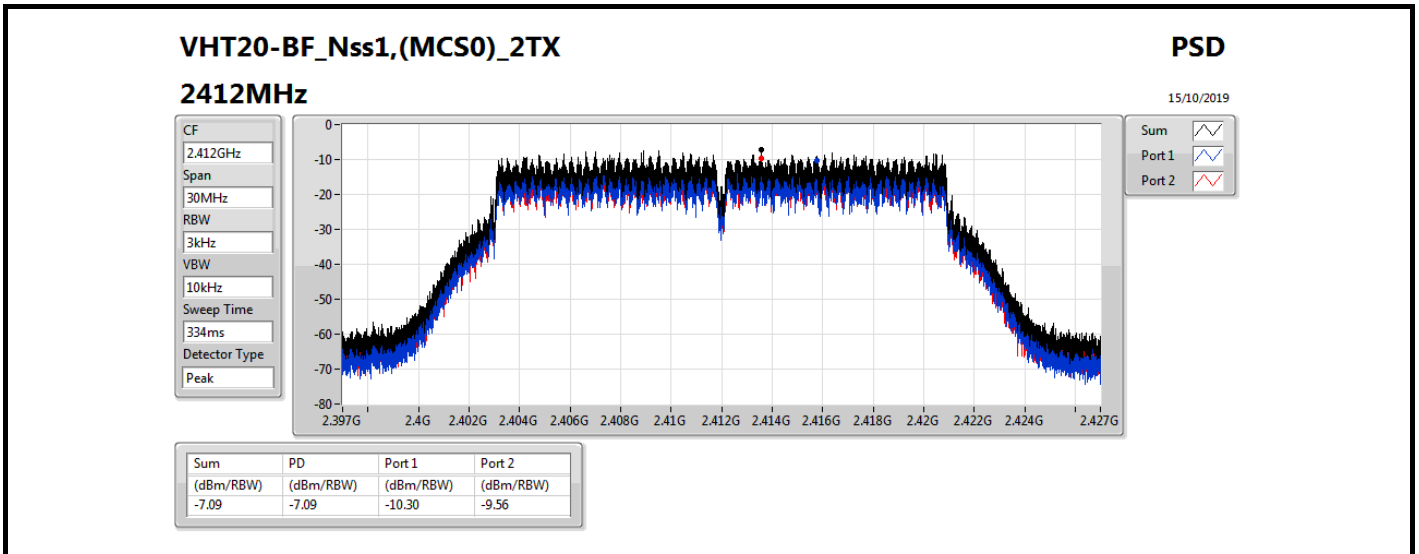

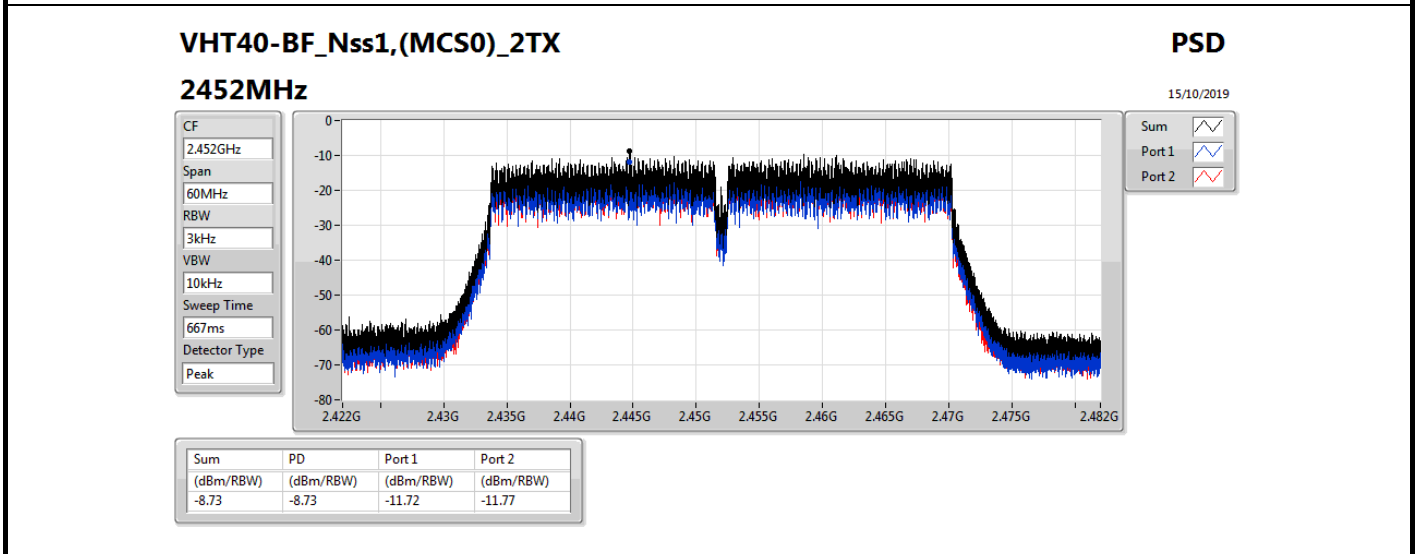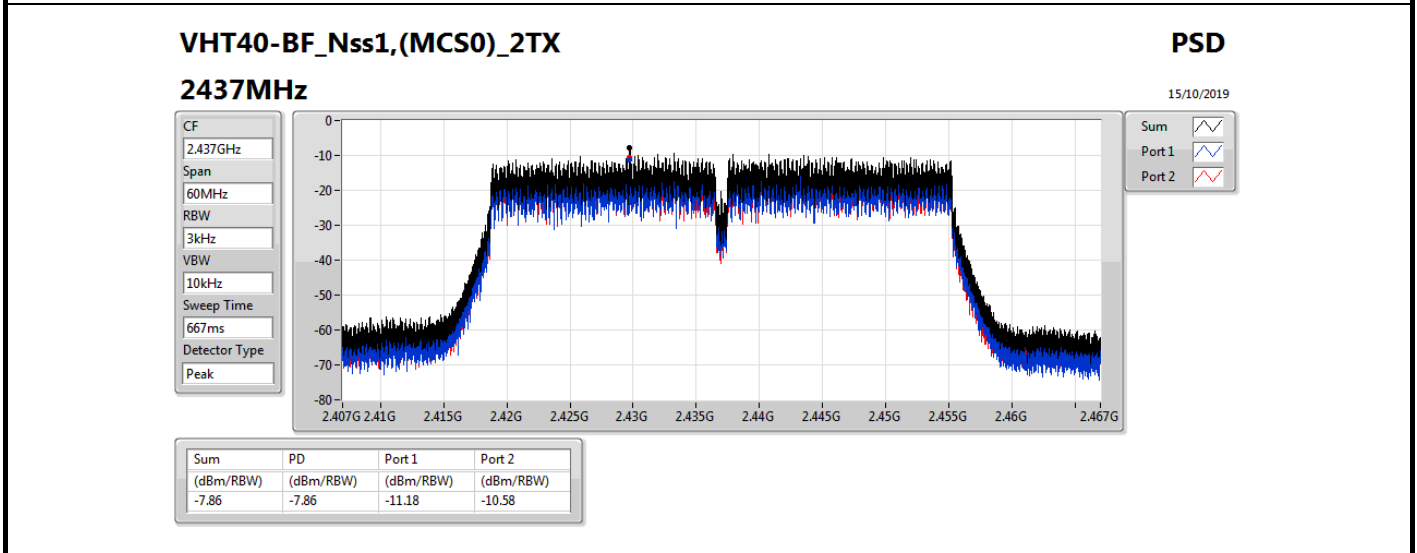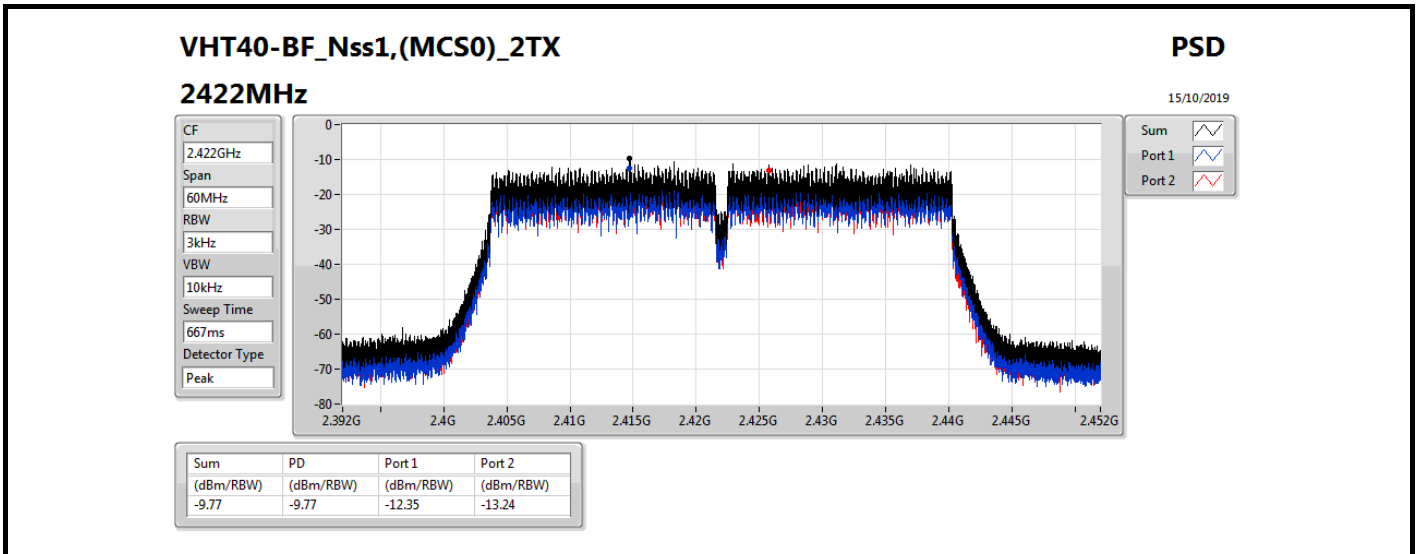

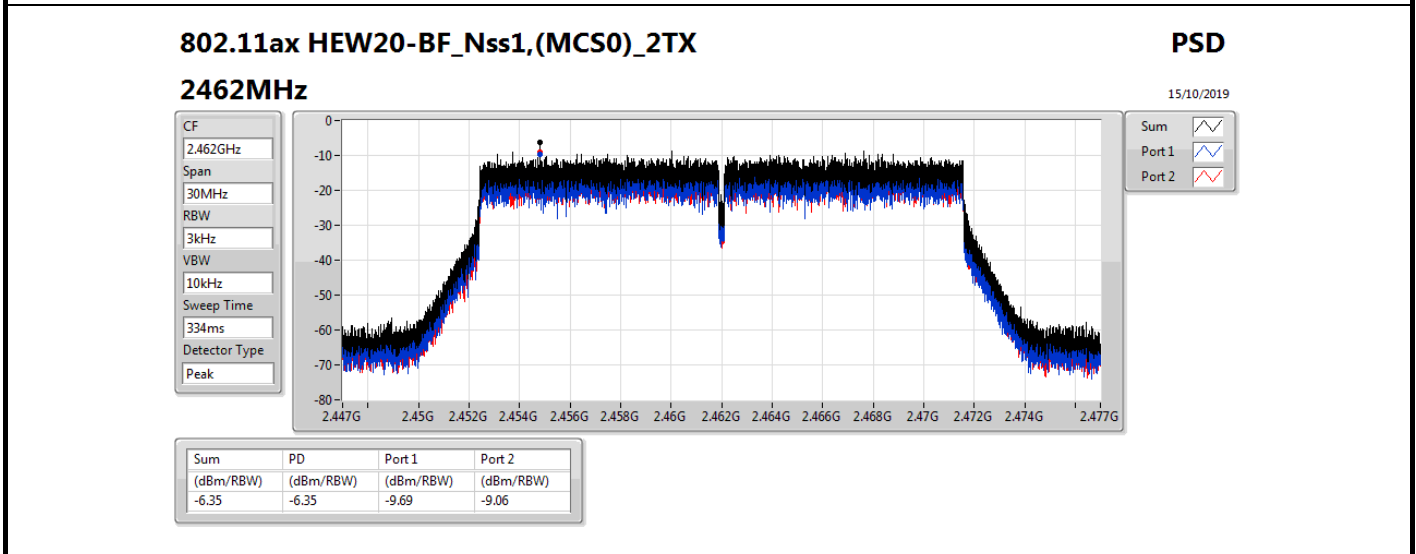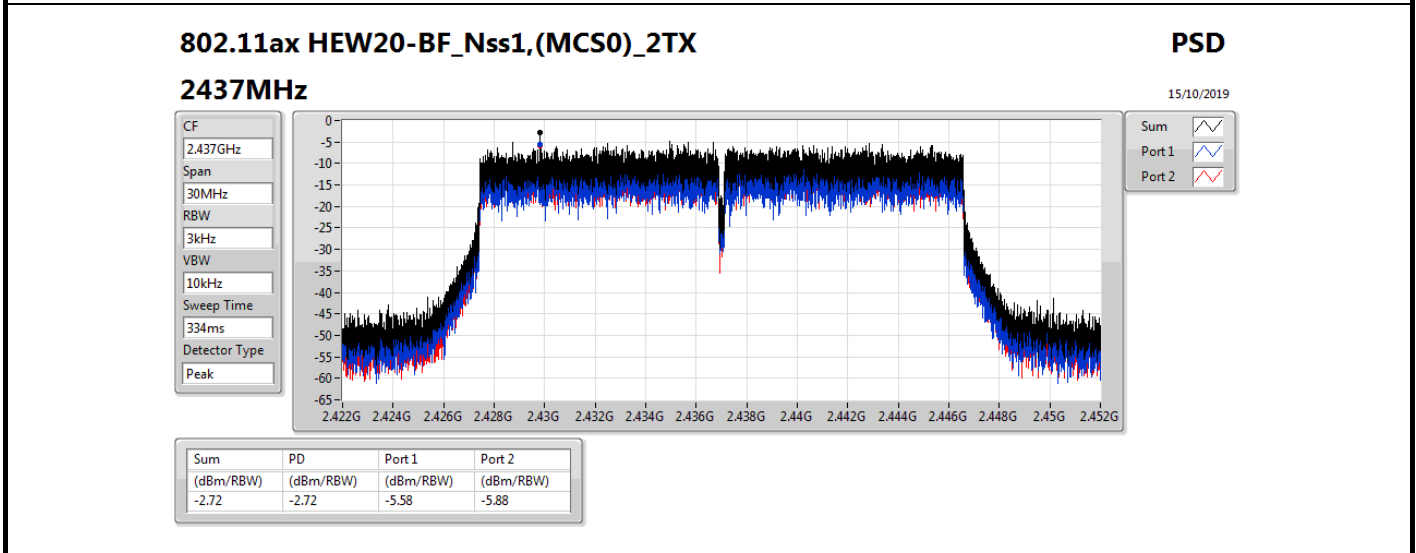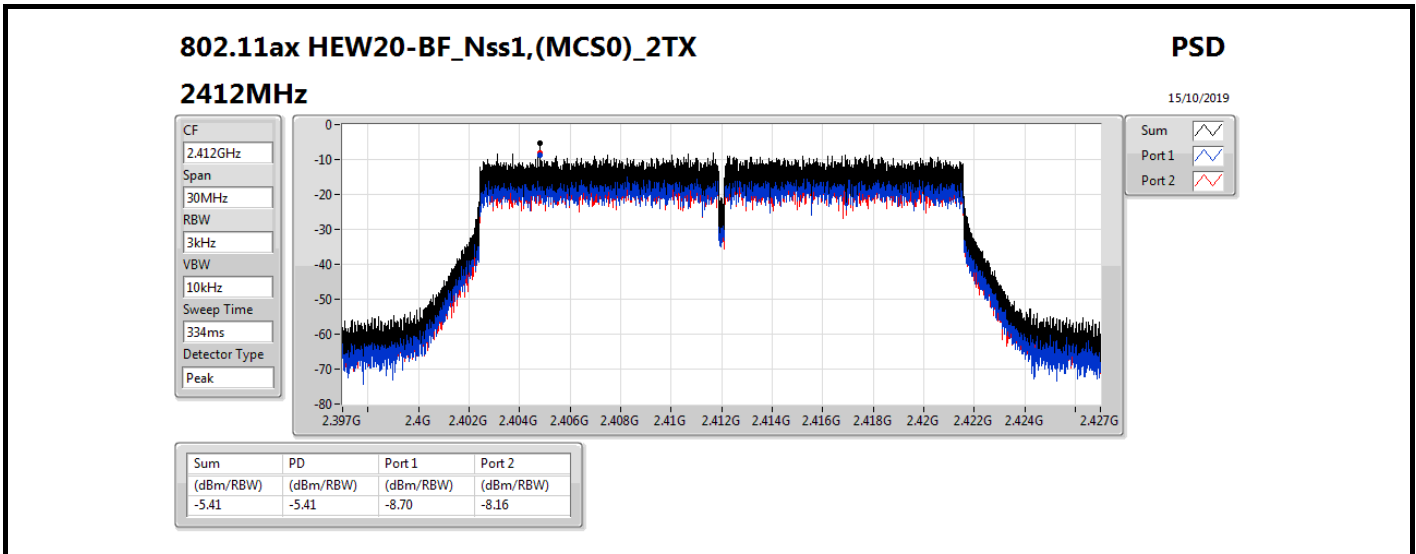

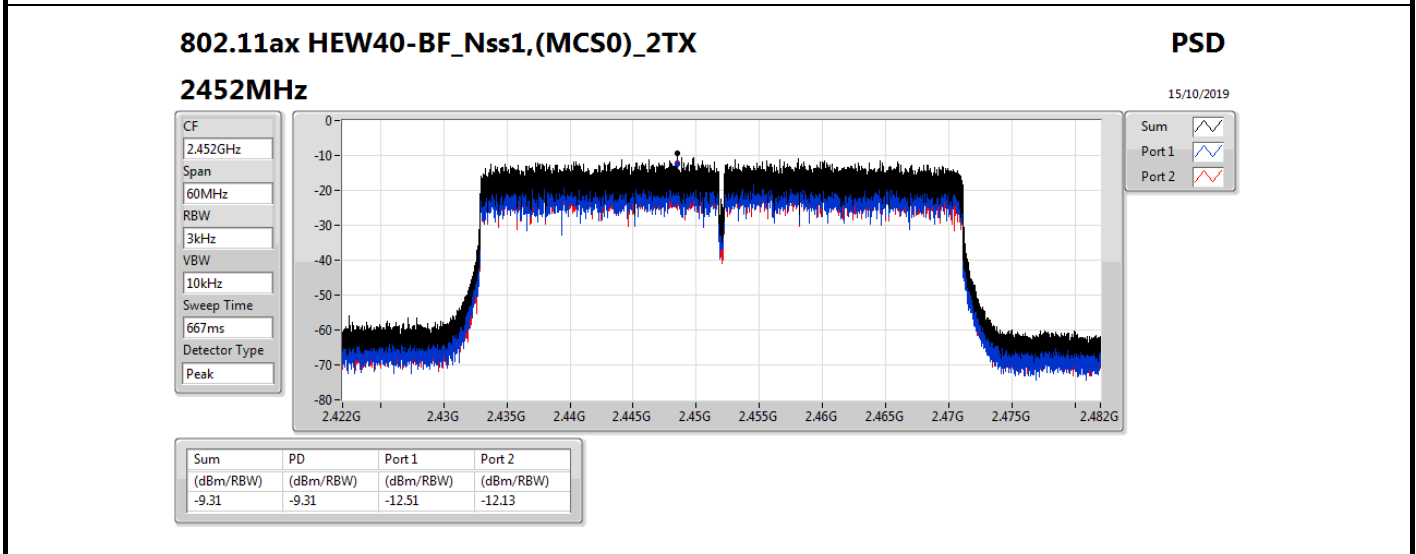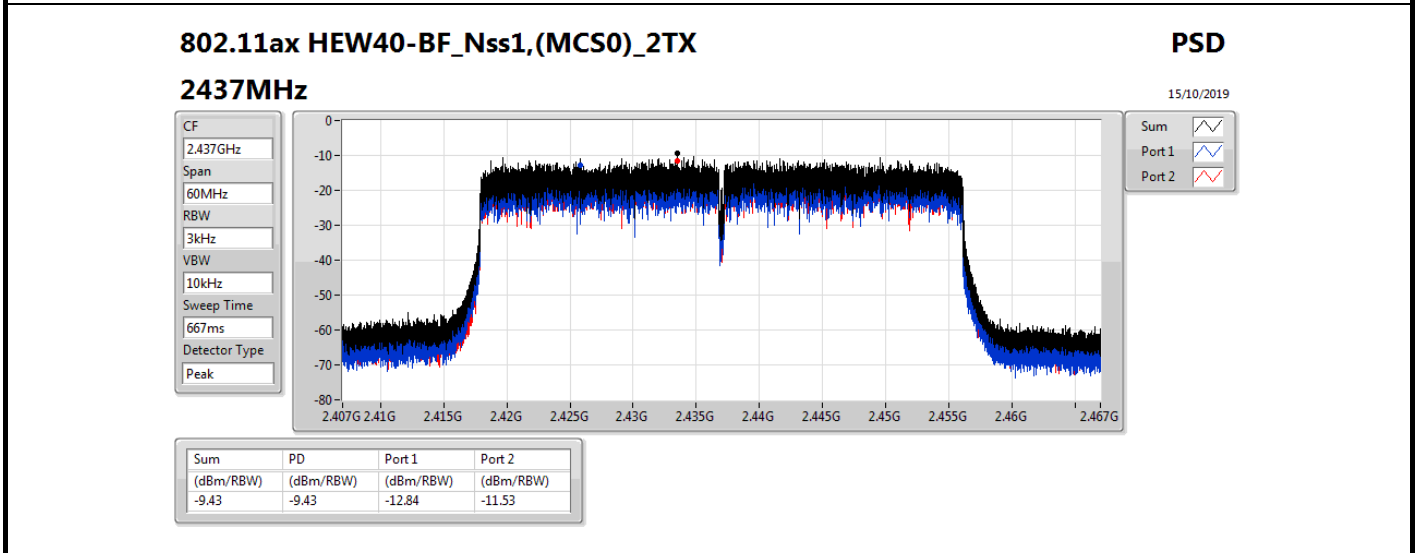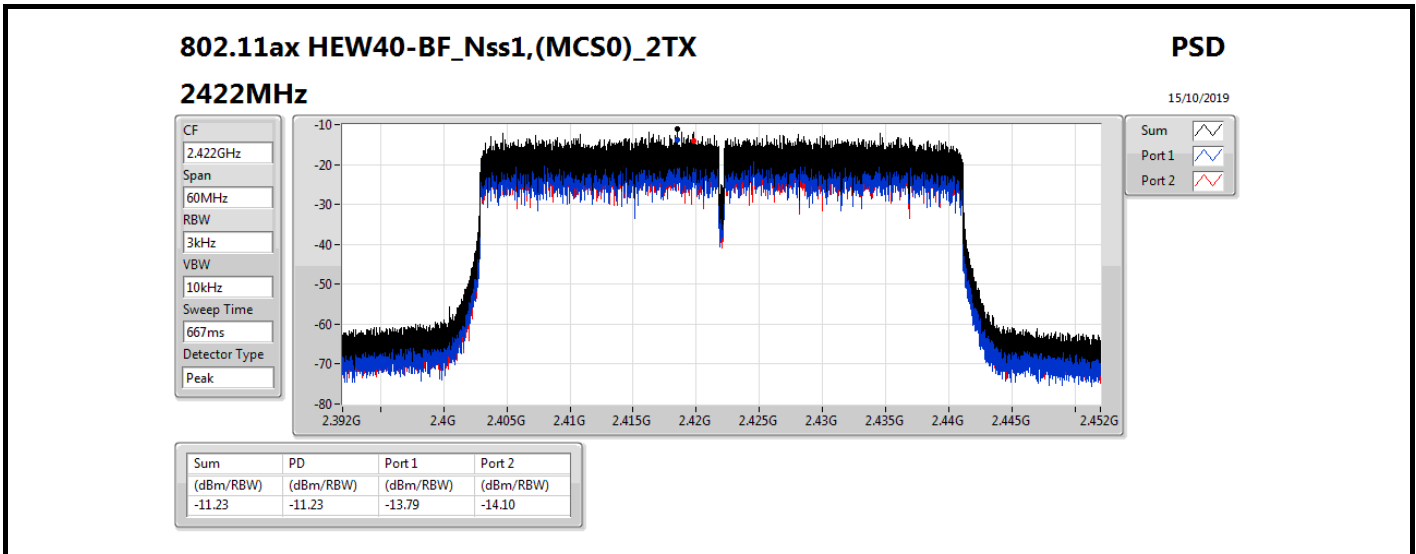



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	2.05
802.11g_Nss1,(6Mbps)_1TX	-2.45
VHT20_Nss1,(MCS0)_1TX	-3.64
VHT40_Nss1,(MCS0)_1TX	-9.01
802.11ax HEW20_Nss1,(MCS0)_1TX	-2.88
802.11ax HEW40_Nss1,(MCS0)_1TX	-9.91

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	4.47	1.05	1.05	8.00
2437MHz	Pass	4.47	1.53	1.53	8.00
2462MHz	Pass	4.47	2.05	2.05	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	4.47	-8.06	-8.06	8.00
2437MHz	Pass	4.47	-2.45	-2.45	8.00
2462MHz	Pass	4.47	-8.52	-8.52	8.00
VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	4.47	-8.22	-8.22	8.00
2437MHz	Pass	4.47	-3.64	-3.64	8.00
2462MHz	Pass	4.47	-10.56	-10.56	8.00
VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	4.47	-10.45	-10.45	8.00
2437MHz	Pass	4.47	-9.01	-9.01	8.00
2452MHz	Pass	4.47	-10.34	-10.34	8.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	4.47	-7.26	-7.26	8.00
2437MHz	Pass	4.47	-2.88	-2.88	8.00
2462MHz	Pass	4.47	-9.45	-9.45	8.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	4.47	-11.54	-11.54	8.00
2437MHz	Pass	4.47	-9.91	-9.91	8.00
2452MHz	Pass	4.47	-11.31	-11.31	8.00




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

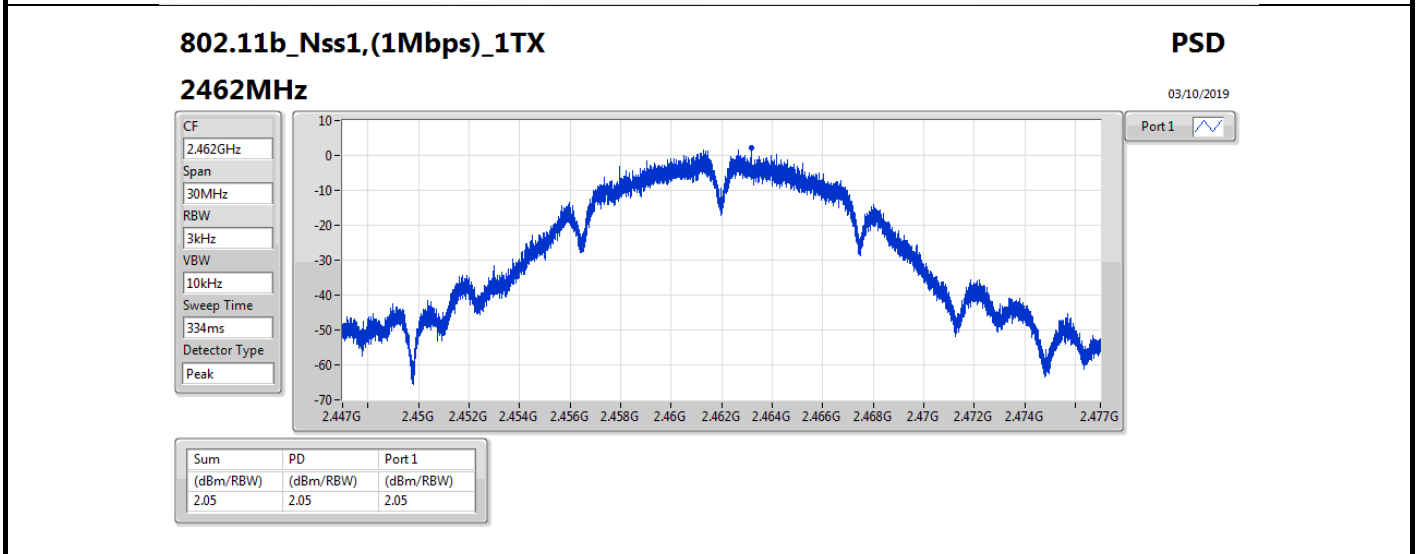
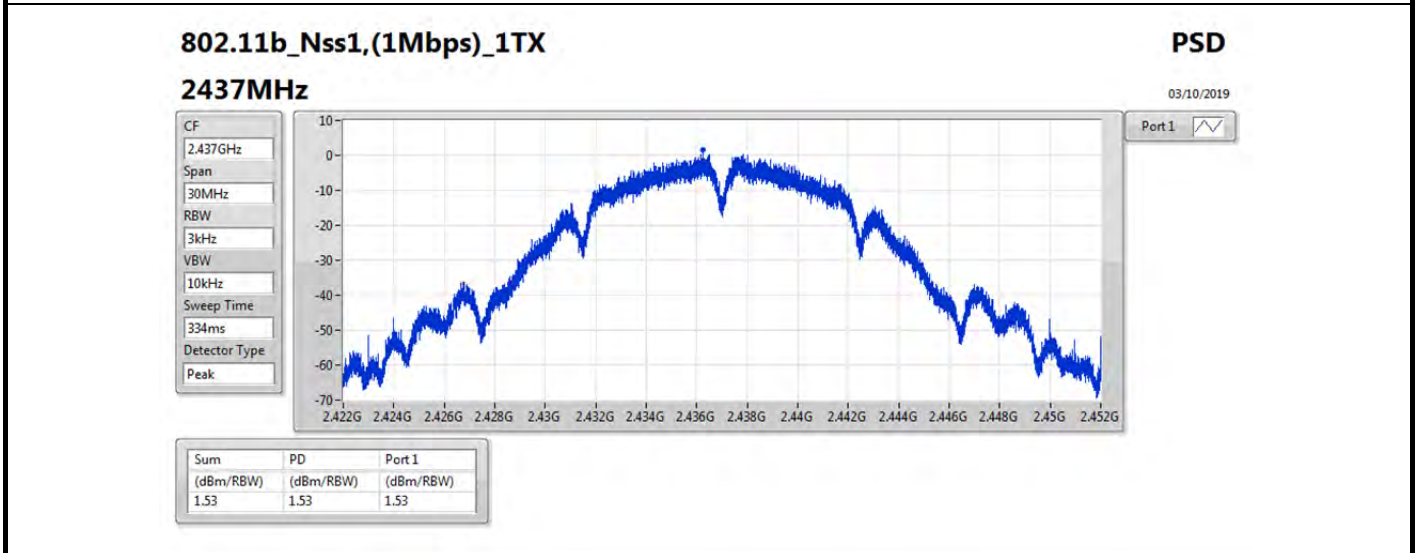
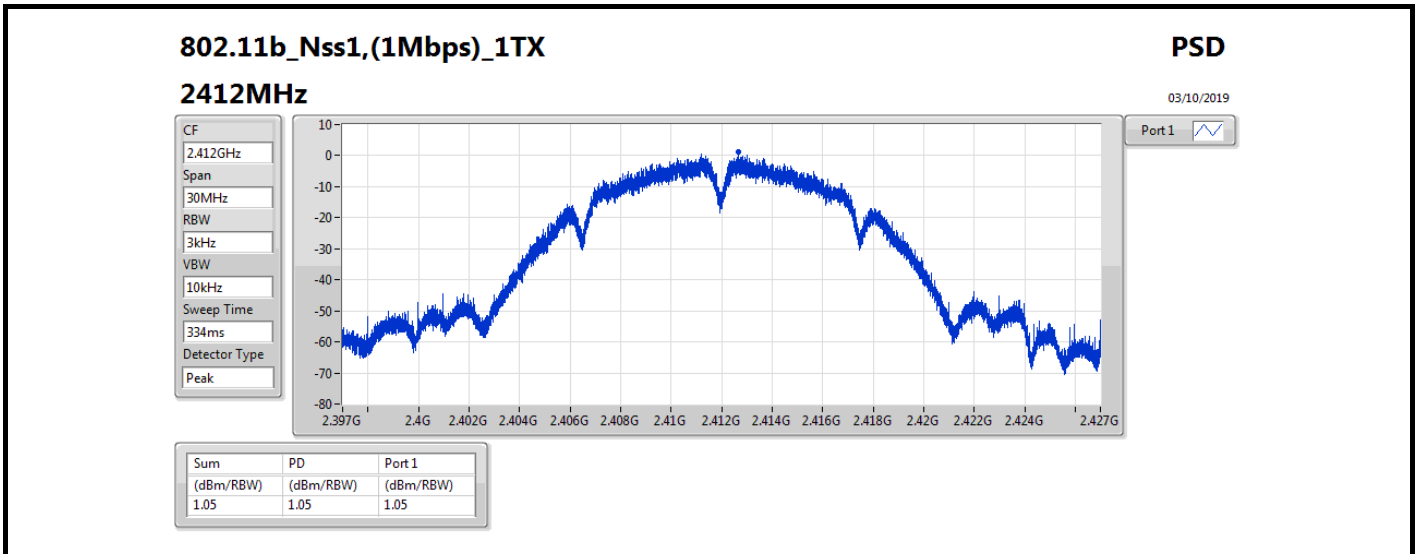


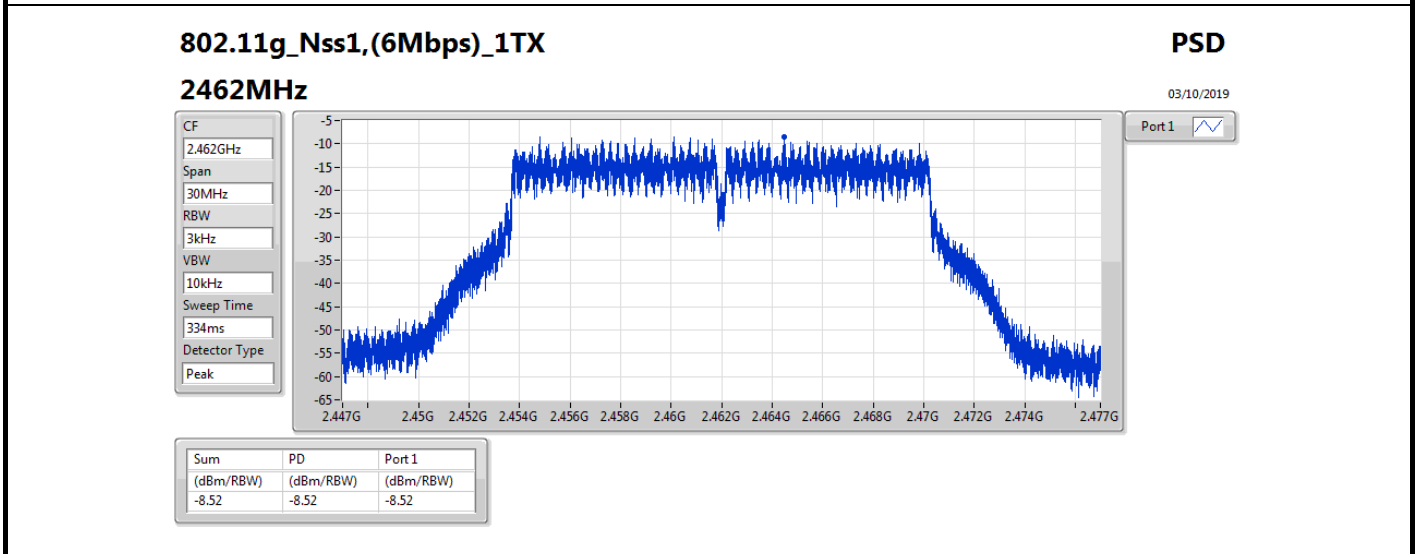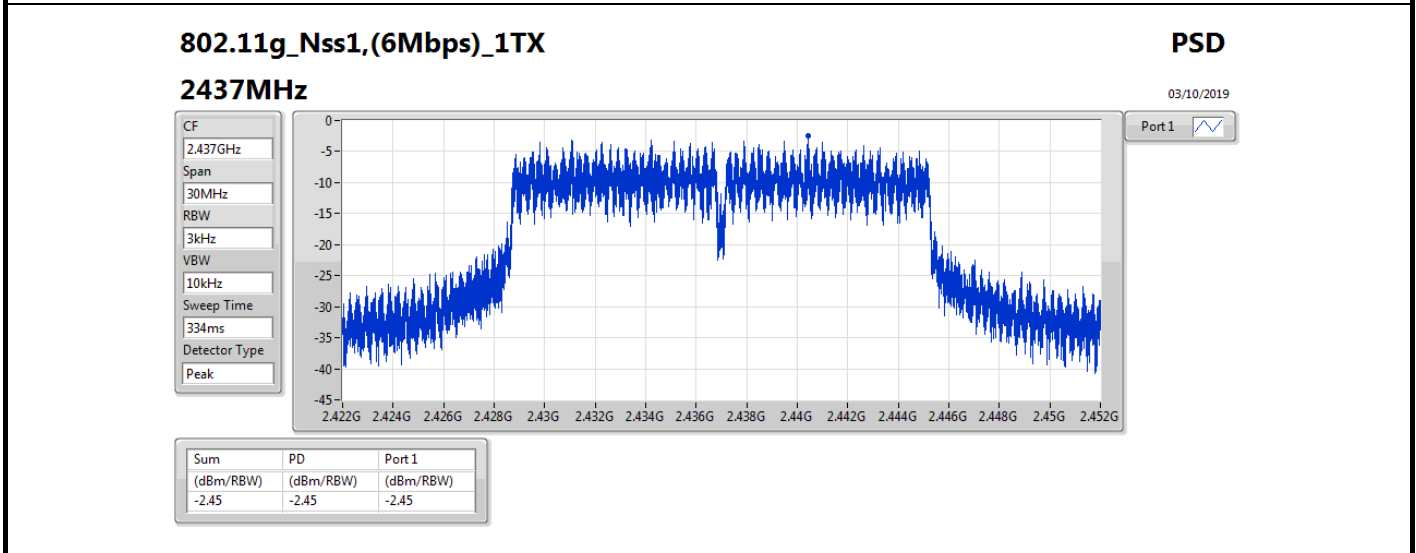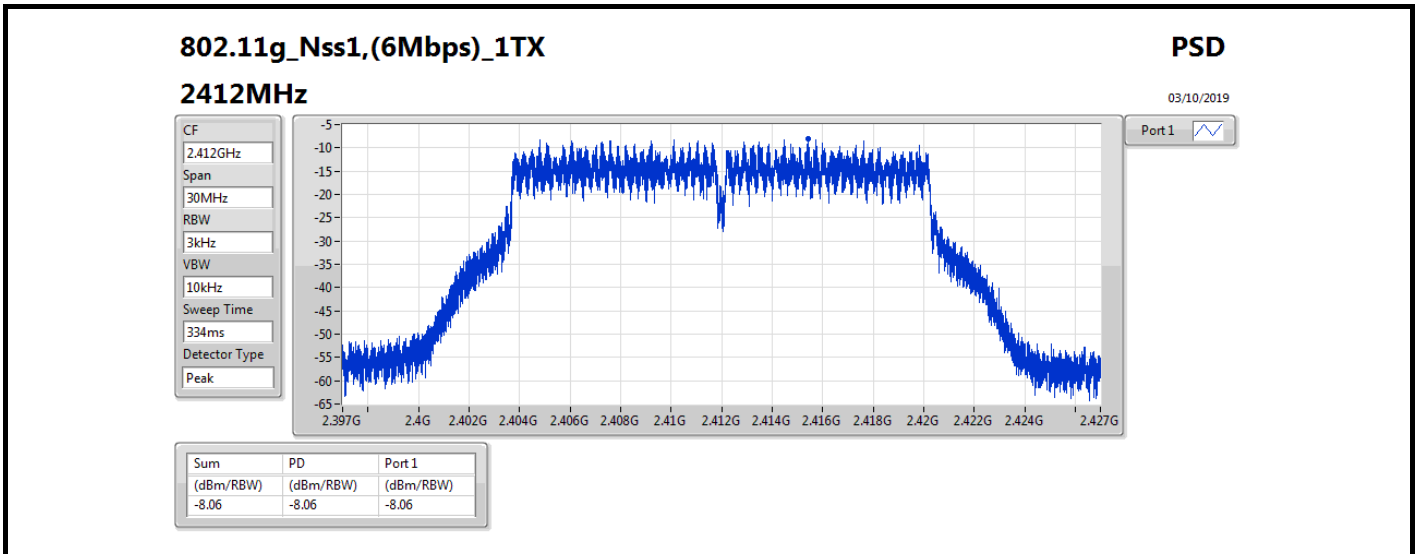

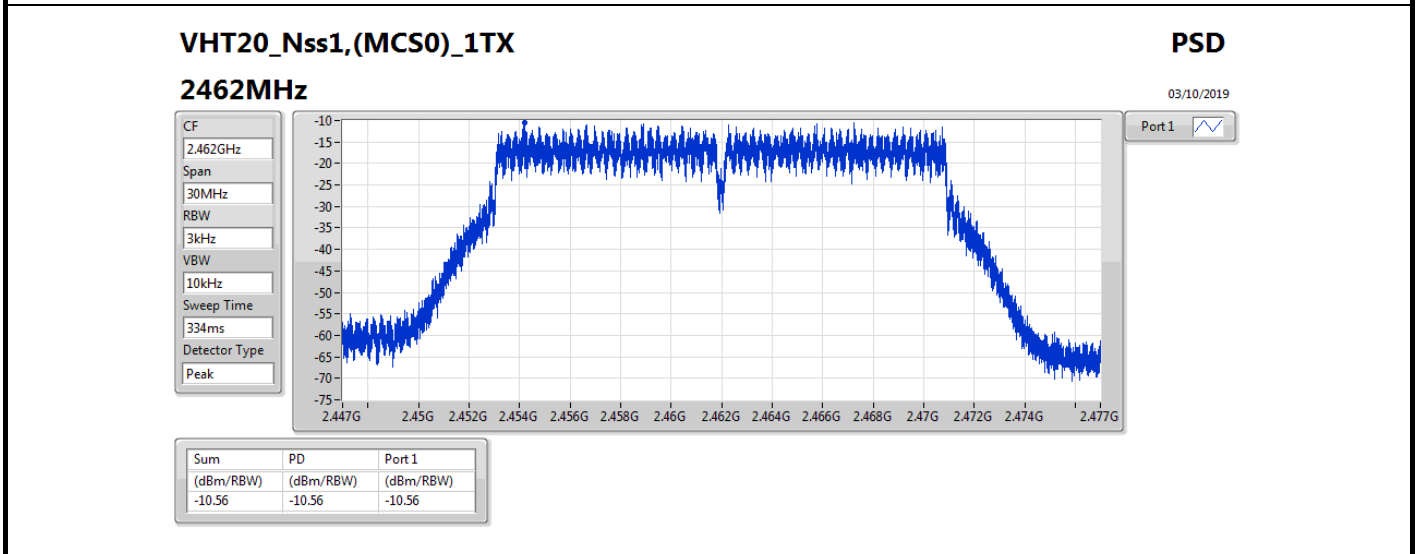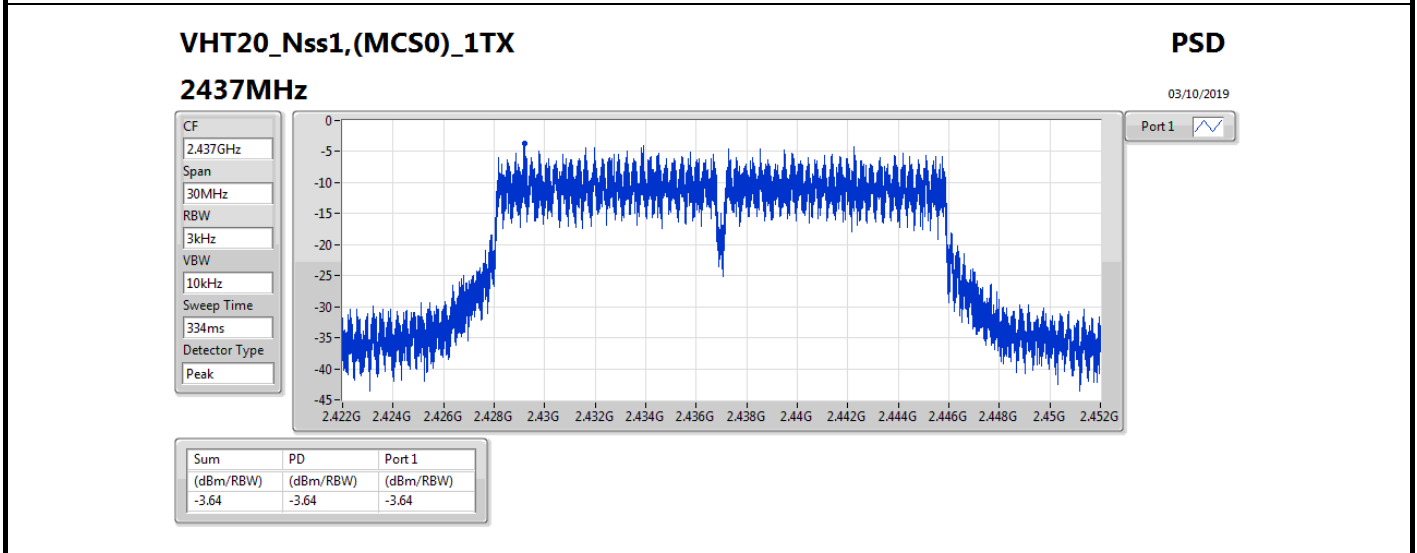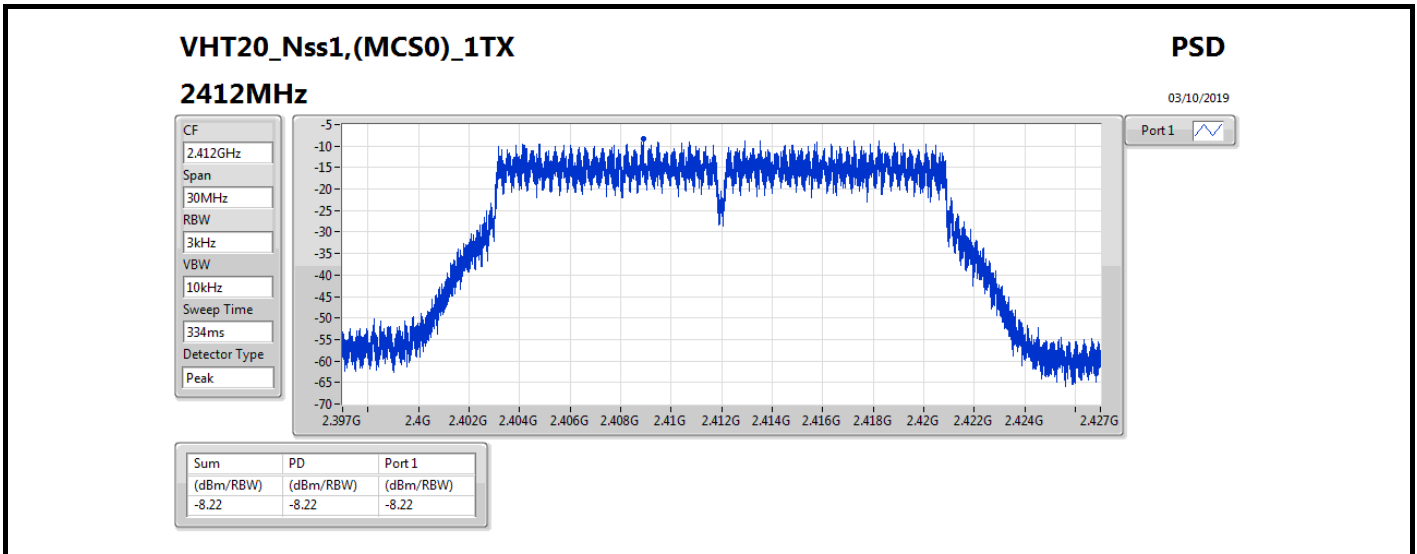

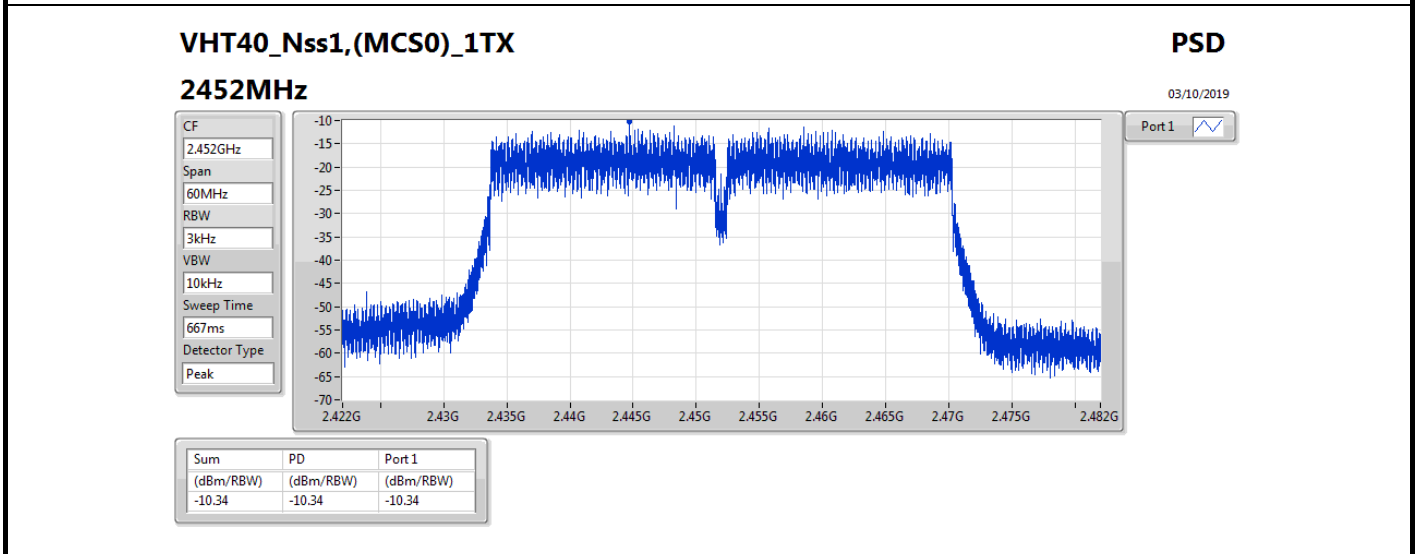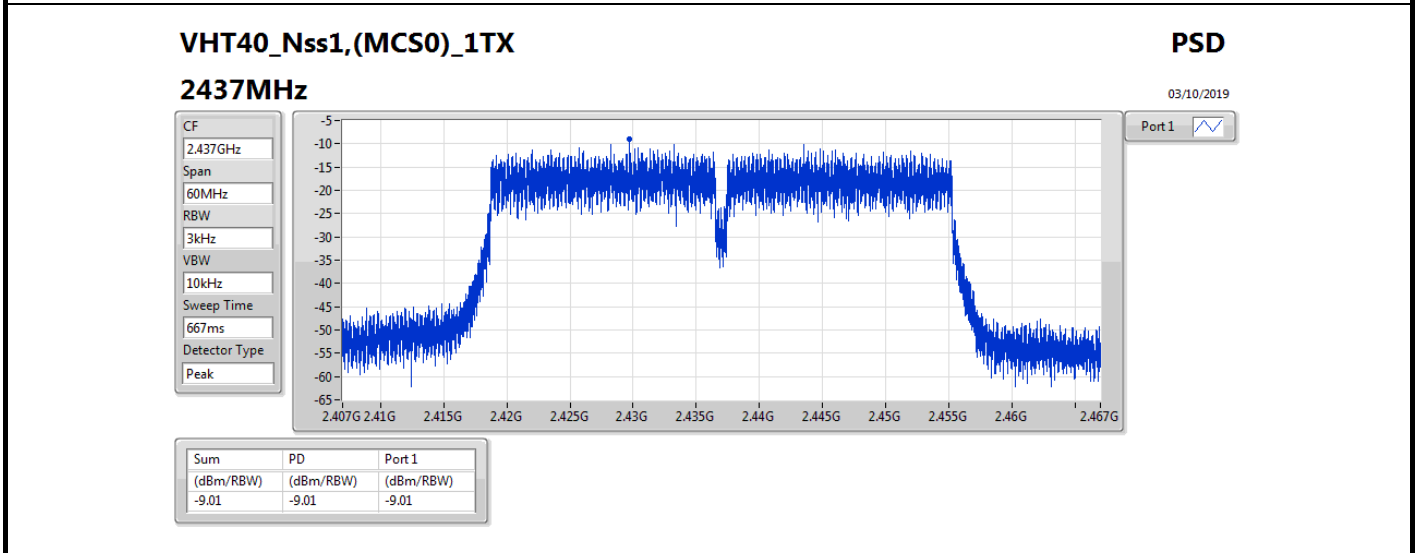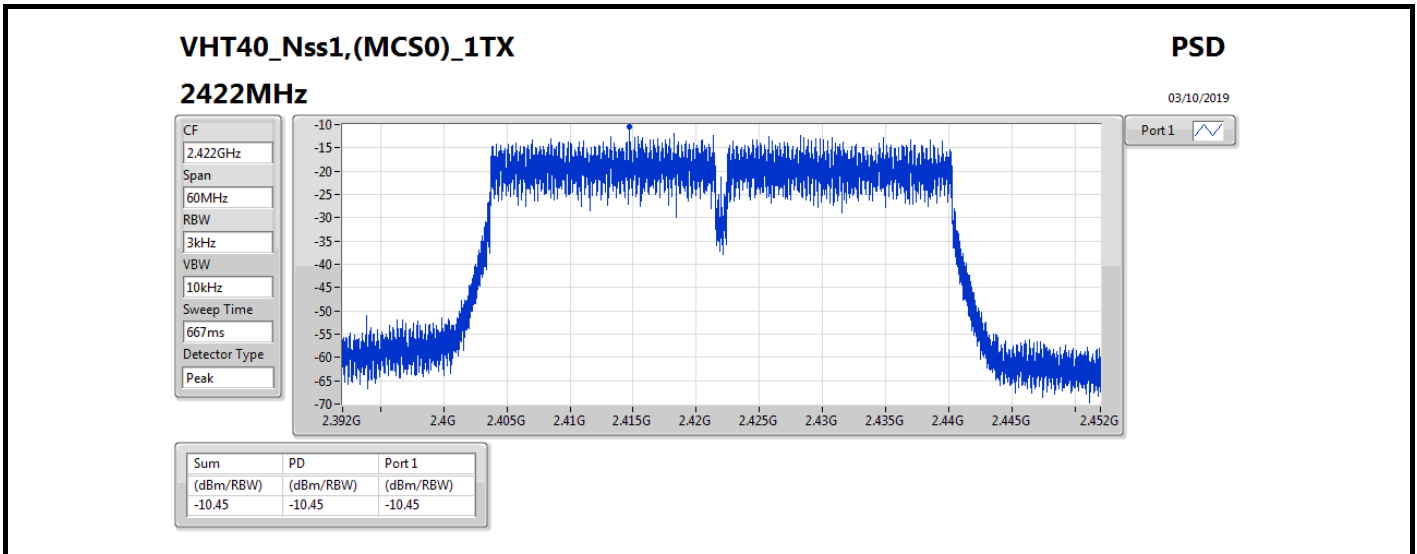

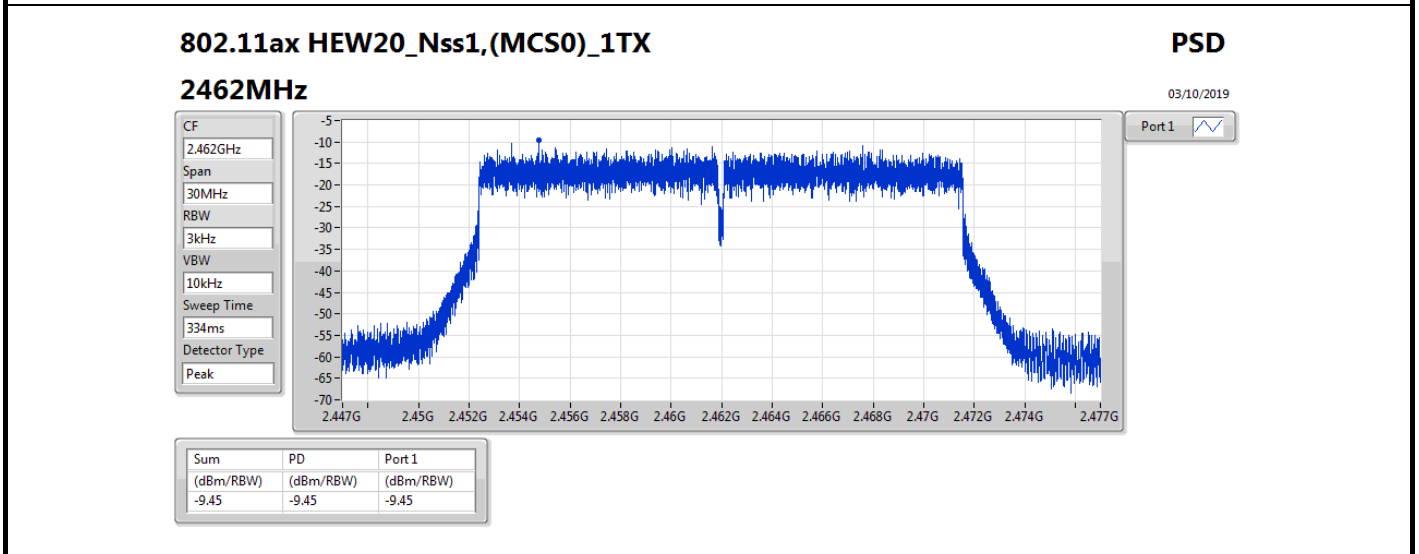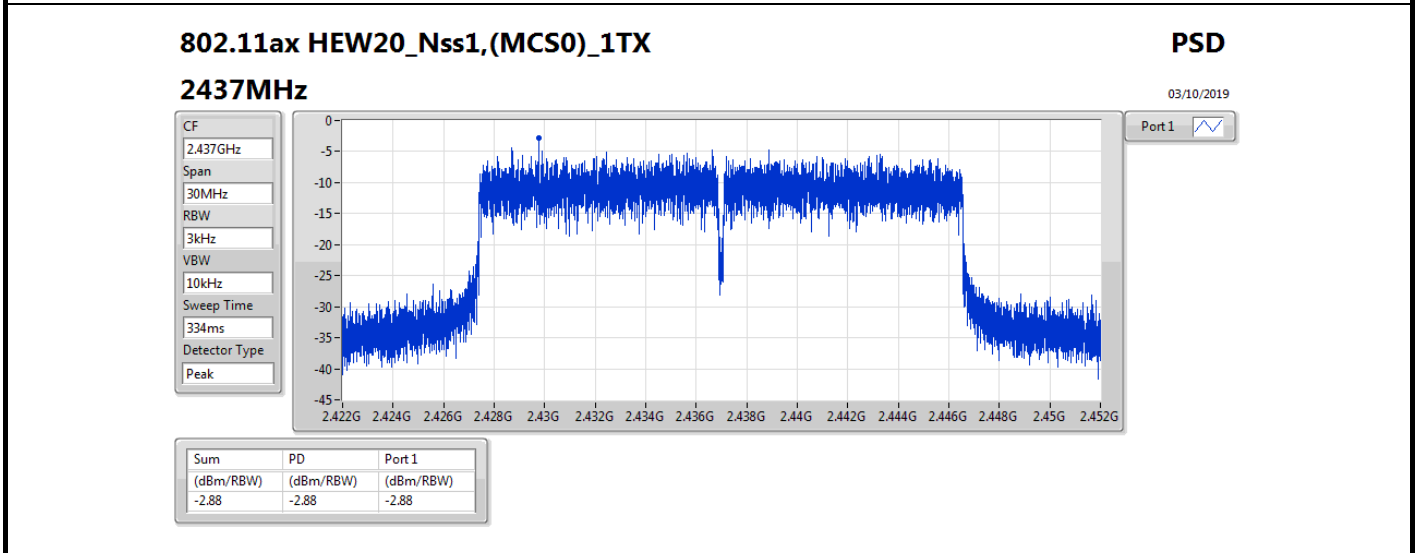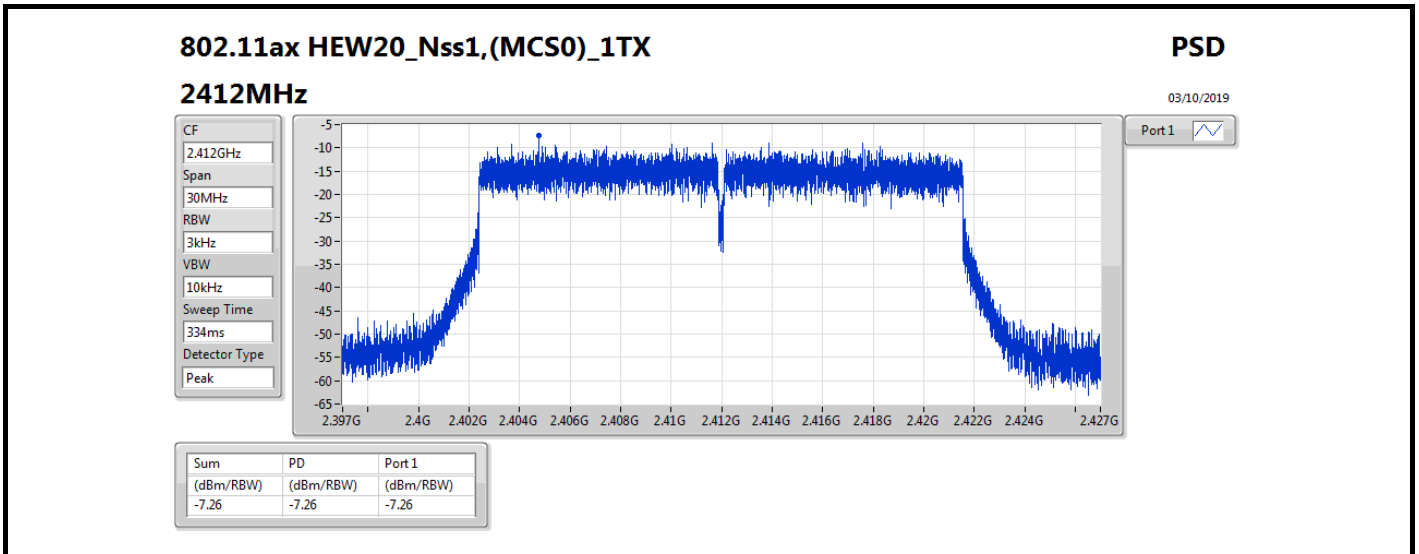

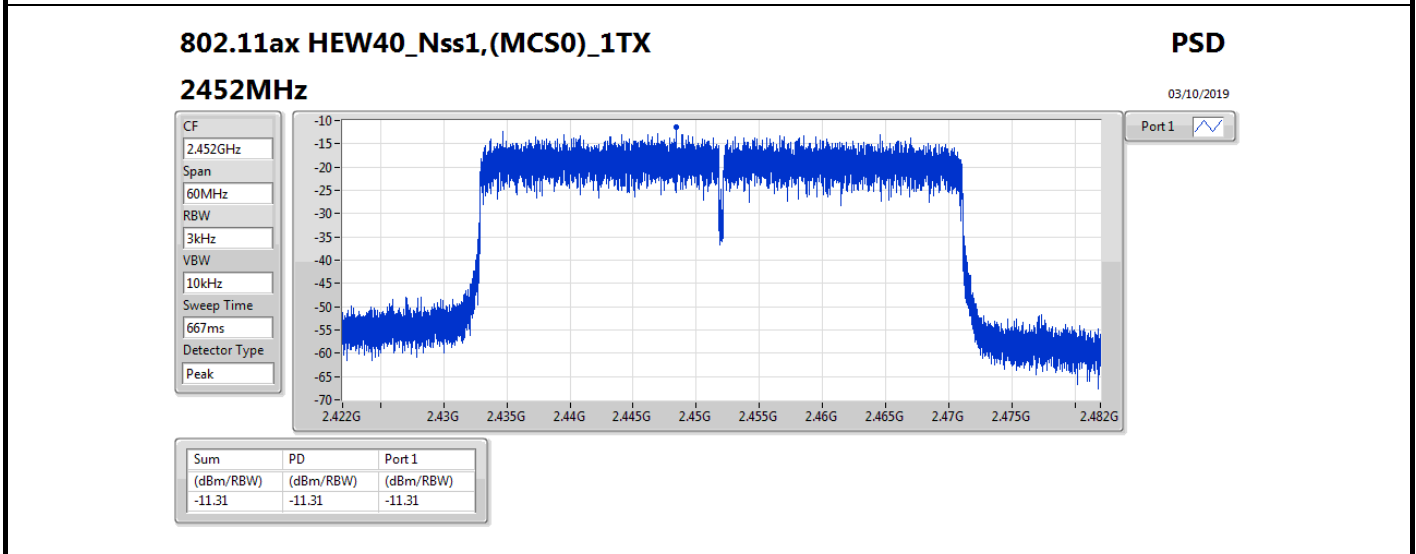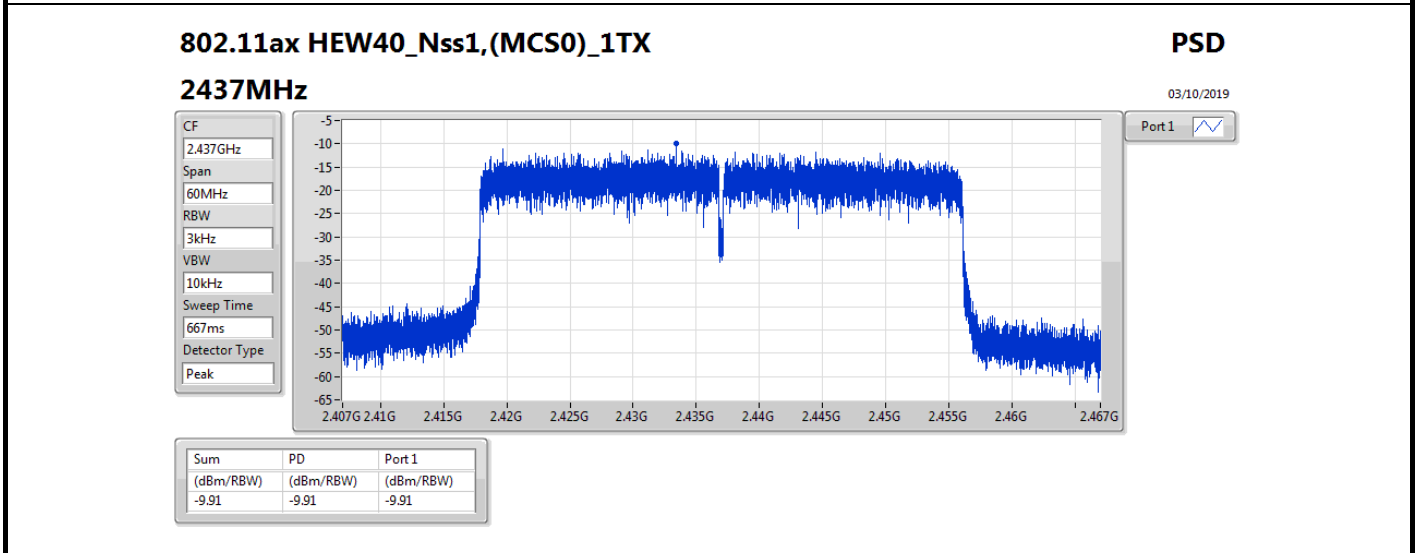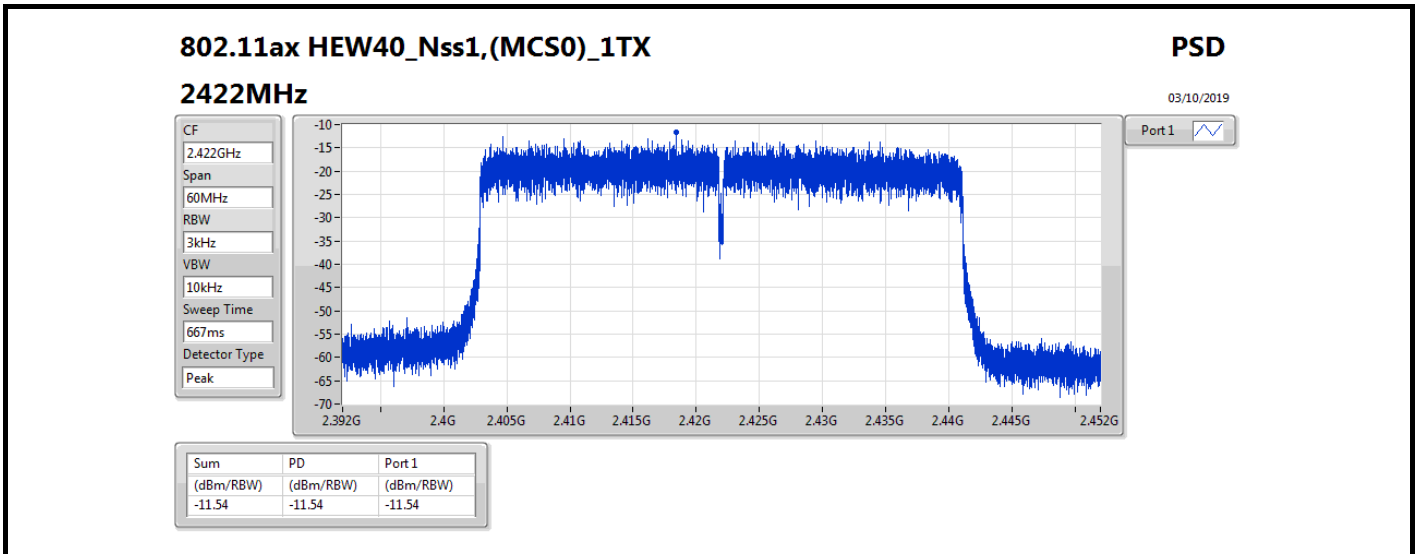



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	3.38
802.11g_Nss1,(6Mbps)_2TX	-1.32
VHT20_Nss2,(MCS0)_2TX	-3.25
VHT40_Nss2,(MCS0)_2TX	-9.68
802.11ax HEW20_Nss2,(MCS0)_2TX	-3.13
802.11ax HEW40_Nss2,(MCS0)_2TX	-10.15

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.48	1.12	0.87	3.13	6.52
2437MHz	Pass	7.48	1.94	1.50	3.38	6.52
2462MHz	Pass	7.48	0.21	0.18	1.97	6.52
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.48	-9.39	-8.91	-6.46	6.52
2437MHz	Pass	7.48	-4.24	-4.43	-1.32	6.52
2462MHz	Pass	7.48	-9.62	-8.33	-6.63	6.52
VHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.47	-9.94	-10.05	-8.49	8.00
2437MHz	Pass	4.47	-4.80	-4.09	-3.25	8.00
2462MHz	Pass	4.47	-9.04	-8.99	-7.51	8.00
VHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	4.47	-13.20	-12.79	-11.71	8.00
2437MHz	Pass	4.47	-11.13	-10.46	-9.68	8.00
2452MHz	Pass	4.47	-13.19	-12.31	-11.05	8.00
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.47	-11.26	-10.31	-8.07	8.00
2437MHz	Pass	4.47	-6.30	-5.25	-3.13	8.00
2462MHz	Pass	4.47	-10.38	-9.40	-7.14	8.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	4.47	-14.17	-13.56	-12.75	8.00
2437MHz	Pass	4.47	-12.24	-11.46	-10.15	8.00
2452MHz	Pass	4.47	-13.70	-13.10	-12.35	8.00




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

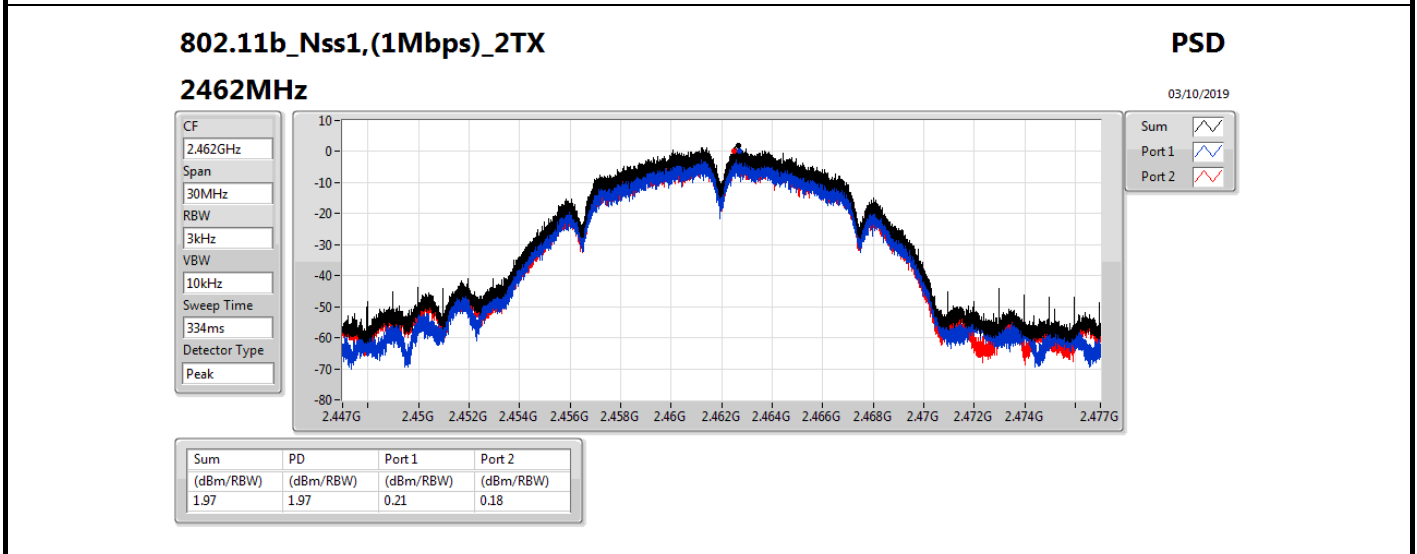
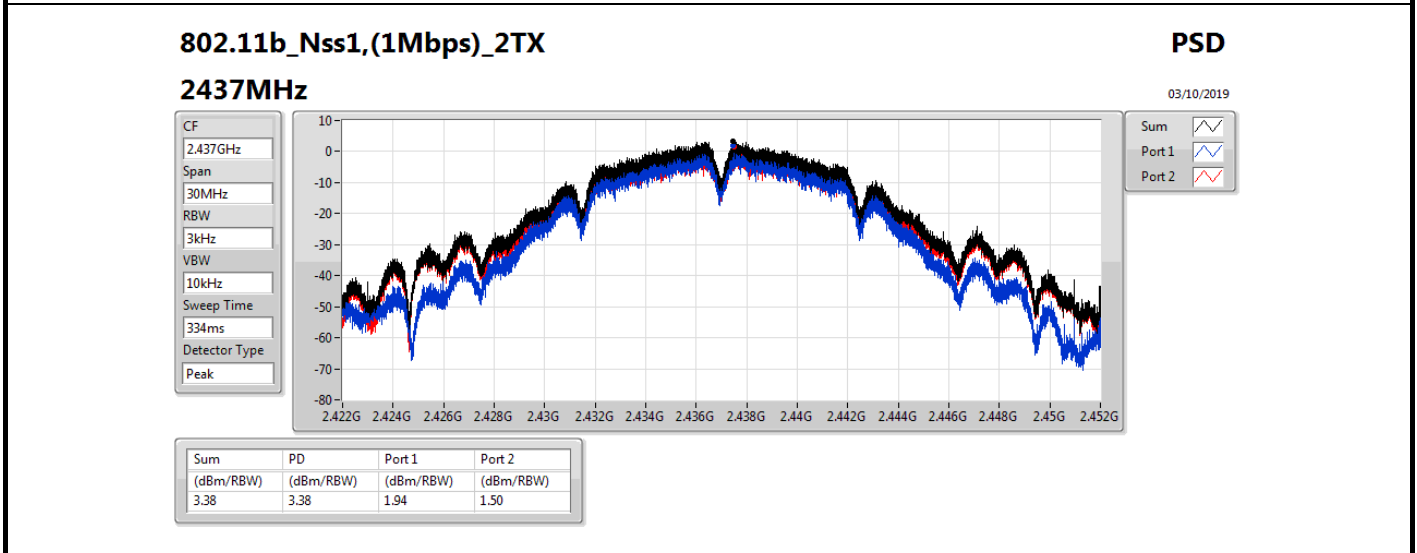
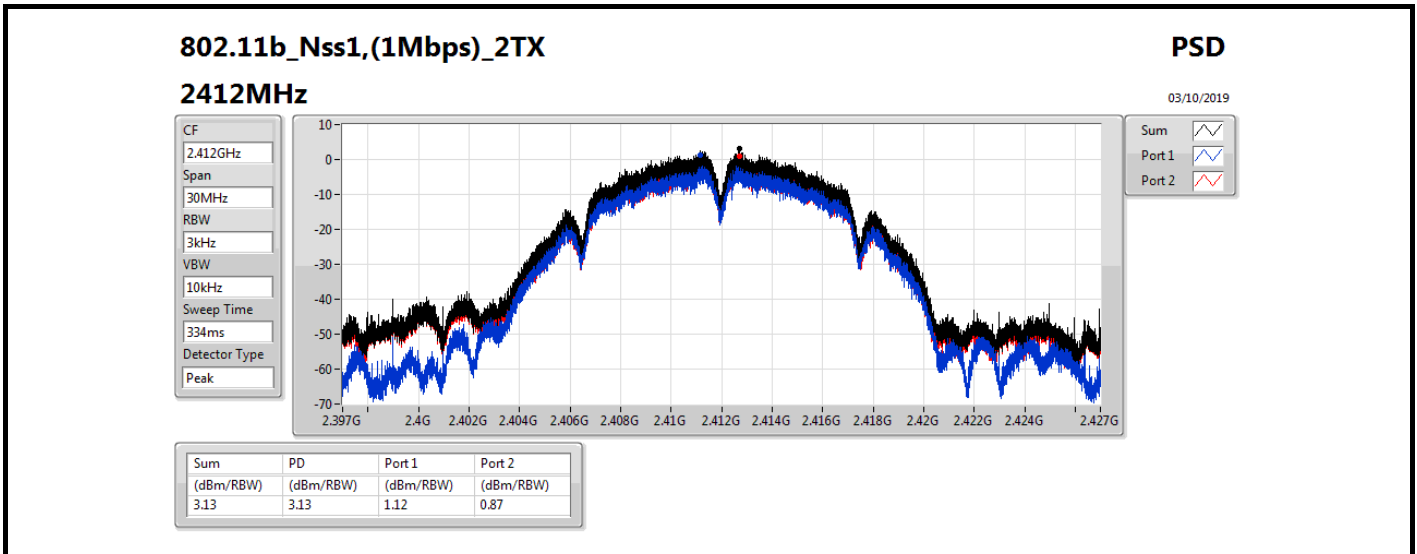


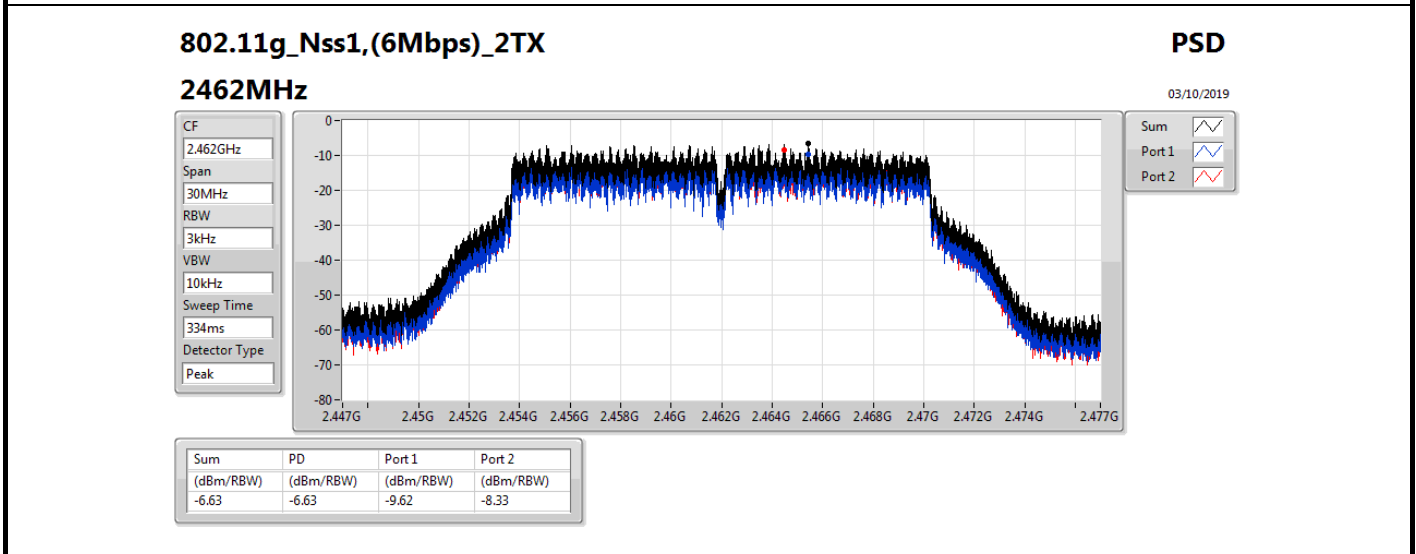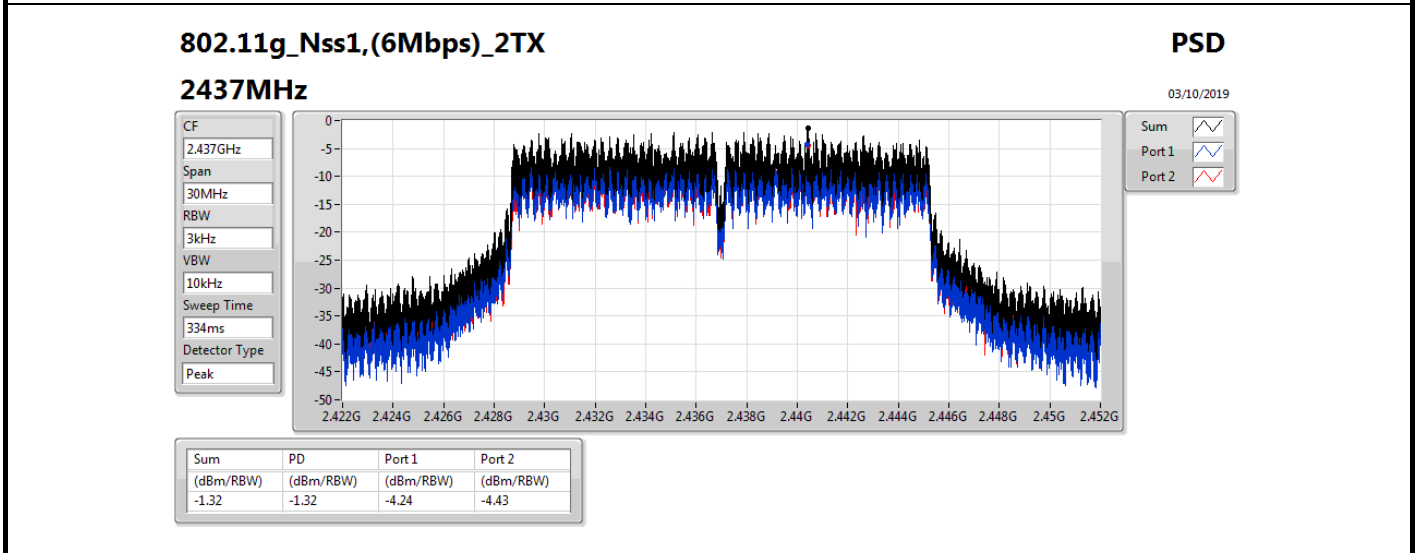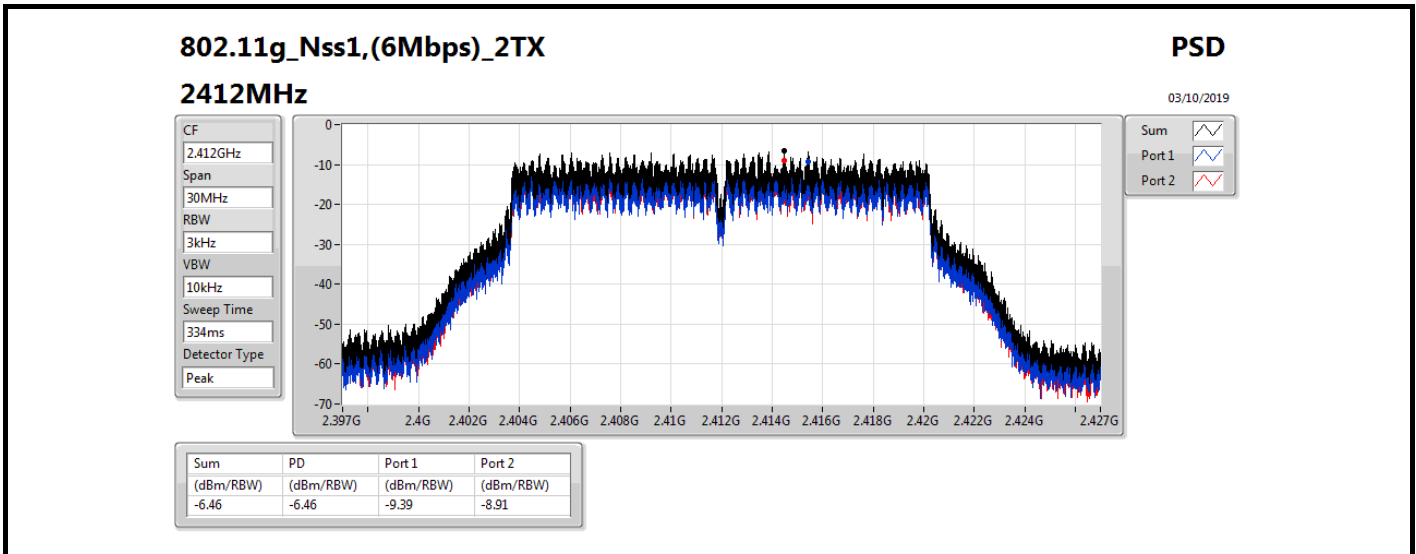

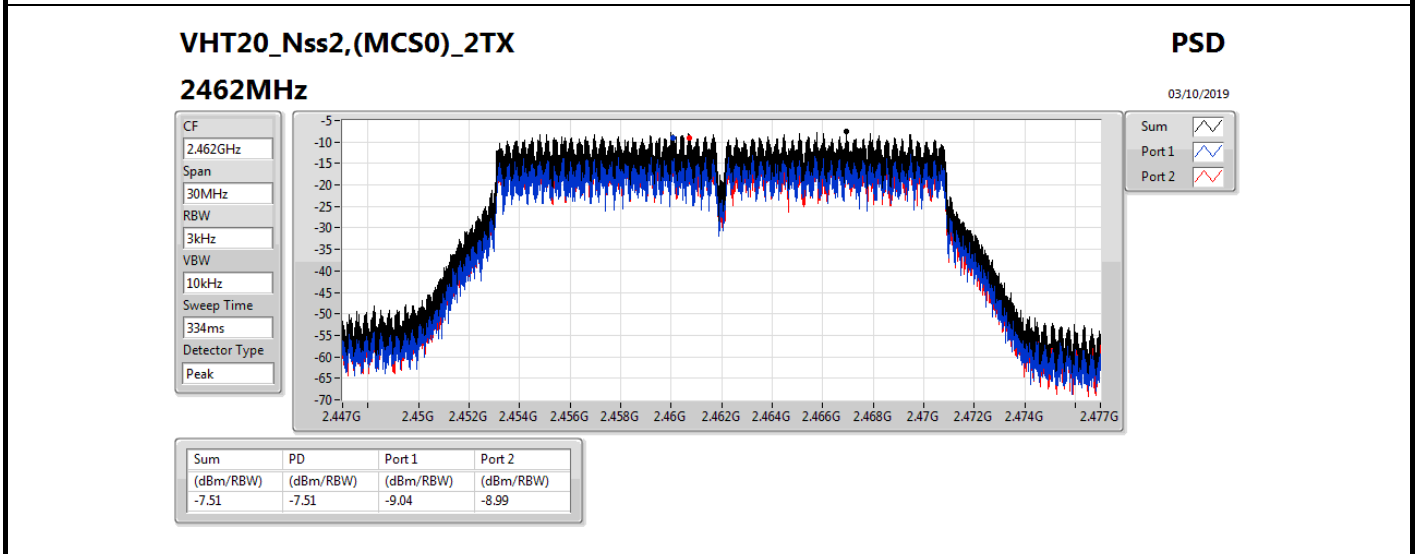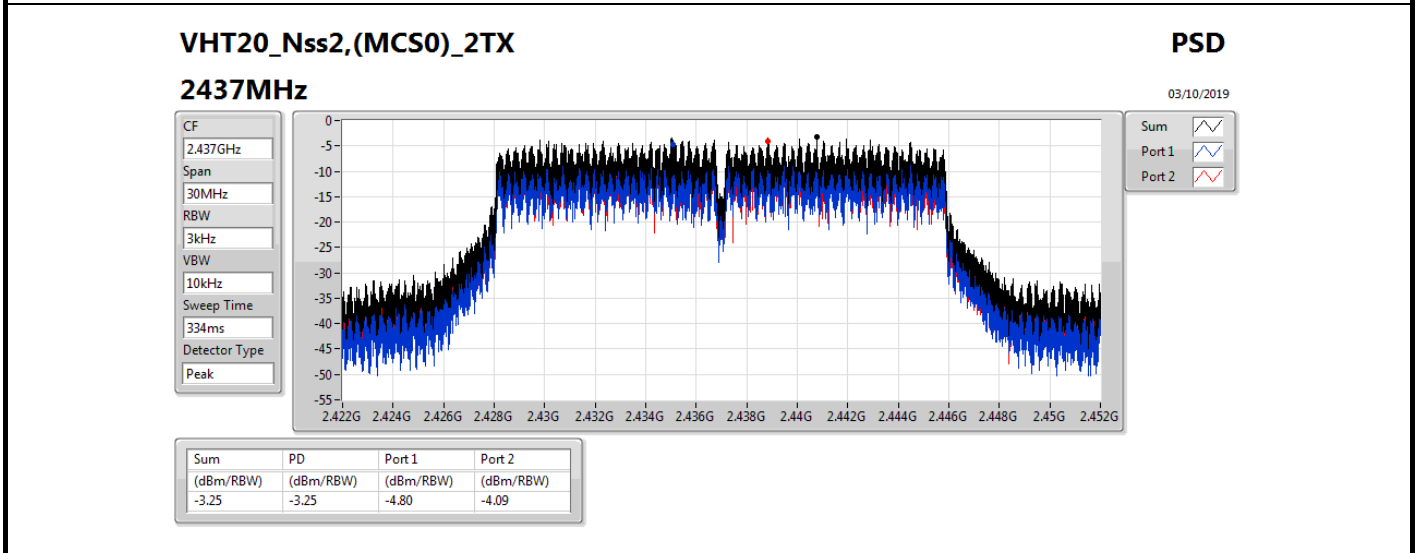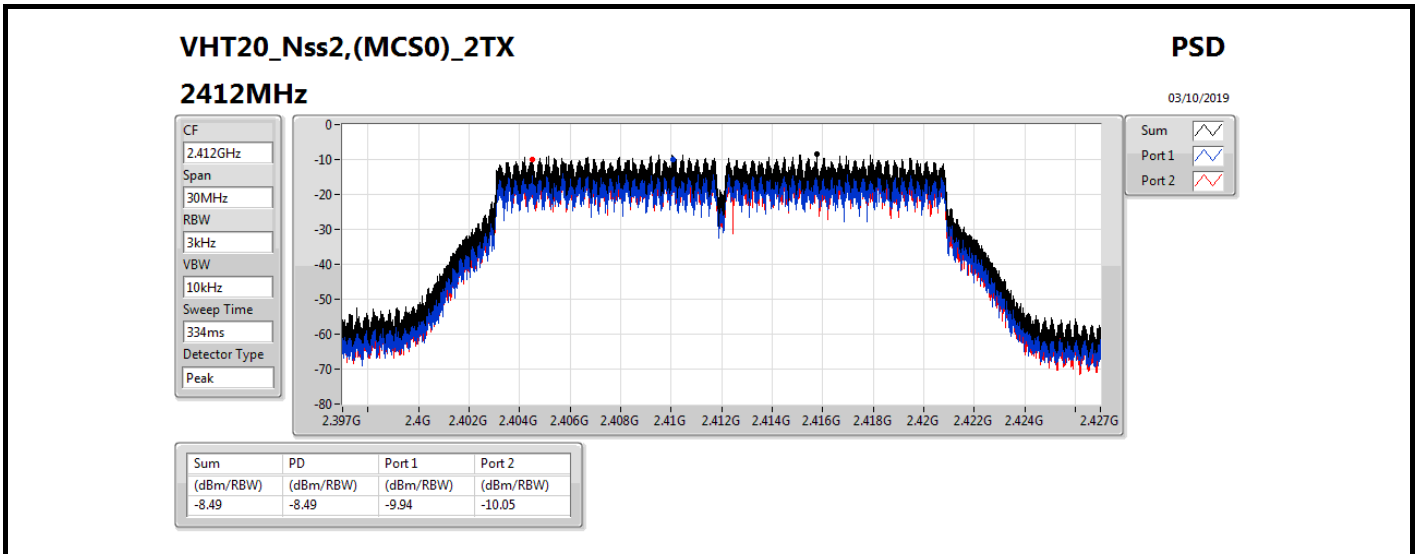

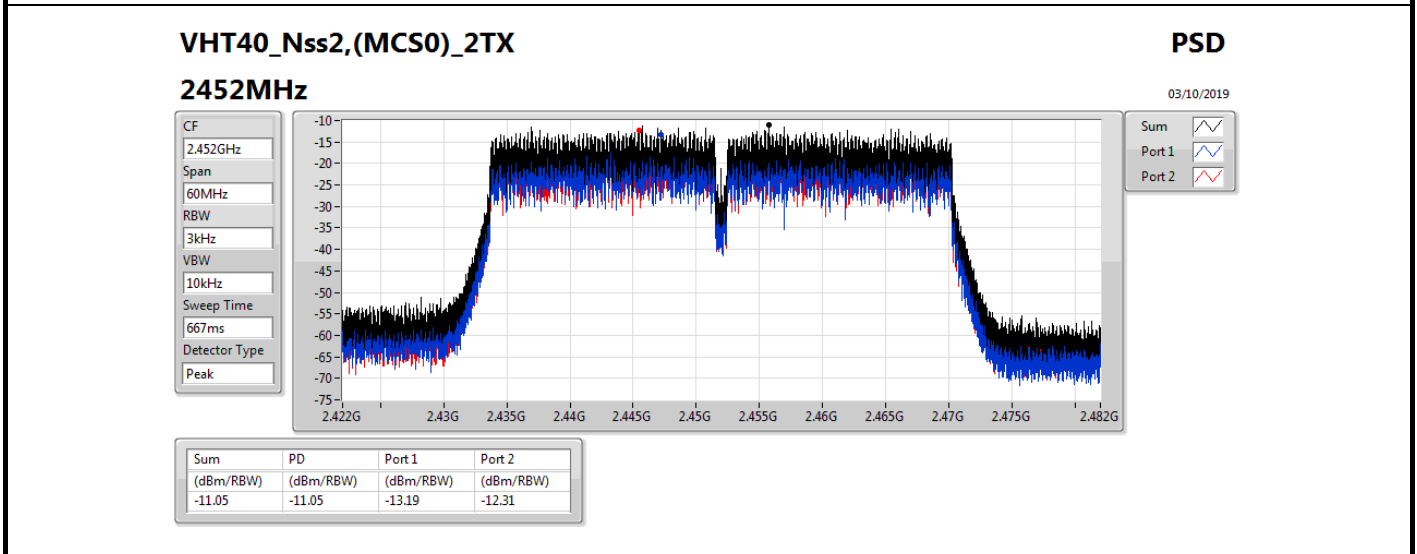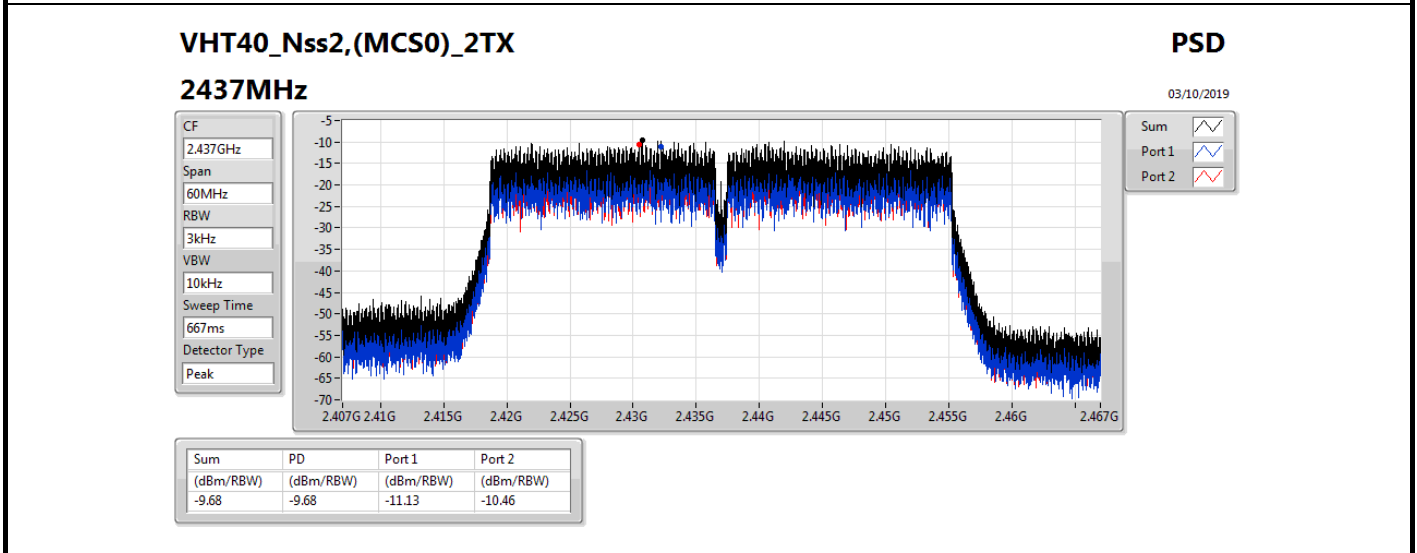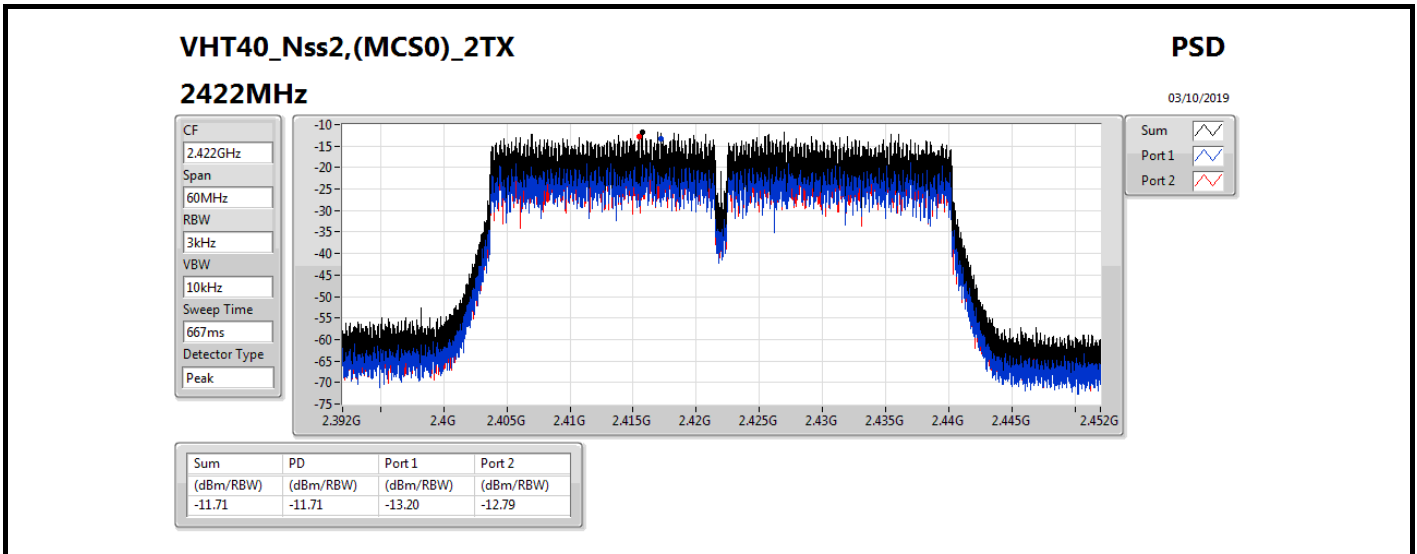

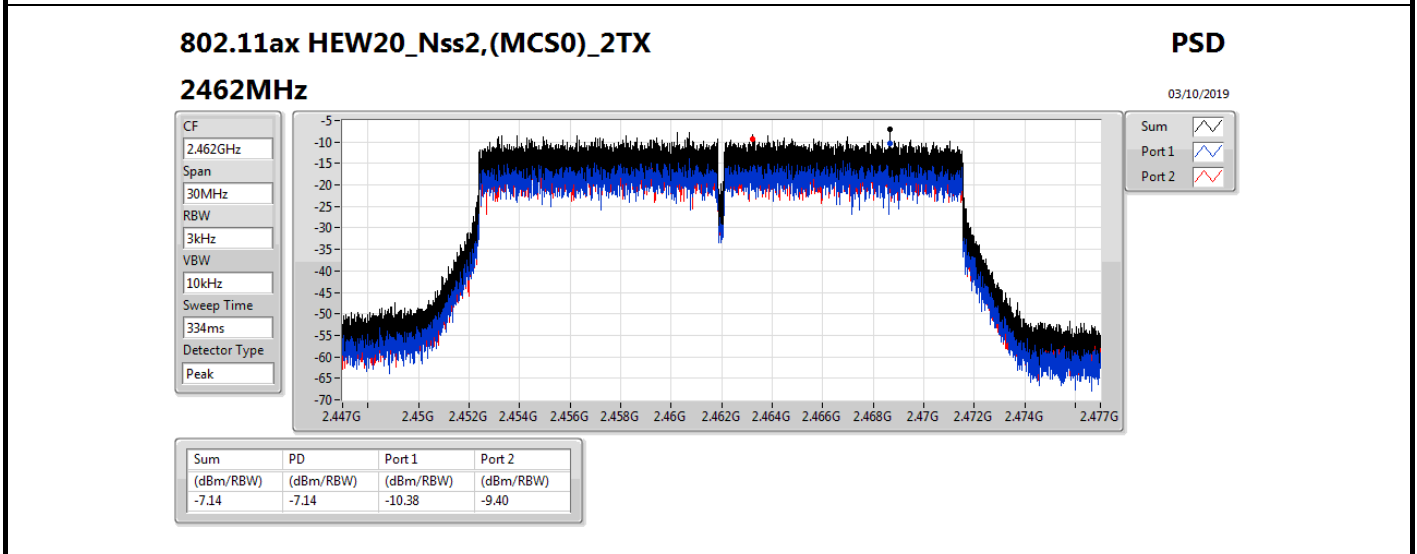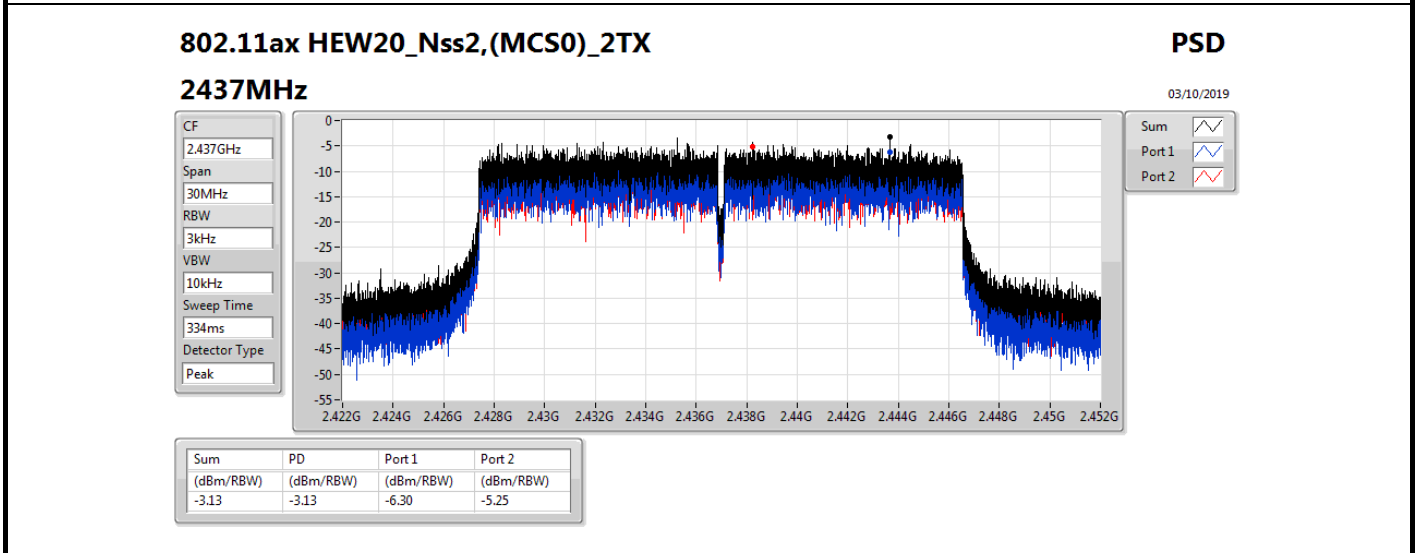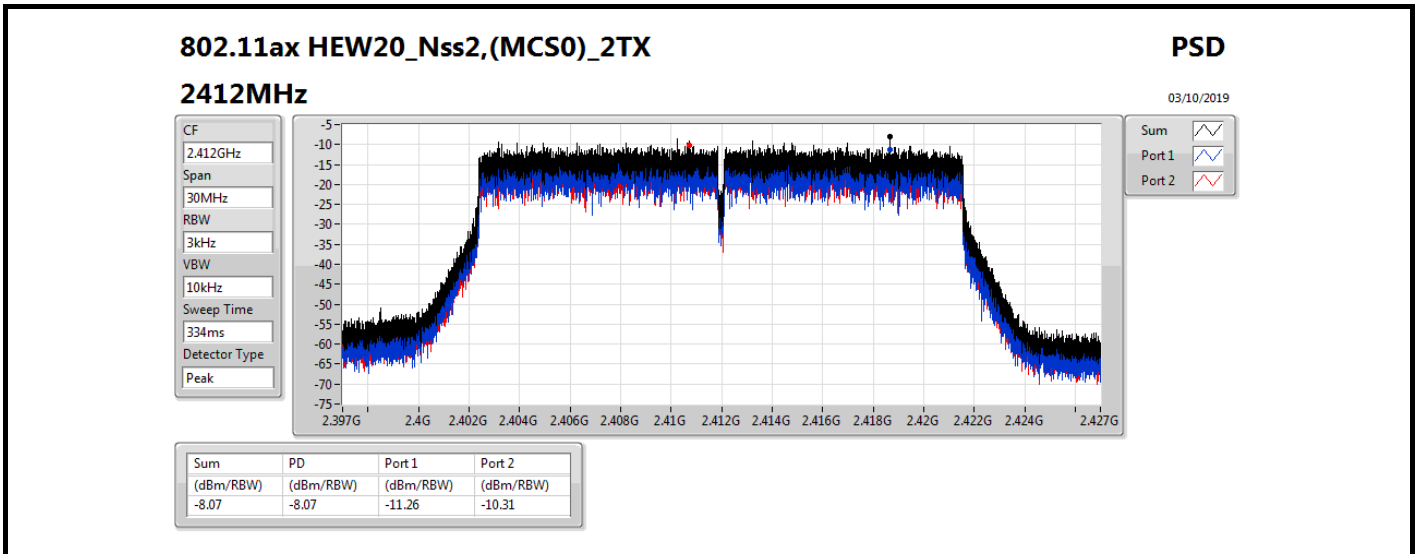

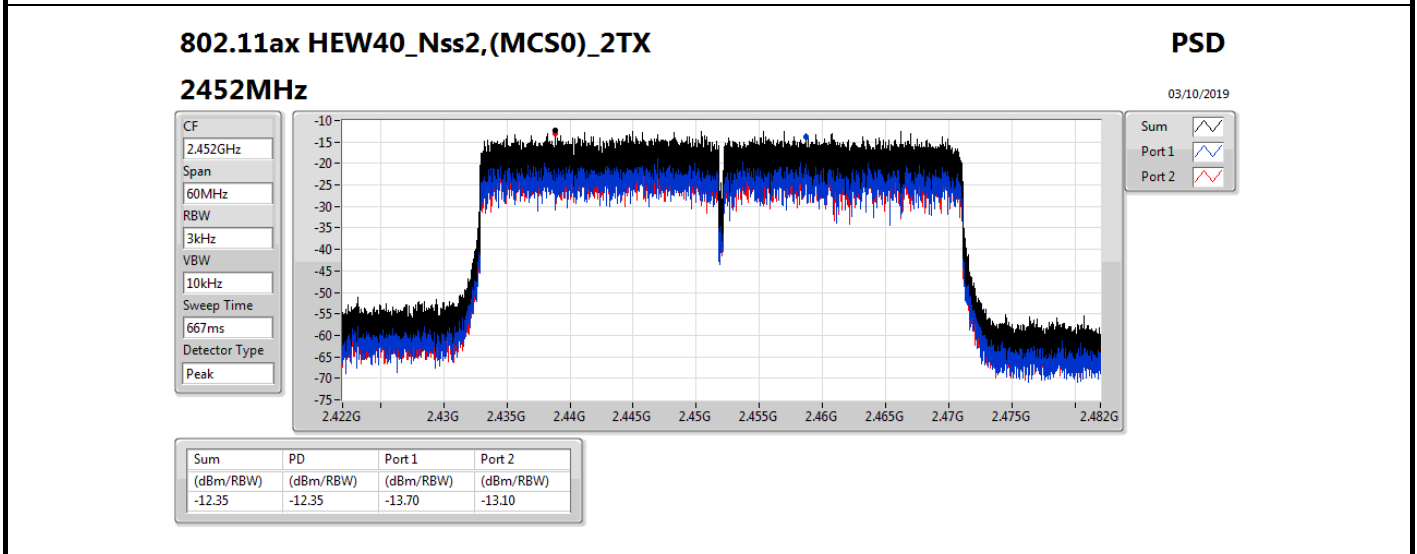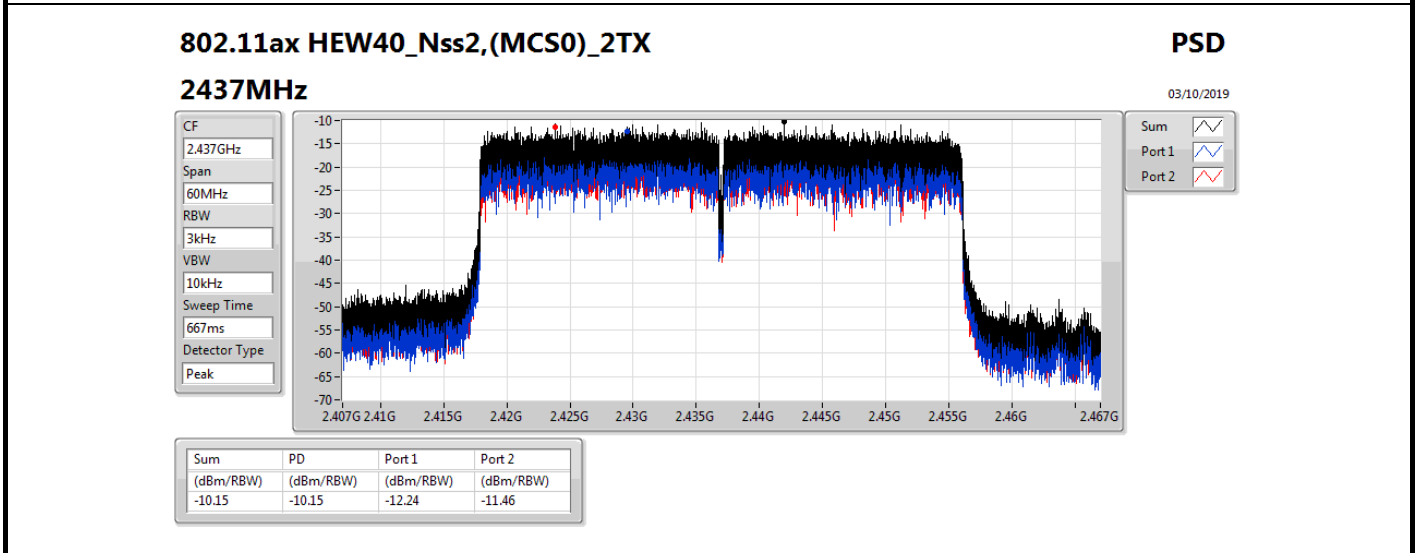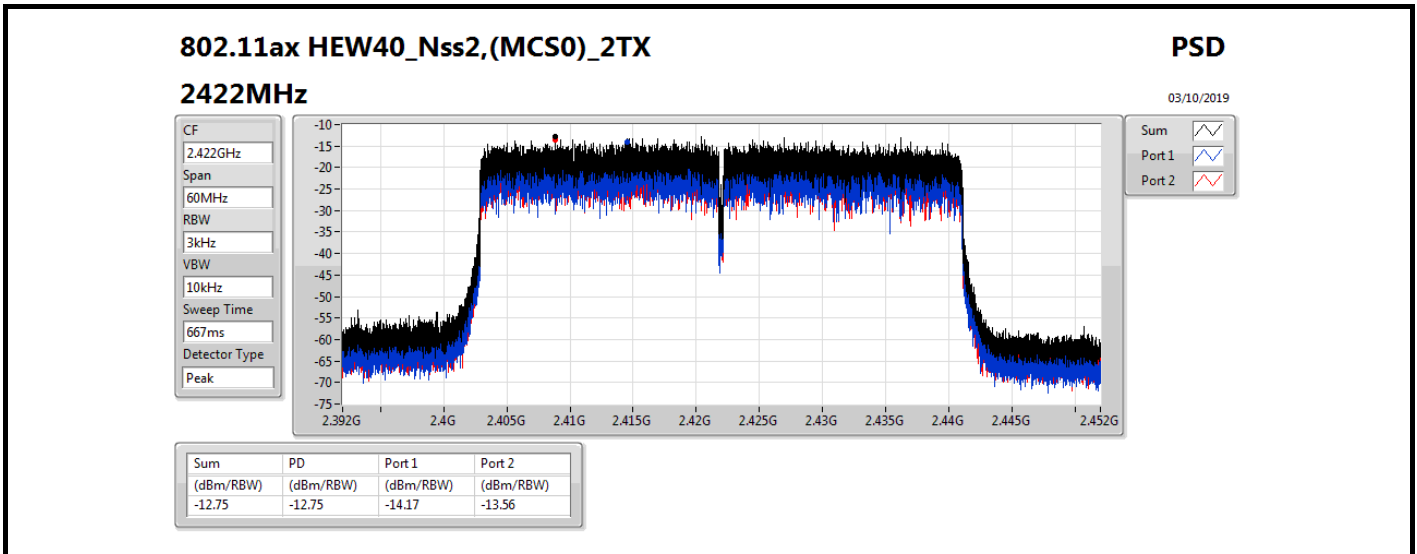



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
VHT20-BF_Nss1,(MCS0)_2TX	-1.82
VHT40-BF_Nss1,(MCS0)_2TX	-8.26
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-1.78
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-9.20

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.48	-9.90	-9.79	-7.26	6.52
2437MHz	Pass	7.48	-4.99	-4.46	-1.82	6.52
2462MHz	Pass	7.48	-10.04	-9.95	-7.43	6.52
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.48	-13.06	-12.35	-9.68	6.52
2437MHz	Pass	7.48	-11.20	-11.35	-8.26	6.52
2452MHz	Pass	7.48	-13.68	-13.30	-10.48	6.52
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.48	-9.39	-8.06	-5.66	6.52
2437MHz	Pass	7.48	-5.11	-4.50	-1.78	6.52
2462MHz	Pass	7.48	-8.58	-7.83	-5.18	6.52
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.48	-14.41	-12.66	-10.44	6.52
2437MHz	Pass	7.48	-12.20	-12.13	-9.20	6.52
2452MHz	Pass	7.48	-14.08	-13.83	-10.94	6.52




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

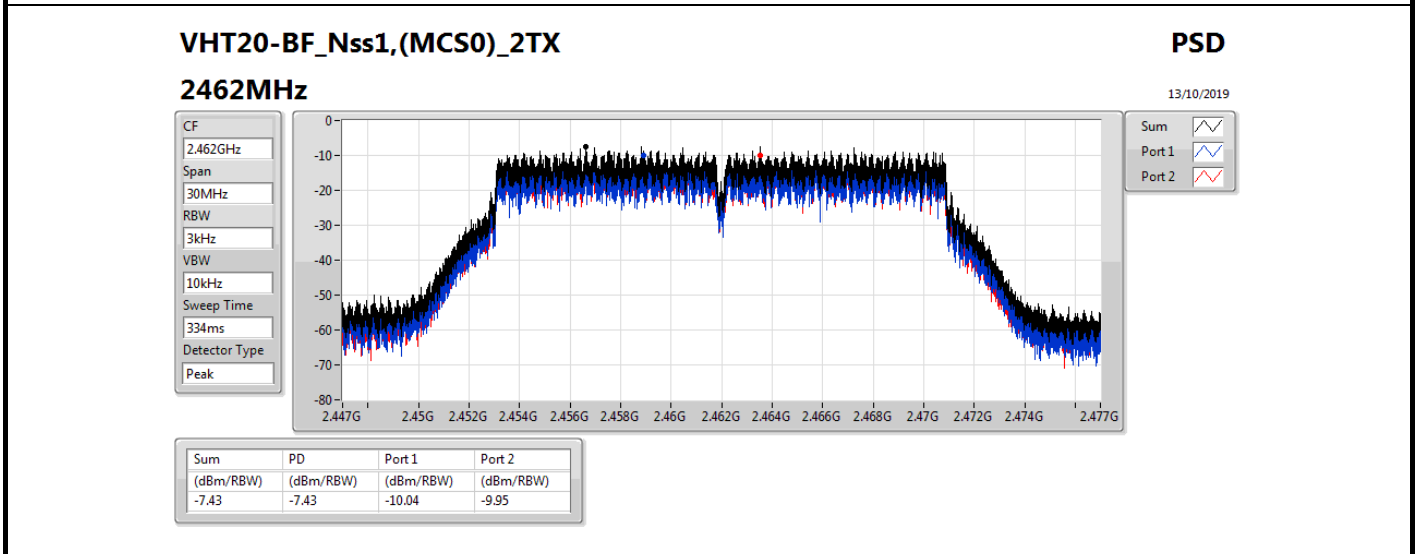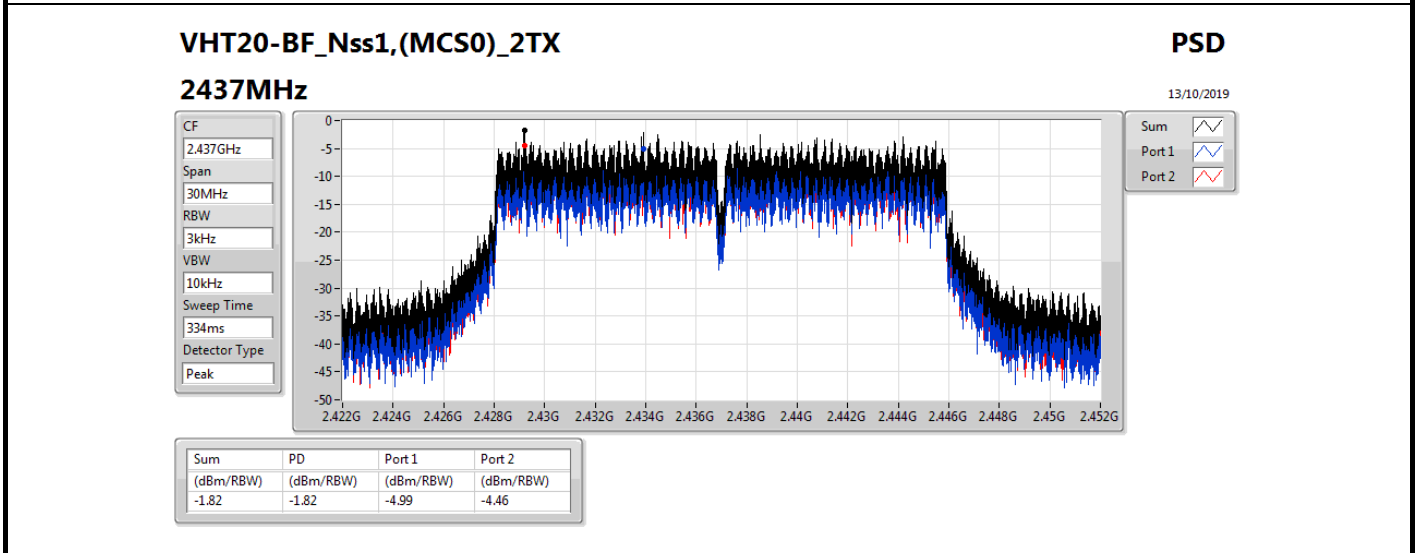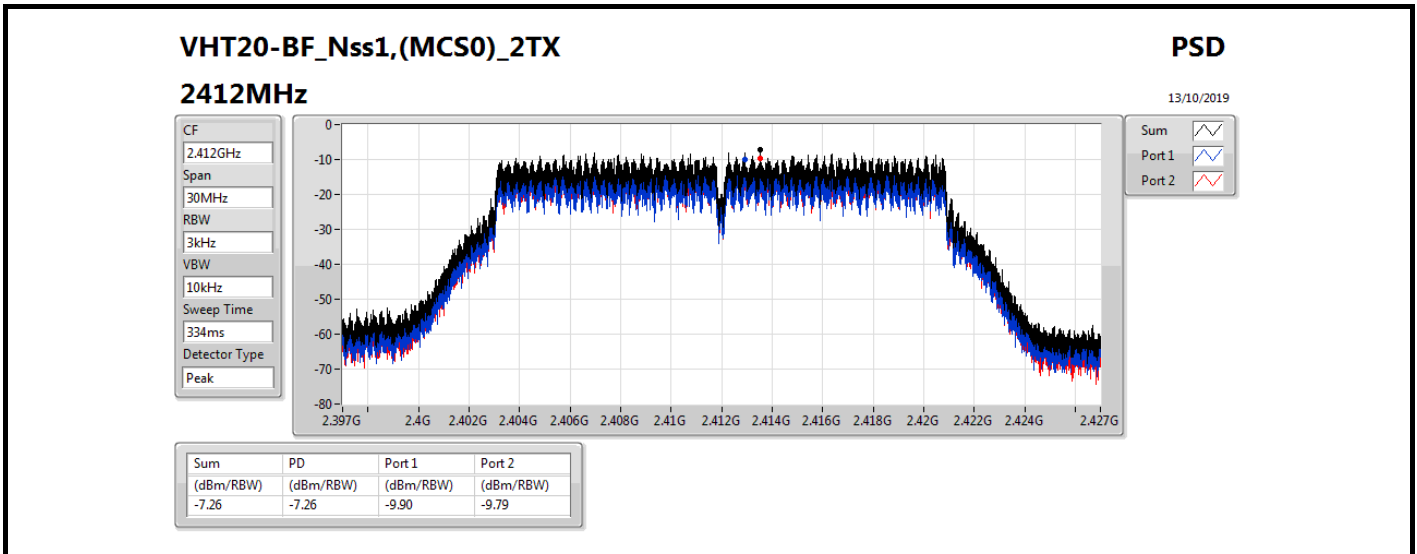

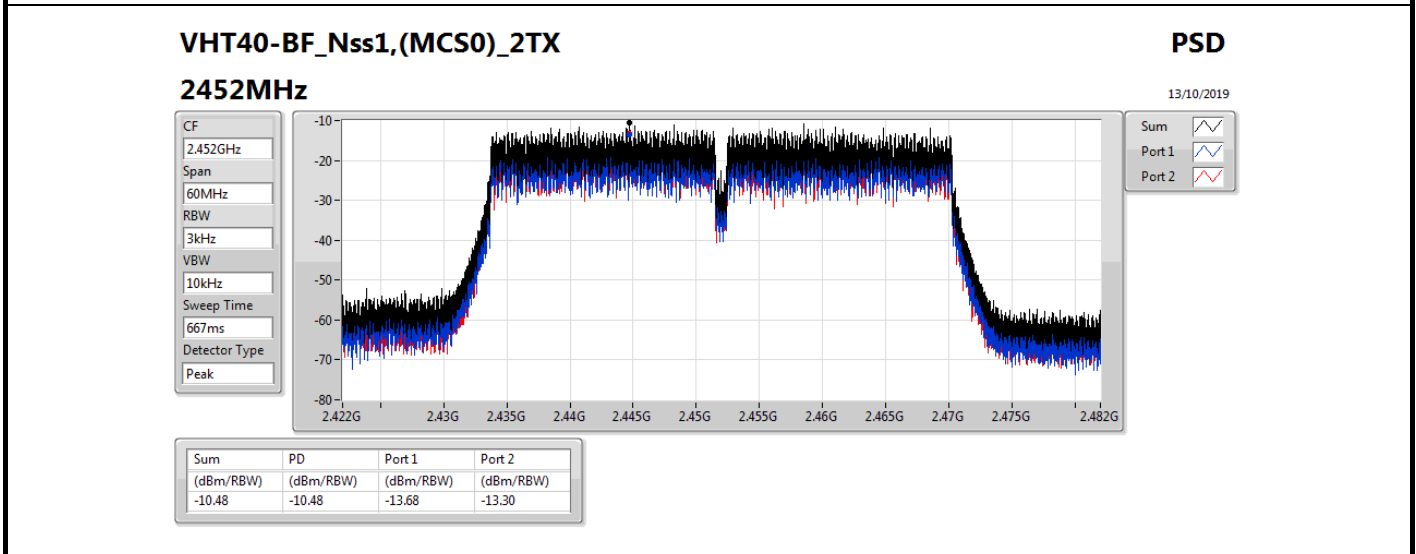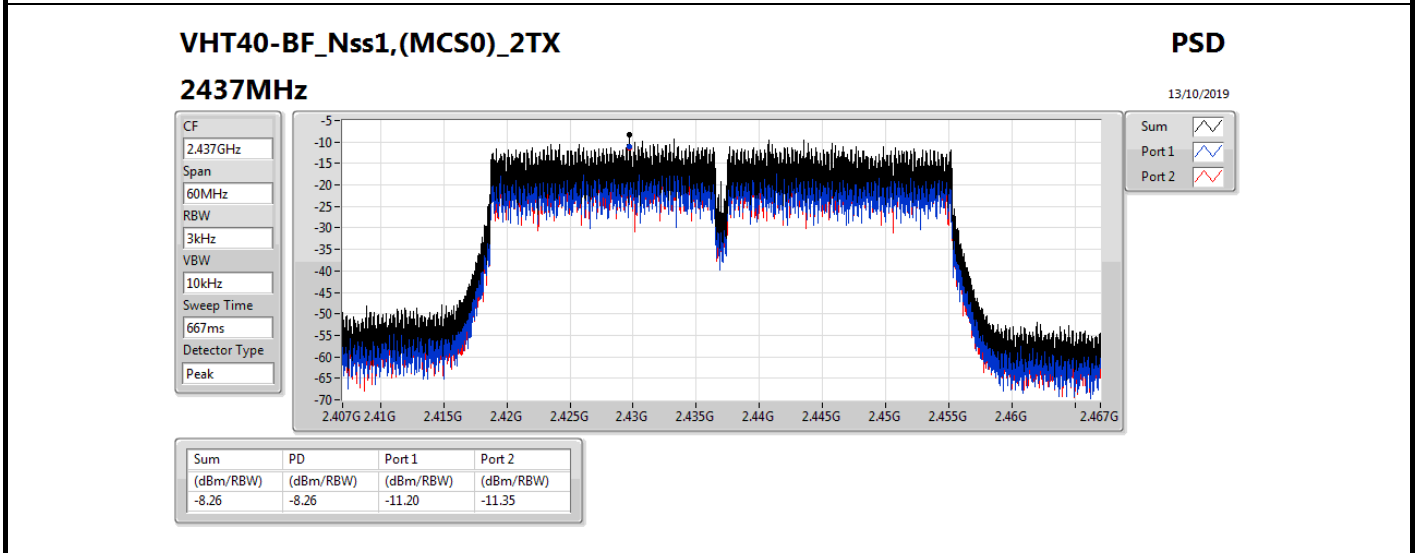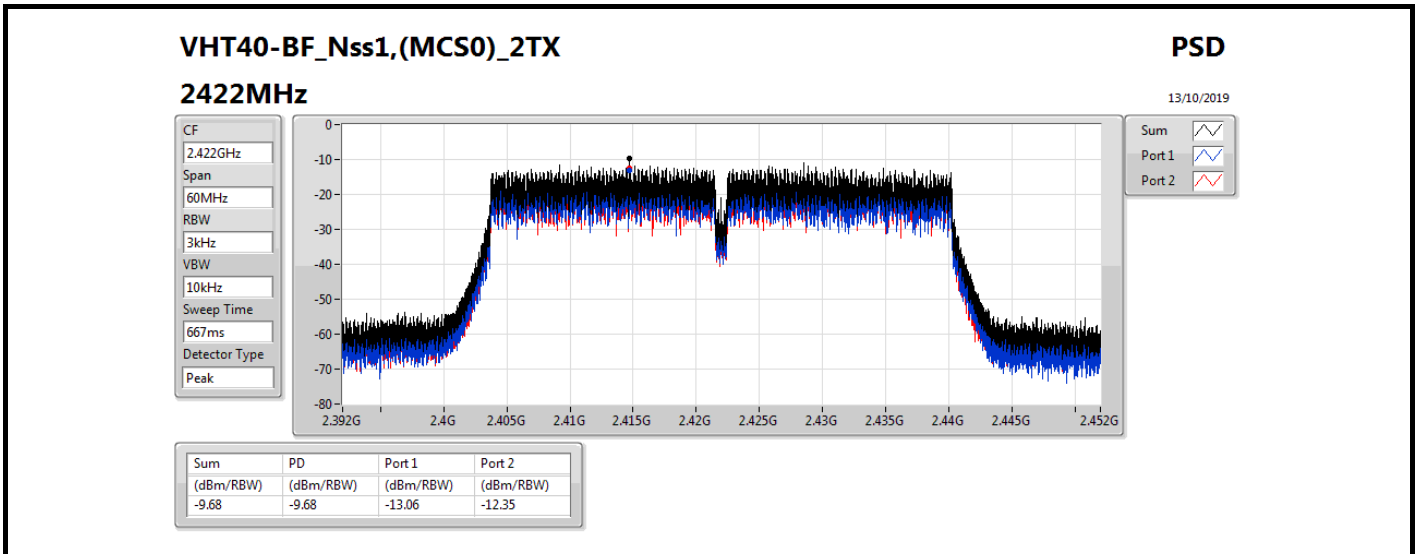

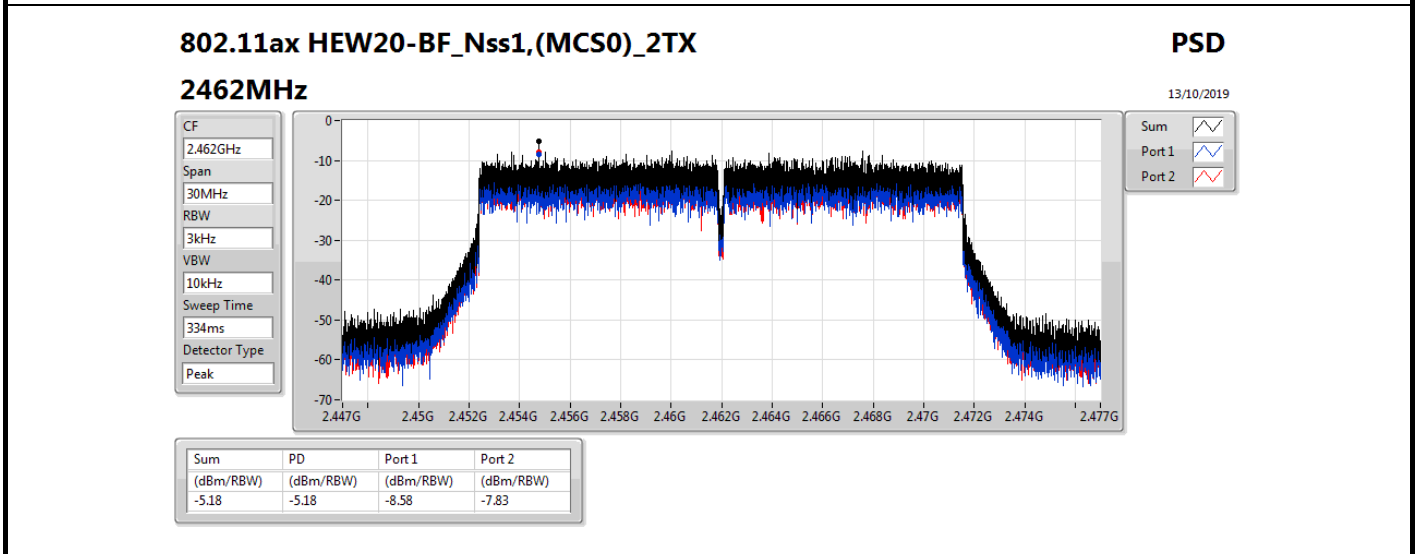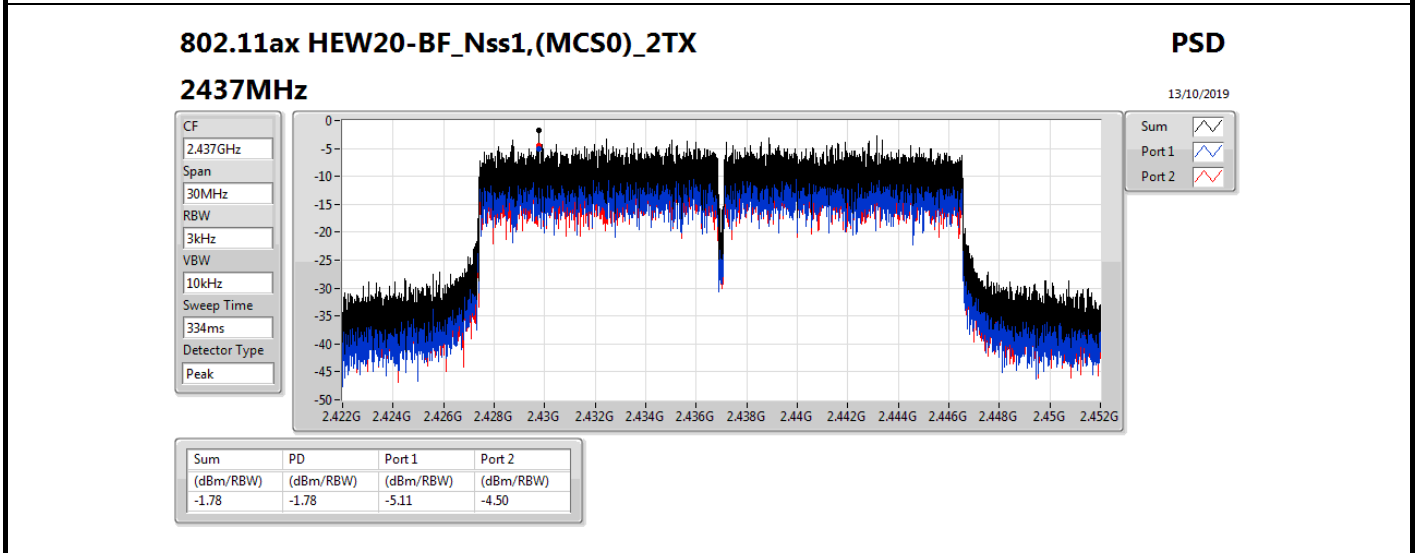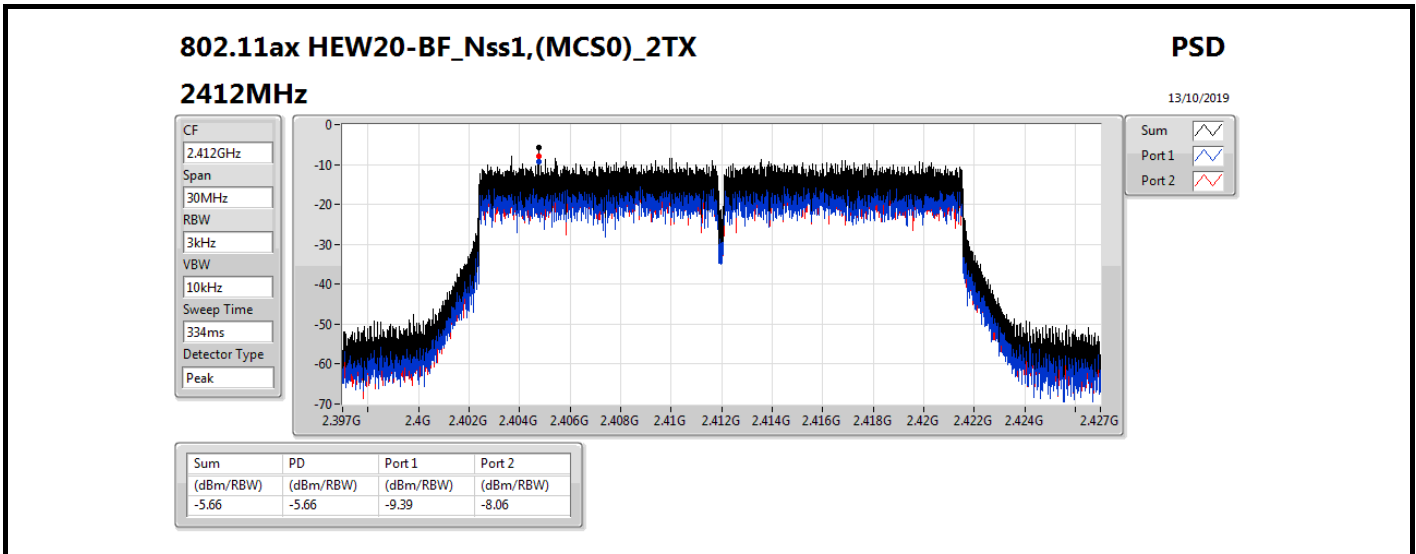

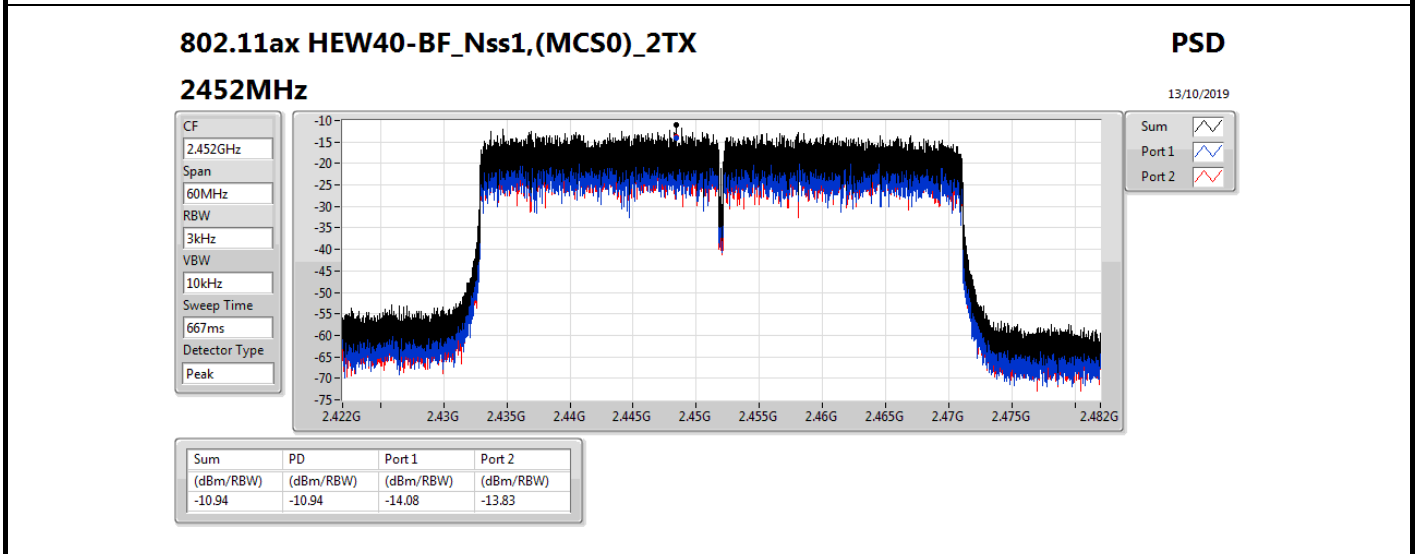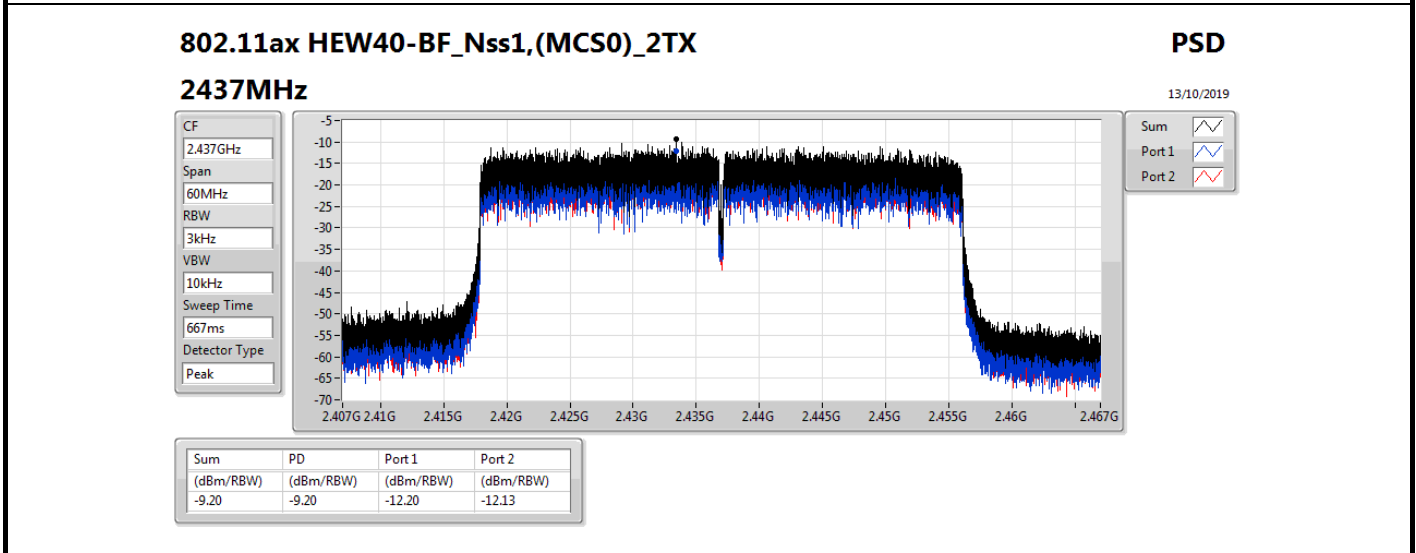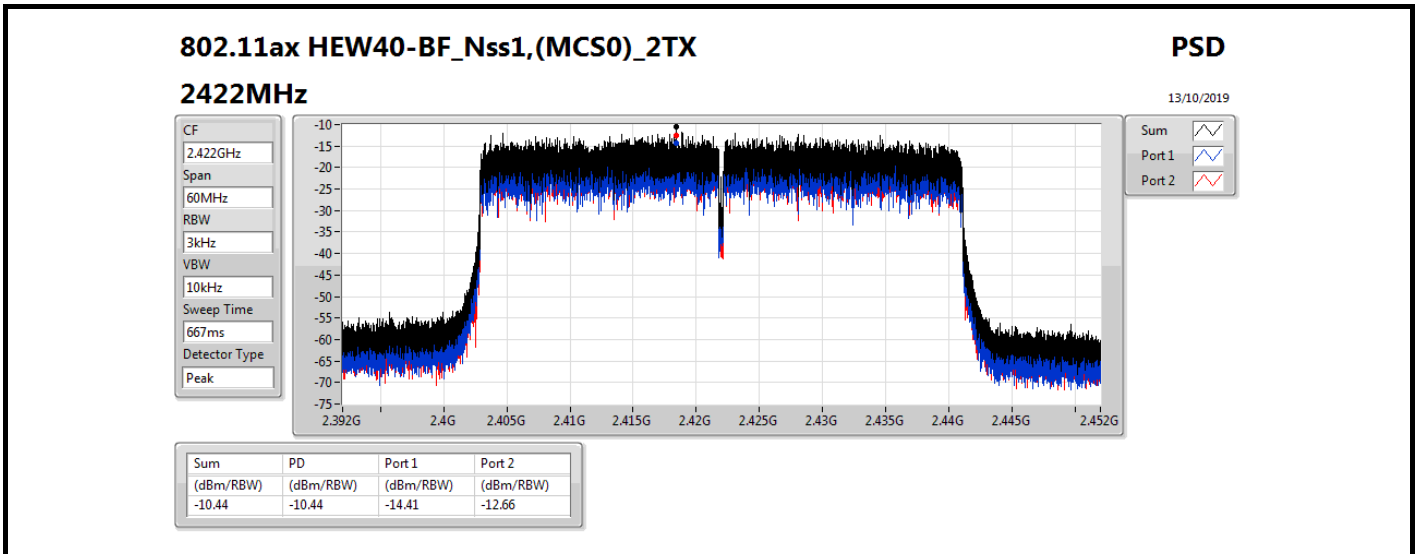



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-0.24
802.11g_Nss1,(6Mbps)_1TX	-4.52
VHT20_Nss1,(MCS0)_1TX	-5.32
VHT40_Nss1,(MCS0)_1TX	-10.46
802.11ax HEW20_Nss1,(MCS0)_1TX	-4.12
802.11ax HEW40_Nss1,(MCS0)_1TX	-11.29

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	5.00	-2.22	-2.22	8.00
2437MHz	Pass	5.00	-2.88	-2.88	8.00
2462MHz	Pass	5.00	-0.24	-0.24	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	5.00	-9.94	-9.94	8.00
2437MHz	Pass	5.00	-4.52	-4.52	8.00
2462MHz	Pass	5.00	-8.57	-8.57	8.00
VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	5.00	-12.59	-12.59	8.00
2437MHz	Pass	5.00	-5.32	-5.32	8.00
2462MHz	Pass	5.00	-10.09	-10.09	8.00
VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	5.00	-13.41	-13.41	8.00
2437MHz	Pass	5.00	-11.21	-11.21	8.00
2452MHz	Pass	5.00	-10.46	-10.46	8.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	5.00	-11.13	-11.13	8.00
2437MHz	Pass	5.00	-4.12	-4.12	8.00
2462MHz	Pass	5.00	-8.73	-8.73	8.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	5.00	-14.43	-14.43	8.00
2437MHz	Pass	5.00	-11.29	-11.29	8.00
2452MHz	Pass	5.00	-11.70	-11.70	8.00




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

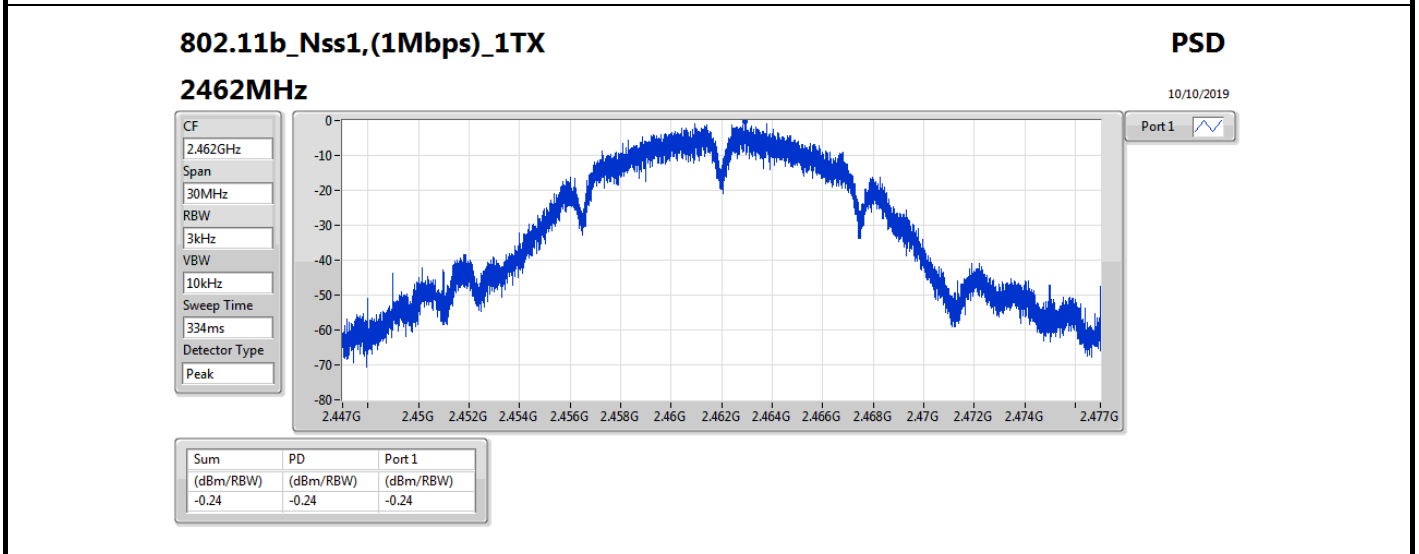
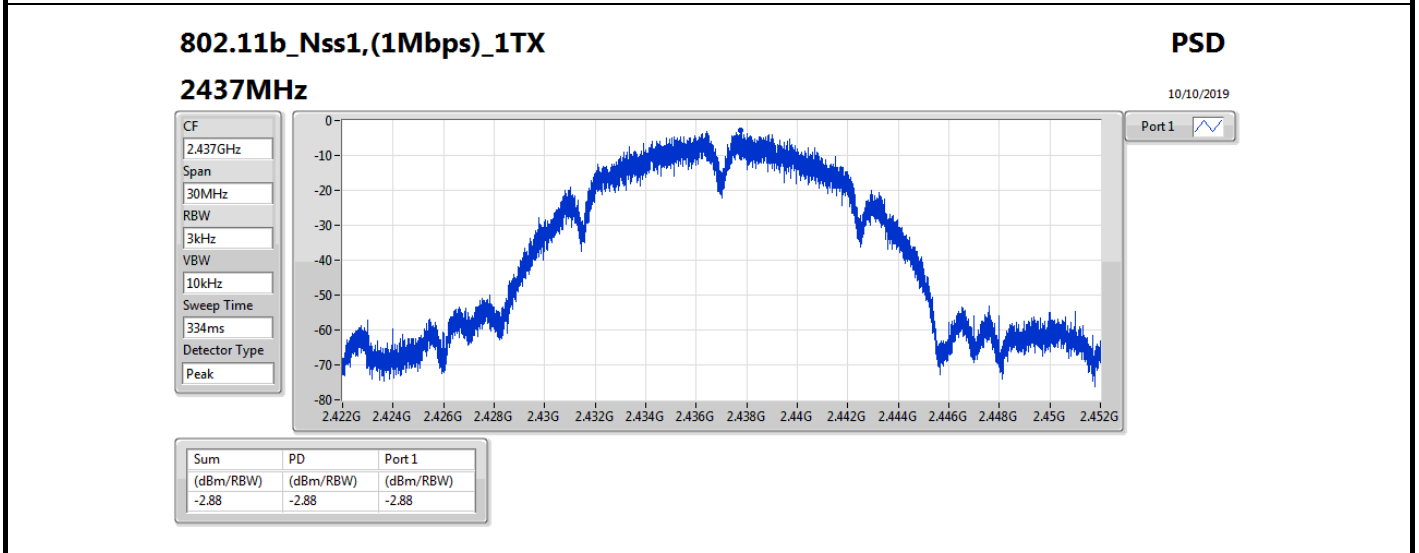
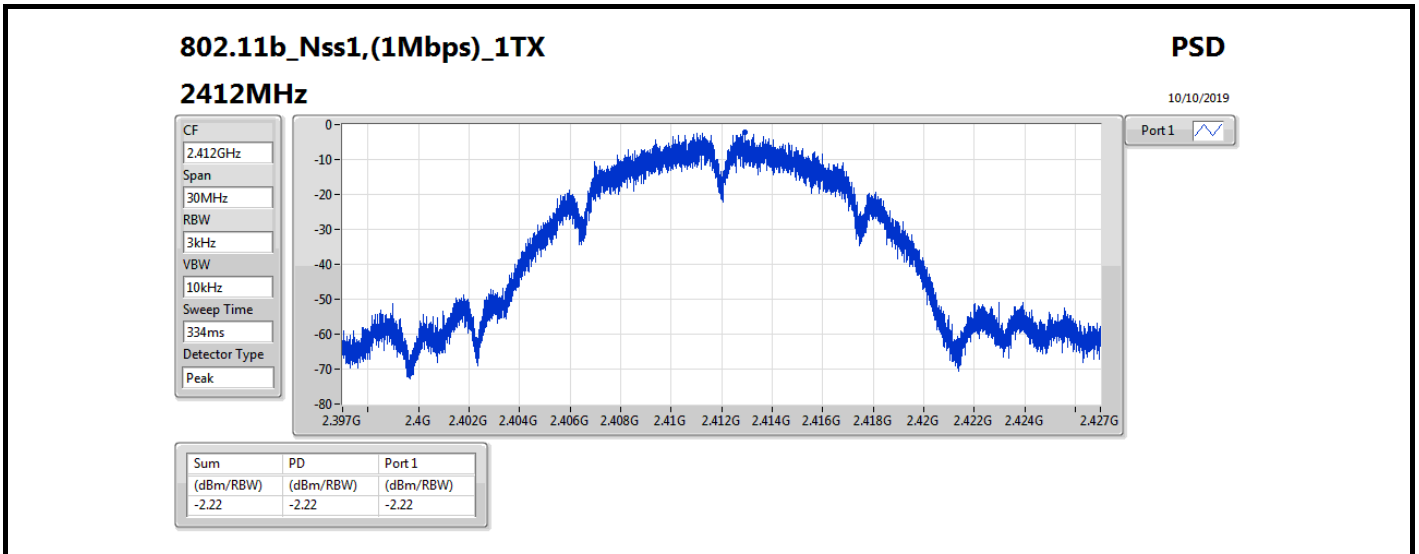


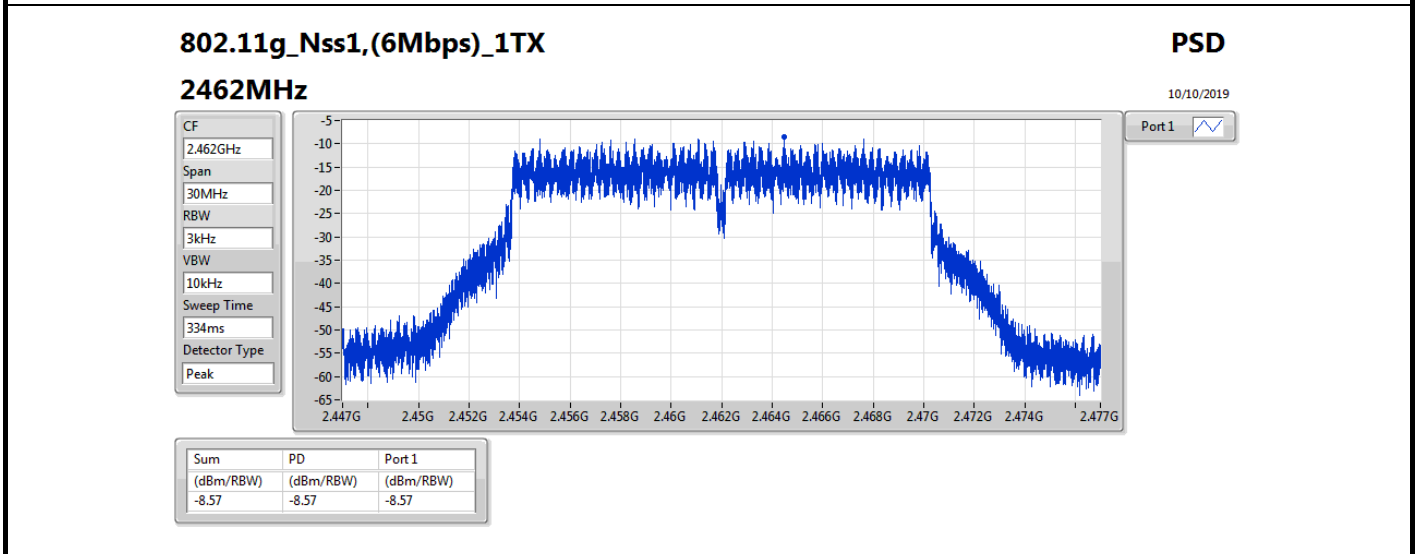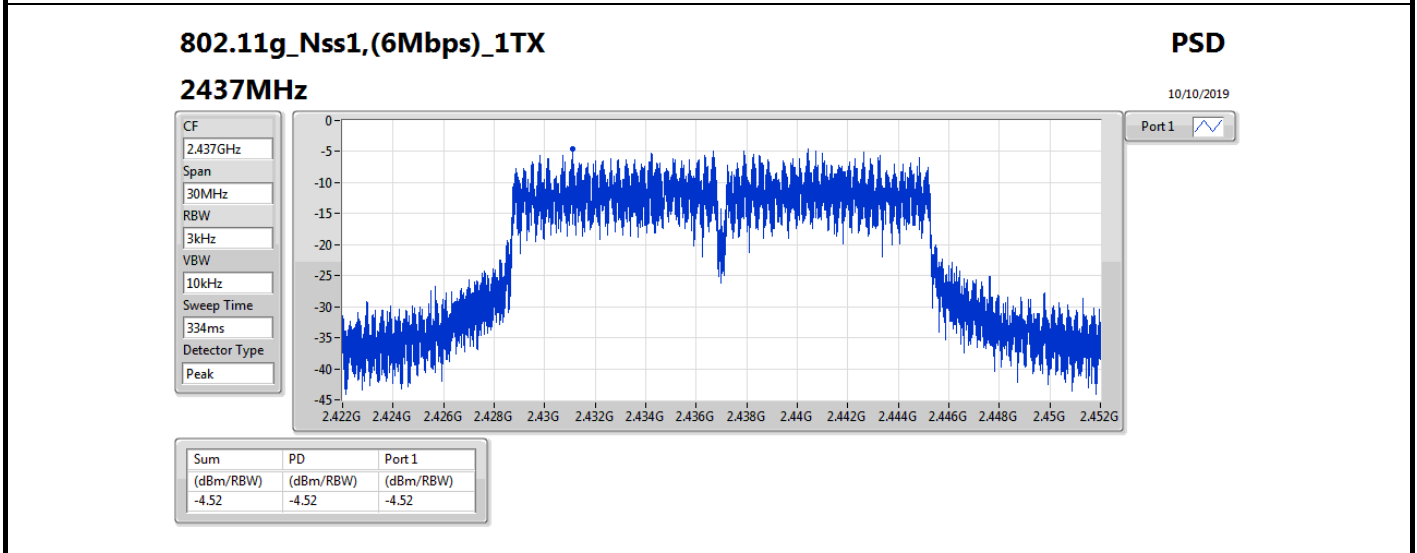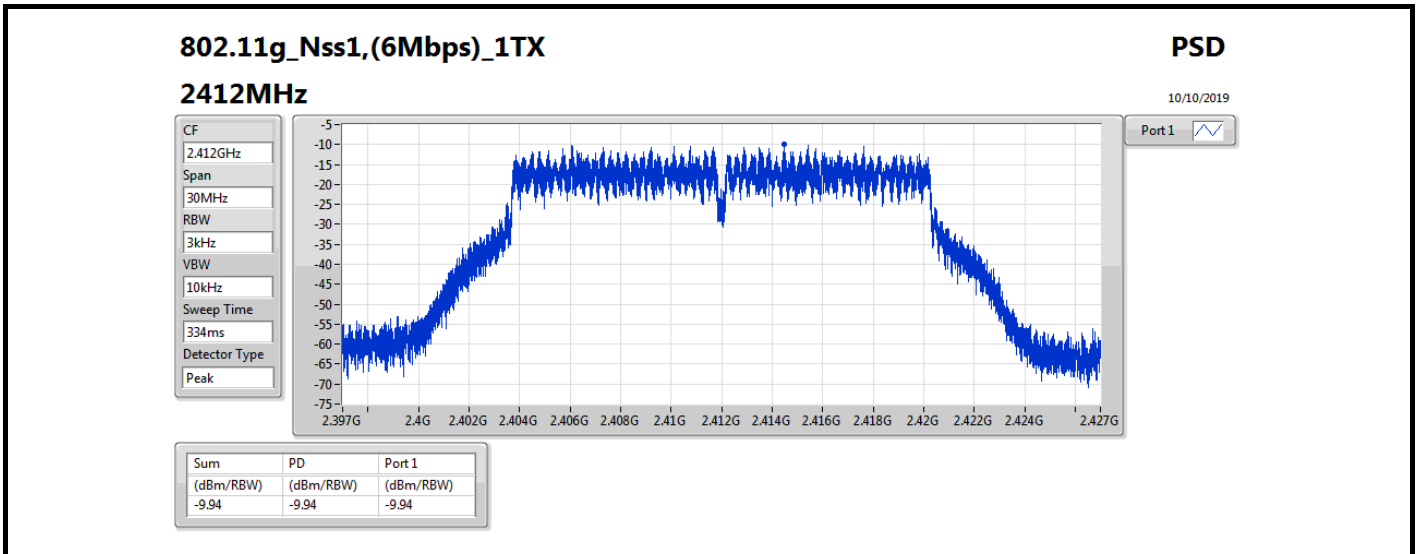

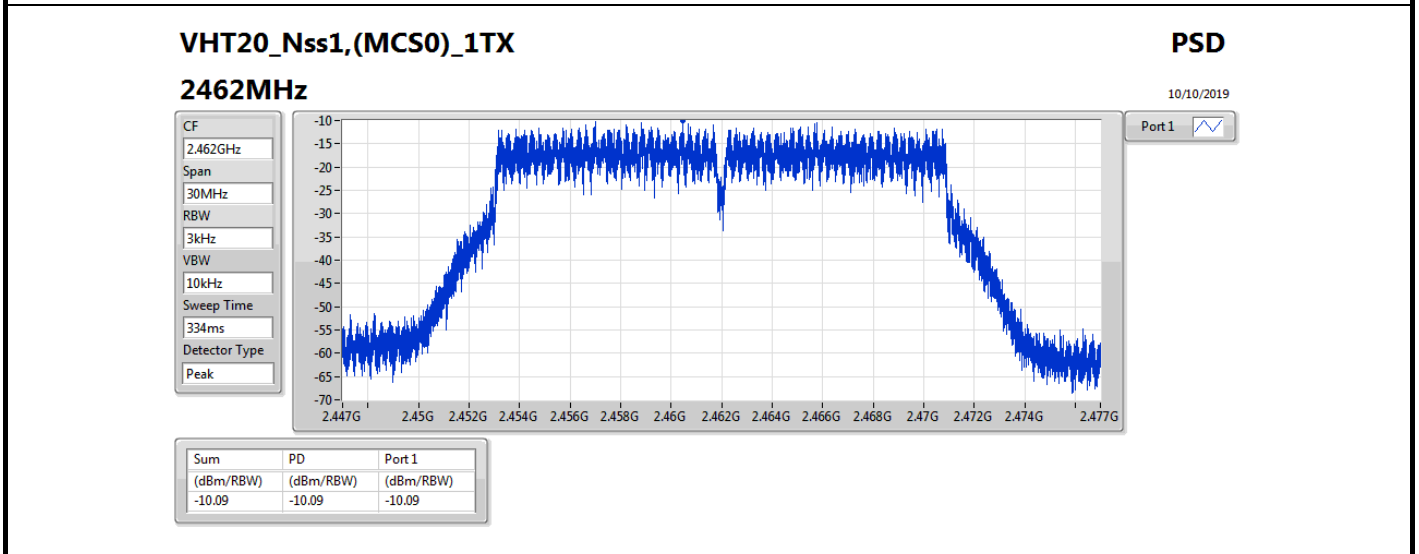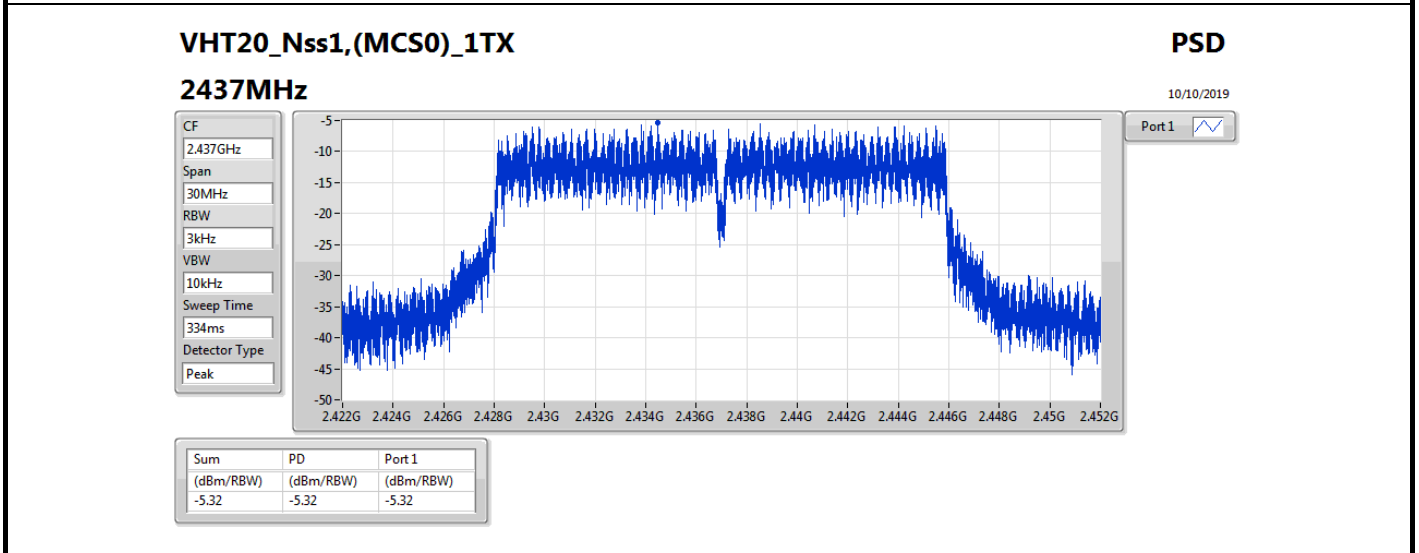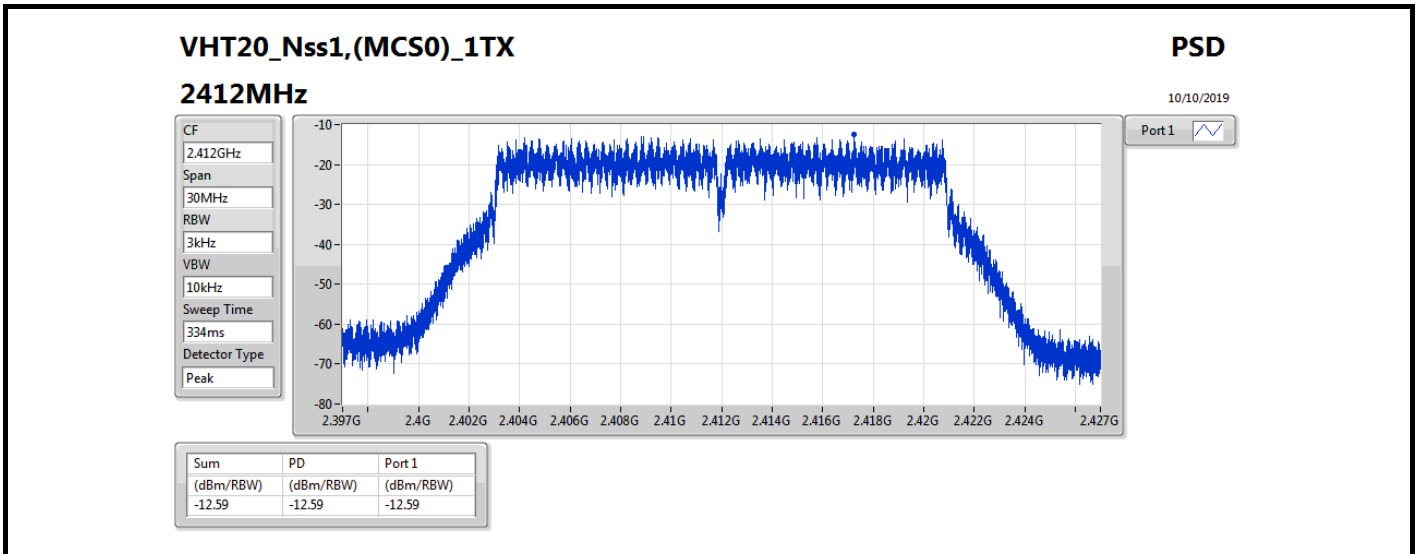

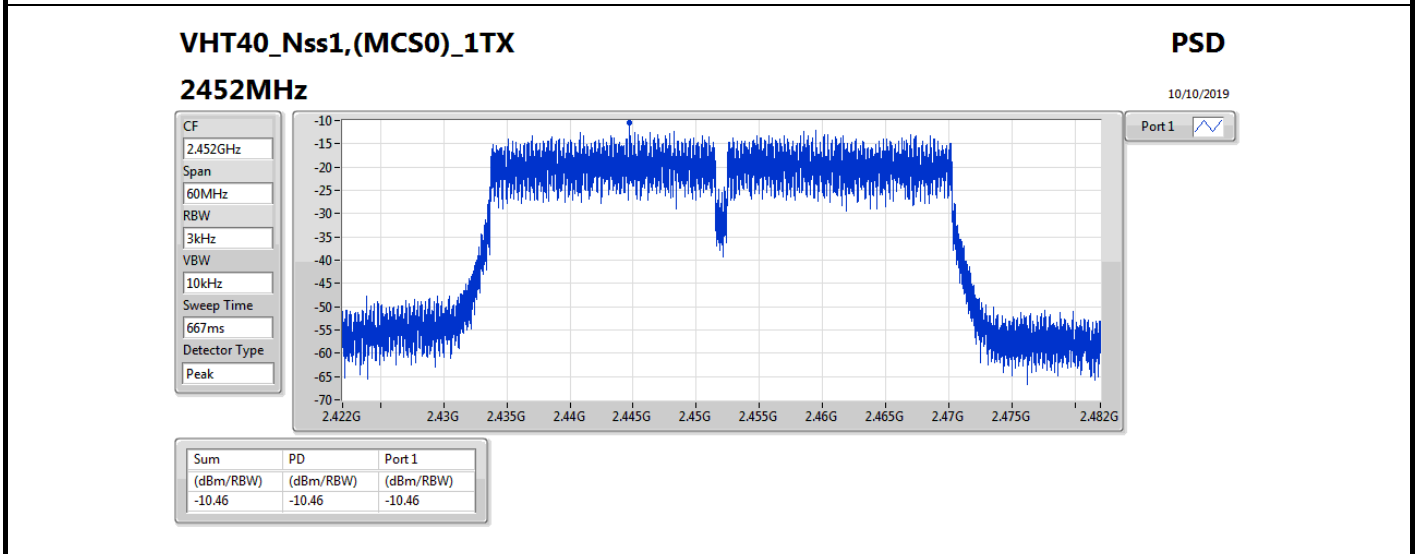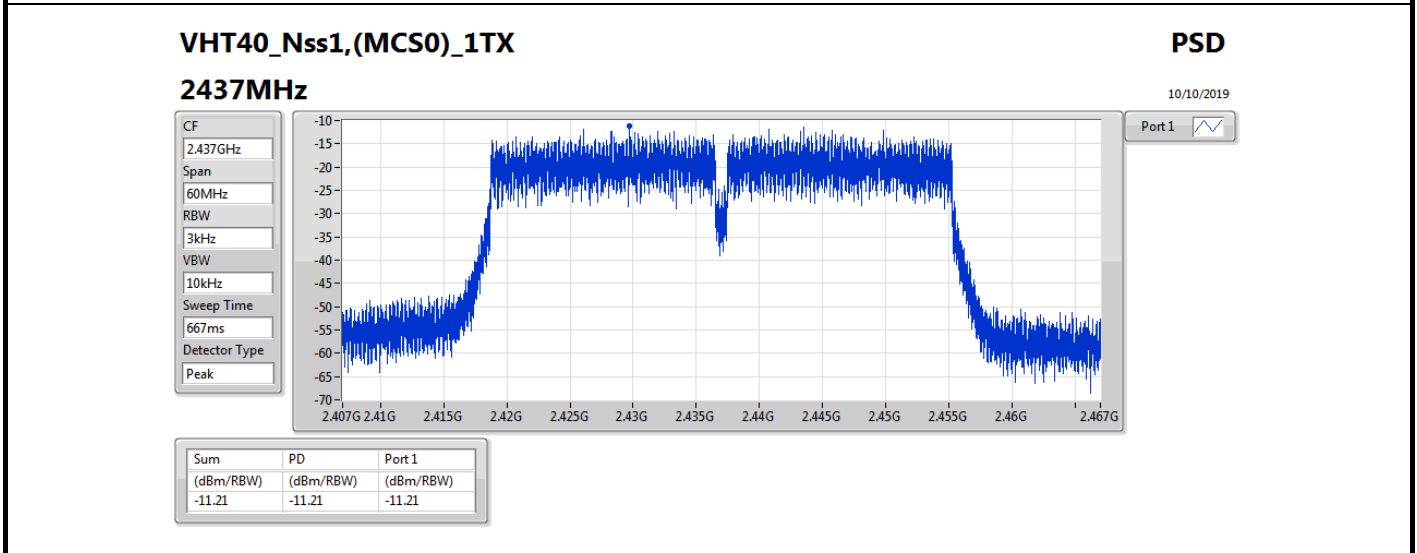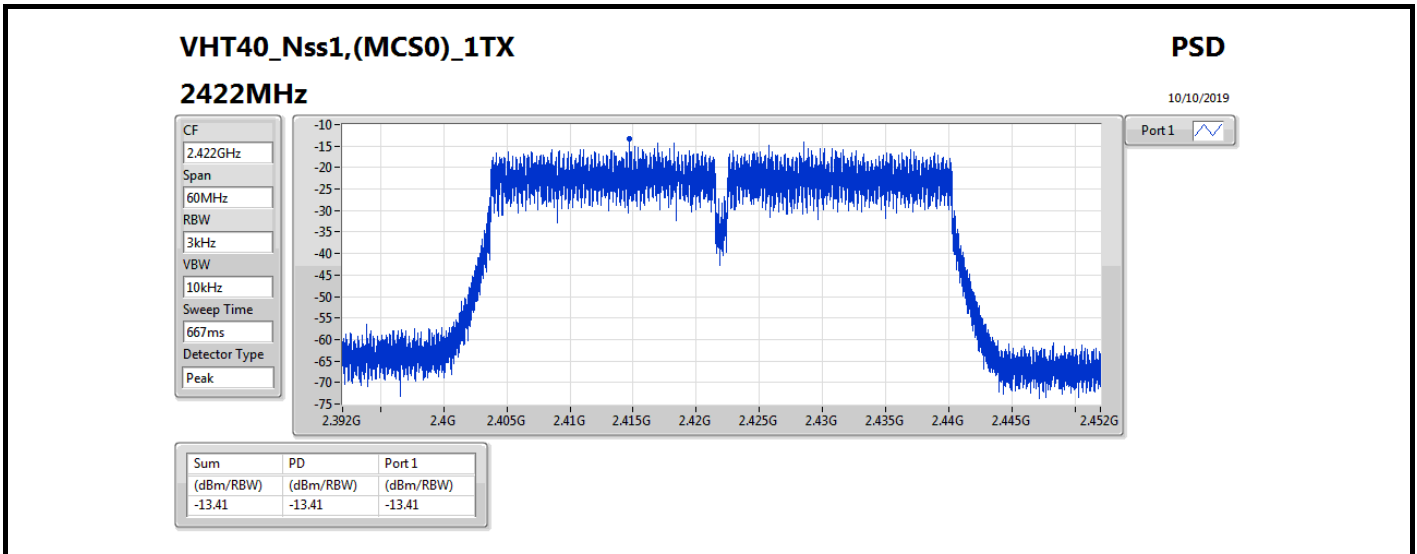

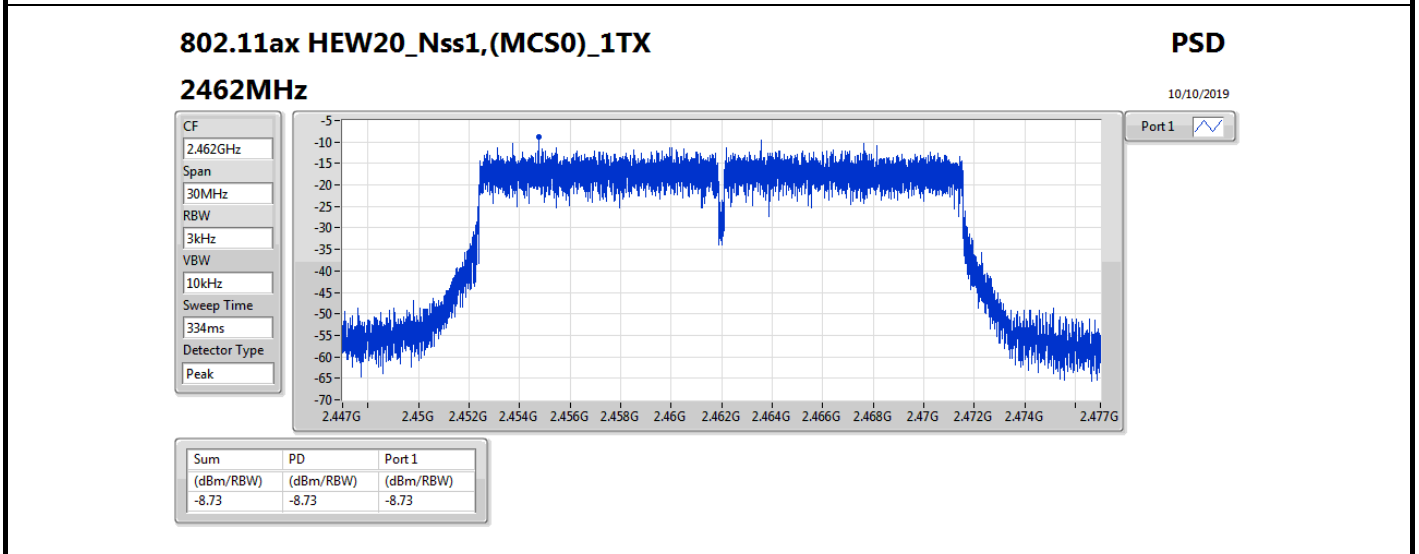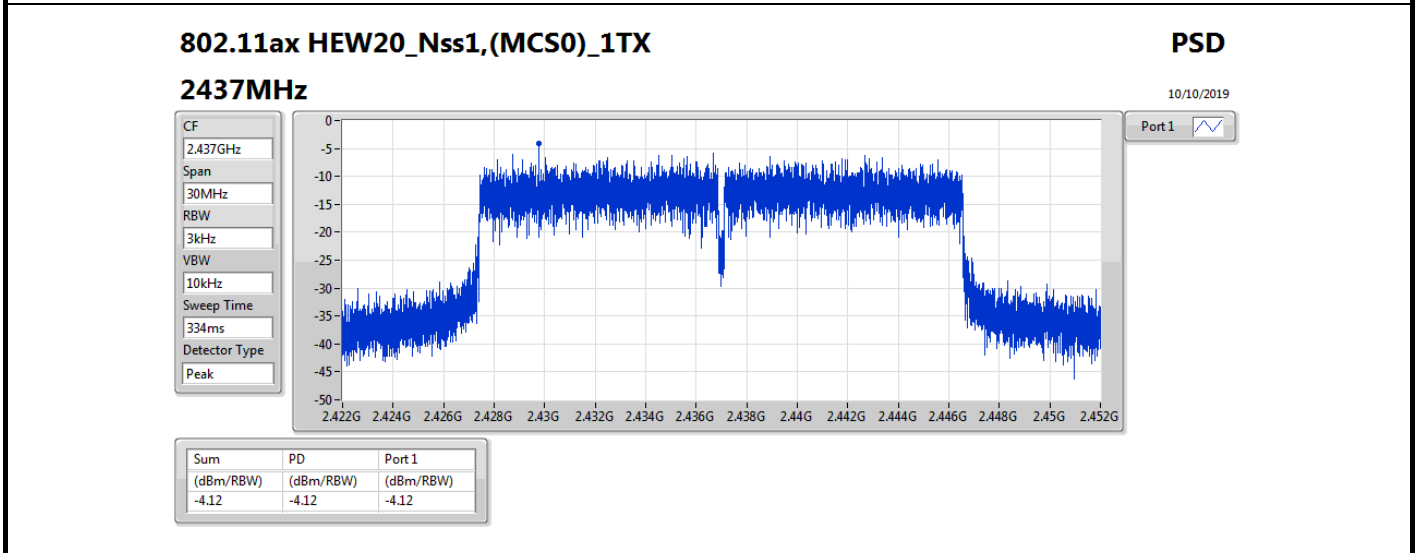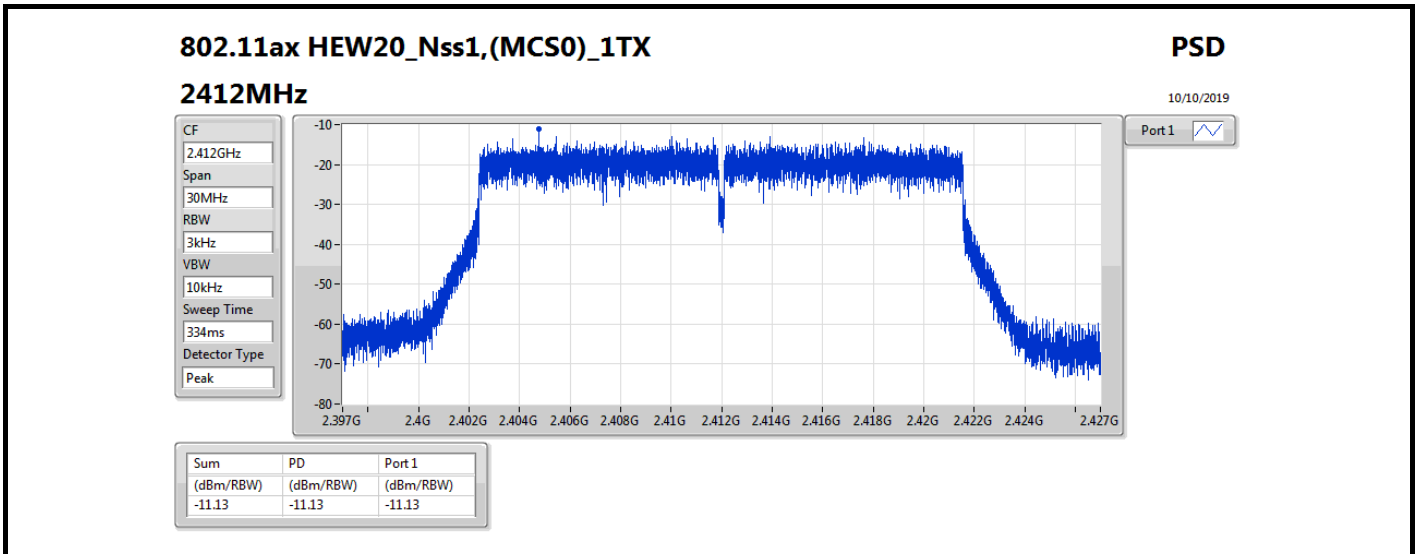

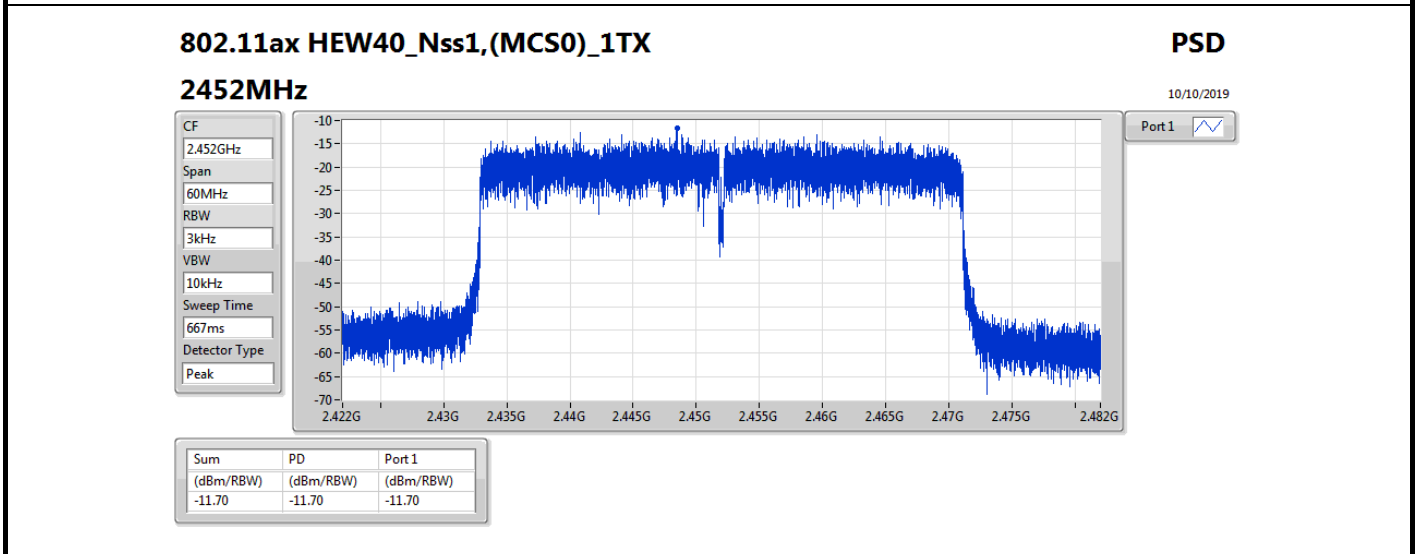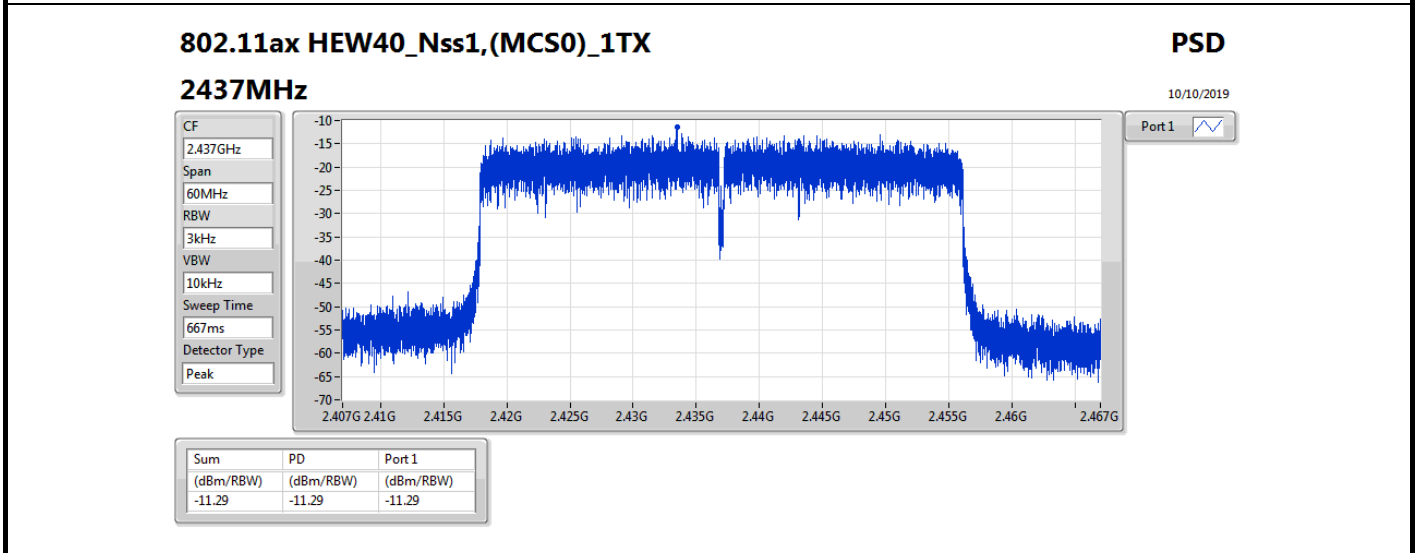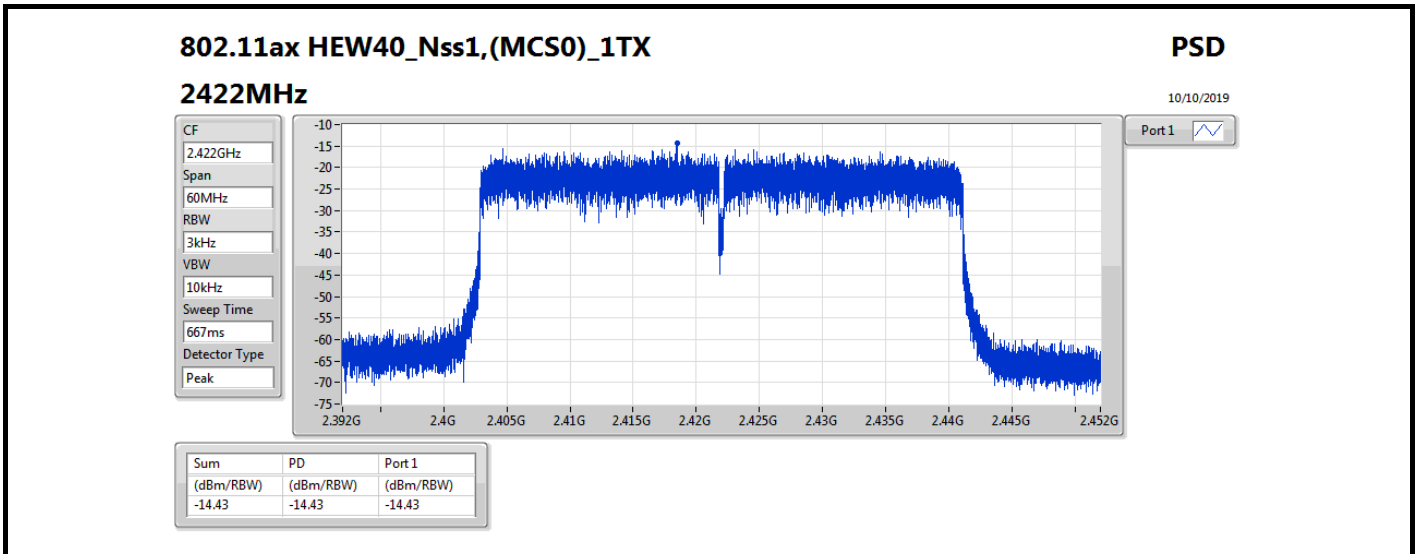



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-2.08
802.11g_Nss1,(6Mbps)_2TX	-2.92
VHT20_Nss2,(MCS0)_2TX	-5.04
VHT40_Nss2,(MCS0)_2TX	-11.91
802.11ax HEW20_Nss2,(MCS0)_2TX	-5.18
802.11ax HEW40_Nss2,(MCS0)_2TX	-13.43

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	8.01	-4.08	-5.15	-2.29	5.99
2437MHz	Pass	8.01	-5.00	-5.54	-3.92	5.99
2462MHz	Pass	8.01	-3.85	-4.35	-2.08	5.99
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	8.01	-10.89	-10.19	-8.12	5.99
2437MHz	Pass	8.01	-6.74	-4.30	-2.92	5.99
2462MHz	Pass	8.01	-10.68	-9.48	-8.03	5.99
VHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.00	-11.81	-11.91	-9.75	8.00
2437MHz	Pass	5.00	-8.14	-6.96	-5.04	8.00
2462MHz	Pass	5.00	-11.77	-10.84	-9.46	8.00
VHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	5.00	-15.92	-14.74	-12.85	8.00
2437MHz	Pass	5.00	-14.89	-13.79	-11.91	8.00
2452MHz	Pass	5.00	-16.73	-15.41	-14.61	8.00
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.00	-12.95	-12.36	-9.66	8.00
2437MHz	Pass	5.00	-8.70	-7.54	-5.18	8.00
2462MHz	Pass	5.00	-12.61	-11.87	-9.25	8.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	5.00	-15.96	-15.44	-14.50	8.00
2437MHz	Pass	5.00	-15.36	-14.61	-13.43	8.00
2452MHz	Pass	5.00	-16.94	-16.17	-15.55	8.00




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

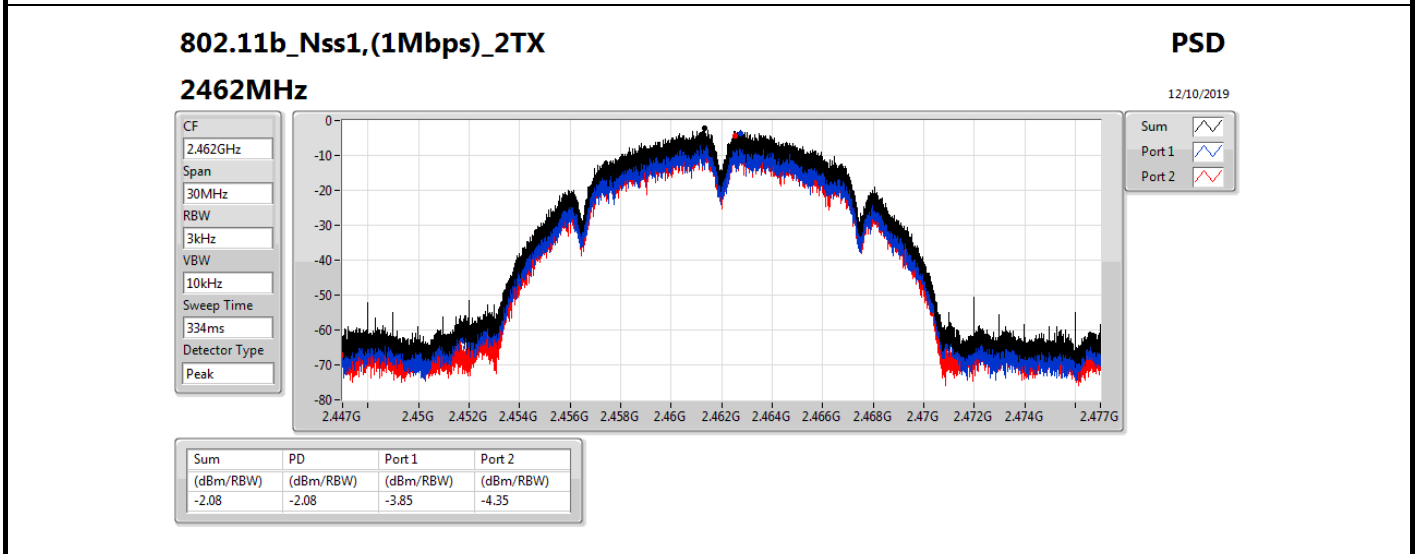
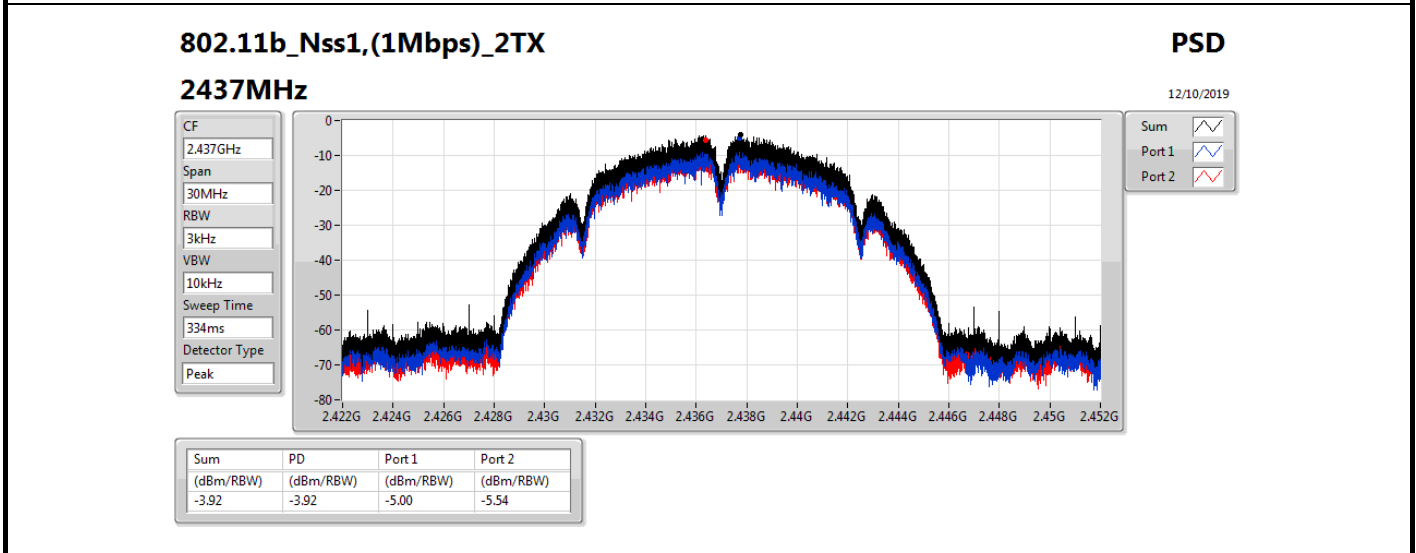
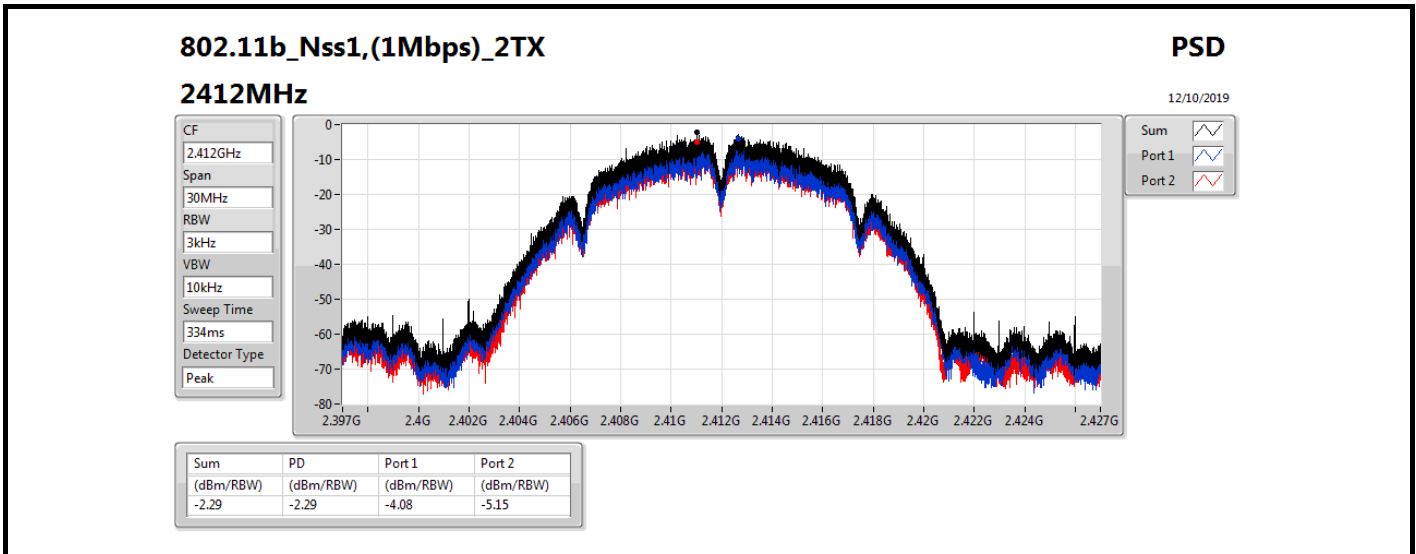


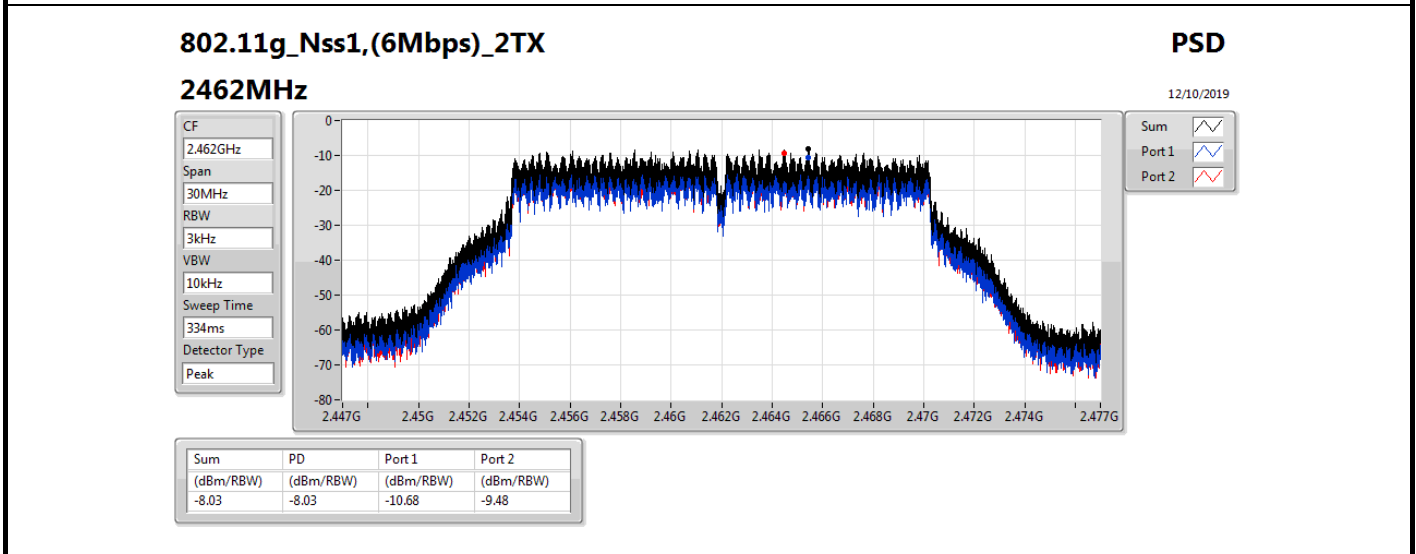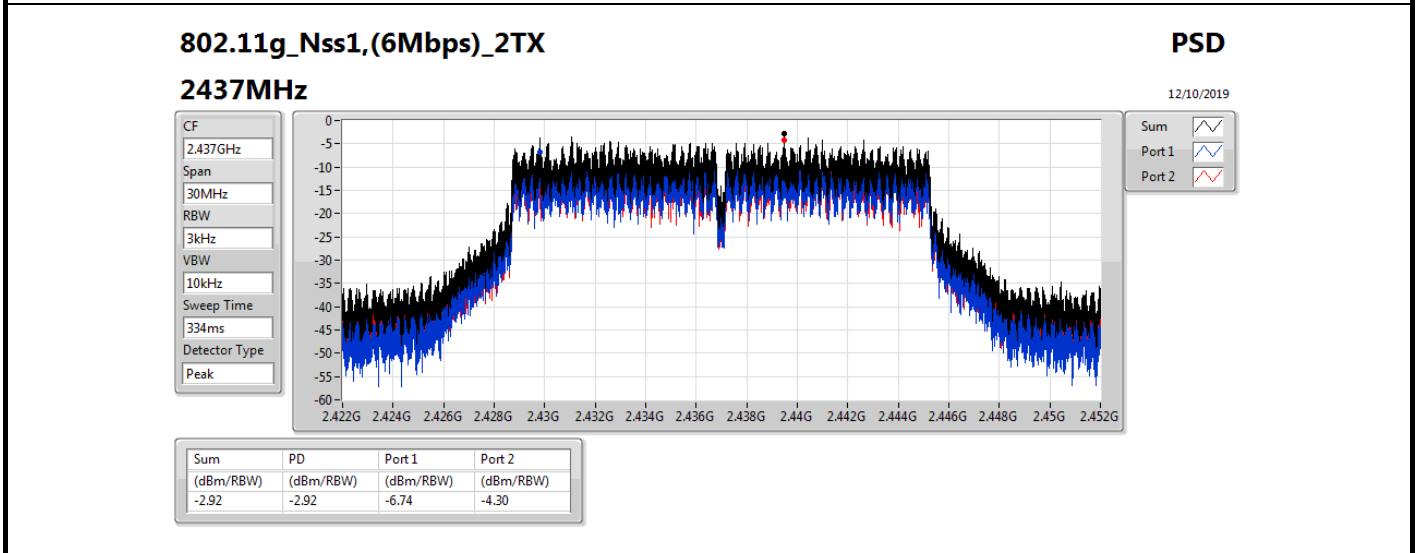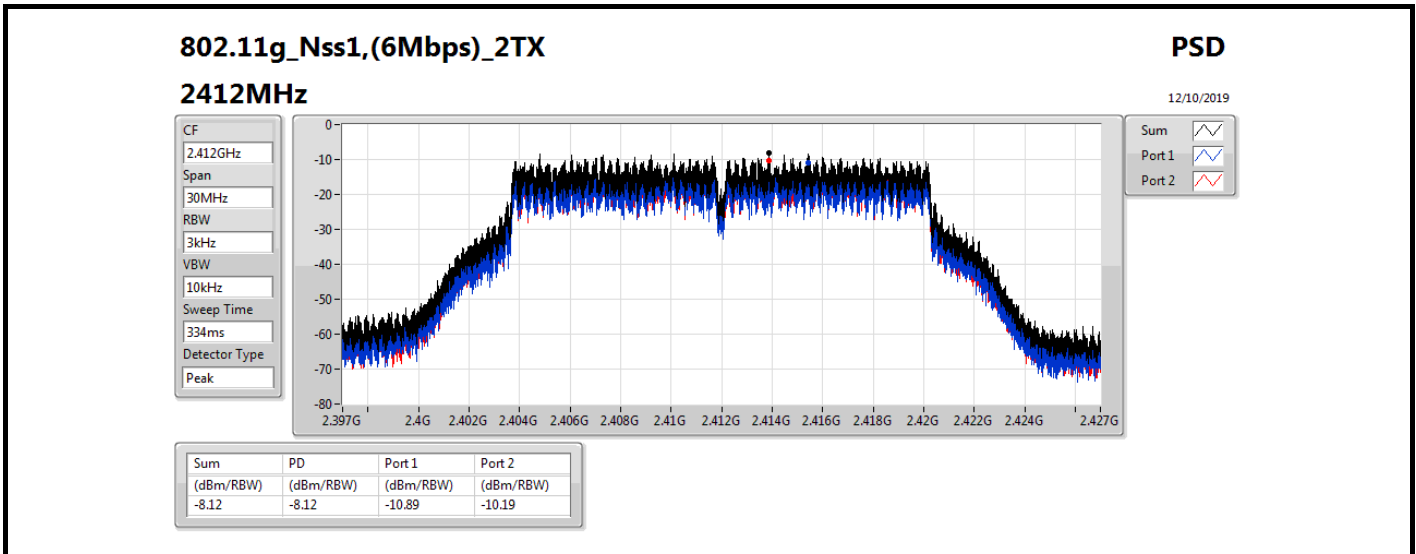

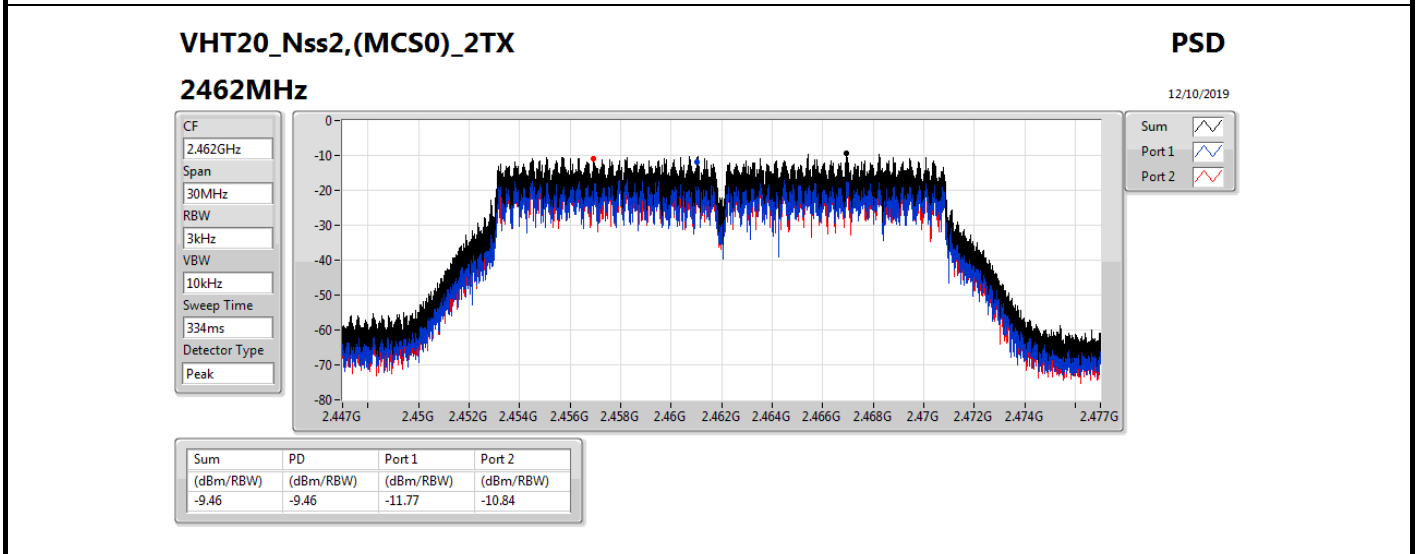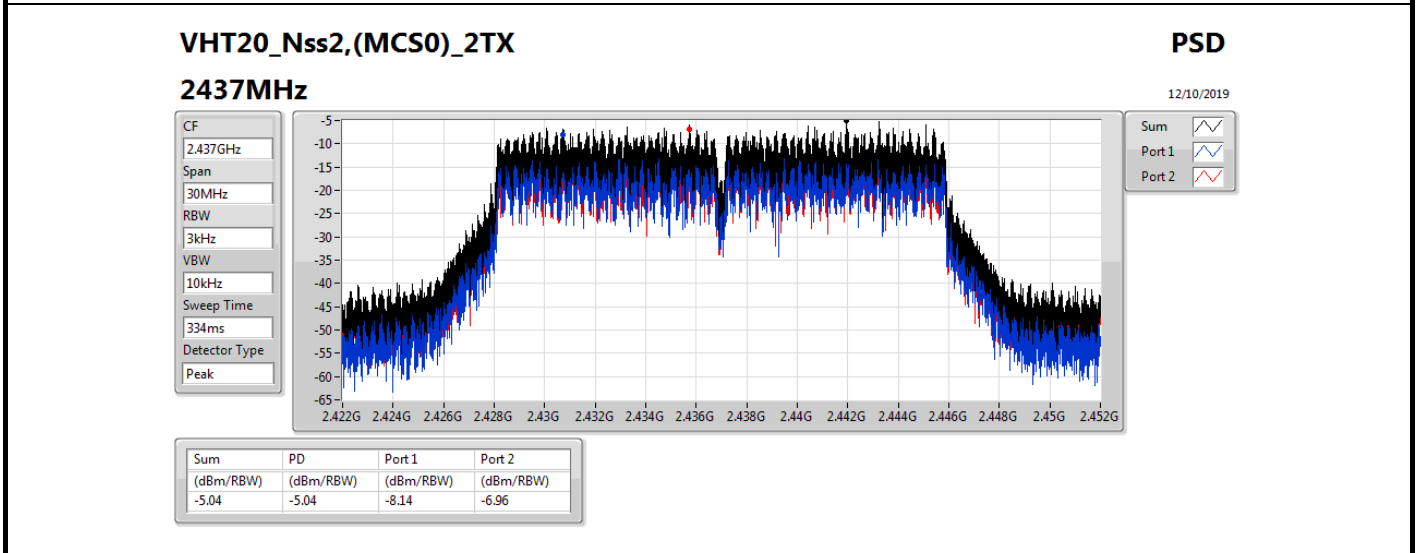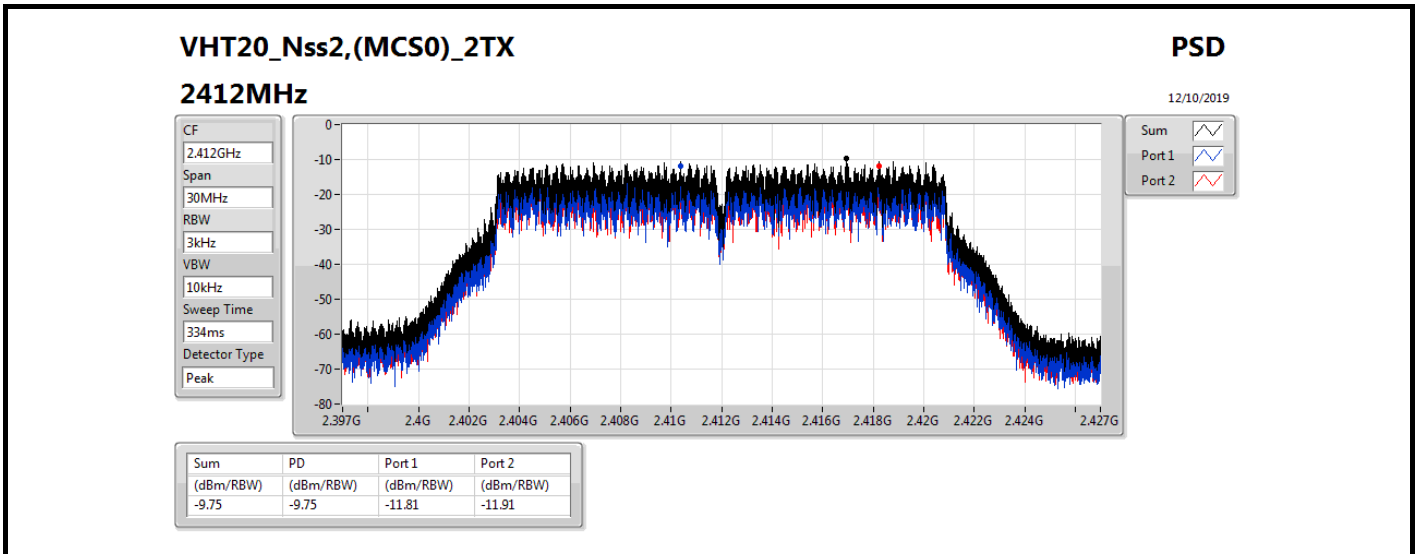

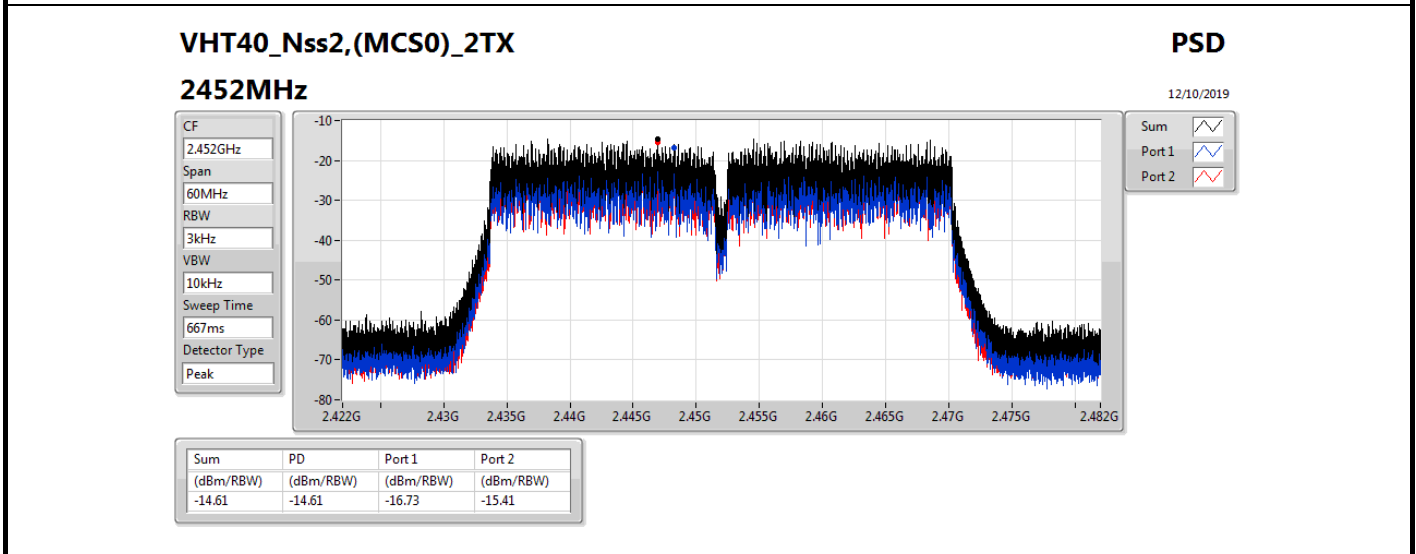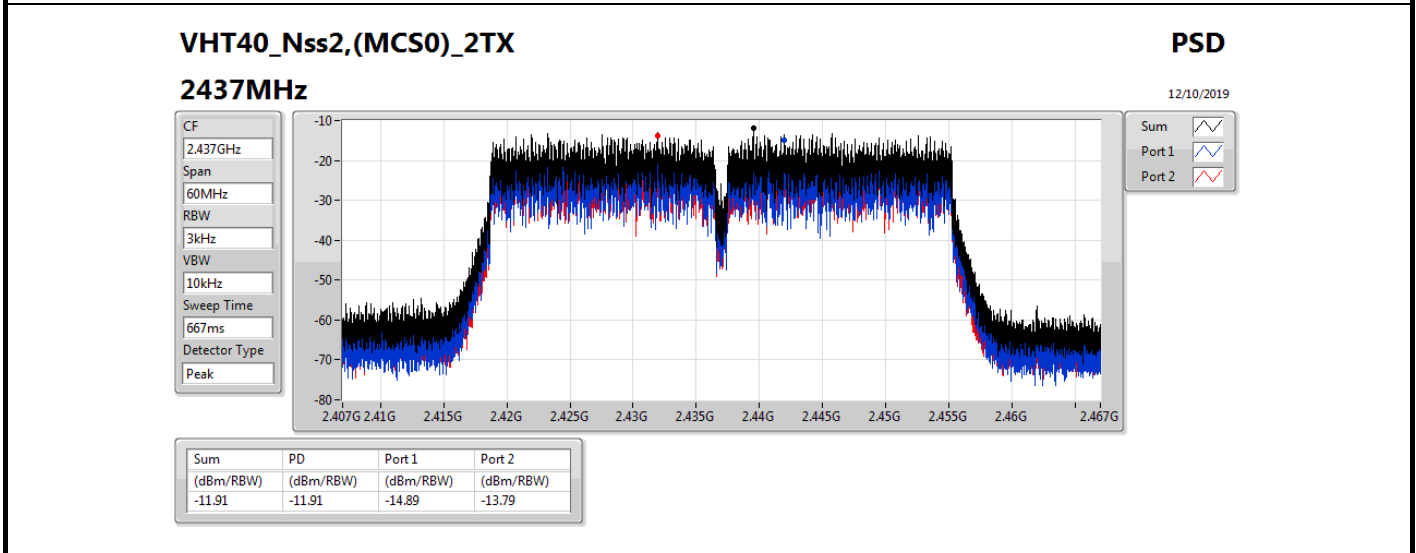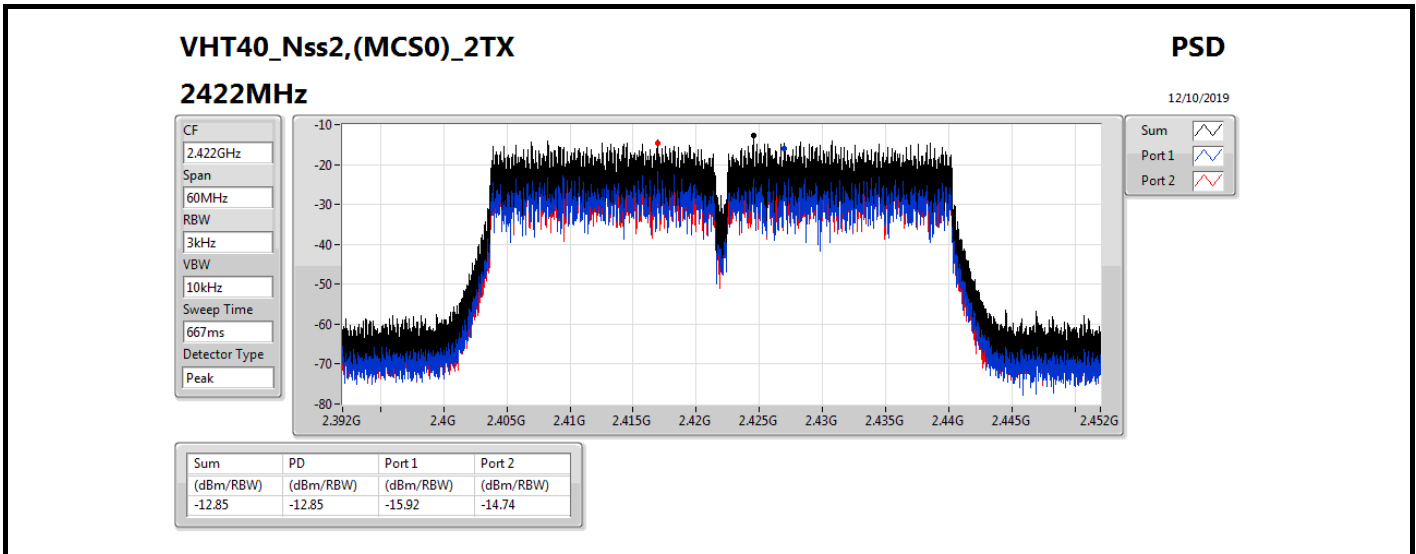

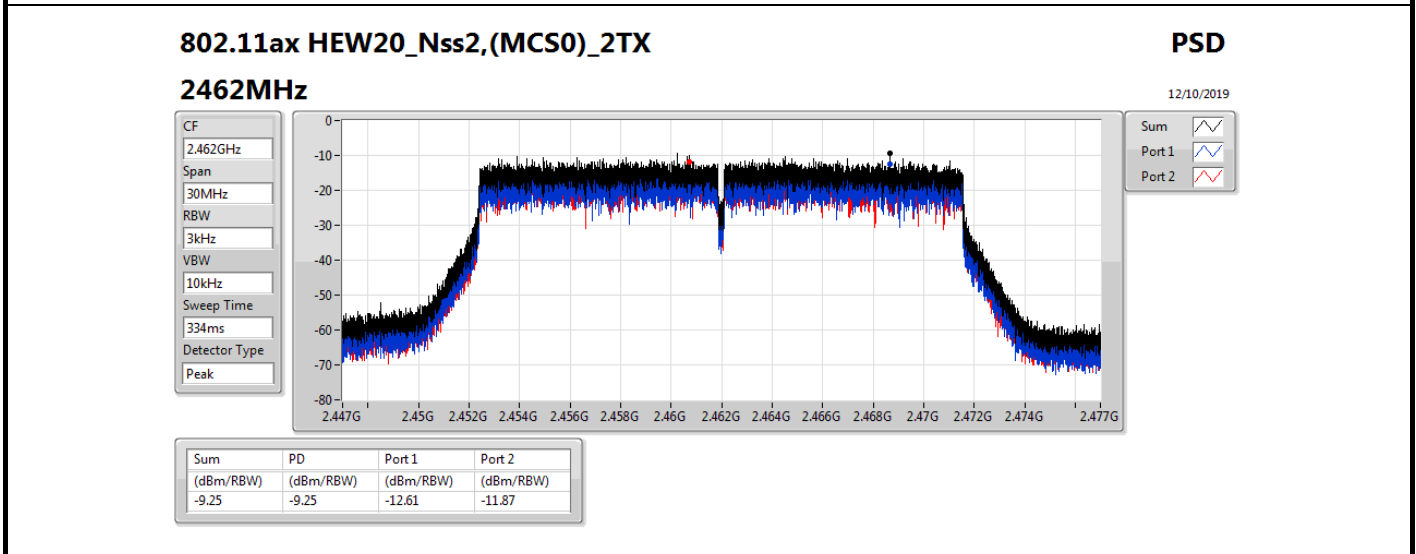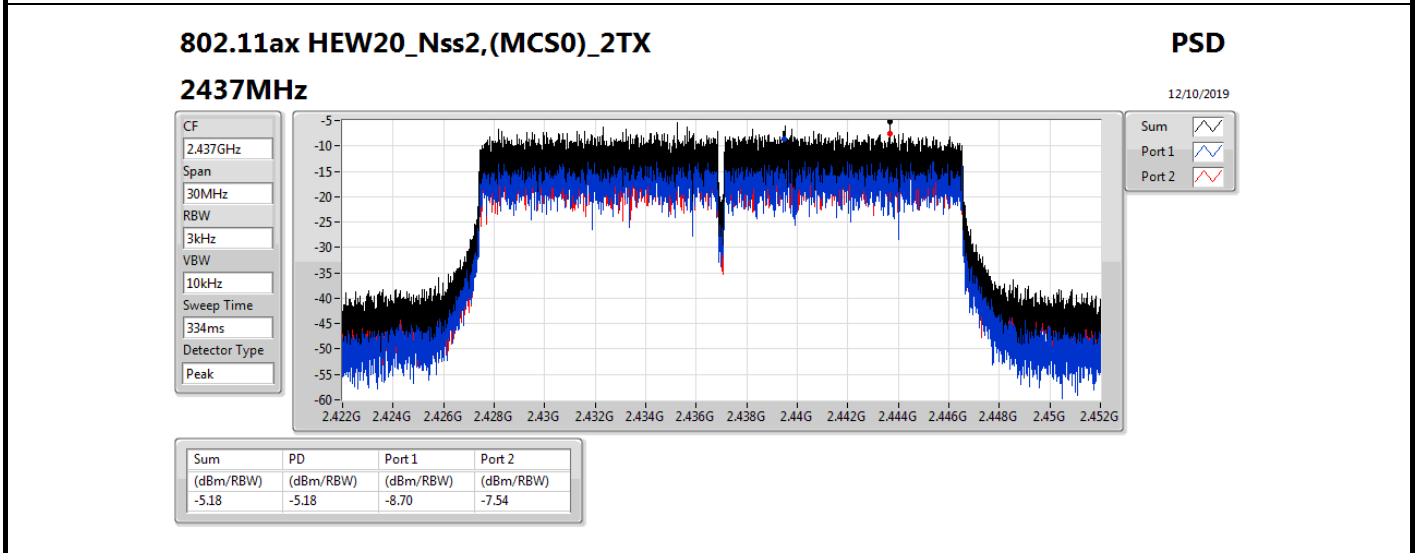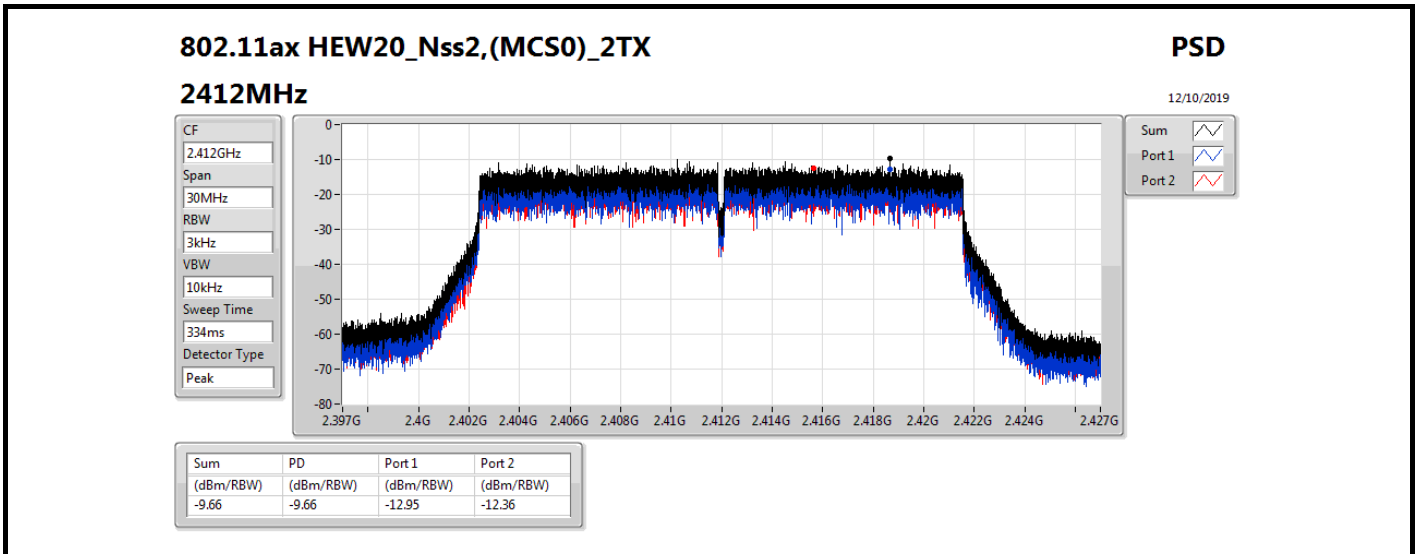

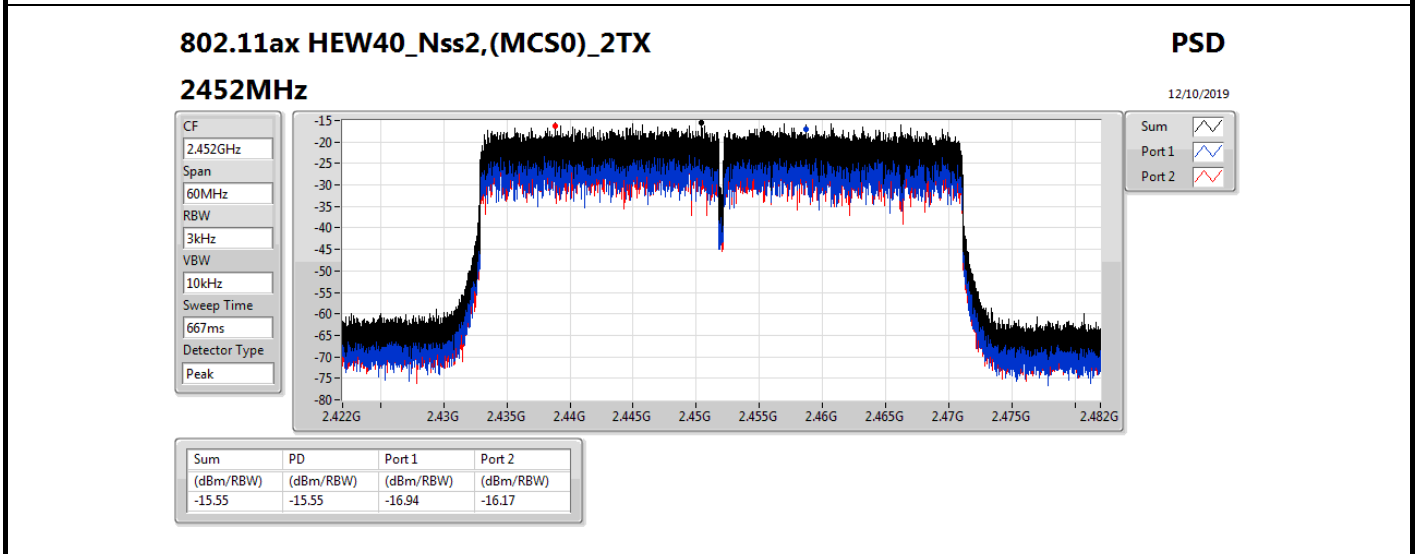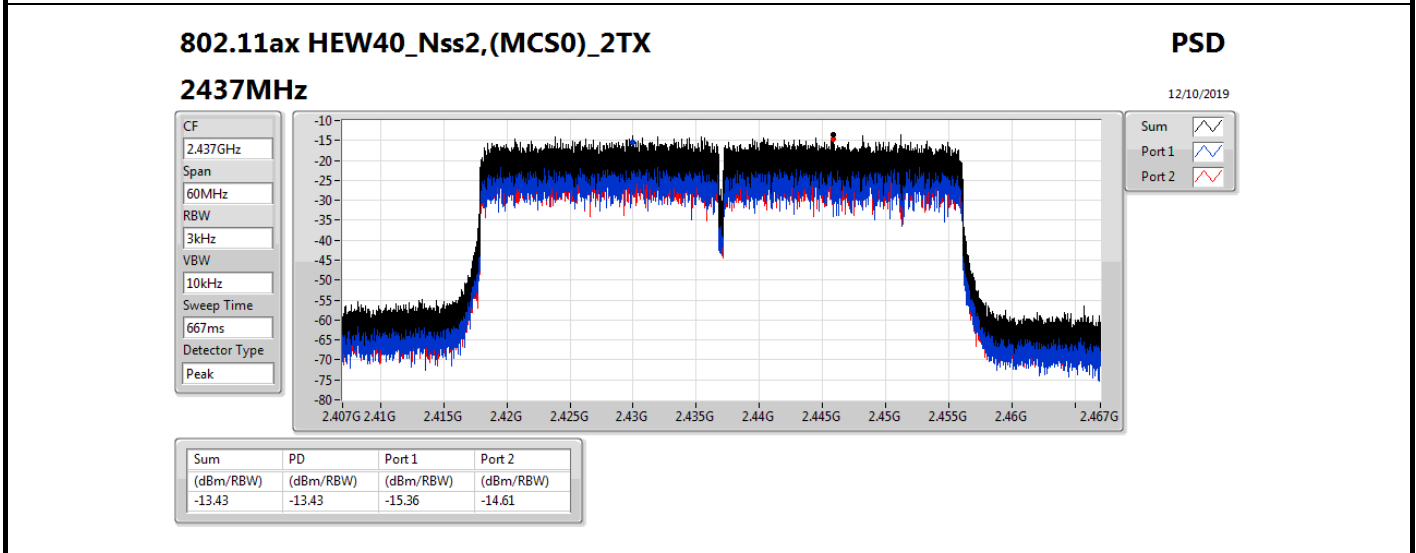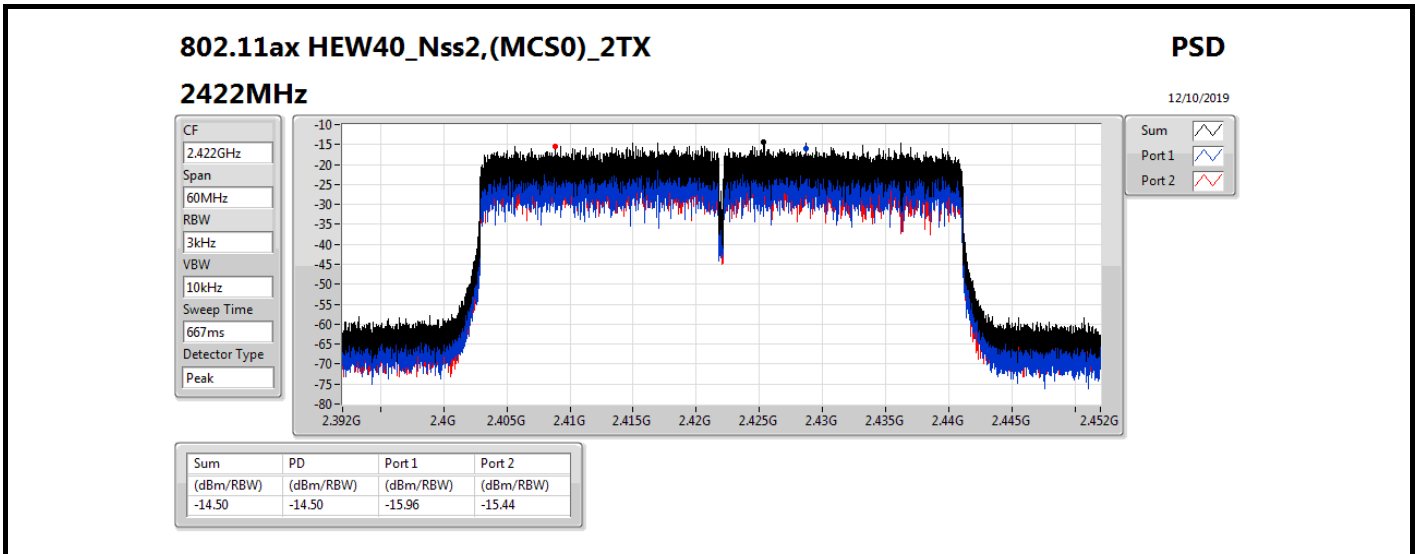



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
VHT20-BF_Nss1,(MCS0)_2TX	-2.61
VHT40-BF_Nss1,(MCS0)_2TX	-9.58
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-2.35
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-9.24

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	8.01	-11.96	-11.49	-9.78	5.99
2437MHz	Pass	8.01	-5.46	-4.24	-2.61	5.99
2462MHz	Pass	8.01	-9.85	-8.34	-6.50	5.99
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	8.01	-14.24	-14.25	-11.92	5.99
2437MHz	Pass	8.01	-12.05	-12.15	-9.58	5.99
2452MHz	Pass	8.01	-12.59	-11.18	-9.72	5.99
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	8.01	-10.53	-11.98	-10.29	5.99
2437MHz	Pass	8.01	-5.86	-3.71	-2.35	5.99
2462MHz	Pass	8.01	-9.52	-9.82	-7.38	5.99
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	8.01	-15.19	-13.57	-12.87	5.99
2437MHz	Pass	8.01	-13.38	-12.93	-10.62	5.99
2452MHz	Pass	8.01	-12.32	-12.19	-9.24	5.99




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

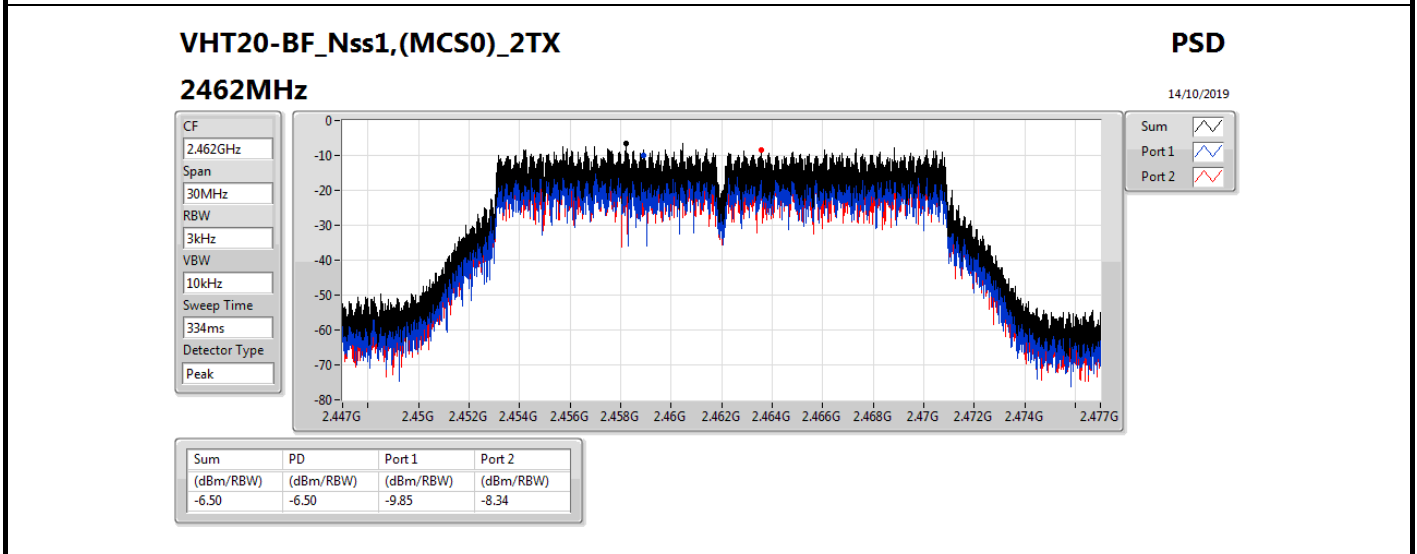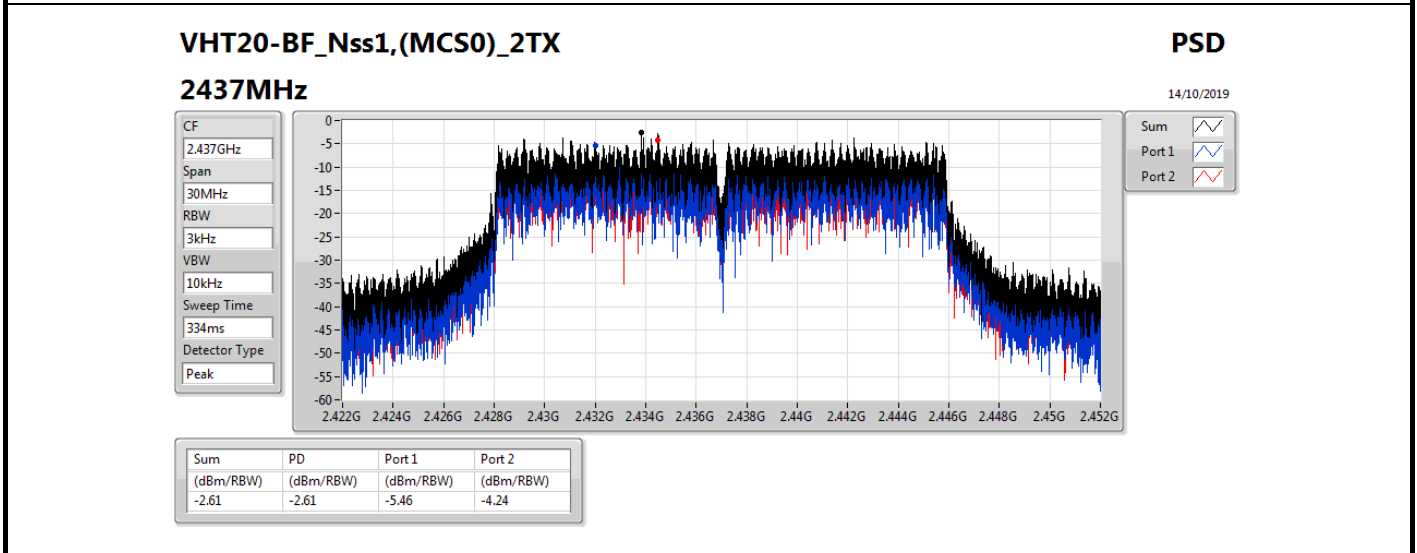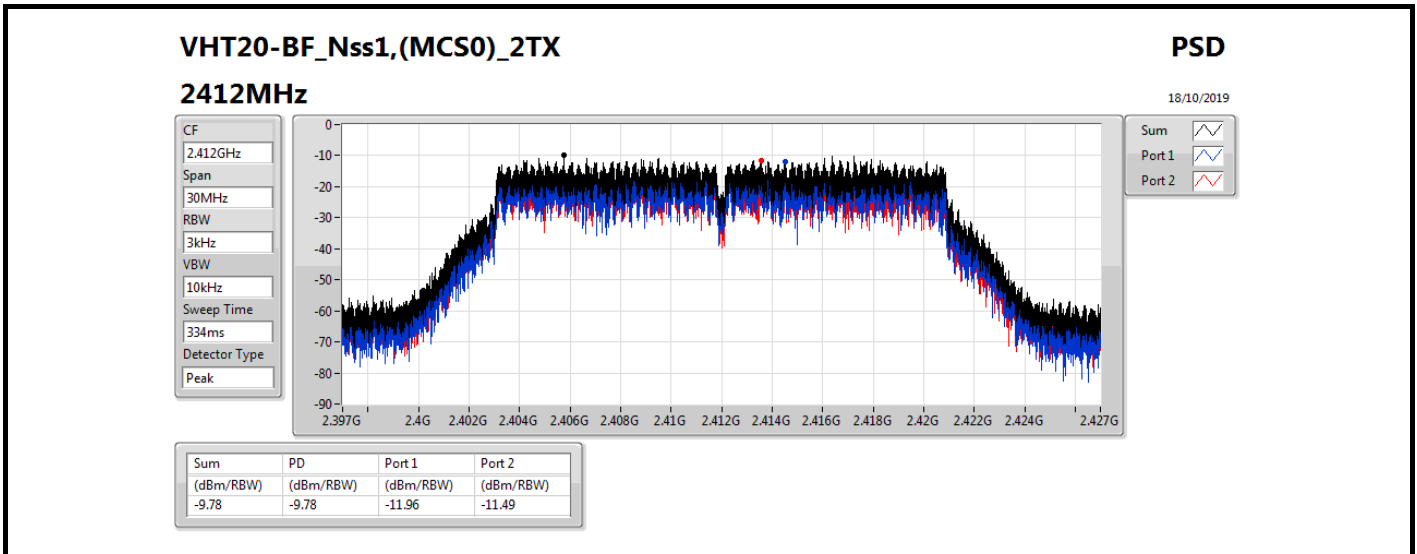

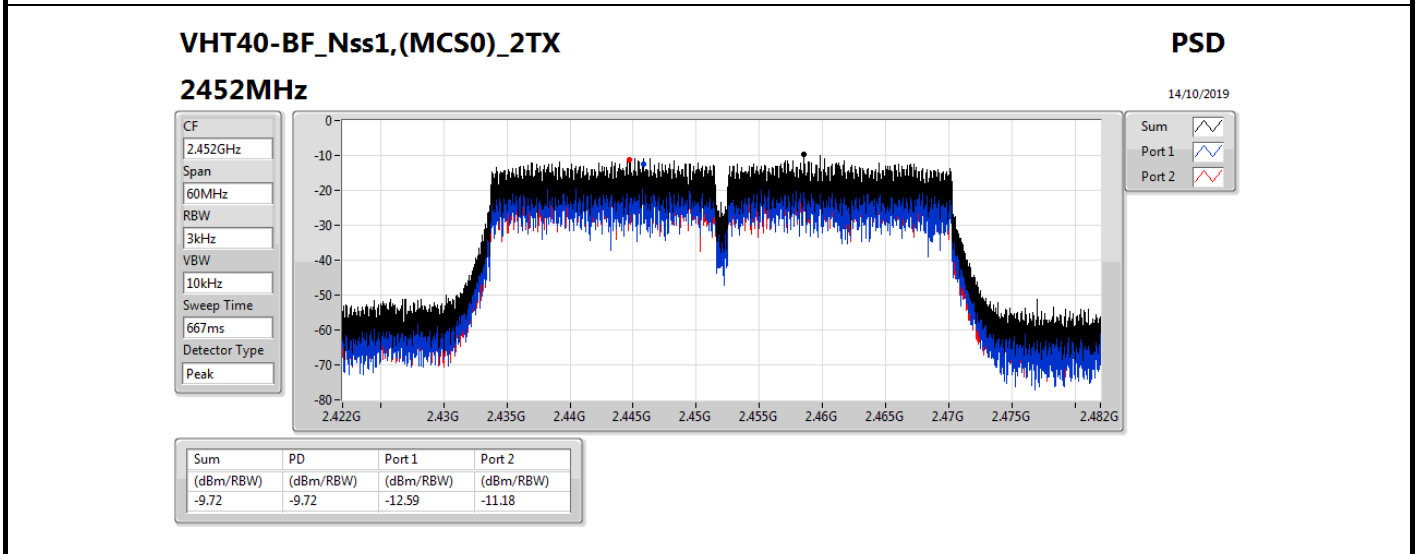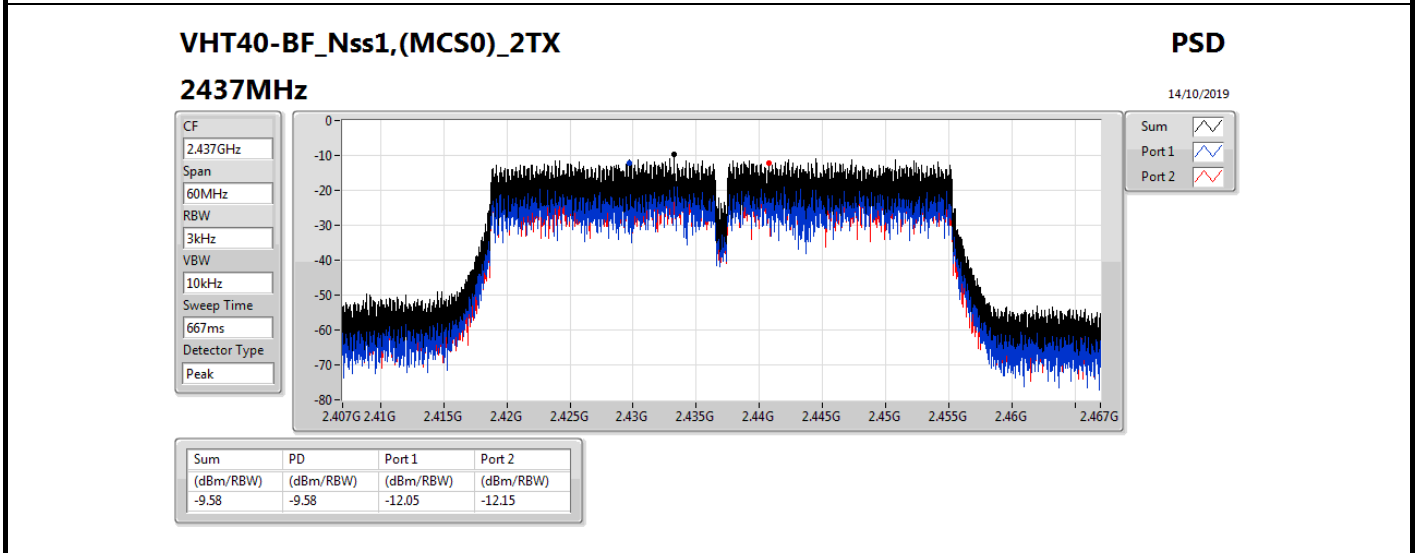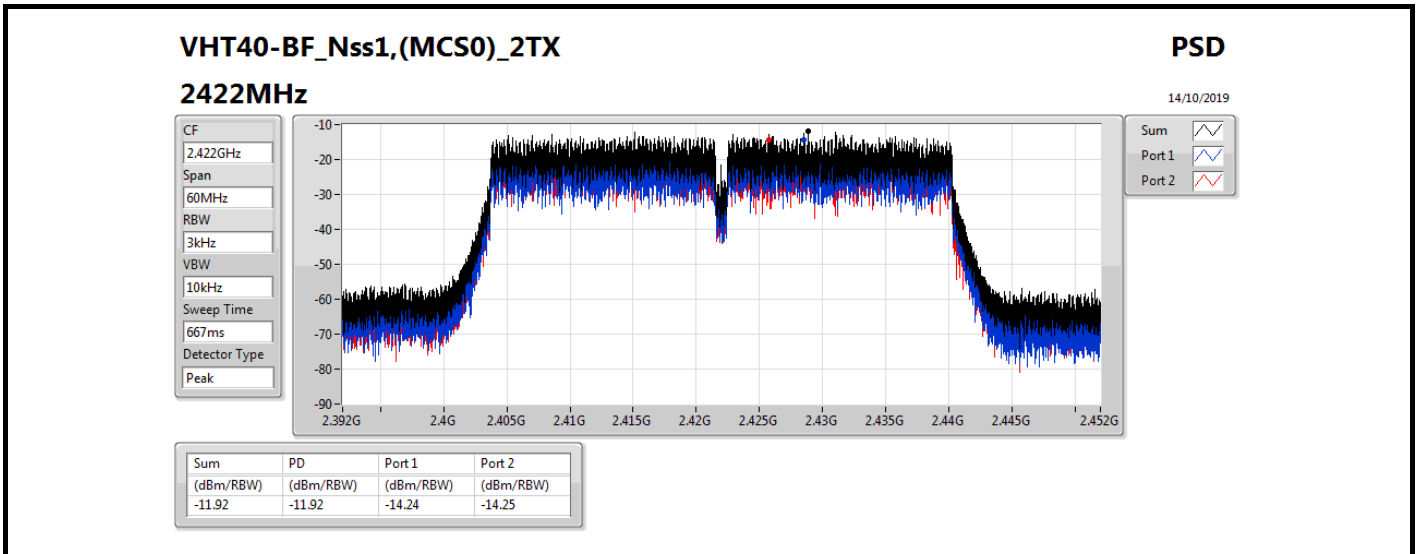

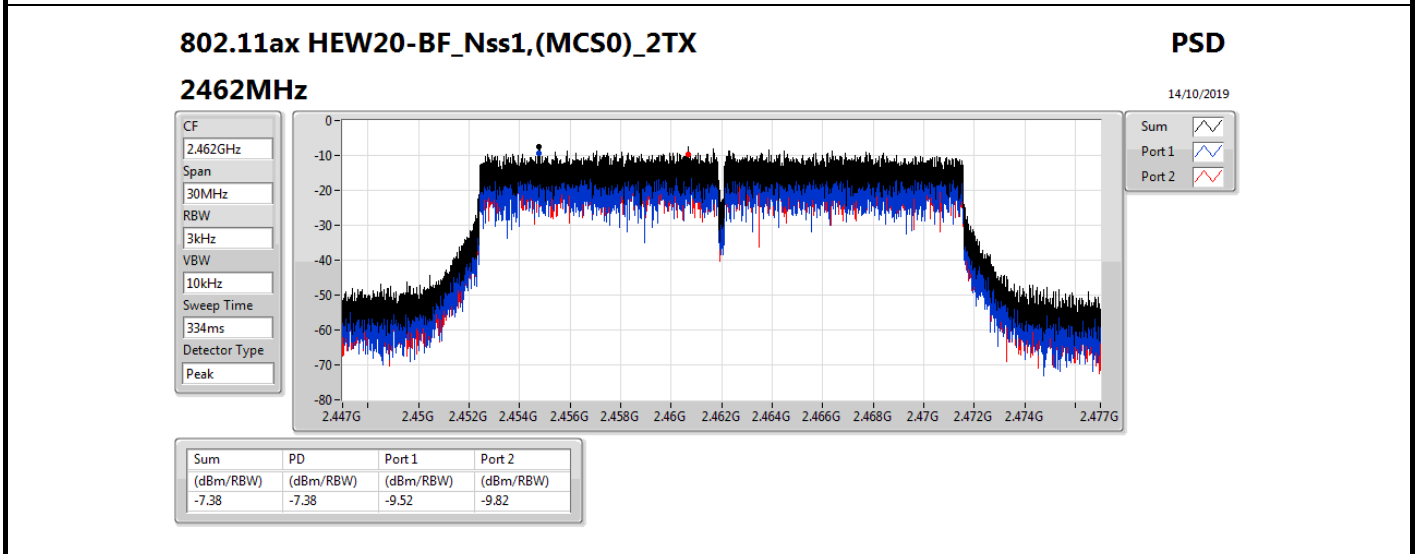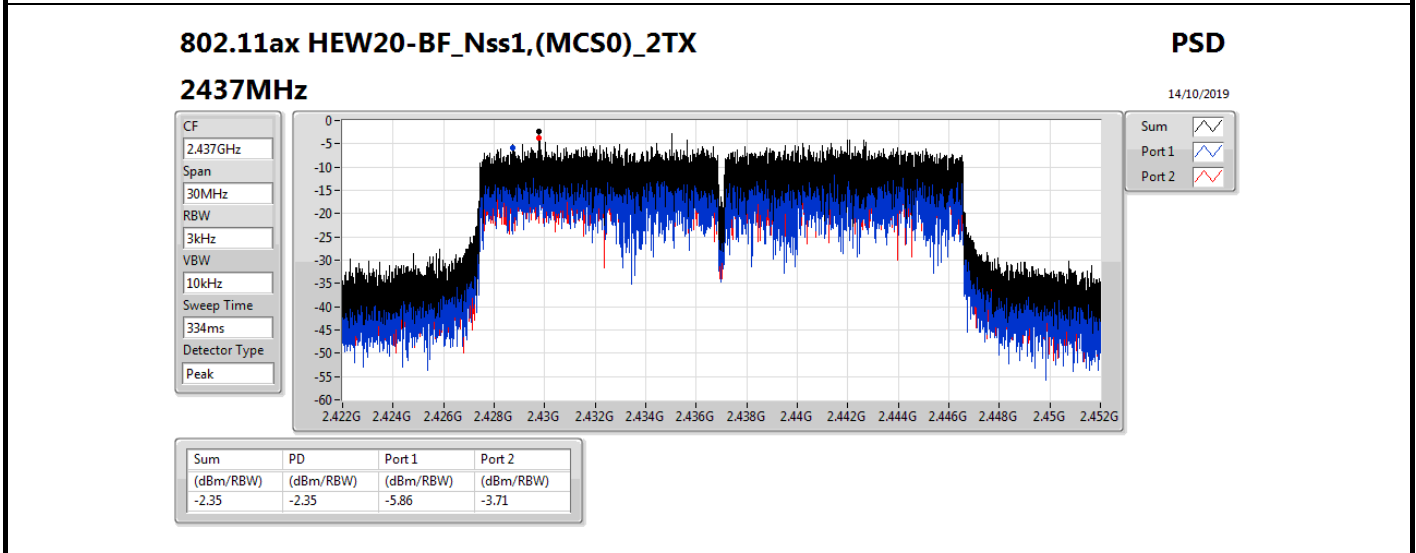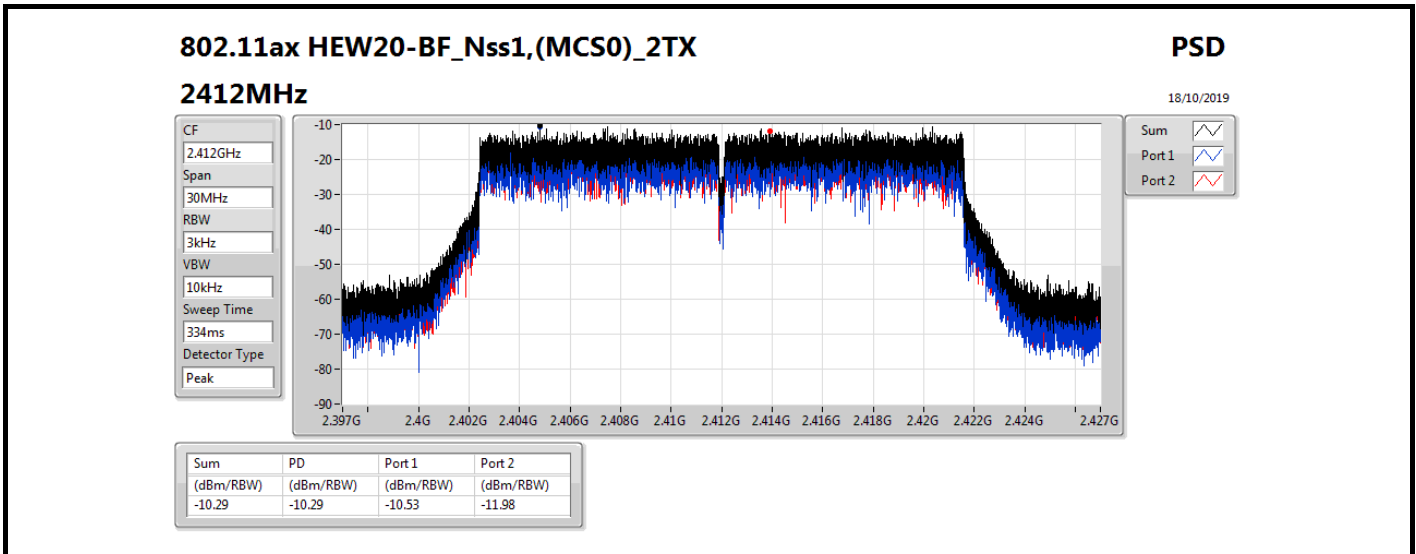

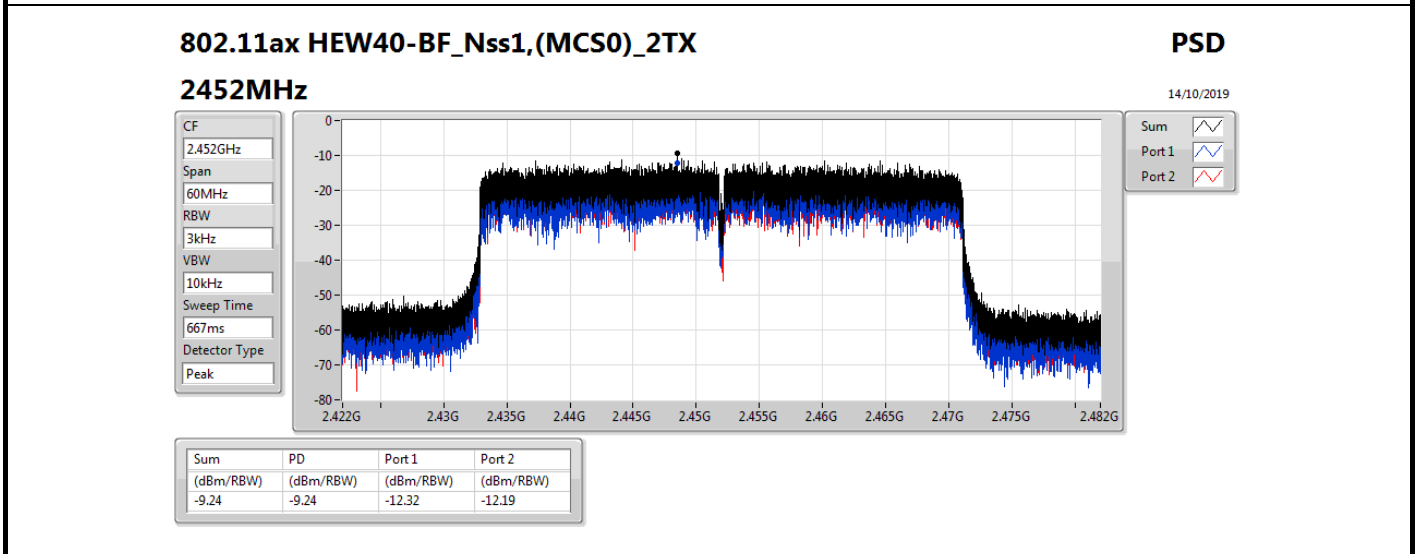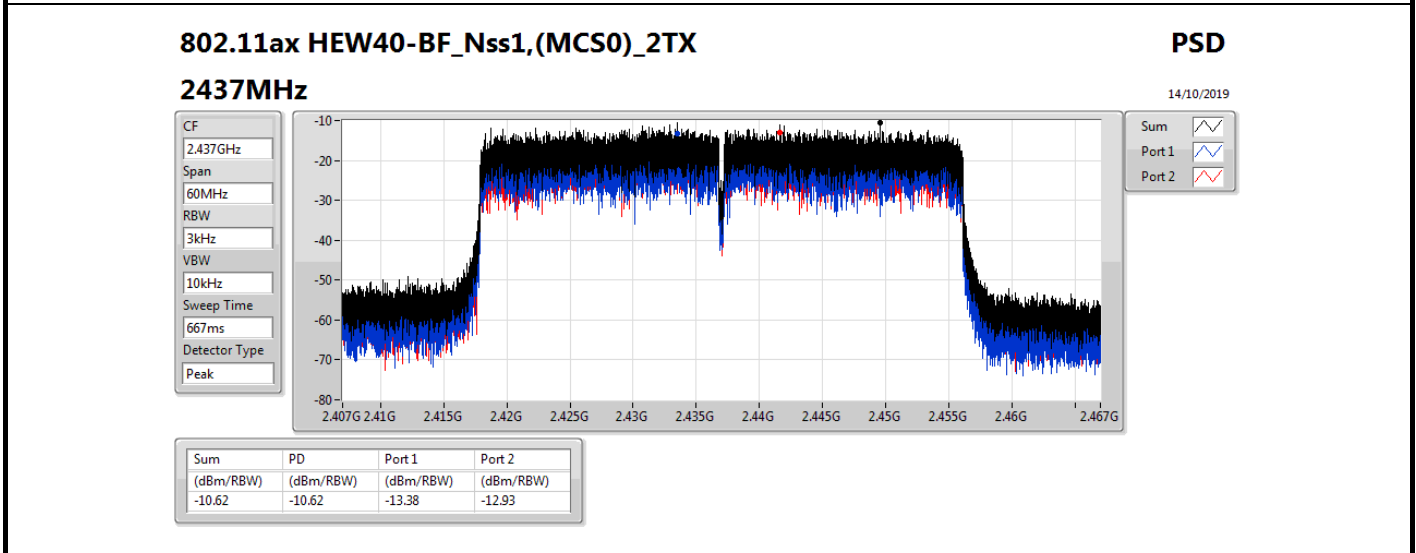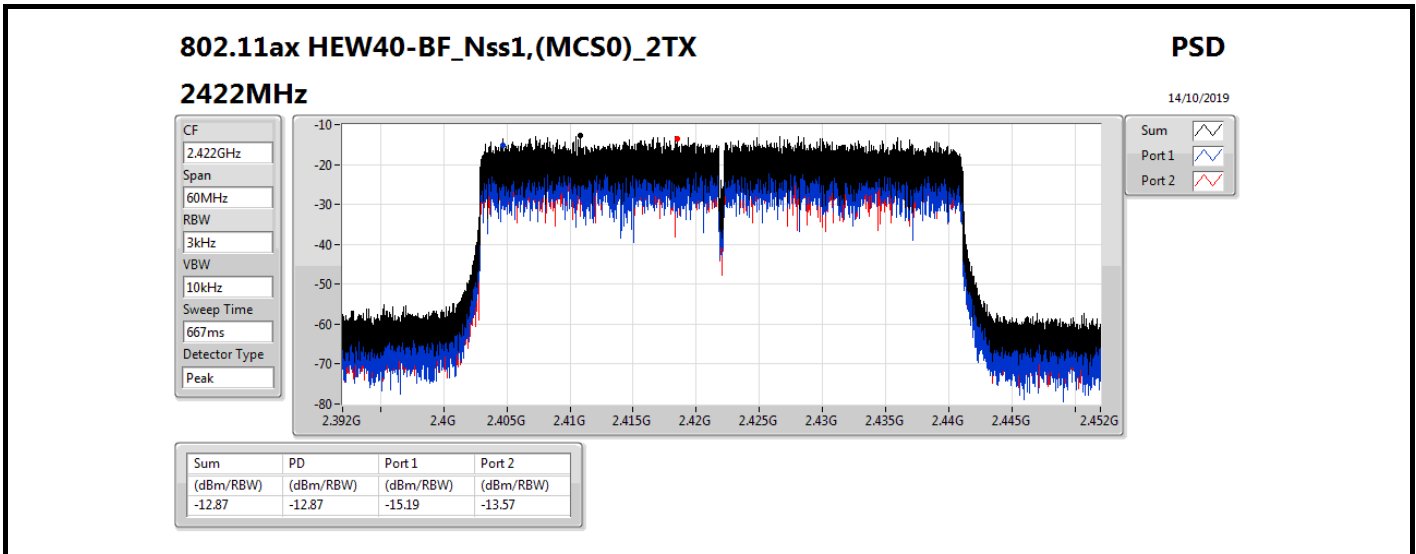



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-1.69
802.11g_Nss1,(6Mbps)_1TX	-3.61
VHT20_Nss1,(MCS0)_1TX	-4.38
VHT40_Nss1,(MCS0)_1TX	-13.39
802.11ax HEW20_Nss1,(MCS0)_1TX	-3.09
802.11ax HEW40_Nss1,(MCS0)_1TX	-14.01

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	7.80	-1.69	-1.69	6.20
2437MHz	Pass	7.80	-5.17	-5.17	6.20
2462MHz	Pass	7.80	-3.50	-3.50	6.20
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	7.80	-9.70	-9.70	6.20
2437MHz	Pass	7.80	-3.61	-3.61	6.20
2462MHz	Pass	7.80	-10.26	-10.26	6.20
VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	7.80	-9.60	-9.60	6.20
2437MHz	Pass	7.80	-4.38	-4.38	6.20
2462MHz	Pass	7.80	-10.54	-10.54	6.20
VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	7.80	-13.44	-13.44	6.20
2437MHz	Pass	7.80	-13.39	-13.39	6.20
2452MHz	Pass	7.80	-13.78	-13.78	6.20
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	7.80	-8.36	-8.36	6.20
2437MHz	Pass	7.80	-3.09	-3.09	6.20
2462MHz	Pass	7.80	-9.67	-9.67	6.20
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	7.80	-15.10	-15.10	6.20
2437MHz	Pass	7.80	-14.01	-14.01	6.20
2452MHz	Pass	7.80	-14.69	-14.69	6.20




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

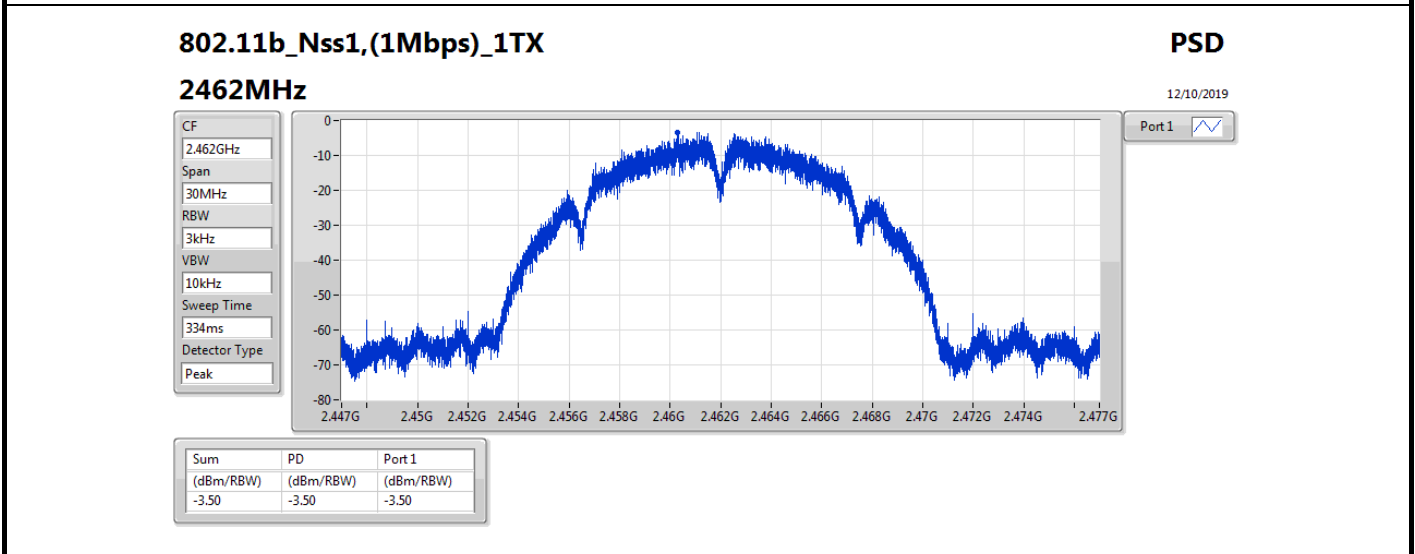
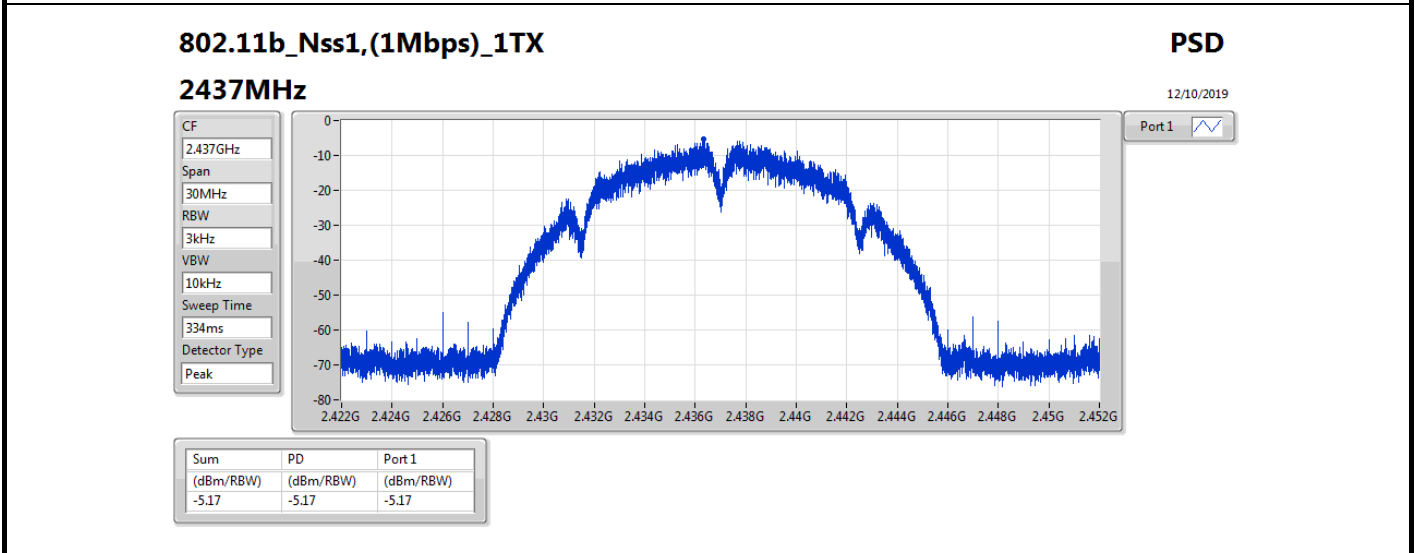
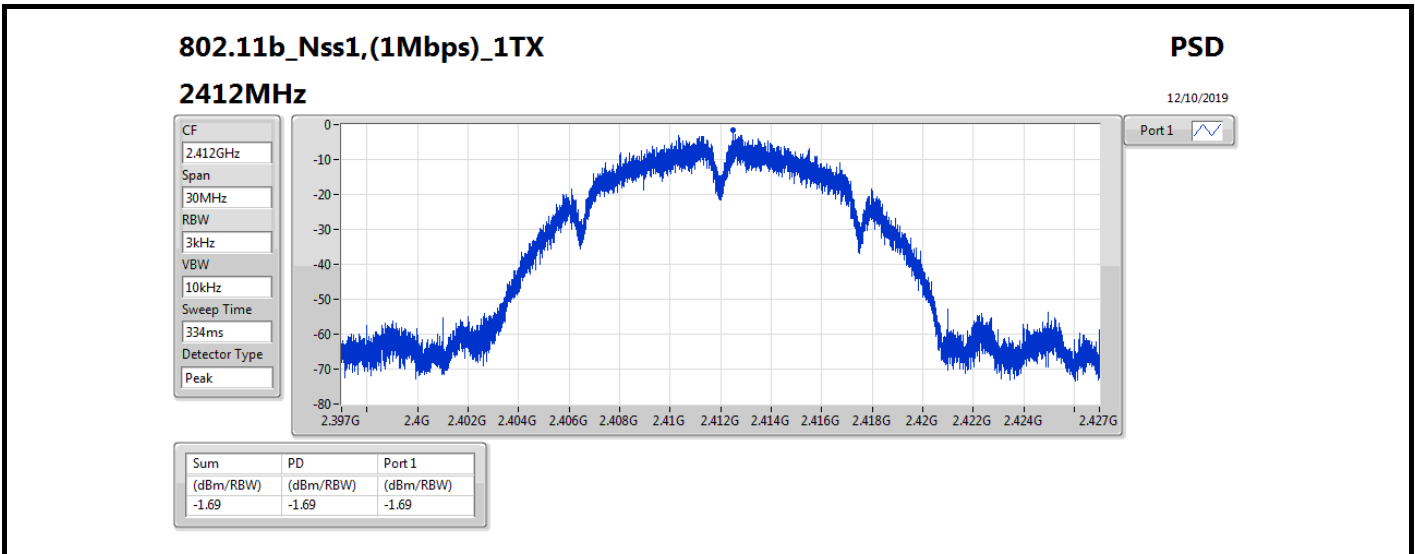


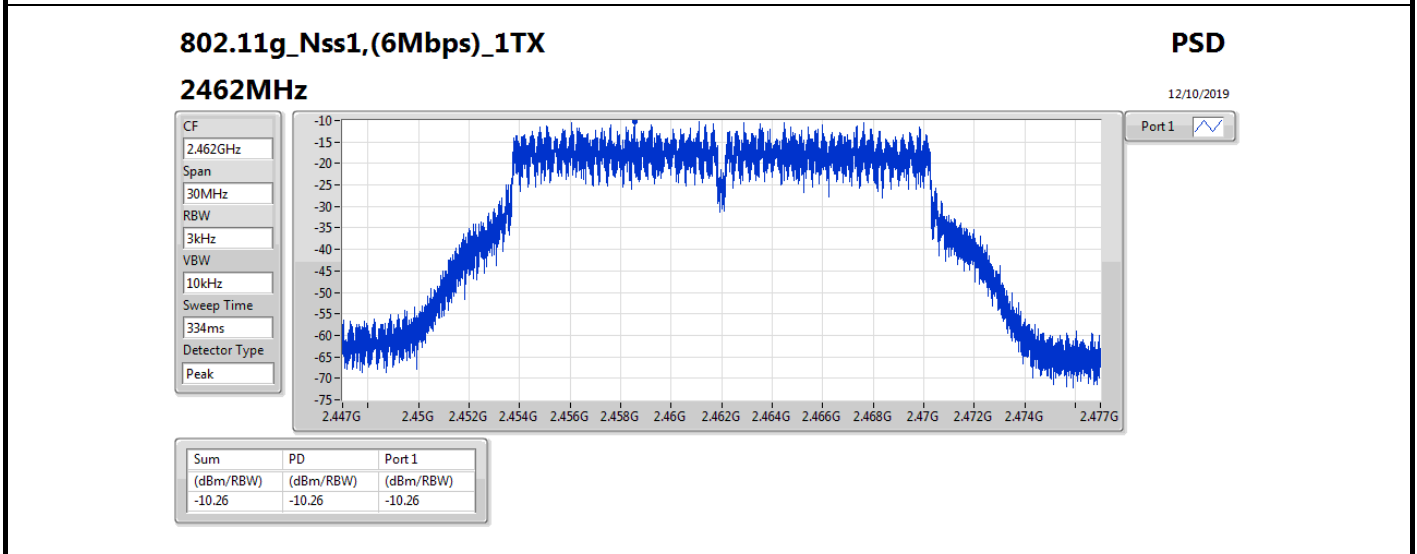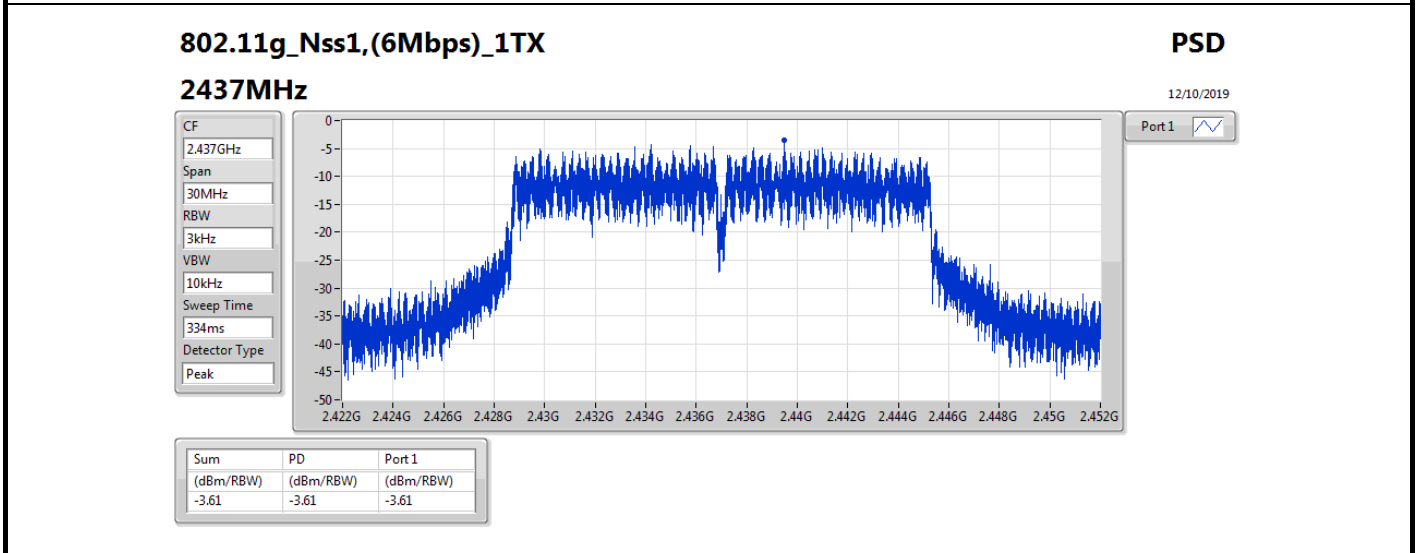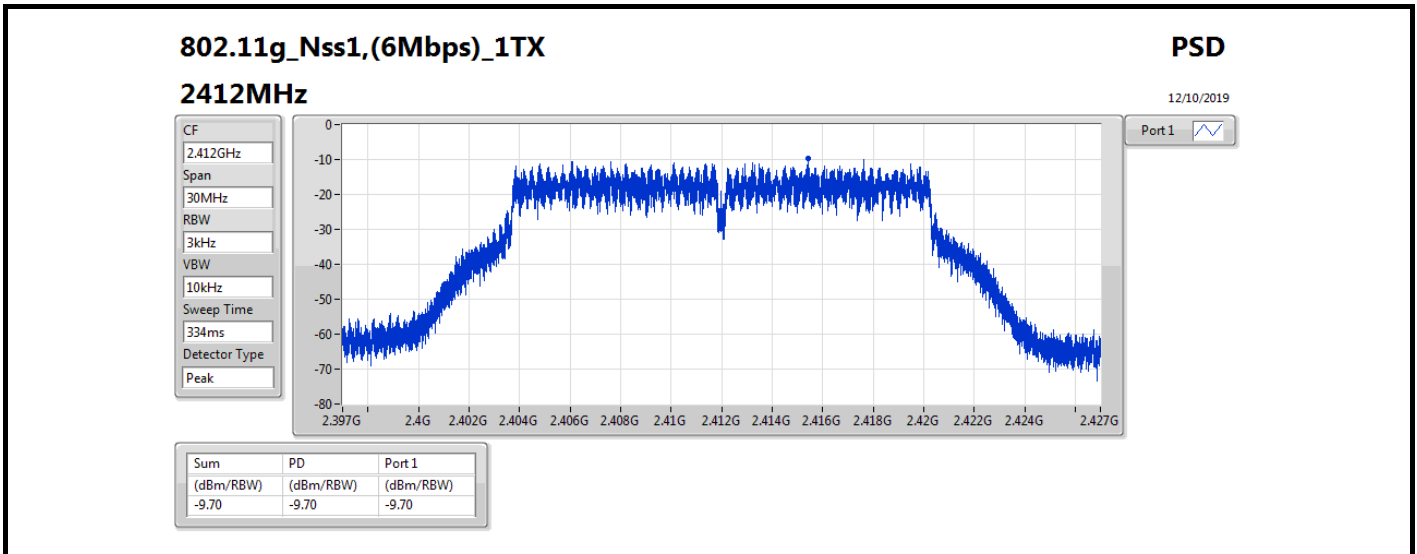

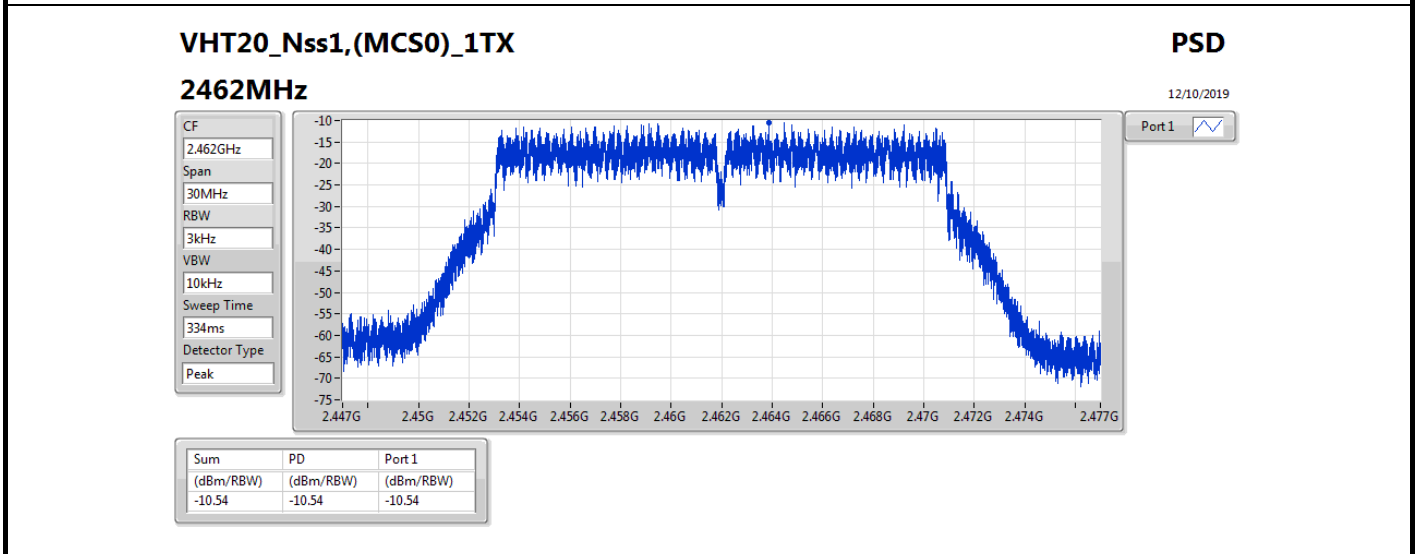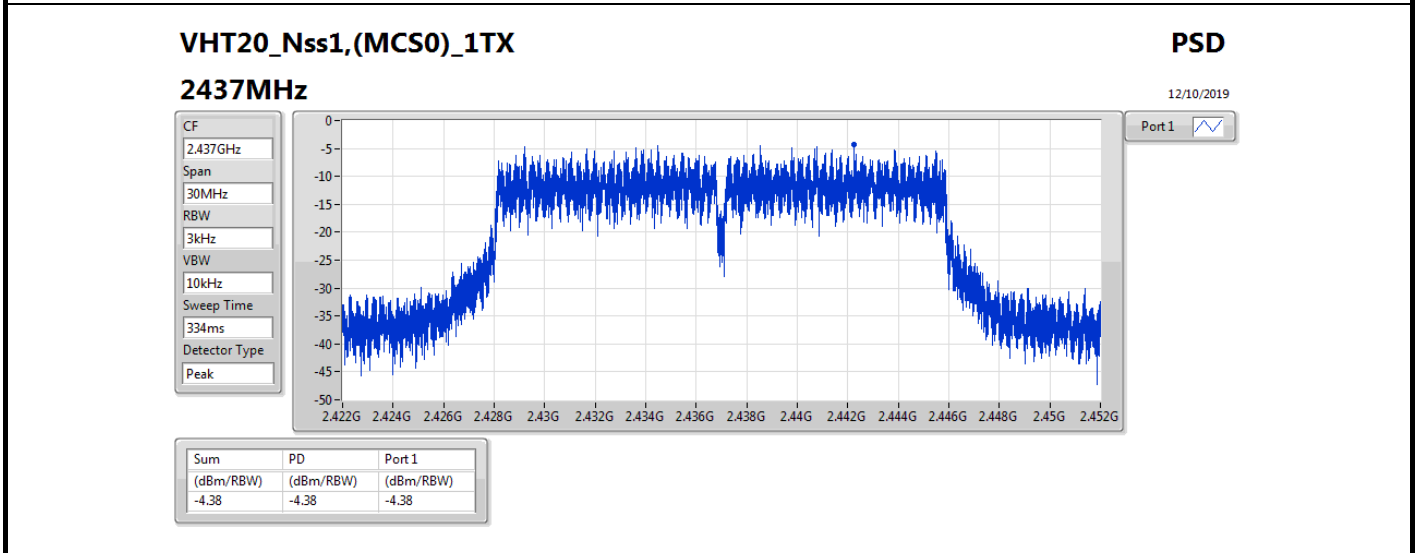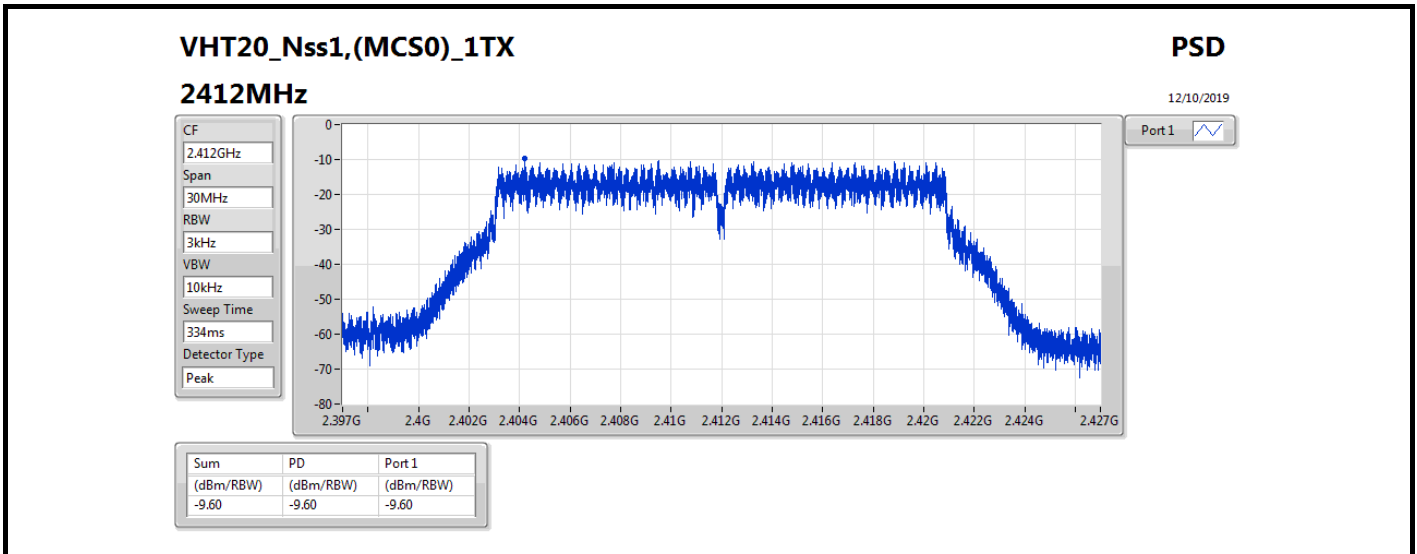

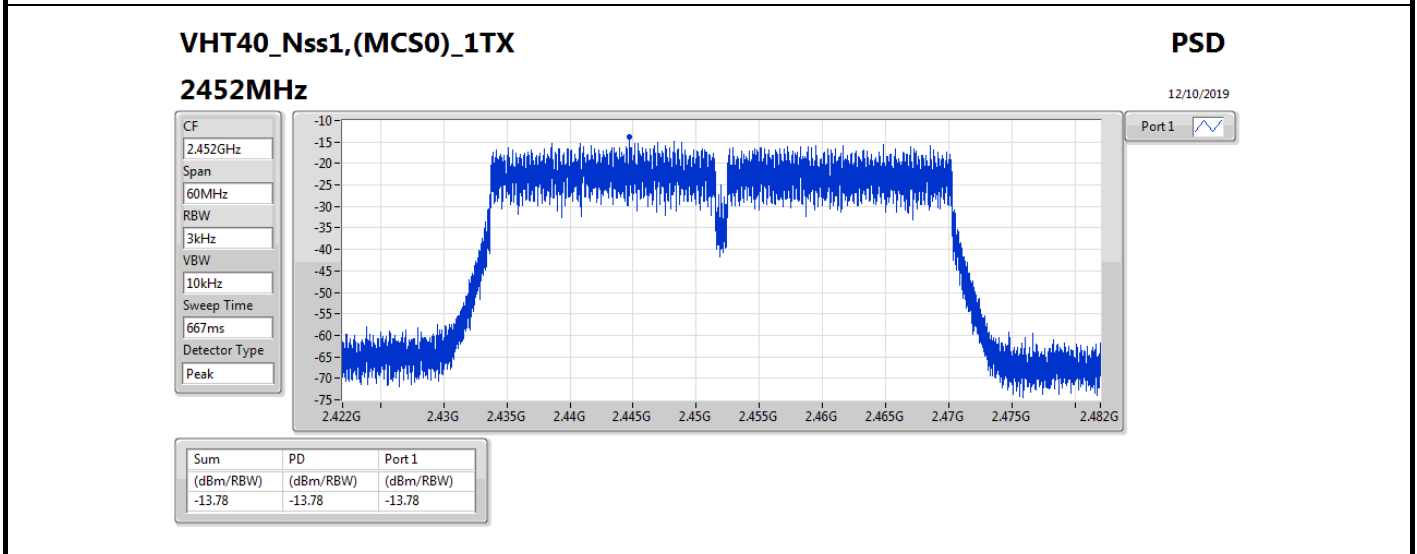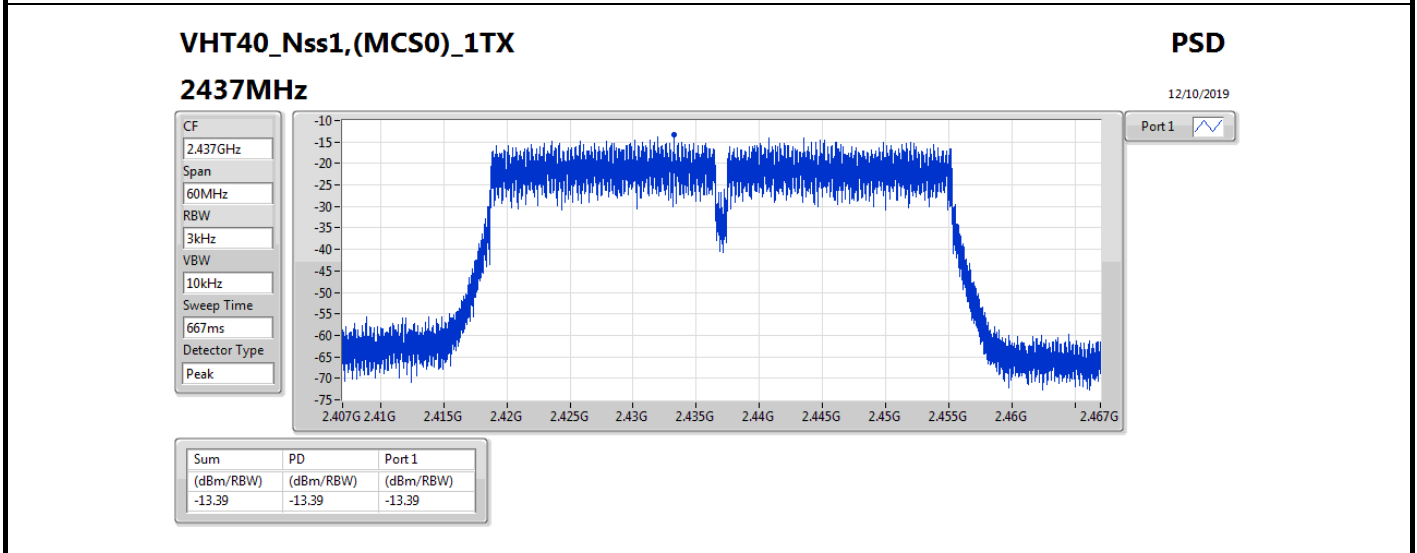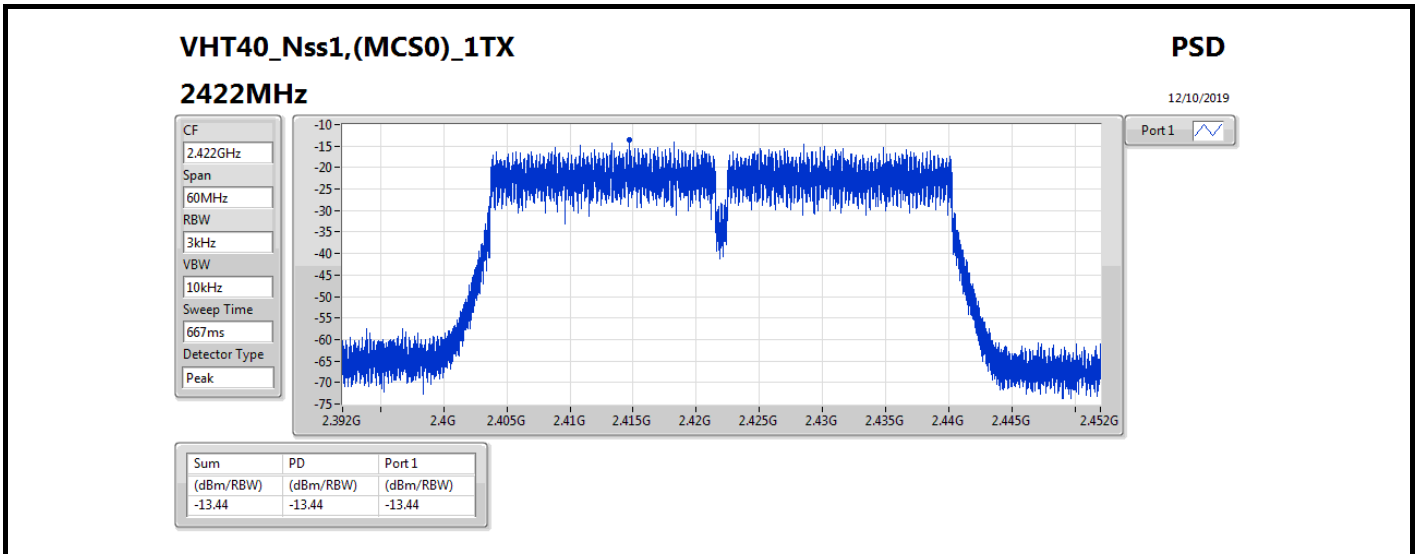

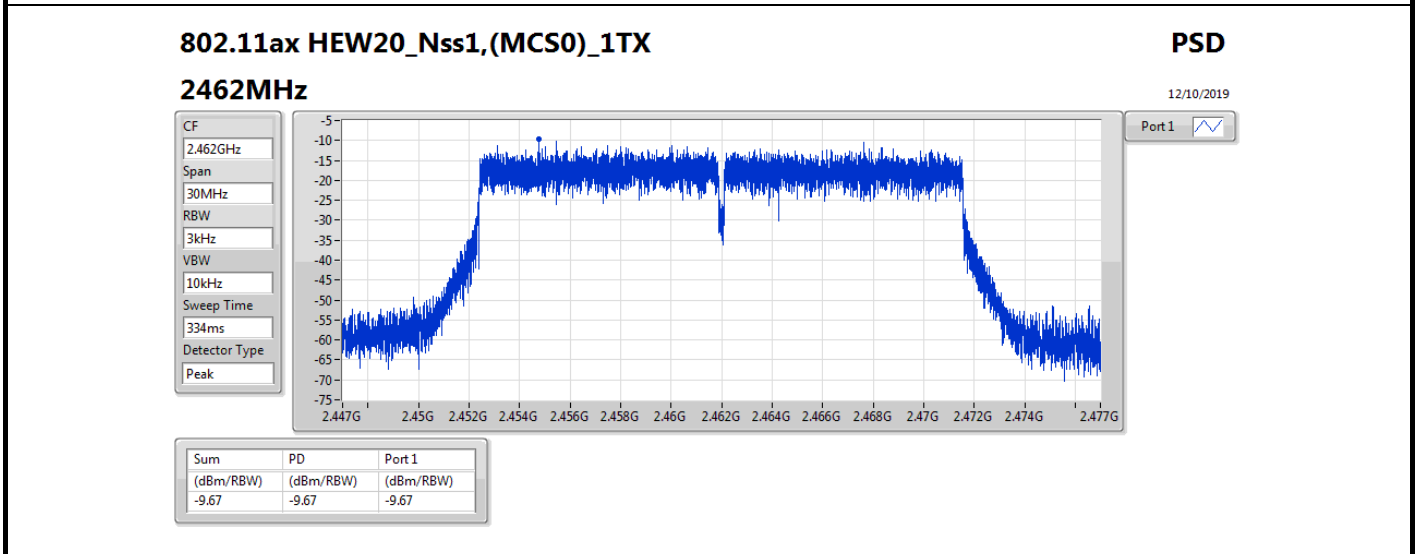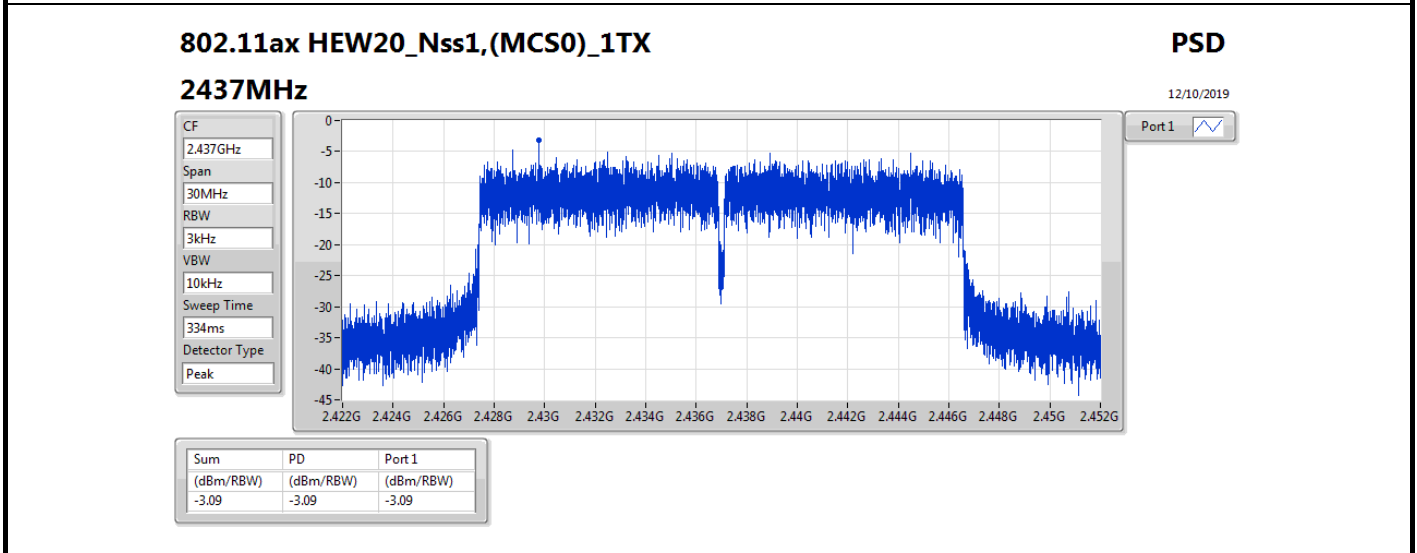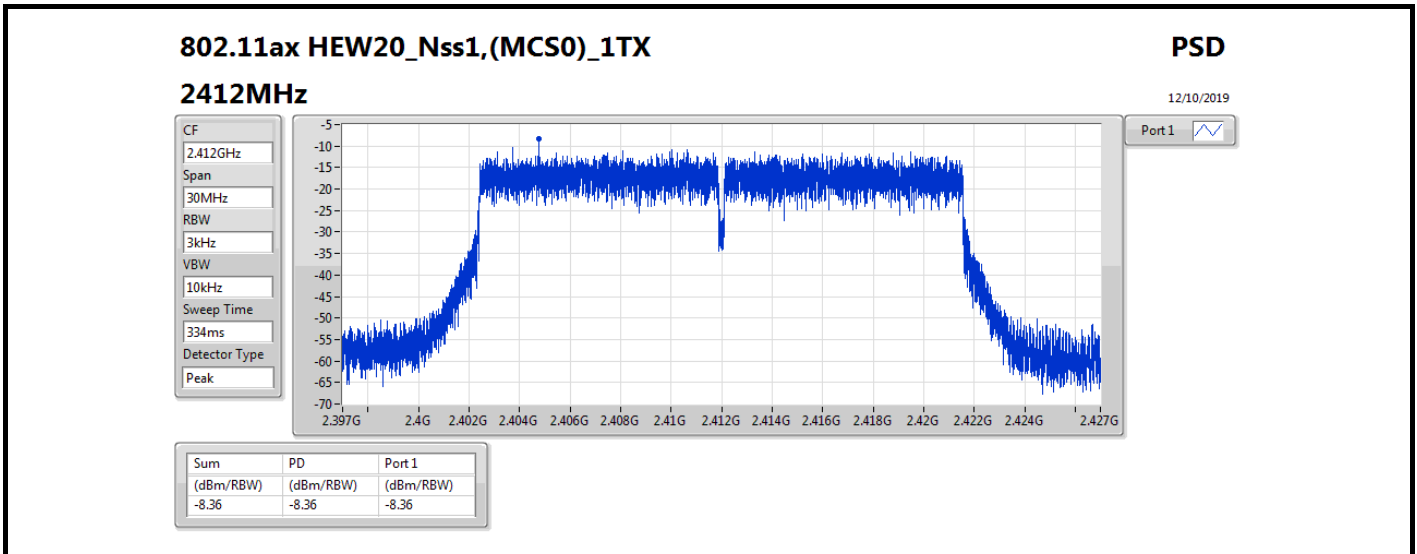

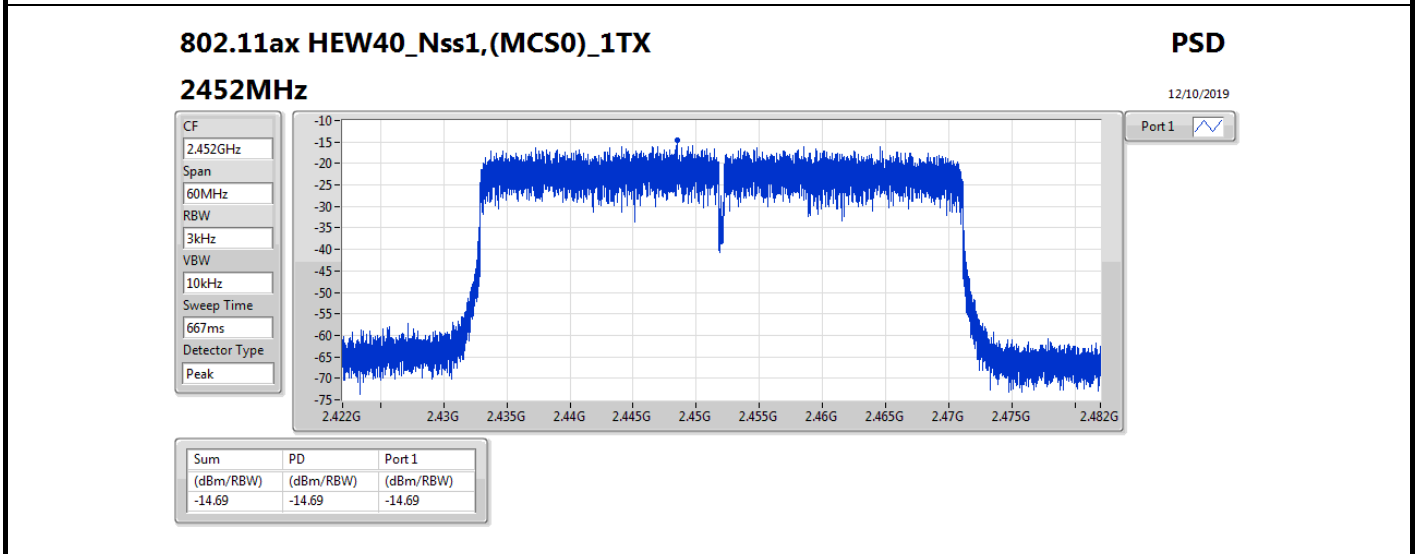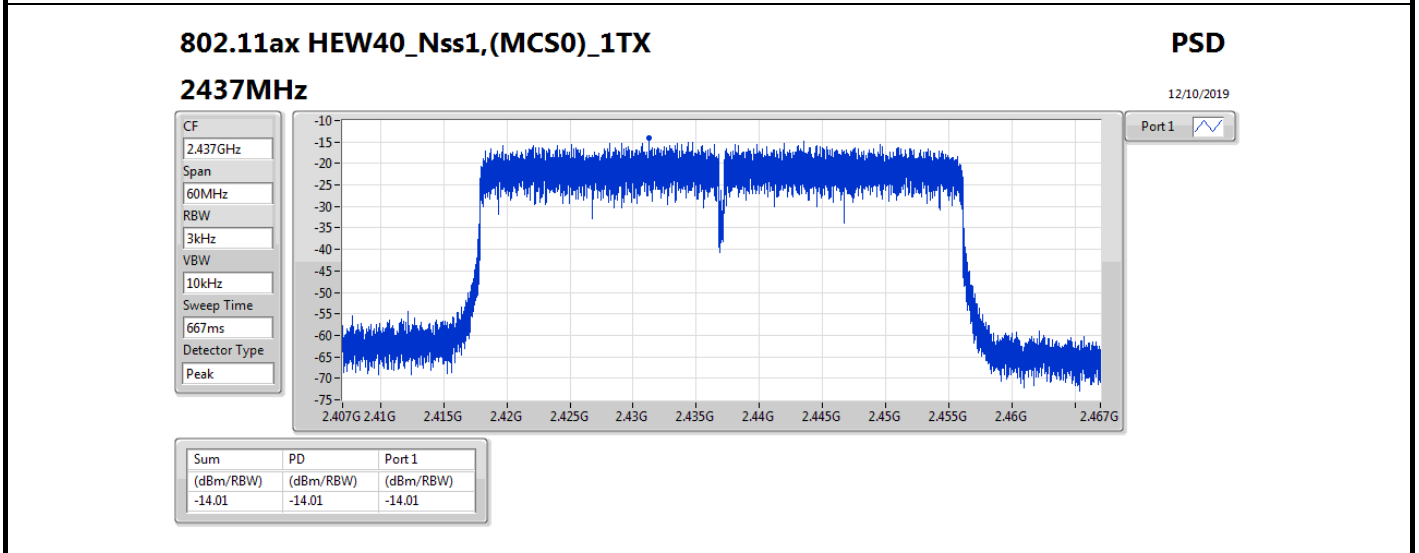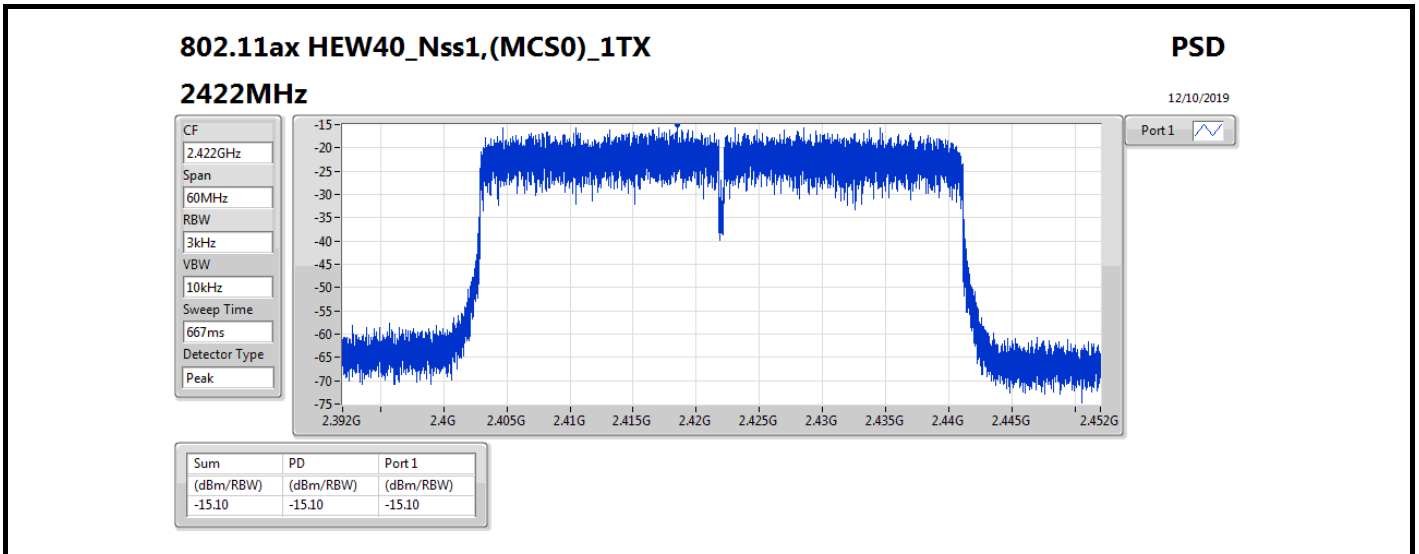



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-5.07
802.11g_Nss1,(6Mbps)_2TX	-3.87
VHT20_Nss2,(MCS0)_2TX	-6.12
VHT40_Nss2,(MCS0)_2TX	-13.07
802.11ax HEW20_Nss2,(MCS0)_2TX	-6.08
802.11ax HEW40_Nss2,(MCS0)_2TX	-14.09

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.81	-6.24	-7.39	-5.07	3.19
2437MHz	Pass	10.81	-8.58	-8.57	-7.17	3.19
2462MHz	Pass	10.81	-7.81	-8.04	-5.98	3.19
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.81	-10.18	-10.44	-7.30	3.19
2437MHz	Pass	10.81	-6.31	-7.23	-3.87	3.19
2462MHz	Pass	10.81	-10.41	-10.49	-7.66	3.19
VHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.80	-12.17	-12.07	-10.48	6.20
2437MHz	Pass	7.80	-7.46	-7.51	-6.12	6.20
2462MHz	Pass	7.80	-11.05	-11.49	-9.89	6.20
VHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.80	-15.70	-15.56	-14.34	6.20
2437MHz	Pass	7.80	-14.01	-14.02	-13.07	6.20
2452MHz	Pass	7.80	-16.71	-16.25	-15.47	6.20
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.80	-12.56	-12.68	-10.30	6.20
2437MHz	Pass	7.80	-9.00	-7.34	-6.08	6.20
2462MHz	Pass	7.80	-12.68	-10.93	-10.04	6.20
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.80	-16.82	-16.67	-15.62	6.20
2437MHz	Pass	7.80	-15.71	-14.89	-14.09	6.20
2452MHz	Pass	7.80	-17.45	-18.13	-16.34	6.20




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

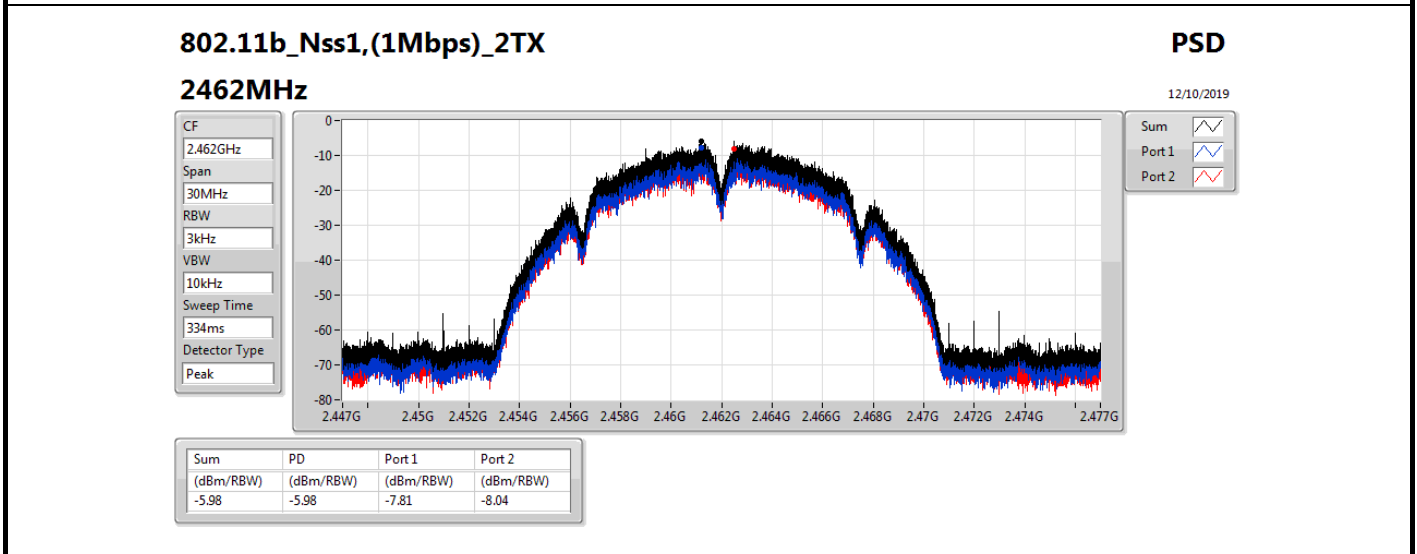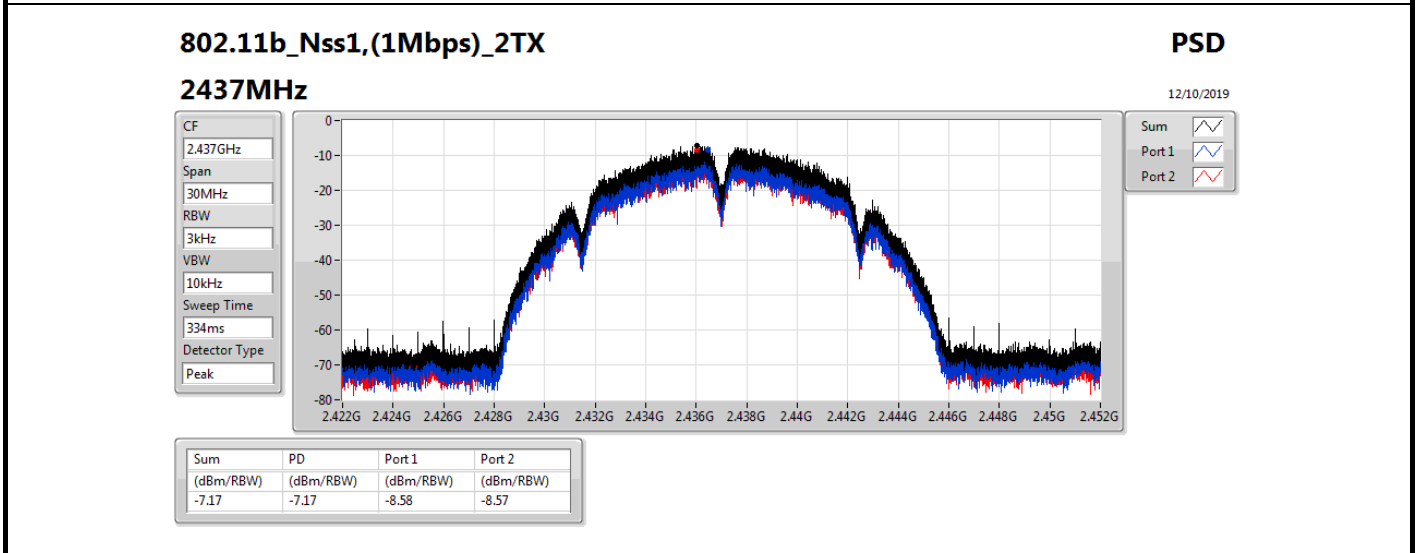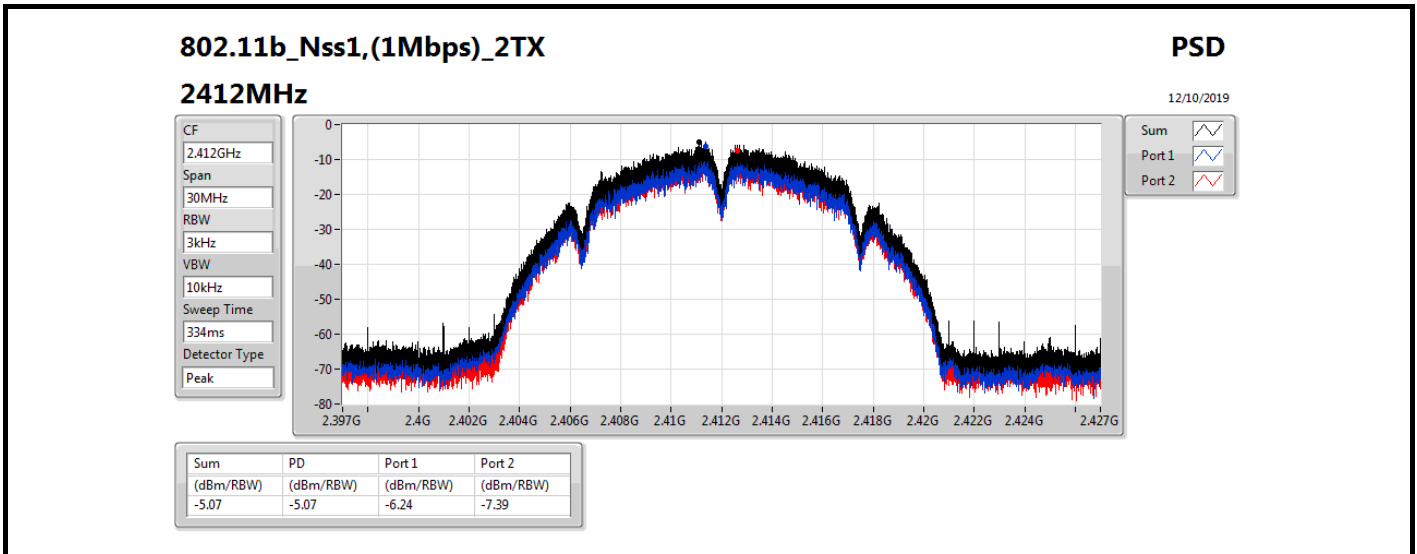

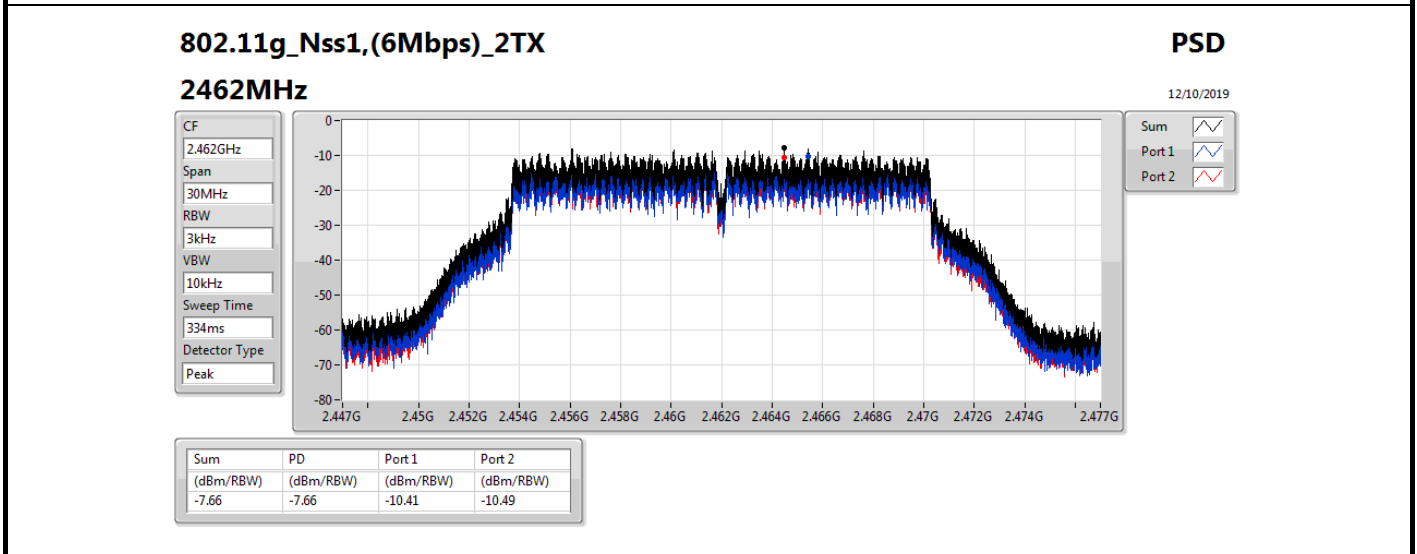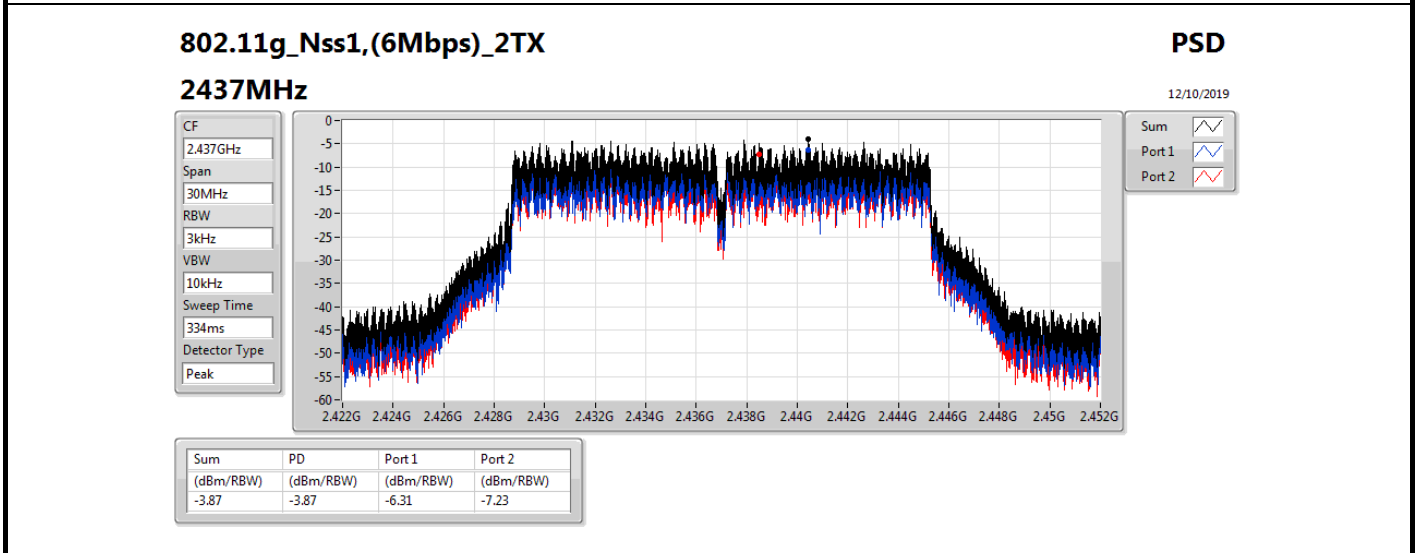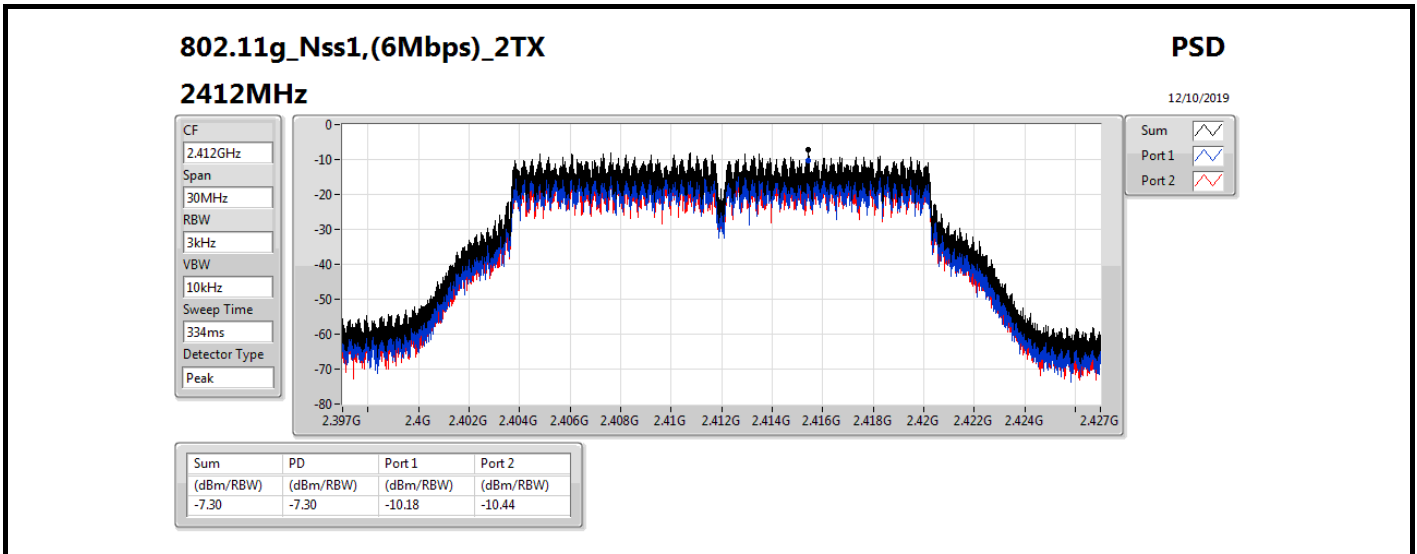

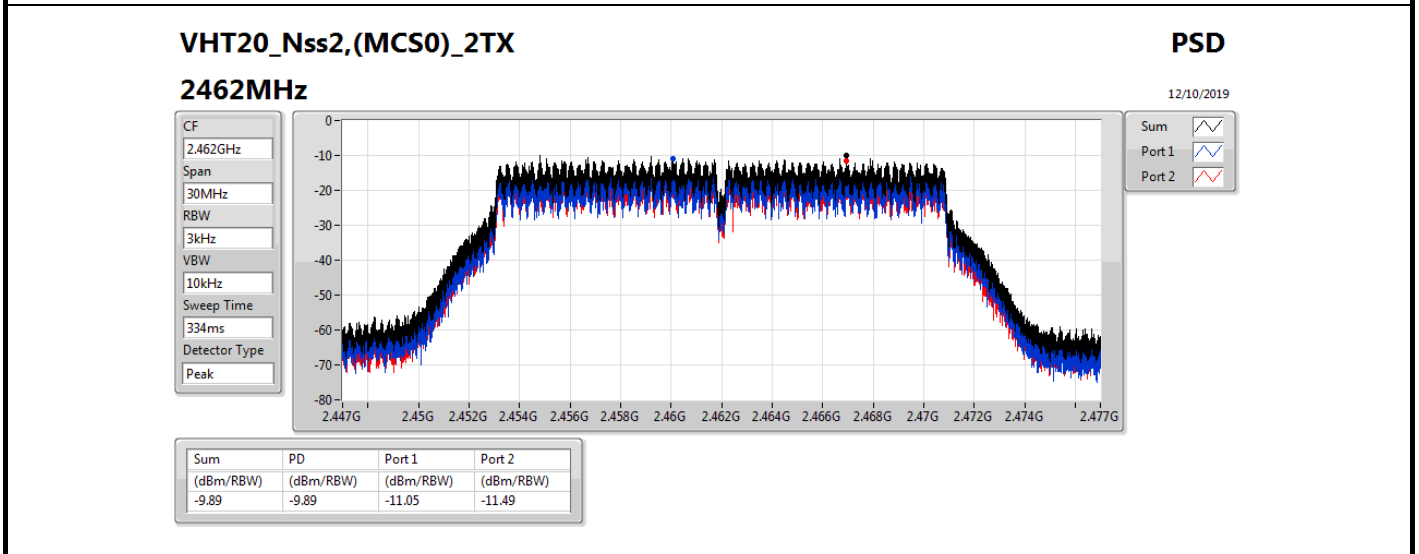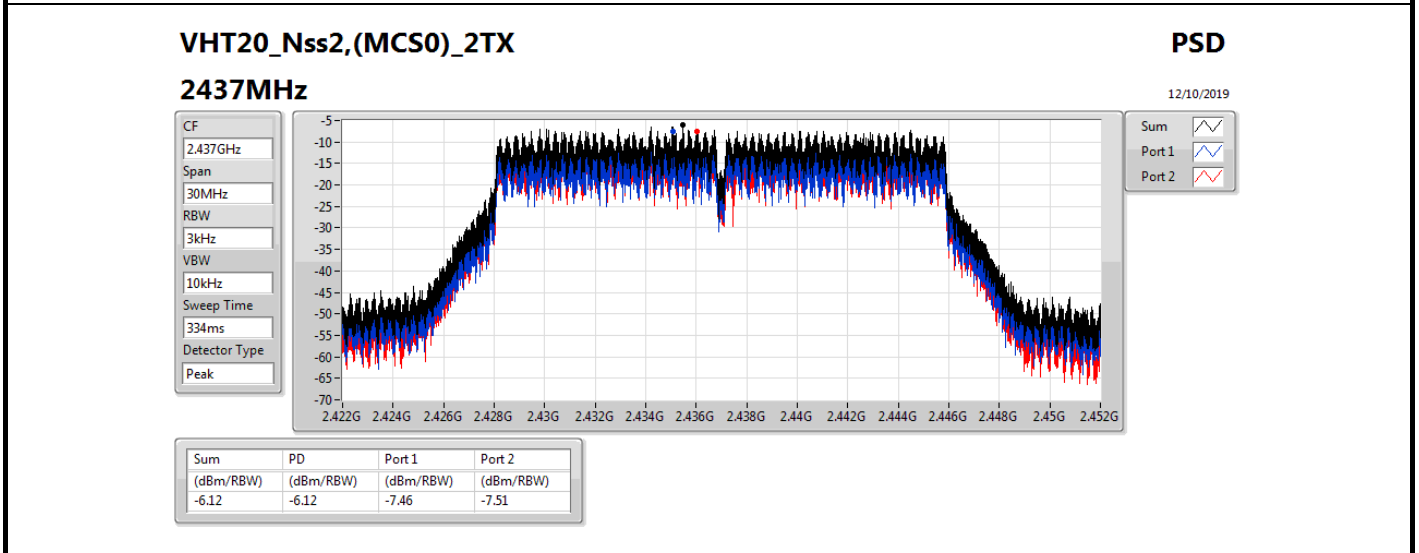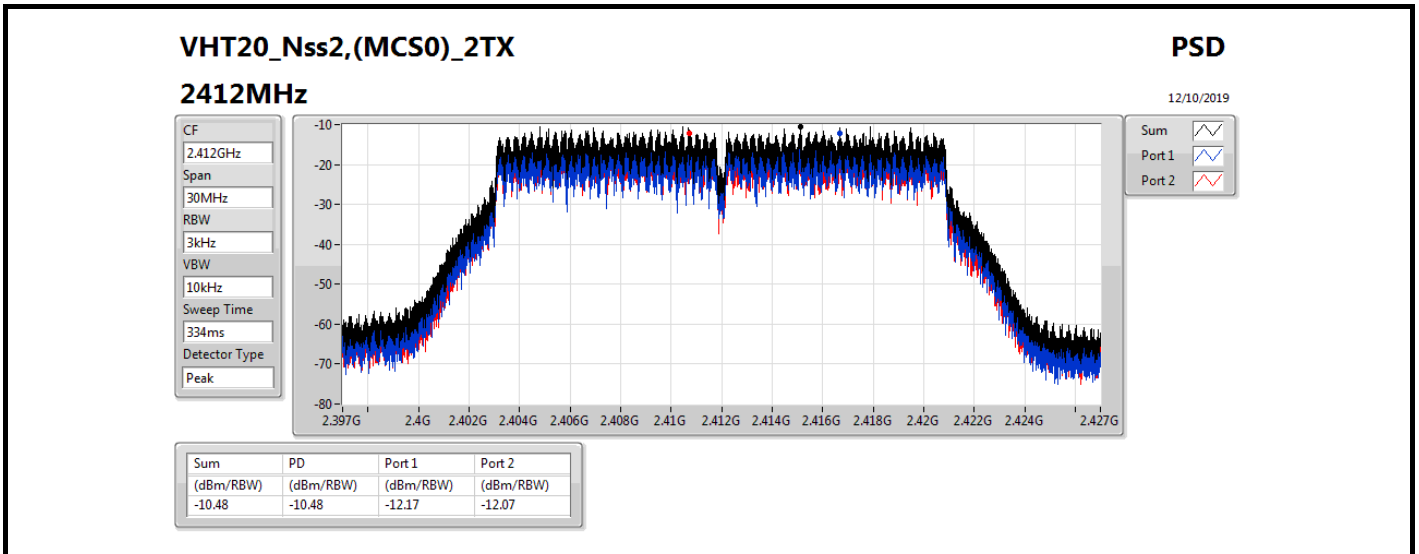

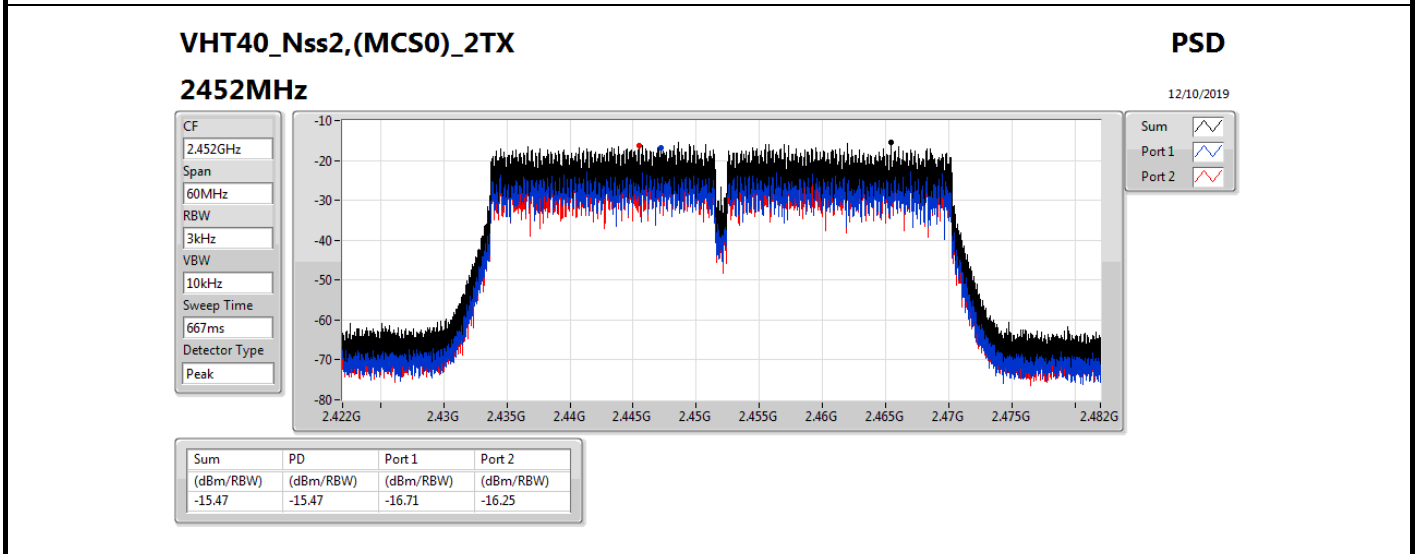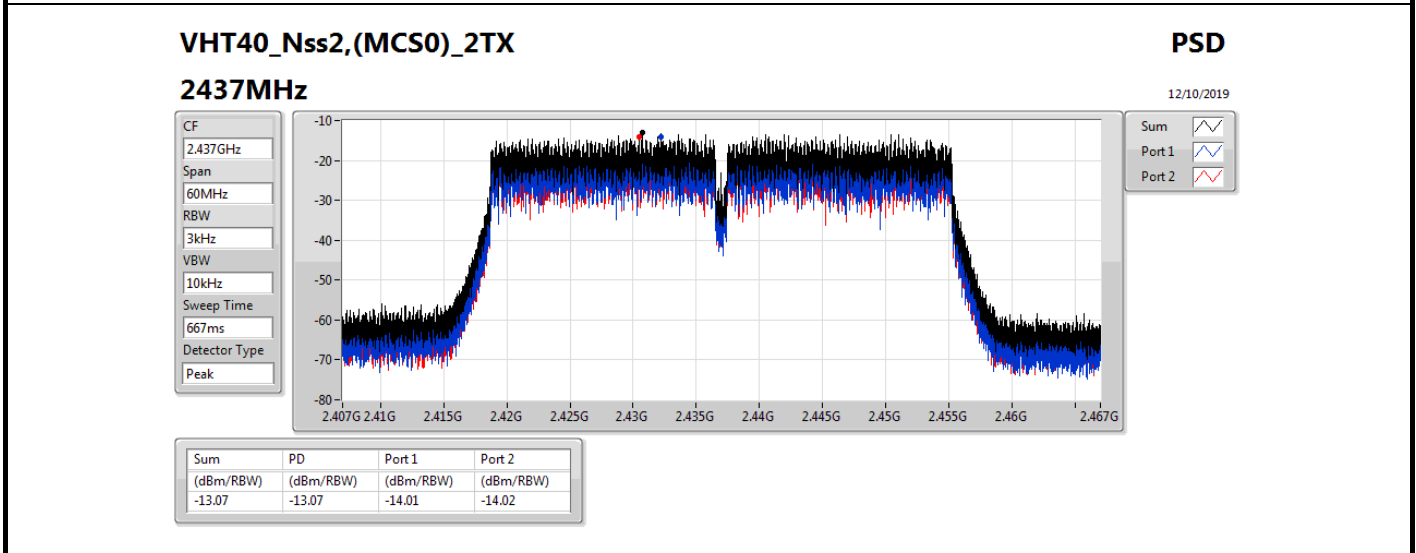
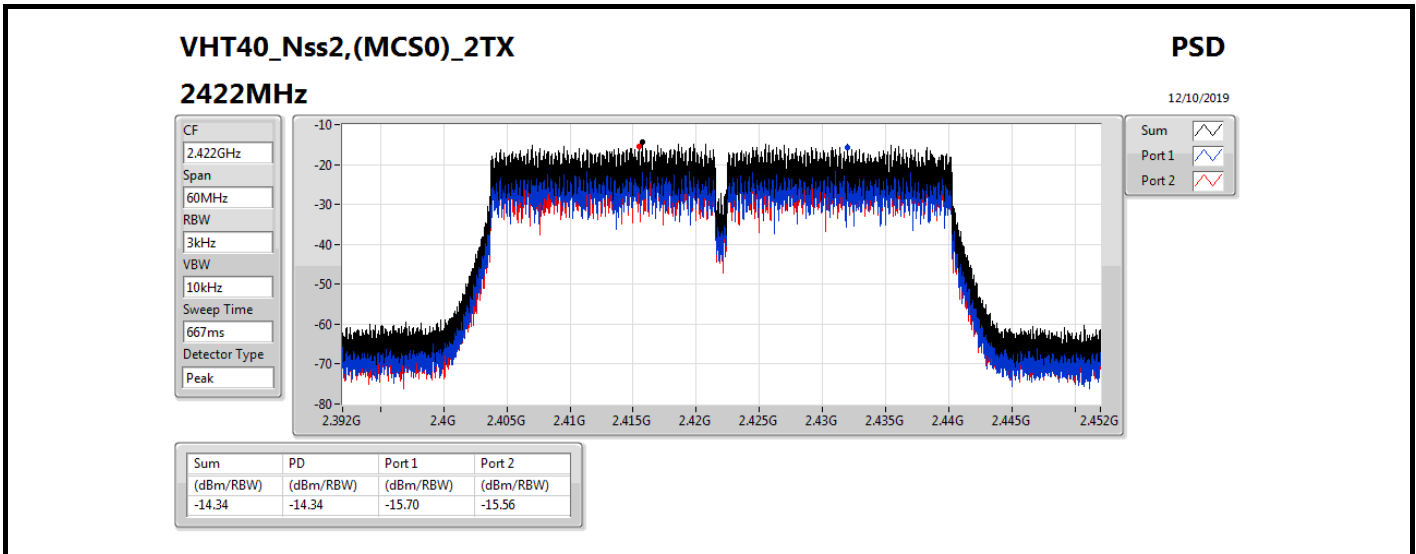


802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

2412MHz

12/10/2019

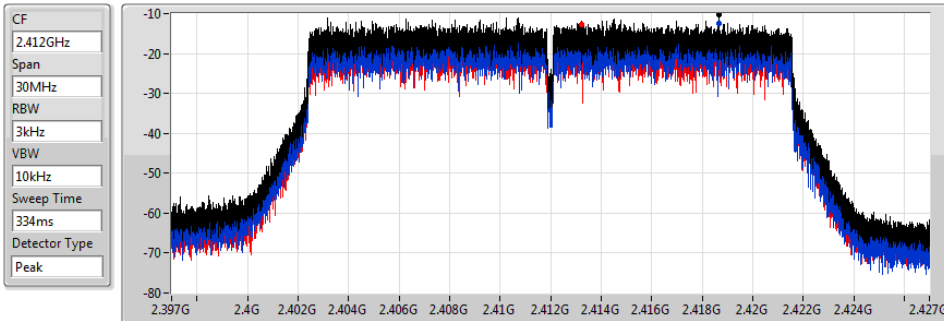



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.30	-10.30	-12.56	-12.68

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

2437MHz

12/10/2019

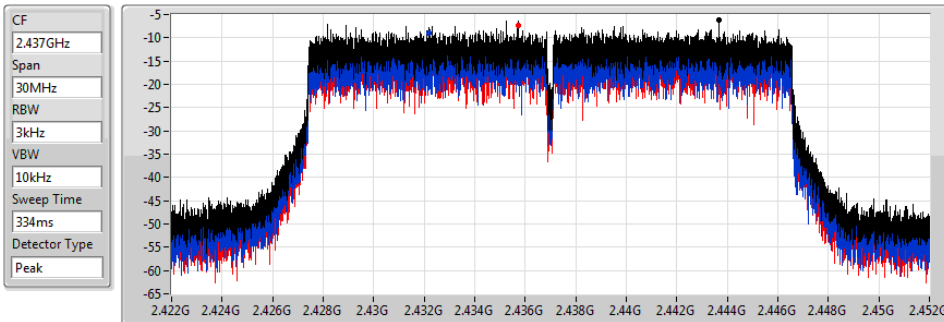



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.08	-6.08	-9.00	-7.34

802.11ax HEW20_Nss2,(MCS0)_2TX




PSD

2462MHz

12/10/2019

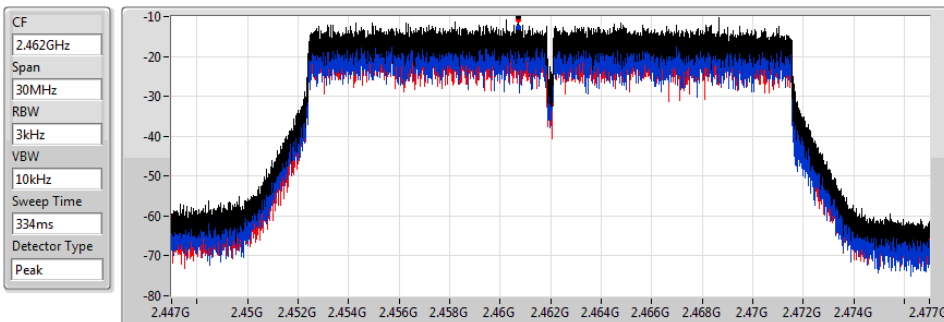

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.04	-10.04	-12.68	-10.93

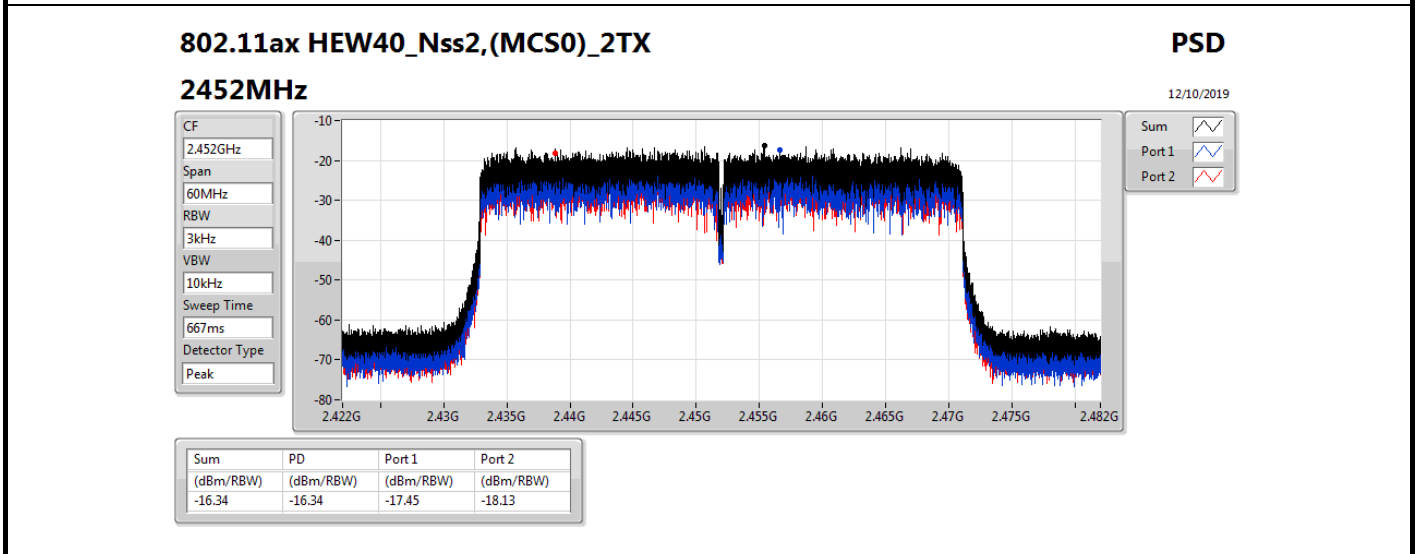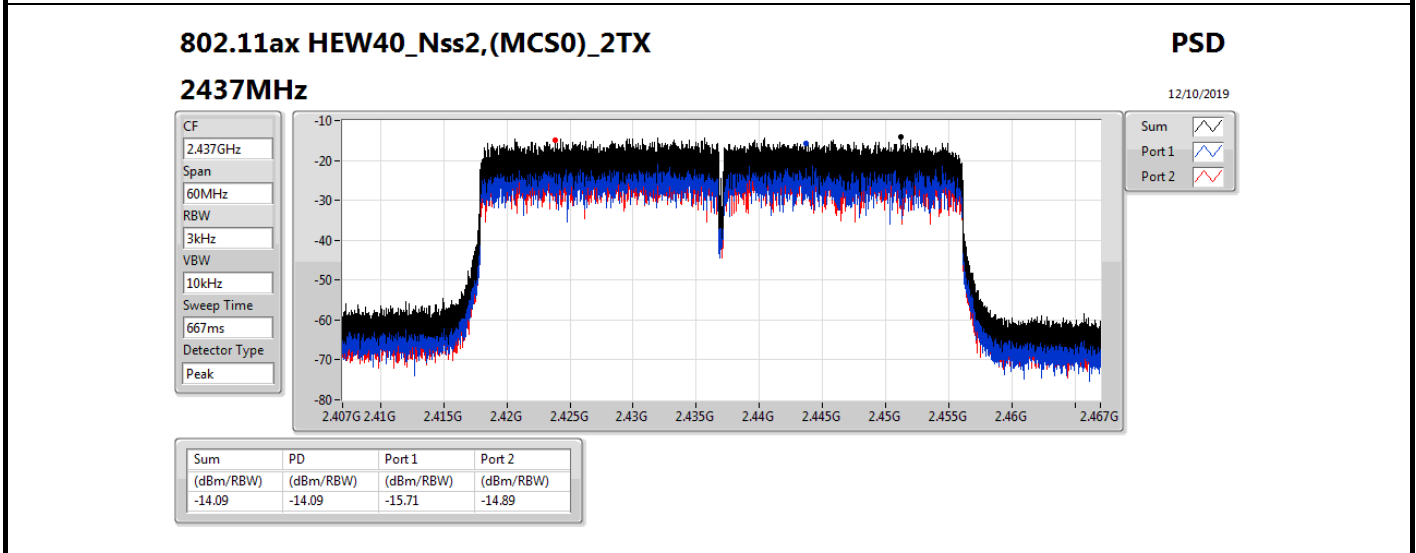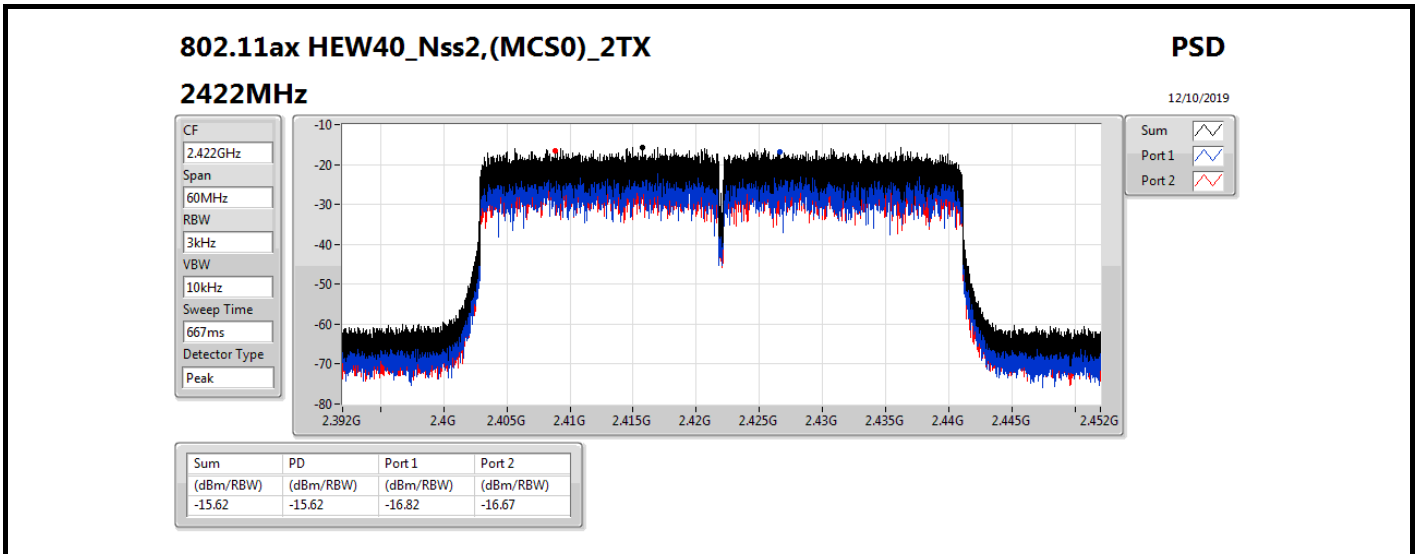



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
VHT20-BF_Nss1,(MCS0)_2TX	-4.27
VHT40-BF_Nss1,(MCS0)_2TX	-12.61
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-3.79
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-13.07

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.81	-12.15	-11.65	-9.01	3.19
2437MHz	Pass	10.81	-7.56	-6.51	-4.27	3.19
2462MHz	Pass	10.81	-13.21	-12.26	-9.84	3.19
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	10.81	-16.60	-15.48	-13.56	3.19
2437MHz	Pass	10.81	-14.95	-15.48	-12.61	3.19
2452MHz	Pass	10.81	-16.31	-15.73	-13.52	3.19
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.81	-11.29	-10.71	-7.98	3.19
2437MHz	Pass	10.81	-7.14	-6.48	-3.79	3.19
2462MHz	Pass	10.81	-13.82	-13.03	-10.58	3.19
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	10.81	-16.95	-16.72	-13.82	3.19
2437MHz	Pass	10.81	-15.84	-16.21	-13.07	3.19
2452MHz	Pass	10.81	-16.55	-16.27	-13.40	3.19




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

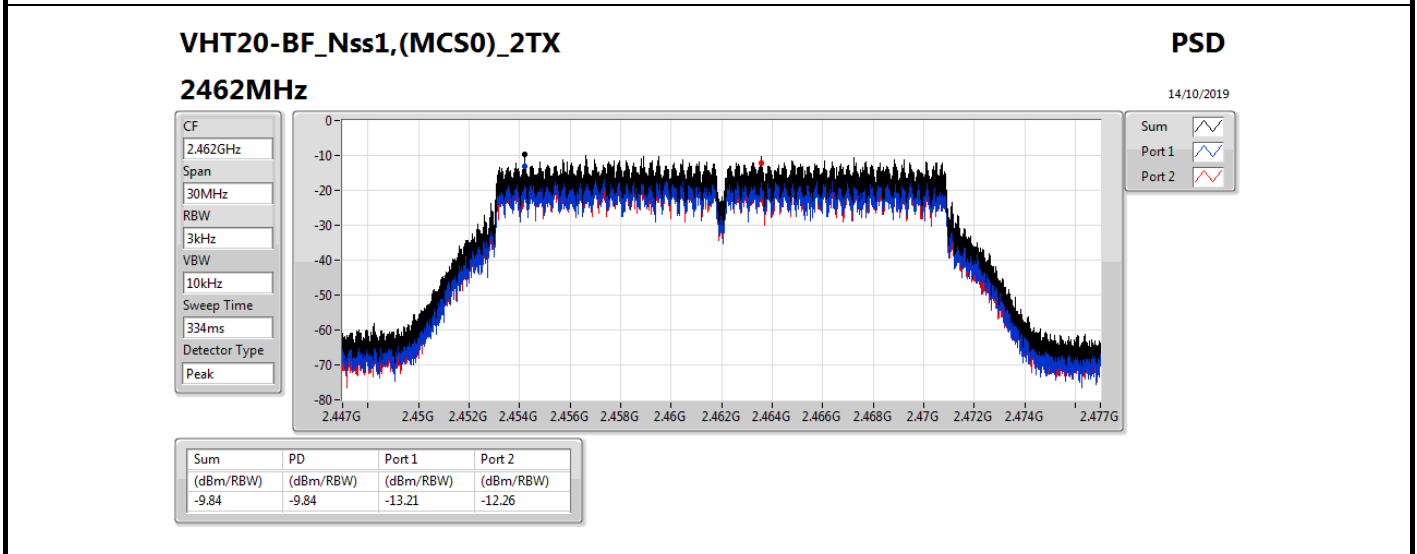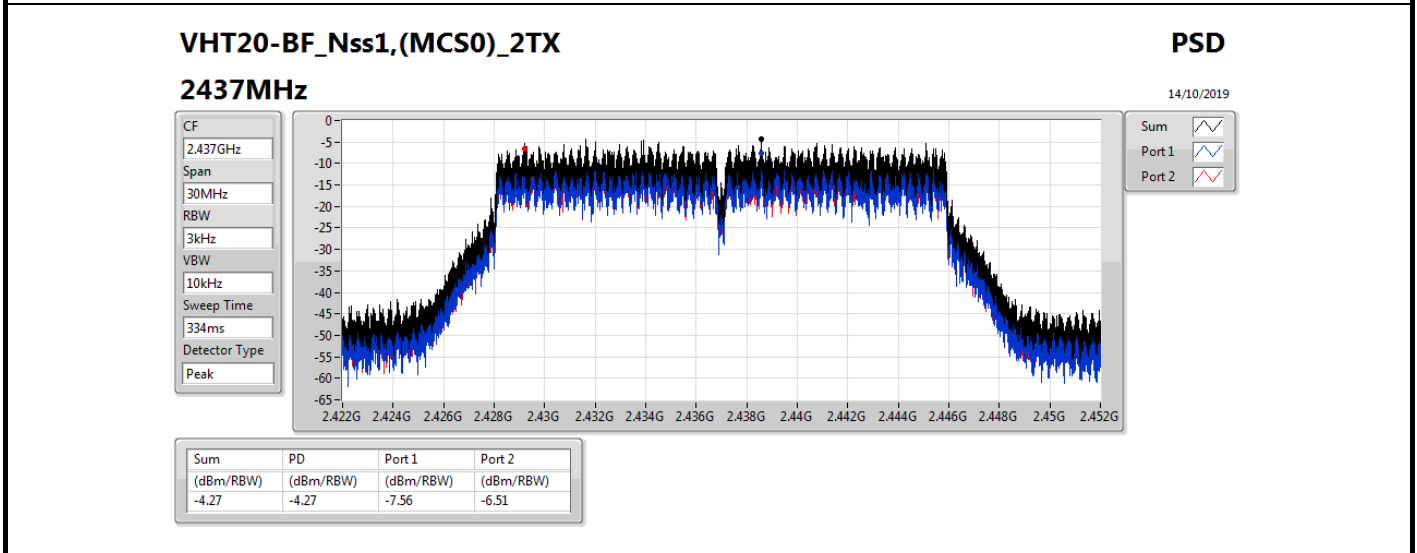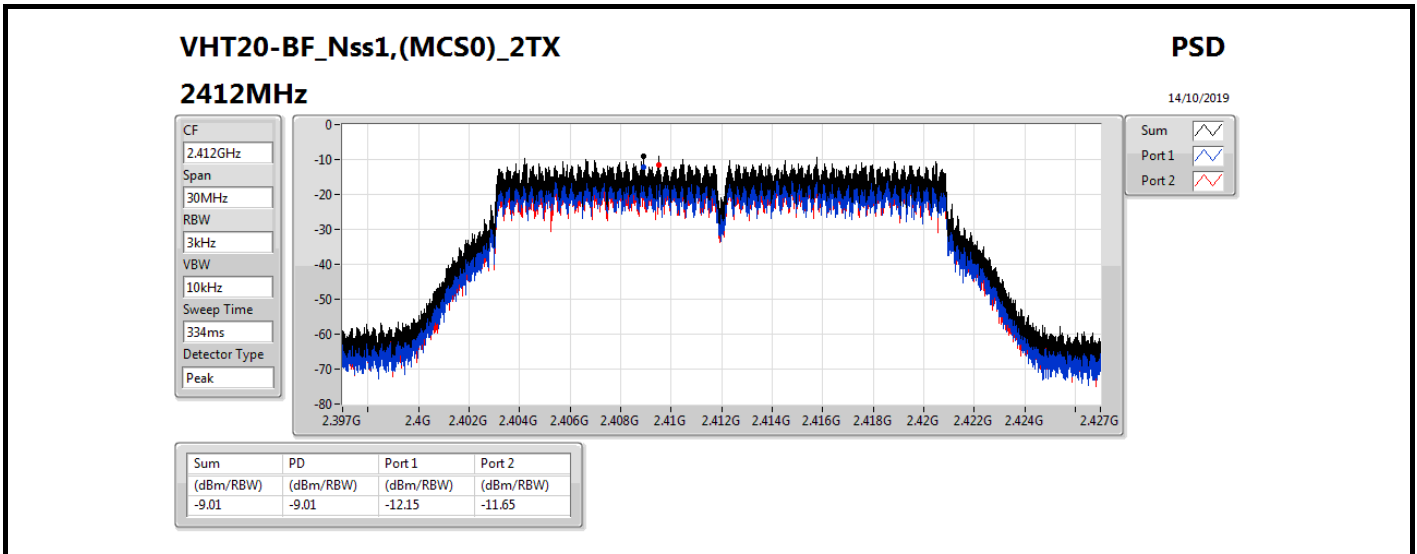

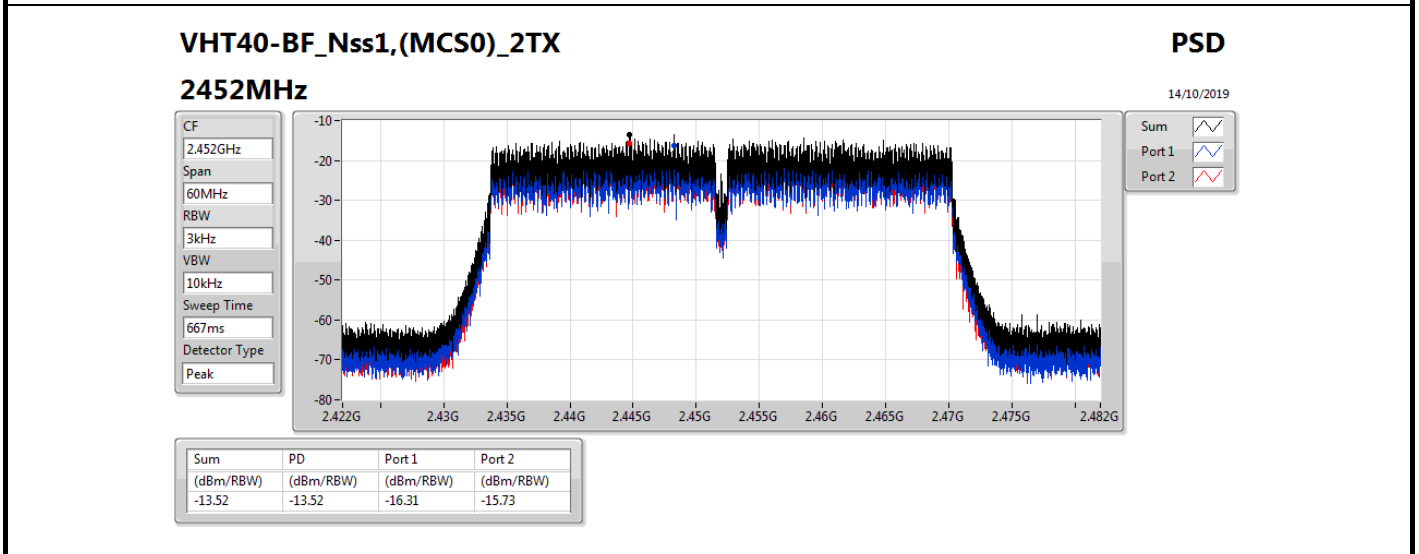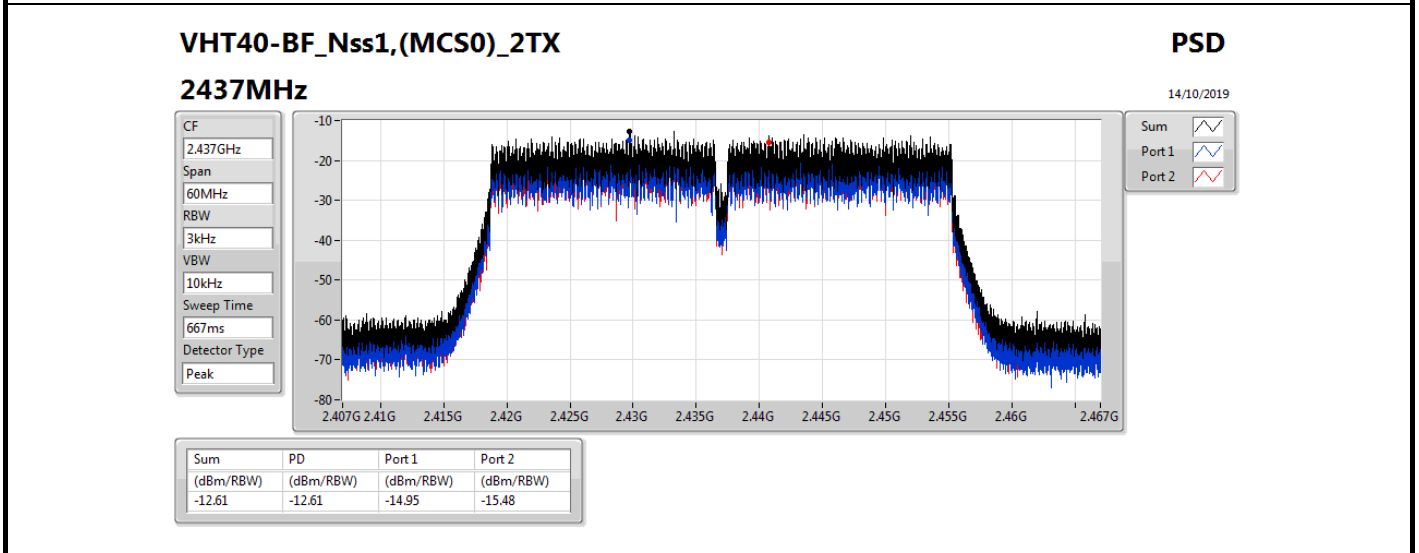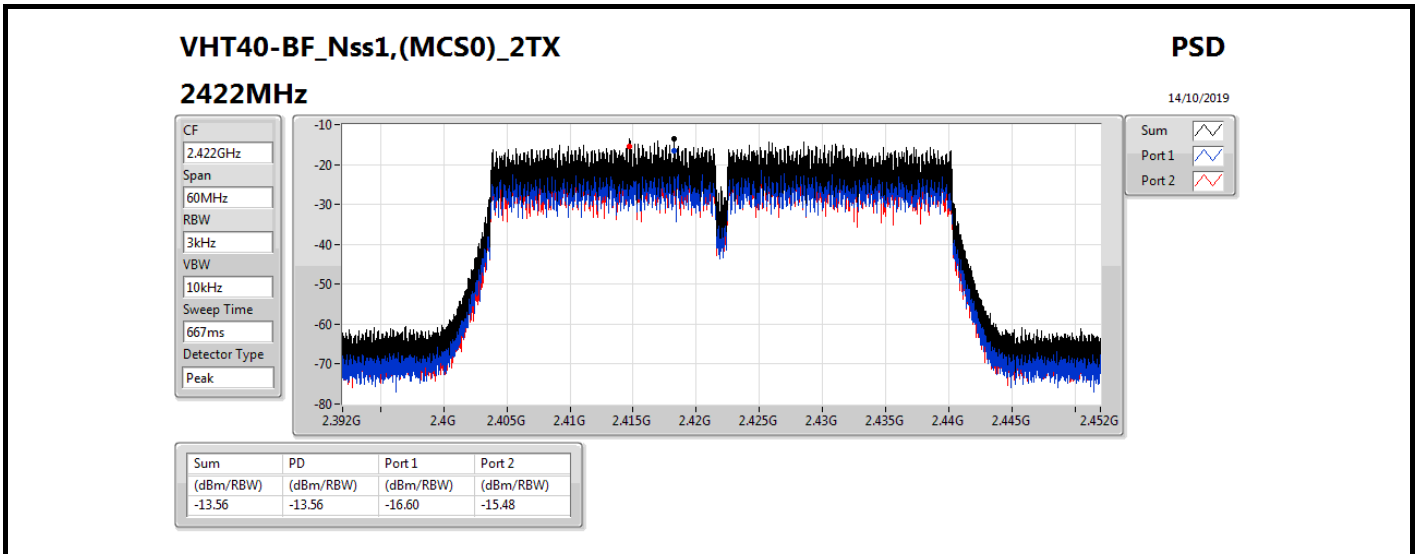

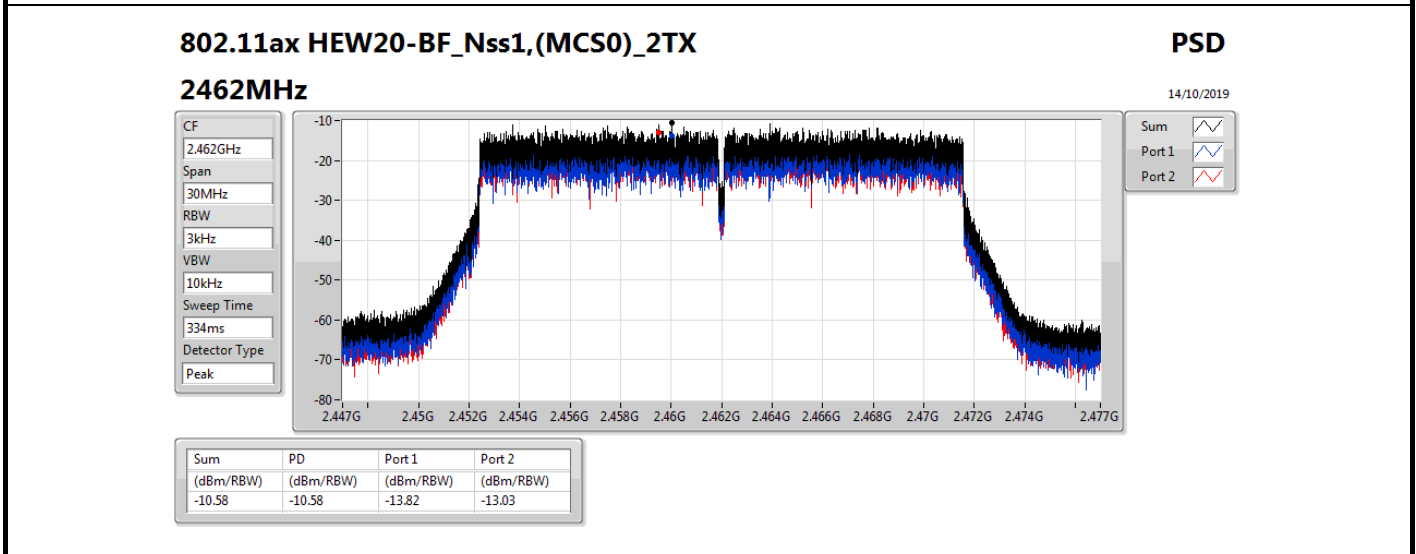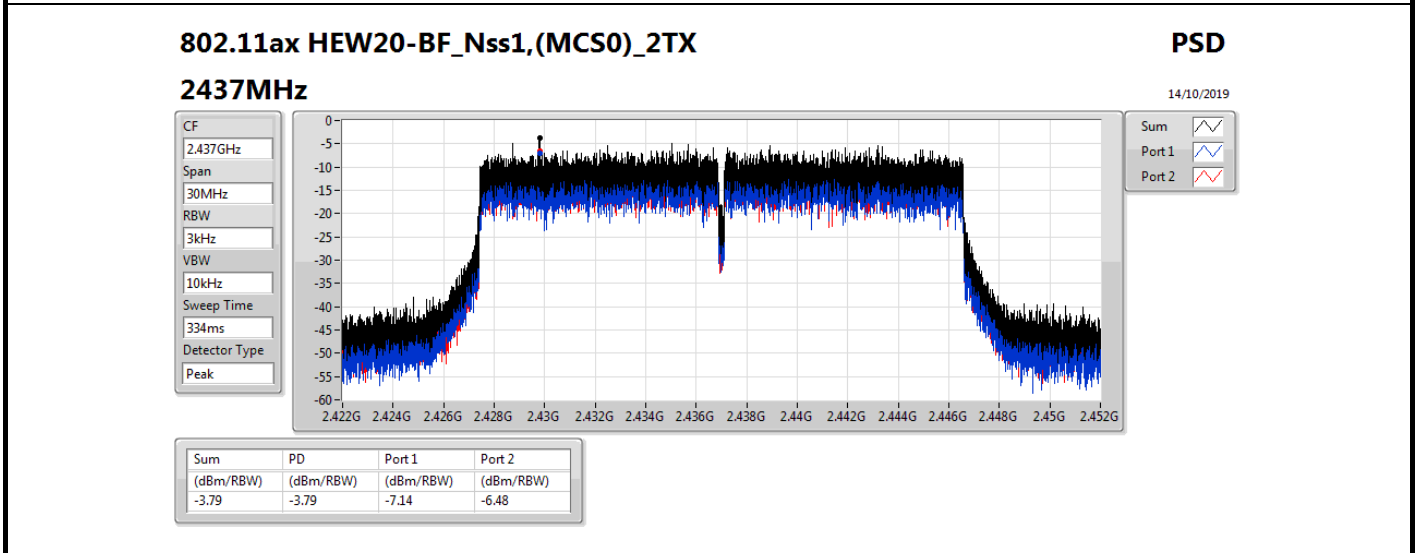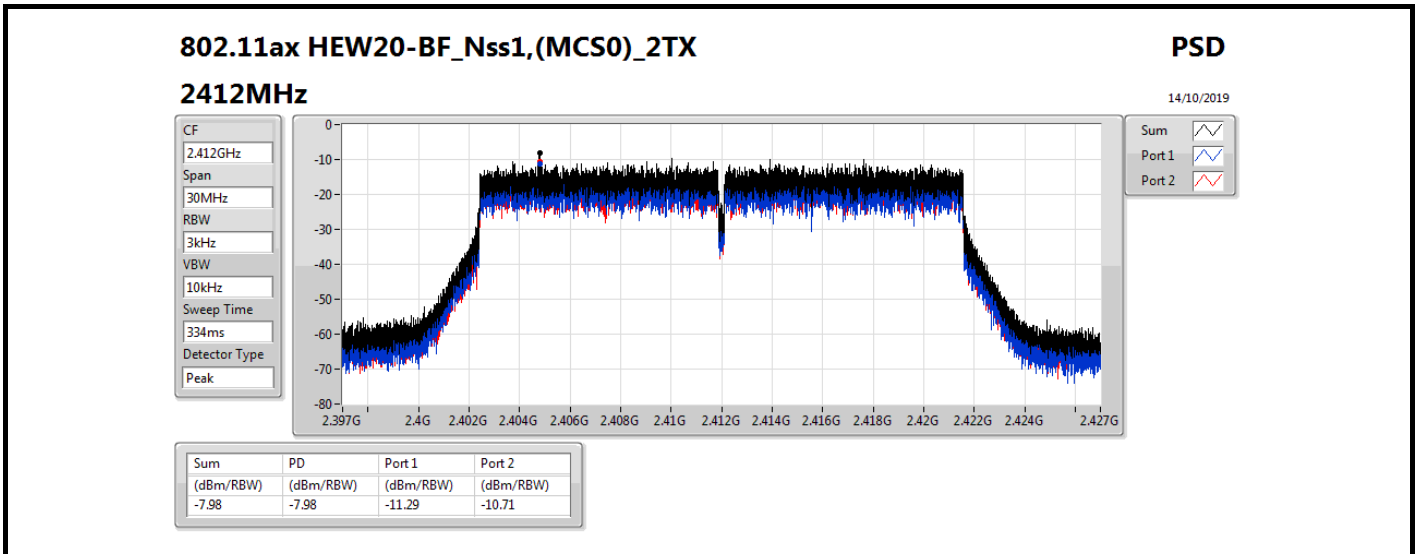

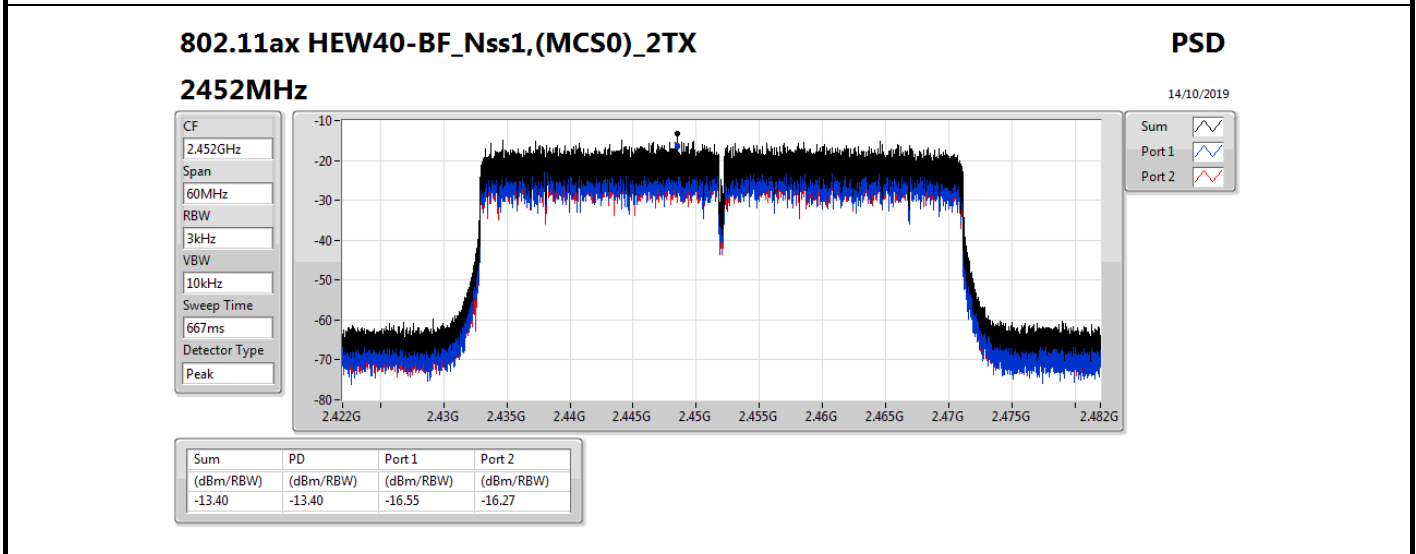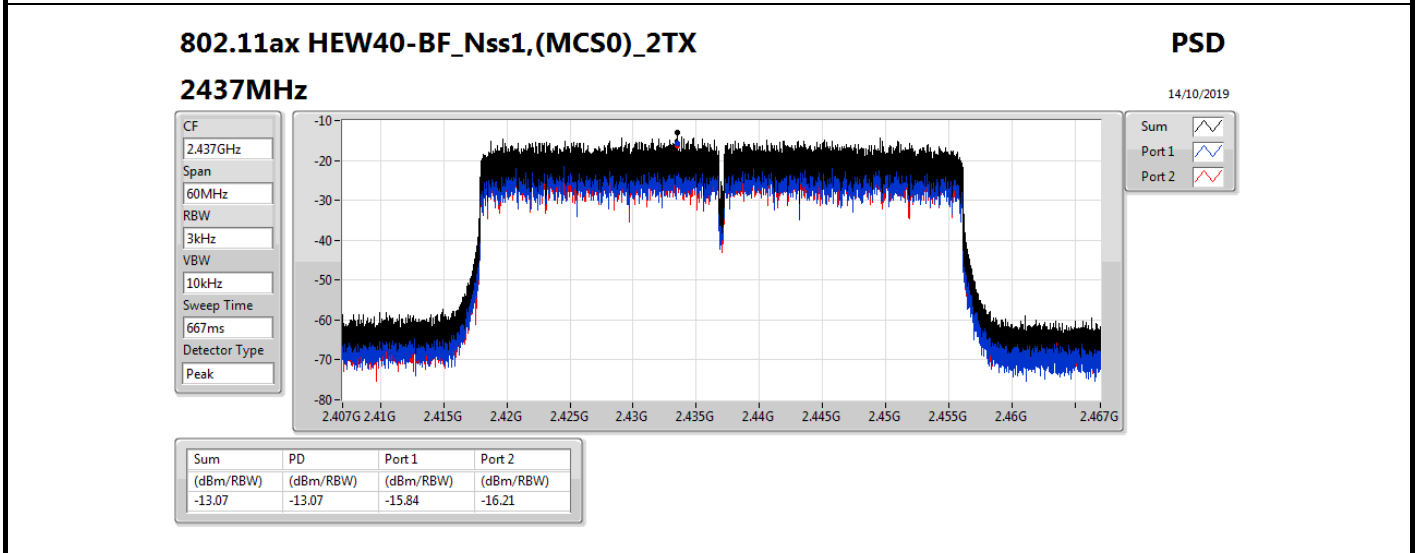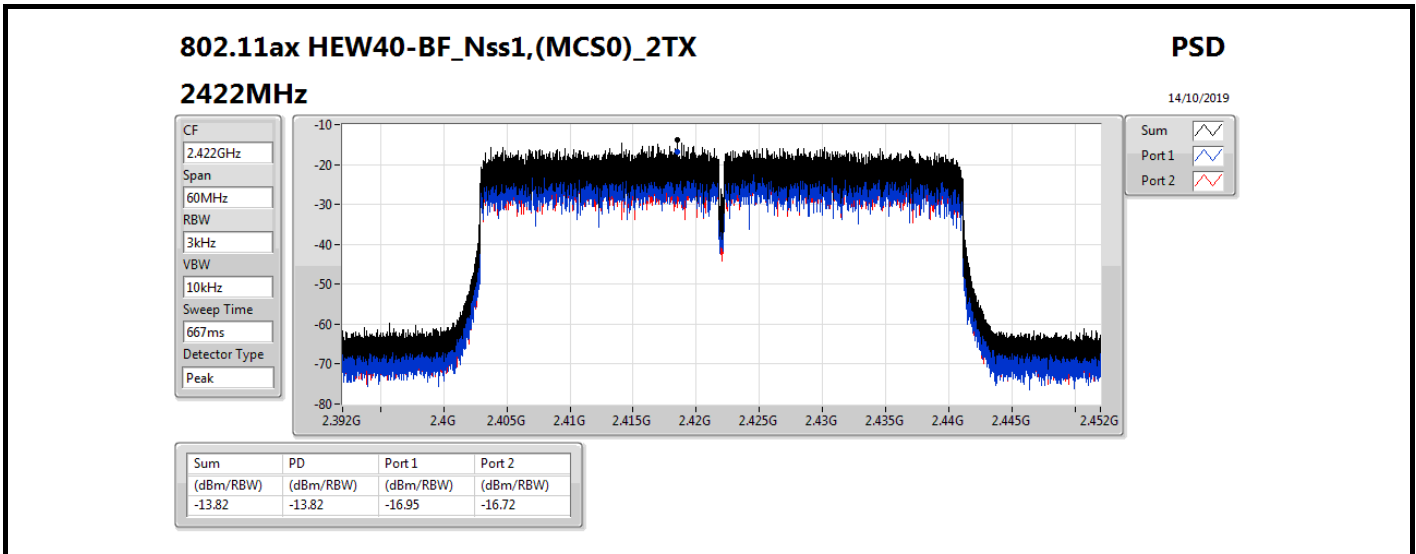



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	0.76
802.11g_Nss1,(6Mbps)_1TX	-5.68
VHT20_Nss1,(MCS0)_1TX	-6.28
VHT40_Nss1,(MCS0)_1TX	-12.35
802.11ax HEW20_Nss1,(MCS0)_1TX	-5.84
802.11ax HEW40_Nss1,(MCS0)_1TX	-14.01

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	10.50	-1.14	-1.14	3.50
2437MHz	Pass	10.50	0.76	0.76	3.50
2462MHz	Pass	10.50	-1.17	-1.17	3.50
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	10.50	-11.02	-11.02	3.50
2437MHz	Pass	10.50	-5.68	-5.68	3.50
2462MHz	Pass	10.50	-11.10	-11.10	3.50
VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	10.50	-12.06	-12.06	3.50
2437MHz	Pass	10.50	-6.28	-6.28	3.50
2462MHz	Pass	10.50	-13.61	-13.61	3.50
VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	10.50	-14.84	-14.84	3.50
2437MHz	Pass	10.50	-12.35	-12.35	3.50
2452MHz	Pass	10.50	-14.20	-14.20	3.50
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	10.50	-11.11	-11.11	3.50
2437MHz	Pass	10.50	-5.84	-5.84	3.50
2462MHz	Pass	10.50	-12.48	-12.48	3.50
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	10.50	-16.39	-16.39	3.50
2437MHz	Pass	10.50	-14.82	-14.82	3.50
2452MHz	Pass	10.50	-14.01	-14.01	3.50




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

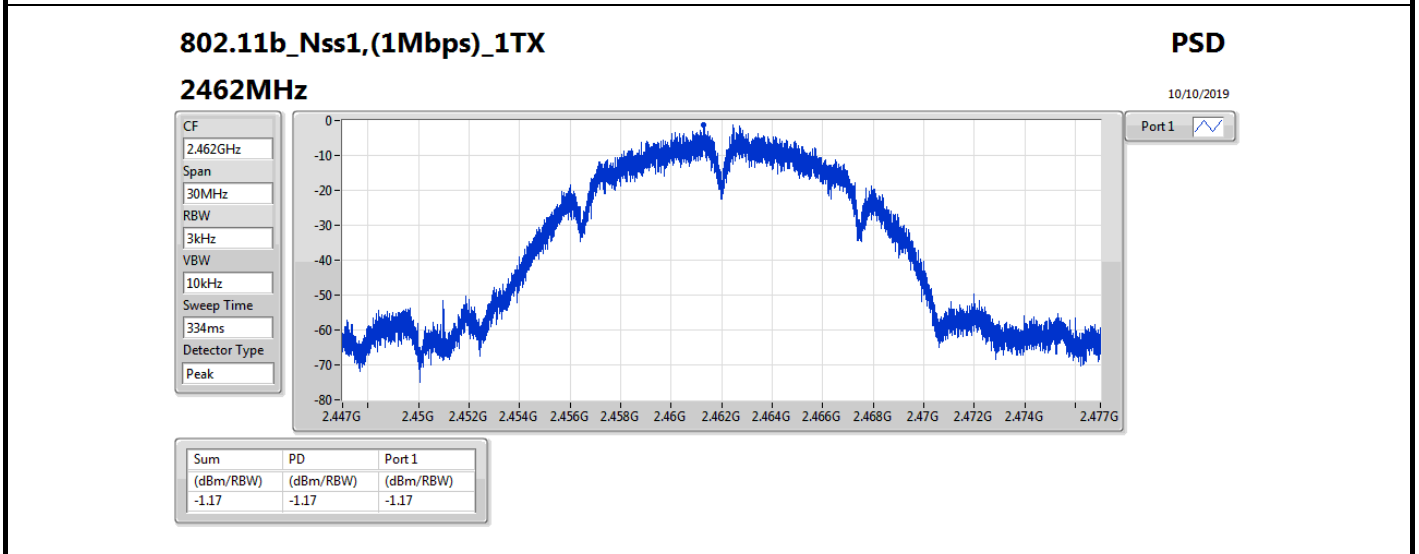
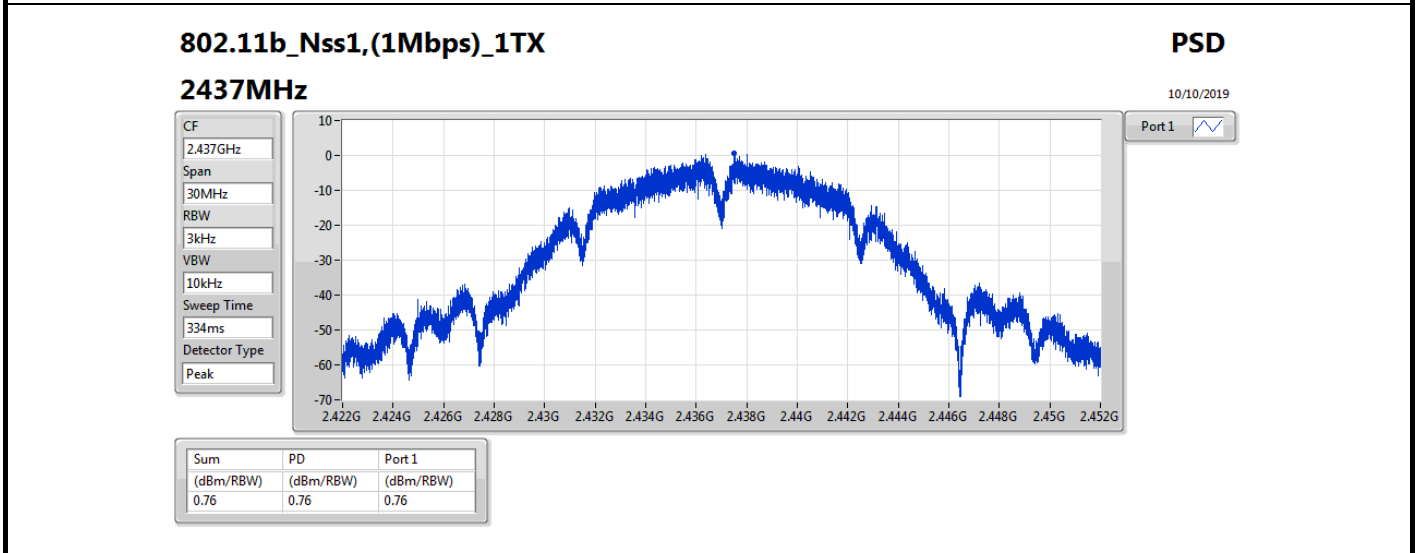
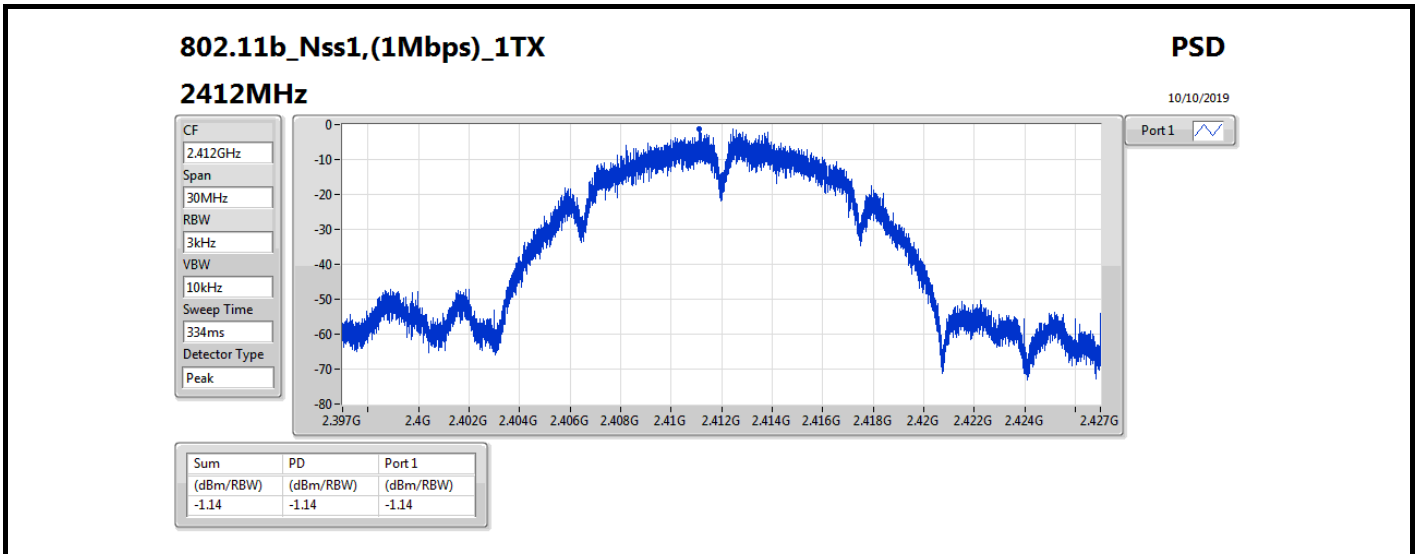


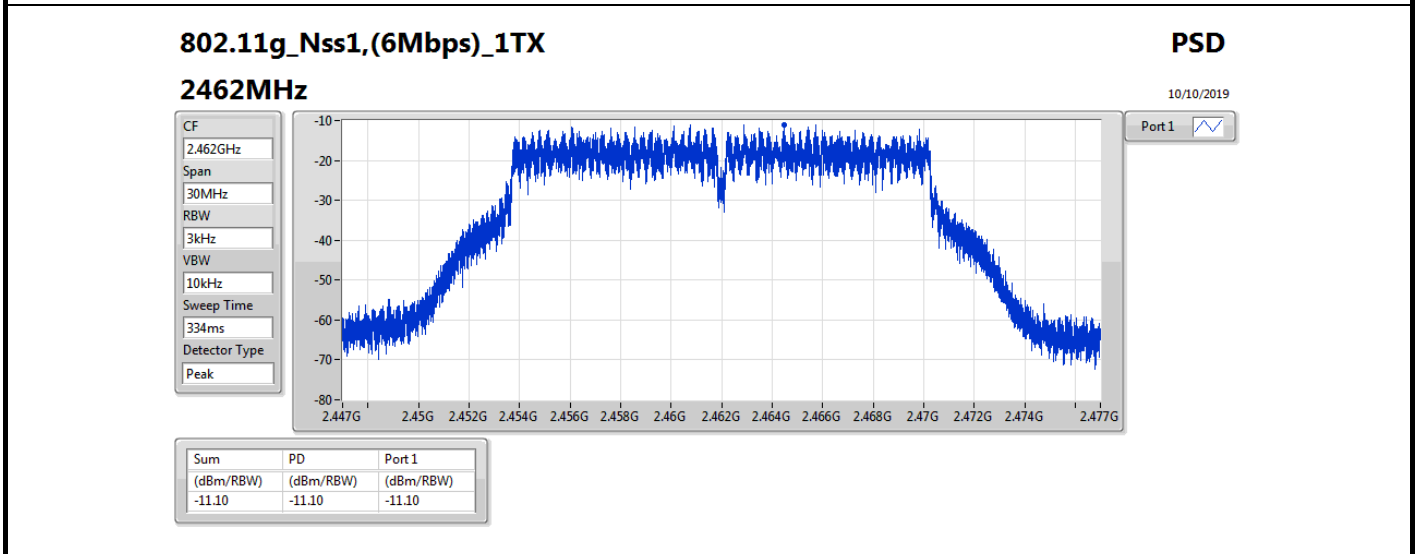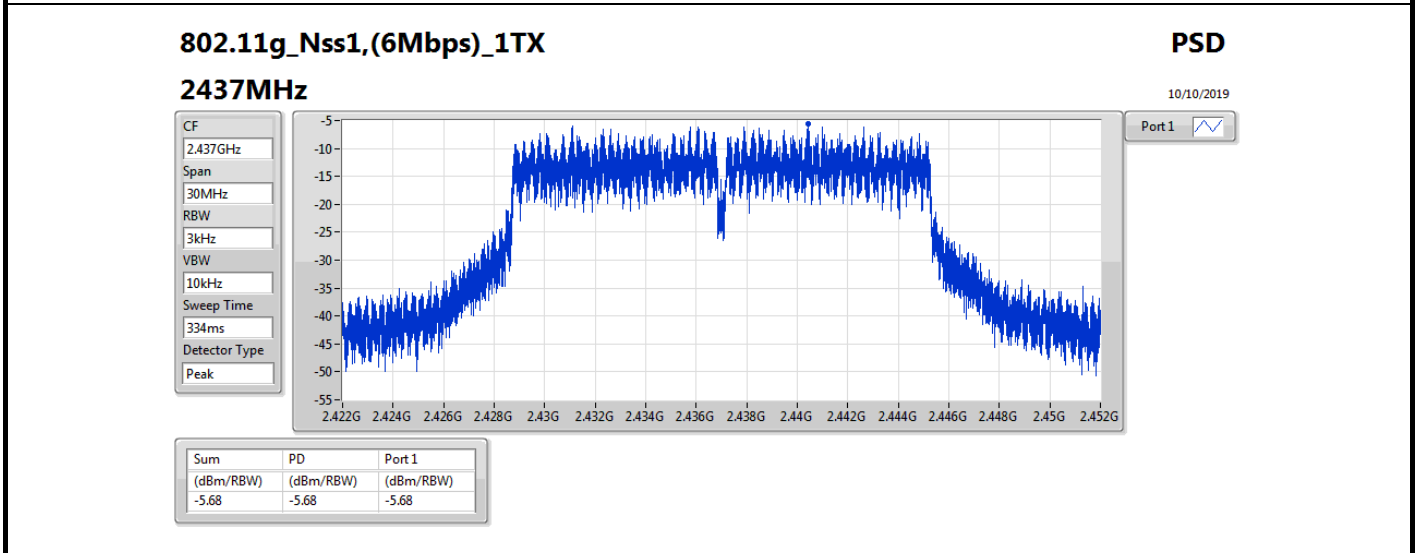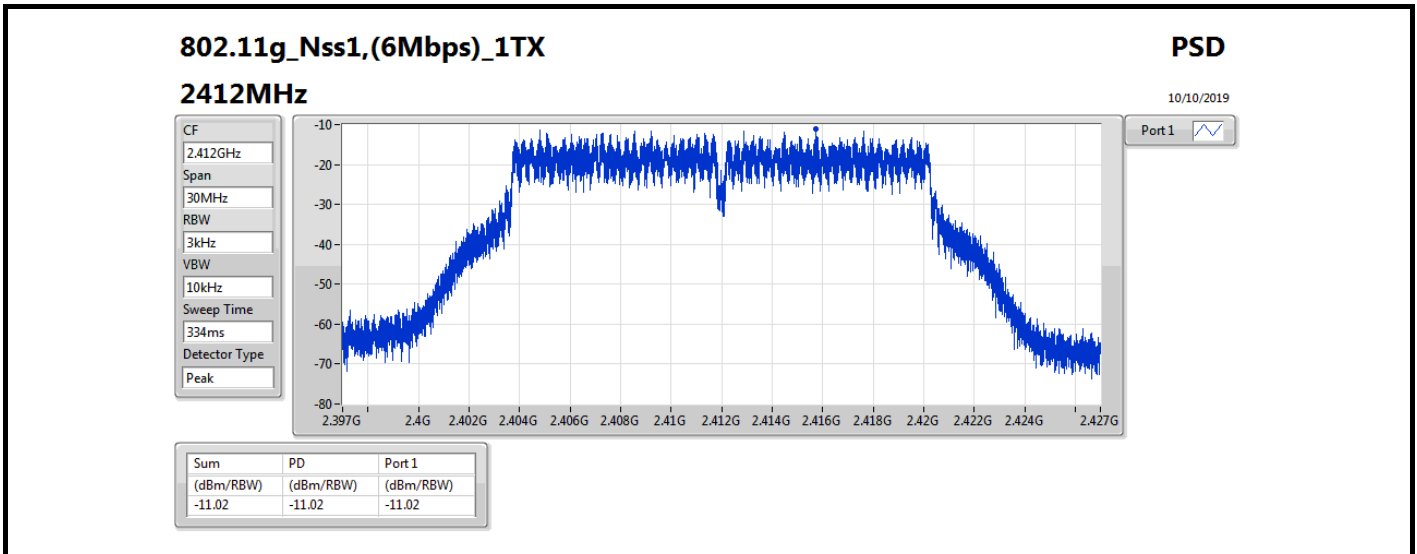

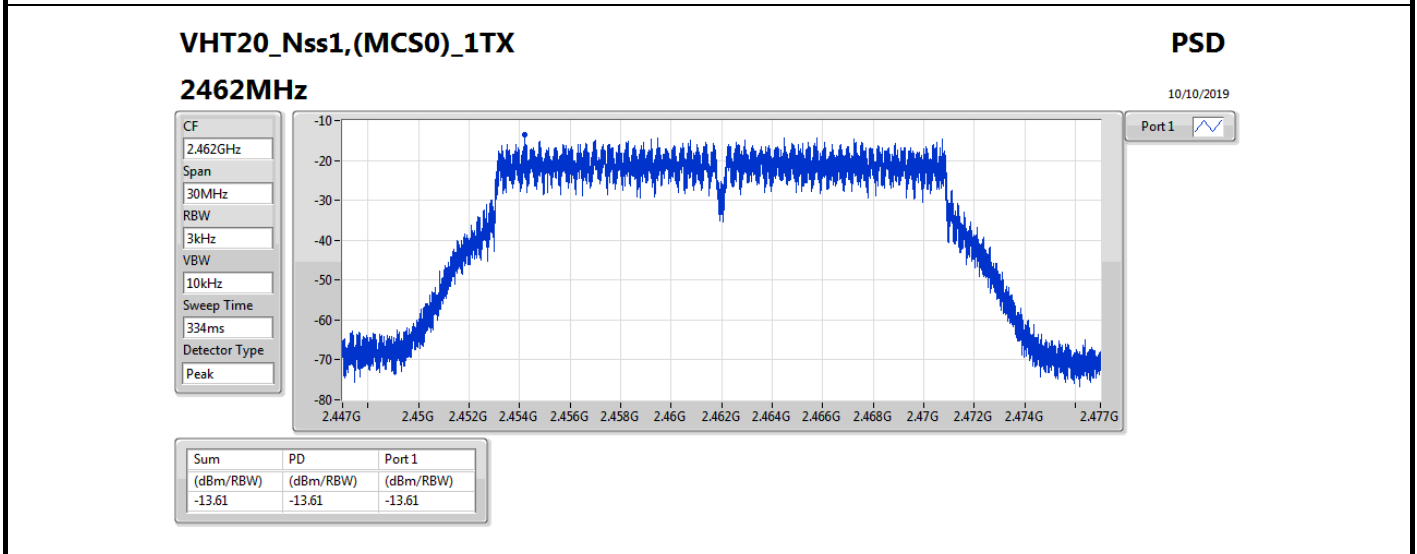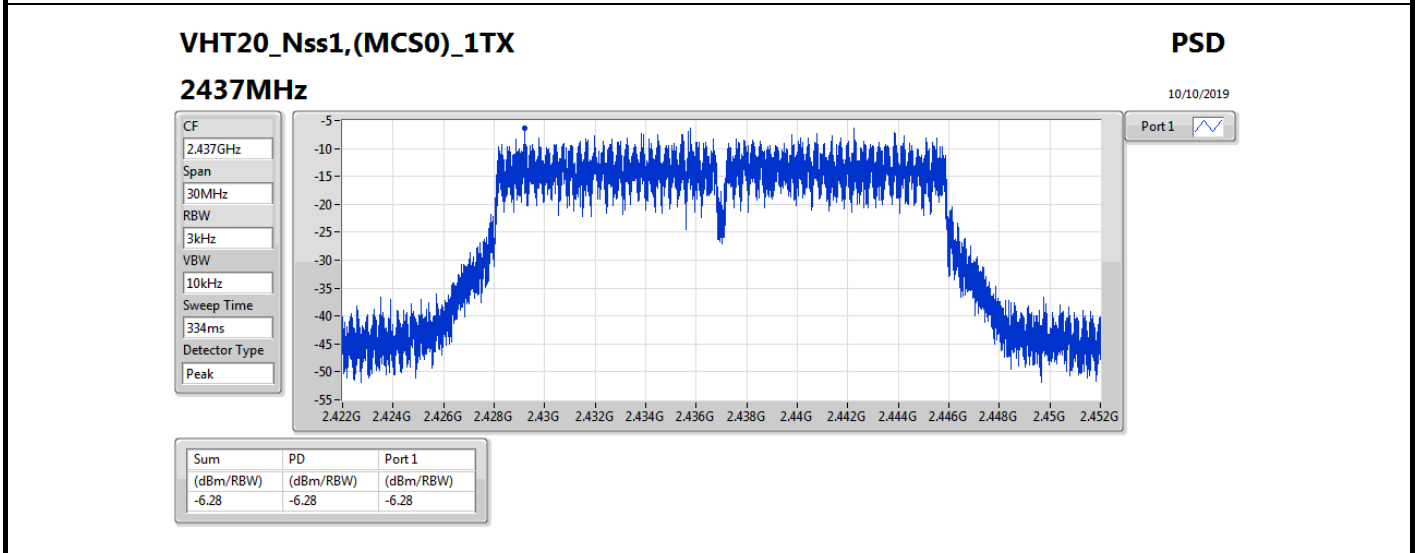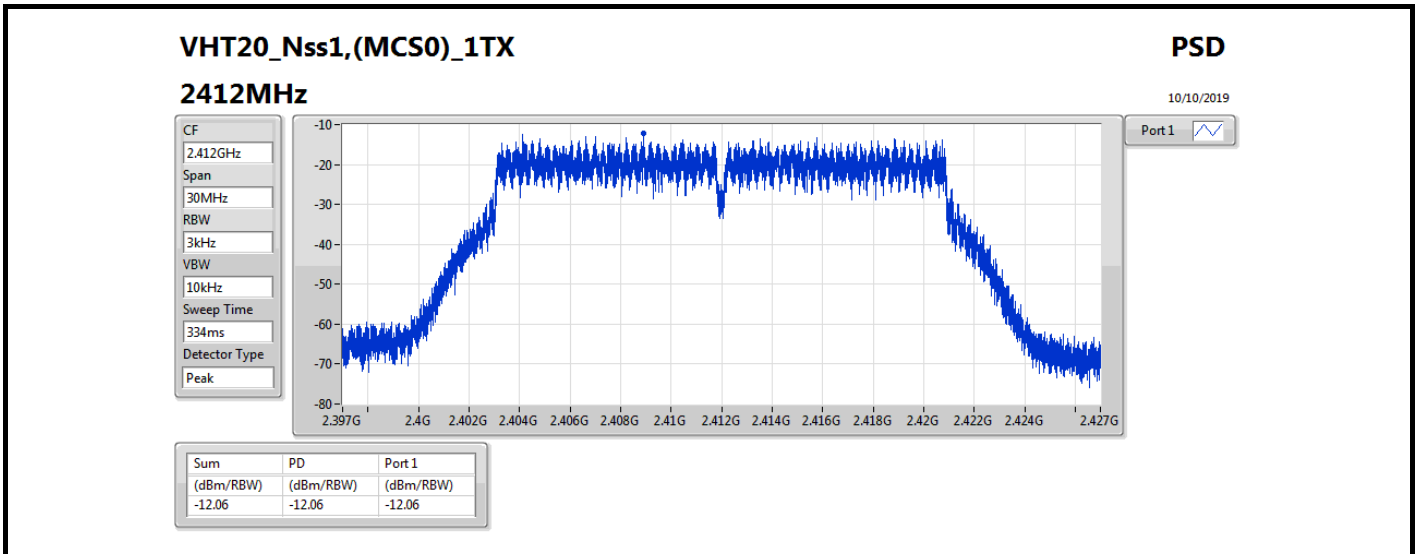

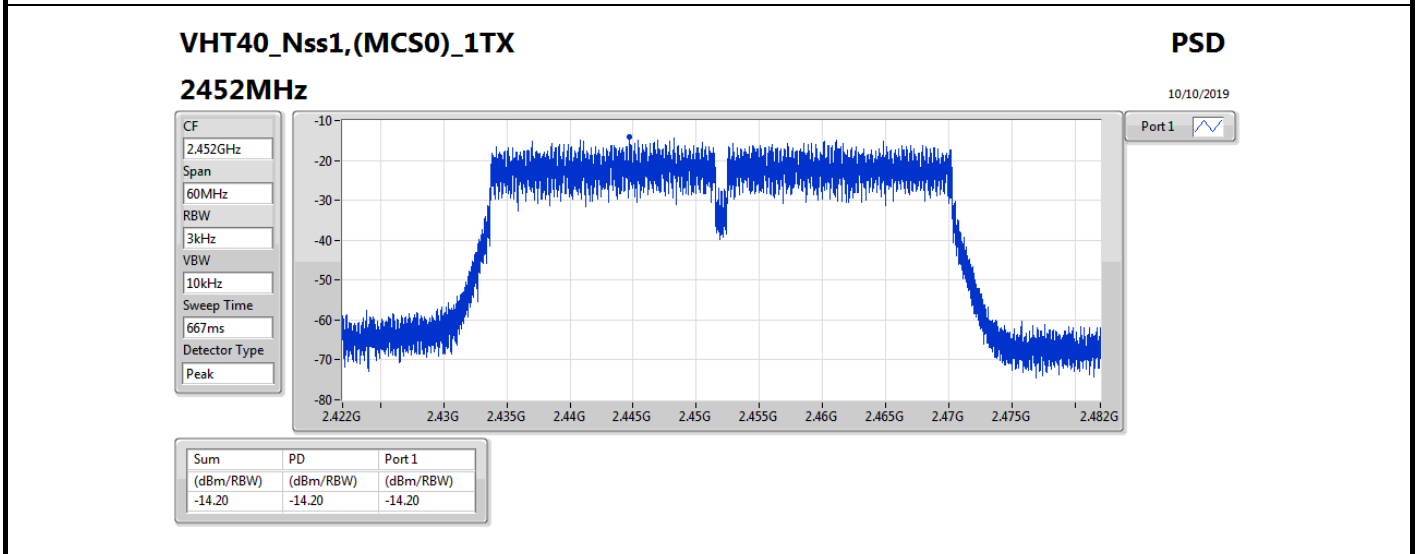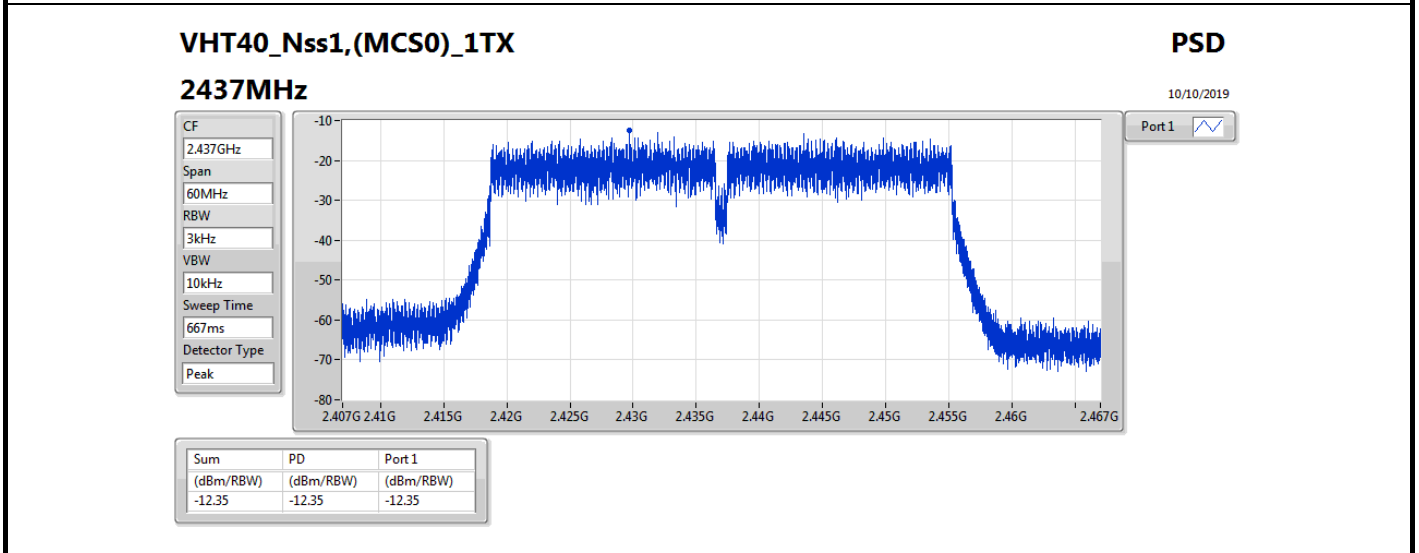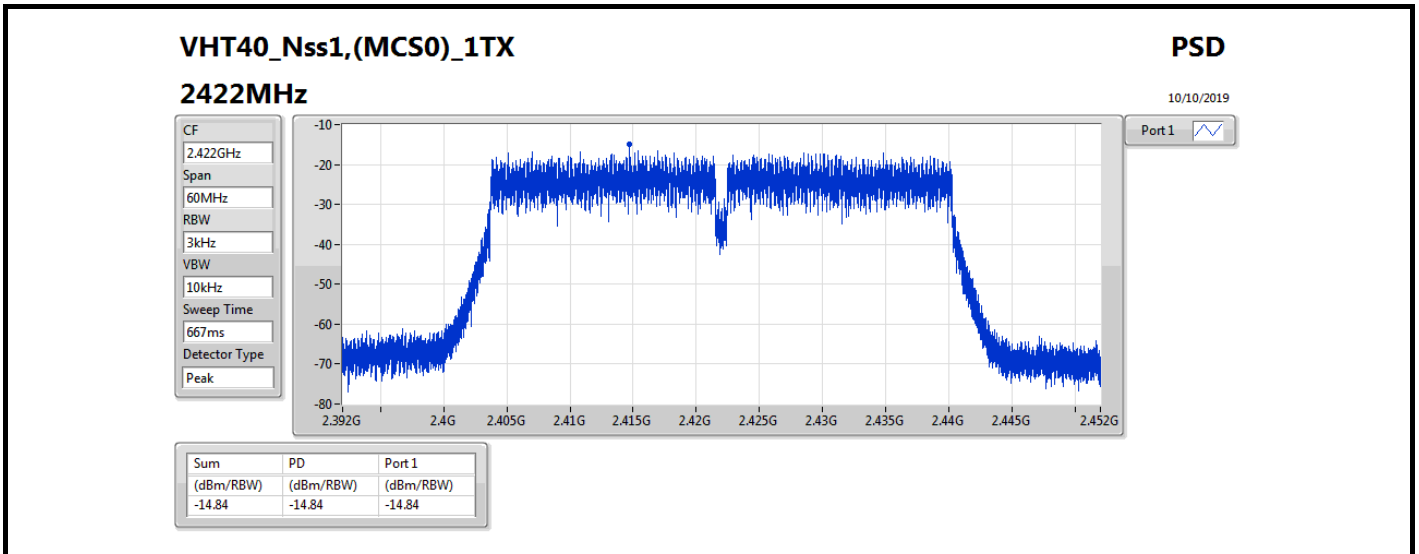

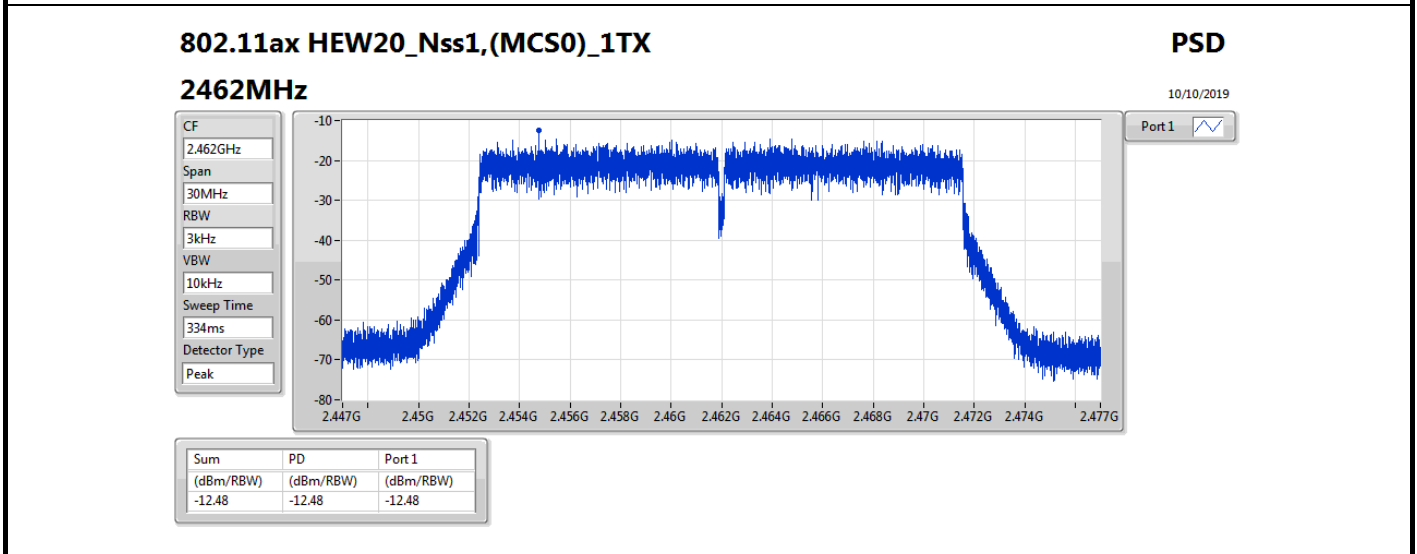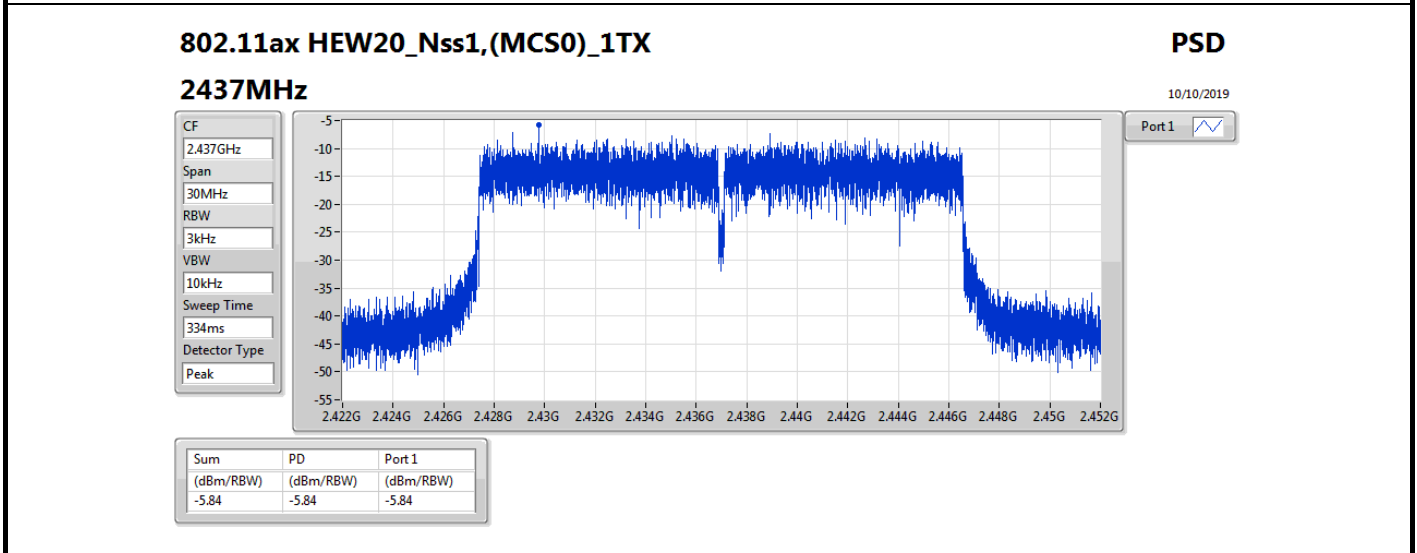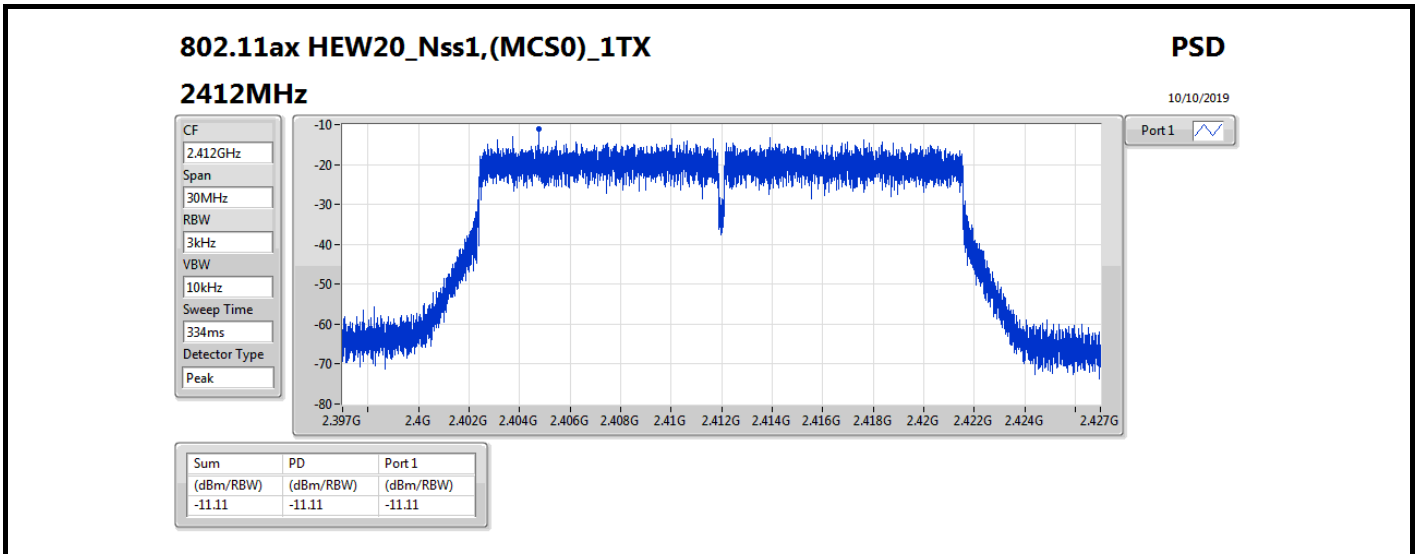

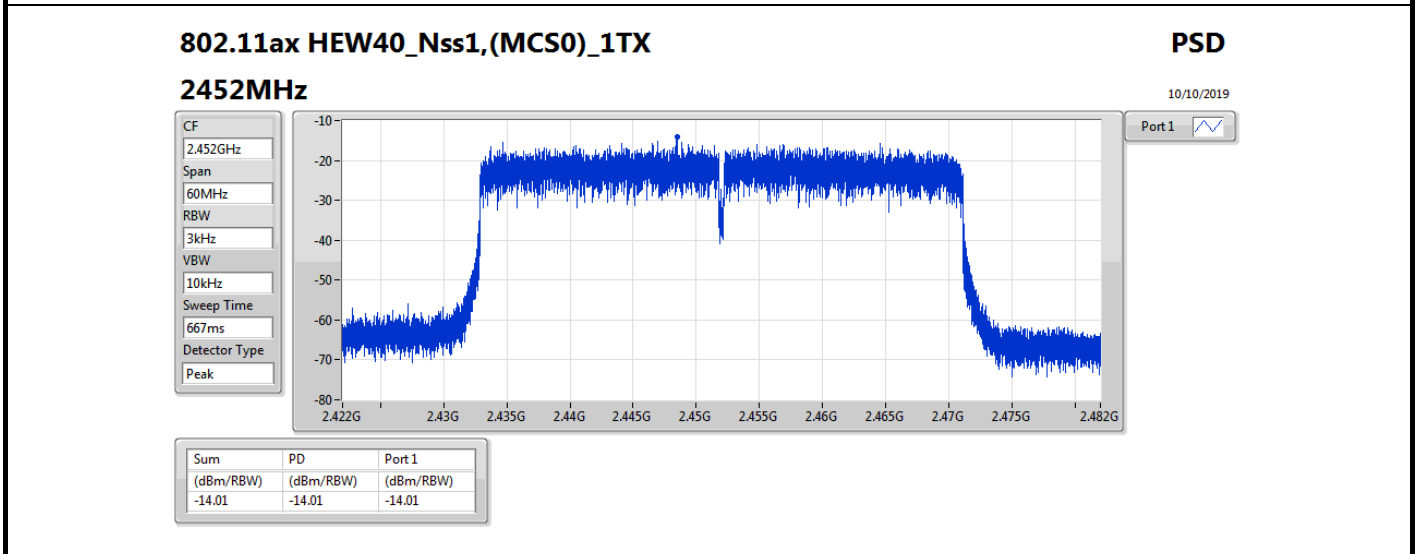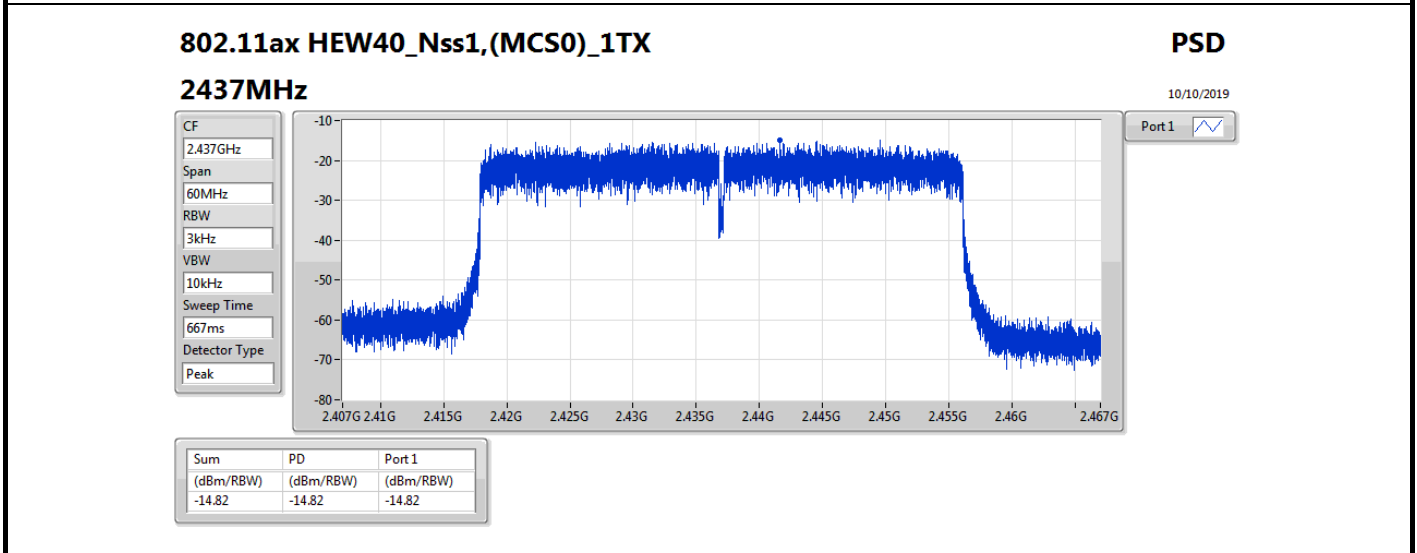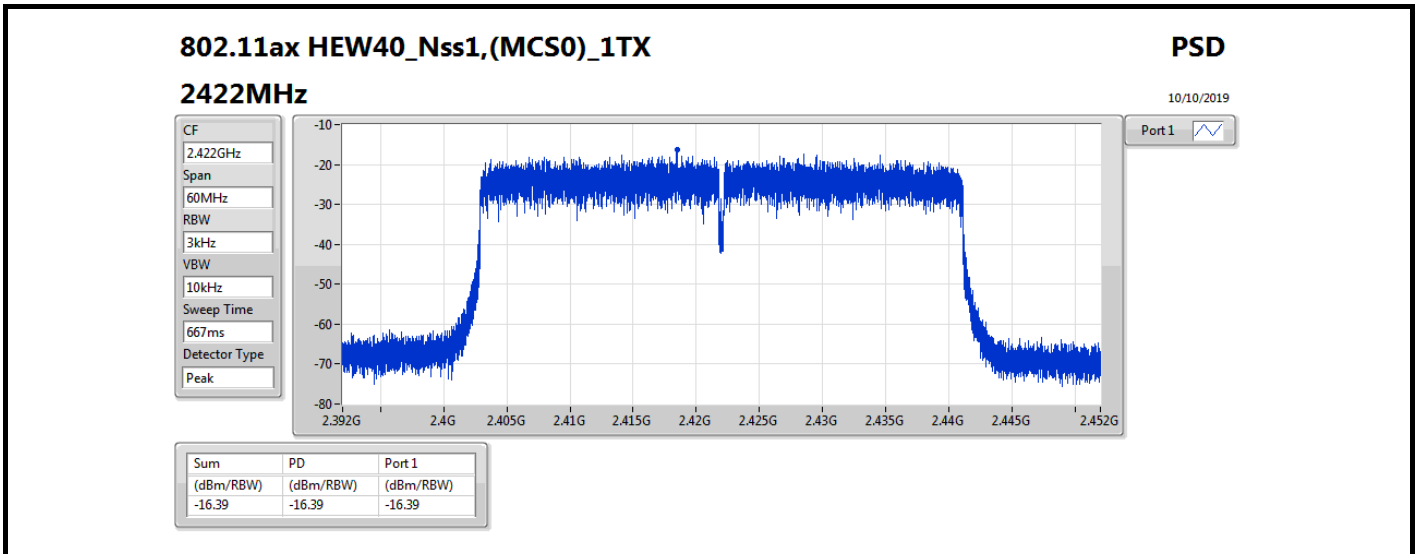



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-0.68
802.11g_Nss1,(6Mbps)_2TX	-4.75
VHT20_Nss2,(MCS0)_2TX	-7.72
VHT40_Nss2,(MCS0)_2TX	-14.41
802.11ax HEW20_Nss2,(MCS0)_2TX	-6.99
802.11ax HEW40_Nss2,(MCS0)_2TX	-15.25

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	13.51	-4.95	-5.36	-3.41	0.49
2437MHz	Pass	13.51	-3.18	-3.32	-0.68	0.49
2462MHz	Pass	13.51	-4.34	-3.25	-2.12	0.49
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	13.51	-12.81	-11.10	-9.24	0.49
2437MHz	Pass	13.51	-8.87	-6.88	-4.75	0.49
2462MHz	Pass	13.51	-12.90	-10.69	-9.60	0.49
VHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.50	-13.20	-13.13	-11.54	3.50
2437MHz	Pass	10.50	-9.56	-8.62	-7.72	3.50
2462MHz	Pass	10.50	-14.52	-13.40	-12.38	3.50
VHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	10.50	-17.95	-16.53	-15.90	3.50
2437MHz	Pass	10.50	-17.09	-15.65	-14.41	3.50
2452MHz	Pass	10.50	-17.90	-16.47	-15.49	3.50
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	10.50	-14.66	-13.63	-12.01	3.50
2437MHz	Pass	10.50	-10.43	-9.61	-6.99	3.50
2462MHz	Pass	10.50	-15.16	-14.50	-11.91	3.50
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	10.50	-18.49	-17.32	-16.41	3.50
2437MHz	Pass	10.50	-17.40	-16.42	-15.25	3.50
2452MHz	Pass	10.50	-17.93	-17.32	-16.34	3.50




DG = Directional Gain; RBW=3 kHz;




PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

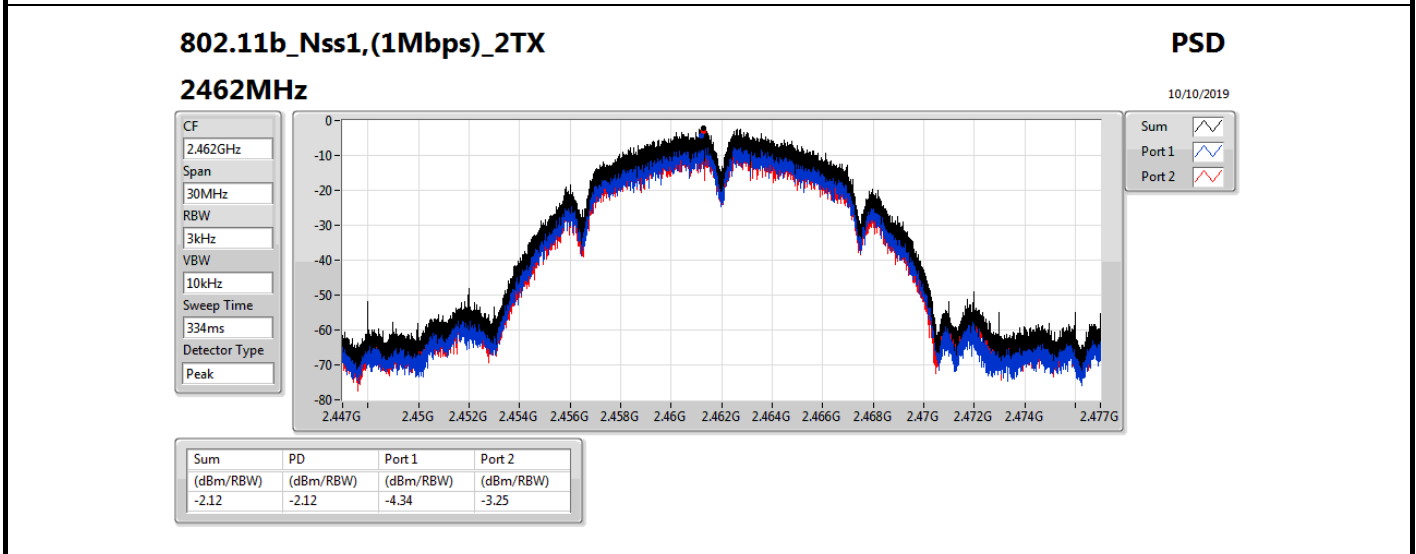
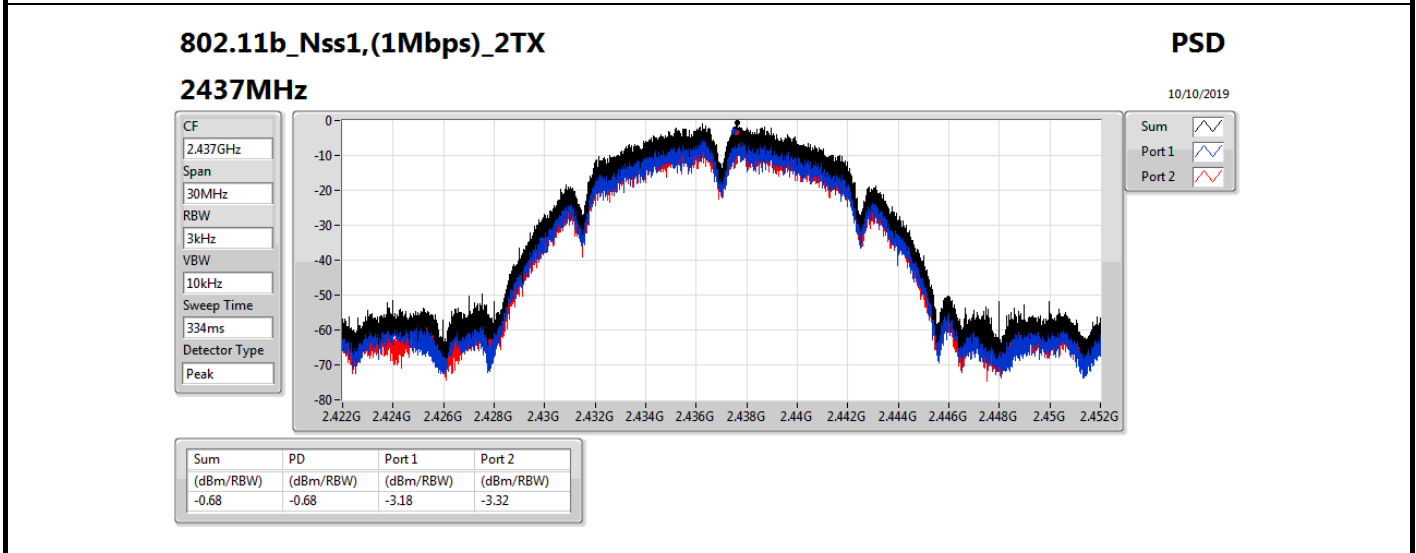
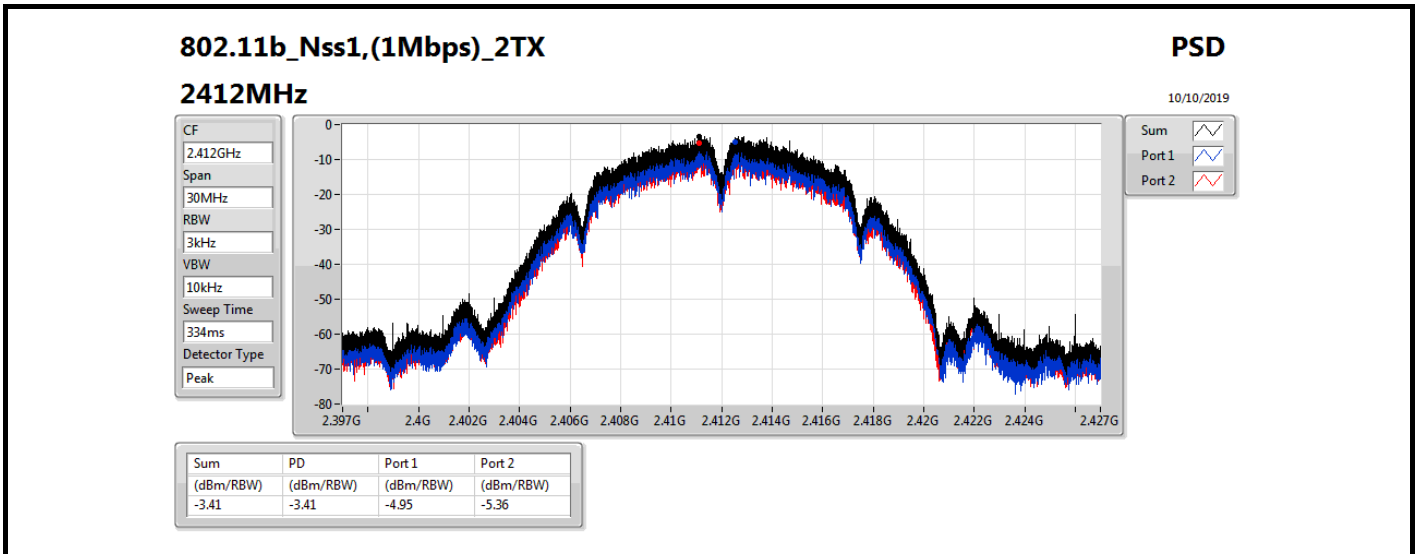


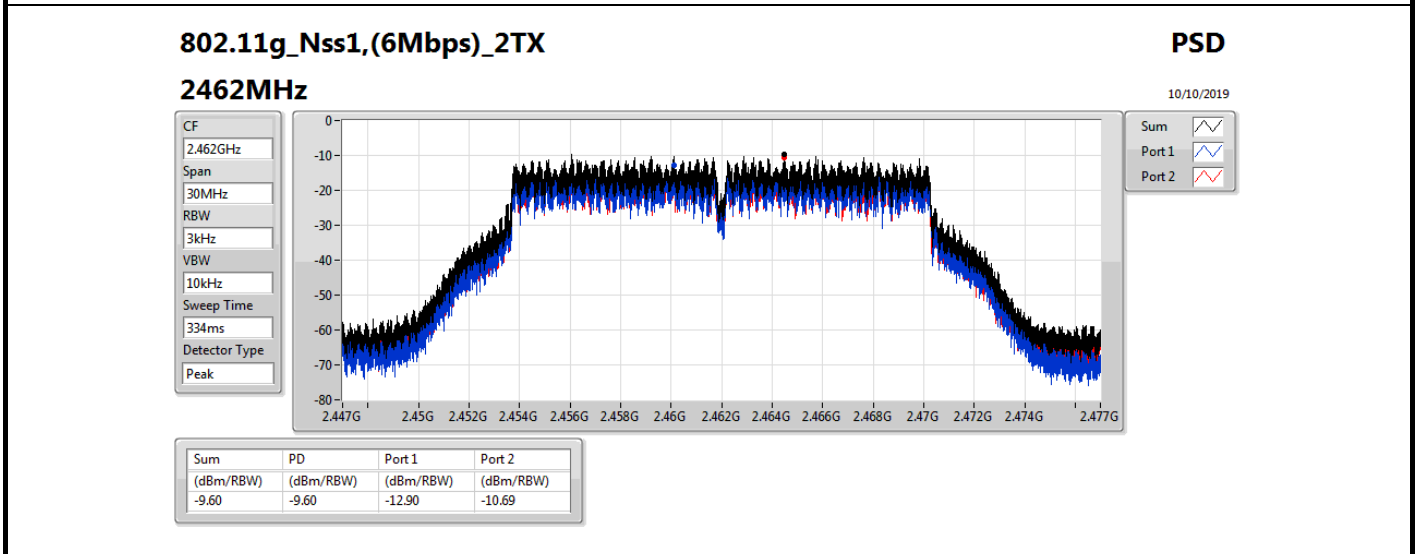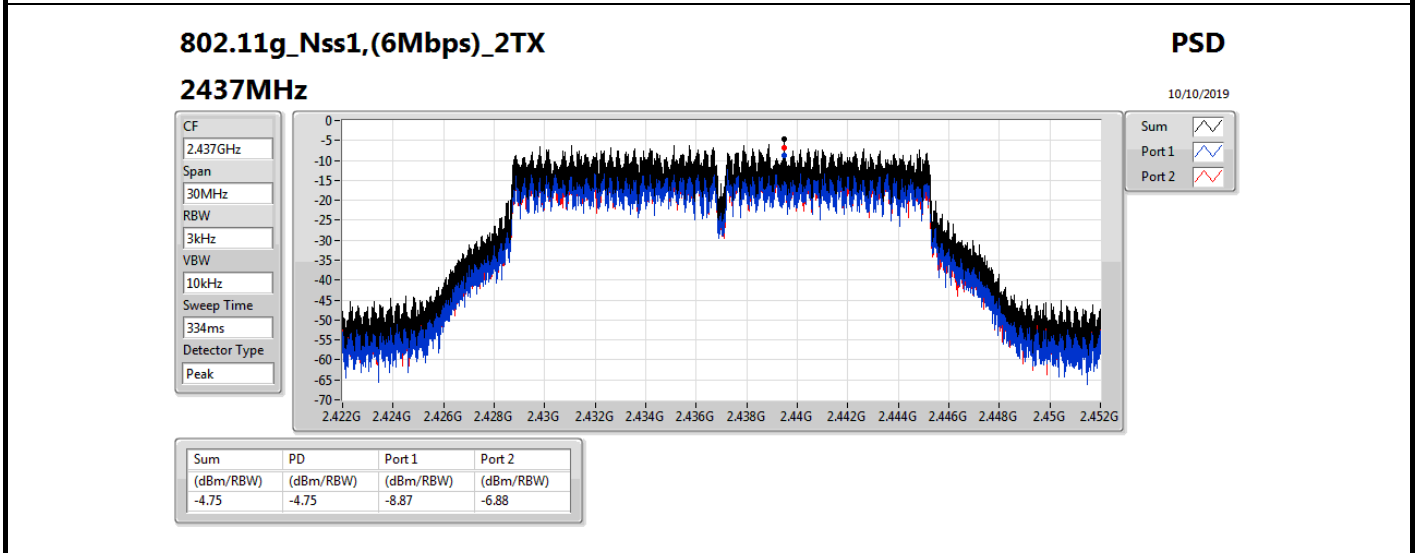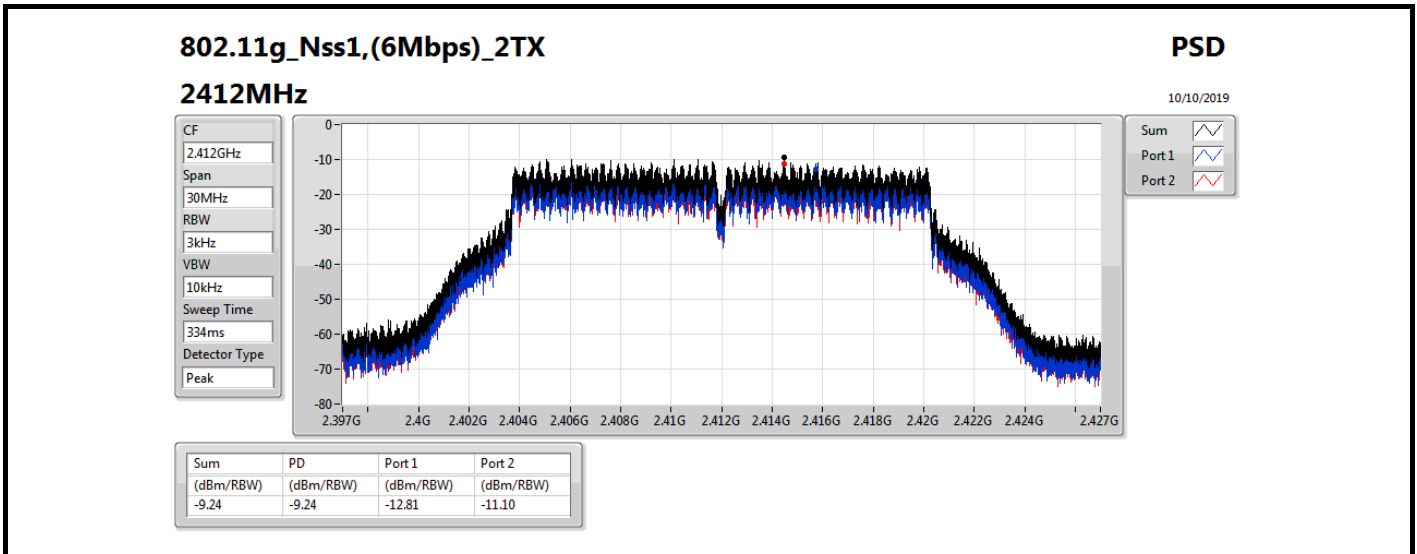

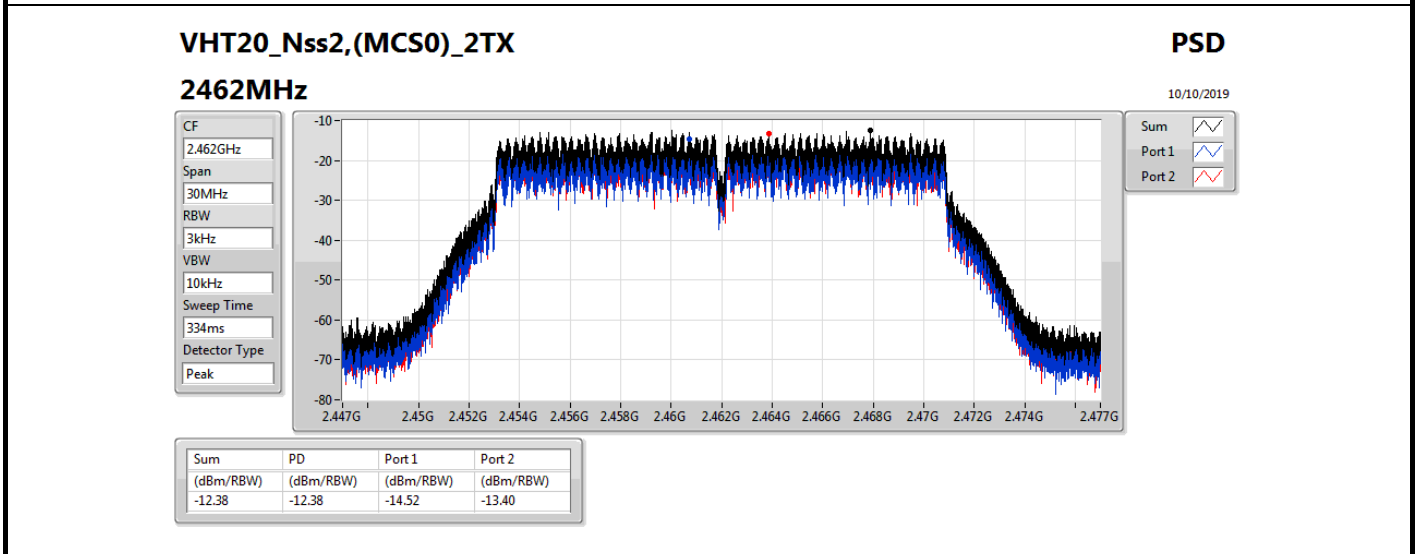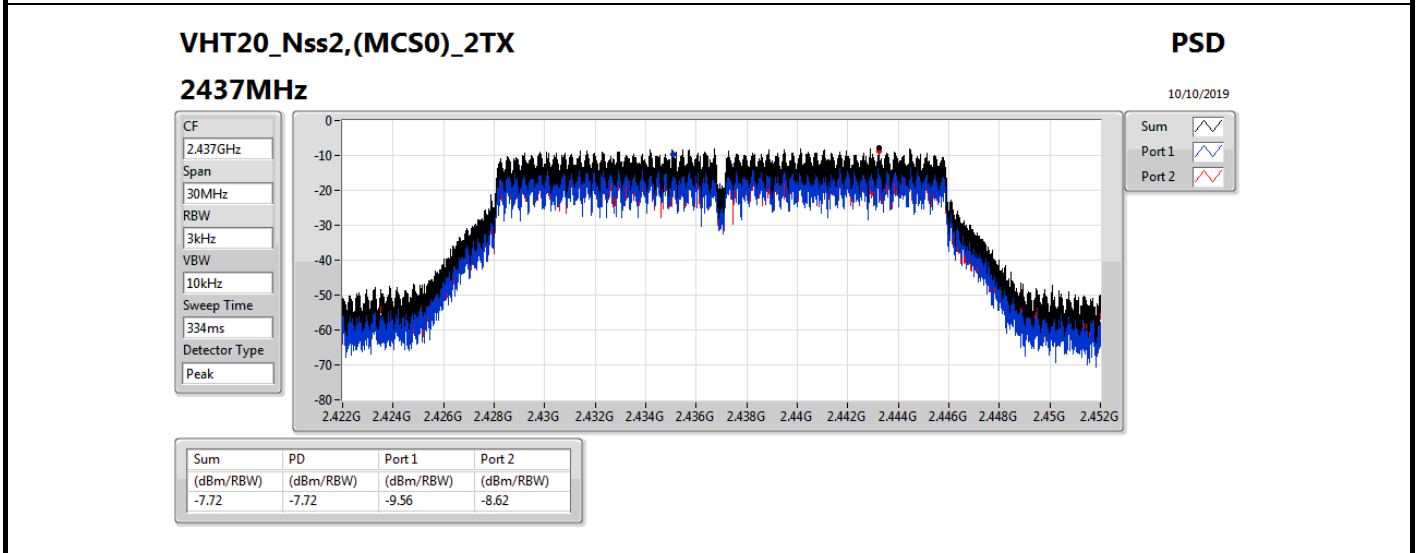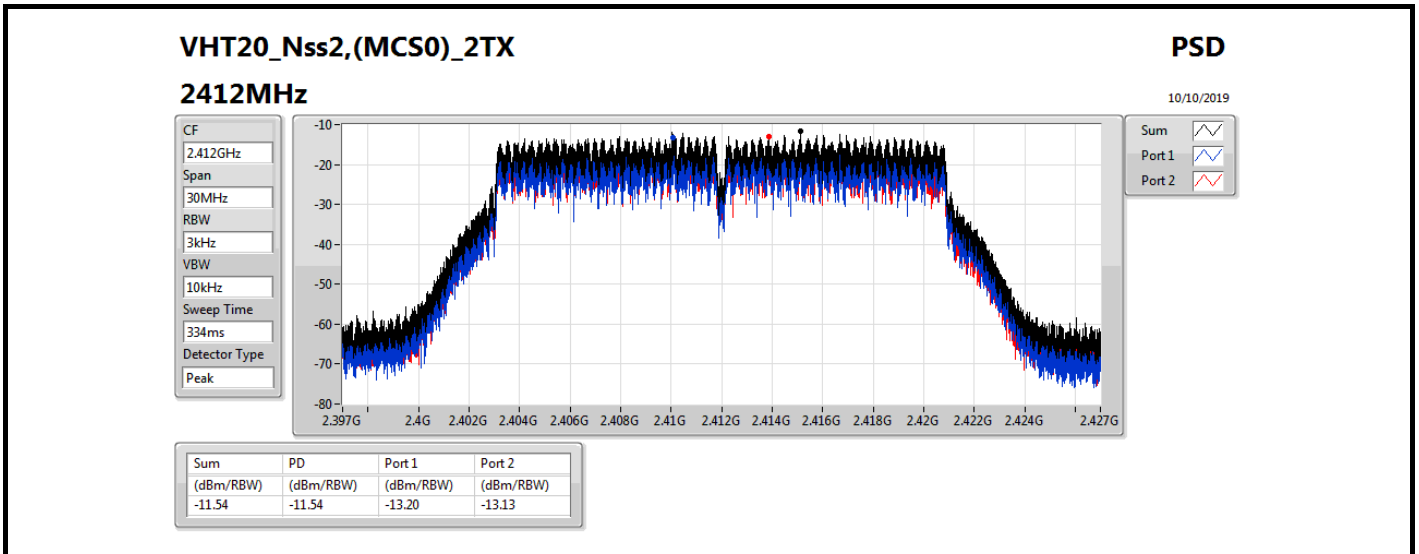

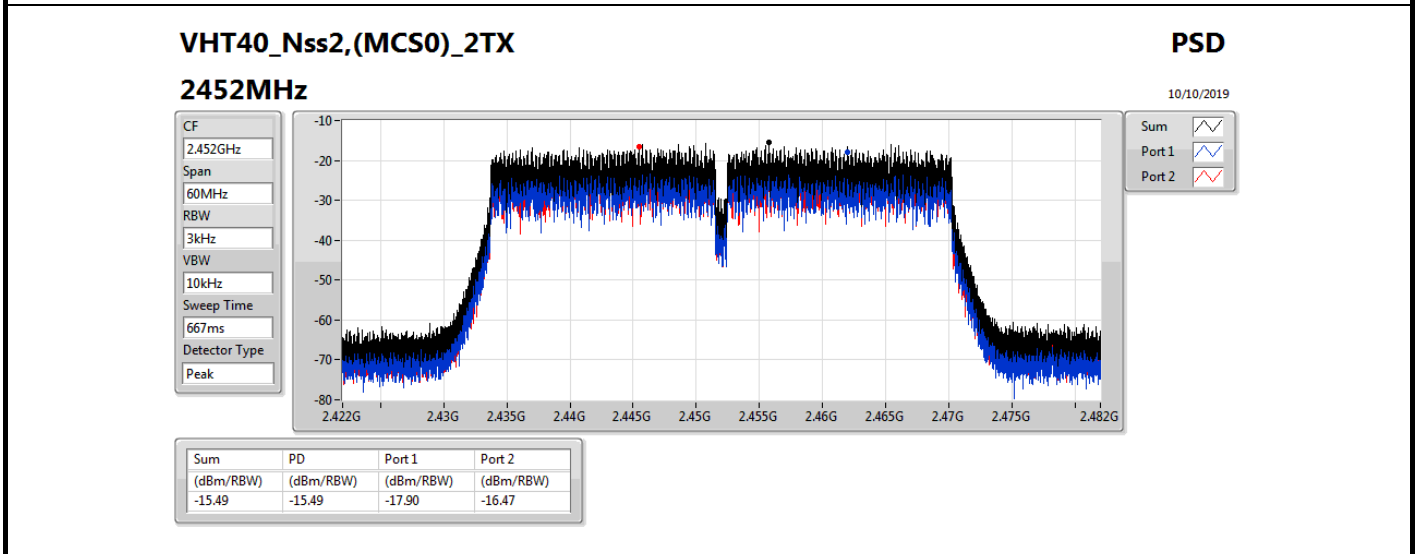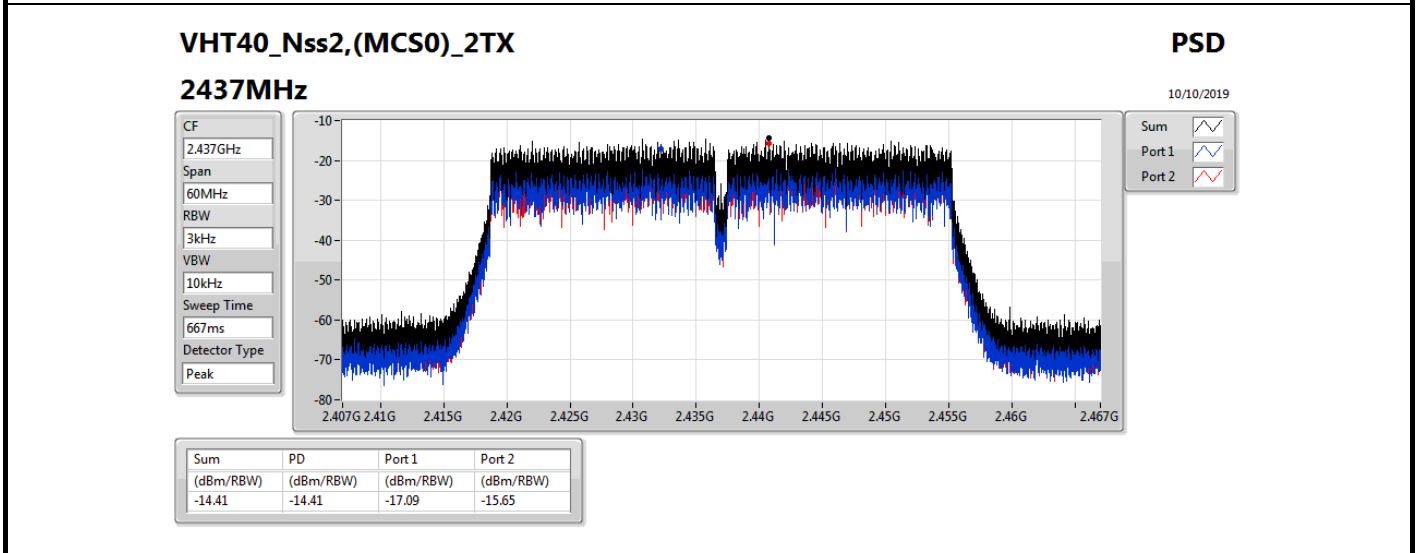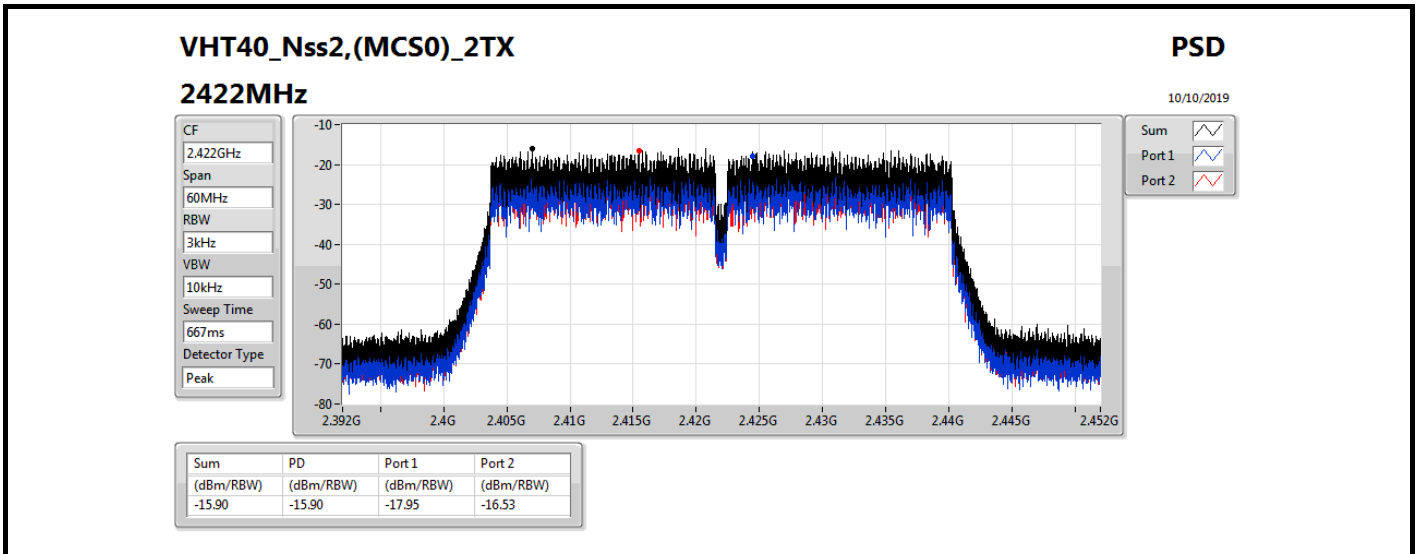

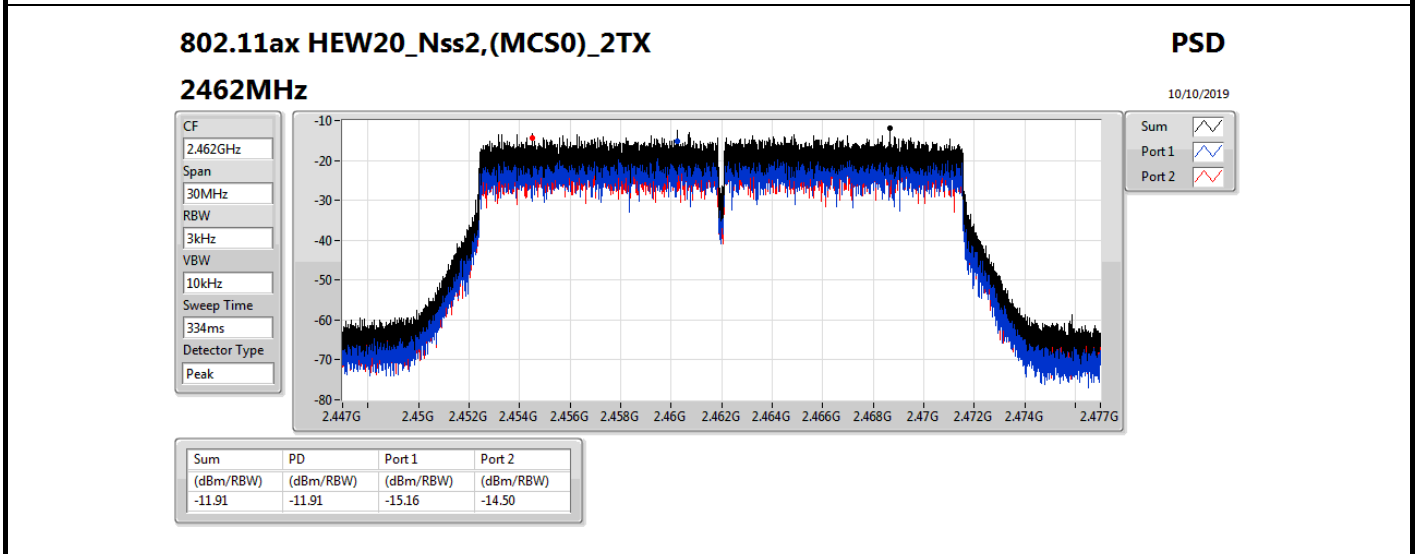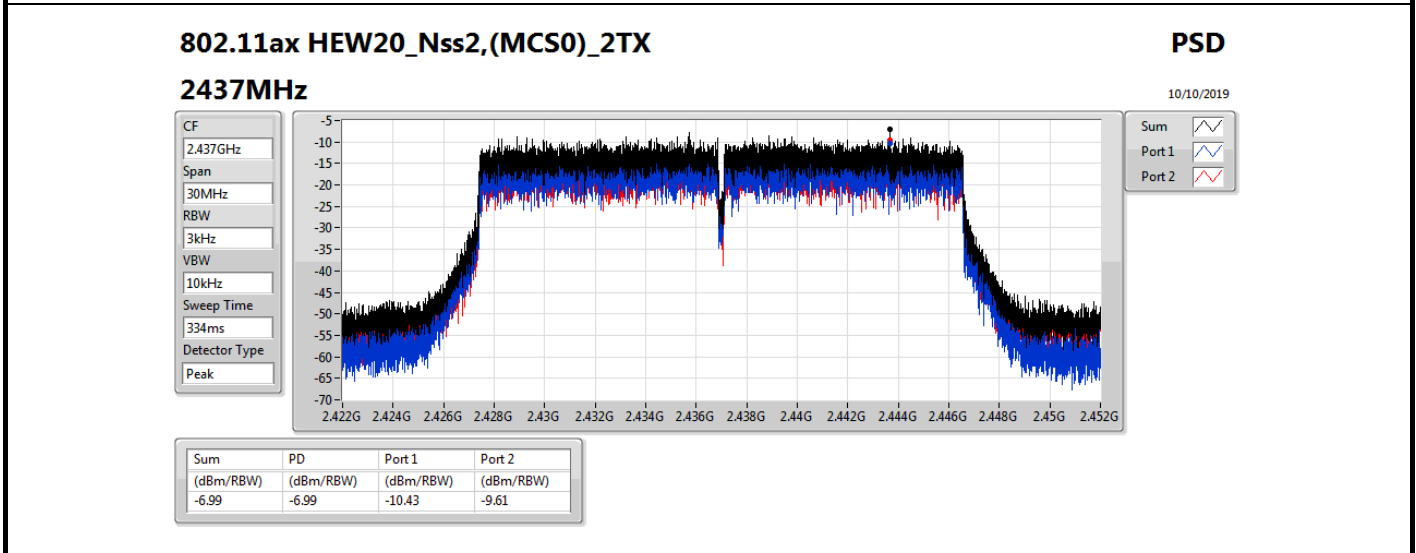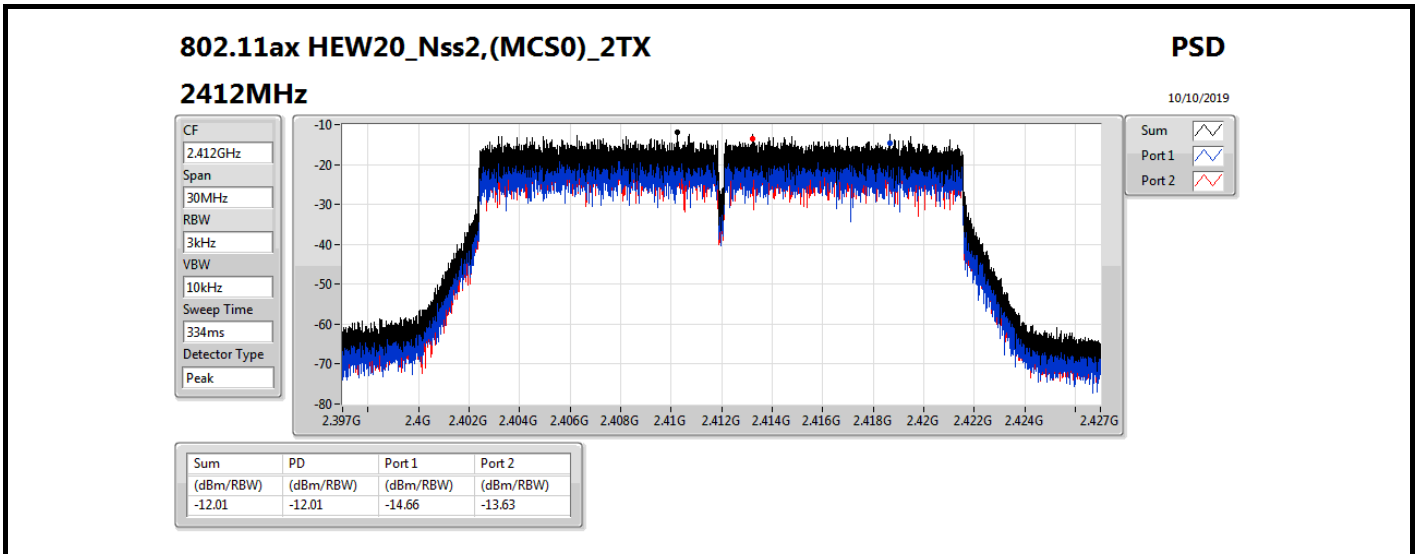

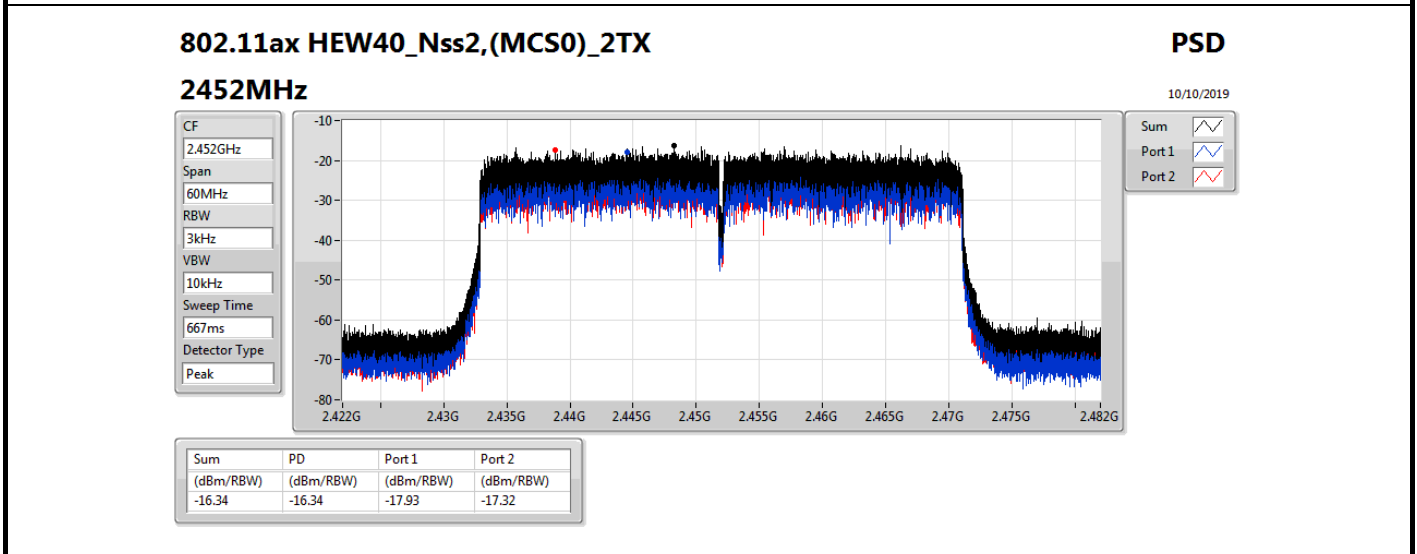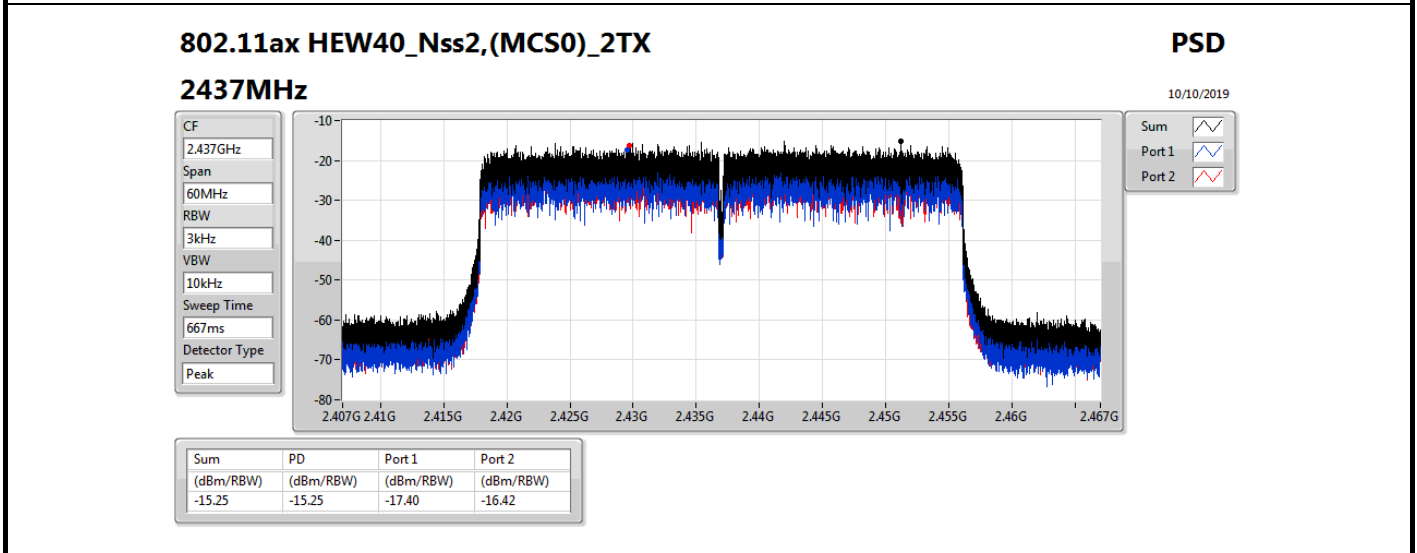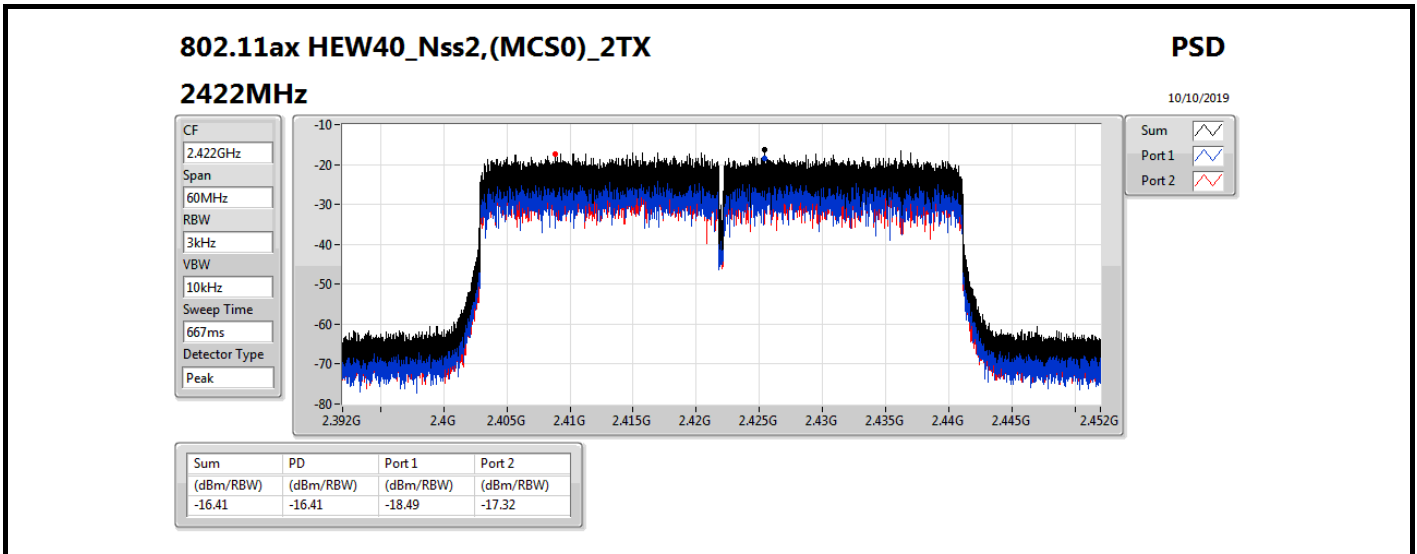



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
VHT20-BF_Nss1,(MCS0)_2TX	-4.61
VHT40-BF_Nss1,(MCS0)_2TX	-12.61
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-3.54
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-13.07

RBW=3 kHz.









Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	13.51	-12.99	-12.42	-9.98	0.49
2437MHz	Pass	13.51	-8.05	-6.98	-4.61	0.49
2462MHz	Pass	13.51	-11.90	-11.74	-9.06	0.49
VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	13.51	-16.71	-17.02	-14.02	0.49
2437MHz	Pass	13.51	-14.95	-15.48	-12.61	0.49
2452MHz	Pass	13.51	-15.27	-16.26	-13.27	0.49
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	13.51	-12.34	-11.71	-9.00	0.49
2437MHz	Pass	13.51	-6.33	-6.77	-3.54	0.49
2462MHz	Pass	13.51	-10.68	-11.87	-9.48	0.49
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	13.51	-17.38	-17.44	-14.40	0.49
2437MHz	Pass	13.51	-15.84	-16.21	-13.07	0.49
2452MHz	Pass	13.51	-16.56	-15.87	-13.19	0.49




DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

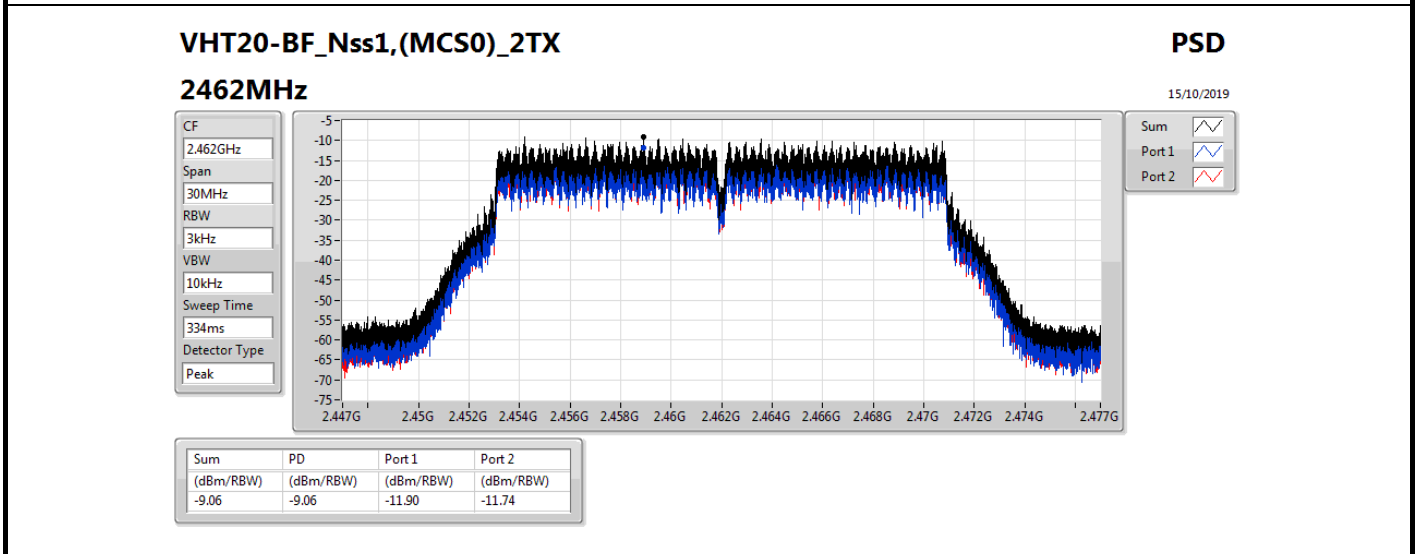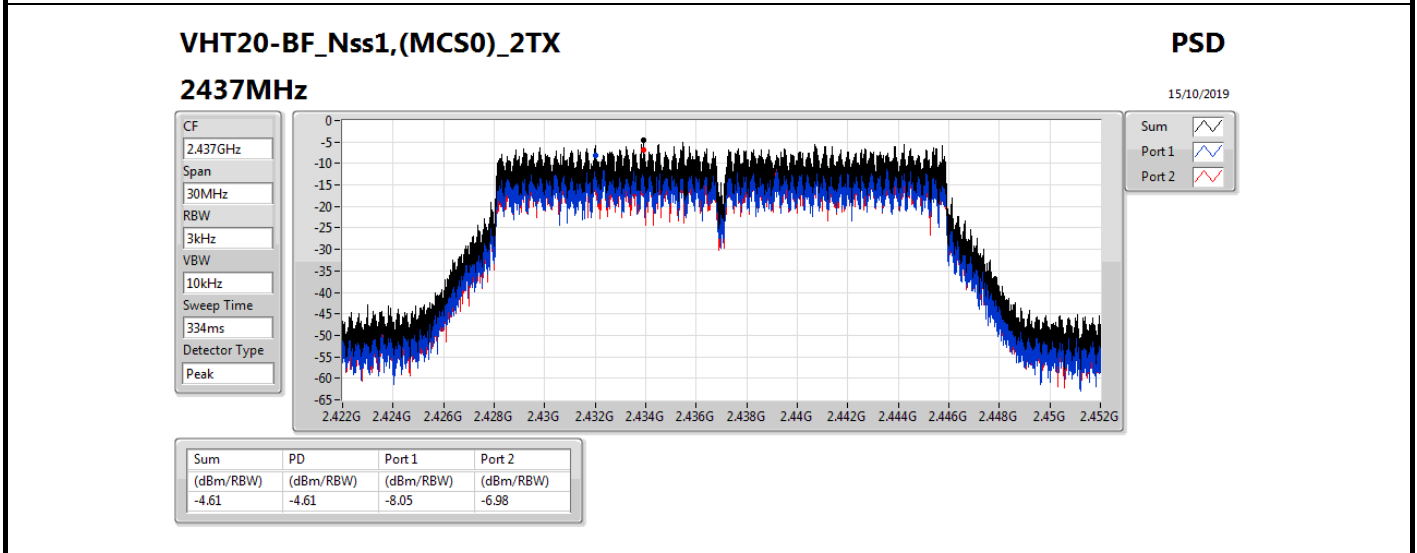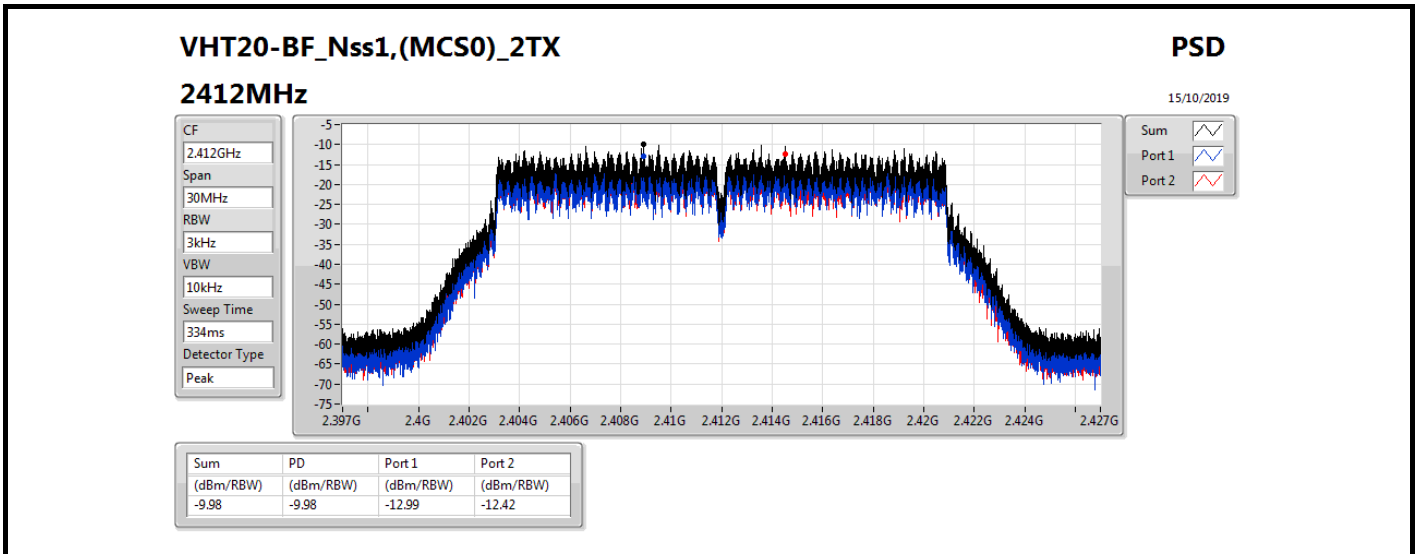

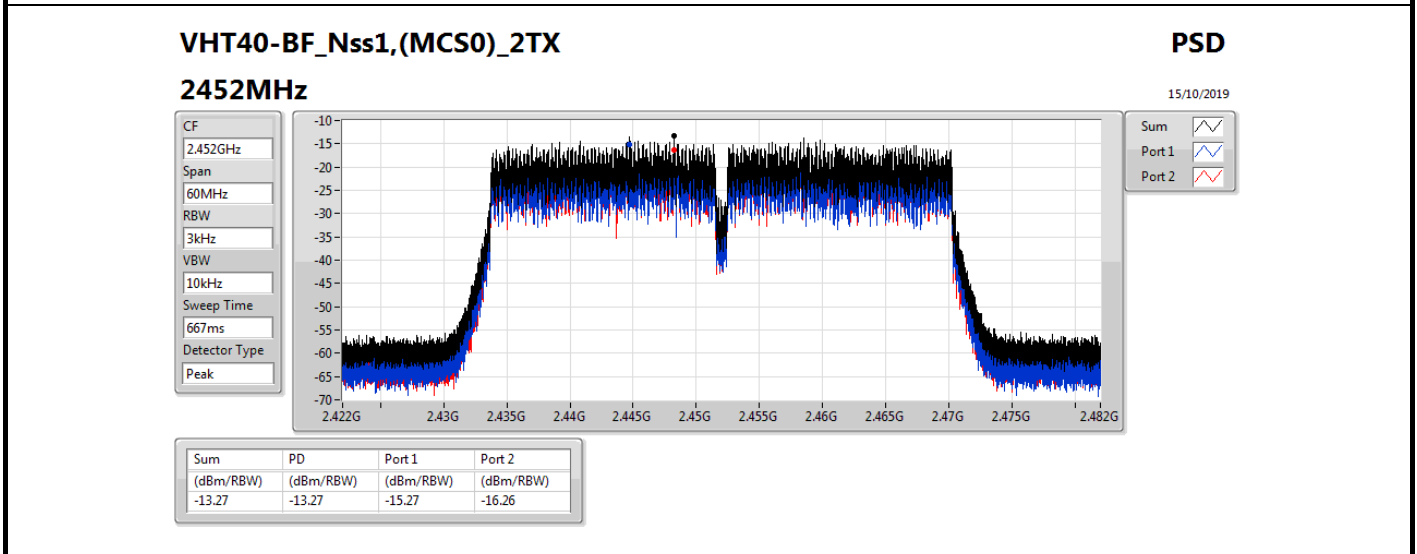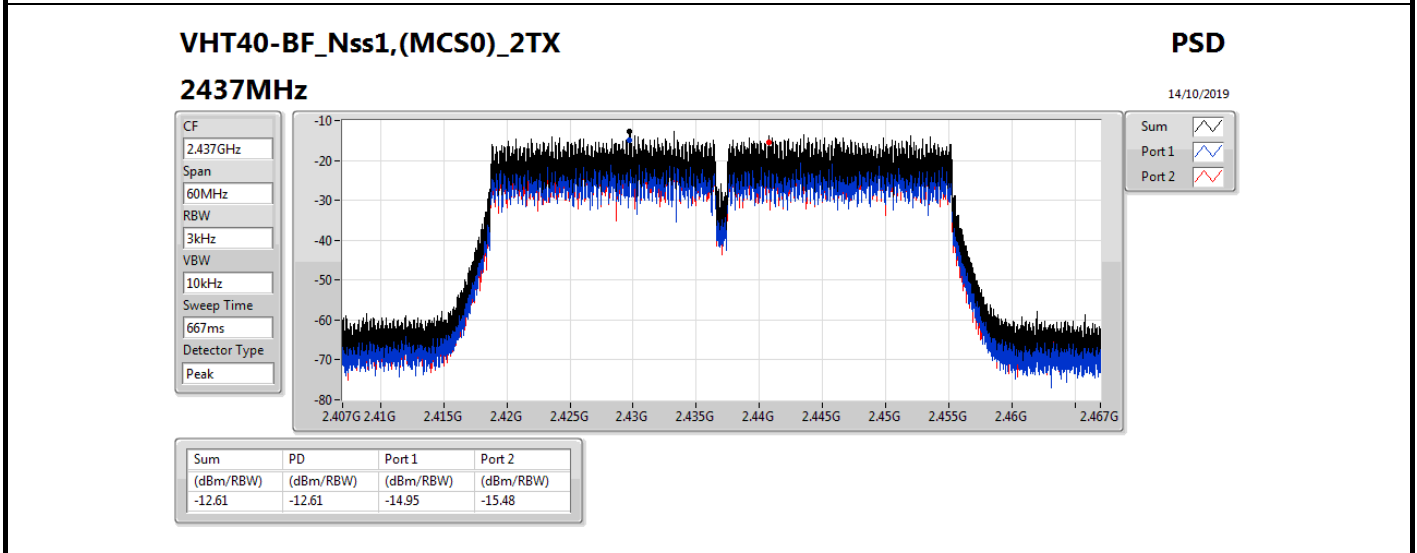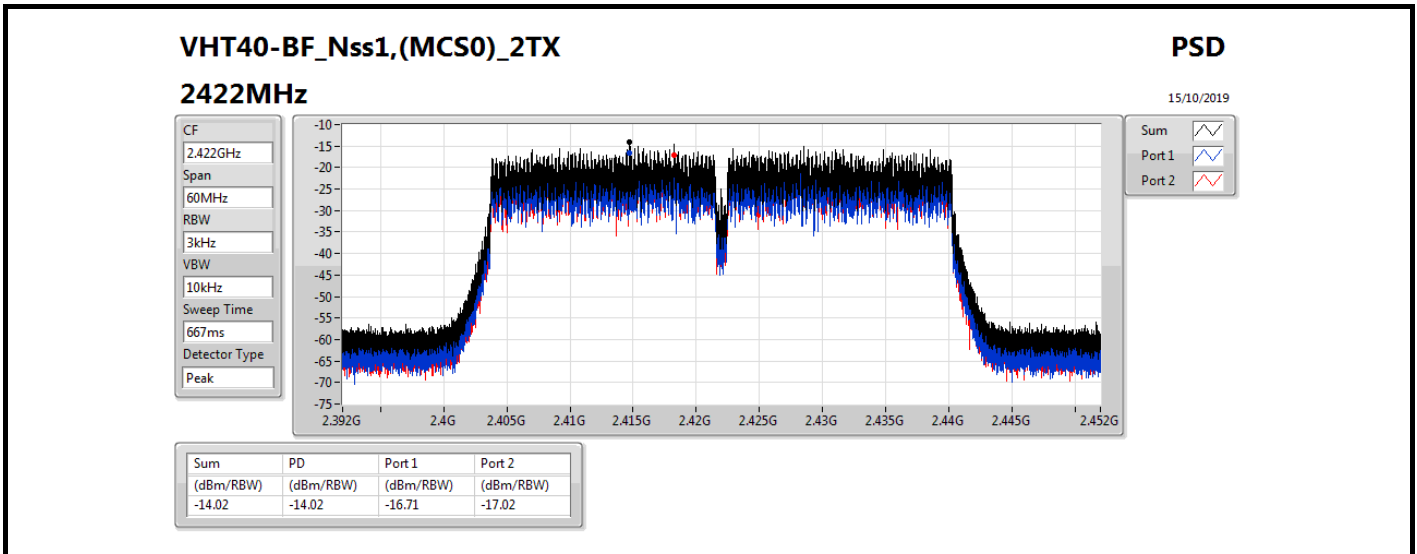

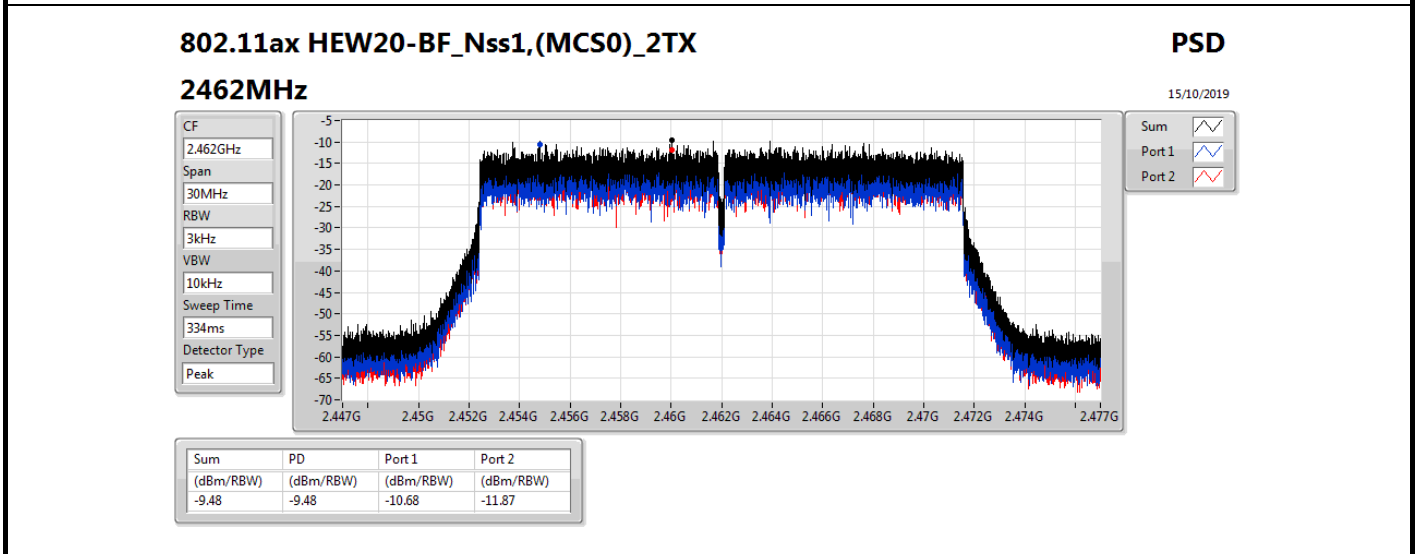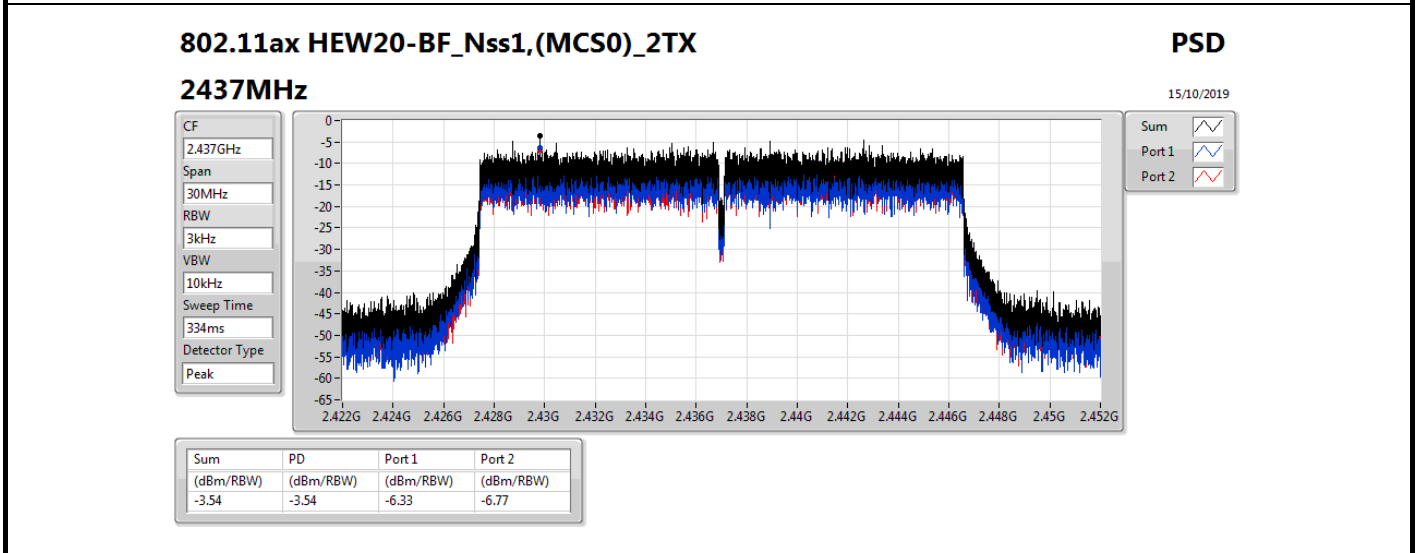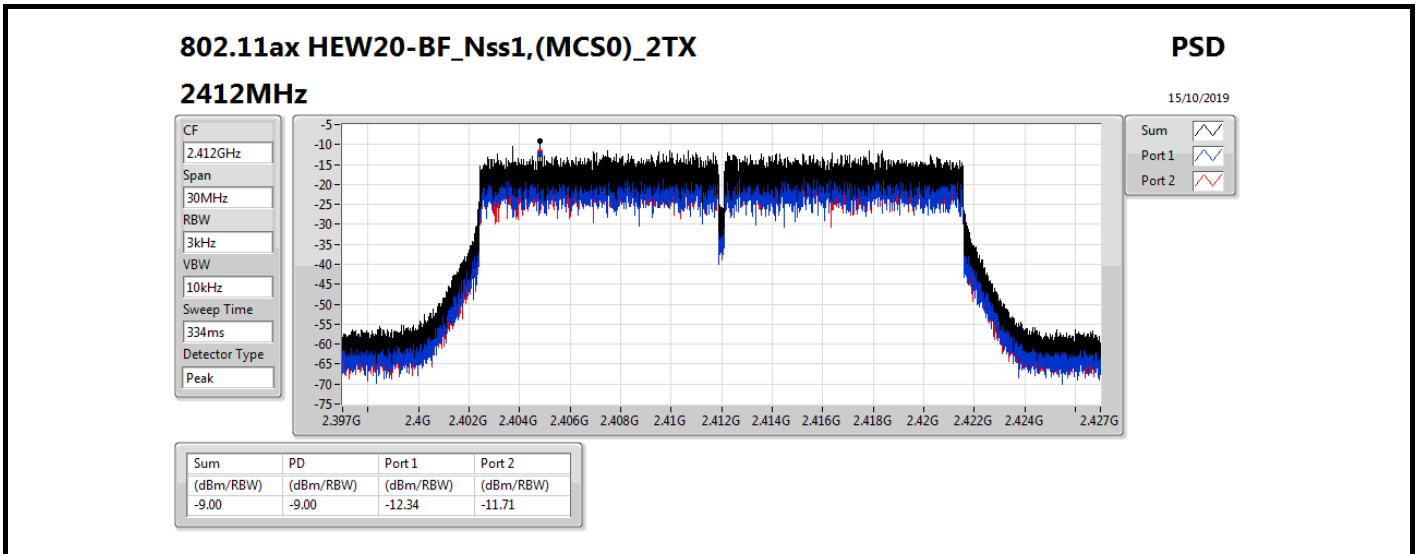

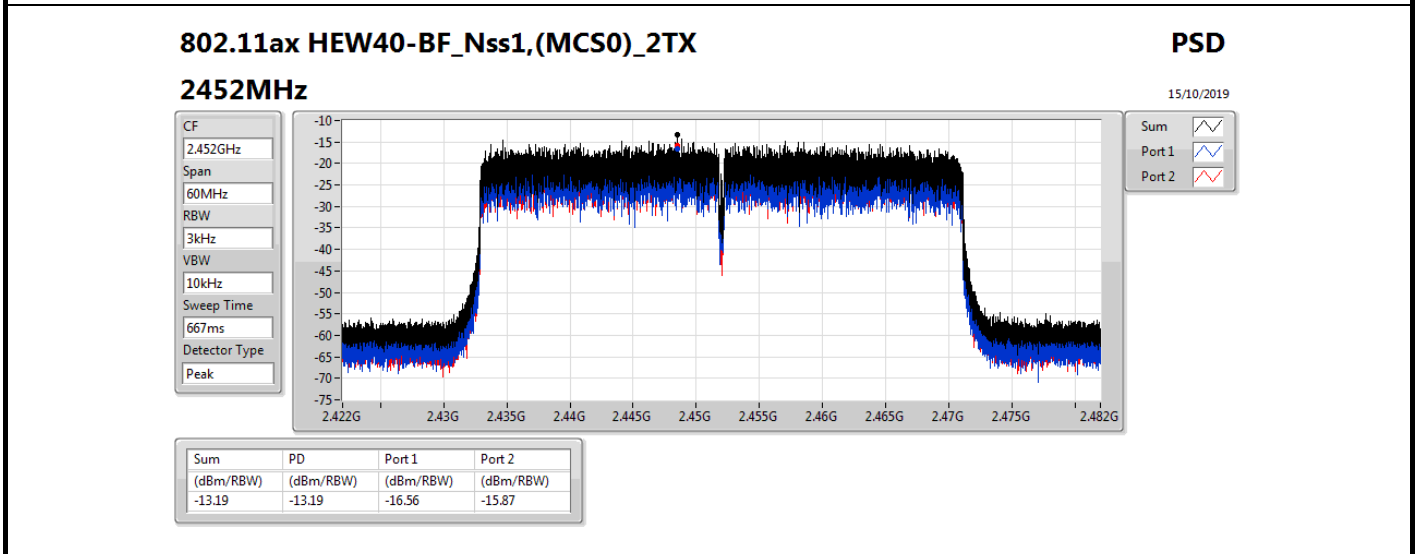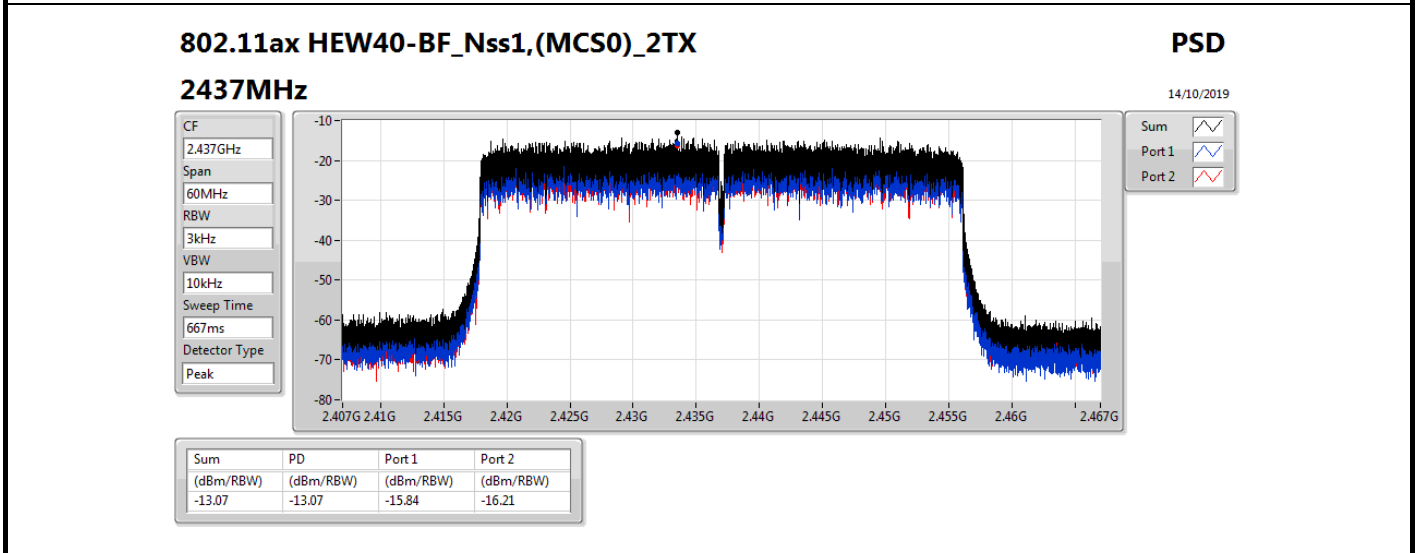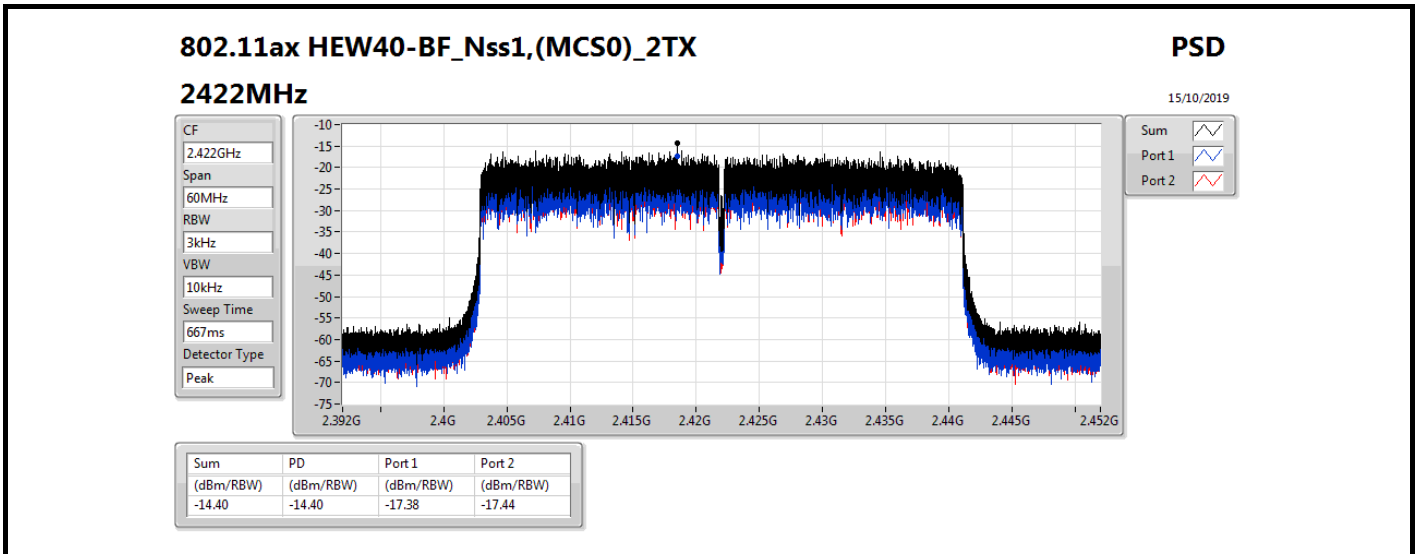





Summary



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	2.43649G	18.98	-11.02	2.30525G	-53.12	2.3965G	-36.78	2.48548G	-40.53	24.66847G	-45.54	1
802.11g_Nss1,(6Mbps)_1TX	Pass	2.43198G	15.12	-14.88	2.3035G	-52.14	2.39986G	-29.78	2.49688G	-48.93	16.36902G	-45.75	1
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	2.43945G	13.61	-16.39	2.30525G	-51.17	2.39996G	-26.89	2.48818G	-48.78	16.54322G	-45.60	1
802.11ax HEW40_Nss1,(MCS0)_1TX	Pass	2.442G	6.18	-23.82	2.30712G	-52.49	2.39948G	-31.98	2.4847G	-36.69	16.98456G	-45.60	1







Result



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43649G	18.98	-11.02	2.30466G	-52.09	2.398G	-43.44	2.5103G	-47.28	7.23514G	-45.27	1
2437MHz	Pass	2.43649G	18.98	-11.02	2.30525G	-53.12	2.3965G	-36.78	2.48548G	-40.53	24.66847G	-45.54	1
2462MHz	Pass	2.43649G	18.98	-11.02	2.30787G	-52.68	2.39552G	-49.99	2.48698G	-46.51	24.2948G	-45.41	1
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43198G	15.12	-14.88	2.3035G	-52.14	2.39986G	-29.78	2.49688G	-48.93	16.36902G	-45.75	1
2437MHz	Pass	2.43198G	15.12	-14.88	2.30029G	-52.36	2.3992G	-32.40	2.48382G	-35.43	16.91127G	-45.42	1
2462MHz	Pass	2.43198G	15.12	-14.88	1.80604G	-53.26	2.39754G	-50.07	2.48388G	-37.80	16.91408G	-44.58	1
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43945G	13.61	-16.39	2.30525G	-51.17	2.39996G	-26.89	2.48818G	-48.78	16.54322G	-45.60	1
2437MHz	Pass	2.43945G	13.61	-16.39	2.17972G	-52.26	2.39616G	-33.61	2.48434G	-36.82	21.71G	-44.47	1
2462MHz	Pass	2.43945G	13.61	-16.39	2.30728G	-52.77	2.39262G	-51.53	2.48358G	-38.30	16.57412G	-44.97	1
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.442G	6.18	-23.82	2.30025G	-53.05	2.39928G	-39.48	2.48986G	-47.26	24.9411G	-44.85	1
2437MHz	Pass	2.442G	6.18	-23.82	2.30712G	-52.49	2.39948G	-31.98	2.4847G	-36.69	16.98456G	-45.60	1
2452MHz	Pass	2.442G	6.18	-23.82	2.30712G	-53.33	2.39052G	-46.22	2.48418G	-38.40	16.49376G	-43.59	1

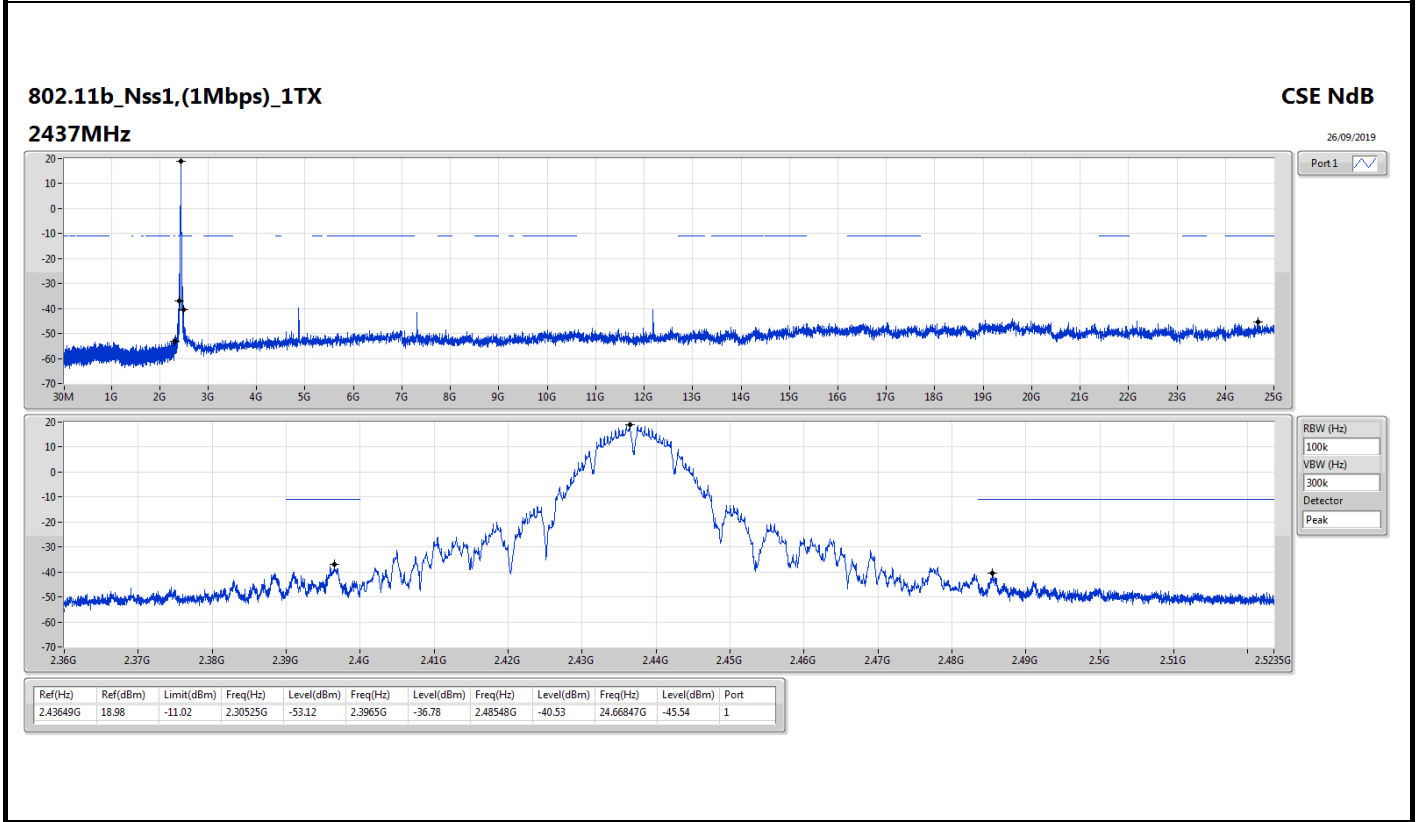
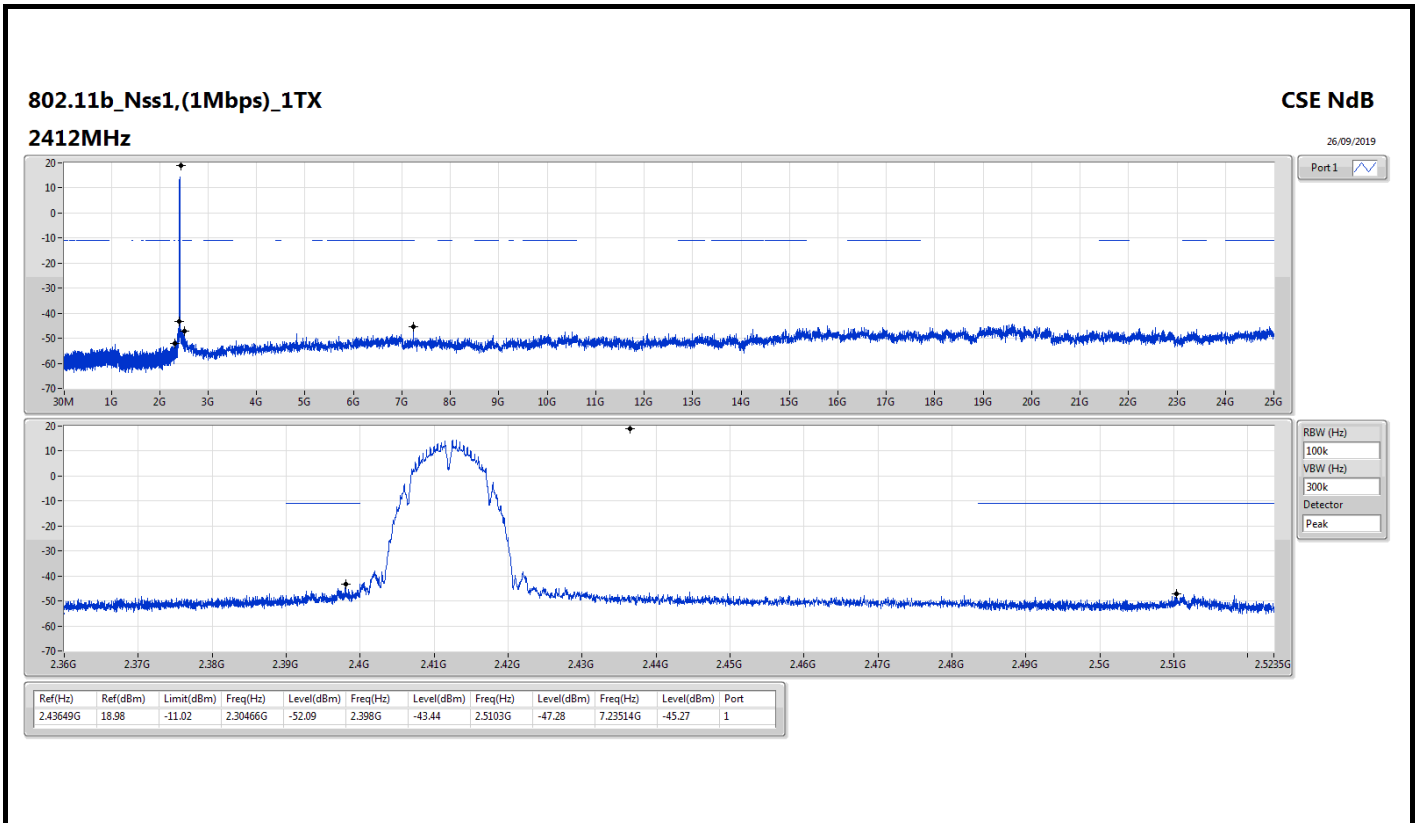


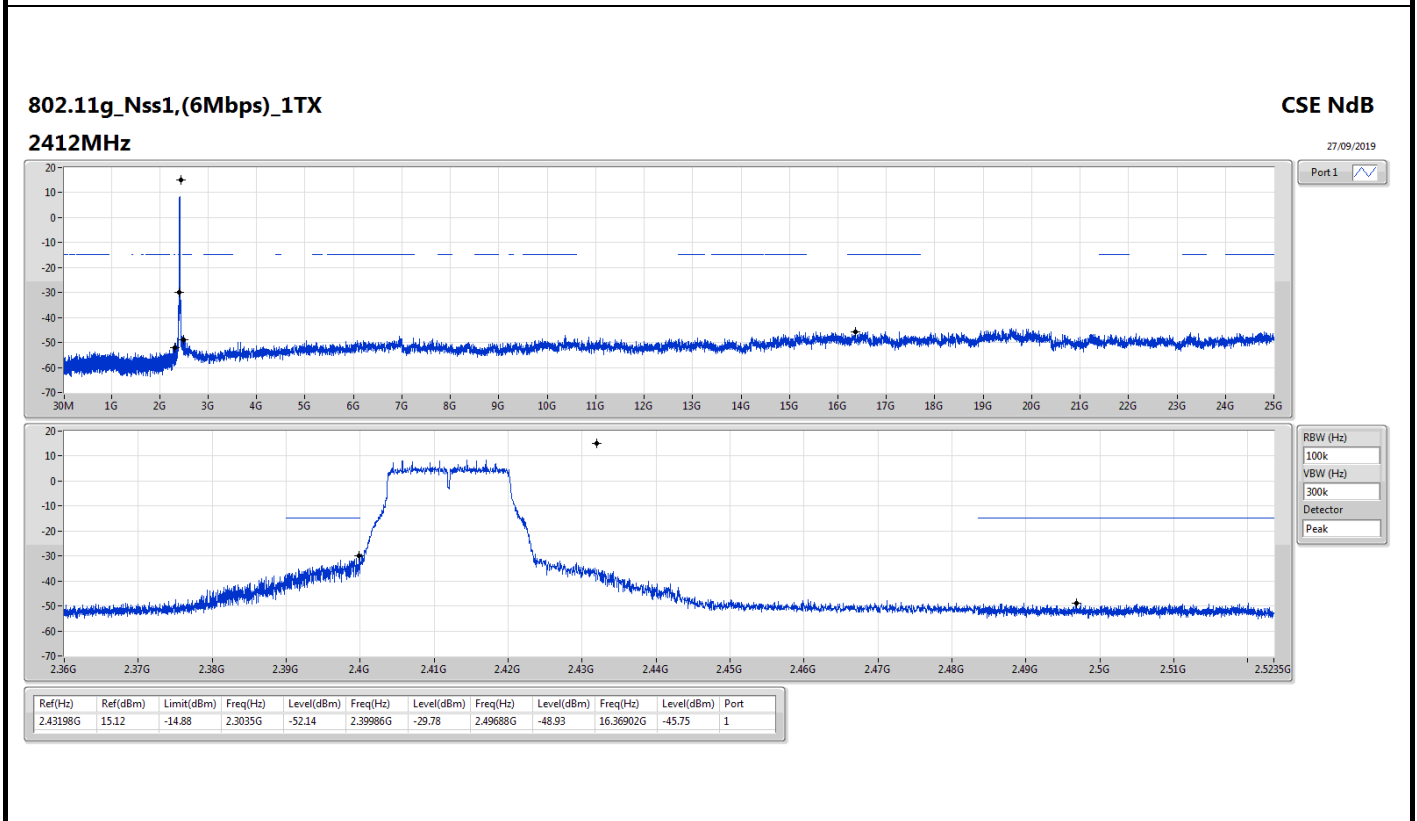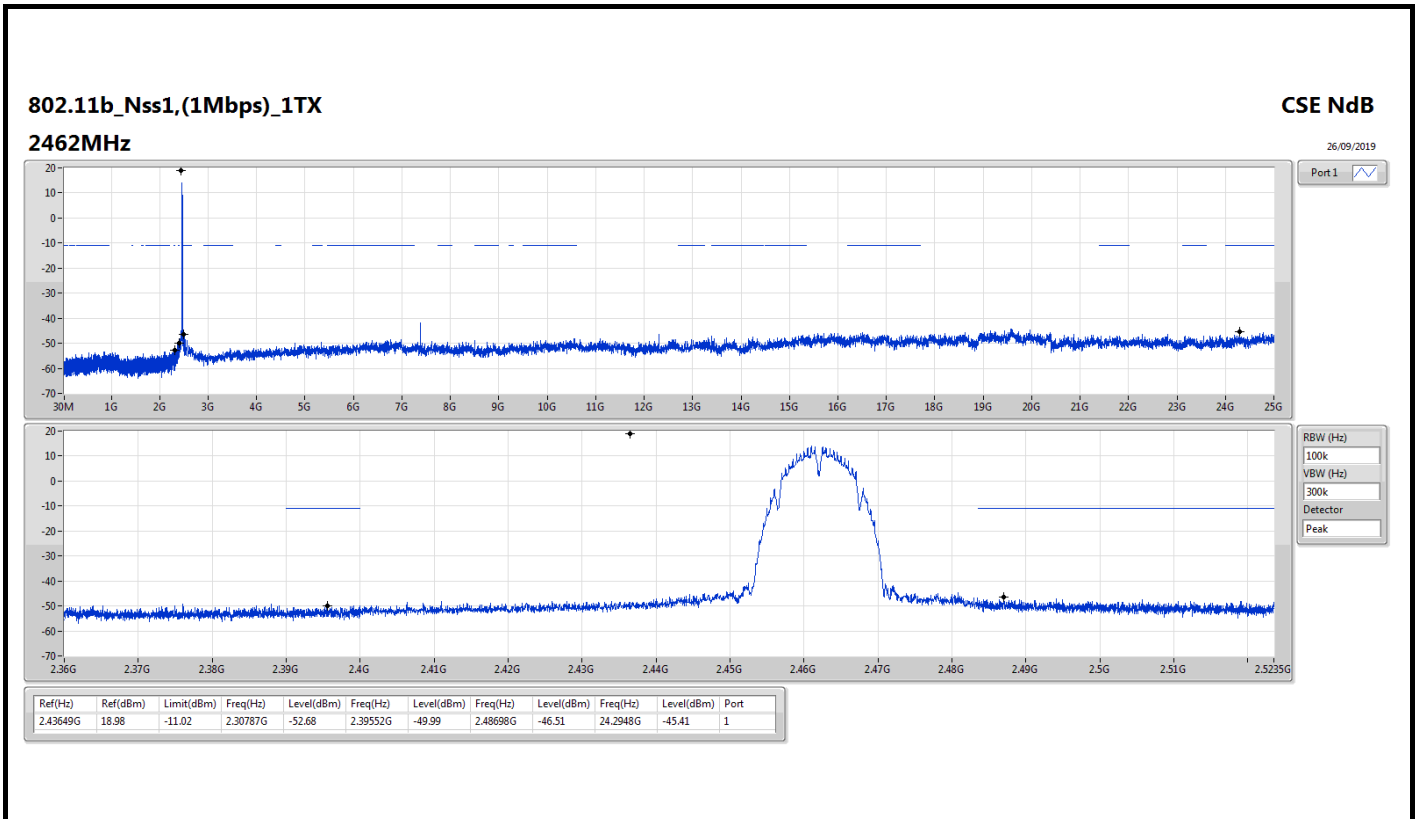

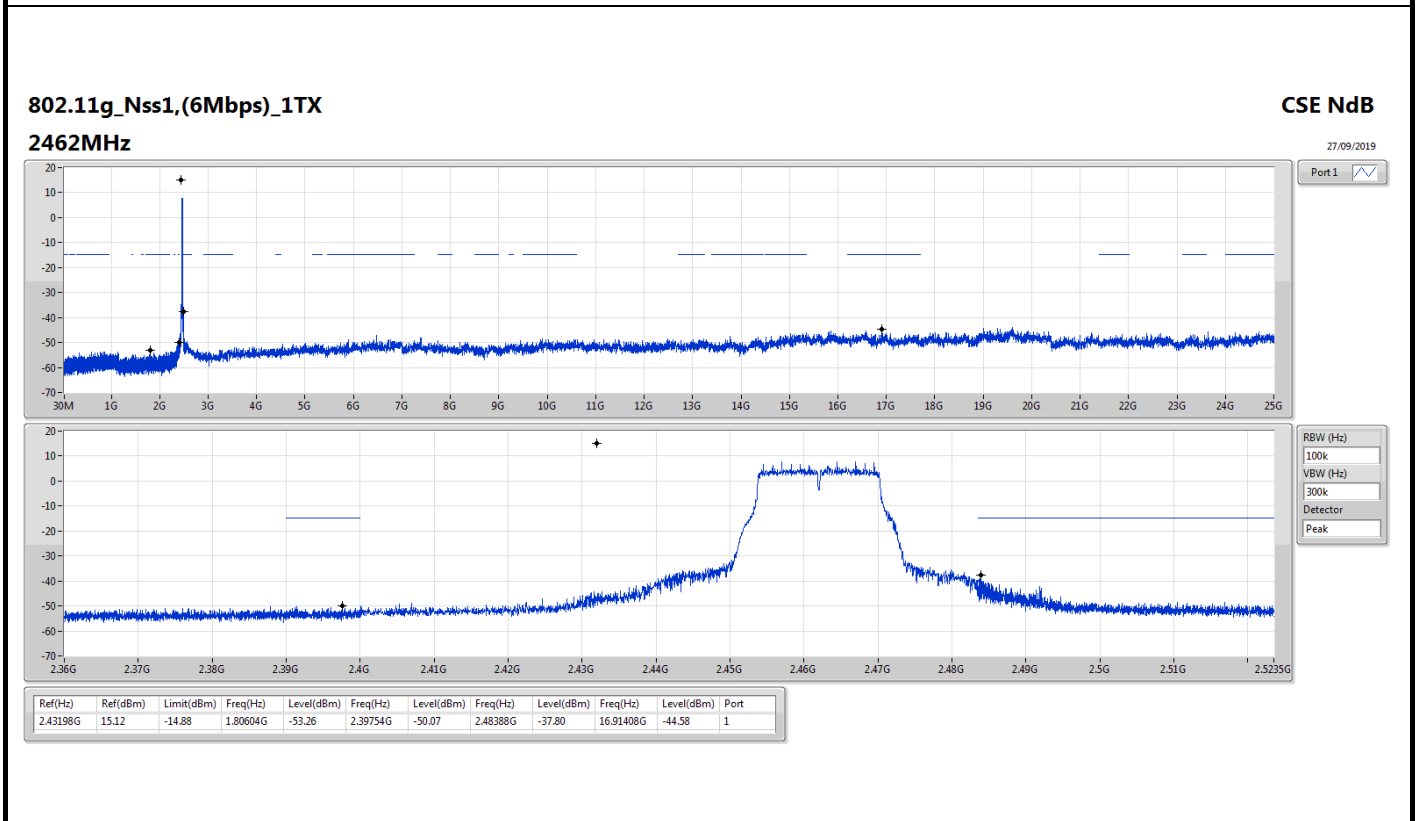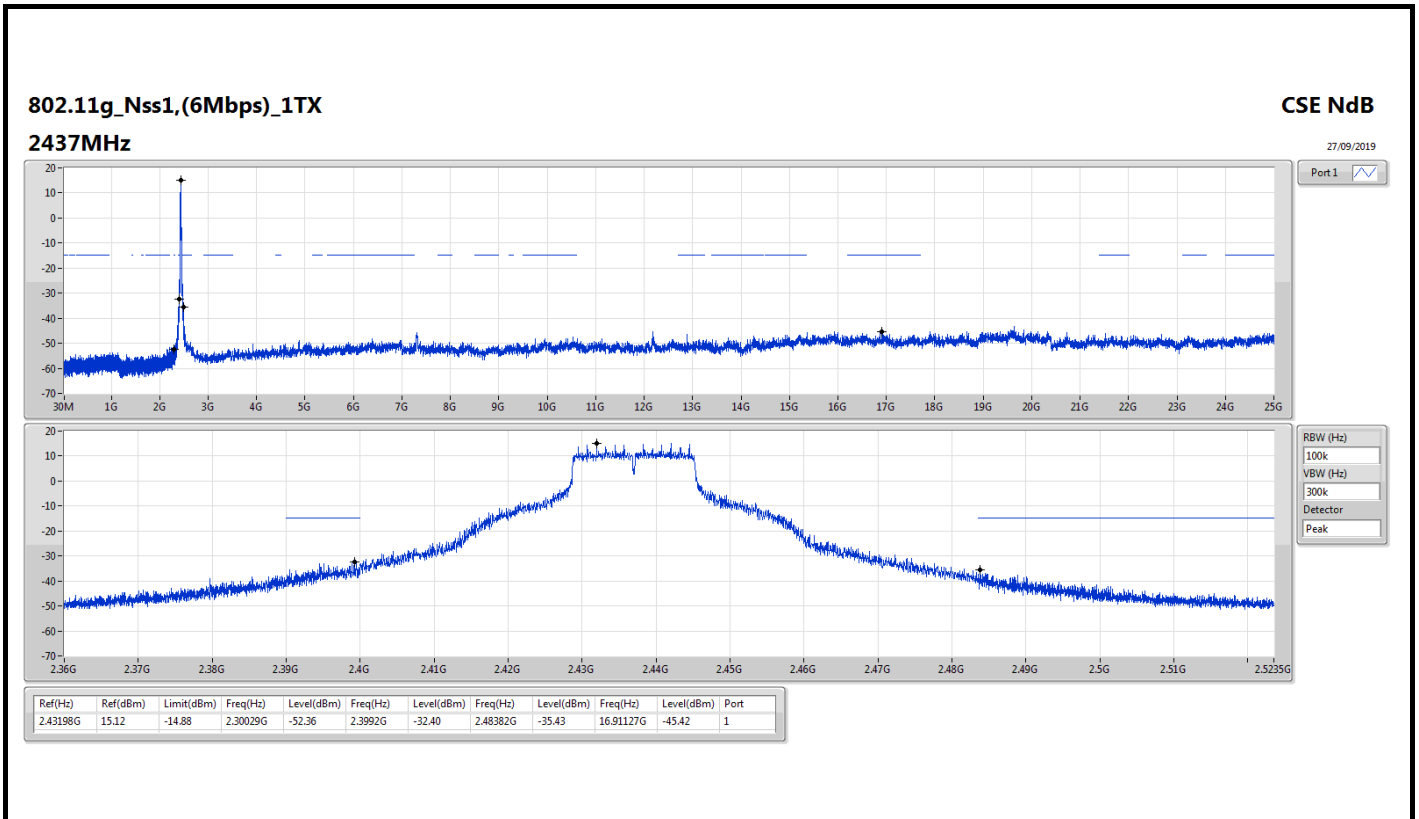

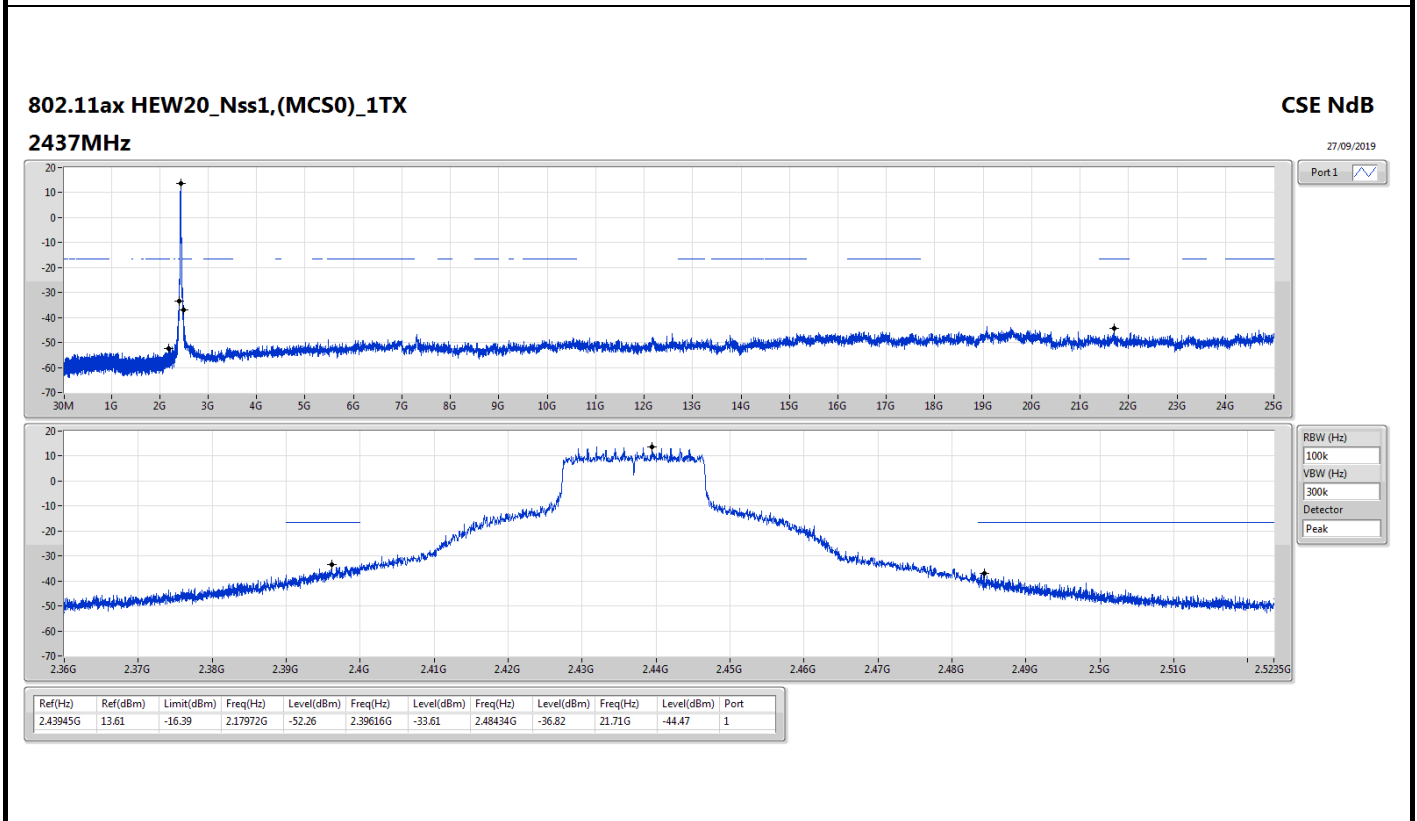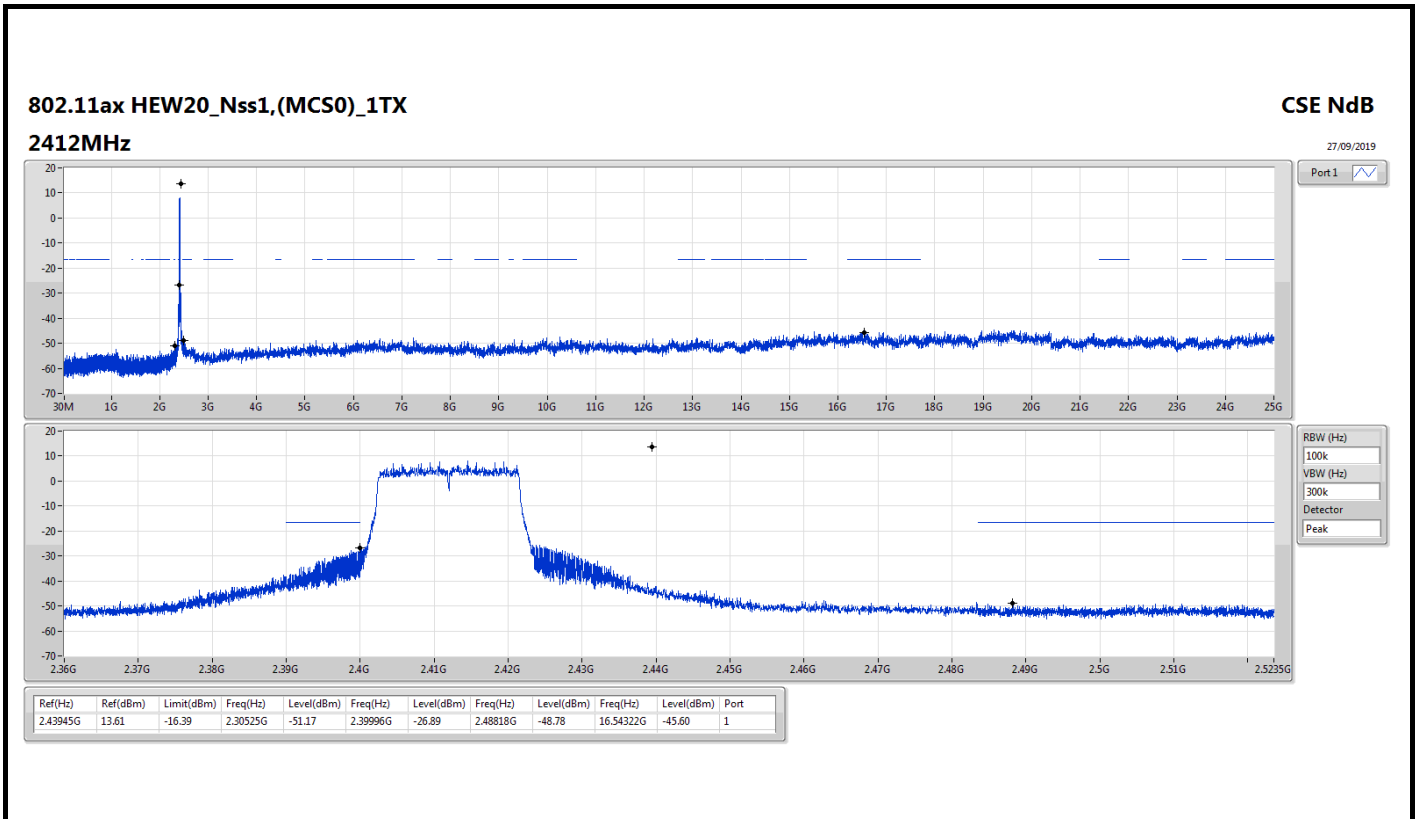

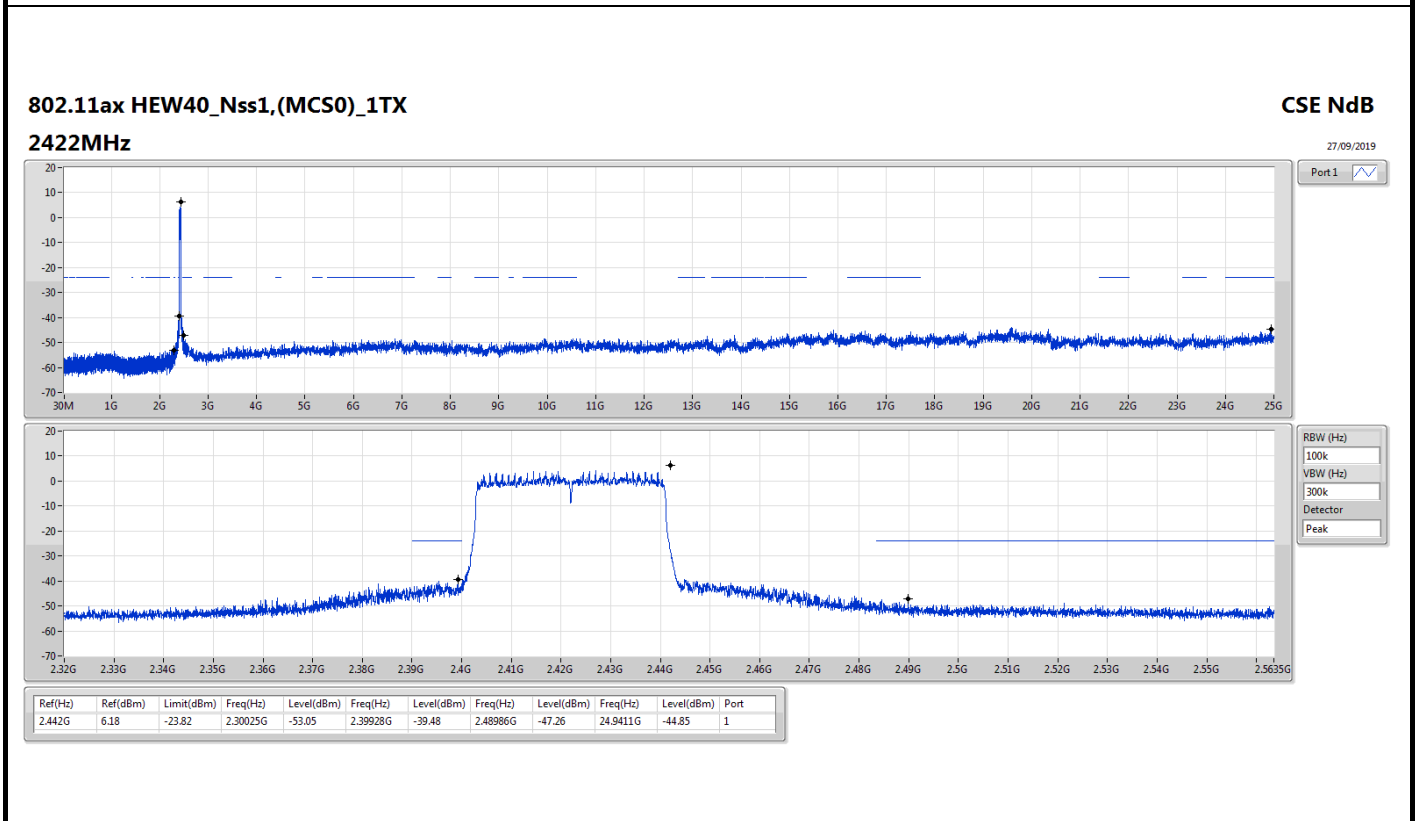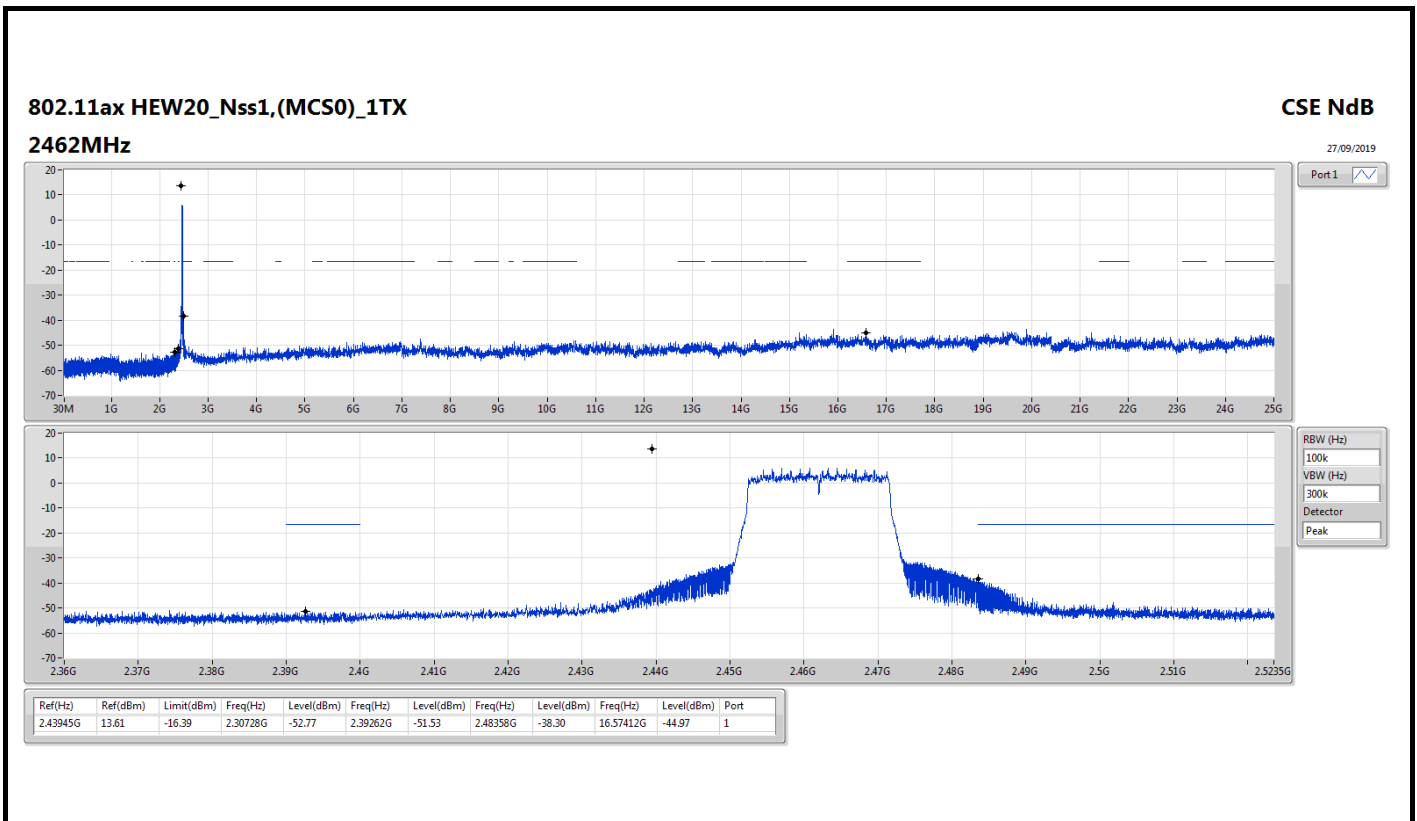

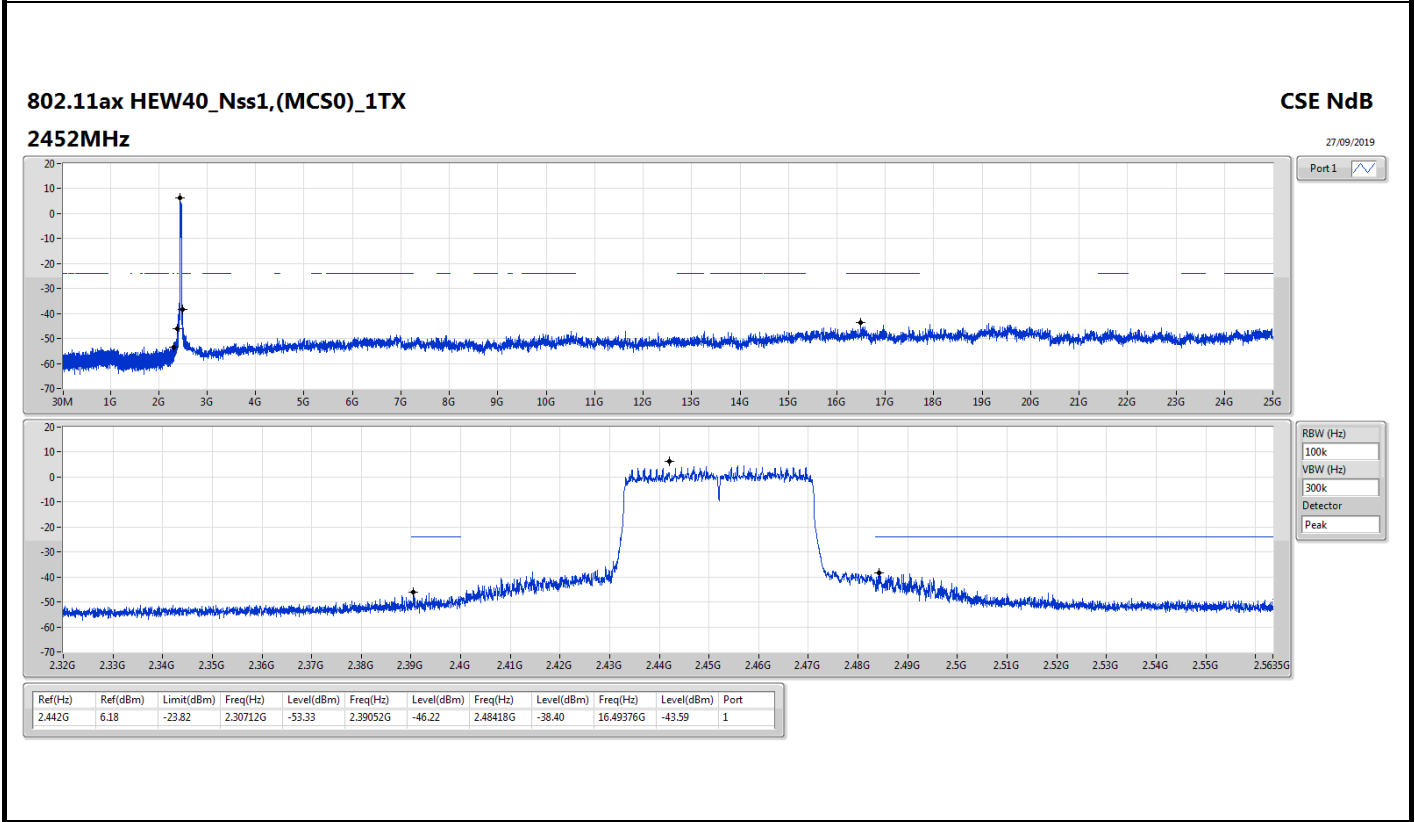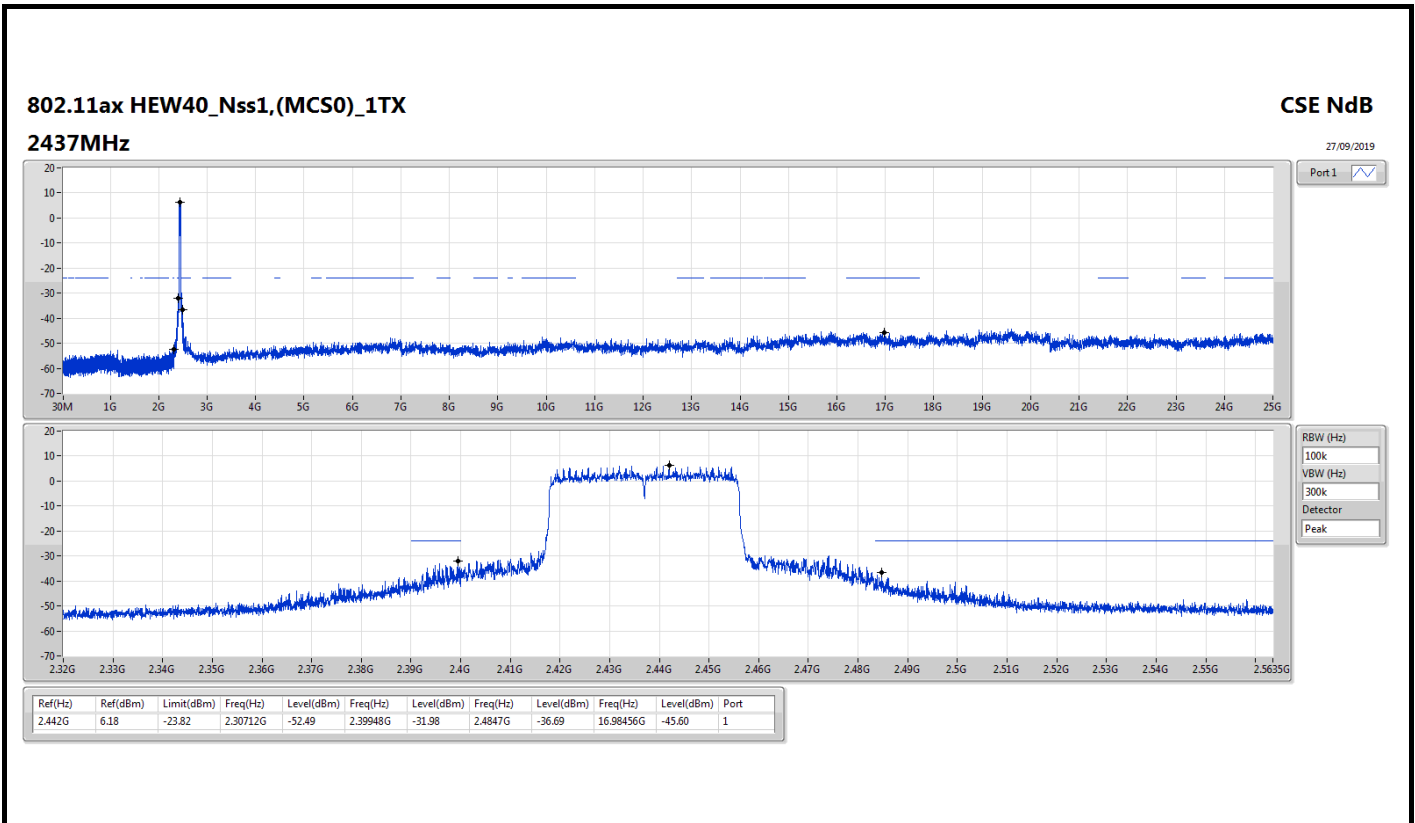



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43599G	17.94	-12.06	2.30728G	-50.85	2.399G	-28.86	2.50082G	-47.71	24.93819G	-43.76	2
802.11g_Nss1,(6Mbps)_2TX	Pass	2.44196G	13.03	-16.97	2.30262G	-52.75	2.39922G	-29.92	2.50534G	-48.79	15.16091G	-45.45	2
802.11ax HEW20_Nss2,(MCS0)_2TX	Pass	2.44196G	11.98	-18.02	2.3035G	-53.05	2.3977G	-49.24	2.48436G	-36.71	16.45893G	-44.5	2
802.11ax HEW40_Nss2,(MCS0)_2TX	Pass	2.43198G	5.58	-24.42	2.30483G	-52.83	2.39976G	-30.1	2.48534G	-36.42	16.53303G	-45.19	2



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43599G	17.94	-12.06	2.30641G	-50.67	2.39902G	-30.86	2.50122G	-47.47	7.23514G	-43.23	1
2412MHz	Pass	2.43599G	17.94	-12.06	2.30728G	-50.85	2.399G	-28.86	2.50082G	-47.71	24.93819G	-43.76	2
2437MHz	Pass	2.43599G	17.94	-12.06	2.1203G	-52.62	2.39964G	-44.83	2.4919G	-46.28	24.96348G	-43.6	1
2437MHz	Pass	2.43599G	17.94	-12.06	2.08215G	-52.64	2.39896G	-45.47	2.49052G	-47.09	16.52355G	-45.35	2
2462MHz	Pass	2.43599G	17.94	-12.06	2.30612G	-53.19	2.39376G	-48.28	2.49676G	-45.06	24.94381G	-45.1	1
2462MHz	Pass	2.43599G	17.94	-12.06	2.30874G	-53.36	2.39998G	-47.75	2.4866G	-43.95	15.2452G	-45	2
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44196G	13.03	-16.97	510.85M	-52.65	2.3993G	-34.83	2.50624G	-49.32	24.27513G	-44.96	1
2412MHz	Pass	2.44196G	13.03	-16.97	2.30262G	-52.75	2.39922G	-29.92	2.50534G	-48.79	15.16091G	-45.45	2
2437MHz	Pass	2.44196G	13.03	-16.97	2.19632G	-51.83	2.39978G	-37.72	2.48472G	-39.62	16.46736G	-45.02	1
2437MHz	Pass	2.44196G	13.03	-16.97	2.30991G	-51.78	2.39946G	-36.46	2.48414G	-39.04	17.01241G	-44.57	2
2462MHz	Pass	2.44196G	13.03	-16.97	720.85M	-53.09	2.39378G	-48.82	2.48362G	-43.4	17.38047G	-44.87	1
2462MHz	Pass	2.44196G	13.03	-16.97	2.05186G	-52.96	2.39086G	-48.98	2.48412G	-41.13	24.93257G	-43.88	2
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44196G	11.98	-18.02	2.30321G	-52.7	2.39994G	-38.78	2.51068G	-49.77	16.86913G	-44.93	1
2412MHz	Pass	2.44196G	11.98	-18.02	852.2M	-53.38	2.39906G	-37.74	2.49266G	-49.73	16.44488G	-45.33	2
2437MHz	Pass	2.44196G	11.98	-18.02	2.3067G	-52.16	2.3989G	-39.03	2.48414G	-43.94	15.21991G	-45.45	1
2437MHz	Pass	2.44196G	11.98	-18.02	2.30845G	-51.13	2.39928G	-37.34	2.48592G	-41.85	24.91571G	-44.4	2
2462MHz	Pass	2.44196G	11.98	-18.02	876.37M	-53	2.39292G	-50.66	2.48364G	-38.32	24.22175G	-45.58	1
2462MHz	Pass	2.44196G	11.98	-18.02	2.3035G	-53.05	2.3977G	-49.24	2.48436G	-36.71	16.45893G	-44.5	2
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43198G	5.58	-24.42	2.30769G	-53.33	2.398G	-41.72	2.48402G	-49.85	24.31008G	-44.76	1
2422MHz	Pass	2.43198G	5.58	-24.42	2.30884G	-53.06	2.39076G	-38.38	2.48358G	-47.55	16.30025G	-45.4	2
2437MHz	Pass	2.43198G	5.58	-24.42	1.95933G	-52.44	2.39976G	-32.37	2.48594G	-37.82	17.27904G	-45.45	1
2437MHz	Pass	2.43198G	5.58	-24.42	2.30483G	-52.83	2.39976G	-30.1	2.48534G	-36.42	16.53303G	-45.19	2
2452MHz	Pass	2.43198G	5.58	-24.42	2.30397G	-52.24	2.3988G	-47.39	2.48526G	-42.2	16.93969G	-45.37	1
2452MHz	Pass	2.43198G	5.58	-24.42	937.7M	-53.28	2.39848G	-44.17	2.48498G	-37.26	24.8794G	-45.79	2

