
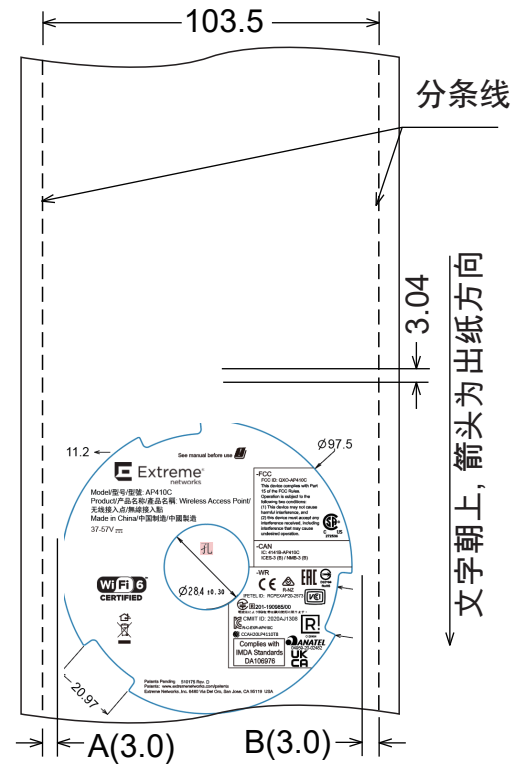


A
B
C
D

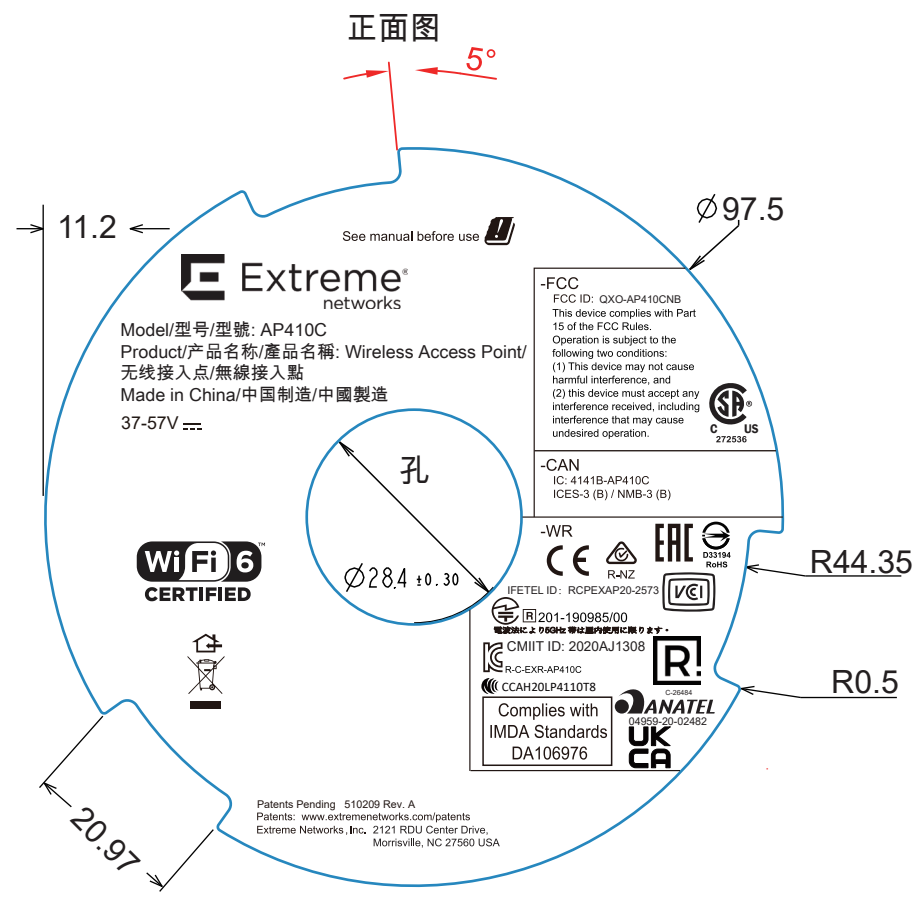

- NOTE:
1. MATERIAL: WHITE MATTE PET, T=0.1
ADHESIVE: ACRYLIC 網紋背膠
 2. FINISH: FINISH: T=0.025
 3. COLOR: ORIGINAL MATERIAL COLOR
印刷: BLACK, 刀模: 斷刀线:
 4. UL APPROVED, PGJ2, PRINTED..
 5. 被貼物: 鋁件
 6. TEMPERATURE RESISTANT= 120° C
 7. 印刷公差: 尺寸30mm以下為±0.2mm, 30~120mm為±0.3mm, 120~315mm為±0.5mm, 315以上±0.8mm
 8. 捲狀出貨, 離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
 9. 中間圓孔排廢
 10. TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附着力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

DONOTSCALEDRAWING

MODEL	AP410C	NAME	Label/Extreme		SCALE	1 / 1
DSN		PART. NO	510209 Rev. A		SHEET	OF
CHK		MATERIAL	white PET	Q' TY	PC	REV. B
APV					REV. DATE	
FILE					2021.06.08	

USED