




# FCC RADIO TEST REPORT

**FCC ID** : QXO-AP505I  
**Equipment** : 802.11ax Access Point  
**Brand Name** : Extreme Networks  
**Model Name** : AP505i  
**Applicant** : Extreme Networks, Inc.  
6480 Via Del Oro, San Jose, CA 95119  
**Manufacturer** : Extreme Networks, Inc.  
6480 Via Del Oro, San Jose, CA 95119  
**Standard** : 47 CFR FCC Part 15.247

The product was received on Oct. 22, 2018, and testing was started from Oct. 25, 2018 and completed on Nov. 26, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

  
Approved by: Cliff Chang

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Information.....	5
1.2 Testing Applied Standards .....	8
1.3 Testing Location Information .....	8
1.4 Measurement Uncertainty .....	8
<b>2 Test Configuration of EUT .....</b>	<b>9</b>
2.1 Test Channel Mode .....	9
2.2 The Worst Case Measurement Configuration.....	9
2.3 EUT Operation during Test .....	10
2.4 Accessories .....	11
2.5 Support Equipment.....	11
2.6 Test Setup Diagram .....	12
<b>3 Transmitter Test Result .....</b>	<b>15</b>
3.1 AC Power-line Conducted Emissions .....	15
3.2 DTS Bandwidth .....	17
3.3 Maximum Conducted Output Power .....	18
3.4 Power Spectral Density .....	21
3.5 Emissions in Non-restricted Frequency Bands .....	23
3.6 Emissions in Restricted Frequency Bands.....	24
<b>4 Test Equipment and Calibration Data .....</b>	<b>28</b>
<b>Appendix A. Test Results of AC Power-line Conducted Emissions</b>	
<b>Appendix B. Test Results of DTS Bandwidth</b>	
<b>Appendix C. Test Results of Maximum Conducted Output Power</b>	
<b>Appendix D. Test Results of Power Spectral Density</b>	
<b>Appendix E. Test Results of Emissions in Non-restricted Frequency Bands</b>	
<b>Appendix F. Test Results of Emissions in Restricted Frequency Bands</b>	
<b>Appendix G. Test Photos</b>	
<b>Photographs of EUT v01</b>	



## History of this test report

[illegible]



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sam Chen**

**Report Producer: Wendy Pan**

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std.	Ch. Frequency (MHz)	Channel Number
2400-2483.5	802.15.4	2405-2480	11-26 [16]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	Thread	3	1TX

Note:

- ♦ Thread uses a O-QPSK (250kbps) modulation for DSSS.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

### 1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		
						WLAN 2.4GHz	WLAN 5GHz	Bluetooth and Thread
1	1	WNC	Starlord 505	PIFA Antenna	I-PEX	3.86	-	-
2	2	WNC	Starlord 505	PIFA Antenna	I-PEX	3.97	-	-
3	3	WNC	Starlord 505	PIFA Antenna	I-PEX	3.89	-	-
4	4	WNC	Starlord 505	PIFA Antenna	I-PEX	3.96	-	-
5	1	WNC	Starlord 505	PIFA Antenna	I-PEX	-	5.29	-
6	2	WNC	Starlord 505	PIFA Antenna	I-PEX	-	4.91	-
7	3	WNC	Starlord 505	PIFA Antenna	I-PEX	-	4.87	-
8	4	WNC	Starlord 505	PIFA Antenna	I-PEX	-	4.73	-
9	1	WNC	Starlord 505	PIFA Antenna	I-PEX	-	-	4.69

Note: 1.The above information was declared by manufacturer.

2.The EUT has nine antennas.

**For 2.4GHz function:**

**For IEEE 802.11b/g/n/ax mode (1TX, 2TX, 4TX/4RX):**

For 1TX

Only Port 1 can be use as transmitting antenna.



For 2TX

Only Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

**For 5GHz function:**

**For IEEE 802.11a/n/ac/ax mode (1TX, 2TX, 4TX/4RX):**

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Only Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

**For Bluetooth and Thread mode (1TX/1RX):**

Only Port 1 can be use as transmitting/receiving antenna.

### 1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
Thread	1	0	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

<b>EUT Power Type</b>	From Power Adapter or PoE		
<b>Beamforming Function</b>	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming	
<b>Function</b>	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Point-to-point	
<b>Test Software Version</b>	Tftpd32 、 Telnet		

Note: The above information was declared by manufacturer.

**1.1.5 Table for EUT support function**

Function	Support Type	Support Band
AP	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1~4
Client	Slave without Radar Detection	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4
Bridge	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4
Mesh	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4

Note: The above information was declared by manufacturer.



## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v05

## 1.3 Testing Location Information

Testing Location				
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	TEL : 886-3-327-3456	FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Welson Chen, Lucke Hsieh	23°C / 61%	Oct. 29, 2018 ~ Nov. 26, 2018
Radiated (Below 1GHz)	03CH01-CB	RJ Huang	22°C / 54%	Nov. 13, 2018 ~ Nov. 19, 2018
Radiated (Above 1GHz)	03CH01-CB	RJ Huang	22°C / 54%	Oct. 25, 2018 ~ Nov. 24, 2018
AC Conduction	CO01-CB	Tony Chang	23°C / 58%	Nov. 22, 2018

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74 x10 <sup>-8</sup>	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

Mode	PowerSetting
Thread 1TX	-
2405MHz	32
2440MHz	32
2480MHz	23

### 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral
<b>Operating Mode</b>	Normal Link
1	EUT (WLAN + Bluetooth) with Adapter
2	EUT (WLAN + Thread) with Adapter
Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT (WLAN + Thread) with PoE
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains

<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Emissions in Restricted Frequency Bands
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
<b>Operating Mode &lt; 1GHz</b>	Normal Link
1	EUT in Z axis (WLAN + Bluetooth) with Adapter
2	EUT in Y axis (WLAN + Bluetooth) with Adapter
Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT in Z axis (WLAN + Bluetooth) with PoE
Mode 3 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.	
4	EUT in Z axis (WLAN + Thread) with PoE
For operating mode 3 is the worst case and it was record in this test report.	
<b>Operating Mode &gt; 1GHz</b>	CTX
The EUT was performed at Y axis and Z axis position and the worst case was found at Y axis. So the measurement will follow this same test configuration.	
1	EUT in Y axis

<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
<b>Operating Mode</b>	
1	WLAN 2.4GHz + WLAN 5GHz + Bluetooth
2	WLAN 2.4GHz + WLAN 5GHz + Thread
Refer to Sporton Test Report No.: FA801737 for Co-location RF Exposure Evaluation.	

Note: 1.The PoE is for measurement only, would not be marketed.

PoE information as below:

<b>Power</b>	<b>Brand</b>	<b>Model</b>
PoE	Microsemi	PD-9001GR/AT/AC

## 2.3 EUT Operation during Test

### For Normal Link:

During the test, the EUT operation to normal function.

### For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.



## 2.4 Accessories

Accessories				
No.	Equipment Name	Brand Name	Model Name	Rating
1	Adapter	POWERTRON	PA1045-120HIB300	Input: 100-240Vac ~ 50-60Hz, 1.0A Output: 12Vdc, 3.0A, 36W Max
Others				
Plug*6 (US*1, EU*1, UK*1, AU*1, China*1, BZ*1) Bracket*1				

## 2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Flash disk3.0	Transcend	JetFlash-700	N/A
B	GE1 PC	DELL	T3400	N/A
C	GE2 Notebook	DELL	E6430	N/A
D	2.4G Notebook	DELL	E6430	N/A
E	5G Notebook	DELL	E6430	N/A
F	Device	Extreme Networks	AP-510i	QXO-AP510I
G	Device Notebook	DELL	E6430	N/A


For Test Site No: 03CH01-CB (below 1GHz)


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PC	DELL	OPTIPLEX 3010	N/A
B	Notebook	DELL	E4300	N/A
C	Notebook	DELL	E4300	N/A
D	Notebook	DELL	E4300	N/A
E	RX Device	Extreme Networks	AP-510i	QXO-AP510I
F	Notebook	DELL	E4300	N/A
G	Flash disk3.0	Transcend	JetFlash-700	N/A
H	PoE	Microsemi	PD-9001GR/AT/AC	N/A

For Test Site No: 03CH01-CB (above 1GHz) and TH01-CB


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

## 2.6 Test Setup Diagram

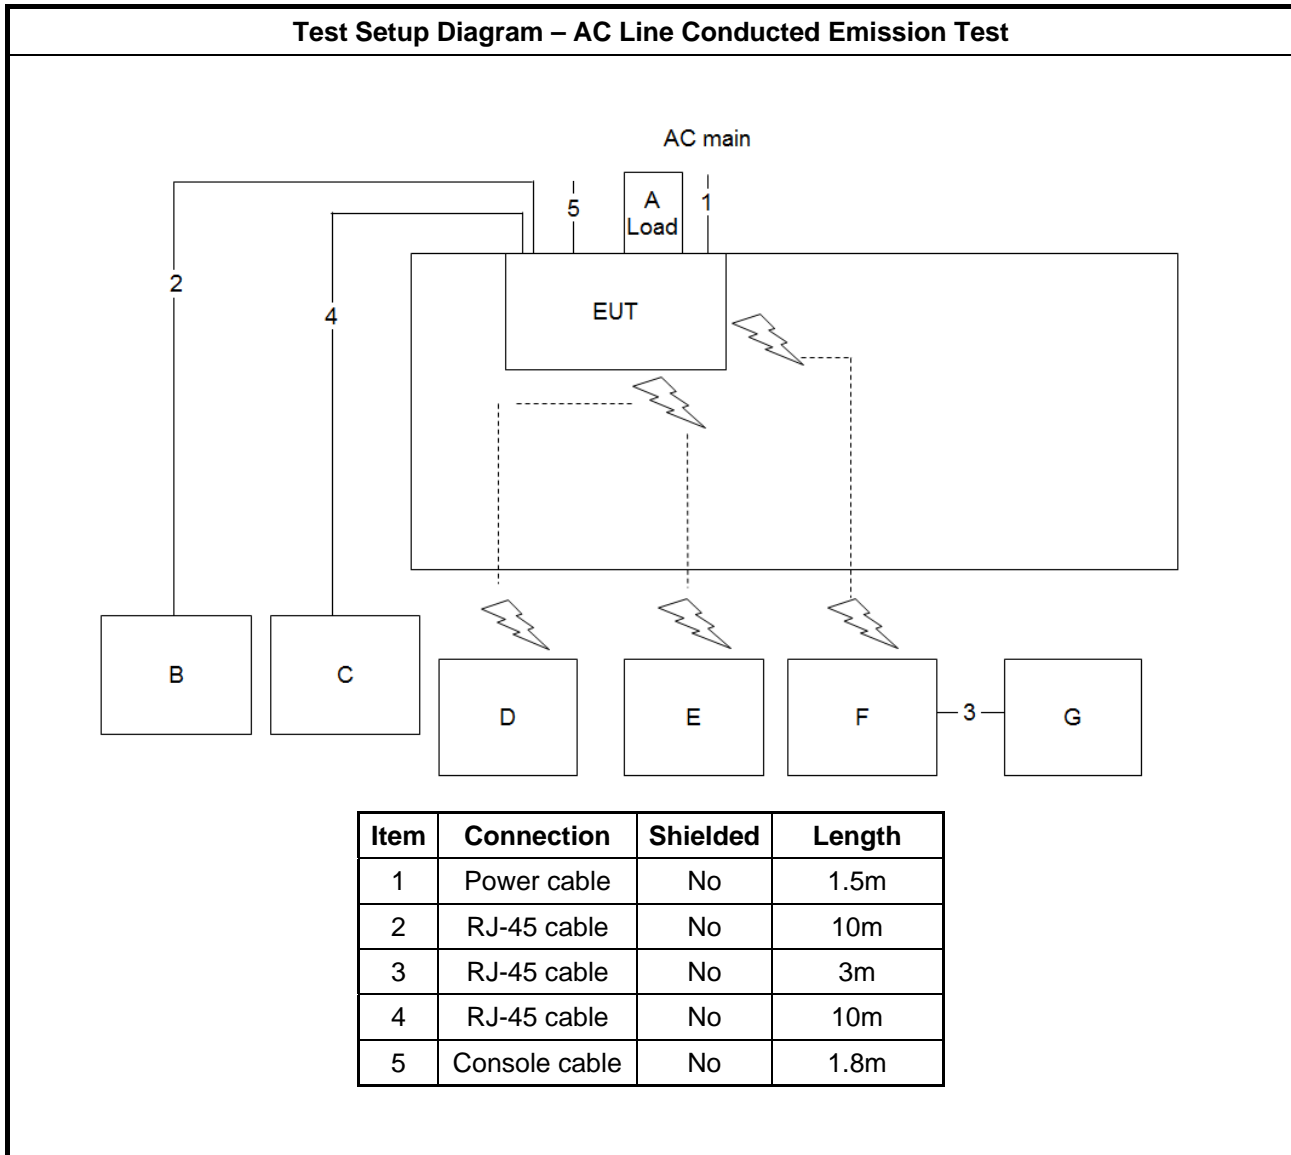

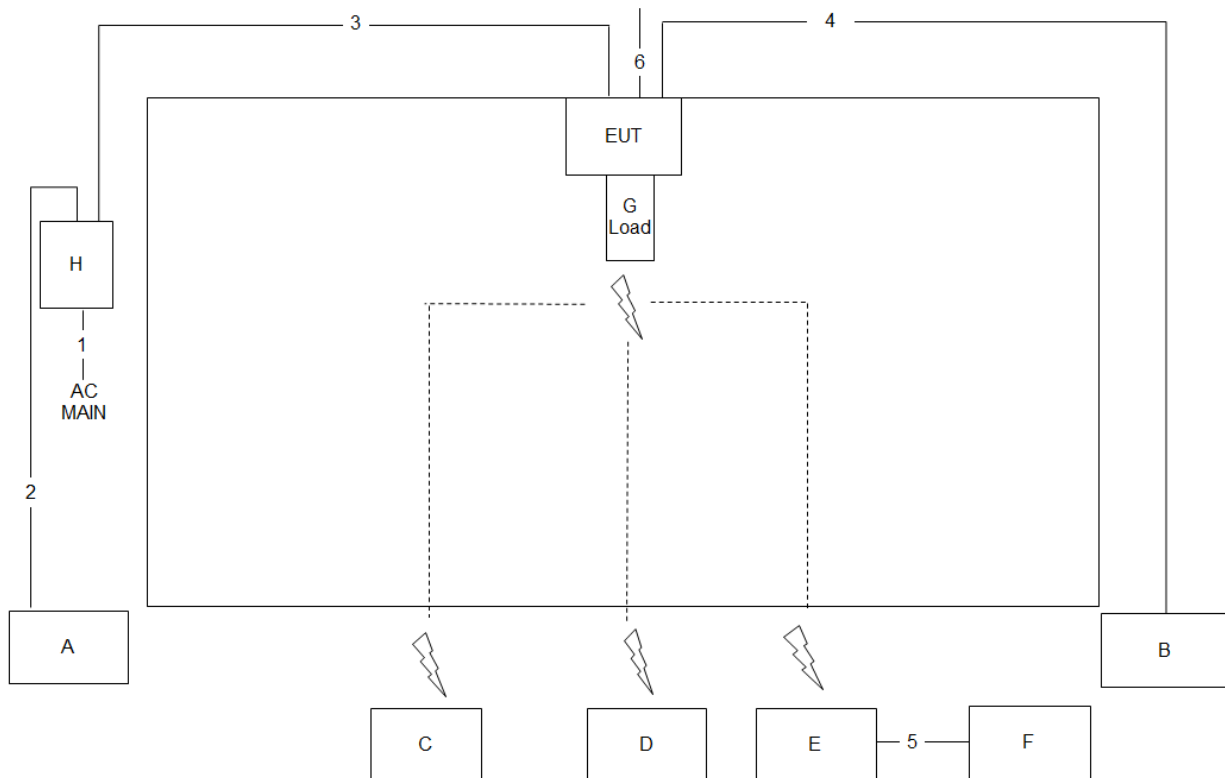**Test Setup Diagram - Radiated Test < 1GHz**


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	1.5m
6	Console cable	No	1.5m

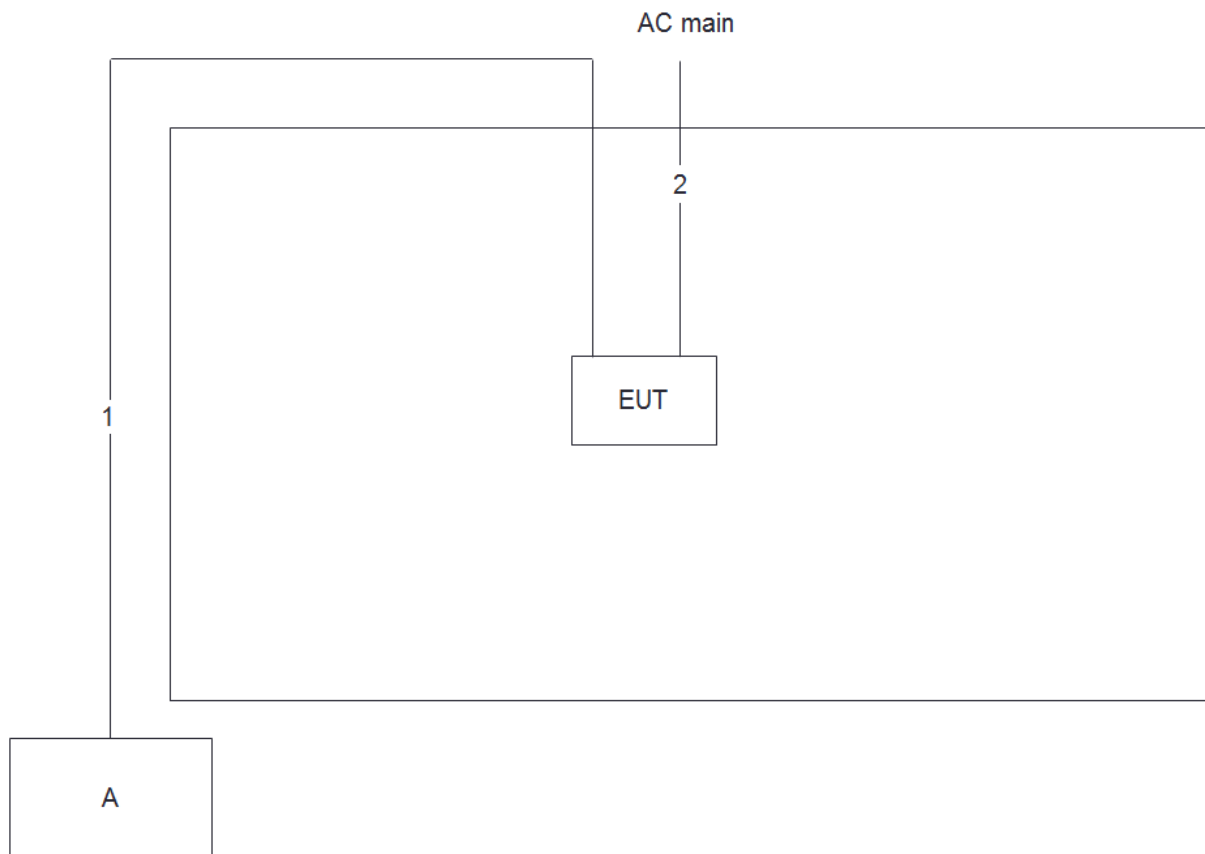**Test Setup Diagram - Radiated Test > 1GHz**


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

### 3.1.4 Test Setup

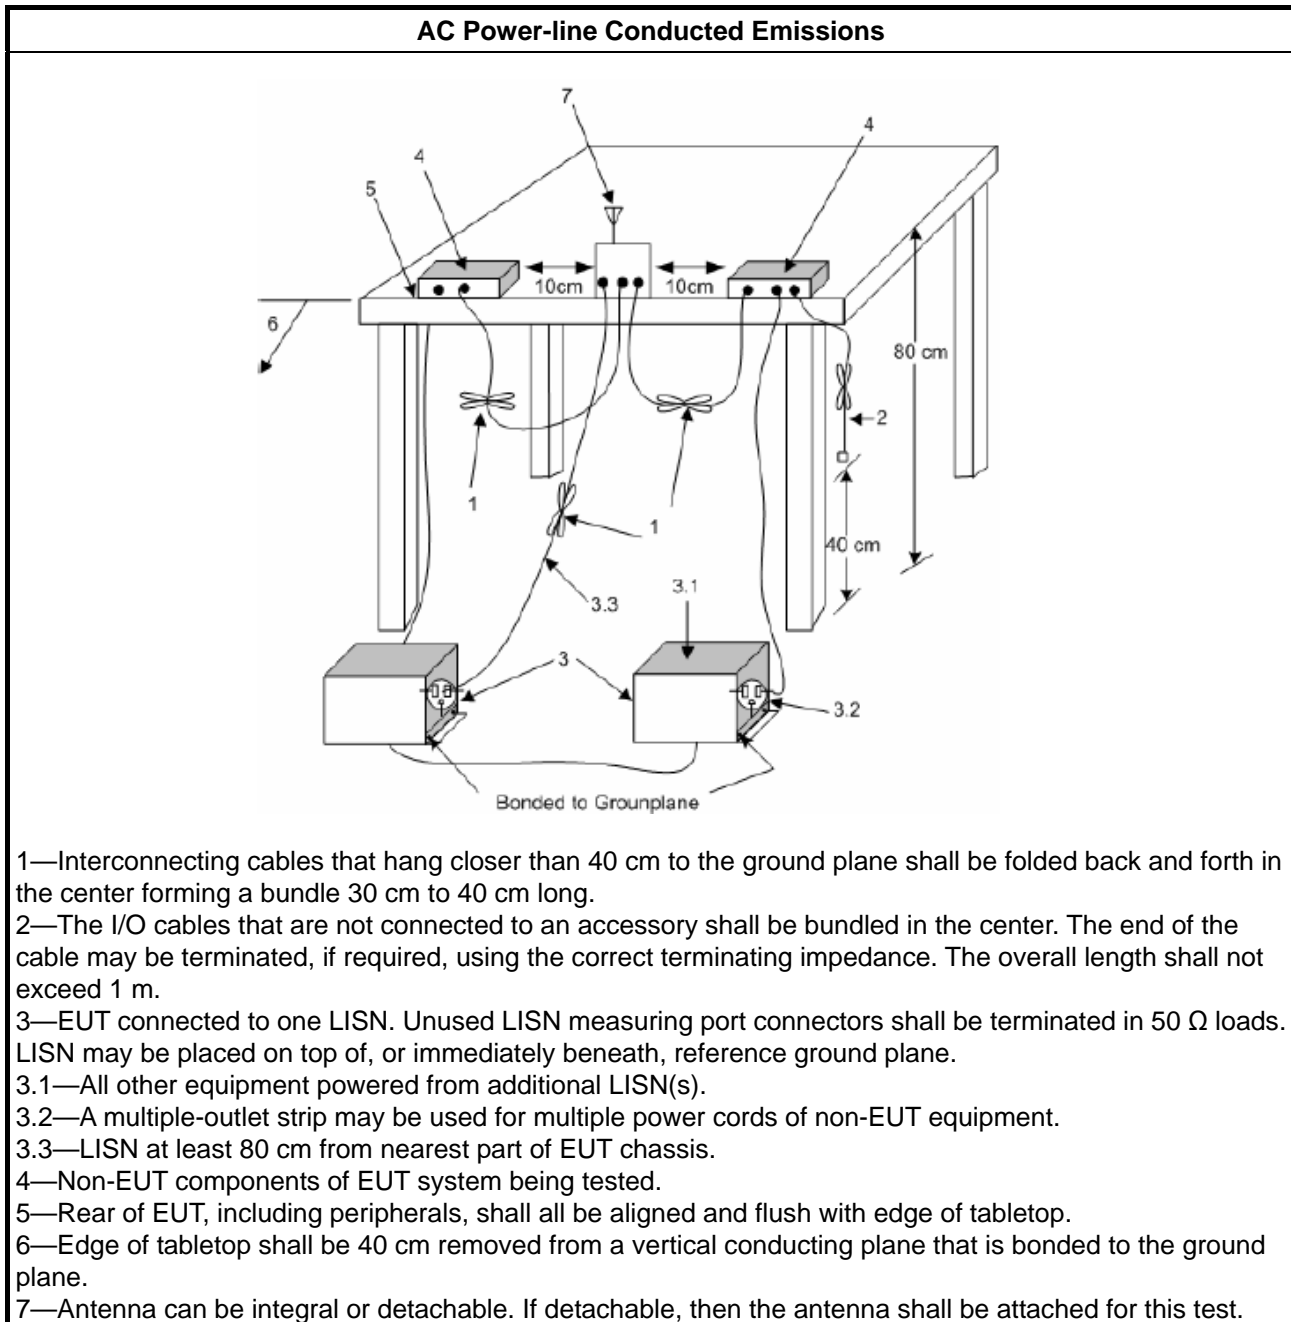

### 3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



## 3.2 DTS Bandwidth

### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
<b>Systems using digital modulation techniques:</b>	
▪	6 dB bandwidth $\geq$ 500 kHz.


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

### 3.2.4 Test Setup

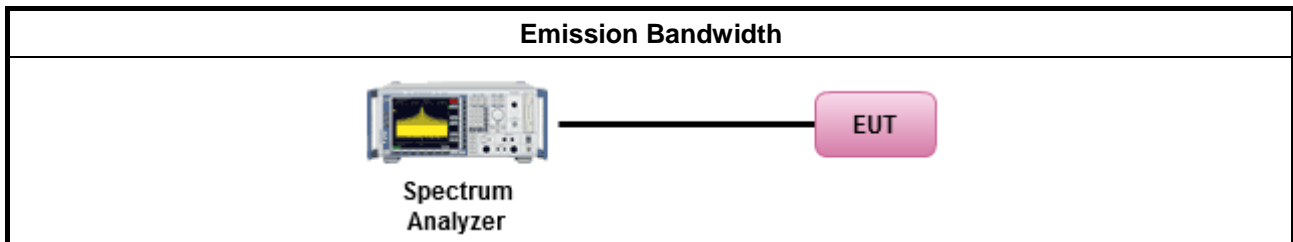

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	

#### 3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul>	
[duty cycle ≥ 98% or external video / power trigger]	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:  <math display="block">P_{total} = P_1 + P_2 + \dots + P_n</math> (calculated in linear unit [mW] and transfer to log unit [dBm])  <math display="block">EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

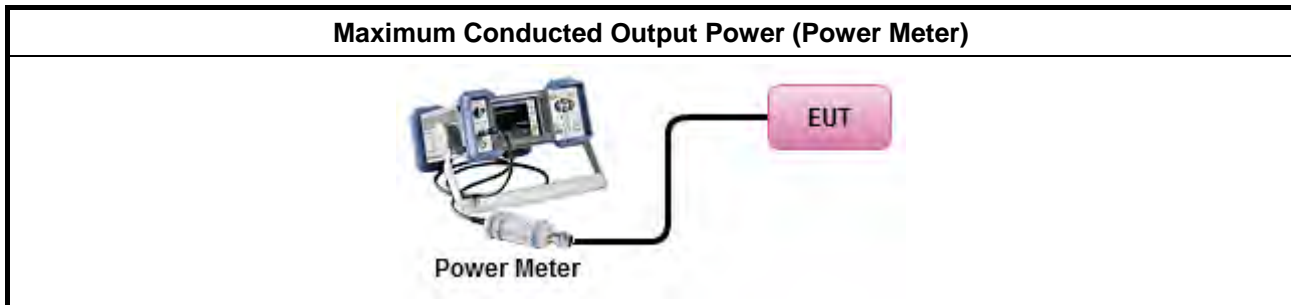

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>Power Spectral Density (PSD) <math>\leq 8</math> dBm/3kHz</li> </ul>

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.2 Method PKPSD. [duty cycle $\geq 98\%$ or external video / power trigger]
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.3 Method AVGPSD-1.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.5 Method AVGPSD-2.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.7 Method AVGPSD-3.
duty cycle $< 98\%$ and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.4 Method AVGPSD-1A. (alternative).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.6 Method AVGPSD-2A. (alternative)
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.8 Method AVGPSD-3A. (alternative)
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>
<ul style="list-style-type: none"> <li>If The EUT supports multiple transmit chains using options given below:</li> </ul>
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,

- |  |  |
|--|--|
|  | <input type="checkbox"/> Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$ . Or each transmit chains shall be add $10 \log(N)$ to compared with the limit. |
|--|--|

### 3.4.4 Test Setup

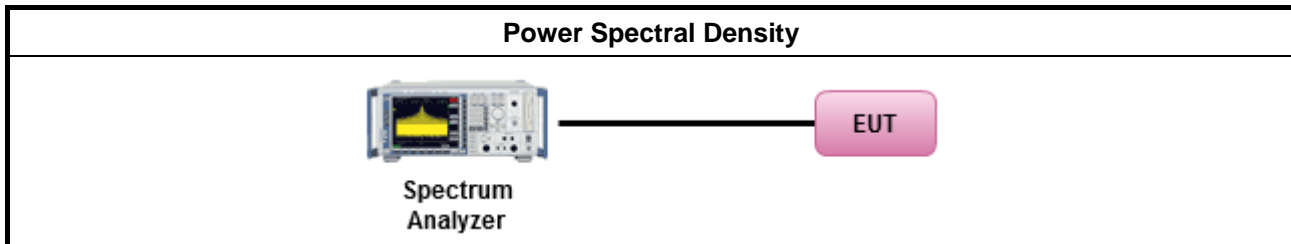

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
<p>Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.</p> <p>Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.</p>	


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.</li> </ul>

#### 3.5.4 Test Setup

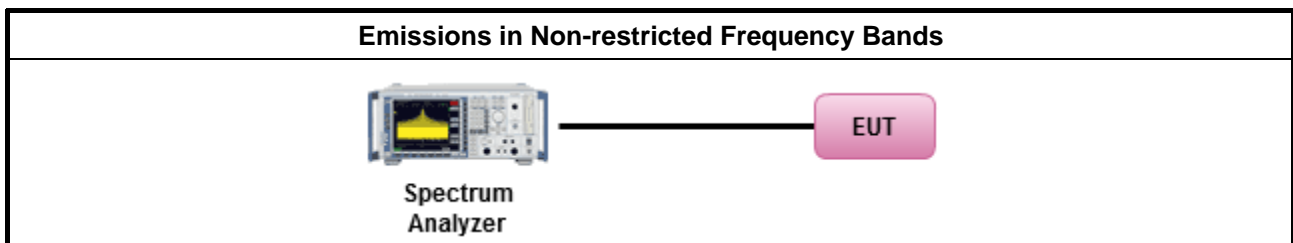

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.







### 3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>The average emission levels shall be measured in [duty cycle <math>\geq 98</math> or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>	
<ul style="list-style-type: none"> <li>For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.</li> </ul>
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$ ).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$ ).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$ , where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> <li>For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074 clause 8.7 &amp; c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>
	<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.</li> </ul>
	<ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li> </ul>
	<ul style="list-style-type: none"> <li>For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB</li> </ul>
	<ul style="list-style-type: none"> <li>For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul>

### 3.6.4 Test Setup

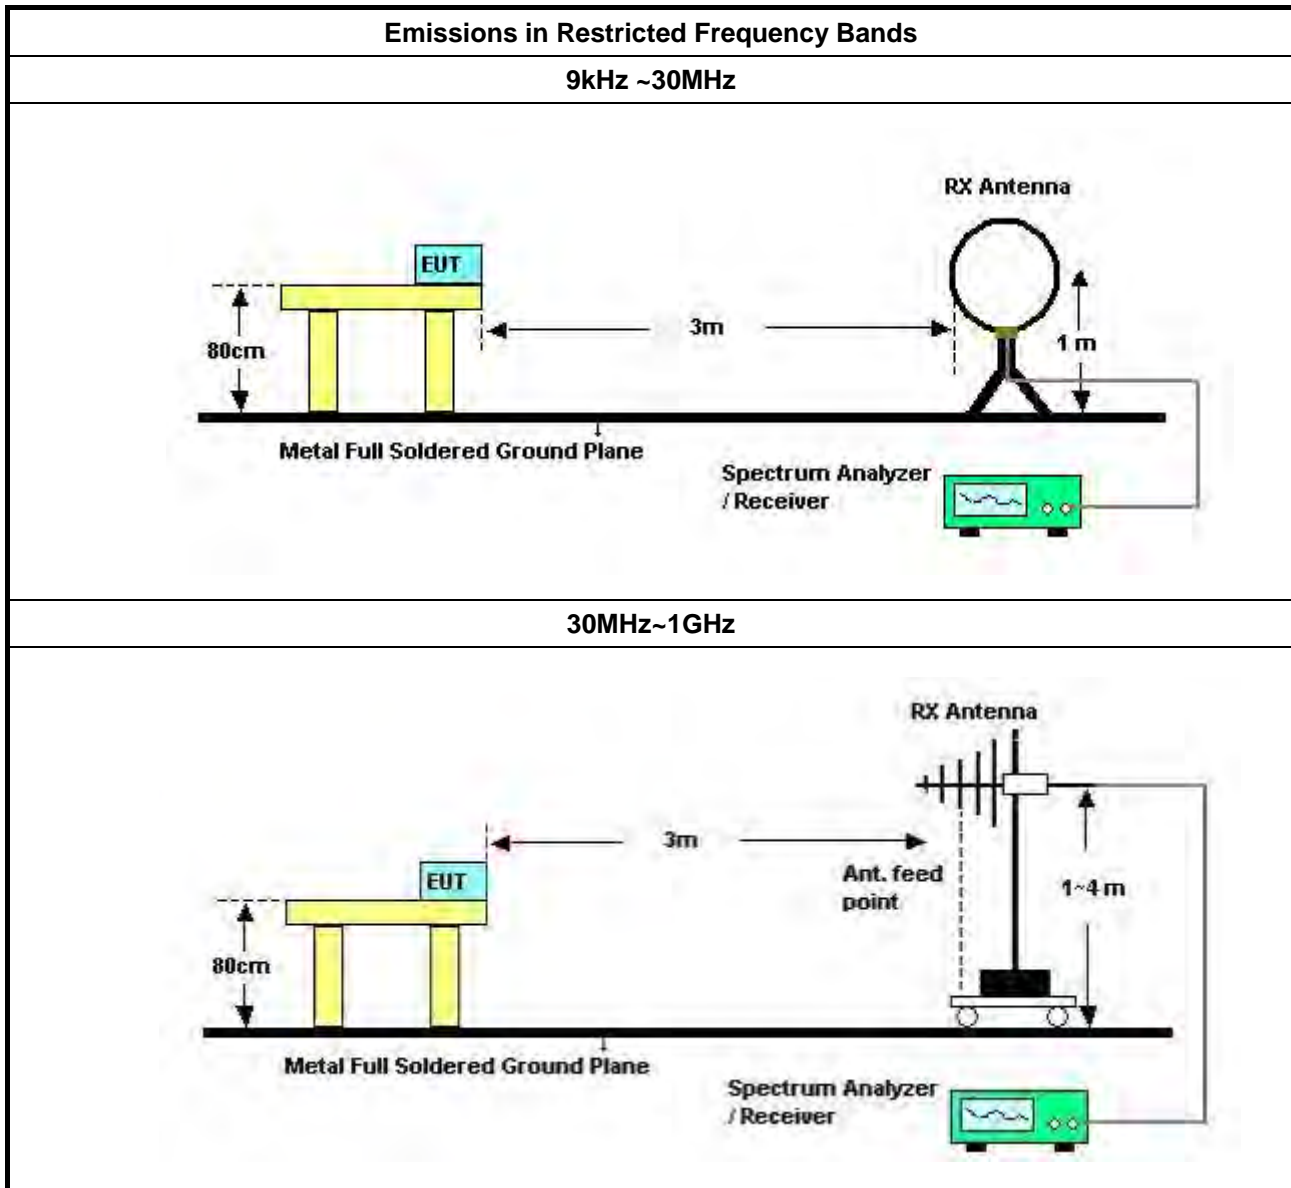

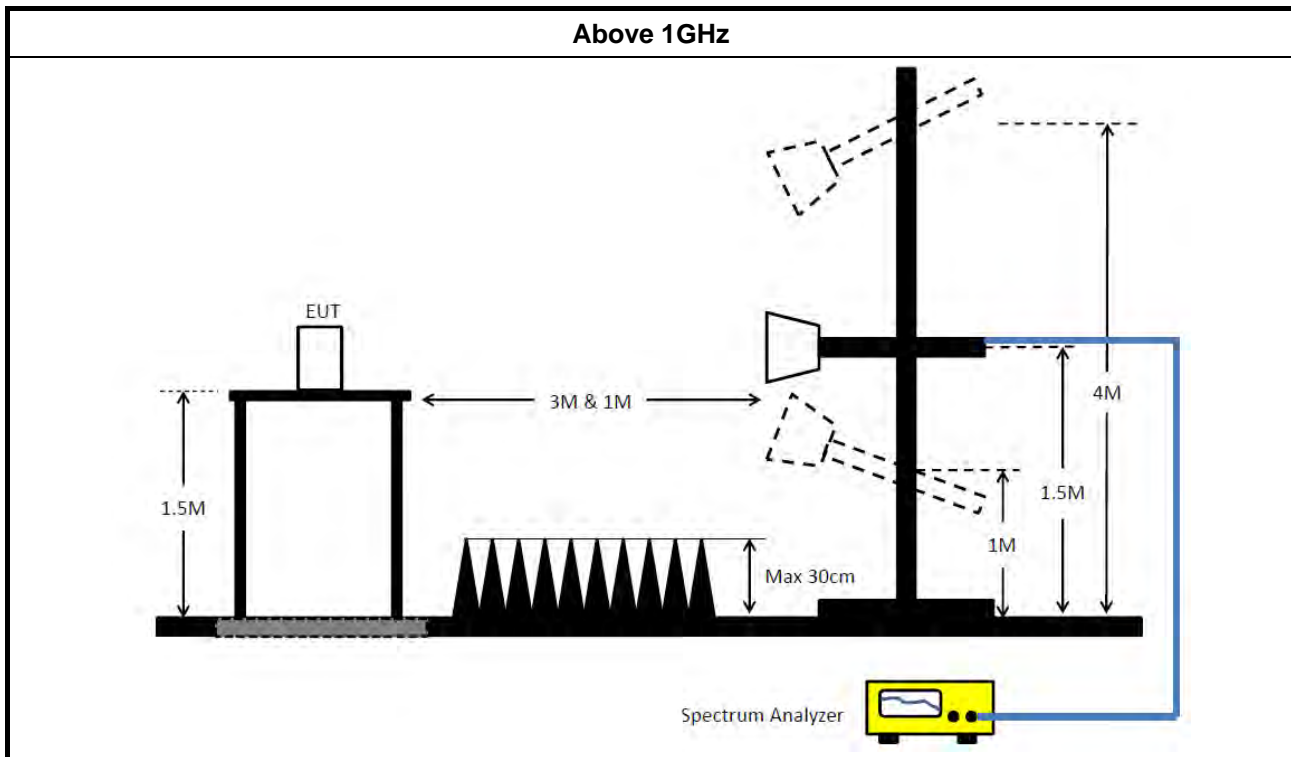

### 3.6.5 Emissions in Restricted Frequency Bands (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

### 3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 31, 2018	Jan. 30, 2019	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 20, 2017	Dec. 19, 2018	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 29, 2017	Dec. 28, 2018	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	150kHz ~ 30MHz	May 22, 2018	May 21, 2019	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2018	Mar. 15, 2019	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 20, 2017	Nov. 19, 2018	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 09, 2018	Jan. 08, 2019	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100080	9kHz~40GHz	Oct. 03, 2018	Oct. 02, 2019	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100354	9kHz ~ 2.75GHz	Dec. 08, 2017	Dec. 07, 2018	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 21, 2017	Dec. 20, 2018	Conducted (TH01-CB)




Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY54320014	50MHz~18GHz	Apr. 17, 2018	Apr. 16, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.


Test Mode	Mode 2	Frequency Range	0.15 MHz to 30 MHz
-----------	--------	-----------------	--------------------

Line

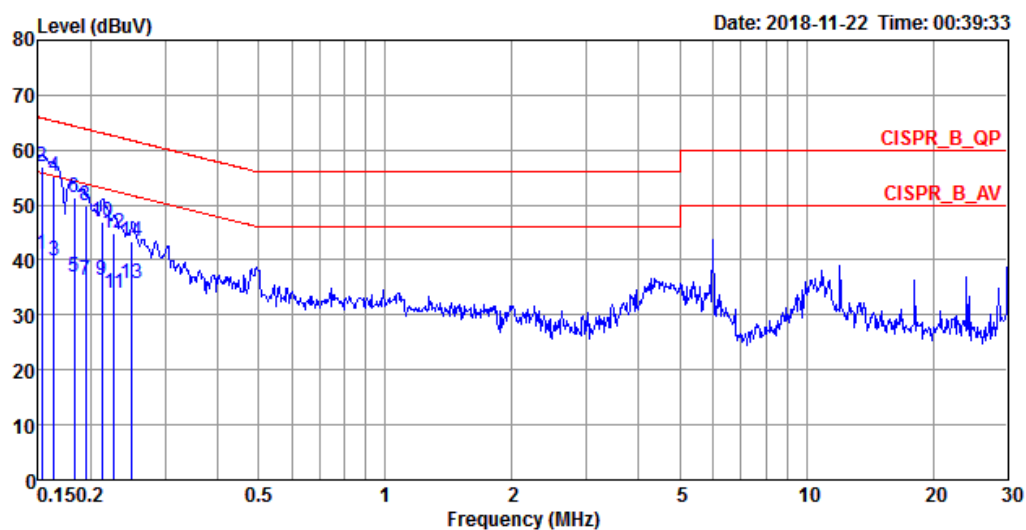

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1532	41.18	-14.64	55.82	31.11	9.91	0.16	Average	LINE
2	0.1532	56.92	-8.90	65.82	46.85	9.91	0.16	QP	LINE
3	0.1633	39.83	-15.47	55.30	29.76	9.91	0.16	Average	LINE
4	0.1633	55.31	-9.99	65.30	45.24	9.91	0.16	QP	LINE
5	0.1825	37.03	-17.34	54.37	26.97	9.91	0.15	Average	LINE
6	0.1825	51.33	-13.04	64.37	41.27	9.91	0.15	QP	LINE
7	0.1945	36.28	-17.56	53.84	26.23	9.91	0.14	Average	LINE
8	0.1945	49.80	-14.04	63.84	39.75	9.91	0.14	QP	LINE
9	0.2128	36.25	-16.85	53.10	26.20	9.91	0.14	Average	LINE
10	0.2128	47.04	-16.06	63.10	36.99	9.91	0.14	QP	LINE
11	0.2268	33.91	-18.66	52.57	23.86	9.91	0.14	Average	LINE
12	0.2268	44.87	-17.70	62.57	34.82	9.91	0.14	QP	LINE
13	0.2508	35.57	-16.16	51.73	25.53	9.91	0.13	Average	LINE
14	0.2508	43.35	-18.38	61.73	33.31	9.91	0.13	QP	LINE

### Neutral

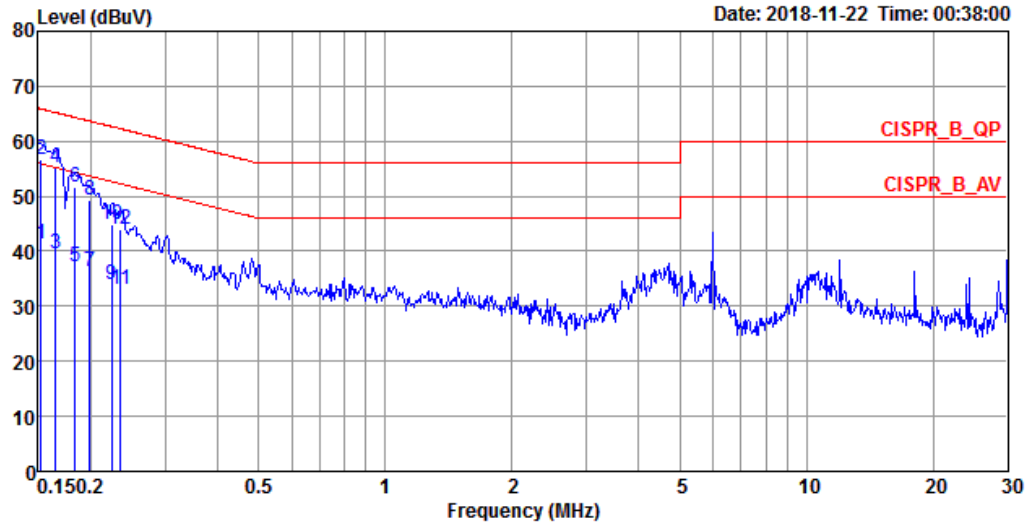

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1524	41.35	-14.52	55.87	31.27	9.92	0.16	Average	NEUTRAL
2	0.1524	56.71	-9.16	65.87	46.63	9.92	0.16	QP	NEUTRAL
3	0.1650	39.49	-15.72	55.21	29.41	9.92	0.16	Average	NEUTRAL
4	0.1650	55.29	-9.92	65.21	45.21	9.92	0.16	QP	NEUTRAL
5	0.1835	37.07	-17.26	54.33	27.00	9.92	0.15	Average	NEUTRAL
6	0.1835	51.57	-12.76	64.33	41.50	9.92	0.15	QP	NEUTRAL
7	0.1986	36.21	-17.46	53.67	26.15	9.92	0.14	Average	NEUTRAL
8	0.1986	49.40	-14.27	63.67	39.34	9.92	0.14	QP	NEUTRAL
9	0.2244	33.85	-18.81	52.66	23.79	9.92	0.14	Average	NEUTRAL
10	0.2244	44.97	-17.69	62.66	34.91	9.92	0.14	QP	NEUTRAL
11	0.2353	33.15	-19.11	52.26	23.09	9.92	0.14	Average	NEUTRAL
12	0.2353	43.84	-18.42	62.26	33.78	9.92	0.14	QP	NEUTRAL



**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
Thread_1TX	1.623M	2.304M	2M30G1D	1.61M	2.271M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

**Result**


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
Thread_1TX	-	-	-	-
2405MHz	Pass	500k	1.61M	2.296M
2440MHz	Pass	500k	1.618M	2.304M
2480MHz	Pass	500k	1.623M	2.271M

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;




**Thread\_1TX**
**2405MHz**
**EBW**


21/11/2018

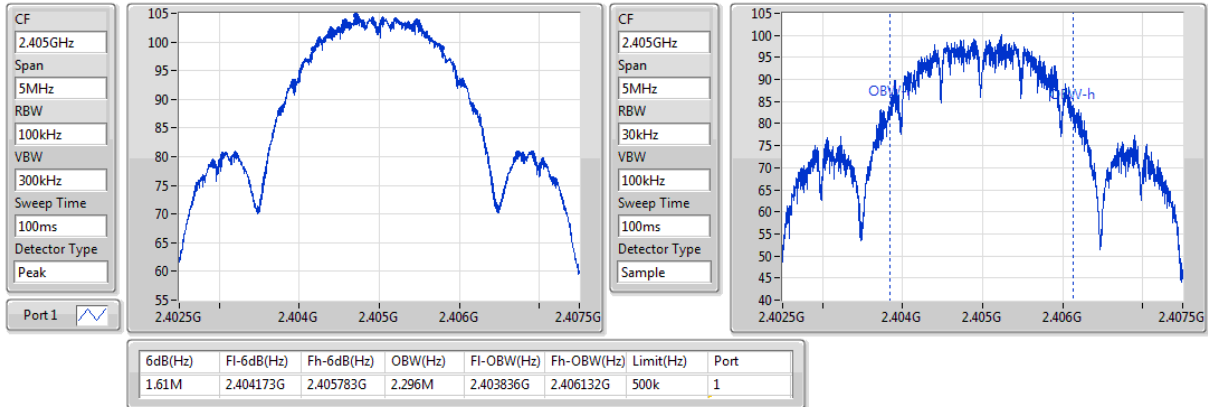
**Thread\_1TX**
**2440MHz**
**EBW**

21/11/2018

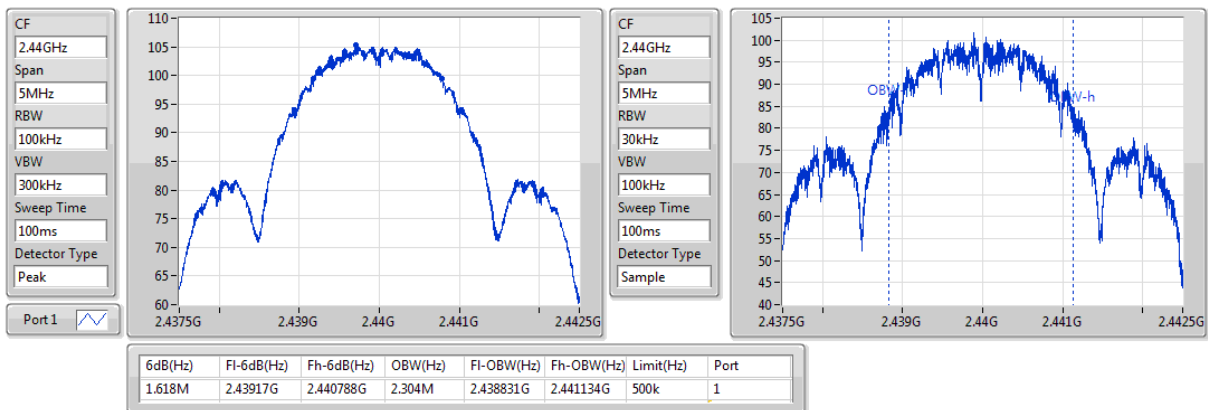
**Thread\_1TX**
**2480MHz**
**EBW**

21/11/2018

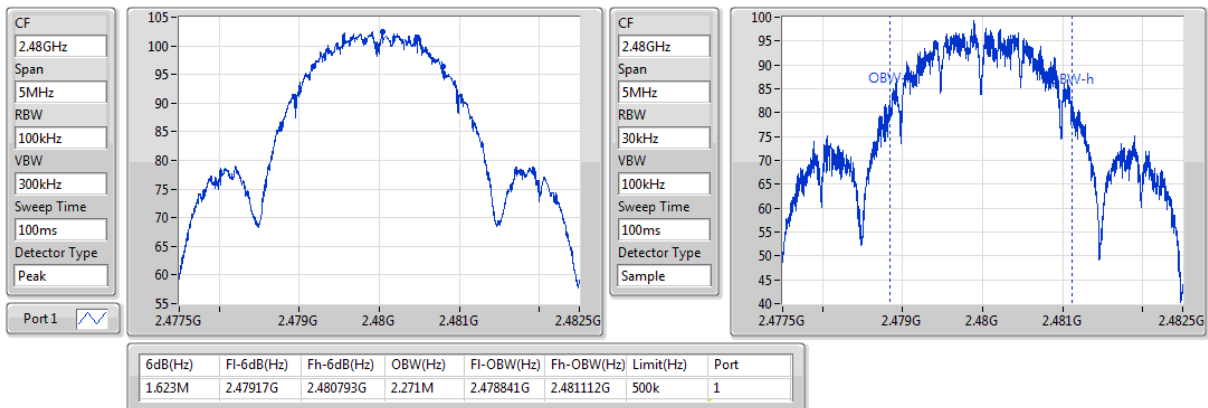

**Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
Thread _1TX	0.78	0.00120

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
Thread _1TX	-	-	-	-	-
2405MHz	Pass	4.69	0.41	0.41	30.00
2440MHz	Pass	4.69	0.78	0.78	30.00
2480MHz	Pass	4.69	-1.51	-1.51	30.00

DG = Directional Gain; Port X = Port X output power

**Note : Conducted average output power is for reference only**

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
Thread_1TX	-13.99

RBW=3kHz.

**Result**


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
Thread_1TX	-	-	-	-	-
2405MHz	Pass	4.69	-14.27	-14.27	8.00
2440MHz	Pass	4.69	-13.99	-13.99	8.00
2480MHz	Pass	4.69	-15.95	-15.95	8.00

**DG** = Directional Gain; RBW=3kHz;**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

### Thread\_1TX

2405MHz

CF  
2.405GHz  
Span  
3MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
33.4ms  
Detector Type  
Peak

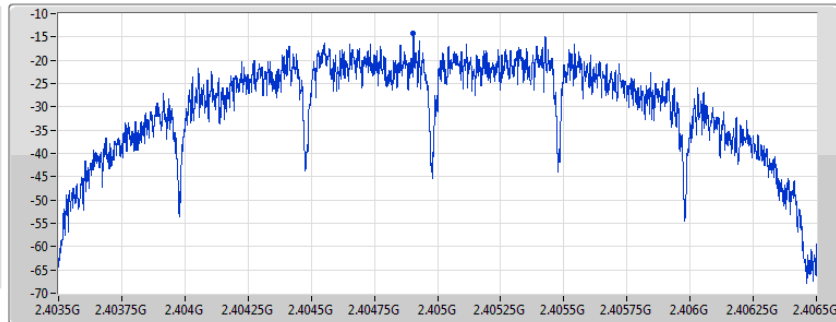

21/11/2018


Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-14.27	-14.27	-14.27

### Thread\_1TX

2440MHz

CF  
2.44GHz  
Span  
3MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
33.4ms  
Detector Type  
Peak

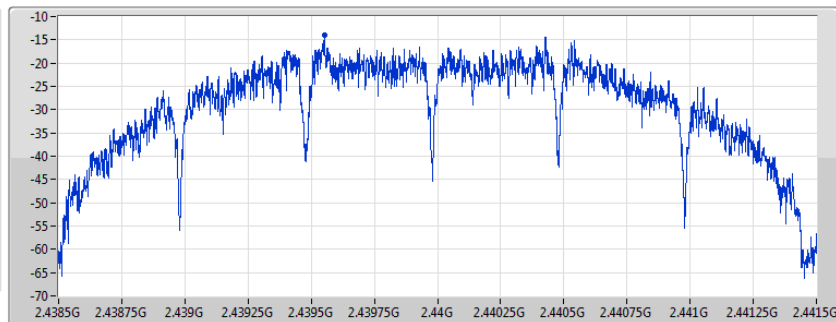

21/11/2018


Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-13.99	-13.99	-13.99

### Thread\_1TX

2480MHz

CF  
2.48GHz  
Span  
3MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
33.4ms  
Detector Type  
Peak

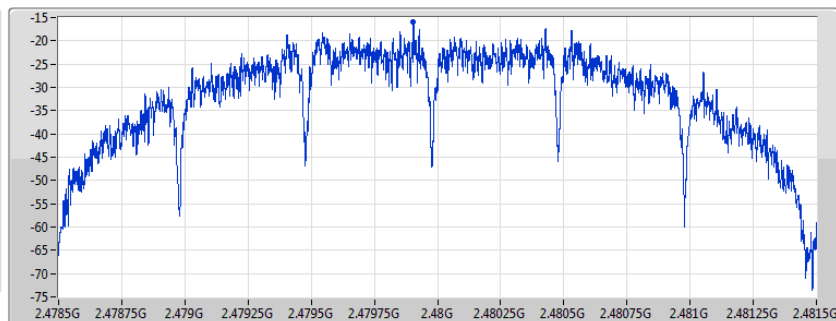

21/11/2018

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-15.95	-15.95	-15.95

### Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
Thread_1TX	Pass	2.43991G	-2.66	-32.66	375.44M	-57.56	2.39643G	-57.48	2.48391G	-43.01	14.9735G	-48.33	1

### Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
Thread_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2405MHz	Pass	2.43991G	-2.66	-32.66	1.80095G	-58.04	2.39989G	-46.67	2.48522G	-57.01	17.48364G	-49.16	1
2440MHz	Pass	2.43991G	-2.66	-32.66	1.96568G	-57.70	2.39996G	-57.48	2.48613G	-56.39	24.71859G	-49.48	1
2480MHz	Pass	2.43991G	-2.66	-32.66	375.44M	-57.56	2.39643G	-57.48	2.48391G	-43.01	14.9735G	-48.33	1


Thread\_1TX

2405MHz

CSE NdB

21/11/2018

Port1

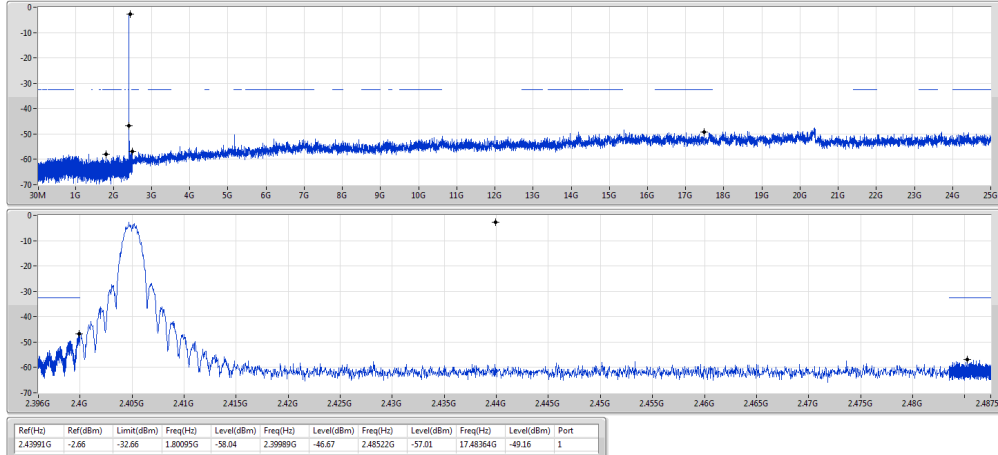


Thread\_1TX

2440MHz

CSE NdB

21/11/2018

Port1

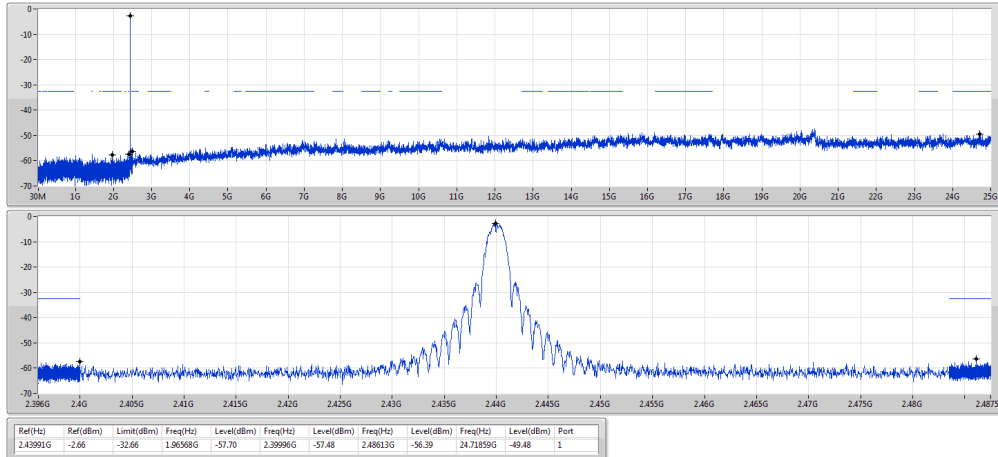


Thread\_1TX

2480MHz

CSE NdB

21/11/2018

Port1

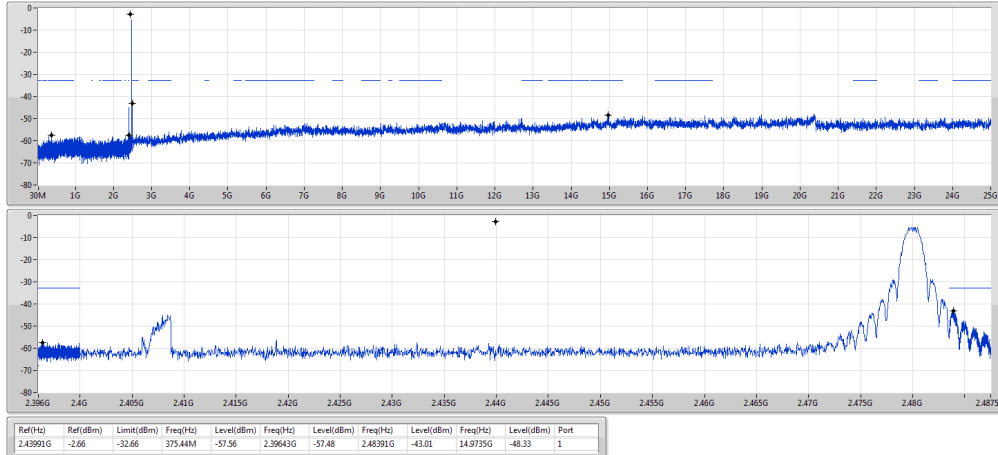




## Radiated Emission below 1GHz Result

Appendix F.1


Test Mode	Mode 3	Frequency Range	30 MHz to 1,000 MHz
-----------	--------	-----------------	---------------------

### Vertical 30 MHz to 1,000 MHz

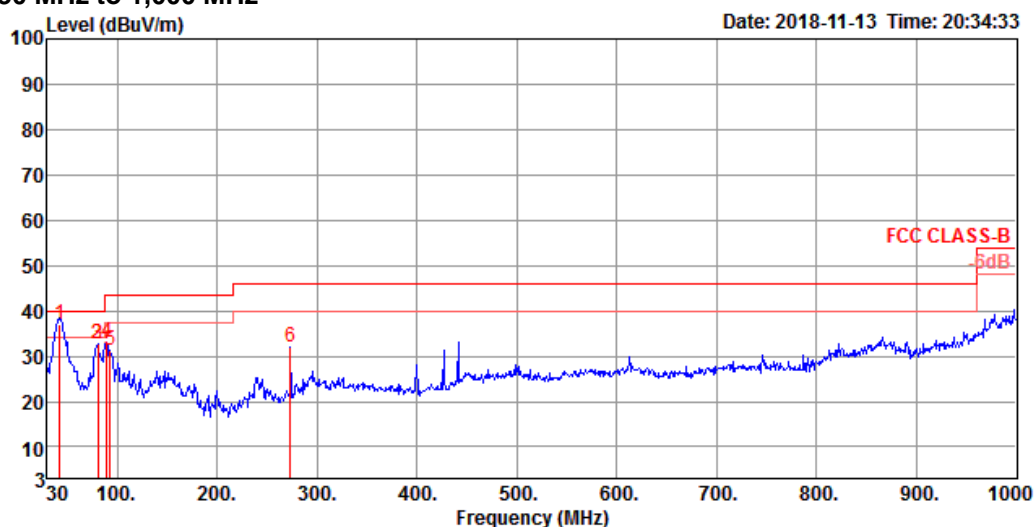

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	42.61	36.95	40.00	-3.05	49.44	0.87	18.32	31.68	100	162 QP		VERTICAL
2	80.44	32.54	40.00	-7.46	49.89	1.15	13.36	31.86	125	117 Peak		VERTICAL
3	80.44	32.54	40.00	-7.46	49.89	1.15	13.36	31.86	125	117 Peak		VERTICAL
4	89.17	33.02	43.50	-10.48	48.57	1.22	15.08	31.85	125	77 Peak		VERTICAL
5	93.05	31.43	43.50	-12.07	46.22	1.24	15.83	31.86	100	89 Peak		VERTICAL
6	273.47	32.12	46.00	-13.88	42.61	2.12	19.40	32.01	150	24 Peak		VERTICAL

## Horizontal 30 MHz to 1,000 MHz

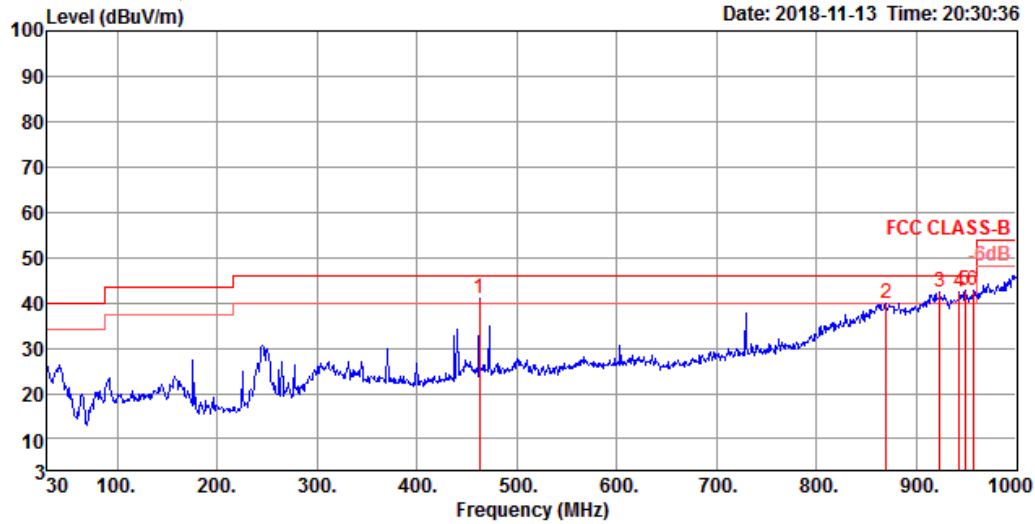

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	462.62	40.78	46.00	-5.22	46.95	2.82	23.21	32.20	100	146	Peak
2	870.02	39.77	46.00	-6.23	40.89	3.88	27.45	32.45	100	164	Peak
3	923.37	42.24	46.00	-3.76	42.74	4.10	27.84	32.44	100	222	Peak
4	942.77	42.20	46.00	-3.80	42.55	4.10	27.96	32.41	100	148	Peak
5	948.59	42.63	46.00	-3.37	42.92	4.11	28.00	32.40	100	158	Peak
6	956.35	42.64	46.00	-3.36	42.90	4.11	28.04	32.41	100	164	Peak




**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
Thread_Nss1_1TX	Pass	AV	2.4835G	53.99	54.00	-0.01	32.23	3	Horizontal	50	2.29	-

## Thread\_1TX

## 2405MHz\_TX

20/11/2018

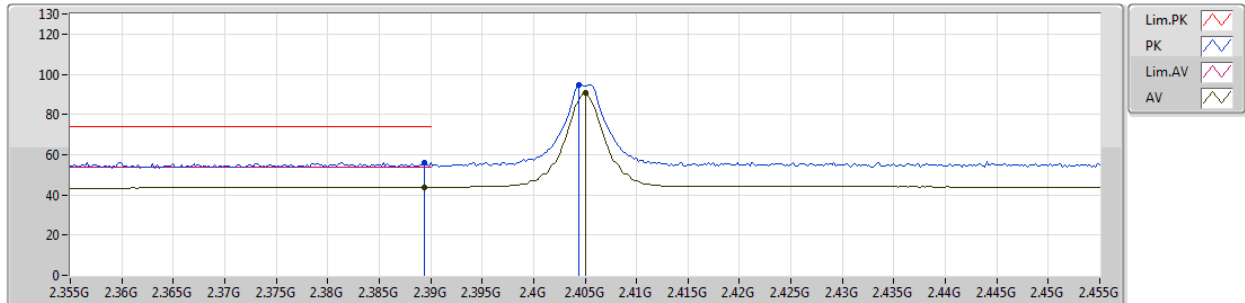


EUT Y\_1TX  
Setting 32  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3894G	56.00	74.00	-18.00	31.95	3	Vertical	8	2.99	-
AV	2.3894G	43.85	54.00	-10.15	31.95	3	Vertical	8	2.99	-
PK	2.4044G	94.97	Inf	-Inf	31.99	3	Vertical	8	2.99	-
AV	2.405G	90.64	Inf	-Inf	31.99	3	Vertical	8	2.99	-

## Thread\_1TX

## 2405MHz\_TX

20/11/2018

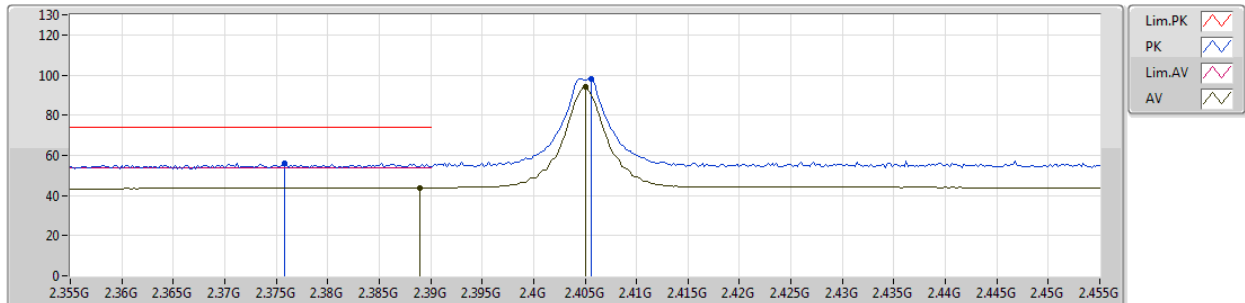


EUT\_V\_1TX  
Setting 32  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3758G	56.21	74.00	-17.79	31.91	3	Horizontal	53	2.61	-
AV	2.389G	43.87	54.00	-10.13	31.95	3	Horizontal	53	2.61	-
PK	2.4056G	98.32	Inf	-Inf	31.99	3	Horizontal	53	2.61	-
AV	2.405G	93.97	Inf	-Inf	31.99	3	Horizontal	53	2.61	-

### Thread\_1TX

### 2405MHz\_TX

20/11/2018

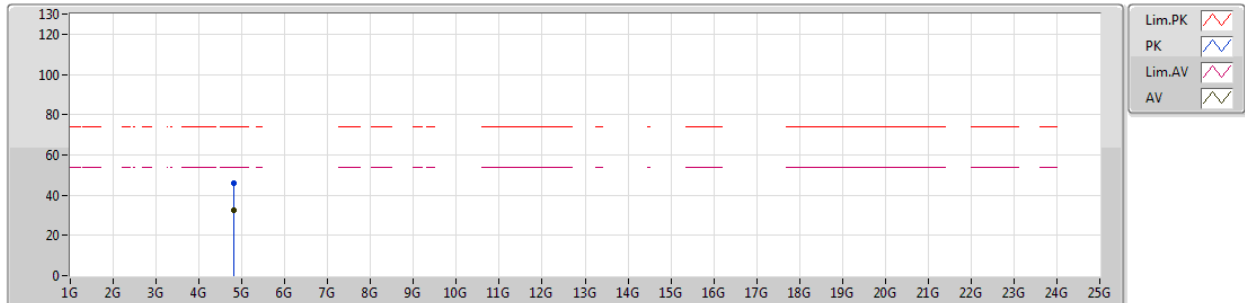


EUT Y\_1TX  
Setting 32  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.80514G	46.21	74.00	-27.79	4.92	3	Vertical	125	2.38	-						
AV	4.80502G	32.48	54.00	-21.52	4.92	3	Vertical	125	2.38	-						

### Thread\_1TX

### 2405MHz\_TX

20/11/2018

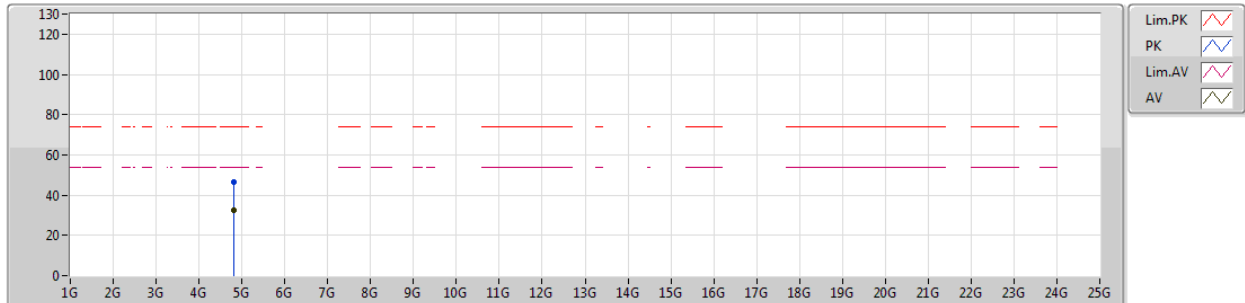


EUT Y\_1TX  
Setting 32  
03-R-5  
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments						
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)							
PK	4.80574G	46.59	74.00	-27.41	4.92	3	Horizontal	358	1.75	-						
AV	4.8052G	32.38	54.00	-21.62	4.92	3	Horizontal	358	1.75	-						

### Thread\_1TX

### 2440MHz\_TX

20/11/2018

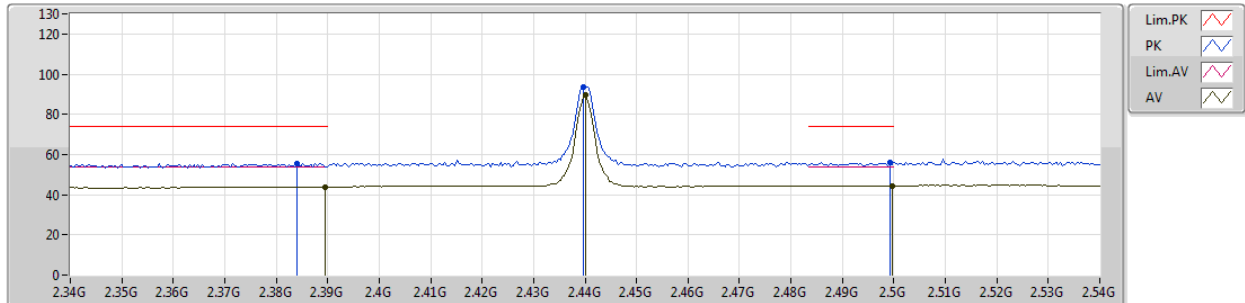


EUT Y\_1TX  
Setting 32  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.384G	55.64	74.00	-18.36	31.94	3	Vertical	8	2.89	-
AV	2.3896G	43.88	54.00	-10.12	31.95	3	Vertical	8	2.89	-
PK	2.4396G	93.69	Inf	-Inf	32.09	3	Vertical	8	2.89	-
AV	2.44G	89.42	Inf	-Inf	32.09	3	Vertical	8	2.89	-
PK	2.4992G	56.11	74.00	-17.89	32.27	3	Vertical	8	2.89	-
AV	2.4996G	44.48	54.00	-9.52	32.27	3	Vertical	8	2.89	-

### Thread\_1TX

### 2440MHz\_TX

20/11/2018

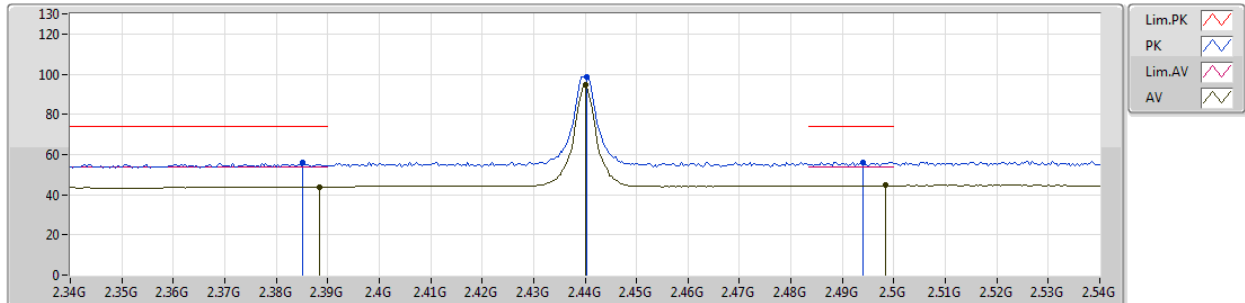


EUT\_V\_1TX  
Setting 32  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3852G	55.99	74.00	-18.01	31.94	3	Horizontal	45	2.58	-
AV	2.3884G	43.90	54.00	-10.10	31.95	3	Horizontal	45	2.58	-
PK	2.4404G	98.80	Inf	-Inf	32.09	3	Horizontal	45	2.58	-
AV	2.44G	94.53	Inf	-Inf	32.09	3	Horizontal	45	2.58	-
PK	2.494G	56.28	74.00	-17.72	32.26	3	Horizontal	45	2.58	-
AV	2.4984G	44.58	54.00	-9.42	32.27	3	Horizontal	45	2.58	-

### Thread\_1TX

### 2440MHz\_TX

20/11/2018

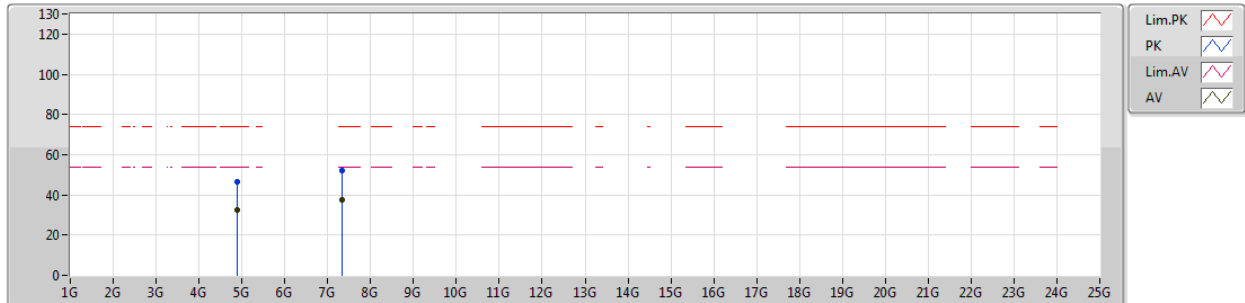

EUT Y\_1TX  
Setting 32  
03-R-5  
FSP


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	4.8813G	46.26	74.00	-27.74	5.12	3	Vertical	71	2.13	-
AV	4.884G	32.33	54.00	-21.67	5.13	3	Vertical	71	2.13	-
PK	7.32356G	52.17	74.00	-21.83	9.74	3	Vertical	50	2.66	-
AV	7.32452G	37.77	54.00	-16.23	9.74	3	Vertical	50	2.66	-



### Thread\_1TX

### 2440MHz\_TX

20/11/2018

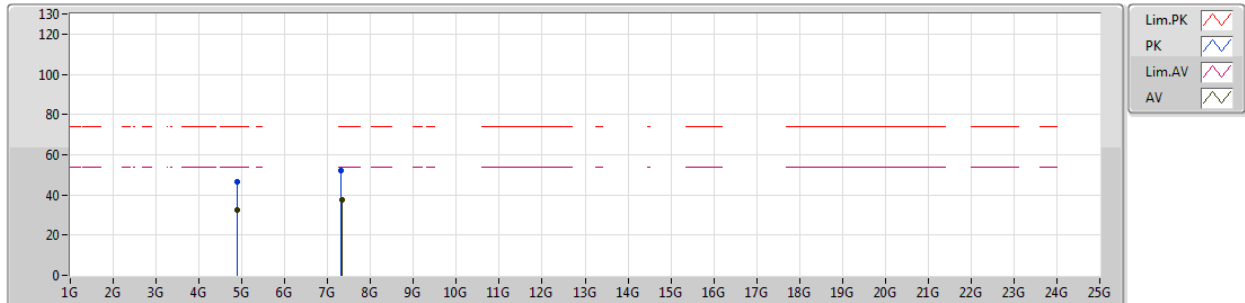


EUT\_Y\_1TX  
Setting 32  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.87738G	46.39	74.00	-27.61	5.11	3	Horizontal	133	1.65	-						
AV	4.88222G	32.37	54.00	-21.63	5.12	3	Horizontal	133	1.65	-						
PK	7.31768G	52.13	74.00	-21.87	9.74	3	Horizontal	155	1.04	-						
AV	7.325G	37.78	54.00	-16.22	9.74	3	Horizontal	155	1.04	-						

### Thread\_1TX

### 2480MHz\_TX

20/11/2018

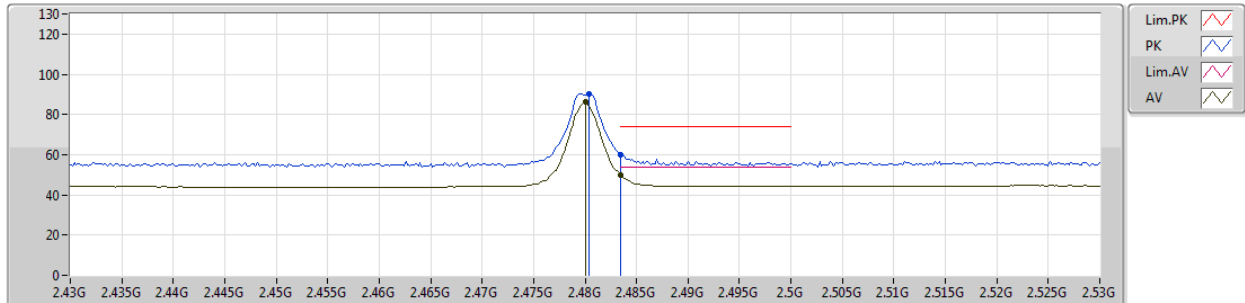


EUT\_Y\_1TX  
Setting 23  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4804G	90.45	Inf	-Inf	32.21	3	Vertical	355	2.87	-
AV	2.48G	86.06	Inf	-Inf	32.21	3	Vertical	355	2.87	-
PK	2.4835G	59.78	74.00	-14.22	32.23	3	Vertical	355	2.87	-
AV	2.4835G	49.97	54.00	-4.03	32.23	3	Vertical	355	2.87	-

### Thread\_1TX

### 2480MHz\_TX

20/11/2018

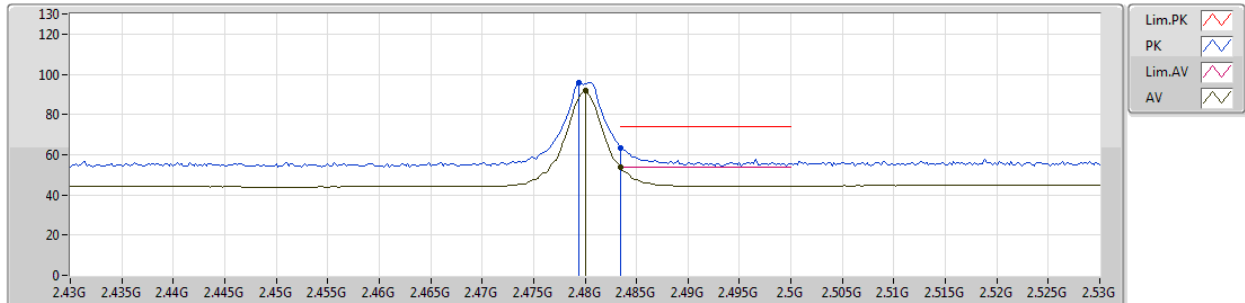


EUT Y\_1TX  
Setting 23  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4794G	95.92	Inf	-Inf	32.21	3	Horizontal	50	2.29	-
AV	2.48G	91.63	Inf	-Inf	32.21	3	Horizontal	50	2.29	-
PK	2.4835G	63.57	74.00	-10.43	32.23	3	Horizontal	50	2.29	-
AV	2.4835G	53.99	54.00	-0.01	32.23	3	Horizontal	50	2.29	-

### Thread\_1TX

### 2480MHz\_TX

20/11/2018

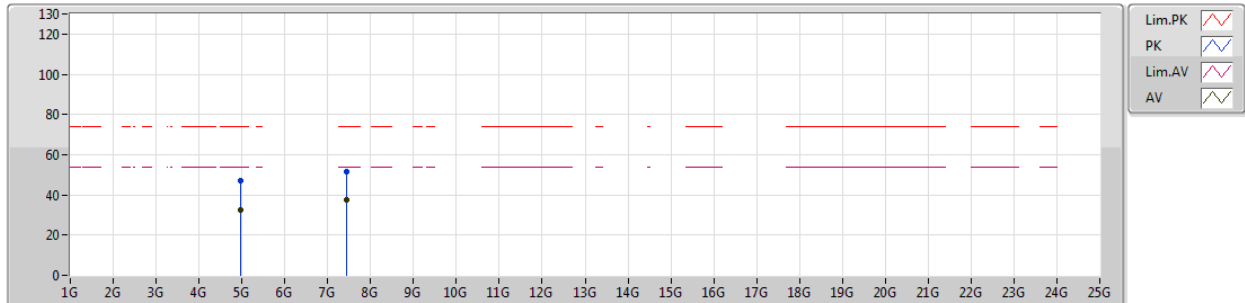


EUT Y\_1TX  
Setting 23  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.95878G	46.93	74.00	-27.07	5.34	3	Vertical	177	1.50	-						
AV	4.959G	32.59	54.00	-21.41	5.34	3	Vertical	177	1.50	-						
PK	7.44126G	51.72	74.00	-22.28	9.95	3	Vertical	162	1.03	-						
AV	7.43514G	37.45	54.00	-16.55	9.93	3	Vertical	162	1.03	-						

### Thread\_1TX

### 2480MHz\_TX

20/11/2018

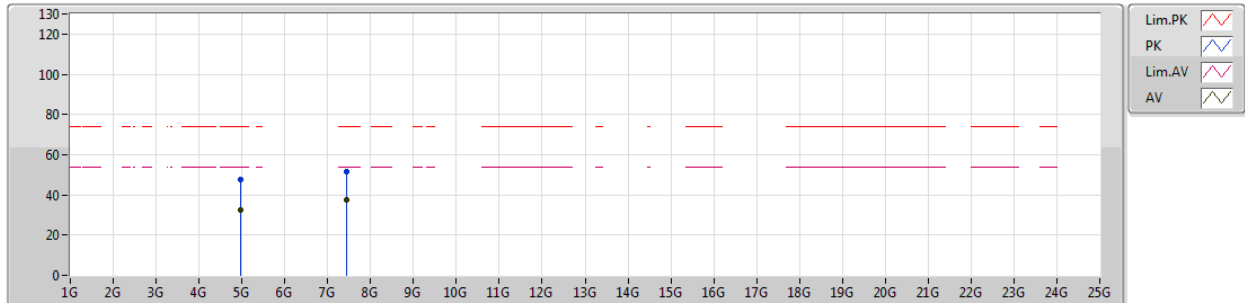

EUT Y\_1TX  
Setting 23  
03-R-5  
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.9631G	47.42	74.00	-26.58	5.36	3	Horizontal	260	1.50	-						
AV	4.9589G	32.54	54.00	-21.46	5.34	3	Horizontal	260	1.50	-						
PK	7.4436G	51.78	74.00	-22.22	9.96	3	Horizontal	76	1.50	-						
AV	7.43508G	37.42	54.00	-16.58	9.93	3	Horizontal	76	1.50	-						