



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

|                        |   |
|------------------------|---|
| Applicant's company    | Enterasys Networks  |
| Applicant Address      | 50 Minuteman Road Andover MA 01810  |
| FCC ID                 | QXO-OAP36C  |
| Manufacturer's company | Accton Technology Corporation   |
| Manufacturer Address   | No. 1 Creation Rd., III, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C. |

|                   |                                       |
|-------------------|---------------------------------------|
| Product Name      | HiPath Wireless Outdoor Access Point  |
| Brand Name        | Enterasys                             |
| Model Name        | WS-AP3660                             |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart E § 15.407 |
| Test Freq. Range  | 5250 ~ 5350MHz                        |
| Received Date     | Jul. 20, 2010                         |
| Final Test Date   | Jul. 13, 2011                         |
| Submission Type   | Original Equipment                    |
| Operating Mode    | Master                                |



### Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a (5250 ~ 5350MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009 and 47 CFR FCC Part 15 Subpart E.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

|  |                 |
|--|-----------------|
| <b>1. CERTIFICATE OF COMPLIANCE .....</b>                | <b>1</b>        |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>               | <b>2</b>        |
| <b>3. GENERAL INFORMATION .....</b>                      | <b>3</b>        |
| 3.1. Product Details.....                                | 3               |
| 3.2. Accessories.....                                    | 5               |
| 3.3. Table for Filed Antenna.....                        | 6               |
| 3.4. Table for Carrier Frequencies .....                 | 7               |
| 3.5. Table for Test Modes.....                           | 8               |
| 3.6. Table for Testing Locations.....                    | 10              |
| 3.7. Table for Supporting Units .....                    | 10              |
| 3.8. Table for Parameters of Test Software Setting ..... | 11              |
| 3.9. Test Configurations .....                           | 13              |
| <b>4. TEST RESULT .....</b>                              | <b>18</b>       |
| 4.1. AC Power Line Conducted Emissions Measurement.....  | 18              |
| 4.2. 26dB Bandwidth Measurement.....                     | 22              |
| 4.3. Maximum Conducted Output Power Measurement.....     | 43              |
| 4.4. Power Spectral Density Measurement .....            | 67              |
| 4.5. Peak Excursion Measurement.....                     | 91              |
| 4.6. Radiated Emissions Measurement .....                | 104             |
| 4.7. Band Edge Emissions Measurement .....               | 142             |
| 4.8. Frequency Stability Measurement .....               | 155             |
| 4.9. Antenna Requirements .....                          | 157             |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>             | <b>158</b>      |
| <b>6. TEST LOCATION.....</b>                             | <b>160</b>      |
| <b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>         | <b>161</b>      |
| <b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>               | <b>A1 ~ A36</b> |
| <b>APPENDIX B. TEST PHOTOS.....</b>                      | <b>B1 ~ B9</b>  |
| <b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>     | <b>C1 ~ C4</b>  |



### History of This Test Report

- No additional attachment.
- Additional attachment were issued as following record:

| REPORT NO.    | VERSION | DESCRIPTION             | ISSUED DATE   |
|---------------|---------|-------------------------|---------------|
| FR072010-02AA | Rev. 01 | Initial issue of report | Jul. 19, 2011 |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |



## 1. CERTIFICATE OF COMPLIANCE

Product Name : HiPath Wireless Outdoor Access Point  
Brand Name : Enterasys  
Model Name : WS-AP3660  
Applicant : Enterasys Networks  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 20, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

*Jordan Hsiao 2011.7.19*

Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart E |              |                                   |          |             |
|--|--------------|-----------------------------------|----------|-------------|
| Part   | Rule Section | Description of Test               | Result   | Under Limit |
| 4.1  | 15.207       | AC Power Line Conducted Emissions | Complies | 5.84 dB     |
| 4.2  | 15.407(a)    | 26dB Spectrum Bandwidth           | Complies | -           |
| 4.3  | 15.407(a)    | Maximum Conducted Output Power    | Complies | 0.03 dB     |
| 4.4  | 15.407(a)    | Power Spectral Density            | Complies | 1.12 dB     |
| 4.5  | 15.407(a)    | Peak Excursion                    | Complies | 6.55 dB     |
| 4.6  | 15.407(b)    | Radiated Emissions Below 1GHz     | Complies | 3.09 dB     |
| 4.6  | 15.407(b)    | Radiated Emissions Above 1GHz     | Complies | 6.17 dB     |
| 4.7  | 15.407(b)    | Band Edge Emissions               | Complies | 0.25 dB     |
| 4.8  | 15.407(g)    | Frequency Stability               | Complies | -           |
| 4.9  | 15.203       | Antenna Requirements              | Complies | -           |

| Test Items                                    | Uncertainty           | Remark                   |
|---|-----------------------|--------------------------|
| AC Power Line Conducted Emissions             | ±2.3dB                | Confidence levels of 95% |
| Maximum Conducted Output Power                | ±0.5dB                | Confidence levels of 95% |
| Power Spectral Density                        | ±0.5dB                | Confidence levels of 95% |
| Peak Excursion                                | ±0.5dB                | Confidence levels of 95% |
| 26dB Spectrum Bandwidth / Frequency Stability | ±8.5×10 <sup>-8</sup> | Confidence levels of 95% |
| Radiated Emissions (9kHz~30MHz)               | ±0.8dB                | Confidence levels of 95% |
| Radiated Emissions (30MHz~1000MHz)            | ±1.9dB                | Confidence levels of 95% |
| Radiated / Band Edge Emissions (1GHz~18GHz)   | ±1.9dB                | Confidence levels of 95% |
| Radiated Emissions (18GHz~40GHz)              | ±1.9dB                | Confidence levels of 95% |
| Temperature                                   | ±0.7°C                | Confidence levels of 95% |
| Humidity                                      | ±3.2%                 | Confidence levels of 95% |
| DC / AC Power Source                          | ±1.4%                 | Confidence levels of 95% |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

| Items                    | Description   |
|--------------------------|---|
| Product Type             | For Ant. 1: WLAN (2TX, 2RX)<br>For Ant. 4, Ant. 7, Ant. 8: WLAN (3TX, 3RX)  |
| Radio Type               | Intentional Transceiver   |
| Power Type               | From Power Adapter & POE  |
| Modulation               | see the below table for IEEE 802.11n  |
| Data Modulation          | OFDM (BPSK / QPSK / 16QAM / 64QAM)  |
| Data Rate (Mbps)         | see the below table for IEEE 802.11n  |
| Frequency Range          | 5250 ~ 5350MHz  |
| Channel Number           | 4 for 20MHz bandwidth ; 2 for 40MHz bandwidth   |
| Channel Band Width (99%) | <p>&lt;For Mode 1 (Ant. 1)&gt;:<br/>MSC8 (20MHz): 18.08 MHz ; MSC8 (40MHz): 36.48 MHz</p> <p>&lt;For Mode 2 (Ant. 4)&gt;:<br/>MSC8 (20MHz): 18.24 MHz ; MSC8 (40MHz): 36.80 MHz</p> <p>&lt;For Mode 3 (Ant. 7)&gt;:<br/>MSC8 (20MHz): 18.24 MHz ; MSC8 (40MHz): 36.80 MHz</p> <p>&lt;For Mode 4 (Ant. 8)&gt;:<br/>MSC8 (20MHz): 18.24 MHz ; MSC8 (40MHz): 36.80 MHz</p>                                 |
| Conducted Output Power   | <p>&lt;For Mode 1 (Ant. 1)&gt;:<br/>Band 2: MSC8 (20MHz): 14.92 dBm ; MSC8 (40MHz): 14.18 dBm</p> <p>&lt;For Mode 2 (Ant. 4)&gt;:<br/>Band 2: MSC8 (20MHz): 23.66 dBm ; MSC8 (40MHz): 23.57 dBm</p> <p>&lt;For Mode 3 (Ant. 7)&gt;:<br/>Band 2: MSC8 (20MHz): 23.97 dBm ; MSC8 (40MHz): 23.57 dBm</p> <p>&lt;For Mode 4 (Ant. 8)&gt;:<br/>Band 2: MSC8 (20MHz): 23.66 dBm ; MSC8 (40MHz): 23.57 dBm</p> |

**IEEE 802.11a**

| Items   | Description  |
|---|--|
| Product Type  | For Ant. 1: WLAN (2TX, 2RX)<br>For Ant. 4, Ant. 7, Ant. 8: WLAN (3TX, 3RX)   |
| Radio Type  | Intentional Transceiver  |
| Power Type  | From Power Adapter & POE   |
| Modulation  | OFDM for IEEE 802.11a  |
| Data Modulation   | OFDM (BPSK / QPSK / 16QAM / 64QAM)   |
| Data Rate (Mbps)  | OFDM (6/9/12/18/24/36/48/54)   |
| Frequency Range   | 5250 ~ 5350MHz   |
| Channel Number  | 4  |
| Channel Band Width (99%)  | <For Mode 1 (Ant. 1)>: 17.28 MHz<br><For Mode 2 (Ant. 4)>: 17.12 MHz<br><For Mode 3 (Ant. 7)>: 17.12 MHz<br><For Mode 4 (Ant. 8)>: 17.12 MHz |
| Conducted Output Power  | <For Mode 1 (Ant. 1)>: 11.80 dBm<br><For Mode 2 (Ant. 4)>: 19.11 dBm<br><For Mode 3 (Ant. 7)>: 21.18 dBm<br><For Mode 4 (Ant. 8)>: 21.18 dBm |
| Carrier Frequencies   | Please refer to section 3.4  |
| Antenna   | Please refer to section 3.3  |
| Note: Due to the system cannot execute RF program, so only use module to test in this report. |  |

**<For Ant. 1>: Antenna & Band width**

| Antenna      | Single (TX) |        | Two (TX) |        |
|--------------|-------------|--------|----------|--------|
|              | 20 MHz      | 40 MHz | 20 MHz   | 40 MHz |
| IEEE 802.11a | X           | X      | V        | X      |
| IEEE 802.11n | X           | X      | V        | V      |

**<For Ant. 4, Ant. 7, Ant. 8>: Antenna & Band width**

| Antenna      | Single (TX) |        | Three (TX) |        |
|--------------|-------------|--------|------------|--------|
|              | 20 MHz      | 40 MHz | 20 MHz     | 40 MHz |
| IEEE 802.11a | X           | X      | V          | X      |
| IEEE 802.11n | X           | X      | V          | V      |

## IEEE 802.11n spec

| MCS Index | Nss | Modulation | R   | NBPS | NCBPS |       | NDBPS |       | Datarate(Mbps) |       |         |       |
|-----------|-----|------------|-----|------|-------|-------|-------|-------|----------------|-------|---------|-------|
|           |     |            |     |      | 20MHz | 40MHz | 20MHz | 40MHz | 800nsGI        |       | 400nsGI |       |
|           |     |            |     |      |       |       |       |       | 20MHz          | 40MHz | 20MHz   | 40MHz |
| 0         | 1   | BPSK       | 1/2 | 1    | 52    | 108   | 26    | 54    | 6.5            | 13.5  | 7.200   | 15    |
| 1         | 1   | QPSK       | 1/2 | 2    | 104   | 216   | 52    | 108   | 13.0           | 27.0  | 14.400  | 30    |
| 2         | 1   | QPSK       | 3/4 | 2    | 104   | 216   | 78    | 162   | 19.5           | 40.5  | 21.700  | 45    |
| 3         | 1   | 16-QAM     | 1/2 | 4    | 208   | 432   | 104   | 216   | 26.0           | 54.0  | 28.900  | 60    |
| 4         | 1   | 16-QAM     | 3/4 | 4    | 208   | 432   | 156   | 324   | 39.0           | 81.0  | 43.300  | 90    |
| 5         | 1   | 64-QAM     | 2/3 | 6    | 312   | 648   | 208   | 432   | 52.0           | 108.0 | 57.800  | 120   |
| 6         | 1   | 64-QAM     | 3/4 | 6    | 312   | 648   | 234   | 486   | 58.5           | 121.5 | 65.000  | 135   |
| 7         | 1   | 64-QAM     | 5/6 | 6    | 312   | 648   | 260   | 540   | 65.0           | 135.0 | 72.200  | 150   |
| 8         | 2   | BPSK       | 1/2 | 1    | 104   | 216   | 52    | 108   | 13.0           | 27.0  | 14.444  | 30    |
| 9         | 2   | QPSK       | 1/2 | 2    | 208   | 432   | 104   | 216   | 26.0           | 54.0  | 28.889  | 60    |
| 10        | 2   | QPSK       | 3/4 | 2    | 208   | 432   | 156   | 324   | 39.0           | 81.0  | 43.333  | 90    |
| 11        | 2   | 16-QAM     | 1/2 | 4    | 416   | 864   | 208   | 432   | 52.0           | 108.0 | 57.778  | 120   |
| 12        | 2   | 16-QAM     | 3/4 | 4    | 416   | 864   | 312   | 648   | 78.0           | 162.0 | 86.667  | 180   |
| 13        | 2   | 64-QAM     | 2/3 | 6    | 624   | 1296  | 416   | 864   | 104.0          | 216.0 | 115.556 | 240   |
| 14        | 2   | 64-QAM     | 3/4 | 6    | 624   | 1296  | 468   | 972   | 117.0          | 243.0 | 130.000 | 270   |
| 15        | 2   | 64-QAM     | 5/6 | 6    | 624   | 1296  | 520   | 1080  | 130.0          | 270.0 | 144.444 | 300   |

| Symbol | Explanation                             |
|--------|---|
| NSS    | Number of spatial streams               |
| R      | Code rate                               |
| NBPS   | Number of coded bits per single carrier |
| NCBPS  | Number of coded bits per symbol         |
| NDBPS  | Number of data bits per symbol          |
| GI     | guard interval                          |

## 3.2. Accessories

| Power   | Brand | Model        | Rating   |
|---------|-------|--------------|--|
| Adapter | UMEC  | UP0601C-1273 | Input: 100-240VAC, 50-60Hz, 1A<br>Output: 12VDC, 3.33A |



### 3.3. Table for Filed Antenna

| Ant. | Brand | Model Name      | Antenna Type   | Connector      | Antenna gain |           | Cable Loss  |           | Test Antenna gain |           |
|------|-------|-----------------|----------------|----------------|--------------|-----------|-------------|-----------|-------------------|-----------|
|      |       |                 |                |                | 2.4GHz Band  | 5GHz Band | 2.4GHz Band | 5GHz Band | 2.4GHz Band       | 5GHz Band |
| 1    | MTI   | MT-484026/NVH/B | Sector Antenna | Reverse N-Type | -            | 16        | -           | 1         | -                 | 15        |
| 2    | MTI   | MT-485025/NVH   | Panel Antenna  | Reverse N-Type | -            | 23        | -           | 1         | -                 | 22        |
| 3    | PCTEL | WISP24018PTNF   | Panel Antenna  | Reverse N-Type | 18           | -         | 0.5         | -         | 17.5              | -         |
| 4    | MARS  | MA-WE2458-3H2   | Sector Antenna | Reverse N-Type | 5            | 5         | 0.5         | 1         | 4.5               | 4         |
| 5    | PCTEL | MFB24010        | Omni Antenna   | Reverse N-Type | 10           | -         | 0.5         | -         | 9.5               | -         |
| 6    | PCTEL | MFB58010        | Omni Antenna   | Reverse N-Type | -            | 10        | -           | 1         | -                 | 9         |
| 7    | Laird | S24493BPX       | Omni Antenna   | Reverse N-Type | 5            | 5         | 0.5         | 1         | 4.5               | 4         |
| 8    | MARS  | MA-DBO2458-6N   | Omni Antenna   | Reverse N-Type | 5            | 7         | 0.5         | 1.0       | 4.5               | 6         |

**Note: <For Ant. 1, Ant. 2 (2TX/2RX)>:**

The EUT has three antenna connectors that can be used for transmitting and receiving simultaneously as 2TX and 2RX.

Connector J2 and J4 can both receive/transmit simultaneously.

Ant. 1: 5GHz Antenna (Band 2, Band 4)

Ant. 2: 5GHz Antenna (Band 4), Ant. 2 supports point-to-point function.

**<For Ant. 3, Ant. 4, Ant. 5, Ant. 6, Ant. 7, Ant. 8 (3TX/3RX)>:**

The EUT has three antenna connectors that can be used for transmitting and receiving simultaneously as 3TX and 3RX.

Connector J2, J3 and J4 can both receive/transmit simultaneously.

Ant. 3: 2.4GHz Antenna, Ant. 3 supports point-to-point function.


Ant. 4: 2.4GHz / 5GHz Antenna (Band 2, Band 4)

Ant. 5: 2.4GHz Antenna

Ant. 6: 5GHz Antenna (Band 4)

Ant. 7: 2.4GHz / 5GHz Antenna (Band 2, Band 4)

Ant. 8: 2.4GHz / 5GHz Antenna (Band 2, Band 4)

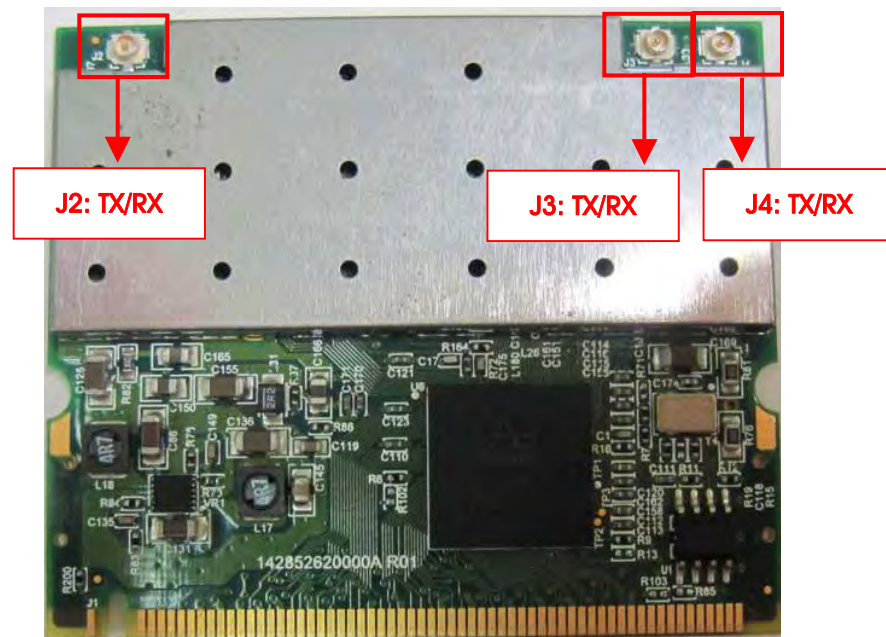

### 3.4. Table for Carrier Frequencies

For IEEE 802.11a, use Channel 52, 56, 60, 64.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 52, 56, 60, 64.

For both 40MHz bandwidth systems, use Channel 54, 62.

| Frequency Band          | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5250~5350 MHz<br>Band 2 | 52          | 5260 MHz  | 60          | 5300 MHz  |
|                         | 54          | 5270 MHz  | 62          | 5310 MHz  |
|                         | 56          | 5280 MHz  | 64          | 5320 MHz  |

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

<For Ant. 1>:

| Test Items                        | Mode          |        | Data Rate | Channel  | Connector   |
|-----------------------------------|---------------|--------|-----------|----------|-------------|
| AC Power Line Conducted Emissions | TX Mode       |        | 6Mbps     | -        | -           |
| Max. Conducted Output Power       | MSC8/20MHz    | Band 2 | 13Mbps    | 52/60/64 | J2/J4/J2+J4 |
| Power Spectral Density            | MSC8/40MHz    | Band 2 | 27Mbps    | 54/62    | J2/J4/J2+J4 |
|                                   | 11a/BPSK      | Band 2 | 6Mbps     | 52/60/64 | J2/J4/J2+J4 |
| 26dB Spectrum Bandwidth           | MSC8/20MHz    | Band 2 | 13Mbps    | 52/60/64 | J2+J4       |
| 99% Occupied Bandwidth            | MSC8/40MHz    | Band 2 | 27Mbps    | 54/62    | J2+J4       |
| Measurement<br>Peak Excursion     | 11a/BPSK      | Band 2 | 6Mbps     | 52/60/64 | J2+J4       |
| Radiated Emission Below 1GHz      | TX Mode       |        | 6Mbps     | -        | -           |
| Radiated Emission Above 1GHz      | MSC8/20MHz    | Band 2 | 13Mbps    | 52/60/64 | J2+J4       |
|                                   | MSC8/40MHz    | Band 2 | 27Mbps    | 54/62    | J2+J4       |
|                                   | 11a/BPSK      | Band 2 | 6Mbps     | 52/60/64 | J2+J4       |
| Band Edge Emission                | MSC8/20MHz    | Band 2 | 13Mbps    | 52/60/64 | J2+J4       |
|                                   | MSC8/40MHz    | Band 2 | 27Mbps    | 54/62    | J2+J4       |
|                                   | 11a/BPSK      | Band 2 | 6Mbps     | 52/60/64 | J2+J4       |
| Frequency Stability               | Un-modulation |        | -         | 60       | N/A         |

<For Ant. 4, Ant. 7, Ant. 8>:

| Test Items   | Mode          |        | Data Rate | Channel  | Connector             |
|--|---------------|--------|-----------|----------|-----------------------|
| AC Power Line Conducted Emissions  | TX Mode       |        | 6Mbps     | -        | -                     |
| Max. Conducted Output Power<br>Power Spectral Density                              | MSC8/20MHz    | Band 2 | 13Mbps    | 52/60/64 | J2/J3/J4/<br>J2+J3+J4 |
|  | MSC8/40MHz    | Band 2 | 27Mbps    | 54/62    | J2/J3/J4/<br>J2+J3+J4 |
|  | 11a/BPSK      | Band 2 | 6Mbps     | 52/60/64 | J2/J3/J4/<br>J2+J3+J4 |
| 26dB Spectrum Bandwidth<br>99% Occupied Bandwidth<br>Measurement<br>Peak Excursion | MSC8/20MHz    | Band 2 | 13Mbps    | 52/60/64 | J2+J3+J4              |
|  | MSC8/40MHz    | Band 2 | 27Mbps    | 54/62    | J2+J3+J4              |
|  | 11a/BPSK      | Band 2 | 6Mbps     | 52/60/64 | J2+J3+J4              |
| Radiated Emission Below 1GHz   | TX Mode       |        | 6Mbps     | -        | -                     |
| Radiated Emission Above 1GHz   | MSC8/20MHz    | Band 2 | 13Mbps    | 52/60/64 | J2+J3+J4              |
|  | MSC8/40MHz    | Band 2 | 27Mbps    | 54/62    | J2+J3+J4              |
|  | 11a/BPSK      | Band 2 | 6Mbps     | 52/60/64 | J2+J3+J4              |
| Band Edge Emission   | MSC8/20MHz    | Band 2 | 13Mbps    | 52/60/64 | J2+J3+J4              |
|  | MSC8/40MHz    | Band 2 | 27Mbps    | 54/62    | J2+J3+J4              |
|  | 11a/BPSK      | Band 2 | 6Mbps     | 52/60/64 | J2+J3+J4              |
| Frequency Stability  | Un-modulation |        | -         | 60       | N/A                   |

Note: All the test modes were listed as below:

Mode 1. EUT + Ant. 1 (5GHz Antenna)

Mode 2. EUT + Ant. 4 (2.4GHz / 5GHz Antenna)

Mode 3. EUT + Ant. 7 (2.4GHz / 5GHz Antenna)

Mode 4. EUT + Ant. 8 (2.4GHz / 5GHz Antenna)

<For Conducted Emission test>:

After evaluating, Mode 1 were selected as worse case and recorded the test data in the report.

<For Radiated Emissions Test Below 1GHz>:

After evaluating, Mode 1 were selected as worse case and recorded the test data in the report.

<For Radiated Emissions Test Above 1GHz>:

All the test modes were tested and recorded in the report.

### 3.6. Table for Testing Locations

| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
|---------------|---------------|----------|--------------|-------------|--------------|
| CO04-HY       | Conduction    | Hsin Chu | 879474       | IC 4086     | -            |
| 03CH03-HY     | SAC           | Hsin Chu | 879474       | IC 4086     | -            |
| TH01-HY       | OVEN Room     | Hsin Chu | -            | -           | -            |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

| Support Unit | Brand  | Model      | FCC ID    |
|--------------|--------|------------|-----------|
| Notebook     | DELL   | D400       | E2K24GBRL |
| Wireless AP  | Planex | GW-AP54SGX | N/A       |

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Mode 1 (Ant. 1)>:

#### Power Parameters of IEEE 802.11n MSC8 20MHz

| Test Software Version   | 0.9 BUILD #21 ART 11_n |          |          |
|-------------------------|------------------------|----------|----------|
| Frequency               | 5260 MHz               | 5300 MHz | 5320 MHz |
| IEEE 802.11n MSC8 20MHz | 9.00                   | 9.00     | 9.00     |

#### Power Parameters of IEEE 802.11n MSC8 40MHz

| Test Software Version   | 0.9 BUILD #21 ART 11_n |          |
|-------------------------|------------------------|----------|
| Frequency               | 5270 MHz               | 5310 MHz |
| IEEE 802.11n MSC8 40MHz | 9.00                   | 5.00     |

#### Power Parameters of IEEE 802.11a

| Test Software Version | 0.9 BUILD #21 ART 11_n |          |          |
|-----------------------|------------------------|----------|----------|
| Frequency             | 5260 MHz               | 5300 MHz | 5320 MHz |
| IEEE 802.11a          | 7.50                   | 7.00     | 7.00     |

<For Mode 2 (Ant. 4)>:

#### Power Parameters of IEEE 802.11n MSC8 20MHz

| Test Software Version   | 0.9 BUILD #21 ART 11_n |          |          |
|-------------------------|------------------------|----------|----------|
| Frequency               | 5260 MHz               | 5300 MHz | 5320 MHz |
| IEEE 802.11n MSC8 20MHz | 16.00                  | 16.00    | 15.50    |

#### Power Parameters of IEEE 802.11n MSC8 40MHz

| Test Software Version   | 0.9 BUILD #21 ART 11_n |          |
|-------------------------|------------------------|----------|
| Frequency               | 5270 MHz               | 5310 MHz |
| IEEE 802.11n MSC8 40MHz | 16.50                  | 12.50    |

#### Power Parameters of IEEE 802.11a

| Test Software Version | 0.9 BUILD #21 ART 11_n |          |          |
|-----------------------|------------------------|----------|----------|
| Frequency             | 5260 MHz               | 5300 MHz | 5320 MHz |
| IEEE 802.11a          | 13.50                  | 13.50    | 13.50    |

<For Mode 3 (Ant. 7)>:

**Power Parameters of IEEE 802.11n MSC8 20MHz**

| Test Software Version   | 0.9 BUILD #21 ART 11_n |          |          |
|-------------------------|------------------------|----------|----------|
| Frequency               | 5260 MHz               | 5300 MHz | 5320 MHz |
| IEEE 802.11n MSC8 20MHz | 16                     | 16       | 17       |

**Power Parameters of IEEE 802.11n MSC8 40MHz**

| Test Software Version   | 0.9 BUILD #21 ART 11_n |          |
|-------------------------|------------------------|----------|
| Frequency               | 5270 MHz               | 5310 MHz |
| IEEE 802.11n MSC8 40MHz | 16.5                   | 13.5     |

**Power Parameters of IEEE 802.11a**

| Test Software Version | 0.9 BUILD #21 ART 11_n |          |          |
|-----------------------|------------------------|----------|----------|
| Frequency             | 5260 MHz               | 5300 MHz | 5320 MHz |
| IEEE 802.11a          | 15.50                  | 15.00    | 14.50    |

<For Mode 4 (Ant. 8)>:

**Power Parameters of IEEE 802.11n MSC8 20MHz**

| Test Software Version   | 0.9 BUILD #21 ART 11_n |          |          |
|-------------------------|------------------------|----------|----------|
| Frequency               | 5260 MHz               | 5300 MHz | 5320 MHz |
| IEEE 802.11n MSC8 20MHz | 16                     | 16       | 14       |

**Power Parameters of IEEE 802.11n MSC8 40MHz**

| Test Software Version   | 0.9 BUILD #21 ART 11_n |          |
|-------------------------|------------------------|----------|
| Frequency               | 5270 MHz               | 5310 MHz |
| IEEE 802.11n MSC8 40MHz | 16.5                   | 10.5     |

**Power Parameters of IEEE 802.11a**


| Test Software Version | 0.9 BUILD #21 ART 11_n |          |          |
|-----------------------|------------------------|----------|----------|
| Frequency             | 5260 MHz               | 5300 MHz | 5320 MHz |
| IEEE 802.11a          | 15.50                  | 15.00    | 14.50    |

During the test, "0.9 BUILD #21 ART 11\_n" under WIN XP was executed to control the EUT continuously transmit RF signal.

### 3.9. Test Configurations

#### 3.9.1. AC Power Line Conducted Emissions Test Configuration

<For Mode 1 (Ant. 1)>:

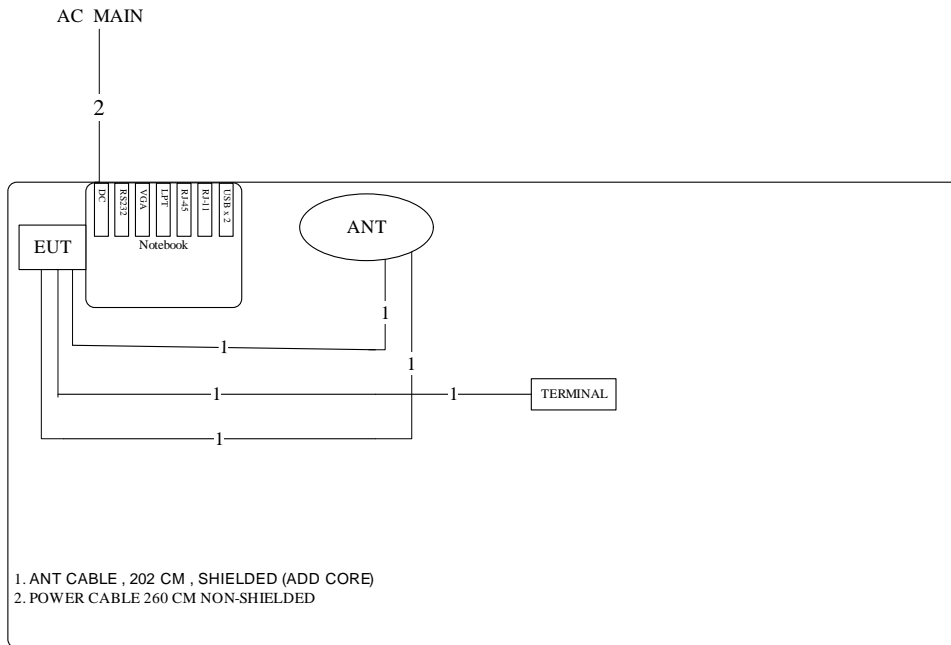

AP




### 3.9.2. Radiation Emissions Test Configuration

<For Mode 1 (Ant. 1)>:

< For WLAN Function >


Test Configuration: above 1GHz

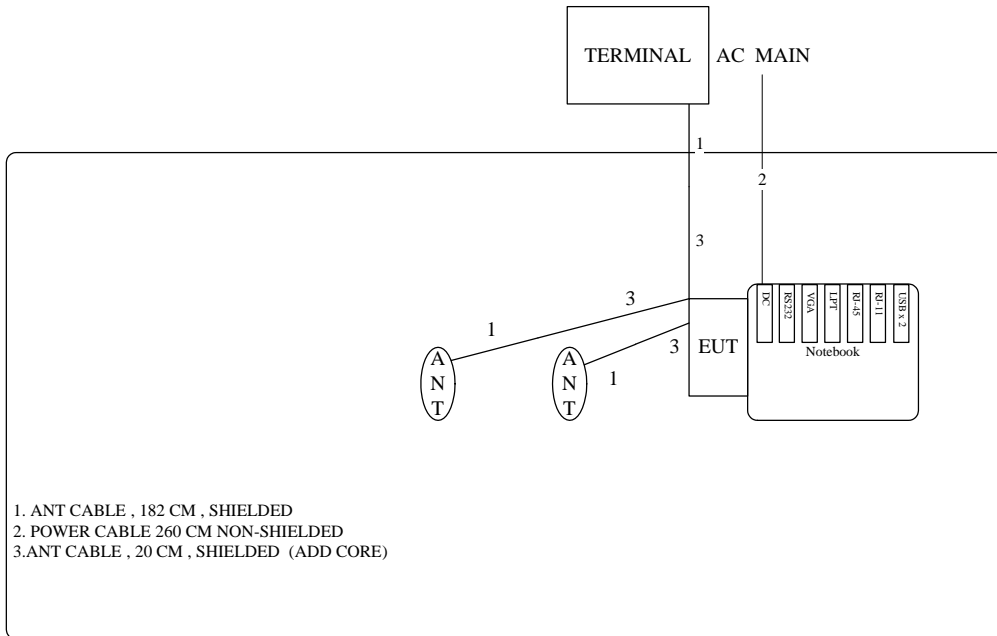

<For Mode 2 (Ant. 4)>:

< For WLAN Function >


Test Configuration: above 1GHz

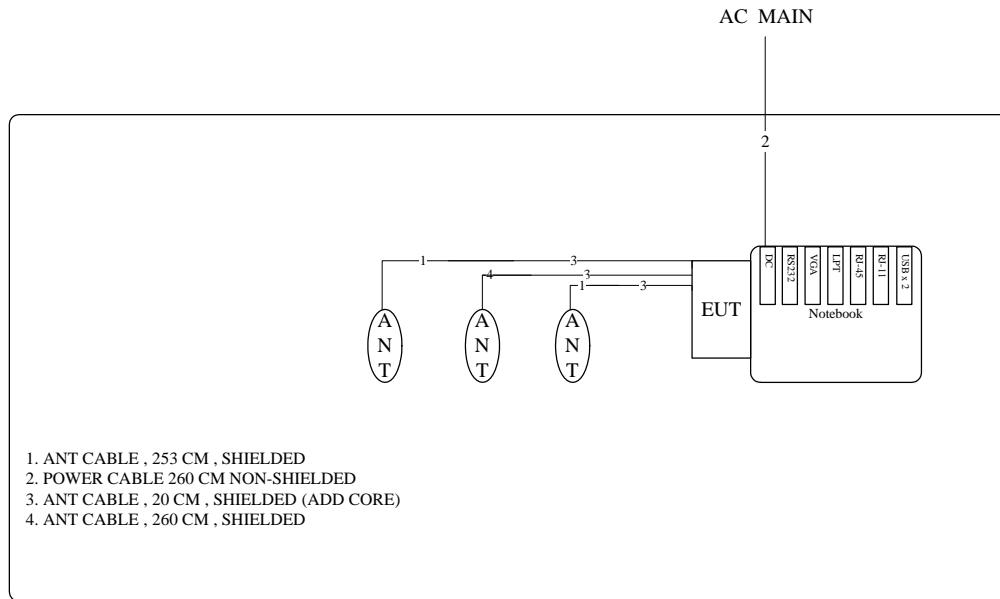

< For Mode 3 (Ant. 7) >

< For WLAN Function >


Test Configuration: above 1GHz

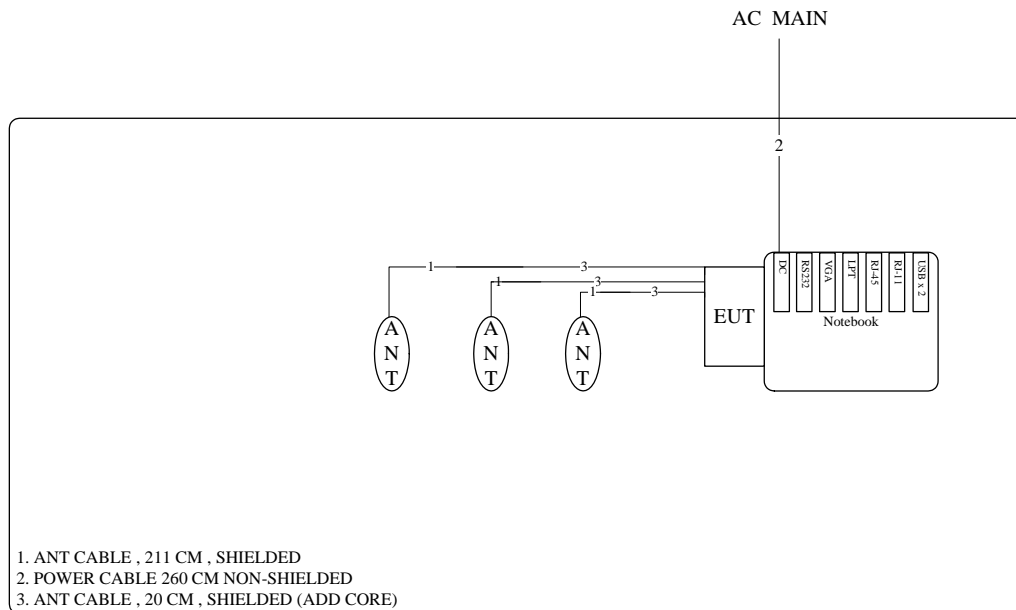

< For Mode 4 (Ant. 8) >

< For WLAN Function >

Test Configuration: above 1GHz

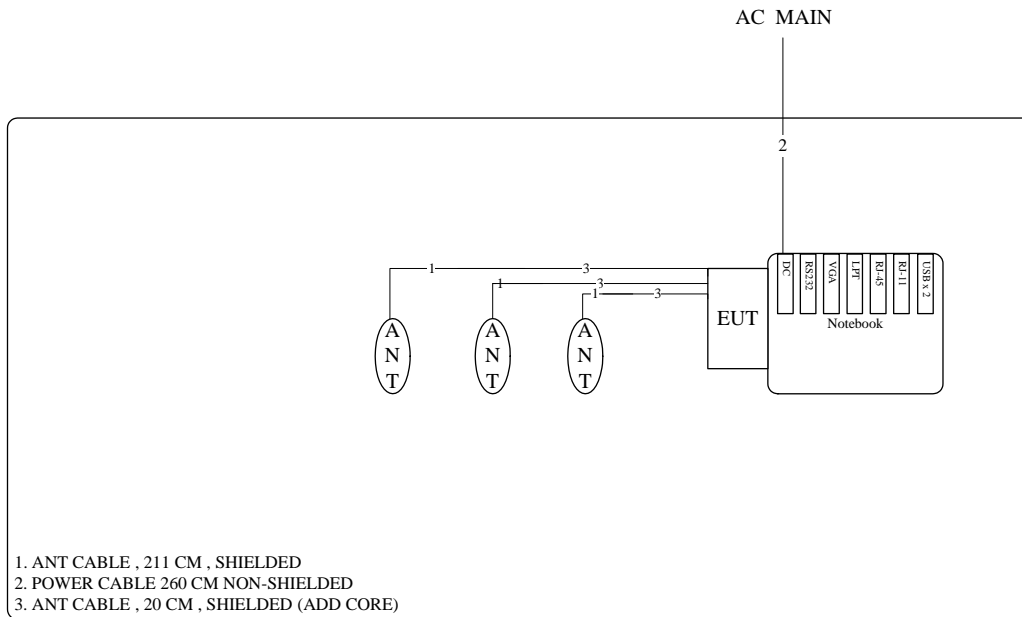

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 KHz    |

#### 4.1.3. Test Procedures

1. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

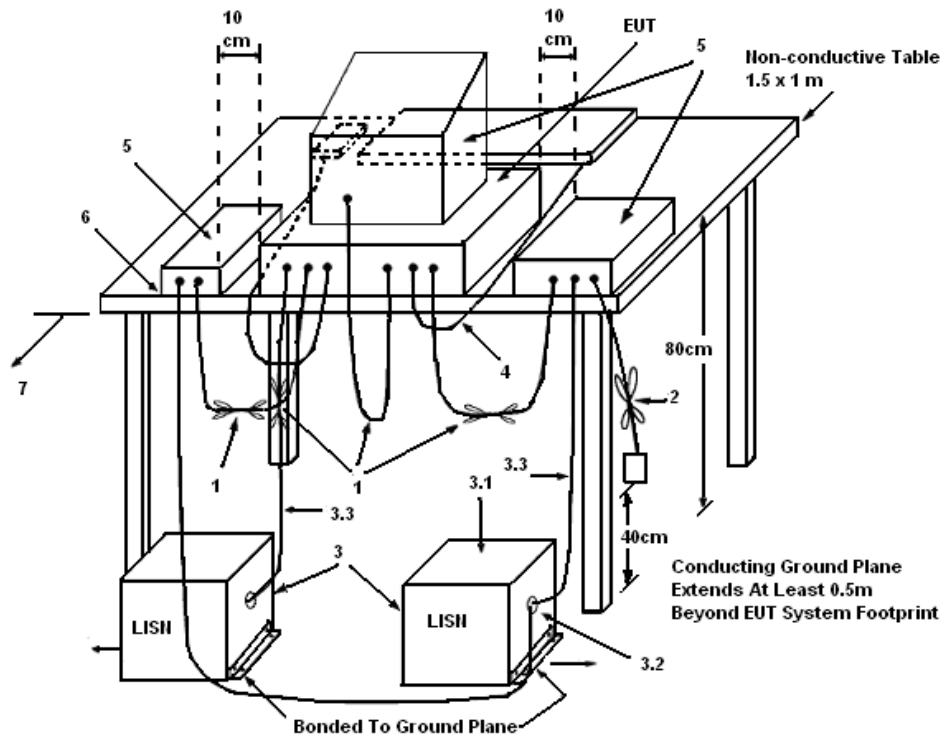

#### LEGEND:


- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation

There is no deviation with the original standard.


4.1.6. Results of AC Power Line Conducted Emissions Measurement

|               |                           |          |      |
|---------------|---------------------------|----------|------|
| Temperature   | 26°C                      | Humidity | 55%  |
| Test Engineer | Beck Wu                   | Phase    | Line |
| Configuration | TX Mode / Mode 1 (Ant. 1) |          |      |

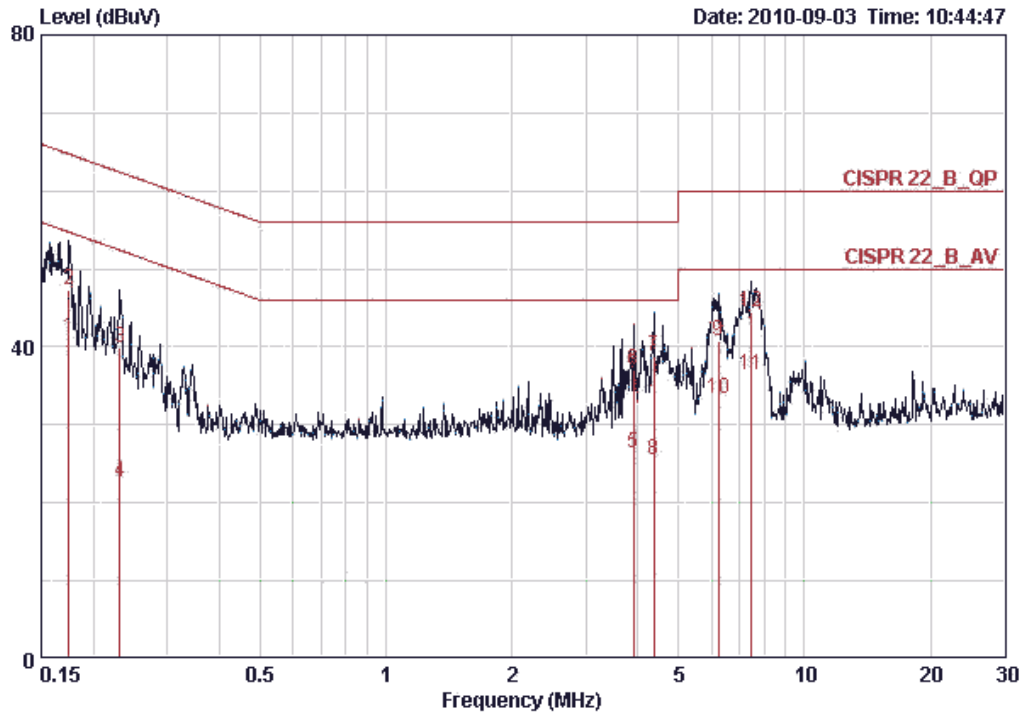

|    | Freq    | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|---------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz     | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.17491 | 41.12 | -13.60     | 54.72      | 40.86      | 0.06        | 0.20       | AVERAGE |
| 2  | 0.17491 | 47.22 | -17.50     | 64.72      | 46.96      | 0.06        | 0.20       | QP      |
| 3  | 0.23162 | 39.94 | -22.46     | 62.39      | 39.69      | 0.05        | 0.20       | QP      |
| 4  | 0.23162 | 22.72 | -29.68     | 52.39      | 22.47      | 0.05        | 0.20       | AVERAGE |
| 5  | 3.901   | 26.34 | -19.66     | 46.00      | 25.94      | 0.10        | 0.30       | AVERAGE |
| 6  | 3.901   | 37.15 | -18.85     | 56.00      | 36.75      | 0.10        | 0.30       | QP      |
| 7  | 4.361   | 38.84 | -17.16     | 56.00      | 38.42      | 0.12        | 0.30       | QP      |
| 8  | 4.361   | 25.47 | -20.53     | 46.00      | 25.05      | 0.12        | 0.30       | AVERAGE |
| 9  | 6.219   | 40.76 | -19.24     | 60.00      | 40.20      | 0.22        | 0.34       | QP      |
| 10 | 6.219   | 33.39 | -16.61     | 50.00      | 32.83      | 0.22        | 0.34       | AVERAGE |
| 11 | 7.486   | 36.48 | -13.52     | 50.00      | 35.81      | 0.27        | 0.39       | AVERAGE |
| 12 | 7.486   | 44.50 | -15.50     | 60.00      | 43.83      | 0.27        | 0.39       | QP      |

|               |                           |          |         |
|---------------|---------------------------|----------|---------|
| Temperature   | 26°C                      | Humidity | 55%     |
| Test Engineer | Beck Wu                   | Phase    | Neutral |
| Configuration | TX Mode / Mode 1 (Ant. 1) |          |         |

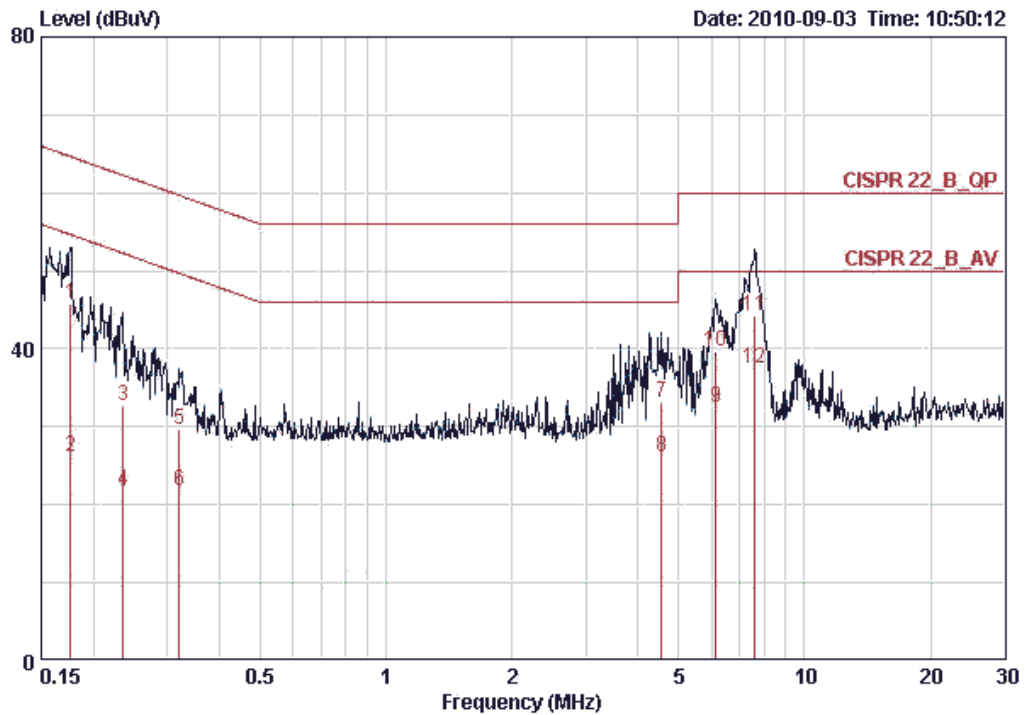

|    | Freq    | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|---------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz     | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.17584 | 45.79 | -18.89     | 64.68      | 45.50      | 0.09        | 0.20       | QP      |
| 2  | 0.17584 | 26.23 | -28.45     | 54.68      | 25.94      | 0.09        | 0.20       | AVERAGE |
| 3  | 0.23533 | 32.77 | -29.49     | 62.26      | 32.49      | 0.08        | 0.20       | QP      |
| 4  | 0.23533 | 21.73 | -30.53     | 52.26      | 21.45      | 0.08        | 0.20       | AVERAGE |
| 5  | 0.31999 | 29.66 | -30.04     | 59.71      | 29.39      | 0.07        | 0.20       | QP      |
| 6  | 0.31999 | 21.76 | -27.94     | 49.71      | 21.49      | 0.07        | 0.20       | AVERAGE |
| 7  | 4.549   | 33.13 | -22.87     | 56.00      | 32.66      | 0.17        | 0.30       | QP      |
| 8  | 4.549   | 26.15 | -19.85     | 46.00      | 25.68      | 0.17        | 0.30       | AVERAGE |
| 9  | 6.153   | 32.47 | -17.53     | 50.00      | 31.88      | 0.26        | 0.34       | AVERAGE |
| 10 | 6.153   | 39.73 | -20.27     | 60.00      | 39.14      | 0.26        | 0.34       | QP      |
| 11 | 7.606   | 44.28 | -15.72     | 60.00      | 43.57      | 0.32        | 0.40       | QP      |
| 12 | 7.606   | 37.41 | -12.59     | 50.00      | 36.70      | 0.32        | 0.40       | AVERAGE |

Note:

Level = Read Level + LISN Factor + Cable Loss.



## 4.2. 26dB Bandwidth Measurement

### 4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.


| Spectrum Parameters | Setting          |
|---------------------|------------------|
| Attenuation         | Auto             |
| Span Frequency      | > 26dB Bandwidth |
| RB                  | 300 kHz          |
| VB                  | 1000 kHz         |
| Detector            | Peak             |
| Trace               | Max Hold         |
| Sweep Time          | Auto             |

| Cable Loss  |           | Combiner Loss |           |
|-------------|-----------|---------------|-----------|
| 2.4GHz Band | 5GHz Band | 2.4GHz Band   | 5GHz Band |
| 0.8         | 1.5       | 5.15          | 5.38      |

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

### 4.2.4. Test Setup Layout

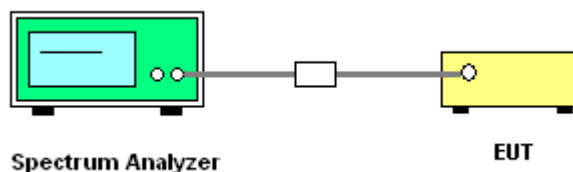

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth

<For Mode 1 (Ant. 1)>

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n / Mode 1 (Ant. 1) |

##### Configuration IEEE 802.11n MSC8 20MHz J2+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 52      | 5260 MHz  | 22.40                | 18.08                        |
| 60      | 5300 MHz  | 22.24                | 18.08                        |
| 64      | 5320 MHz  | 22.56                | 17.92                        |

##### Configuration IEEE 802.11n MSC8 40MHz J2+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 54      | 5270 MHz  | 42.88                | 36.32                        |
| 62      | 5310 MHz  | 42.56                | 36.48                        |

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11a / Mode 1 (Ant. 1) |

##### Configuration IEEE 802.11a J2+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 52      | 5260 MHz  | 20.80                | 16.48                        |
| 60      | 5300 MHz  | 22.88                | 17.28                        |
| 64      | 5320 MHz  | 21.44                | 16.48                        |

## &lt; For Mode 2 (Ant. 4)&gt;

|                      |               |                       |                                |
|----------------------|---------------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C          | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n / Mode 2 (Ant. 4) |

## Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 52      | 5260 MHz  | 24.48                | 18.24                        |
| 60      | 5300 MHz  | 24.48                | 18.24                        |
| 64      | 5320 MHz  | 24.48                | 18.08                        |

## Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 54      | 5270 MHz  | 46.72                | 36.80                        |
| 62      | 5310 MHz  | 46.72                | 36.80                        |

|                      |               |                       |                                |
|----------------------|---------------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C          | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a / Mode 2 (Ant. 4) |

## Configuration IEEE 802.11a J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 52      | 5260 MHz  | 23.84                | 17.12                        |
| 60      | 5300 MHz  | 23.52                | 17.12                        |
| 64      | 5320 MHz  | 23.68                | 17.12                        |

<For Mode 3 (Ant. 7)>:

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n / Mode 3 (Ant. 7) |

Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 52      | 5260 MHz  | 24.48                | 18.24                        |
| 60      | 5300 MHz  | 24.48                | 18.24                        |
| 64      | 5320 MHz  | 24.32                | 18.24                        |

Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 54      | 5270 MHz  | 46.72                | 36.80                        |
| 62      | 5310 MHz  | 47.36                | 36.80                        |

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11a / Mode 3 (Ant. 7) |

Configuration IEEE 802.11a J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 52      | 5260 MHz  | 23.84                | 17.12                        |
| 60      | 5300 MHz  | 23.52                | 17.12                        |
| 64      | 5320 MHz  | 23.68                | 17.12                        |

<For Mode 4 (Ant. 8)>:

|                      |          |                       |                                |
|----------------------|----------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C     | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Jacky Ho | <b>Configurations</b> | IEEE 802.11n / Mode 4 (Ant. 8) |

Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 52      | 5260 MHz  | 24.48                | 18.24                        |
| 60      | 5300 MHz  | 24.48                | 18.24                        |
| 64      | 5320 MHz  | 24.32                | 18.24                        |

Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 54      | 5270 MHz  | 45.44                | 36.80                        |
| 62      | 5310 MHz  | 48.96                | 36.80                        |


|                      |          |                       |                                |
|----------------------|----------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C     | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Jacky Ho | <b>Configurations</b> | IEEE 802.11a / Mode 4 (Ant. 8) |

Configuration IEEE 802.11a J2+J3+J4

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 52      | 5260 MHz  | 23.84                | 17.12                        |
| 60      | 5300 MHz  | 23.52                | 17.12                        |
| 64      | 5320 MHz  | 23.68                | 17.12                        |


< For Mode 1 (Ant. 1)>:

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J4 / 5260 MHz

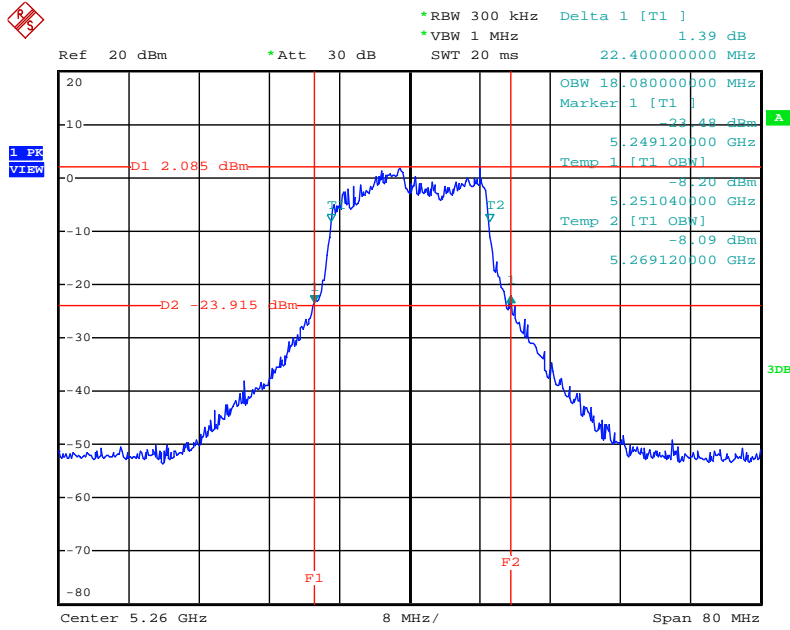


Date: 12.AUG.2010 15:24:59

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J4 / 5300 MHz

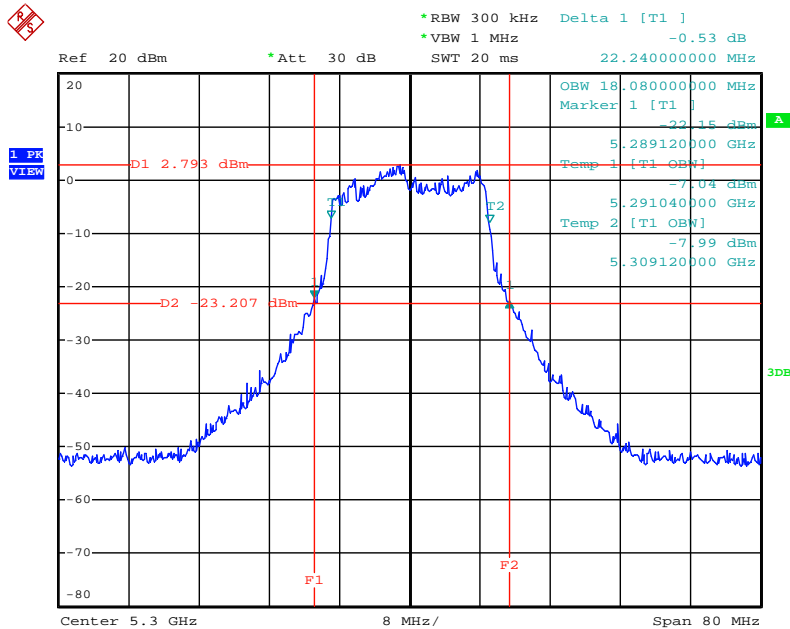


Date: 12.AUG.2010 15:23:46

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J4 / 5320 MHz

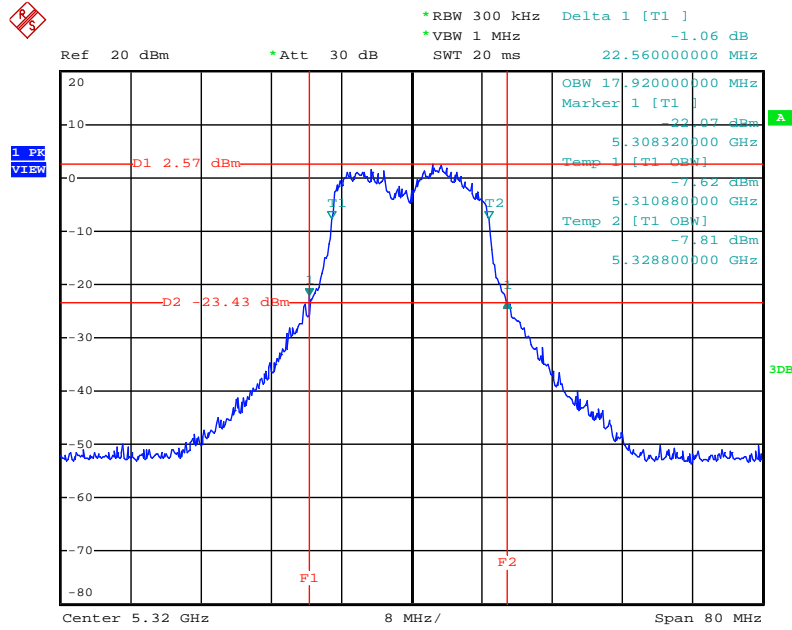


Date: 12.AUG.2010 15:22:38

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J4 / 5270 MHz

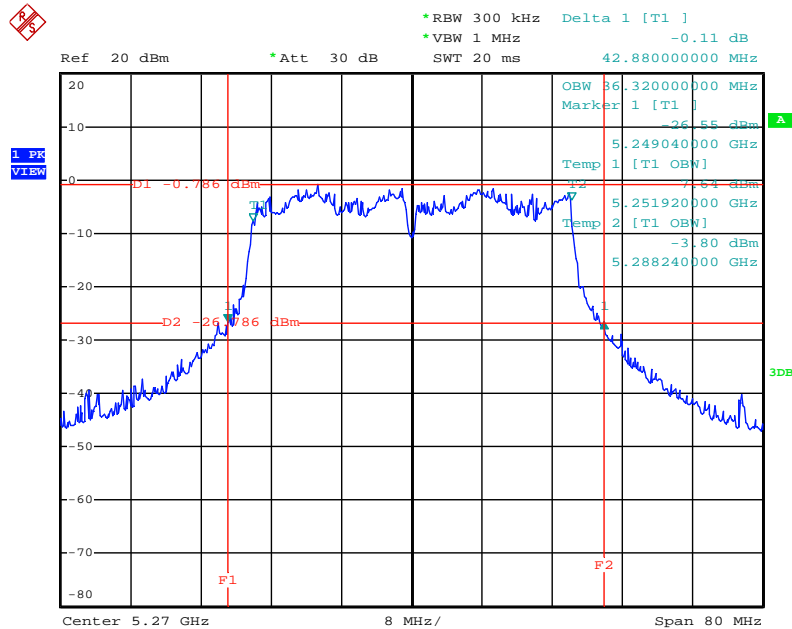


Date: 12.AUG.2010 15:38:30

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J4 / 5310 MHz

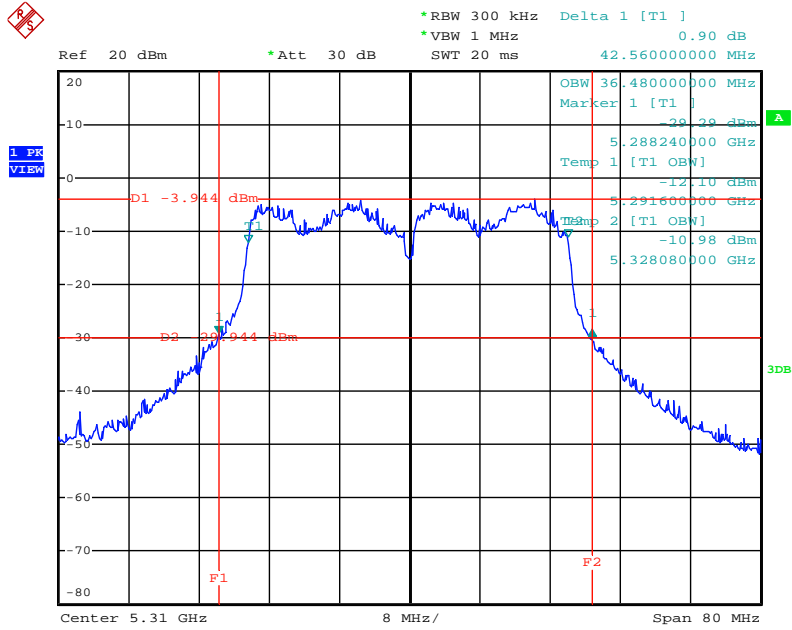

Date: 12.AUG.2010 15:39:44


26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J4 / 5260 MHz

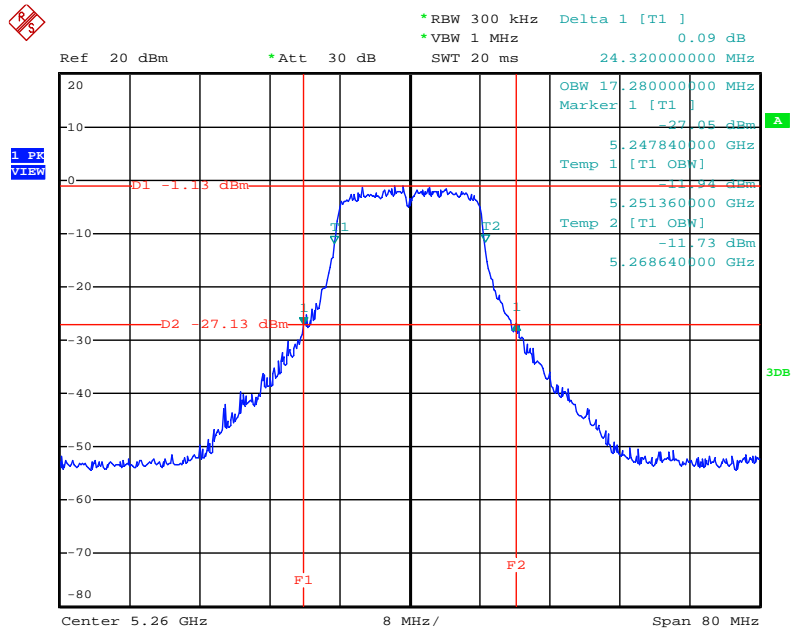

Date: 12.JUL.2011 04:34:08




### 26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J4 / 5300 MHz

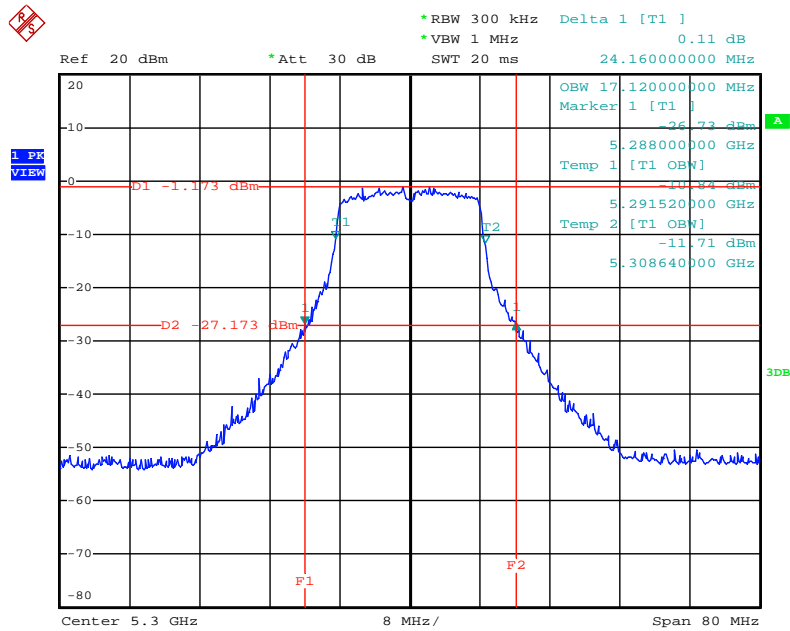

Date: 12.JUL.2011 04:33:22


### 26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J4 / 5320 MHz

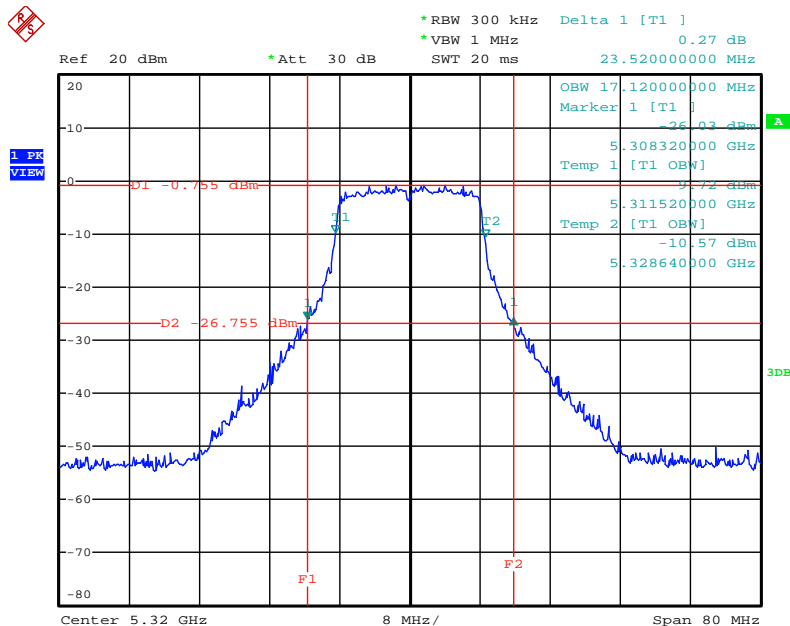

Date: 12.JUL.2011 04:32:28


<For Mode 2 (Ant. 4)>:

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5260 MHz

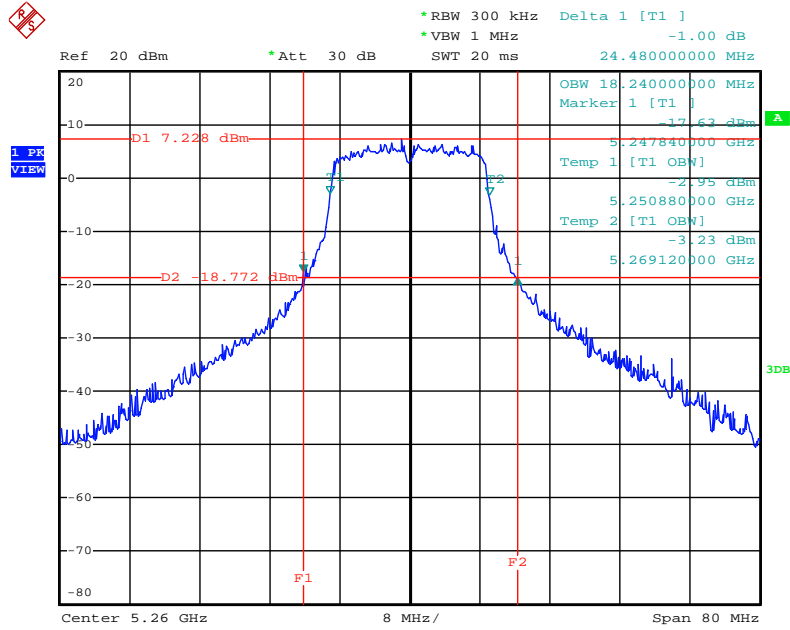


Date: 12.JUL.2011 00:48:00

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5300 MHz

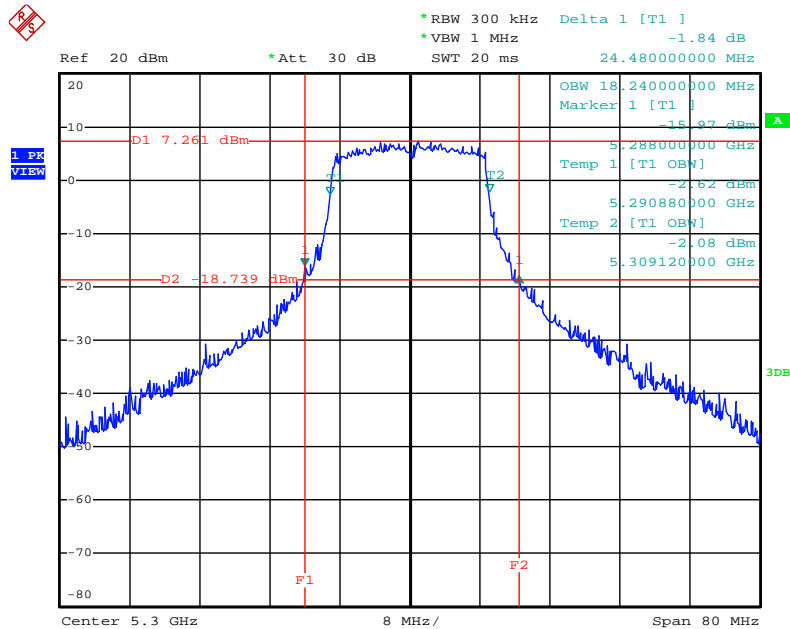


Date: 12.JUL.2011 00:48:56

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5320 MHz

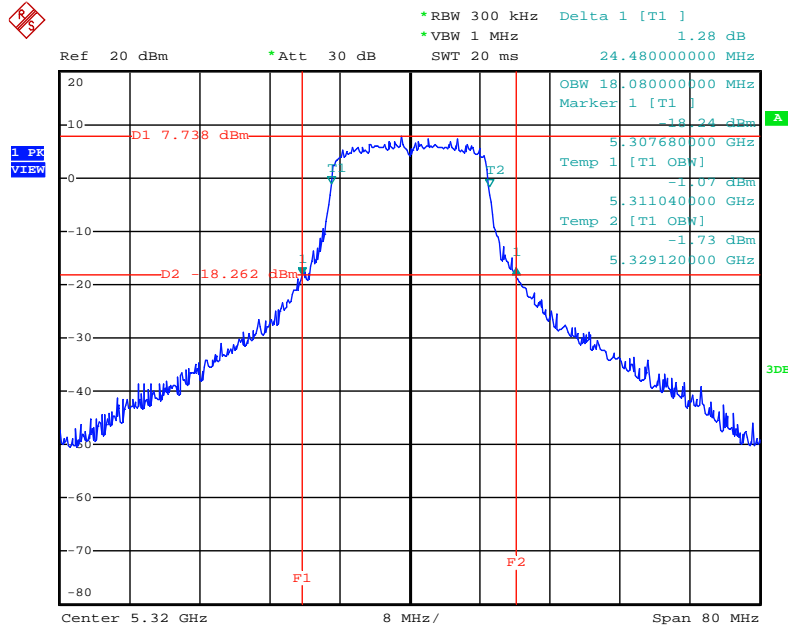


Date: 12.JUL.2011 03:21:12

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5270 MHz

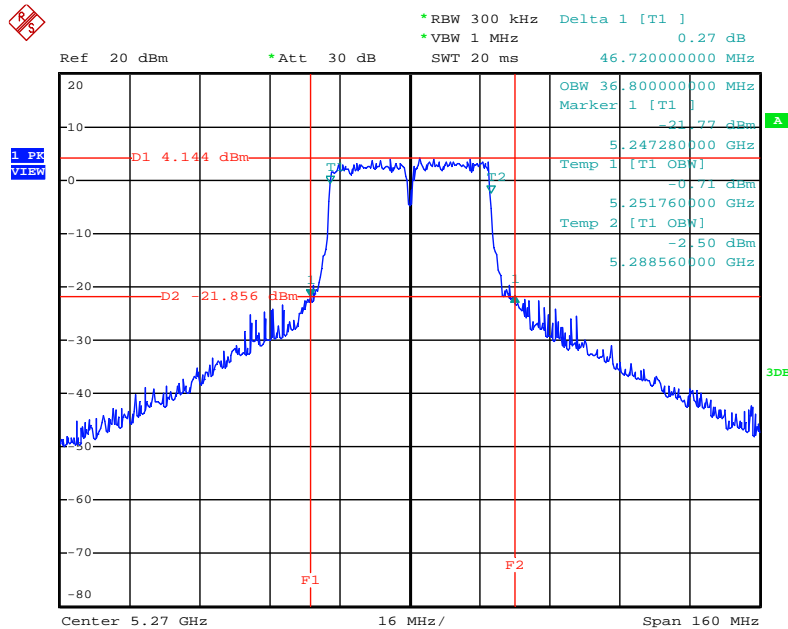


Date: 12.JUL.2011 03:03:04

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5310 MHz

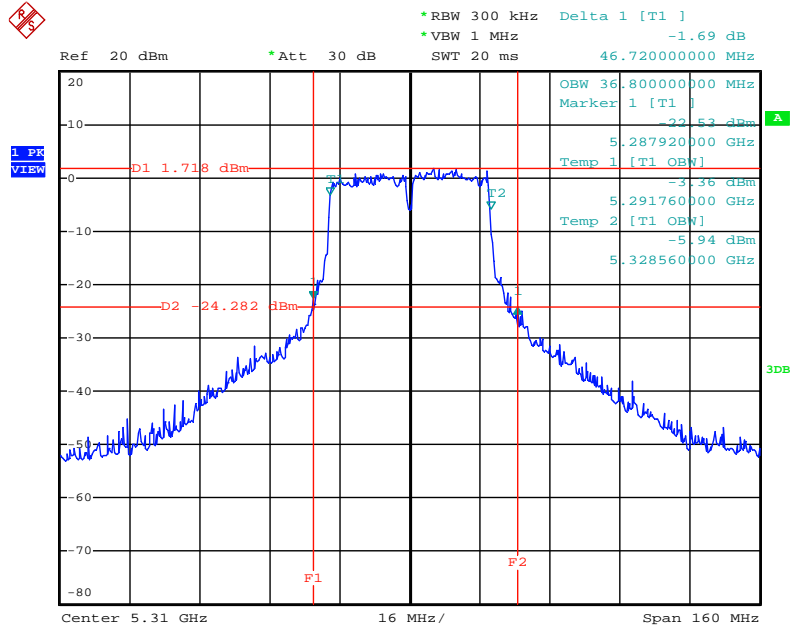


Date: 12.JUL.2011 03:19:49

26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5260 MHz

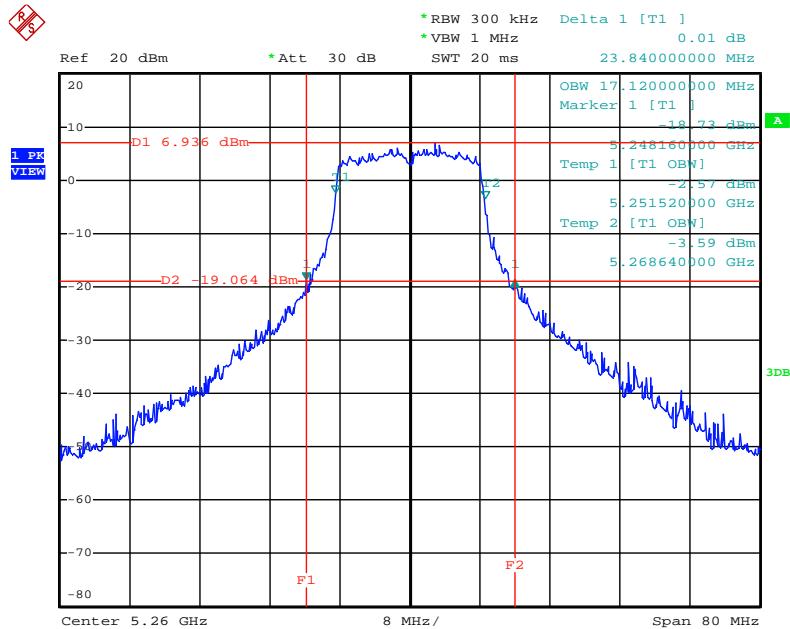


Date: 12.JUL.2011 00:18:34

### 26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5300 MHz

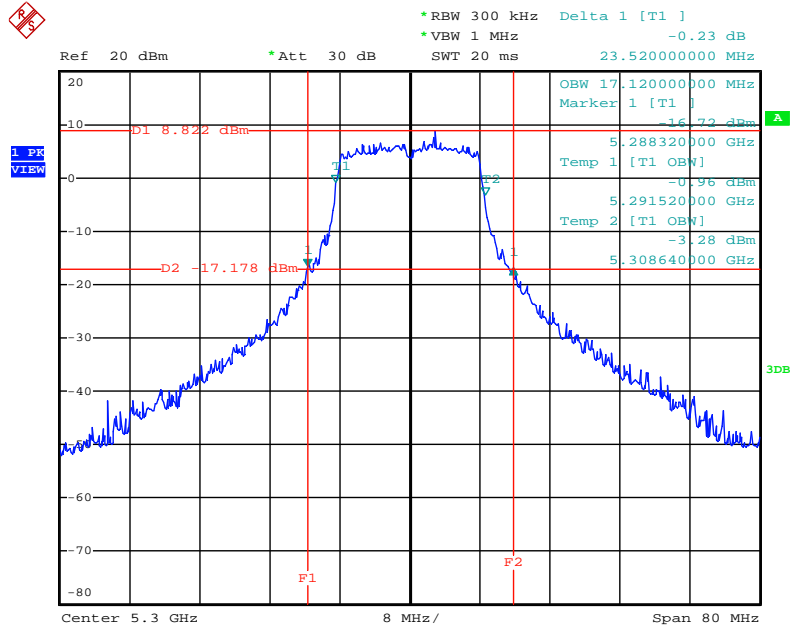

Date: 12.JUL.2011 00:21:09


### 26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5320 MHz

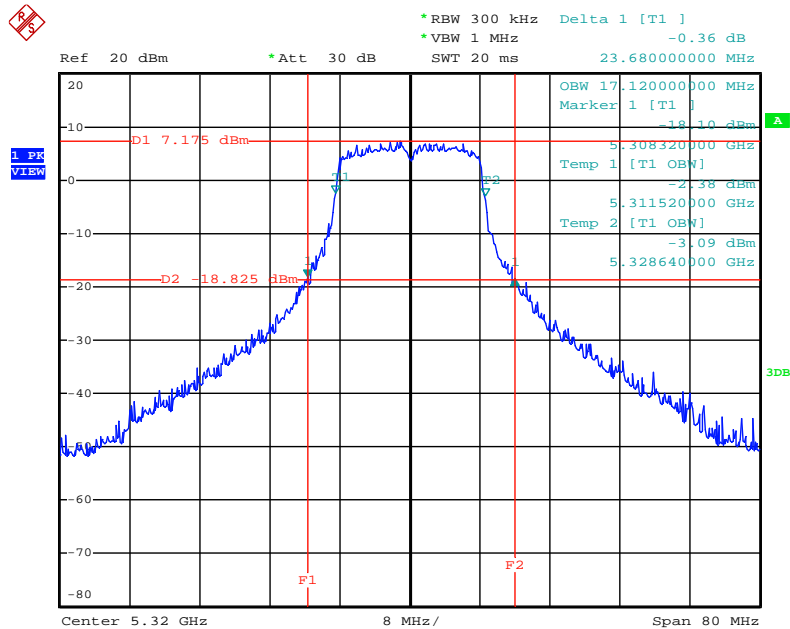

Date: 12.JUL.2011 00:21:55


<For Mode 3 (Ant. 7)>:

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5260 MHz

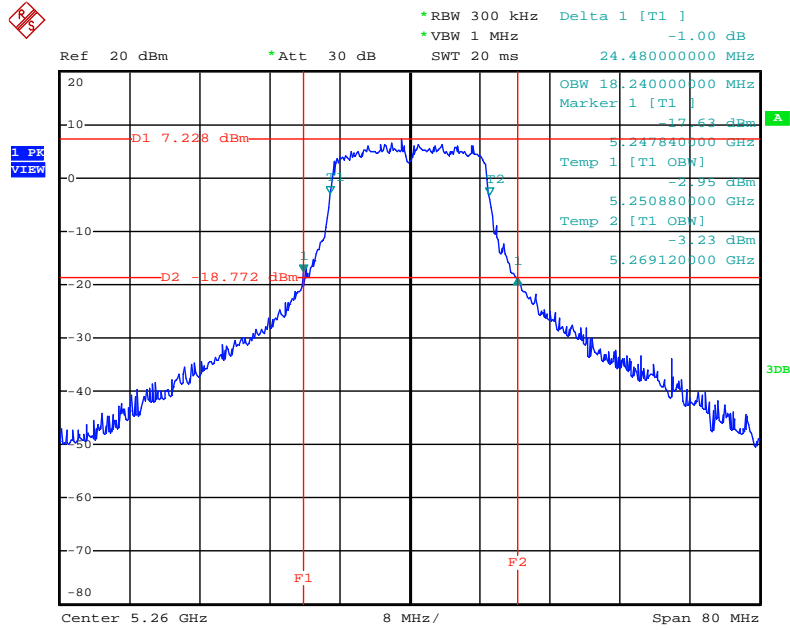


Date: 12.JUL.2011 00:48:00

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5300 MHz

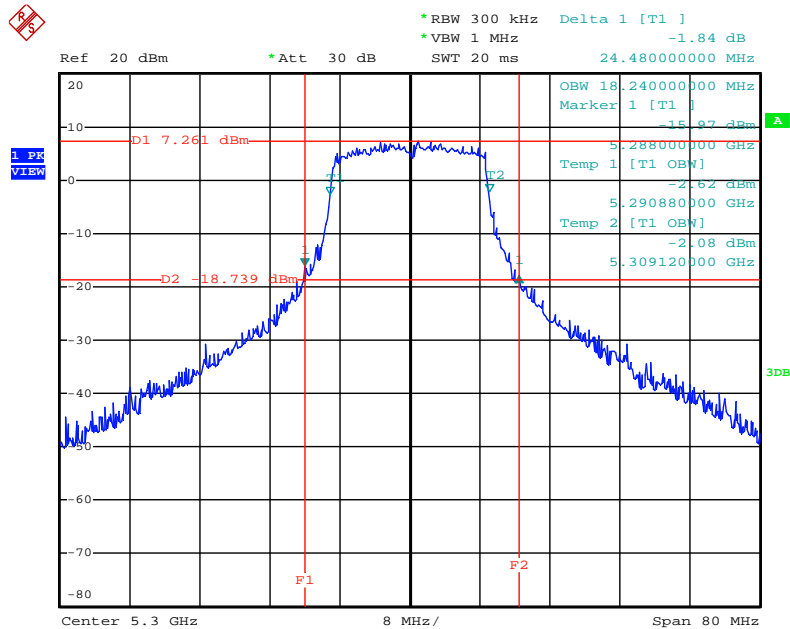


Date: 12.JUL.2011 00:48:56

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5320 MHz

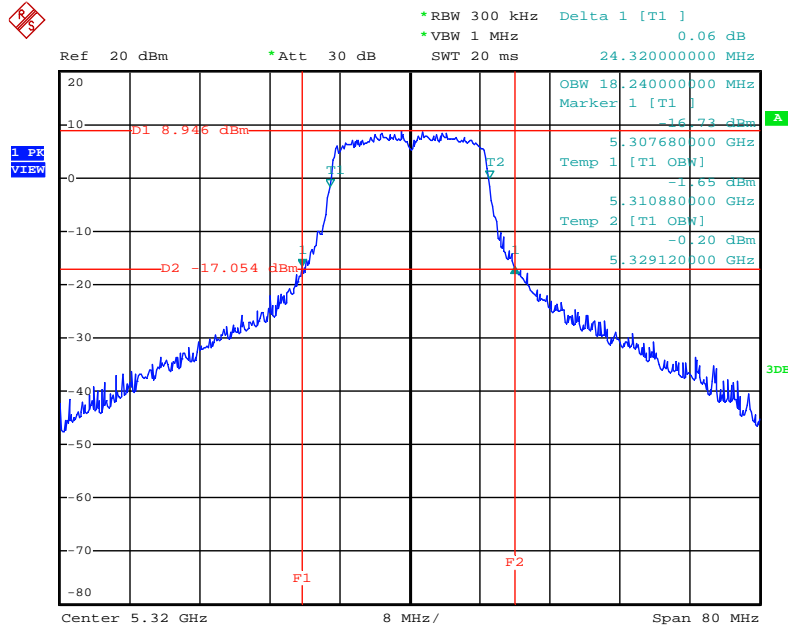


Date: 12.JUL.2011 00:49:49

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5270 MHz

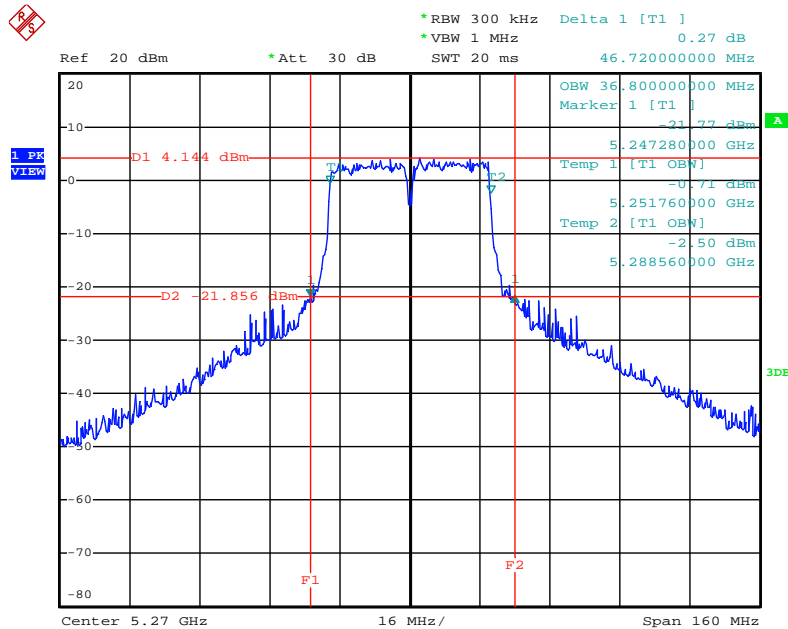


Date: 12.JUL.2011 03:03:04

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5310 MHz

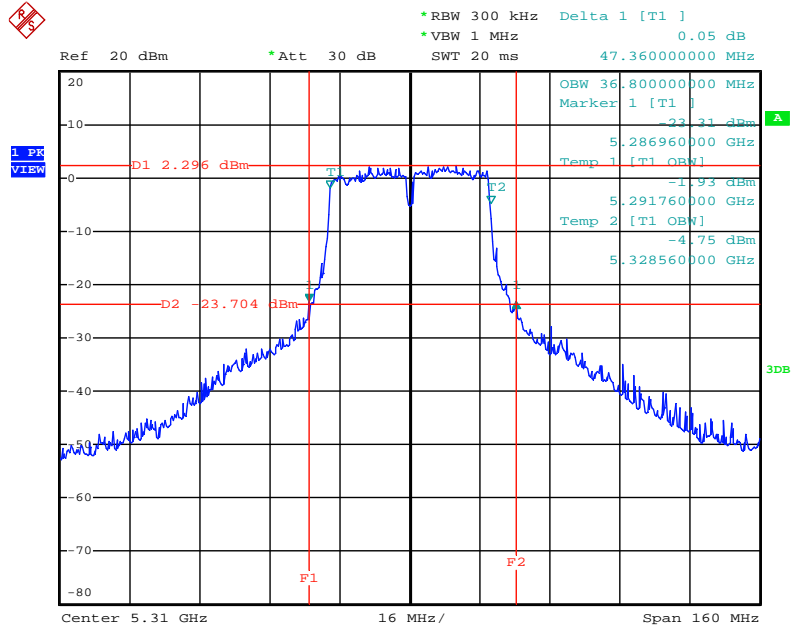

Date: 12.JUL.2011 03:00:39


26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5260 MHz

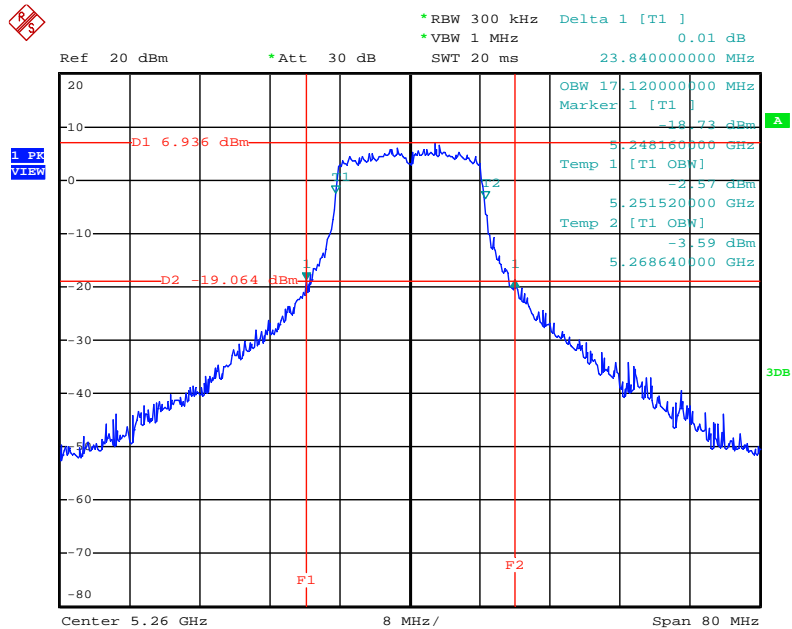

Date: 12.JUL.2011 00:18:34




### 26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5300 MHz

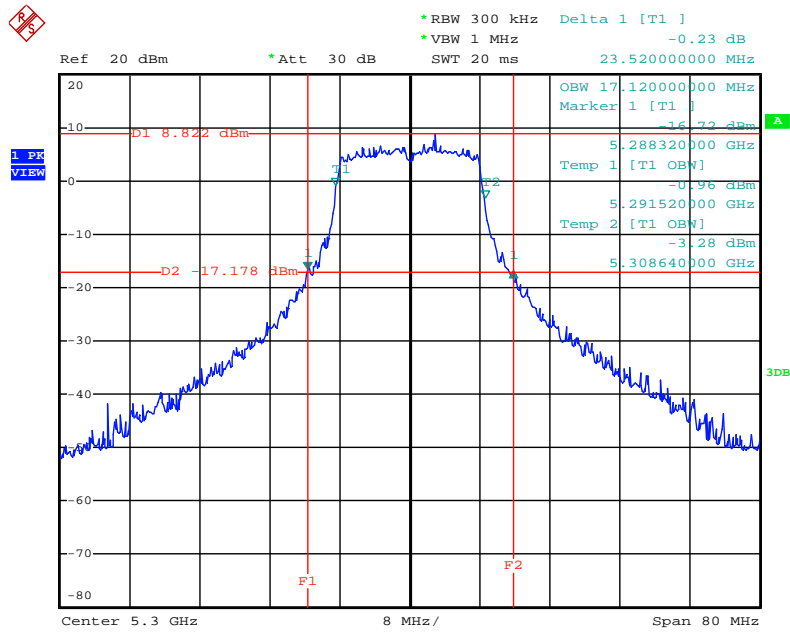

Date: 12.JUL.2011 00:21:09


### 26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5320 MHz

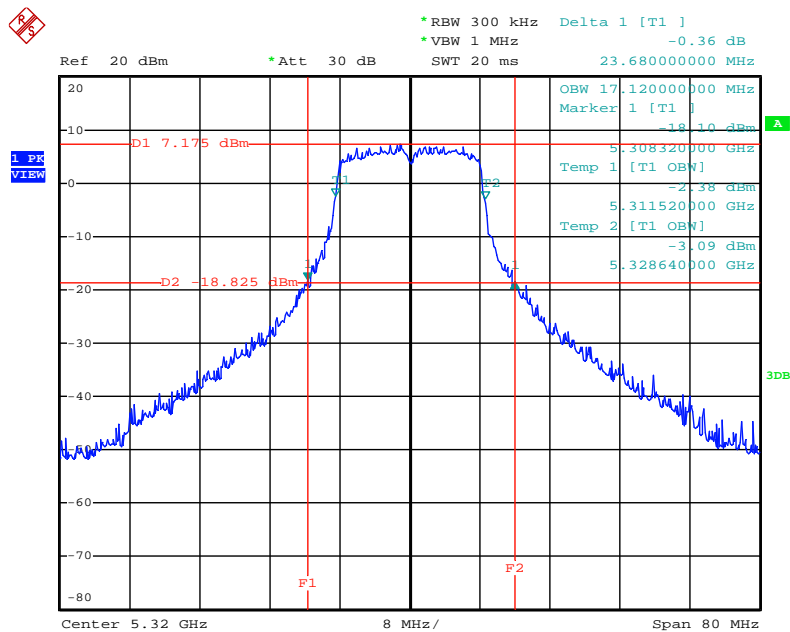

Date: 12.JUL.2011 00:21:55


<For Mode 4 (Ant. 8)>:

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5260 MHz

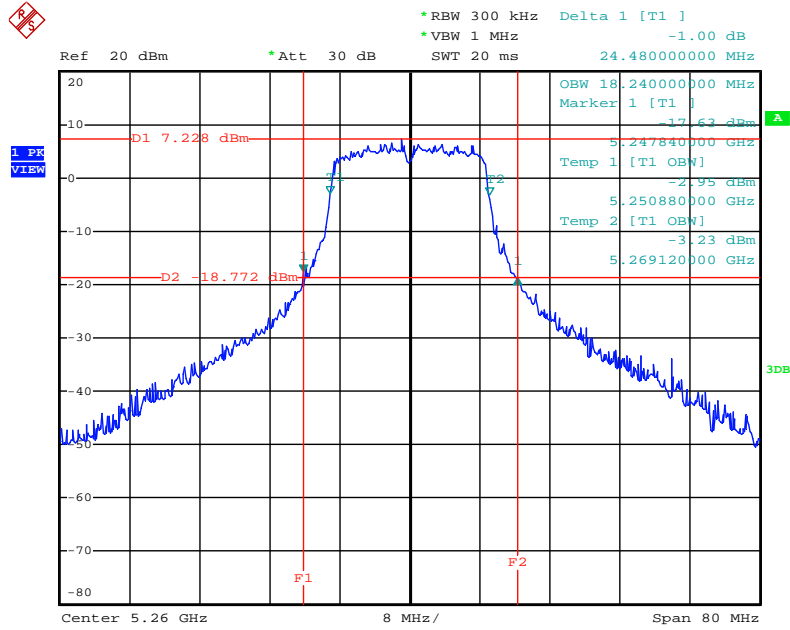


Date: 12.JUL.2011 00:48:00

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5300 MHz

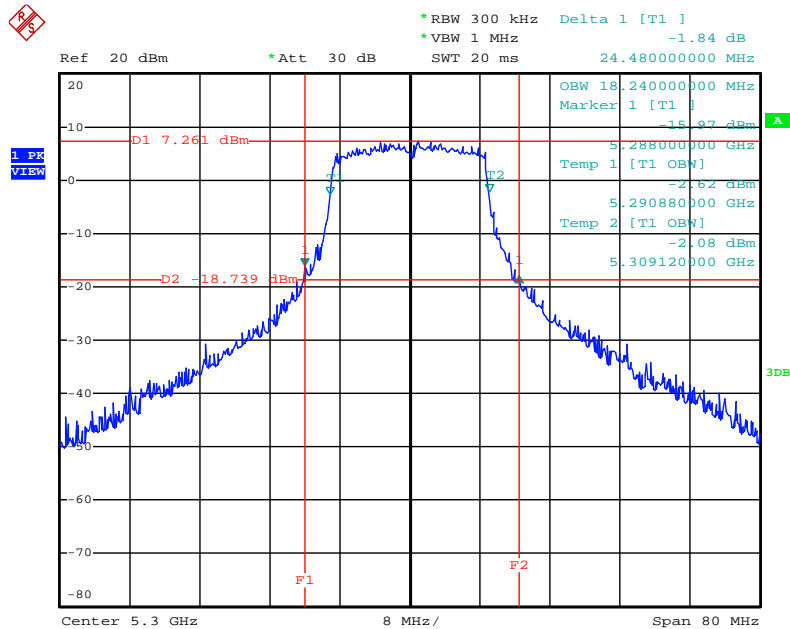


Date: 12.JUL.2011 00:48:56

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5320 MHz

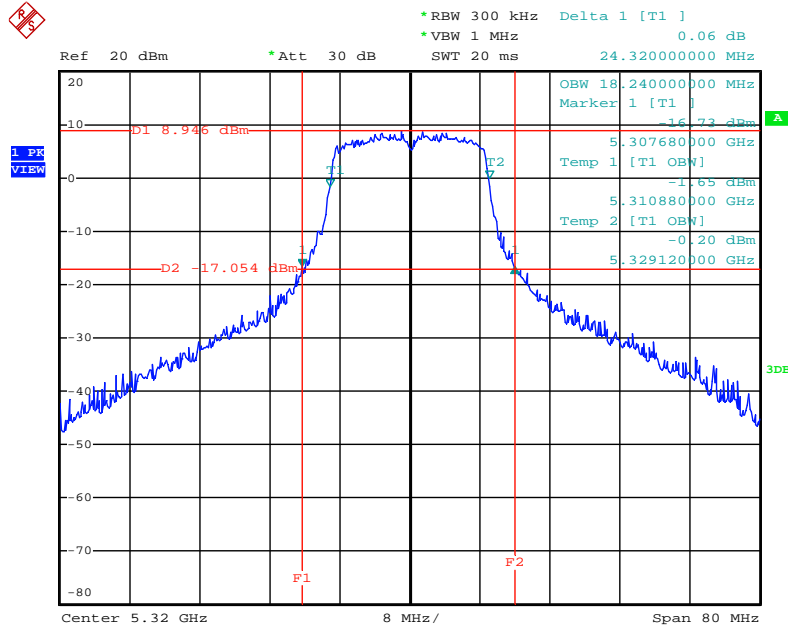


Date: 12.JUL.2011 00:49:49

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5270 MHz

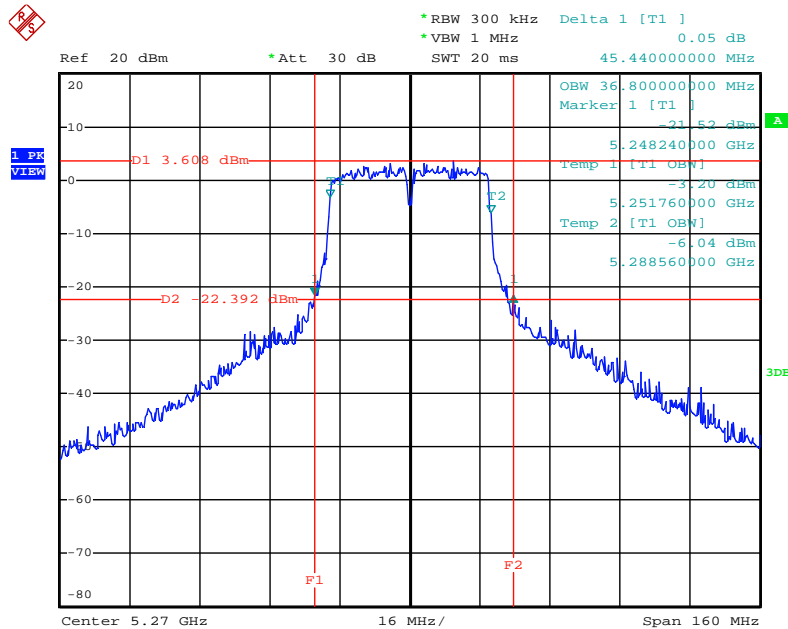


Date: 12.JUL.2011 00:59:54

26 dB Bandwidth Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5310 MHz

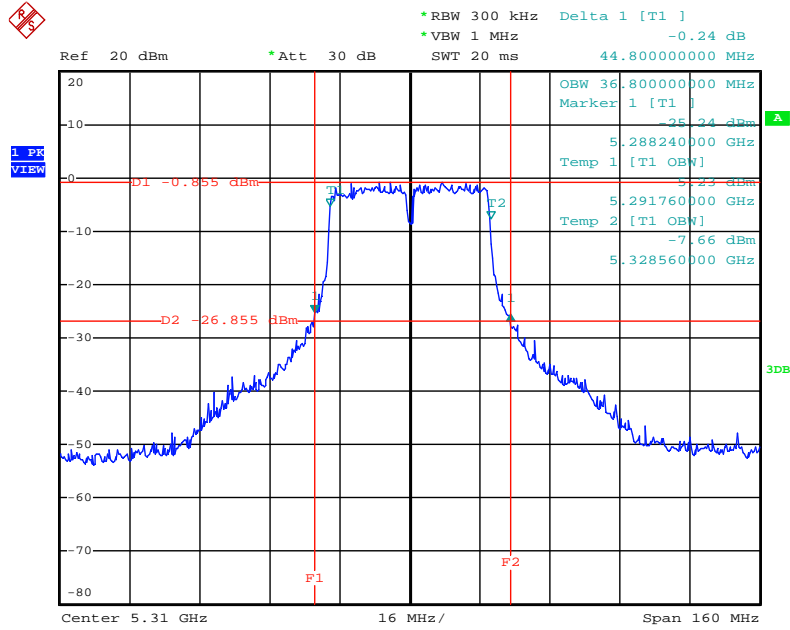


Date: 12.JUL.2011 03:01:33

26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5260 MHz

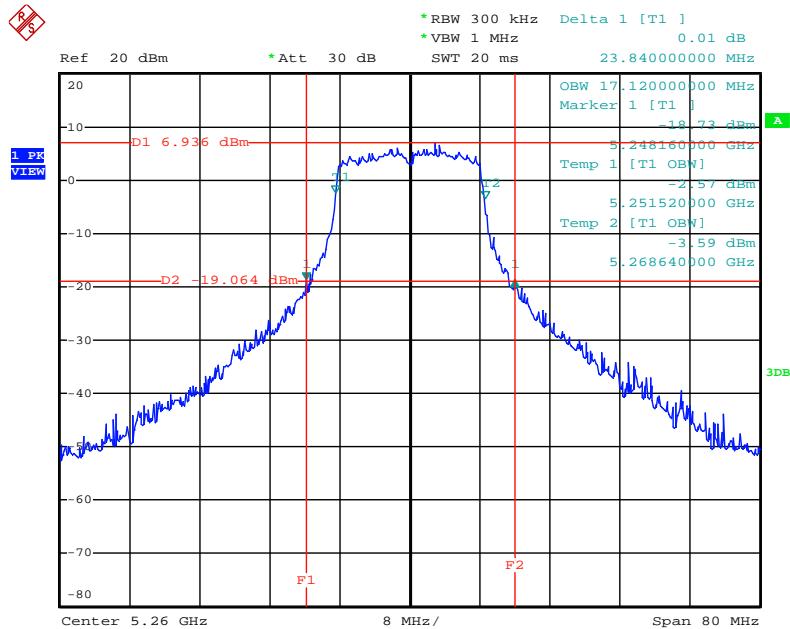


Date: 12.JUL.2011 00:18:34

26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5300 MHz

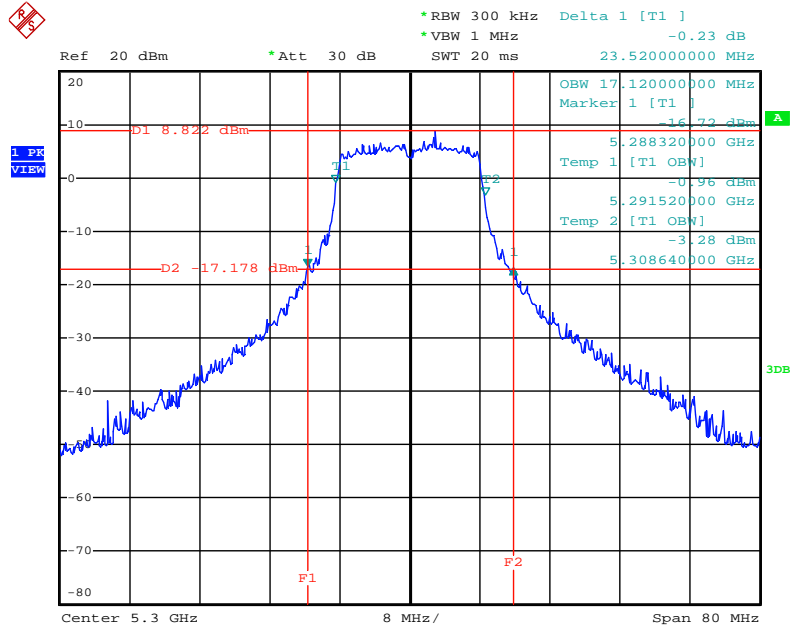

Date: 12.JUL.2011 00:21:09

26 dB Bandwidth Plot on Configuration IEEE 802.11a J2+J3+J4 / 5320 MHz

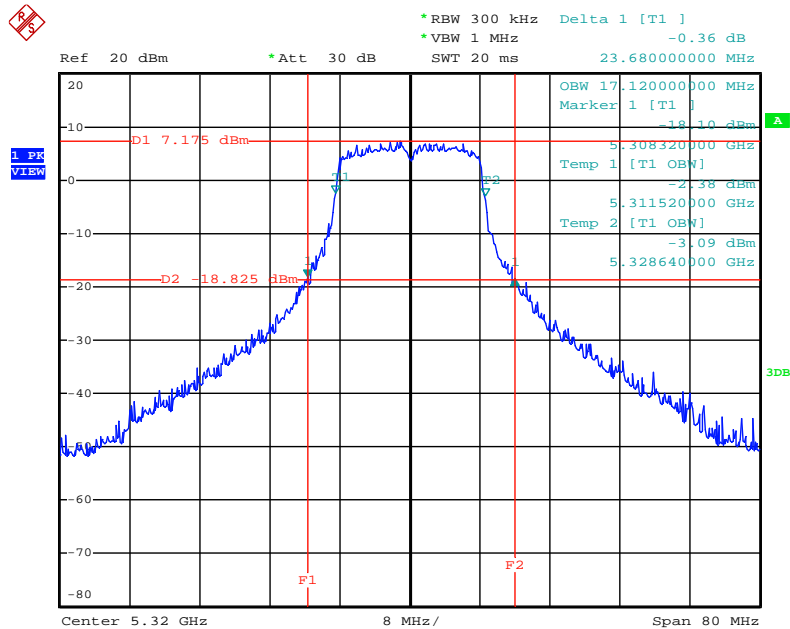

Date: 12.JUL.2011 00:21:55

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the 5.25-5.35 GHz band, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or  $11 \text{ dBm} + 10\log B$ . If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

#### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.


| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB                 | 1000 kHz   |
| VB                 | 3000 kHz   |
| Detector           | RMS  |
| Trace              | MAX HOLD   |
| Sweep Time         | Auto   |

| Cable Loss  |           | Combiner Loss |           |
|-------------|-----------|---------------|-----------|
| 2.4GHz Band | 5GHz Band | 2.4GHz Band   | 5GHz Band |
| 0.8         | 1.5       | 5.15          | 5.38      |

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with FCC Public Notice DA 02-2138, August 30, 2002.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

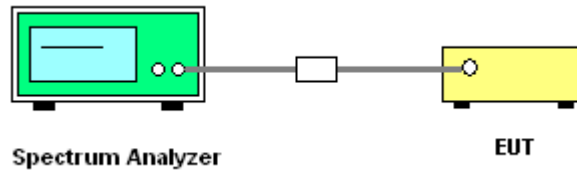

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

<For Mode 1 (Ant. 1)>:

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n / Mode 1 (Ant. 1) |

##### Configuration IEEE 802.11n MSC8 20MHz

| Channel | Frequency | Conducted Power (dBm) |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J4    |                             |                  |          |
| 52      | 5260 MHz  | 11.66                 | 11.53 | 14.61                       | 15.00            | Complies |
| 60      | 5300 MHz  | 12.03                 | 11.76 | 14.91                       | 15.00            | Complies |
| 64      | 5320 MHz  | 11.95                 | 11.86 | 14.92                       | 15.00            | Complies |

##### Configuration IEEE 802.11n MSC8 40MHz

| Channel | Frequency | Conducted Power (dBm) |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J4    |                             |                  |          |
| 54      | 5270 MHz  | 11.99                 | 10.15 | 14.18                       | 15.00            | Complies |
| 62      | 5310 MHz  | 7.45                  | 6.71  | 10.11                       | 15.00            | Complies |

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11a / Mode 1 (Ant. 1) |

##### Configuration IEEE 802.11a J2

| Channel | Frequency | Conducted Power (dBm) |      | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------|-----------------------------|------------------|----------|
|         |           | J2                    | J4   |                             |                  |          |
| 52      | 5260 MHz  | 8.83                  | 8.44 | 11.65                       | 11.99            | Complies |
| 60      | 5300 MHz  | 9.01                  | 8.15 | 11.61                       | 11.99            | Complies |
| 64      | 5320 MHz  | 9.09                  | 8.46 | 11.80                       | 11.99            | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.



<For Mode 2 (Ant. 4)>

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n / Mode 2 (Ant. 4) |

Configuration IEEE 802.11n MSC8 20MHz

| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 52      | 5260 MHz  | 18.60                 | 18.92 | 18.58 | 23.47                       | 24.00            | Complies |
| 60      | 5300 MHz  | 18.94                 | 19.01 | 18.71 | 23.66                       | 24.00            | Complies |
| 64      | 5320 MHz  | 18.32                 | 18.26 | 17.55 | 22.83                       | 24.00            | Complies |

Configuration IEEE 802.11n MSC8 40MHz

| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 54      | 5270 MHz  | 18.46                 | 19.09 | 18.82 | 23.57                       | 24.00            | Complies |
| 62      | 5310 MHz  | 15.15                 | 14.93 | 15.18 | 19.86                       | 24.00            | Complies |

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11a / Mode 2 (Ant. 4) |

Configuration IEEE 802.11a

| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 52      | 5260 MHz  | 14.11                 | 14.05 | 14.51 | 19.00                       | 19.23            | Complies |
| 60      | 5300 MHz  | 14.57                 | 13.73 | 14.55 | 19.07                       | 19.23            | Complies |
| 64      | 5320 MHz  | 14.82                 | 13.33 | 14.71 | 19.11                       | 19.23            | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

<For Mode 3 (Ant. 7)>:

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n / Mode 3 (Ant. 7) |

Configuration IEEE 802.11n MSC8 20MHz

| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 52      | 5260 MHz  | 18.60                 | 18.92 | 18.58 | 23.47                       | 24.00            | Complies |
| 60      | 5300 MHz  | 18.94                 | 19.01 | 18.71 | 23.66                       | 24.00            | Complies |
| 64      | 5320 MHz  | 17.84                 | 21.02 | 17.95 | 23.97                       | 24.00            | Complies |

Configuration IEEE 802.11n MSC8 40MHz

| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 54      | 5270 MHz  | 18.46                 | 19.09 | 18.82 | 23.57                       | 24.00            | Complies |
| 62      | 5310 MHz  | 14.79                 | 16.94 | 15.31 | 20.55                       | 24.00            | Complies |

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11a / Mode 3 (Ant. 7) |

Configuration IEEE 802.11a

| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 52      | 5260 MHz  | 16.77                 | 15.80 | 16.61 | 21.18                       | 21.23            | Complies |
| 60      | 5300 MHz  | 16.51                 | 15.39 | 16.66 | 20.99                       | 21.23            | Complies |
| 64      | 5320 MHz  | 16.68                 | 15.49 | 16.71 | 21.10                       | 21.23            | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

<For Mode 4 (Ant. 8)>:

|               |          |                |                                |
|---------------|----------|----------------|--------------------------------|
| Temperature   | 24°C     | Humidity       | 56%                            |
| Test Engineer | Jacky Ho | Configurations | IEEE 802.11n / Mode 4 (Ant. 8) |

Configuration IEEE 802.11n MSC8 20MHz

| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 52      | 5260 MHz  | 18.60                 | 18.92 | 18.58 | 23.47                       | 24.00            | Complies |
| 60      | 5300 MHz  | 18.94                 | 19.01 | 18.71 | 23.66                       | 24.00            | Complies |
| 64      | 5320 MHz  | 16.52                 | 16.78 | 16.52 | 21.38                       | 24.00            | Complies |

Configuration IEEE 802.11n MSC8 40MHz J2

| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 54      | 5270 MHz  | 18.46                 | 19.09 | 18.82 | 23.57                       | 24.00            | Complies |
| 62      | 5310 MHz  | 12.00                 | 13.70 | 13.22 | 17.80                       | 24.00            | Complies |

|               |          |                |                                |
|---------------|----------|----------------|--------------------------------|
| Temperature   | 24°C     | Humidity       | 56%                            |
| Test Engineer | Jacky Ho | Configurations | IEEE 802.11a / Mode 4 (Ant. 8) |

Configuration IEEE 802.11a


| Channel | Frequency | Conducted Power (dBm) |       |       | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|-------|-------|-----------------------------|------------------|----------|
|         |           | J2                    | J3    | J4    |                             |                  |          |
| 52      | 5260 MHz  | 16.77                 | 15.80 | 16.61 | 21.18                       | 21.23            | Complies |
| 60      | 5300 MHz  | 16.51                 | 15.39 | 16.66 | 20.99                       | 21.23            | Complies |
| 64      | 5320 MHz  | 16.68                 | 15.49 | 16.71 | 21.10                       | 21.23            | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


<For Mode 1 (Ant. 1)>:

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J2 / 5320 MHz

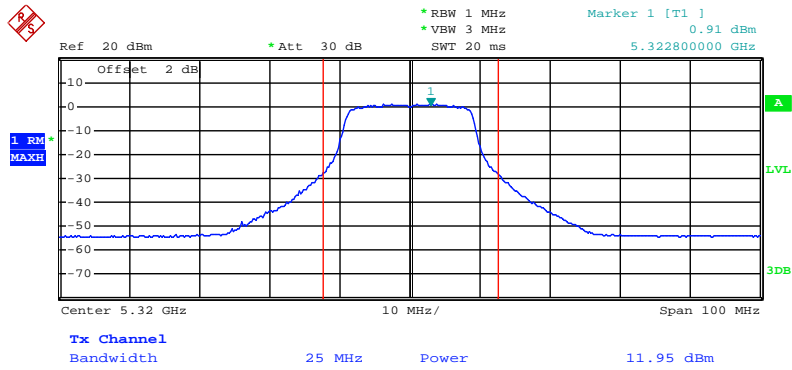


Date: 11.AUG.2010 23:00:45

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J4 / 5320 MHz

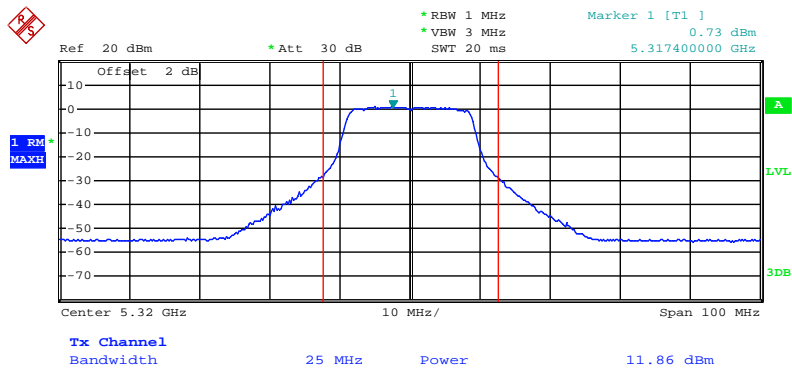


Date: 11.AUG.2010 23:00:12

### Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J2 / 5270 MHz

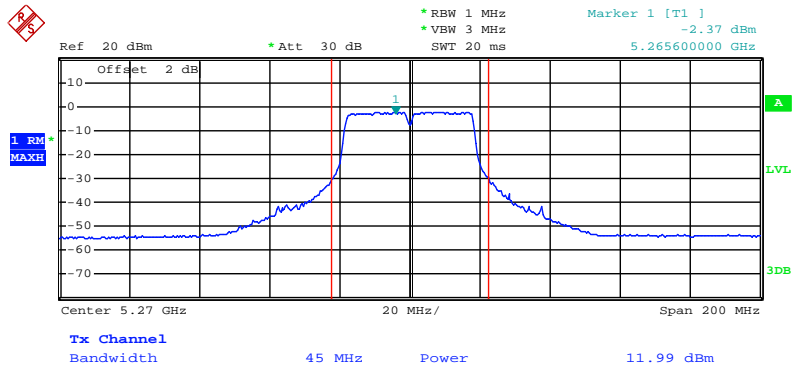


Date: 11.AUG.2010 23:04:45

### Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J4 / 5270 MHz

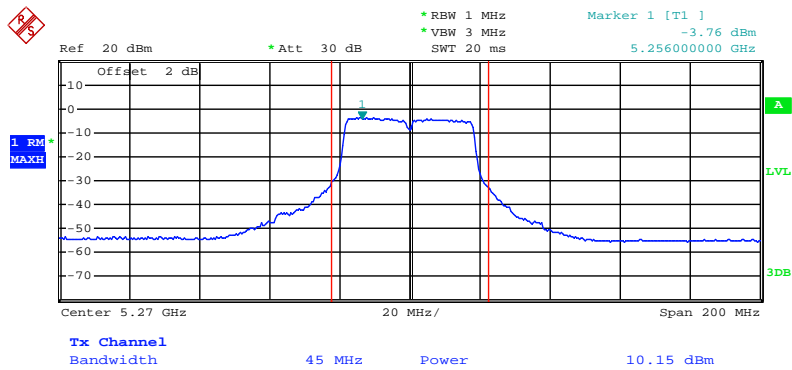


Date: 11.AUG.2010 23:04:15

### Conducted Output Power Plot on Configuration IEEE 802.11a J2 / 5320 MHz

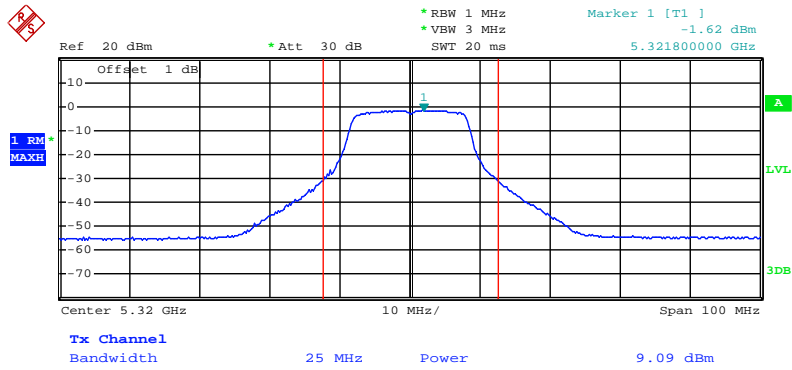

Date: 12.JUL.2011 04:28:44


### Conducted Output Power Plot on Configuration IEEE 802.11a J4 / 5320 MHz

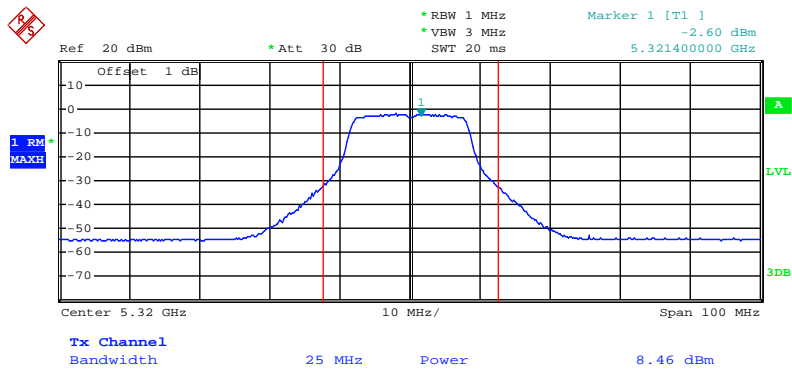

Date: 12.JUL.2011 04:25:58


<For Mode 2 (Ant. 4)>:

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J2 / 5300 MHz

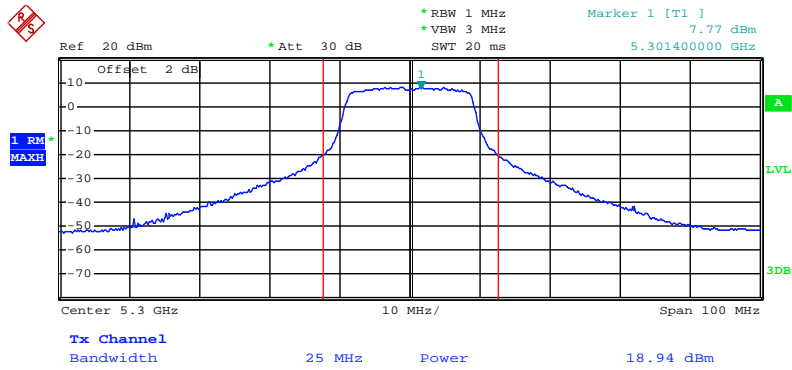


Date: 11.AUG.2010 22:34:42

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J3 / 5300 MHz

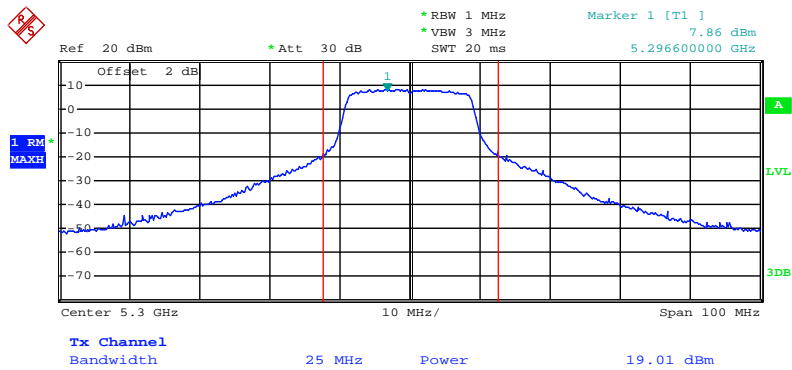


Date: 11.AUG.2010 22:35:07

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J4 / 5300 MHz

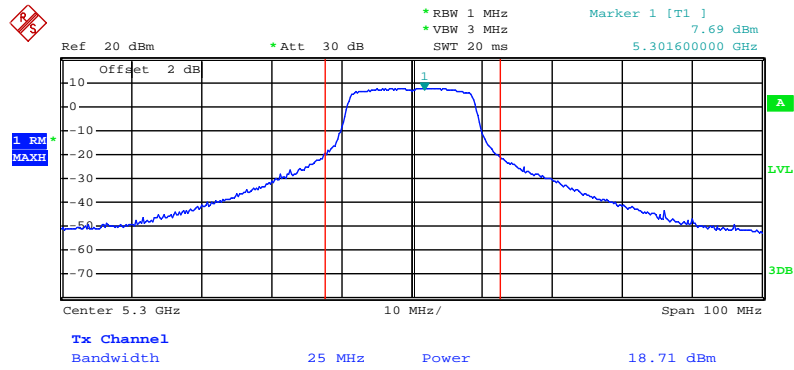

Date: 11.AUG.2010 22:35:52


Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J2 / 5270 MHz

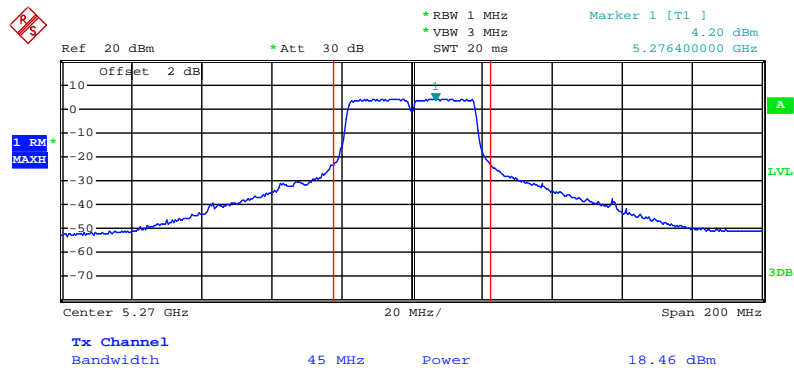

Date: 11.AUG.2010 22:24:58




**Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J3 / 5270 MHz**

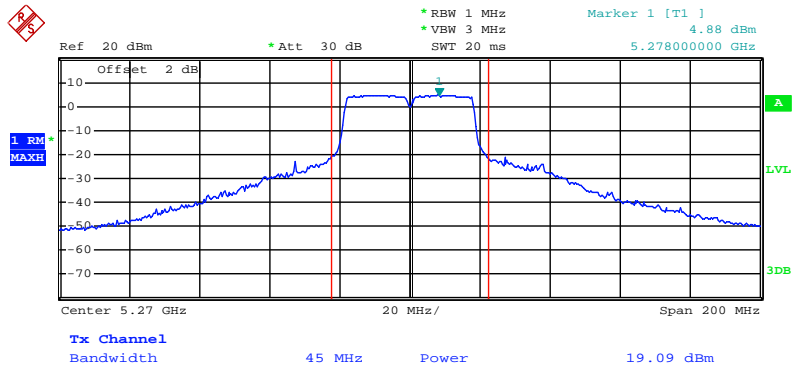


Date: 11.AUG.2010 22:25:40

**Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J4 / 5270 MHz**

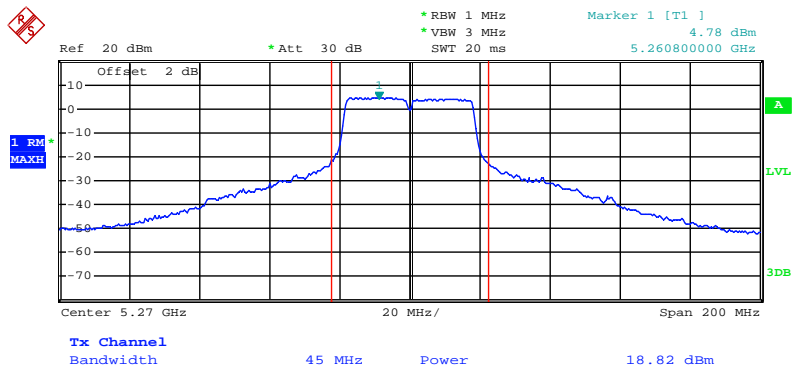


Date: 11.AUG.2010 22:26:12

**Conducted Output Power Plot on Configuration IEEE 802.11a J2 / 5320 MHz**

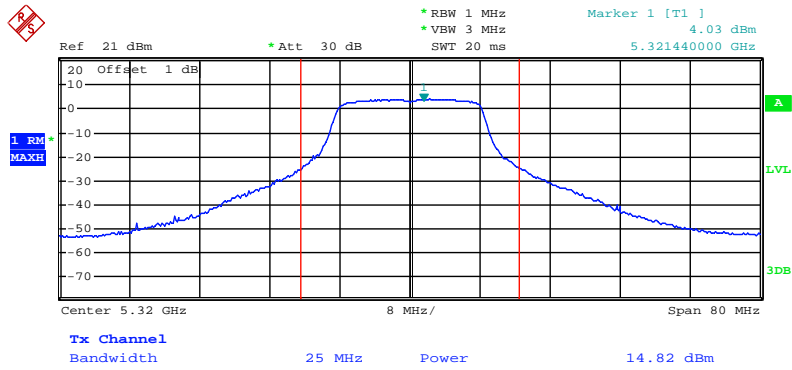


Date: 12.JUL.2011 04:50:16

**Conducted Output Power Plot on Configuration IEEE 802.11a J3 / 5320 MHz**

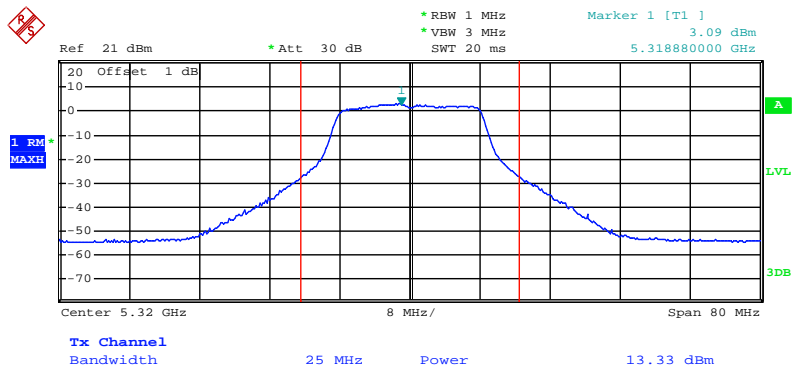

Date: 12.JUL.2011 04:50:58


Conducted Output Power Plot on Configuration IEEE 802.11a J4 / 5320 MHz

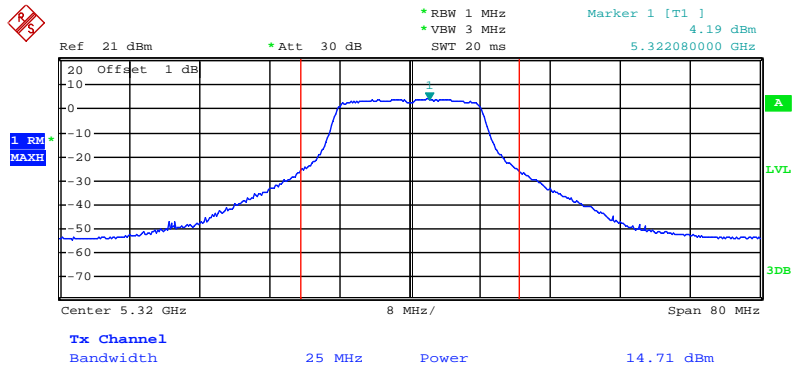

Date: 12.JUL.2011 04:51:25


<For Mode 3 (Ant. 7)>:

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J2 / 5320 MHz

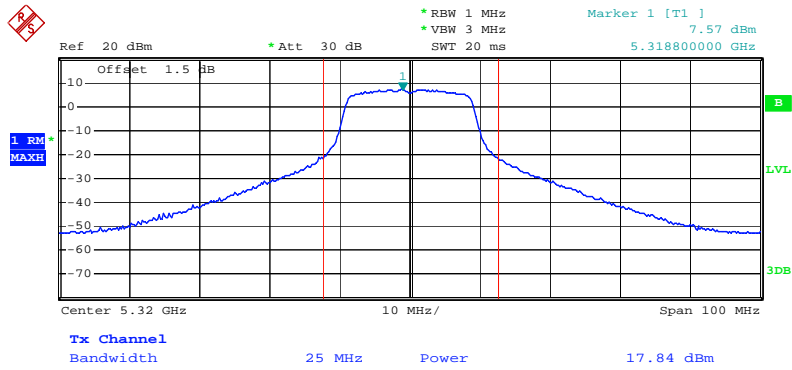


Date: 2.SEP.2010 15:03:41

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J3 / 5320 MHz

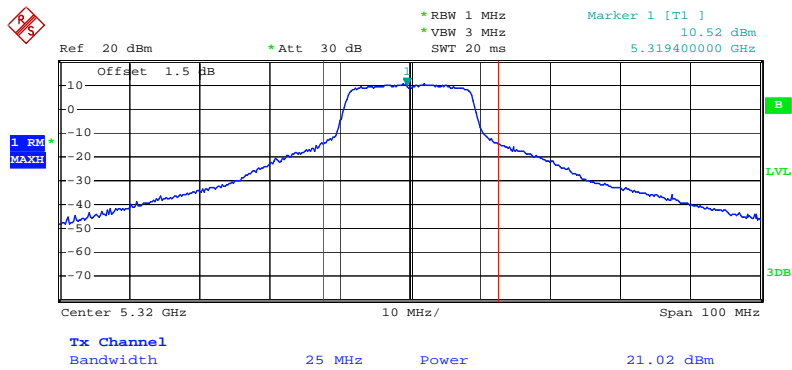


Date: 2.SEP.2010 15:04:46

**Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J4 / 5320 MHz**

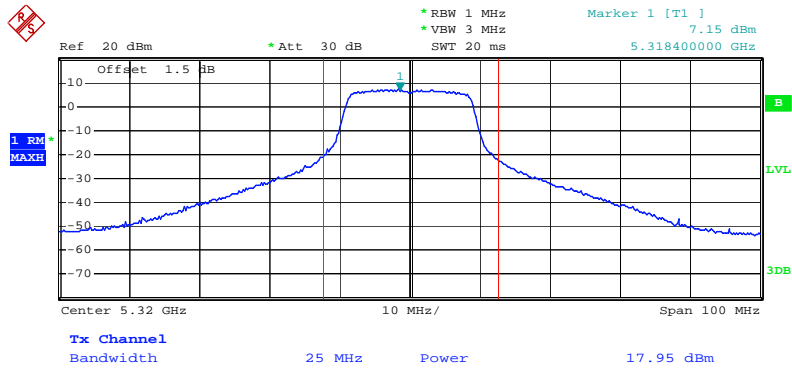


Date: 2.SEP.2010 15:05:43

**Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J2 / 5270 MHz**

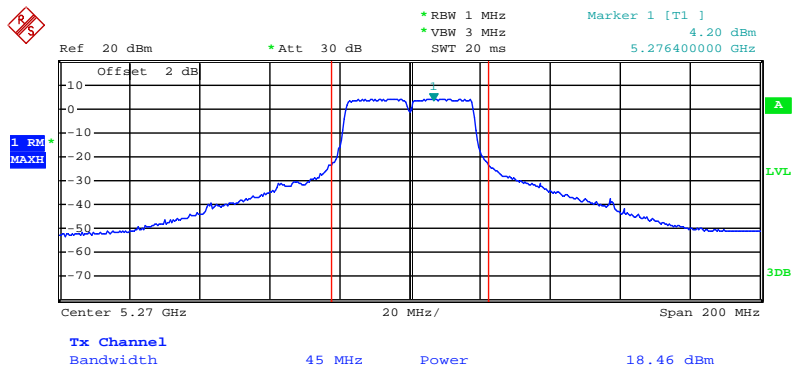


Date: 11.AUG.2010 22:24:58

**Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J3 / 5270 MHz**

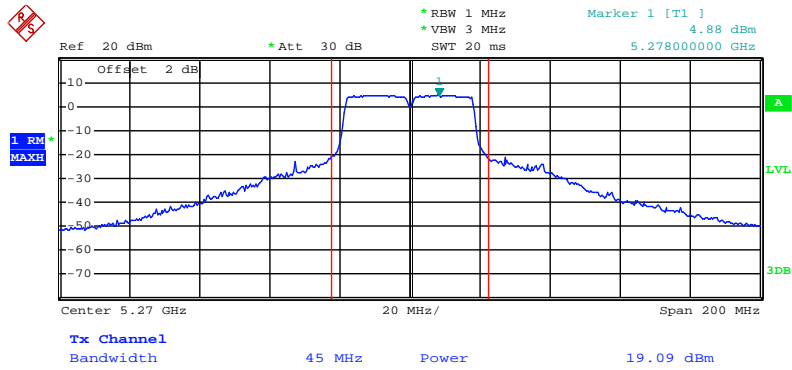


Date: 11.AUG.2010 22:25:40

**Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J4 / 5270 MHz**

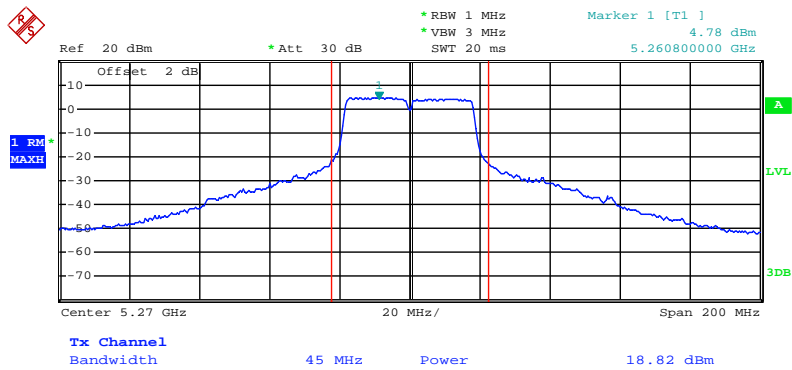


Date: 11.AUG.2010 22:26:12

### Conducted Output Power Plot on Configuration IEEE 802.11a J2 / 5260 MHz

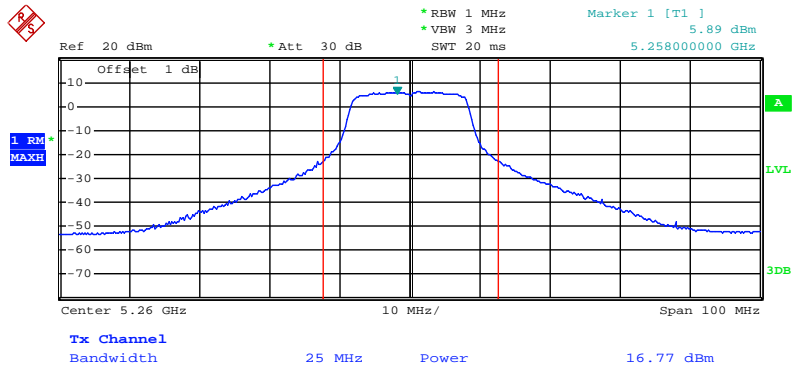


Date: 12.JUL.2011 00:44:33

### Conducted Output Power Plot on Configuration IEEE 802.11a J3 / 5260 MHz

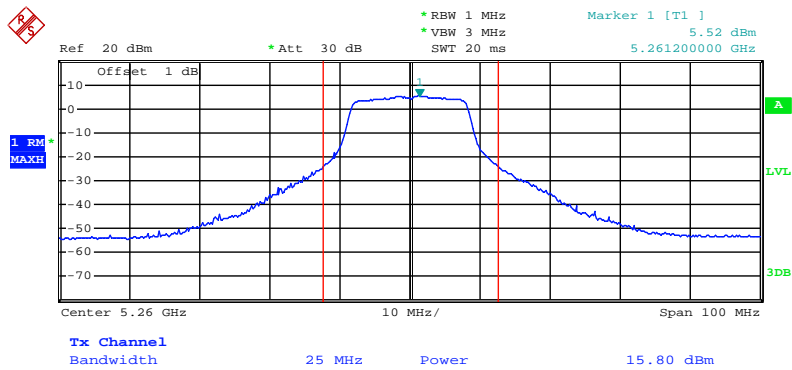

Date: 12.JUL.2011 00:43:29

Conducted Output Power Plot on Configuration IEEE 802.11a J4 / 5260 MHz

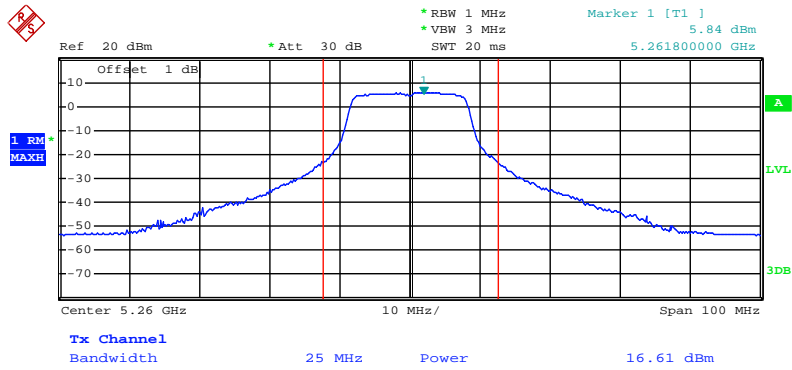


Date: 12.JUL.2011 00:42:36




<For Mode 4 (Ant. 8)>:

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J2 / 5300 MHz

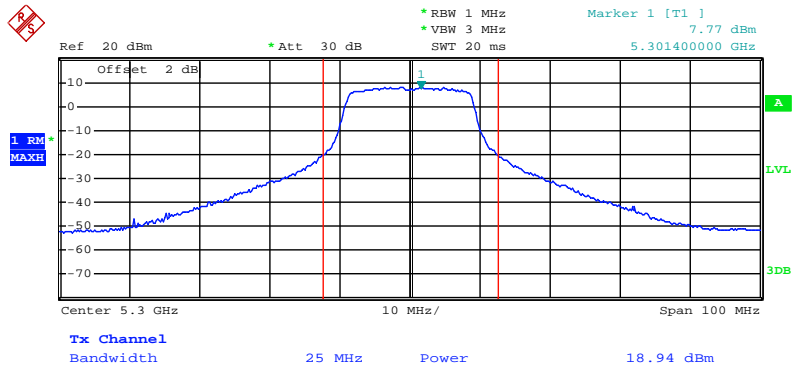


Date: 11.AUG.2010 22:34:42

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J3 / 5300 MHz

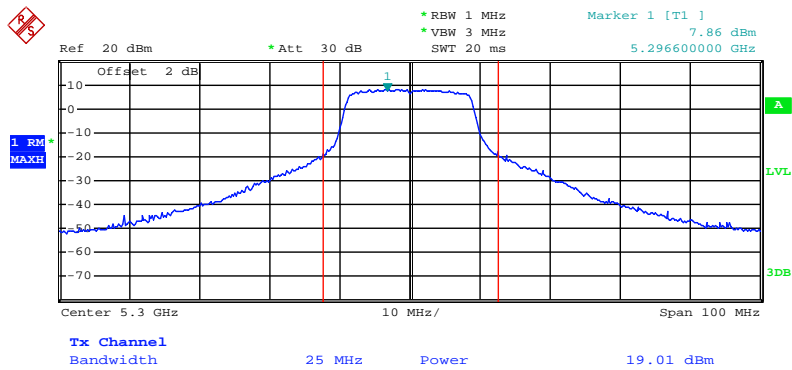


Date: 11.AUG.2010 22:35:07

**Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 20MHz J4 / 5300 MHz**

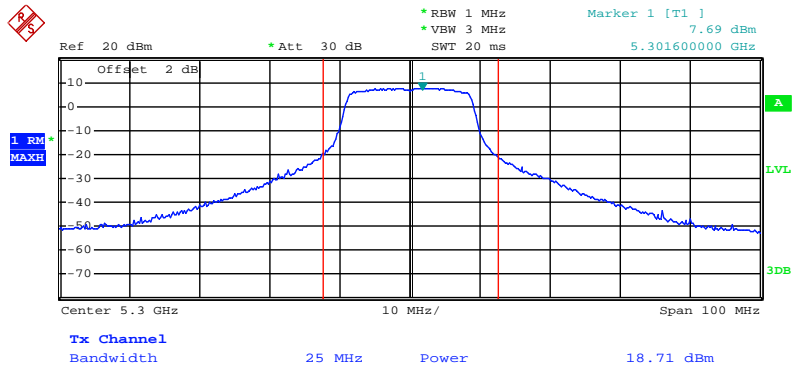


Date: 11.AUG.2010 22:35:52

**Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J2 / 5270 MHz**

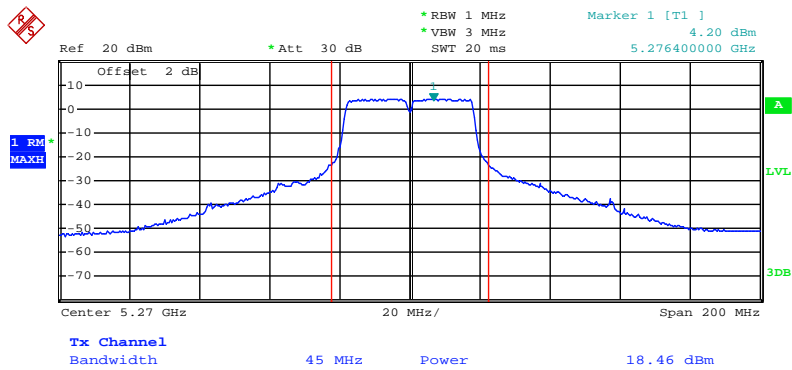


Date: 11.AUG.2010 22:24:58

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J3 / 5270 MHz

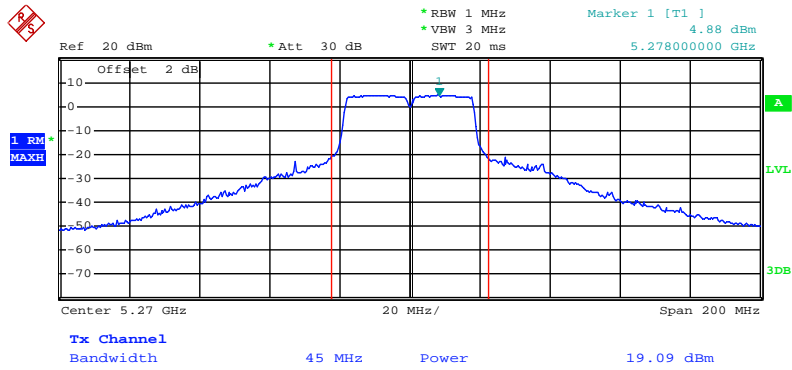


Date: 11.AUG.2010 22:25:40

Conducted Output Power Plot on Configuration IEEE 802.11n MSC8 40MHz J4 / 5270 MHz

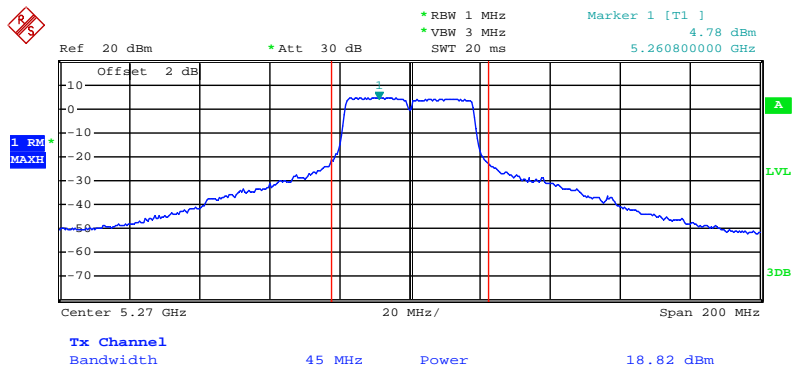


Date: 11.AUG.2010 22:26:12

### Conducted Output Power Plot on Configuration IEEE 802.11a J2 / 5260 MHz

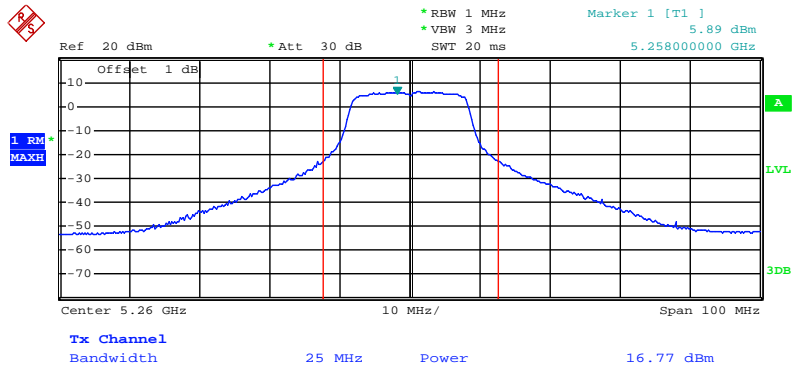


Date: 12..JUL.2011 00:44:33

### Conducted Output Power Plot on Configuration IEEE 802.11a J3 / 5260 MHz

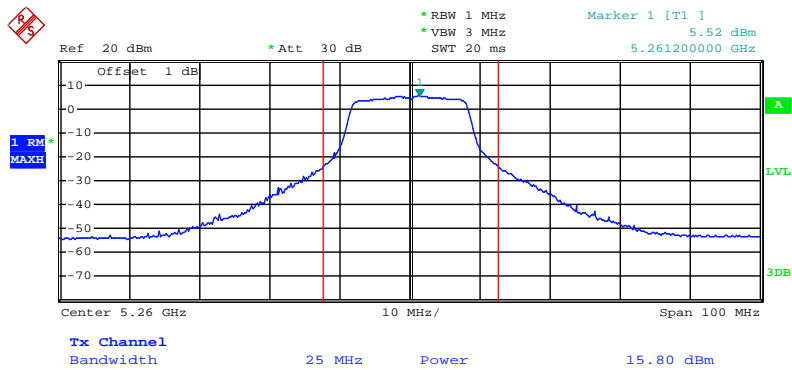

Date: 12..JUL.2011 00:43:29

Conducted Output Power Plot on Configuration IEEE 802.11a J4 / 5260 MHz

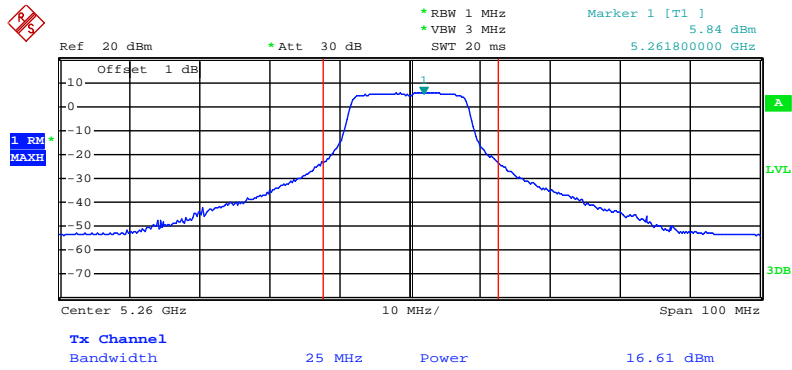

Date: 12.JUL.2011 00:42:36

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

<For Mode 1 (Ant. 1)>:

| Frequency Range | Power Spectral Density limit (dBm/MHz) |
|-----------------|--|
| 5.25-5.35 GHz   | 2.00                                   |

<For Mode 2 (Ant. 4), Mode 3 (Ant. 7), Mode 4 (Ant. 8)>:

| Frequency Range | Power Spectral Density limit (dBm/MHz) |
|-----------------|--|
| 5.25-5.35 GHz   | 11.00                                  |

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.


| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB                 | 1000 kHz   |
| VB                 | 3000 kHz   |
| Detector           | Peak   |
| Trace              | Max Hold   |
| Sweep Time         | Auto   |

| Cable Loss  |           | Combiner Loss |           |
|-------------|-----------|---------------|-----------|
| 2.4GHz Band | 5GHz Band | 2.4GHz Band   | 5GHz Band |
| 0.8         | 1.5       | 5.15          | 5.38      |

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

#### 4.4.4. Test Setup Layout

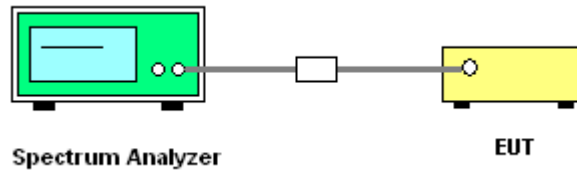

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

<For Mode 1 (Ant. 1)>:

|                      |               |                       |                                |
|----------------------|---------------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C          | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n / Mode 1 (Ant. 1) |

##### Configuration IEEE 802.11n MSC8 20MHz

| Channel | Frequency | Power Density (dBm/3kHz) |       | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J4    |                                |                       |          |
| 52      | 5260 MHz  | -5.24                    | -6.38 | -2.76                          | 2.00                  | Complies |
| 60      | 5300 MHz  | -4.70                    | -5.50 | -2.07                          | 2.00                  | Complies |
| 64      | 5320 MHz  | -4.29                    | -5.18 | -1.70                          | 2.00                  | Complies |

##### Configuration IEEE 802.11n MSC8 40MHz

| Channel | Frequency | Power Density (dBm/3kHz) |        | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J4     |                                |                       |          |
| 54      | 5270 MHz  | -9.51                    | -10.43 | -6.94                          | 2.00                  | Complies |
| 62      | 5310 MHz  | -11.43                   | -13.02 | -9.14                          | 2.00                  | Complies |

|                      |               |                       |                                |
|----------------------|---------------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C          | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a / Mode 1 (Ant. 1) |

##### Configuration IEEE 802.11a

| Channel | Frequency | Power Density (dBm/3kHz) |       | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J4    |                                |                       |          |
| 52      | 5260 MHz  | -6.53                    | -6.99 | -3.74                          | -1.01                 | Complies |
| 60      | 5300 MHz  | -6.24                    | -7.23 | -3.70                          | -1.01                 | Complies |
| 64      | 5320 MHz  | -5.90                    | -7.12 | -3.46                          | -1.01                 | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.



<For Mode 2 (Ant. 4)>:

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n / Mode 2 (Ant. 4) |

Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4

| Channel | Frequency | Power Density (dBm/3kHz) |      |      | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|------|------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3   | J4   |                                |                       |          |
| 52      | 5260 MHz  | 1.02                     | 0.93 | 1.25 | 5.84                           | 11.00                 | Complies |
| 60      | 5300 MHz  | 2.23                     | 1.12 | 2.21 | 6.65                           | 11.00                 | Complies |
| 64      | 5320 MHz  | 1.26                     | 0.12 | 1.63 | 5.82                           | 11.00                 | Complies |

Configuration IEEE 802.11n MSC8 40MHz

| Channel | Frequency | Power Density (dBm/3kHz) |       |       | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|-------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3    | J4    |                                |                       |          |
| 54      | 5270 MHz  | -1.22                    | -1.27 | -1.18 | 3.55                           | 11.00                 | Complies |
| 62      | 5310 MHz  | -4.86                    | -5.94 | -5.38 | -0.60                          | 11.00                 | Complies |

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11a / Mode 2 (Ant. 4) |

Configuration IEEE 802.11a

| Channel | Frequency | Power Density (dBm/3kHz) |       |       | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|-------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3    | J4    |                                |                       |          |
| 52      | 5260 MHz  | 0.67                     | -0.13 | 0.43  | 5.11                           | 6.23                  | Complies |
| 60      | 5300 MHz  | 0.78                     | -0.69 | 0.18  | 4.90                           | 6.23                  | Complies |
| 64      | 5320 MHz  | 0.31                     | -1.38 | -0.62 | 4.26                           | 6.23                  | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

<For Mode 3 (Ant. 7)>:

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n / Mode 3 (Ant. 7) |

Configuration IEEE 802.11n MSC8 20MHz

| Channel | Frequency | Power Density (dBm/3kHz) |      |      | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|------|------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3   | J4   |                                |                       |          |
| 52      | 5260 MHz  | 1.02                     | 0.93 | 1.25 | 5.84                           | 11.00                 | Complies |
| 60      | 5300 MHz  | 2.23                     | 1.12 | 2.21 | 6.65                           | 11.00                 | Complies |
| 64      | 5320 MHz  | 3.13                     | 1.30 | 3.06 | 7.35                           | 11.00                 | Complies |

Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4

| Channel | Frequency | Power Density (dBm/3kHz) |       |       | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|-------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3    | J4    |                                |                       |          |
| 54      | 5270 MHz  | -1.22                    | -1.27 | -1.18 | 3.55                           | 11.00                 | Complies |
| 62      | 5310 MHz  | -3.72                    | -4.88 | -4.29 | 0.50                           | 11.00                 | Complies |

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11a / Mode 3 (Ant. 7) |

Configuration IEEE 802.11a

| Channel | Frequency | Power Density (dBm/3kHz) |       |      | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3    | J4   |                                |                       |          |
| 52      | 5260 MHz  | 0.85                     | 0.37  | 1.23 | 5.60                           | 8.23                  | Complies |
| 60      | 5300 MHz  | 0.87                     | 0.47  | 0.78 | 5.48                           | 8.23                  | Complies |
| 64      | 5320 MHz  | 1.27                     | -0.20 | 0.58 | 5.36                           | 8.23                  | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

<For Mode 4 (Ant. 8)>:

|               |          |                |                                |
|---------------|----------|----------------|--------------------------------|
| Temperature   | 24°C     | Humidity       | 56%                            |
| Test Engineer | Jacky Ho | Configurations | IEEE 802.11n / Mode 4 (Ant. 8) |

Configuration IEEE 802.11n MSC8 20MHz

| Channel | Frequency | Power Density (dBm/3kHz) |       |       | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|-------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3    | J4    |                                |                       |          |
| 52      | 5260 MHz  | 1.02                     | 0.93  | 1.25  | 5.84                           | 11.00                 | Complies |
| 60      | 5300 MHz  | 2.23                     | 1.12  | 2.21  | 6.65                           | 11.00                 | Complies |
| 64      | 5320 MHz  | 0.23                     | -1.47 | -0.34 | 4.30                           | 11.00                 | Complies |

Configuration IEEE 802.11n MSC8 40MHz

| Channel | Frequency | Power Density (dBm/3kHz) |       |       | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|-------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3    | J4    |                                |                       |          |
| 54      | 5270 MHz  | -1.22                    | -1.27 | -1.18 | 3.55                           | 11.00                 | Complies |
| 62      | 5310 MHz  | -6.43                    | -7.71 | -7.13 | -2.29                          | 11.00                 | Complies |

|               |          |                |                                |
|---------------|----------|----------------|--------------------------------|
| Temperature   | 24°C     | Humidity       | 56%                            |
| Test Engineer | Jacky Ho | Configurations | IEEE 802.11a / Mode 4 (Ant. 8) |

Configuration IEEE 802.11a


| Channel | Frequency | Power Density (dBm/3kHz) |       |      | Total Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|-------|------|--------------------------------|-----------------------|----------|
|         |           | J2                       | J3    | J4   |                                |                       |          |
| 52      | 5260 MHz  | 0.85                     | 0.37  | 1.23 | 5.60                           | 8.23                  | Complies |
| 60      | 5300 MHz  | 0.87                     | 0.47  | 0.78 | 5.48                           | 8.23                  | Complies |
| 64      | 5320 MHz  | 1.27                     | -0.20 | 0.58 | 5.36                           | 8.23                  | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


<For Mode 1 (Ant. 1)>

Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J2 / 5320 MHz

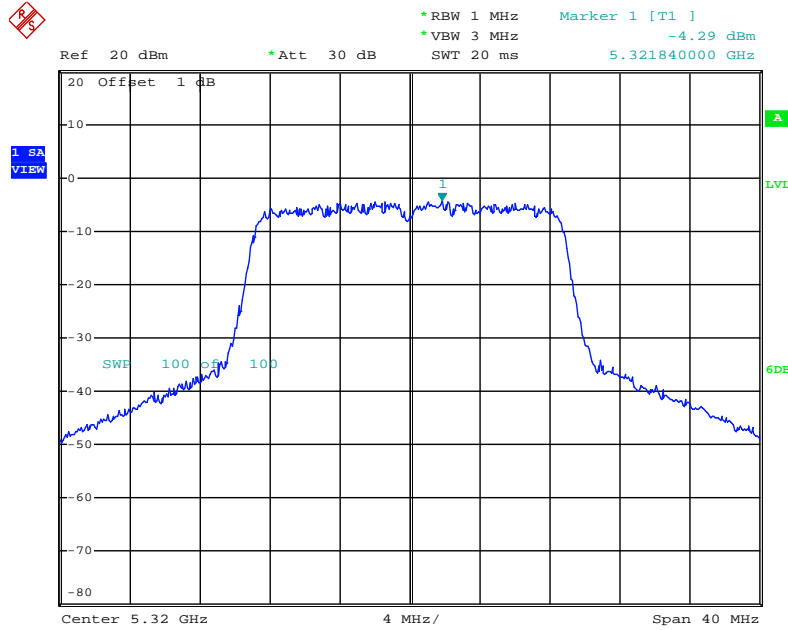


Date: 13.JUL.2011 02:58:56

Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J4 / 5320 MHz

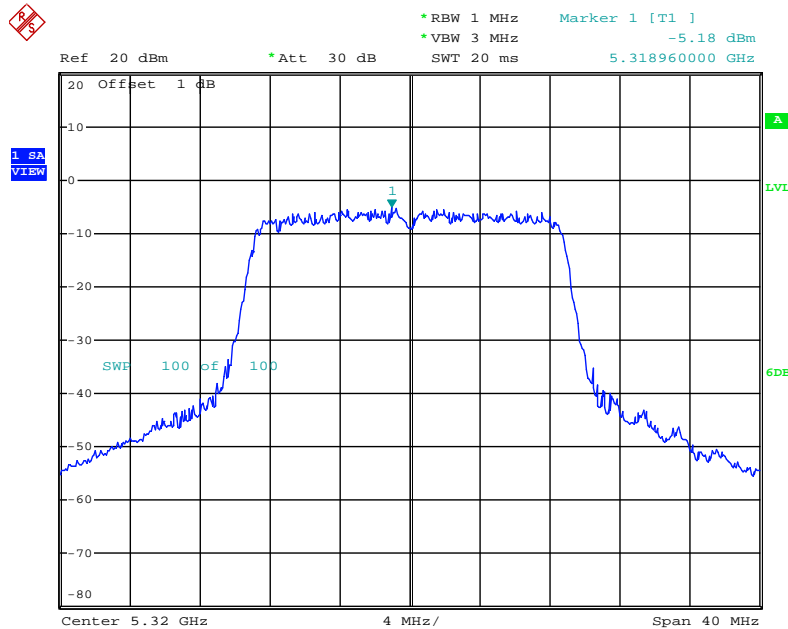


Date: 13.JUL.2011 02:59:52

## Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J2 / 5270 MHz

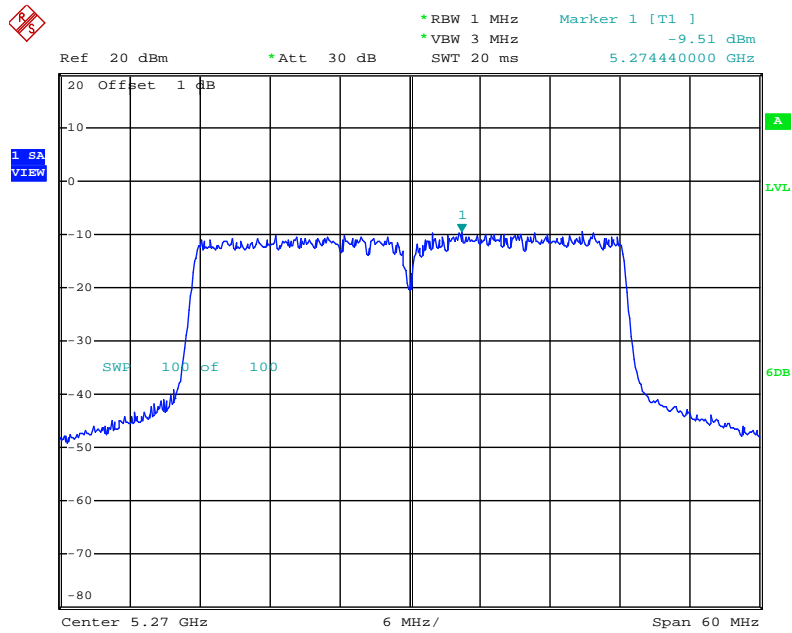


Date: 13.JUL.2011 03:08:06

## Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J4 / 5270 MHz

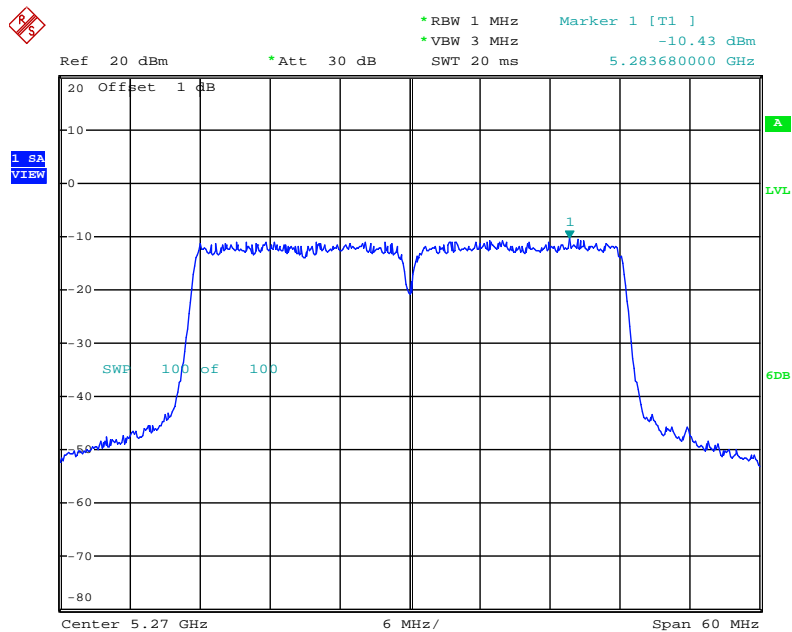


Date: 13.JUL.2011 03:06:50

**Power Density Plot on Configuration IEEE 802.11a J2 / 5320 MHz**

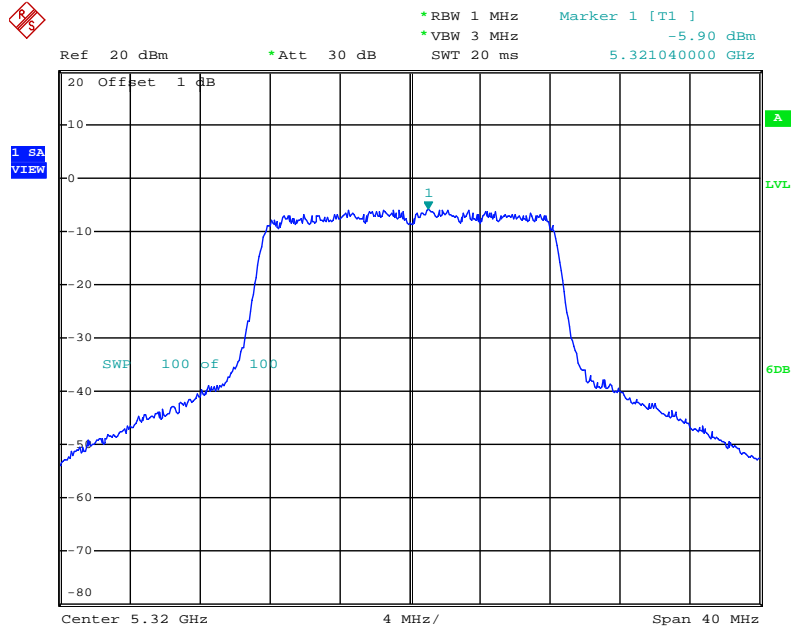

Date: 13.JUL.2011 02:56:52


**Power Density Plot on Configuration IEEE 802.11a J4 / 5320 MHz**

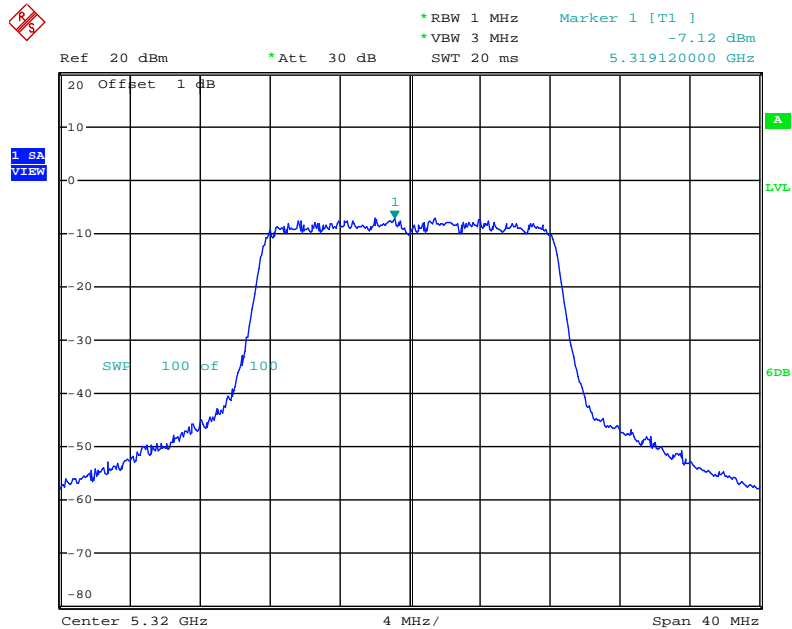

Date: 13.JUL.2011 02:55:41


<For Mode 2 (Ant. 4)>:

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J2 / 5300 MHz**

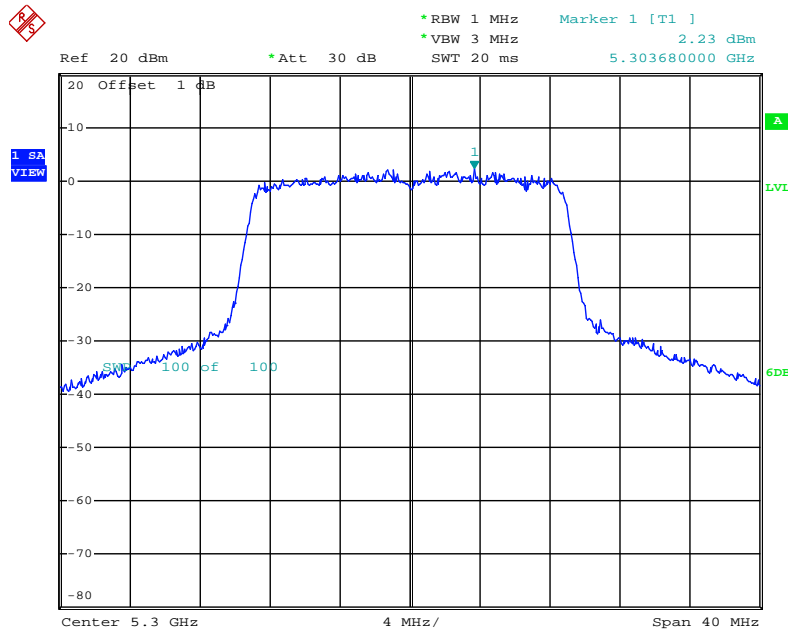


Date: 12.JUL.2011 01:54:37

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J3 / 5300 MHz**

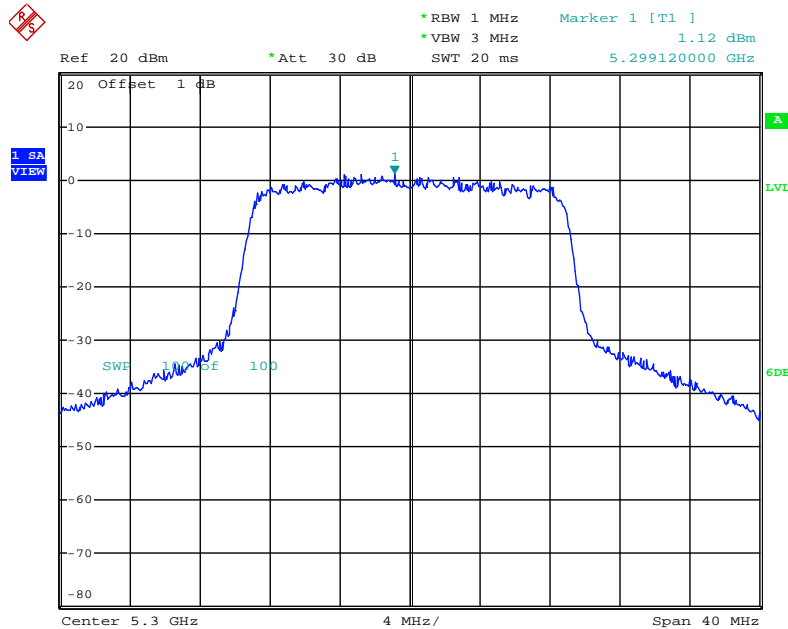


Date: 12.JUL.2011 01:52:40

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J4 / 5300 MHz**

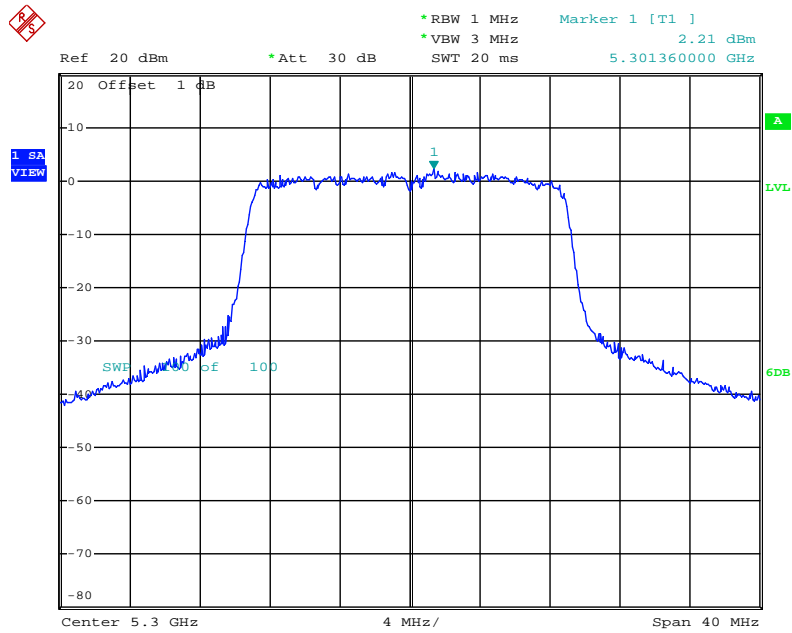

Date: 12.JUL.2011 01:50:48


**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J2 / 5270 MHz**

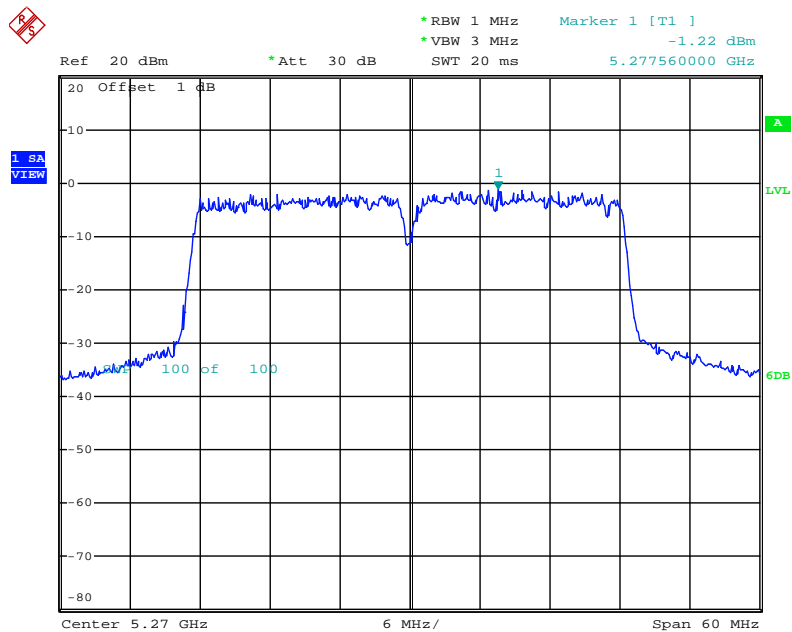

Date: 12.JUL.2011 01:29:41




**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J3 / 5270 MHz**

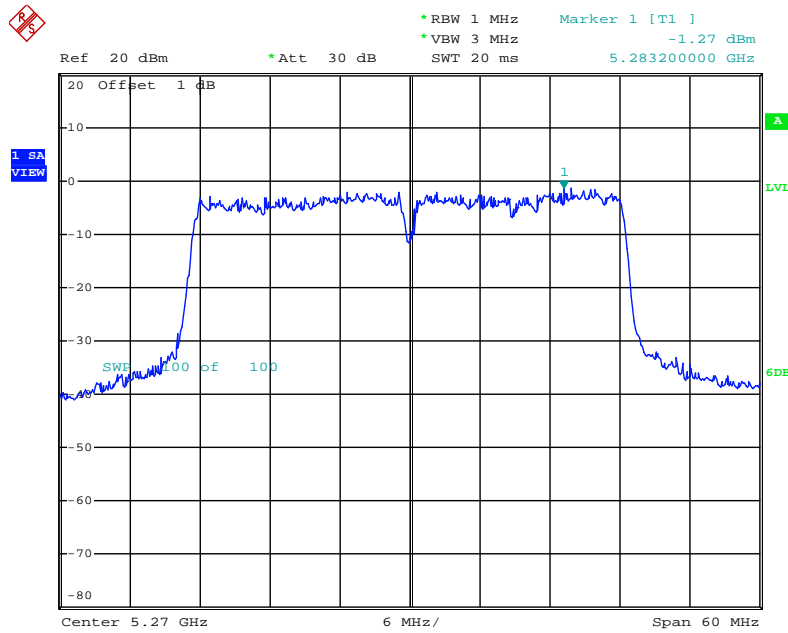


Date: 12.JUL.2011 01:34:53

**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J4 / 5270 MHz**

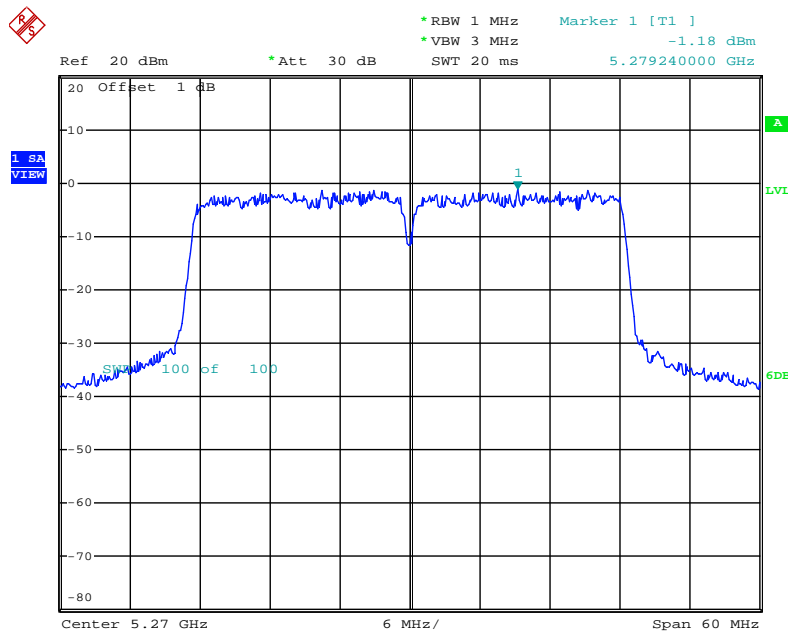


Date: 12.JUL.2011 01:36:49

**Power Density Plot on Configuration IEEE 802.11a J2 / 5260 MHz**

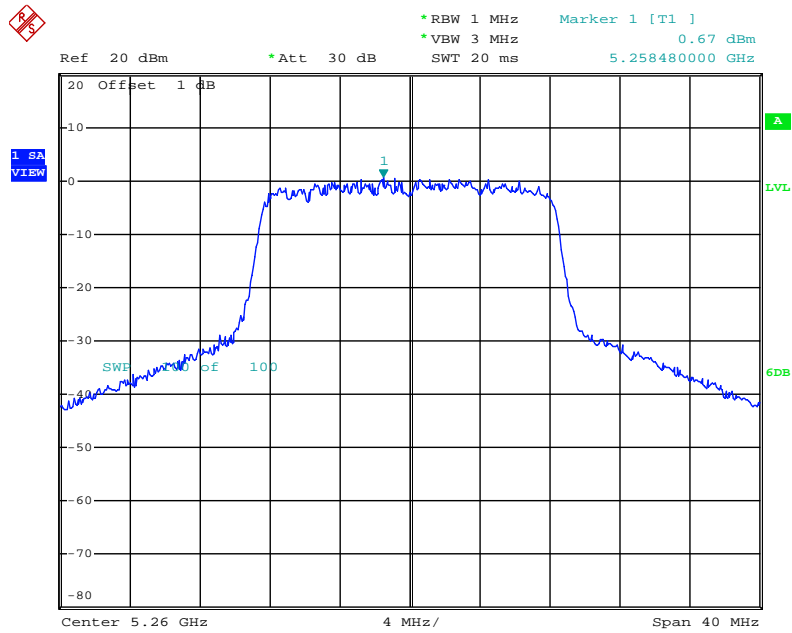


Date: 12.JUL.2011 03:54:38

**Power Density Plot on Configuration IEEE 802.11a J3 / 5260 MHz**

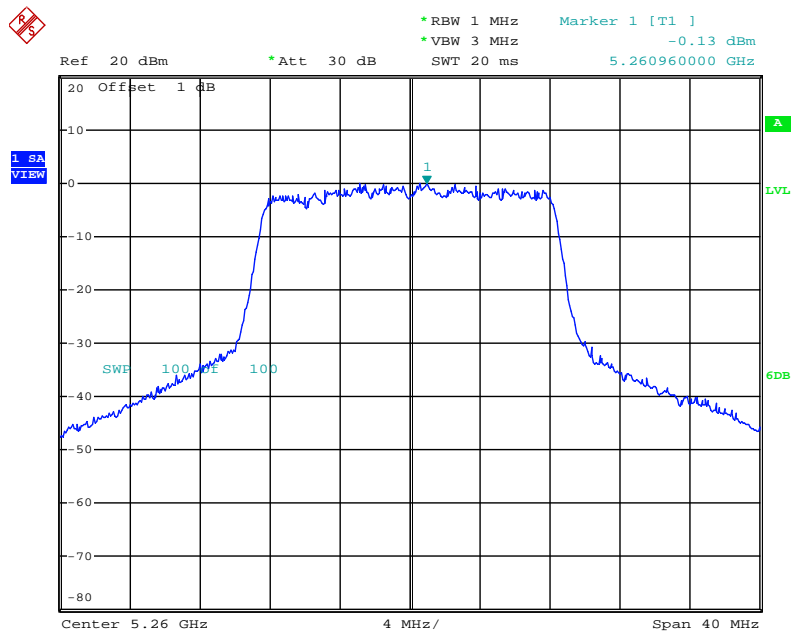

Date: 12.JUL.2011 03:53:57


### Power Density Plot on Configuration IEEE 802.11a J4 / 5260 MHz

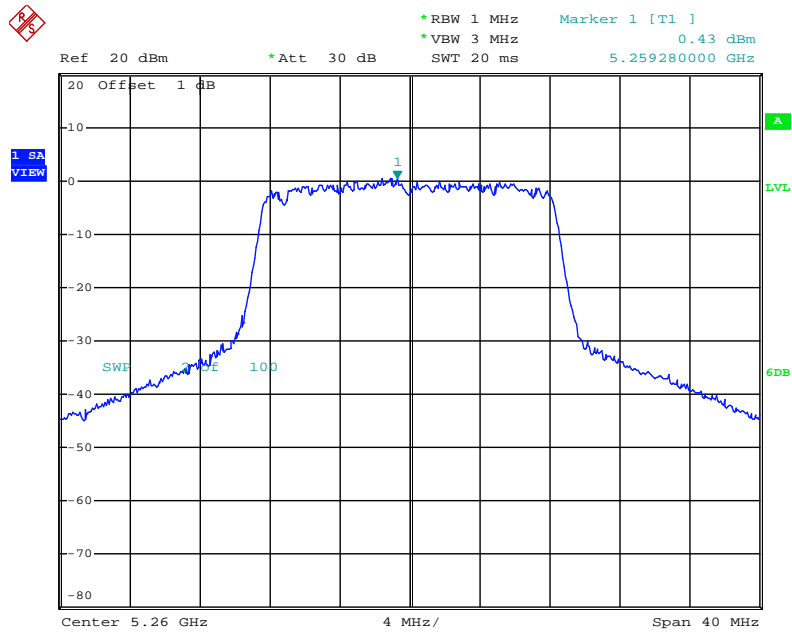

Date: 12.JUL.2011 03:53:00


<For Mode 3 (Ant. 7)>:

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J2 / 5320 MHz**

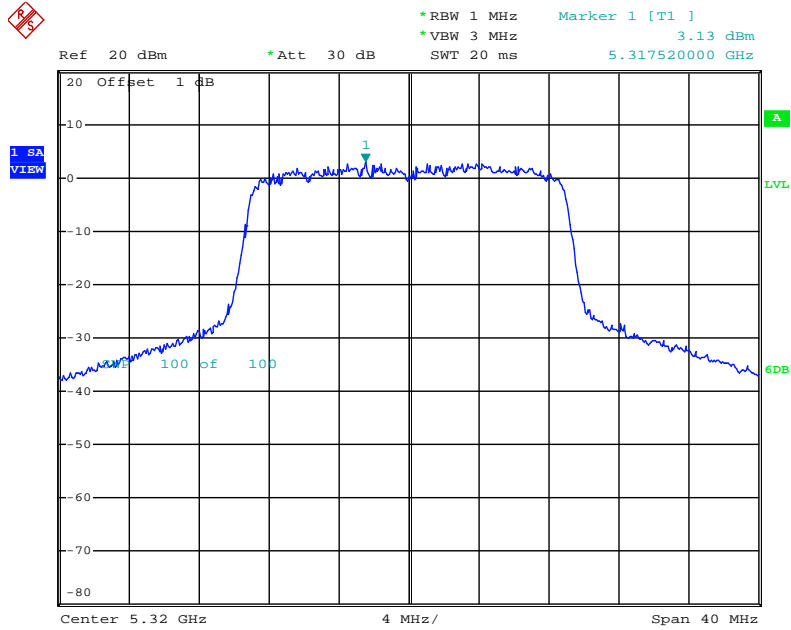


Date: 12.JUL.2011 02:50:42

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J3 / 5320 MHz**

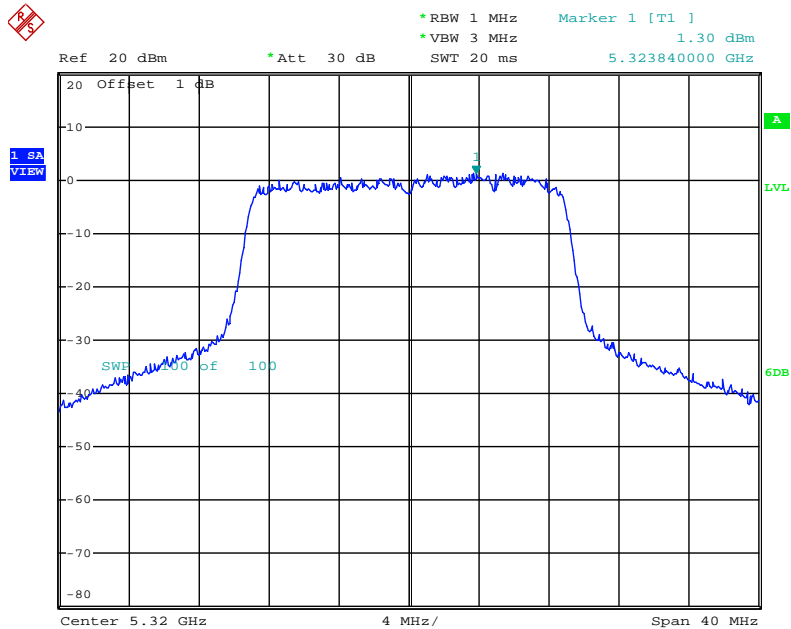


Date: 12.JUL.2011 02:53:36

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J4 / 5320 MHz**

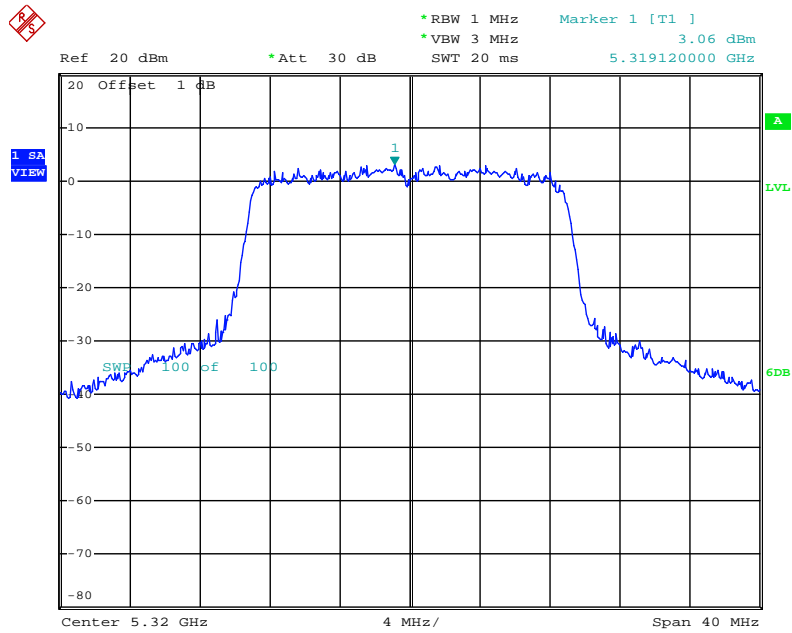


Date: 12.JUL.2011 02:54:48

**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J2 / 5270 MHz**

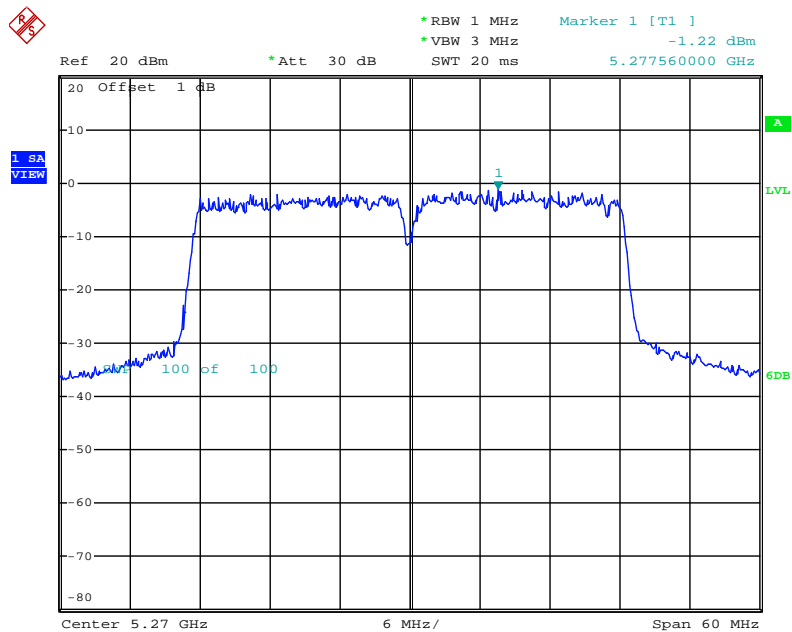


Date: 12.JUL.2011 01:29:41

**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J3 / 5270 MHz**

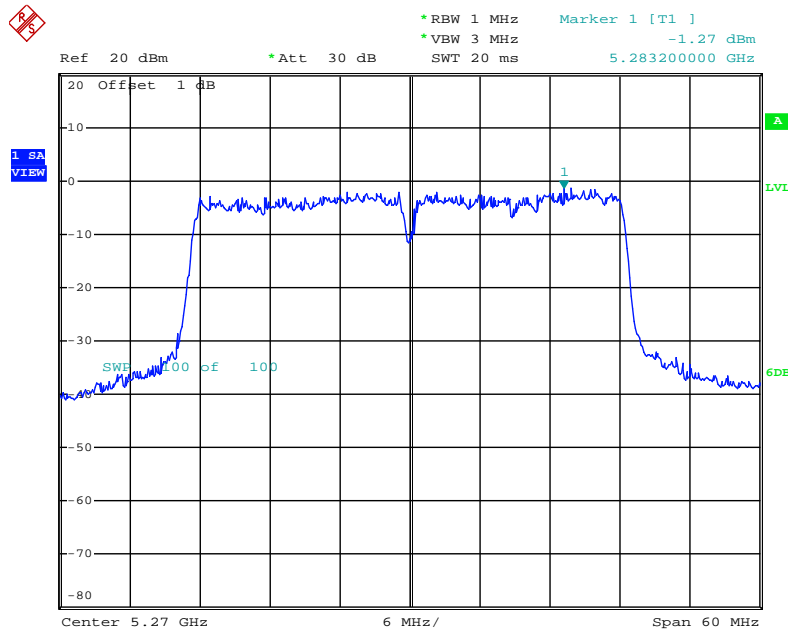


Date: 12.JUL.2011 01:34:53

**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J4 / 5270 MHz**

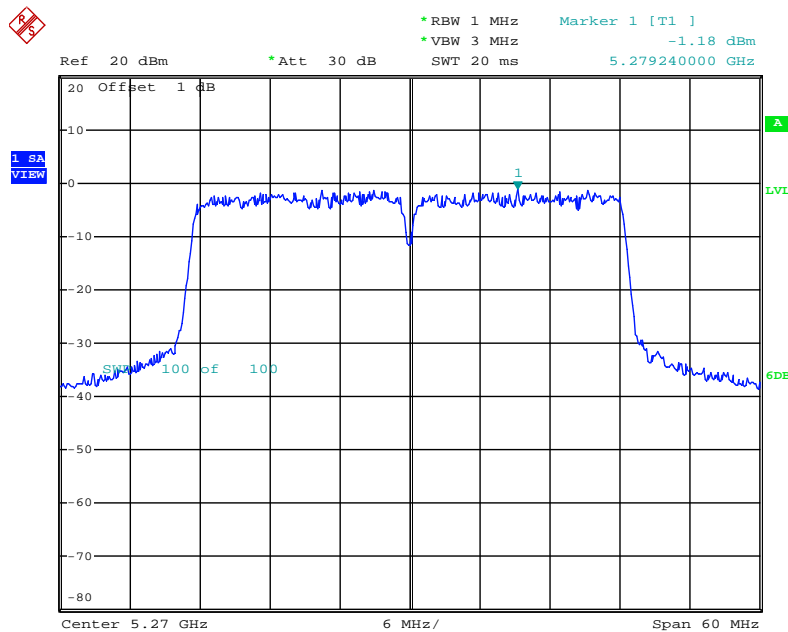


Date: 12.JUL.2011 01:36:49

**Power Density Plot on Configuration IEEE 802.11a J2 / 5260 MHz**

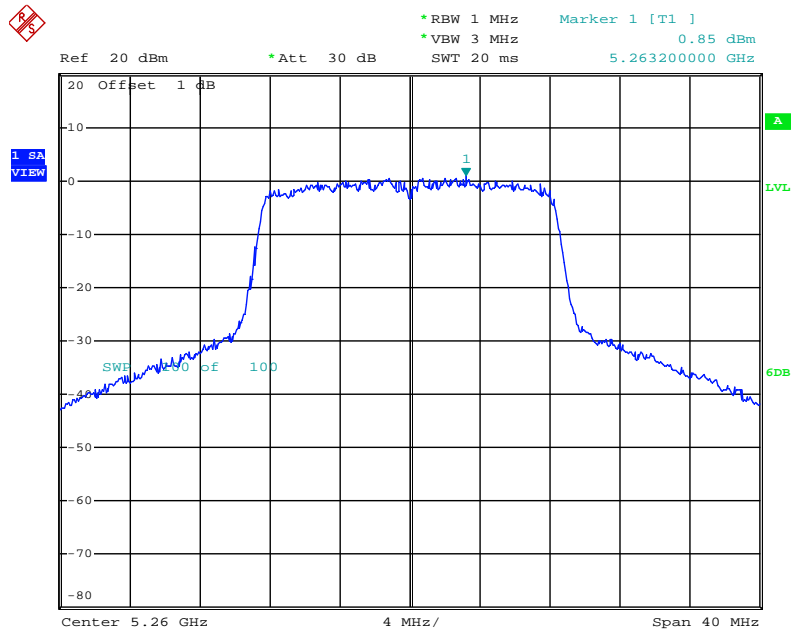


Date: 12.JUL.2011 02:12:58

**Power Density Plot on Configuration IEEE 802.11a J3 / 5260 MHz**

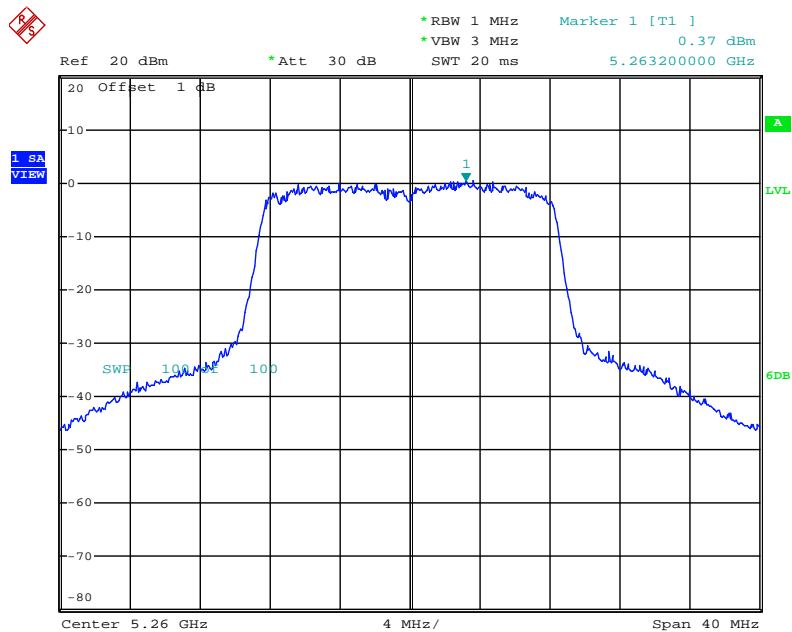

Date: 12.JUL.2011 02:10:25

### Power Density Plot on Configuration IEEE 802.11a J4 / 5260 MHz

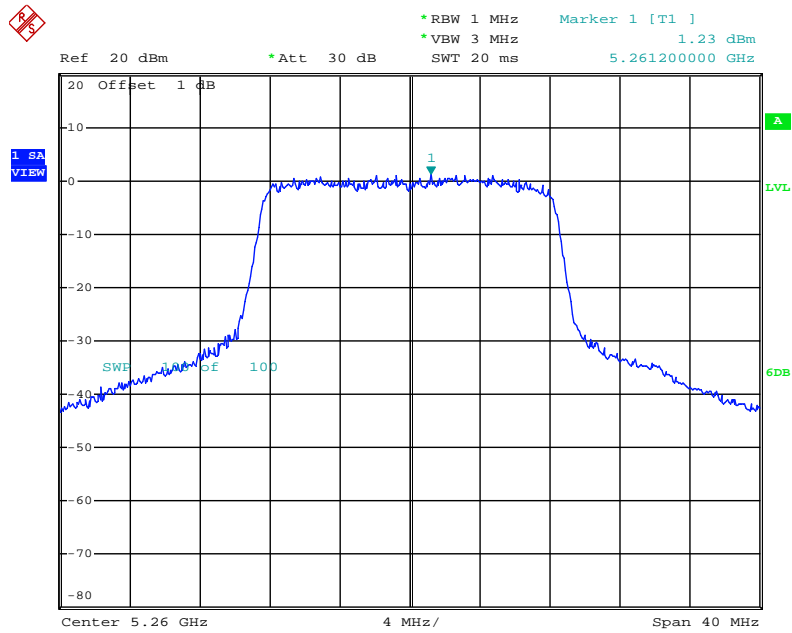


Date: 12.JUL.2011 02:07:32




<For Mode 4 (Ant. 8)>:

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J2 / 5300 MHz**

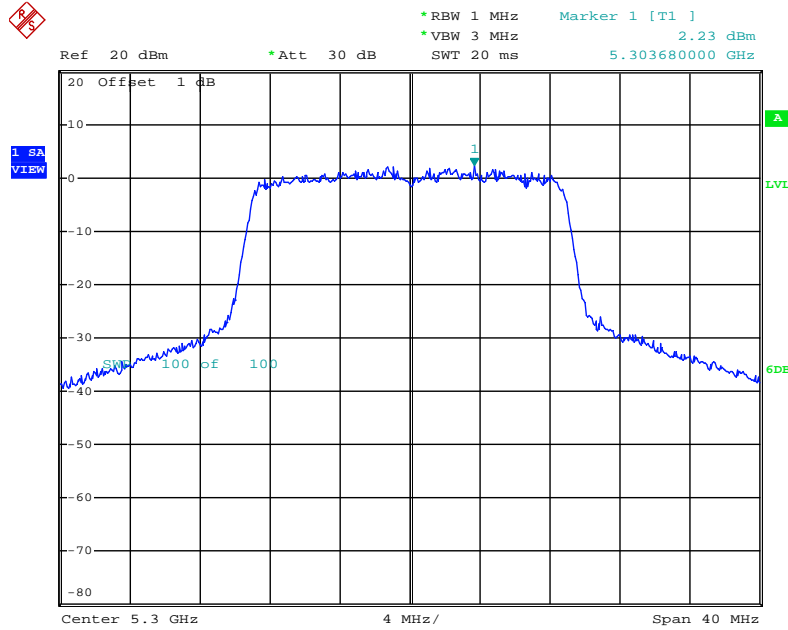


Date: 12.JUL.2011 01:54:37

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J3 / 5300 MHz**

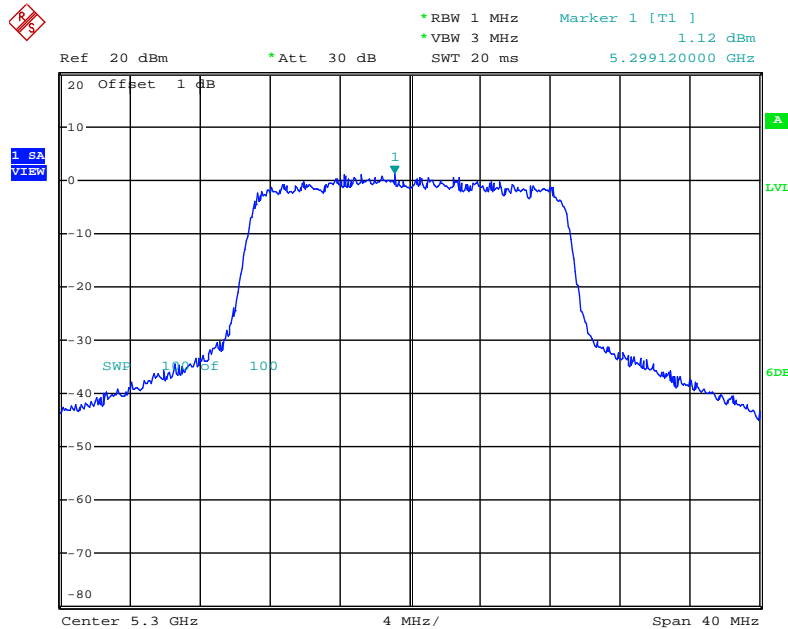


Date: 12.JUL.2011 01:52:40

**Power Density Plot on Configuration IEEE 802.11n MSC8 20MHz J4 / 5300 MHz**

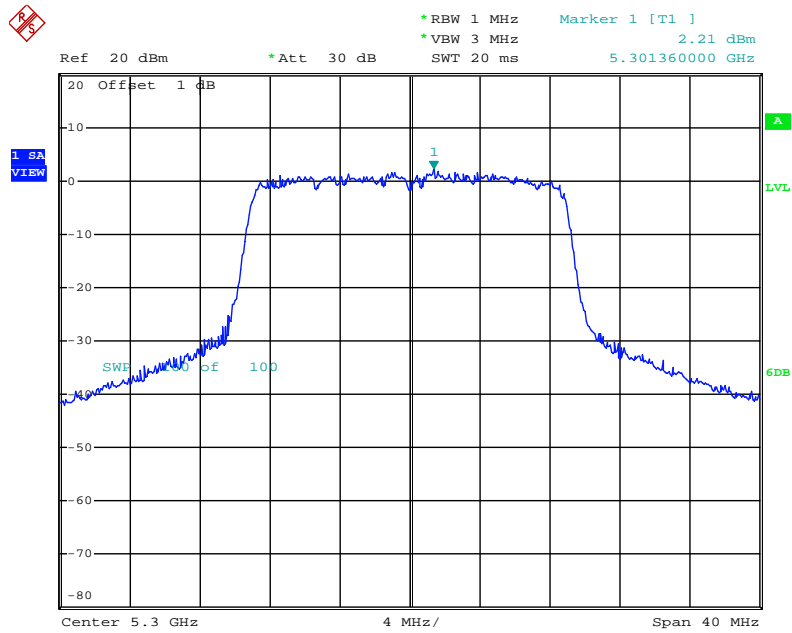


Date: 12.JUL.2011 01:50:48

**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J2 / 5270 MHz**

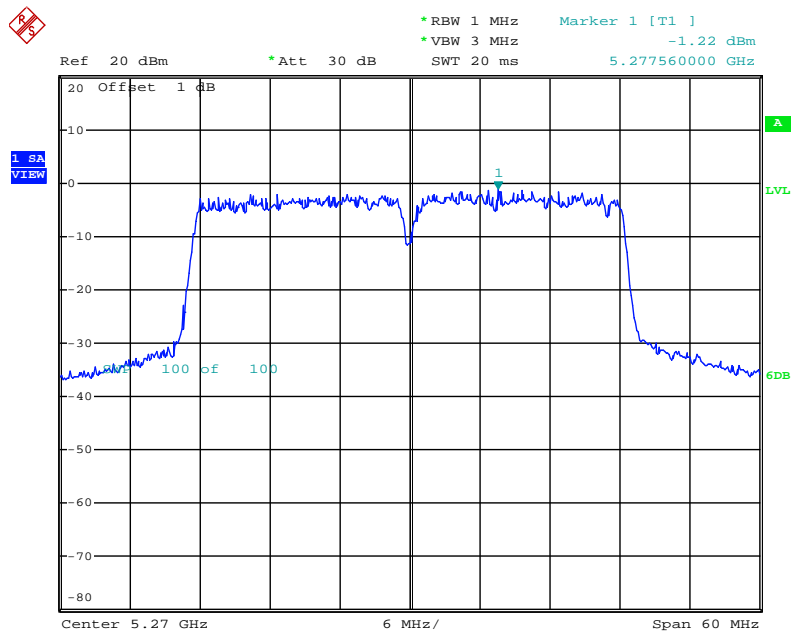


Date: 12.JUL.2011 01:29:41

**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J3 / 5270 MHz**

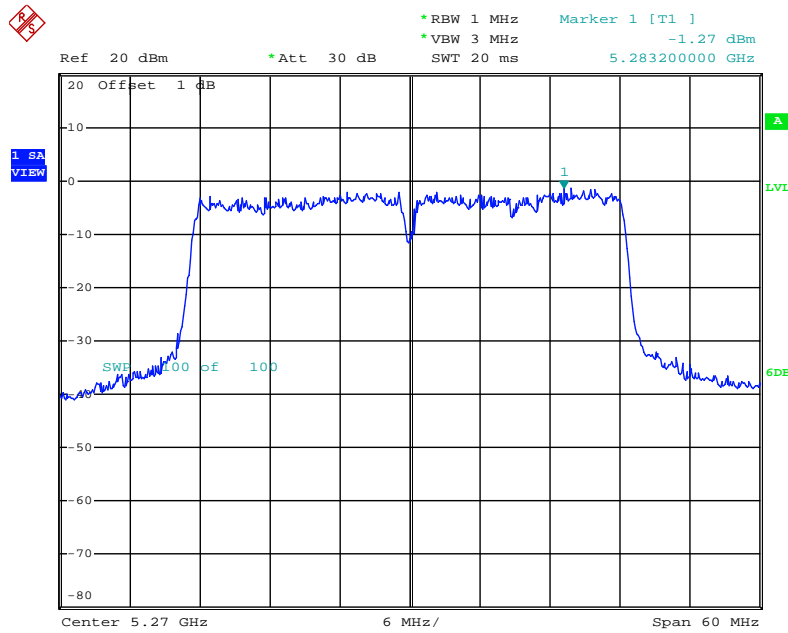


Date: 12.JUL.2011 01:34:53

**Power Density Plot on Configuration IEEE 802.11n MSC8 40MHz J4 / 5270 MHz**

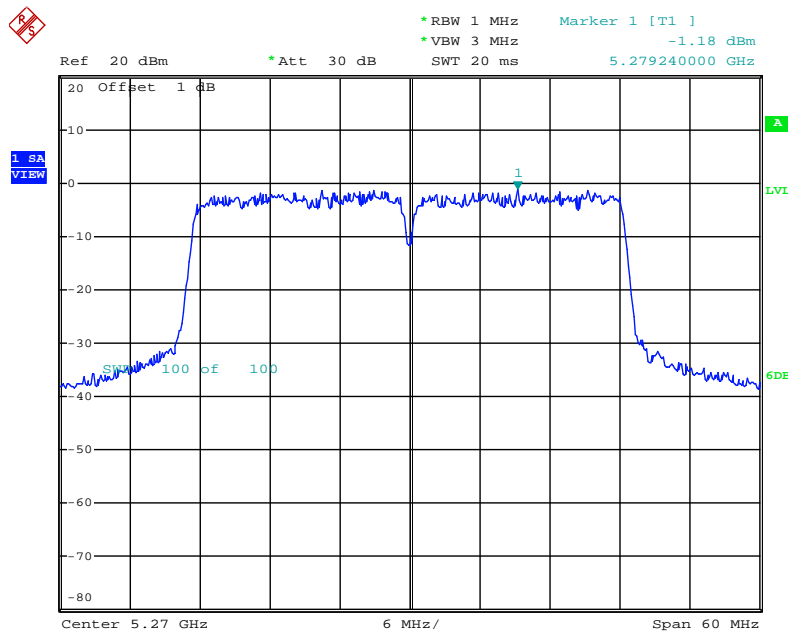


Date: 12.JUL.2011 01:36:49

**Power Density Plot on Configuration IEEE 802.11a J2 / 5260 MHz**

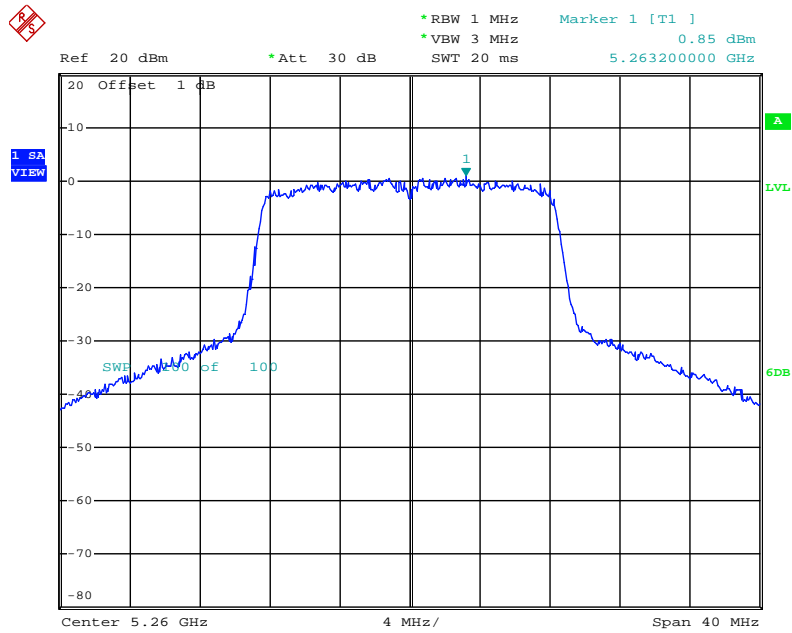


Date: 12.JUL.2011 02:12:58

**Power Density Plot on Configuration IEEE 802.11a J3 / 5260 MHz**

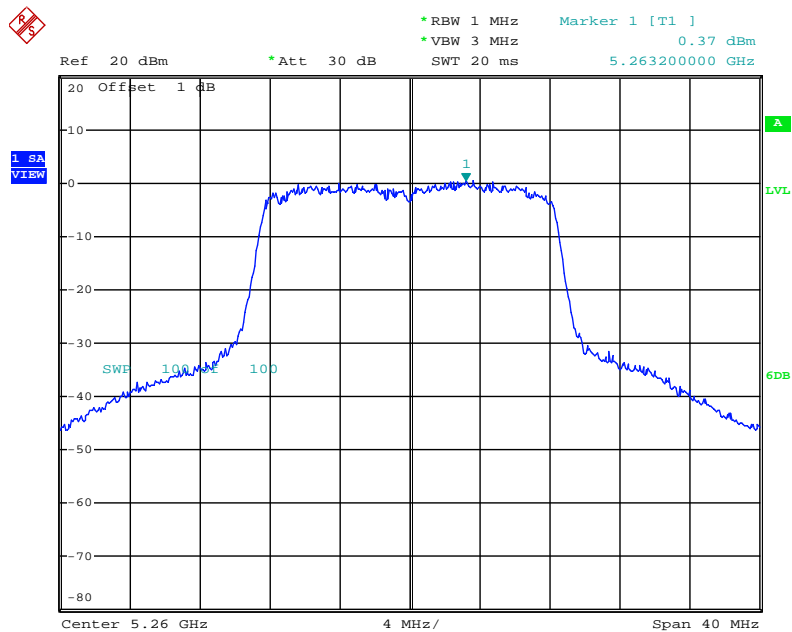

Date: 12.JUL.2011 02:10:25

**Power Density Plot on Configuration IEEE 802.11a J4 / 5260 MHz**

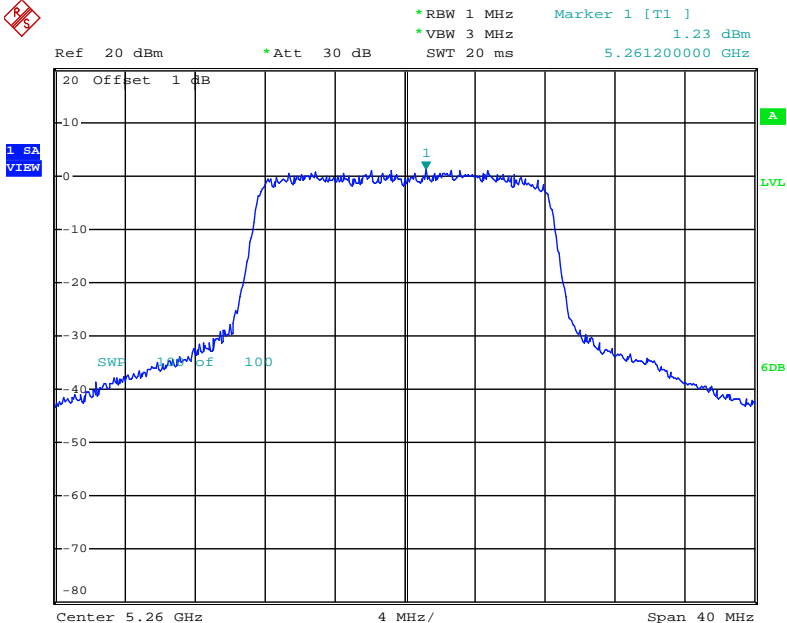

Date: 12.JUL.2011 02:07:32

## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB                 | 1000 kHz (Peak Trace) / 1000 kHz (Average Trace)             |
| VB                 | 3000 kHz (Peak Trace) / 300 kHz (Average Trace)              |
| Detector           | Peak (Peak Trace) / Sample (Average Trace)                   |
| Trace              | Max Hold   |
| Sweep Time         | 60s  |

| Cable Loss  |           | Combiner Loss |           |
|-------------|-----------|---------------|-----------|
| 2.4GHz Band | 5GHz Band | 2.4GHz Band   | 5GHz Band |
| 0.8         | 1.5       | 5.15          | 5.38      |

### 4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

<For Mode 1 (Ant. 1)>:

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n / Mode 1 (Ant. 1) |

##### Configuration IEEE 802.11n MSC8 20MHz J2+J4

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 52      | 5260 MHz  | 6.37                | 13              | Complies |
| 60      | 5300 MHz  | 5.40                | 13              | Complies |
| 64      | 5320 MHz  | 4.81                | 13              | Complies |

##### Configuration IEEE 802.11n MSC8 40MHz J2+J4

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 54      | 5270 MHz  | 5.63                | 13              | Complies |
| 62      | 5310 MHz  | 4.35                | 13              | Complies |

|               |               |                |                                |
|---------------|---------------|----------------|--------------------------------|
| Temperature   | 24°C          | Humidity       | 56%                            |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11a / Mode 1 (Ant. 1) |

##### Configuration IEEE 802.11a J2+J4

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 52      | 5260 MHz  | 5.36                | 13              | Complies |
| 60      | 5300 MHz  | 4.96                | 13              | Complies |
| 64      | 5320 MHz  | 5.72                | 13              | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

<For Mode 2 (Ant. 4)>:

|                      |               |                       |                                |
|----------------------|---------------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C          | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n / Mode 2 (Ant. 4) |

**Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4**

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 52      | 5260 MHz  | 6.45                | 13              | Complies |
| 60      | 5300 MHz  | 6.14                | 13              | Complies |
| 64      | 5320 MHz  | 5.01                | 13              | Complies |

**Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4**

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 54      | 5270 MHz  | 4.31                | 13              | Complies |
| 62      | 5310 MHz  | 6.11                | 13              | Complies |

|                      |               |                       |                                |
|----------------------|---------------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C          | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a / Mode 2 (Ant. 4) |

**Configuration IEEE 802.11a J2+J3+J4**

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 52      | 5260 MHz  | 4.45                | 13              | Complies |
| 60      | 5300 MHz  | 5.02                | 13              | Complies |
| 64      | 5320 MHz  | 4.64                | 13              | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.



<For Mode 3 (Ant. 7)>:

|                      |               |                       |                                |
|----------------------|---------------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C          | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n / Mode 3 (Ant. 7) |

**Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4**

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 52      | 5260 MHz  | 6.45                | 13              | Complies |
| 60      | 5300 MHz  | 6.14                | 13              | Complies |
| 64      | 5320 MHz  | 6.06                | 13              | Complies |

**Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4**

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 54      | 5270 MHz  | 4.31                | 13              | Complies |
| 62      | 5310 MHz  | 5.23                | 13              | Complies |

|                      |               |                       |                                |
|----------------------|---------------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C          | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a / Mode 3 (Ant. 7) |

**Configuration IEEE 802.11a J2+J3+J4**

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 52      | 5260 MHz  | 4.45                | 13              | Complies |
| 60      | 5300 MHz  | 5.02                | 13              | Complies |
| 64      | 5320 MHz  | 5.19                | 13              | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

<For Mode 4 (Ant. 8)>:

|                      |          |                       |                                |
|----------------------|----------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C     | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Jacky Ho | <b>Configurations</b> | IEEE 802.11n / Mode 4 (Ant. 8) |

**Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4**

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 52      | 5260 MHz  | 6.45                | 13              | Complies |
| 60      | 5300 MHz  | 6.14                | 13              | Complies |
| 64      | 5320 MHz  | 5.26                | 13              | Complies |

**Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4**

| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 54      | 5270 MHz  | 4.31                | 13              | Complies |
| 62      | 5310 MHz  | 4.65                | 13              | Complies |

|                      |          |                       |                                |
|----------------------|----------|-----------------------|--------------------------------|
| <b>Temperature</b>   | 24°C     | <b>Humidity</b>       | 56%                            |
| <b>Test Engineer</b> | Jacky Ho | <b>Configurations</b> | IEEE 802.11a / Mode 4 (Ant. 8) |

**Configuration IEEE 802.11a J2+J3+J4**


| Channel | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------|-----------|---------------------|-----------------|----------|
| 52      | 5260 MHz  | 4.45                | 13              | Complies |
| 60      | 5300 MHz  | 5.02                | 13              | Complies |
| 64      | 5320 MHz  | 5.99                | 13              | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


<For Mode 1 (Ant. 1)>:

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz J2+J4 / 5260 MHz

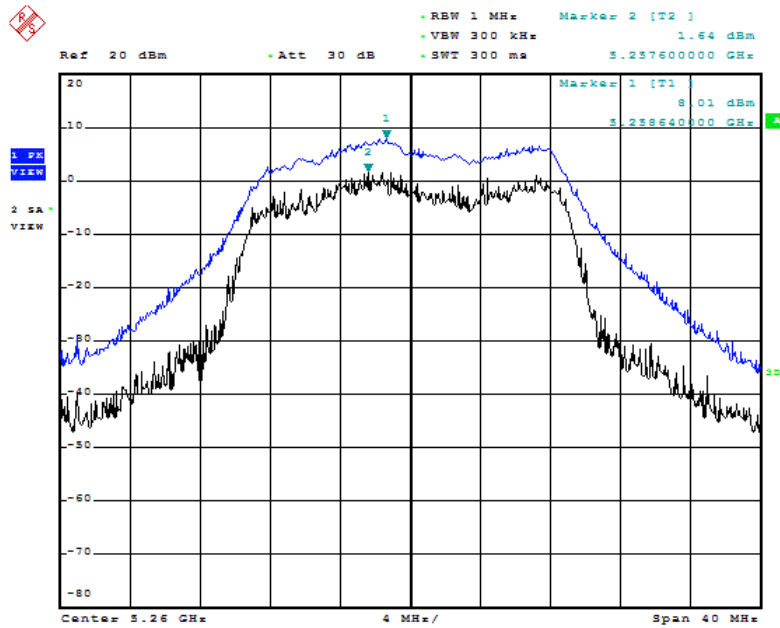


Date: 12.AUG.2010 15:25:11

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz J2+J4 / 5270 MHz

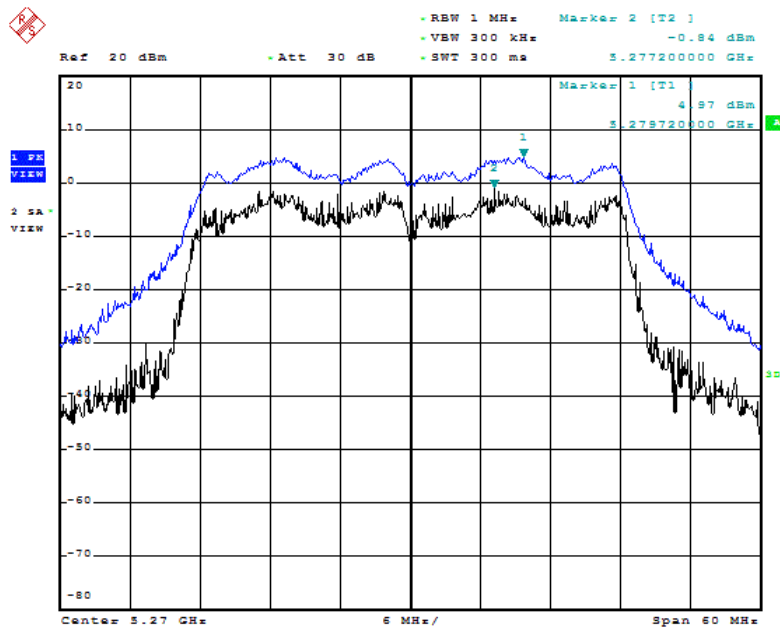

Date: 12.AUG.2010 15:38:42


Peak Excursion Plot on Configuration IEEE 802.11a J2+J4 / 5320 MHz

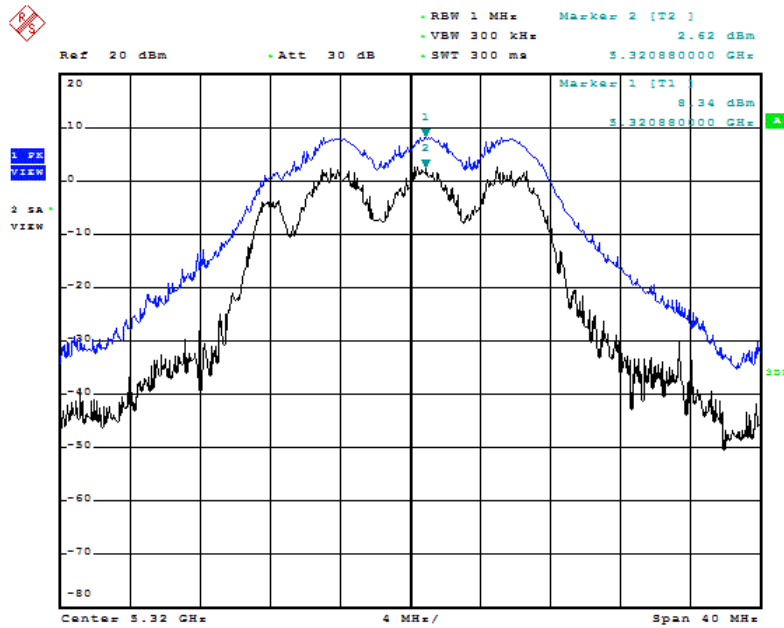

Date: 12.AUG.2010 15:21:52


<For Mode 2 (Ant. 4)>:

Peak Excursion Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5260 MHz

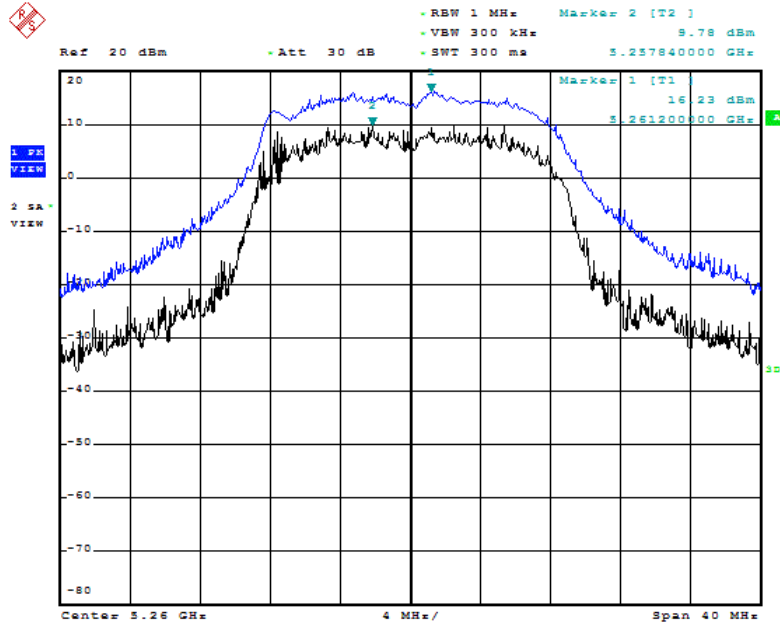


Date: 12.AUG.2010 23:42:25

Peak Excursion Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5310 MHz

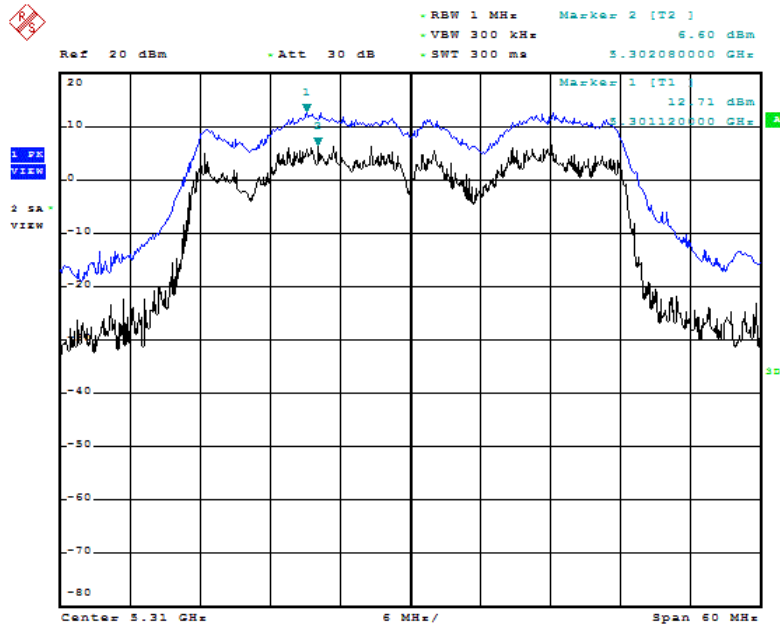

Date: 12.AUG.2010 23:37:33


Peak Excursion Plot on Configuration IEEE 802.11a J2+J3+J4 / 5300 MHz

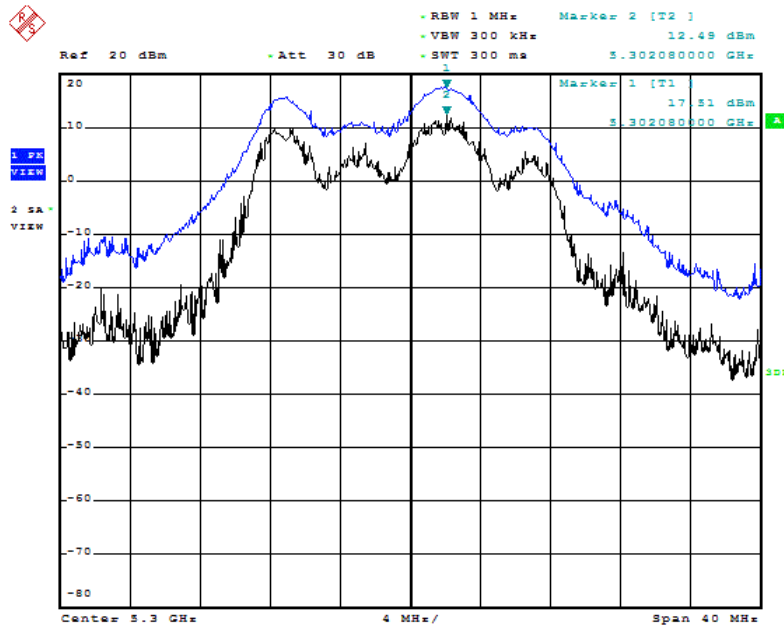

Date: 12.AUG.2010 23:44:40


<For Mode 3 (Ant. 7)>:

Peak Excursion Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5260 MHz

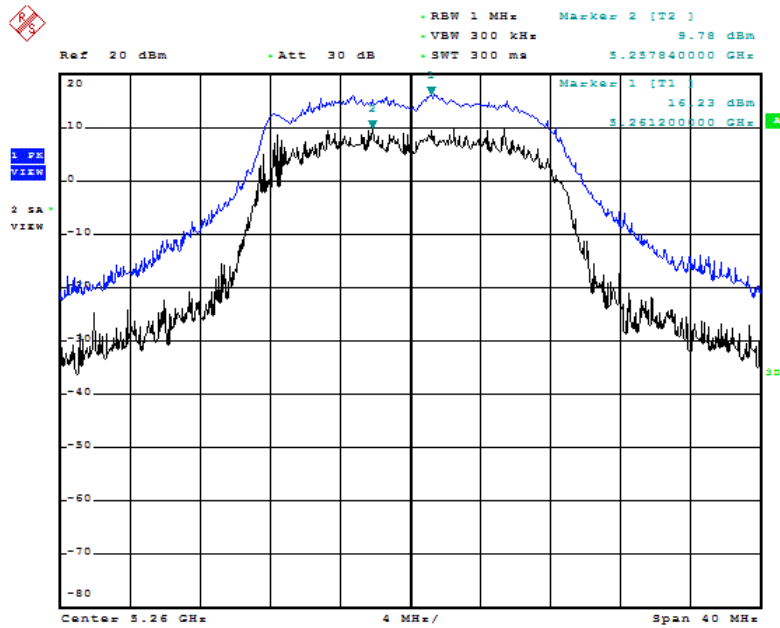


Date: 12.AUG.2010 23:42:25

Peak Excursion Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5310 MHz

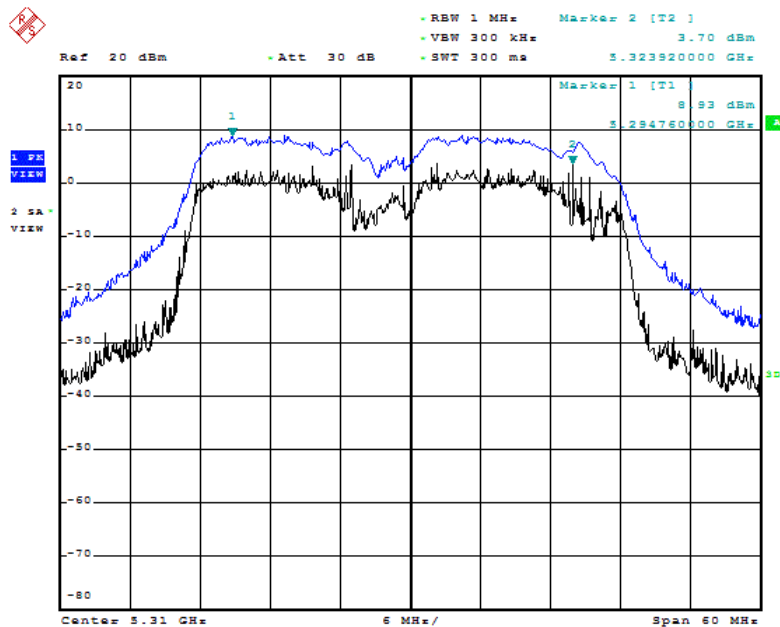

Date: 2.SEP.2010 18:53:43

Peak Excursion Plot on Configuration IEEE 802.11a J2+J3+J4 / 5320 MHz

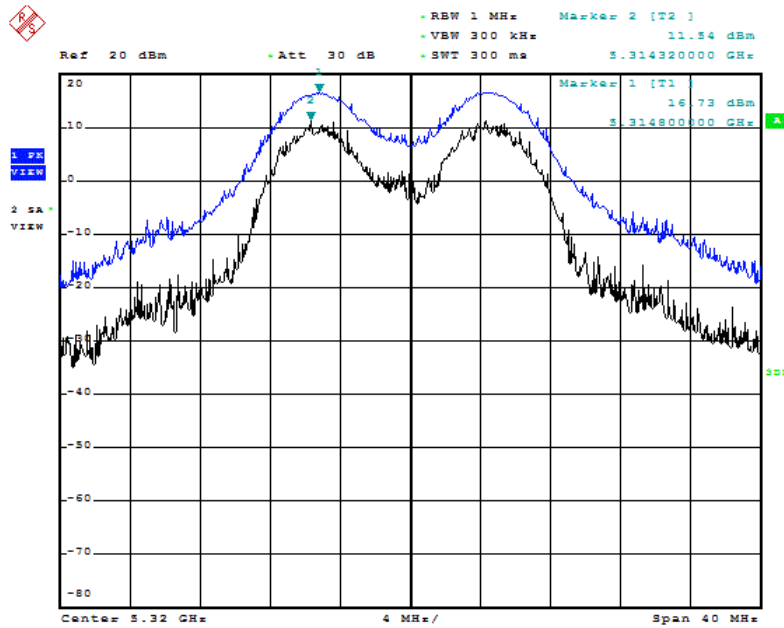


Date: 2.SEP.2010 18:57:36




<For Mode 4 (Ant. 8)>:

Peak Excursion Plot on Configuration IEEE 802.11n MSC8 20MHz J2+J3+J4 / 5260 MHz

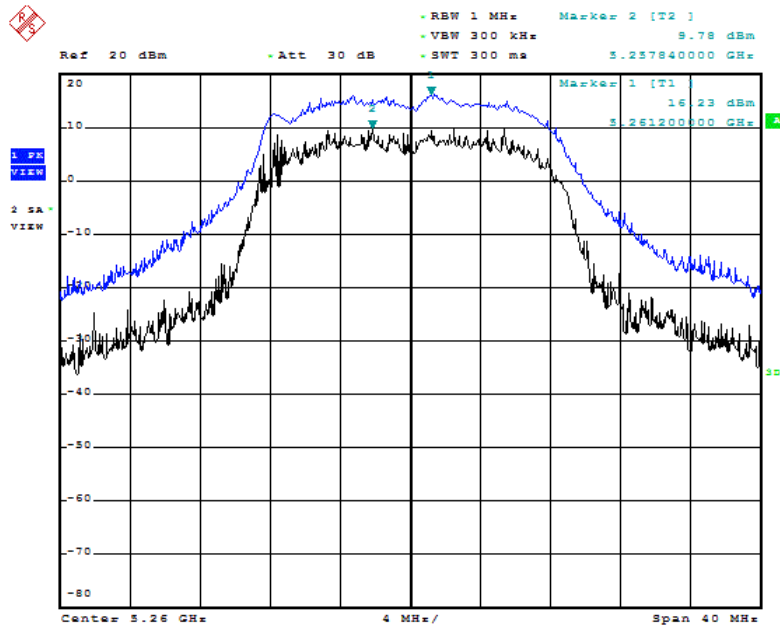


Date: 12.AUG.2010 23:42:25

Peak Excursion Plot on Configuration IEEE 802.11n MSC8 40MHz J2+J3+J4 / 5310 MHz

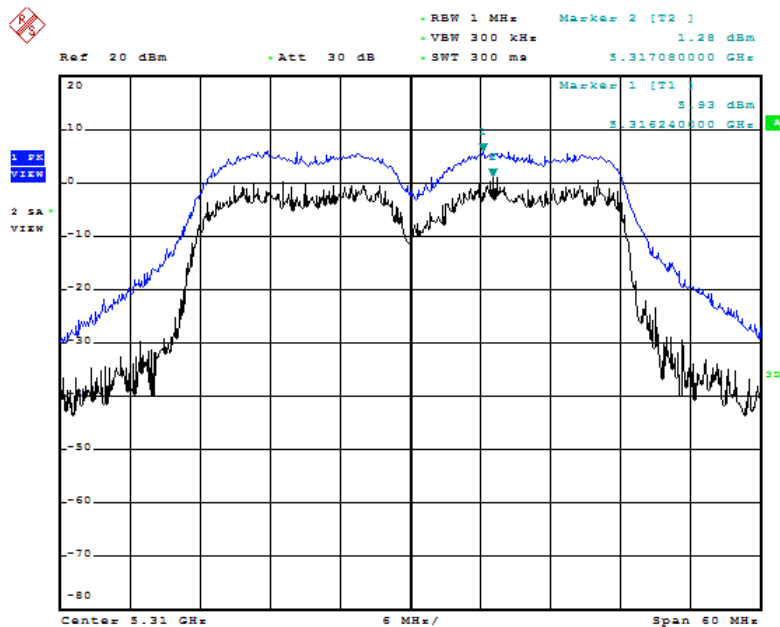

Date: 28.JAN.2011 15:54:13

Peak Excursion Plot on Configuration IEEE 802.11a J2+J3+J4 / 5320 MHz

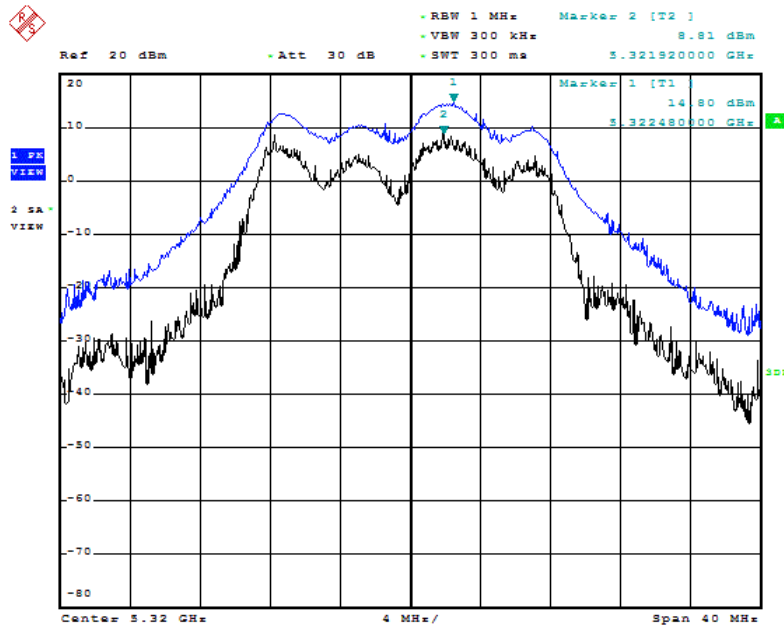

Date: 28.JAN.2011 15:50:17

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting  |
|---|--|
| Attenuation                               | Auto   |
| Start Frequency                           | 1000 MHz                                       |
| Stop Frequency                            | 40 GHz   |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1000KHz / 1000KHz for peak                     |


| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 1GHz

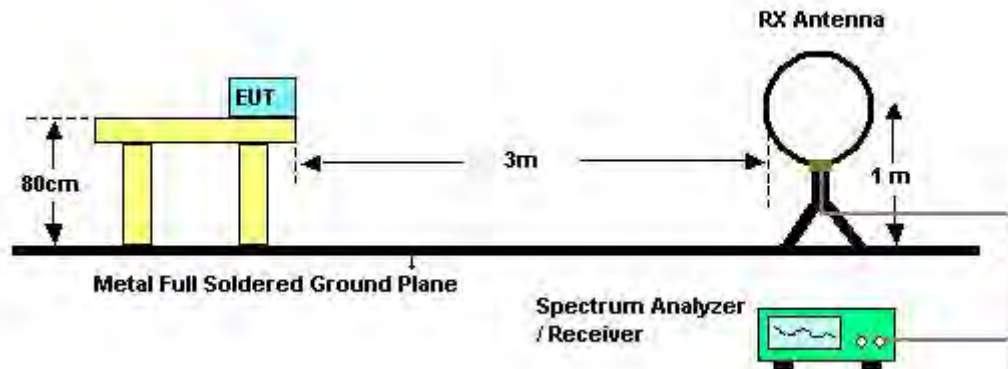

For radiated emissions above 1GHz

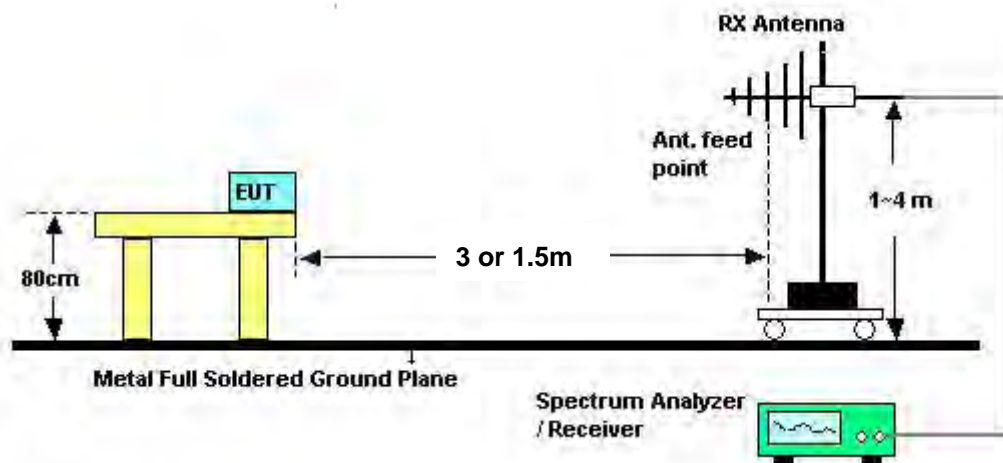

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

|               |               |                |             |
|---------------|---------------|----------------|-------------|
| Temperature   | 26°C          | Humidity       | 60%         |
| Test Engineer | Johnson Chang | Configurations | Normal Link |
| Test Date     | Aug. 13, 2010 |                |             |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Limit Line (dBuV) | Remark   |
|-------------|--------------|-----------------|-------------------|----------|
| -           | -            | -               | -                 | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)

<For Mode 1 (Ant. 1)>


|               |               |                |                           |
|---------------|---------------|----------------|---------------------------|
| Temperature   | 26°C          | Humidity       | 60%                       |
| Test Engineer | Johnson Chang | Configurations | TX Mode / Mode 1 (Ant. 1) |

Horizontal

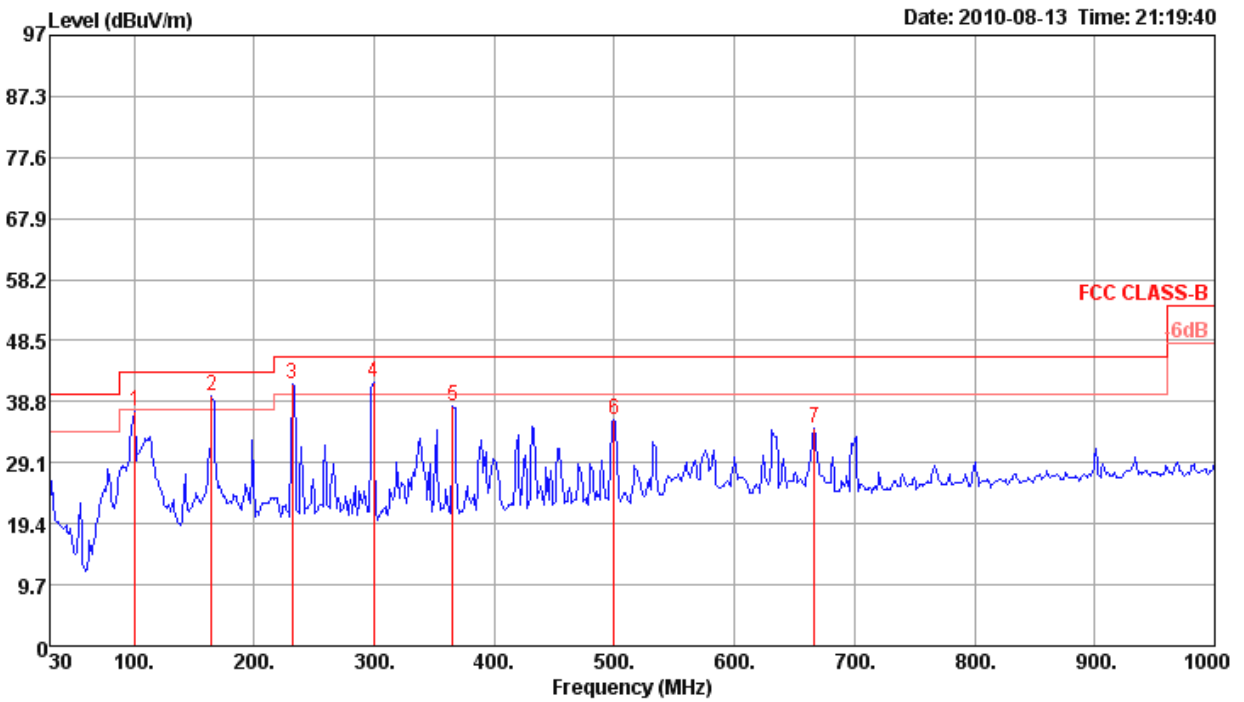

|   | Freq   | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark | Pol/Phase  |
|---|--------|--------|--------|--------|-------|-------|--------|---------|-------|-------|--------|------------|
|   | MHz    | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |        |            |
| 1 | 100.81 | 37.22  | 43.50  | -6.28  | 52.56 | 1.20  | 27.60  | 11.06   | 0     | 100   | Peak   | HORIZONTAL |
| 2 | 164.83 | 39.66  | 43.50  | -3.84  | 53.02 | 1.52  | 27.27  | 12.39   | 0     | 100   | Peak   | HORIZONTAL |
| 3 | 231.76 | 41.49  | 46.00  | -4.51  | 55.29 | 1.83  | 27.04  | 11.41   | 0     | 100   | Peak   | HORIZONTAL |
| 4 | 299.66 | 41.81  | 46.00  | -4.19  | 53.25 | 2.10  | 26.90  | 13.36   | 0     | 100   | Peak   | HORIZONTAL |
| 5 | 365.62 | 38.18  | 46.00  | -7.82  | 48.17 | 2.23  | 27.36  | 15.14   | 0     | 100   | Peak   | HORIZONTAL |
| 6 | 499.48 | 36.04  | 46.00  | -9.96  | 43.82 | 2.70  | 28.09  | 17.61   | 0     | 100   | Peak   | HORIZONTAL |
| 7 | 666.32 | 34.61  | 46.00  | -11.39 | 40.23 | 3.43  | 28.03  | 18.98   | 0     | 100   | Peak   | HORIZONTAL |

**Vertical**

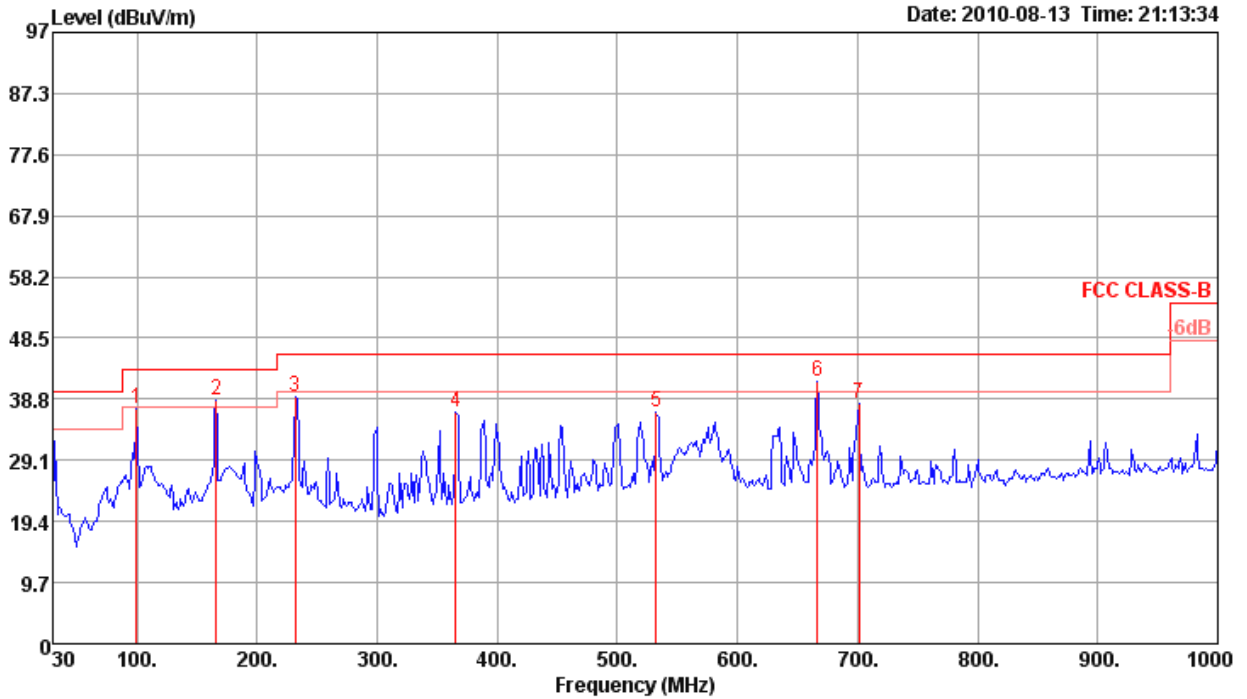

|   | Freq   | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark | PoI/Phase |
|---|--------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|--------|-----------|
|   | MHz    | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |        |           |
| 1 | 99.84  | 37.19  | 43.50      | -6.31      | 52.60      | 1.20       | 27.60         | 10.99          | 0     | 400   | Peak   | VERTICAL  |
| 2 | 165.80 | 38.65  | 43.50      | -4.85      | 51.92      | 1.53       | 27.27         | 12.47          | 0     | 400   | Peak   | VERTICAL  |
| 3 | 231.76 | 39.21  | 46.00      | -6.79      | 53.01      | 1.83       | 27.04         | 11.41          | 0     | 400   | Peak   | VERTICAL  |
| 4 | 365.62 | 36.65  | 46.00      | -9.35      | 46.64      | 2.23       | 27.36         | 15.14          | 0     | 400   | Peak   | VERTICAL  |
| 5 | 532.46 | 36.64  | 46.00      | -9.36      | 43.98      | 2.76       | 28.10         | 18.00          | 0     | 400   | Peak   | VERTICAL  |
| 6 | 666.32 | 41.60  | 46.00      | -4.40      | 47.22      | 3.43       | 28.03         | 18.98          | 0     | 400   | Peak   | VERTICAL  |
| 7 | 701.24 | 38.19  | 46.00      | -7.81      | 43.78      | 3.30       | 27.99         | 19.10          | 0     | 400   | Peak   | VERTICAL  |

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<For Mode 1 (Ant. 1)>:

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 52<br>/ J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |   |

##### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10519.92 | 64.01  | 94.00      | -29.99     | 55.82      | 4.78       | 35.18         | 38.59          | 272   | 102   | Peak    | HORIZONTAL |
| 2 | 10520.44 | 49.49  | 74.00      | -24.51     | 41.30      | 4.78       | 35.18         | 38.59          | 272   | 102   | Average | HORIZONTAL |

##### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10520.01 | 61.46  | 94.00      | -32.54     | 53.27      | 4.78       | 35.18         | 38.59          | 275   | 102   | Peak    | VERTICAL  |
| 2 | 10520.27 | 50.66  | 74.00      | -23.34     | 42.47      | 4.78       | 35.18         | 38.59          | 275   | 102   | Average | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 60 / J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10600.00 | 47.78  | 60.00      | -12.22     | 39.59      | 4.73       | 35.10         | 38.56          | 274   | 100   | Average | HORIZONTAL |
| 2 | 10600.00 | 61.83  | 80.00      | -18.17     | 53.64      | 4.73       | 35.10         | 38.56          | 274   | 100   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10600.00 | 51.62  | 60.00      | -8.38      | 43.43      | 4.73       | 35.10         | 38.56          | 276   | 110   | Average | VERTICAL  |
| 2 | 10600.00 | 65.02  | 80.00      | -14.98     | 56.83      | 4.73       | 35.10         | 38.56          | 276   | 110   | Peak    | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 64<br>/ J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |   |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10640.09 | 58.00  | 80.00      | -22.00     | 49.81      | 4.70       | 35.05         | 38.54          | 274   | 105   | Peak    | HORIZONTAL |
| 2 | 10640.17 | 42.77  | 60.00      | -17.23     | 34.58      | 4.70       | 35.05         | 38.54          | 274   | 105   | Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10639.78 | 61.38  | 80.00      | -18.62     | 53.19      | 4.70       | 35.05         | 38.54          | 277   | 100   | Peak    | VERTICAL  |
| 2 | 10639.97 | 45.67  | 60.00      | -14.33     | 37.48      | 4.70       | 35.05         | 38.54          | 277   | 100   | Average | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 54<br>/ J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |   |

### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              | deg   | cm    |         |            |
| 1 | 10539.93 | 40.80  | 74.00         | -33.20        | 32.60         | 4.76          | 35.15            | 38.59             | 274   | 100   | Average | HORIZONTAL |
| 2 | 10539.93 | 57.21  | 94.00         | -36.79        | 49.01         | 4.76          | 35.15            | 38.59             | 274   | 100   | Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              | deg   | cm    |         |           |
| 1 | 10539.78 | 59.53  | 94.00         | -34.47        | 51.33         | 4.76          | 35.15            | 38.59             | 277   | 100   | Peak    | VERTICAL  |
| 2 | 10540.13 | 42.91  | 74.00         | -31.09        | 34.71         | 4.76          | 35.15            | 38.59             | 277   | 100   | Average | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 62<br>/ J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |   |

#### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10619.84 | 52.06  | 80.00      | -27.94     | 43.88      | 4.71       | 35.08         | 38.55          | 260   | 100   | Peak    | HORIZONTAL |
| 2 | 10620.48 | 38.36  | 60.00      | -21.64     | 30.18      | 4.71       | 35.08         | 38.55          | 260   | 100   | Average | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10619.70 | 39.23  | 60.00      | -20.77     | 31.05      | 4.71       | 35.08         | 38.55          | 276   | 100   | Average | VERTICAL  |
| 2 | 10619.90 | 54.67  | 80.00      | -25.33     | 46.49      | 4.71       | 35.08         | 38.55          | 276   | 100   | Peak    | VERTICAL  |

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 52<br>/ J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |            |
| 1 | 10519.50 | 49.71  | 74.00  | -24.29 | 41.52 | 4.78  | 35.18  | 38.59   | 272   | 101   | Average | HORIZONTAL |
| 2 | 10519.93 | 63.43  | 94.00  | -30.57 | 55.24 | 4.78  | 35.18  | 38.59   | 272   | 101   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |           |
| 1 | 10519.50 | 52.83  | 74.00  | -21.17 | 44.64 | 4.78  | 35.18  | 38.59   | 272   | 100   | Average | VERTICAL  |
| 2 | 10520.33 | 65.70  | 94.00  | -28.30 | 57.51 | 4.78  | 35.18  | 38.59   | 272   | 100   | Peak    | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 60<br>/ J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |            |
| 1 | 10600.00 | 47.44  | 60.00  | -12.56 | 39.25 | 4.73  | 35.10  | 38.56   | 274   | 100   | Average | HORIZONTAL |
| 2 | 10600.00 | 60.56  | 80.00  | -19.44 | 52.37 | 4.73  | 35.10  | 38.56   | 274   | 100   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |           |
| 1 | 10600.00 | 52.90  | 60.00  | -7.10  | 44.71 | 4.73  | 35.10  | 38.56   | 276   | 101   | Average | VERTICAL  |
| 2 | 10600.00 | 66.69  | 80.00  | -13.31 | 58.50 | 4.73  | 35.10  | 38.56   | 276   | 101   | Peak    | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 64<br>/ J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10640.03 | 53.82  | 80.00      | -26.18     | 45.63      | 4.70       | 35.05         | 38.54          | 273   | 100   | Peak    | HORIZONTAL |
| 2 | 10640.46 | 39.58  | 60.00      | -20.42     | 31.39      | 4.70       | 35.05         | 38.54          | 273   | 100   | Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10639.51 | 41.87  | 60.00      | -18.13     | 33.68      | 4.70       | 35.05         | 38.54          | 275   | 112   | Average | VERTICAL  |
| 2 | 10639.86 | 55.75  | 80.00      | -24.25     | 47.56      | 4.70       | 35.05         | 38.54          | 275   | 112   | Peak    | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].





<For Mode 2 (Ant. 4)>:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 52<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 31, 2010 |                       |  |

**Horizontal**

|     | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase  |
|-----|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|------------|
|     | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |            |
| 1 p | 10520.00 | 54.53  | 94.00  | -39.47 | 42.92 | 6.83  | 35.20  | 39.98   | 17    | 100   | Peak    | HORIZONTAL |
| 2 a | 10520.00 | 46.53  | 74.00  | -27.47 | 34.92 | 6.83  | 35.20  | 39.98   | 17    | 100   | Average | HORIZONTAL |

**Vertical**

|     | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase |
|-----|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|-----------|
|     | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |           |
| 1 p | 10519.98 | 54.63  | 94.00  | -39.37 | 43.02 | 6.83  | 35.20  | 39.98   | 219   | 100   | Peak    | VERTICAL  |
| 2 a | 10519.98 | 45.63  | 74.00  | -28.37 | 34.02 | 6.83  | 35.20  | 39.98   | 219   | 100   | Average | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 60<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 26, 2010 |                       |  |

#### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |            |
| 1 | 10600.40 | 39.67  | 60.00  | -20.33 | 31.60 | 5.11         | 38.38  | 35.42 | 298   | 100 Average | HORIZONTAL |
| 2 | 10600.44 | 52.07  | 80.00  | -27.93 | 44.00 | 5.11         | 38.38  | 35.42 | 298   | 100 Peak    | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 10600.00 | 40.66  | 60.00  | -19.34 | 32.59 | 5.11         | 38.38  | 35.42 | 50    | 100 Average | VERTICAL  |
| 2 | 10600.41 | 52.76  | 80.00  | -27.24 | 44.69 | 5.11         | 38.38  | 35.42 | 50    | 100 Peak    | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 64<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 26, 2010 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 10639.42 | 38.05  | 60.00      | -21.95     | 29.95      | 5.12              | 38.37          | 35.39         | 318   | 100   | Average | HORIZONTAL |
| 2 | 10639.57 | 49.95  | 80.00      | -30.05     | 41.85      | 5.12              | 38.37          | 35.39         | 318   | 100   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 10640.78 | 50.78  | 80.00      | -29.22     | 42.68      | 5.12              | 38.37          | 35.39         | 260   | 100   | Peak    | VERTICAL  |
| 2 | 10640.86 | 36.66  | 60.00      | -23.34     | 28.56      | 5.12              | 38.37          | 35.39         | 260   | 100   | Average | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 54<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 26, 2010 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor | deg   | cm    |         |            |
| 1 | 10539.42 | 37.77  | 74.00  | -36.23 | 29.77 | 5.09  | 38.39   | 35.48  | 132   | 100   | Average | HORIZONTAL |
| 2 | 10539.46 | 50.40  | 94.00  | -43.60 | 42.40 | 5.09  | 38.39   | 35.48  | 132   | 100   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor | deg   | cm    |         |           |
| 1 | 10539.10 | 36.04  | 74.00  | -37.96 | 28.04 | 5.09  | 38.39   | 35.48  | 136   | 100   | Average | VERTICAL  |
| 2 | 10540.61 | 49.87  | 94.00  | -44.13 | 41.87 | 5.09  | 38.39   | 35.48  | 136   | 100   | Peak    | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 62<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 26, 2010 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 10620.13 | 50.00  | 80.00      | -30.00     | 41.93      | 5.11              | 38.38          | 35.42         | 49    | 116   | Peak    | HORIZONTAL |
| 2 | 10620.15 | 37.72  | 60.00      | -22.28     | 29.65      | 5.11              | 38.38          | 35.42         | 49    | 116   | Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 10619.87 | 50.65  | 80.00      | -29.35     | 42.58      | 5.11              | 38.38          | 35.42         | 118   | 137   | Peak    | VERTICAL  |
| 2 | 10620.81 | 37.80  | 60.00      | -22.20     | 29.73      | 5.11              | 38.38          | 35.42         | 118   | 137   | Average | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 52<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 31, 2010 |                       |   |

**Horizontal**

|     | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase  |
|-----|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|------------|
|     | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |            |
| 1 p | 10520.00 | 54.80  | 94.00  | -39.20 | 43.19 | 6.83  | 35.20  | 39.98   | 48    | 100   | Peak    | HORIZONTAL |
| 2 a | 10520.00 | 46.80  | 74.00  | -27.20 | 35.19 | 6.83  | 35.20  | 39.98   | 48    | 100   | Average | HORIZONTAL |

**Vertical**

|     | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase |
|-----|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|-----------|
|     | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |           |
| 1 p | 10519.99 | 53.89  | 94.00  | -40.11 | 42.28 | 6.83  | 35.20  | 39.98   | 190   | 100   | Peak    | VERTICAL  |
| 2 a | 10519.99 | 45.89  | 74.00  | -28.11 | 34.28 | 6.83  | 35.20  | 39.98   | 190   | 100   | Average | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 60<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 31, 2010 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |            |
| 1 | 10600.00 | 38.03  | 60.00  | -21.97 | 29.84 | 4.73  | 35.10  | 38.56   | 218   | 106   | Average | HORIZONTAL |
| 2 | 10600.00 | 48.77  | 80.00  | -31.23 | 40.58 | 4.73  | 35.10  | 38.56   | 218   | 106   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|--------|---------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    | deg   | cm    |         |           |
| 1 | 10600.00 | 38.51  | 60.00  | -21.49 | 30.32 | 4.73  | 35.10  | 38.56   | 164   | 102   | Average | VERTICAL  |
| 2 | 10600.00 | 50.18  | 80.00  | -29.82 | 41.99 | 4.73  | 35.10  | 38.56   | 164   | 102   | Peak    | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 64<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 31, 2010 |                       |   |

#### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10640.22 | 51.82  | 80.00      | -28.18     | 43.63      | 4.70       | 35.05         | 38.54          | 199   | 113   | Peak    | HORIZONTAL |
| 2 | 10640.49 | 38.75  | 60.00      | -21.25     | 30.56      | 4.70       | 35.05         | 38.54          | 199   | 113   | Average | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10639.82 | 52.23  | 80.00      | -27.77     | 44.04      | 4.70       | 35.05         | 38.54          | 205   | 126   | Peak    | VERTICAL  |
| 2 | 10640.50 | 38.47  | 60.00      | -21.53     | 30.28      | 4.70       | 35.05         | 38.54          | 205   | 126   | Average | VERTICAL  |

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



<For Mode 3 (Ant. 7)>:

|               |               |                |  |
|---------------|---------------|----------------|--|
| Temperature   | 26°C          | Humidity       | 60%  |
| Test Engineer | Johnson Chang | Configurations | IEEE 802.11n MSC8 20MHz Ch 52<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| Test Date     | Sep. 01, 2010 |                |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10518.37 | 57.42  | 94.00      | -36.58     | 49.23      | 4.78       | 35.18         | 38.59          | 304   | 100   | Peak    | HORIZONTAL |
| 2 | 10518.89 | 43.95  | 74.00      | -30.05     | 35.76      | 4.78       | 35.18         | 38.59          | 304   | 100   | Average | HORIZONTAL |
| 3 | 15780.36 | 46.58  | 60.00      | -13.42     | 36.93      | 6.11       | 34.94         | 38.48          | 286   | 100   | Average | HORIZONTAL |
| 4 | 15780.44 | 63.61  | 80.00      | -16.39     | 53.96      | 6.11       | 34.94         | 38.48          | 286   | 100   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10519.94 | 45.77  | 74.00      | -28.23     | 37.58      | 4.78       | 35.18         | 38.59          | 304   | 100   | Average | VERTICAL  |
| 2 | 10519.95 | 61.39  | 94.00      | -32.61     | 53.20      | 4.78       | 35.18         | 38.59          | 304   | 100   | Peak    | VERTICAL  |
| 3 | 15779.87 | 45.34  | 60.00      | -14.66     | 35.69      | 6.11       | 34.94         | 38.48          | 300   | 100   | Average | VERTICAL  |
| 4 | 15779.96 | 61.85  | 80.00      | -18.15     | 52.20      | 6.11       | 34.94         | 38.48          | 300   | 100   | Peak    | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 60<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10600.00 | 42.75  | 60.00      | -17.25     | 34.56      | 4.73       | 35.10         | 38.56          | 305   | 100   | Average | HORIZONTAL |
| 2 | 10600.00 | 56.35  | 80.00      | -23.65     | 48.16      | 4.73       | 35.10         | 38.56          | 305   | 100   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10600.00 | 43.74  | 60.00      | -16.26     | 35.55      | 4.73       | 35.10         | 38.56          | 289   | 100   | Average | VERTICAL  |
| 2 | 10600.00 | 58.73  | 80.00      | -21.27     | 50.54      | 4.73       | 35.10         | 38.56          | 289   | 100   | Peak    | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 64<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              | deg   | cm    |         |            |
| 1 | 10639.63 | 39.09  | 60.00         | -20.91        | 30.90         | 4.70          | 35.05            | 38.54             | 285   | 100   | Average | HORIZONTAL |
| 2 | 10640.05 | 55.21  | 80.00         | -24.79        | 47.02         | 4.70          | 35.05            | 38.54             | 285   | 100   | Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              | deg   | cm    |         |           |
| 1 | 10639.50 | 40.51  | 60.00         | -19.49        | 32.32         | 4.70          | 35.05            | 38.54             | 290   | 100   | Average | VERTICAL  |
| 2 | 10639.99 | 57.32  | 80.00         | -22.68        | 49.13         | 4.70          | 35.05            | 38.54             | 290   | 100   | Peak    | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 54<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              | deg   | cm    |         |            |
| 1 | 10539.60 | 39.04  | 74.00         | -34.96        | 30.84         | 4.76          | 35.15            | 38.59             | 312   | 100   | Average | HORIZONTAL |
| 2 | 10540.16 | 52.97  | 94.00         | -41.03        | 44.77         | 4.76          | 35.15            | 38.59             | 312   | 100   | Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              | deg   | cm    |         |           |
| 1 | 10547.35 | 56.33  | 94.00         | -37.67        | 48.14         | 4.76          | 35.15            | 38.58             | 290   | 100   | Peak    | VERTICAL  |
| 2 | 10547.59 | 41.47  | 74.00         | -32.53        | 33.28         | 4.76          | 35.15            | 38.58             | 290   | 100   | Average | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 62<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10619.57 | 50.34  | 80.00      | -29.66     | 42.16      | 4.71       | 35.08         | 38.55          | 314   | 100   | Peak    | HORIZONTAL |
| 2 | 10619.57 | 36.16  | 80.00      | -23.84     | 27.98      | 4.71       | 35.08         | 38.55          | 314   | 100   | Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10619.59 | 37.48  | 80.00      | -22.52     | 29.30      | 4.71       | 35.08         | 38.55          | 288   | 100   | Average | VERTICAL  |
| 2 | 10619.91 | 53.10  | 80.00      | -26.90     | 44.92      | 4.71       | 35.08         | 38.55          | 288   | 100   | Peak    | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 52<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |   |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10517.91 | 46.00  | 74.00      | -28.00     | 37.81      | 4.78       | 35.18         | 38.59          | 285   | 100   | Average | HORIZONTAL |
| 2 | 10518.33 | 60.35  | 94.00      | -33.65     | 52.16      | 4.78       | 35.18         | 38.59          | 285   | 100   | Peak    | HORIZONTAL |
| 3 | 15780.25 | 59.98  | 80.00      | -20.02     | 50.33      | 6.11       | 34.94         | 38.48          | 295   | 100   | Peak    | HORIZONTAL |
| 4 | 15780.50 | 43.47  | 60.00      | -16.53     | 33.82      | 6.11       | 34.94         | 38.48          | 295   | 100   | Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10519.50 | 46.96  | 74.00      | -27.04     | 38.77      | 4.78       | 35.18         | 38.59          | 305   | 100   | Average | VERTICAL  |
| 2 | 10519.54 | 60.72  | 94.00      | -33.28     | 52.53      | 4.78       | 35.18         | 38.59          | 305   | 100   | Peak    | VERTICAL  |
| 3 | 15780.35 | 60.45  | 80.00      | -19.55     | 50.80      | 6.11       | 34.94         | 38.48          | 295   | 100   | Peak    | VERTICAL  |
| 4 | 15780.50 | 44.77  | 60.00      | -15.23     | 35.12      | 6.11       | 34.94         | 38.48          | 295   | 100   | Average | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 60<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |   |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10607.16 | 59.84  | 80.00      | -20.16     | 51.65      | 4.71       | 35.08         | 38.56          | 293   | 100   | Peak    | HORIZONTAL |
| 2 | 10607.20 | 44.58  | 60.00      | -15.42     | 36.39      | 4.71       | 35.08         | 38.56          | 293   | 100   | Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10607.32 | 60.38  | 80.00      | -19.62     | 52.19      | 4.71       | 35.08         | 38.56          | 290   | 100   | Peak    | VERTICAL  |
| 2 | 10607.46 | 45.88  | 60.00      | -14.12     | 37.69      | 4.71       | 35.08         | 38.56          | 290   | 100   | Average | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 64<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |   |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |            |
| 1 | 10641.46 | 40.26  | 60.00      | -19.74     | 32.07      | 4.70       | 35.05         | 38.54          | 298   | 100   | Average | HORIZONTAL |
| 2 | 10641.92 | 54.54  | 80.00      | -25.46     | 46.35      | 4.70       | 35.05         | 38.54          | 298   | 100   | Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 10643.52 | 54.59  | 80.00      | -25.41     | 46.40      | 4.70       | 35.05         | 38.54          | 302   | 100   | Peak    | VERTICAL  |
| 2 | 10643.88 | 40.33  | 60.00      | -19.67     | 32.14      | 4.70       | 35.05         | 38.54          | 302   | 100   | Average | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



<For Mode 4 (Ant. 8)>:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 52<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |            |
| 1 | 15778.80 | 49.32  | 60.00  | -10.68 | 40.70 | 6.63         | 37.41  | 35.42 | 259   | 104 Average | HORIZONTAL |
| 2 | 15778.95 | 66.80  | 80.00  | -13.20 | 58.18 | 6.63         | 37.41  | 35.42 | 259   | 104 Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 15777.32 | 66.89  | 80.00  | -13.11 | 58.27 | 6.63         | 37.41  | 35.42 | 267   | 100 Peak    | VERTICAL  |
| 2 | 15777.57 | 48.38  | 60.00  | -11.62 | 39.76 | 6.63         | 37.41  | 35.42 | 267   | 100 Average | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 60<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |            |
| 1 | 10604.55 | 40.85  | 60.00  | -19.15 | 32.78 | 5.11  | 38.38   | 35.42  | 243   | 116   | Average | HORIZONTAL |
| 2 | 10604.55 | 52.47  | 80.00  | -27.53 | 44.40 | 5.11  | 38.38   | 35.42  | 243   | 116   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |           |
| 1 | 10604.53 | 40.46  | 60.00  | -19.54 | 32.39 | 5.11  | 38.38   | 35.42  | 288   | 100   | Average | VERTICAL  |
| 2 | 10604.55 | 54.16  | 80.00  | -25.84 | 46.09 | 5.11  | 38.38   | 35.42  | 288   | 100   | Peak    | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 64<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 10639.92 | 38.17  | 60.00      | -21.83     | 30.07      | 5.12       | 38.37          | 35.39         | 88    | 100   | Average | HORIZONTAL |
| 2 | 10640.32 | 50.15  | 80.00      | -29.85     | 42.05      | 5.12       | 38.37          | 35.39         | 88    | 100   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 10637.69 | 51.78  | 80.00      | -28.22     | 43.68      | 5.12       | 38.37          | 35.39         | 269   | 100   | Peak    | VERTICAL  |
| 2 | 10638.00 | 39.75  | 60.00      | -20.25     | 31.65      | 5.12       | 38.37          | 35.39         | 269   | 100   | Average | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 54<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor | deg   | cm    |         |            |
| 1 | 15809.87 | 41.21  | 60.00  | -18.79 | 32.60 | 6.65  | 37.39   | 35.43  | 105   | 100   | Average | HORIZONTAL |
| 2 | 15810.38 | 53.55  | 80.00  | -26.45 | 44.96 | 6.65  | 37.37   | 35.43  | 0     | 100   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | Loss  | Factor  | Factor | deg   | cm    |         |           |
| 1 | 15809.86 | 54.35  | 80.00  | -25.65 | 45.74 | 6.65  | 37.39   | 35.43  | 215   | 100   | Peak    | VERTICAL  |
| 2 | 15810.09 | 40.70  | 60.00  | -19.30 | 32.09 | 6.65  | 37.39   | 35.43  | 215   | 100   | Average | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 62<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |  |

#### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 10619.97 | 37.01  | 60.00      | -22.99     | 28.94      | 5.11       | 38.38          | 35.42         | 78    | 100   | Average | HORIZONTAL |
| 2 | 10620.41 | 49.51  | 80.00      | -30.49     | 41.44      | 5.11       | 38.38          | 35.42         | 20    | 100   | Peak    | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 10619.97 | 37.27  | 60.00      | -22.73     | 29.20      | 5.11       | 38.38          | 35.42         | 188   | 100   | Average | VERTICAL  |
| 2 | 10620.26 | 49.83  | 80.00      | -30.17     | 41.76      | 5.11       | 38.38          | 35.42         | 188   | 100   | Peak    | VERTICAL  |

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11a Ch 52<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit  | Over  | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|-------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB    | dBuV  | Loss  | Factor  | Factor | deg   | cm    |         |            |
| 1 | 15779.09 | 53.83  | 60.00  | -6.17 | 45.21 | 6.63  | 37.41   | 35.42  | 259   | 106   | Average | HORIZONTAL |
| 2 | 15779.46 | 73.38  | 80.00  | -6.62 | 64.76 | 6.63  | 37.41   | 35.42  | 259   | 106   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over  | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|-------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB    | dBuV  | Loss  | Factor  | Factor | deg   | cm    |         |           |
| 1 | 15779.50 | 52.13  | 60.00  | -7.87 | 43.51 | 6.63  | 37.41   | 35.42  | 268   | 100   | Average | VERTICAL  |
| 2 | 15779.59 | 71.72  | 80.00  | -8.28 | 63.10 | 6.63  | 37.41   | 35.42  | 268   | 100   | Peak    | VERTICAL  |



|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11a Ch 60<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 10606.34 | 42.38  | 60.00      | -17.62     | 34.31      | 5.11       | 38.38          | 35.42         | 289   | 113   | Average | HORIZONTAL |
| 2 | 10606.41 | 56.74  | 80.00      | -23.26     | 48.67      | 5.11       | 38.38          | 35.42         | 289   | 113   | Peak    | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 10606.50 | 43.68  | 60.00      | -16.32     | 35.61      | 5.11       | 38.38          | 35.42         | 82    | 100   | Average | VERTICAL  |
| 2 | 10606.50 | 55.66  | 80.00      | -24.34     | 47.59      | 5.11       | 38.38          | 35.42         | 82    | 100   | Peak    | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11a Ch 64<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |   |

#### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 10640.01 | 39.21  | 60.00      | -20.79     | 31.11      | 5.12       | 38.37          | 35.39         | 103   | 100   | Average | HORIZONTAL |
| 2 | 10640.25 | 50.35  | 80.00      | -29.65     | 42.25      | 5.12       | 38.37          | 35.39         | 103   | 100   | Peak    | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 10635.89 | 53.43  | 80.00      | -26.57     | 45.33      | 5.12       | 38.37          | 35.39         | 267   | 100   | Peak    | VERTICAL  |
| 2 | 10636.10 | 41.24  | 60.00      | -18.76     | 33.14      | 5.12       | 38.37          | 35.39         | 267   | 100   | Average | VERTICAL  |

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micровolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                        | Setting  |
|---|--|
| Attenuation                               | Auto   |
| Span Frequency                            | 100 MHz  |
| RB / VB (Emission in restricted band)     | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1 MHz / 1 MHz for Peak                           |

### 4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
- In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

<For Mode 1 (Ant. 1)>:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 60, 64 / J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |  |

##### Channel 60

|   | Freq    | Level  | Limit  | Over  | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|--------|-------|-------|-------|--------|---------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | Loss  | Factor | Factor  | deg   | cm    |         |           |
| 1 | 5302.00 | 130.84 |        |       |       | 3.14  | 0.00   | 33.34   | 0     | 100   | Peak    | VERTICAL  |
| 2 | 5303.20 | 119.15 |        |       |       | 3.14  | 0.00   | 33.34   | 0     | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 59.01  | 60.00  | -0.99 | 22.42 | 3.16  | 0.00   | 33.43   | 0     | 100   | Average | VERTICAL  |
| 4 | 5350.00 | 75.59  | 80.00  | -4.41 | 39.00 | 3.16  | 0.00   | 33.43   | 0     | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5300 MHz.

##### Channel 64

|   | Freq    | Level  | Limit  | Over  | Read  | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|--------|-------|-------|-------|--------|---------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | Loss  | Factor | Factor  | deg   | cm    |         |           |
| 1 | 5322.00 | 126.48 |        |       |       | 3.14  | 0.00   | 33.37   | 0     | 100   | Peak    | VERTICAL  |
| 2 | 5324.60 | 114.92 |        |       |       | 3.15  | 0.00   | 33.37   | 0     | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 59.37  | 60.00  | -0.63 | 22.78 | 3.16  | 0.00   | 33.43   | 0     | 100   | Average | VERTICAL  |
| 4 | 5350.20 | 77.37  | 80.00  | -2.63 | 40.78 | 3.16  | 0.00   | 33.43   | 0     | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5320 MHz.

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 54, 62 / J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |  |

### Channel 54

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5264.80 | 125.20 |            |            |            | 3.12       | 0.00          | 33.28          | 0     | 100   | Peak    | VERTICAL  |
| 2 | 5282.80 | 113.01 |            |            |            | 3.13       | 0.00          | 33.31          | 0     | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 59.05  | 60.00      | -0.95      | 22.46      | 3.16       | 0.00          | 33.43          | 0     | 100   | Average | VERTICAL  |
| 4 | 5350.40 | 71.28  | 80.00      | -8.72      | 34.69      | 3.16       | 0.00          | 33.43          | 0     | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5270 MHz.

### Channel 62

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5322.00 | 116.48 |            |            |            | 3.14       | 0.00          | 33.37          | 0     | 100   | Peak    | VERTICAL  |
| 2 | 5324.80 | 104.76 |            |            |            | 3.15       | 0.00          | 33.37          | 0     | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 59.51  | 60.00      | -0.49      | 22.92      | 3.16       | 0.00          | 33.43          | 0     | 100   | Average | VERTICAL  |
| 4 | 5350.00 | 71.72  | 80.00      | -8.28      | 35.13      | 3.16       | 0.00          | 33.43          | 0     | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5310 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 60, 64<br>/ J2+J4, Mode 1 (Ant. 1) |
| <b>Test Date</b>     | Aug. 06, 2010 |                       |  |

#### Channel 60

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5303.60 | 119.86 |            |            |            | 3.14       | 0.00          | 33.34          | 360   | 100   | Average | VERTICAL  |
| 2 | 5304.40 | 129.31 |            |            |            | 3.14       | 0.00          | 33.34          | 360   | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 59.42  | 60.00      | -0.58      | 22.83      | 3.16       | 0.00          | 33.43          | 360   | 100   | Average | VERTICAL  |
| 4 | 5351.60 | 78.21  | 80.00      | -1.79      | 41.62      | 3.16       | 0.00          | 33.43          | 360   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5300 MHz.

#### Channel 64

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5323.40 | 125.05 |            |            |            | 3.15       | 0.00          | 33.37          | 360   | 100   | Peak    | VERTICAL  |
| 2 | 5323.60 | 115.85 |            |            |            | 3.15       | 0.00          | 33.37          | 360   | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 59.40  | 60.00      | -0.60      | 22.81      | 3.16       | 0.00          | 33.43          | 360   | 100   | Average | VERTICAL  |
| 4 | 5351.00 | 77.88  | 80.00      | -2.12      | 41.29      | 3.16       | 0.00          | 33.43          | 360   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5320 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

<For Mode 2 (Ant. 4)>:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%  |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 60, 64<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 26, 2010 |                       |  |

#### Channel 60

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark | Pol/Phase |          |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|--------|-----------|----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm     |           |          |
| 1 | 5296.80 | 111.81 |        |       |       | 2.64         | 33.94  | 0.00  | 10    | 100    | Average   | VERTICAL |
| 2 | 5298.40 | 123.52 |        |       |       | 2.64         | 33.94  | 0.00  | 10    | 100    | Peak      | VERTICAL |
| 3 | 5350.00 | 59.57  | 60.00  | -0.43 | 22.87 | 2.67         | 34.03  | 0.00  | 10    | 100    | Average   | VERTICAL |
| 4 | 5351.60 | 74.52  | 80.00  | -5.48 | 37.82 | 2.67         | 34.03  | 0.00  | 10    | 100    | Peak      | VERTICAL |

Item 1, 2 are the fundamental frequency at 5300 MHz.

#### Channel 64

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark | Pol/Phase |          |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|--------|-----------|----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm     |           |          |
| 1 | 5316.60 | 120.78 |        |       |       | 2.66         | 33.97  | 0.00  | 21    | 100    | Peak      | VERTICAL |
| 2 | 5317.40 | 109.18 |        |       |       | 2.66         | 33.97  | 0.00  | 21    | 100    | Average   | VERTICAL |
| 3 | 5350.00 | 59.70  | 60.00  | -0.30 | 23.00 | 2.67         | 34.03  | 0.00  | 21    | 100    | Average   | VERTICAL |
| 4 | 5350.40 | 77.02  | 80.00  | -2.98 | 40.32 | 2.67         | 34.03  | 0.00  | 21    | 100    | Peak      | VERTICAL |

Item 1, 2 are the fundamental frequency at 5320 MHz.



|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 54, 62 / J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 26, 2010 |                       |   |

**Channel 54**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 5258.00 | 120.95 |            |            |            | 2.62              | 33.85          | 0.00          | 12    | 100   | Peak    | VERTICAL  |
| 2 | 5277.60 | 107.78 |            |            |            | 2.63              | 33.88          | 0.00          | 12    | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 59.13  | 60.00      | -0.87      | 22.43      | 2.67              | 34.03          | 0.00          | 12    | 100   | Average | VERTICAL  |
| 4 | 5350.40 | 77.55  | 80.00      | -2.45      | 40.85      | 2.67              | 34.03          | 0.00          | 12    | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 5314.80 | 102.27 |            |            |            | 2.66              | 33.97          | 0.00          | 12    | 100   | Average | VERTICAL  |
| 2 | 5317.60 | 114.63 |            |            |            | 2.66              | 33.97          | 0.00          | 12    | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 59.09  | 60.00      | -0.91      | 22.39      | 2.67              | 34.03          | 0.00          | 12    | 100   | Average | VERTICAL  |
| 4 | 5351.60 | 78.13  | 80.00      | -1.87      | 41.43      | 2.67              | 34.03          | 0.00          | 12    | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5310 MHz.

Note: Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 60, 64<br>/ J2+J3+J4, Mode 2 (Ant. 4) |
| <b>Test Date</b>     | Jul. 26, 2010 |                       |   |

### Channel 60

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5301.20 | 115.55 |            |            |            | 3.14       | 0.00          | 33.34          | 172   | 102   | Average | VERTICAL  |
| 2 | 5301.20 | 125.97 |            |            |            | 3.14       | 0.00          | 33.34          | 172   | 102   | Peak    | VERTICAL  |
| 3 | 5350.00 | 59.13  | 60.00      | -0.87      | 22.54      | 3.16       | 0.00          | 33.43          | 172   | 102   | Average | VERTICAL  |
| 4 | 5351.20 | 78.58  | 80.00      | -1.42      | 41.99      | 3.16       | 0.00          | 33.43          | 172   | 102   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5322.00 | 113.20 |            |            |            | 3.14       | 0.00          | 33.37          | 153   | 100   | Average | VERTICAL  |
| 2 | 5322.60 | 123.43 |            |            |            | 3.15       | 0.00          | 33.37          | 153   | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 58.99  | 60.00      | -1.01      | 22.40      | 3.16       | 0.00          | 33.43          | 153   | 100   | Average | VERTICAL  |
| 4 | 5351.80 | 78.01  | 80.00      | -1.99      | 41.42      | 3.16       | 0.00          | 33.43          | 153   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5320 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

<For Mode 3 (Ant. 7)>:

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 60, 64 / J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |   |

#### Channel 60

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5304.40 | 117.68 |            |            |            | 3.14       | 0.00          | 33.34          | 306   | 100   | Peak    | VERTICAL  |
| 2 | 5305.20 | 106.14 |            |            |            | 3.14       | 0.00          | 33.34          | 306   | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 58.19  | 60.00      | -1.81      | 21.60      | 3.16       | 0.00          | 33.43          | 306   | 100   | Average | VERTICAL  |
| 4 | 5350.00 | 71.46  | 80.00      | -8.54      | 34.87      | 3.16       | 0.00          | 33.43          | 306   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5300 MHz.

#### Channel 64

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5317.20 | 106.40 |            |            |            | 3.14       | 0.00          | 33.37          | 63    | 100   | Average | VERTICAL  |
| 2 | 5318.80 | 116.77 |            |            |            | 3.14       | 0.00          | 33.37          | 63    | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 59.44  | 60.00      | -0.56      | 22.85      | 3.16       | 0.00          | 33.43          | 63    | 100   | Average | VERTICAL  |
| 4 | 5350.40 | 73.51  | 80.00      | -6.49      | 36.92      | 3.16       | 0.00          | 33.43          | 63    | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5320 MHz.



|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 54, 62 / J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |   |

**Channel 54**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5263.20 | 116.55 |            |            |            | 3.12       | 0.00          | 33.28          | 150   | 100   | Peak    | VERTICAL  |
| 2 | 5267.60 | 103.62 |            |            |            | 3.12       | 0.00          | 33.28          | 150   | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 59.65  | 60.00      | -0.35      | 23.06      | 3.16       | 0.00          | 33.43          | 150   | 100   | Average | VERTICAL  |
| 4 | 5351.60 | 73.94  | 80.00      | -6.06      | 37.35      | 3.16       | 0.00          | 33.43          | 150   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5294.80 | 98.02  |            |            |            | 3.13       | 0.00          | 33.34          | 308   | 100   | Average | VERTICAL  |
| 2 | 5297.60 | 109.32 |            |            |            | 3.14       | 0.00          | 33.34          | 308   | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 59.75  | 60.00      | -0.25      | 23.16      | 3.16       | 0.00          | 33.43          | 308   | 100   | Average | VERTICAL  |
| 4 | 5352.00 | 76.78  | 80.00      | -3.22      | 40.19      | 3.16       | 0.00          | 33.43          | 308   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5310 MHz.

Note: Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Johnson Chang | <b>Configurations</b> | IEEE 802.11a Ch 60, 64<br>/ J2+J3+J4, Mode 3 (Ant. 7) |
| <b>Test Date</b>     | Sep. 01, 2010 |                       |   |

#### Channel 60

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5296.00 | 106.78 |            |            |            | 3.13       | 0.00          | 33.34          | 317   | 100   | Average | VERTICAL  |
| 2 | 5304.00 | 116.33 |            |            |            | 3.14       | 0.00          | 33.34          | 317   | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 58.59  | 60.00      | -1.41      | 22.00      | 3.16       | 0.00          | 33.43          | 317   | 100   | Average | VERTICAL  |
| 4 | 5350.40 | 74.80  | 80.00      | -5.20      | 38.21      | 3.16       | 0.00          | 33.43          | 317   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5300 MHz.

#### Channel 64

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           | deg   | cm    |         |           |
| 1 | 5317.00 | 120.09 |            |            |            | 3.14       | 0.00          | 33.37          | 150   | 100   | Peak    | VERTICAL  |
| 2 | 5325.80 | 110.43 |            |            |            | 3.15       | 0.00          | 33.37          | 150   | 100   | Average | VERTICAL  |
| 3 | 5350.80 | 58.32  | 60.00      | -1.68      | 21.73      | 3.16       | 0.00          | 33.43          | 150   | 100   | Average | VERTICAL  |
| 4 | 5354.20 | 76.20  | 80.00      | -3.80      | 39.61      | 3.16       | 0.00          | 33.43          | 150   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5320 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

<For Mode 4 (Ant. 8)>:

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11n MSC8 20MHz Ch 60, 64 / J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |   |

#### Channel 60

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 5304.00 | 112.31 |            |            |            | 2.64              | 33.94          | 0.00          | 352   | 100   | Average | VERTICAL  |
| 2 | 5304.80 | 125.63 |            |            |            | 2.64              | 33.94          | 0.00          | 352   | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 58.21  | 60.00      | -1.79      | 21.51      | 2.67              | 34.03          | 0.00          | 352   | 100   | Average | VERTICAL  |
| 4 | 5350.00 | 72.59  | 80.00      | -7.41      | 35.89      | 2.67              | 34.03          | 0.00          | 352   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5300 MHz.

#### Channel 64

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 5319.40 | 109.24 |            |            |            | 2.66              | 33.97          | 0.00          | 286   | 100   | Average | VERTICAL  |
| 2 | 5321.20 | 121.81 |            |            |            | 2.66              | 33.97          | 0.00          | 286   | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 58.66  | 60.00      | -1.34      | 21.96      | 2.67              | 34.03          | 0.00          | 286   | 100   | Average | VERTICAL  |
| 4 | 5350.40 | 74.95  | 80.00      | -5.05      | 38.25      | 2.67              | 34.03          | 0.00          | 286   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5320 MHz.

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11n MSC8 40MHz Ch 54, 62 / J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |   |

#### Channel 54

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 5280.40 | 105.75 |            |            |            | 2.63              | 33.91          | 0.00          | 357   | 100   | Average | VERTICAL  |
| 2 | 5284.80 | 119.63 |            |            |            | 2.63              | 33.91          | 0.00          | 357   | 100   | Peak    | VERTICAL  |
| 3 | 5350.00 | 59.09  | 60.00      | -0.91      | 22.39      | 2.67              | 34.03          | 0.00          | 357   | 100   | Average | VERTICAL  |
| 4 | 5350.40 | 75.71  | 80.00      | -4.29      | 39.01      | 2.67              | 34.03          | 0.00          | 357   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5270 MHz.

#### Channel 62

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 5315.60 | 114.19 |            |            |            | 2.66              | 33.97          | 0.00          | 284   | 100   | Peak    | VERTICAL  |
| 2 | 5322.40 | 100.38 |            |            |            | 2.66              | 33.97          | 0.00          | 284   | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 58.94  | 60.00      | -1.06      | 22.24      | 2.67              | 34.03          | 0.00          | 284   | 100   | Average | VERTICAL  |
| 4 | 5354.80 | 71.82  | 80.00      | -8.18      | 35.12      | 2.67              | 34.03          | 0.00          | 284   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5310 MHz.

Note: Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 26°C          | <b>Humidity</b>       | 60%   |
| <b>Test Engineer</b> | Magic Lai     | <b>Configurations</b> | IEEE 802.11a Ch 60, 64<br>/ J2+J3+J4, Mode 4 (Ant. 8) |
| <b>Test Date</b>     | Jan. 26, 2011 |                       |   |

### Channel 60

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 5301.20 | 114.38 |            |            |            | 2.64              | 33.94          | 0.00          | 110   | 100   | Average | VERTICAL  |
| 2 | 5301.60 | 124.48 |            |            |            | 2.64              | 33.94          | 0.00          | 110   | 100   | Peak    | VERTICAL  |
| 3 | 5350.40 | 58.76  | 60.00      | -1.24      | 22.06      | 2.67              | 34.03          | 0.00          | 110   | 100   | Average | VERTICAL  |
| 4 | 5351.20 | 77.01  | 80.00      | -2.99      | 40.31      | 2.67              | 34.03          | 0.00          | 110   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | PoI/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 5322.00 | 121.88 |            |            |            | 2.66              | 33.97          | 0.00          | 297   | 100   | Peak    | VERTICAL  |
| 2 | 5322.60 | 111.10 |            |            |            | 2.66              | 33.97          | 0.00          | 297   | 100   | Average | VERTICAL  |
| 3 | 5350.00 | 58.09  | 60.00      | -1.91      | 21.39      | 2.67              | 34.03          | 0.00          | 297   | 100   | Average | VERTICAL  |
| 4 | 5353.60 | 79.34  | 80.00      | -0.66      | 42.64      | 2.67              | 34.03          | 0.00          | 297   | 100   | Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 5320 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or  $\pm 20\text{ppm}$  (IEEE 802.11 specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Entire absence of modulation emissions bandwidth |
| RB                 | 10 kHz   |
| VB                 | 10 kHz   |
| Sweep Time         | Auto   |

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20\text{ppm}$  (IEEE 802.11 specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .
8. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

### 4.8.4. Test Setup Layout

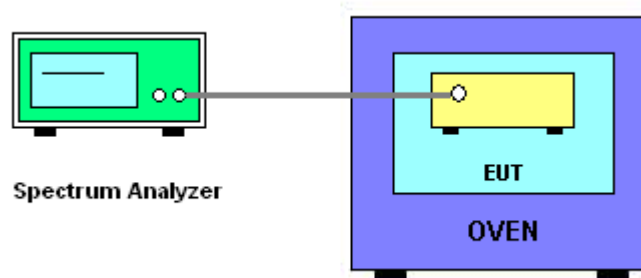

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

| Voltage              | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (V)                  | <b>5300</b>                 |
| 126.50               | 5300.0139                   |
| 110.00               | 5300.0238                   |
| 93.50                | 5300.0264                   |
| Max. Deviation (MHz) | <b>0.026350</b>             |
| Max. Deviation (ppm) | <b>4.97</b>                 |

##### Temperature vs. Frequency Stability

| Temperature          | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (°C)                 | <b>5300</b>                 |
| -30                  | 5299.9839                   |
| -20                  | 5299.9662                   |
| -10                  | 5299.9541                   |
| 0                    | 5299.9516                   |
| 10                   | 5299.9544                   |
| 20                   | 5299.9584                   |
| 30                   | 5299.9580                   |
| 40                   | 5299.9528                   |
| 50                   | 5299.9528                   |
| Max. Deviation (MHz) | <b>0.048400</b>             |
| Max. Deviation (ppm) | <b>9.1321</b>               |

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

| Instrument               | Manufacturer   | Model No.     | Serial No.  | Characteristics      | Calibration Date | Remark                |
|--------------------------|----------------|---------------|-------------|----------------------|------------------|-----------------------|
| EMC Receiver             | R&S            | ESCS 30       | 100174      | 9kHz – 2.75GHz       | Apr. 06, 2010    | Conduction (CO04-HY)  |
| LISN                     | MessTec        | NNB-2/16Z     | 99041       | 9kHz – 30MHz         | Mar. 23, 2010    | Conduction (CO04-HY)  |
| LISN (Support Unit)      | EMCO           | 3810/2NM      | 9703-1839   | 9kHz – 30MHz         | Apr. 29, 2010    | Conduction (CO04-HY)  |
| RF Cable-CON             | UTIFLEX        | 3102-26886-4  | CB049       | 9kHz – 30MHz         | Apr. 20, 2010    | Conduction (CO04-HY)  |
| EMI Filter               | LINDGREN       | LRE-2030      | 2651        | < 450 Hz             | N/A              | Conduction (CO04-HY)  |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M        | 03CH03-HY   | 30 MHz - 1 GHz<br>3m | Jun. 07, 2010    | Radiation (03CH03-HY) |
| Amplifier                | SCHAFFNER      | COA9231A      | 18667       | 9 kHz - 2 GHz        | Jan. 24, 2010    | Radiation (03CH03-HY) |
| Amplifier                | SCHAFFNER      | COA9231A      | 18667       | 9 kHz - 2 GHz        | Jan. 24, 2011    | Radiation (03CH03-HY) |
| Amplifier                | Agilent        | 8449B         | 3008A02120  | 1 GHz - 26.5 GHz     | Jul. 21, 2010    | Radiation (03CH03-HY) |
| Amplifier                | MITEQ          | AMF-6F-260400 | 9121372     | 26.5 GHz - 40 GHz    | Apr. 06, 2009*   | Radiation (03CH03-HY) |
| Spectrum Analyzer        | R&S            | FSP40         | 100004      | 9 kHz - 40 GHz       | Oct. 03, 2009    | Radiation (03CH03-HY) |
| Spectrum Analyzer        | R&S            | FSP40         | 100004      | 9 kHz - 40 GHz       | Oct. 03, 2010    | Radiation (03CH03-HY) |
| Loop Antenna             | R&S            | HFH2-Z2       | 860004/001  | 9 kHz - 30 MHz       | Jul. 29, 2010*   | Radiation (03CH03-HY) |
| Bilog Antenna            | SCHAFFNER      | CBL 6112D     | 22237       | 30 MHz – 1 GHz       | Sep. 26, 2009    | Radiation (03CH03-HY) |
| Bilog Antenna            | SCHAFFNER      | CBL 6112D     | 22237       | 30 MHz – 1 GHz       | Oct. 16, 2010    | Radiation (03CH03-HY) |
| Horn Antenna             | EMCO           | 3115          | 6741        | 1GHz ~ 18GHz         | Apr. 28, 2010    | Radiation (03CH03-HY) |
| Horn Antenna             | SCHWARZBECK    | BBHA9170      | BBHA9170154 | 15 GHz - 40 GHz      | Jan. 11, 2010    | Radiation (03CH03-HY) |
| Horn Antenna             | SCHWARZBECK    | BBHA9170      | BBHA9170154 | 15 GHz - 40 GHz      | Jan. 11, 2011    | Radiation (03CH03-HY) |
| RF Cable-R03m            | Jye Bao        | RG142         | CB021       | 30 MHz - 1 GHz       | Jan. 05, 2010    | Radiation (03CH03-HY) |
| RF Cable-R03m            | Jye Bao        | RG142         | CB021       | 30 MHz - 1 GHz       | Jan. 05, 2011    | Radiation (03CH03-HY) |
| RF Cable-HIGH            | SUHNER         | SUCOFLEX 106  | 03CH03-HY   | 1 GHz - 40 GHz       | Jan. 05, 2010    | Radiation (03CH03-HY) |
| RF Cable-HIGH            | SUHNER         | SUCOFLEX 106  | 03CH03-HY   | 1 GHz - 40 GHz       | Jan. 05, 2011    | Radiation (03CH03-HY) |
| Turn Table               | HD             | DS 420        | 420/650/00  | 0 – 360 degree       | N/A              | Radiation (03CH03-HY) |
| Antenna Mast             | HD             | MA 240        | 240/560/00  | 1 m - 4 m            | N/A              | Radiation (03CH03-HY) |
| Spectrum Analyzer        | R&S            | FSU26.5       | 100015      | 20Hz ~ 26.5GHz       | Oct. 29, 2009    | Conducted (TH01-HY)   |
| Spectrum Analyzer        | R&S            | FSU26.5       | 100015      | 20Hz ~ 26.5GHz       | Oct. 29, 2010    | Conducted (TH01-HY)   |

| Instrument                 | Manufacturer | Model No.    | Serial No.  | Characteristics | Calibration Date | Remark              |
|----------------------------|--------------|--------------|-------------|-----------------|------------------|---------------------|
| Power Meter                | R&S          | NRVS         | 100444      | DC ~ 40GHz      | Jul. 28, 2010    | Conducted (TH01-HY) |
| Power Sensor               | R&S          | NRV-Z51      | 100666      | DC ~ 30GHz      | Jul. 04, 2010    | Conducted (TH01-HY) |
| Power Sensor               | R&S          | NRV-Z51      | 100666      | DC ~ 30GHz      | Jul. 04, 2011    | Conducted (TH01-HY) |
| Power Sensor               | R&S          | NRV-Z32      | 100057      | 30MHz ~ 6GHz    | Jul. 31, 2010    | Conducted (TH01-HY) |
| AC Power Source            | HPC          | HPA-500W     | HPA-9100024 | AC 0 ~ 300V     | Jul. 12, 2009*   | Conducted (TH01-HY) |
| AC Power Source            | HPC          | HPA-500W     | HPA-9100024 | AC 0 ~ 300V     | Jul. 12, 2010*   | Conducted (TH01-HY) |
| DC Power Source            | G.W.         | GPC-6030D    | C671845     | DC 1V ~ 60V     | Mar. 13, 2010    | Conducted (TH01-HY) |
| DC Power Source            | G.W.         | GPC-6030D    | C671845     | DC 1V ~ 60V     | Mar. 13, 2011    | Conducted (TH01-HY) |
| Temp. and Humidity Chamber | Giant Force  | GTH-225-20-S | MAB0103-001 | N/A             | Aug. 06, 2010    | Conducted (TH01-HY) |
| RF CABLE-1m                | Jye Bao      | RG142        | CB034-1m    | 20MHz ~ 7GHz    | Dec. 02, 2009    | Conducted (TH01-HY) |
| RF CABLE-1m                | Jye Bao      | RG142        | CB034-1m    | 20MHz ~ 7GHz    | Dec. 02, 2010    | Conducted (TH01-HY) |
| RF CABLE-2m                | Jye Bao      | RG142        | CB035-2m    | 20MHz ~ 1GHz    | Dec. 02, 2009    | Conducted (TH01-HY) |
| RF CABLE-2m                | Jye Bao      | RG142        | CB035-2m    | 20MHz ~ 1GHz    | Dec. 02, 2010    | Conducted (TH01-HY) |
| Vector Signal Generator    | R&S          | SMU200A      | 102098      | 100kHz ~ 6GHz   | Feb. 13, 2010    | Conducted (TH01-HY) |
| Vector Signal Generator    | R&S          | SMU200A      | 102098      | 100kHz ~ 6GHz   | Feb. 13, 2011    | Conducted (TH01-HY) |
| Signal Generator           | R&S          | SMR40        | 100116      | 10MHz ~ 40GHz   | Mar. 25, 2010    | Conducted (TH01-HY) |
| Signal Generator           | R&S          | SMR40        | 100116      | 10MHz ~ 40GHz   | Mar. 25, 2011    | Conducted (TH01-HY) |
| Power Sensor               | Anritsu      | MA2411B      | 0917017     | 300MHz~40GHz    | Dec. 03, 2009    | Conducted (TH01-HY) |
| Power Sensor               | Anritsu      | MA2411B      | 0917017     | 300MHz~40GHz    | Dec. 03, 2010    | Conducted (TH01-HY) |
| Power Meter                | Anritsu      | ML2495A      | 0949003     | 300MHz~40GHz    | Dec. 03, 2009    | Conducted (TH01-HY) |
| Power Meter                | Anritsu      | ML2495A      | 0949003     | 300MHz~40GHz    | Dec. 03, 2010    | Conducted (TH01-HY) |

Note: Calibration Interval of instruments listed above is one year.

Note: For "\*" Calibration Interval of instruments listed above is two years.

## 6. TEST LOCATION

|        |  |
|--------|--|
| SHIJR  | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C.<br>TEL : 886-2-2696-2468<br>FAX : 886-2-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 886-3-327-3456<br>FAX : 886-3-318-0055         |
| LINKOU | ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C<br>TEL : 886-2-2601-1640<br>FAX : 886-2-2601-1695               |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C.<br>TEL : 886-2-2631-4739<br>FAX : 886-2-2631-9740            |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C.<br>TEL : 886-2-8227-2020<br>FAX : 886-2-8227-2626           |
| NEIHU  | ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C.<br>TEL : 886-2-2794-8886<br>FAX : 886-2-2794-9777         |
| JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065<br>FAX : 886-3-656-9085       |

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

|                                       |  |
|---------------------------------------|--|
| <b>Accreditation Criteria</b>         | : ISO/IEC 17025:2005   |
| <b>Accreditation Number</b>           | : 1190   |
| <b>Originally Accredited</b>          | : December 15, 2003  |
| <b>Effective Period</b>               | : January 10, 2010 to January 09, 2013   |
| <b>Accredited Scope</b>               | : Testing Field, see described in the Appendix   |
| <b>Specific Accreditation Program</b> | : Accreditation Program for Designated Testing Laboratory for Commodities Inspection<br>Accreditation Program for Telecommunication Equipment Testing Laboratory<br>Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities |

*Jay-san Chen*

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 30, 2009

Pl, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix