


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	58%
Test Engineer	Peter Wu / Owen Hsu	Configurations	2.4GHz + 5GHz

Horizontal

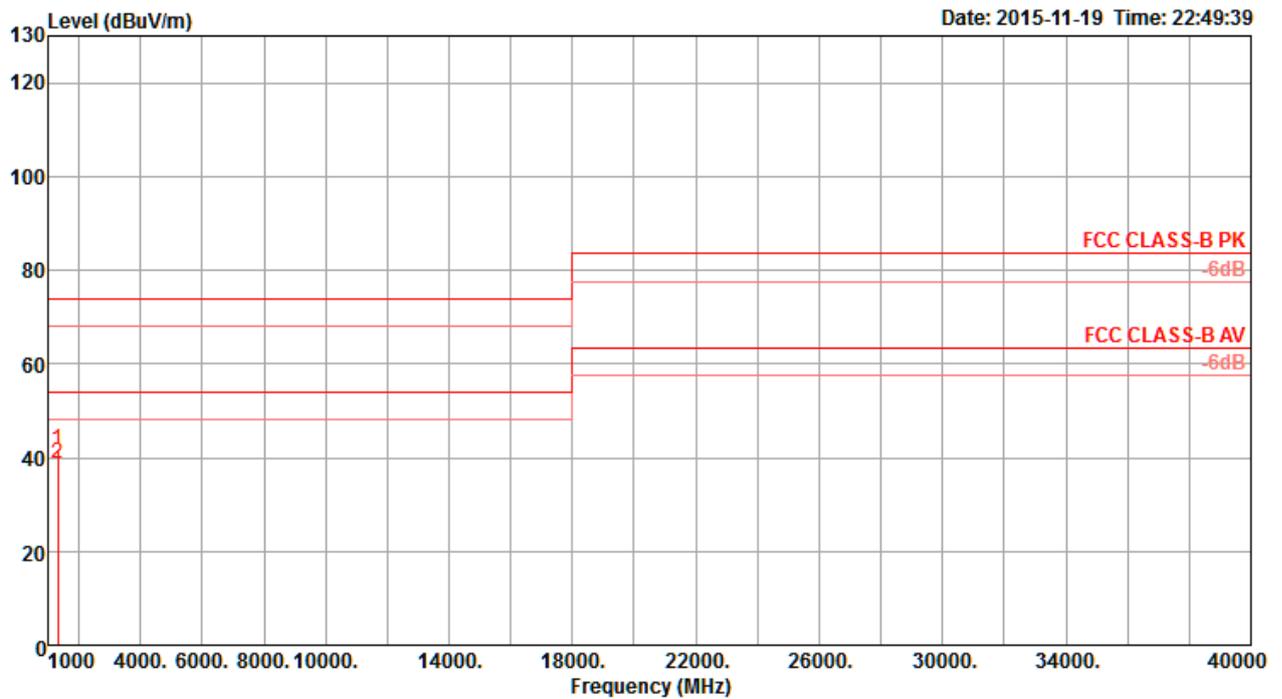

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1321.04	41.73	74.00	-32.27	49.27	2.67	24.97	35.18	151	154	Peak	HORIZONTAL
2	1323.07	38.89	54.00	-15.11	46.41	2.67	24.99	35.18	151	154	Average	HORIZONTAL

Vertical

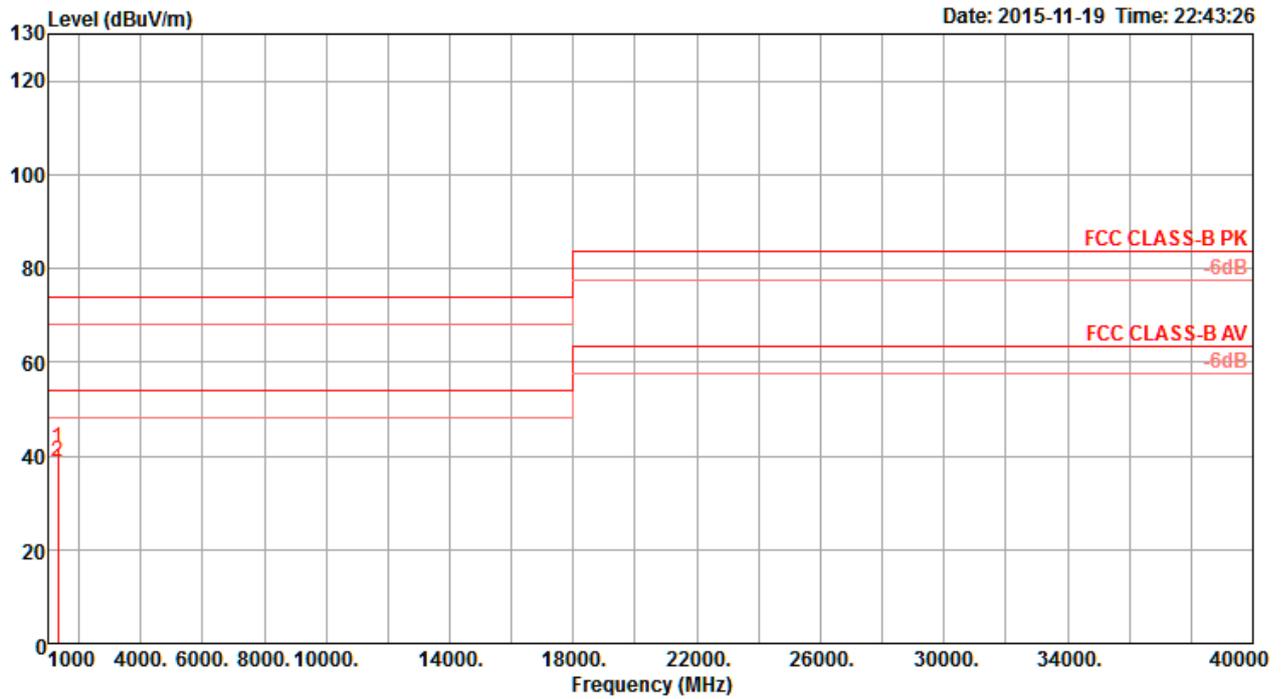

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1322.97	41.65	74.00	-32.35	49.17	2.67	24.99	35.18	143	153	Peak	VERTICAL
2	1323.13	38.81	54.00	-15.19	46.33	2.67	24.99	35.18	143	153	Average	VERTICAL