




FCC RADIO TEST REPORT

FCC ID : QXO-AP510I
Equipment : 802.11ax Access Point
Brand Name : Extreme Networks
Model Name : AP510i
Applicant : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Manufacturer : Extreme Networks, Inc.
6480 Via Del Oro, San Jose, CA 95119
Standard : 47 CFR FCC Part 15.247

The product was received on Nov. 03, 2018, and testing was started from Nov. 14, 2018 and completed on Dec. 18, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Testing Applied Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration.....	18
2.3 EUT Operation during Test	21
2.4 Accessories	21
2.5 Support Equipment.....	22
2.6 Test Setup Diagram	23
3 Transmitter Test Result	27
3.1 AC Power-line Conducted Emissions	27
3.2 DTS Bandwidth	29
3.3 Maximum Conducted Output Power	30
3.4 Power Spectral Density	33
3.5 Emissions in Non-restricted Frequency Bands	36
3.6 Emissions in Restricted Frequency Bands.....	37
4 Test Equipment and Calibration Data	41
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB Ver1.0

Page Number : 3 of 42
Issued Date : Jan. 22, 2019
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

- 1.The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
- 2.The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Cliff Chang

Report Producer: Wendy Pan

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), ax (HEW20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), ax (HEW40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	1TX, 2TX, 4TX
2.4-2.4835GHz	802.11g	20	1TX, 2TX, 4TX
2.4-2.4835GHz	802.11n HT20	20	1TX, 2TX, 4TX
2.4-2.4835GHz	802.11ax HEW20	20	1TX, 2TX, 4TX
2.4-2.4835GHz	802.11ax HEW20-BF	20	2TX, 4TX
2.4-2.4835GHz	802.11n HT40	40	1TX, 2TX, 4TX
2.4-2.4835GHz	802.11ax HEW40	40	1TX, 2TX, 4TX
2.4-2.4835GHz	802.11ax HEW40-BF	40	2TX, 4TX

Note:

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ HEW20, HEW40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Radio	Antenna Gain(dBi)
	1TX	2TX	4TX						
1	1	1	1	WNC	Starlord 510i	PIFA	I-PEX	R1-5GHz	Note 1
2	-	2	2	WNC	Starlord 510i	PIFA	I-PEX	R1-5GHz	Note 1
3	-	-	3	WNC	Starlord 510i	PIFA	I-PEX	R1-5GHz	Note 1
4	-	-	4	WNC	Starlord 510i	PIFA	I-PEX	R1-5GHz	Note 1
5	R2-1	R2-1	R1-4 R2-1	WNC	Starlord 510i	PIFA	I-PEX	R1-2.4GHz R2-5GHz	Note 1
6	-	R2-2	R1-3 R2-2	WNC	Starlord 510i	PIFA	I-PEX	R1-2.4GHz R2-5GHz	Note 1
7	-	R1-2	R1-2 R2-3	WNC	Starlord 510i	PIFA	I-PEX	R1-2.4GHz R2-5GHz	Note 1
8	R1-1	R1-1	R1-1 R2-4	WNC	Starlord 510i	PIFA	I-PEX	R1-2.4GHz R2-5GHz	Note 1
9	1	-	-	WNC	Starlord 510i	PIFA	I-PEX	R3	Note 1

Note1:

Ant.	Antenna Gain(dBi)			
	WLAN 2.4GHz	WLAN 5GHz	Bluetooth	Thread
1	-	5.89	-	-
2	-	5.36	-	-
3	-	5.67	-	-
4	-	5.36	-	-
5	3.48	4.57	-	-
6	3.80	4.40	-	-
7	3.84	4.98	-	-
8	3.90	5.18	-	-
9	-	-	4.40	4.40

Note2: The above information was declared by manufacturer.

Note3:

For 2.4GHz function:

For IEEE 802.11b/g/n/ax mode (1TX, 2TX, 4TX/4RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For 5GHz function:



For IEEE 802.11a/n/ac/ax mode (1TX, 2TX, 4TX/4RX):

For 1TX

Only Port 1 can be use as transmitting antenna.

For 2TX

Port 1 and Port 2 can be use as transmitting antenna.

Port 1 and Port 2 could transmit simultaneously.

For 4TX

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit simultaneously.

For 4RX

Port 1, Port 2, Port 3 and Port 4 can be used as receiving antennas.

Port 1, Port 2, Port 3 and Port 4 could receive simultaneously.

For Bluetooth and Thread mode (1TX/1RX):

Only Port 1 can be use as transmitting/receiving antenna.

1.1.3 Mode Test Duty Cycle

For 1T1S Mode:

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11b	0.946	0.241	12.424m	100
802.11g	0.952	0.214	2.07m	1k
802.11ax HEW20	0.986	0.061	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11ax HEW40	0.97	0.132	910u	3k

For 2T2S Mode:

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11ax HEW20	0.972	0.123	925u	3k
802.11ax HEW40	0.948	0.232	506.25u	3k

For 4T1S Mode:

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11b	0.949	0.227	12.422m	100
802.11g	0.955	0.2	2.072m	1k
802.11ax HEW20	0.985	0.066	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11ax HEW40	0.973	0.119	910u	3k
802.11ax HEW20-BF	0.905	0.434	2.936m	1k
802.11ax HEW40-BF	0.903	0.443	2.932m	1k

For 4T4S Mode:

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11ax HEW20	0.953	0.209	537.5u	3k
802.11ax HEW40	0.923	0.348	330u	10k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter or PoE		
Beamforming Function	☒ With beamforming	☐ Without beamforming	
	For 802.11ax in 2.4GHz and 802.11n/ac/ax in 5GHz.		
Function	☒ Point-to-multipoint	☐ Point-to-point	
Test Software Version	accessMtool 3.0.0.6		

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The EUT has three radios, the information as following table:

Radio	Function		
	WLAN 2.4GHz	WLAN 5GHz	Bluetooth/Thread
1	V	V	-
2	-	V	-
3	-	-	V

1.1.6 Table for EUT support function

Function	Support Type	Support Band
AP	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1~4
Client	Slave without Radar Detection (Sensor Mode)	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4
Bridge	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4
Mesh	Master	WLAN 2.4GHz/Bluetooth/Thread/WLAN 5GHz Band 1+4

Note: The above information was declared by manufacturer.



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v05
- ♦ FCC KDB 662911 D01 v02r01

1.3 Testing Location Information

Testing Location		
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Eddie Weng	23°C / 61%	Nov. 14, 2018 ~ Dec. 17, 2018
Radiated (Below 1GHz) and (Emission Co-location)	03CH01-CB	Paul Chen	22°C / 54%	Nov. 22, 2018 ~ Nov. 23, 2018
Radiated (Above 1GHz)	03CH01-CB	Stim Sung	22°C / 54%	Nov. 22, 2018 ~ Dec. 18, 2018
AC Conduction	CO02-CB	Deven Huang	23°C / 60%	Nov. 26, 2018

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74 x10 ⁻⁸	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For 1T1S Mode:

For Conducted measurement and Band Edge Emission test:

Mode	PowerSetting	PowerSetting (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-
2412MHz	88	22
2417MHz	89	22.25
2422MHz	91	22.75
2427MHz	91	22.75
2432MHz	92	23
2437MHz	92	23
2442MHz	92	23
2447MHz	91	22.75
2452MHz	91	22.75
2457MHz	88	22
2462MHz	84	21
802.11g_Nss1,(6Mbps)_1TX	-	-
2412MHz	69	17.25
2417MHz	75	18.75
2422MHz	79	19.75
2427MHz	82	20.5
2432MHz	85	21.25
2437MHz	85	21.25
2442MHz	84	21
2447MHz	84	21
2452MHz	80	20
2457MHz	75	18.75
2462MHz	66	16.5
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-
2412MHz	68	17
2417MHz	74	18.5
2422MHz	79	19.75
2427MHz	82	20.5
2432MHz	83	20.75
2437MHz	84	21
2442MHz	83	20.75
2447MHz	79	19.75
2452MHz	70	17.5



Mode	PowerSetting	PowerSetting (dBm)
2457MHz	70	17.5
2462MHz	58	14.5
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-
2422MHz	66	16.5
2427MHz	67	16.75
2432MHz	69	17.25
2437MHz	69	17.25
2442MHz	67	16.75
2447MHz	67	16.75
2452MHz	64	16

**For 2T2S Mode:****For Conducted measurement and Band Edge Emission test:**

Mode	PowerSetting	PowerSetting (dBm)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-
2412MHz	64	16
2417MHz	73	18.25
2422MHz	75	18.75
2427MHz	79	19.75
2432MHz	80	20
2437MHz	82	20.5
2442MHz	81	20.25
2447MHz	76	19
2452MHz	72	18
2457MHz	68	17
2462MHz	64	16
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-
2422MHz	61	15.25
2427MHz	61	15.25
2432MHz	64	16
2437MHz	66	16.5
2442MHz	64	16
2447MHz	64	16
2452MHz	61	15.25

**For 4T1S Mode:****For Radiated Emission:**

Mode	PowerSetting
802.11b_Nss1,(1Mbps)_4TX	-
2412MHz	110
2437MHz	110
2462MHz	110
802.11g_Nss1,(6Mbps)_4TX	-
2412MHz	110
2437MHz	110
2462MHz	110
802.11ax HEW20_Nss1,(MCS0)_4TX	-
2412MHz	110
2437MHz	110
2462MHz	110
802.11ax HEW40_Nss1,(MCS0)_4TX	-
2422MHz	110
2437MHz	110
2452MHz	110

**For Conducted measurement and Band Edge Emission test:**

Mode	PowerSetting	PowerSetting (dBm)
802.11b_Nss1,(1Mbps)_4TX	-	-
2412MHz	83	20.75
2417MHz	85	21.25
2422MHz	89	22.25
2437MHz	89	22.25
2442MHz	89	22.25
2447MHz	87	21.75
2452MHz	87	21.75
2457MHz	83	20.75
2462MHz	80	20
802.11g_Nss1,(6Mbps)_4TX	-	-
2412MHz	61	15.25
2417MHz	67	16.75
2422MHz	73	18.25
2427MHz	74	18.5
2432MHz	74	18.5
2437MHz	76	19
2442MHz	75	18.75
2447MHz	72	18
2452MHz	70	17.5
2457MHz	67	16.75
2462MHz	60	15
802.11ax HEW20_Nss1,(MCS0)_4TX	-	-
2412MHz	58	14.5
2417MHz	65	16.25
2422MHz	66	16.5
2427MHz	72	18
2437MHz	72	18
2442MHz	72	18
2447MHz	65	16.25
2452MHz	65	16.25
2457MHz	57	14.25
2462MHz	50	12.5
802.11ax HEW40_Nss1,(MCS0)_4TX	-	-
2422MHz	56	14
2427MHz	57	14.25
2432MHz	60	15
2437MHz	61	15.25
2442MHz	60	15



Mode	PowerSetting	PowerSetting (dBm)
2447MHz	57	14.25
2452MHz	55	13.75
802.11ax HEW20-BF_Nss1,(MCS0)_4TX	-	-
2412MHz	39	9.75
2417MHz	43	10.75
2422MHz	47	11.75
2427MHz	48	12
2432MHz	51	12.75
2437MHz	53	13.25
2442MHz	50	12.5
2447MHz	49	12.25
2452MHz	45	11.25
2457MHz	41	10.25
2462MHz	35	8.75
802.11ax HEW40-BF_Nss1,(MCS0)_4TX	-	-
2422MHz	40	10
2427MHz	40	10
2432MHz	40	10
2437MHz	43	10.75
2442MHz	41	10.25
2447MHz	41	10.25
2452MHz	37	9.25

**For 4T4S Mode:****For Conducted measurement and Band Edge Emission test:**

Mode	PowerSetting	PowerSetting (dBm)
802.11ax HEW20_Nss4,(MCS0)_4TX	-	-
2412MHz	60	15
2417MHz	66	16.5
2422MHz	70	17.5
2427MHz	73	18.25
2432MHz	77	19.25
2437MHz	77	19.25
2442MHz	76	19
2447MHz	73	18.25
2452MHz	69	17.25
2457MHz	64	16
2462MHz	59	14.75
802.11ax HEW40_Nss4,(MCS0)_4TX	-	-
2422MHz	51	12.75
2427MHz	51	12.75
2432MHz	55	13.75
2437MHz	56	14
2442MHz	55	13.75
2447MHz	50	12.5
2452MHz	47	11.75

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests										
Tests Item	AC power-line conducted emissions									
Condition	AC power-line conducted measurement for line and neutral									
Operating Mode	Normal Link									
	Radio 1 with 2.4GHz function	Radio 1 with 5GHz function	Radio 2 with 5GHz function	Radio 3 with Bluetooth	Radio 3 with Thread	EUT GE1	EUT GE2	Adapter	PoE connect with EUT GE1	PoE connect with EUT GE2
1	●	-	●	●	-	●	●	●	-	-
2	-	●	●	●	-	●	●	●	-	-
3	●	-	●	-	●	●	●	●	-	-
4	-	●	●	-	●	●	●	●	-	-
Mode 4 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5 ~ 6 will follow this same test mode.										
5	-	●	●	-	●	●	●	-	●	-
6	-	●	●	-	●	●	●	-	-	●
For operating mode 5 is the worst case and it was record in this test report.										

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
Test Mode	Refer to note 1

The Worst Case Mode for Following Conformance Tests												
Tests Item	Emissions in Restricted Frequency Bands											
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.											
Operating Mode < 1GHz	Normal Link											
	EUT at Z-axis	EUT at Y-axis	Radio 1 with 2.4GHz function	Radio 1 with 5GHz function	Radio 2 with 5GHz function	Radio 3 with Bluetooth	Radio 3 with Thread	EUT GE1	EUT GE2	Adapter	PoE connect with EUT GE1	PoE connect with EUT GE2
1	●	-	●	-	●	●	-	●	●	●	-	-
2	-	●	●	-	●	●	-	●	●	●	-	-
Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 ~ 5 will follow this same test mode.												
3	-	●	-	●	●	●	-	●	●	●	-	-
4	-	●	●	-	●	-	●	●	●	●	-	-
5	-	●	-	●	●	-	●	●	●	●	-	-
Mode 5 has been evaluated to be the worst case between Mode 1~5, thus measurement for Mode 6 ~ 7 will follow this same test mode.												
6	-	●	-	●	●	-	●	●	●	-	●	-
7	-	●	-	●	●	-	●	●	●	-	-	●
For operating mode 6 is the worst case and it was record in this test report.												
Operating Mode > 1GHz	CTX											
For Radiated Emission 4T1S Mode: The EUT was performed at Y axis and Z axis and the worst case was found at Z axis. So the measurement will follow this same test configuration.												
For Band Edge Emission 1T1S, 4T1S, 4T4S Mode: The EUT was performed at Y axis and Z axis position and the worst case was found at Z axis. So the measurement will follow this same test configuration.												
2T2SMode: The EUT was performed at Y axis and Z axis and the worst case was found at Y axis. So the measurement will follow this same test configuration.												
Test Mode	Refer to note 1											

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	The EUT was performed at Y axis and Z axis position and the worst case was found at Z axis. So the measurement will follow this same test configuration.
1	EUT in Z axis WLAN 2.4GHz (Radio 1) + WLAN 5GHz (Radio 2)
Refer to Appendix G for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz (Radio 1) + WLAN 5GHz (Radio 2) + Bluetooth (Radio 3)
2	WLAN 5GHz (Radio 1) + WLAN 5GHz (Radio 2) + Bluetooth (Radio 3)
3	WLAN 2.4GHz (Radio 1) + WLAN 5GHz (Radio 2) + Thread (Radio 3)
4	WLAN 5GHz (Radio 1) + WLAN 5GHz (Radio 2) + Thread (Radio 3)
Refer to Sporton Test Report No.: FA801739-01 for Co-location RF Exposure Evaluation.	

Note:

1. Test Mode:

Test Item	Test Mode										
	802.11b		802.11g		802.11ax HEW20/40						
	1T1S	4T1S	1T1S	4T1S	SDM 1T1S	SDM 2T2S	CDD 4T1S	SDM 4T4S	TxBF 2T2S	TxBF 4T1S	TxBF 4T4S
Maximum Conducted Output Power	V	V	V	V	V	V	V	V	-	V	-
DTS Bandwidth	V	V	V	V	V	V	V	V	-	V	-
Power Spectral Density	V	V	V	V	V	V	V	V	-	V	-
Emissions in Non-restricted Frequency Bands	V	V	V	V	V	V	V	V	-	V	-
Radiated Emission	Cover by CDD 4T1S Max setting	V	Cover by CDD 4T1S Max setting	V	Cover by CDD 4T1S Max setting	Cover by CDD 4T1S Max setting	Max setting	Cover by CDD 4T1S Max setting	-	Cover by CDD 4T1S Max setting	-
Band Edge Emission	V	V	V	V	V	V	V	V	-	V	-

2. 802.11ax modulation and bandwidth are similar for 802.11n mode for 20MHz / 40MHz, therefore investigated worst case to representative mode in test report.

3. The PoE is for measurement only, would not be marketed.

PoE information as below:

Power	Brand	Model
PoE	Microsemi	PD-9001GR/AT/AC



2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.
The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under Telnet and LanTest.
3. Executed " Telnet and LanTest " to link with the remote workstation to transmit and receive packet by WLAN AP and transmit duty cycle no less than 98%.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Equipment Name	Brand Holder	Model Name	Rating
Adapter	Powertron Electronics Corp.	PA1045-120HIB300	Intput:100-240V~50-60Hz, 1.0A Output: 12V, 3.0A 36W Max
Others			
Plug*6 (US*1, EU*1, UK*1, AU*1, China*1, BZ*1)			
Bracket*1			



2.5 Support Equipment

For Test Site No: CO02-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Flash disk3.0	Transcend	JetFlash-700	N/A
B	PoE	Microsemi	PD-9001GR/AT/AC	N/A
C	GE1 PC	DELL	T3400	N/A
D	GE2 NB	DELL	E6430	N/A
E	2.4G/5G NB	DELL	E6430	N/A
F	5G NB	DELL	E6430	N/A
G	802.11ax Access Point (Device)	Extreme Networks	AP510i	QXO-AP510I
H	Device NB	DELL	E6430	N/A

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PC	ASUS	N/A	N/A
B	LAN NB	DELL	E4300	N/A
C	2.4G/5G NB	DELL	E4300	N/A
D	5G NB	DELL	E4300	N/A
E	802.11ax Access Point (Device)	Extreme Networks	AP510i	QXO-AP510I
F	Device NB	DELL	E4300	N/A
G	Flash disk3.0	Transcend	JetFlash-700	N/A
H	PoE	Microsemi	PD-9001GR/AT/AC	N/A


For Test Site No: TH01-CB and 03CH01-CB (above 1GHz, Non-Beamforming Mode)


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A


For Test Site No: 03CH01-CB (above 1GHz, Beamforming Mode)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	WLAN AP	Extreme Networks	AP510i	QXO-AP510I
C	Notebook	DELL	E4300	N/A


2.6 Test Setup Diagram

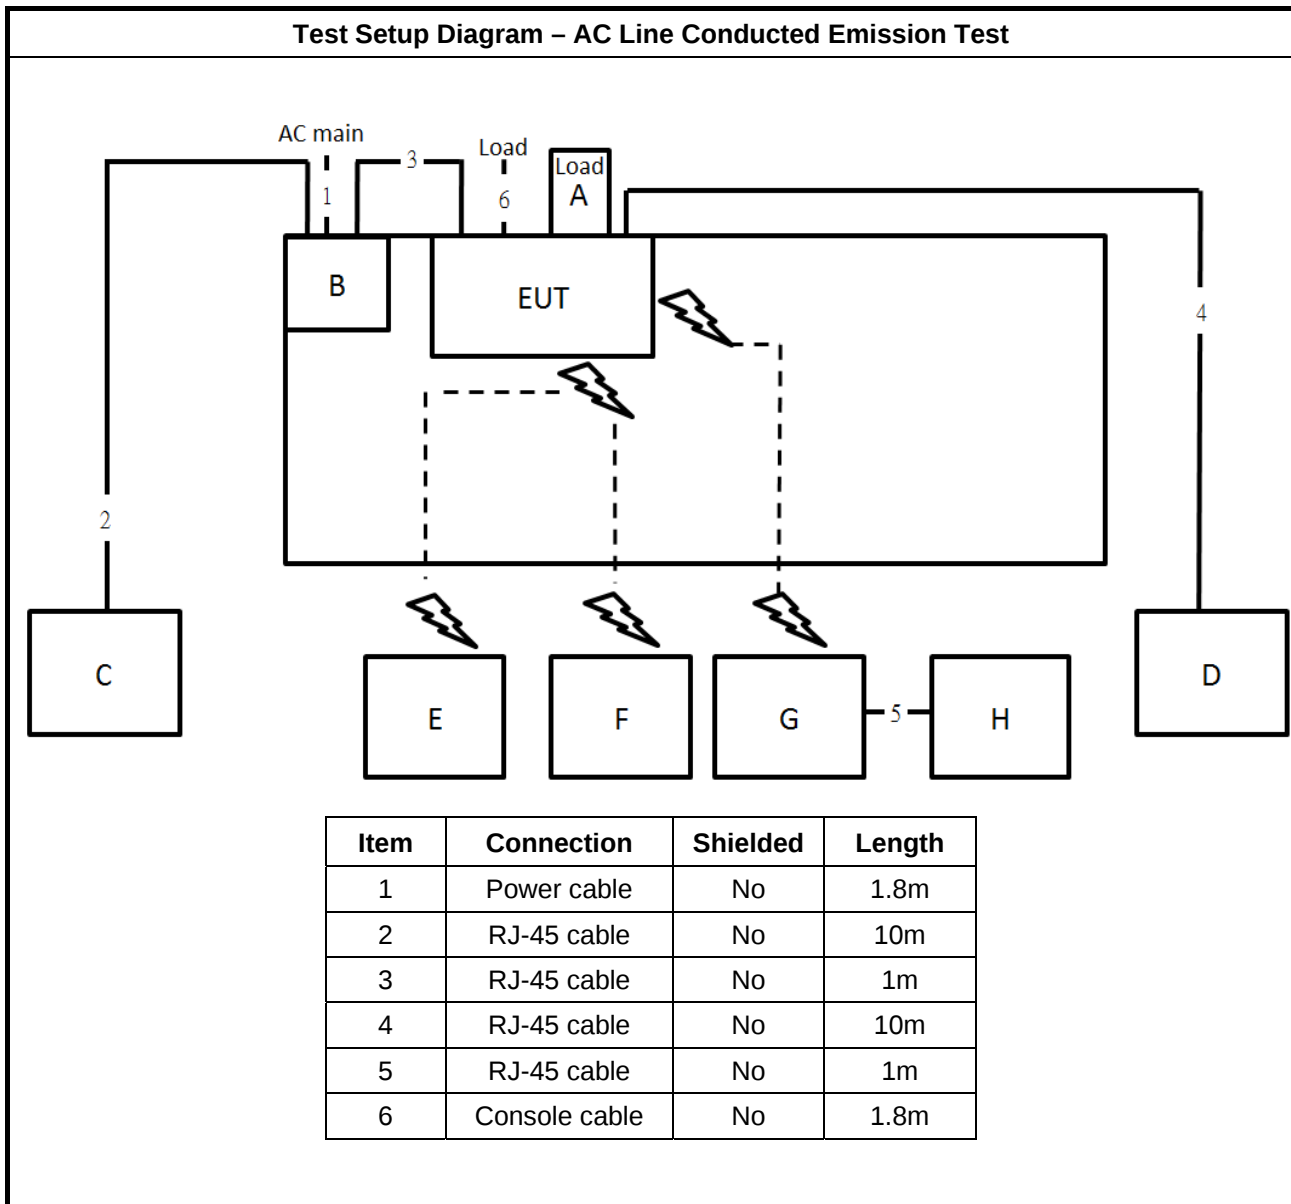

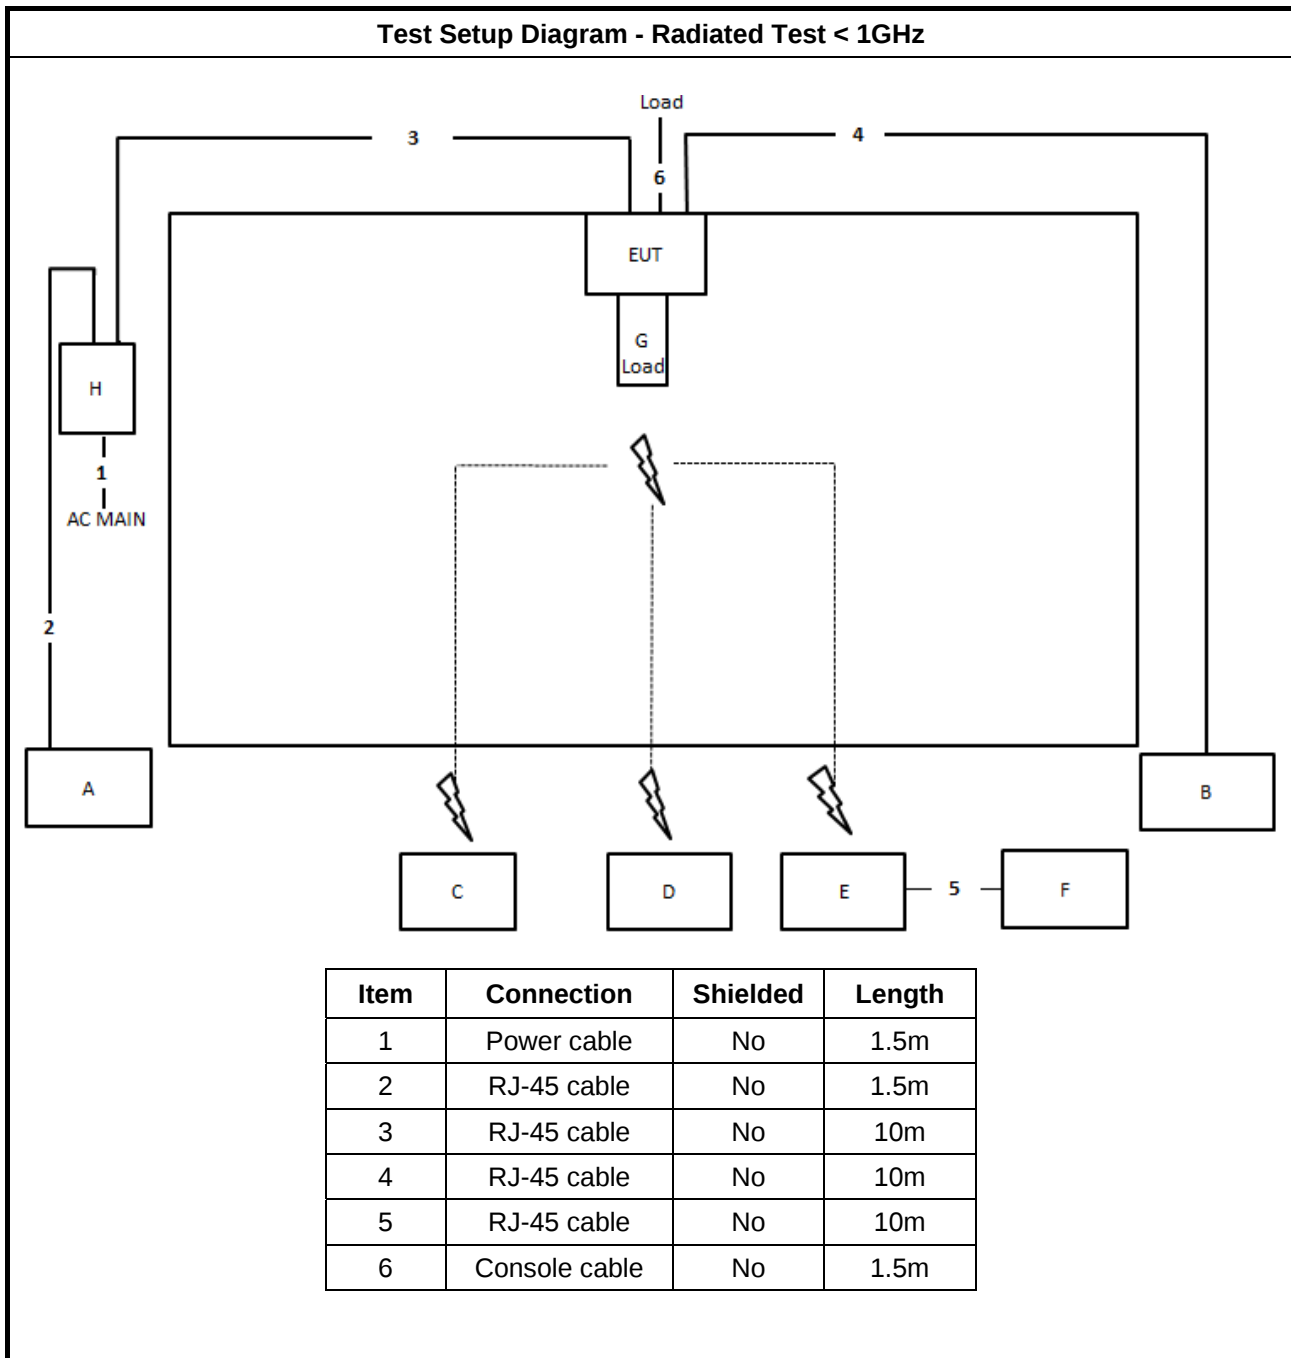Test Setup Diagram - Radiated Test < 1GHz

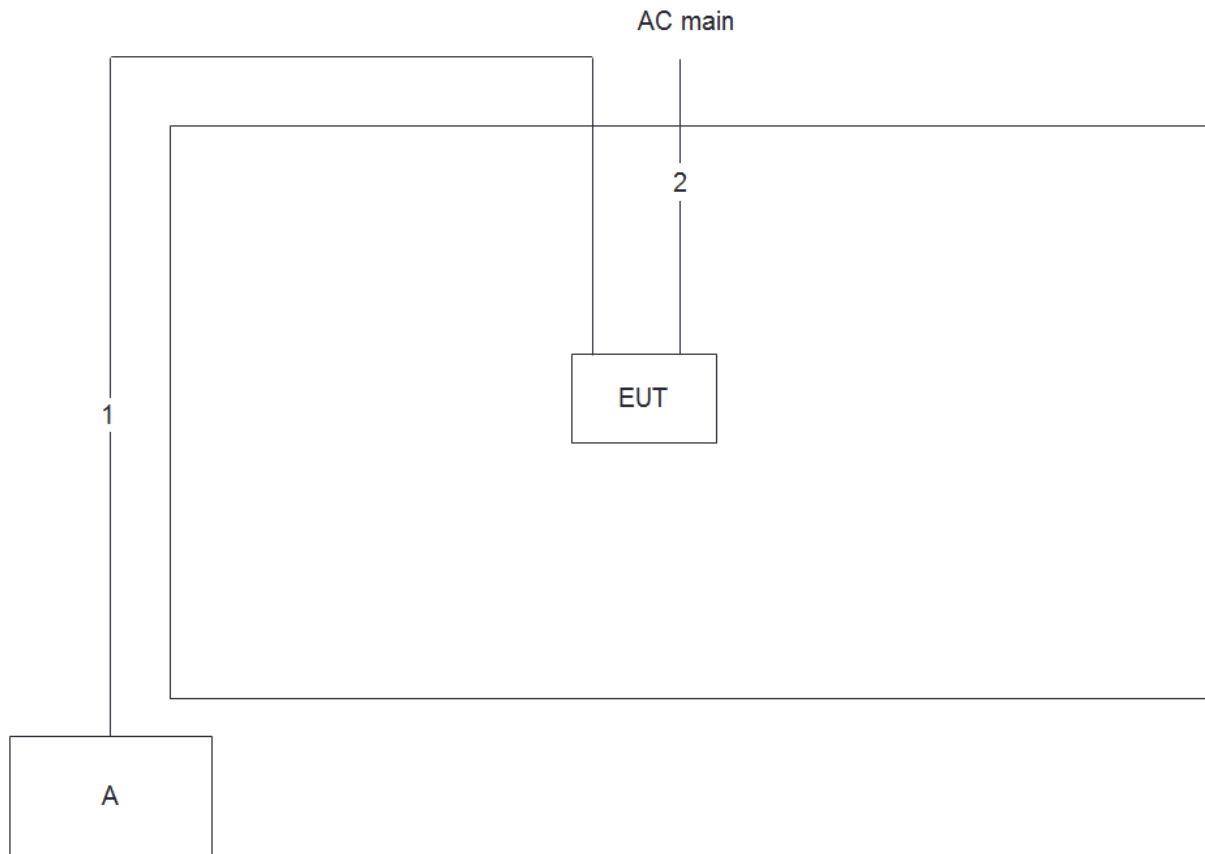
Test Setup Diagram - Radiated Test > 1GHz , Non-Beamforming Mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

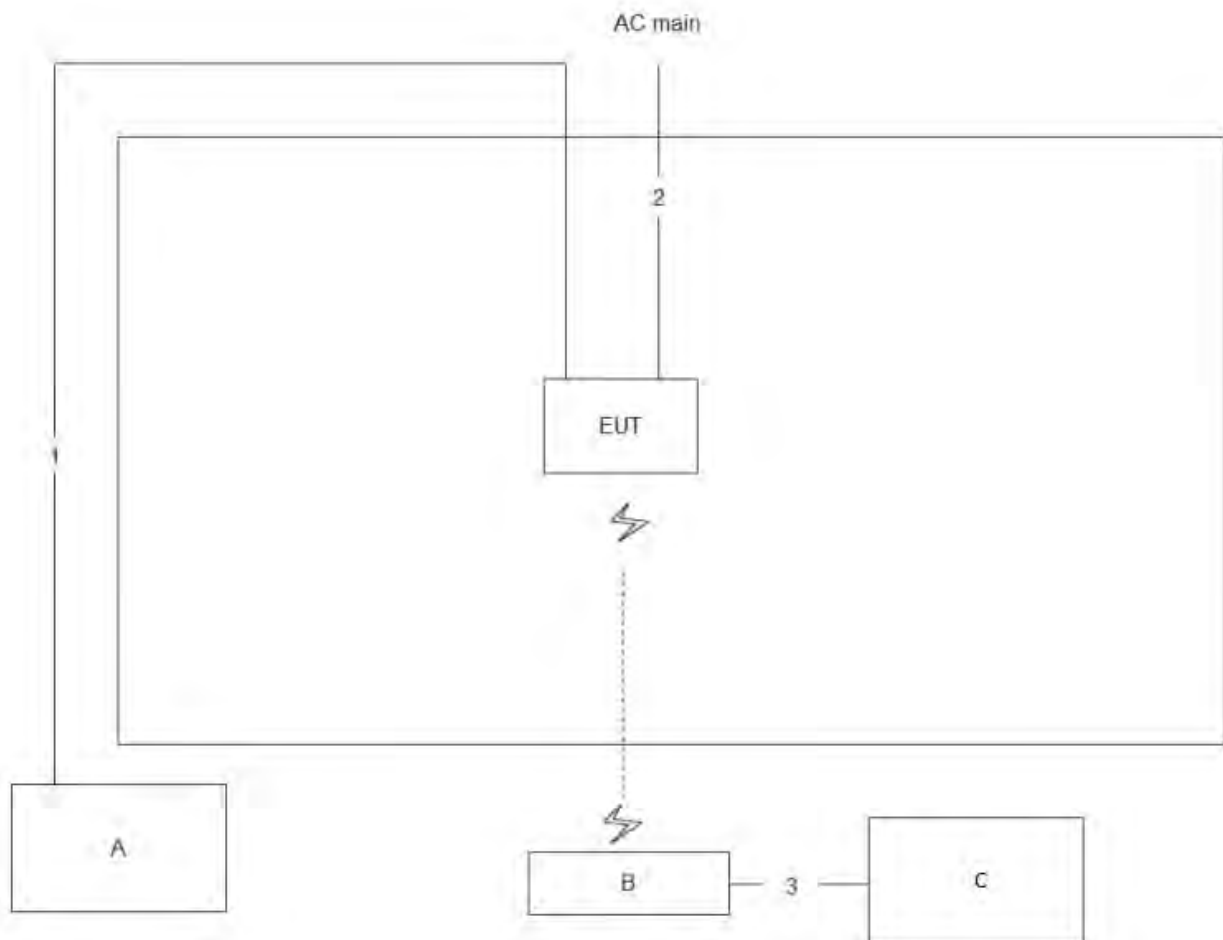Test Setup Diagram - Radiated Test > 1GHz , Beamforming Mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m
3	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

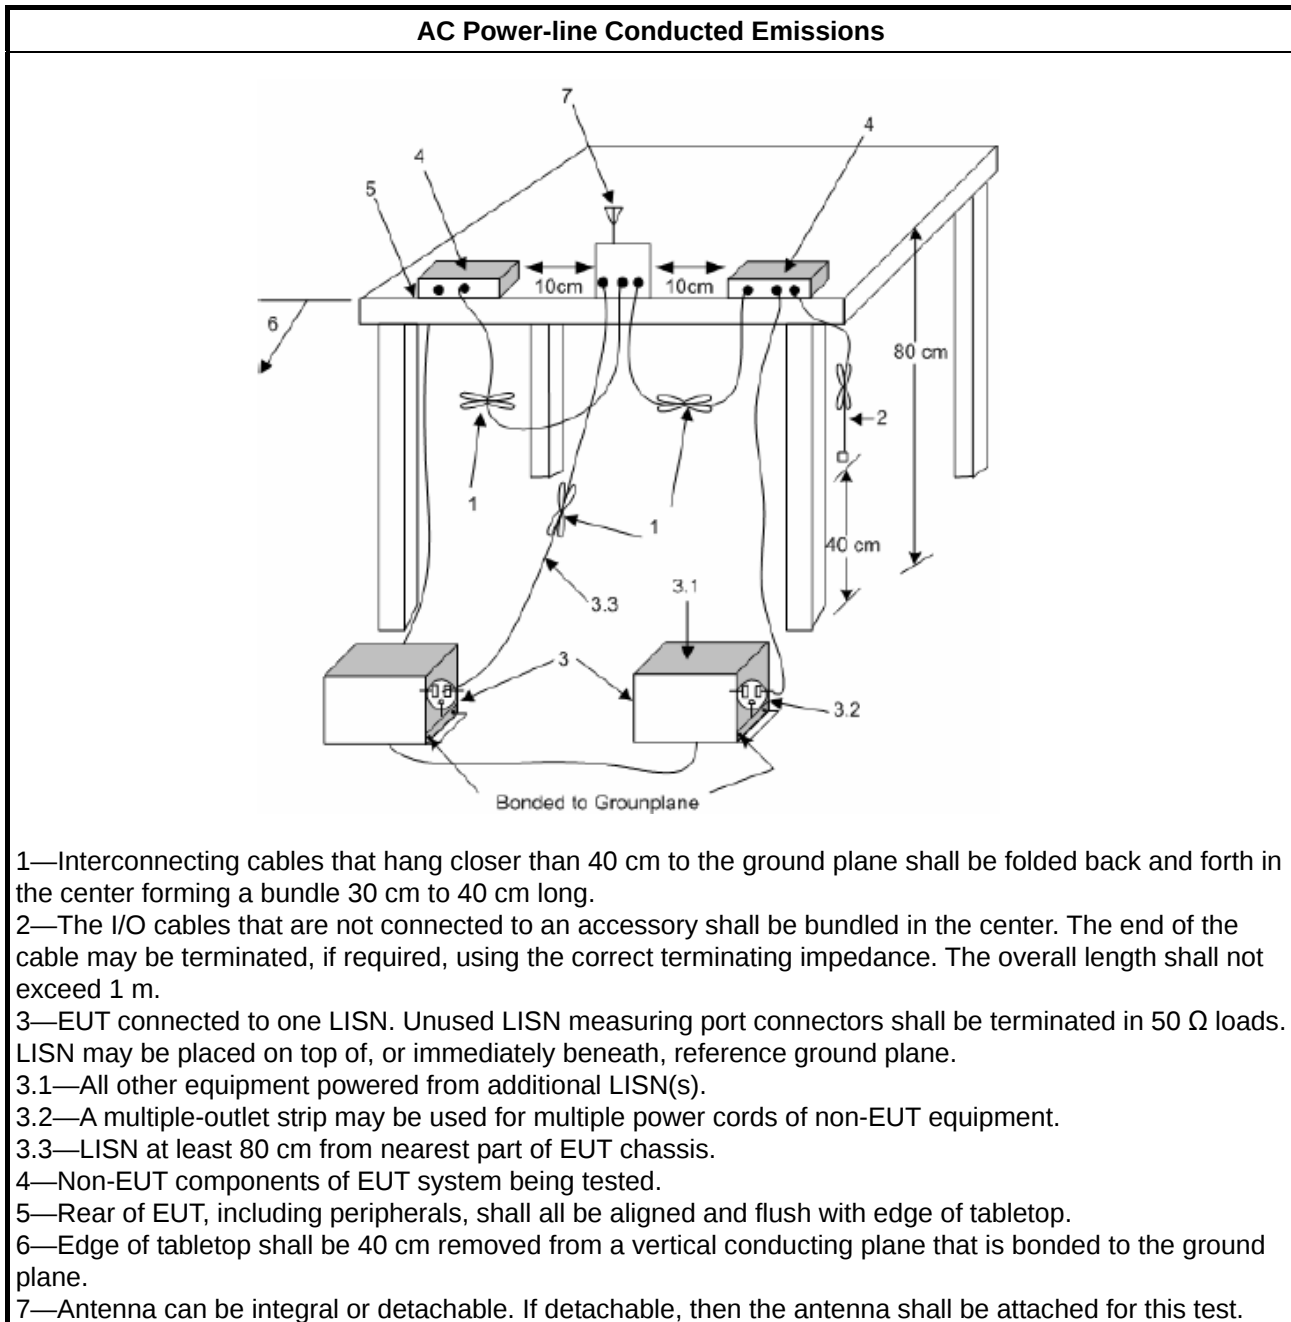

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

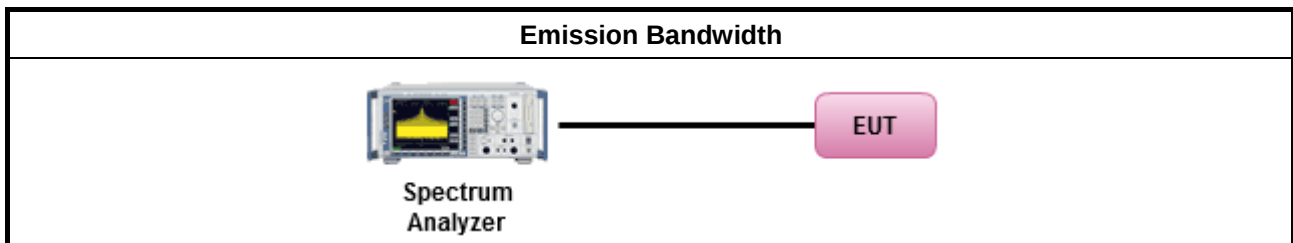

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

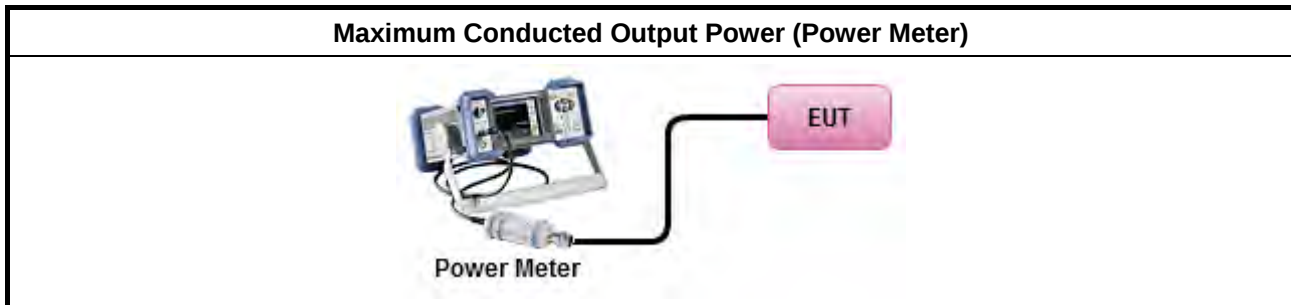

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) $\leq$ 8 dBm/3kHz

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.2 Method PKPSD.
[duty cycle $\geq$ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.3 Method AVGPS-1.
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.5 Method AVGPS-2.
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.7 Method AVGPS-3.
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.4 Method AVGPS-1A. (alternative).
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.6 Method AVGPS-2A. (alternative)
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.8 Method AVGPS-3A. (alternative)
For conducted measurement.	
If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

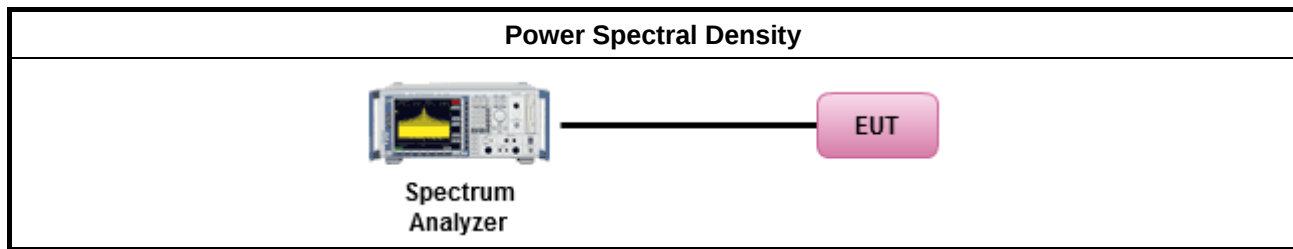

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

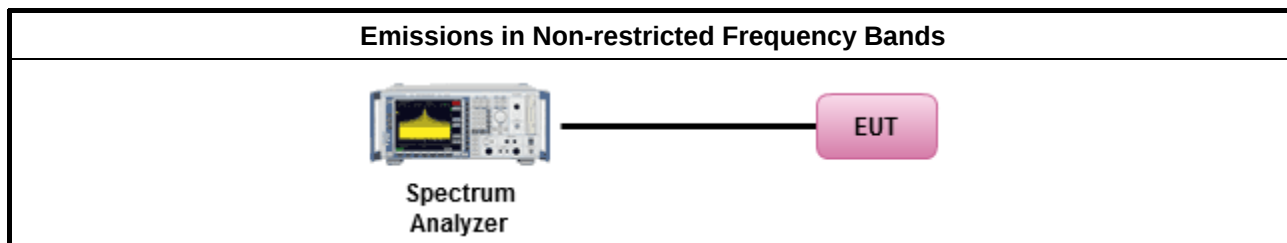

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
☐	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
☐	Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
☒	Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

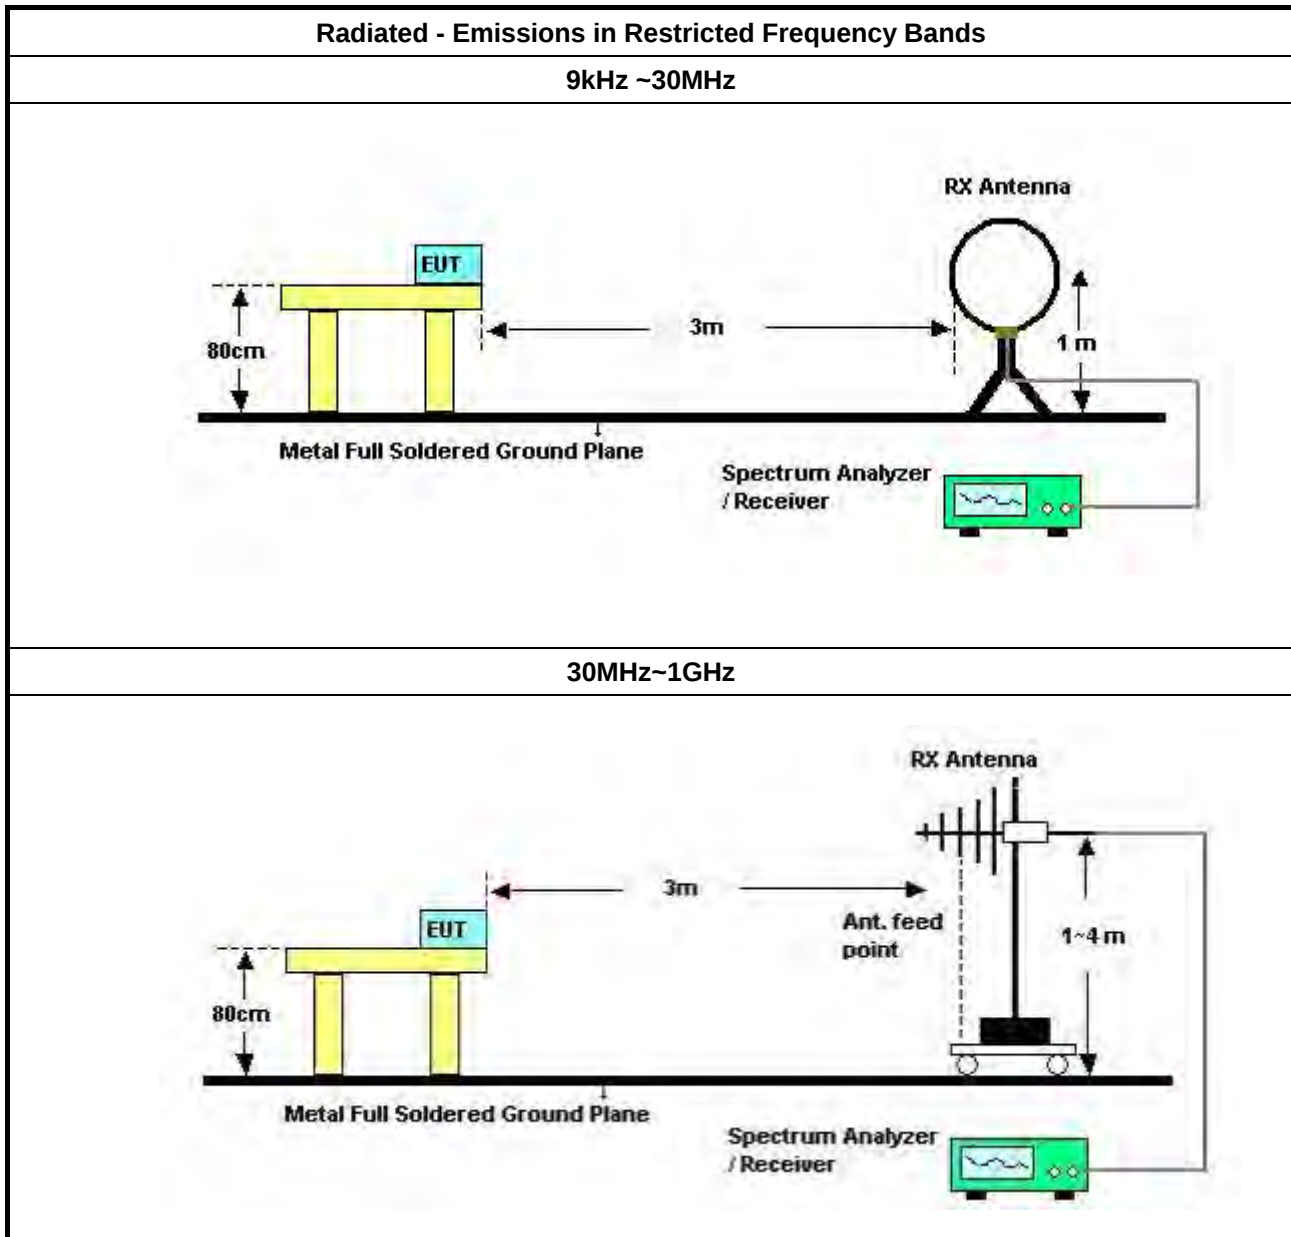

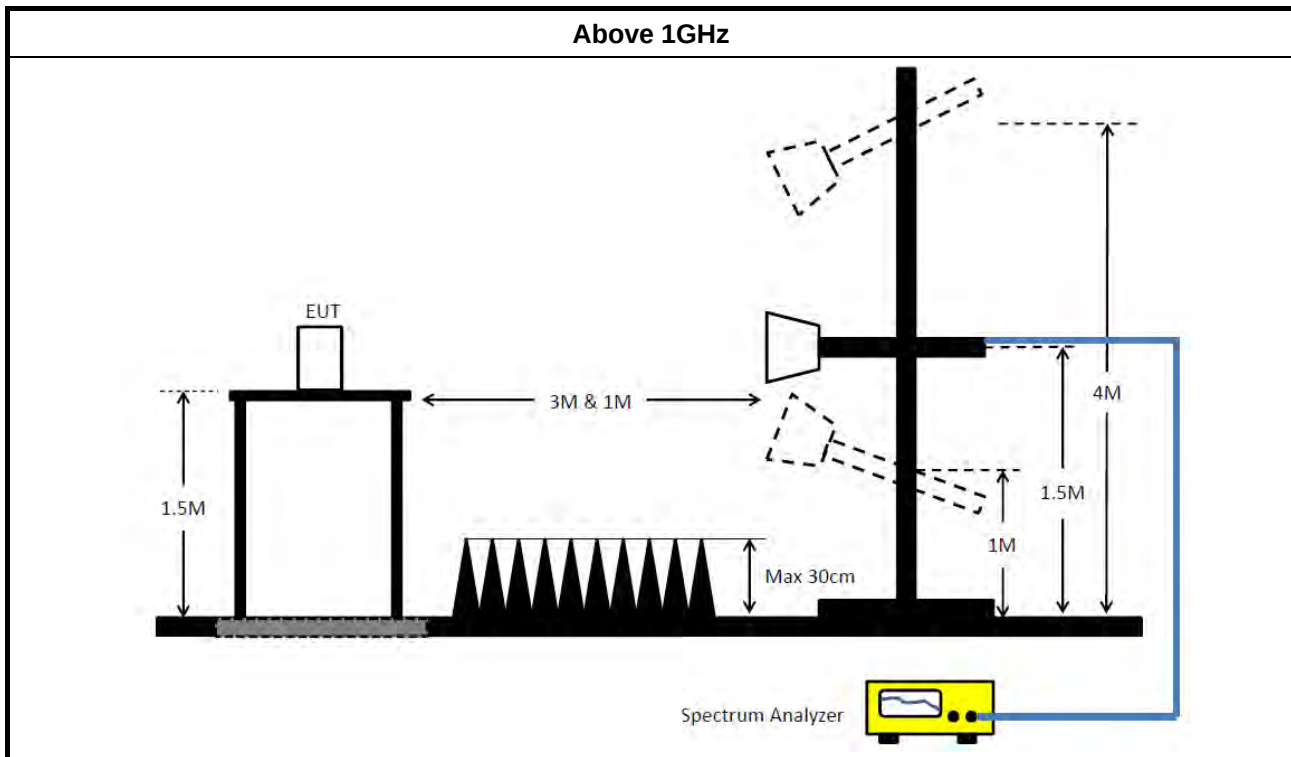

3.6.5 Emissions in Restricted Frequency Bands (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2018	Nov. 20, 2019	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 05, 2018	Nov. 04, 2019	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jan. 17, 2018	Jan. 16, 2019	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Nov. 06, 2018	Nov. 05, 2019	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2018	Mar. 15, 2019	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 09, 2018	Jan. 08, 2019	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Oct. 03, 2018	Oct. 02, 2019	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	100359	9kHz ~ 2.75GHz	Jul. 03, 2018	Jul. 02, 2019	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 21, 2017	Dec. 20, 2018	Conducted (TH01-CB)




Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 05, 2018	Nov. 04, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.


Test Mode	Mode 5	Frequency Range	0.15 MHz to 30 MHz
-----------	--------	-----------------	--------------------

Line

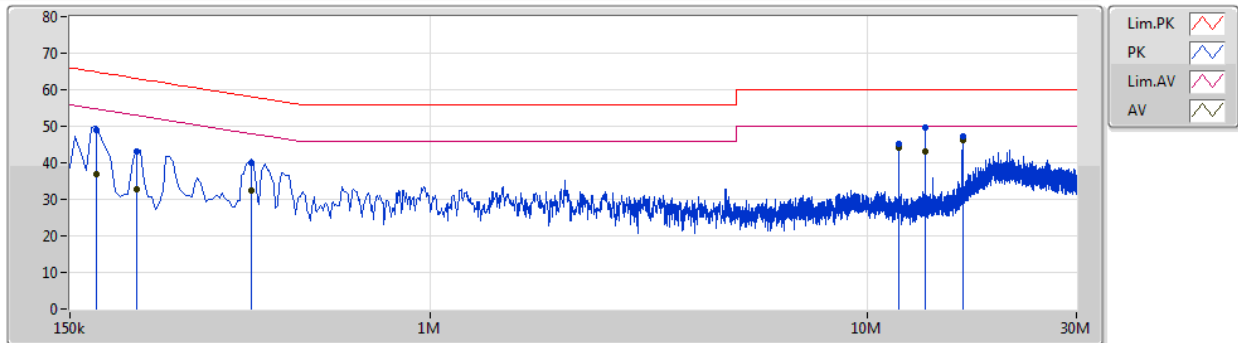

Type	Freq	Level	Limit	Margin	Factor	Condition	Comment	Raw	AF	CL	AT			
	(Hz)	(dBuV)	(dBuV)	(dB)	(dB)			(dBuV)	(dB)	(dB)	(dB)			
QP	172.5k	48.90	64.83	-15.93	10.18	Line	-	38.72	10.16	0.02	-			
AV	172.5k	37.04	54.83	-17.79	10.18	Line	-	26.86	10.16	0.02	-			
QP	213k	43.14	63.09	-19.95	10.18	Line	-	32.96	10.16	0.02	-			
AV	213k	32.76	53.09	-20.33	10.18	Line	-	22.58	10.16	0.02	-			
QP	388.5k	40.05	58.10	-18.05	10.18	Line	-	29.87	10.16	0.02	-			
AV	388.5k	32.54	48.10	-15.56	10.18	Line	-	22.36	10.16	0.02	-			
QP	11.76M	45.05	60.00	-14.95	10.43	Line	-	34.62	10.34	0.09	-			
AV	11.76M	44.21	50.00	-5.79	10.43	Line	-	33.78	10.34	0.09	-			
QP	13.56M	49.51	60.00	-10.49	10.46	Line	-	39.05	10.36	0.10	-			
AV	13.56M	42.95	50.00	-7.05	10.46	Line	-	32.49	10.36	0.10	-			
QP	16.463M	47.26	60.00	-12.74	10.49	Line	-	36.77	10.38	0.11	-			
AV	16.463M	46.29	50.00	-3.71	10.49	Line	"Worst"	35.80	10.38	0.11	-			

Neutral

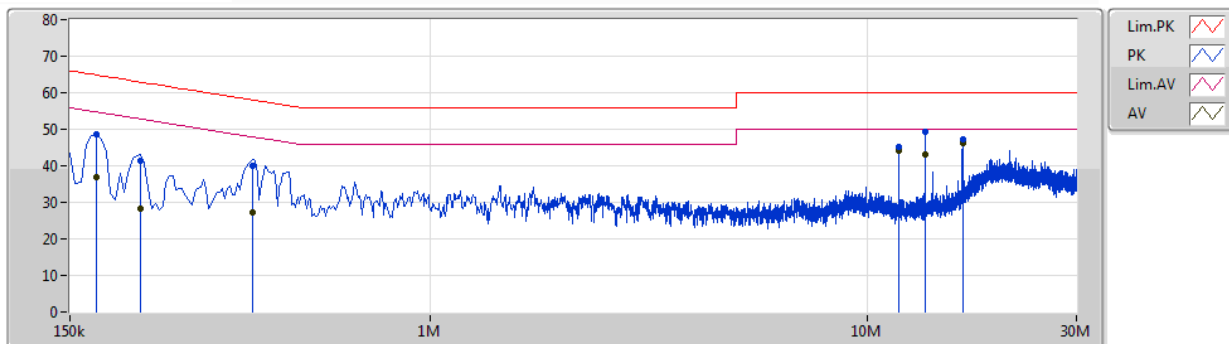

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	172.5k	48.56	64.83	-16.27	10.19	Neutral	-	38.37	10.17	0.02	-			
AV	172.5k	36.90	54.83	-17.93	10.19	Neutral	-	26.71	10.17	0.02	-			
QP	217.5k	41.54	62.92	-21.38	10.19	Neutral	-	31.35	10.17	0.02	-			
AV	217.5k	28.33	52.92	-24.59	10.19	Neutral	-	18.14	10.17	0.02	-			
QP	393k	39.88	58.01	-18.13	10.19	Neutral	-	29.69	10.17	0.02	-			
AV	393k	27.12	48.01	-20.89	10.19	Neutral	-	16.93	10.17	0.02	-			
QP	11.76M	45.02	60.00	-14.98	10.43	Neutral	-	34.59	10.34	0.09	-			
AV	11.76M	44.20	50.00	-5.80	10.43	Neutral	-	33.77	10.34	0.09	-			
QP	13.56M	49.19	60.00	-10.81	10.46	Neutral	-	38.73	10.36	0.10	-			
AV	13.56M	43.03	50.00	-6.97	10.46	Neutral	-	32.57	10.36	0.10	-			
QP	16.467M	47.21	60.00	-12.79	10.48	Neutral	-	36.73	10.37	0.11	-			
AV	16.467M	46.25	50.00	-3.75	10.48	Neutral	"Worst"	35.77	10.37	0.11	-			

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	9.525M	15.917M	15M9G1D	6.475M	11.944M
802.11g_Nss1,(6Mbps)_1TX	16.325M	23.388M	23M4D1D	16.3M	16.567M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	6.55M	12.669M
2437MHz	Pass	500k	9.525M	15.917M
2462MHz	Pass	500k	6.475M	11.944M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	16.3M	16.592M
2437MHz	Pass	500k	16.325M	23.388M
2462MHz	Pass	500k	16.325M	16.567M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_1TX
EBW
2412MHz


06/12/2018

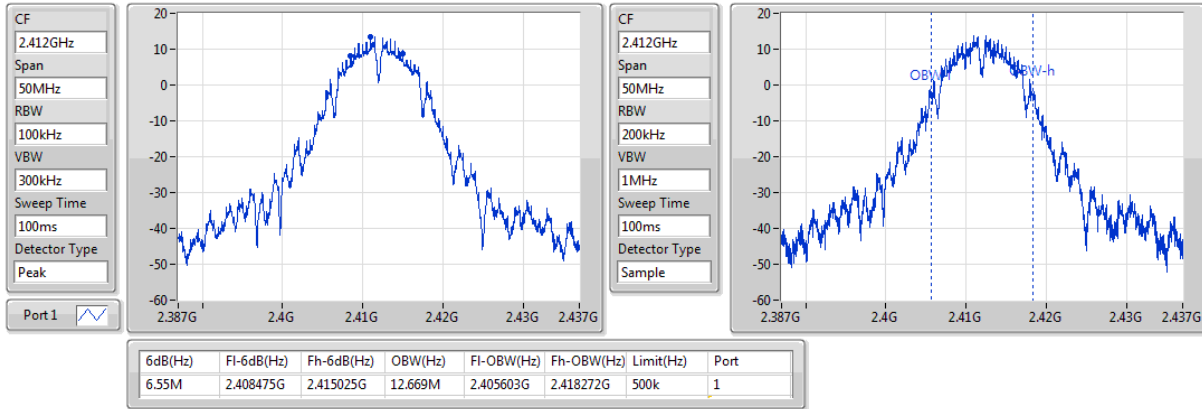
802.11b_Nss1,(1Mbps)_1TX
EBW
2437MHz

06/12/2018

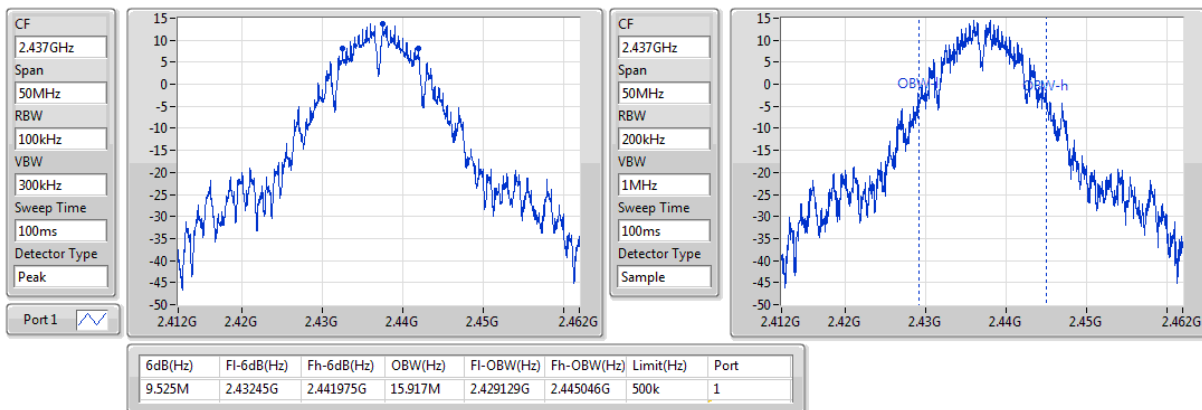

802.11b_Nss1,(1Mbps)_1TX
EBW
2462MHz

06/12/2018

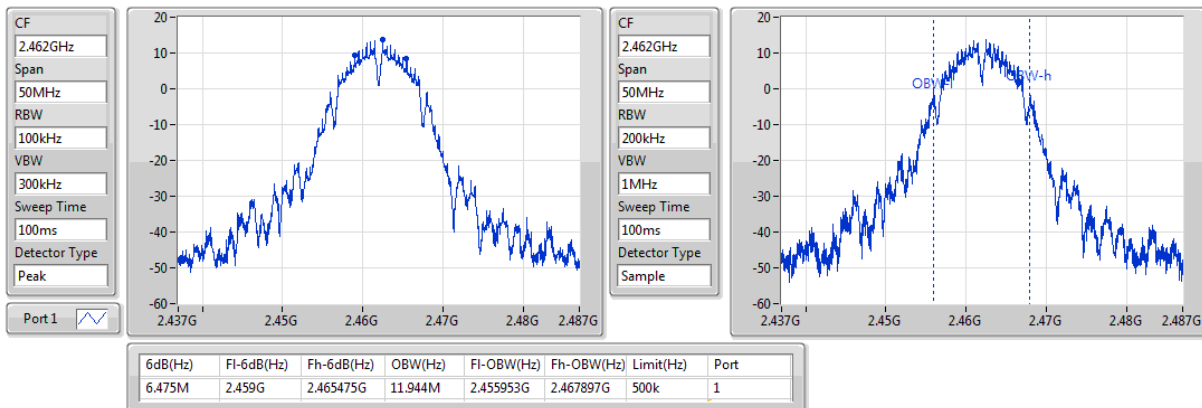


802.11g_Nss1,(6Mbps)_1TX
EBW
2412MHz


06/12/2018

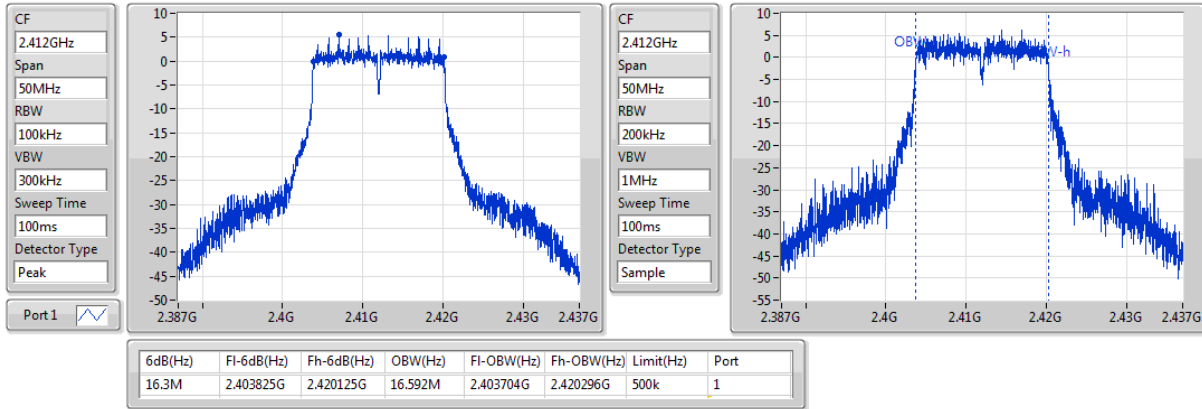
802.11g_Nss1,(6Mbps)_1TX
EBW
2437MHz

06/12/2018

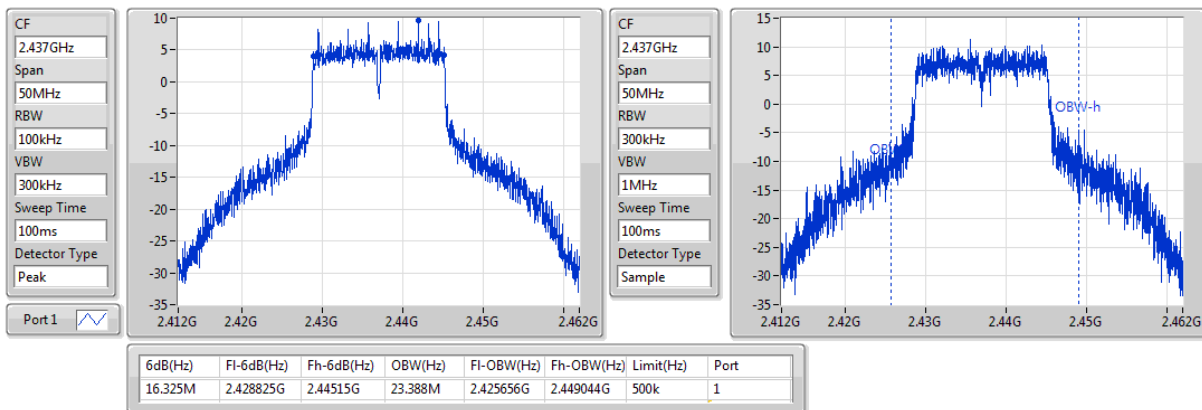
802.11g_Nss1,(6Mbps)_1TX
EBW
2462MHz

06/12/2018

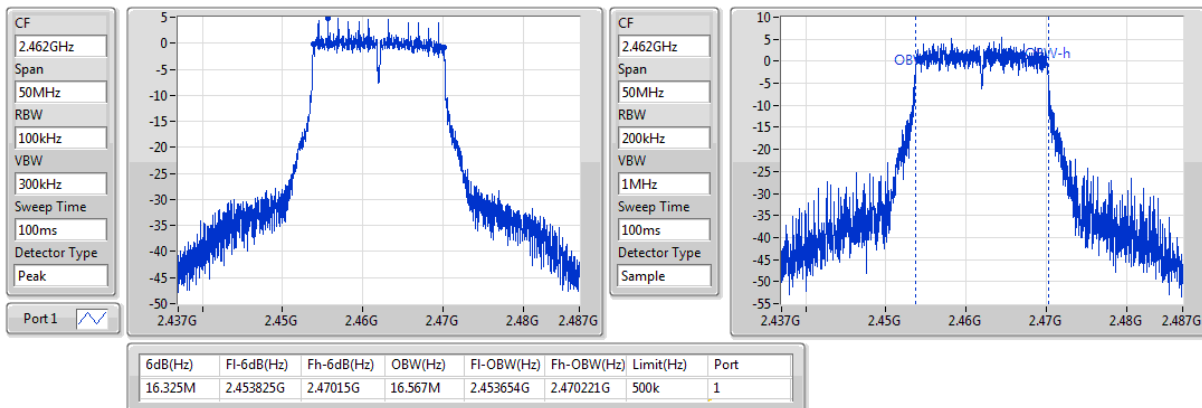

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19M	24.388M	24M4D1D	18.675M	18.916M
802.11ax HEW40_Nss1,(MCS0)_1TX	37.5M	37.631M	37M6D1D	37.2M	37.431M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
2412MHz	Pass	500k	19M	18.941M
2437MHz	Pass	500k	18.675M	24.388M
2462MHz	Pass	500k	18.925M	18.916M
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-
2422MHz	Pass	500k	37.5M	37.631M
2437MHz	Pass	500k	37.25M	37.631M
2452MHz	Pass	500k	37.2M	37.431M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
2412MHz


06/12/2018

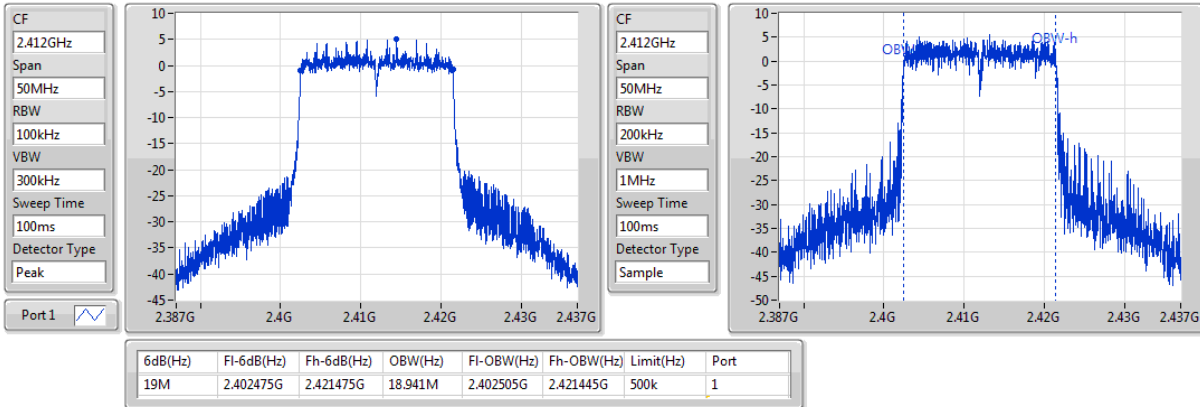
802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
2437MHz

06/12/2018

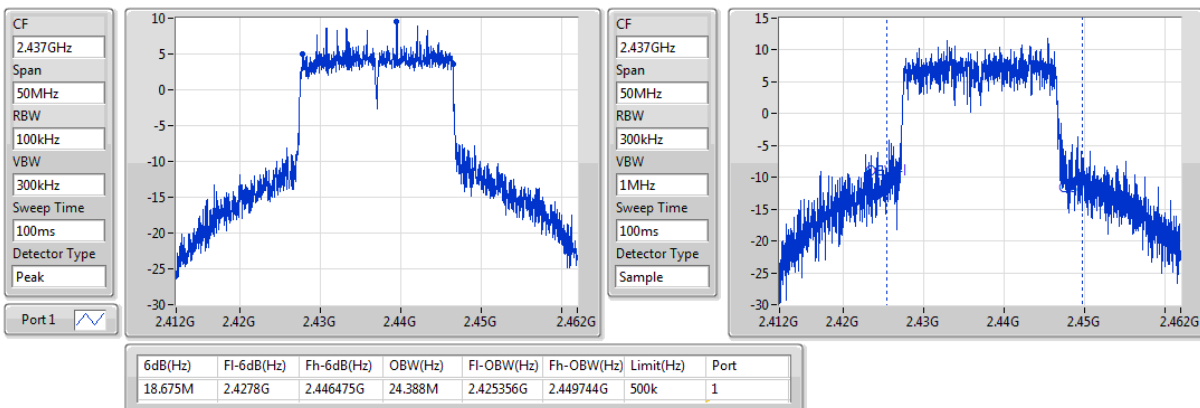

802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
2462MHz

06/12/2018

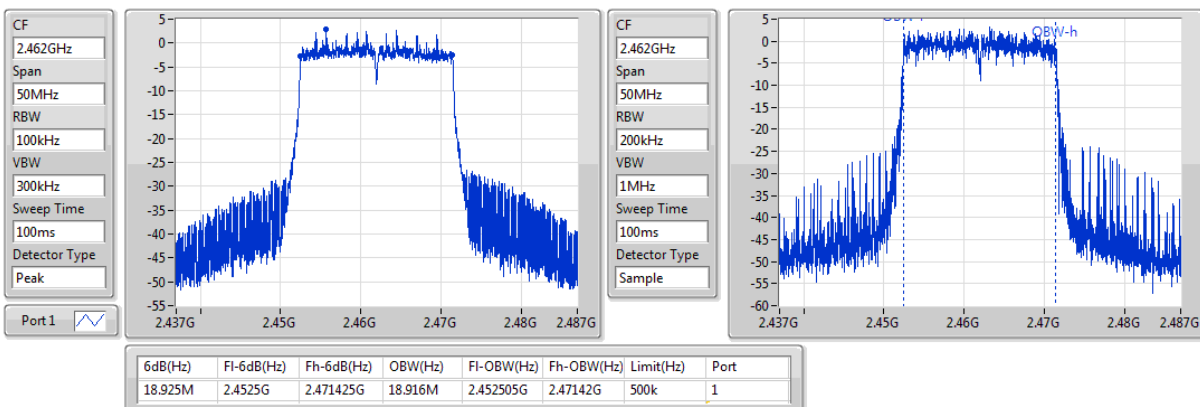


802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
2422MHz


06/12/2018

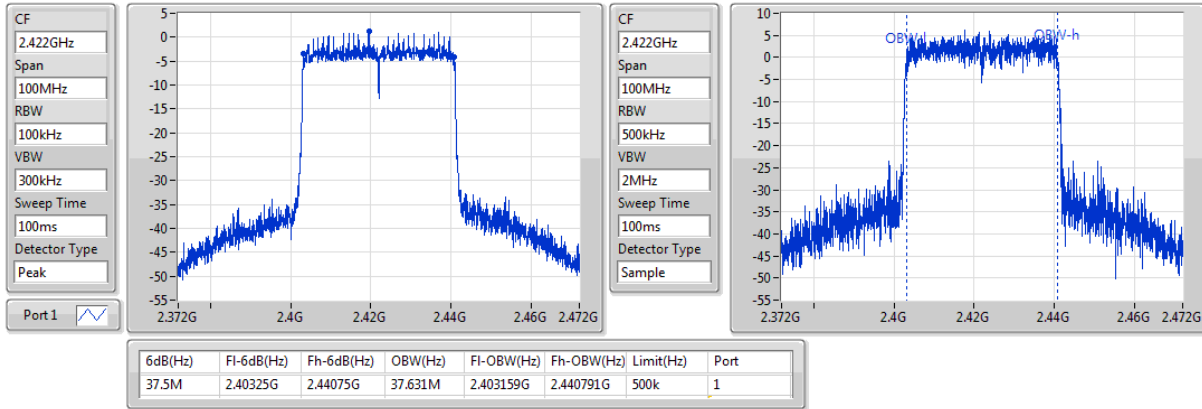
802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
2437MHz

06/12/2018

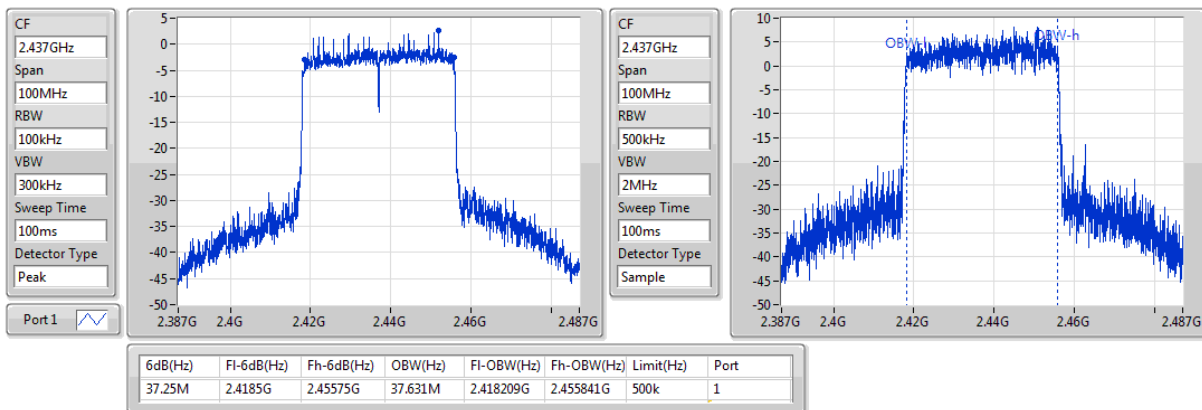
802.11ax HEW40_Nss1,(MCS0)_1TX
EBW
2452MHz

06/12/2018

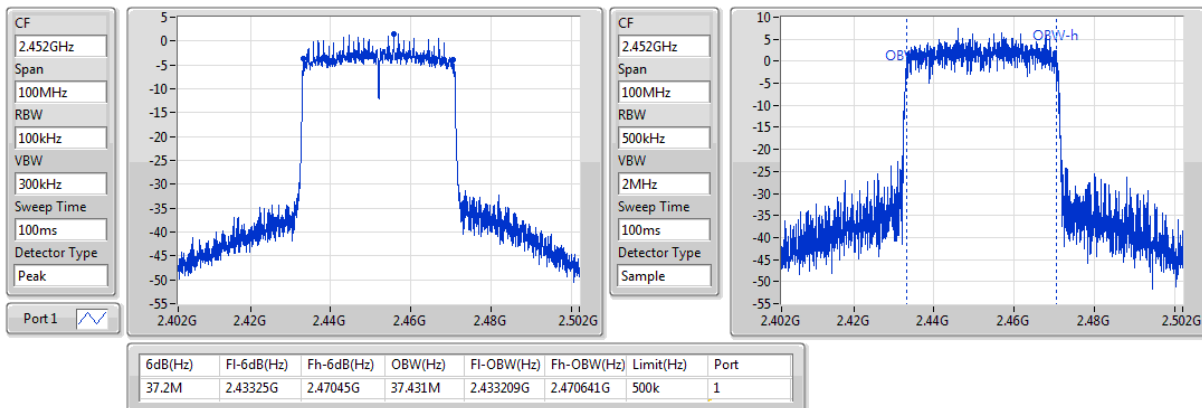

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	18.95M	20.49M	20M5D1D	18.725M	18.891M
802.11ax HEW40_Nss2,(MCS0)_2TX	37.6M	37.681M	37M7D1D	36.95M	37.231M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.95M	18.916M	18.725M	18.891M
2437MHz	Pass	500k	18.8M	20.49M	18.825M	19.315M
2462MHz	Pass	500k	18.8M	18.966M	18.75M	18.991M
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	36.95M	37.581M	37M	37.231M
2437MHz	Pass	500k	37.25M	37.531M	37.1M	37.631M
2452MHz	Pass	500k	36.95M	37.431M	37.6M	37.681M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
2412MHz


06/12/2018

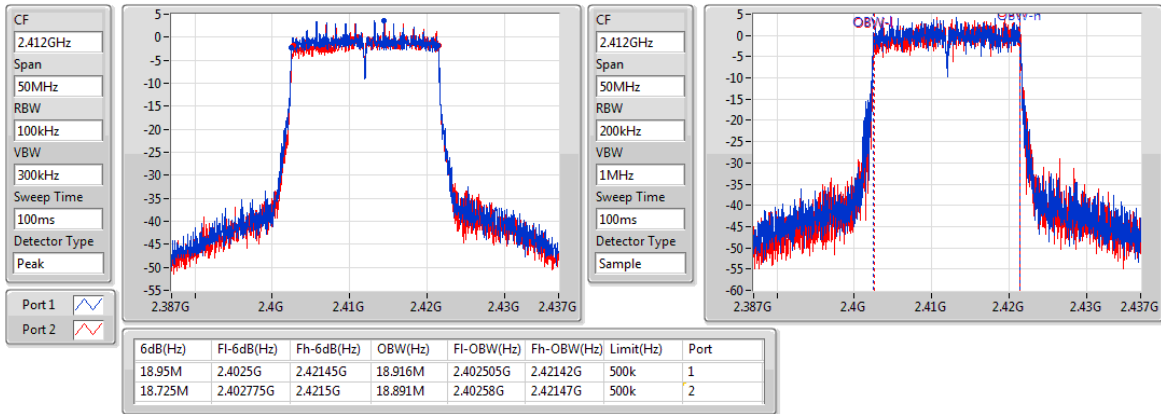
802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
2437MHz

06/12/2018

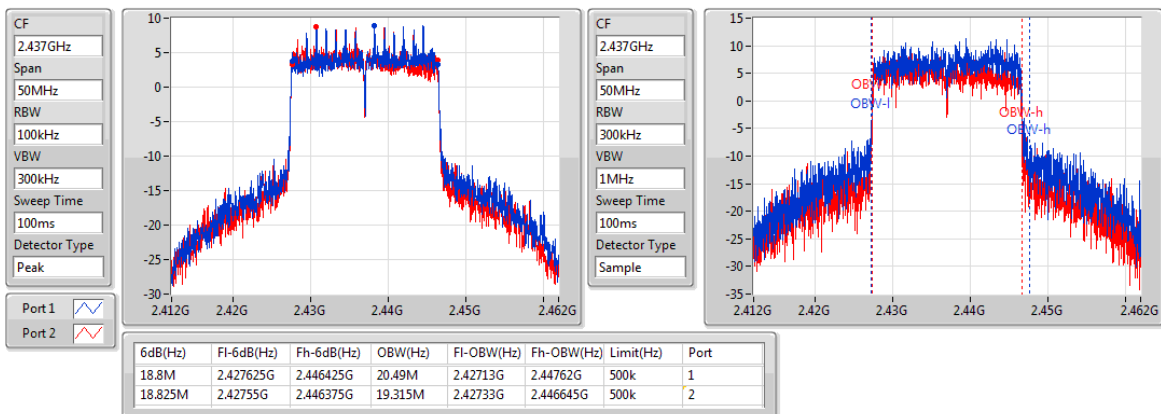

802.11ax HEW20_Nss2,(MCS0)_2TX
EBW
2462MHz

06/12/2018

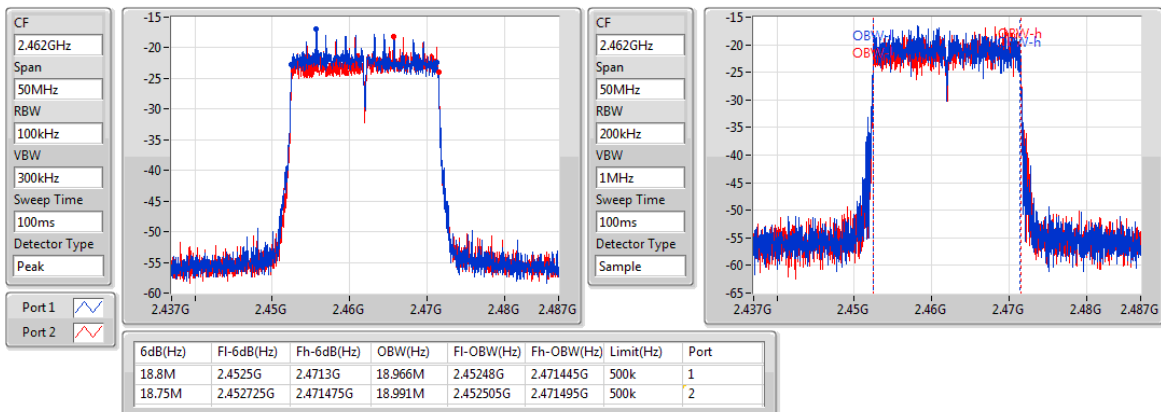


802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
2422MHz


06/12/2018

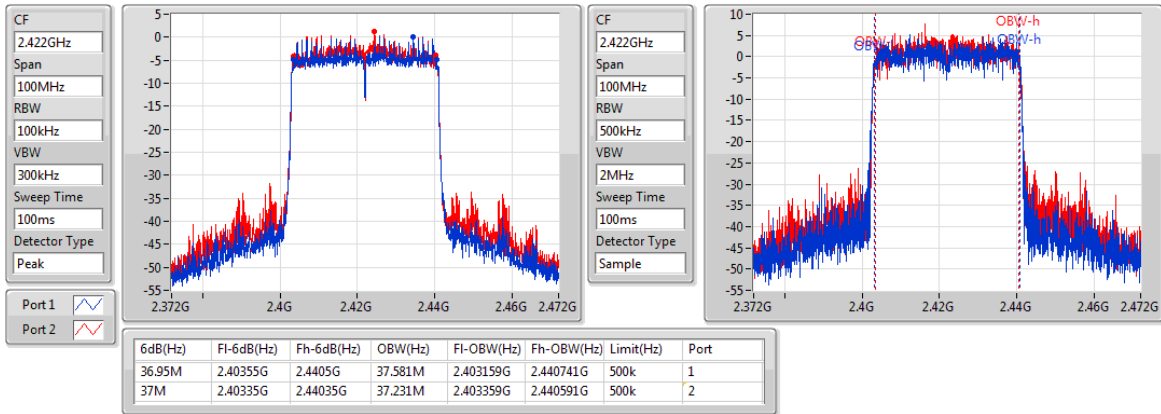
802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
2437MHz

06/12/2018

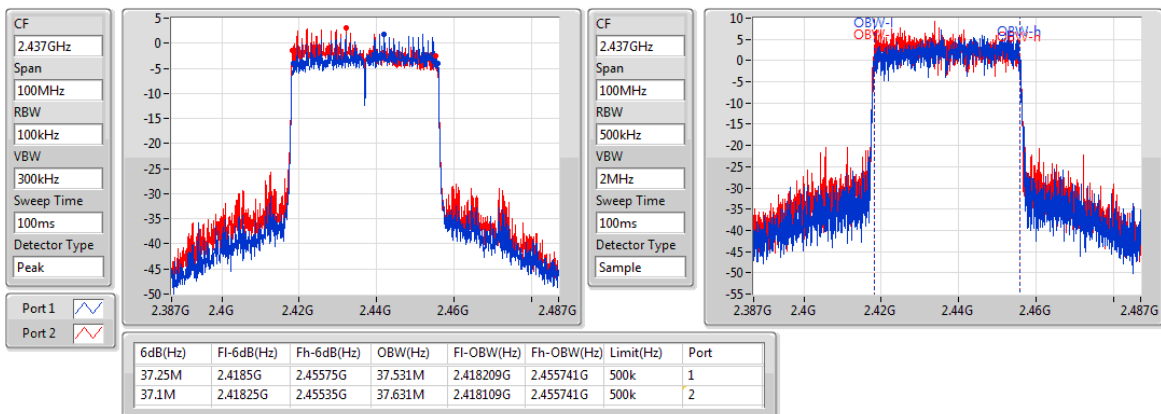
802.11ax HEW40_Nss2,(MCS0)_2TX
EBW
2452MHz

06/12/2018

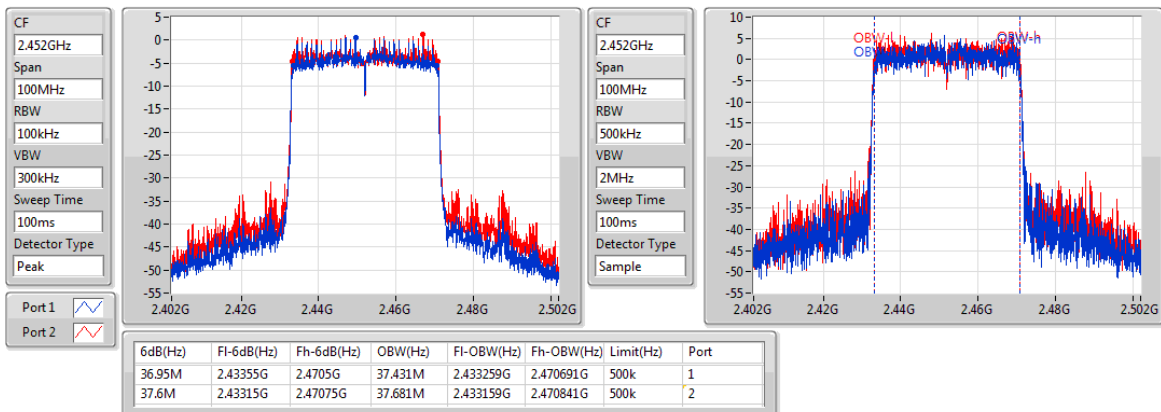

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	7.55M	13.293M	13M3G1D	6.55M	10.745M
802.11g_Nss1,(6Mbps)_4TX	16.35M	16.767M	16M8D1D	16.05M	16.517M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	7.05M	11.919M	7.55M	11.369M	7.525M	11.719M	7.05M	11.919M
2437MHz	Pass	500k	7.05M	12.994M	7.5M	12.369M	7.5M	13.293M	7.525M	12.994M
2462MHz	Pass	500k	6.55M	11.269M	6.55M	10.745M	6.55M	11.244M	6.55M	11.569M
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16.35M	16.567M	16.3M	16.542M	16.3M	16.517M	16.35M	16.567M
2437MHz	Pass	500k	16.325M	16.742M	16.05M	16.742M	16.35M	16.767M	16.3M	16.742M
2462MHz	Pass	500k	16.35M	16.567M	16.325M	16.567M	16.3M	16.617M	16.35M	16.592M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_4TX

EBW

2412MHz

06/12/2018

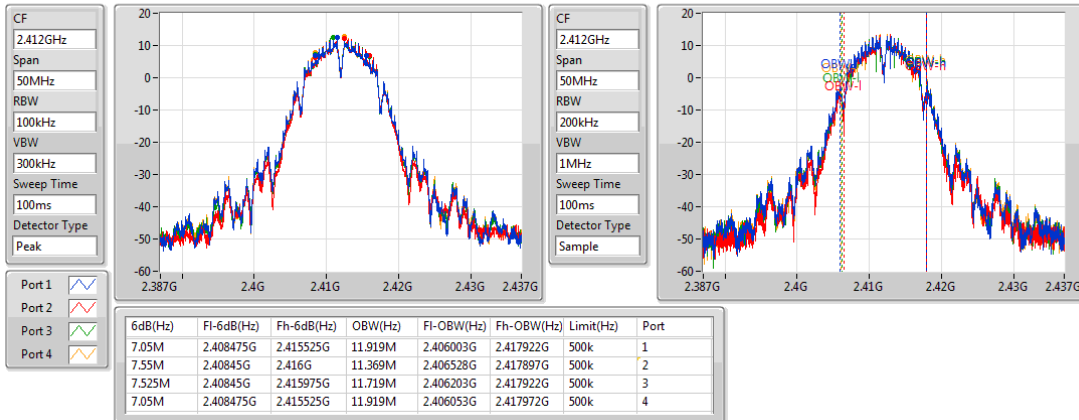


802.11b_Nss1,(1Mbps)_4TX

EBW

2437MHz

06/12/2018

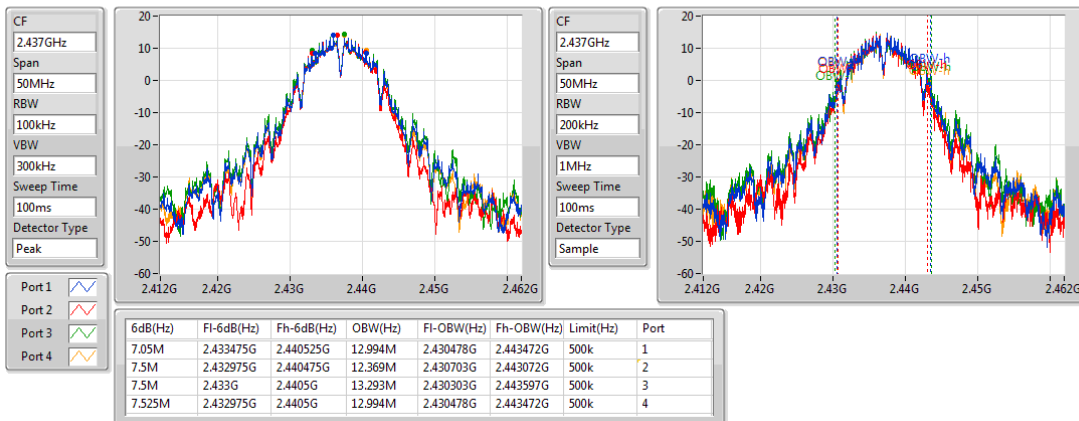


802.11b_Nss1,(1Mbps)_4TX

EBW


2462MHz

06/12/2018

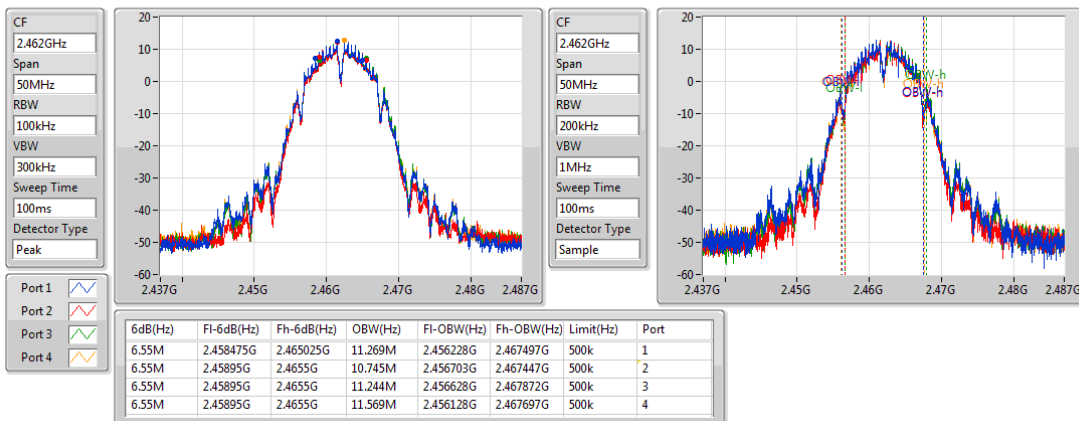


802.11g_Nss1,(6Mbps)_4TX
EBW
2412MHz


06/12/2018

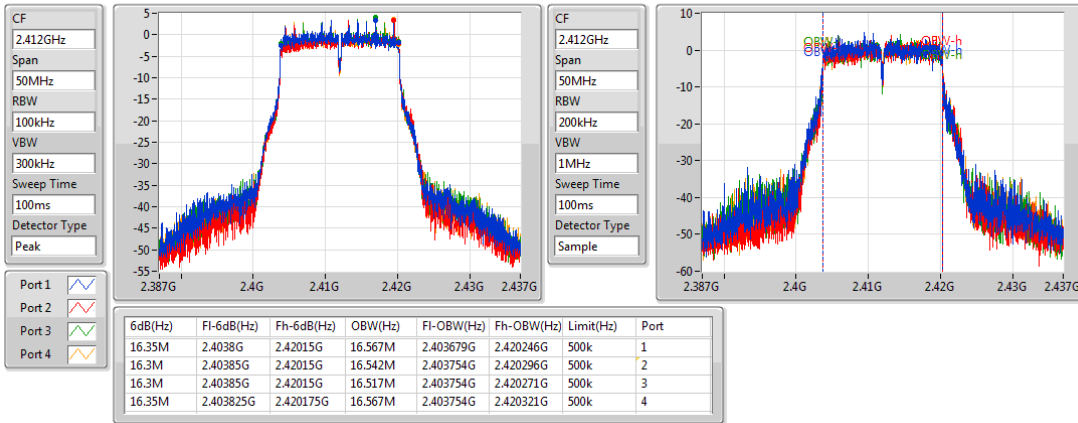
802.11g_Nss1,(6Mbps)_4TX
EBW
2437MHz

06/12/2018

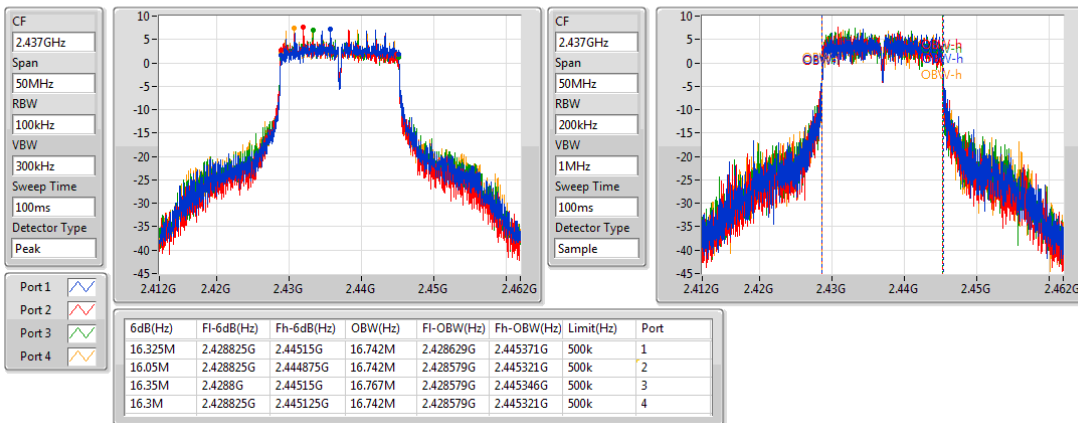
802.11g_Nss1,(6Mbps)_4TX
EBW
2462MHz

06/12/2018

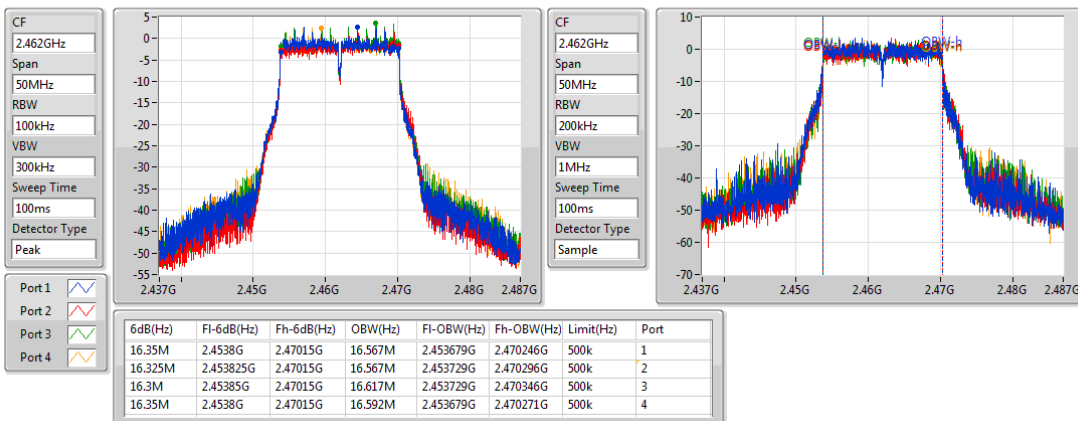

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_4TX	18.975M	19.015M	19M0D1D	18.1M	18.916M
802.11ax HEW40_Nss1,(MCS0)_4TX	37.75M	37.831M	37M8D1D	36.05M	37.281M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.925M	18.966M	18.1M	18.991M	18.5M	18.916M	18.9M	18.991M
2437MHz	Pass	500k	18.875M	18.991M	18.925M	18.991M	18.85M	19.015M	18.85M	18.991M
2462MHz	Pass	500k	18.95M	18.941M	18.975M	18.941M	18.975M	18.941M	18.95M	18.991M
802.11ax HEW40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	37.5M	37.581M	37.05M	37.331M	36.05M	37.281M	36.55M	37.531M
2437MHz	Pass	500k	37M	37.531M	37M	37.581M	37.2M	37.681M	37.2M	37.531M
2452MHz	Pass	500k	37.3M	37.381M	37.65M	37.831M	37.75M	37.581M	37.65M	37.481M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11ax HEW20_Nss1,(MCS0)_4TX
EBW
2412MHz


06/12/2018

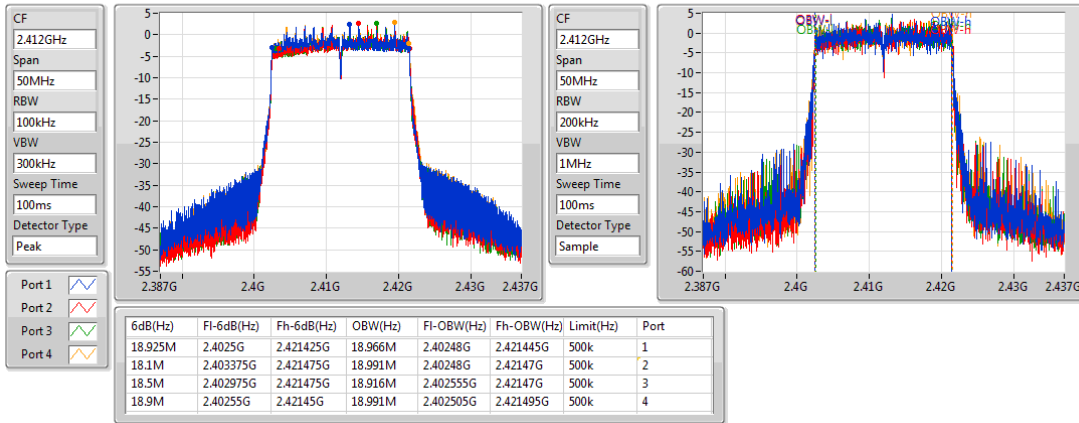
802.11ax HEW20_Nss1,(MCS0)_4TX
EBW
2437MHz

06/12/2018

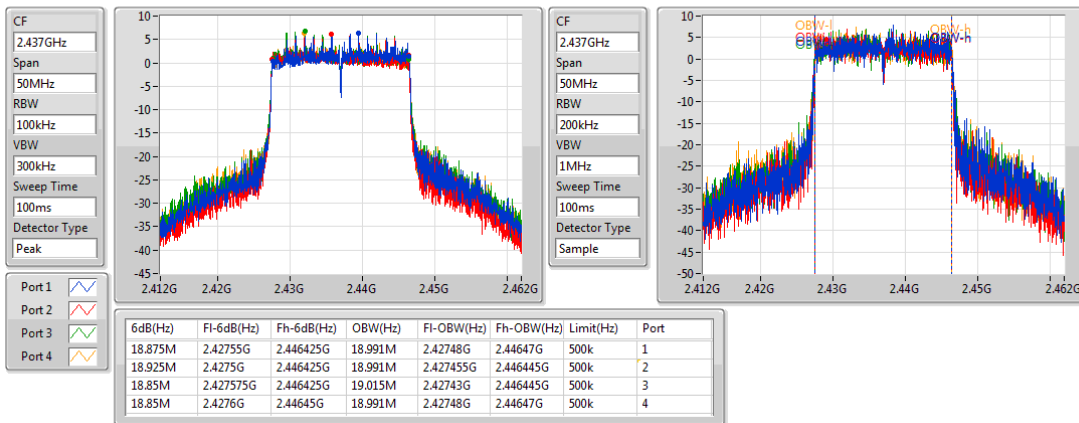

802.11ax HEW20_Nss1,(MCS0)_4TX
EBW
2462MHz

06/12/2018

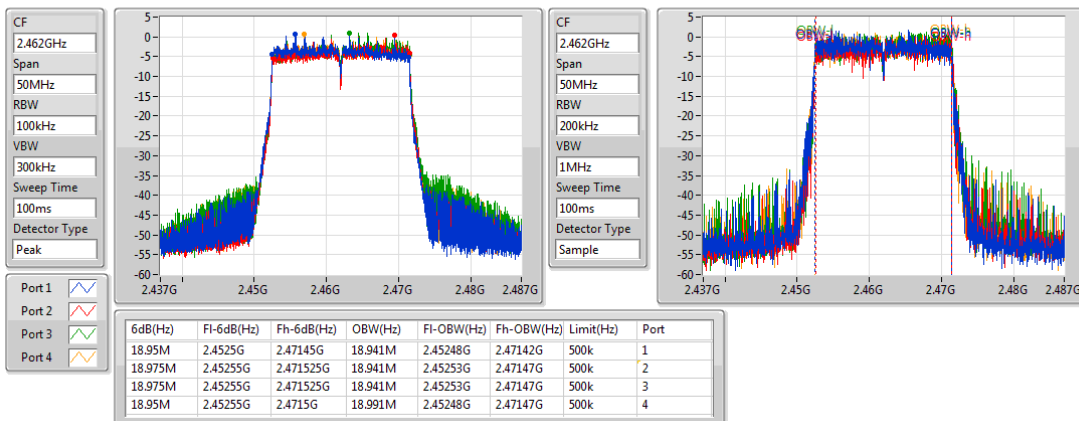


802.11ax HEW40_Nss1,(MCS0)_4TX
EBW
2422MHz


06/12/2018

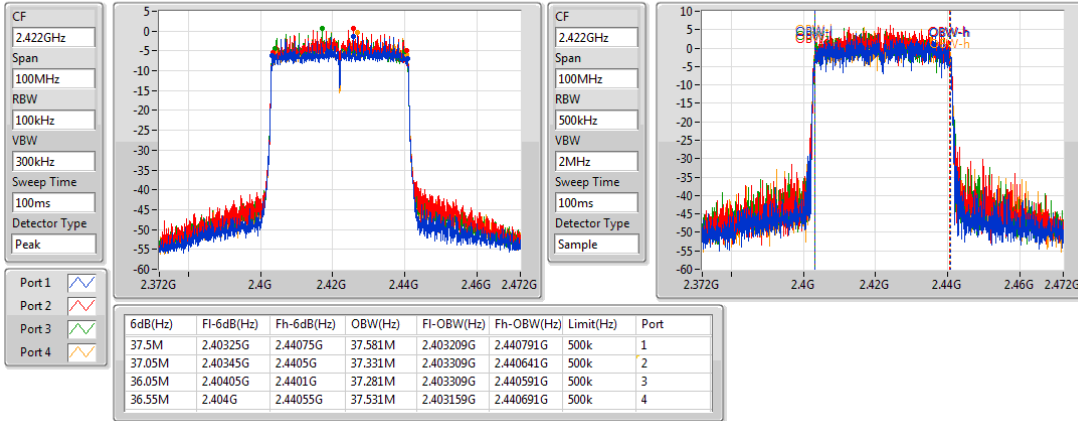
802.11ax HEW40_Nss1,(MCS0)_4TX
EBW
2437MHz

06/12/2018

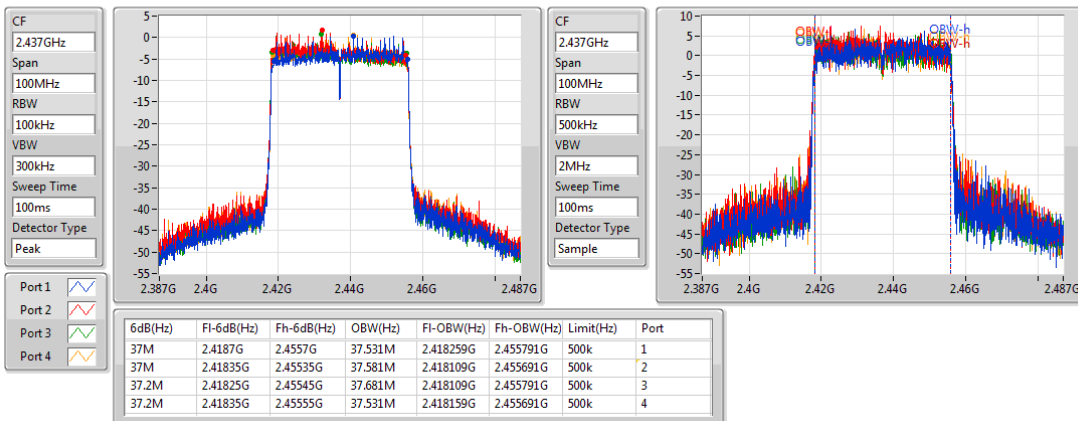
802.11ax HEW40_Nss1,(MCS0)_4TX
EBW
2452MHz

06/12/2018

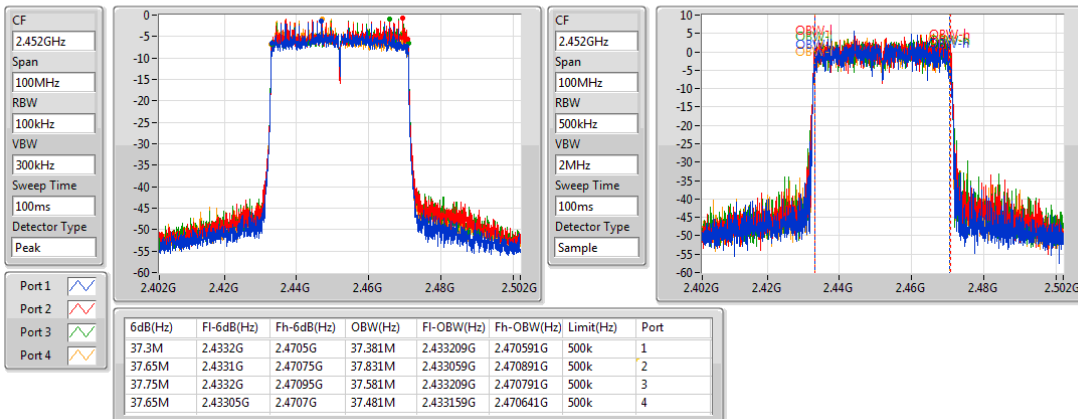

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_4TX	19.075M	18.991M	19M0D1D	18.425M	18.891M
802.11ax HEW40-BF_Nss1,(MCS0)_4TX	37.65M	37.681M	37M7D1D	36.1M	37.281M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11ax HEW20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.925M	18.991M	18.425M	18.891M	18.8M	18.891M	18.95M	18.941M
2437MHz	Pass	500k	18.975M	18.991M	19.075M	18.941M	19.05M	18.966M	19.025M	18.966M
2462MHz	Pass	500k	18.95M	18.966M	18.975M	18.966M	18.775M	18.991M	19.05M	18.916M
802.11ax HEW40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	37.55M	37.581M	36.1M	37.381M	36.4M	37.331M	36.8M	37.281M
2437MHz	Pass	500k	37.5M	37.481M	37.2M	37.531M	37.4M	37.681M	37.15M	37.531M
2452MHz	Pass	500k	37.25M	37.631M	37.5M	37.581M	37.45M	37.631M	37.65M	37.581M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11ax HEW20-BF_Nss1,(MCS0)_4TX
EBW
2412MHz


07/12/2018

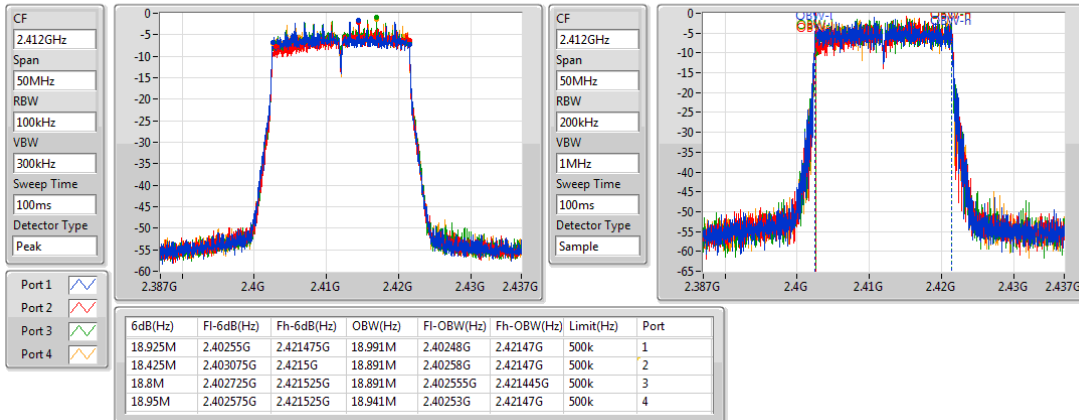
802.11ax HEW20-BF_Nss1,(MCS0)_4TX
EBW
2437MHz

07/12/2018

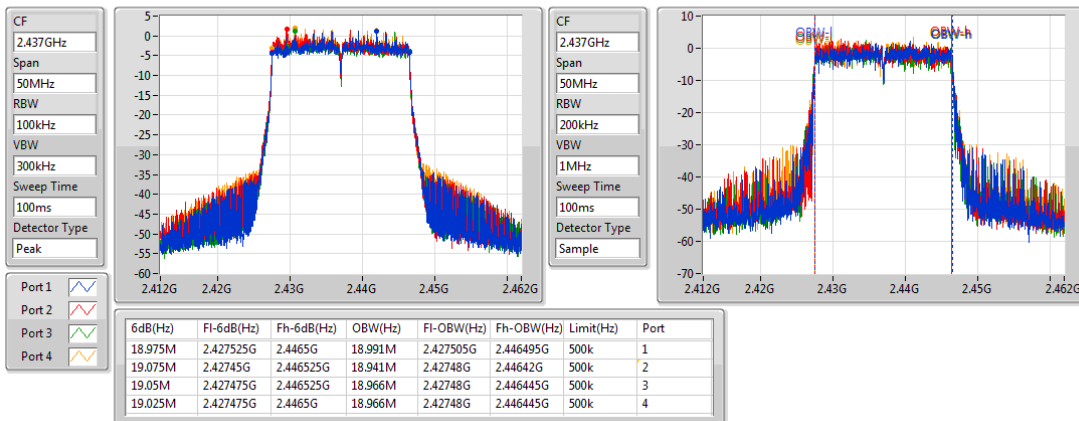

802.11ax HEW20-BF_Nss1,(MCS0)_4TX
EBW
2462MHz

07/12/2018

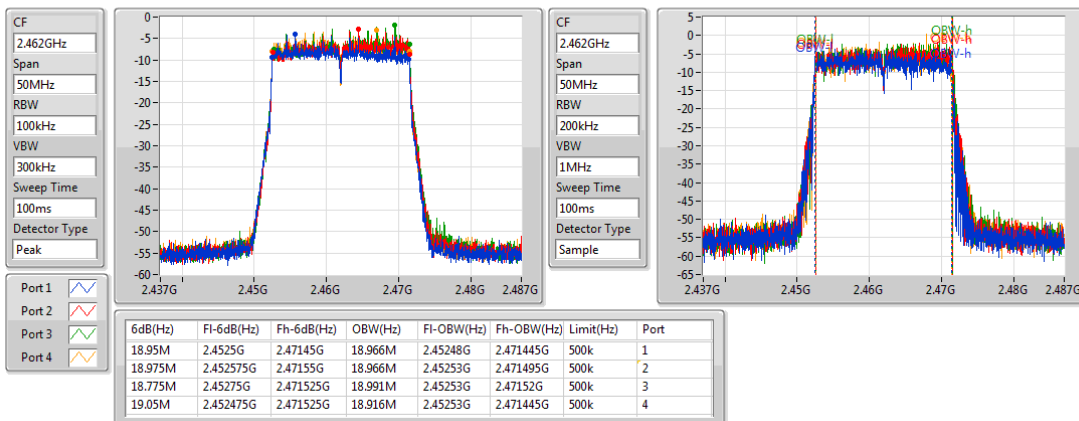


802.11ax HEW40-BF_Nss1,(MCS0)_4TX
EBW
2422MHz


07/12/2018

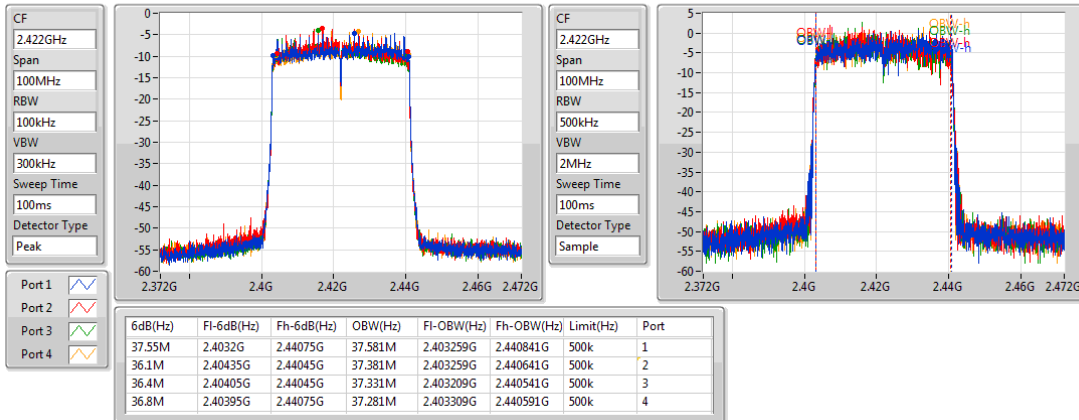
802.11ax HEW40-BF_Nss1,(MCS0)_4TX
EBW
2437MHz

07/12/2018

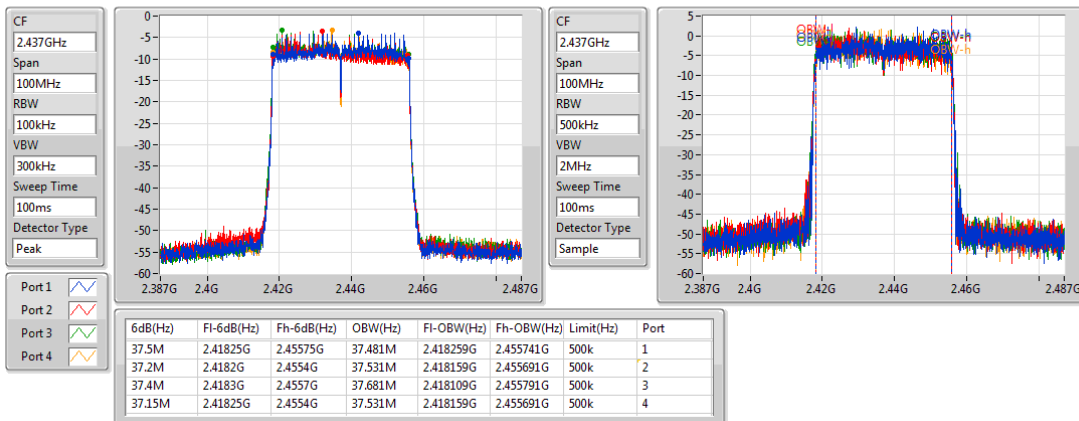
802.11ax HEW40-BF_Nss1,(MCS0)_4TX
EBW
2452MHz

07/12/2018

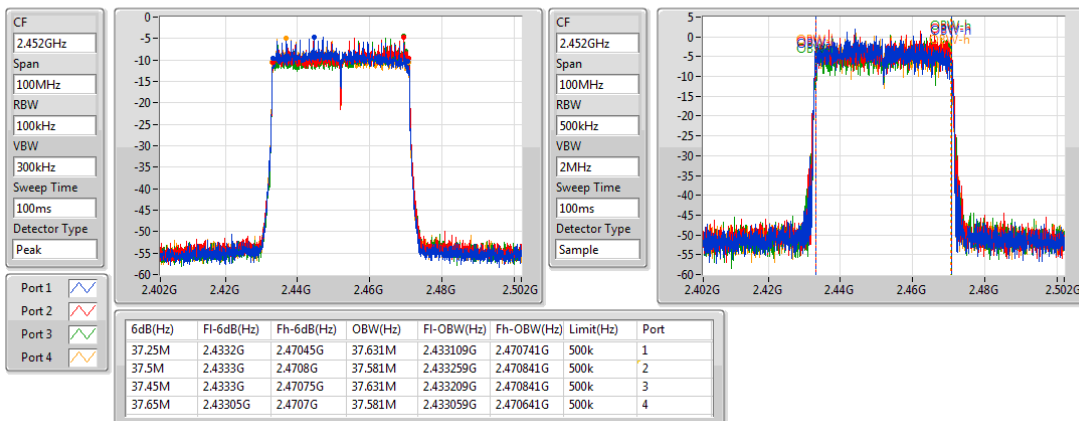

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11ax HEW20_Nss4,(MCS0)_4TX	19M	19.115M	19M1D1D	18.6M	18.891M
802.11ax HEW40_Nss4,(MCS0)_4TX	37.7M	37.631M	37M6D1D	35.1M	37.331M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11ax HEW20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.875M	18.941M	18.6M	18.891M	18.675M	18.916M	19M	18.941M
2437MHz	Pass	500k	18.675M	19.04M	18.925M	18.991M	18.875M	19.115M	18.6M	19.115M
2462MHz	Pass	500k	18.9M	18.916M	18.65M	18.941M	18.85M	18.941M	18.875M	18.941M
802.11ax HEW40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	37.4M	37.581M	35.1M	37.481M	36.05M	37.331M	36.4M	37.581M
2437MHz	Pass	500k	37.7M	37.531M	36.9M	37.581M	37.65M	37.581M	36.35M	37.631M
2452MHz	Pass	500k	36.9M	37.481M	37.7M	37.581M	37.7M	37.581M	37.5M	37.631M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11ax HEW20_Nss4,(MCS0)_4TX
EBW
2412MHz


06/12/2018

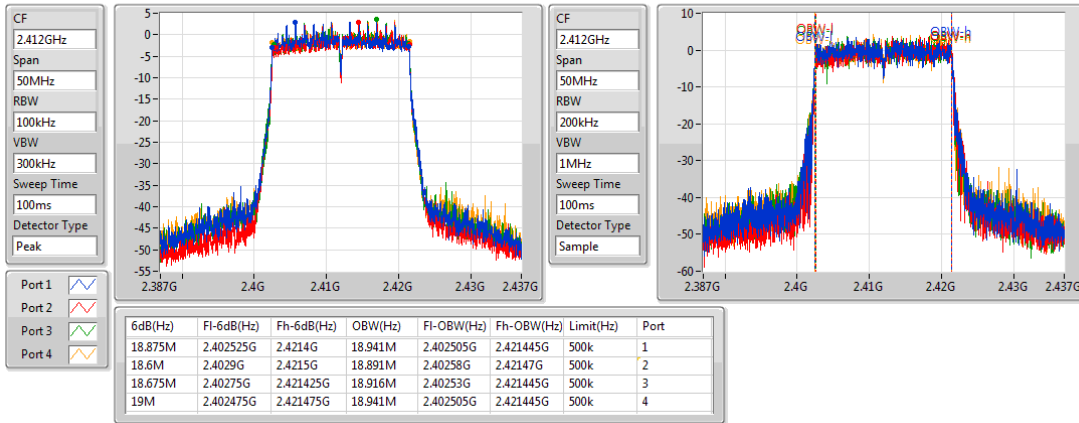
802.11ax HEW20_Nss4,(MCS0)_4TX
EBW
2437MHz

06/12/2018

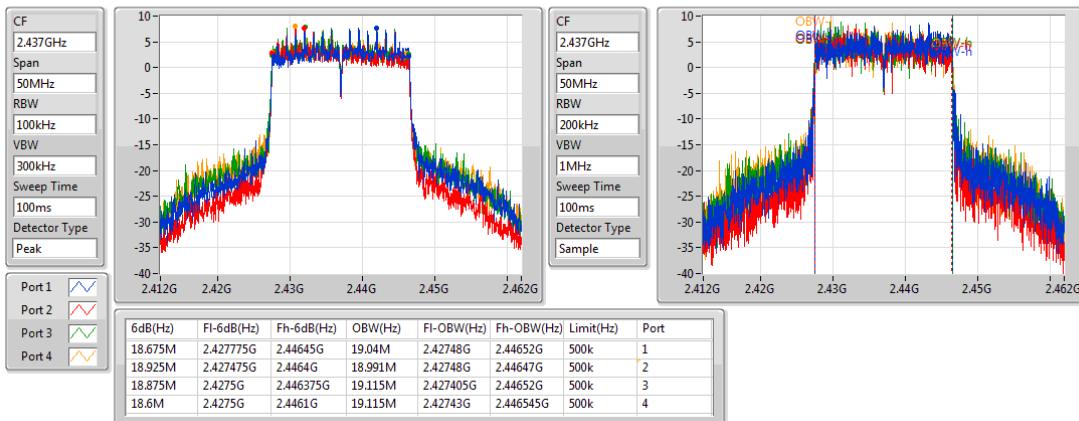

802.11ax HEW20_Nss4,(MCS0)_4TX
EBW
2462MHz

06/12/2018

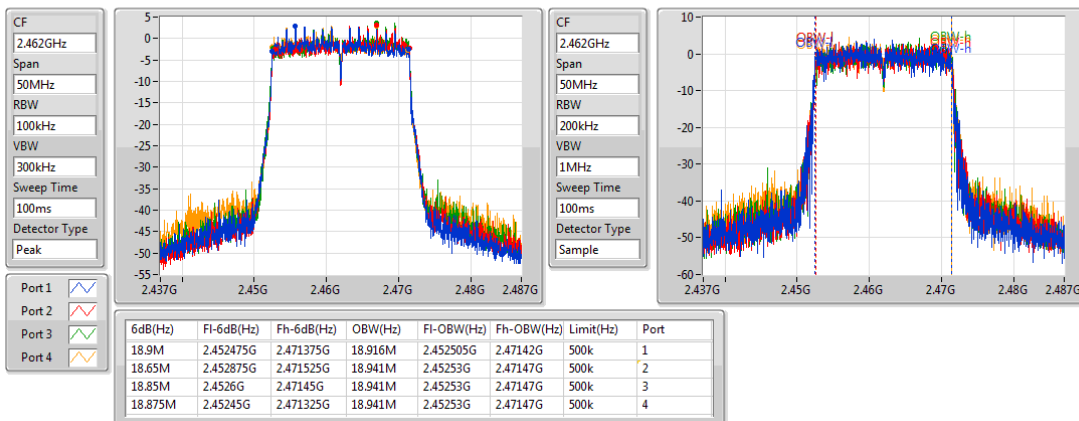


802.11ax HEW40_Nss4,(MCS0)_4TX
EBW
2422MHz


06/12/2018

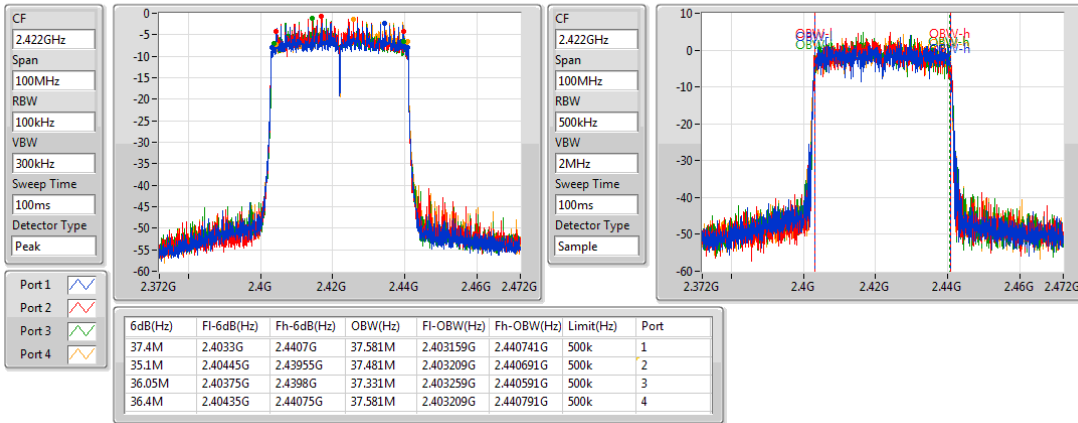
802.11ax HEW40_Nss4,(MCS0)_4TX
EBW
2437MHz

06/12/2018

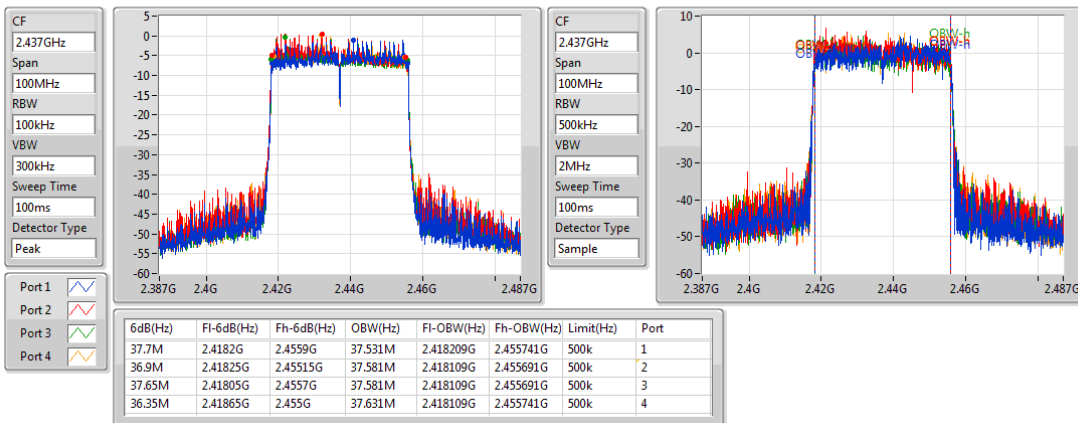
802.11ax HEW40_Nss4,(MCS0)_4TX
EBW
2452MHz

06/12/2018

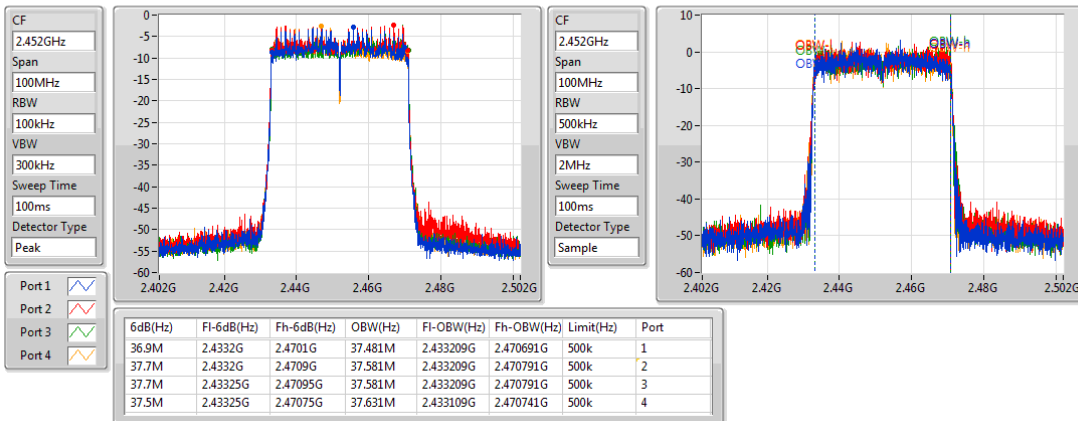

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	22.93	0.19634
802.11g_Nss1,(6Mbps)_1TX	20.91	0.12331

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-
2412MHz	Pass	3.90	22.04	22.04	30.00	22
2417MHz	Pass	3.90	22.22	22.22	30.00	22.25
2422MHz	Pass	3.90	22.52	22.52	30.00	22.75
2427MHz	Pass	3.90	22.55	22.55	30.00	22.75
2432MHz	Pass	3.90	22.83	22.83	30.00	23
2437MHz	Pass	3.90	22.93	22.93	30.00	23
2442MHz	Pass	3.90	22.90	22.90	30.00	23
2447MHz	Pass	3.90	22.64	22.64	30.00	22.75
2452MHz	Pass	3.90	22.75	22.75	30.00	22.75
2457MHz	Pass	3.90	22.03	22.03	30.00	22
2462MHz	Pass	3.90	21.46	21.46	30.00	21
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-
2412MHz	Pass	3.90	17.45	17.45	30.00	17.25
2417MHz	Pass	3.90	18.45	18.45	30.00	18.75
2422MHz	Pass	3.90	19.36	19.36	30.00	19.75
2427MHz	Pass	3.90	20.10	20.10	30.00	20.5
2432MHz	Pass	3.90	20.80	20.80	30.00	21.25
2437MHz	Pass	3.90	20.91	20.91	30.00	21.25
2442MHz	Pass	3.90	20.82	20.82	30.00	21
2447MHz	Pass	3.90	20.77	20.77	30.00	21
2452MHz	Pass	3.90	19.73	19.73	30.00	20
2457MHz	Pass	3.90	18.67	18.67	30.00	18.75
2462MHz	Pass	3.90	16.33	16.33	30.00	16.5

DG = Directional Gain; Port X = Port X output power

Note : Conducted output power is for reference only

Note : Conducted setting = Pass conducted setting division 4.

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	21.03	0.12677
802.11ax HEW40_Nss1,(MCS0)_1TX	17.09	0.05117

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
2412MHz	Pass	3.90	16.94	16.94	30.00	17
2417MHz	Pass	3.90	18.65	18.65	30.00	18.5
2422MHz	Pass	3.90	19.69	19.69	30.00	19.75
2427MHz	Pass	3.90	20.48	20.48	30.00	20.5
2432MHz	Pass	3.90	20.66	20.66	30.00	20.75
2437MHz	Pass	3.90	21.03	21.03	30.00	21
2442MHz	Pass	3.90	20.63	20.63	30.00	20.75
2447MHz	Pass	3.90	19.78	19.78	30.00	19.75
2452MHz	Pass	3.90	18.04	18.04	30.00	17.5
2457MHz	Pass	3.90	17.49	17.49	30.00	17.5
2462MHz	Pass	3.90	14.58	14.58	30.00	14.5
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-
2422MHz	Pass	3.90	16.31	16.31	30.00	16.5
2427MHz	Pass	3.90	16.36	16.36	30.00	16.75
2432MHz	Pass	3.90	17.09	17.09	30.00	17.25
2437MHz	Pass	3.90	17.03	17.03	30.00	17.25
2442MHz	Pass	3.90	16.48	16.48	30.00	16.75
2447MHz	Pass	3.90	16.60	16.60	30.00	16.75
2452MHz	Pass	3.90	15.93	15.93	30.00	16

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

Note : Conducted setting = Pass conducted setting division 4.

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	23.17	0.20749
802.11ax HEW40_Nss2,(MCS0)_2TX	19.54	0.08995

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
2412MHz	Pass	3.87	16.08	15.36	18.75	30.00	16
2417MHz	Pass	3.87	18.14	17.72	20.95	30.00	18.25
2422MHz	Pass	3.87	18.79	18.13	21.48	30.00	18.75
2427MHz	Pass	3.87	19.64	19.10	22.39	30.00	19.75
2432MHz	Pass	3.87	19.89	19.34	22.63	30.00	20
2437MHz	Pass	3.87	20.47	19.82	23.17	30.00	20.5
2442MHz	Pass	3.87	20.15	19.74	22.96	30.00	20.25
2447MHz	Pass	3.87	18.98	18.44	21.73	30.00	19
2452MHz	Pass	3.87	18.36	17.53	20.98	30.00	18
2457MHz	Pass	3.87	17.22	16.53	19.90	30.00	17
2462MHz	Pass	3.87	16.16	15.50	18.85	30.00	16
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
2422MHz	Pass	3.87	14.85	15.24	18.06	30.00	15.25
2427MHz	Pass	3.87	14.80	15.12	17.97	30.00	15.25
2432MHz	Pass	3.87	15.66	16.16	18.93	30.00	16
2437MHz	Pass	3.87	16.19	16.85	19.54	30.00	16.5
2442MHz	Pass	3.87	15.90	16.21	19.07	30.00	16
2447MHz	Pass	3.87	15.72	16.11	18.93	30.00	16
2452MHz	Pass	3.87	14.93	15.29	18.12	30.00	15.25

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

Note : Conducted setting = Pass conducted setting division 4.

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_4TX	28.09	0.64417
802.11g_Nss1,(6Mbps)_4TX	24.60	0.28840

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.90	21.14	20.58	21.11	21.02	26.99	30.00	20.75
2417MHz	Pass	3.90	21.50	21.00	21.56	21.47	27.41	30.00	21.25
2422MHz	Pass	3.90	21.62	21.73	22.36	22.11	27.99	30.00	22.25
2437MHz	Pass	3.90	22.23	21.76	22.24	22.04	28.09	30.00	22.25
2442MHz	Pass	3.90	22.26	21.56	22.36	21.99	28.07	30.00	22.25
2447MHz	Pass	3.90	21.82	21.28	21.81	21.57	27.65	30.00	21.75
2452MHz	Pass	3.90	21.89	21.52	21.86	21.68	27.76	30.00	21.75
2457MHz	Pass	3.90	21.22	20.64	21.05	20.87	26.97	30.00	20.75
2462MHz	Pass	3.90	20.59	19.98	20.63	20.29	26.40	30.00	20
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.90	15.07	14.63	15.23	15.16	21.05	30.00	15.25
2417MHz	Pass	3.90	16.52	15.96	16.90	16.60	22.53	30.00	16.75
2422MHz	Pass	3.90	17.62	17.60	18.00	18.10	23.86	30.00	18.25
2427MHz	Pass	3.90	18.21	17.70	18.55	18.43	24.26	30.00	18.5
2432MHz	Pass	3.90	18.16	17.68	18.35	18.32	24.16	30.00	18.5
2437MHz	Pass	3.90	18.80	18.31	18.99	18.18	24.60	30.00	19
2442MHz	Pass	3.90	18.43	17.92	18.63	18.54	24.41	30.00	18.75
2447MHz	Pass	3.90	17.61	17.16	17.77	17.91	23.64	30.00	18
2452MHz	Pass	3.90	17.43	16.97	17.57	17.17	23.31	30.00	17.5
2457MHz	Pass	3.90	16.67	16.04	16.63	16.60	22.51	30.00	16.75
2462MHz	Pass	3.90	15.10	14.46	15.14	15.13	20.99	30.00	15

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

Note : Conducted setting = Pass conducted setting division 4.

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_4TX	24.04	0.25351
802.11ax HEW40_Nss1,(MCS0)_4TX	21.31	0.13521

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11ax HEW20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.90	14.78	14.27	14.76	14.86	20.69	30.00	14.5
2417MHz	Pass	3.90	16.42	15.85	16.31	16.40	22.27	30.00	16.25
2422MHz	Pass	3.90	16.55	16.09	16.76	16.81	22.58	30.00	16.5
2427MHz	Pass	3.90	17.91	17.78	18.00	17.79	23.89	30.00	18
2437MHz	Pass	3.90	18.08	17.36	18.45	18.11	24.04	30.00	18
2442MHz	Pass	3.90	18.12	17.54	18.40	17.99	24.04	30.00	18
2447MHz	Pass	3.90	16.57	16.16	16.75	16.53	22.53	30.00	16.25
2452MHz	Pass	3.90	16.33	15.92	16.44	16.44	22.31	30.00	16.25
2457MHz	Pass	3.90	14.30	14.07	14.32	14.72	20.38	30.00	14.25
2462MHz	Pass	3.90	12.60	12.11	12.83	12.76	18.60	30.00	12.5
802.11ax HEW40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
2422MHz	Pass	3.90	13.74	14.35	14.23	13.98	20.10	30.00	14
2427MHz	Pass	3.90	14.03	14.50	14.27	14.35	20.31	30.00	14.25
2432MHz	Pass	3.90	14.84	15.47	14.95	15.10	21.12	30.00	15
2437MHz	Pass	3.90	15.09	15.46	15.30	15.28	21.31	30.00	15.25
2442MHz	Pass	3.90	14.77	15.23	15.12	15.34	21.14	30.00	15
2447MHz	Pass	3.90	14.39	14.48	14.19	14.46	20.40	30.00	14.25
2452MHz	Pass	3.90	13.36	14.03	14.03	13.61	19.79	30.00	13.75

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

Note : Conducted setting = Pass conducted setting division 4.

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_4TX	19.27	0.08453
802.11ax HEW40-BF_Nss1,(MCS0)_4TX	17.03	0.05047

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11ax HEW20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
2412MHz	Pass	9.78	9.71	9.84	10.18	9.96	15.95	26.22	9.75
2417MHz	Pass	9.78	10.61	10.55	11.02	10.70	16.74	26.22	10.75
2422MHz	Pass	9.78	11.76	10.84	11.96	12.01	17.69	26.22	11.75
2427MHz	Pass	9.78	11.91	11.76	12.14	12.47	18.10	26.22	12
2432MHz	Pass	9.78	13.11	12.28	13.03	13.01	18.89	26.22	12.75
2437MHz	Pass	9.78	13.02	13.20	13.62	13.12	19.27	26.22	13.25
2442MHz	Pass	9.78	12.76	12.15	12.72	12.47	18.55	26.22	12.5
2447MHz	Pass	9.78	12.43	12.28	12.88	12.35	18.51	26.22	12.25
2452MHz	Pass	9.78	11.54	11.39	11.62	11.73	17.59	26.22	11.25
2457MHz	Pass	9.78	9.93	9.93	10.91	10.57	16.38	26.22	10.25
2462MHz	Pass	9.78	9.34	9.07	9.16	9.20	15.21	26.22	8.75
802.11ax HEW40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
2422MHz	Pass	9.78	9.71	10.35	10.10	9.93	16.05	26.22	10
2427MHz	Pass	9.78	9.83	10.99	10.55	10.26	16.45	26.22	10
2432MHz	Pass	9.78	9.94	10.68	10.09	10.28	16.28	26.22	10
2437MHz	Pass	9.78	10.72	11.22	11.07	11.00	17.03	26.22	10.75
2442MHz	Pass	9.78	9.96	10.94	10.53	10.42	16.50	26.22	10.25
2447MHz	Pass	9.78	10.22	11.14	10.00	10.68	16.55	26.22	10.25
2452MHz	Pass	9.78	8.91	9.83	9.20	9.47	15.39	26.22	9.25

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

Note : Conducted setting = Pass conducted setting division 4.

**Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ax HEW20_Nss4,(MCS0)_4TX	25.11	0.32434
802.11ax HEW40_Nss4,(MCS0)_4TX	19.90	0.09772

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	Conducted setting
802.11ax HEW20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
2412MHz	Pass	3.76	15.03	14.12	14.64	14.82	20.69	30.00	15
2417MHz	Pass	3.76	16.69	16.19	16.45	16.64	22.52	30.00	16.5
2422MHz	Pass	3.76	17.30	17.06	17.46	17.37	23.32	30.00	17.5
2427MHz	Pass	3.76	18.13	17.98	18.13	18.23	24.14	30.00	18.25
2432MHz	Pass	3.76	19.18	18.58	19.36	19.19	25.11	30.00	19.25
2437MHz	Pass	3.76	19.12	18.65	19.37	19.17	25.11	30.00	19.25
2442MHz	Pass	3.76	18.94	18.54	19.06	18.77	24.85	30.00	19
2447MHz	Pass	3.76	18.20	17.49	18.24	18.25	24.08	30.00	18.25
2452MHz	Pass	3.76	17.31	16.95	17.35	17.42	23.28	30.00	17.25
2457MHz	Pass	3.76	16.16	15.62	15.97	16.08	21.98	30.00	16
2462MHz	Pass	3.76	14.68	14.23	14.88	15.06	20.74	30.00	14.75
802.11ax HEW40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
2422MHz	Pass	3.76	12.42	12.95	12.70	12.51	18.67	30.00	12.75
2427MHz	Pass	3.76	12.61	12.83	12.82	12.58	18.73	30.00	12.75
2432MHz	Pass	3.76	13.37	13.96	13.87	13.55	19.71	30.00	13.75
2437MHz	Pass	3.76	13.46	14.04	13.94	14.05	19.90	30.00	14
2442MHz	Pass	3.76	13.16	13.82	13.84	13.72	19.66	30.00	13.75
2447MHz	Pass	3.76	12.15	12.59	12.61	12.38	18.46	30.00	12.5
2452MHz	Pass	3.76	11.93	11.69	11.63	11.96	17.83	30.00	11.75

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

Note : Conducted setting = Pass conducted setting division 4.

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	0.44
802.11g_Nss1,(6Mbps)_1TX	-5.67

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	3.90	0.38	0.38	8.00
2437MHz	Pass	3.90	0.44	0.44	8.00
2462MHz	Pass	3.90	-0.11	-0.11	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	3.90	-8.89	-8.89	8.00
2437MHz	Pass	3.90	-5.67	-5.67	8.00
2462MHz	Pass	3.90	-9.38	-9.38	8.00


DG = Directional Gain; RBW=3kHz;**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11b_Nss1,(1Mbps)_1TX

PSD

2412MHz

06/12/2018

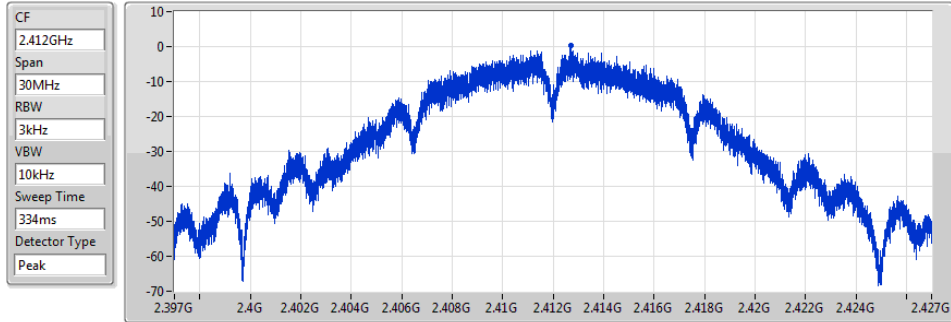


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.38	0.38	0.38

802.11b_Nss1,(1Mbps)_1TX

PSD

2437MHz

06/12/2018

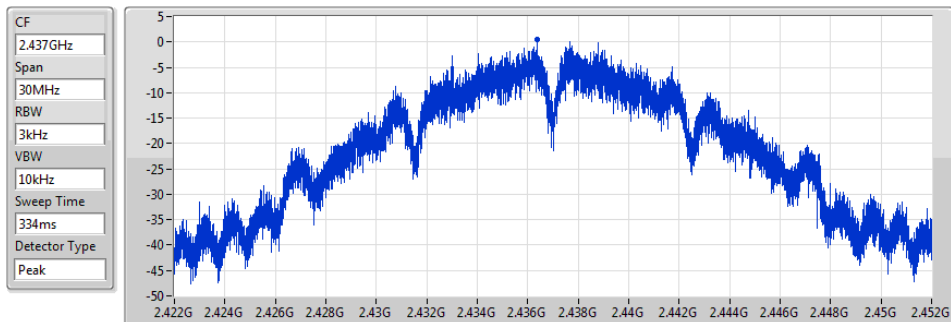


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.44	0.44	0.44

802.11b_Nss1,(1Mbps)_1TX

PSD

2462MHz

06/12/2018

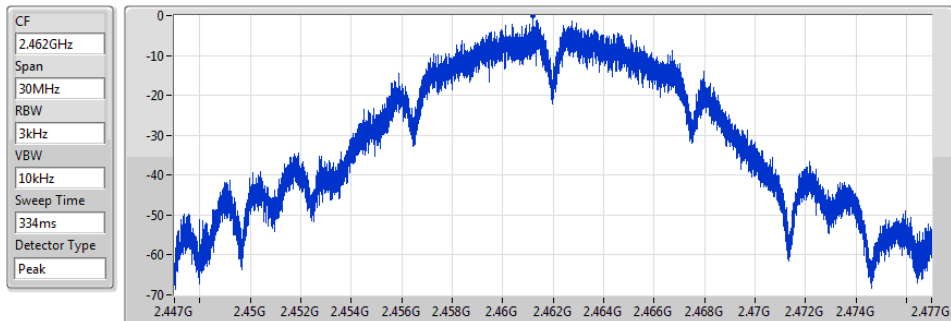


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.11	-0.11	-0.11

802.11g_Nss1,(6Mbps)_1TX

PSD

2412MHz

06/12/2018

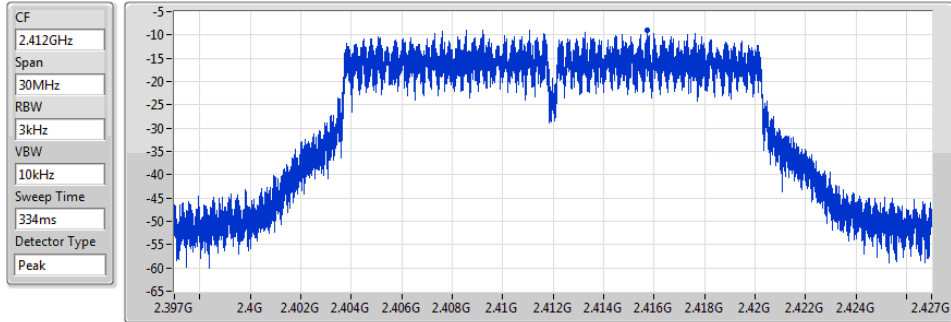


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-8.89	-8.89	-8.89

802.11g_Nss1,(6Mbps)_1TX

PSD

2437MHz

06/12/2018

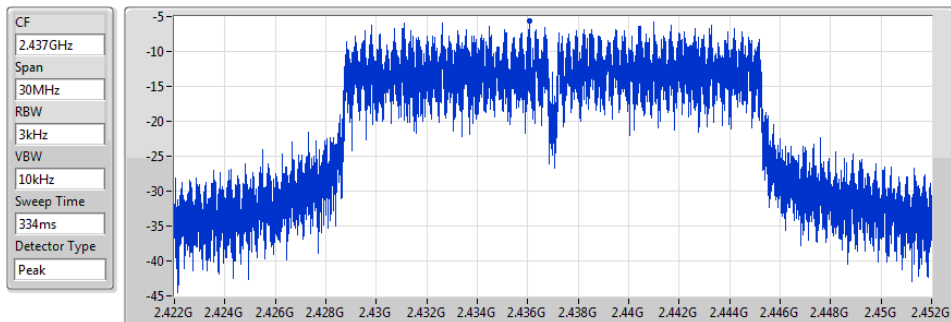


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-5.67	-5.67	-5.67

802.11g_Nss1,(6Mbps)_1TX

PSD

2462MHz

06/12/2018

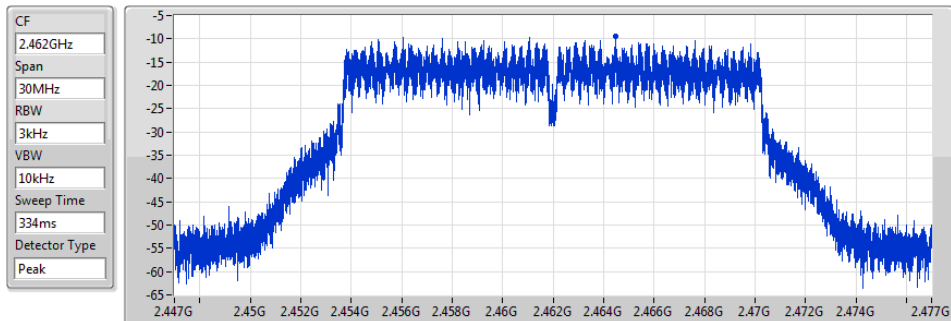

Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-9.38	-9.38	-9.38

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	-5.28
802.11ax HEW40_Nss1,(MCS0)_1TX	-11.42

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	3.90	-7.57	-7.57	8.00
2437MHz	Pass	3.90	-5.28	-5.28	8.00
2462MHz	Pass	3.90	-10.06	-10.06	8.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	3.90	-12.13	-12.13	8.00
2437MHz	Pass	3.90	-11.42	-11.42	8.00
2452MHz	Pass	3.90	-12.69	-12.69	8.00


DG = Directional Gain; RBW=3kHz;**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

2412MHz

06/12/2018

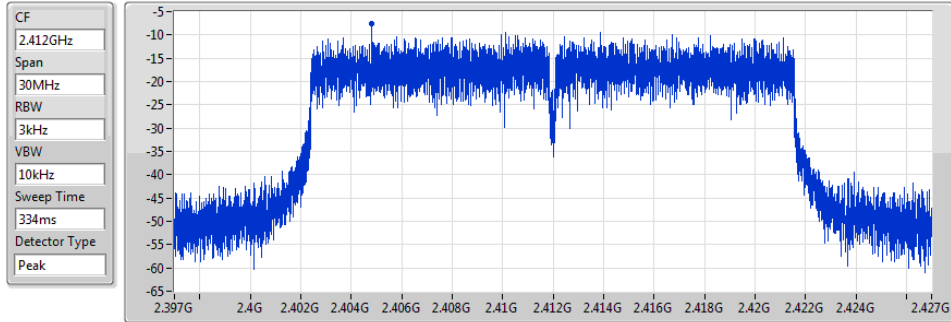


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-7.57	-7.57	-7.57

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

2437MHz

06/12/2018

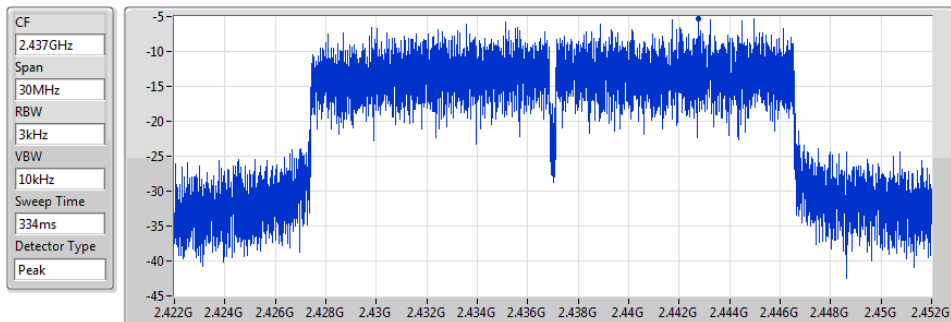


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-5.28	-5.28	-5.28

802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

2462MHz

06/12/2018

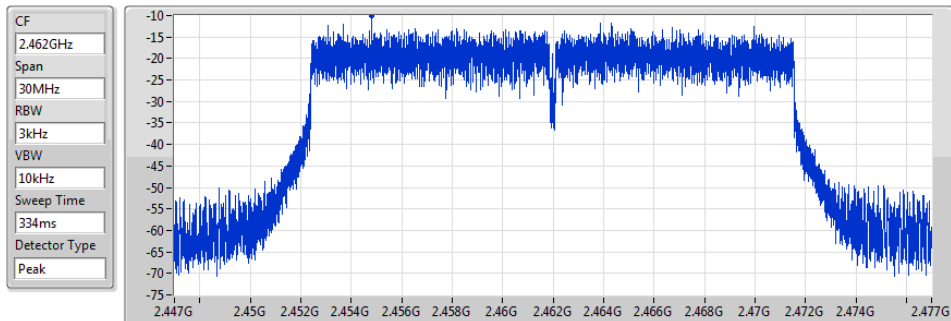


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.06	-10.06	-10.06

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

2422MHz

06/12/2018

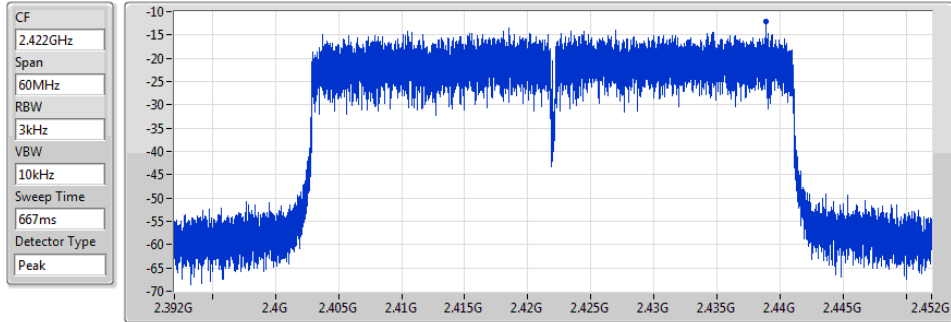


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-12.13	-12.13	-12.13

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

2437MHz

06/12/2018

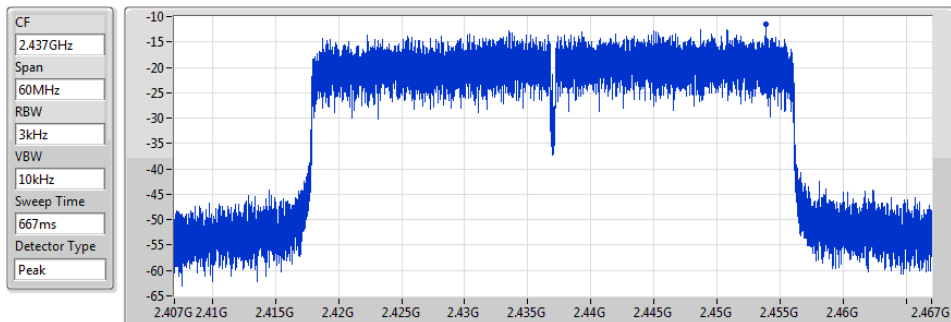


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-11.42	-11.42	-11.42

802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

2452MHz

06/12/2018

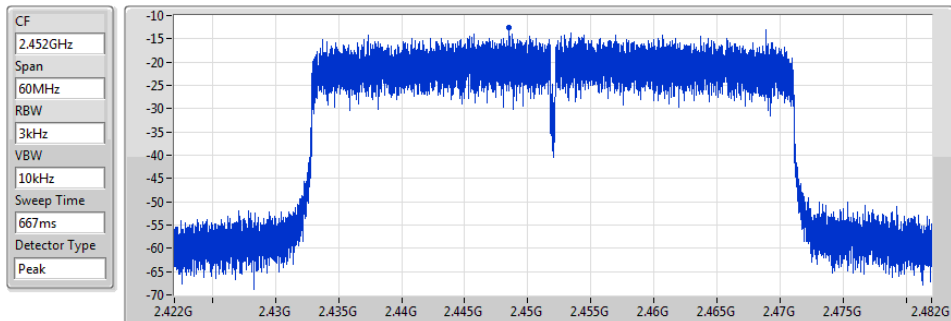

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-12.69	-12.69	-12.69

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11ax HEW20_Nss2,(MCS0)_2TX	-4.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-11.11

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.87	-10.65	-10.25	-9.08	8.00
2437MHz	Pass	3.87	-5.57	-5.74	-4.00	8.00
2462MHz	Pass	3.87	-10.77	-10.99	-9.07	8.00
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	3.87	-14.49	-12.74	-11.91	8.00
2437MHz	Pass	3.87	-13.32	-12.32	-11.11	8.00
2452MHz	Pass	3.87	-13.76	-13.09	-12.02	8.00


DG = Directional Gain; RBW=3kHz;**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

2412MHz

06/12/2018

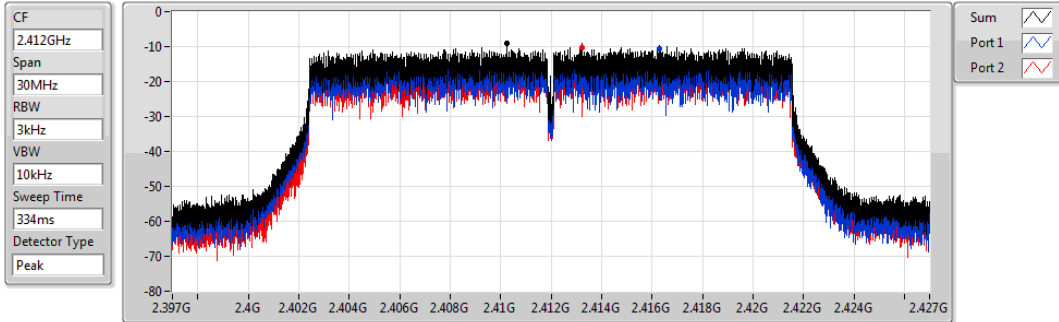


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.08	-9.08	-10.65	-10.25

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

2437MHz

06/12/2018

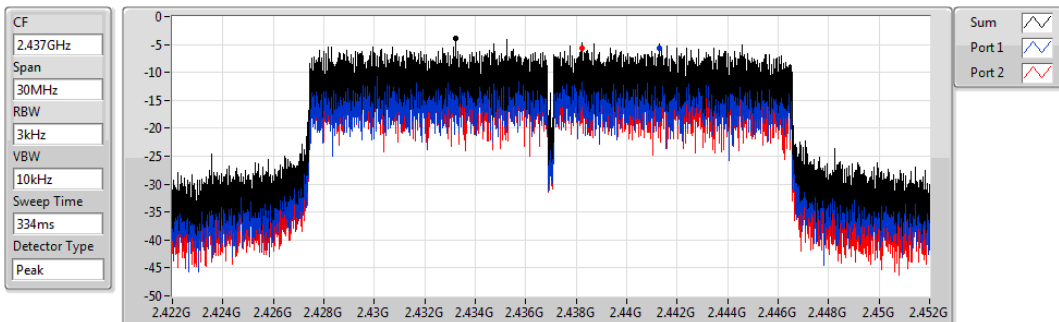


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.00	-4.00	-5.57	-5.74

802.11ax HEW20_Nss2,(MCS0)_2TX

PSD

2462MHz

06/12/2018

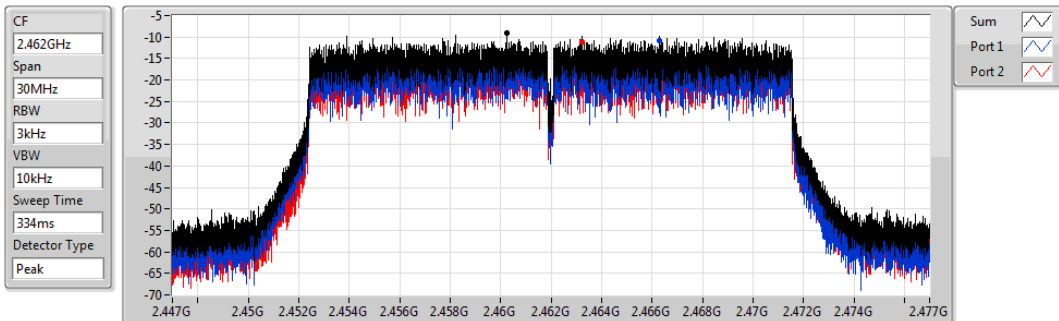

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.07	-9.07	-10.77	-10.99


802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

2422MHz

06/12/2018

CF
2.422GHz
Span
60MHz
RBW
3kHz
VBW
10kHz
Sweep Time
667ms
Detector Type
Peak

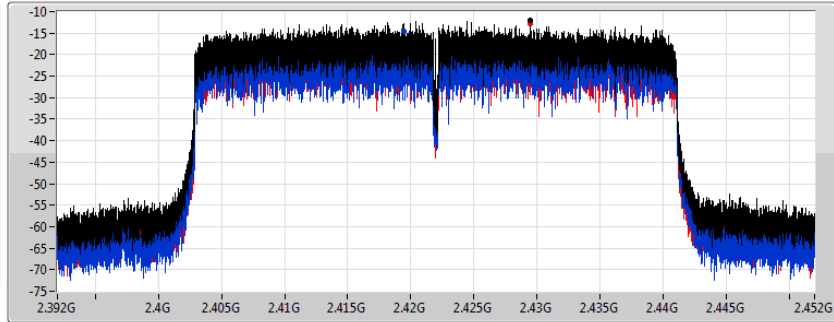

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.91	-11.91	-14.49	-12.74


802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

2437MHz

06/12/2018

CF
2.437GHz
Span
60MHz
RBW
3kHz
VBW
10kHz
Sweep Time
667ms
Detector Type
Peak

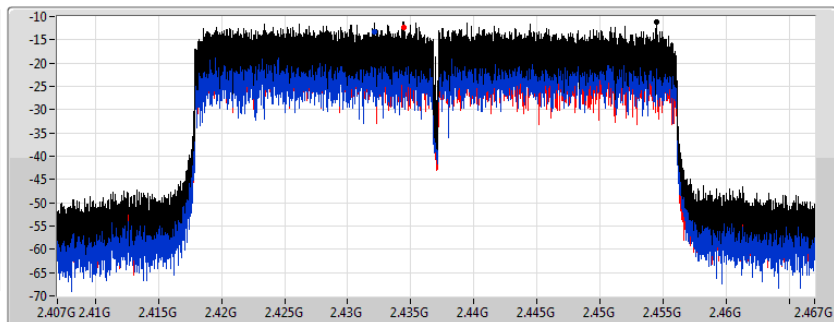

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.11	-11.11	-13.32	-12.32


802.11ax HEW40_Nss2,(MCS0)_2TX

PSD

2452MHz

06/12/2018

CF
2.452GHz
Span
60MHz
RBW
3kHz
VBW
10kHz
Sweep Time
667ms
Detector Type
Peak

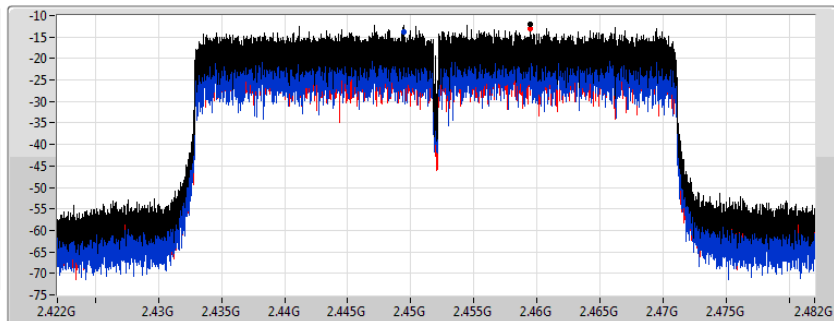

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-12.02	-12.02	-13.76	-13.09

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_4TX	3.97
802.11g_Nss1,(6Mbps)_4TX	-1.20

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	9.78	-0.84	-0.74	-1.38	-1.63	2.24	4.22
2437MHz	Pass	9.78	-0.36	-0.20	1.06	-0.64	3.97	4.22
2462MHz	Pass	9.78	-0.92	-2.67	-2.35	-2.63	2.03	4.22
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	9.78	-10.80	-10.55	-10.61	-11.24	-5.17	4.22
2437MHz	Pass	9.78	-6.78	-6.65	-6.16	-7.31	-1.20	4.22
2462MHz	Pass	9.78	-11.06	-10.99	-10.43	-11.76	-5.73	4.22


DG = Directional Gain; RBW=3kHz;**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11b_Nss1,(1Mbps)_4TX

PSD

2412MHz

06/12/2018

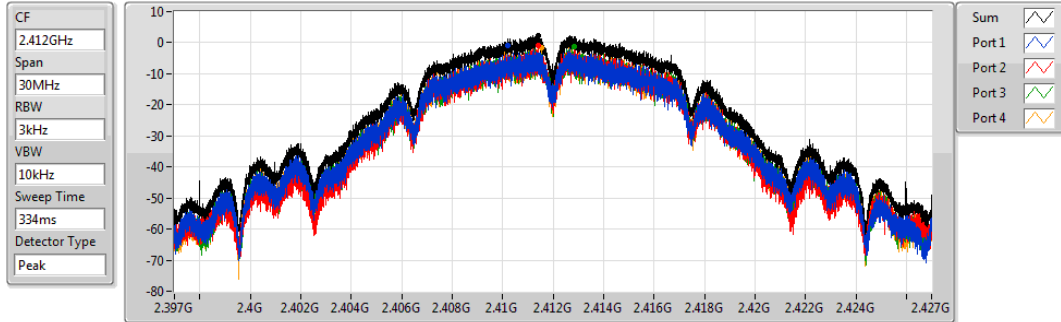


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.24	2.24	-0.84	-0.74	-1.38	-1.63

802.11b_Nss1,(1Mbps)_4TX

PSD

2437MHz

06/12/2018

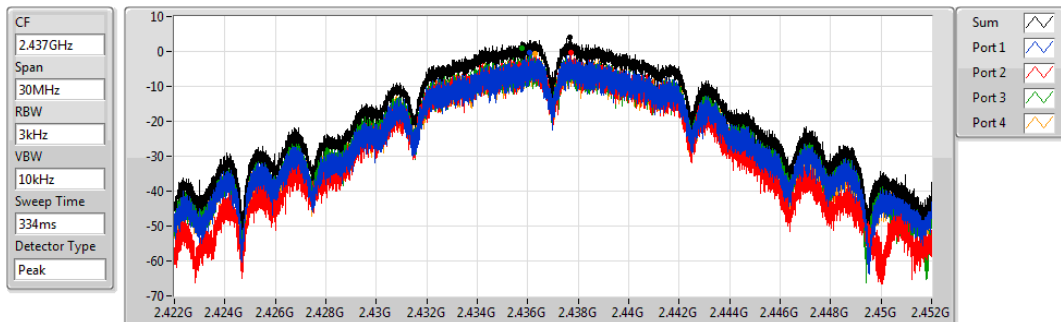


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.97	3.97	-0.36	-0.20	1.06	-0.64

802.11b_Nss1,(1Mbps)_4TX

PSD

2462MHz

06/12/2018

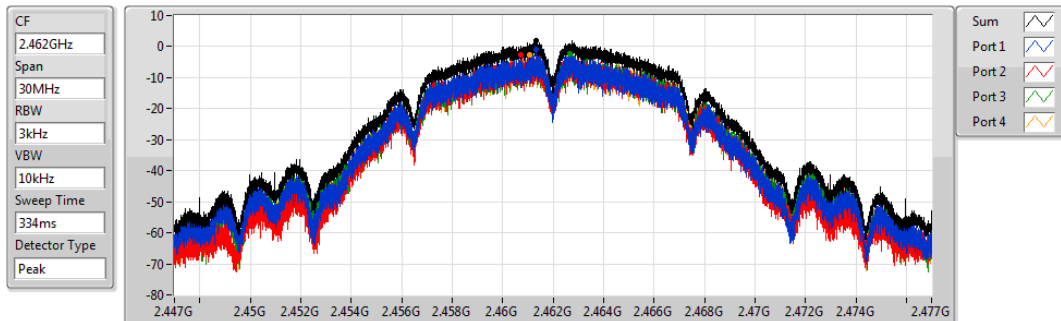


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.03	2.03	-0.92	-2.67	-2.35	-2.63

802.11g_Nss1,(6Mbps)_4TX

PSD

2412MHz

06/12/2018

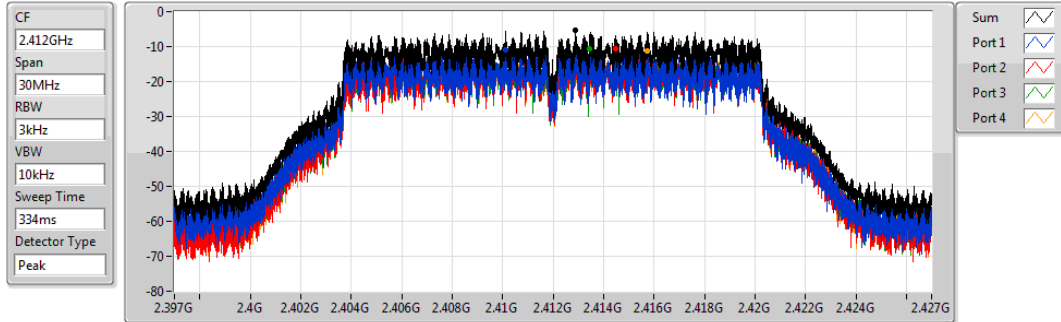


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.17	-5.17	-10.80	-10.55	-10.61	-11.24

802.11g_Nss1,(6Mbps)_4TX

PSD

2437MHz

06/12/2018

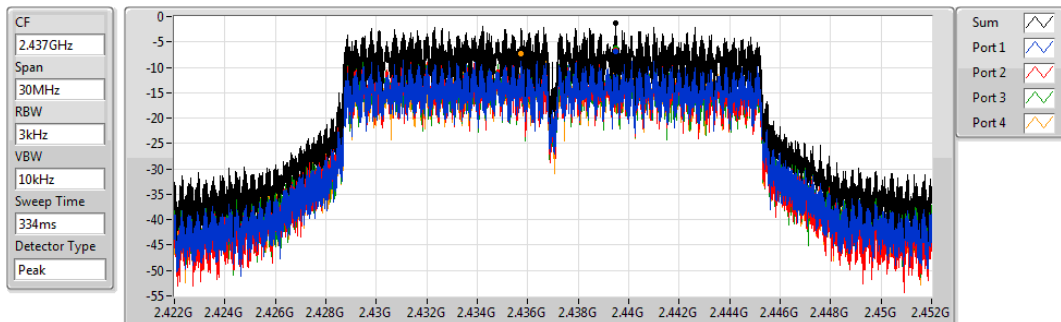


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.20	-1.20	-6.78	-6.65	-6.16	-7.31

802.11g_Nss1,(6Mbps)_4TX

PSD

2462MHz

06/12/2018

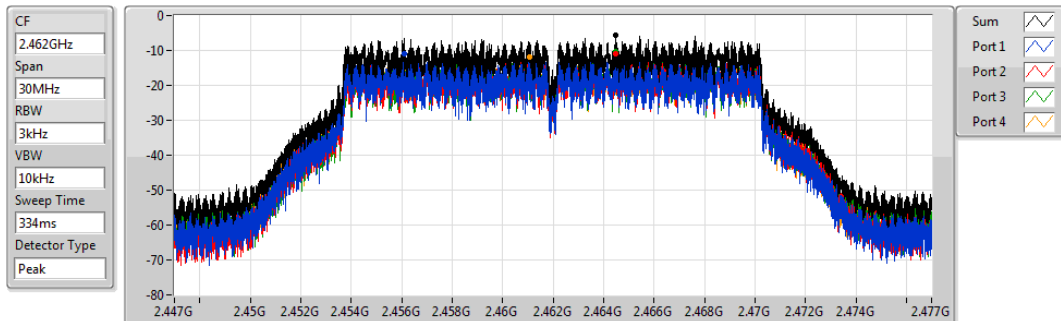

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.73	-5.73	-11.06	-10.99	-10.43	-11.76

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11ax HEW20_Nss1,(MCS0)_4TX	-2.48
802.11ax HEW40_Nss1,(MCS0)_4TX	-7.54

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	9.78	-12.07	-11.48	-11.67	-10.36	-5.49	4.22
2437MHz	Pass	9.78	-7.69	-6.15	-8.76	-8.72	-2.48	4.22
2462MHz	Pass	9.78	-13.68	-13.74	-12.50	-11.72	-8.72	4.22
802.11ax HEW40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	9.78	-15.09	-14.28	-13.97	-14.37	-9.11	4.22
2437MHz	Pass	9.78	-13.41	-12.48	-14.07	-13.35	-7.54	4.22
2452MHz	Pass	9.78	-15.39	-13.61	-13.03	-15.17	-8.24	4.22

DG = Directional Gain; RBW=3kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11ax HEW20_Nss1,(MCS0)_4TX

PSD

2412MHz

06/12/2018

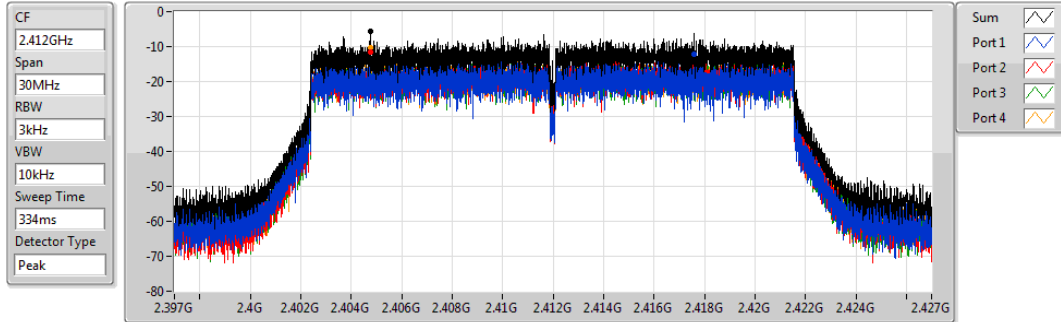


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.49	-5.49	-12.07	-11.48	-11.67	-10.36

802.11ax HEW20_Nss1,(MCS0)_4TX

PSD

2437MHz

06/12/2018

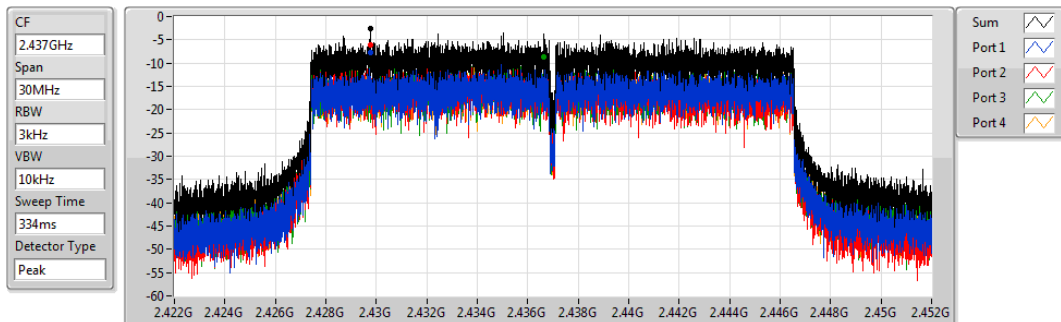


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.48	-2.48	-7.69	-6.15	-8.76	-8.72

802.11ax HEW20_Nss1,(MCS0)_4TX

PSD

2462MHz

06/12/2018

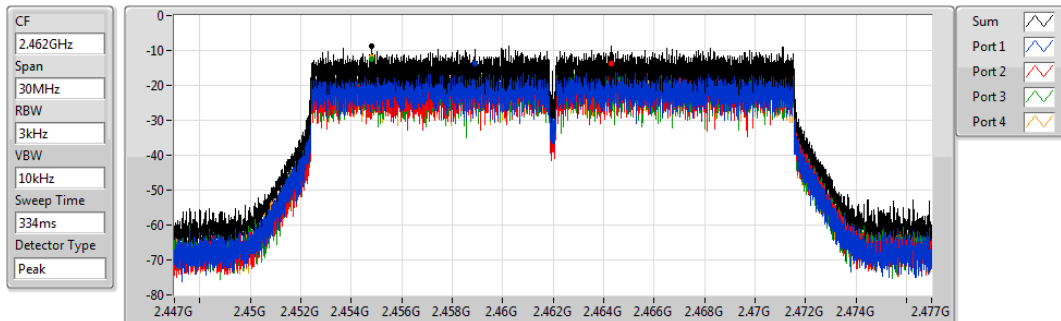


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.72	-8.72	-13.68	-13.74	-12.50	-11.72

802.11ax HEW40_Nss1,(MCS0)_4TX

PSD

2422MHz

06/12/2018

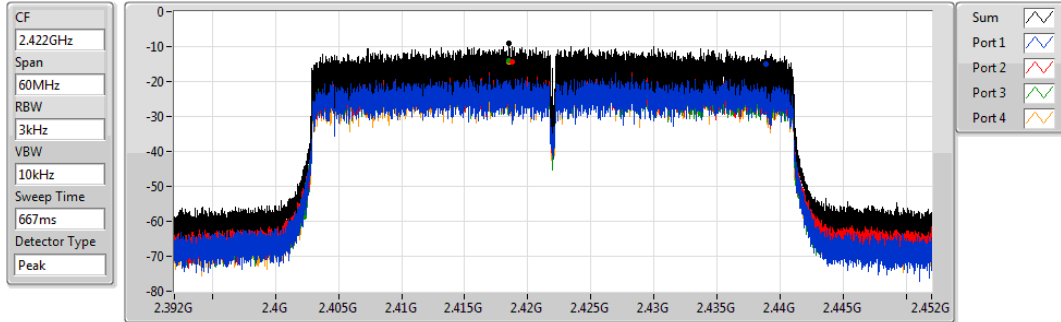


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.11	-9.11	-15.09	-14.28	-13.97	-14.37

802.11ax HEW40_Nss1,(MCS0)_4TX

PSD

2437MHz

06/12/2018

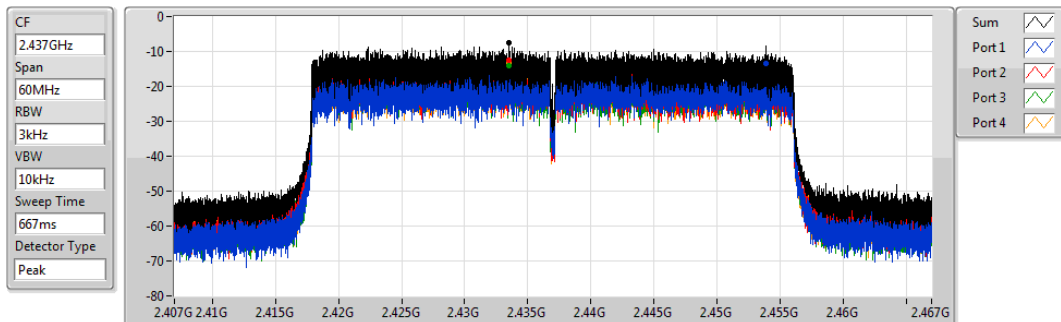


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.54	-7.54	-13.41	-12.48	-14.07	-13.35

802.11ax HEW40_Nss1,(MCS0)_4TX

PSD

2452MHz

06/12/2018

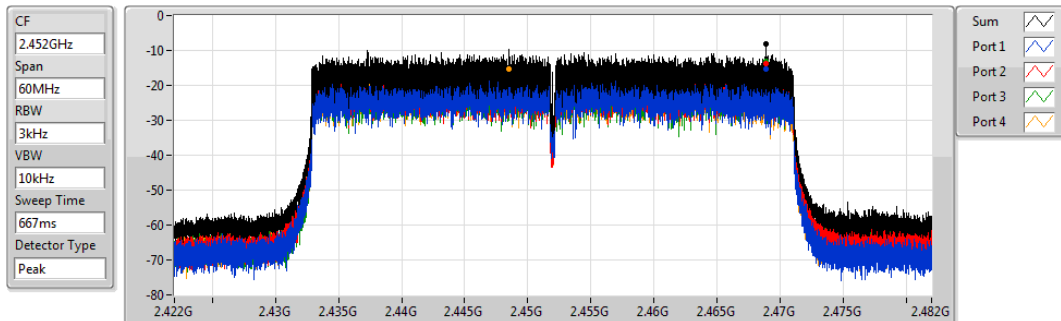

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.24	-8.24	-15.39	-13.61	-13.03	-15.17

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11ax HEW20-BF_Nss1,(MCS0)_4TX	-5.53
802.11ax HEW40-BF_Nss1,(MCS0)_4TX	-11.94

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	9.78	-14.58	-15.41	-14.67	-15.04	-8.91	4.22
2437MHz	Pass	9.78	-12.54	-12.00	-10.77	-10.42	-5.53	4.22
2462MHz	Pass	9.78	-16.36	-15.65	-16.24	-15.19	-9.85	4.22
802.11ax HEW40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	9.78	-19.42	-17.29	-18.95	-18.49	-13.38	4.22
2437MHz	Pass	9.78	-18.58	-17.34	-17.13	-17.61	-11.94	4.22
2452MHz	Pass	9.78	-18.90	-17.35	-17.73	-19.29	-12.25	4.22

DG = Directional Gain; RBW=3kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

PSD

2412MHz

07/12/2018

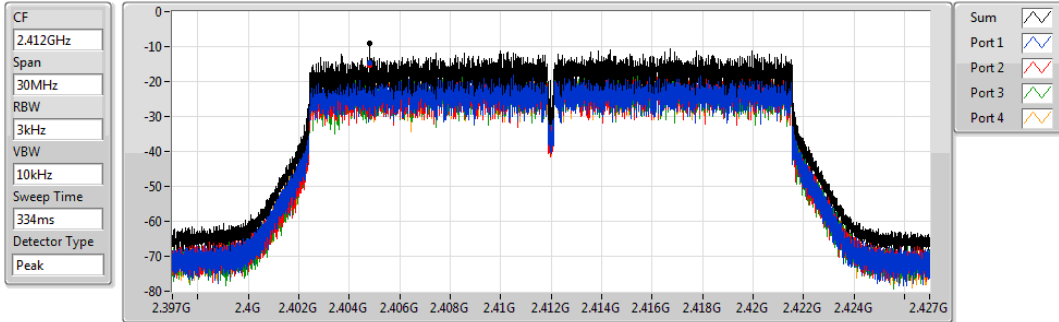


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-8.91	-8.91	-14.58	-15.41	-14.67	-15.04

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

07/12/2018

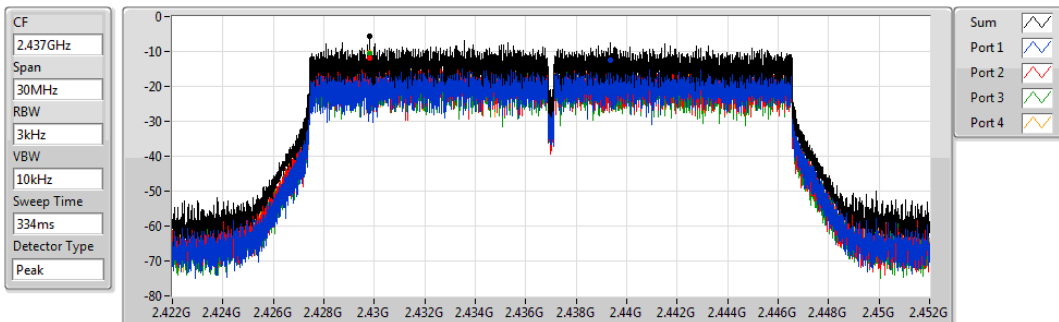


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-5.53	-5.53	-12.54	-12.00	-10.77	-10.42

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

PSD

2462MHz

07/12/2018

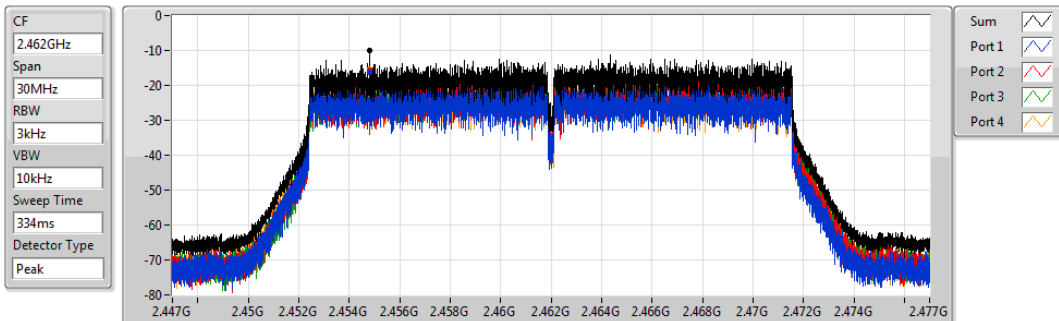


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-9.85	-9.85	-16.36	-15.65	-16.24	-15.19

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

PSD

2422MHz

07/12/2018

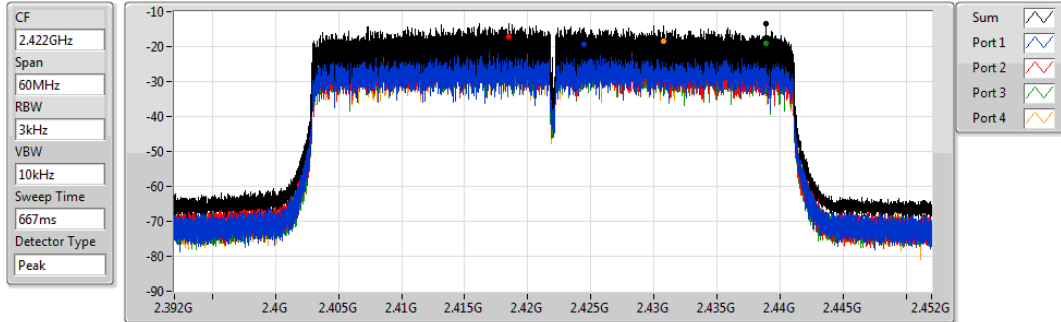


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-13.38	-13.38	-19.42	-17.29	-18.95	-18.49

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

07/12/2018

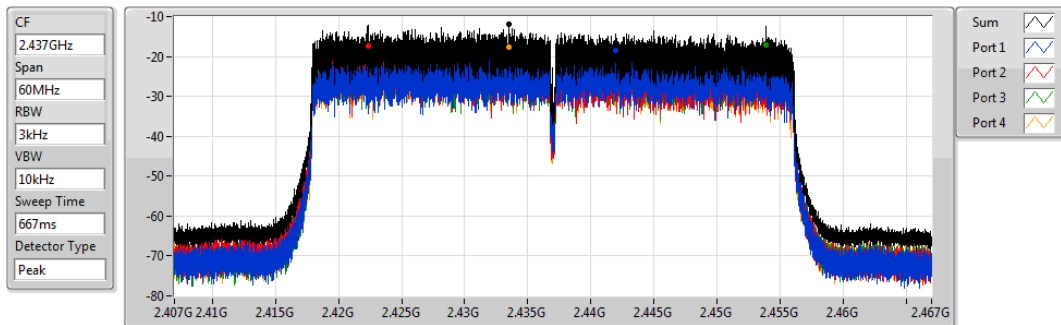


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.94	-11.94	-18.58	-17.34	-17.13	-17.61

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

PSD

2452MHz

07/12/2018

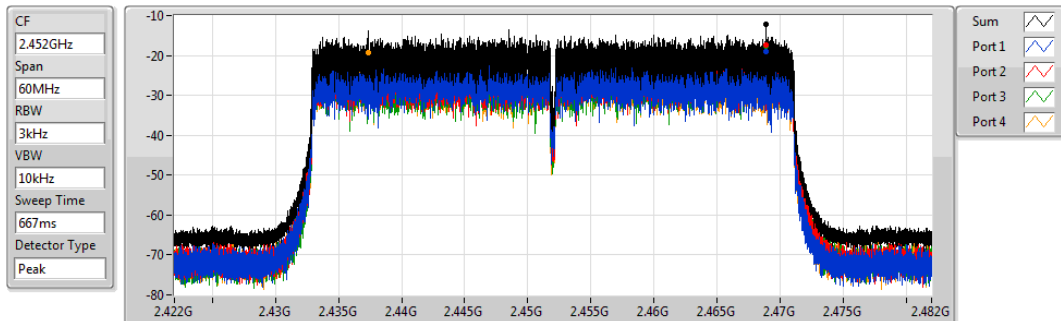

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-12.25	-12.25	-18.90	-17.35	-17.73	-19.29

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11ax HEW20_Nss4,(MCS0)_4TX	-3.65
802.11ax HEW40_Nss4,(MCS0)_4TX	-9.98

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.76	-12.03	-11.11	-11.97	-11.33	-7.94	8.00
2437MHz	Pass	3.76	-7.52	-7.01	-7.67	-7.63	-3.65	8.00
2462MHz	Pass	3.76	-12.35	-11.87	-11.90	-11.69	-8.63	8.00
802.11ax HEW40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	3.76	-17.16	-15.85	-16.05	-14.58	-11.67	8.00
2437MHz	Pass	3.76	-15.93	-14.55	-15.58	-14.22	-9.98	8.00
2452MHz	Pass	3.76	-17.78	-16.72	-16.94	-16.95	-12.68	8.00


DG = Directional Gain; RBW=3kHz;**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11ax HEW20_Nss4,(MCS0)_4TX

PSD

2412MHz

06/12/2018

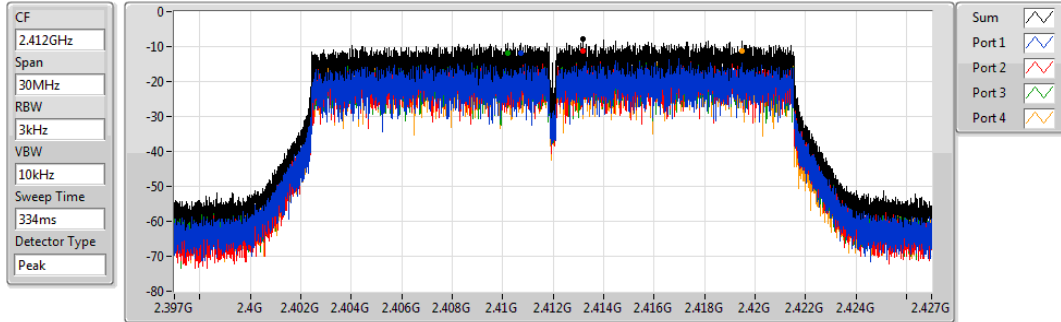


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.94	-7.94	-12.03	-11.11	-11.97	-11.33

802.11ax HEW20_Nss4,(MCS0)_4TX

PSD

2437MHz

06/12/2018

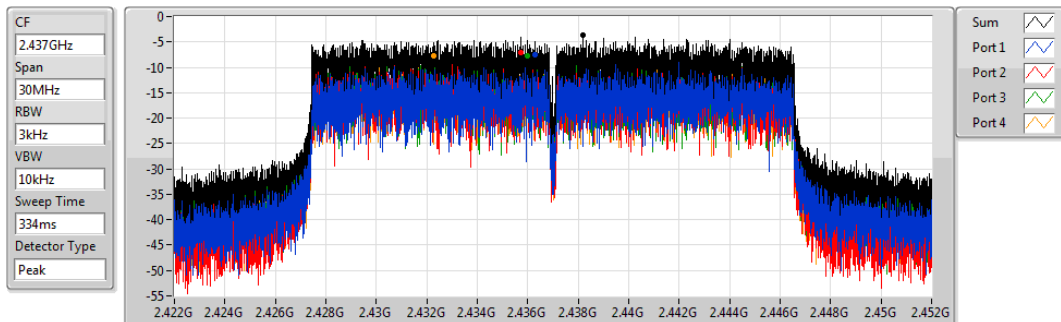


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.65	-3.65	-7.52	-7.01	-7.67	-7.63

802.11ax HEW20_Nss4,(MCS0)_4TX

PSD

2462MHz

06/12/2018

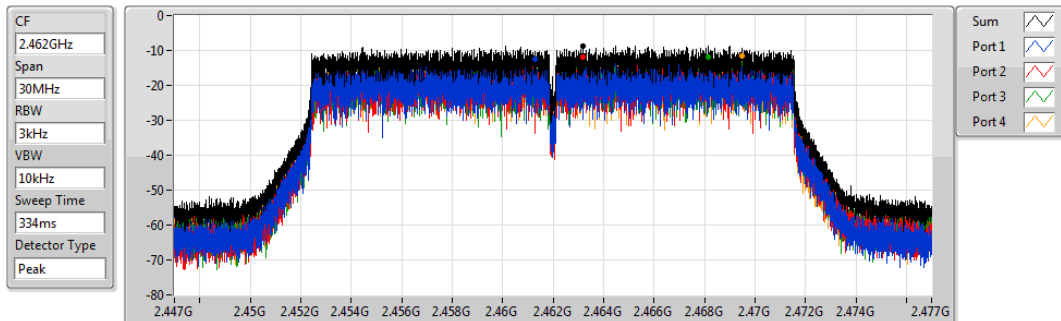


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.63	-8.63	-12.35	-11.87	-11.90	-11.69

802.11ax HEW40_Nss4,(MCS0)_4TX

PSD

2422MHz

06/12/2018

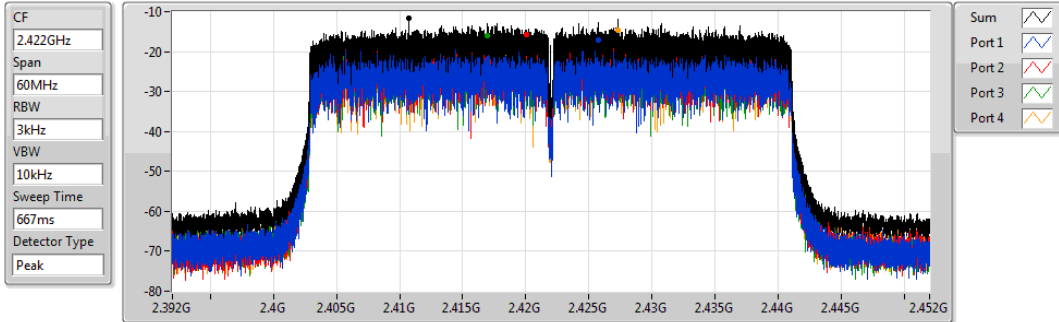


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-11.67	-11.67	-17.16	-15.85	-16.05	-14.58

802.11ax HEW40_Nss4,(MCS0)_4TX

PSD

2437MHz

06/12/2018

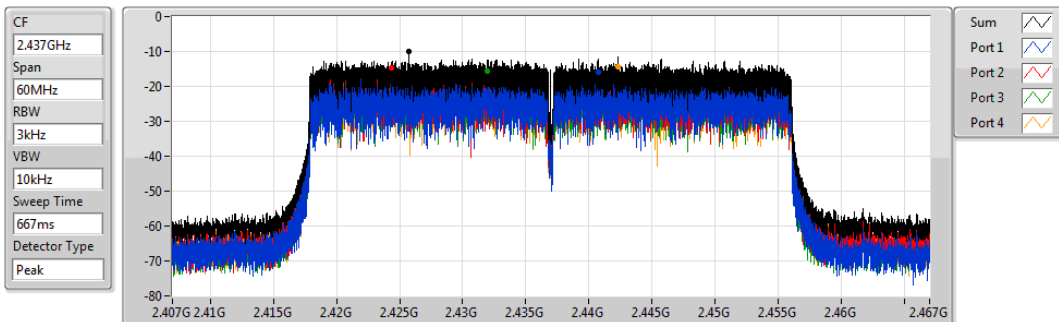


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.98	-9.98	-15.93	-14.55	-15.58	-14.22

802.11ax HEW40_Nss4,(MCS0)_4TX

PSD

2452MHz

06/12/2018

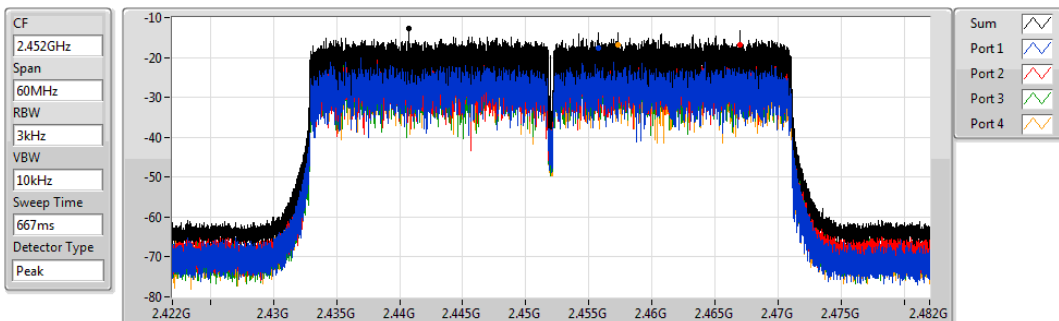

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-12.68	-12.68	-17.78	-16.72	-16.94	-16.95



Summary


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	2.43749G	13.07	-16.93	827.73M	-44.64	2.399G	-26.56	2.48416G	-43.36	7.11994G	-43.29	1
802.11g_Nss1,(6Mbps)_1TX	Pass	2.43578G	6.78	-23.22	892.1M	-44.42	2.39796G	-27.88	2.48818G	-44.22	6.2546G	-43.06	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43749G	13.07	-16.93	827.73M	-44.64	2.399G	-26.56	2.48416G	-43.36	7.11994G	-43.29	1
2437MHz	Pass	2.43749G	13.07	-16.93	890.64M	-43.58	2.399G	-39.11	2.48826G	-41.15	6.44003G	-43.14	1
2462MHz	Pass	2.43749G	13.07	-16.93	923.26M	-44.81	2.3988G	-44.54	2.49022G	-42.49	6.42598G	-42.57	1
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43578G	6.78	-23.22	892.1M	-44.42	2.39796G	-27.88	2.48818G	-44.22	6.2546G	-43.06	1
2437MHz	Pass	2.43578G	6.78	-23.22	779.1M	-45.10	2.3998G	-33.97	2.48478G	-38.20	6.25741G	-43.06	1
2462MHz	Pass	2.43578G	6.78	-23.22	71.36M	-44.69	2.39684G	-45.49	2.48396G	-37.02	6.91485G	-41.00	1


802.11b_Nss1,(1Mbps)_1TX 2412MHz

CSE NdB

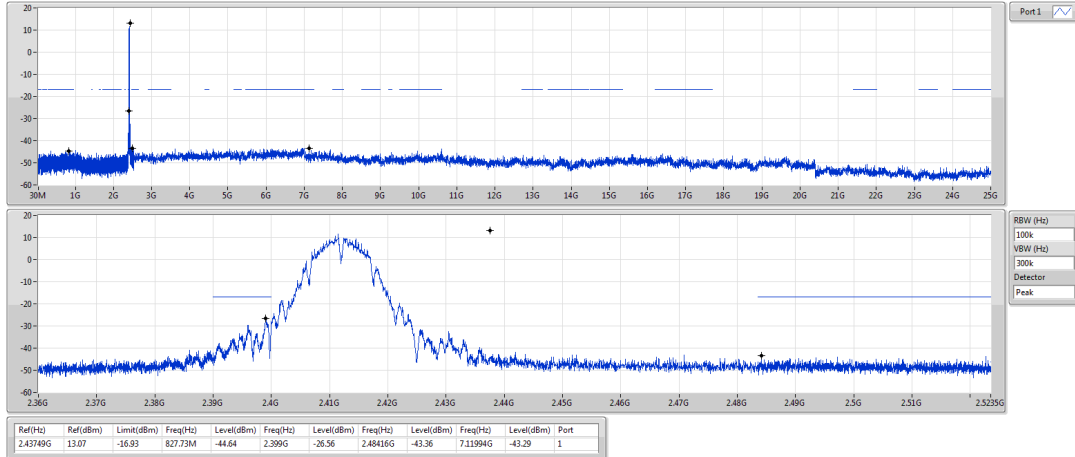


802.11b_Nss1,(1Mbps)_1TX 2437MHz

CSE NdB

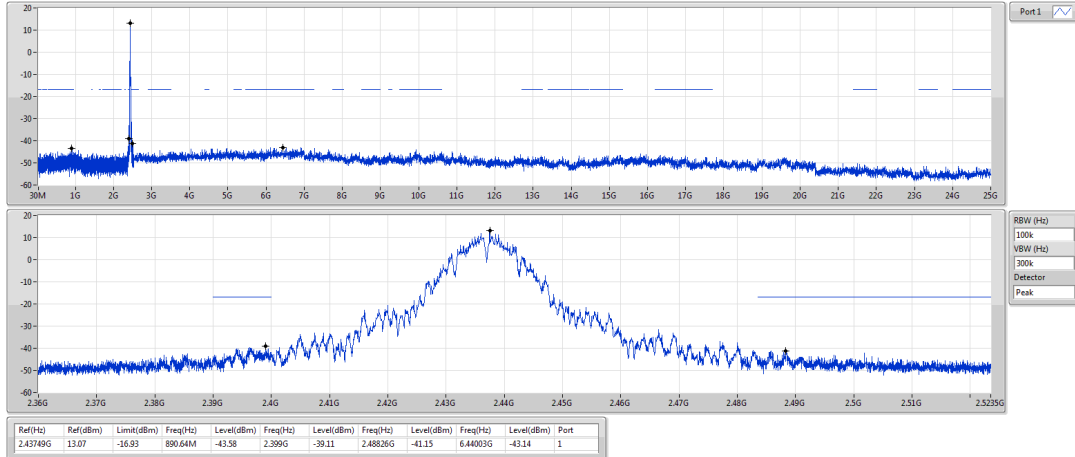


802.11b_Nss1,(1Mbps)_1TX 2462MHz

CSE NdB

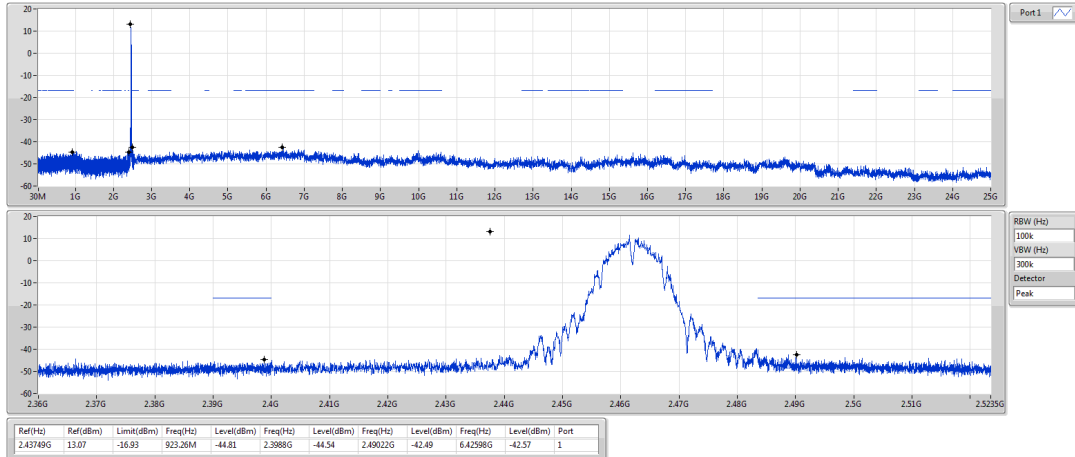


802.11g_Nss1,(6Mbps)_1TX
2412MHz

CSE NdB

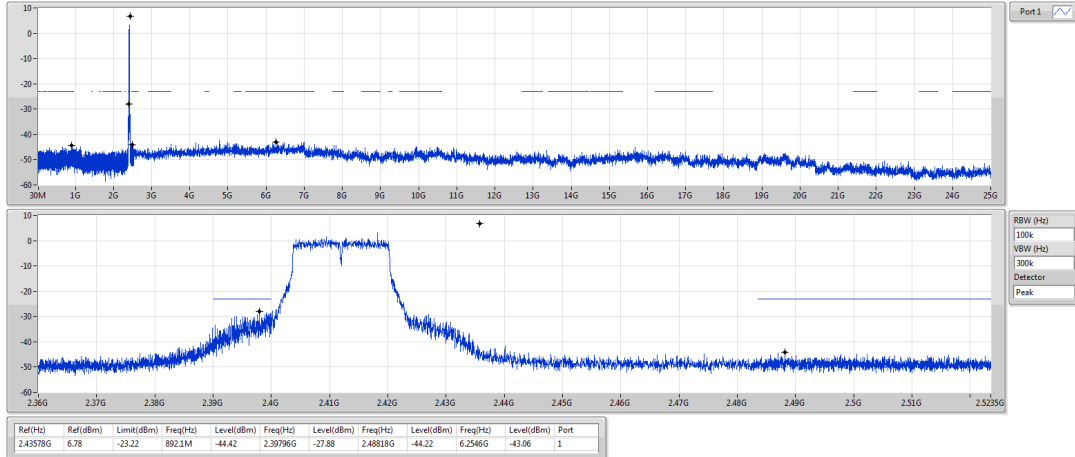


802.11g_Nss1,(6Mbps)_1TX
2437MHz

CSE NdB

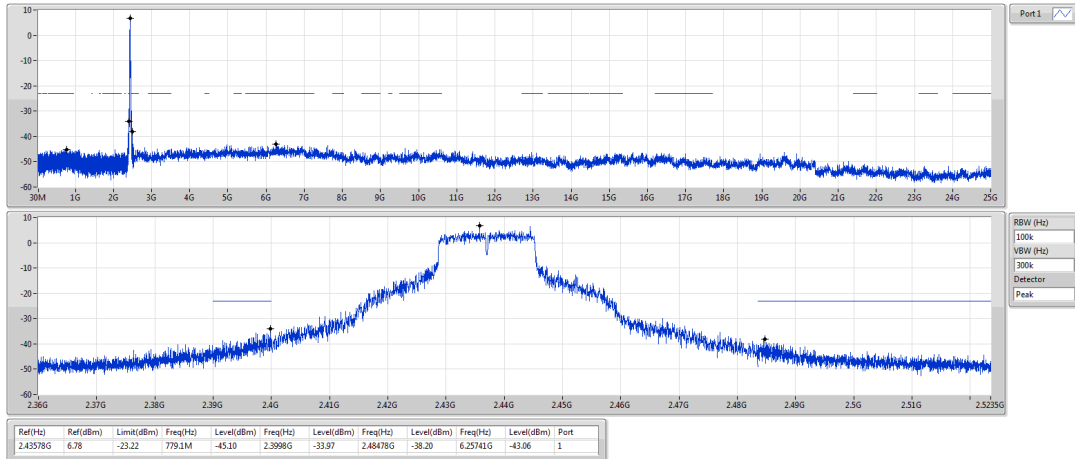

802.11g_Nss1,(6Mbps)_1TX
2462MHz

CSE NdB

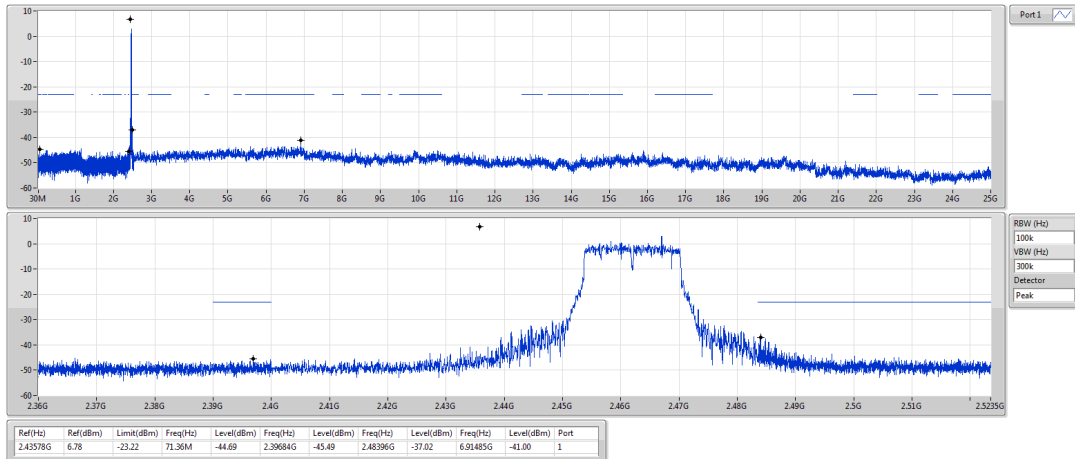



Summary


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	2.4395G	7.94	-22.06	902.88M	-44.30	2.39974G	-25.95	2.50466G	-44.43	6.79965G	-43.45	1
802.11ax HEW40_Nss1,(MCS0)_1TX	Pass	2.44075G	1.25	-28.75	890.47M	-44.62	2.39708G	-45.24	2.48426G	-35.12	6.06359G	-41.37	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.4395G	7.94	-22.06	902.88M	-44.30	2.39974G	-25.95	2.50466G	-44.43	6.79965G	-43.45	1
2437MHz	Pass	2.4395G	7.94	-22.06	952.39M	-44.48	2.39952G	-34.35	2.48386G	-35.72	6.22369G	-42.95	1
2462MHz	Pass	2.4395G	7.94	-22.06	770.65M	-43.35	2.39514G	-45.41	2.48382G	-35.99	6.03264G	-43.38	1
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.44075G	1.25	-28.75	933.98M	-44.24	2.39824G	-35.63	2.49974G	-44.99	6.18139G	-42.80	1
2437MHz	Pass	2.44075G	1.25	-28.75	770.53M	-44.26	2.39848G	-35.13	2.48434G	-38.89	6.27674G	-42.63	1
2452MHz	Pass	2.44075G	1.25	-28.75	890.47M	-44.62	2.39708G	-45.24	2.48426G	-35.12	6.06359G	-41.37	1


802.11ax HEW20_Nss1,(MCS0)_1TX
2412MHz

CSE NdB

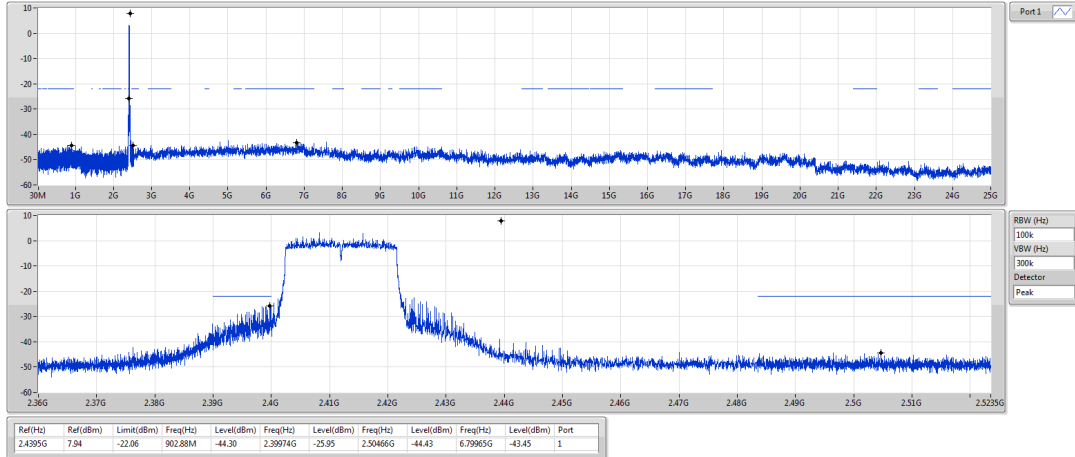


802.11ax HEW20_Nss1,(MCS0)_1TX
2437MHz

CSE NdB

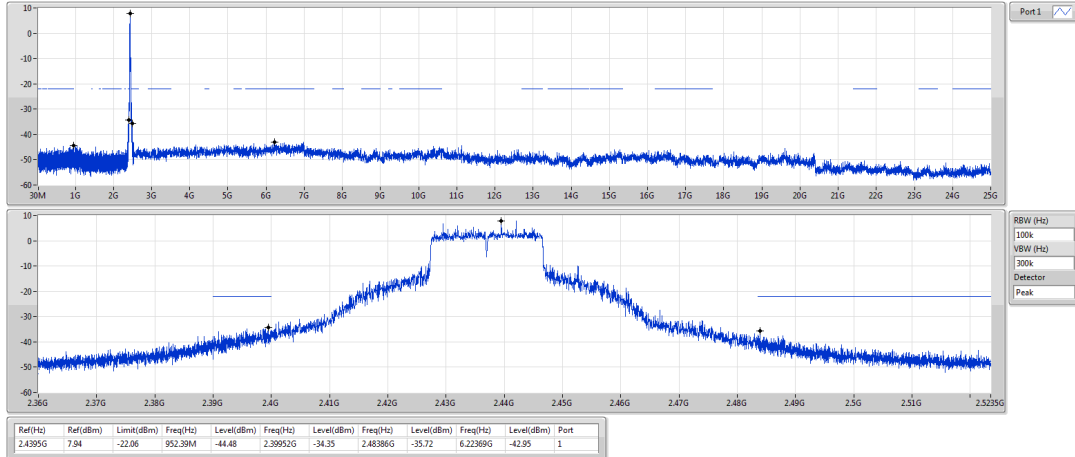


802.11ax HEW20_Nss1,(MCS0)_1TX
2462MHz

CSE NdB

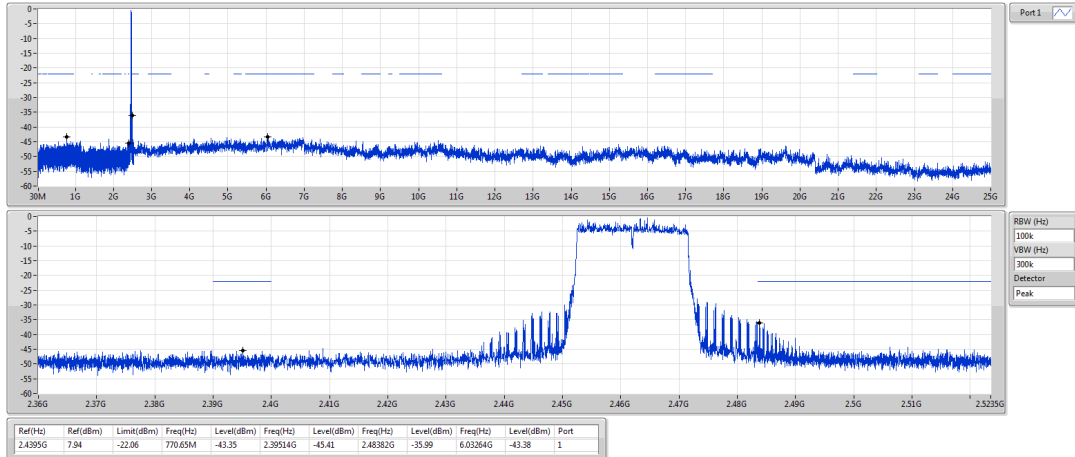


802.11ax HEW40_Nss1,(MCS0)_1TX
2422MHz

CSE NdB

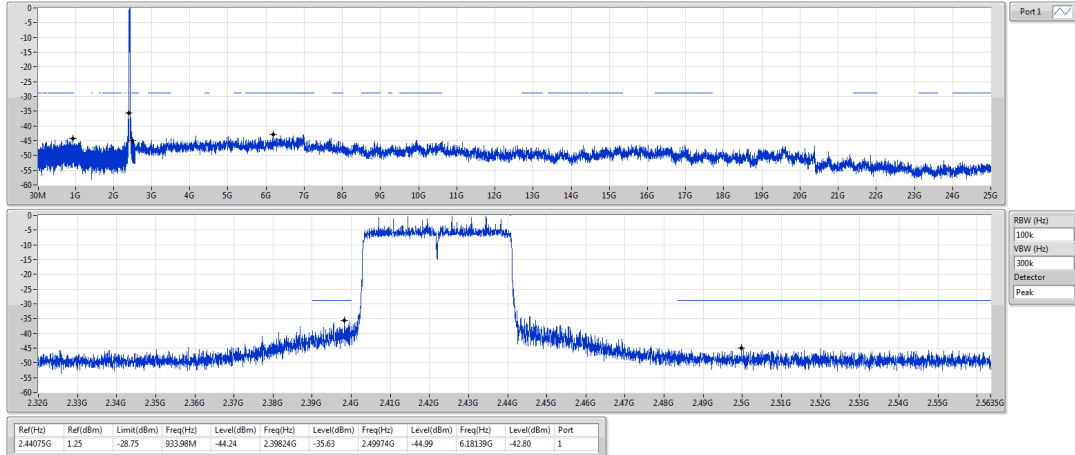


802.11ax HEW40_Nss1,(MCS0)_1TX
2437MHz

CSE NdB

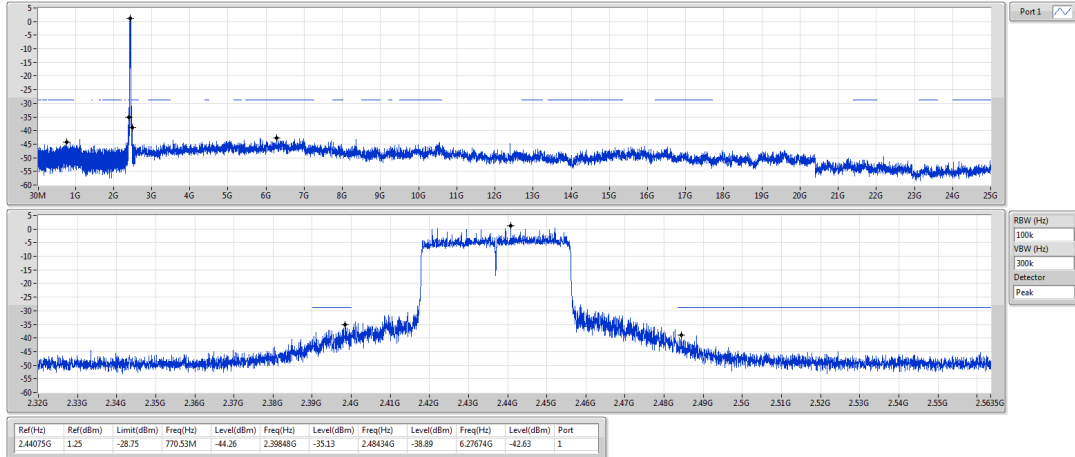

802.11ax HEW40_Nss1,(MCS0)_1TX
2452MHz

CSE NdB

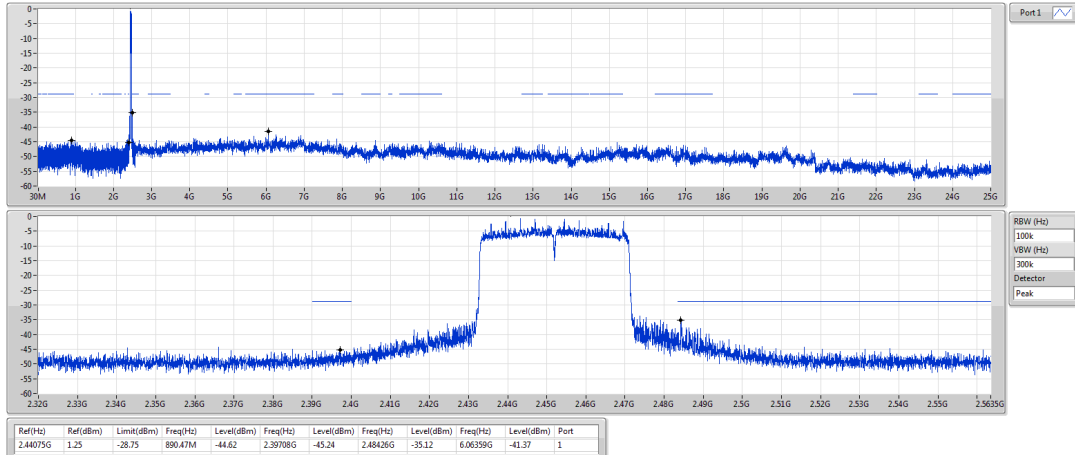



CSE Non-restricted Band Result

Appendix E.3

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss2,(MCS0)_2TX	Pass	2.44446G	9.11	-20.89	716.77M	-44.11	2.39992G	-34.07	2.48424G	-37.99	16.5966G	-35.85	1
802.11ax HEW40_Nss2,(MCS0)_2TX	Pass	2.43202G	2.51	-27.49	2.05436G	-44.07	2.3976G	-31.17	2.48654G	-42.78	24.28764G	-35.79	2


Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11ax HEW20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44446G	9.11	-20.89	769.19M	-44.13	2.39996G	-34.92	2.4848G	-42.98	24.30042G	-36.26	1
2412MHz	Pass	2.44446G	9.11	-20.89	2.04225G	-43.59	2.39954G	-35.41	2.48996G	-42.79	24.76962G	-35.28	2
2437MHz	Pass	2.44446G	9.11	-20.89	716.77M	-44.11	2.39992G	-34.07	2.48424G	-37.99	16.5966G	-35.85	1
2437MHz	Pass	2.44446G	9.11	-20.89	877.54M	-43.24	2.39946G	-34.17	2.48758G	-38.49	16.91689G	-35.63	2
2462MHz	Pass	2.44446G	9.11	-20.89	1.81798G	-43.41	2.39588G	-44.47	2.48492G	-38.25	17.5378G	-36.32	1
2462MHz	Pass	2.44446G	9.11	-20.89	2.30932G	-44.03	2.39126G	-44.00	2.48398G	-40.19	16.48984G	-35.84	2
802.11ax HEW40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43202G	2.51	-27.49	2.30025G	-44.08	2.39768G	-37.29	2.49038G	-43.16	16.90884G	-35.92	1
2422MHz	Pass	2.43202G	2.51	-27.49	2.05436G	-44.07	2.3976G	-31.17	2.48654G	-42.78	24.28764G	-35.79	2
2437MHz	Pass	2.43202G	2.51	-27.49	639.43M	-44.01	2.39856G	-37.46	2.48382G	-40.30	16.42365G	-35.56	1
2437MHz	Pass	2.43202G	2.51	-27.49	871.86M	-44.06	2.39852G	-33.60	2.4839G	-38.65	16.96493G	-36.05	2
2452MHz	Pass	2.43202G	2.51	-27.49	726.45M	-43.51	2.39936G	-44.00	2.48662G	-37.36	16.99578G	-36.08	1
2452MHz	Pass	2.43202G	2.51	-27.49	748.2M	-44.34	2.39572G	-43.39	2.48758G	-33.61	24.90184G	-35.64	2

802.11ax HEW20_Nss2,(MCS0)_2TX

CSE NdB


2412MHz

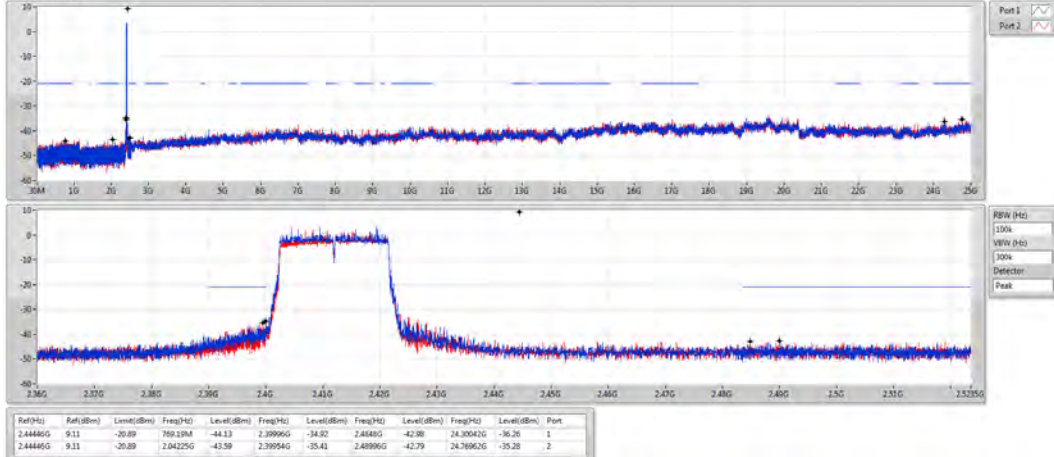

802.11ax HEW20_Nss2,(MCS0)_2TX

CSE NdB


2437MHz

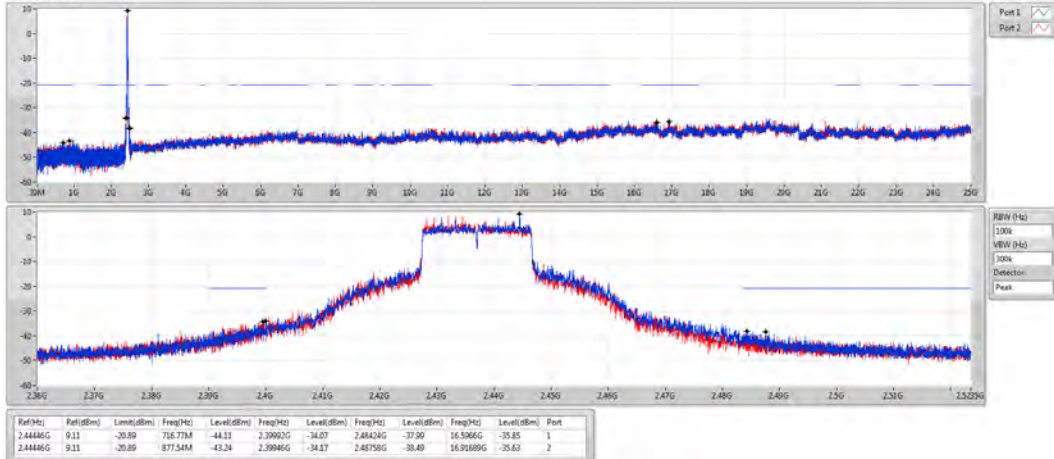

802.11ax HEW20_Nss2,(MCS0)_2TX

CSE NdB


2462MHz

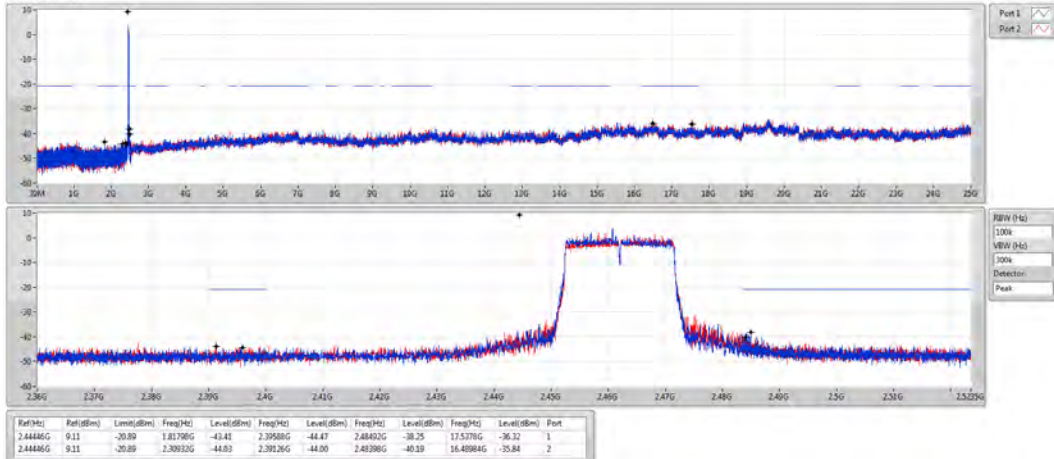

802.11ax HEW40_Nss2,(MCS0)_2TX
2422MHz

CSE NdB


06.12.2018

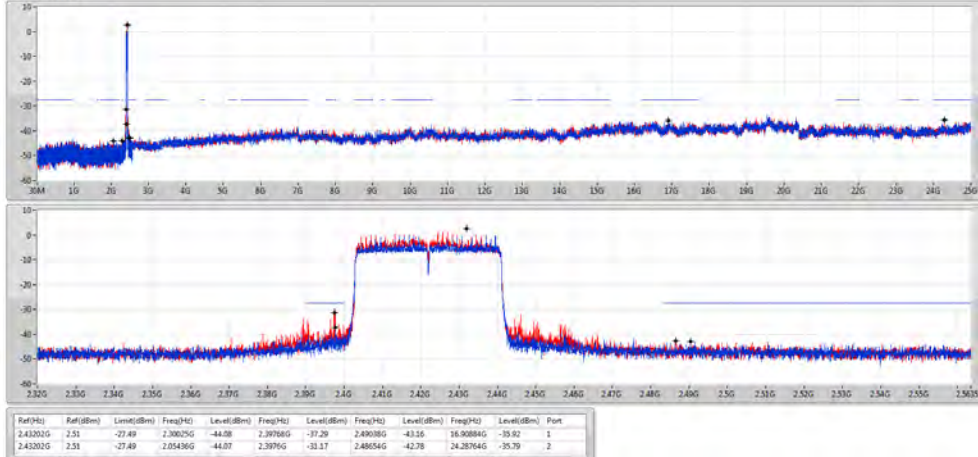

802.11ax HEW40_Nss2,(MCS0)_2TX
2437MHz

CSE NdB


06.12.2018

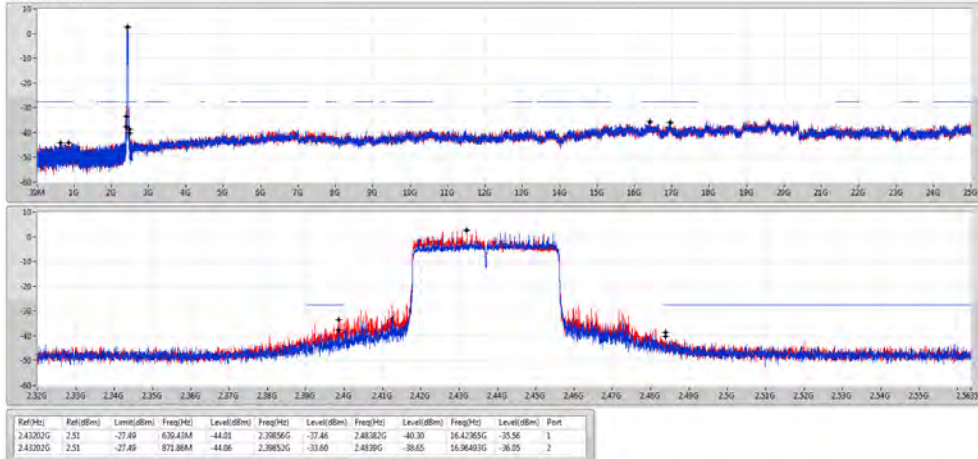

802.11ax HEW40_Nss2,(MCS0)_2TX
2452MHz

CSE NdB

06.12.2018

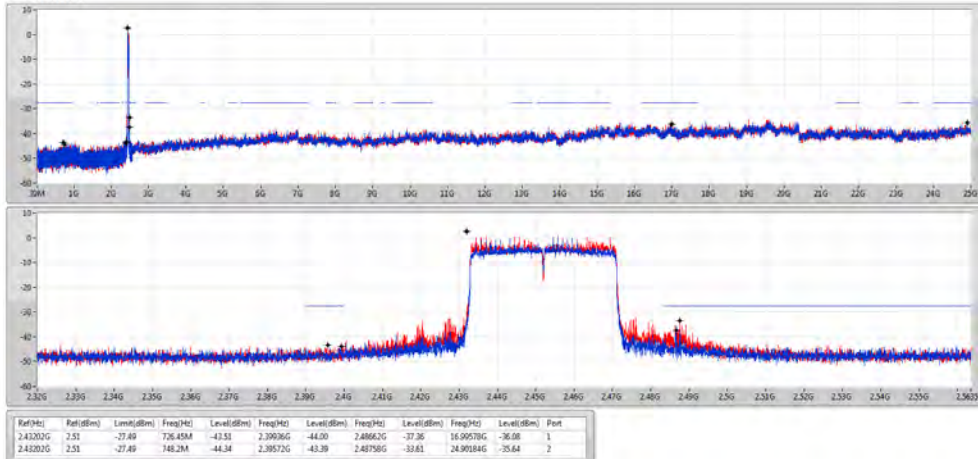

**Summary**


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	2.43745G	14.18	-15.82	870.55M	-43.16	2.39998G	-29.09	2.495G	-42.16	16.60222G	-34.74	3
802.11g_Nss1,(6Mbps)_4TX	Pass	2.43073G	7.82	-22.18	647.16M	-44.46	2.39886G	-33.04	2.49158G	-41.83	16.58255G	-35.41	3

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43745G	14.18	-15.82	1.88468G	-44.23	2.39994G	-30.66	2.49276G	-43.12	24.90167G	-35.18	1
2412MHz	Pass	2.43745G	14.18	-15.82	860.06M	-43.41	2.39998G	-33.03	2.48406G	-42.58	24.71062G	-35.38	2
2412MHz	Pass	2.43745G	14.18	-15.82	870.55M	-43.16	2.39998G	-29.09	2.495G	-42.16	16.60222G	-34.74	3
2412MHz	Pass	2.43745G	14.18	-15.82	847.25M	-44.31	2.39996G	-29.78	2.49224G	-42.74	16.31002G	-35.26	4
2437MHz	Pass	2.43745G	14.18	-15.82	785.21M	-43.35	2.39088G	-42.71	2.49338G	-42.54	16.9787G	-35.96	1
2437MHz	Pass	2.43745G	14.18	-15.82	824.24M	-44.09	2.39904G	-43.27	2.49332G	-41.66	24.92695G	-35.66	2
2437MHz	Pass	2.43745G	14.18	-15.82	1.97497G	-42.58	2.39696G	-41.28	2.4847G	-41.00	24.90167G	-34.78	3
2437MHz	Pass	2.43745G	14.18	-15.82	928.51M	-43.48	2.39426G	-42.41	2.48402G	-42.09	16.27912G	-36.23	4
2462MHz	Pass	2.43745G	14.18	-15.82	1.76993G	-43.72	2.39426G	-43.92	2.49112G	-41.87	15.26487G	-35.84	1
2462MHz	Pass	2.43745G	14.18	-15.82	1.98778G	-44.01	2.39212G	-43.70	2.49092G	-42.18	16.41398G	-34.69	2
2462MHz	Pass	2.43745G	14.18	-15.82	2.1171G	-43.53	2.3916G	-44.06	2.48476G	-42.35	24.84828G	-35.59	3
2462MHz	Pass	2.43745G	14.18	-15.82	892.39M	-42.89	2.39586G	-44.01	2.48856G	-41.89	24.86795G	-35.97	4
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43073G	7.82	-22.18	2.30437G	-44.33	2.39962G	-34.20	2.48558G	-42.79	15.21991G	-35.43	1
2412MHz	Pass	2.43073G	7.82	-22.18	1.95487G	-43.93	2.39884G	-35.45	2.50468G	-42.39	24.96909G	-35.85	2
2412MHz	Pass	2.43073G	7.82	-22.18	647.16M	-44.46	2.39886G	-33.04	2.49158G	-41.83	16.58255G	-35.41	3
2412MHz	Pass	2.43073G	7.82	-22.18	758.13M	-44.58	2.3982G	-35.86	2.50972G	-41.04	24.94943G	-34.41	4
2437MHz	Pass	2.43073G	7.82	-22.18	642.79M	-44.06	2.39308G	-39.78	2.4953G	-41.87	16.31845G	-35.85	1
2437MHz	Pass	2.43073G	7.82	-22.18	934.91M	-44.00	2.39366G	-40.95	2.49314G	-41.59	16.42802G	-35.91	2
2437MHz	Pass	2.43073G	7.82	-22.18	784.92M	-44.23	2.39856G	-37.83	2.48628G	-41.74	24.86233G	-35.61	3
2437MHz	Pass	2.43073G	7.82	-22.18	915.4M	-43.46	2.39368G	-38.66	2.48778G	-42.59	24.94943G	-35.24	4
2462MHz	Pass	2.43073G	7.82	-22.18	698.13M	-44.29	2.39114G	-43.08	2.484G	-39.44	16.39431G	-35.42	1
2462MHz	Pass	2.43073G	7.82	-22.18	940.74M	-43.56	2.39446G	-43.35	2.48352G	-40.61	24.83705G	-35.46	2
2462MHz	Pass	2.43073G	7.82	-22.18	885.11M	-43.63	2.39928G	-43.87	2.48388G	-40.62	24.92976G	-35.44	3
2462MHz	Pass	2.43073G	7.82	-22.18	1.97235G	-43.94	2.3923G	-43.47	2.48382G	-39.99	16.98713G	-35.33	4


802.11b_Nss1,(1Mbps)_4TX
2412MHz

CSE NdB

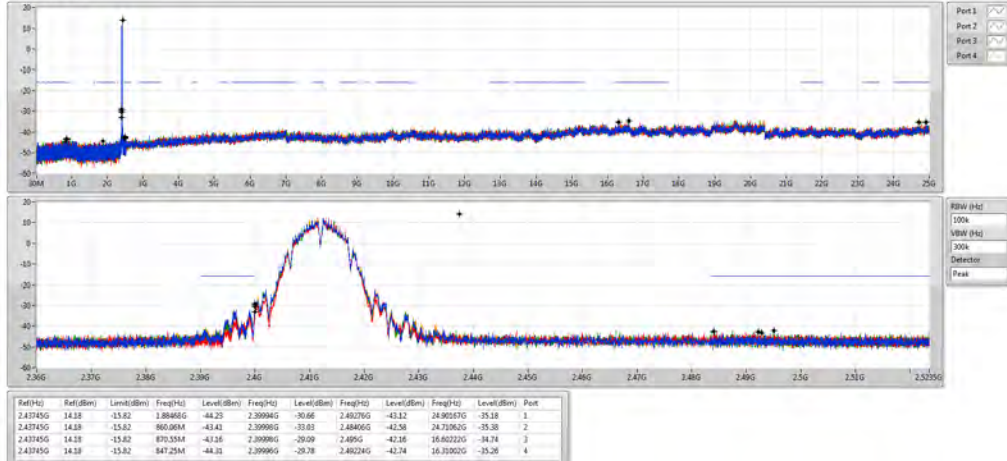


802.11b_Nss1,(1Mbps)_4TX
2437MHz

CSE NdB

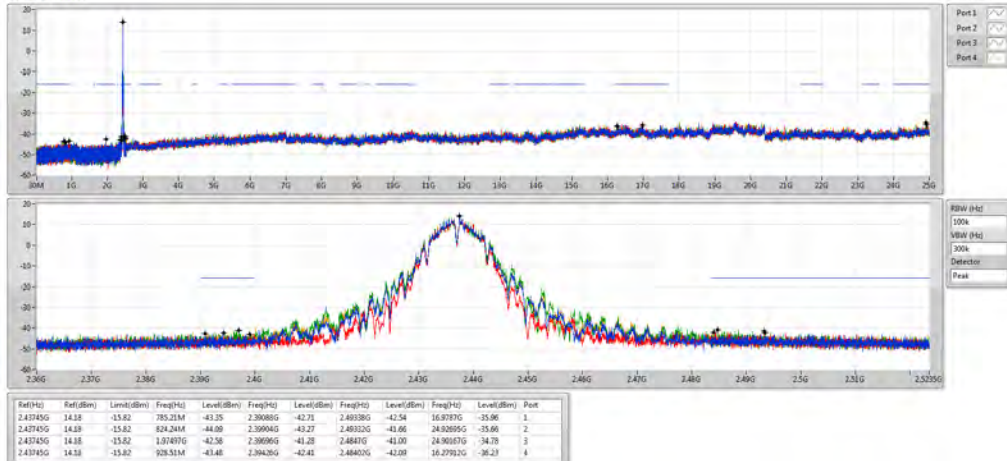


802.11b_Nss1,(1Mbps)_4TX
2462MHz

CSE NdB

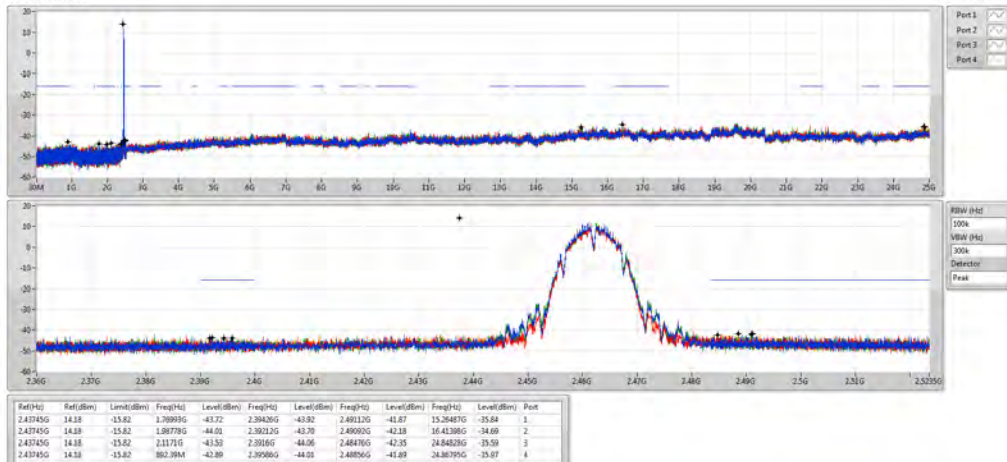


802.11g_Nss1,(6Mbps)_4TX
2412MHz

CSE NdB

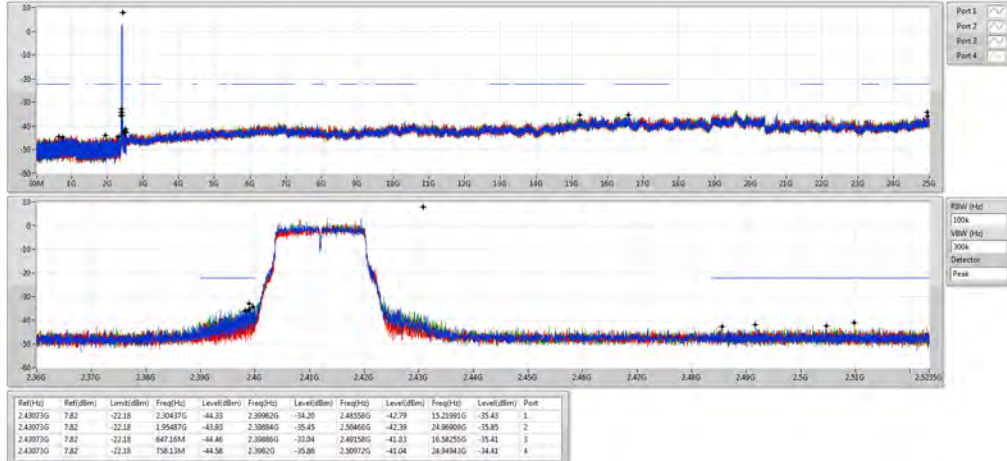


802.11g_Nss1,(6Mbps)_4TX
2437MHz

CSE NdB

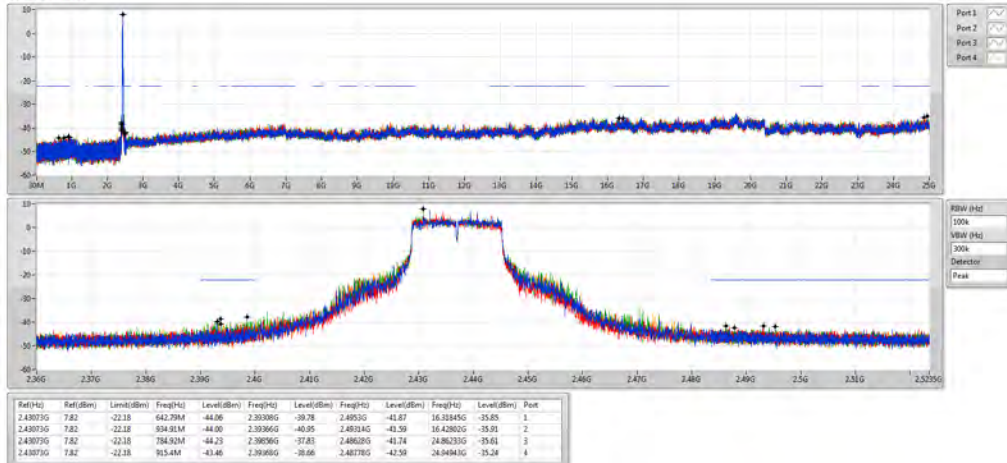

802.11g_Nss1,(6Mbps)_4TX
2462MHz

CSE NdB

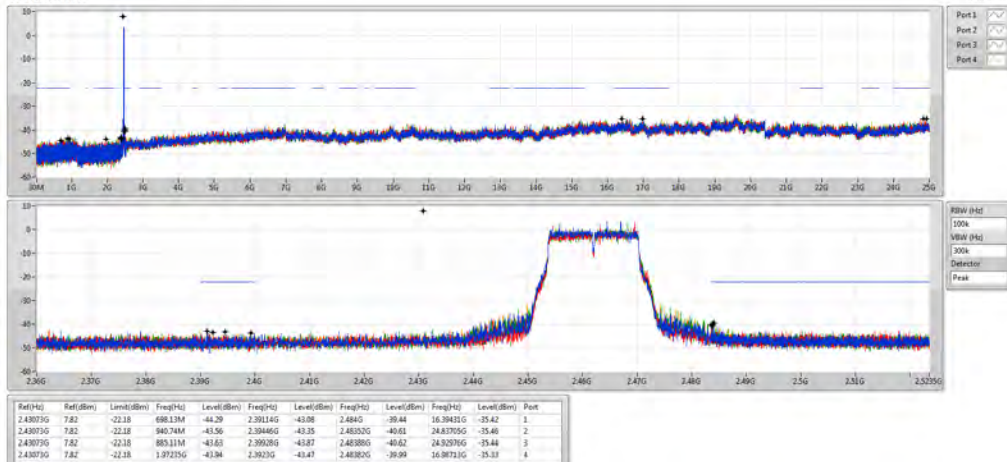

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_4TX	Pass	2.442G	6.10	-23.90	619.78M	-44.20	2.39946G	-32.22	2.48784G	-42.97	16.43645G	-35.49	1
802.11ax HEW40_Nss1,(MCS0)_4TX	Pass	2.42572G	1.09	-28.91	855.55M	-44.32	2.39284G	-43.31	2.49022G	-42.20	24.92428G	-34.49	4

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11ax HEW20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.442G	6.10	-23.90	619.78M	-44.20	2.39946G	-32.22	2.48784G	-42.97	16.43645G	-35.49	1
2412MHz	Pass	2.442G	6.10	-23.90	893.85M	-44.01	2.39992G	-33.50	2.502G	-42.91	24.69657G	-36.11	2
2412MHz	Pass	2.442G	6.10	-23.90	2.15117G	-42.20	2.39946G	-32.92	2.5174G	-42.65	16.38588G	-35.73	3
2412MHz	Pass	2.442G	6.10	-23.90	782.3M	-44.13	2.3985G	-32.25	2.48498G	-43.45	16.5966G	-35.94	4
2437MHz	Pass	2.442G	6.10	-23.90	1.93565G	-44.28	2.39826G	-43.03	2.48594G	-42.49	16.90846G	-35.09	1
2437MHz	Pass	2.442G	6.10	-23.90	2.07516G	-43.38	2.39006G	-42.38	2.48478G	-42.57	16.57131G	-34.70	2
2437MHz	Pass	2.442G	6.10	-23.90	1.93594G	-43.21	2.39694G	-41.71	2.48694G	-41.88	17.46194G	-35.41	3
2437MHz	Pass	2.442G	6.10	-23.90	2.1337G	-44.04	2.39942G	-42.09	2.4844G	-41.76	24.77524G	-35.18	4
2462MHz	Pass	2.442G	6.10	-23.90	2.16079G	-42.97	2.39744G	-43.47	2.50042G	-42.60	24.89043G	-35.71	1
2462MHz	Pass	2.442G	6.10	-23.90	661.72M	-42.52	2.39354G	-43.61	2.4863G	-42.65	16.52917G	-35.34	2
2462MHz	Pass	2.442G	6.10	-23.90	858.02M	-44.22	2.3991G	-43.86	2.48678G	-41.48	16.58817G	-35.85	3
2462MHz	Pass	2.442G	6.10	-23.90	597.06M	-44.15	2.39072G	-44.17	2.50688G	-43.15	15.22272G	-35.16	4
802.11ax HEW40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.42572G	1.09	-28.91	744.48M	-43.67	2.3922G	-43.29	2.5215G	-43.12	16.60875G	-35.88	1
2422MHz	Pass	2.42572G	1.09	-28.91	850.39M	-43.97	2.3968G	-40.03	2.55926G	-42.58	17.57352G	-35.81	2
2422MHz	Pass	2.42572G	1.09	-28.91	761.94M	-44.19	2.39548G	-41.21	2.51862G	-43.01	24.67467G	-35.23	3
2422MHz	Pass	2.42572G	1.09	-28.91	850.97M	-44.49	2.39924G	-42.36	2.5279G	-43.04	24.96074G	-35.91	4
2437MHz	Pass	2.42572G	1.09	-28.91	934.55M	-44.02	2.3992G	-41.52	2.48766G	-41.61	16.58351G	-35.53	1
2437MHz	Pass	2.42572G	1.09	-28.91	2.02087G	-42.94	2.39944G	-41.20	2.48582G	-42.59	16.43487G	-35.54	2
2437MHz	Pass	2.42572G	1.09	-28.91	903.35M	-43.14	2.39416G	-40.84	2.50418G	-42.42	16.41243G	-35.53	3
2437MHz	Pass	2.42572G	1.09	-28.91	2.10646G	-43.59	2.397G	-40.61	2.53522G	-42.41	16.32268G	-35.19	4
2452MHz	Pass	2.42572G	1.09	-28.91	729.88M	-44.52	2.39956G	-44.30	2.5533G	-42.23	16.93127G	-35.70	1
2452MHz	Pass	2.42572G	1.09	-28.91	668.91M	-43.33	2.39784G	-43.04	2.48402G	-41.53	16.60594G	-35.65	2
2452MHz	Pass	2.42572G	1.09	-28.91	897.91M	-44.37	2.39404G	-43.73	2.4971G	-41.85	16.28903G	-35.35	3
2452MHz	Pass	2.42572G	1.09	-28.91	855.55M	-44.32	2.39284G	-43.31	2.49022G	-42.20	24.92428G	-34.49	4


802.11ax HEW20_Nss1,(MCS0)_4TX
2412MHz

CSE NdB




802.11ax HEW20_Nss1,(MCS0)_4TX
2437MHz

CSE NdB

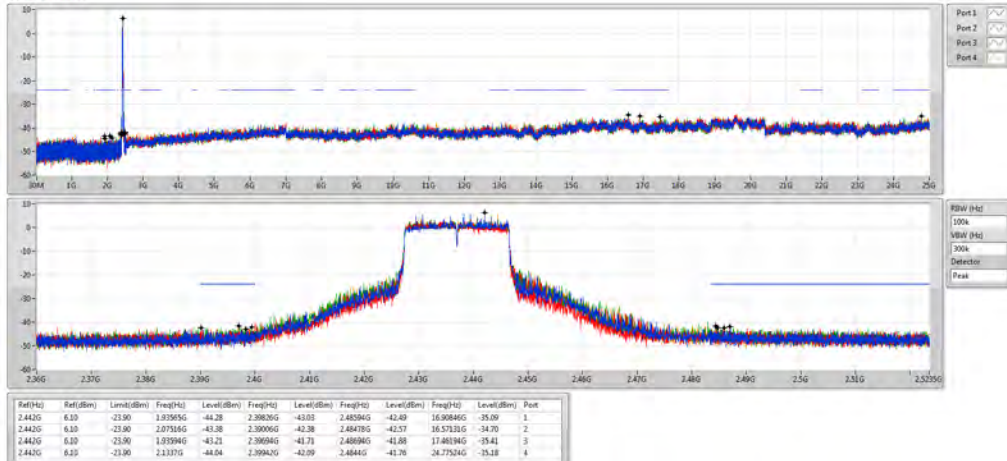

802.11ax HEW20_Nss1,(MCS0)_4TX
2462MHz

CSE NdB

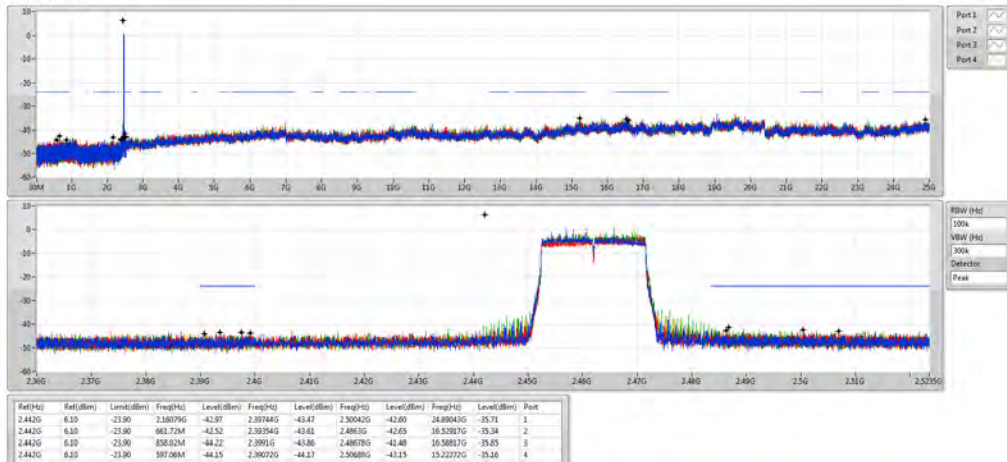

802.11ax HEW40_Nss1,(MCS0)_4TX
2422MHz

CSE NdB




802.11ax HEW40_Nss1,(MCS0)_4TX
2437MHz

CSE NdB



802.11ax HEW40_Nss1,(MCS0)_4TX
2452MHz

CSE NdB

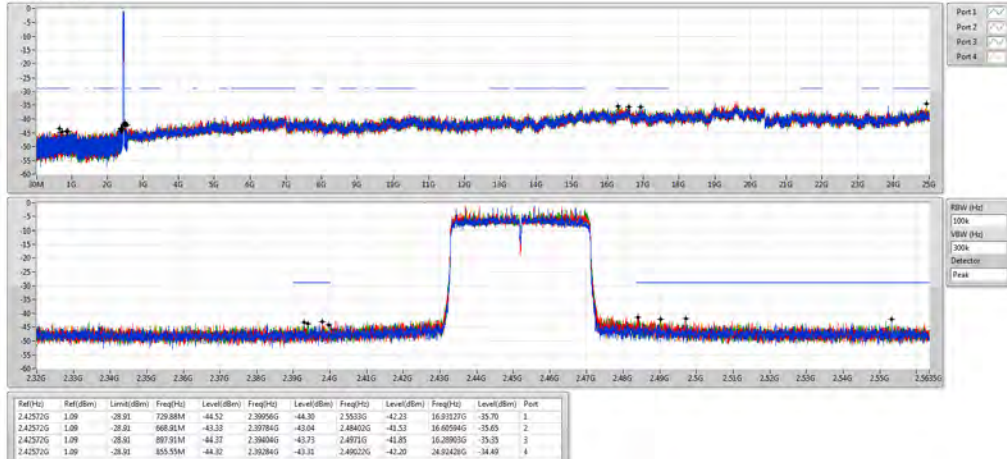

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20-BF_Nss1.(MCS0)_4TX	Pass	2.43073G	2.32	-27.68	732.79M	-43.50	2.39986G	-43.81	2.5075G	-41.24	16.39993G	-34.38	1
802.11ax HEW40-BF_Nss1.(MCS0)_4TX	Pass	2.42196G	-3.00	-33.00	2.16199G	-42.84	2.39744G	-43.52	2.48934G	-42.92	16.44048G	-34.28	4

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11ax HEW20-BF_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43073G	2.32	-27.68	732.79M	-43.50	2.39986G	-43.81	2.5075G	-41.24	16.39993G	-34.38	1
2412MHz	Pass	2.43073G	2.32	-27.68	945.4M	-43.37	2.39752G	-43.40	2.48488G	-42.00	16.94498G	-35.58	2
2412MHz	Pass	2.43073G	2.32	-27.68	2.00613G	-42.50	2.39724G	-43.77	2.50006G	-42.86	16.32407G	-34.58	3
2412MHz	Pass	2.43073G	2.32	-27.68	673.95M	-43.30	2.39804G	-42.00	2.48496G	-41.77	15.21991G	-34.67	4
2437MHz	Pass	2.43073G	2.32	-27.68	410.66M	-43.40	2.39752G	-42.80	2.5094G	-41.04	16.93656G	-34.78	1
2437MHz	Pass	2.43073G	2.32	-27.68	821.62M	-41.68	2.39944G	-43.83	2.49636G	-42.93	16.60222G	-34.79	2
2437MHz	Pass	2.43073G	2.32	-27.68	380.37M	-43.73	2.39908G	-44.10	2.49088G	-42.18	15.22272G	-35.03	3
2437MHz	Pass	2.43073G	2.32	-27.68	850.74M	-43.45	2.39114G	-43.61	2.49214G	-42.97	16.92813G	-35.10	4
2462MHz	Pass	2.43073G	2.32	-27.68	656.48M	-43.38	2.39346G	-43.99	2.52286G	-43.05	16.46174G	-35.33	1
2462MHz	Pass	2.43073G	2.32	-27.68	2.11419G	-42.65	2.39468G	-43.67	2.50354G	-41.98	16.55165G	-34.46	2
2462MHz	Pass	2.43073G	2.32	-27.68	955.01M	-43.48	2.39532G	-43.04	2.50504G	-42.85	16.50388G	-35.70	3
2462MHz	Pass	2.43073G	2.32	-27.68	1.96419G	-42.49	2.39028G	-44.34	2.49516G	-41.88	16.56569G	-35.46	4
802.11ax HEW40-BF_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.42196G	-3.00	-33.00	2.30884G	-43.36	2.39672G	-42.92	2.49994G	-42.32	16.60034G	-34.49	1
2422MHz	Pass	2.42196G	-3.00	-33.00	692.67M	-43.78	2.39768G	-43.44	2.51514G	-42.53	16.46572G	-34.41	2
2422MHz	Pass	2.42196G	-3.00	-33.00	959.17M	-42.89	2.39788G	-42.99	2.5561G	-42.64	16.49096G	-35.69	3
2422MHz	Pass	2.42196G	-3.00	-33.00	2.16199G	-42.84	2.39744G	-43.52	2.48934G	-42.92	16.44048G	-34.28	4
2437MHz	Pass	2.42196G	-3.00	-33.00	2.1202G	-43.51	2.39672G	-43.96	2.48514G	-43.28	16.26659G	-35.52	1
2437MHz	Pass	2.42196G	-3.00	-33.00	1.80904G	-43.37	2.3934G	-43.84	2.54714G	-41.46	16.27501G	-35.53	2
2437MHz	Pass	2.42196G	-3.00	-33.00	652.59M	-42.25	2.39572G	-43.58	2.53118G	-42.35	16.49657G	-35.71	3
2437MHz	Pass	2.42196G	-3.00	-33.00	691.24M	-43.33	2.39884G	-43.59	2.52494G	-43.02	16.98736G	-35.04	4
2452MHz	Pass	2.42196G	-3.00	-33.00	826.06M	-43.61	2.39104G	-44.48	2.55962G	-42.94	24.91586G	-34.94	1
2452MHz	Pass	2.42196G	-3.00	-33.00	599.35M	-43.96	2.39704G	-44.05	2.56198G	-43.11	24.47555G	-34.82	2
2452MHz	Pass	2.42196G	-3.00	-33.00	2.11505G	-43.62	2.39444G	-43.64	2.52334G	-42.02	16.30866G	-35.19	3
2452MHz	Pass	2.42196G	-3.00	-33.00	2.13337G	-42.69	2.39208G	-44.61	2.50258G	-42.67	16.52181G	-35.21	4

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

2412MHz

CSE NdB

07/12/2018

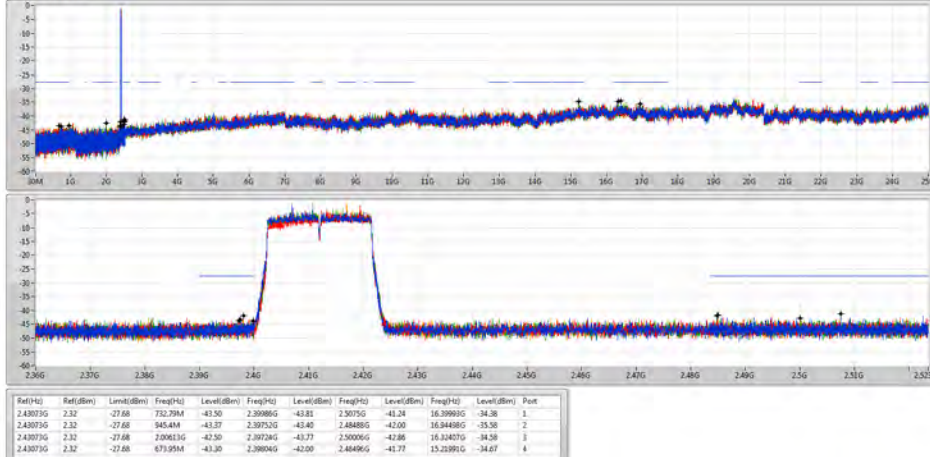

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

2437MHz

CSE NdB

07/12/2018






802.11ax HEW20-BF_Nss1,(MCS0)_4TX

2462MHz

CSE NdB

07/12/2018



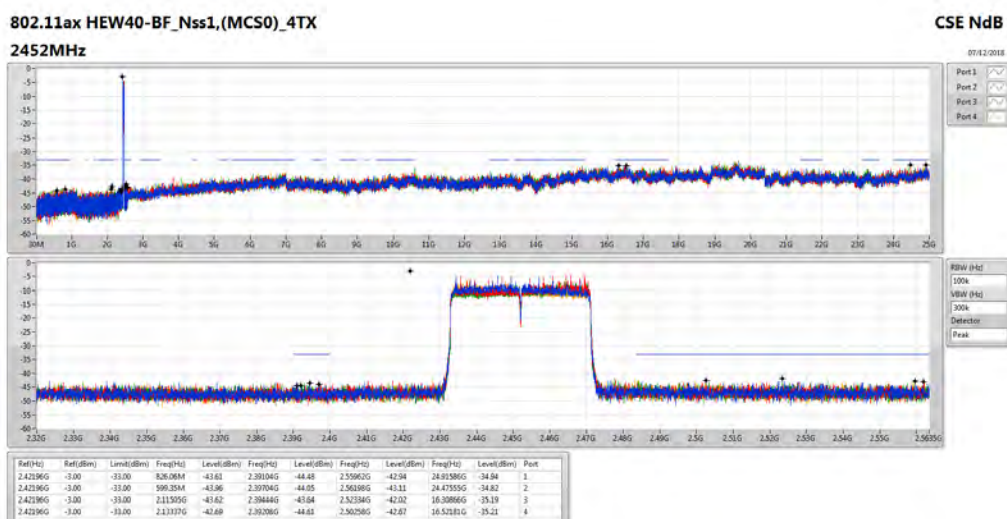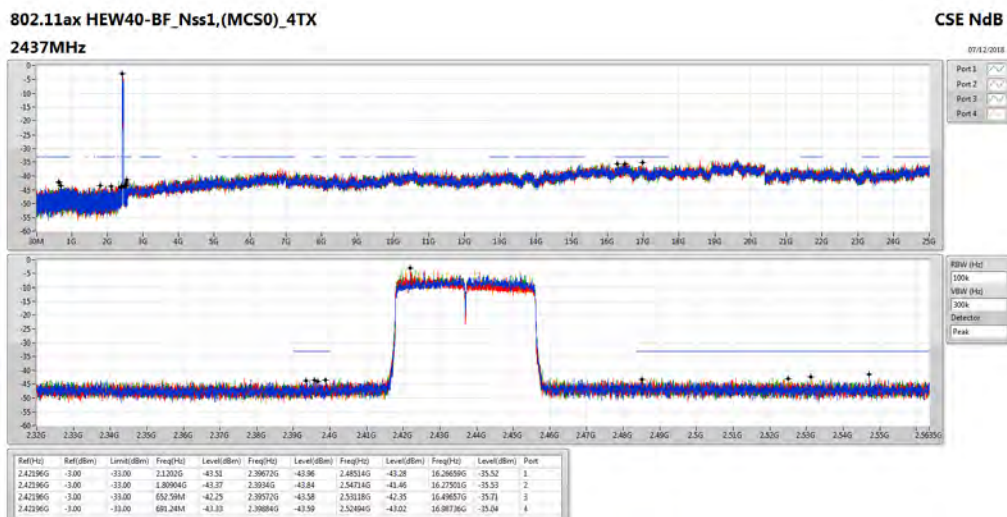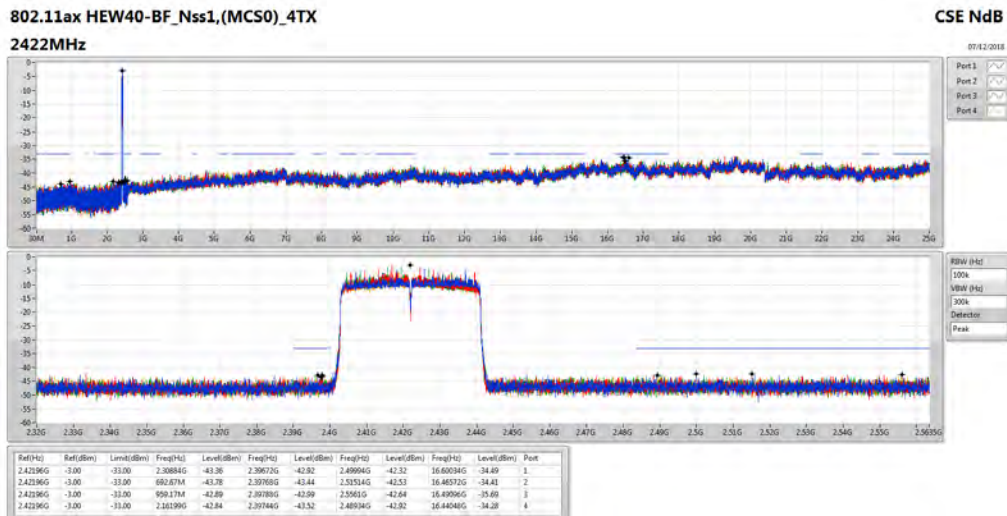

**Summary**


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss4,(MCS0)_4TX	Pass	2.43073G	8.13	-21.87	1.84303G	-43.15	2.39932G	-35.65	2.48574G	-39.54	16.45612G	-34.51	4
802.11ax HEW40_Nss4,(MCS0)_4TX	Pass	2.42196G	0.35	-29.65	1.92612G	-42.77	2.397G	-41.74	2.48394G	-42.88	16.54985G	-34.98	3

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11ax HEW20_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43073G	8.13	-21.87	932M	-43.20	2.39576G	-37.62	2.49818G	-42.97	16.29878G	-35.64	1
2412MHz	Pass	2.43073G	8.13	-21.87	939.57M	-43.68	2.39852G	-39.51	2.48912G	-41.80	16.49826G	-36.02	2
2412MHz	Pass	2.43073G	8.13	-21.87	2.17273G	-43.56	2.39974G	-38.06	2.49522G	-42.94	24.83143G	-35.42	3
2412MHz	Pass	2.43073G	8.13	-21.87	729M	-43.28	2.39688G	-36.52	2.5143G	-43.10	24.67128G	-35.76	4
2437MHz	Pass	2.43073G	8.13	-21.87	690.26M	-42.54	2.39998G	-38.32	2.49512G	-40.89	24.95224G	-35.60	1
2437MHz	Pass	2.43073G	8.13	-21.87	558.91M	-43.80	2.39918G	-40.01	2.48552G	-41.63	15.23677G	-35.37	2
2437MHz	Pass	2.43073G	8.13	-21.87	821.04M	-42.23	2.39616G	-37.34	2.48722G	-40.84	16.31002G	-35.37	3
2437MHz	Pass	2.43073G	8.13	-21.87	1.84303G	-43.15	2.39932G	-35.65	2.48574G	-39.54	16.45612G	-34.51	4
2462MHz	Pass	2.43073G	8.13	-21.87	576.09M	-43.63	2.39124G	-43.75	2.50264G	-42.84	24.79209G	-35.16	1
2462MHz	Pass	2.43073G	8.13	-21.87	2.10603G	-44.06	2.39418G	-43.86	2.4937G	-42.13	16.28193G	-35.55	2
2462MHz	Pass	2.43073G	8.13	-21.87	773.56M	-44.05	2.39638G	-44.02	2.48352G	-40.65	16.53198G	-35.24	3
2462MHz	Pass	2.43073G	8.13	-21.87	1.92604G	-44.08	2.39632G	-43.88	2.484G	-40.12	16.47017G	-35.90	4
802.11ax HEW40_Nss4,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.42196G	0.35	-29.65	779.12M	-44.07	2.39128G	-43.18	2.55278G	-43.66	16.56107G	-35.80	1
2422MHz	Pass	2.42196G	0.35	-29.65	592.48M	-43.71	2.39428G	-43.60	2.53354G	-43.02	16.3956G	-35.90	2
2422MHz	Pass	2.42196G	0.35	-29.65	1.92612G	-42.77	2.397G	-41.74	2.48394G	-42.88	16.54985G	-34.98	3
2422MHz	Pass	2.42196G	0.35	-29.65	842.95M	-43.91	2.39796G	-42.80	2.53782G	-42.72	16.37877G	-36.16	4
2437MHz	Pass	2.42196G	0.35	-29.65	809.75M	-42.93	2.39952G	-40.73	2.53722G	-43.13	16.94249G	-35.97	1
2437MHz	Pass	2.42196G	0.35	-29.65	827.78M	-44.13	2.39948G	-39.06	2.48702G	-42.58	24.86538G	-35.36	2
2437MHz	Pass	2.42196G	0.35	-29.65	361.19M	-43.25	2.39952G	-43.36	2.55878G	-43.08	16.96493G	-35.87	3
2437MHz	Pass	2.42196G	0.35	-29.65	2.03003G	-43.76	2.39948G	-42.38	2.4879G	-42.56	16.98456G	-35.93	4
2452MHz	Pass	2.42196G	0.35	-29.65	837.23M	-44.04	2.39432G	-44.57	2.53854G	-43.15	16.49376G	-36.03	1
2452MHz	Pass	2.42196G	0.35	-29.65	822.63M	-43.34	2.39368G	-43.82	2.51302G	-43.13	24.99439G	-35.70	2
2452MHz	Pass	2.42196G	0.35	-29.65	656.6M	-43.32	2.39412G	-44.75	2.50522G	-42.94	16.52461G	-36.01	3
2452MHz	Pass	2.42196G	0.35	-29.65	804.59M	-44.11	2.3958G	-44.15	2.48538G	-43.39	17.00139G	-35.78	4


802.11ax HEW20_Nss4,(MCS0)_4TX
2412MHz

CSE NdB

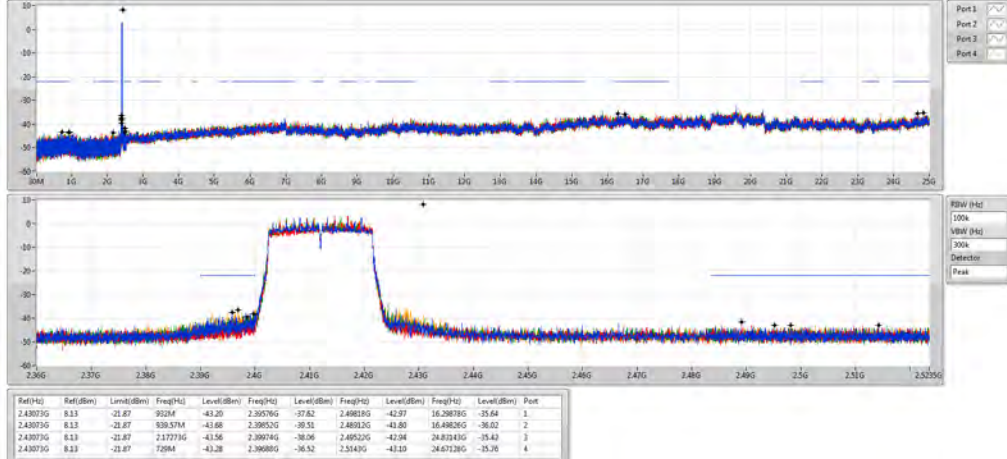


802.11ax HEW20_Nss4,(MCS0)_4TX
2437MHz

CSE NdB

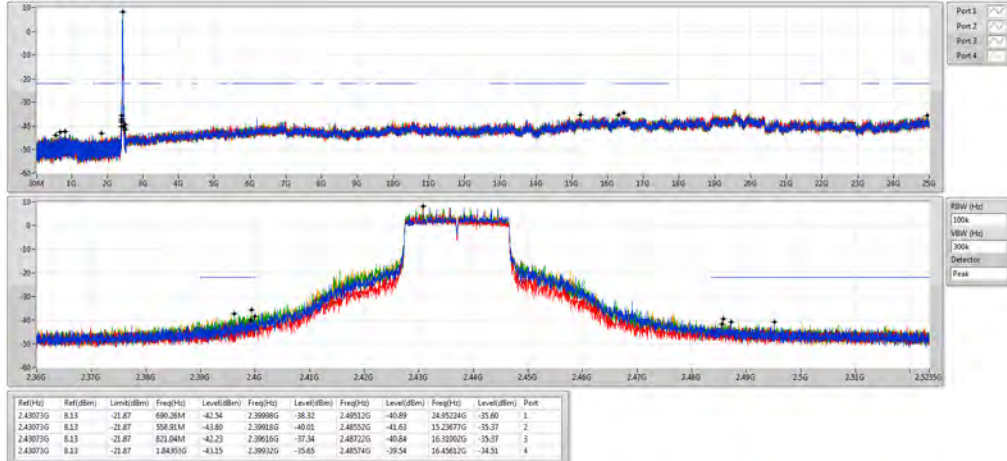


802.11ax HEW20_Nss4,(MCS0)_4TX
2462MHz

CSE NdB

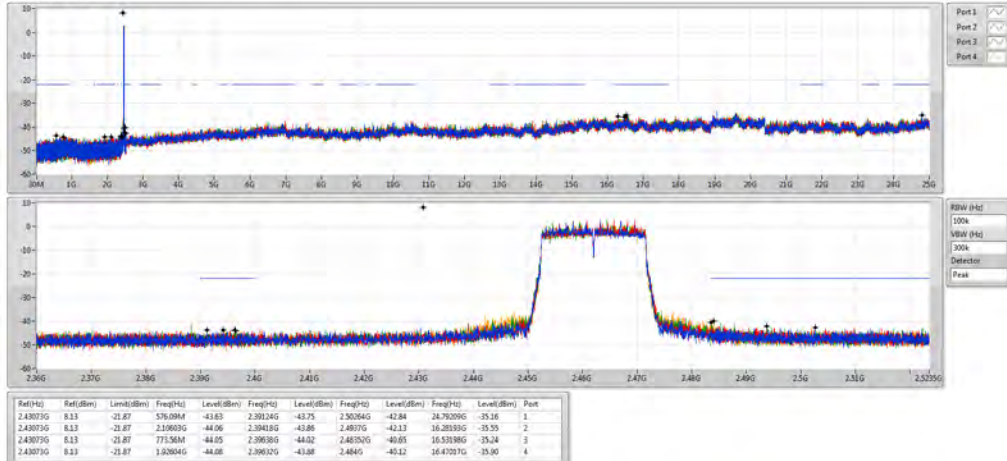

802.11ax HEW40_Nss4,(MCS0)_4TX
2422MHz

CSE NdB

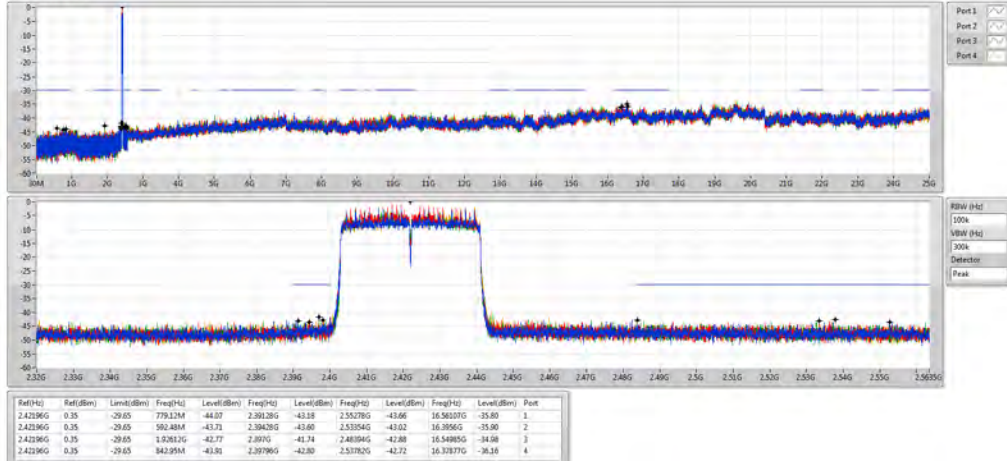


802.11ax HEW40_Nss4,(MCS0)_4TX
2437MHz

CSE NdB



802.11ax HEW40_Nss4,(MCS0)_4TX
2452MHz

CSE NdB

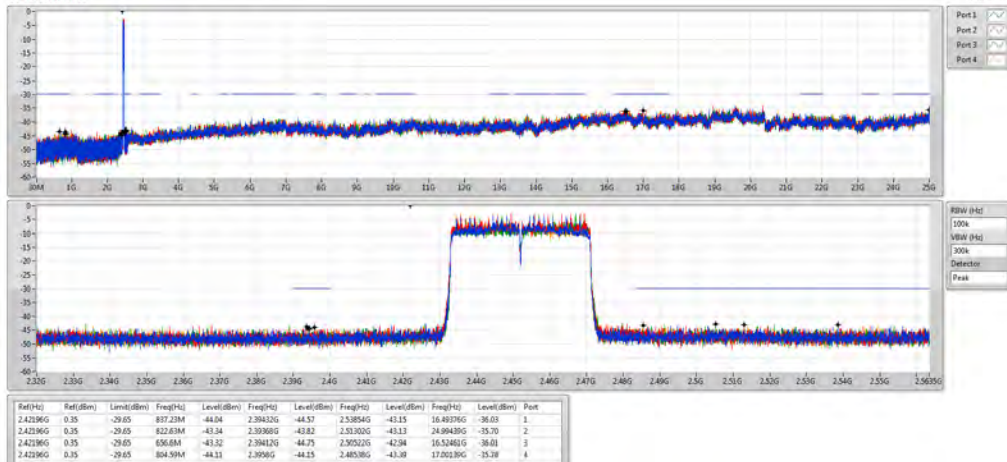




Radiated Emission below 1GHz Result

Appendix F.1


Test Mode	Mode 6	Frequency Range	30 MHz to 1,000 MHz
-----------	--------	-----------------	---------------------

Vertical 30 MHz to 1,000 MHz

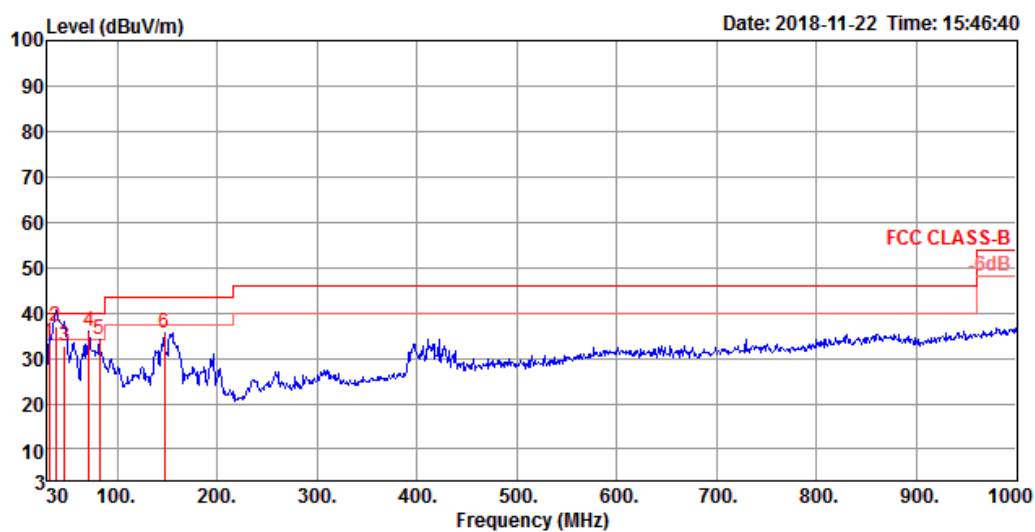

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	31.94	33.45	40.00	-6.55	42.29	0.67	23.09	32.60	100	53 QP	VERTICAL
2	38.73	36.93	40.00	-3.07	49.50	0.88	19.15	32.60	100	2 QP	VERTICAL
3	47.46	32.60	40.00	-7.40	49.20	0.98	15.01	32.59	112	21 QP	VERTICAL
4	71.71	35.89	40.00	-4.11	55.23	1.18	12.05	32.57	200	71 Peak	VERTICAL
5	82.38	34.00	40.00	-6.00	52.20	1.30	13.06	32.56	125	144 Peak	VERTICAL
6	147.37	35.60	43.50	-7.90	49.68	1.89	16.54	32.51	125	218 Peak	VERTICAL

Horizontal 30 MHz to 1,000 MHz

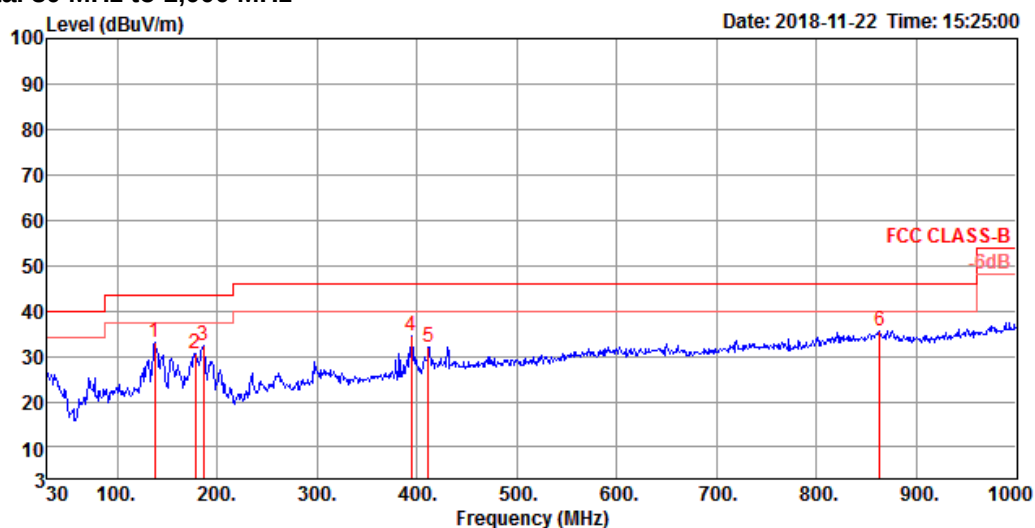

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	137.67	33.10	43.50	-10.40	46.51	1.87	17.24	32.52	300	272	Peak HORIZONTAL
2	178.41	30.71	43.50	-12.79	46.07	2.04	15.09	32.49	200	210	Peak HORIZONTAL
3	186.17	32.24	43.50	-11.26	47.76	2.11	14.86	32.49	200	193	Peak HORIZONTAL
4	394.72	34.53	46.00	-11.47	42.23	3.51	21.23	32.44	125	287	Peak HORIZONTAL
5	411.21	32.09	46.00	-13.91	38.97	3.59	21.97	32.44	125	271	Peak HORIZONTAL
6	863.23	35.74	46.00	-10.26	35.73	5.95	26.07	32.01	100	34	Peak HORIZONTAL


**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	AV	7.3866G	53.80	54.00	-0.20	10.76	3	Vertical	324	1.18	-

802.11b_Nss1,(1Mbps)_4TX

04/12/2018

2412MHz_TX

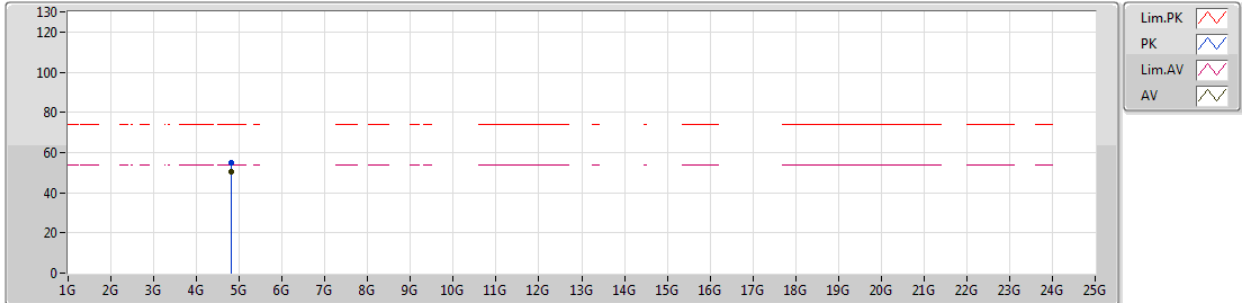


EUT_Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.82392G	55.04	74.00	-18.96	7.30	3	Vertical	34	2.37	-						
AV	4.82396G	50.21	54.00	-3.79	7.30	3	Vertical	34	2.37	-						

802.11b_Nss1,(1Mbps)_4TX

04/12/2018

2412MHz_TX

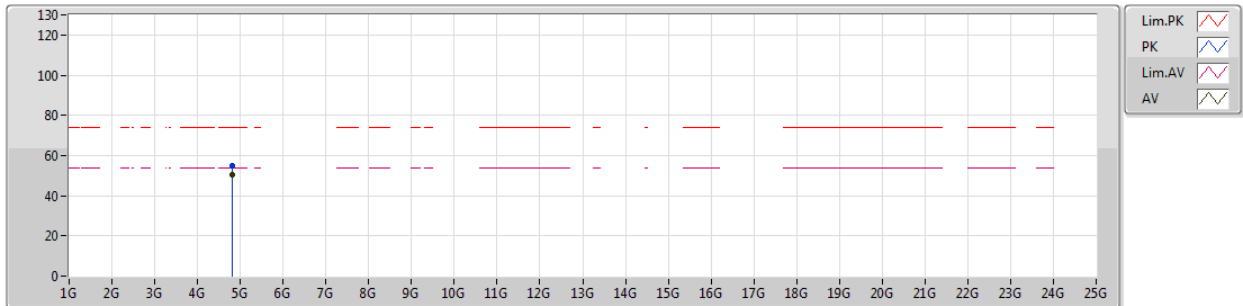


EUT_Z_4TX
Setting 110
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	4.82384G	54.78	74.00	-19.22	7.30	3	Horizontal	284	2.81	-
AV	4.8239G	50.54	54.00	-3.46	7.30	3	Horizontal	284	2.81	-

802.11b_Nss1,(1Mbps)_4TX

04/12/2018

2437MHz_TX

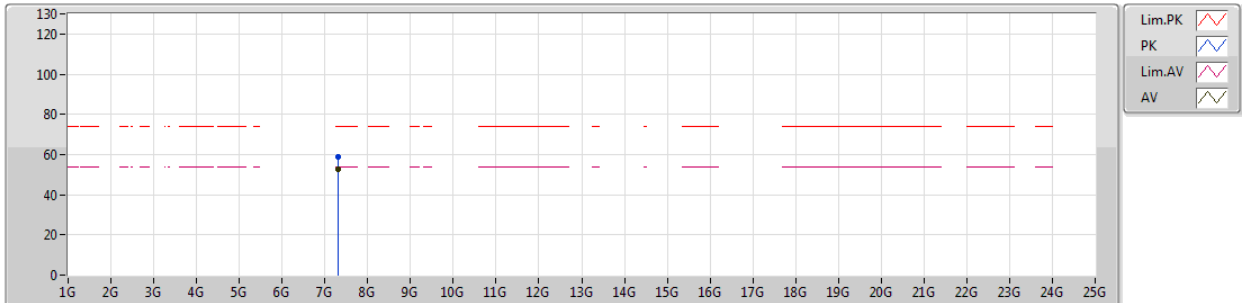


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.31136G	58.61	74.00	-15.39	10.54	3	Vertical	335	2.31	-						
AV	7.31022G	52.50	54.00	-1.50	10.54	3	Vertical	335	2.31	-						

802.11b_Nss1,(1Mbps)_4TX

04/12/2018

2437MHz_TX

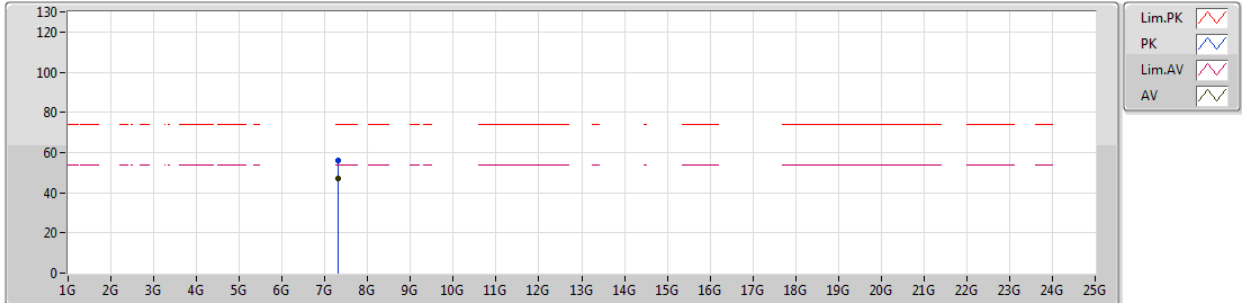


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.31184G	55.88	74.00	-18.12	10.55	3	Horizontal	92	1.21	-						
AV	7.31166G	47.28	54.00	-6.72	10.55	3	Horizontal	92	1.21	-						

802.11b_Nss1,(1Mbps)_4TX

04/12/2018

2462MHz_TX

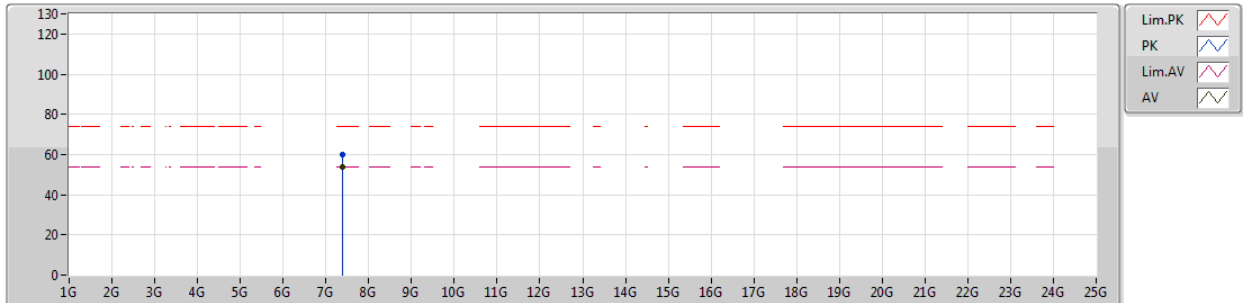


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.38684G	59.87	74.00	-14.13	10.76	3	Vertical	324	1.18	-						
AV	7.3866G	53.80	54.00	-0.20	10.76	3	Vertical	324	1.18	-						

802.11b_Nss1,(1Mbps)_4TX

04/12/2018

2462MHz_TX

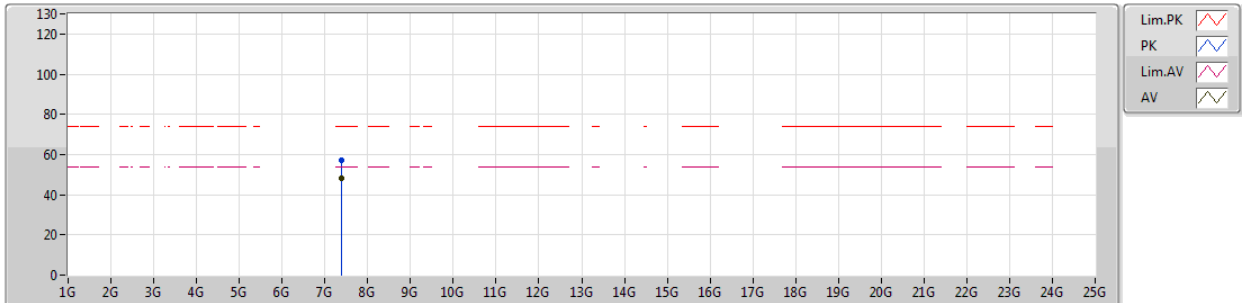


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.38804G	57.19	74.00	-16.81	10.77	3	Horizontal	181	2.37	-						
AV	7.38666G	48.00	54.00	-6.00	10.76	3	Horizontal	181	2.37	-						

802.11g_Nss1,(6Mbps)_4TX

04/12/2018

2412MHz_TX

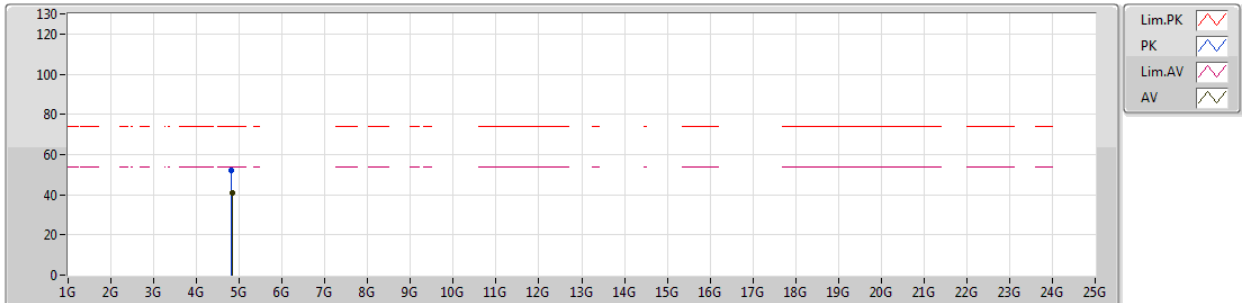


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.82472G	51.84	74.00	-22.16	7.30	3	Vertical	187	1.60	-						
AV	4.82658G	40.70	54.00	-13.30	7.32	3	Vertical	187	1.60	-						

802.11g_Nss1,(6Mbps)_4TX

04/12/2018

2412MHz_TX

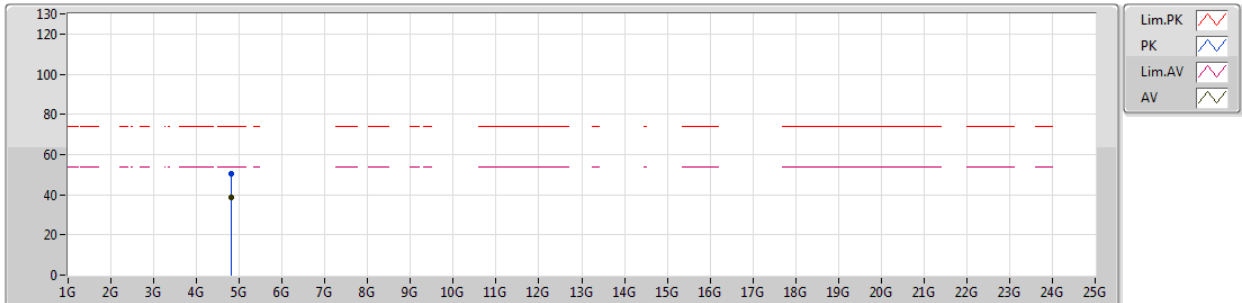


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.82328G	50.37	74.00	-23.63	7.30	3	Horizontal	297	2.03	-						
AV	4.82292G	38.73	54.00	-15.27	7.30	3	Horizontal	297	2.03	-						

802.11g_Nss1,(6Mbps)_4TX

04/12/2018

2437MHz_TX

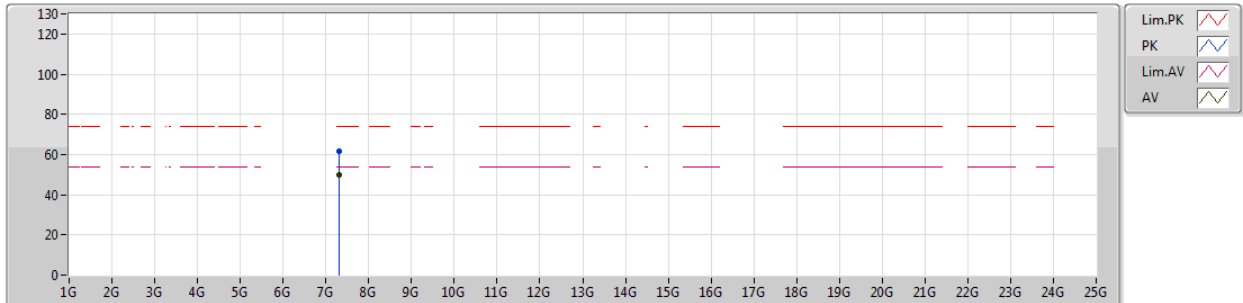


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments						
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)							
PK	7.311G	61.49	74.00	-12.51	10.54	3	Vertical	135	2.49	-						
AV	7.31112G	49.84	54.00	-4.16	10.54	3	Vertical	135	2.49	-						

802.11g_Nss1,(6Mbps)_4TX

04/12/2018

2437MHz_TX

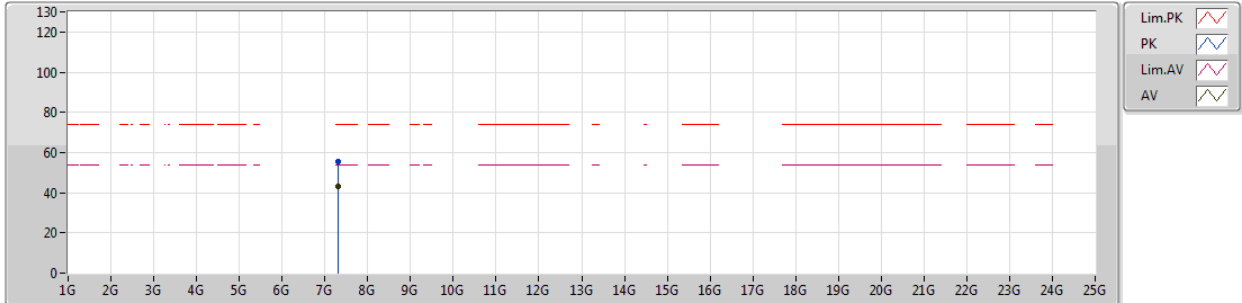


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.31334G	55.52	74.00	-18.48	10.56	3	Horizontal	13	1.75	-						
AV	7.31088G	43.36	54.00	-10.64	10.54	3	Horizontal	13	1.75	-						

802.11g_Nss1,(6Mbps)_4TX

04/12/2018

2462MHz_TX

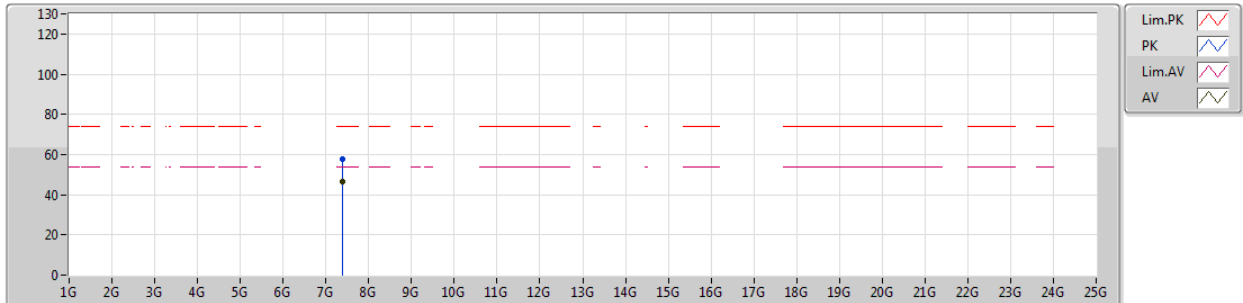


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments						
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)							
PK	7.39008G	57.95	74.00	-16.05	10.78	3	Vertical	102	2.26	-						
AV	7.38966G	46.51	54.00	-7.49	10.78	3	Vertical	102	2.26	-						

802.11g_Nss1,(6Mbps)_4TX

04/12/2018

2462MHz_TX

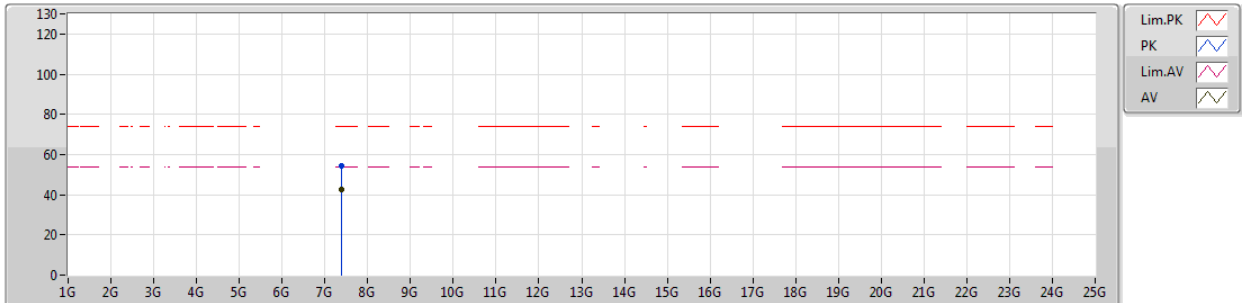


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments						
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)							
PK	7.39812G	54.49	74.00	-19.51	10.80	3	Horizontal	264	1.50	-						
AV	7.39368G	42.44	54.00	-11.56	10.78	3	Horizontal	264	1.50	-						

802.11ax HEW20_Nss1,(MCS0)_4TX

04/12/2018

2412MHz_TX

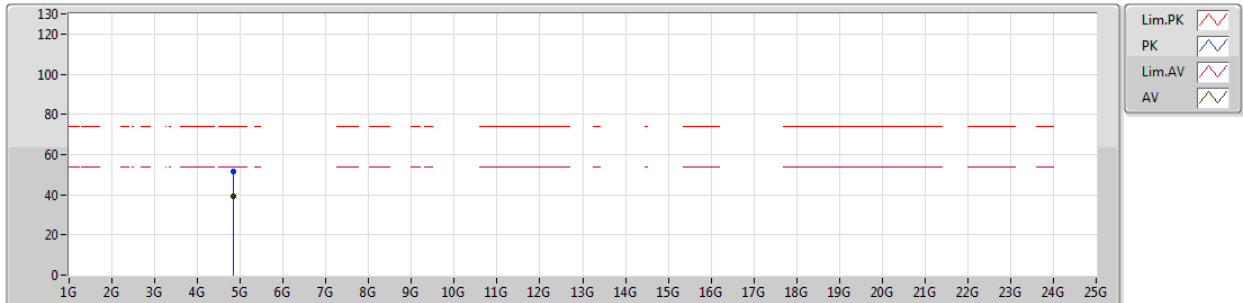


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.82652G	51.37	74.00	-22.63	7.32	3	Vertical	21	1.31	-						
AV	4.82664G	39.25	54.00	-14.75	7.32	3	Vertical	21	1.31	-						

802.11ax HEW20_Nss1,(MCS0)_4TX

04/12/2018

2412MHz_TX

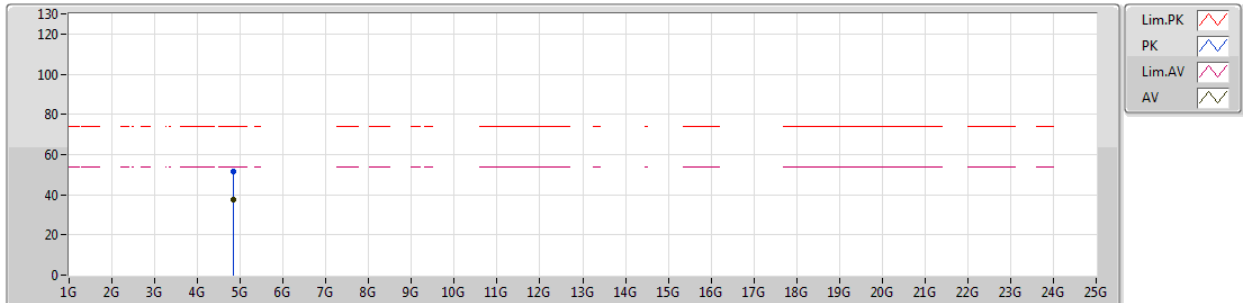


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.82874G	51.60	74.00	-22.40	7.32	3	Horizontal	272	1.62	-						
AV	4.82886G	37.69	54.00	-16.31	7.32	3	Horizontal	272	1.62	-						

802.11ax HEW20_Nss1,(MCS0)_4TX

04/12/2018

2437MHz_TX

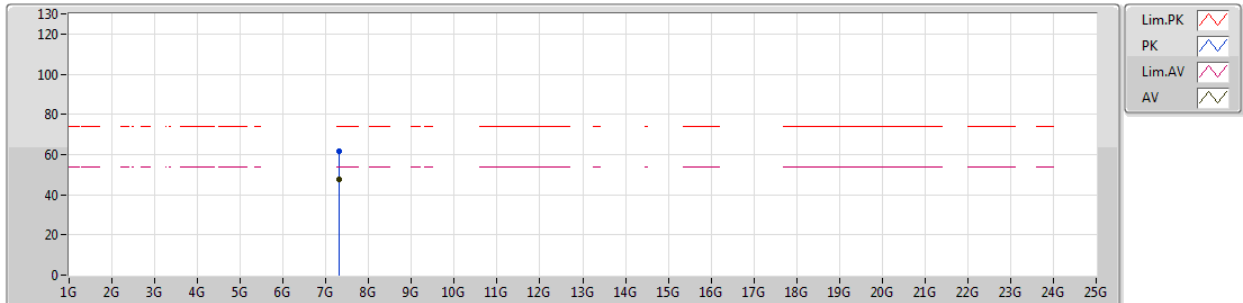


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.31514G	61.64	74.00	-12.36	10.56	3	Vertical	120	2.35	-						
AV	7.3101G	47.79	54.00	-6.21	10.54	3	Vertical	120	2.35	-						

802.11ax HEW20_Nss1,(MCS0)_4TX

04/12/2018

2437MHz_TX

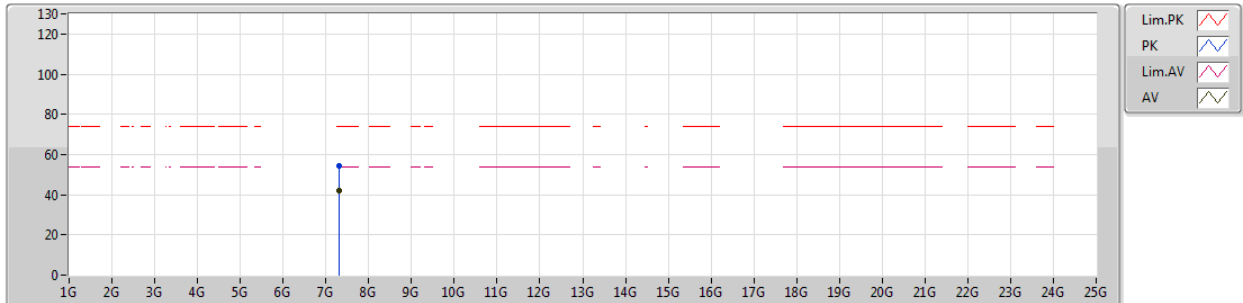


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.30662G	54.48	74.00	-19.52	10.54	3	Horizontal	344	2.57	-						
AV	7.31214G	42.04	54.00	-11.96	10.55	3	Horizontal	344	2.57	-						

802.11ax HEW20_Nss1,(MCS0)_4TX

04/12/2018

2462MHz_TX

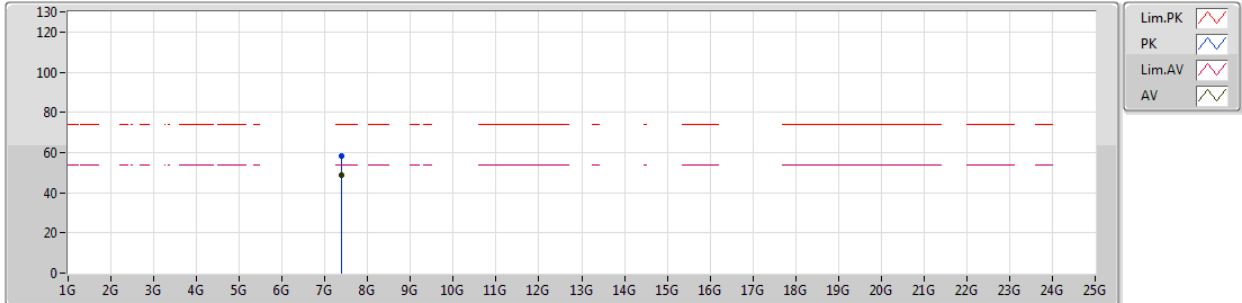


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.38354G	58.30	74.00	-15.70	10.75	3	Vertical	155	2.45	-						
AV	7.38852G	48.80	54.00	-5.20	10.77	3	Vertical	155	2.45	-						

802.11ax HEW20_Nss1,(MCS0)_4TX

04/12/2018

2462MHz_TX

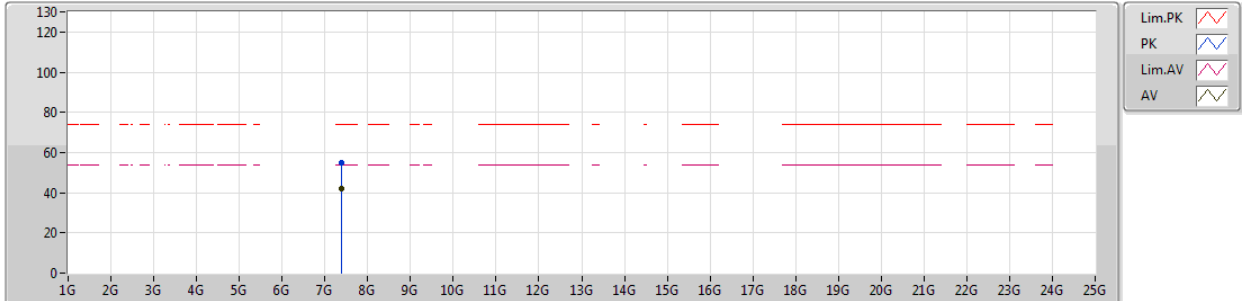


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.39884G	54.93	74.00	-19.07	10.80	3	Horizontal	254	2.53	-						
AV	7.39566G	41.84	54.00	-12.16	10.78	3	Horizontal	254	2.53	-						

802.11ax HEW40_Nss1,(MCS0)_4TX

04/12/2018

2422MHz_TX

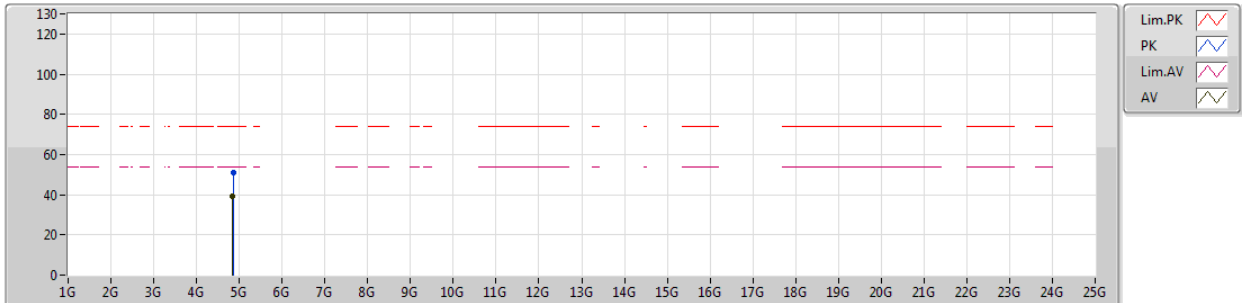


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.8527G	50.72	74.00	-23.28	7.37	3	Vertical	222	1.20	-						
AV	4.84634G	39.48	54.00	-14.52	7.35	3	Vertical	222	1.20	-						

802.11ax HEW40_Nss1,(MCS0)_4TX

04/12/2018

2422MHz_TX

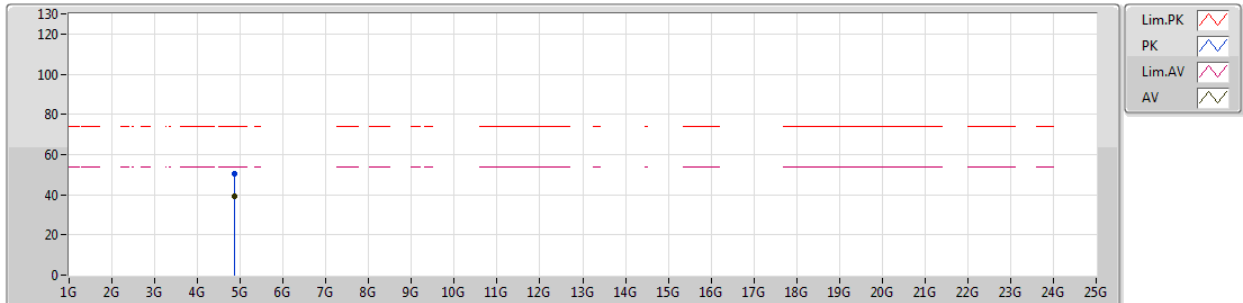


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	4.85474G	50.42	74.00	-23.58	7.37	3	Horizontal	108	1.71	-						
AV	4.85534G	39.25	54.00	-14.75	7.37	3	Horizontal	108	1.71	-						

802.11ax HEW40_Nss1,(MCS0)_4TX

04/12/2018

2437MHz_TX

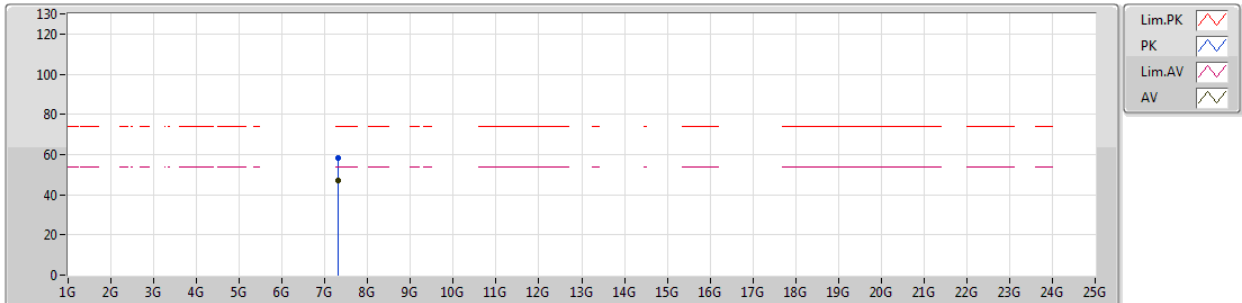


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.31202G	58.53	74.00	-15.47	10.55	3	Vertical	145	2.41	-						
AV	7.31166G	47.13	54.00	-6.87	10.55	3	Vertical	145	2.41	-						

802.11ax HEW40_Nss1,(MCS0)_4TX

04/12/2018

2437MHz_TX

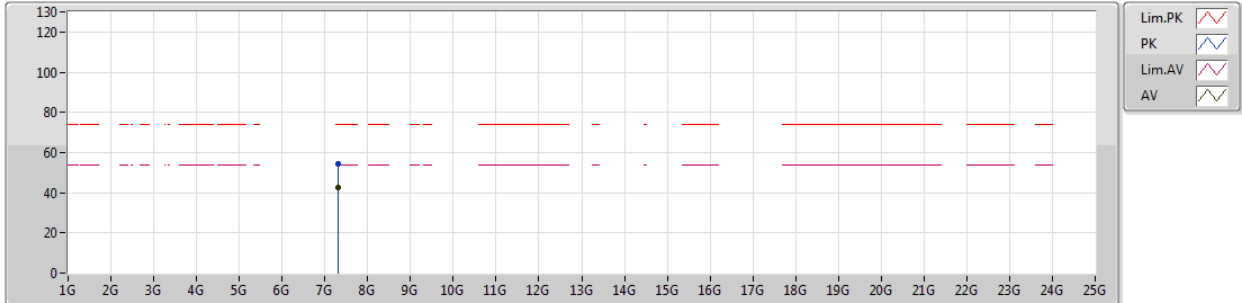


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.32066G	54.08	74.00	-19.92	10.58	3	Horizontal	90	1.67	-						
AV	7.31958G	42.48	54.00	-11.52	10.57	3	Horizontal	90	1.67	-						

802.11ax HEW40_Nss1,(MCS0)_4TX

04/12/2018

2452MHz_TX

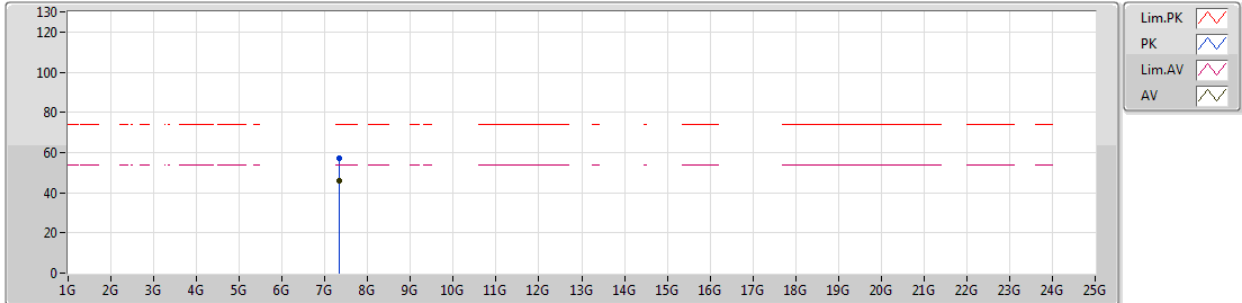


EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.3452G	56.88	74.00	-17.12	10.64	3	Vertical	142	2.47	-						
AV	7.3452G	45.69	54.00	-8.31	10.64	3	Vertical	142	2.47	-						

802.11ax HEW40_Nss1,(MCS0)_4TX

04/12/2018

2452MHz_TX

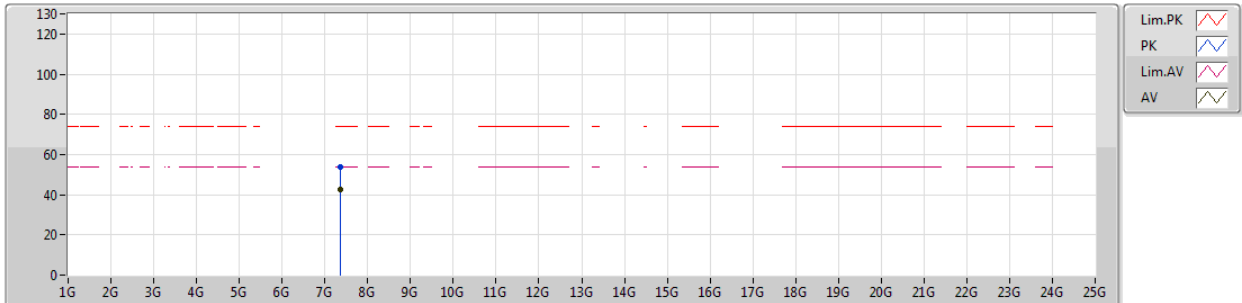

EUT Z_4TX
Setting 110
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	7.3602G	53.84	74.00	-20.16	10.68	3	Horizontal	334	2.01	-						
AV	7.34832G	42.52	54.00	-11.48	10.66	3	Horizontal	334	2.01	-						




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11g_Nss1,(6Mbps)_1TX	Pass	PK	2.4864G	73.95	74.00	-0.05	31.60	3	Vertical	132	1.95	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2412MHz_TX

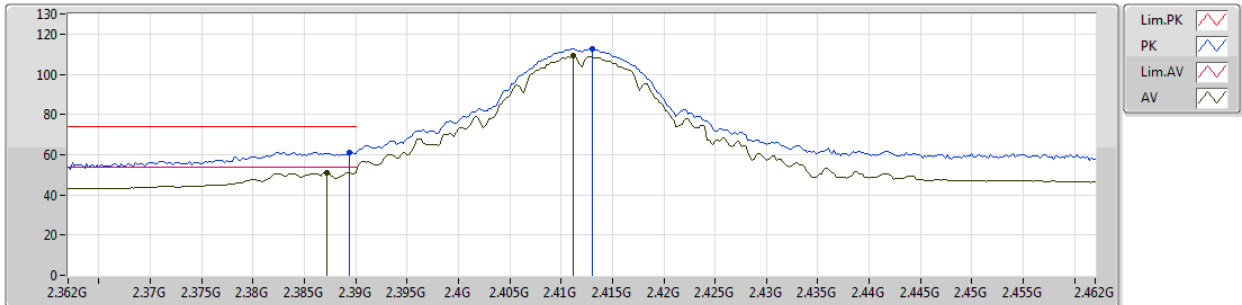


EUT_Z_1TX
Setting 88
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	2.3894G	61.33	74.00	-12.67	31.38	3	Vertical	165	1.97	-						
AV	2.3872G	51.11	54.00	-2.89	31.37	3	Vertical	165	1.97	-						
PK	2.413G	112.85	Inf	-Inf	31.44	3	Vertical	165	1.97	-						
AV	2.4112G	109.09	Inf	-Inf	31.43	3	Vertical	165	1.97	-						

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2412MHz_TX

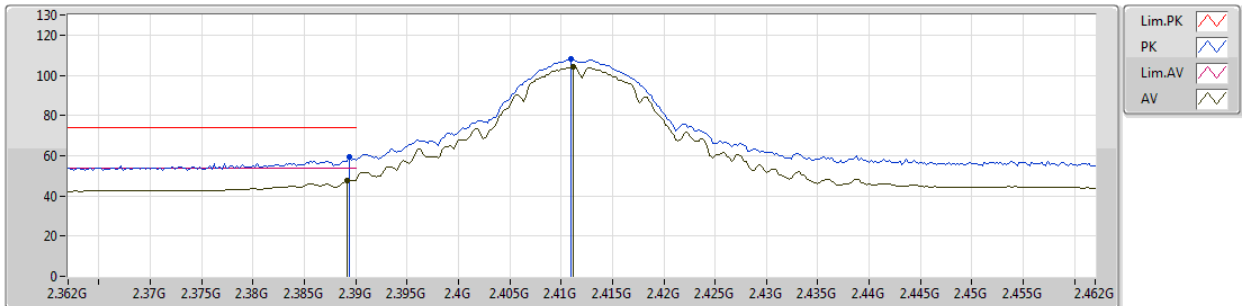


EUT_Z_1TX
Setting 88
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3894G	59.32	74.00	-14.68	31.38	3	Horizontal	255	2.53	-
AV	2.3892G	47.90	54.00	-6.10	31.38	3	Horizontal	255	2.53	-
PK	2.411G	108.04	Inf	-Inf	31.43	3	Horizontal	255	2.53	-
AV	2.4112G	104.27	Inf	-Inf	31.43	3	Horizontal	255	2.53	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2437MHz_TX

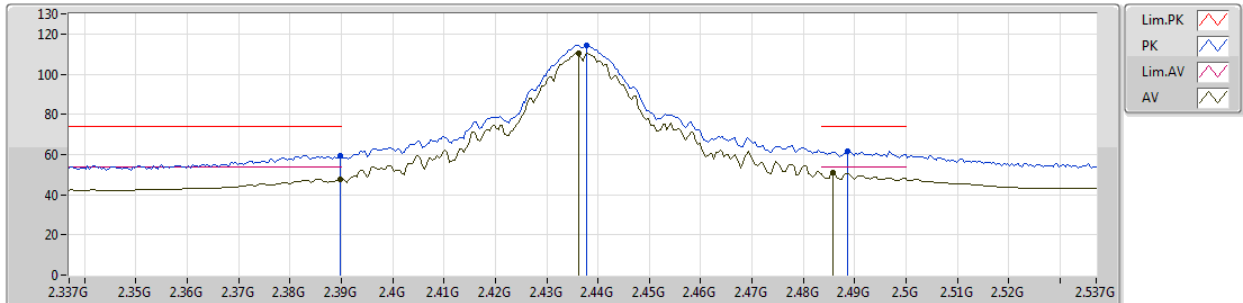


EUT_Z_1TX
Setting 92
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	59.24	74.00	-14.76	31.38	3	Vertical	246	1.72	-
AV	2.3898G	47.90	54.00	-6.10	31.38	3	Vertical	246	1.72	-
PK	2.4378G	114.53	Inf	-Inf	31.50	3	Vertical	246	1.72	-
AV	2.4362G	110.58	Inf	-Inf	31.49	3	Vertical	246	1.72	-
PK	2.4886G	61.75	74.00	-12.25	31.61	3	Vertical	246	1.72	-
AV	2.4858G	50.91	54.00	-3.09	31.59	3	Vertical	246	1.72	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2437MHz_TX

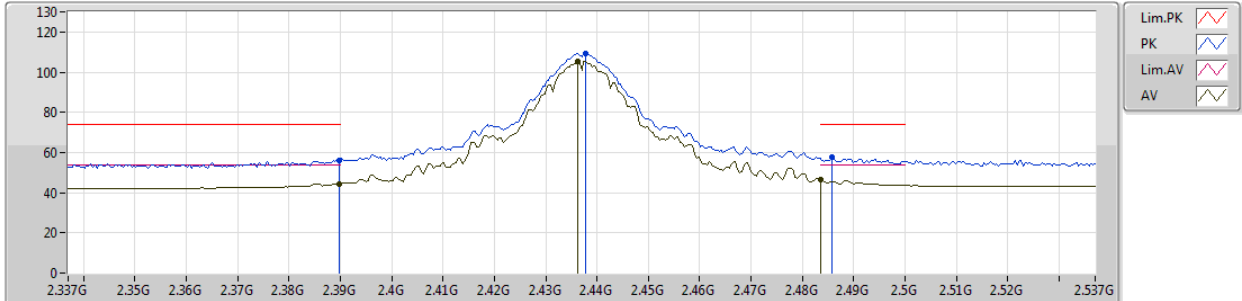


EUT_Z_1TX
Setting 92
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	56.10	74.00	-17.90	31.38	3	Horizontal	302	2.48	-
AV	2.3898G	44.51	54.00	-9.49	31.38	3	Horizontal	302	2.48	-
PK	2.4378G	109.21	Inf	-Inf	31.50	3	Horizontal	302	2.48	-
AV	2.4362G	105.36	Inf	-Inf	31.49	3	Horizontal	302	2.48	-
PK	2.4858G	57.54	74.00	-16.46	31.59	3	Horizontal	302	2.48	-
AV	2.4835G	46.24	54.00	-7.76	31.59	3	Horizontal	302	2.48	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2462MHz_TX

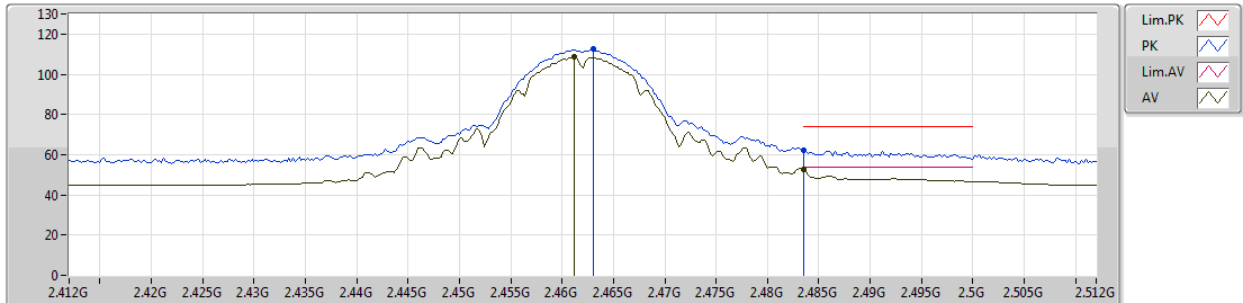


EUT_Z_1TX
Setting 84
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	2.463G	112.45	Inf	-Inf	31.55	3	Vertical	259	2.77	-						
AV	2.4612G	108.51	Inf	-Inf	31.54	3	Vertical	259	2.77	-						
PK	2.4835G	62.11	74.00	-11.89	31.59	3	Vertical	259	2.77	-						
AV	2.4835G	52.51	54.00	-1.49	31.59	3	Vertical	259	2.77	-						

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2462MHz_TX

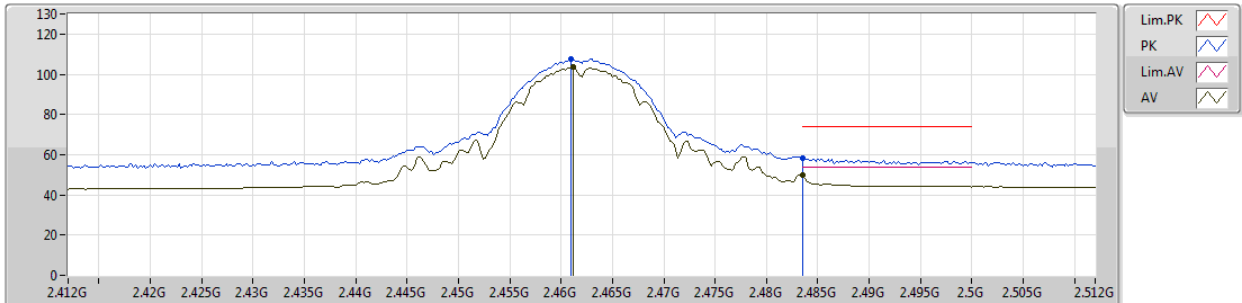


EUT Z_1TX
Setting 84
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.461G	107.43	Inf	-Inf	31.54	3	Horizontal	325	2.76	-
AV	2.4612G	103.51	Inf	-Inf	31.54	3	Horizontal	325	2.76	-
PK	2.4835G	58.23	74.00	-15.77	31.59	3	Horizontal	325	2.76	-
AV	2.4835G	49.94	54.00	-4.06	31.59	3	Horizontal	325	2.76	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2417MHz_TX

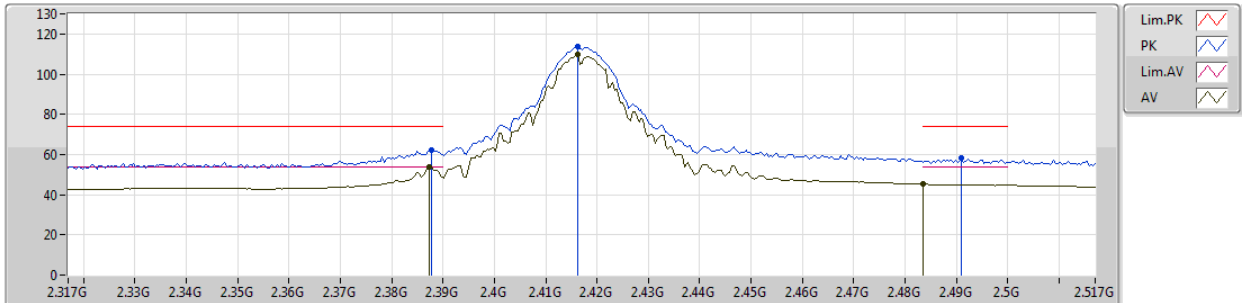


EUT_Z_1TX
Setting 89
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3878G	62.42	74.00	-11.58	31.38	3	Vertical	159	2.02	-
AV	2.3874G	53.93	54.00	-0.07	31.37	3	Vertical	159	2.02	-
PK	2.4162G	113.55	Inf	-Inf	31.45	3	Vertical	159	2.02	-
AV	2.4162G	109.81	Inf	-Inf	31.45	3	Vertical	159	2.02	-
PK	2.491G	58.29	74.00	-15.71	31.61	3	Vertical	159	2.02	-
AV	2.4835G	45.18	54.00	-8.82	31.59	3	Vertical	159	2.02	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2417MHz_TX

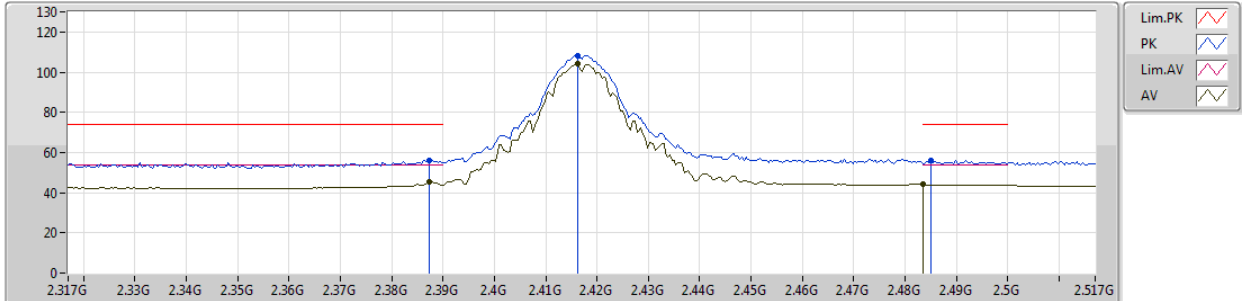


EUT Z_1TX
Setting 89
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3874G	56.02	74.00	-17.98	31.37	3	Horizontal	300	2.78	-
AV	2.3874G	45.46	54.00	-8.54	31.37	3	Horizontal	300	2.78	-
PK	2.4162G	108.20	Inf	-Inf	31.45	3	Horizontal	300	2.78	-
AV	2.4162G	104.32	Inf	-Inf	31.45	3	Horizontal	300	2.78	-
PK	2.485G	56.04	74.00	-17.96	31.59	3	Horizontal	300	2.78	-
AV	2.4835G	44.06	54.00	-9.94	31.59	3	Horizontal	300	2.78	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2422MHz_TX

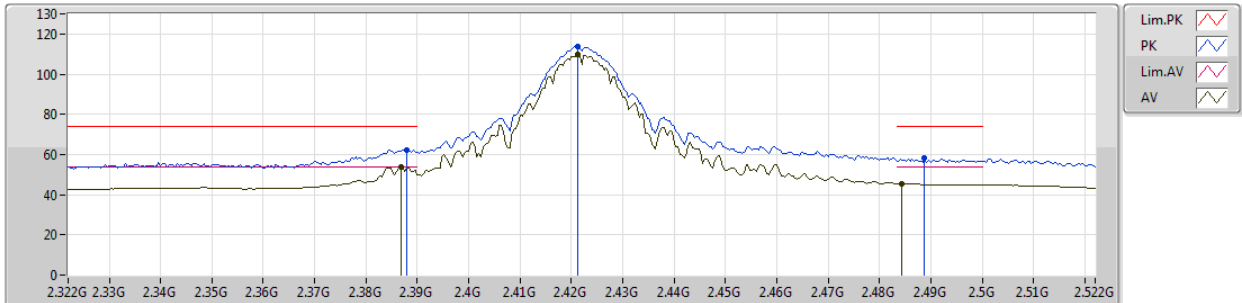


EUT Z_1TX
Setting 91
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.388G	62.28	74.00	-11.72	31.38	3	Vertical	161	1.97	-
AV	2.3868G	53.77	54.00	-0.23	31.37	3	Vertical	161	1.97	-
PK	2.4212G	113.66	Inf	-Inf	31.46	3	Vertical	161	1.97	-
AV	2.4212G	109.76	Inf	-Inf	31.46	3	Vertical	161	1.97	-
PK	2.4888G	58.36	74.00	-15.64	31.61	3	Vertical	161	1.97	-
AV	2.4844G	45.62	54.00	-8.38	31.59	3	Vertical	161	1.97	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2422MHz_TX

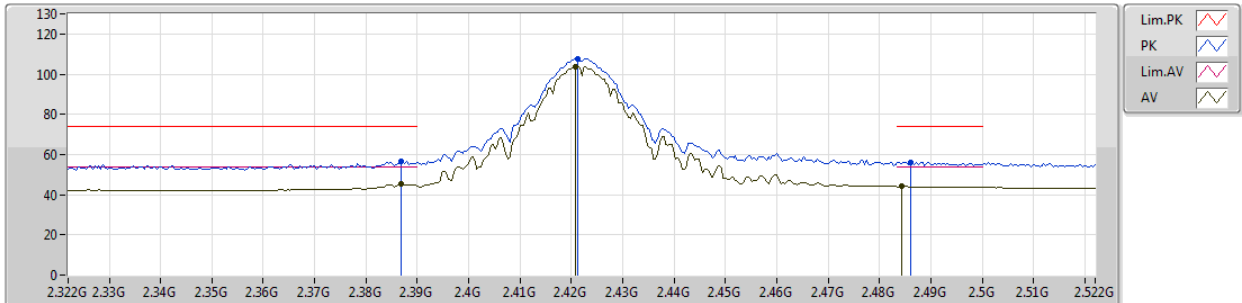


EUT Z_1TX
Setting 91
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3868G	56.85	74.00	-17.15	31.37	3	Horizontal	303	2.77	-
AV	2.3868G	45.40	54.00	-8.60	31.37	3	Horizontal	303	2.77	-
PK	2.4212G	107.86	Inf	-Inf	31.46	3	Horizontal	303	2.77	-
AV	2.4208G	103.76	Inf	-Inf	31.46	3	Horizontal	303	2.77	-
PK	2.486G	56.13	74.00	-17.87	31.59	3	Horizontal	303	2.77	-
AV	2.4844G	44.14	54.00	-9.86	31.59	3	Horizontal	303	2.77	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2427MHz_TX

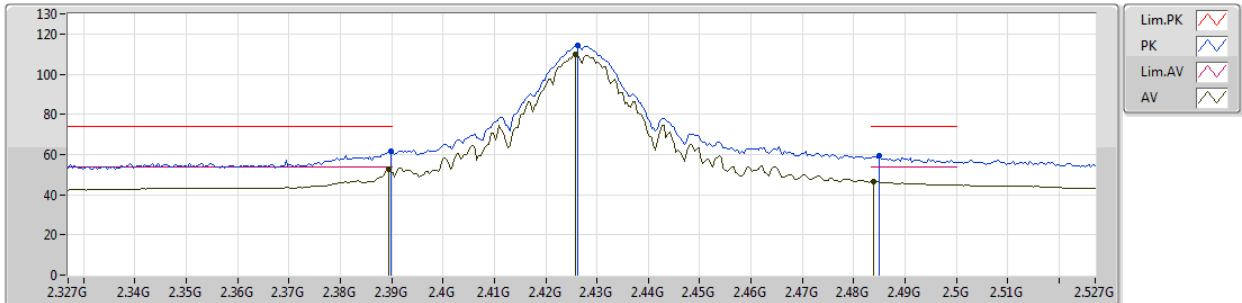


EUT_Z_1TX
Setting 91
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	61.74	74.00	-12.26	31.38	3	Vertical	143	1.97	-
AV	2.3894G	52.77	54.00	-1.23	31.38	3	Vertical	143	1.97	-
PK	2.4262G	114.05	Inf	-Inf	31.47	3	Vertical	143	1.97	-
AV	2.4258G	109.79	Inf	-Inf	31.47	3	Vertical	143	1.97	-
PK	2.485G	59.47	74.00	-14.53	31.59	3	Vertical	143	1.97	-
AV	2.4838G	46.73	54.00	-7.27	31.59	3	Vertical	143	1.97	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2427MHz_TX

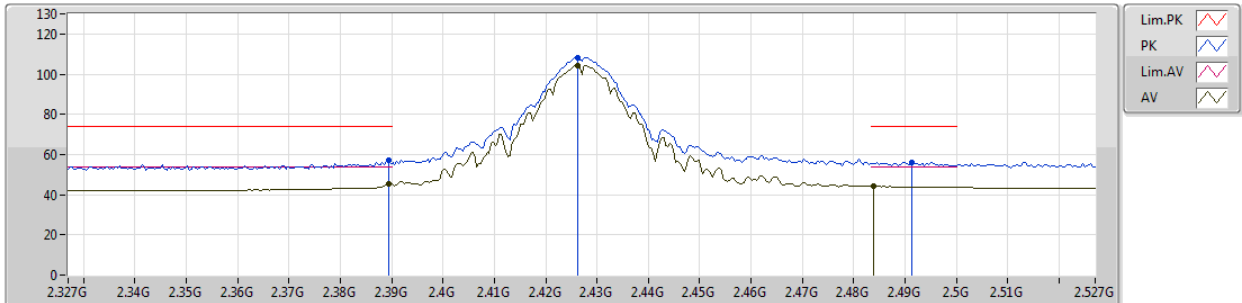


EUT_Z_1TX
Setting 91
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3894G	56.90	74.00	-17.10	31.38	3	Horizontal	292	2.79	-
AV	2.3894G	45.57	54.00	-8.43	31.38	3	Horizontal	292	2.79	-
PK	2.4262G	108.24	Inf	-Inf	31.47	3	Horizontal	292	2.79	-
AV	2.4262G	104.39	Inf	-Inf	31.47	3	Horizontal	292	2.79	-
PK	2.4914G	56.08	74.00	-17.92	31.61	3	Horizontal	292	2.79	-
AV	2.4838G	44.29	54.00	-9.71	31.59	3	Horizontal	292	2.79	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2432MHz_TX

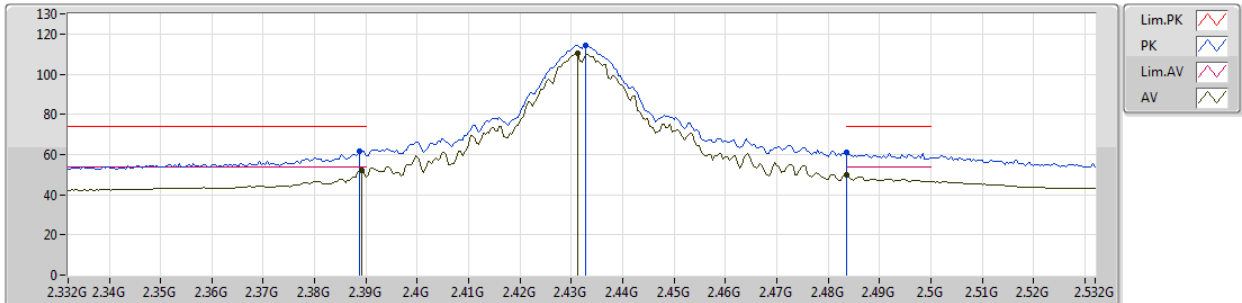


EUT_Z_1TX
Setting 92
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3888G	61.89	74.00	-12.11	31.38	3	Vertical	250	1.50	-
AV	2.3892G	52.01	54.00	-1.99	31.38	3	Vertical	250	1.50	-
PK	2.4328G	114.13	Inf	-Inf	31.48	3	Vertical	250	1.50	-
AV	2.4312G	110.28	Inf	-Inf	31.48	3	Vertical	250	1.50	-
PK	2.4835G	60.91	74.00	-13.09	31.59	3	Vertical	250	1.50	-
AV	2.4835G	49.81	54.00	-4.19	31.59	3	Vertical	250	1.50	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2432MHz_TX

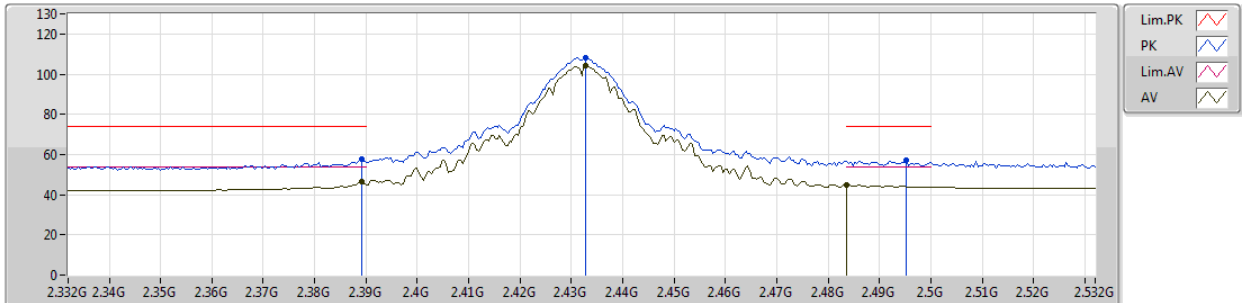


EUT Z_1TX
Setting 92
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3892G	57.95	74.00	-16.05	31.38	3	Horizontal	300	2.28	-
AV	2.3892G	46.32	54.00	-7.68	31.38	3	Horizontal	300	2.28	-
PK	2.4328G	107.94	Inf	-Inf	31.48	3	Horizontal	300	2.28	-
AV	2.4328G	104.06	Inf	-Inf	31.48	3	Horizontal	300	2.28	-
PK	2.4952G	56.90	74.00	-17.10	31.62	3	Horizontal	300	2.28	-
AV	2.4835G	44.90	54.00	-9.10	31.59	3	Horizontal	300	2.28	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2442MHz_TX

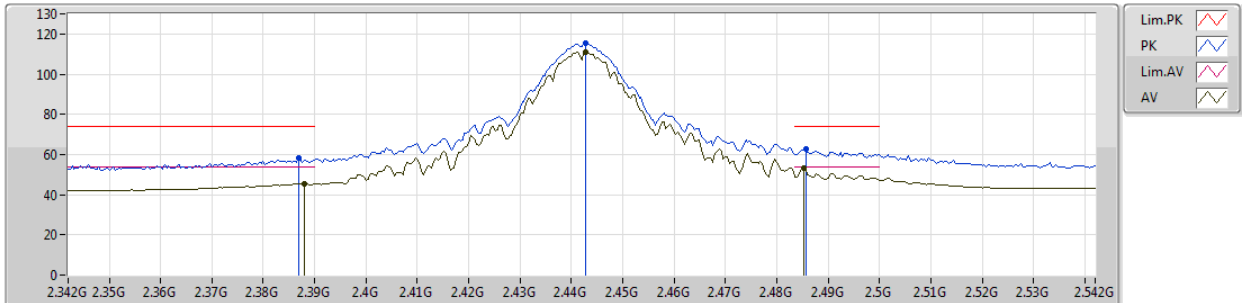


EUT Z_1TX
Setting 92
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3868G	58.26	74.00	-15.74	31.37	3	Vertical	235	2.57	-
AV	2.388G	45.62	54.00	-8.38	31.38	3	Vertical	235	2.57	-
PK	2.4428G	115.22	Inf	-Inf	31.51	3	Vertical	235	2.57	-
AV	2.4428G	111.13	Inf	-Inf	31.51	3	Vertical	235	2.57	-
PK	2.4856G	62.83	74.00	-11.17	31.59	3	Vertical	235	2.57	-
AV	2.4852G	53.49	54.00	-0.51	31.59	3	Vertical	235	2.57	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2442MHz_TX

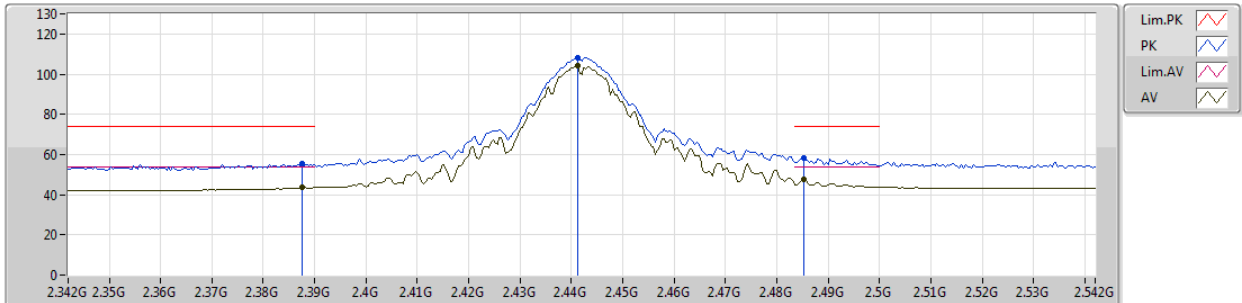


EUT Z_1TX
Setting 92
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3876G	55.45	74.00	-18.55	31.38	3	Horizontal	307	2.49	-
AV	2.3876G	43.51	54.00	-10.49	31.38	3	Horizontal	307	2.49	-
PK	2.4412G	108.04	Inf	-Inf	31.50	3	Horizontal	307	2.49	-
AV	2.4412G	104.24	Inf	-Inf	31.50	3	Horizontal	307	2.49	-
PK	2.4852G	58.52	74.00	-15.48	31.59	3	Horizontal	307	2.49	-
AV	2.4852G	47.81	54.00	-6.19	31.59	3	Horizontal	307	2.49	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2447MHz_TX

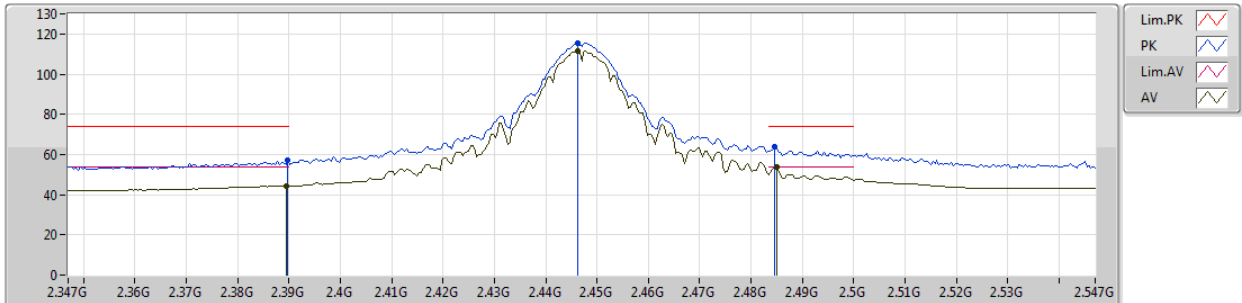


EUT_Z_1TX
Setting 91
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	56.96	74.00	-17.04	31.38	3	Vertical	247	2.56	-
AV	2.3894G	44.28	54.00	-9.72	31.38	3	Vertical	247	2.56	-
PK	2.4462G	115.37	Inf	-Inf	31.51	3	Vertical	247	2.56	-
AV	2.4462G	111.58	Inf	-Inf	31.51	3	Vertical	247	2.56	-
PK	2.4846G	63.71	74.00	-10.29	31.59	3	Vertical	247	2.56	-
AV	2.485G	53.79	54.00	-0.21	31.59	3	Vertical	247	2.56	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2447MHz_TX

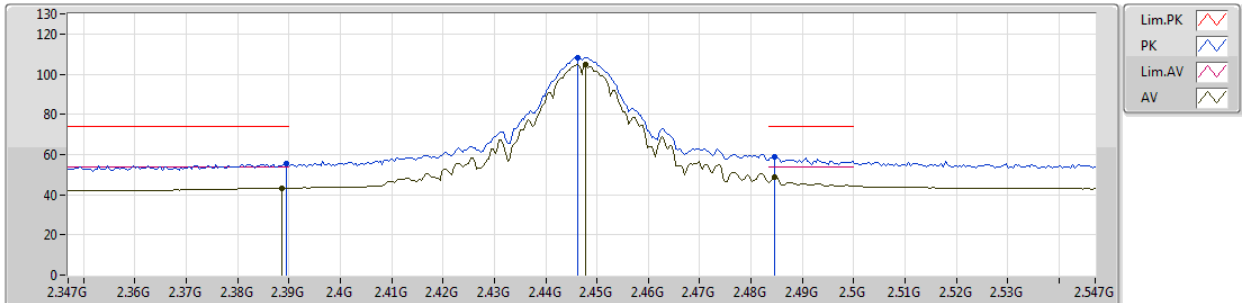


EUT_Z_1TX
Setting 91
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3894G	55.33	74.00	-18.67	31.38	3	Horizontal	302	1.39	-
AV	2.3886G	43.29	54.00	-10.71	31.38	3	Horizontal	302	1.39	-
PK	2.4462G	108.37	Inf	-Inf	31.51	3	Horizontal	302	1.39	-
AV	2.4478G	104.55	Inf	-Inf	31.52	3	Horizontal	302	1.39	-
PK	2.4846G	59.00	74.00	-15.00	31.59	3	Horizontal	302	1.39	-
AV	2.4846G	48.53	54.00	-5.47	31.59	3	Horizontal	302	1.39	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2452MHz_TX

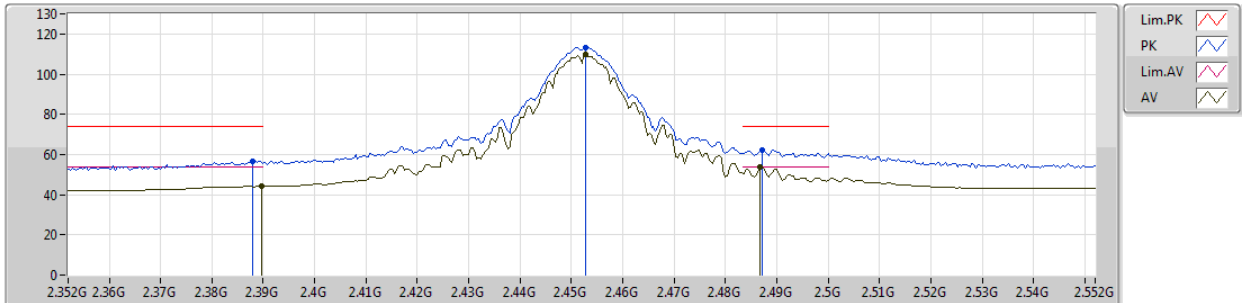


EUT_Z_1TX
Setting 91
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.388G	56.72	74.00	-17.28	31.38	3	Vertical	313	1.90	-
AV	2.3896G	44.13	54.00	-9.87	31.38	3	Vertical	313	1.90	-
PK	2.4528G	113.39	Inf	-Inf	31.53	3	Vertical	313	1.90	-
AV	2.4528G	109.56	Inf	-Inf	31.53	3	Vertical	313	1.90	-
PK	2.4872G	62.43	74.00	-11.57	31.60	3	Vertical	313	1.90	-
AV	2.4868G	53.93	54.00	-0.07	31.60	3	Vertical	313	1.90	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2452MHz_TX

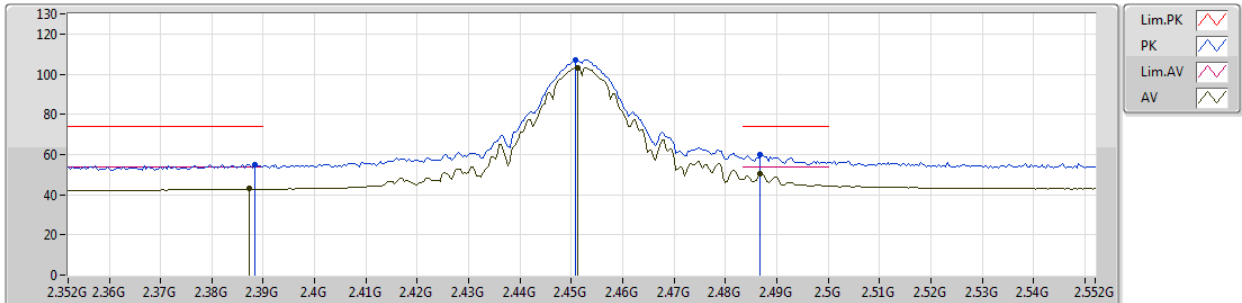


EUT Z_1TX
Setting 91
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3884G	55.08	74.00	-18.92	31.38	3	Horizontal	4	1.49	-
AV	2.3872G	42.87	54.00	-11.13	31.37	3	Horizontal	4	1.49	-
PK	2.4508G	107.20	Inf	-Inf	31.52	3	Horizontal	4	1.49	-
AV	2.4512G	103.28	Inf	-Inf	31.52	3	Horizontal	4	1.49	-
PK	2.4868G	59.68	74.00	-14.32	31.60	3	Horizontal	4	1.49	-
AV	2.4868G	50.45	54.00	-3.55	31.60	3	Horizontal	4	1.49	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2457MHz_TX

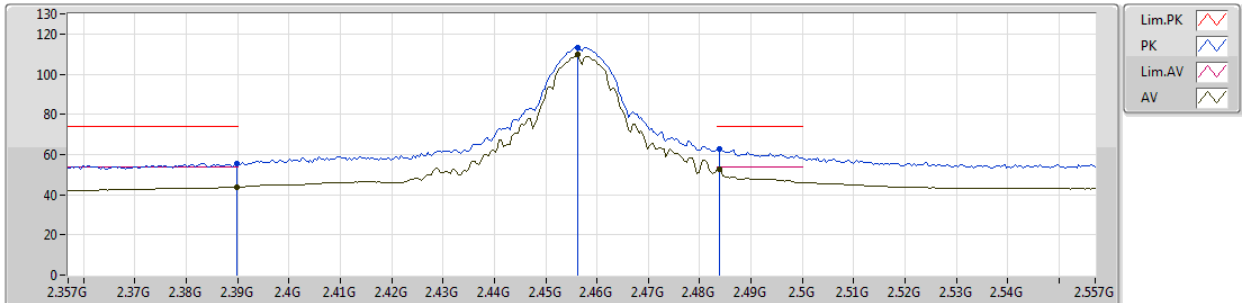


EUT Z_1TX
Setting 88
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	55.67	74.00	-18.33	31.38	3	Vertical	183	1.51	-
AV	2.3898G	43.83	54.00	-10.17	31.38	3	Vertical	183	1.51	-
PK	2.4562G	113.33	Inf	-Inf	31.53	3	Vertical	183	1.51	-
AV	2.4562G	109.60	Inf	-Inf	31.53	3	Vertical	183	1.51	-
PK	2.4838G	62.52	74.00	-11.48	31.59	3	Vertical	183	1.51	-
AV	2.4838G	52.80	54.00	-1.20	31.59	3	Vertical	183	1.51	-

802.11b_Nss1,(1Mbps)_1TX

05/12/2018

2457MHz_TX

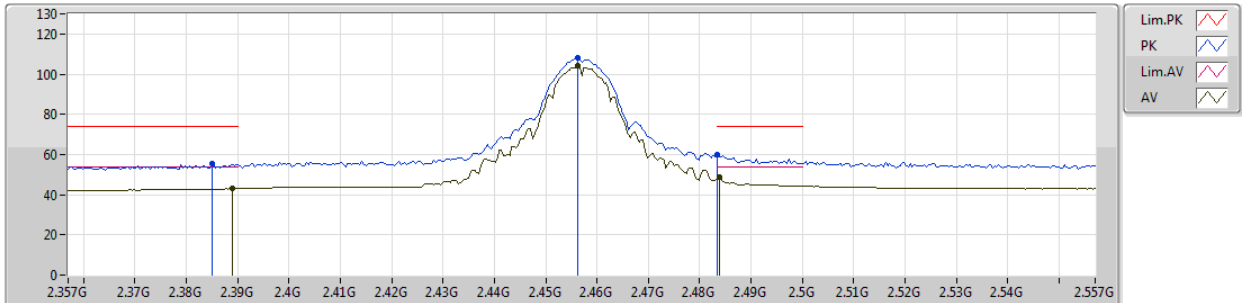


EUT Z_1TX
Setting 88
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.385G	55.54	74.00	-18.46	31.37	3	Horizontal	284	1.20	-
AV	2.389G	42.99	54.00	-11.01	31.38	3	Horizontal	284	1.20	-
PK	2.4562G	107.88	Inf	-Inf	31.53	3	Horizontal	284	1.20	-
AV	2.4562G	104.03	Inf	-Inf	31.53	3	Horizontal	284	1.20	-
PK	2.4835G	59.83	74.00	-14.17	31.59	3	Horizontal	284	1.20	-
AV	2.4838G	48.75	54.00	-5.25	31.59	3	Horizontal	284	1.20	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2412MHz_TX

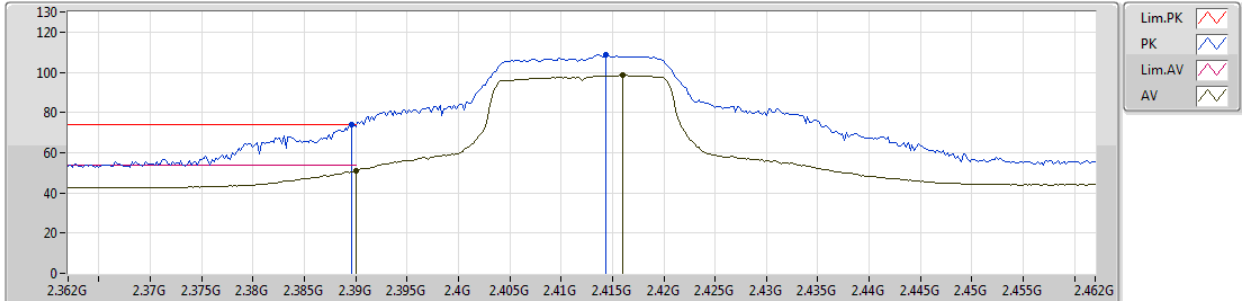


EUT_Z_1TX
Setting 69
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	2.3896G	73.76	74.00	-0.24	31.38	3	Vertical	217	2.90	-						
AV	2.39G	50.81	54.00	-3.19	31.38	3	Vertical	217	2.90	-						
PK	2.4144G	108.66	Inf	-Inf	31.45	3	Vertical	217	2.90	-						
AV	2.416G	98.84	Inf	-Inf	31.45	3	Vertical	217	2.90	-						

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2412MHz_TX

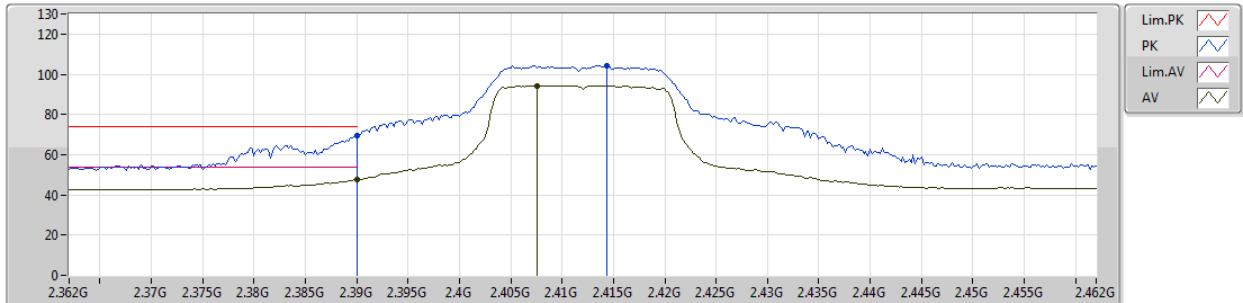


EUT_Z_1TX
Setting 69
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.39G	69.68	74.00	-4.32	31.38	3	Horizontal	286	2.85	-
AV	2.39G	47.45	54.00	-6.55	31.38	3	Horizontal	286	2.85	-
PK	2.4144G	104.50	Inf	-Inf	31.45	3	Horizontal	286	2.85	-
AV	2.4076G	94.38	Inf	-Inf	31.42	3	Horizontal	286	2.85	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2437MHz_TX

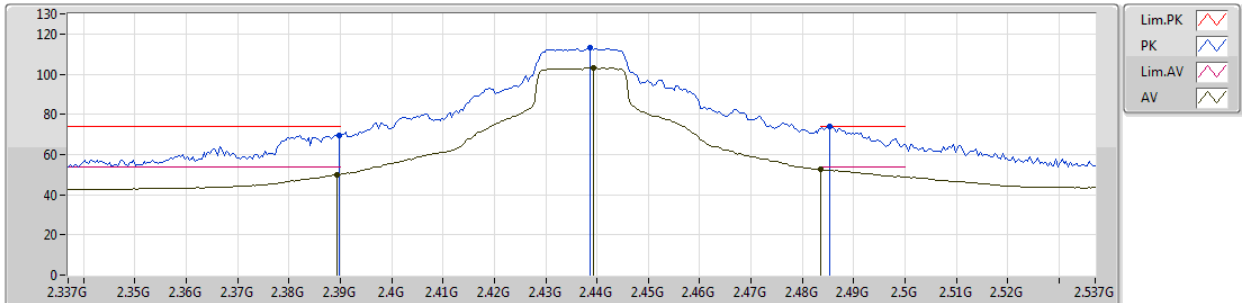


EUT_Z_1TX
Setting 85
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	69.73	74.00	-4.27	31.38	3	Vertical	233	1.49	-
AV	2.3894G	49.98	54.00	-4.02	31.38	3	Vertical	233	1.49	-
PK	2.4386G	112.94	Inf	-Inf	31.50	3	Vertical	233	1.49	-
AV	2.4394G	103.19	Inf	-Inf	31.50	3	Vertical	233	1.49	-
PK	2.4854G	73.80	74.00	-0.20	31.59	3	Vertical	233	1.49	-
AV	2.4835G	52.63	54.00	-1.37	31.59	3	Vertical	233	1.49	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2437MHz_TX

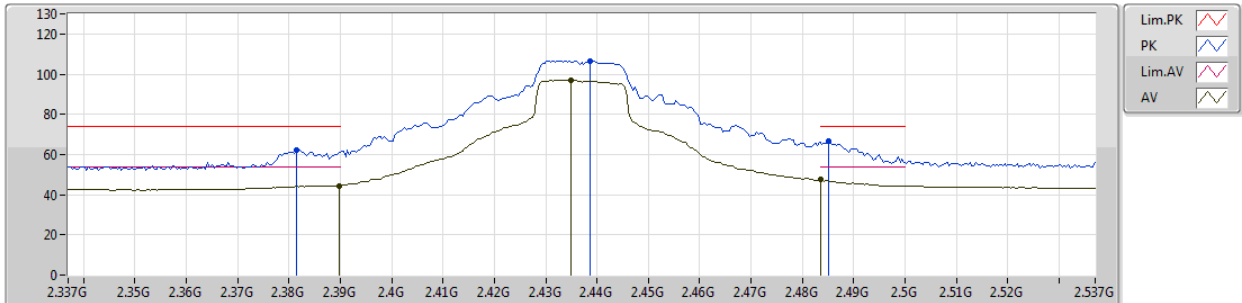


EUT_Z_1TX
Setting 85
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3814G	62.42	74.00	-11.58	31.36	3	Horizontal	285	2.80	-
AV	2.3898G	44.51	54.00	-9.49	31.38	3	Horizontal	285	2.80	-
PK	2.4386G	106.69	Inf	-Inf	31.50	3	Horizontal	285	2.80	-
AV	2.435G	97.15	Inf	-Inf	31.48	3	Horizontal	285	2.80	-
PK	2.485G	66.48	74.00	-7.52	31.59	3	Horizontal	285	2.80	-
AV	2.4835G	47.40	54.00	-6.60	31.59	3	Horizontal	285	2.80	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2462MHz_TX

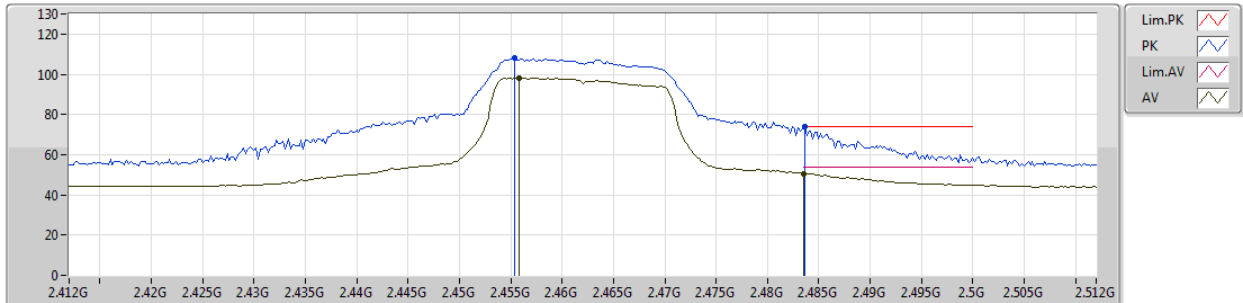


EUT Z_1TX
Setting 66
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4554G	108.16	Inf	-Inf	31.53	3	Vertical	266	2.63	-
AV	2.4558G	98.06	Inf	-Inf	31.53	3	Vertical	266	2.63	-
PK	2.4836G	73.78	74.00	-0.22	31.59	3	Vertical	266	2.63	-
AV	2.4835G	50.70	Inf	-Inf	31.59	3	Vertical	266	2.63	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2462MHz_TX

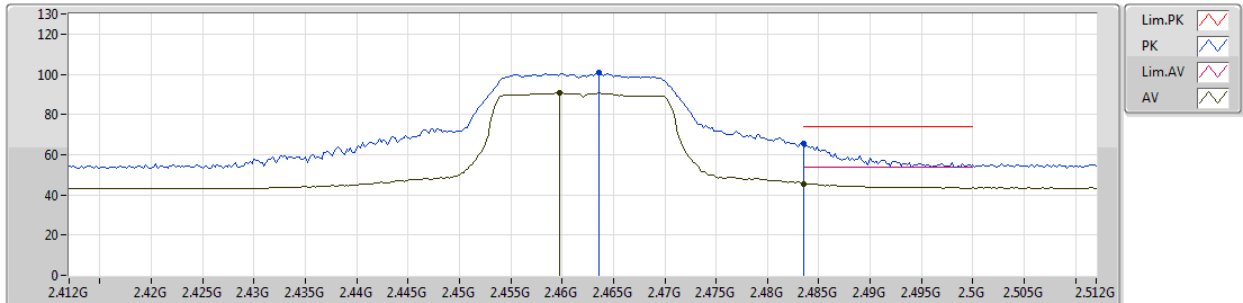


EUT_Z_1TX
Setting 66
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4636G	100.91	Inf	-Inf	31.55	3	Horizontal	7	2.34	-
AV	2.4598G	90.85	Inf	-Inf	31.54	3	Horizontal	7	2.34	-
PK	2.4835G	65.60	74.00	-8.40	31.59	3	Horizontal	7	2.34	-
AV	2.4835G	45.63	54.00	-8.37	31.59	3	Horizontal	7	2.34	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2417MHz_TX

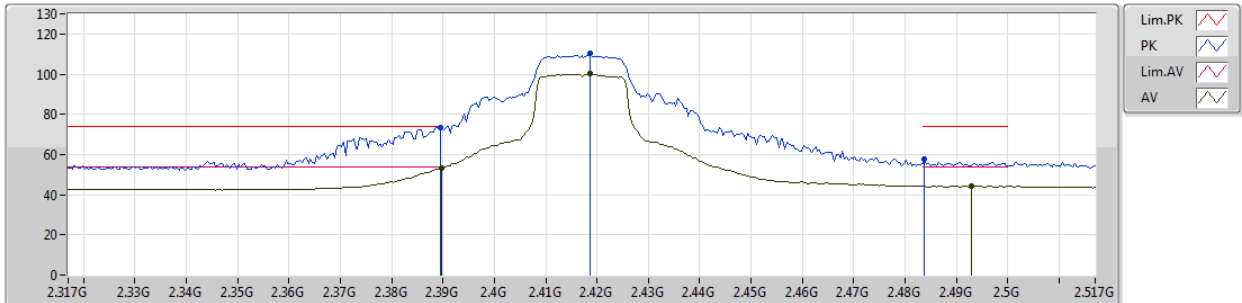


EUT_Z_1TX
Setting 75
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3894G	73.49	74.00	-0.51	31.38	3	Vertical	159	2.02	-
AV	2.3898G	53.26	54.00	-0.74	31.38	3	Vertical	159	2.02	-
PK	2.4186G	110.21	Inf	-Inf	31.45	3	Vertical	159	2.02	-
AV	2.4186G	100.04	Inf	-Inf	31.45	3	Vertical	159	2.02	-
PK	2.4838G	57.78	74.00	-16.22	31.59	3	Vertical	159	2.02	-
AV	2.493G	44.20	54.00	-9.80	31.62	3	Vertical	159	2.02	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2417MHz_TX

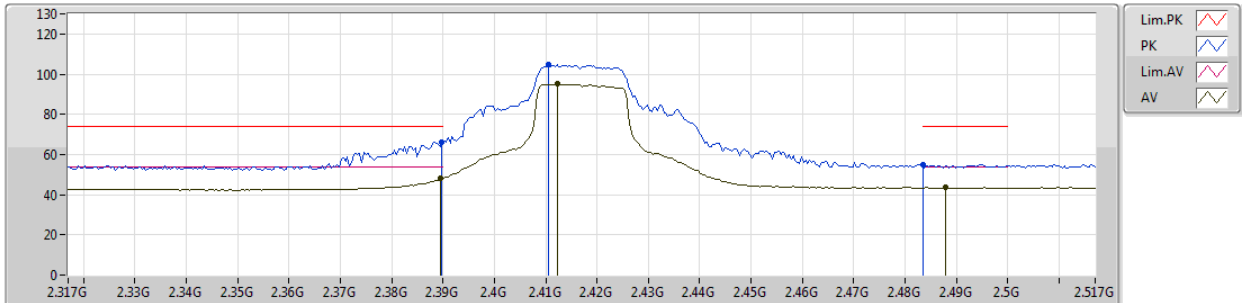


EUT_Z_1TX
Setting 75
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	66.25	74.00	-7.75	31.38	3	Horizontal	292	2.85	-
AV	2.3894G	48.06	54.00	-5.94	31.38	3	Horizontal	292	2.85	-
PK	2.4106G	104.87	Inf	-Inf	31.43	3	Horizontal	292	2.85	-
AV	2.4122G	95.07	Inf	-Inf	31.43	3	Horizontal	292	2.85	-
PK	2.4835G	55.04	74.00	-18.96	31.59	3	Horizontal	292	2.85	-
AV	2.4878G	43.46	54.00	-10.54	31.61	3	Horizontal	292	2.85	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2422MHz_TX

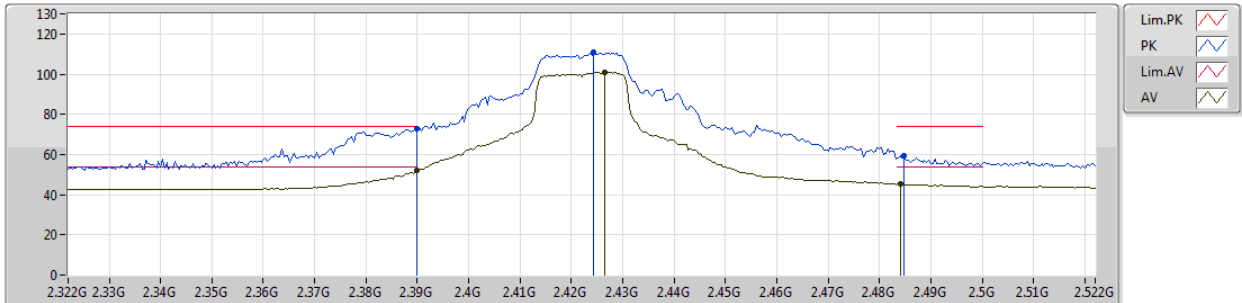


EUT Z_1TX
Setting 79
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.39G	72.89	74.00	-1.11	31.38	3	Vertical	139	1.48	-
AV	2.39G	51.99	54.00	-2.01	31.38	3	Vertical	139	1.48	-
PK	2.424G	110.86	Inf	-Inf	31.46	3	Vertical	139	1.48	-
AV	2.4264G	100.84	Inf	-Inf	31.47	3	Vertical	139	1.48	-
PK	2.4848G	59.30	74.00	-14.70	31.59	3	Vertical	139	1.48	-
AV	2.484G	45.20	54.00	-8.80	31.59	3	Vertical	139	1.48	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2422MHz_TX

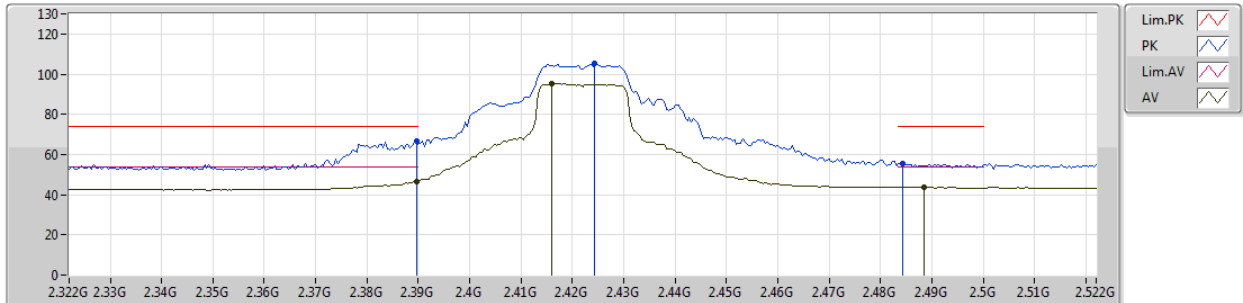


EUT Z_1TX
Setting 79
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3896G	66.51	74.00	-7.49	31.38	3	Horizontal	287	2.83	-
AV	2.3896G	46.50	54.00	-7.50	31.38	3	Horizontal	287	2.83	-
PK	2.4244G	105.08	Inf	-Inf	31.46	3	Horizontal	287	2.83	-
AV	2.416G	95.13	Inf	-Inf	31.45	3	Horizontal	287	2.83	-
PK	2.4844G	55.72	74.00	-18.28	31.59	3	Horizontal	287	2.83	-
AV	2.4884G	43.71	54.00	-10.29	31.61	3	Horizontal	287	2.83	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2427MHz_TX

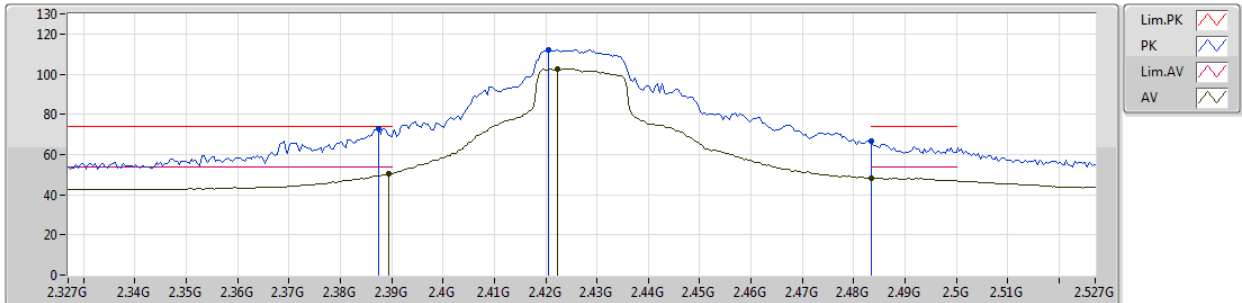


EUT_Z_1TX
Setting 82
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3874G	72.86	74.00	-1.14	31.37	3	Vertical	228	2.32	-
AV	2.3894G	50.68	54.00	-3.32	31.38	3	Vertical	228	2.32	-
PK	2.4206G	112.15	Inf	-Inf	31.46	3	Vertical	228	2.32	-
AV	2.4222G	102.40	Inf	-Inf	31.46	3	Vertical	228	2.32	-
PK	2.4835G	66.92	74.00	-7.08	31.59	3	Vertical	228	2.32	-
AV	2.4835G	48.40	54.00	-5.60	31.59	3	Vertical	228	2.32	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2427MHz_TX

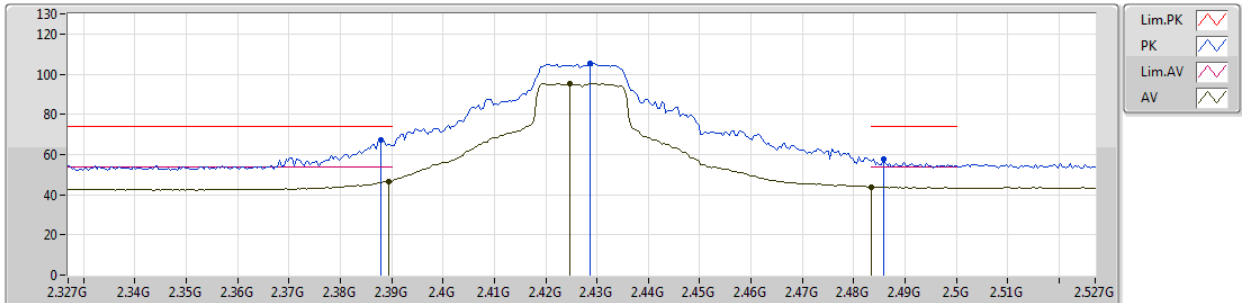


EUT_Z_1TX
Setting 82
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3878G	67.33	74.00	-6.67	31.38	3	Horizontal	295	2.84	-
AV	2.3894G	46.77	54.00	-7.23	31.38	3	Horizontal	295	2.84	-
PK	2.4286G	105.21	Inf	-Inf	31.47	3	Horizontal	295	2.84	-
AV	2.4246G	95.14	Inf	-Inf	31.46	3	Horizontal	295	2.84	-
PK	2.4858G	57.54	74.00	-16.46	31.59	3	Horizontal	295	2.84	-
AV	2.4835G	43.90	54.00	-10.10	31.59	3	Horizontal	295	2.84	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2432MHz_TX

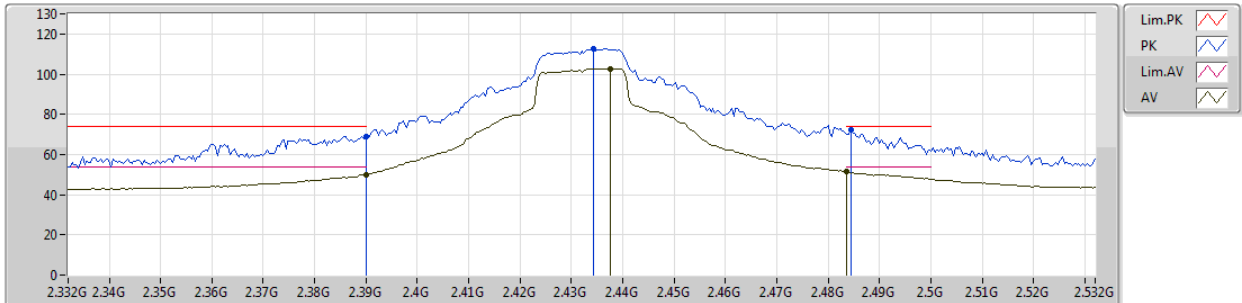


EUT Z_1TX
Setting 85
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.39G	68.92	74.00	-5.08	31.38	3	Vertical	236	2.53	-
AV	2.39G	50.09	54.00	-3.91	31.38	3	Vertical	236	2.53	-
PK	2.4344G	112.74	Inf	-Inf	31.48	3	Vertical	236	2.53	-
AV	2.4376G	102.75	Inf	-Inf	31.50	3	Vertical	236	2.53	-
PK	2.4844G	72.33	74.00	-1.67	31.59	3	Vertical	236	2.53	-
AV	2.4835G	51.43	54.00	-2.57	31.59	3	Vertical	236	2.53	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2432MHz_TX

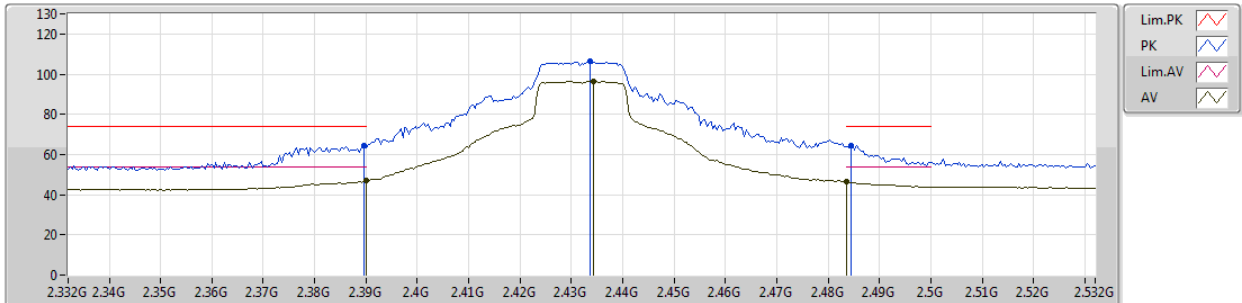


EUT Z_1TX
Setting 85
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3896G	64.36	74.00	-9.64	31.38	3	Horizontal	290	2.82	-
AV	2.39G	46.84	54.00	-7.16	31.38	3	Horizontal	290	2.82	-
PK	2.4336G	106.34	Inf	-Inf	31.48	3	Horizontal	290	2.82	-
AV	2.4344G	96.59	Inf	-Inf	31.48	3	Horizontal	290	2.82	-
PK	2.4844G	64.47	74.00	-9.53	31.59	3	Horizontal	290	2.82	-
AV	2.4835G	46.24	54.00	-7.76	31.59	3	Horizontal	290	2.82	-

802.11g_Nss1,(6Mbps)_1TX

06/12/2018

2442MHz_TX

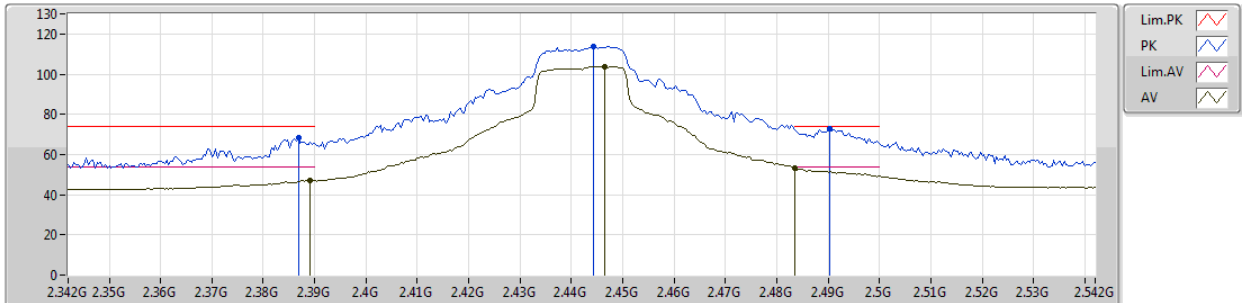


EUT Z_1TX
Setting 84
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3868G	68.13	74.00	-5.87	31.37	3	Vertical	247	2.57	-
AV	2.3892G	47.14	54.00	-6.86	31.38	3	Vertical	247	2.57	-
PK	2.4444G	113.81	Inf	-Inf	31.51	3	Vertical	247	2.57	-
AV	2.4464G	103.77	Inf	-Inf	31.51	3	Vertical	247	2.57	-
PK	2.4904G	72.90	74.00	-1.10	31.61	3	Vertical	247	2.57	-
AV	2.4835G	53.17	54.00	-0.83	31.59	3	Vertical	247	2.57	-

802.11g_Nss1,(6Mbps)_1TX

06/12/2018

2442MHz_TX

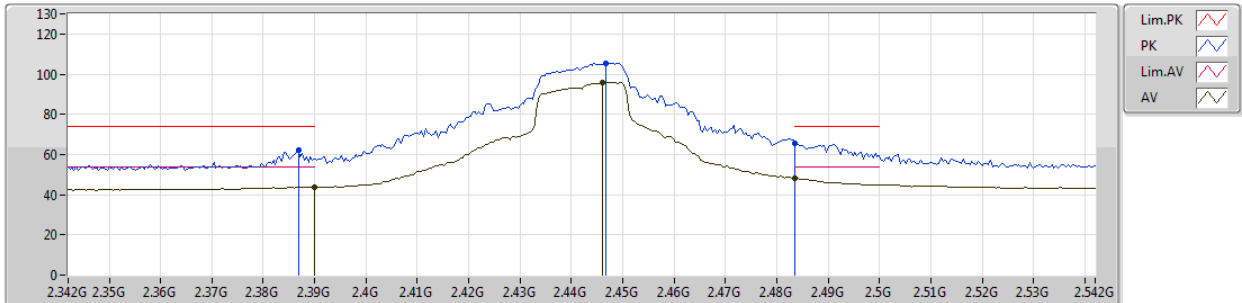


EUT Z_1TX
Setting 84
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3868G	62.10	74.00	-11.90	31.37	3	Horizontal	356	1.49	-
AV	2.39G	43.96	54.00	-10.04	31.38	3	Horizontal	356	1.49	-
PK	2.4468G	105.56	Inf	-Inf	31.51	3	Horizontal	356	1.49	-
AV	2.446G	95.86	Inf	-Inf	31.51	3	Horizontal	356	1.49	-
PK	2.4835G	65.77	74.00	-8.23	31.59	3	Horizontal	356	1.49	-
AV	2.4835G	48.24	54.00	-5.76	31.59	3	Horizontal	356	1.49	-

802.11g_Nss1,(6Mbps)_1TX

06/12/2018

2447MHz_TX

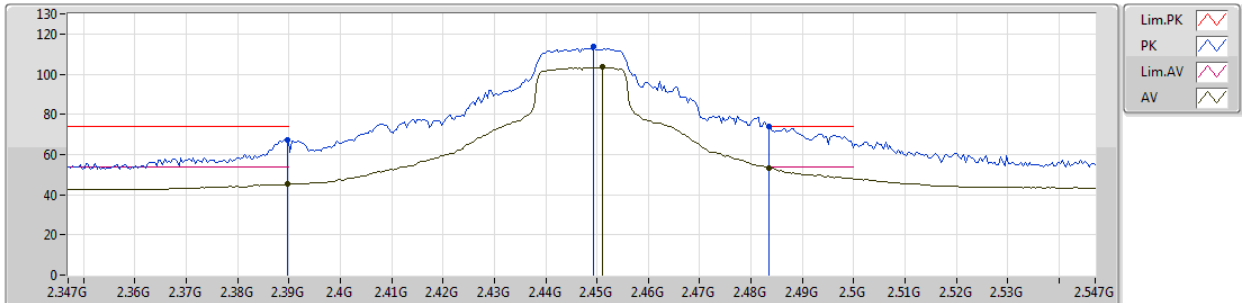


EUT_Z_1TX
Setting 84
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	67.16	74.00	-6.84	31.38	3	Vertical	246	2.59	-
AV	2.3898G	45.14	54.00	-8.86	31.38	3	Vertical	246	2.59	-
PK	2.4494G	113.49	Inf	-Inf	31.52	3	Vertical	246	2.59	-
AV	2.451G	103.42	Inf	-Inf	31.52	3	Vertical	246	2.59	-
PK	2.4835G	73.76	74.00	-0.24	31.59	3	Vertical	246	2.59	-
AV	2.4835G	53.04	54.00	-0.96	31.59	3	Vertical	246	2.59	-

802.11g_Nss1,(6Mbps)_1TX

06/12/2018

2447MHz_TX

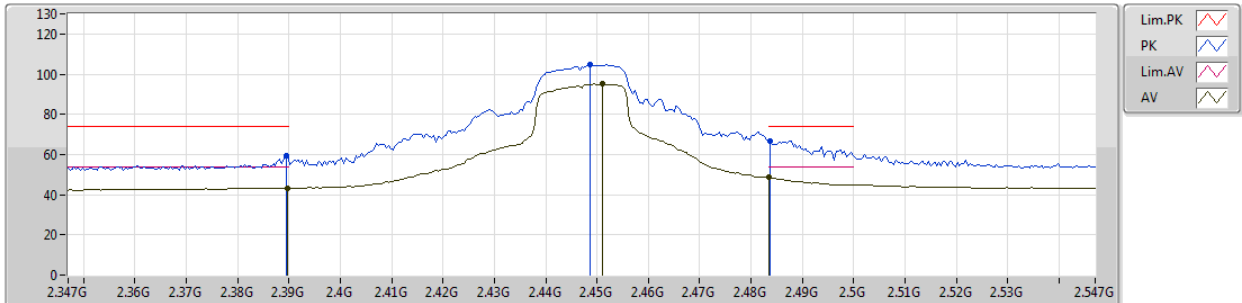


EUT_Z_1TX
Setting 84
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3894G	59.25	74.00	-14.75	31.38	3	Horizontal	12	1.50	-
AV	2.3898G	43.37	54.00	-10.63	31.38	3	Horizontal	12	1.50	-
PK	2.4486G	104.86	Inf	-Inf	31.52	3	Horizontal	12	1.50	-
AV	2.451G	95.30	Inf	-Inf	31.52	3	Horizontal	12	1.50	-
PK	2.4838G	66.83	74.00	-7.17	31.59	3	Horizontal	12	1.50	-
AV	2.4835G	48.52	54.00	-5.48	31.59	3	Horizontal	12	1.50	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2452MHz_TX

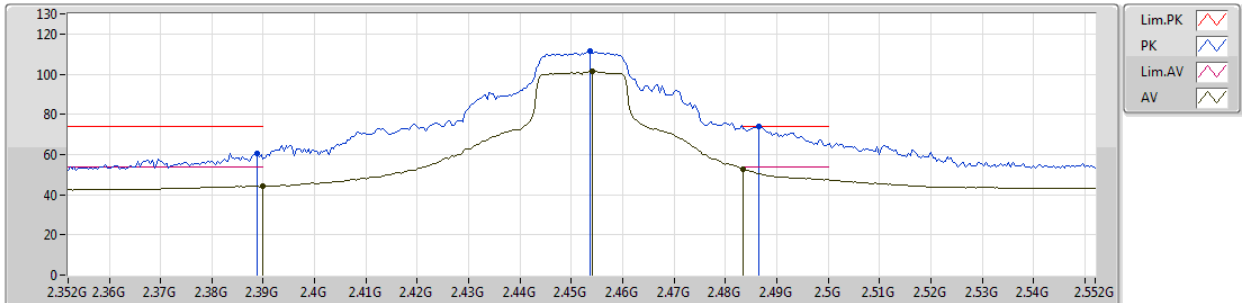


EUT_Z_1TX
Setting 80
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3888G	60.45	74.00	-13.55	31.38	3	Vertical	132	1.95	-
AV	2.39G	44.23	54.00	-9.77	31.38	3	Vertical	132	1.95	-
PK	2.4536G	111.50	Inf	-Inf	31.53	3	Vertical	132	1.95	-
AV	2.454G	101.26	Inf	-Inf	31.53	3	Vertical	132	1.95	-
PK	2.4864G	73.95	74.00	-0.05	31.60	3	Vertical	132	1.95	-
AV	2.4835G	52.49	54.00	-1.51	31.59	3	Vertical	132	1.95	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2452MHz_TX

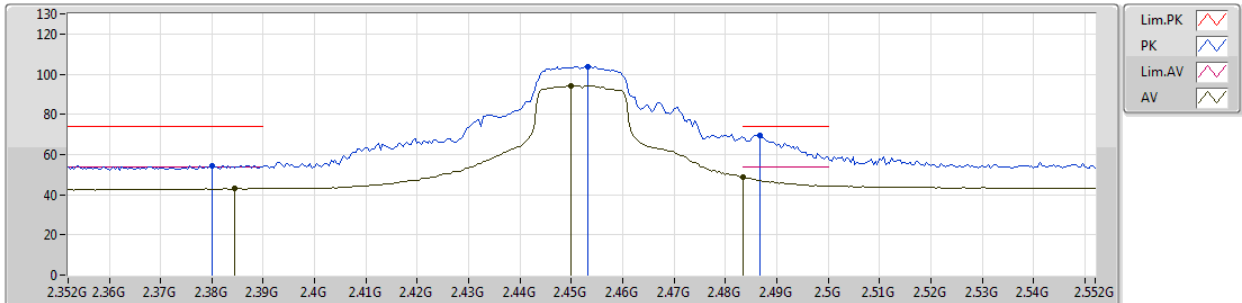


EUT Z_1TX
Setting 80
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.38G	54.58	74.00	-19.42	31.36	3	Horizontal	302	1.50	-
AV	2.3844G	42.97	54.00	-11.03	31.37	3	Horizontal	302	1.50	-
PK	2.4532G	103.85	Inf	-Inf	31.53	3	Horizontal	302	1.50	-
AV	2.45G	94.22	Inf	-Inf	31.52	3	Horizontal	302	1.50	-
PK	2.4868G	69.50	74.00	-4.50	31.60	3	Horizontal	302	1.50	-
AV	2.4835G	48.50	54.00	-5.50	31.59	3	Horizontal	302	1.50	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2457MHz_TX

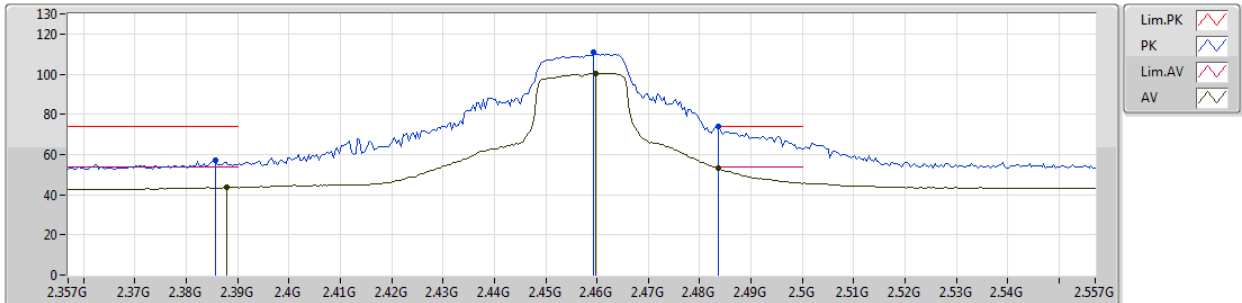


EUT_Z_1TX
Setting 75
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3858G	56.91	74.00	-17.09	31.37	3	Vertical	151	1.36	-
AV	2.3878G	43.68	54.00	-10.32	31.38	3	Vertical	151	1.36	-
PK	2.4594G	110.72	Inf	-Inf	31.54	3	Vertical	151	1.36	-
AV	2.4598G	100.47	Inf	-Inf	31.54	3	Vertical	151	1.36	-
PK	2.4836G	73.79	74.00	-0.21	31.59	3	Vertical	151	1.36	-
AV	2.4836G	53.17	54.00	-0.83	31.59	3	Vertical	151	1.36	-

802.11g_Nss1,(6Mbps)_1TX

05/12/2018

2457MHz_TX

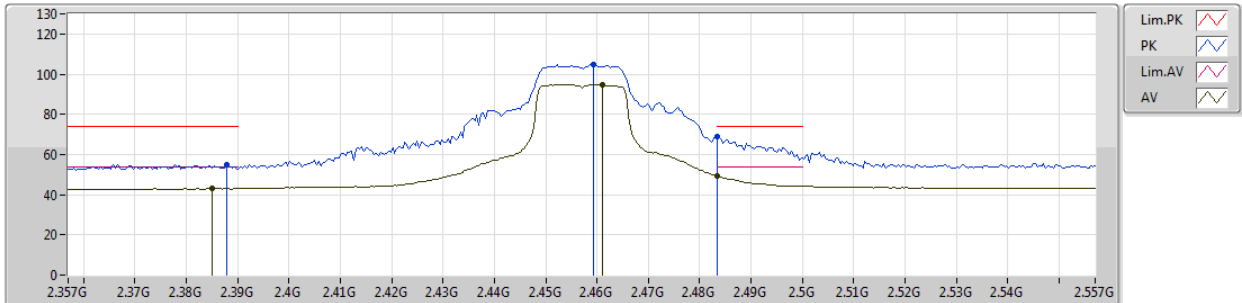

EUT_Z_1TX
Setting 75
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3878G	55.06	74.00	-18.94	31.38	3	Horizontal	251	1.08	-
AV	2.385G	42.97	54.00	-11.03	31.37	3	Horizontal	251	1.08	-
PK	2.4594G	105.06	Inf	-Inf	31.54	3	Horizontal	251	1.08	-
AV	2.461G	94.85	Inf	-Inf	31.54	3	Horizontal	251	1.08	-
PK	2.4835G	68.74	74.00	-5.26	31.59	3	Horizontal	251	1.08	-
AV	2.4835G	49.51	54.00	-4.49	31.59	3	Horizontal	251	1.08	-




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	AV	2.39G	53.99	54.00	-0.01	31.38	3	Vertical	206	2.31	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2412MHz_TX

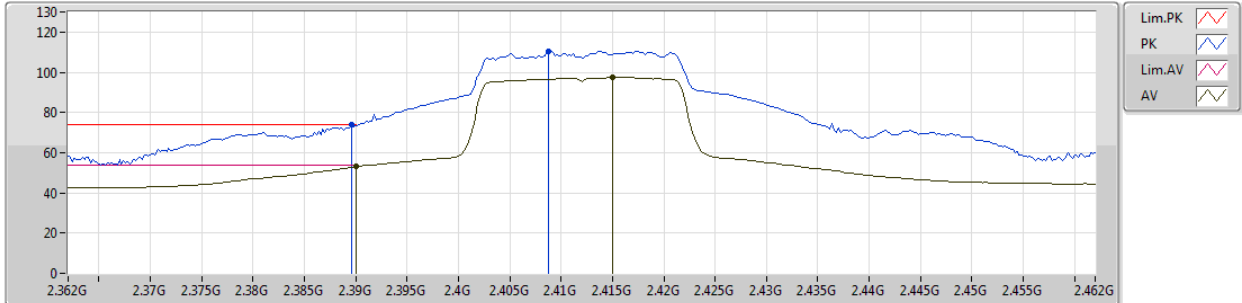


EUT_Z_1TX
Setting 68
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3896G	73.98	74.00	-0.02	31.38	3	Vertical	197	1.48	-
AV	2.39G	53.05	54.00	-0.95	31.38	3	Vertical	197	1.48	-
PK	2.4088G	110.59	Inf	-Inf	31.43	3	Vertical	197	1.48	-
AV	2.415G	97.37	Inf	-Inf	31.45	3	Vertical	197	1.48	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2412MHz_TX

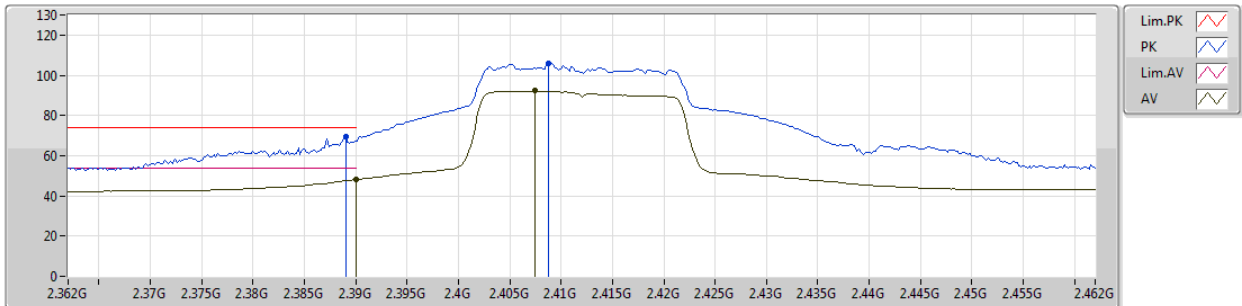


EUT_Z_1TX
Setting 68
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.389G	69.22	74.00	-4.78	31.38	3	Horizontal	257	2.93	-
AV	2.39G	48.08	54.00	-5.92	31.38	3	Horizontal	257	2.93	-
PK	2.4088G	105.77	Inf	-Inf	31.43	3	Horizontal	257	2.93	-
AV	2.4074G	92.20	Inf	-Inf	31.42	3	Horizontal	257	2.93	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2437MHz_TX

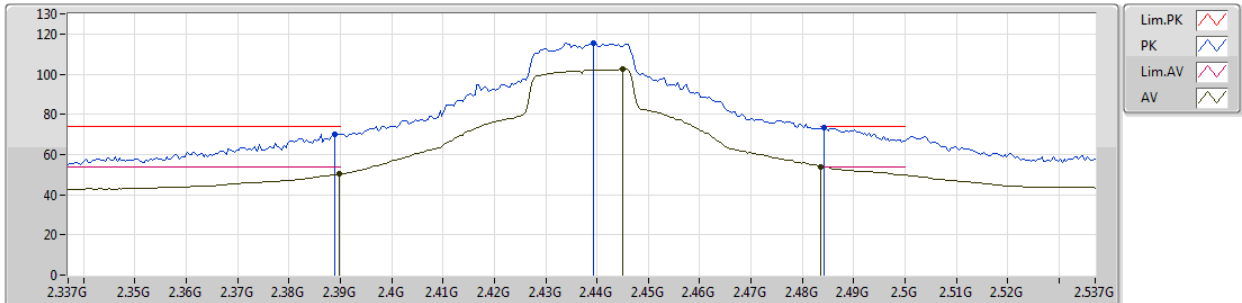


EUT_Z_1TX
Setting 84
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.389G	70.28	74.00	-3.72	31.38	3	Vertical	256	2.24	-
AV	2.3898G	50.17	54.00	-3.83	31.38	3	Vertical	256	2.24	-
PK	2.4394G	115.42	Inf	-Inf	31.50	3	Vertical	256	2.24	-
AV	2.445G	102.46	Inf	-Inf	31.51	3	Vertical	256	2.24	-
PK	2.4842G	73.64	74.00	-0.36	31.59	3	Vertical	256	2.24	-
AV	2.4836G	53.97	54.00	-0.03	31.59	3	Vertical	256	2.24	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2437MHz_TX

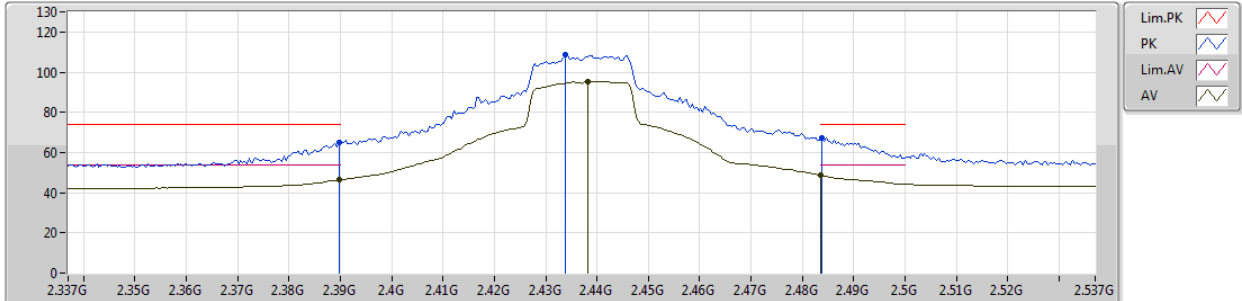


EUT Z_1TX
Setting 84
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	65.08	74.00	-8.92	31.38	3	Horizontal	250	2.76	-
AV	2.3898G	46.34	54.00	-7.66	31.38	3	Horizontal	250	2.76	-
PK	2.4338G	108.49	Inf	-Inf	31.48	3	Horizontal	250	2.76	-
AV	2.4382G	95.45	Inf	-Inf	31.50	3	Horizontal	250	2.76	-
PK	2.4838G	67.35	74.00	-6.65	31.59	3	Horizontal	250	2.76	-
AV	2.4835G	48.61	54.00	-5.39	31.59	3	Horizontal	250	2.76	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2462MHz_TX

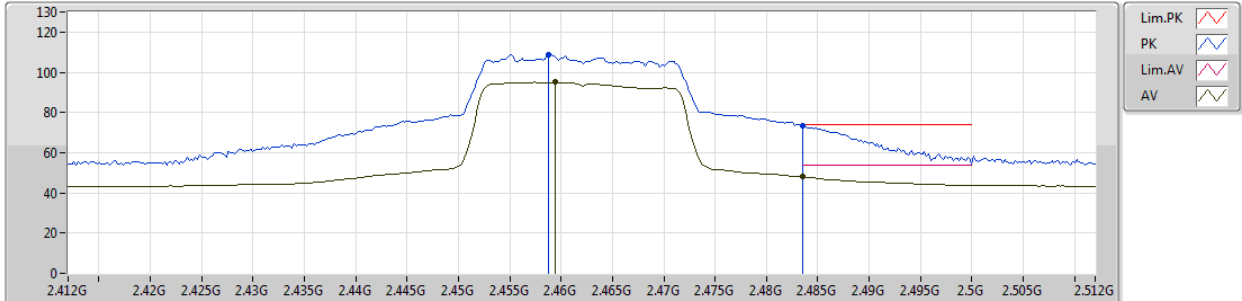


EUT Z_1TX
Setting 58
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4588G	108.96	Inf	-Inf	31.54	3	Vertical	149	1.60	-
AV	2.4594G	95.02	Inf	-Inf	31.54	3	Vertical	149	1.60	-
PK	2.4835G	73.38	74.00	-0.62	31.59	3	Vertical	149	1.60	-
AV	2.4835G	47.92	54.00	-6.08	31.59	3	Vertical	149	1.60	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2462MHz_TX

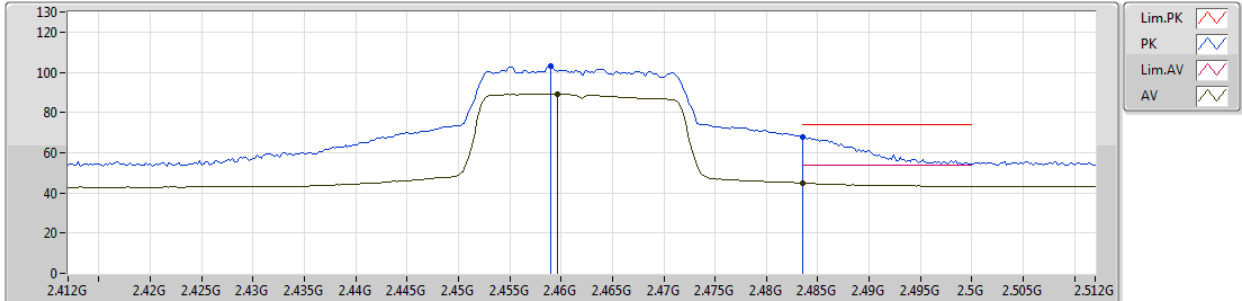


EUT Z_1TX
Setting 58
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.459G	102.88	Inf	-Inf	31.54	3	Horizontal	162	2.69	-
AV	2.4596G	89.08	Inf	-Inf	31.54	3	Horizontal	162	2.69	-
PK	2.4835G	67.74	74.00	-6.26	31.59	3	Horizontal	162	2.69	-
AV	2.4835G	44.89	54.00	-9.11	31.59	3	Horizontal	162	2.69	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2417MHz_TX

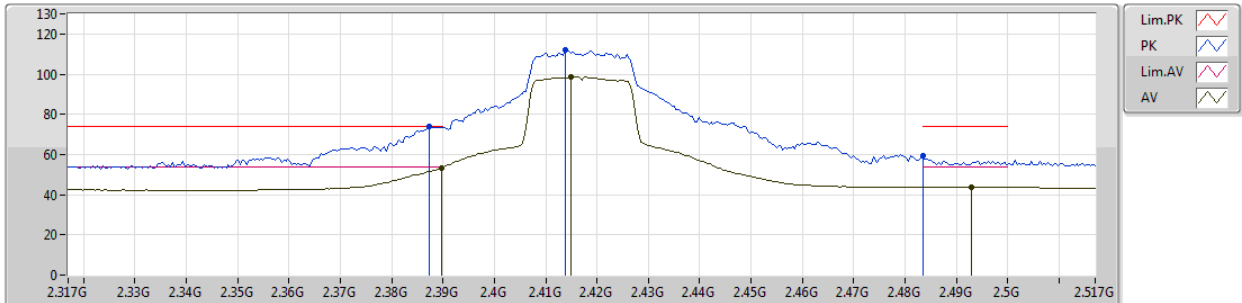


EUT Z_1TX
Setting 74
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3874G	73.77	74.00	-0.23	31.37	3	Vertical	205	1.92	-
AV	2.3898G	53.19	54.00	-0.81	31.38	3	Vertical	205	1.92	-
PK	2.4138G	112.25	Inf	-Inf	31.44	3	Vertical	205	1.92	-
AV	2.415G	98.65	Inf	-Inf	31.45	3	Vertical	205	1.92	-
PK	2.4835G	59.35	74.00	-14.65	31.59	3	Vertical	205	1.92	-
AV	2.493G	43.90	54.00	-10.10	31.62	3	Vertical	205	1.92	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2417MHz_TX

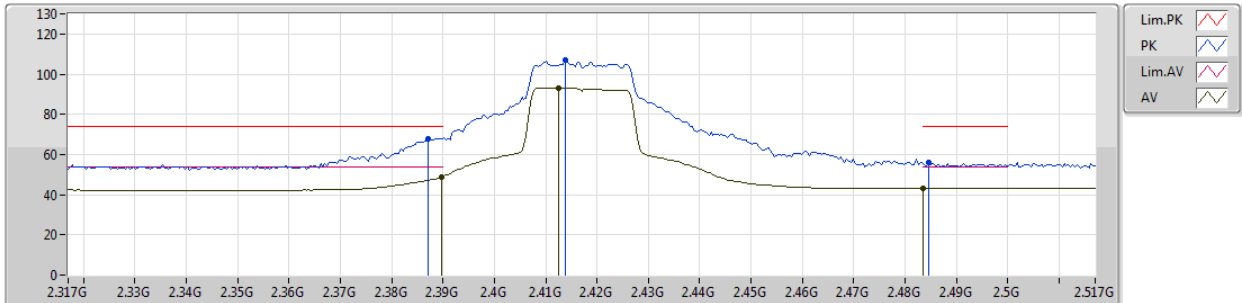


EUT Z_1TX
Setting 74
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.387G	67.94	74.00	-6.06	31.37	3	Horizontal	268	2.84	-
AV	2.3898G	48.70	54.00	-5.30	31.38	3	Horizontal	268	2.84	-
PK	2.4138G	106.91	Inf	-Inf	31.44	3	Horizontal	268	2.84	-
AV	2.4126G	93.12	Inf	-Inf	31.44	3	Horizontal	268	2.84	-
PK	2.4846G	55.77	74.00	-18.23	31.59	3	Horizontal	268	2.84	-
AV	2.4835G	43.24	54.00	-10.76	31.59	3	Horizontal	268	2.84	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2422MHz_TX

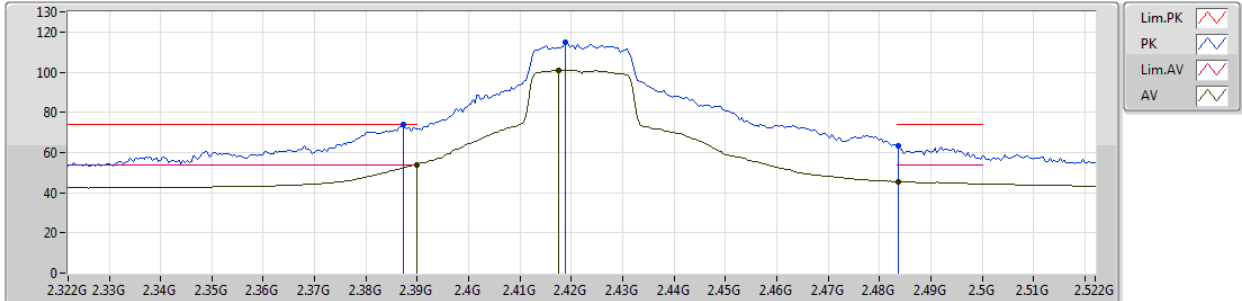


EUT Z_1TX
Setting 79
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3872G	73.91	74.00	-0.09	31.37	3	Vertical	206	2.31	-
AV	2.39G	53.99	54.00	-0.01	31.38	3	Vertical	206	2.31	-
PK	2.4188G	114.85	Inf	-Inf	31.45	3	Vertical	206	2.31	-
AV	2.4176G	100.88	Inf	-Inf	31.45	3	Vertical	206	2.31	-
PK	2.4836G	63.49	74.00	-10.51	31.59	3	Vertical	206	2.31	-
AV	2.4836G	45.50	54.00	-8.50	31.59	3	Vertical	206	2.31	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2422MHz_TX

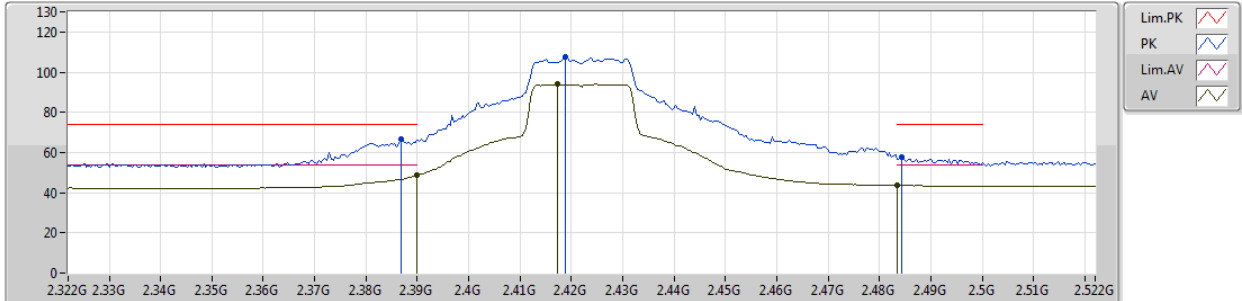


EUT Z_1TX
Setting 79
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3868G	66.74	74.00	-7.26	31.37	3	Horizontal	257	2.81	-
AV	2.39G	48.47	54.00	-5.53	31.38	3	Horizontal	257	2.81	-
PK	2.4188G	107.86	Inf	-Inf	31.45	3	Horizontal	257	2.81	-
AV	2.4172G	93.90	Inf	-Inf	31.45	3	Horizontal	257	2.81	-
PK	2.4844G	57.69	74.00	-16.31	31.59	3	Horizontal	257	2.81	-
AV	2.4835G	43.67	54.00	-10.33	31.59	3	Horizontal	257	2.81	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2427MHz_TX

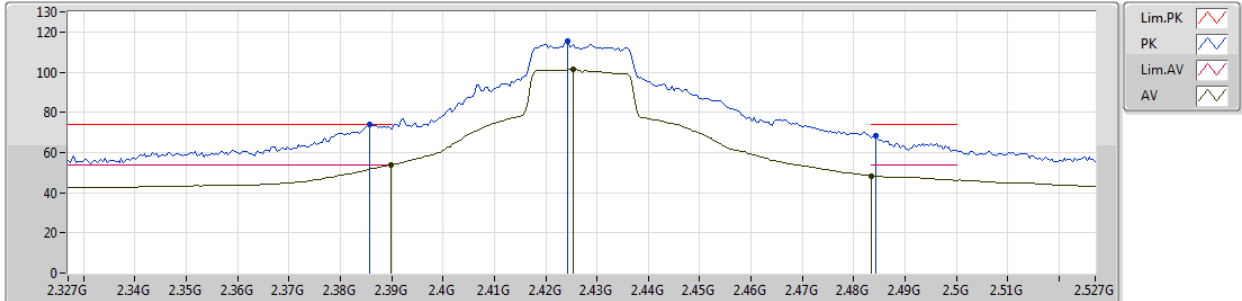


EUT Z_1TX
Setting 82
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3858G	73.69	74.00	-0.31	31.37	3	Vertical	192	2.32	-
AV	2.3898G	53.86	54.00	-0.14	31.38	3	Vertical	192	2.32	-
PK	2.4242G	115.27	Inf	-Inf	31.46	3	Vertical	192	2.32	-
AV	2.4254G	101.26	Inf	-Inf	31.47	3	Vertical	192	2.32	-
PK	2.4842G	68.37	74.00	-5.63	31.59	3	Vertical	192	2.32	-
AV	2.4835G	48.38	54.00	-5.62	31.59	3	Vertical	192	2.32	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2427MHz_TX

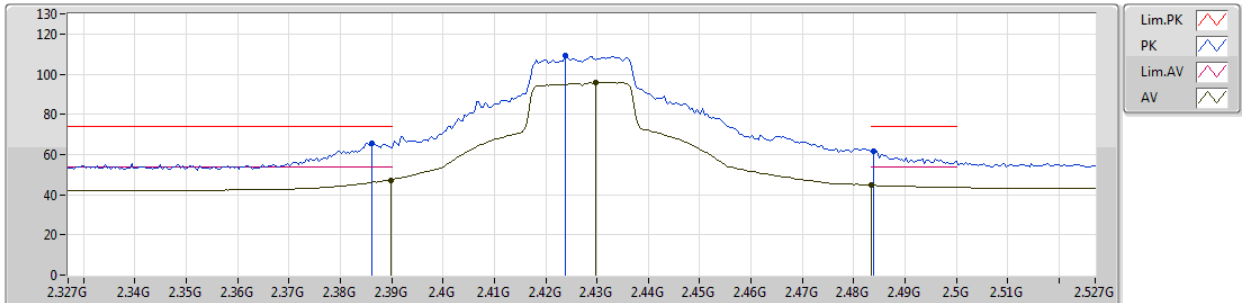


EUT Z_1TX
Setting 82
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3862G	65.59	74.00	-8.41	31.37	3	Horizontal	258	2.79	-
AV	2.3898G	47.30	54.00	-6.70	31.38	3	Horizontal	258	2.79	-
PK	2.4238G	109.07	Inf	-Inf	31.46	3	Horizontal	258	2.79	-
AV	2.4298G	95.89	Inf	-Inf	31.47	3	Horizontal	258	2.79	-
PK	2.4838G	61.59	74.00	-12.41	31.59	3	Horizontal	258	2.79	-
AV	2.4835G	44.67	54.00	-9.33	31.59	3	Horizontal	258	2.79	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2432MHz_TX

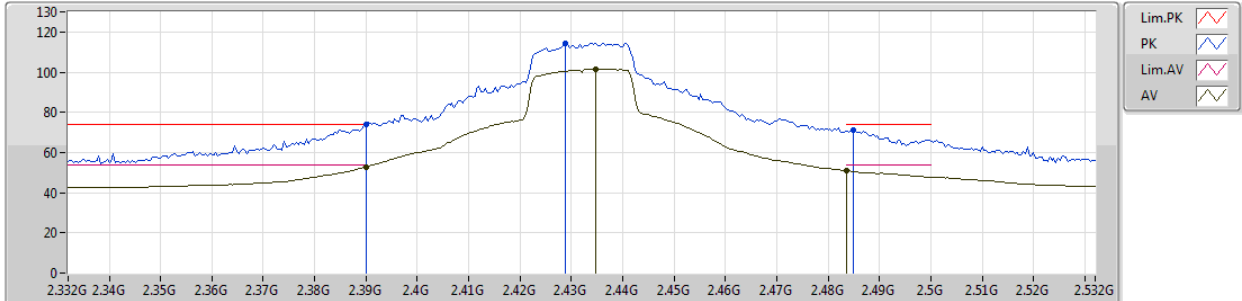


EUT Z_1TX
Setting 83
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.39G	73.98	74.00	-0.02	31.38	3	Vertical	179	1.50	-
AV	2.39G	52.71	54.00	-1.29	31.38	3	Vertical	179	1.50	-
PK	2.4288G	114.51	Inf	-Inf	31.47	3	Vertical	179	1.50	-
AV	2.4348G	101.43	Inf	-Inf	31.48	3	Vertical	179	1.50	-
PK	2.4848G	70.97	74.00	-3.03	31.59	3	Vertical	179	1.50	-
AV	2.4836G	50.96	54.00	-3.04	31.59	3	Vertical	179	1.50	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2432MHz_TX

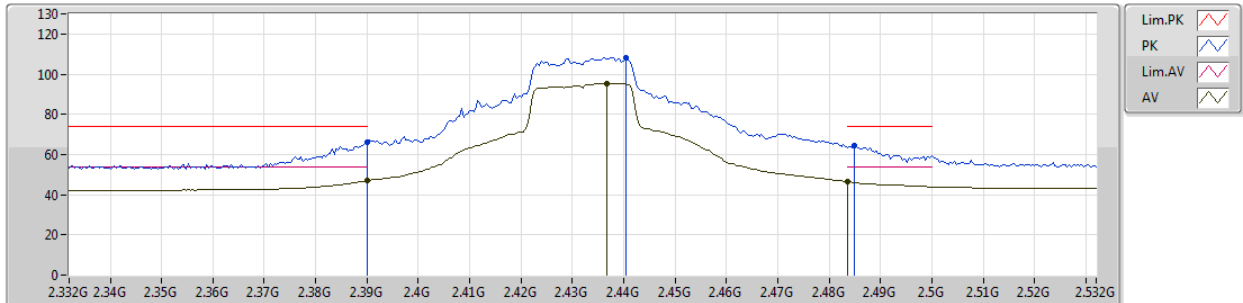


EUT Z_1TX
Setting 83
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.39G	65.97	74.00	-8.03	31.38	3	Horizontal	241	2.49	-
AV	2.39G	46.86	54.00	-7.14	31.38	3	Horizontal	241	2.49	-
PK	2.4404G	108.32	Inf	-Inf	31.50	3	Horizontal	241	2.49	-
AV	2.4368G	95.38	Inf	-Inf	31.49	3	Horizontal	241	2.49	-
PK	2.4848G	64.63	74.00	-9.37	31.59	3	Horizontal	241	2.49	-
AV	2.4835G	46.38	54.00	-7.62	31.59	3	Horizontal	241	2.49	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2442MHz_TX

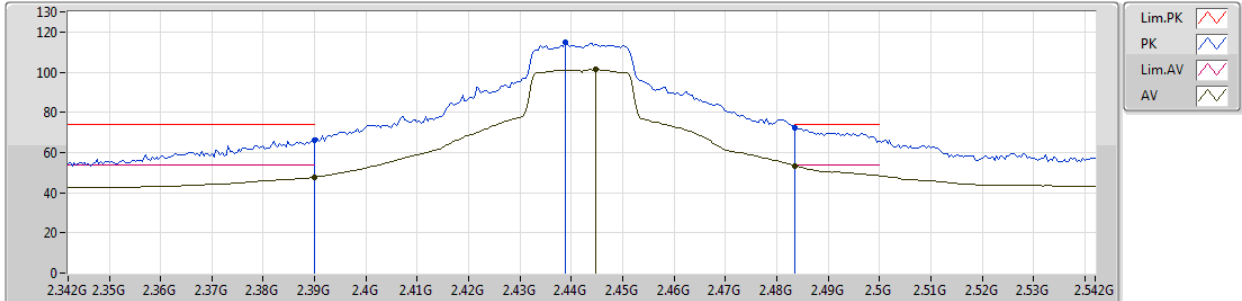


EUT Z_1TX
Setting 83
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.39G	66.22	74.00	-7.78	31.38	3	Vertical	101	1.22	-
AV	2.39G	47.67	54.00	-6.33	31.38	3	Vertical	101	1.22	-
PK	2.4388G	115.02	Inf	-Inf	31.50	3	Vertical	101	1.22	-
AV	2.4448G	101.22	Inf	-Inf	31.51	3	Vertical	101	1.22	-
PK	2.4835G	72.40	74.00	-1.60	31.59	3	Vertical	101	1.22	-
AV	2.4835G	53.38	54.00	-0.62	31.59	3	Vertical	101	1.22	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2442MHz_TX

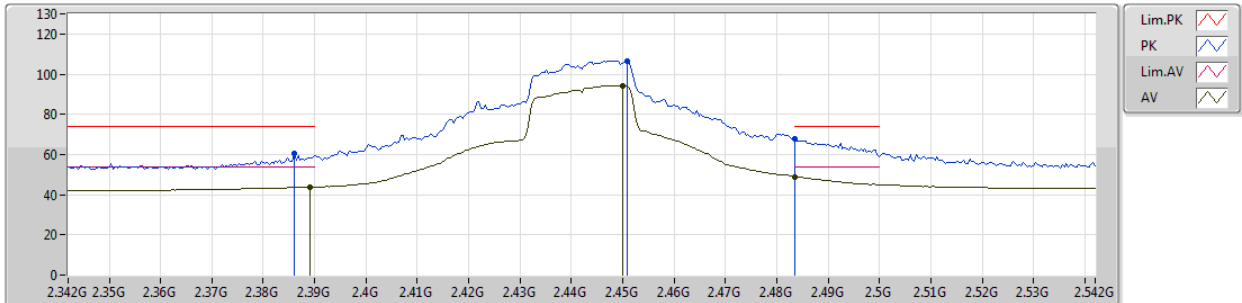


EUT Z_1TX
Setting 83
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.386G	60.46	74.00	-13.54	31.37	3	Horizontal	255	1.50	-
AV	2.3892G	43.82	54.00	-10.18	31.38	3	Horizontal	255	1.50	-
PK	2.4508G	106.72	Inf	-Inf	31.52	3	Horizontal	255	1.50	-
AV	2.45G	94.25	Inf	-Inf	31.52	3	Horizontal	255	1.50	-
PK	2.4835G	67.87	74.00	-6.13	31.59	3	Horizontal	255	1.50	-
AV	2.4835G	48.91	54.00	-5.09	31.59	3	Horizontal	255	1.50	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2447MHz_TX

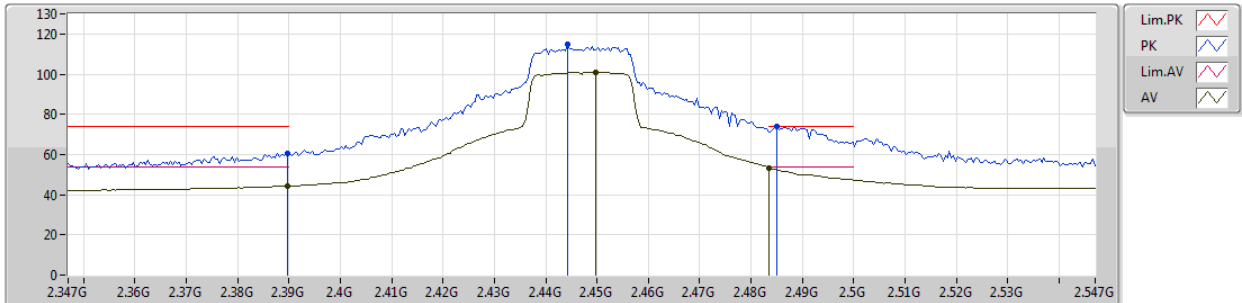


EUT_Z_1TX
Setting 79
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	60.51	74.00	-13.49	31.38	3	Vertical	160	2.54	-
AV	2.3898G	44.23	54.00	-9.77	31.38	3	Vertical	160	2.54	-
PK	2.4442G	114.67	Inf	-Inf	31.51	3	Vertical	160	2.54	-
AV	2.4498G	101.06	Inf	-Inf	31.52	3	Vertical	160	2.54	-
PK	2.485G	73.99	74.00	-0.01	31.59	3	Vertical	160	2.54	-
AV	2.4835G	53.50	54.00	-0.50	31.59	3	Vertical	160	2.54	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2447MHz_TX

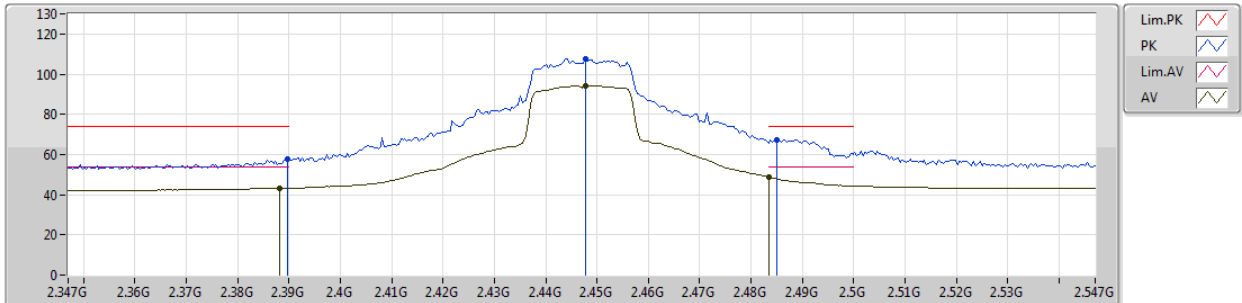


EUT_Z_1TX
Setting 79
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	57.46	74.00	-16.54	31.38	3	Horizontal	210	1.38	-
AV	2.3882G	43.25	54.00	-10.75	31.38	3	Horizontal	210	1.38	-
PK	2.4478G	107.81	Inf	-Inf	31.52	3	Horizontal	210	1.38	-
AV	2.4478G	94.20	Inf	-Inf	31.52	3	Horizontal	210	1.38	-
PK	2.485G	67.35	74.00	-6.65	31.59	3	Horizontal	210	1.38	-
AV	2.4835G	48.68	54.00	-5.32	31.59	3	Horizontal	210	1.38	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2452MHz_TX

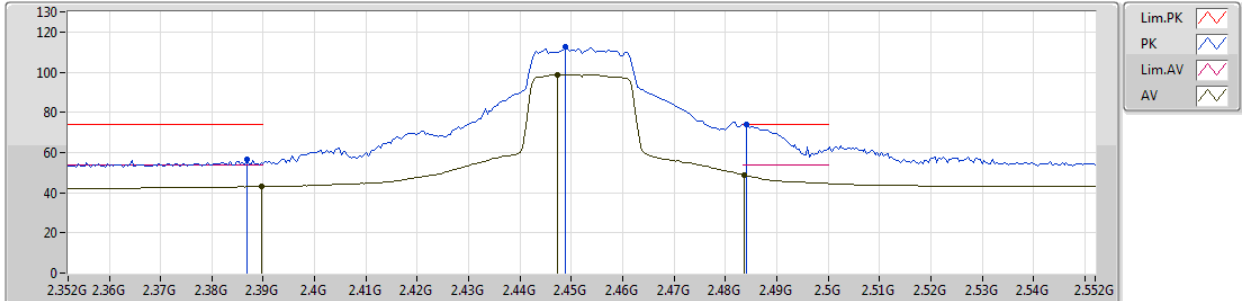


EUT Z_1TX
Setting 70
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3868G	56.44	74.00	-17.56	31.37	3	Vertical	179	2.60	-
AV	2.3896G	43.05	54.00	-10.95	31.38	3	Vertical	179	2.60	-
PK	2.4488G	112.63	Inf	-Inf	31.52	3	Vertical	179	2.60	-
AV	2.4472G	98.87	Inf	-Inf	31.51	3	Vertical	179	2.60	-
PK	2.484G	73.98	74.00	-0.02	31.59	3	Vertical	179	2.60	-
AV	2.4836G	48.85	54.00	-5.15	31.59	3	Vertical	179	2.60	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2452MHz_TX

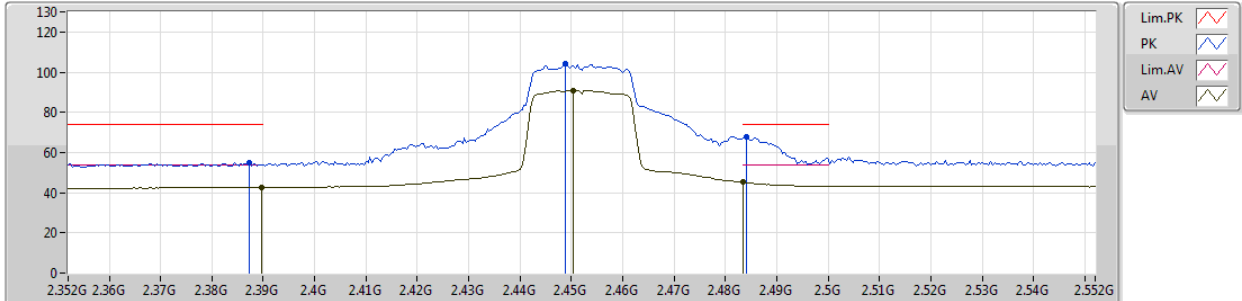


EUT Z_1TX
Setting 70
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3872G	54.92	74.00	-19.08	31.37	3	Horizontal	283	1.50	-
AV	2.3896G	42.63	54.00	-11.37	31.38	3	Horizontal	283	1.50	-
PK	2.4488G	104.43	Inf	-Inf	31.52	3	Horizontal	283	1.50	-
AV	2.4504G	90.86	Inf	-Inf	31.52	3	Horizontal	283	1.50	-
PK	2.484G	67.53	74.00	-6.47	31.59	3	Horizontal	283	1.50	-
AV	2.4835G	45.14	54.00	-8.86	31.59	3	Horizontal	283	1.50	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2457MHz_TX

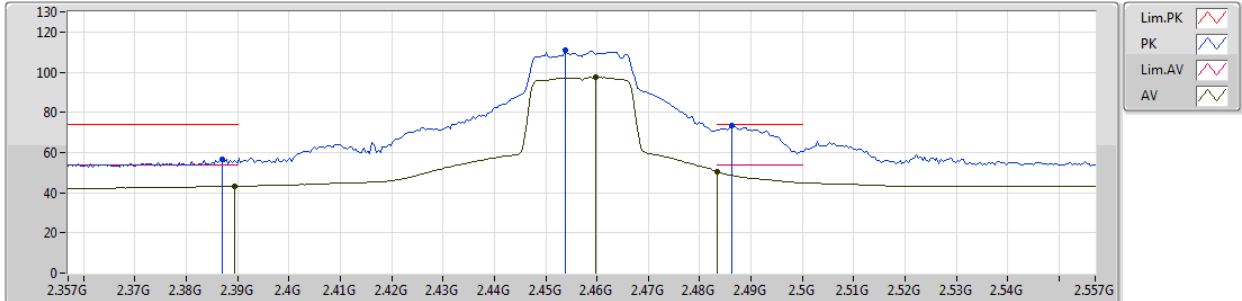


EUT_Z_1TX
Setting 70
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.387G	56.76	74.00	-17.24	31.37	3	Vertical	84	1.56	-
AV	2.3894G	43.13	54.00	-10.87	31.38	3	Vertical	84	1.56	-
PK	2.4538G	110.84	Inf	-Inf	31.53	3	Vertical	84	1.56	-
AV	2.4598G	97.46	Inf	-Inf	31.54	3	Vertical	84	1.56	-
PK	2.4862G	73.30	74.00	-0.70	31.60	3	Vertical	84	1.56	-
AV	2.4835G	50.42	54.00	-3.58	31.59	3	Vertical	84	1.56	-

802.11ax HEW20_Nss1,(MCS0)_1TX

06/12/2018

2457MHz_TX

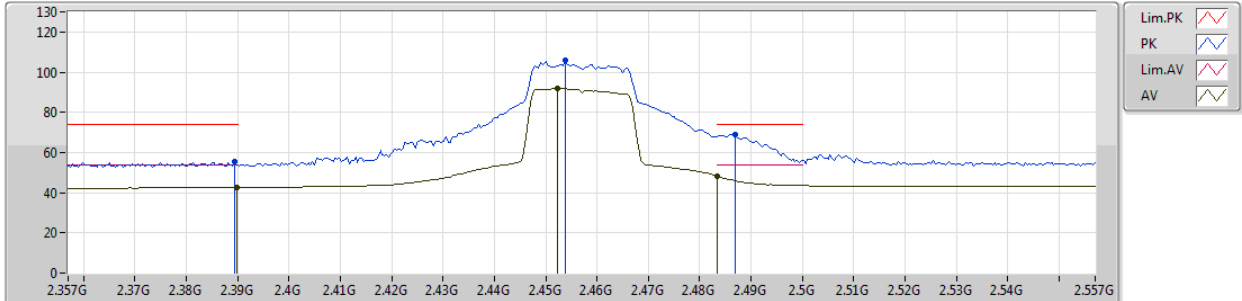


EUT Z_1TX
Setting 70
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3894G	55.54	74.00	-18.46	31.38	3	Horizontal	231	2.22	-
AV	2.3898G	42.64	54.00	-11.36	31.38	3	Horizontal	231	2.22	-
PK	2.4538G	105.67	Inf	-Inf	31.53	3	Horizontal	231	2.22	-
AV	2.4522G	91.92	Inf	-Inf	31.52	3	Horizontal	231	2.22	-
PK	2.487G	69.07	74.00	-4.93	31.60	3	Horizontal	231	2.22	-
AV	2.4835G	48.12	54.00	-5.88	31.59	3	Horizontal	231	2.22	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2422MHz_TX

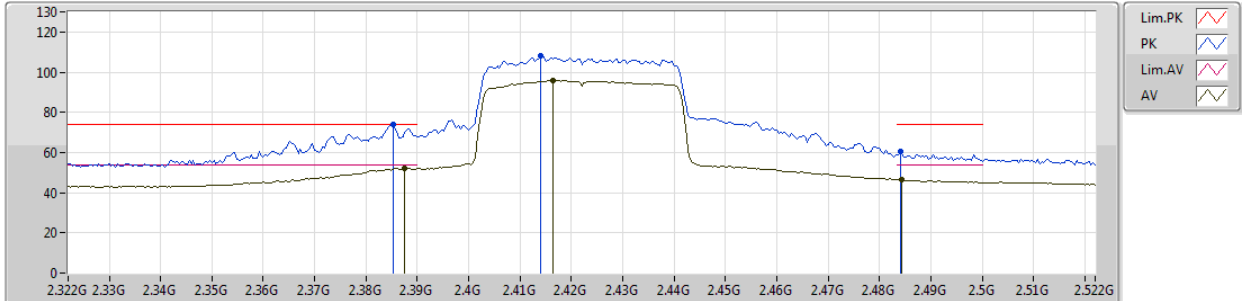


EUT Z_1TX
Setting 66
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3852G	73.77	74.00	-0.23	31.37	3	Vertical	203	2.39	-
AV	2.3876G	52.12	54.00	-1.88	31.38	3	Vertical	203	2.39	-
PK	2.414G	107.98	Inf	-Inf	31.45	3	Vertical	203	2.39	-
AV	2.4164G	95.81	Inf	-Inf	31.45	3	Vertical	203	2.39	-
PK	2.484G	60.57	74.00	-13.43	31.59	3	Vertical	203	2.39	-
AV	2.4844G	46.53	54.00	-7.47	31.59	3	Vertical	203	2.39	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2422MHz_TX

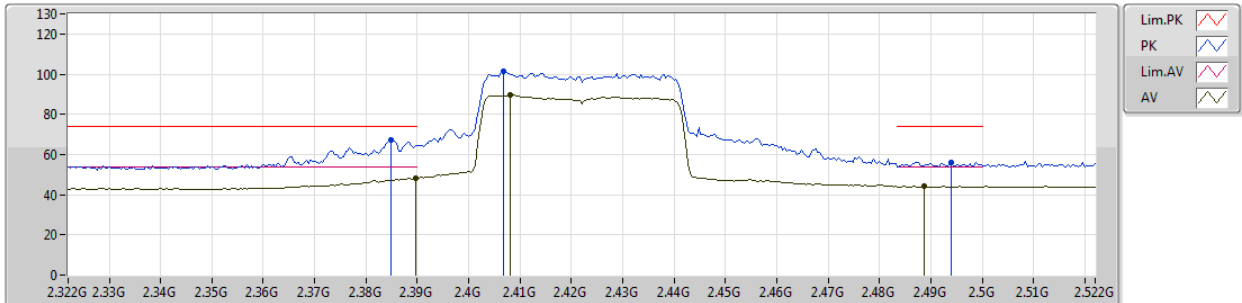


EUT Z_1TX
Setting 66
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3848G	67.37	74.00	-6.63	31.37	3	Horizontal	252	2.56	-
AV	2.3896G	48.15	54.00	-5.85	31.38	3	Horizontal	252	2.56	-
PK	2.4068G	101.64	Inf	-Inf	31.42	3	Horizontal	252	2.56	-
AV	2.408G	89.42	Inf	-Inf	31.42	3	Horizontal	252	2.56	-
PK	2.494G	56.21	74.00	-17.79	31.62	3	Horizontal	252	2.56	-
AV	2.4888G	44.18	54.00	-9.82	31.61	3	Horizontal	252	2.56	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2437MHz_TX

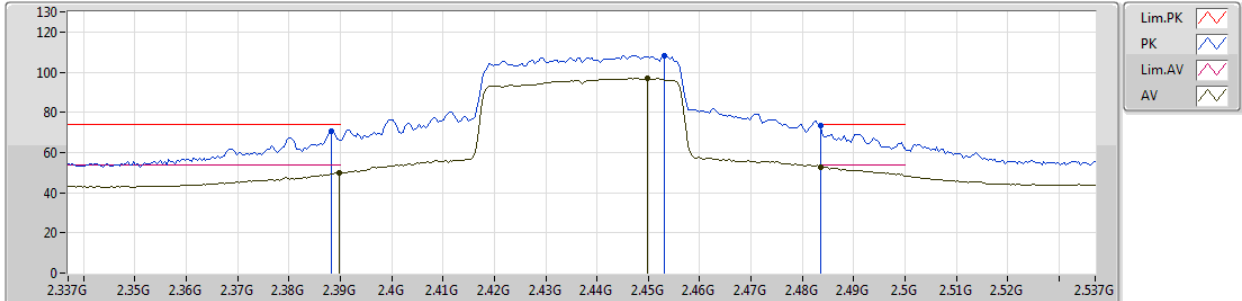


EUT Z_1TX
Setting 69
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3882G	70.42	74.00	-3.58	31.38	3	Vertical	177	2.55	-
AV	2.3898G	49.68	54.00	-4.32	31.38	3	Vertical	177	2.55	-
PK	2.453G	108.38	Inf	-Inf	31.53	3	Vertical	177	2.55	-
AV	2.4498G	96.97	Inf	-Inf	31.52	3	Vertical	177	2.55	-
PK	2.4835G	73.13	74.00	-0.87	31.59	3	Vertical	177	2.55	-
AV	2.4835G	52.91	54.00	-1.09	31.59	3	Vertical	177	2.55	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2437MHz_TX

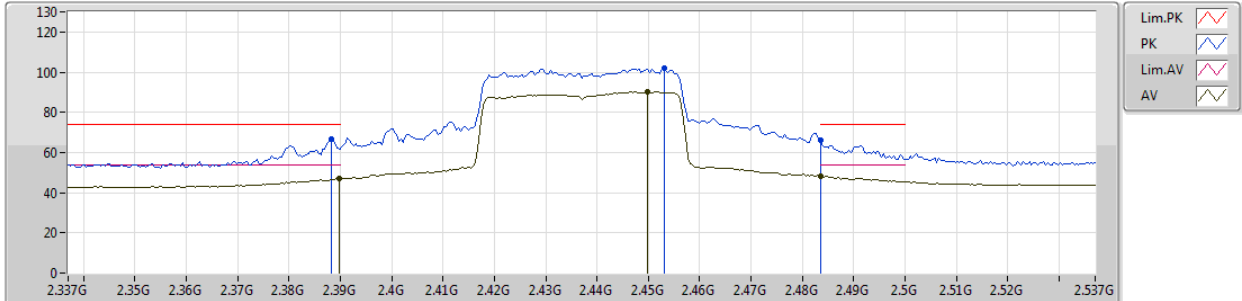


EUT Z_1TX
Setting 69
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.3882G	66.45	74.00	-7.55	31.38	3	Horizontal	307	1.42	-
AV	2.3898G	46.96	54.00	-7.04	31.38	3	Horizontal	307	1.42	-
PK	2.453G	101.89	Inf	-Inf	31.53	3	Horizontal	307	1.42	-
AV	2.4498G	90.32	Inf	-Inf	31.52	3	Horizontal	307	1.42	-
PK	2.4835G	66.17	74.00	-7.83	31.59	3	Horizontal	307	1.42	-
AV	2.4835G	48.20	54.00	-5.80	31.59	3	Horizontal	307	1.42	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2452MHz_TX

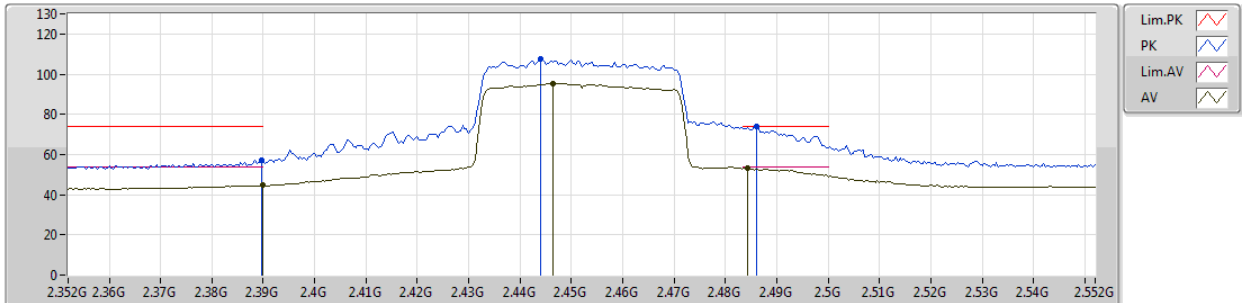


EUT Z_1TX
Setting 64
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3896G	57.26	74.00	-16.74	31.38	3	Vertical	248	2.54	-
AV	2.39G	44.90	54.00	-9.10	31.38	3	Vertical	248	2.54	-
PK	2.444G	107.39	Inf	-Inf	31.51	3	Vertical	248	2.54	-
AV	2.4464G	95.30	Inf	-Inf	31.51	3	Vertical	248	2.54	-
PK	2.486G	73.99	74.00	-0.01	31.59	3	Vertical	248	2.54	-
AV	2.4844G	53.14	54.00	-0.86	31.59	3	Vertical	248	2.54	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2452MHz_TX

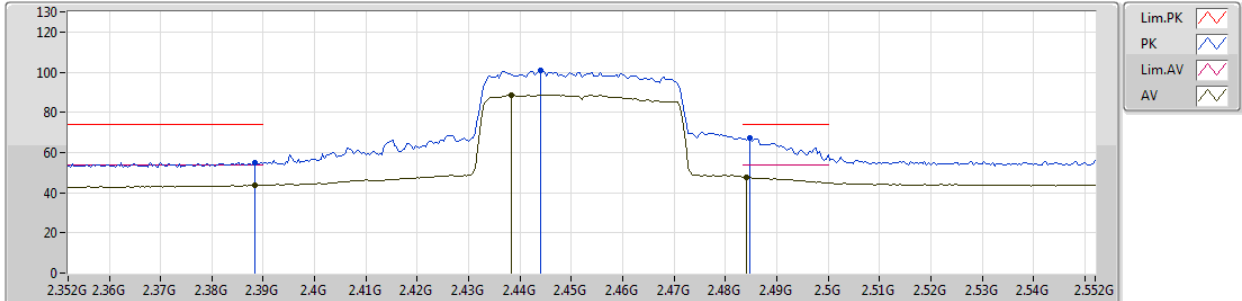


EUT Z_1TX
Setting 64
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3884G	54.96	74.00	-19.04	31.38	3	Horizontal	295	2.50	-
AV	2.3884G	43.72	54.00	-10.28	31.38	3	Horizontal	295	2.50	-
PK	2.444G	101.14	Inf	-Inf	31.51	3	Horizontal	295	2.50	-
AV	2.4384G	88.67	Inf	-Inf	31.50	3	Horizontal	295	2.50	-
PK	2.4848G	67.27	74.00	-6.73	31.59	3	Horizontal	295	2.50	-
AV	2.484G	47.84	54.00	-6.16	31.59	3	Horizontal	295	2.50	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2427MHz_TX

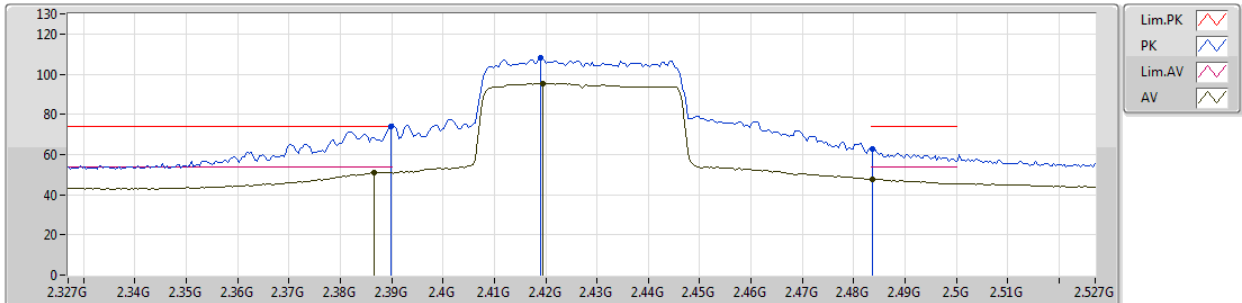


EUT Z_1TX
Setting 67
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	73.89	74.00	-0.11	31.38	3	Vertical	138	2.39	-
AV	2.3866G	51.03	54.00	-2.97	31.37	3	Vertical	138	2.39	-
PK	2.419G	107.98	Inf	-Inf	31.45	3	Vertical	138	2.39	-
AV	2.4194G	95.33	Inf	-Inf	31.45	3	Vertical	138	2.39	-
PK	2.4836G	62.81	74.00	-11.19	31.59	3	Vertical	138	2.39	-
AV	2.4836G	47.81	54.00	-6.19	31.59	3	Vertical	138	2.39	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2427MHz_TX

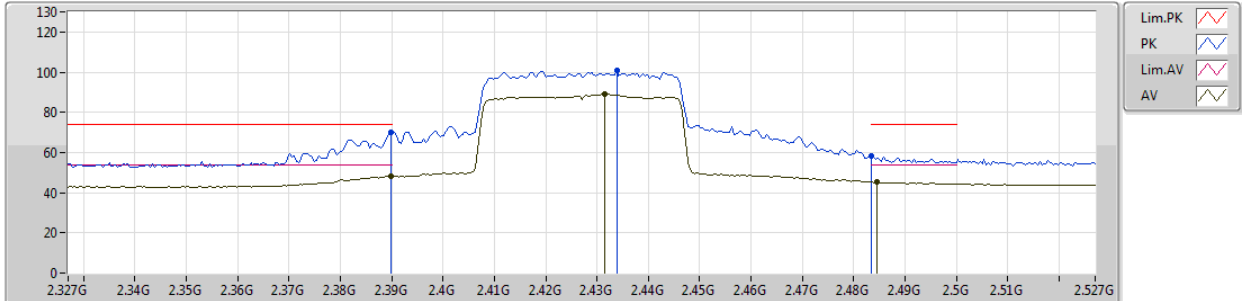


EUT Z_1TX
Setting 67
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	70.18	74.00	-3.82	31.38	3	Horizontal	178	1.45	-
AV	2.3898G	48.17	54.00	-5.83	31.38	3	Horizontal	178	1.45	-
PK	2.4338G	100.88	Inf	-Inf	31.48	3	Horizontal	178	1.45	-
AV	2.4314G	88.96	Inf	-Inf	31.48	3	Horizontal	178	1.45	-
PK	2.4835G	58.06	74.00	-15.94	31.59	3	Horizontal	178	1.45	-
AV	2.4846G	45.30	54.00	-8.70	31.59	3	Horizontal	178	1.45	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2432MHz_TX

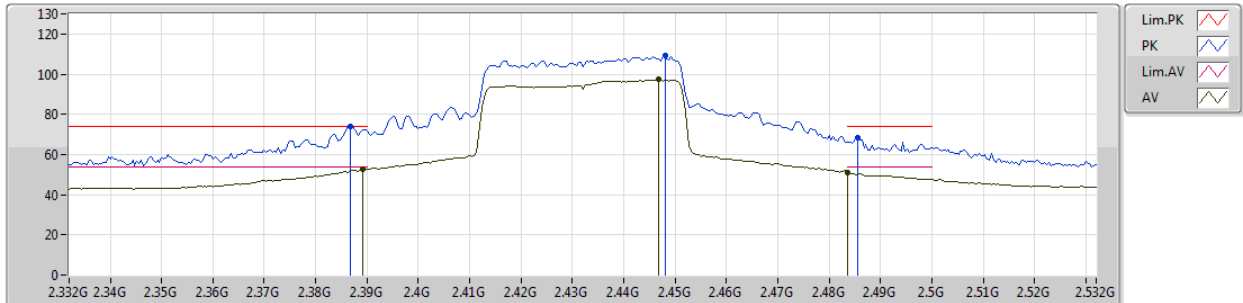


EUT Z_1TX
Setting 69
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3868G	73.95	74.00	-0.05	31.37	3	Vertical	113	2.58	-
AV	2.3892G	52.85	54.00	-1.15	31.38	3	Vertical	113	2.58	-
PK	2.448G	109.52	Inf	-Inf	31.52	3	Vertical	113	2.58	-
AV	2.4468G	97.31	Inf	-Inf	31.51	3	Vertical	113	2.58	-
PK	2.4856G	68.38	74.00	-5.62	31.59	3	Vertical	113	2.58	-
AV	2.4836G	51.06	54.00	-2.94	31.59	3	Vertical	113	2.58	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2432MHz_TX

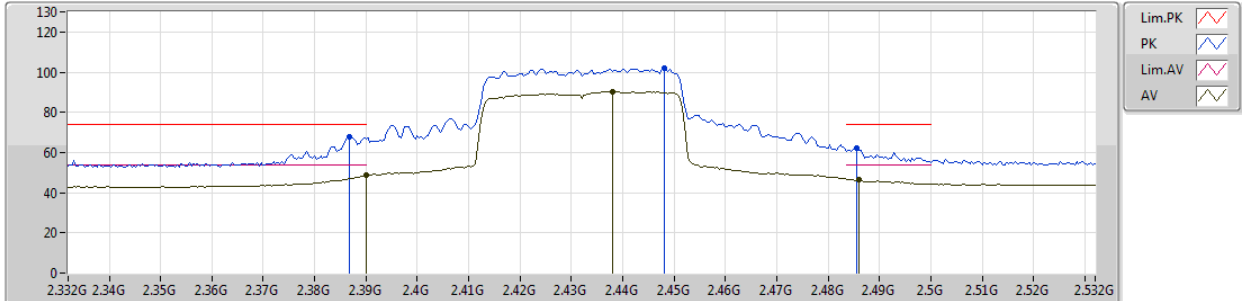


EUT Z_1TX
Setting 69
02-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.3868G	67.75	74.00	-6.25	31.37	3	Horizontal	167	2.51	-
AV	2.39G	48.51	54.00	-5.49	31.38	3	Horizontal	167	2.51	-
PK	2.448G	102.08	Inf	-Inf	31.52	3	Horizontal	167	2.51	-
AV	2.438G	90.43	Inf	-Inf	31.50	3	Horizontal	167	2.51	-
PK	2.4856G	62.21	74.00	-11.79	31.59	3	Horizontal	167	2.51	-
AV	2.486G	46.69	54.00	-7.31	31.59	3	Horizontal	167	2.51	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2442MHz_TX

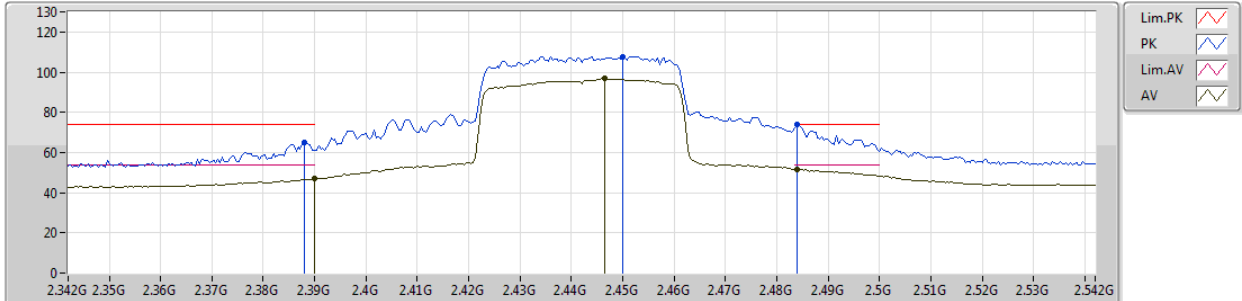


EUT Z_1TX
Setting 67
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.388G	64.84	74.00	-9.16	31.38	3	Vertical	84	2.56	-
AV	2.39G	46.90	54.00	-7.10	31.38	3	Vertical	84	2.56	-
PK	2.45G	107.69	Inf	-Inf	31.52	3	Vertical	84	2.56	-
AV	2.4464G	96.75	Inf	-Inf	31.51	3	Vertical	84	2.56	-
PK	2.484G	73.80	74.00	-0.20	31.59	3	Vertical	84	2.56	-
AV	2.484G	51.54	54.00	-2.46	31.59	3	Vertical	84	2.56	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2442MHz_TX

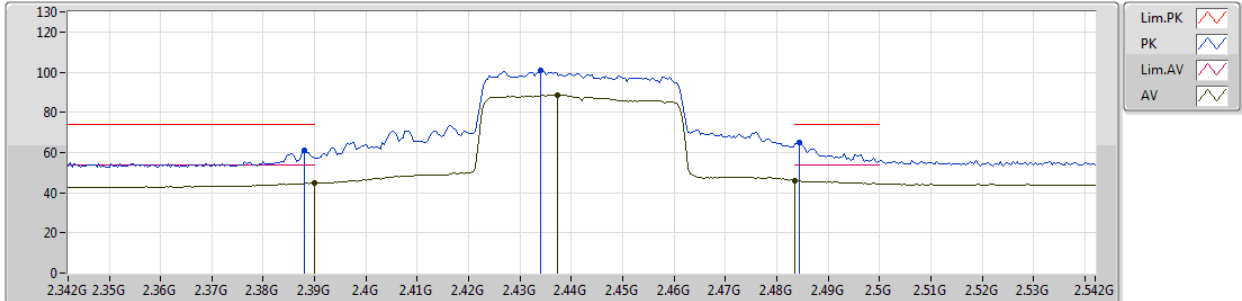


EUT Z_1TX
Setting 67
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.388G	61.15	74.00	-12.85	31.38	3	Horizontal	165	2.56	-
AV	2.39G	44.76	54.00	-9.24	31.38	3	Horizontal	165	2.56	-
PK	2.434G	100.98	Inf	-Inf	31.48	3	Horizontal	165	2.56	-
AV	2.4372G	88.55	Inf	-Inf	31.49	3	Horizontal	165	2.56	-
PK	2.4844G	65.27	74.00	-8.73	31.59	3	Horizontal	165	2.56	-
AV	2.4835G	45.89	54.00	-8.11	31.59	3	Horizontal	165	2.56	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2447MHz_TX

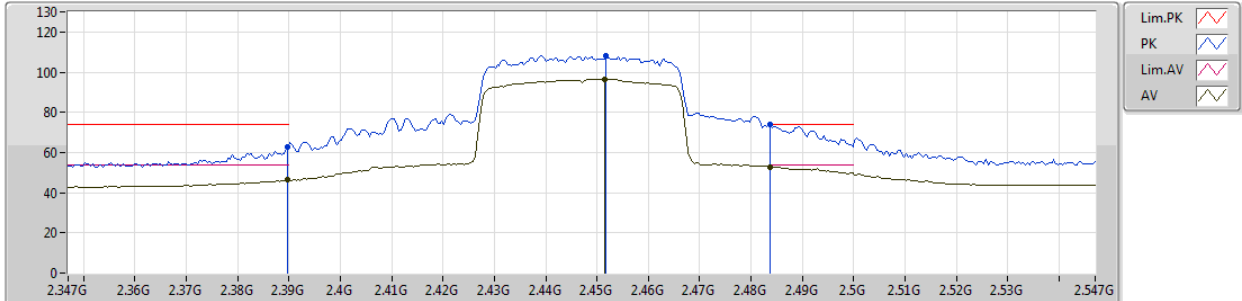


EUT Z_1TX
Setting 67
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	62.98	74.00	-11.02	31.38	3	Vertical	97	2.58	-
AV	2.3898G	46.27	54.00	-7.73	31.38	3	Vertical	97	2.58	-
PK	2.4518G	108.02	Inf	-Inf	31.52	3	Vertical	97	2.58	-
AV	2.4514G	96.63	Inf	-Inf	31.52	3	Vertical	97	2.58	-
PK	2.4836G	73.76	74.00	-0.24	31.59	3	Vertical	97	2.58	-
AV	2.4836G	52.87	54.00	-1.13	31.59	3	Vertical	97	2.58	-

802.11ax HEW40_Nss1,(MCS0)_1TX

06/12/2018

2447MHz_TX

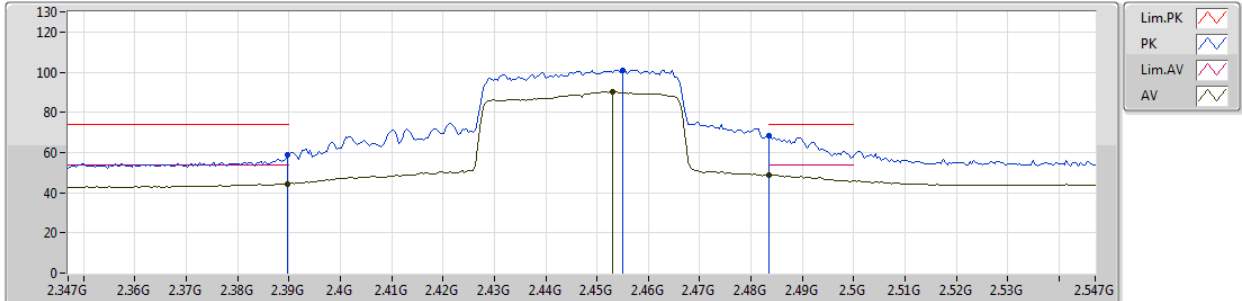

EUT Z_1TX
Setting 67
02-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	58.58	74.00	-15.42	31.38	3	Horizontal	150	1.05	-
AV	2.3898G	44.32	54.00	-9.68	31.38	3	Horizontal	150	1.05	-
PK	2.455G	101.07	Inf	-Inf	31.53	3	Horizontal	150	1.05	-
AV	2.453G	90.30	Inf	-Inf	31.53	3	Horizontal	150	1.05	-
PK	2.4835G	68.45	74.00	-5.55	31.59	3	Horizontal	150	1.05	-
AV	2.4835G	48.57	54.00	-5.43	31.59	3	Horizontal	150	1.05	-


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW40_Nss2,(MCS0)_2TX	Pass	AV	2.3898G	53.96	54.00	-0.04	30.80	3	Horizontal	61	2.06	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2412MHz_TX

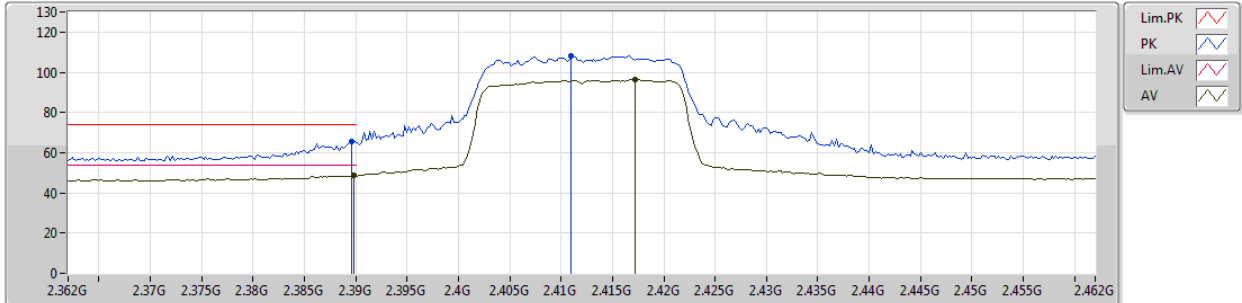


EUT Y_2TX
Setting 64
01-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	2.3896G	65.78	74.00	-8.22	30.80	3	Vertical	338	2.99	-						
AV	2.3898G	48.62	54.00	-5.38	30.80	3	Vertical	338	2.99	-						
PK	2.411G	108.20	Inf	-Inf	30.86	3	Vertical	338	2.99	-						
AV	2.4172G	96.14	Inf	-Inf	30.87	3	Vertical	338	2.99	-						

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2412MHz_TX

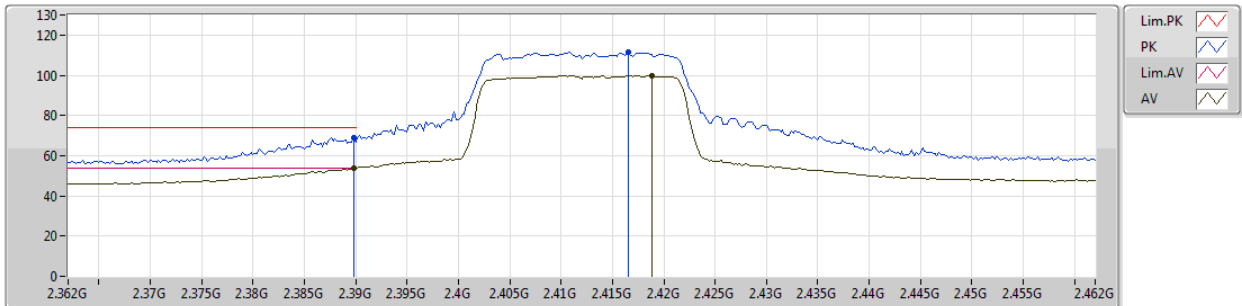


EUT Y_2TX
Setting 64
01-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.3898G	69.09	74.00	-4.91	30.80	3	Horizontal	66	2.70	-
AV	2.3898G	53.81	54.00	-0.19	30.80	3	Horizontal	66	2.70	-
PK	2.4166G	111.70	Inf	-Inf	30.87	3	Horizontal	66	2.70	-
AV	2.4188G	99.87	Inf	-Inf	30.87	3	Horizontal	66	2.70	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2437MHz_TX

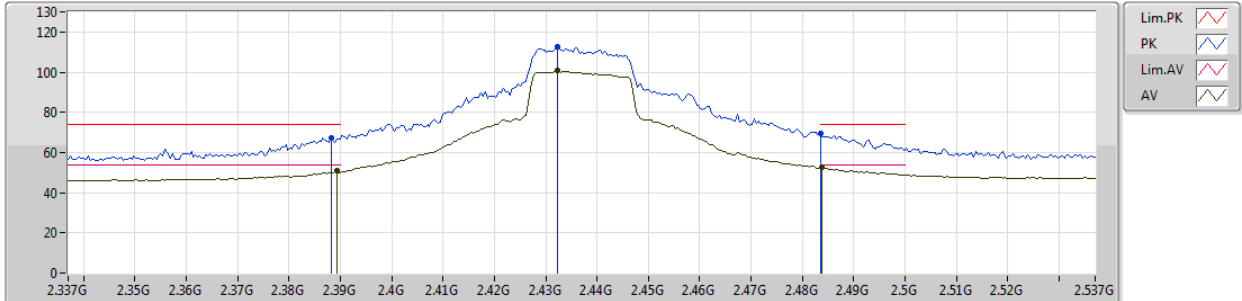


EUT Y_2TX
Setting 82
01-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3882G	67.18	74.00	-6.82	30.79	3	Vertical	330	2.91	-
AV	2.3894G	50.76	54.00	-3.24	30.80	3	Vertical	330	2.91	-
PK	2.4322G	112.37	Inf	-Inf	30.89	3	Vertical	330	2.91	-
AV	2.4322G	100.64	Inf	-Inf	30.89	3	Vertical	330	2.91	-
PK	2.4835G	69.71	74.00	-4.29	30.96	3	Vertical	330	2.91	-
AV	2.4838G	52.58	54.00	-1.42	30.96	3	Vertical	330	2.91	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2437MHz_TX

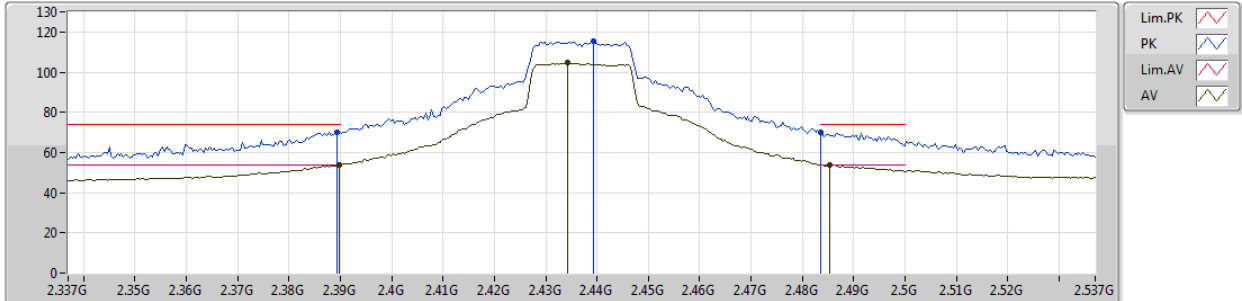


EUT Y_2TX
Setting 82
01-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3894G	70.19	74.00	-3.81	30.80	3	Horizontal	64	2.04	-
AV	2.3898G	53.86	54.00	-0.14	30.80	3	Horizontal	64	2.04	-
PK	2.4394G	115.19	Inf	-Inf	30.90	3	Horizontal	64	2.04	-
AV	2.4342G	104.66	Inf	-Inf	30.89	3	Horizontal	64	2.04	-
PK	2.4835G	70.26	74.00	-3.74	30.96	3	Horizontal	64	2.04	-
AV	2.4854G	53.92	54.00	-0.08	30.97	3	Horizontal	64	2.04	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2462MHz_TX

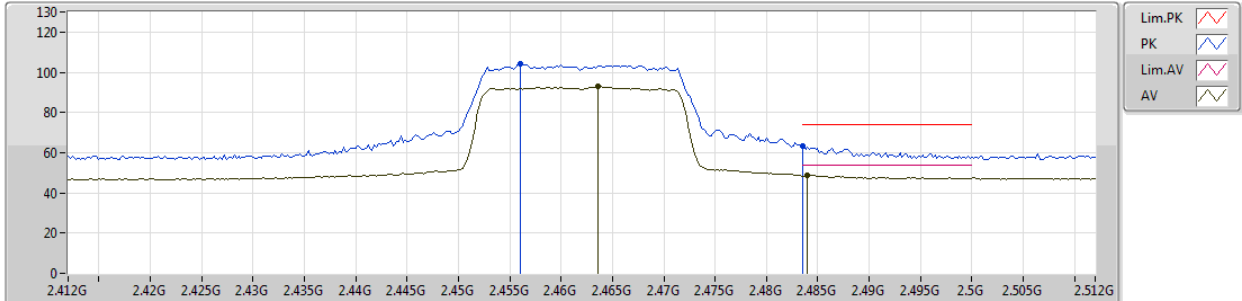


EUT Y_2TX
Setting 64
01-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.456G	104.42	Inf	-Inf	30.93	3	Vertical	308	1.34	-
AV	2.4636G	92.85	Inf	-Inf	30.93	3	Vertical	308	1.34	-
PK	2.4835G	63.38	74.00	-10.62	30.96	3	Vertical	308	1.34	-
AV	2.484G	48.87	54.00	-5.13	30.96	3	Vertical	308	1.34	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2462MHz_TX

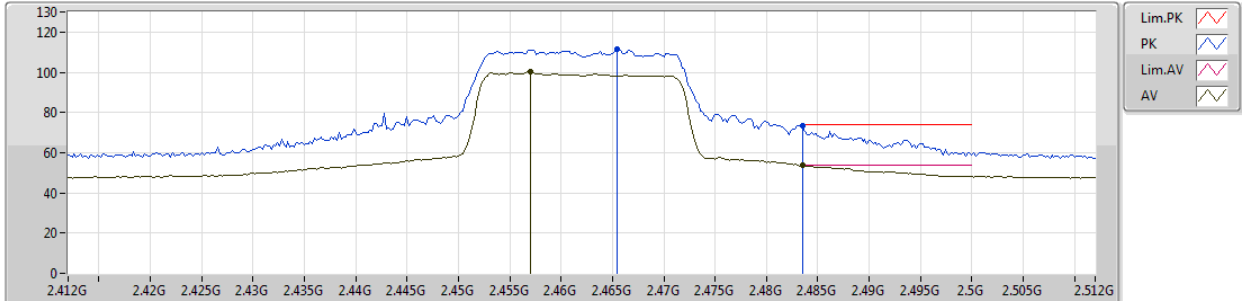


EUT Y_2TX
Setting 64
01-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4654G	111.57	Inf	-Inf	30.94	3	Horizontal	61	2.00	-
AV	2.457G	100.28	Inf	-Inf	30.93	3	Horizontal	61	2.00	-
PK	2.4835G	73.22	74.00	-0.78	30.96	3	Horizontal	61	2.00	-
AV	2.4835G	53.78	54.00	-0.22	30.96	3	Horizontal	61	2.00	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2422MHz_TX

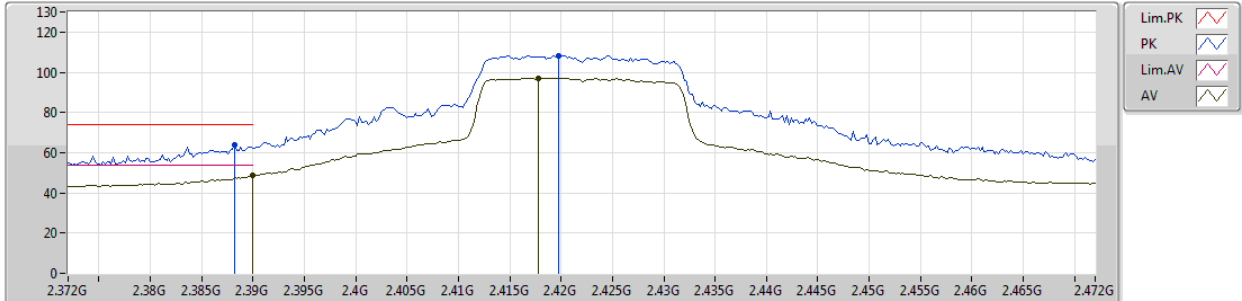


EUT Y_2TX
Setting 75
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3882G	63.86	74.00	-10.14	31.38	3	Vertical	184	2.89	-
AV	2.39G	48.48	54.00	-5.52	31.38	3	Vertical	184	2.89	-
PK	2.4198G	108.31	Inf	-Inf	31.46	3	Vertical	184	2.89	-
AV	2.4178G	97.18	Inf	-Inf	31.45	3	Vertical	184	2.89	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2422MHz_TX

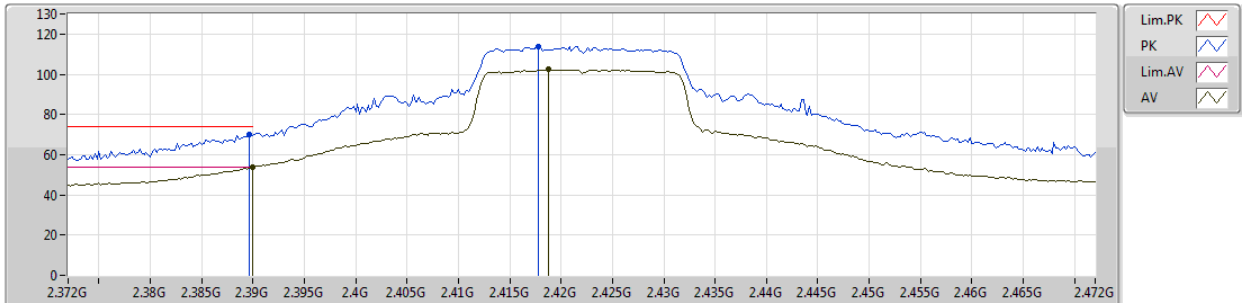


EUT Y_2TX
Setting 75
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3896G	69.99	74.00	-4.01	31.38	3	Horizontal	76	2.11	-
AV	2.39G	53.82	54.00	-0.18	31.38	3	Horizontal	76	2.11	-
PK	2.4178G	113.74	Inf	-Inf	31.45	3	Horizontal	76	2.11	-
AV	2.4188G	102.31	Inf	-Inf	31.45	3	Horizontal	76	2.11	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2427MHz_TX

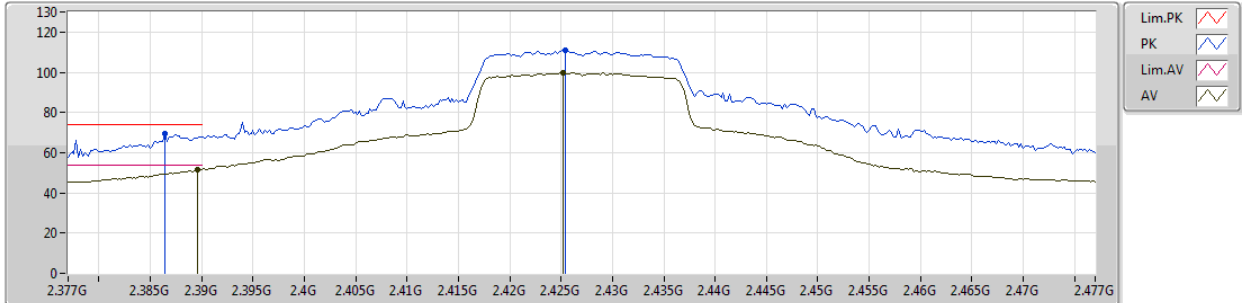


EUT Y_2TX
Setting 79
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments						
PK	2.3864G	69.43	74.00	-4.57	31.37	3	Vertical	20	2.96	-						
AV	2.3896G	51.49	54.00	-2.51	31.38	3	Vertical	20	2.96	-						
PK	2.4254G	110.92	Inf	-Inf	31.47	3	Vertical	20	2.96	-						
AV	2.4252G	99.68	Inf	-Inf	31.47	3	Vertical	20	2.96	-						

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2427MHz_TX

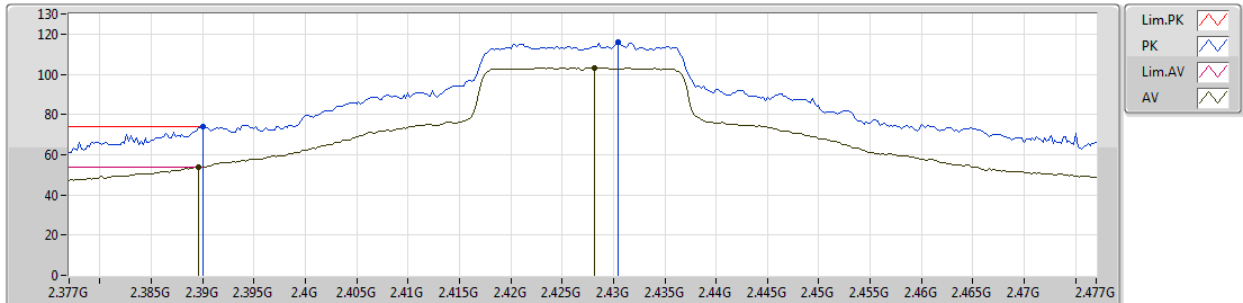


EUT Y_2TX
Setting 79
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.39G	73.73	74.00	-0.27	31.38	3	Horizontal	61	2.54	-
AV	2.3896G	53.90	54.00	-0.10	31.38	3	Horizontal	61	2.54	-
PK	2.4304G	115.93	Inf	-Inf	31.47	3	Horizontal	61	2.54	-
AV	2.4282G	103.28	Inf	-Inf	31.47	3	Horizontal	61	2.54	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2432MHz_TX

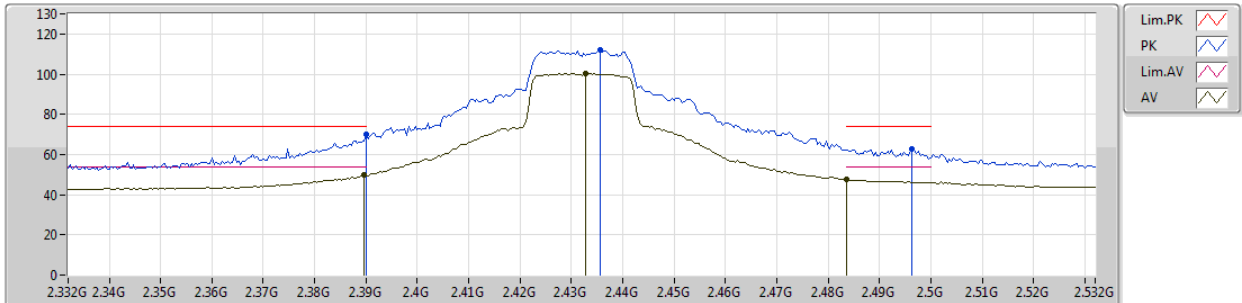


EUT Y_2TX
Setting 80
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.39G	70.10	74.00	-3.90	31.38	3	Vertical	327	2.53	-
AV	2.3896G	49.96	54.00	-4.04	31.38	3	Vertical	327	2.53	-
PK	2.4356G	111.82	Inf	-Inf	31.48	3	Vertical	327	2.53	-
AV	2.4328G	100.18	Inf	-Inf	31.48	3	Vertical	327	2.53	-
PK	2.4964G	62.95	74.00	-11.05	31.62	3	Vertical	327	2.53	-
AV	2.4835G	47.58	54.00	-6.42	31.59	3	Vertical	327	2.53	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2432MHz_TX

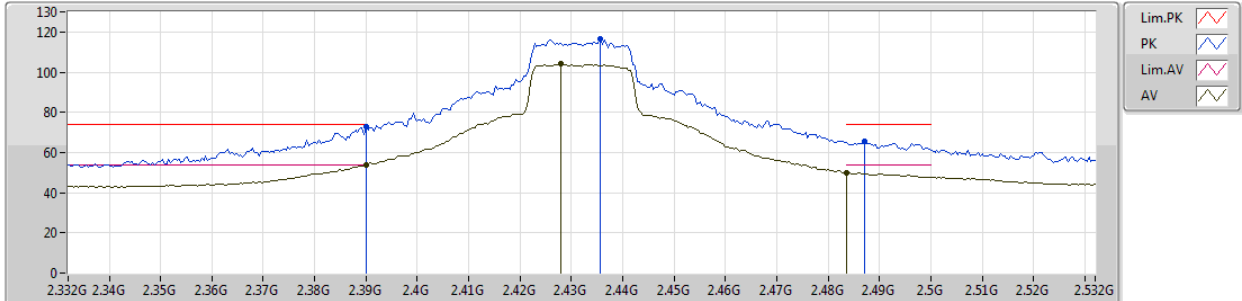


EUT Y_2TX
Setting 80
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.39G	72.66	74.00	-1.34	31.38	3	Horizontal	61	2.55	-
AV	2.39G	53.85	54.00	-0.15	31.38	3	Horizontal	61	2.55	-
PK	2.4356G	116.32	Inf	-Inf	31.48	3	Horizontal	61	2.55	-
AV	2.428G	104.03	Inf	-Inf	31.47	3	Horizontal	61	2.55	-
PK	2.4872G	65.47	74.00	-8.53	31.60	3	Horizontal	61	2.55	-
AV	2.4835G	49.87	54.00	-4.13	31.59	3	Horizontal	61	2.55	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2442MHz_TX

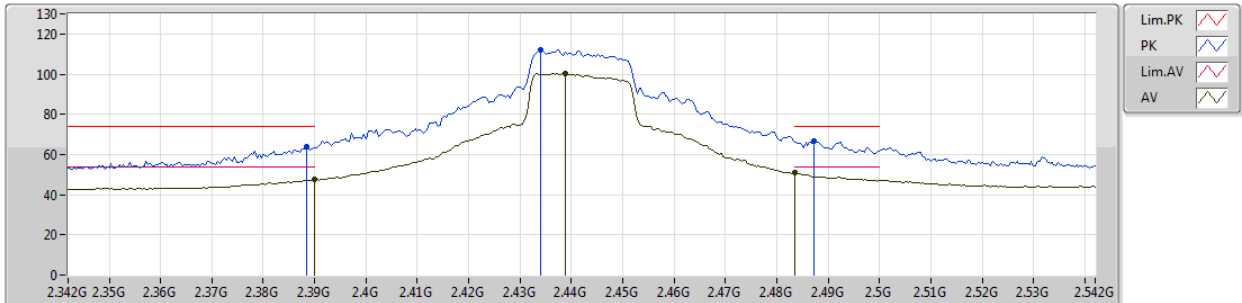


EUT Y_2TX
Setting 81
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3884G	64.13	74.00	-9.87	31.38	3	Vertical	330	2.53	-
AV	2.39G	47.48	54.00	-6.52	31.38	3	Vertical	330	2.53	-
PK	2.434G	112.21	Inf	-Inf	31.48	3	Vertical	330	2.53	-
AV	2.4388G	100.16	Inf	-Inf	31.50	3	Vertical	330	2.53	-
PK	2.4872G	66.91	74.00	-7.09	31.60	3	Vertical	330	2.53	-
AV	2.4835G	50.81	54.00	-3.19	31.59	3	Vertical	330	2.53	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2442MHz_TX

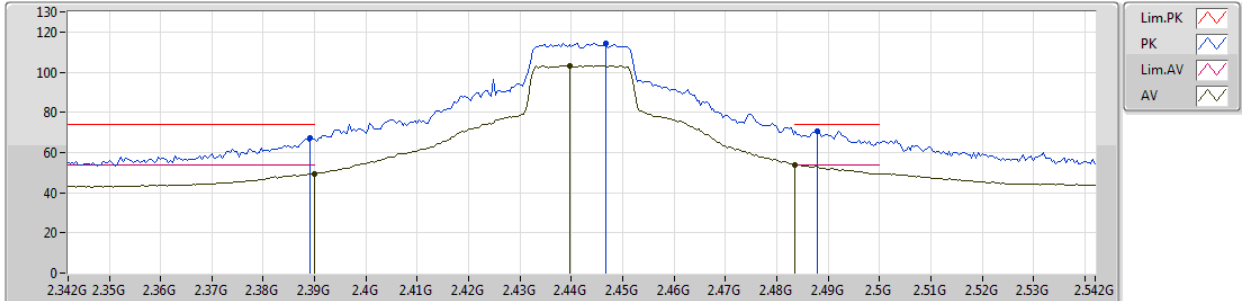


EUT Y_2TX
Setting 81
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3892G	67.12	74.00	-6.88	31.38	3	Horizontal	81	1.88	-
AV	2.39G	49.55	54.00	-4.45	31.38	3	Horizontal	81	1.88	-
PK	2.4468G	114.30	Inf	-Inf	31.51	3	Horizontal	81	1.88	-
AV	2.4396G	103.18	Inf	-Inf	31.50	3	Horizontal	81	1.88	-
PK	2.488G	70.60	74.00	-3.40	31.61	3	Horizontal	81	1.88	-
AV	2.4835G	53.85	54.00	-0.15	31.59	3	Horizontal	81	1.88	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2447MHz_TX

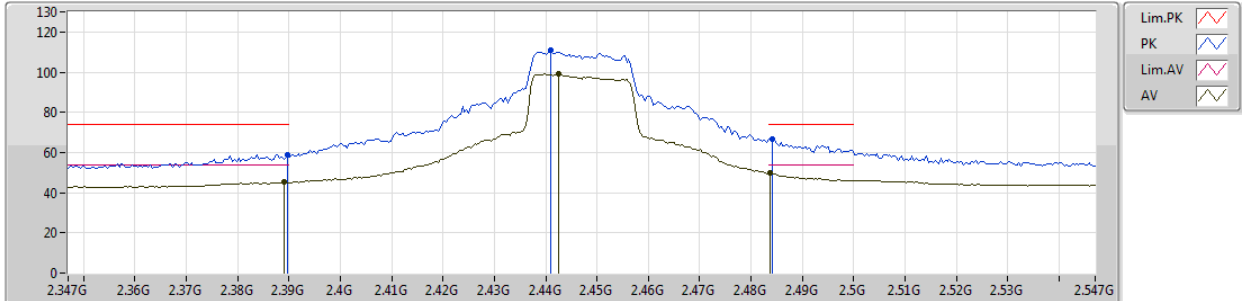


EUT Y_2TX
Setting 76
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	58.93	74.00	-15.07	31.38	3	Vertical	340	2.55	-
AV	2.389G	45.11	54.00	-8.89	31.38	3	Vertical	340	2.55	-
PK	2.441G	110.77	Inf	-Inf	31.50	3	Vertical	340	2.55	-
AV	2.4426G	99.09	Inf	-Inf	31.51	3	Vertical	340	2.55	-
PK	2.4842G	66.76	74.00	-7.24	31.59	3	Vertical	340	2.55	-
AV	2.4838G	49.85	54.00	-4.15	31.59	3	Vertical	340	2.55	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2447MHz_TX

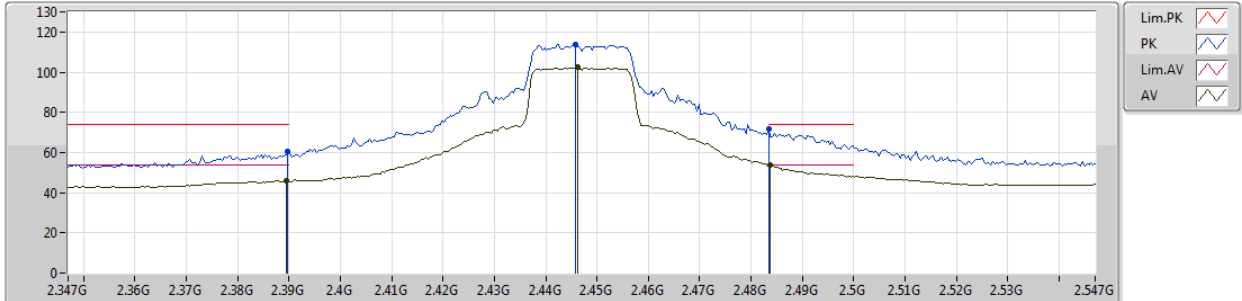


EUT Y_2TX
Setting 76
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	60.43	74.00	-13.57	31.38	3	Horizontal	58	1.49	-
AV	2.3894G	45.89	54.00	-8.11	31.38	3	Horizontal	58	1.49	-
PK	2.4458G	113.72	Inf	-Inf	31.51	3	Horizontal	58	1.49	-
AV	2.4462G	102.47	Inf	-Inf	31.51	3	Horizontal	58	1.49	-
PK	2.4835G	71.68	74.00	-2.32	31.59	3	Horizontal	58	1.49	-
AV	2.4838G	53.80	54.00	-0.20	31.59	3	Horizontal	58	1.49	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2452MHz_TX

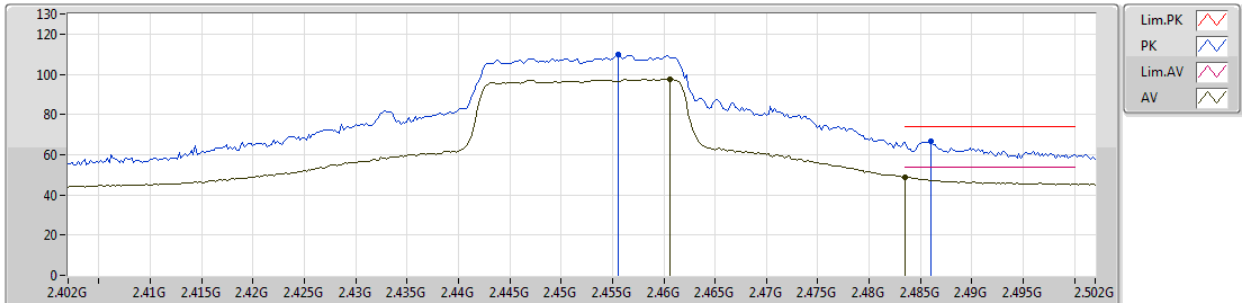


EUT Y_2TX
Setting 72
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4556G	110.03	Inf	-Inf	31.53	3	Vertical	330	2.90	-
AV	2.4606G	97.60	Inf	-Inf	31.54	3	Vertical	330	2.90	-
PK	2.486G	66.89	74.00	-7.11	31.59	3	Vertical	330	2.90	-
AV	2.4835G	48.67	54.00	-5.33	31.59	3	Vertical	330	2.90	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2452MHz_TX

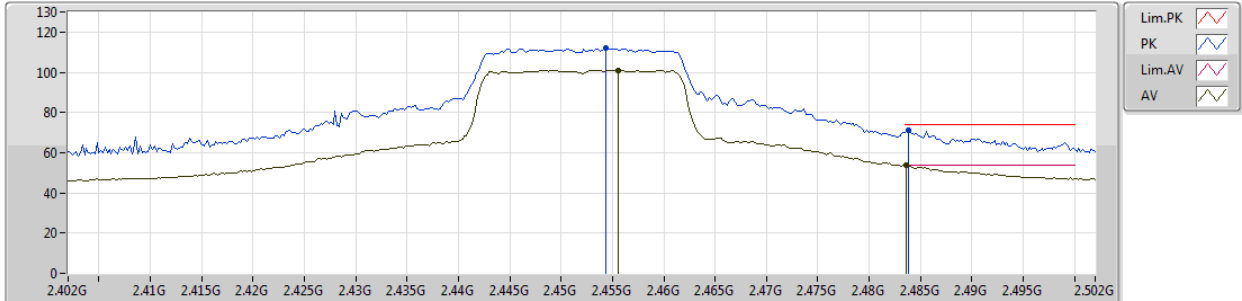


EUT Y_2TX
Setting 72
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4544G	112.00	Inf	-Inf	31.53	3	Horizontal	301	1.70	-
AV	2.4556G	101.01	Inf	-Inf	31.53	3	Horizontal	301	1.70	-
PK	2.4838G	71.01	74.00	-2.99	31.59	3	Horizontal	301	1.70	-
AV	2.4836G	53.78	54.00	-0.22	31.59	3	Horizontal	301	1.70	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2457MHz_TX

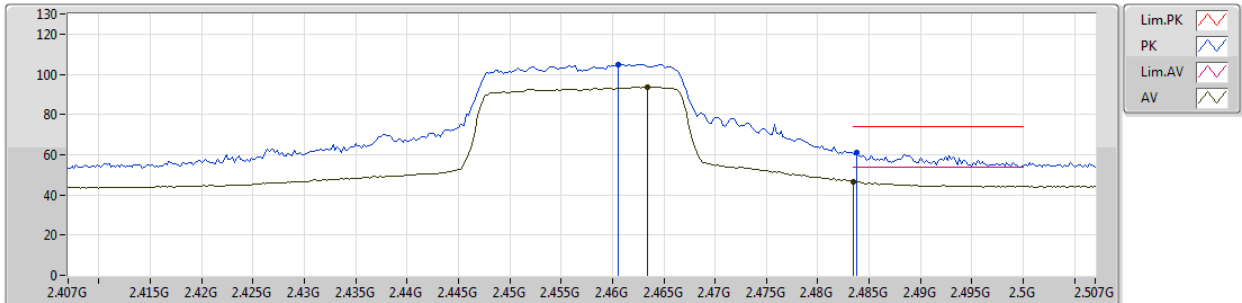


EUT Y_2TX
Setting 68
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4606G	104.93	Inf	-Inf	31.54	3	Vertical	223	1.48	-
AV	2.4634G	93.75	Inf	-Inf	31.55	3	Vertical	223	1.48	-
PK	2.4838G	61.12	74.00	-12.88	31.59	3	Vertical	223	1.48	-
AV	2.4835G	46.78	54.00	-7.22	31.59	3	Vertical	223	1.48	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2457MHz_TX

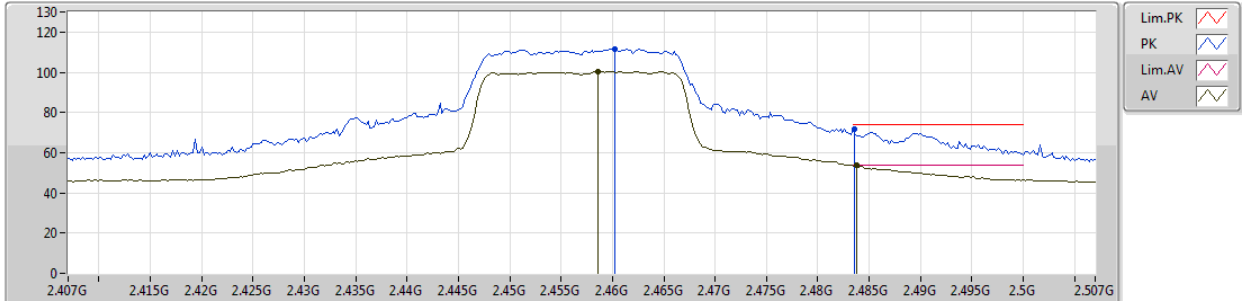


EUT Y_2TX
Setting 68
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.4602G	111.77	Inf	-Inf	31.54	3	Horizontal	308	1.35	-
AV	2.4586G	100.55	Inf	-Inf	31.54	3	Horizontal	308	1.35	-
PK	2.4836G	71.68	74.00	-2.32	31.59	3	Horizontal	308	1.35	-
AV	2.4838G	53.79	54.00	-0.21	31.59	3	Horizontal	308	1.35	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2417MHz_TX

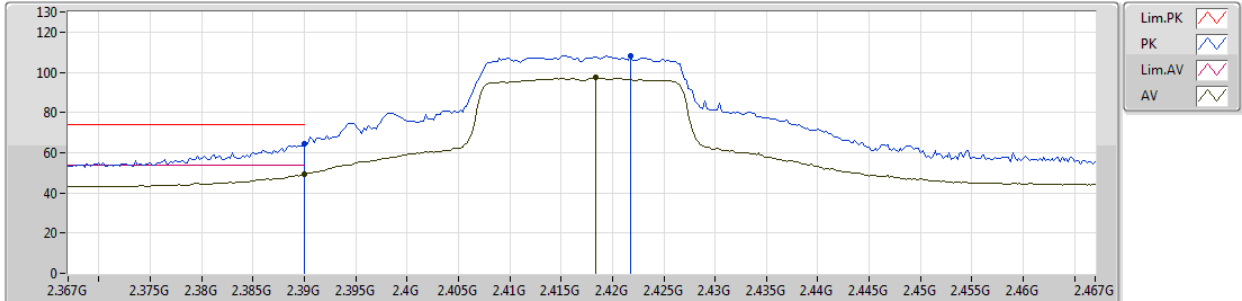


EUT Y_2TX
Setting 73
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.39G	64.20	74.00	-9.80	31.38	3	Vertical	192	2.88	-
AV	2.39G	49.10	54.00	-4.90	31.38	3	Vertical	192	2.88	-
PK	2.4218G	108.32	Inf	-Inf	31.46	3	Vertical	192	2.88	-
AV	2.4184G	97.25	Inf	-Inf	31.45	3	Vertical	192	2.88	-

802.11ax HEW20_Nss2,(MCS0)_2TX

05/12/2018

2417MHz_TX

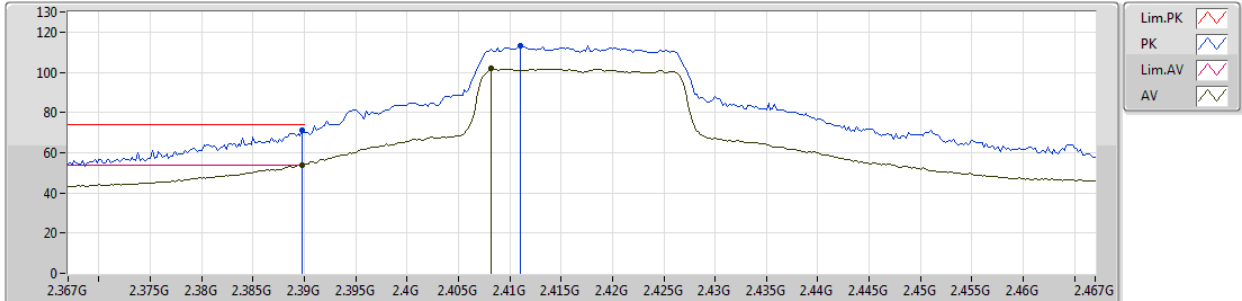


EUT Y_2TX
Setting 73
02-C-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	71.00	74.00	-3.00	31.38	3	Horizontal	294	1.53	-
AV	2.3898G	53.86	54.00	-0.14	31.38	3	Horizontal	294	1.53	-
PK	2.411G	113.14	Inf	-Inf	31.43	3	Horizontal	294	1.53	-
AV	2.4082G	101.71	Inf	-Inf	31.42	3	Horizontal	294	1.53	-

802.11ax HEW40_Nss2,(MCS0)_2TX

05/12/2018

2422MHz_TX

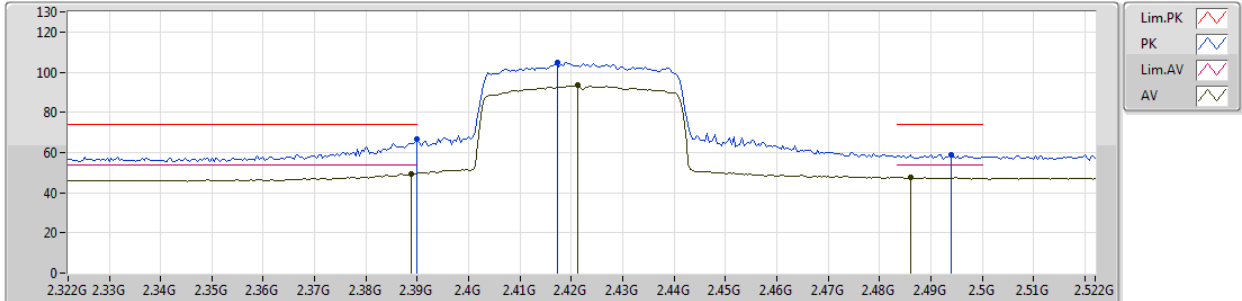


EUT Y_2TX
Setting 61
01-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.39G	66.95	74.00	-7.05	30.80	3	Vertical	344	2.90	-
AV	2.3888G	49.48	54.00	-4.52	30.80	3	Vertical	344	2.90	-
PK	2.4172G	104.93	Inf	-Inf	30.87	3	Vertical	344	2.90	-
AV	2.4212G	93.32	Inf	-Inf	30.87	3	Vertical	344	2.90	-
PK	2.494G	58.86	74.00	-15.14	30.98	3	Vertical	344	2.90	-
AV	2.486G	47.49	54.00	-6.51	30.97	3	Vertical	344	2.90	-

802.11ax HEW40_Nss2,(MCS0)_2TX

05/12/2018

2422MHz_TX

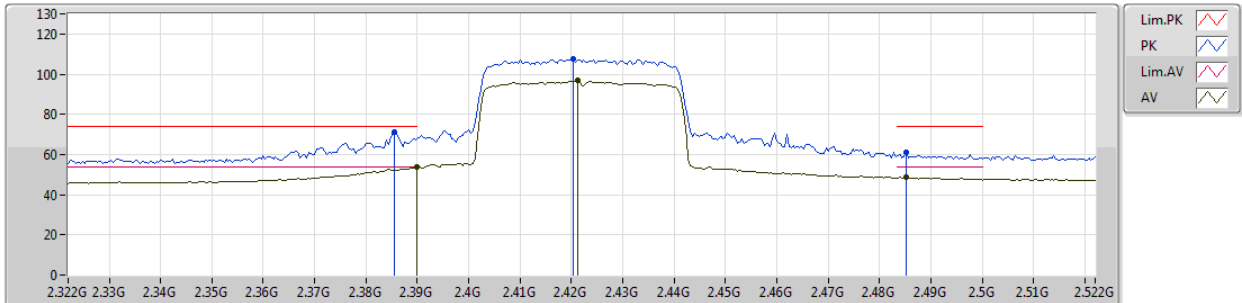


EUT Y_2TX
Setting 61
01-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.3856G	71.25	74.00	-2.75	30.79	3	Horizontal	63	2.75	-
AV	2.39G	53.77	54.00	-0.23	30.80	3	Horizontal	63	2.75	-
PK	2.4204G	107.82	Inf	-Inf	30.87	3	Horizontal	63	2.75	-
AV	2.4212G	96.99	Inf	-Inf	30.87	3	Horizontal	63	2.75	-
PK	2.4852G	60.95	74.00	-13.05	30.97	3	Horizontal	63	2.75	-
AV	2.4852G	48.57	54.00	-5.43	30.97	3	Horizontal	63	2.75	-

802.11ax HEW40_Nss2,(MCS0)_2TX

05/12/2018

2437MHz_TX

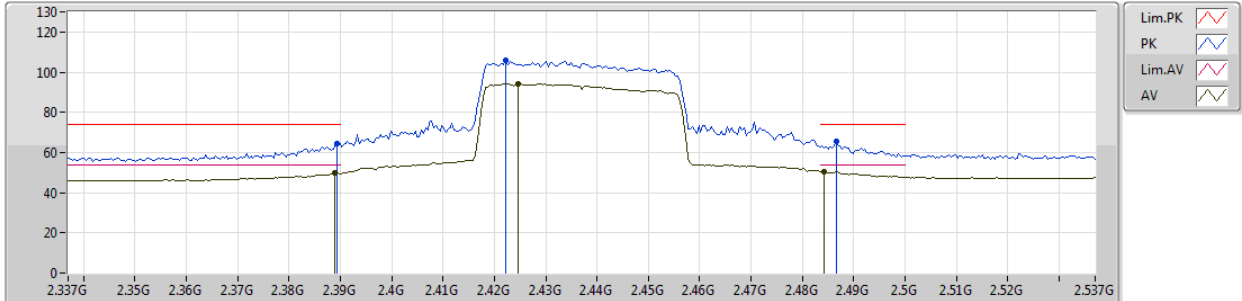


EUT Y_2TX
Setting 66
01-R-5
FSP

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	2.3894G	64.36	74.00	-9.64	30.80	3	Vertical	335	2.91	-
AV	2.389G	49.89	54.00	-4.11	30.80	3	Vertical	335	2.91	-
PK	2.4222G	106.06	Inf	-Inf	30.87	3	Vertical	335	2.91	-
AV	2.4246G	94.25	Inf	-Inf	30.87	3	Vertical	335	2.91	-
PK	2.4866G	65.45	74.00	-8.55	30.97	3	Vertical	335	2.91	-
AV	2.4842G	50.58	54.00	-3.42	30.96	3	Vertical	335	2.91	-

802.11ax HEW40_Nss2,(MCS0)_2TX

05/12/2018

2437MHz_TX

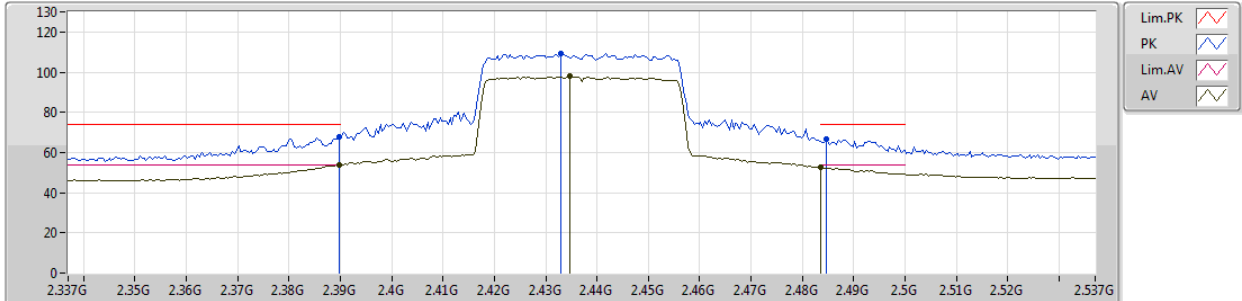

EUT Y_2TX
Setting 66
01-R-5
FSP

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.3898G	67.96	74.00	-6.04	30.80	3	Horizontal	61	2.06	-
AV	2.3898G	53.96	54.00	-0.04	30.80	3	Horizontal	61	2.06	-
PK	2.433G	109.23	Inf	-Inf	30.89	3	Horizontal	61	2.06	-
AV	2.4346G	97.92	Inf	-Inf	30.89	3	Horizontal	61	2.06	-
PK	2.4846G	66.53	74.00	-7.47	30.96	3	Horizontal	61	2.06	-
AV	2.4836G	52.78	54.00	-1.22	30.96	3	Horizontal	61	2.06	-