



Engineering Solutions & Electromagnetic Compatibility Services

**Certification Application Report  
FCC Part 15.245 & Industry Canada RSS-210**

<b>Test Lab:</b>  Rhein Tech Laboratories, Inc. Tel: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: <a href="mailto:atcbinfo@rheintech.com">atcbinfo@rheintech.com</a>		<b>Applicant:</b>  FlightScope (Pty) Ltd Tel: +27 21 880 2160 10 Elektron St Fax: +27 21 880 2159 Technopark Stellenbosch South Africa 7600 Contact: Tom Johnson	
<b>FCC ID/IC</b>	QXP-HP244 4612A-HP244	<b>Test Report Date</b>	January 20, 2015
<b>Platform</b>	N/A	<b>RTL Work Order #</b>	2014207
<b>Model</b>	X2 ELITE	<b>RTL Quote #</b>	QRTL14-207A
<b>American National Standard Institute</b>	ANSI C63.4: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
<b>FCC Classification</b>	FDS: Field Disturbance Sensor		
<b>FCC Rule Part(s)/Guidance</b>	FCC Rules Part 15.245: Operation within the bands 902–928 MHz, 2435–2465 MHz, 5785–5815 MHz, 10500–10550 MHz, and 24075–24175 MHz (10-01-13)		
<b>Industry Canada</b>	RSS-210 Issue 8: License-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment RSS-Gen Issue 4: General Requirements for Compliance of Radio Apparatus		
<b>Digital Interface Information</b>	Digital Interface was found to be compliant		
<b>Frequency Range (MHz)</b>	<b>Output Power (W)</b>	<b>Frequency Tolerance</b>	<b>Emission Designator</b>
10,525	N/A	N/A	232KN0N

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, ANSI C63.4, IC RSS-210 and RSS-Gen.

Signature: 

Date: January 20, 2015

Typed/Printed Name: Desmond A. Fraser

Position: President

*This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and FlightScope (Pty) Ltd. The test results relate only to the item(s) tested.*

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB. Refer to certificate and scope of accreditation AT-1445.*

## Table of Contents

1	General Information .....	4
1.1	Scope .....	4
1.2	Description of EUT .....	4
1.3	Test Facility .....	4
1.4	Related Submittal(s)/Grant(s) .....	4
1.5	Modifications .....	4
2	Test Information .....	5
2.1	Description of Test Modes .....	5
2.2	Exercising the EUT .....	5
2.3	Test Result Summary.....	5
2.4	Test System Details .....	5
2.5	Configuration of Tested System.....	6
3	Radiated Emissions – FCC 15.209, 15.245(b); RSS-210 Annex 7 .....	7
3.1	Limits of Radiated Emissions Measurement.....	7
3.2	Radiated Emissions Measurement Test Procedure .....	7
3.3	Radiated Emissions Test Results .....	9
3.4	Radiated Emissions Harmonics/Spurious Test Results.....	9
4	AC Conducted Emissions - FCC 15.207; RSS-Gen 7.2.4.....	10
4.1	Test Methodology for Conducted Line Emissions Measurements.....	10
4.2	Conducted Line Emission Test Procedure.....	10
4.3	Conducted Line Emissions Test Data.....	11
5	99% Bandwidth – IC RSS-Gen 4.6.1 .....	13
5.1	99% Bandwidth Test Procedure .....	13
5.2	Bandwidth Test Data.....	13
5.3	99% Bandwidth Plots .....	14
6	Conclusion .....	15

## Table of Figures

Figure 2-1: Configuration of System Under Test .....	6
--	---

## Table of Tables

Table 2-1: Test Result Summary .....	5
Table 2-2: Equipment Under Test .....	5
Table 3-1: Radiated Emissions Test Equipment .....	8
Table 3-2: Radiated Emissions Test Data .....	9
Table 3-3: Radiated Emissions Harmonics/Spurious Test Data .....	9
Table 4-1: Conducted Line Emissions Test Equipment .....	10
Table 5-1: 99% Bandwidth Test Equipment .....	13
Table 5-2: Bandwidth Test Data .....	13

## Table of Plots

Plot 4-1: Conducted Emissions (Phase Side) .....	11
Plot 4-2: Conducted Emissions (Neutral Side) .....	12
Plot 5-1: 99% Bandwidth .....	14

## Table of Appendixes

Appendix A: RF Exposure .....	16
Appendix B: Agency Authorization .....	17
Appendix C: FCC Confidentiality Request .....	18
Appendix D: IC Letters .....	19
Appendix E: IC Confidentiality Request Letter .....	20
Appendix F: Canadian-Based Representative Letter .....	21
Appendix G: ID Label and Location .....	22
Appendix H: Technical Operational Description .....	23
Appendix I: Block Diagram .....	24
Appendix J: Schematics .....	25
Appendix K: Manual .....	26
Appendix L: Test Configuration Photographs .....	27
Appendix M: External Photographs .....	31
Appendix N: Internal Photographs .....	32

## 1 General Information

### 1.1 Scope

This is an original FCC and IC certification application report.

Applicable Standards:

- FCC Part 15.245: Operation within the bands 902–928 MHz, 2435–2465 MHz, 5785–5815 MHz, 10500–10550 MHz, and 24075–24175 MHz
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices (Annex 7)
- Industry Canada RSS-Gen Issue 4

### 1.2 Description of EUT

<b>Equipment Under Test</b>	Ball Sensor
<b>Model</b>	X2 ELITE
<b>Power Supply</b>	120V-240 VAC adapter to 12VDC
<b>Modulation Type</b>	CW
<b>Frequency Range</b>	10,5 MHz
<b>Antenna Connector Type</b>	N/A
<b>Antenna Type</b>	Microstrip patch antenna

### 1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia, 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

### 1.4 Related Submittal(s)/Grant(s)

This is an original application for certification for FlightScope (Pty) Ltd., Model: X2 ELITE, FCC ID: QXP-HP244, IC: 4612A-HP244.

### 1.5 Modifications

No modifications were made to the equipment during testing in order to achieve compliance with these standards.

## 2 Test Information

### 2.1 Description of Test Modes

In accordance with FCC 15.31(m), because the EUT only utilizes one operating frequency, one channel was tested.

### 2.2 Exercising the EUT

The EUT was supplied with test firmware so that the EUT would continuously transmit during testing. The EUT was tested in all three orthogonal planes in order to determine worst-case emissions.

### 2.3 Test Result Summary

**Table 2-1: Test Result Summary**

Standard	Test	Pass/Fail or N/A
FCC 15.207	AC Power Conducted Emissions	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.245(b)	Field Strength of Fundamental and Harmonics	Pass
RSS-Gen 4.6.1	99% Bandwidth	N/A

### 2.4 Test System Details

The test samples were received on January 5, 2015. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following table.

**Table 2-2: Equipment Under Test**

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Ball Sensor	FlightScope (Pty) Ltd.	X2 ELITE	X2E-00004	QXP-HP244	5m Ethernet	21618
AC Adapter	Mean Well	GS40A12	EB44522230	N/A	1.3m unshielded	21619

## 2.5 Configuration of Tested System

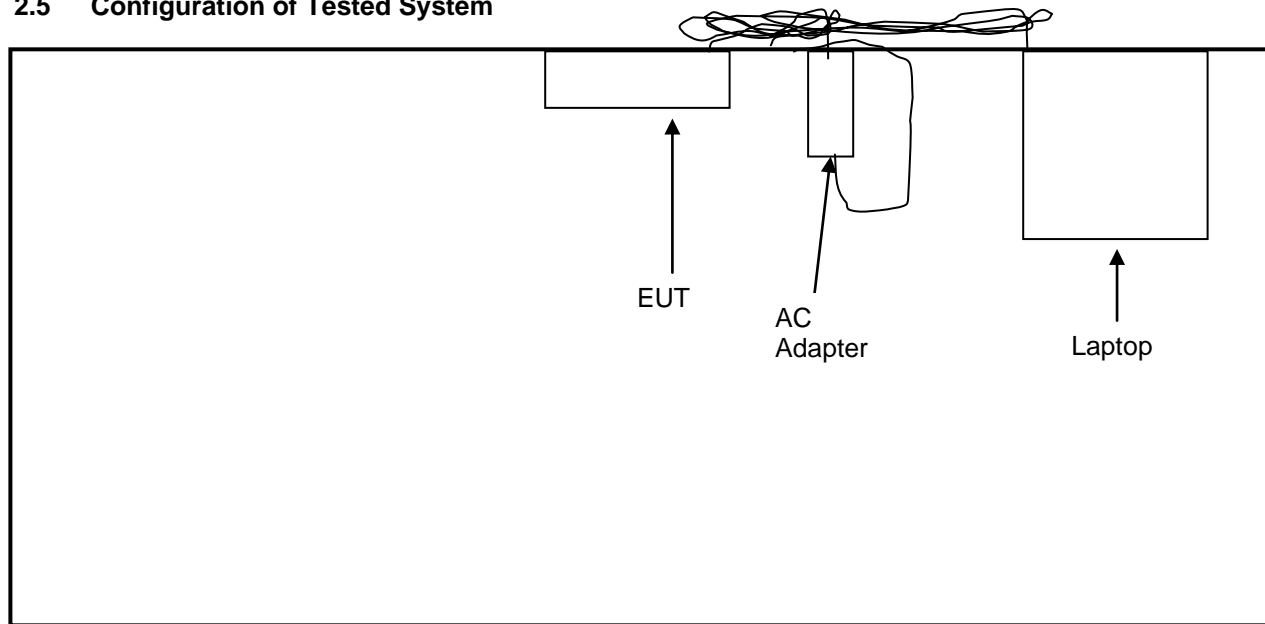


Figure 2-1: Configuration of System Under Test

### 3 Radiated Emissions – FCC 15.209, 15.245(b); RSS-210 Annex 7

#### 3.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
10,500 – 10,550 (fundamental)	2,500,000	3
harmonics	25,000	3

As shown in 15.35(b), for frequencies above 1,000 MHz, the field strength limits are based on average detector, however the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any circumstances of modulation.

#### 3.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 5<sup>th</sup> harmonic of the highest fundamental transmitter frequency (52.6 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode.

For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

**Table 3-1: Radiated Emissions Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901303	EMCO	3160-10	Horn Antenna (26.5 - 40.0 GHz) WR-28	960452-007	6/19/15
900712	ATM	15-443-6R	Horn Antenna (50 - 75 GHz)	8051805-1	1/27/15
900873	Continental Microwave & Tool	RA28-K-F-4B-C	Waveguide (26.5 - 40 GHz)	990706-001	1/23/15
900874	Continental Microwave & Tool	RA42-K-F-4B-C	Waveguide (18 - 26.5 GHz)	990706-002	1/23/15
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	9/5/15
901256	ATM	19-443-6R	Horn Antenna (40 - 60 GHz) WR-19	8041704-01	1/23/15
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	11/13/15
901586	Rohde & Schwarz	1089.0876.00	Mixer (50 – 75 GHz)	100098	1/23/15
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	9/3/15
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	9/3/15
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	4/20/15
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	4/20/15
900323	EMCO	3160-07	Horn Antenna (8.2 - 12.4 GHz)	9605-1054	4/20/15
900356	EMCO	3160-08	Horn Antenna (12.4 - 18 GHz)	9607-1044	4/20/15
900325	EMCO	3160-9	Horn Antenna (18 - 26.5 GHz)	9605-1051	4/19/15
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	4/21/16
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	4/21/16
900933	Hewlett Packard	11975A	Amplifier (2 - 8 GHz)	2304A00348	Not Required



### 3.3 Radiated Emissions Test Results

**Table 3-2: Radiated Emissions Test Data**

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV/m) (1 MHz RBW/ VBW)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Average Limit (dBuV/m)	Average Margin (dB)
10,518.116	88.1	35.5	123.6	148.0	-24.4	128.0	-4.4


\* testing performed at 3m

### 3.4 Radiated Emissions Harmonics/Spurious Test Results

**Table 3-3: Radiated Emissions Harmonics/Spurious Test Data**

Emission Frequency (MHz)	Analyzer Detector (1 MHz RBW/ 10 MHz VBW)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Average Limit (dBuV/m)	Average Margin (dB)
21,036.354	Pk	20.7	43.6	64.3	108.0	-43.7		
21,036.354	Av	18.1	43.6	61.7			88.0	-26.3
31,554.391	Pk	23.1	50.9	74.0	108.0	-34.0		
31,554.391	Av	20.2	50.9	71.1			88.0	-16.9
42,072.508	Pk	14.4	34.0	48.4	108.0	-59.6		
42,072.508	Av	5.6	34.0	39.6			88.0	-48.4
52,590.624	Pk	28.2	32.6	60.8	108.0	-47.2		
52,590.624	Av	17.5	32.6	50.1			88.0	-37.9

#### Test Personnel:

Daniel W. Baltzell		January 11, 2015
Test Engineer	Signature	Date of Test

## 4 AC Conducted Emissions - FCC 15.207; RSS-Gen 7.2.4

### 4.1 Test Methodology for Conducted Line Emissions Measurements

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm / 50 microhenry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.

### 4.2 Conducted Line Emission Test Procedure


The conducted test was performed with the EUT exercise program loaded, and the emissions were scanned between 150 kHz to 30 MHz on the NEUTRAL SIDE and PHASE SIDE.

**Table 4-1: Conducted Line Emissions Test Equipment**


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900968	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz - 1.5 GHz)	2602A00160	2/17/16
900339	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz - 1 GHz)	2521A00743	2/17/16
900970	Hewlett Packard	85662A	Spectrum Analyzer Display	2542A11239	2/17/16
901084	AFJ International	LS16	16A LISN	16010020082	4/4/15
N/A	Quantum Change	Tile!	Test Software	4.0.A.8	N/A

#### 4.3 Conducted Line Emissions Test Data

Plot 4-1: Conducted Emissions (Phase Side)

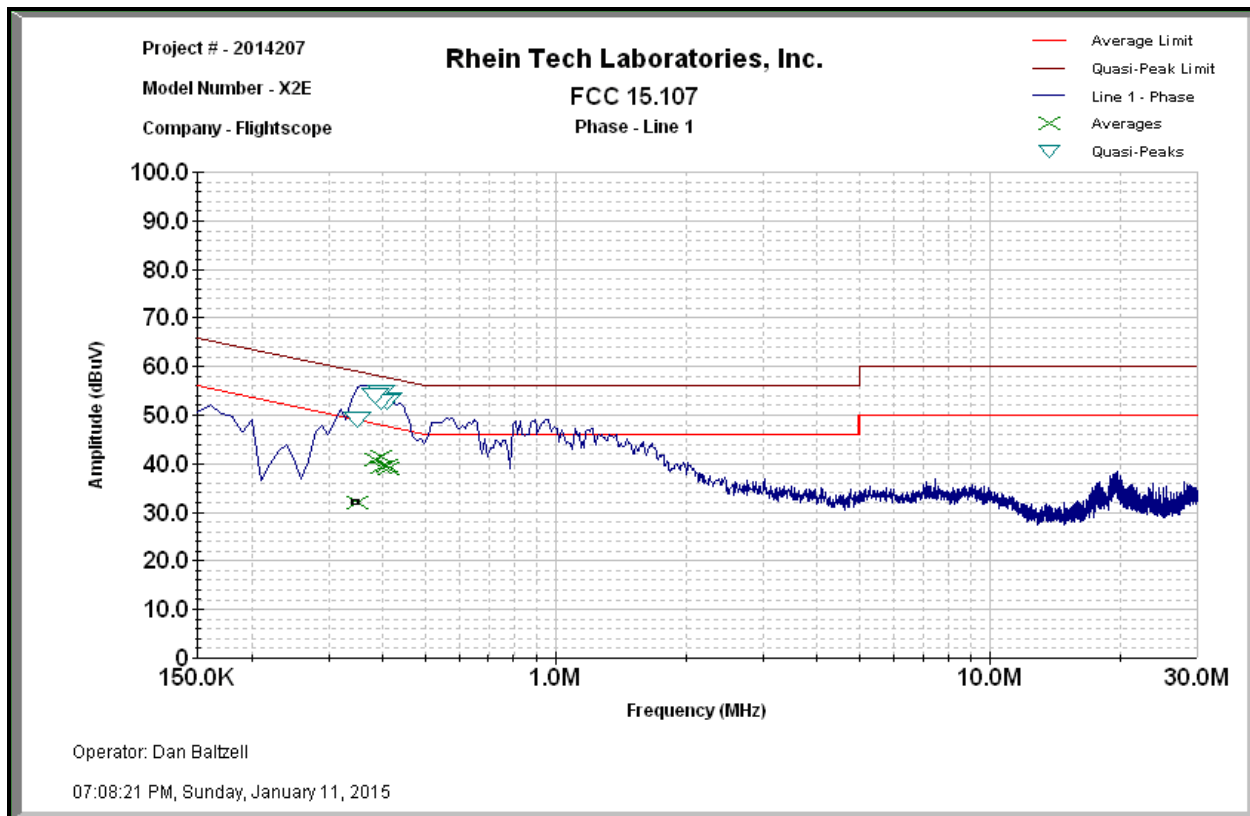

**Plot 4-2: Conducted Emissions (Neutral Side)**

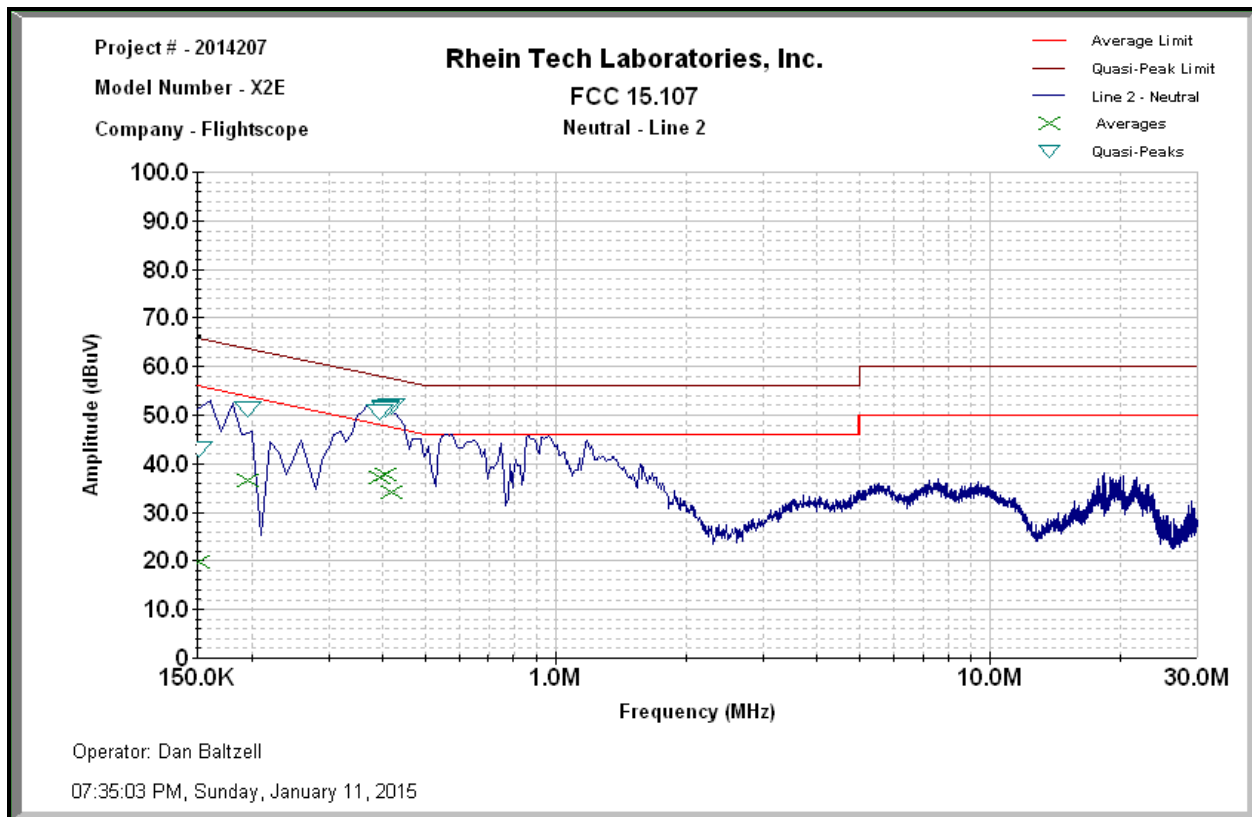

**Test Personnel:**

Daniel Baltzell	<i>Daniel W. Baltzell</i>	January 11, 2015
Test Engineer	Signature	Date of Test

## 5 99% Bandwidth – IC RSS-Gen 6.6

### 5.1 99% Bandwidth Test Procedure

The 99% bandwidths per RSS-Gen were measured using a 50-ohm spectrum analyzer. The modulated carrier was adjusted on the analyzer so that it was displayed entirely on the spectrum analyzer. The sweep time was auto and allowed through several sweeps with the max hold function used in peak detector mode. The resolution bandwidth was set to 100 kHz, and the video bandwidth set to 1 MHz. The table below contains the bandwidth measurement results.

**Table 5-1: 99% Bandwidth Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15


### 5.2 Bandwidth Test Data

**Table 5-2: Bandwidth Test Data**

99% Bandwidth (kHz)
232

### 5.3 99% Bandwidth Plots

Plot 5-1: 99% Bandwidth

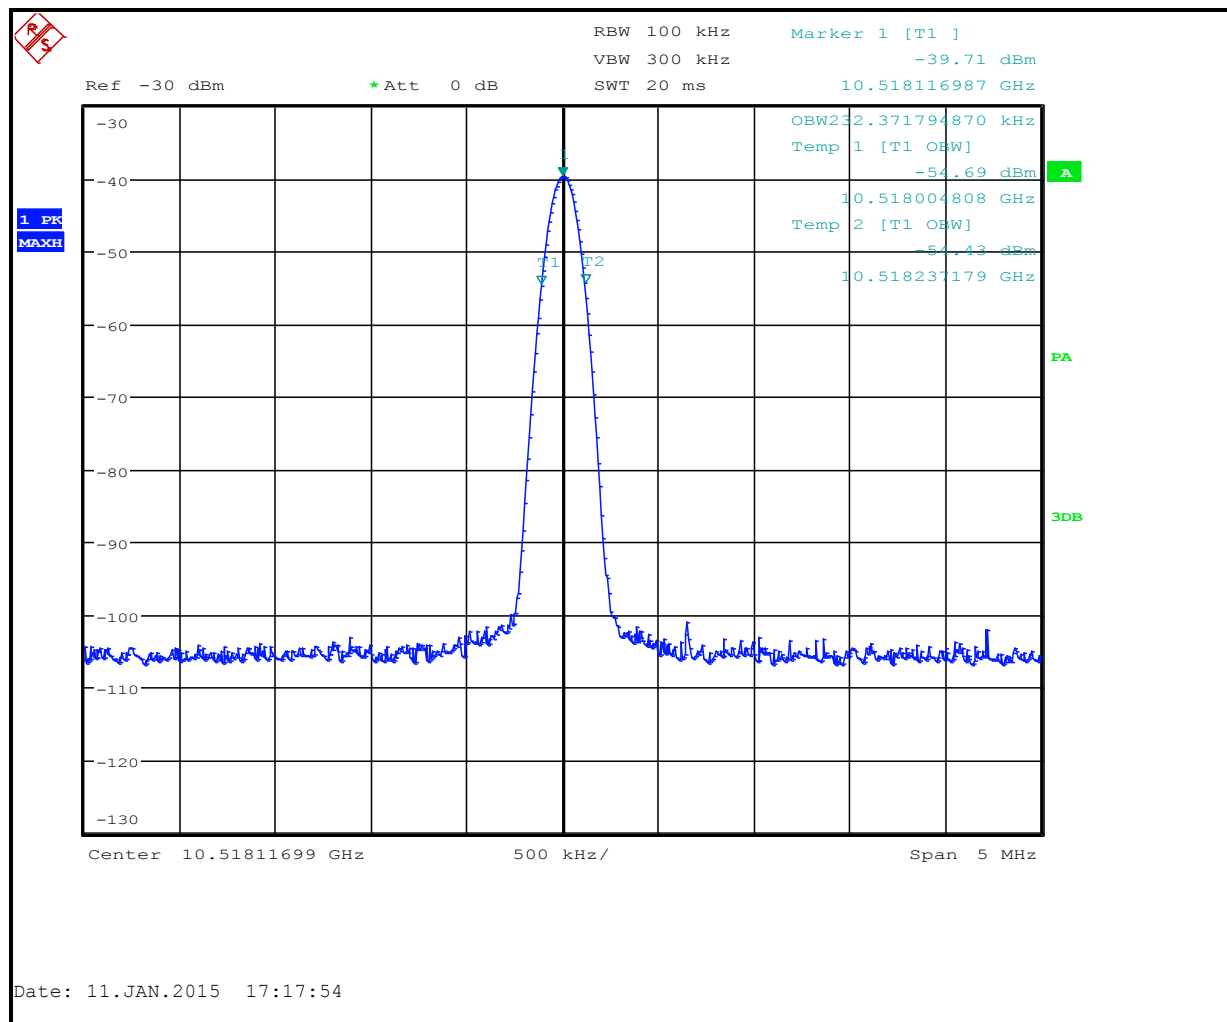

### Test Personnel:

Daniel W. Baltzell	<i>Daniel W. Baltzell</i>	January 11, 2015
Test Engineer	Signature	Date of Test

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

Client: FlightScope (Pty) Ltd  
Model: X2 ELITE  
Standards: FCC 15.245/IC RSS-210  
FCC/IC ID: QXP-HP2441/4612A-HP244  
Report #: 2014207

## **6 Conclusion**

The data in this measurement report shows that the EUT as tested, FlightScope (Pty) Ltd., Model: X2 ELITE, FCC ID: QXP-HP244, IC: 4612A-HP244, complies with the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations, and Industry Canada RSS-210 and RSS-Gen.