

Test Report No. 53S062852/EMC/06
dated 29 Nov 2006



Note: This report is issued subject to TÜV SÜD PSB Corporation's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH
FCC Parts 2, 15 and 25 : 2006
OF A
SATELLITE BROADBAND COMMUNICATOR
[Model : SABRE I]
[FCC ID : QY9-SABRE1WE]

TEST FACILITY TÜV SÜD PSB Corporation Pte Ltd,
Telecoms & EMC, Testing Group,
1 Science Park Drive, Singapore 118221

FCC REG. NO. 90937 (3m & 10m OATS)
99142 (10m Anechoic Chamber)
871638 (5m Anechoic Chamber)
325572 (10m Anechoic Chamber)

IND. CANADA REG. NO. IC 4257 (3m and 10m Anechoic Chambers)

PREPARED FOR Mr Prabakar Kuttaniseeri
Addvalue Communications Pte Ltd
190 Changi Road
#02-02 MDIS Building
Singapore 419974

Tel : (65) 6342 5420 Fax : (65) 6342 5426

QUOTATION NUMBER 53Q0601508

JOB NUMBER 53S062852

TEST PERIOD 20 Oct 2006 – 27 Nov 2006

PREPARED BY

Quek Keng Huat
Associate Engineer

APPROVED BY

Lim Cher Hwee
Assistant Vice President



Laboratory:
TÜV SÜD PSB Corporation Pte. Ltd.
Testing Group
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: testing@psbcorp.com
www.psbcorp.com
Co. Reg : 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
3 Science Park Drive
#04-01/05 The Franklin
Singapore 118223



LA-2001-0212-A
LA-2001-0213-F
LA-2001-0214-E
LA-2001-0215-B
LA-2001-0216-G
LA-2001-0217-G
LA-2006-0355-C

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.



TABLE OF CONTENTS

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING EQUIPMENT DESCRIPTION

EUT OPERATING CONDITIONS

CONDUCTED EMISSION TEST

RF OUTPUT POWER TEST

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

RADIATED SPURIOUS EMISSION TEST

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

FREQUENCY STABILITY (VOLTAGE VARIATION) TEST

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

ANNEX A - EUT PHOTOGRAPHS / DIAGRAMS

ANNEX B - FCC LABEL & POSITION

ANNEX C - USER MANUAL, TECHNICAL DESCRIPTION, BLOCK & CIRCUIT DIAGRAMS

Test Report No. 53S062852/EMC/06
dated 29 Nov 2006



TEST SUMMARY

The product was tested in accordance with the customer's specifications.

Test Results Summary

Test Standard	Description	Pass / Fail
FCC Parts 2, 15 and 25: 2006		
15.107(a), 15.207	Conducted Emissions	Pass
2.1046(a), 25.204	RF Output Power	Pass
2.1051, 25.202(f)	Unwanted Emissions at Antenna Terminal	Pass
2.1053, 25.202(f)	Radiated Spurious Emissions	Pass
25.216(h)(i)(j)	Protection of Aeronautical Radio Navigation Satellite Service	Pass
2.1055, 25.202(d)	Frequency Stability (Temperature Variation)	Pass
2.1055, 25.202(d)	Frequency Stability (Voltage Variation)	Pass
1.1310	Maximum Permissible Exposure	Pass



TEST SUMMARY

Notes

1. Three channels as listed below, which respectively represent the lower, middle and upper channels of the Equipment Under Test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
Lower Channel	1.626590
Middle Channel	1.643500
Upper Channel	1.660330

2. The following tests were based on conducted measurements.
 - a. RF Output Power
 - b. Unwanted Emissions at Antenna Terminal
 - c. Frequency Stability (Temperature Variation)
 - d. Frequency Stability (Voltage Variation)
3. The EUT is a Class B device when in non-transmitting state and meets the FCC Part15B Class B requirements.
4. All test measurement procedures are according to ANSI/TIA-603-B-2002.

Modifications

1. No modifications were made.

PRODUCT DESCRIPTION

Description : The Equipment Under Test (EUT) is a **Satellite Broadband Communicator**.

Manufacturer : Addvalue Communications Pte Ltd
190 Changi Road
#02-02 MDIS Building
Singapore 419974

Model Number : Sabre I

FCC ID : QY9-SABRE1WE

Serial Number : Nil

Microprocessor : OMAP 5190, FPGA XC3S4000

Operating / Transmitting Frequency : Bluetooth
2.402GHz - 2.480GHz

Satellite
Uplink: 1.6265GHz - 1.6605GHz
Downlink: 1.525GHz - 1.559GHz

GPS
1.57542GHz

Clock / Oscillator Frequency : OMAP 5910
30MHz, 60MHz, 120MHz

FPGA XC3S4000
9.6768MHz, 24.192MHz, 38.192MHz

Modulation : Bluetooth
Gaussian Frequency Shift Keying (GFSK)

Satellite
Pi/4 QPSK (transmit)
Pi/4 QPSK and 16-QAM (receive)

GPS
BPSK

Port / Connectors : Refer to manufacturers' user manual / operating manual.

Rated Input Power : 100VAC - 240VAC 50/60Hz

Accessories : Coded Analogue Phone
M/N: SB1/AH100 S/N: Nil

SUPPORTING EQUIPMENT DESCRIPTION

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Dell Notebook	M/N: PP10L S/N: 24746315248 FCC ID: DoC	Nil
Dell AC/DC Adapter	M/N: PA-1650-05D2 S/N: Nil FCC ID: Verification	0.5m unshielded DC power cable with ferrite loaded 2.00m 7unshielded AC power cable
Panasonic Telephone	M/N: KX-TS3MXR S/N: 2GAFC179179 FCC ID: Nil	1.0m unshielded telephone line
DVE AC/DC Adapter (EUT AC/DC Adapter)	M/N: DSA-0412S-14 242 S/N: Nil FCC ID: DoC	2.0m unshielded DC power cable with ferrite loaded 1.5m unshielded AC power cable



EUT OPERATING CONDITIONS

FCC Parts 2, 15 and 25

- | |
|---|
| <ol style="list-style-type: none">1. Conducted Emissions2. RF Output Power3. Unwanted Emissions at Antenna Terminal4. Radiated Spurious Emissions5. Protection of Aeronautical Radio Navigation Satellite Service6. Frequency Stability (Temperature Variation)7. Frequency Stability (Voltage Variation)8. Maximum Permissible Exposure |
|---|

<p>The EUT was exercised by operating in maximum continuous transmission, i.e transmitting at lower, middle and upper channels respectively at one time. The satellite continuous transmission and reception was simulated by activating the client's provided test program, "<lotus-test-script".</p>

Test Report No. 53S062852/EMC/06
dated 29 Nov 2006



CONDUCTED EMISSION TEST

FCC Parts 15.107(a) and 15.207 Conducted Emission Limits

Frequency Range (MHz)	Limit Values (dBµV)	
	Quasi-peak (QP)	Average (AV)
0.15 - 0.5	66 – 56 *	56 – 46 *
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreasing linearly with the logarithm of the frequency

FCC Parts 15.107(a) and 15.207 Conducted Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Schaffner EMI Receiver – SCR1	SCR 3501	238	23 Nov 2006
Agilent EMC Analyzer-SA7	E7403A	US41160167	22 May 2007
EMCO LISN (for EUT) – LISN9	3825/2	9309-2128	15 May 2007
EMCO LISN (for supporting) – LISN6	3825/2	9309-2127	15 May 2007
R&S Pulse Limiter – PL2	ESH3-Z2	100347	15 Apr 2007



CONDUCTED EMISSION TEST

FCC Parts 15.107(a) and 15.207 Conducted Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

FCC Parts 15.107(a) and 15.207 Conducted Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

Sample Calculation Example

At 20 MHz	Q-P limit (Class B) = 1000 μV = 60.0 dBμV
Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dBμV (Calibrated for system losses)	
Therefore, Q-P margin = 40.0 - 60.0 = -20.0	i.e. 20.0 dB below Q-P limit

CONDUCTED EMISSION TEST



Conducted Emissions Test Setup (Front View)



Conducted Emissions Test Setup (Rear View)

Test Report No. 53S062852/EMC/06
dated 29 Nov 2006



CONDUCTED EMISSION TEST

FCC Parts 15.107(a) and 15.207 Conducted Emission Results

Operating Mode	Satellite	Temperature	23°C
Test Input Power	110V 60Hz	Relative Humidity	58%
Line Under Test	AC Mains	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia

Frequency (MHz)	Q-P Value (dBμV)	Q-P Margin (dB)	AV Value (dBμV)	AV Margin (dB)	Line	Channel
0.1877	43.6	-20.5	32.9	-21.2	Live	Upper
0.3749	26.3	-32.1	24.1	-24.4	Live	Upper
0.5620	21.4	-34.7	20.0	-26.0	Neutral	Upper
2.4375	35.8	-20.2	32.0	-14.0	Neutral	Upper
2.9343	32.5	-23.5	31.7	-14.3	Neutral	Upper
3.8092	30.7	-25.3	29.0	-17.0	Neutral	Upper

Notes

1. All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
9kHz - 30MHz
RBW: 10kHz VBW: 30kHz
4. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ±2.4dB.



RF OUTPUT POWER TEST

FCC Parts 2.1046 and 25.204 RF Output Power Test Limits

1. 25.204 Power Limits
 - (a) In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1GHz and 5GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:
 - +40dBW in any 4kHz band for $\theta: 0^\circ$
 - +40dBW + 3.0dBW in any 4kHz band for $0^\circ < \theta \leq 5^\circ$
 where θ is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.
 - (c) For angles of evaluation of the horizon greater than 5° there shall be no restriction as to the equivalent isotropically radiated power transmitted by an earth station towards the horizon.
 - (d) Notwithstanding the e.i.r.p and e.i.r.p density limits specified in the station authorization, each earth station transmission shall be conducted at the lowest power level that will provide the required signal quality as indicated in the application and further amended by coordination agreements.

2. 2.1046 Measurements Required: RF Power Output
 - (a) For transmission other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.
 - (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

FCC Parts 2.1046 and 25.204 RF Output Power Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Universal Radio Communication Tester	CMU	837728/071	04 Mar 2007
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007
JFW 20dB RF Attenuator	50FHC-020-15	Nil	13 Aug 2007



RF OUTPUT POWER TEST

FCC Parts 2.1046 and 25.204 RF Output Power Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a RF attenuator and a low-loss coaxial cable.
4. The spectrum analyser was then calibrated to the power meter level as shown by the Universal Radio Communicator Tester with a calibrated RF signal source.
5. All other supporting equipment were powered separately from another filtered mains.

FCC Parts 2.1046 and 25.204 RF Output Power Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, transmitting frequency at lower channel.
2. The maximum peak power of the transmitting frequency was measured and recorded.
3. The RF carrier peak and average pots were plotted.
4. The steps 2 to 4 were repeated with the transmitting frequency was set to middle and upper channels respectively.

RF OUTPUT POWER TEST



RF Output Power Test Setup

Test Report No. 53S062852/EMC/06
dated 29 Nov 2006



RF OUTPUT POWER TEST

FCC Parts 2.1046 and 25.204 RF Output Power Results

Operating Mode	Satellite	Temperature	23 °C
Test Input Power	110V 60Hz	Relative Humidity	55%
Antenna Gain	8 dBi	Atmospheric Pressure	1030mbar
Attached Plots	1 - 12	Tested By	Thor Wen Lei

Symbol Rate: 0.5 x 33.6kS/s

Channel	Channel Frequency (GHz)	Peak Power (dBm)	EIRP Peak (dBm)	Mean Power (dBm)	EIRP Mean (dBm)
Lower	1.62659	31.9	39.9	31.7	39.7
Middle	1.64350	31.9	39.9	31.8	39.8
Upper	1.66033	32.0	40.0	32.0	40.0

Symbol Rate: 4.5 x 33.6kS/s


Channel	Channel Frequency (GHz)	Peak Power (dBm)	EIRP Peak (dBm)	Mean Power (dBm)	EIRP Mean (dBm)
Lower	1.62676	31.2	39.2	30.8	38.8
Middle	1.64350	31.2	39.2	31.2	39.2
Upper	1.66033	31.4	39.4	31.2	39.2

Notes


- Power analyser of Universal Radio Communication Tester was used for power measurement with peak detection as mode of measurement. The power analyser mode supports a wideband power measurement ranging from 100kHz to 2700MHz.

RF OUTPUT POWER TEST

Output Power Plots @ Symbol Rate: 0.5 x 33.6kS/s

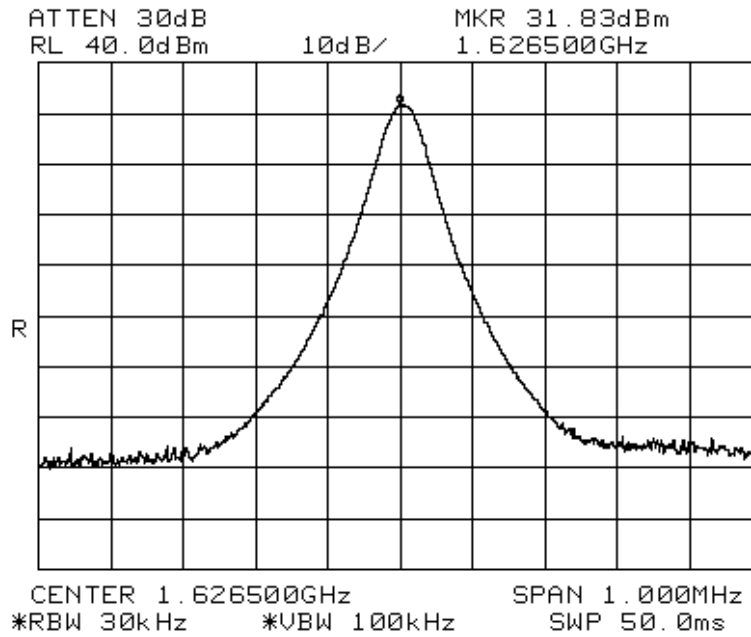

Plot 1 – Lower Channel (Peak)

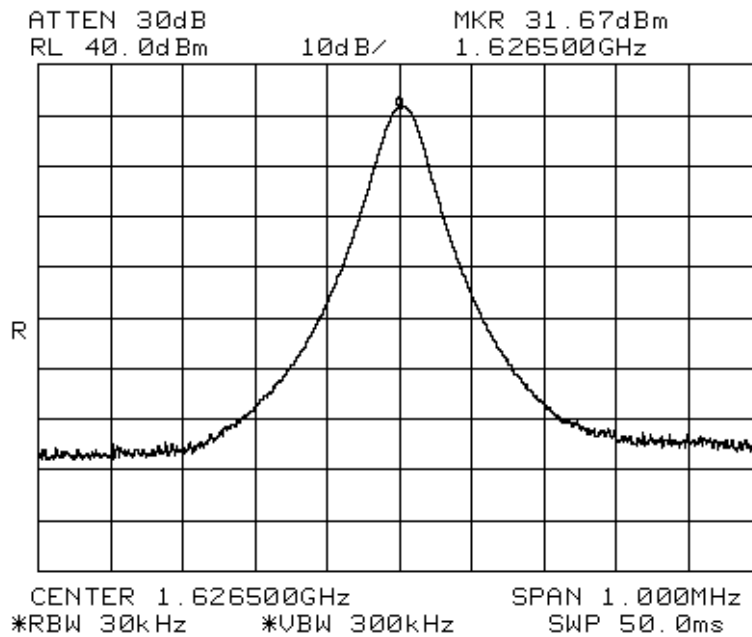


Plot 2 – Lower Channel (Average)




RF OUTPUT POWER TEST

Output Power Plots @ Symbol Rate: 0.5 x 33.6kS/s

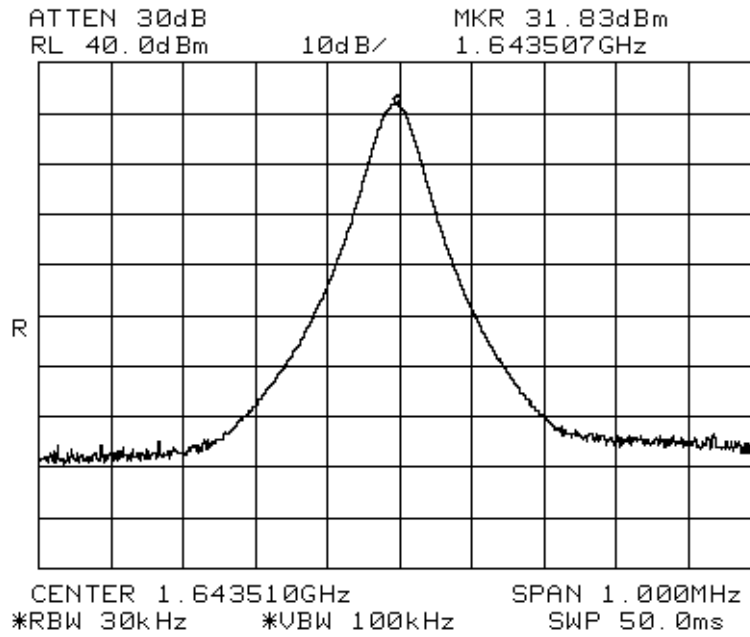


Plot 3 – Middle Channel (Peak)

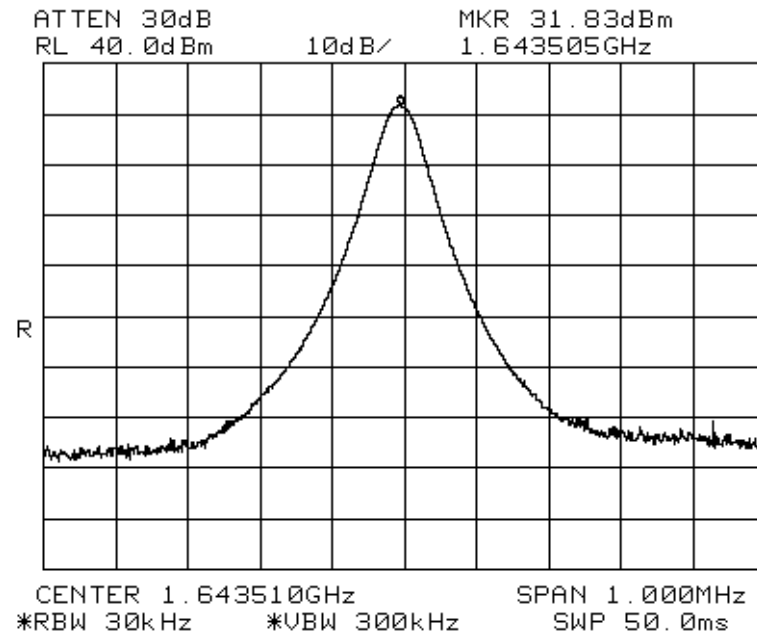


Plot 4 – Middle Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots @ Symbol Rate: 0.5 x 33.6kS/s

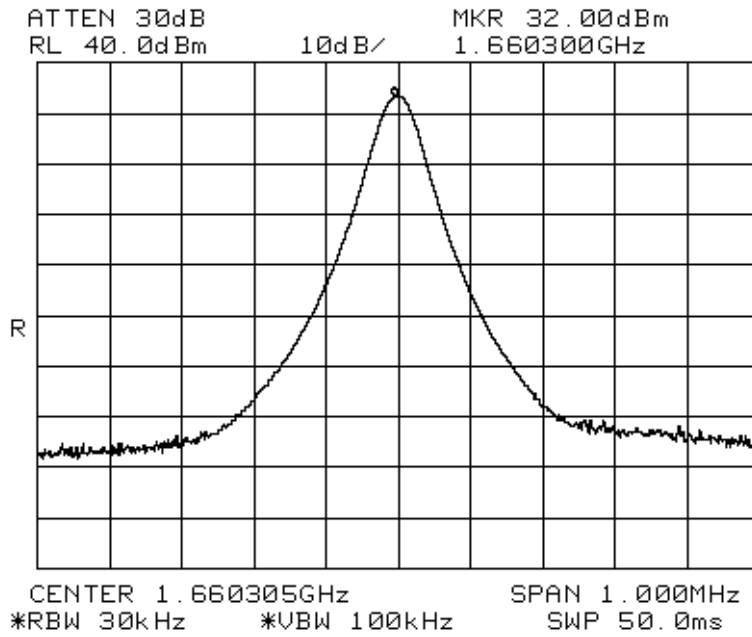

Plot 5 – Upper Channel (Peak)

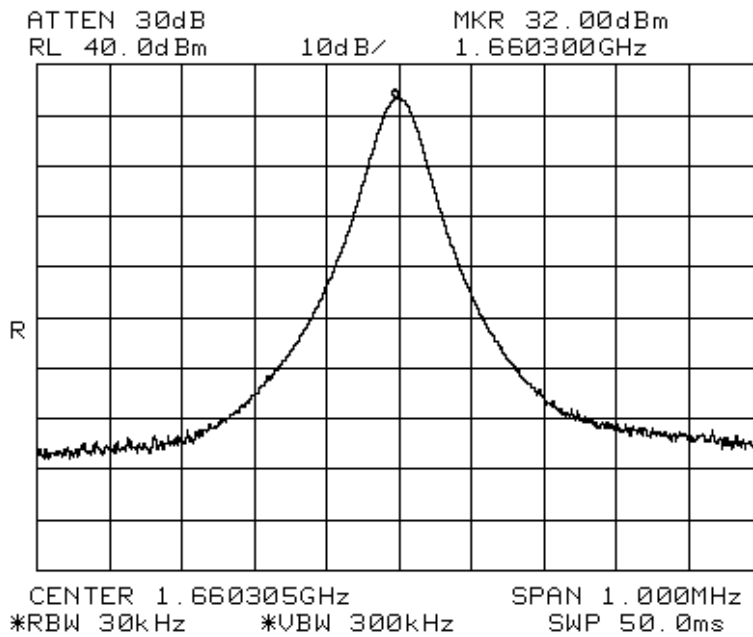


Plot 6 – Upper Channel (Average)




RF OUTPUT POWER TEST

Output Power Plots @ Symbol Rate: 4.5 x 33.6kS/s

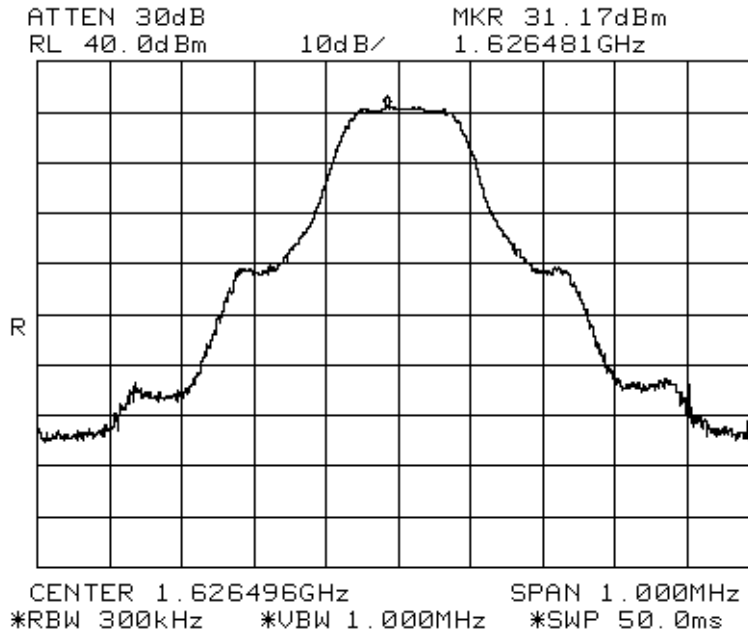


Plot 7 – Lower Channel (Peak)

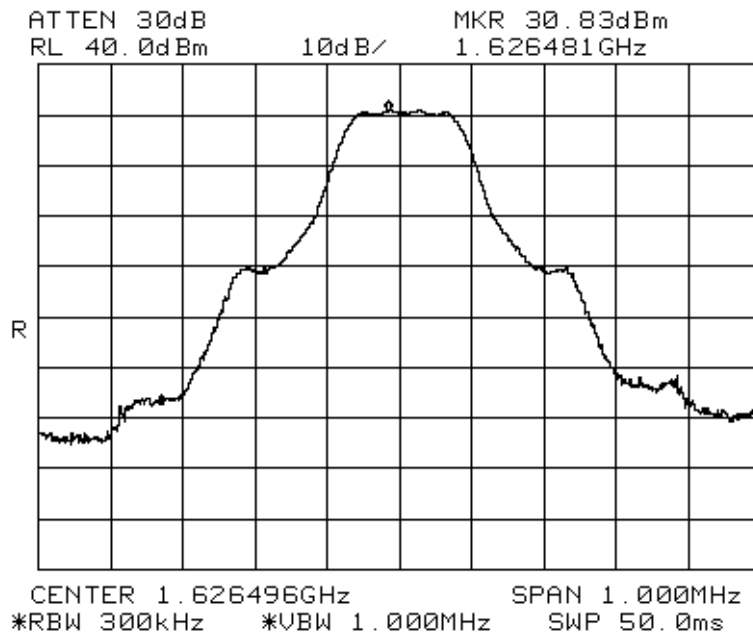


Plot 8 – Lower Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots @ Symbol Rate: 4.5 x 33.6kS/s

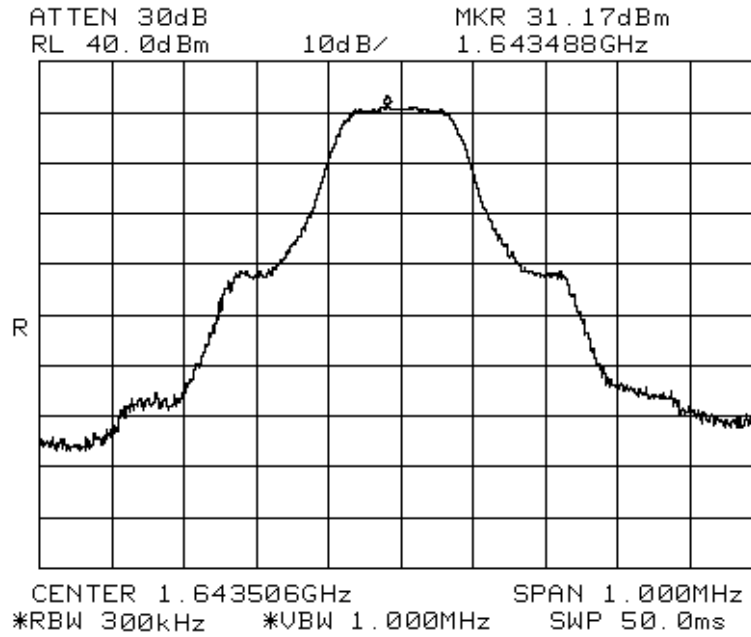


Plot 9 – Middle Channel (Peak)

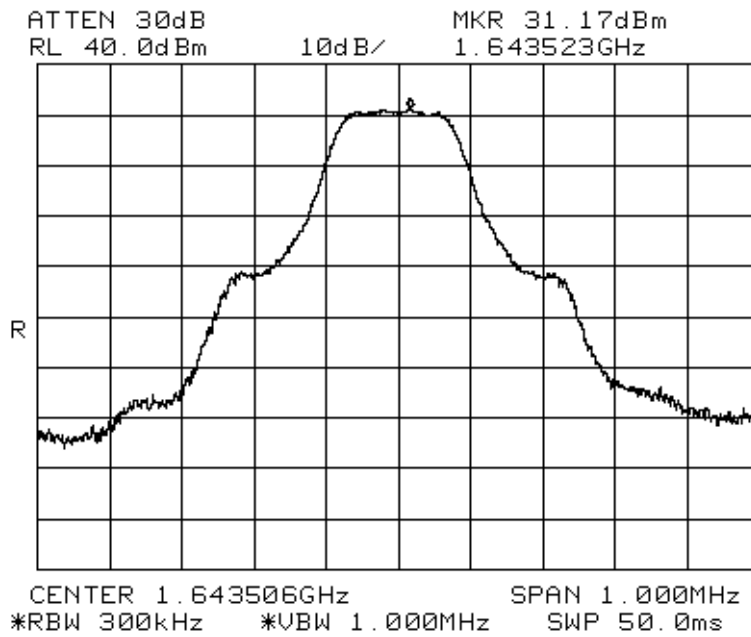


Plot 10 – Middle Channel (Average)

RF OUTPUT POWER TEST

Output Power Plots @ Symbol Rate: 4.5 x 33.6kS/s

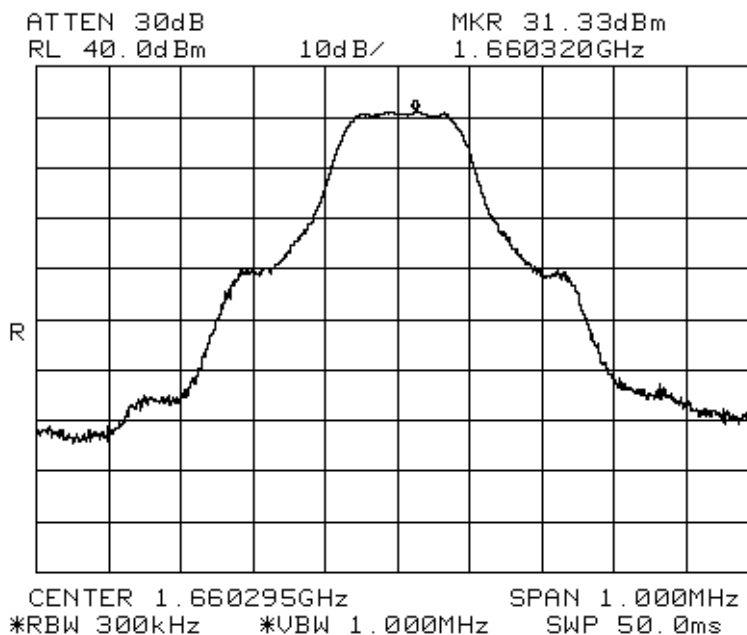

Plot 11 – Upper Channel (Peak)

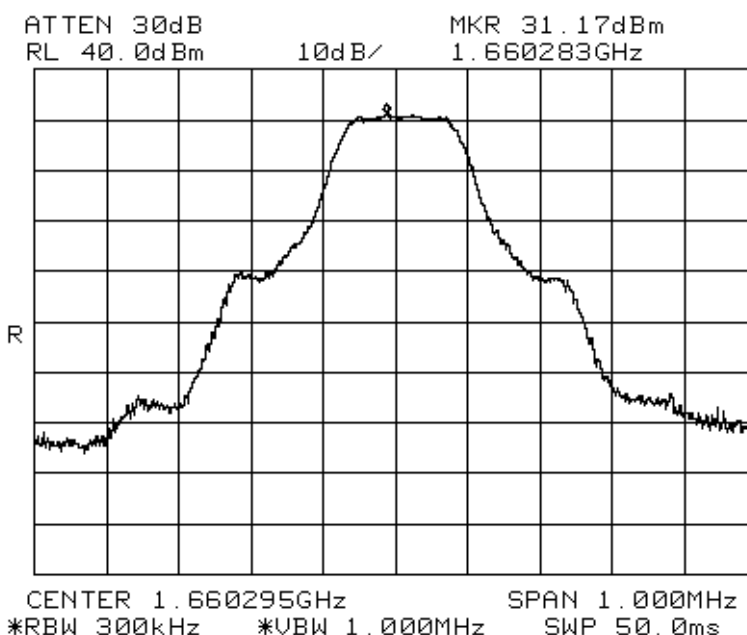

Plot 12 – Upper Channel (Average)



UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Limits

1. 25.202 Emissions Limitations
 - (f) The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:
 - (1) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth: 25 decibels;
 - (2) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth: 35 decibels;
 - (3) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 250% of the authorized bandwidth: an amount equal to 43 decibels plus 10 times logarithm (to the base 10) of the transmitter power in watts.
2. 2.1051 Measurements Required: Spurious Emissions at Antenna Terminals
The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20dB below the permissible value needed not be specified.

FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer (for Out of Band Spurious)	8564E	3846A01433	08 Apr 2007
HP Spectrum Analyzer (for 26dB Bandwidth and In Band Emissions)	8593E	3831U02087	25 Oct 2007
JFW 20dB RF Attenuator	50FHC-020-15	Nil	13 Aug 2007



UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, transmitting frequency at lower channel.
2. The 26dB bandwidth of the transmitting channel was measured.
3. The emission mask was drawn based on the authorized bandwidth and the measured average output power.
4. The transmitting channel emissions were plotted.
5. The steps 2 to 5 were repeated with the transmitting frequency was set to middle and upper channels respectively.

UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST



Unwanted Emissions at Antenna Terminal Test Setup



UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

FCC Parts 2.1051 and 25.202(f) Unwanted Emissions at Antenna Terminal Results

Operating Mode	Satellite	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	58%
Antenna Gain	8 dBi	Atmospheric Pressure	1030bar
Attached Plots	13 - 18 (26dB Bandwidth) 19 - 24 (In Band Emissions) 25 - 36 (Out of Band Spurious)	Tested By	Chang Wai Kit

All emissions are within the emission mask. Please refer to the attached plots.

Notes

1. The Resolution Bandwidth (RBW) was corrected from 4kHz by $10\log_{10} [(used\ RBW) / 4kHz]$.
2. Emission limits are computed based on following:
 - a. Emissions Limits (dBm) (50% - 100% authorised bandwidth) = $P - 25 + CF$
 - b. Emissions Limits (dBm) (100% - 250% authorised bandwidth) = $P - 35 + CF$
 - c. Emissions Limits (dBm) (> 250% authorised bandwidth) = $P - [43 + 10 \log_{10} P_w] + 30 + CF$


where

P	=	Measured mean power in dBm
P_w	=	Meausred mean power in dBW
CF	=	RBW correction factor (see Note 1)




UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

26dB Bandwidth Plots @ Symbol Rate: 0.5 x 33.6kS/s

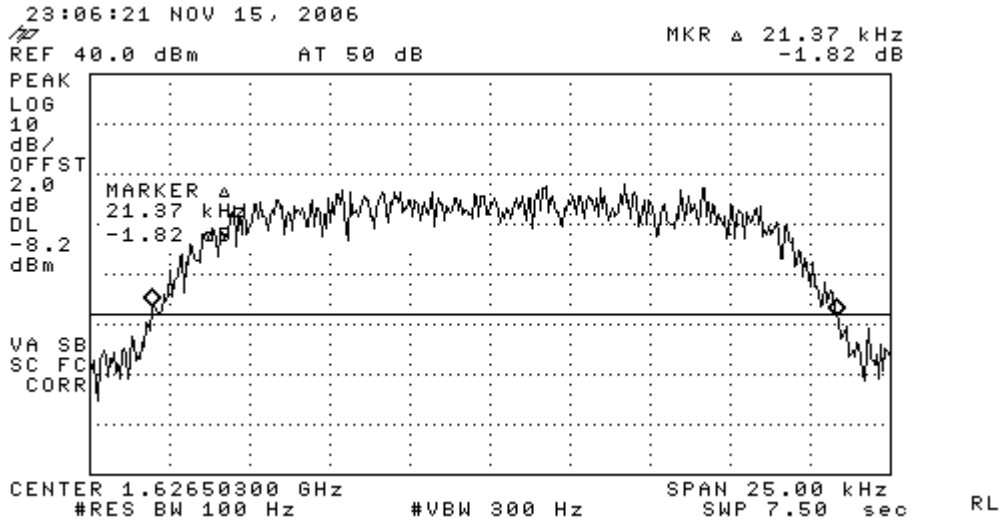

Plot 13 – Lower Channel

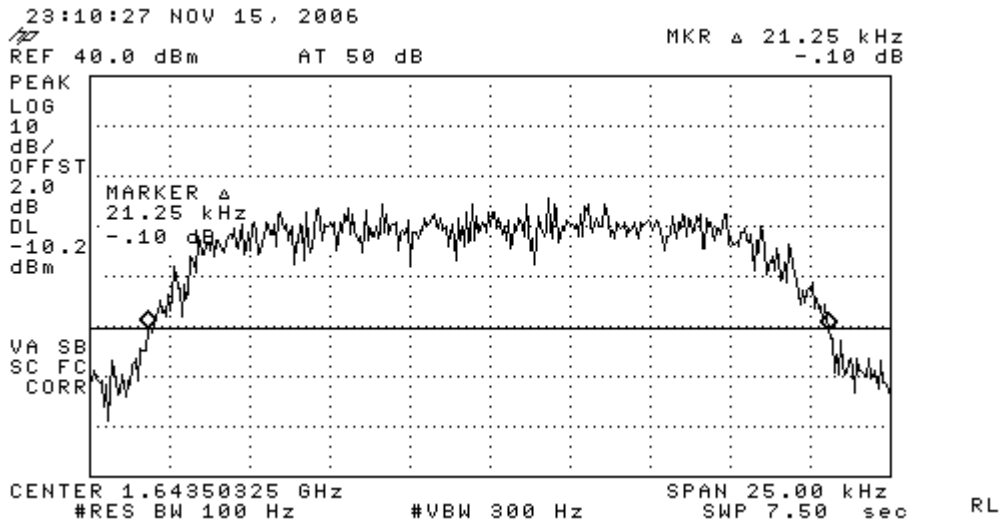


Plot 14 – Middle Channel




UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

26dB Bandwidth Plots @ Symbol Rate: 0.5 x 33.6kS/s

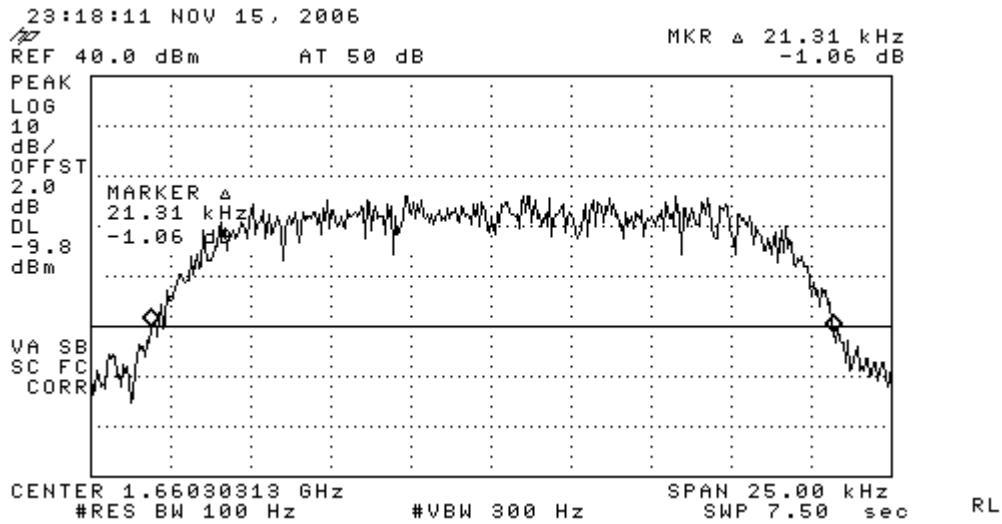


UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

26dB Bandwidth Plots @ Symbol Rate: 4.5 x 33.6kS/s

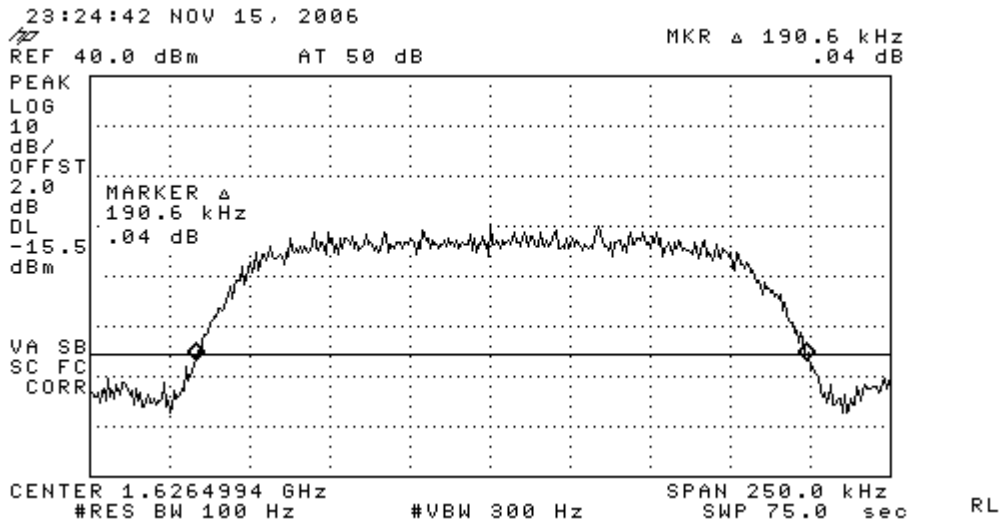


Plot 16 – Lower Channel

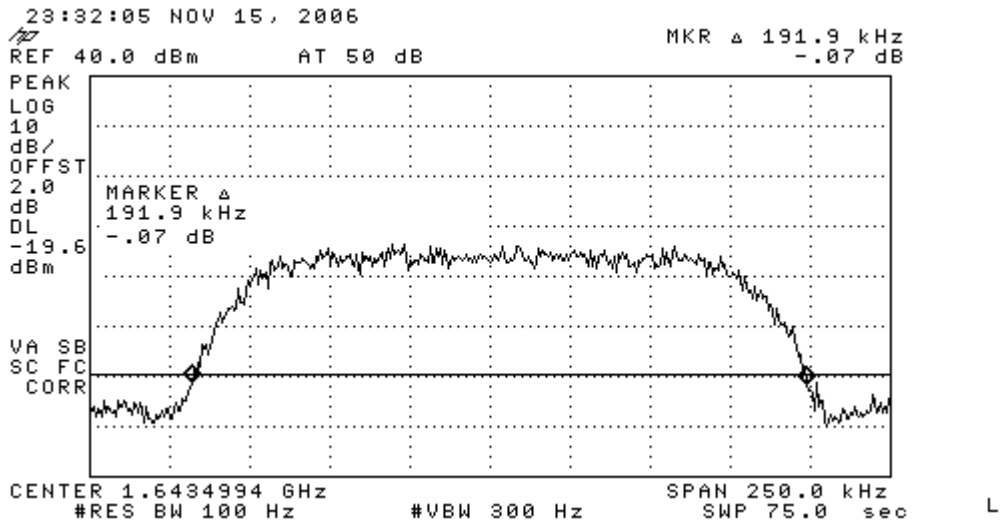

Plot 17 – Middle Channel

UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST


26dB Bandwidth Plots @ Symbol Rate: 4.5 x 33.6kS/s

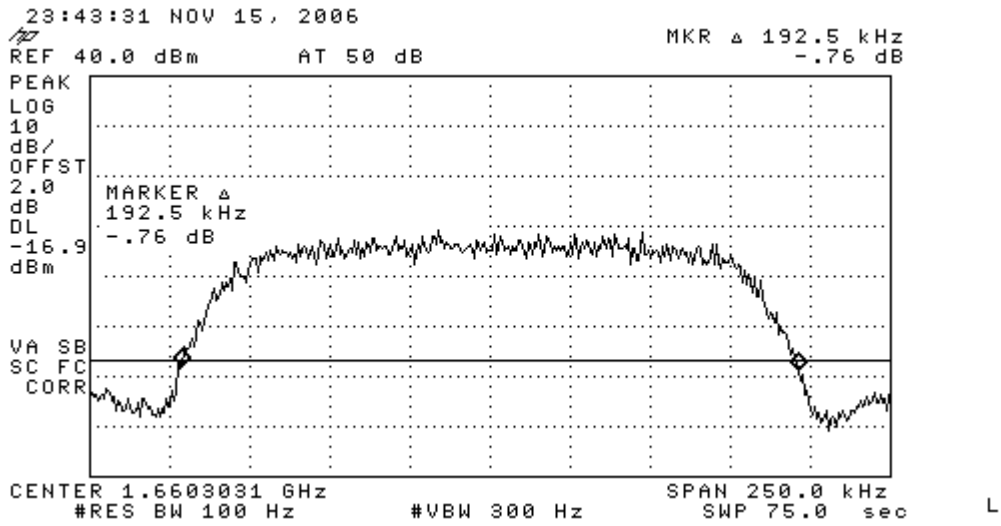




UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

In Band Emissions @ Symbol Rate: 0.5 x 33.6kS/s

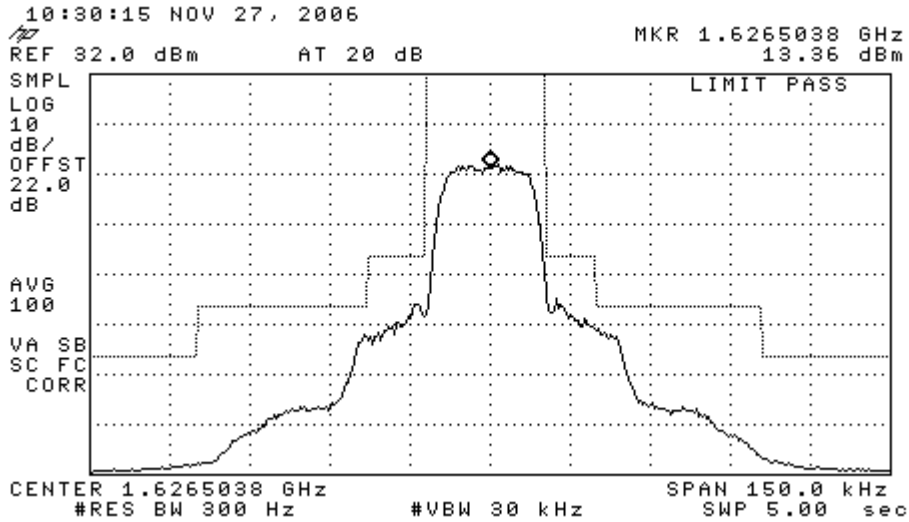

RL

Plot 19 – Lower Channel

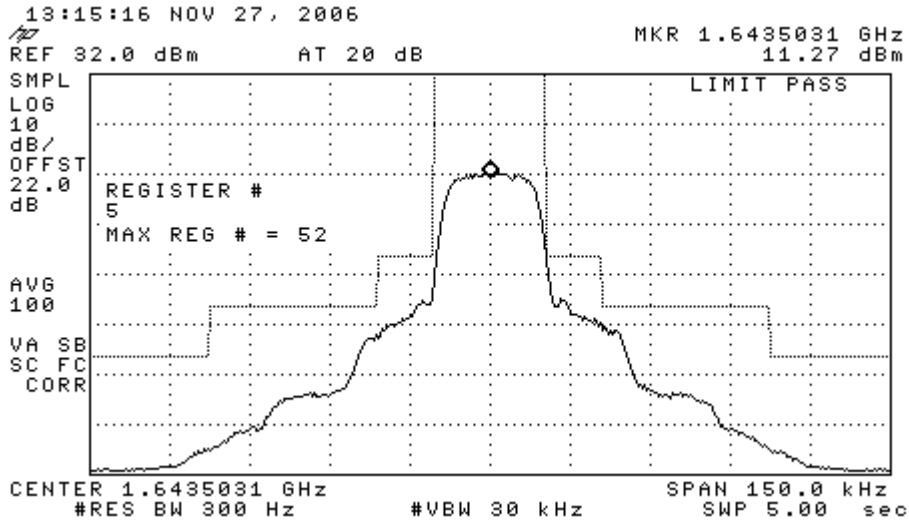


L

Plot 20 – Middle Channel



UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

In Band Emissions @ Symbol Rate: 0.5 x 33.6kS/s

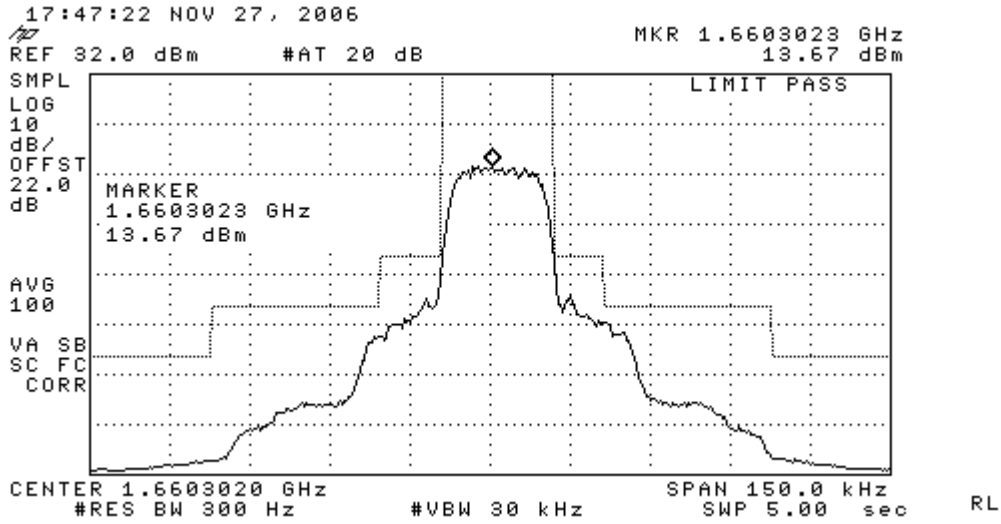


Plot 21 – Upper Channel




UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

In Band Emissions @ Symbol Rate: 4.5 x 33.6kS/s

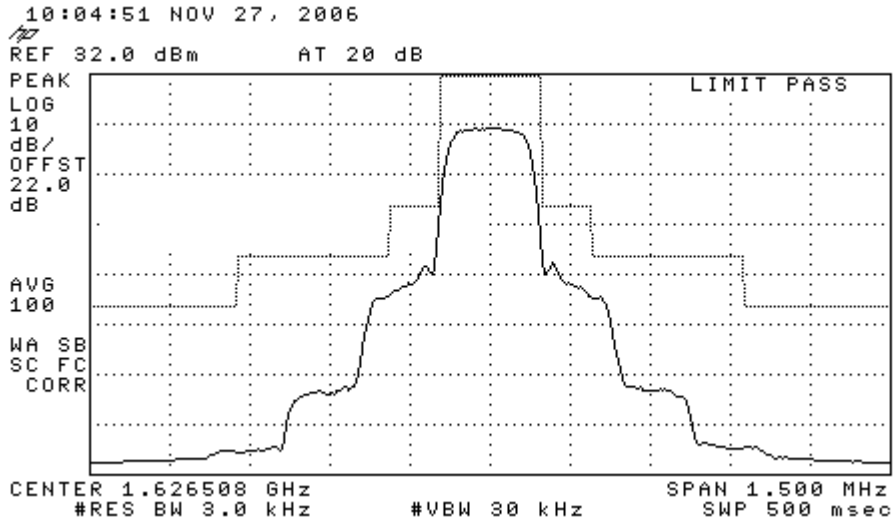

RL

Plot 22 – Lower Channel

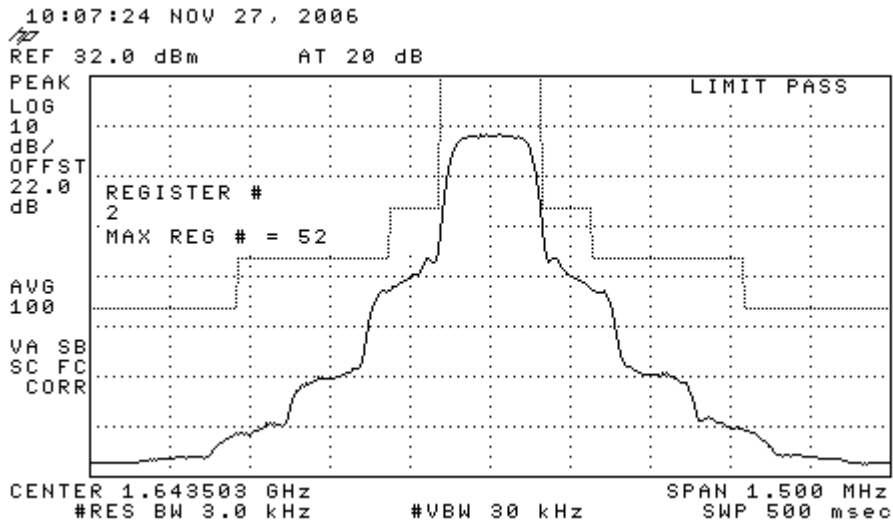


L

Plot 23 – Middle Channel



UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

In Band Emissions @ Symbol Rate: 4.5 x 33.6kS/s

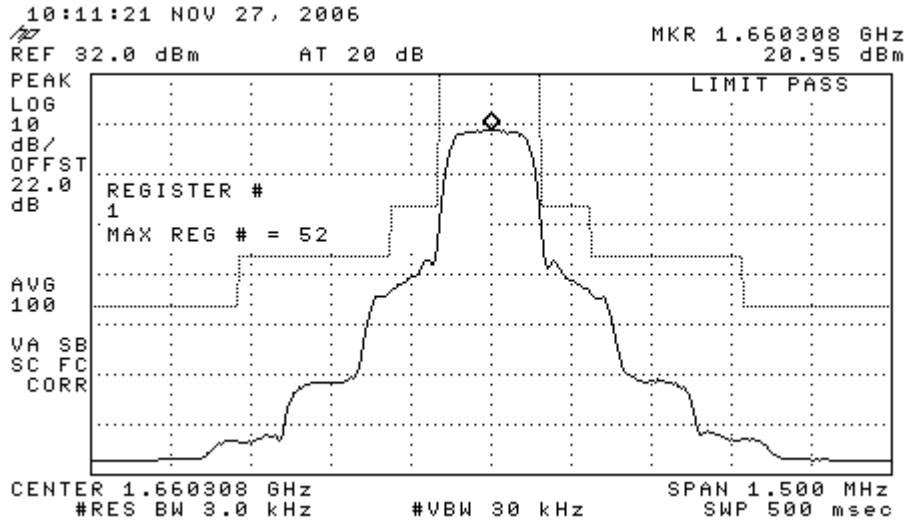


Plot 24 – Upper Channel




UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious @ Symbol Rate: 0.5 x 33.6kS/s

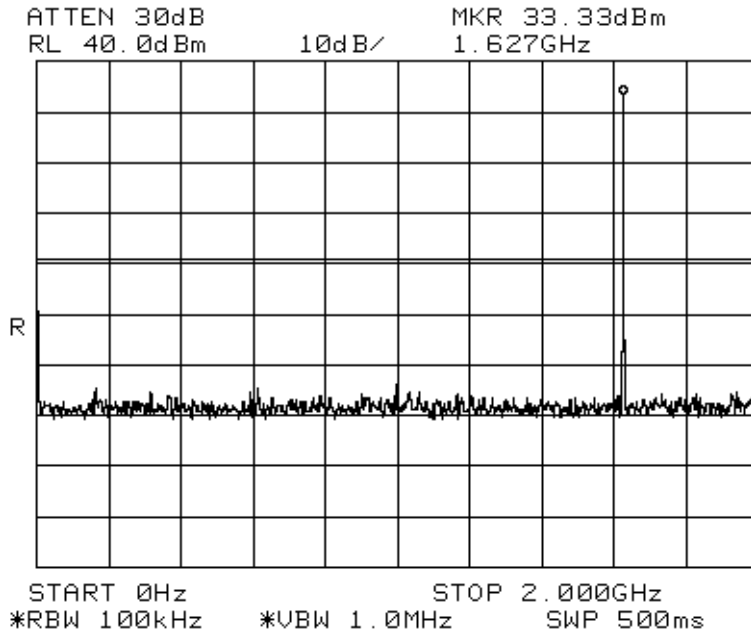

Plot 25 – Lower Channel

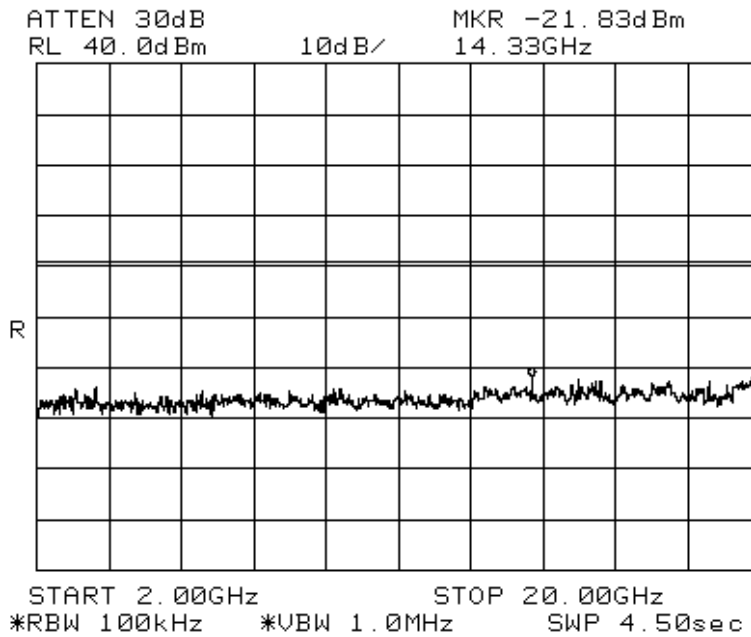


Plot 26 – Lower Channel




UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

Out of Band Spurious @ Symbol Rate: 0.5 x 33.6kS/s

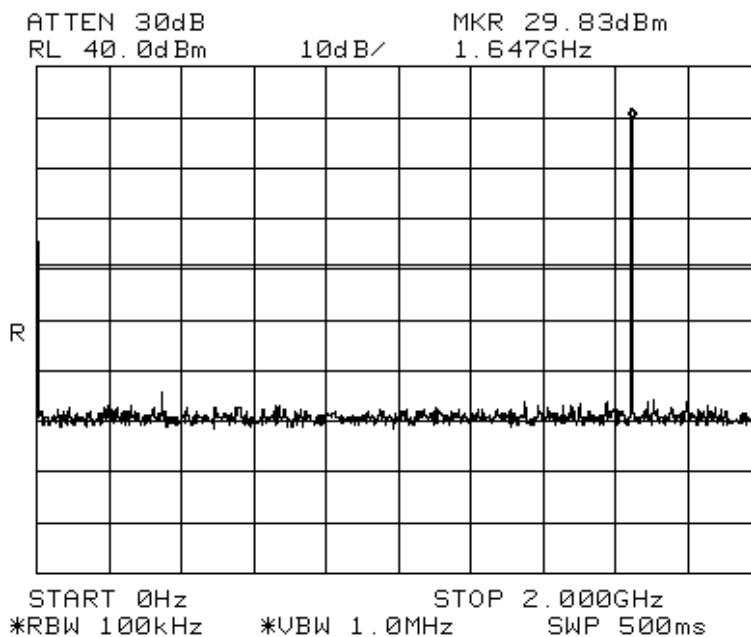


Plot 27 – Middle Channel

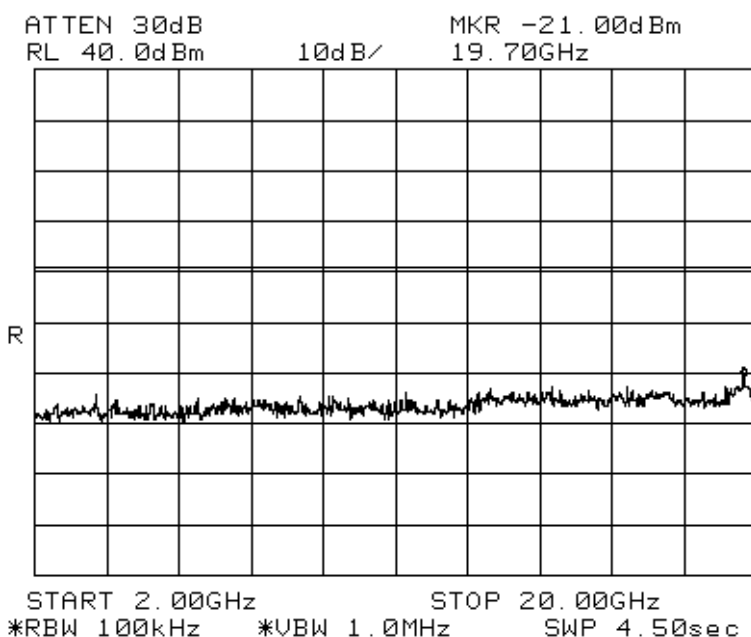


Plot 28 – Middle Channel

UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

Out of Band Spurious @ Symbol Rate: 0.5 x 33.6kS/s

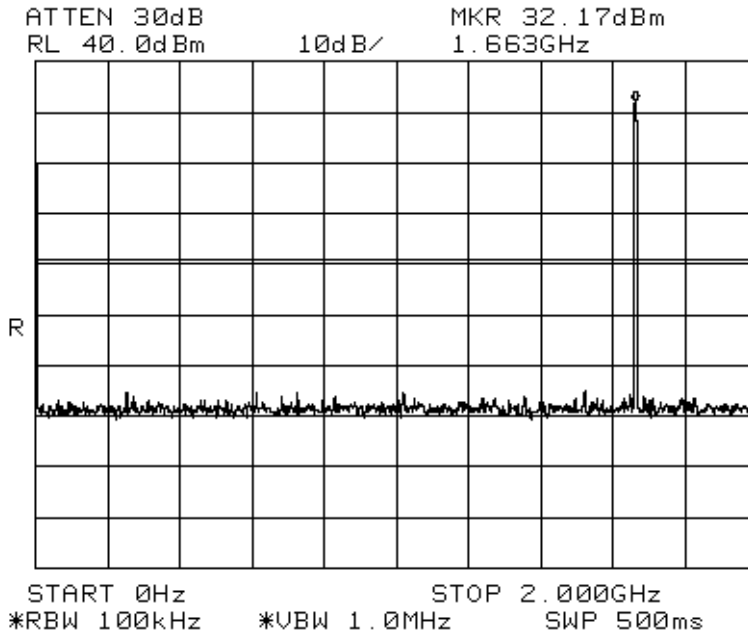


Plot 29 – Upper Channel

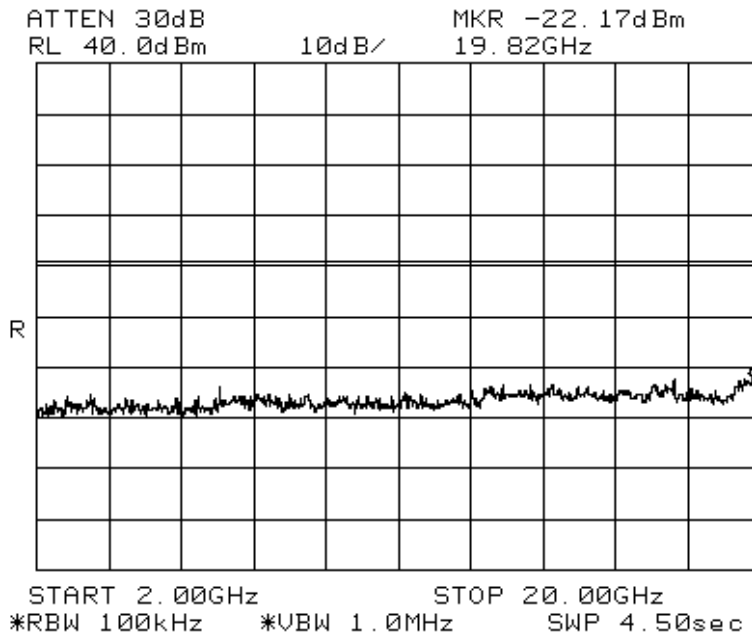


Plot 30 – Upper Channel

UNWANTED EMISSIONS AT ANTENNA TERNIMAL TEST

Out of Band Spurious @ Symbol Rate: 4.5 x 33.6kS/s

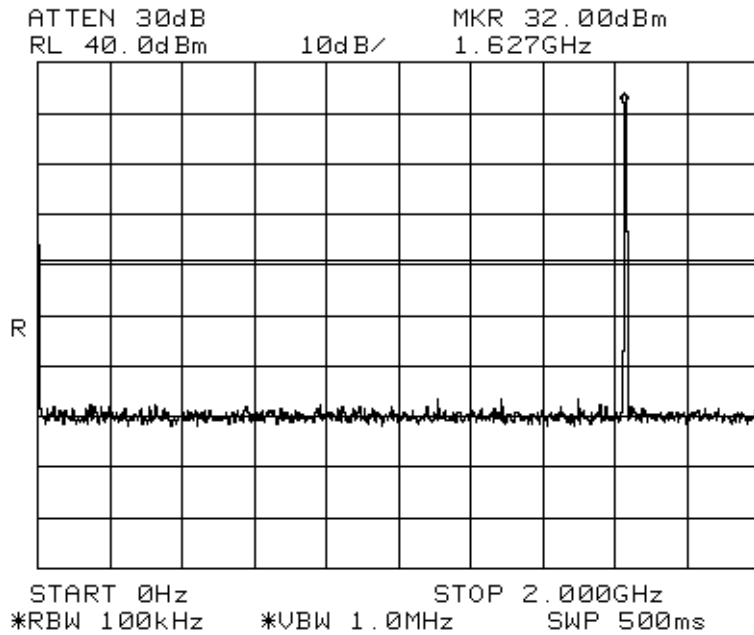


Plot 31 – Lower Channel

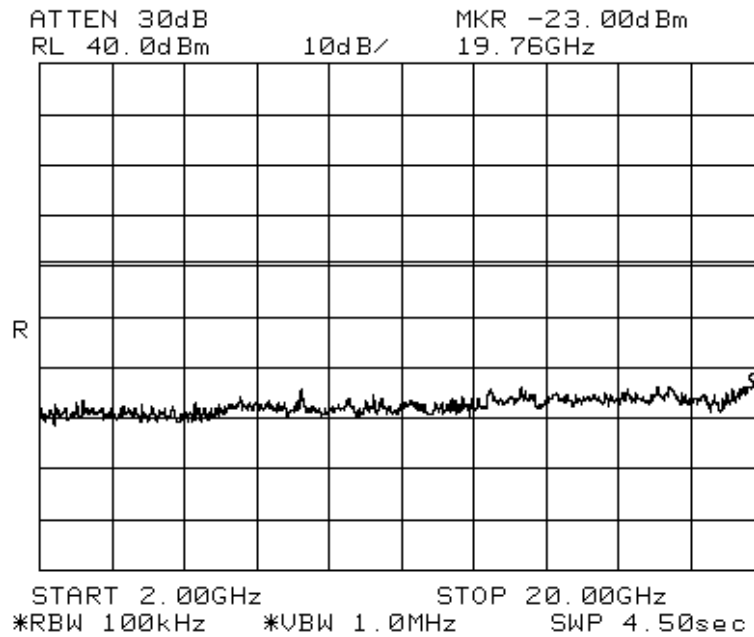


Plot 32 – Lower Channel

UNWANTED EMISSIONS AT ANTENNA TERMINAL TEST

Out of Band Spurious @ Symbol Rate: 4.5 x 33.6kS/s

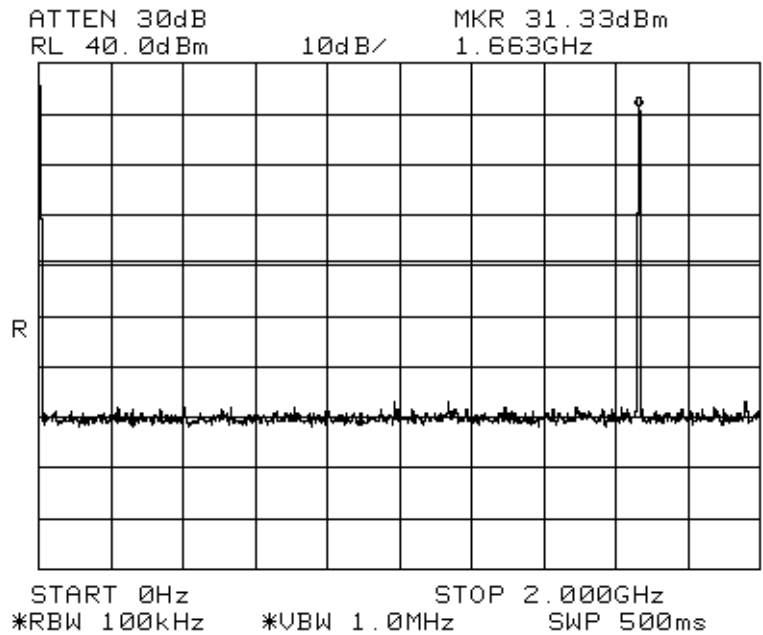

Plot 35 – Upper Channel

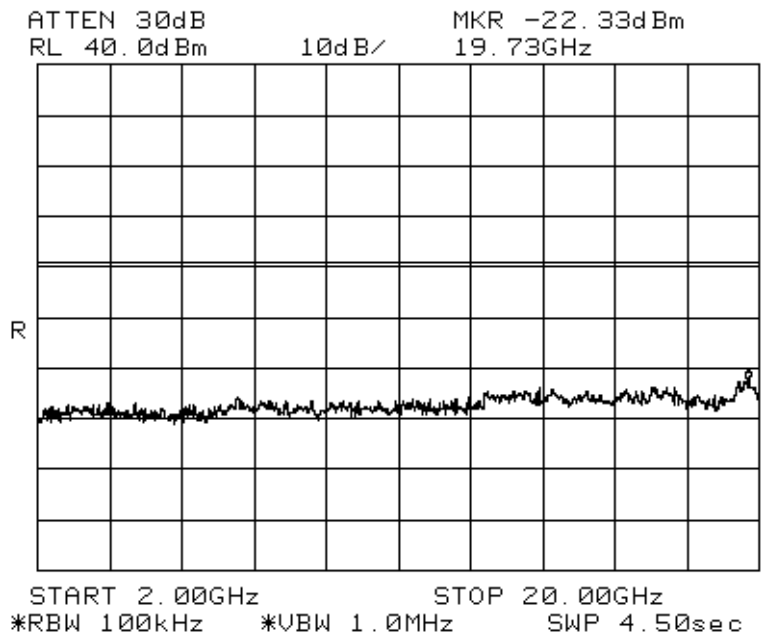

Plot 36 – Upper Channel



RADIATED SPURIOUS EMISSION TEST

FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Limits

1. 25.202 Emissions Limitations
 - (f) The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:
 - (1) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth: 25 decibels;
 - (2) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth: 35 decibels;
 - (3) In any 4kHz band, the center frequency of which is removed from the assigned frequency by more than 250% of the authorized bandwidth: an amount equal to 43 decibels plus 10 times logarithm (to the base 10) of the transmitter power in watts.

2. 2.1053 Measurements Required: Field Strength of Spurious Emissions
 - (a) Measurement shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of 2.1049, as appropriate. For equipment operating on frequencies below 890MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
 - (b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
 - (1) Those in which the spurious emission are required to be 60dB or more below the mean power of the transmitter.
 - (2) All equipment operating on frequencies higher than 25MHz.
 - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
 - (4) Other types of equipment as required, when deemed necessary by the Commission.

FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver (20Hz –26.5GHz) – ESMI1	ESMI	849182/003 848926/007	04 Jul 2007
Agilent Preamplifier (0.01-4GHz) – PA6	87405B	10003	12 Jan 2007
MITEQ Preamplifier (0.1-26.5GHz) – PA4	NSP2650-N	604879	07 Nov 2006
Schaffner Bilog Antenna –BL4	CBL6112B	2593	12 May 2007
Schaffner Bilog Antenna	CBL6112D	22020	19 Dec 2006
K & L Variable Bandstop Filter (1GHz - 2.0GHz)	3TNF-0008	436	13 Aug 2007
EMCO Horn Antenna – H14	3115	0003-6087	19 May 2007
EMCO Horn Antenna – H15	3115	0003-6088	19 May 2007

RADIATED SPURIOUS EMISSION TEST

FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant antenna was set at the required test distance away from the EUT and supporting equipment boundary

FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Test Method


1. The EUT was set to transmit at the maximum power at the lower channel with the modulation on at normal test condition.
2. The receiving antenna (test antenna) was set at vertical polarization with the height of 1m.
3. With the spectrum analyser was set to max hold enabled (peak detector mode), the spurious emissions were searched and recorded. For EUT which is a portable device, the spurious emission search was carried out by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces worst emissions.
4. For each spurious emission found, the test antenna was raised or lowered through the specified range of heights (1m – 4m) until a maximum signal level was detected on the test receiver.
5. The EUT was then rotated through 360° in the horizontal plane until the maximum signal was received. The maximum received signal level was recorded as A (in dBm).
6. The EUT was replaced with the substitution antenna with the antenna input was connected to the signal generator via a 10dB attenuator (if required).
7. The signal generator was set to the found spurious frequency. The output level of the signal generator was adjusted until the test receiver was at least 20dB above the level when the signal generator was switched off.
8. The test antenna was raised and lowered through the specified range of heights (1m – 4m) until the maximum signal level was received on the test receiver.
9. The substitution antenna was rotated until the maximum level was detected on the test receiver.
10. The output level of the signal generator was adjusted until the received signal level at the test receiver was equal to the level recorded in step 5 (A dBm). The signal generator output level was recorded as B (in dBm).
11. The spurious emission level, P (e.i.r.p) was computed as followed:

P (e.i.r.p)	=	B – C – D + E
where C	=	cable loss between the signal generator and the substitution
D	=	attenuation level if attenuator is used
E	=	substitution antenna gain
12. The steps 2 to 11 were repeated with the receiving antenna was set to horizontal polarization.
13. Comparison was made on both measured results with vertical and horizontal polarizations. The highest value out of vertical and horizontal polarizations was recorded.
14. The steps 2 to 13 were repeated until all the spurious emissions (up to 10th harmonics of the carrier frequency) were measured.
15. The steps 1 to 14 were repeated with the EUT was set to operate at the middle and upper channels respectively.

RADIATED SPURIOUS EMISSION TEST



Radiated Spurious Emissions Test Setup (Front View)

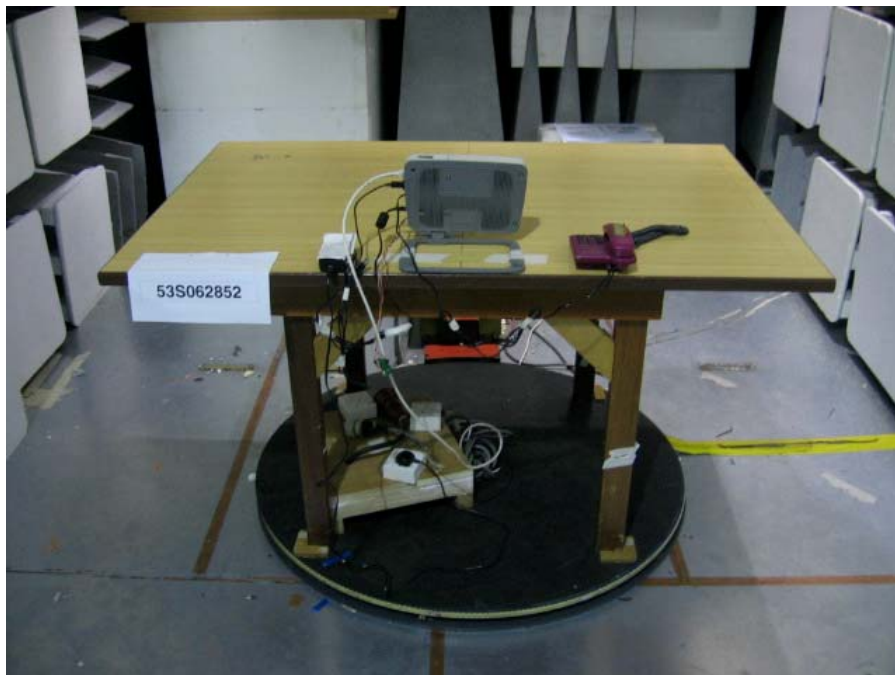

Radiated Spurious Emissions Test Setup (Rear View)



RADIATED SPURIOUS EMISSION TEST

FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Results

Operating Mode	Satellite	Temperature	23 °C
Test Input Power	110V 60Hz	Relative Humidity	55%
Test Distance	3m	Atmospheric Pressure	1030mbar
		Tested By	Thor Wen Lei

Symbol Rate: 0.5 x 33.6kS/s

Lower Channel

Frequency (GHz)	Amplitude (dBm)	Limit * See Notes 4, 5 & 6 (dBm)
3.2532	-55.5	1
4.8798	-57.8	1
--	--	--
--	--	--
--	--	--
--	--	--

Middle Channel

Frequency (GHz)	Amplitude (dBm)	Limit * See Notes 4, 5 & 6 (dBm)
3.2872	-54.8	1
4.9305	-56.4	1
--	--	--
--	--	--
--	--	--
--	--	--

Upper Channel

Frequency (GHz)	Amplitude (dBm)	Limit * See Notes 4, 5 & 6 (dBm)
0.0721	-32.2	1
3.3207	-55.3	1
4.9810	-55.0	1
--	--	--
--	--	--
--	--	--



RADIATED SPURIOUS EMISSION TEST

FCC Parts 2.1053 and 25.202(f) Radiated Spurious Emission Results

Operating Mode	Satellite	Temperature	23 °C
Test Input Power	110V 60Hz	Relative Humidity	55%
Test Distance	3m	Atmospheric Pressure	1030mbar
		Tested By	Thor Wen Lei

Symbol Rate: 4.5 x 33.6kS/s

Lower Channel

Frequency (GHz)	Amplitude (dBm)	Limit * See Notes 4, 5 & 6 (dBm)
3.2534	-55.4	1
4.8798	-56.1	1
--	--	--
--	--	--
--	--	--
--	--	--

Middle Channel

Frequency (GHz)	Amplitude (dBm)	Limit * See Notes 4, 5 & 6 (dBm)
3.2871	-55.6	1
4.9303	-56.2	1
--	--	--
--	--	--
--	--	--
--	--	--

Upper Channel

Frequency (GHz)	Amplitude (dBm)	Limit * See Notes 4, 5 & 6 (dBm)
0.8710	-31.3	1
3.3208	-55.1	1
4.9810	-55.4	1
--	--	--
--	--	--
--	--	--



RADIATED SPURIOUS EMISSION TEST

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. "-" indicates no emissions were found and shows compliance to the limits.
4. The Resolution Bandwidth (RBW) was corrected from 4kHz by $10\log_{10} [(used\ RBW) / 4kHz]$.
5. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 20GHz
RBW: 100kHz VBW: 300kHz
6. Emission limits are computed based on following:
 - a. Emissions Limits (dBm) (50% - 100% authorised bandwidth) = $P - 25 + CF$
 - b. Emissions Limits (dBm) (100% - 250% authorised bandwidth) = $P - 35 + CF$
 - c. Emissions Limits (dBm) (> 250% authorised bandwidth) = $P - [43 + 10 \log_{10} P_W] + 30 + CF$
where
 P = Measured mean power in dBm
 P_W = Measured mean power in dBW
 CF = RBW correction factor (see Note 1)
7. Radiated Spurious Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25.0GHz (QP only @ 3m & 10m) is $\pm 4.3dB$ (for EUTs < 0.5m X 0.5m X 0.5m).



PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Limits

25.216(h)(i)(j) Limits on Emissions from Mobile Earth Stations for Protection of Aeronautical Radionavigation-Satellite Service

(h) Mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FC 03-283 (from November 6, 2003) with assigned uplink frequencies in the 1626.5MHz - 1660.5MHz band shall suppress the power density of emissions in the 1605MHz - 1610MHz band-segment to an extent determined by linear interoperation from -70dBW/MHz at 1605MHz to -46dBW/MHz at 1610MHz, averaged over any 2ms active transmission interval. The e.i.r.p of discrete emissions of less than 700Hz bandwidth from such stations shall not exceed a level determined by linear interoperation from -80dBW at 1605MHz to -56dBW at 1610MHz, averaged over any 2ms active transmission interval.

(i) The e.i.r.p density of carrier-off state emissions from mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies between 1GHz and 3GHz shall not exceed -80dBW/MHz in the 1559MHz - 1610MHz band averaged over any 2ms interval.

(j) A Root-Mean-Square detector shall be used for all power density measurements.

FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver (20Hz -26.5GHz) – ESM11	ESMI	849182/003 848926/007	04 Jul 2007
Agilent Preamplifier (0.01-4GHz) – PA6	87405B	10003	12 Jan 2007
MITEQ Preamplifier (0.1-26.5GHz) – PA4	NSP2650-N	604879	07 Nov 2006
Schaffner Bilog Antenna –BL4	CBL6112B	2593	12 May 2007
Schaffner Bilog Antenna	CBL6112D	22020	19 Dec 2006
K & L Variable Bandstop Filter (1GHz - 2.0GHz)	3TNF-0008	436	13 Aug 2007
EMCO Horn Antenna – H14	3115	0003-6087	19 May 2007
EMCO Horn Antenna – H15	3115	0003-6088	19 May 2007

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant antenna was set at the required test distance away from the EUT and supporting equipment boundary


FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Test Method

1. The EUT was set to transmit at the maximum power at the lower channel with the modulation on at normal test condition.
2. The receiving antenna (test antenna) was set at vertical polarization with the height of 1m.
3. A prescan was carried out in the frequency range under investigations with the EMI receiver set to max hold mode. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces such emissions.
4. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
5. The maximized emissions were plotted with inclusion of corrector factor of measured radiated emissions to EIRP.
6. The steps 1 to 5 were repeated with the EUT was set to operate at the middle and upper channels respectively.
7. The measurements were repeated with the EUT in carrier off state (standby).

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST



Protection of Aeronautical Radio Navigation Satellite Service Test Setup (Front View)

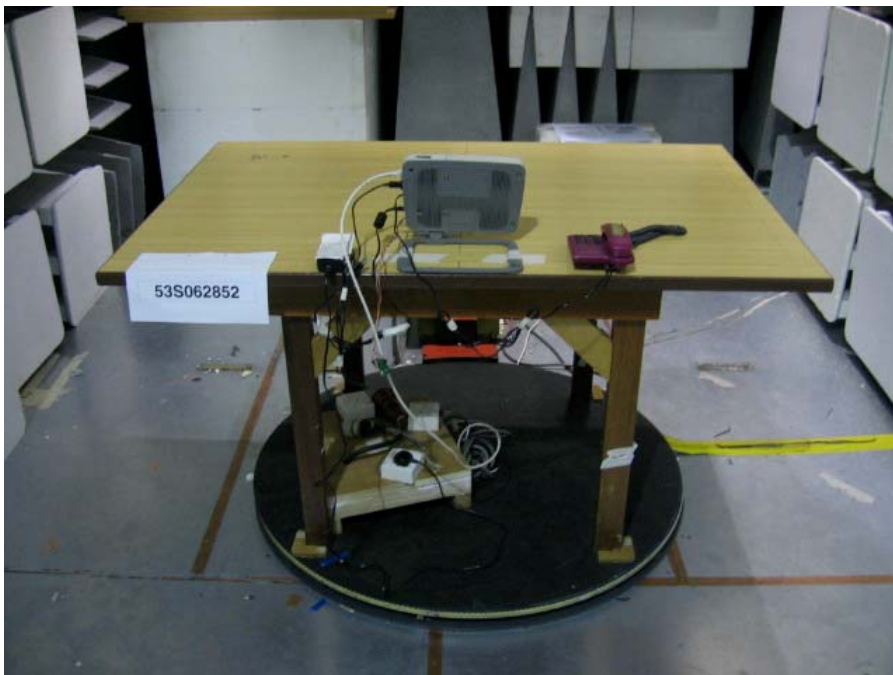

Protection of Aeronautical Radio Navigation Satellite Service Test Setup (Rear View)

Test Report No. 53S062852/EMC/06
dated 29 Nov 2006



PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST


FCC Part 25.216(h)(i)(j) Protection of Aeronautical Radio Navigation Satellite Service Results

Operating Mode	Satellite	Temperature	23 °C
Test Input Power	110V 60Hz	Relative Humidity	55%
Antenna Gain	8 dBi	Atmospheric Pressure	1030mbar
Attached Plots	37 - 43	Tested By	Thor Wen Lei


All spurious signals found were below the specified limit. Please refer to the attached plots.

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

Symbol Rate: 0.5 x 33.6kS/s - Transmitter On

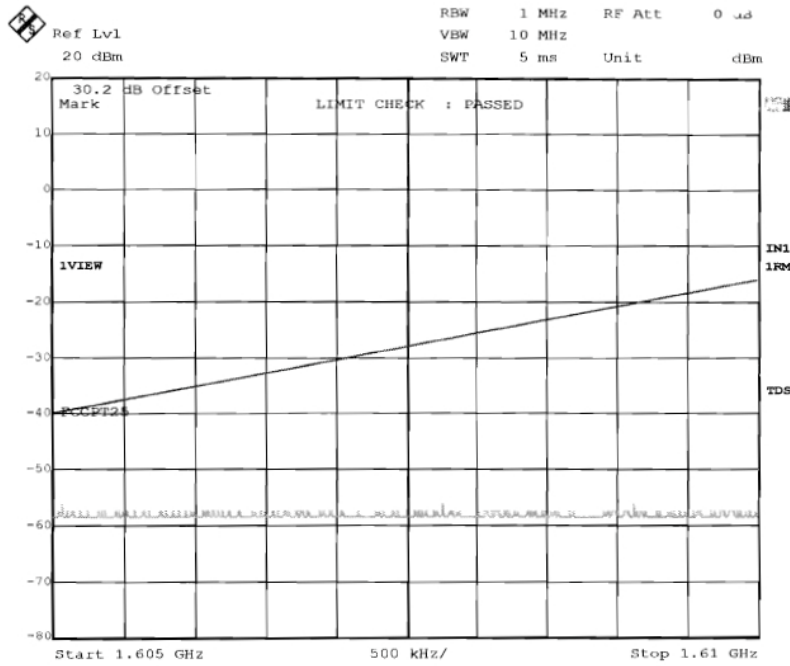

Plot 37 - Lower Channel

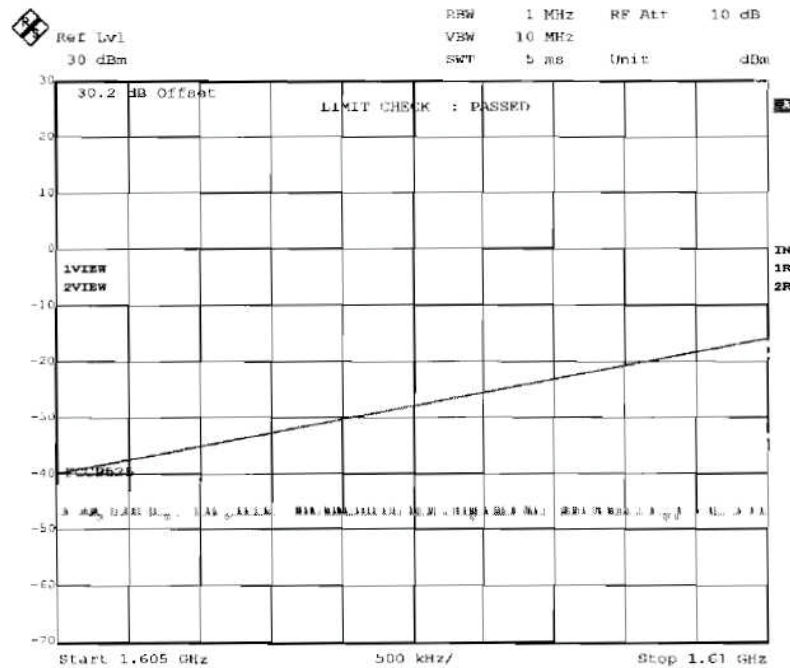


Plot 38 - Middle Channel



PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST


Symbol Rate: 0.5 x 33.6kS/s - Transmitter On

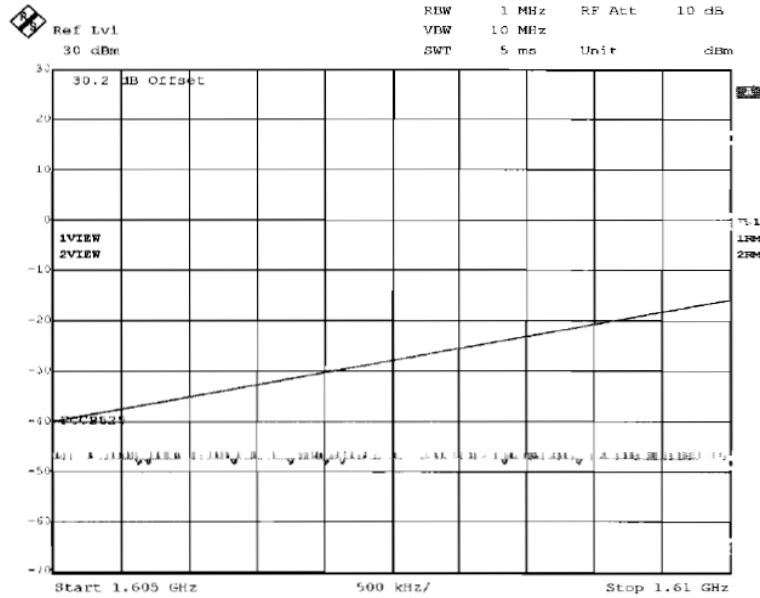


Plot 39 – Upper Channel

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

Symbol Rate: 4.5 x 33.6kS/s - Transmitter On

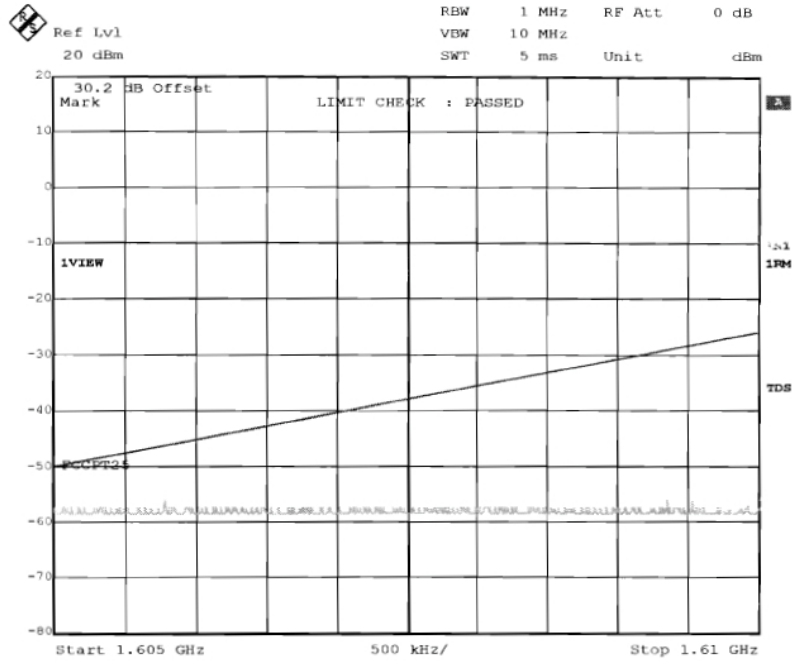


Plot 40 – Lower Channel

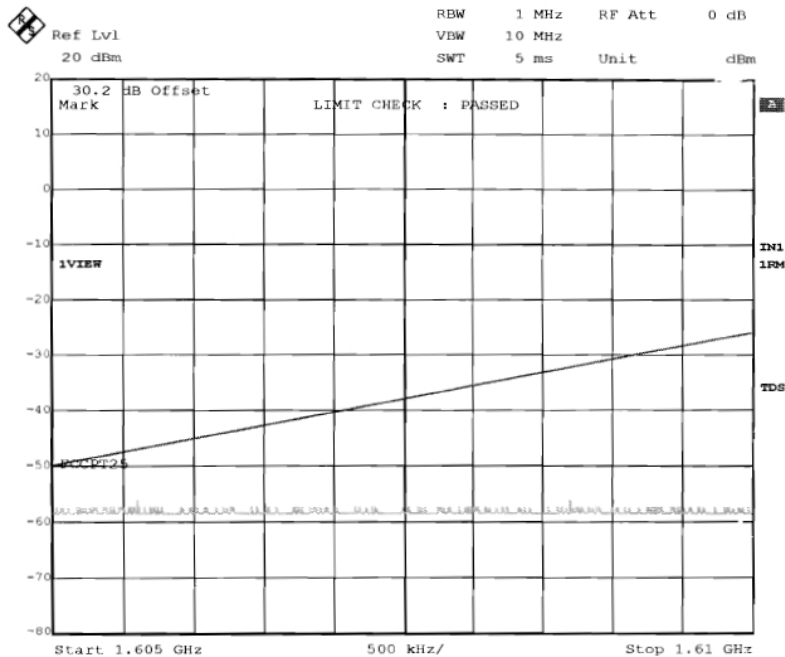

Plot 41 – Middle Channel

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST


Symbol Rate: 4.5 x 33.6kS/s - Transmitter On

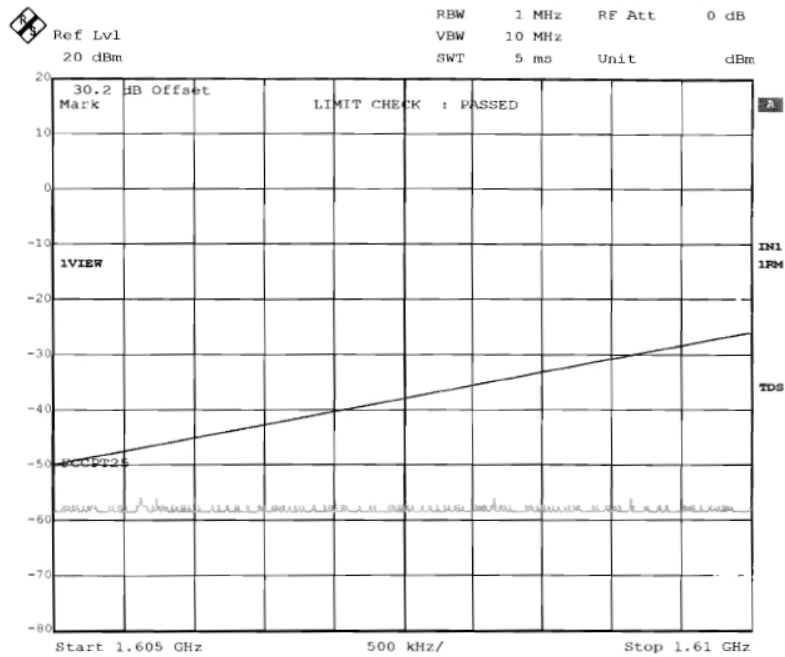

Plot 42 – Upper Channel

PROTECTION OF AERONAUTICAL RADIO NAVIGATION SATELLITE SERVICE TEST

Carrier Off

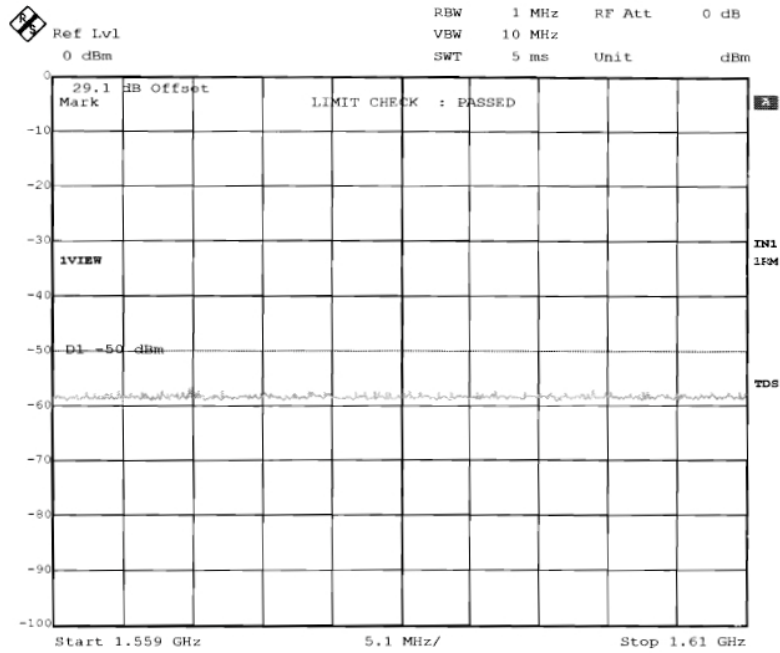

Plot 43



FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Limits

1. 25.202(d) Frequency Tolerance, Earth Stations
The carrier frequency of each earth station transmitter authorised in these services shall be maintained within 0.001% (10ppm) of the reference frequency.
2. 2.1055 Measurements Required: Frequency Stability
 - (a) The frequency stability shall be measured with variation of ambient temperature as follows:
 - (1) From -30°C to +50°C for all equipment except that specified in paragraphs (a)(2) and (3) of this section.
 - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at interval of not more than 10°C throughout the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion of portions of the transmitter containing the frequency determining and stabilizing circuitry need to be subjected to the temperature variation test.
 - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007
HP Universal Counter	53132A	3736A06236	01 Mar 2007
JFW 20dB RF Attenuator	50FHC-020-15	Nil	13 Aug 2007

FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Setup

1. The EUT and supporting equipment were set up as shown in the test setup photo. A temperature-controlled chamber was used.
2. The EUT was connected to an appropriate power source while all other supporting equipment were powered separately from another power source.
3. The RF antenna connector of the EUT was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Test Method

1. The temperature chamber was set at 20°C and permitted to stabilize. The EUT was set to transmit at lower channel without modulation. The carrier frequency was measured as the reference frequency.
2. With the EUT power removed, the temperature of the temperature chamber was set to -30°C and permitted to stabilize.
3. The EUT was turned on and set to operate at lower channel without modulation. The maximum change in the carrier frequency was recorded within a minute.
4. The EUT was powered off and the temperature was raised to -20°C.
5. The EUT was left stabilized for at least an hour before next measurement was taken as described in step 3.
6. The steps 4 and 5 were repeated with increment of temperature in 10°C step until the temperature reached 50°C.
7. The steps 1 to 6 were repeated with the EUT was set to operate at the middle and upper channels respectively.

FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST



Frequency Stability (Temperature Variation) Test Setup



FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Temperature Variation) Results

Operating Mode	Satellite	Temperature	See table below
Test Input Power	110V 60Hz	Relative Humidity	30%
Test Distance	3m	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia

Lower Channel

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (ppm)
-30	1.626592102	1.626592002	0.061478
-20	1.626592201	1.626592002	0.127875
-10	1.626592103	1.626592002	0.062093
0	1.626592209	1.626592002	0.127260
10	1.626592108	1.626592002	0.054101
20	1.626592002	1.626592002	0.000000
30	1.626592108	1.626592002	0.054101
40	1.626592104	1.626592002	0.062708
50	1.626592204	1.626592002	0.124186

Middle Channel

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (ppm)
-30	1.643506923	1.643506803	0.073015
-20	1.643506865	1.643506803	0.037724
-10	1.643506712	1.643506803	-0.055369
0	1.643506716	1.643506803	-0.052936
10	1.643506912	1.643506803	0.066322
20	1.643506803	1.643506803	0.000000
30	1.643506954	1.643506803	0.091878
40	1.643506860	1.643506803	0.034682
50	1.643506900	1.643506803	0.059010



FREQUENCY STABILITY (TEMPERATURE VARIATION) TEST

Upper Channel

Temperature (°C)	Measured Frequency (GHz)	Reference Channel Frequency (GHz)	Deviation (ppm)
-30	1.660333468	1.660333518	-0.030114
-20	1.660333389	1.660333518	-0.077595
-10	1.660333209	1.660333518	-0.186107
0	1.660333312	1.660333518	-0.127071
10	1.660333411	1.660333518	-0.064445
20	1.660333518	1.660333518	0.000000
30	1.660333325	1.660333518	-0.116242
40	1.660333339	1.660333518	-0.107810
50	1.660333788	1.660333518	0.162618



FREQUENCY STABILITY (VOLTAGE VARIATION) TEST

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Limits

1. 25.202(d) Frequency Tolerance, Earth Stations
The carrier frequency of each earth station transmitter authorised in these services shall be maintained within 0.001% (10ppm) of the reference frequency.

2. 2.1055 Measurements Required: Frequency Stability
 - (a) The frequency stability shall be measured with variation of ambient temperature as follows:
 - (1) From -30°C to +50°C for all equipment except that specified in paragraphs (a)(2) and (3) of this section.
 - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at interval of not more than 10°C throughout the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion of portions of the transmitter containing the frequency determining and stabilizing circuitry need to be subjected to the temperature variation test.
 - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007
HP Universal Counter	53132A	3736A06236	01 Mar 2007
JFW 20dB RF Attenuator	50FHC-020-15	Nil	13 Aug 2007



FREQUENCY STABILITY (VOLTAGE VARIATION) TEST

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Setup

1. The EUT and supporting equipment were set up as shown in the test setup photo. A temperature-controlled chamber was used.
2. The EUT was connected to an appropriate power source while all other supporting equipment were powered separately from another power source.
3. The RF antenna connector of the EUT was connected to the spectrum analyser via a RF attenuator and a low-loss coaxial cable.

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Test Method

1. The temperature chamber was set at 20°C and permitted to stabilize. The EUT was set to transmit at lower channel without modulation. The carrier frequency was measured as the reference frequency.
2. The EUT was powered from 85% of the nominal supplied voltage and set to operate at lower channel without modulation.
3. The EUT power was varied from 85% to 115% of the nominal supplied voltage. The carrier frequency variation was recorded.
4. The steps 1 to 3 were repeated with the EUT was set to operate at the middle and upper channels respectively.

FREQUENCY STABILITY (VOLTAGE VARIATION) TEST



Frequency Stability (Voltage Variation) Test Setup



FREQUENCY STABILITY (VOLTAGE VARIATION) TEST

FCC Parts 2.1055 and 25.202(d) Frequency Stability (Voltage Variation) Results

Operating Mode	Satellite	Temperature	20°C
Test Input Power	See table below	Relative Humidity	30%
Test Distance	3m	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia

Lower Channel

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (ppm)
93.5	1.626592209	1.626592002	0.127260
110.0	1.626592002	1.626592002	0.000000
126.5	1.626592225	1.626592002	0.137096

Middle Channel

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (ppm)
93.5	1.643506917	1.643506803	0.069364
110.0	1.643506803	1.643506803	0.000000
126.5	1.643506999	1.643506803	0.119257

Upper Channel

Voltage (V)	Measured Frequency (GHz)	Nominal Channel Frequency (GHz)	Deviation (ppm)
93.5	1.660333290	1.660333518	-0.137322
110.0	1.660333518	1.660333518	0.000000
126.5	1.660333404	1.660333518	-0.068661



MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Limits

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (min)
0.3 - 1.34	614	1.63	100 ^{Note 2}	30
1.34 - 30	824 / f	2.19 / f	180 / f ² ^{Note 2}	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30
Notes				
1. f = frequency in MHz				
2. Plane wave equivalent power density				

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
PMM 8053 Portable Field Meter	8053	0220J10308	16 Apr 2007
PMM Electric and Magnetic Field Analyzer	EHP-50A	1311L10515	16 Apr 2007



MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Setup

1. The EUT and supporting equipment were set up as shown on the setup photo.
2. Prior the measurement, the minimum safe distance between the EUT and field probe was computed from the following formula:
$$P = (ED)^2 / (30G)$$
where
P = Power density, W/m²
E = Electric field strength, V/m
d = Test distance, m
G = Numerical isotropic gain
3. The relevant field probe was then positioned at least at the computed test distance away from the EUT and supporting equipment boundary.

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was first carried out at one of the positions / sides of the EUT.
3. Power density measurement (mW/cm²) was made using the field meter set to the required averaging time.
4. Steps 2 and 3 were repeated for the next position and its associate EUT operating mode, until all possible positions and modes were measured.

Sample Calculation Example

At 2400 MHz, limit = 1.0 mW/cm²

Power density reading obtained directly from field meter = 0.3 mW/cm² averaged over the required 30 minutes.

Therefore, margin = 0.3 – 1.0 = -0.7 mW/cm² i.e. **0.7 mW/cm² below limit**

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST



Maximum Permissible Exposure (MPE) Test Setup



MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

FCC Part 1.1310 Maximum Permissible Exposure (MPE) Results

Operating Mode	Satellite	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	57%
Test Distance	60cm	Atmospheric Pressure	1030mbar
		Tested By	Lucas Beh

Channel	Channel Frequency (GHz)	Power Density Value (mW/cm ²)	Margin (mW/cm ²)	Averaging Time (min)	Limit (mW/cm ²)
Lower	1.6265	0.2	-0.8	30	1.0
Middle	1.6435	0.1	-0.9	30	1.0
Upper	1.6603	0.2	-0.8	30	1.0

Notes

1. All possible modes of operation were investigated. Only the worst case highest radiation levels were measured. Measurements were taken at the required averaging time. All other radiation levels were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. The EUT shall maintain a minimum distance separation of 60cm from users during operation.
4. Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 0.1MHz – 3GHz is ±15% .

Test Report No. 53S062852/EMC/06
dated 29 Nov 2006



This Report is issued under the following conditions:

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
2. Unless otherwise requested, a report shall contain only technical results. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.
3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB Corporation approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB Corporation in any way "guarantees" the later performance of the product/equipment.
4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB Corporation therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through TÜV SÜD PSB Corporation, unless the Client has authorised TÜV SÜD PSB Corporation in writing to do so.
6. TÜV SÜD PSB Corporation may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.
7. All copyright in the report shall remain with TÜV SÜD PSB Corporation and the Client shall, upon payment of TÜV SÜD PSB Corporation's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that TÜV SÜD PSB Corporation may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
8. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB Corporation has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB Corporation or to the report or results furnished by TÜV SÜD PSB Corporation in any advertisements or sales promotion.
10. Unless otherwise stated, the tests are carried out in TÜV SÜD PSB Corporation Pte Ltd, No.1 Science Park Drive Singapore 118221.

October 2006



ANNEX A

EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR



Front View



Rear View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR



Top View



Bottom View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR




Internal View 1

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR

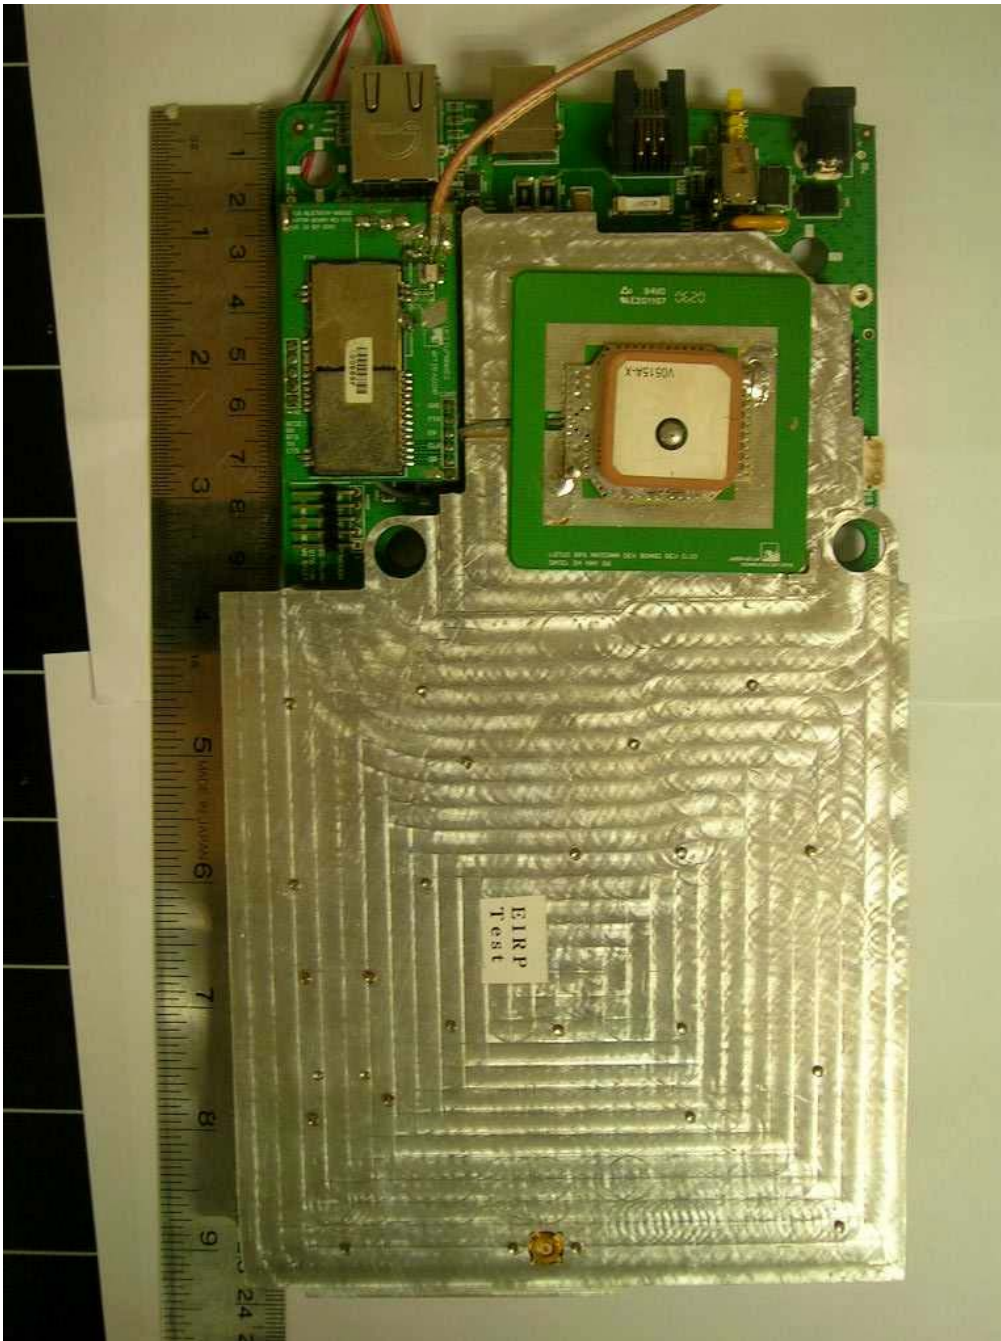


Internal View 2

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR

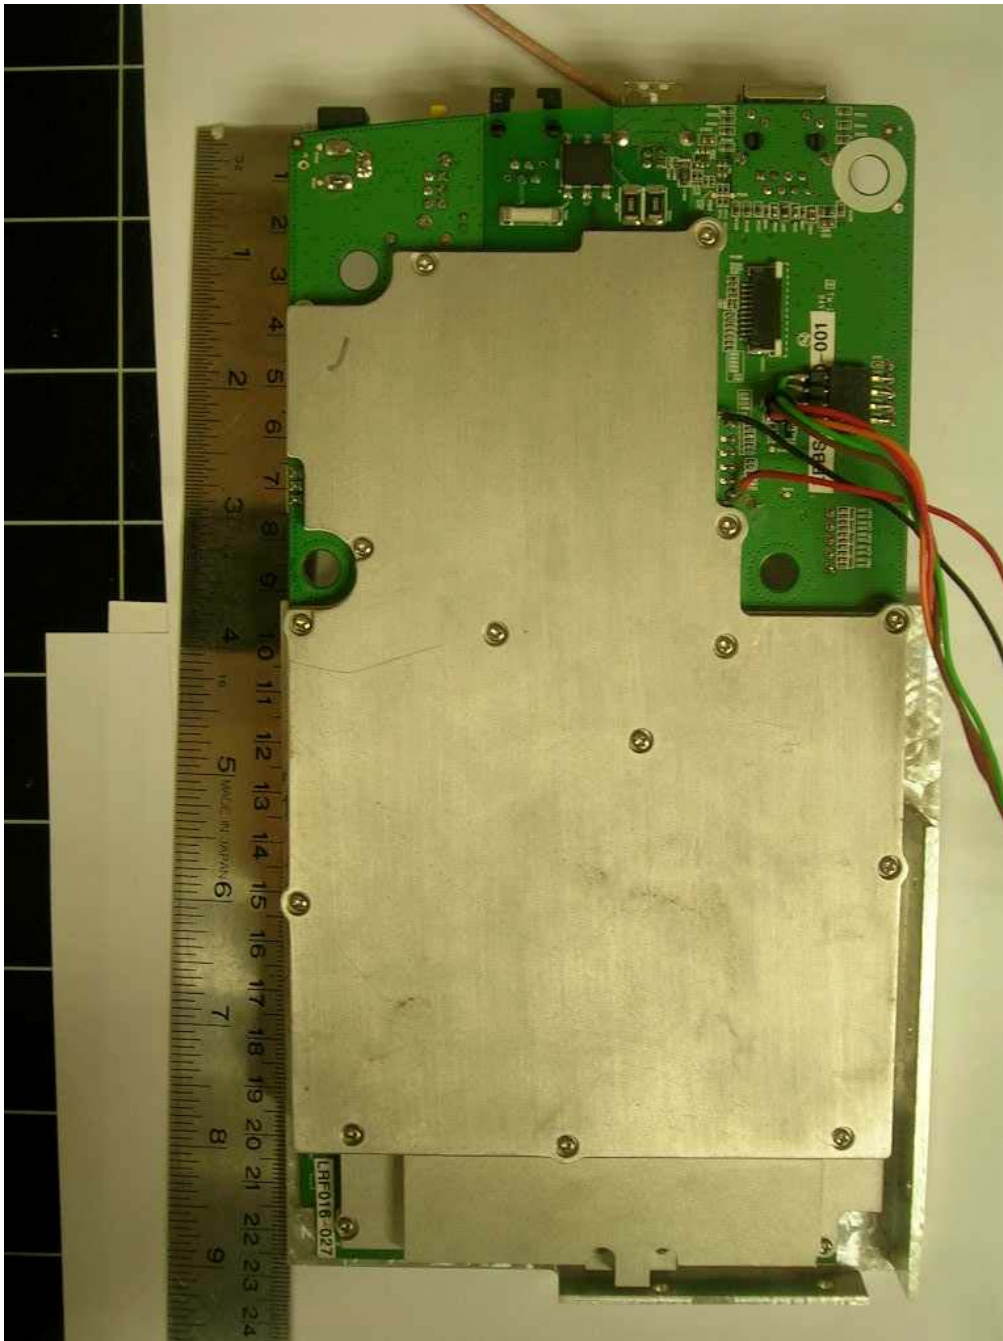

Internal View 3

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR




Main-Board - Component Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR

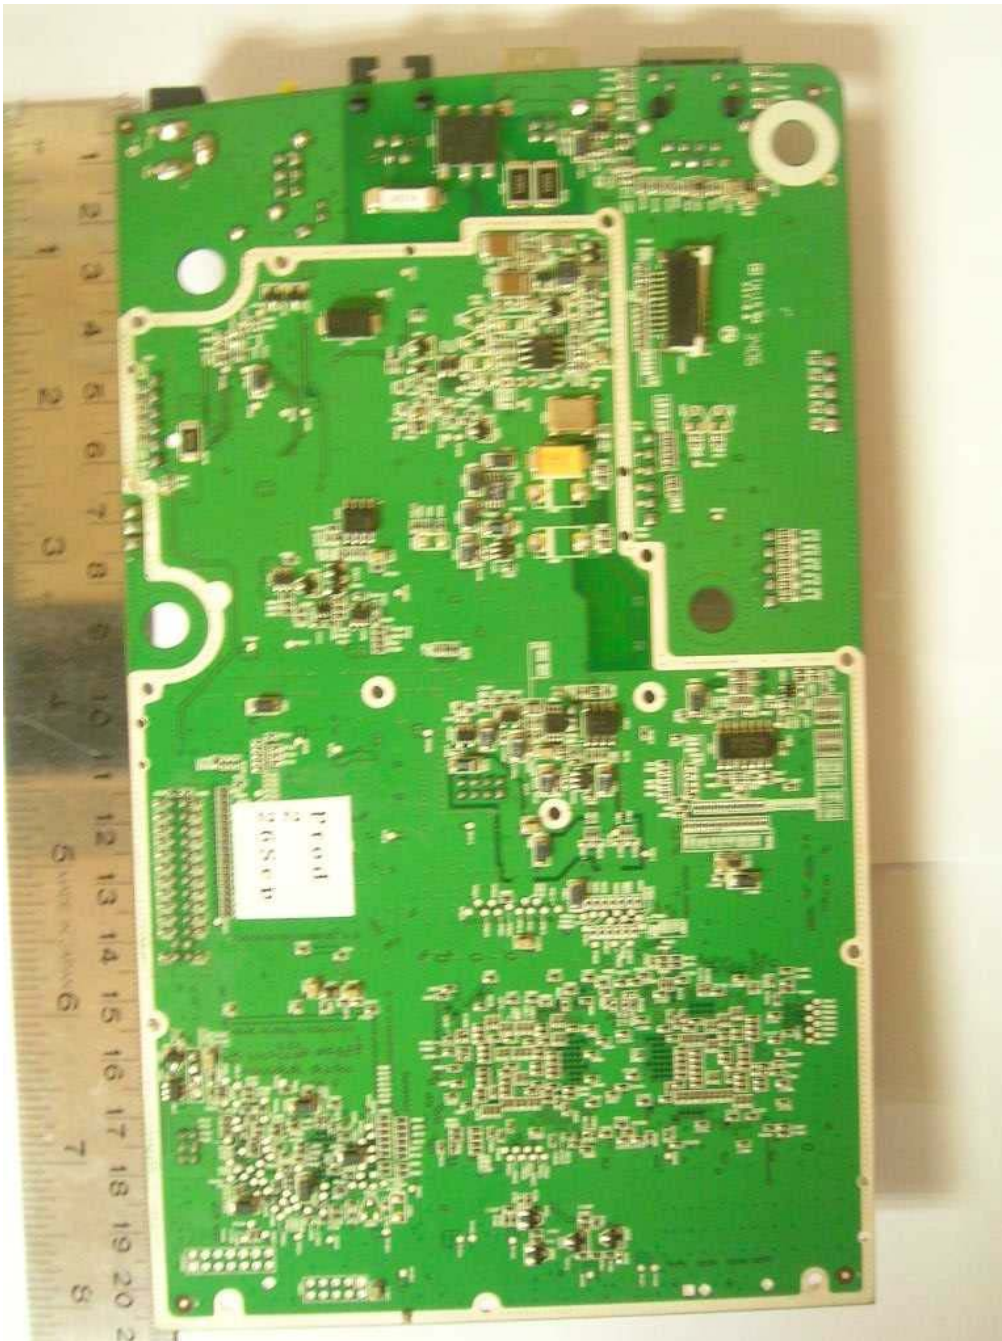


Main-Board - Trace Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR

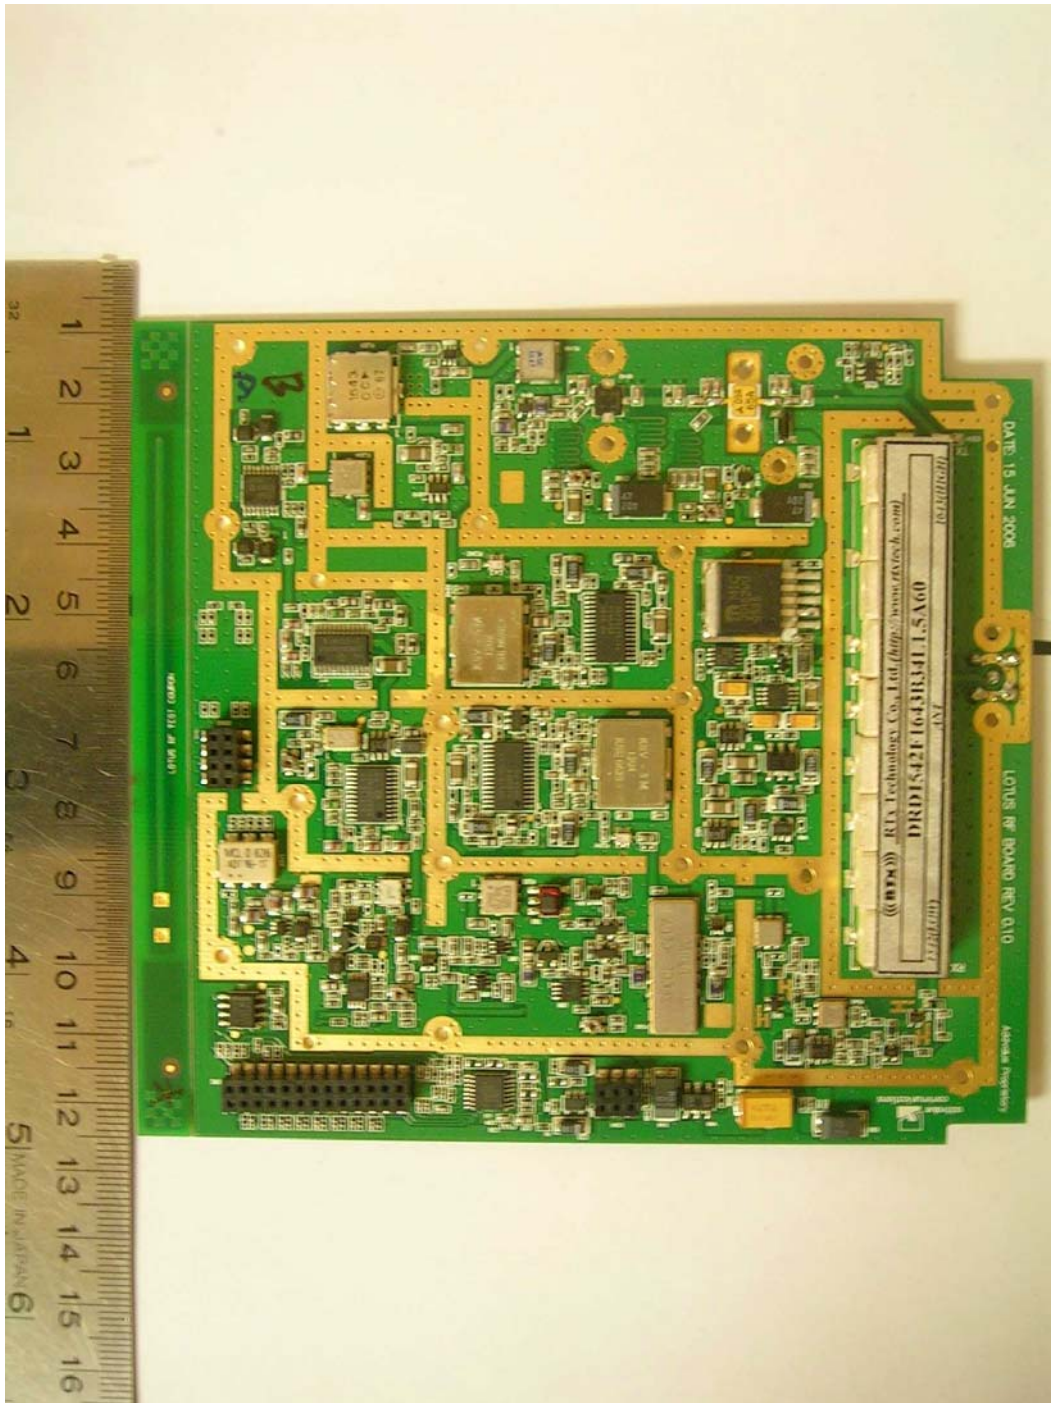


RF Board – Component View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR

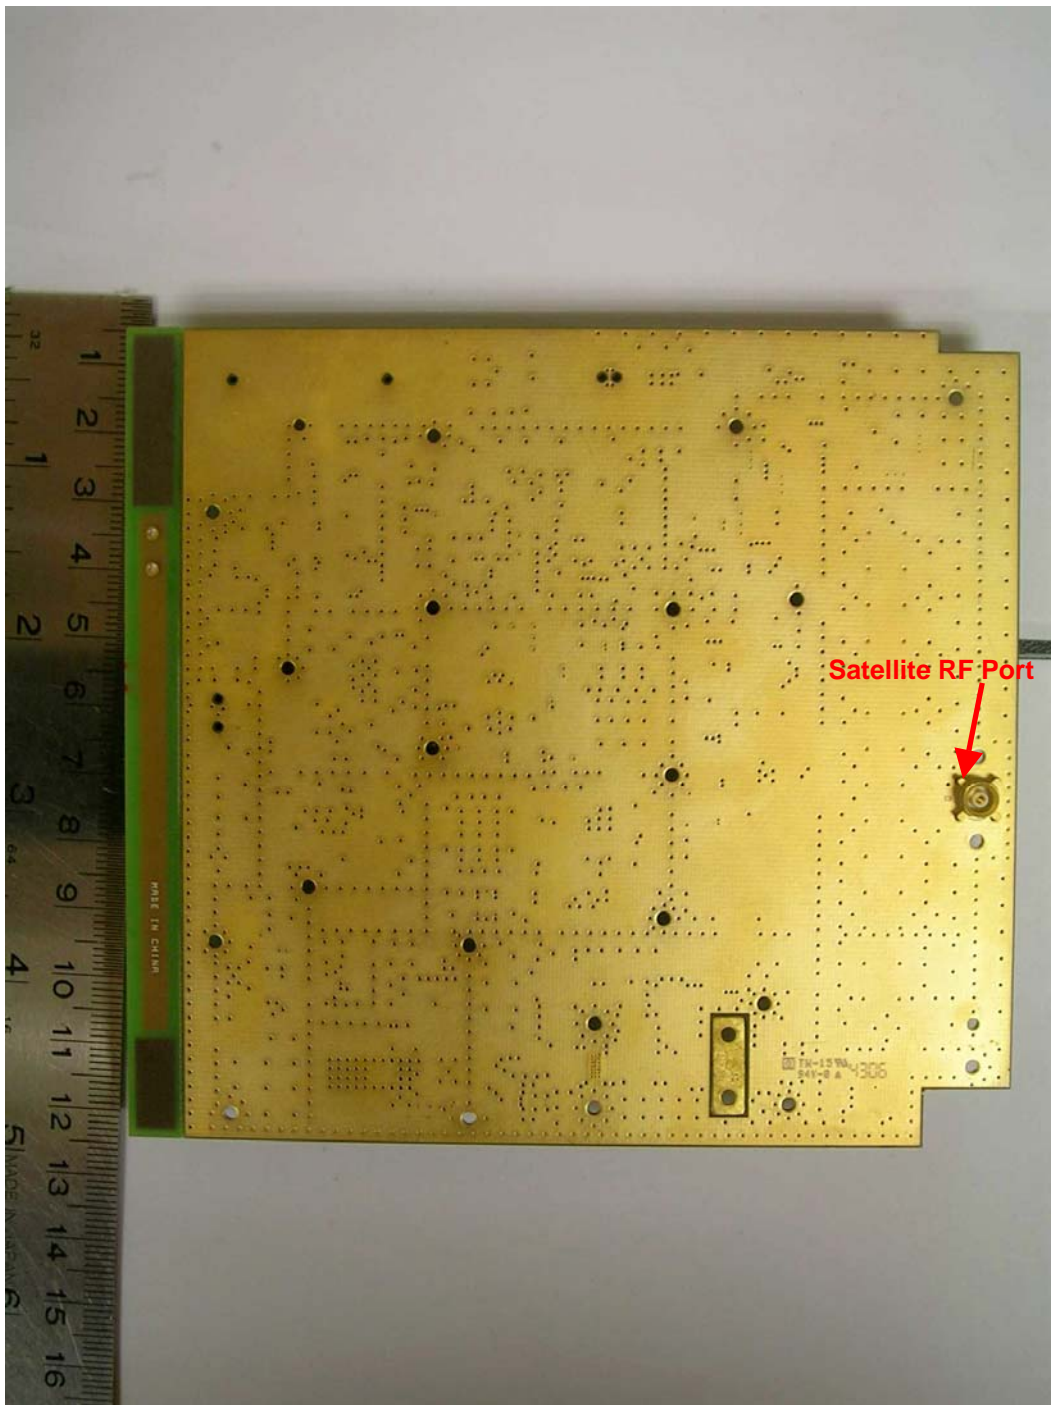


RF Board – Trace View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR

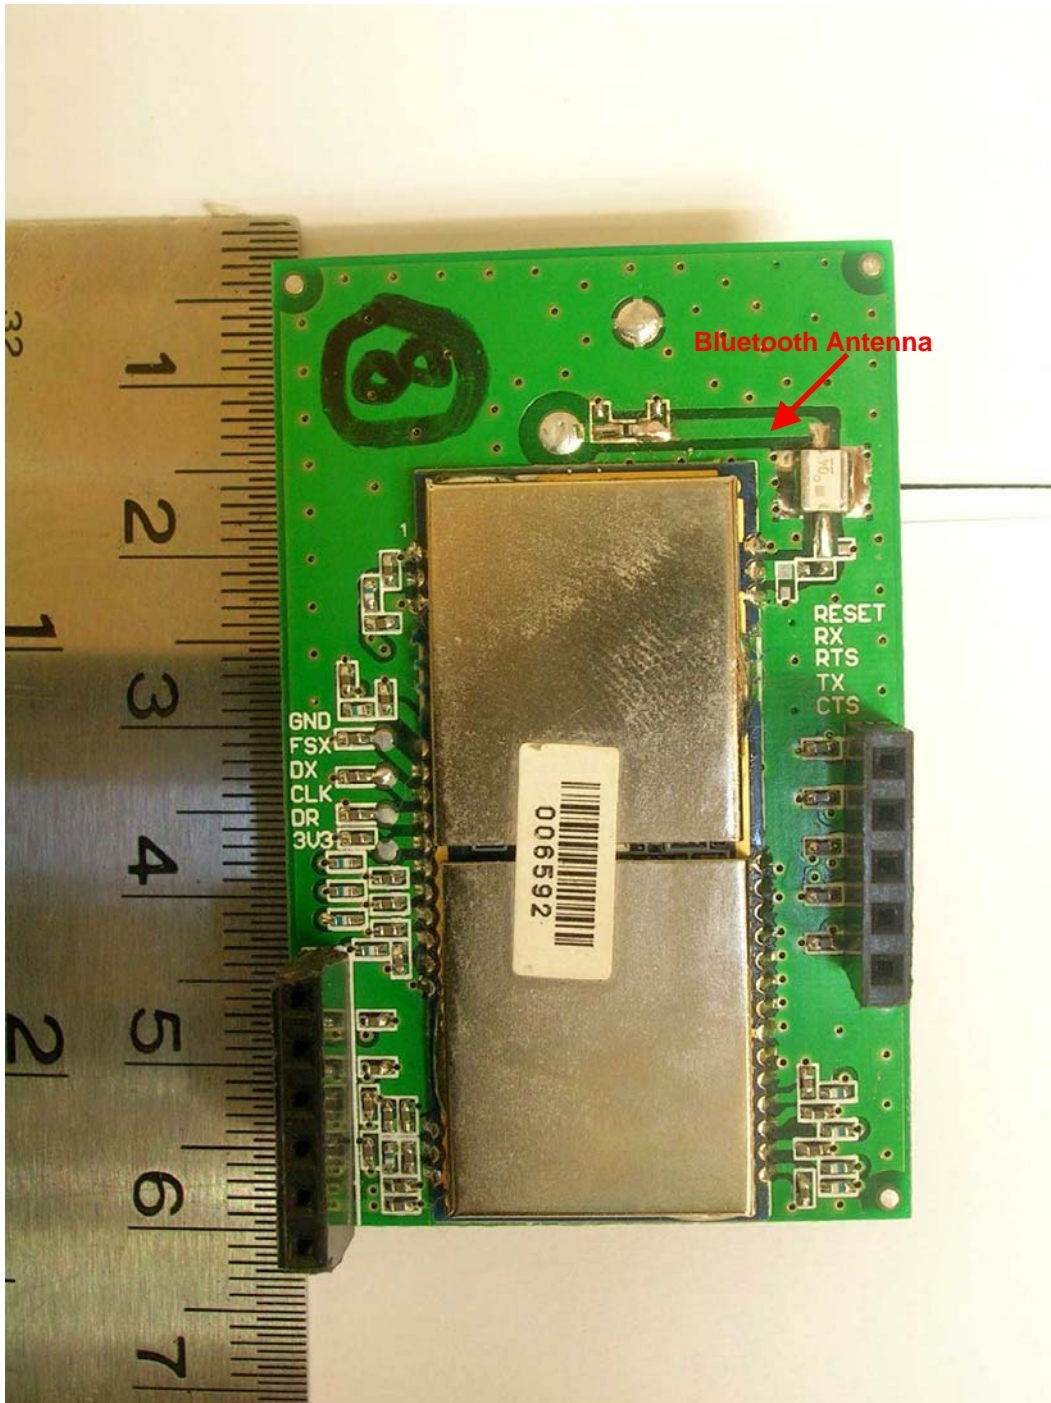


Bluetooth Board – Component View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR

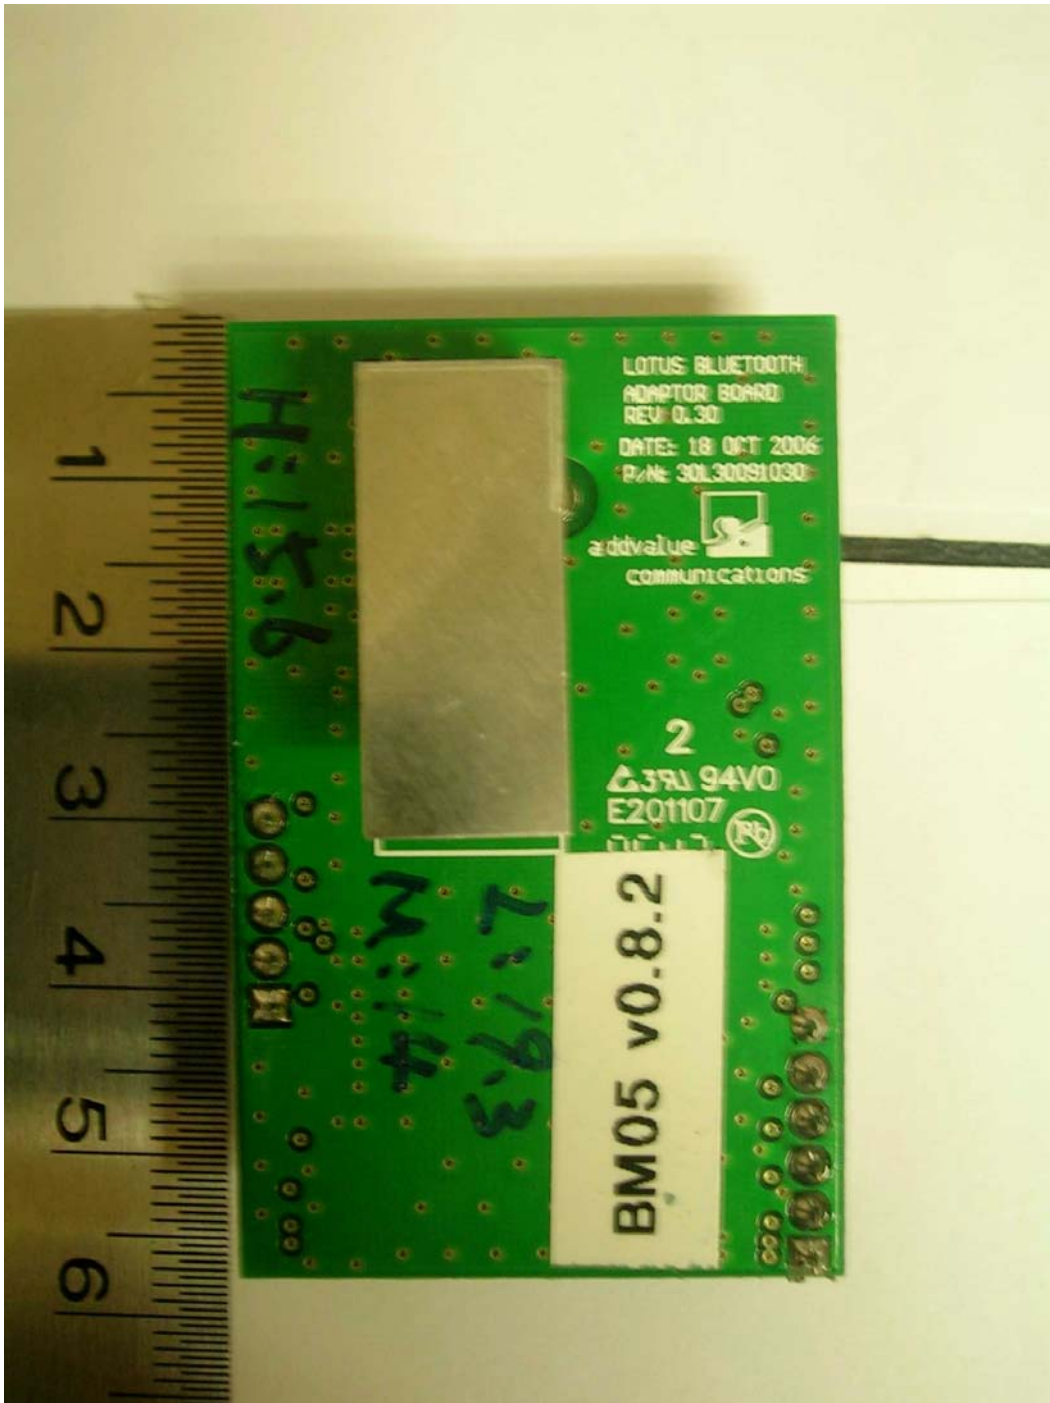

Bluetooth Board – Trace View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR




LCD Display Board – Component View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR

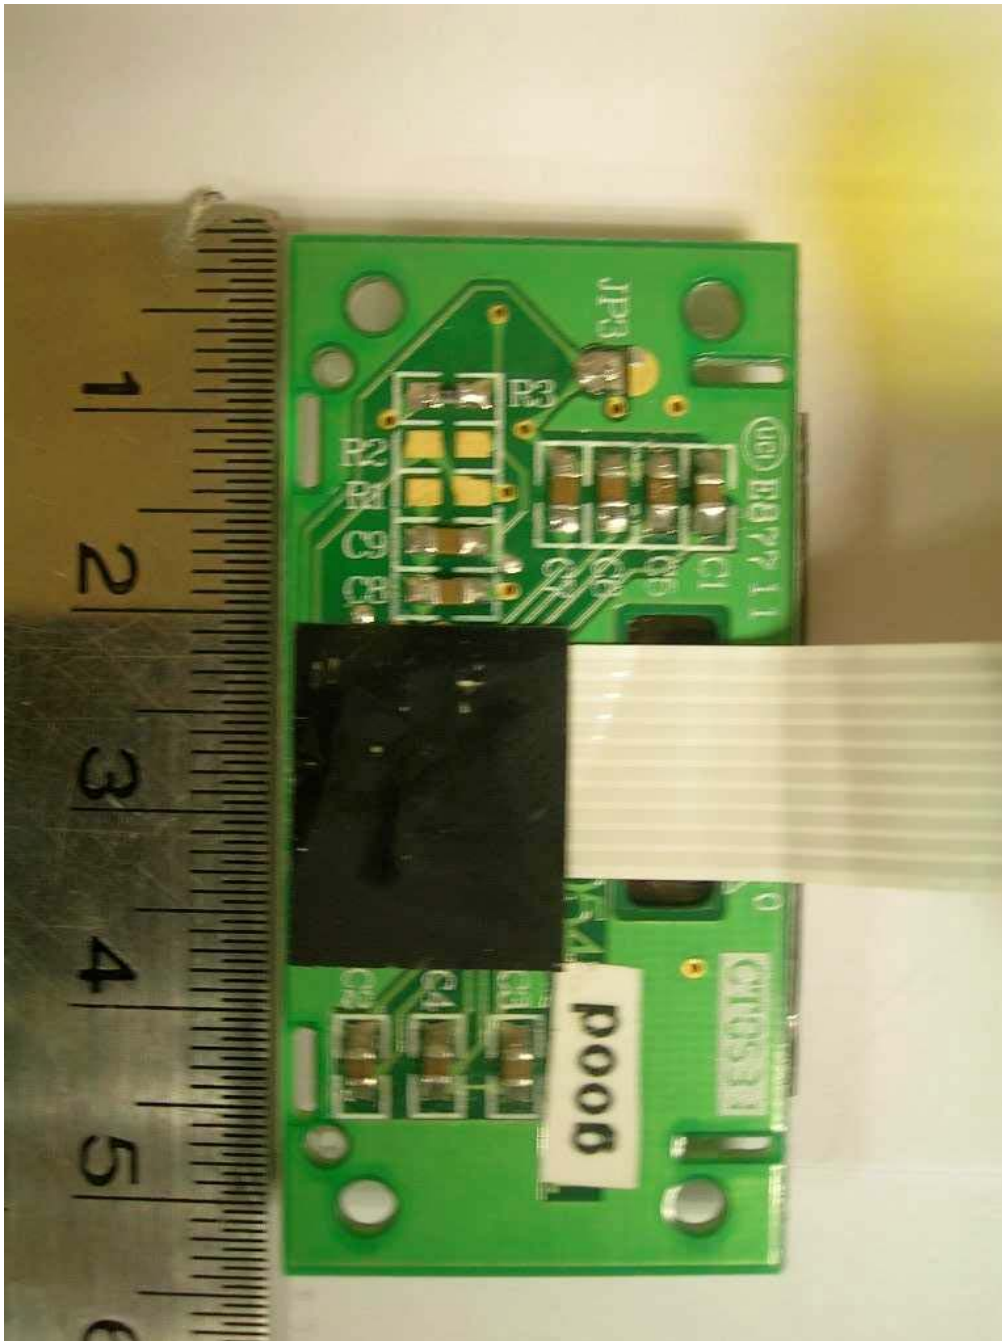

LCD Display Board – Trace View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT ACCESSORIES - CORDED ANALOGUE PHONE



Front View



Rear View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT ACCESSORIES - CORDED ANALOGUE PHONE



Housing View 1




Housing View 2

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT ACCESSORIES - CORDED ANALOGUE PHONE

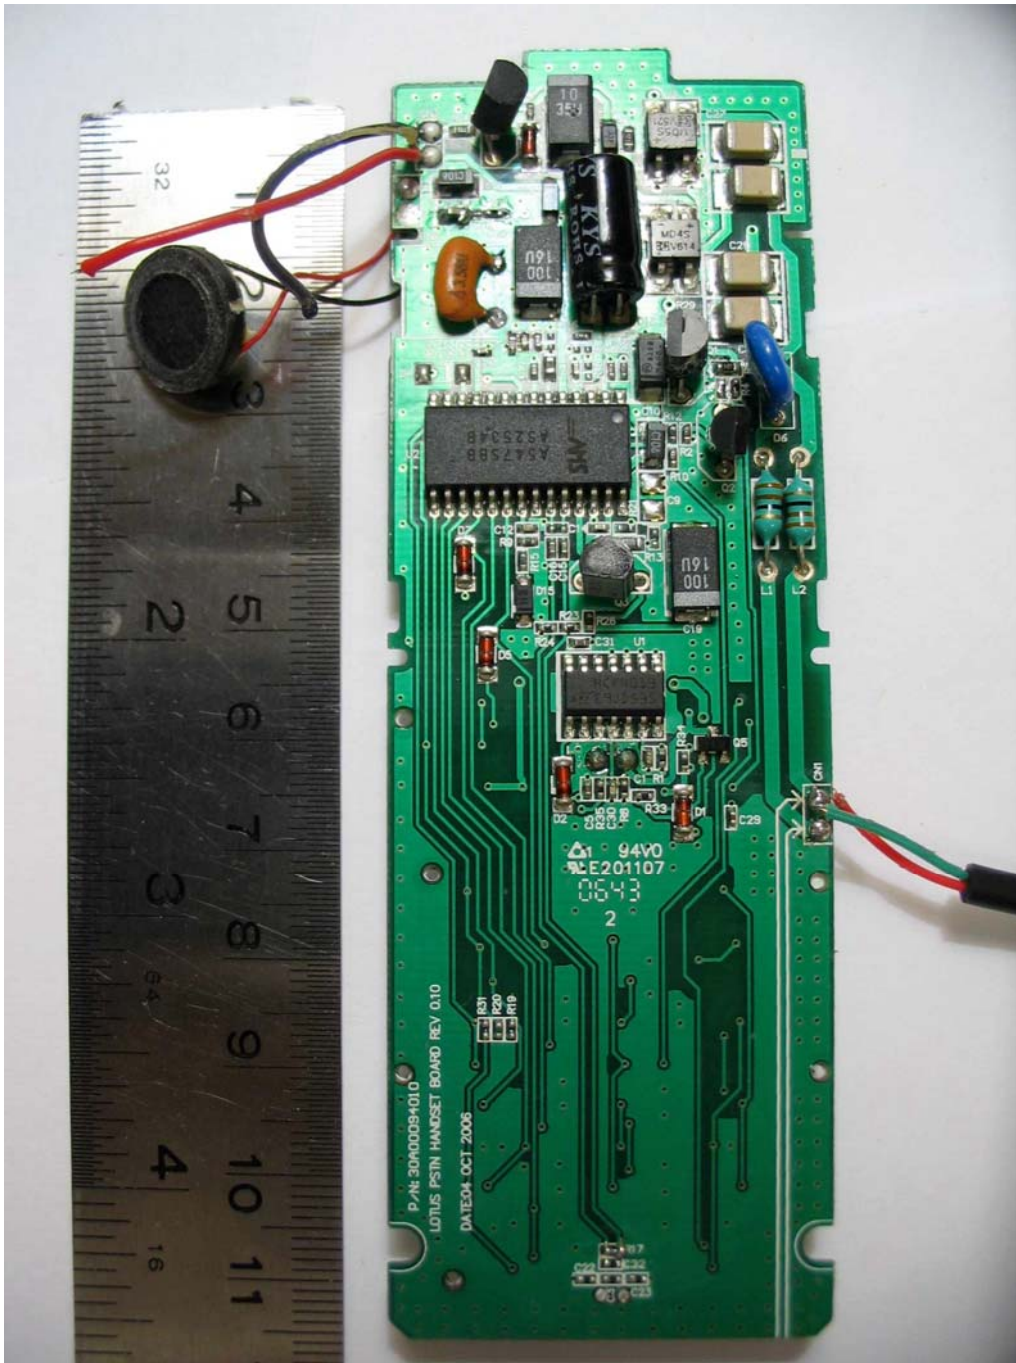


Component View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT ACCESSORIES - CORDED ANALOGUE PHONE

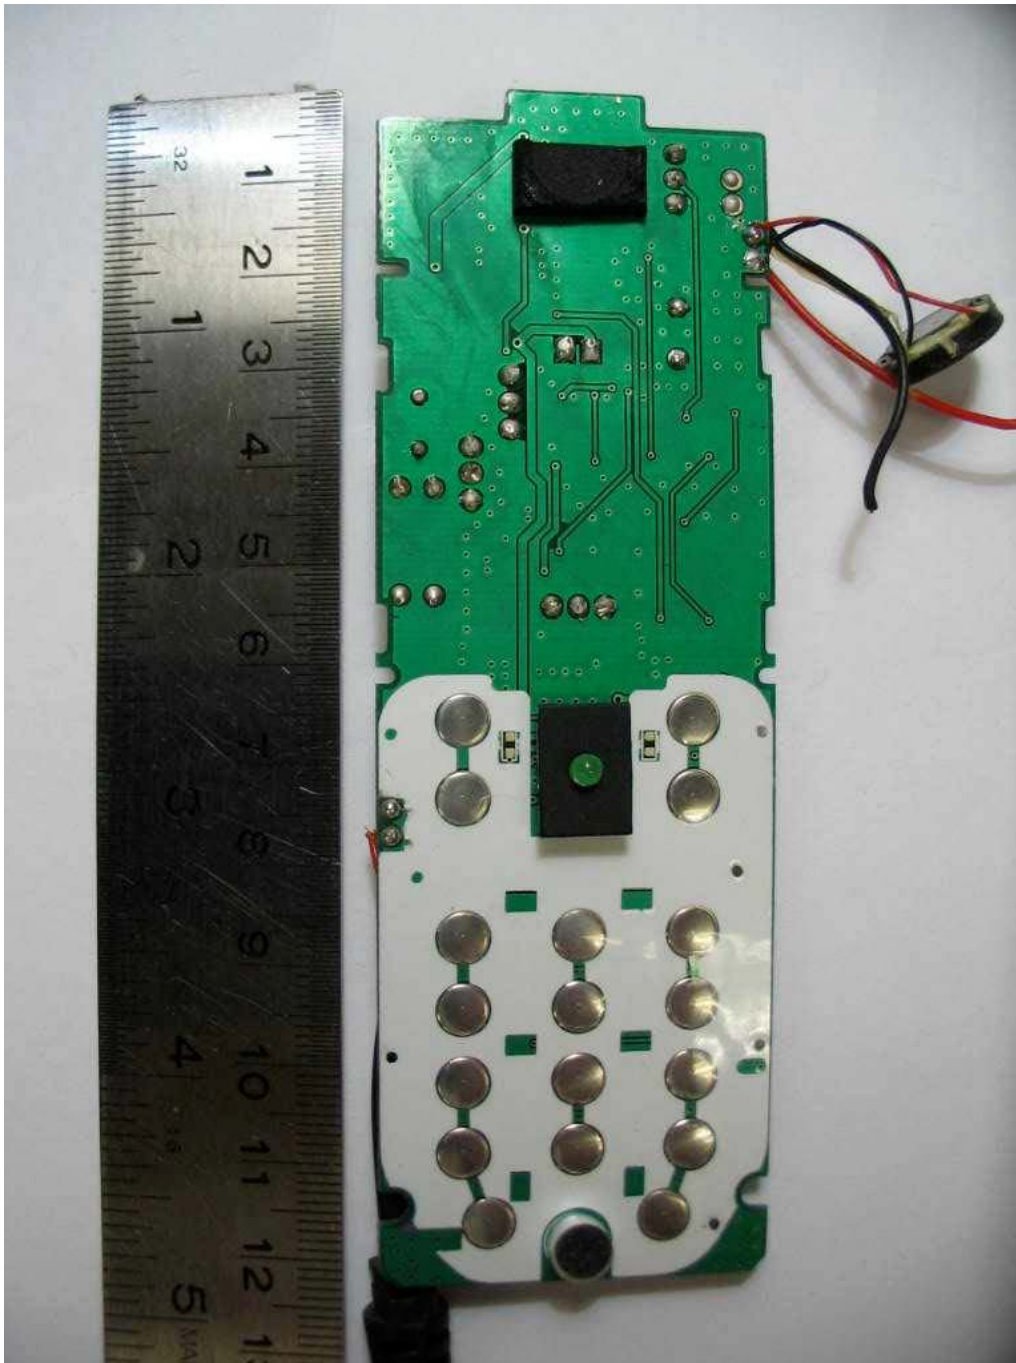

Trace View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR AC/DC ADAPTOR



Front View



Rear View



ANNEX B

FCC LABEL & POSITION

FCC LABEL & POSITION


ANNEX B

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.




FCC ID Sample Label

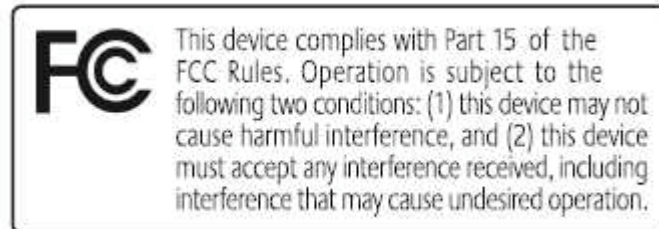

FCC Statement Sample Label

FCC LABEL & POSITION

ANNEX B

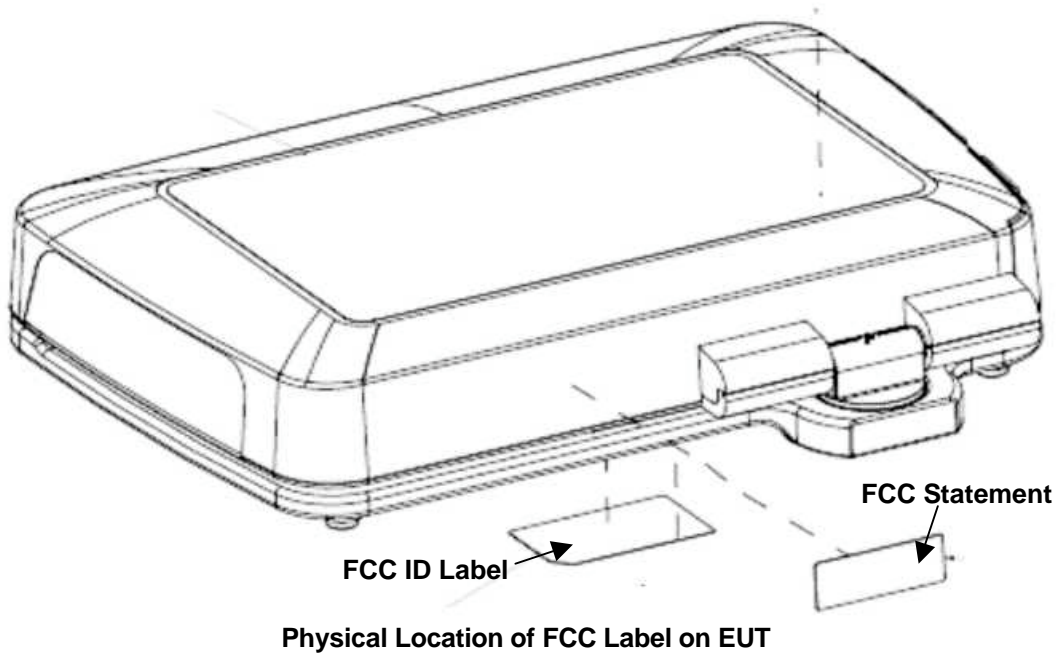



ANNEX C

**USER MANUAL
TECHNICAL DESCRIPTION
BLOCK & CIRCUIT DIAGRAMS**

(Please refer to manufacturer for details)