

Test Report No. 7191007525-EEC11/05
dated 07 Jun 2011



PSB Singapore

Note: This report is issued subject to TÜV SÜD PSB's "Terms and Conditions Governing Technical Services".
The terms and conditions governing the issue of this report are set out as attached within this report.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH
47 CFR FCC Parts 15B & C : 2011
OF AN
INMARSAT BGAN LAND MOBILE SATELLITE TERMINAL
[Model : SAFARI]
[FCC ID : QY9-WESAFARI]

Choose certainty.
Add value.

TEST FACILITIES TÜV SÜD PSB Pte Ltd,
Electrical & Electronics Centre (EEC), Product Services,
No. 1 Science Park Drive, Singapore 118221

TÜV SÜD PSB Pte Ltd,
Electrical & Electronics Centre (EEC), Product Services,
13 International Business Park #01-01, Singapore 609932

FCC REG. NO. 160581 (3m and 10m Semi-Anechoic Chamber, International Business Park)

IND. CANADA REG. NO. 2932N-1 (10m Semi-Anechoic Chamber, International Business Park)

PREPARED FOR Addvalue Communications Pte Ltd
28 Tai Seng Street #06-02
Singapore 534106

Tel : +65 6509 5700 Tel : +65 6509 5700

QUOTATION NUMBER 219130074 & 219129102

JOB NUMBER 7191007525 & 7191005878

TEST PERIOD 23 May 2011 – 03 Jun 2011

PREPARED BY

Quek Keng Huat
Associate Engineer

APPROVED BY

Lim Cher Hwee
Assistance Vice President



Laboratory:
TÜV SÜD PSB Pte. Ltd.
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: testing@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg : 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
3 Science Park Drive, #04-01/05
The Franklin, Singapore 118223
TUV®



LA-2007-0380-A
LA-2007-0380-A-1
LA-2007-0381-F
LA-2007-0382-B
LA-2007-0383-G
LA-2007-0384-G
LA-2007-0385-E
LA-2007-0386-C

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.



TABLE OF CONTENTS

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING EQUIPMENT DESCRIPTION

EUT OPERATING CONDITIONS

RADIATED EMISSION TEST

SPECTRUM BANDWIDTH (6dB BANDWIDTH
MEASUREMENT) TEST

MAXIMUM PEAK POWER TEST

RF CONDUCTED SPURIOUS EMISSIONS TEST

BAND EDGE COMPLIANCE (CONDUCTED) TEST

BAND EDGE COMPLIANCE (RADIATED) TEST

PEAK POWER SPECTRAL DENSITY TEST

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

ANNEX A - EUT PHOTOGRAPHS / DIAGRAMS

ANNEX B - FCC LABEL & POSITION

ANNEX C - USER MANUAL, TECHNICAL DESCRIPTION,
BLOCK & CIRCUIT DIAGRAMS

TEST SUMMARY

The product was tested in accordance with the customer's specifications.

Test Results Summary

Test Standard	Description	Pass / Fail
47 CFR FCC Part 15: 2011		
15.107(a), 15.207	Conducted Emissions	Not Applicable *See Note 7
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)	Pass
15.247(a)(2)	Spectrum Bandwidth (6dB Bandwidth Measurement)	Pass
15.247(b)(3)	Maximum Peak Power	Pass
15.247(d)	RF Conducted Spurious Emissions	Pass
15.247(d)	Band Edge Compliance (Conducted)	Pass
15.247(d)	Band Edge Compliance (Radiated)	Pass
15.247(e)	Peak Power Spectral Density	Pass
1.1310	Maximum Permissible Exposure	Refer to page 88 for details
15.35(c)	Duty Cycle Factor Computation	See Note 8



TEST SUMMARY

Notes

1. The channels as listed below, under the different configurations were tested for 802.11b WLAN.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>	<u>Modulation</u>	<u>Data Rate</u>
Channel 1	2.412	DBPSK	1Mbps
Channel 6	2.437	DBPSK	1Mbps
Channel 11	2.462	DBPSK	1Mbps
Channel 1	2.412	DQPSK	2Mbps
Channel 6	2.437	DQPSK	2Mbps
Channel 11	2.462	DQPSK	2Mbps
Channel 1	2.412	CCK	5.5Mbps
Channel 6	2.437	CCK	5.5Mbps
Channel 11	2.462	CCK	5.5Mbps
Channel 1	2.412	CCK	11Mbps
Channel 6	2.437	CCK	11Mbps
Channel 11	2.462	CCK	11Mbps

2. The channels as listed below, under the different configurations were tested for 802.11g WLAN.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>	<u>Modulation</u>	<u>Data Rate</u>
Channel 1	2.412	BPSK	9Mbps
Channel 6	2.437	BPSK	9Mbps
Channel 11	2.462	BPSK	9Mbps
Channel 1	2.412	QPSK	18Mbps
Channel 6	2.437	QPSK	18Mbps
Channel 11	2.462	QPSK	18Mbps
Channel 1	2.412	16QAM	36Mbps
Channel 6	2.437	16QAM	36Mbps
Channel 11	2.462	16QAM	36Mbps
Channel 1	2.412	64QAM	54Mbps
Channel 6	2.437	64QAM	54Mbps
Channel 11	2.462	64QAM	54Mbps

3. All the measurements in section 15.247 were done based on conducted measurements except:
- Transmitter Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)
 - Receiver Radiated Emissions
 - Band Edge Compliance (Radiated)
 - Maximum Permissible Exposure
4. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
5. All test measurement procedures are according to ANSI C63.4: 2003.




TEST SUMMARY

Notes (continued)

6. The maximum measured RF power of the Equipment Under Test is 16.7dBm.
7. The Equipment Under Test (EUT) is a DC powered device and contains no provision for public utility connections.
8. The Equipment Under Test (EUT) was configured to transmit in continuous mode, ie 0 duty cycle.
9. The results of the radiated spurious emissions when the Equipment Under Test (EUT) was operating in GSP + 802.11b/g and Satellite mode were reported in TÜV SÜD PSB's test report, 7191007525-EEC11/04.

Modifications

No modifications were made.

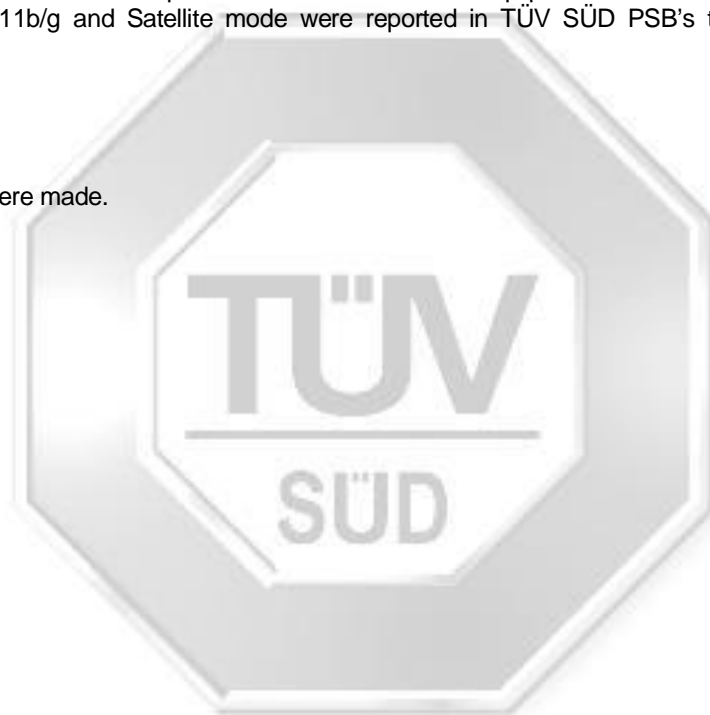

PRODUCT DESCRIPTION

Description	: The Equipment Under Test (EUT) is an INMARSAT BGAN LAND MOBILE SATELLITE TERMINAL .
Manufacturer	: Addvalue Communications Pte Ltd 28 Tai Seng Street #06-02 Singapore 534106
Model Number	: SAFARI
FCC ID	: QY9-WESAFARI
Serial Number	: Nil
Microprocessor	: Refer to manufacturer
Operating / Transmitting Frequency	: <u>Satellite</u> a. Transmit: 1626.5MHz – 1660.5MHz b. Receive: 1525MHz – 1559MHz <u>802.11b/g</u> 2412MHz – 2462MHz <u>GPS</u> 1575.42MHz
Clock / Oscillator Frequency	: <u>Baseband Board</u> 32.768kHz, 12.0MHz, 16.384MHz, 25.0MHz, 39.3216MHz <u>RF Board</u> 4MHz, 24.192MHz <u>Wi-Fi Board</u> 25.0MHz
Modulation	: Pi/4 QPSK and 16QAM (Satellite) DBPSK, DQPSK, CCK, BPSK, QPSK, 16QAM, 64QAM (802.11b/g) QPSK (GPS)
Antenna Gain	: 10.0dBi (Satellite) 0.0 dBi (802.11b/g)
Port / Connectors	: 2 x RJ45 Ethernet port 1 x primary handset connector 1 x GPS output connector 1 x Antenna connector 2 x RJ11 port 1 x DC input port 1 x ground stud connector 1 x GPIO signal port connector
Rated Input Power	: 12VDC to 31.2VDC
Accessories	: Primary Handset BGAN-X Class 11 Antenna



SUPPORTING DESCRIPTION DESCRIPTION

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Antenna ADU	M/N: AS BGAN FB250 S/N: 10080008 FCC ID: Nil	Nil
Globe i250 Phone	M/N: Globe i250 S/N: EH250SM09520018 FCC ID: Nil	3.2m RJ11 cable





EUT OPERATING CONDITIONS

47 CFR FCC Part 15

1. Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)
2. Spectrum Bandwidth (6dB Bandwidth Measurement)
3. Maximum Peak Power
4. RF Conducted Spurious Emissions
5. Band Edge Compliance (Conducted)
6. Band Edge Compliance (Radiated)
7. Peak Power Spectral Density
8. Maximum Permissible Exposure

The EUT was exercised by operating in maximum continuous transmission in test mode, i.e transmitting at lower, middle and upper channels respectively at one time.



RADIATED EMISSION TEST

47 CFR FCC Part 15.205 Restricted Bands

MHz		MHz		MHz		GHz	
0.090	- 0.110	16.42	- 16.423	399.9	- 410	4.5	- 5.15
0.495	- 0.505	16.69475	- 16.69525	608	- 614	5.35	- 5.46
2.1735	- 2.1905	16.80425	- 16.80475	960	- 1240	7.25	- 7.75
4.125	- 4.128	25.5	- 25.67	1300	- 1427	8.025	- 8.5
4.17725	- 4.17775	37.5	- 38.25	1435	- 1626.5	9.0	- 9.2
4.20725	- 4.20775	73	- 74.6	1645.5	- 1646.5	9.3	- 9.5
6.215	- 6.218	74.8	- 75.2	1660	- 1710	10.6	- 12.7
6.26775	- 6.26825	108	- 121.94	1718.8	- 1722.2	13.25	- 13.4
6.31175	- 6.31225	123	- 138	2200	- 2300	14.47	- 14.5
8.291	- 8.294	149.9	- 150.05	2310	- 2390	15.35	- 16.2
8.362	- 8.366	156.52475	- 156.52525	2483.5	- 2500	17.7	- 21.4
8.37625	- 8.38675	156.7	- 156.9	2690	- 2900	22.01	- 23.12
8.41425	- 8.41475	162.0125	- 167.17	3260	- 3267	23.6	- 24.0
12.29	- 12.293	167.72	- 173.2	3332	- 3339	31.2	- 31.8
12.51975	- 12.52025	240	- 285	3345.8	- 3358	36.43	- 36.5
12.57675	- 12.57725	322	- 335.4	3600	- 4400	Above 38.6	
13.36	- 13.41						

47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Limits

Frequency Range (MHz)	Quasi-Peak Limit Values (dBµV/m) @ 3m
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
Above 960	54.0*

* Above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Rohde & Schwarz EMI Test Receiver (20Hz – 26.5GHz)	ESMI	829179/002 829179/005	28 Jul 2011
TDK RF Solutions Hybrid Log Periodic Antenna (30MHz-3GHz)	HLP-3003C	130238	19 Mar 2012
Sonoma Preamplifier (9kHz – 1GHz)	310N	270640	13 Sep 2011
TDK RF Solution Horn Antenna (1GHz-18GHz)	HRN-0118	130256	15 Mar 2012
Schwarzbeck Horn Antenna (2-18GHz) / Pre-amplifier assembly HAP-series	BBHA 9120 C/ HAP06-18W	00000004	25 Mar 2012
Sonoma Preamplifier (9kHz – 1GHz)	310N	270640	13 Sep 2011
Toyo MicroWave Preamplifier (1GHz - 8GHz)	TPA0108-40	0443	02 Feb 2012
ETS Horn Antenna (18GHz – 40GHz)	3116	0004-2474	19 Apr 2012
Micro-Tronics Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2011

RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.


47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 10th harmonics of the EUT fundamental frequency, using the Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.


Sample Calculation Example

At 300 MHz	Q-P limit (Class B) = 200 μ V/m = 46.0 dB μ V/m
Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V/m (Calibrated level including antenna factors & cable losses)	
Therefore, Q-P margin = 40.0 - 46.0 = -6.0	i.e. 6 dB below Q-P limit

RADIATED EMISSION TEST

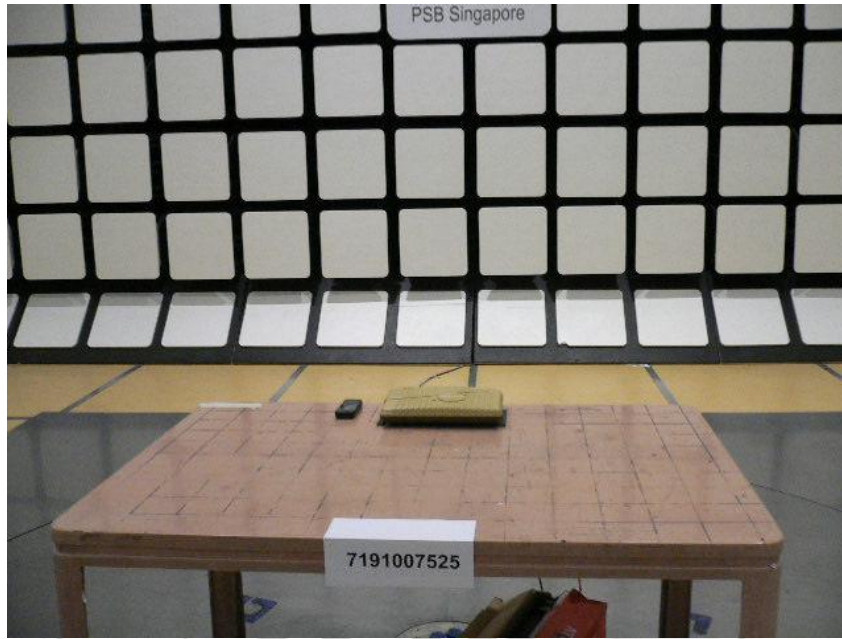

Radiated Emissions Test Setup (Front View)

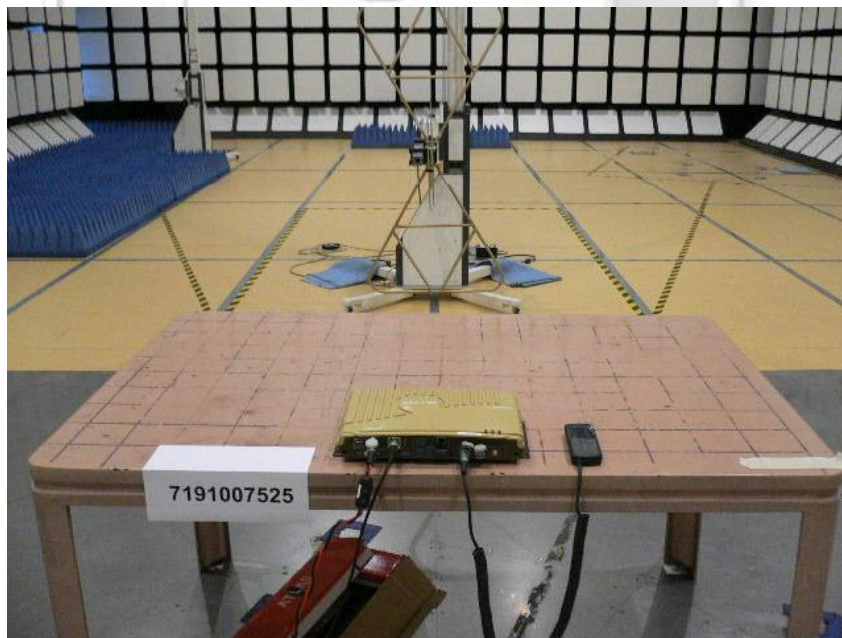

Radiated Emissions Test Setup (Rear View)



RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results

Test Input Power	12VDC (Worst Voltage)	Temperature	22°C
Test Distance	3m	Relative Humidity	52%
		Atmospheric Pressure	1028mbar
		Tested By	Jason Lai

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB μ V/m)	Q-P Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)	Channel
41.5390	22.9	-17.1	66	103	V	11
63.6220	26.1	-13.9	95	103	V	11
91.8470	25.4	-18.1	30	110	V	11
187.7520	31.7	-11.8	280	166	H	11
196.6480	28.9	-14.6	293	162	H	11
367.9960	34.7	-11.3	1	101	H	11

Spurious Emissions above 1GHz

Frequency (GHz)	Peak Value (dB μ V/m)	Peak Margin (dB)	Average Value (dB μ V/m) <small>*See Note 2</small>	Average Margin (dB) <small>*See Note 3</small>	Azimuth (Degrees)	Height (cm)	PoI (H/V)	Channel
4.9961	34.5	--	--	-19.5	94	194	V	11
12.2889	24.0	--	--	-30.0	36	101	V	11
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

RADIATED EMISSION TEST

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. As the measured peak shows compliance to the average limit, as such no average measurement was required.
3. The average margin indicates the margin of the measured peak value below the average limit.
4. "--" indicates no emissions were found and shows compliance to the limits.
5. Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
6. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
7. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 1GHz
RBW: 120kHz VBW: 1MHz
>1GHz
RBW: 1MHz VBW: 1MHz
8. The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33(a) for intentional radiators & Section 15.33(b) for unintentional radiators.
9. The channel in the table refers to the transmit channel of the EUT.
10. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz is ± 4.6 dB.

SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

47 CFR FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Limits

The EUT shows compliance to the requirements of this section, which states that the minimum bandwidth of the EUT employing digital modulation techniques shall be at least 500kHz.

47 CFR FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E7405A	MY45106084	11 Jan 2012
Bird 20dB Attenuator	25-A-MFN-20	0209	25 May 2012

47 CFR FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at Channel 1 (2.412GHz) with specified modulation and data rate.
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 6dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 6dB peak frequency at lower (f_L) and upper (f_H) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
5. The 6dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies, $|f_H - f_L|$.
6. Repeat steps 1 to 5 with all possible modulations and data rates.
7. The steps 2 to 6 were repeated with the transmitting frequency was set to Channel 6 (2.437GHz) and Channel 11 (2.462GHz) respectively.

SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST



Spectrum Bandwidth (6dB Bandwidth Measurement) Test Setup





SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

47 CFR FCC Part 15.247(a)(2) Spectrum Bandwidth (6dB Bandwidth Measurement) Results

Test Input Power	24VDC	Temperature	24°C
Attached Plots	1 – 12 (802.11b) 13 – 24 (802.11g)	Relative Humidity	54%
		Atmospheric Pressure	1027mbar
		Tested By	Foo Kai Maun


Channel	Channel Frequency (GHz)	6dB Bandwidth (MHz)	802.11b Modulation @ Data Rate
1	2.412	12.000	DBPSK @ 1Mbps
		10.375	DQPSK @ 2Mbps
		12.625	CCK @ 5.5Mbps
		12.625	CCK @ 11Mbps
6	2.437	12.250	DBPSK @ 1Mbps
		12.250	DQPSK @ 2Mbps
		12.250	CCK @ 5.5Mbps
		12.125	CCK @ 11Mbps
16	2.462	11.375	DBPSK @ 1Mbps
		11.750	DQPSK @ 2Mbps
		11.125	CCK @ 5.5Mbps
		13.000	CCK @ 11Mbps

Channel	Channel Frequency (GHz)	6dB Bandwidth (MHz)	802.11g Modulation @ Data Rate
1	2.412	16.500	BPSK @ 9Mbps
		16.625	QPSK @ 18Mbps
		16.625	16QAM @ 36Mbps
		16.750	64QAM @ 54Mbps
6	2.437	16.625	BPSK @ 9Mbps
		16.625	QPSK @ 18Mbps
		16.750	16QAM @ 36Mbps
		16.750	64QAM @ 54Mbps
16	2.462	16.500	BPSK @ 9Mbps
		16.625	QPSK @ 18Mbps
		16.750	16QAM @ 36Mbps
		16.750	64QAM @ 54Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11b

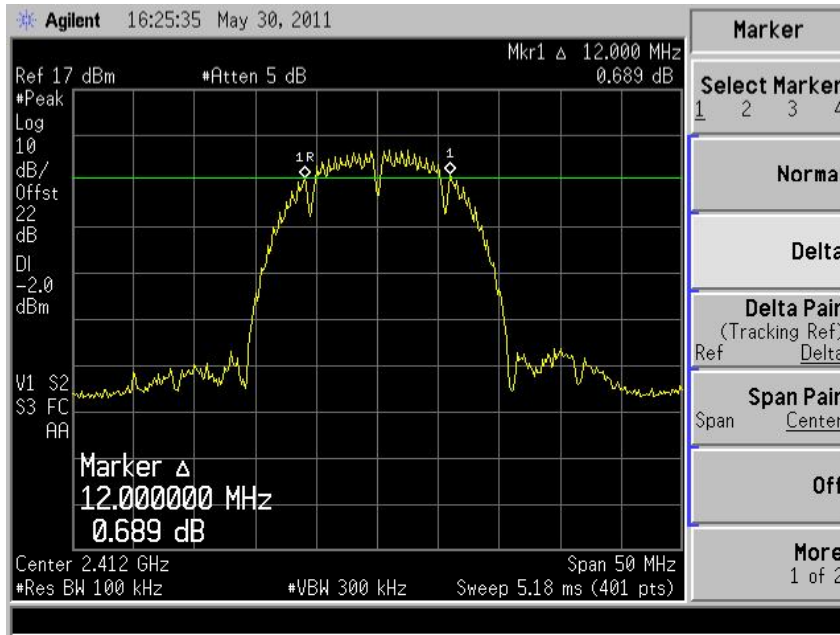

Plot 1 - Channel 1 @ DBPSK 1Mbps

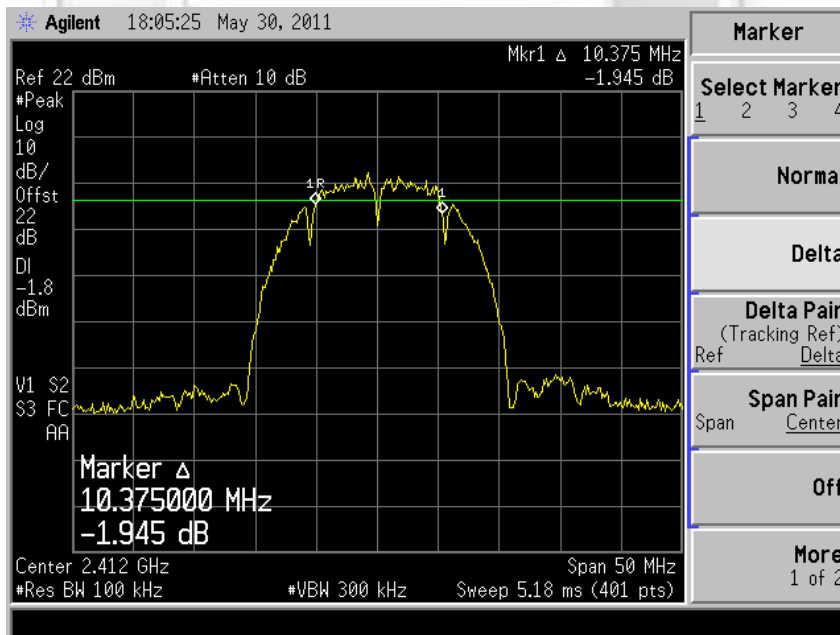


Plot 2 - Channel 1 @ DQPSK 2Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11b

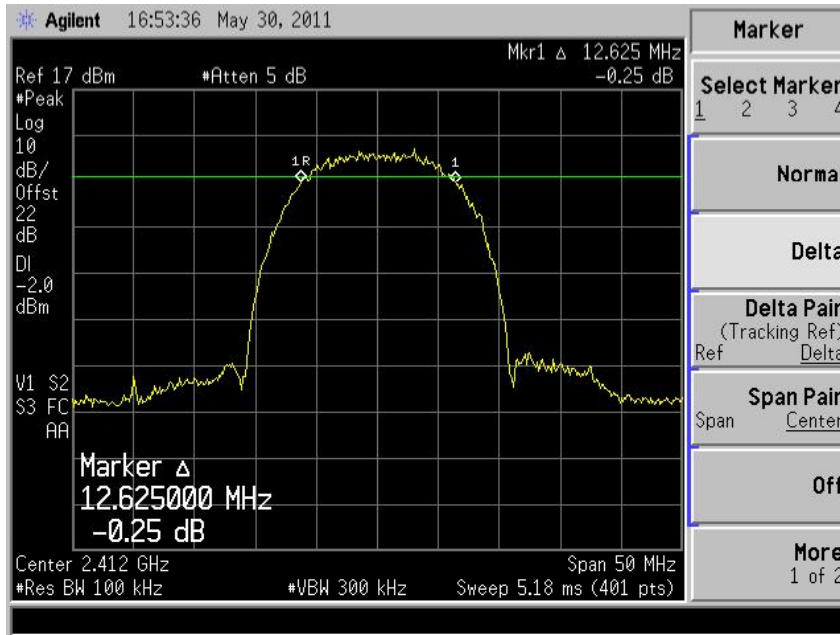

Plot 3 - Channel 1 @ CCK 5.5Mbps

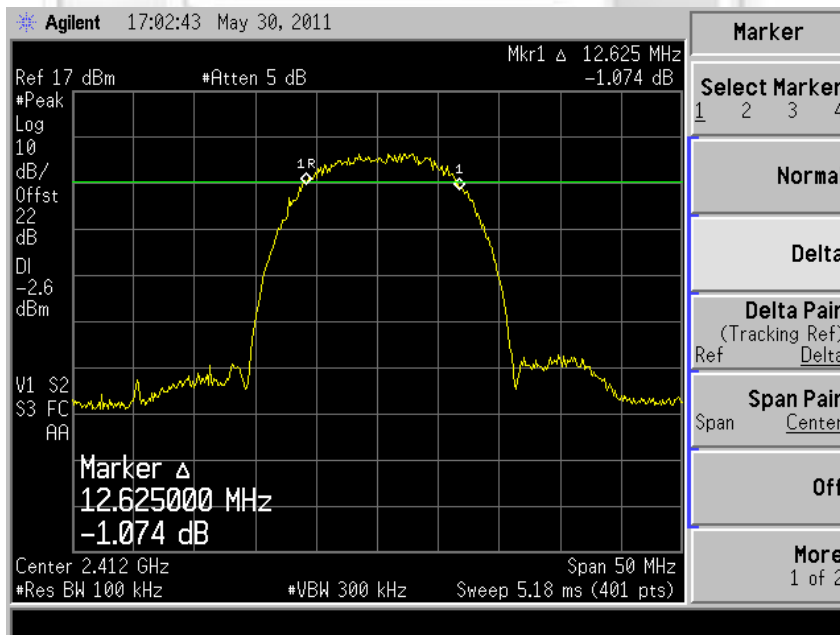


Plot 4 - Channel 1 @ CCK 11Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11b

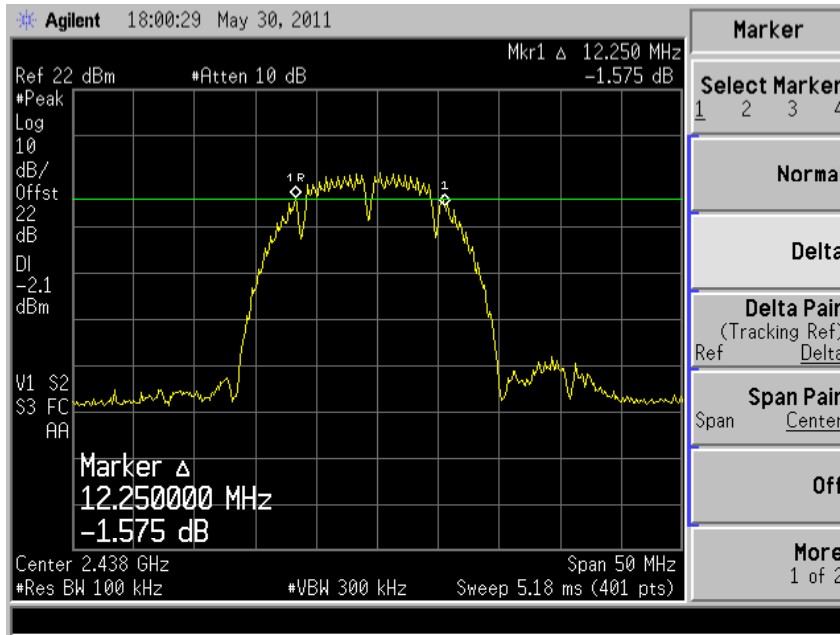

Plot 5 - Channel 6 @ DBPSK 1Mbps

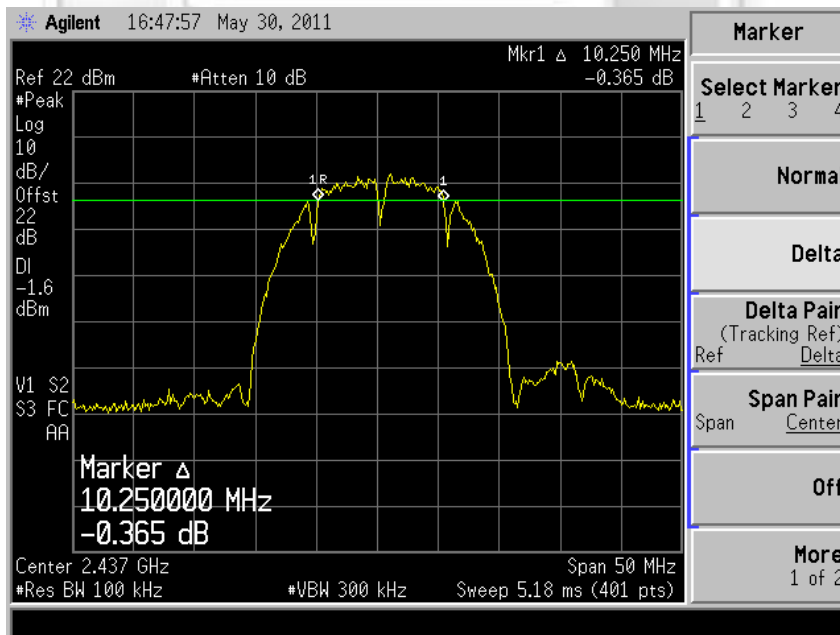


Plot 6 - Channel 6 @ DQPSK 2Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11b

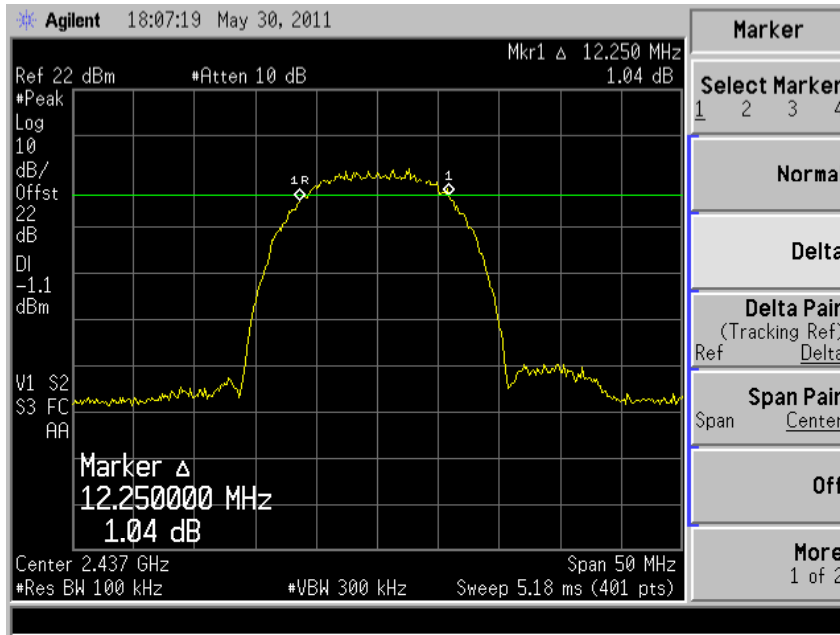

Plot 7 - Channel 6 @ CCK 5.5Mbps

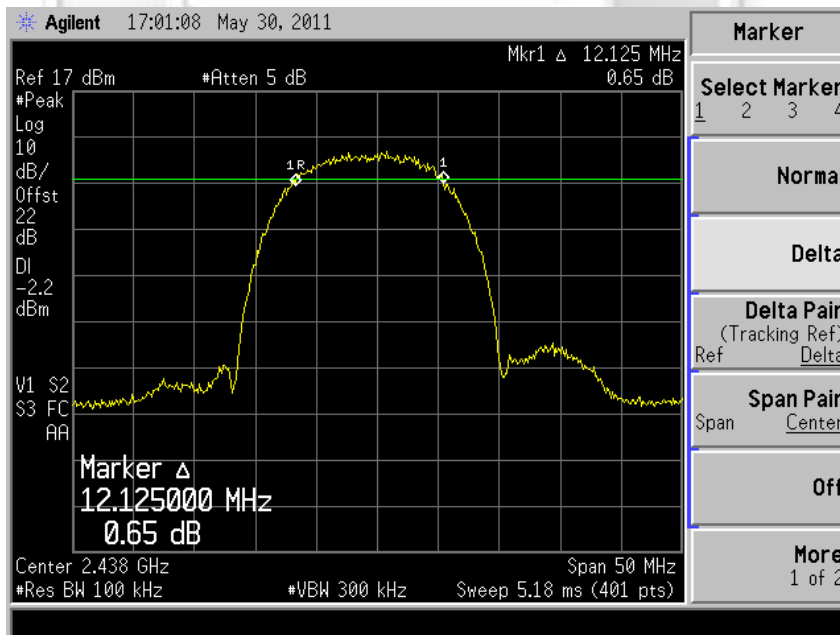


Plot 8 - Channel 6 @ CCK 11Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11b

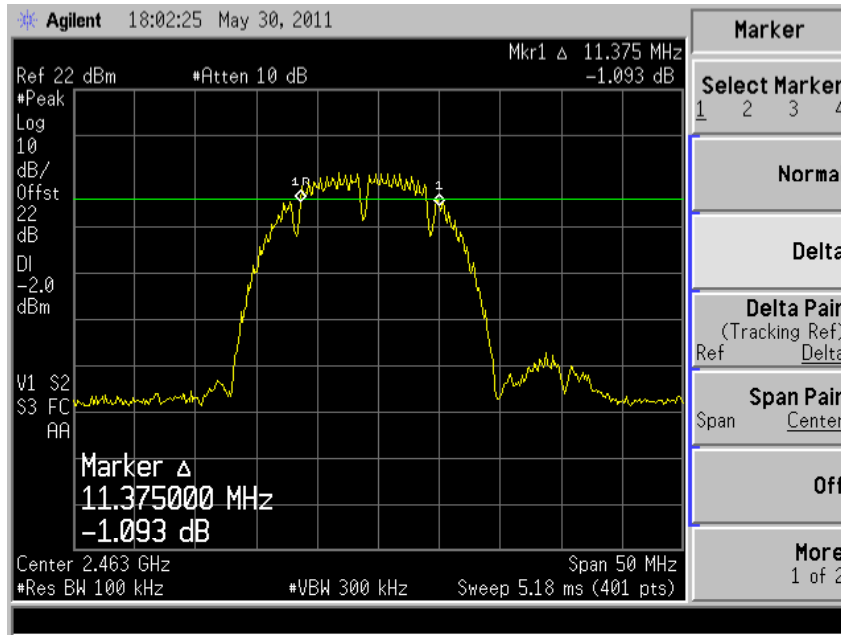

Plot 9 - Channel 11 @ DBPSK 1Mbps

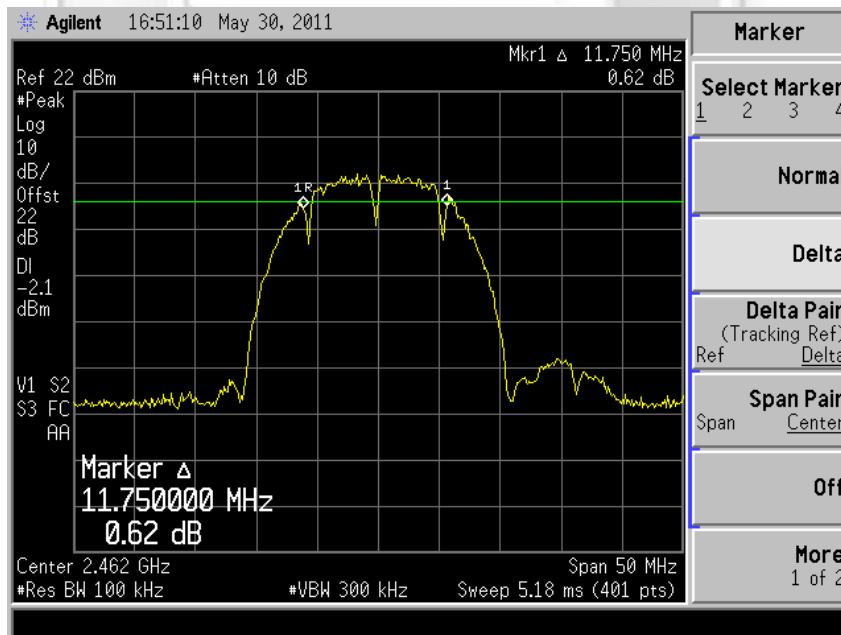


Plot 10 - Channel 11 @ DQPSK 2Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11b

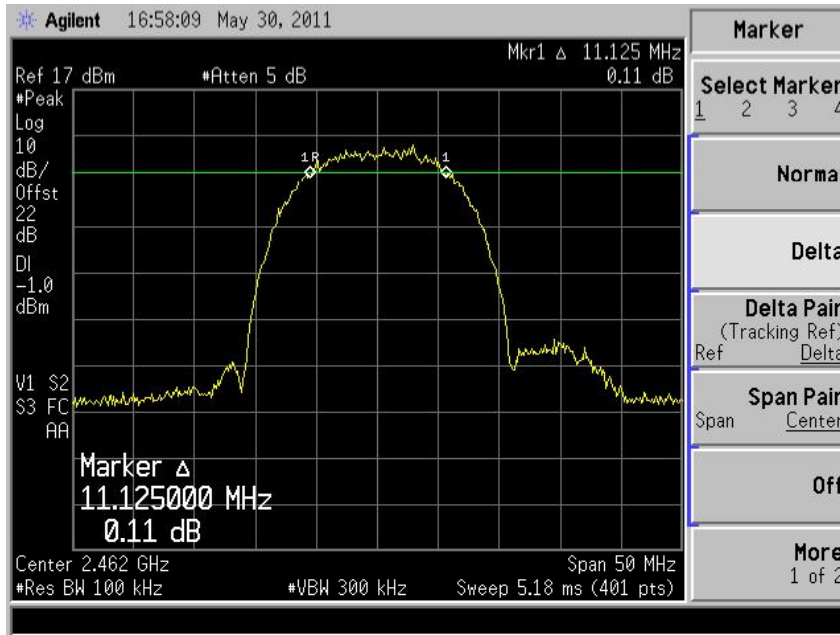

Plot 11 - Channel 11 @ CCK 5.5Mbps

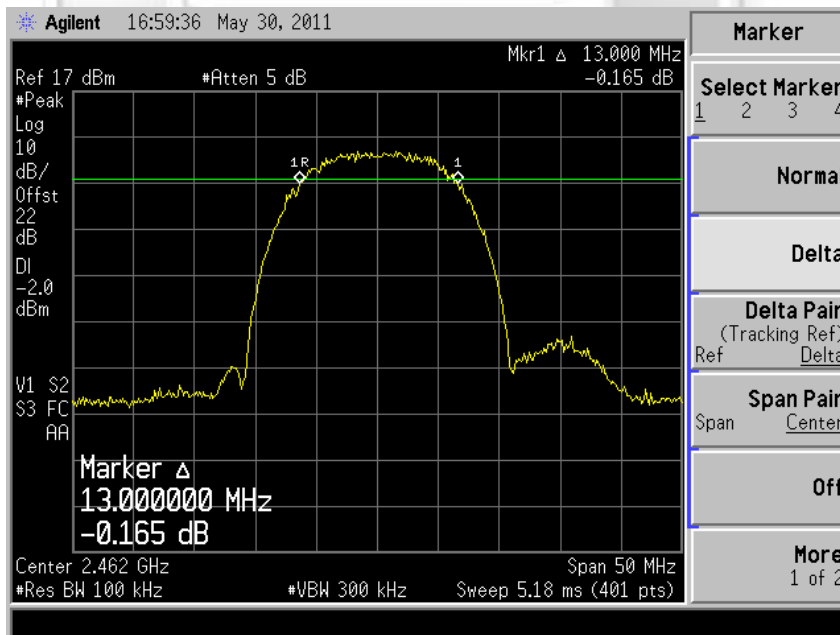


Plot 12 - Channel 11 @ CCK 11Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11g

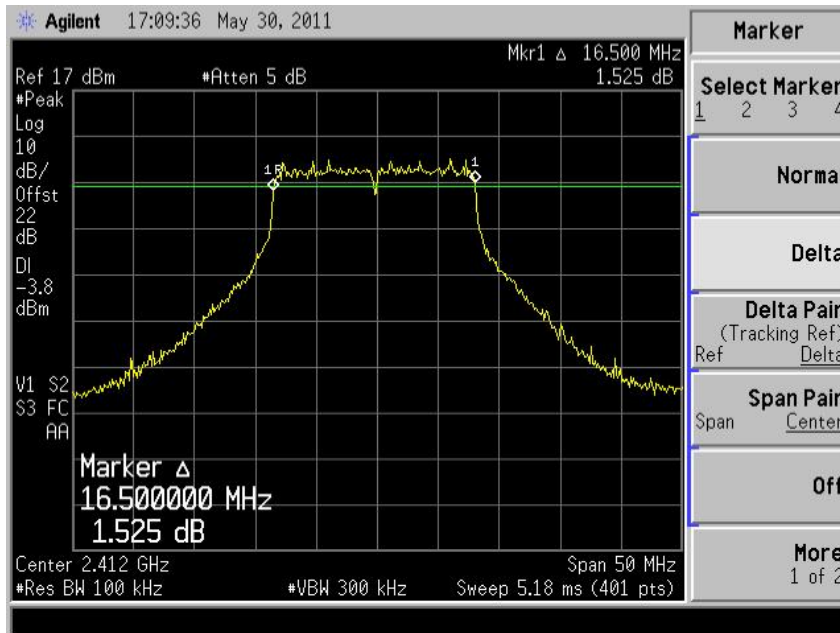

Plot 13 - Channel 1 @ BPSK 9Mbps

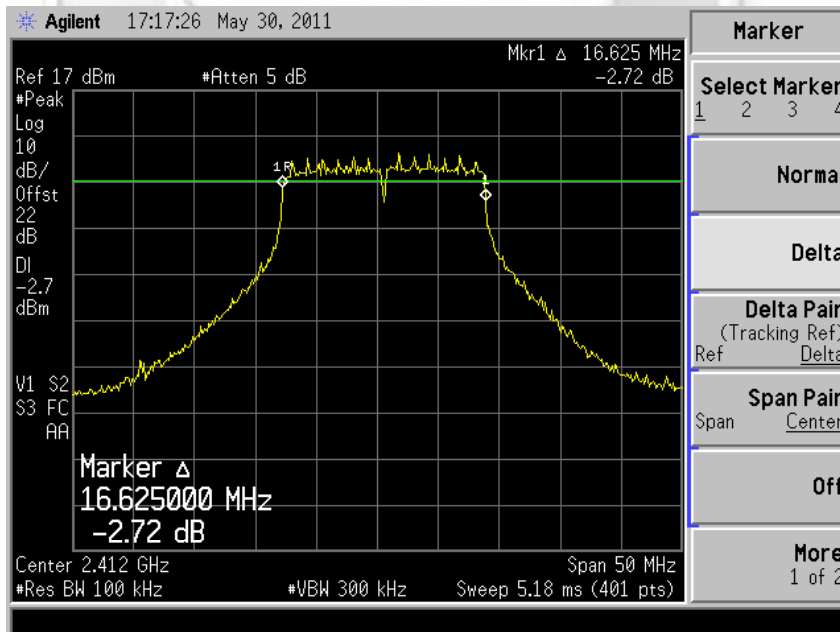


Plot 14 - Channel 1 @ QPSK 18Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11g

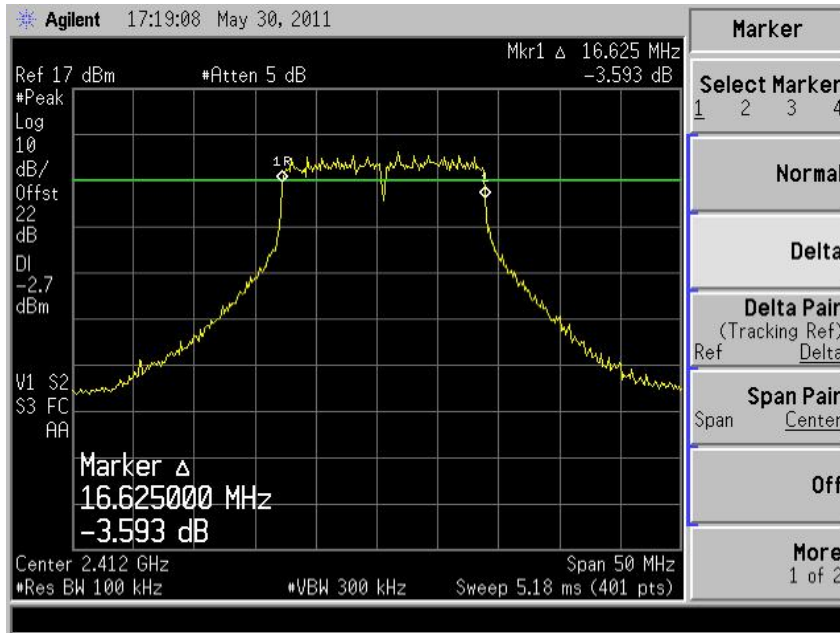

Plot 15 - Channel 1 @ 16QAM 36Mbps

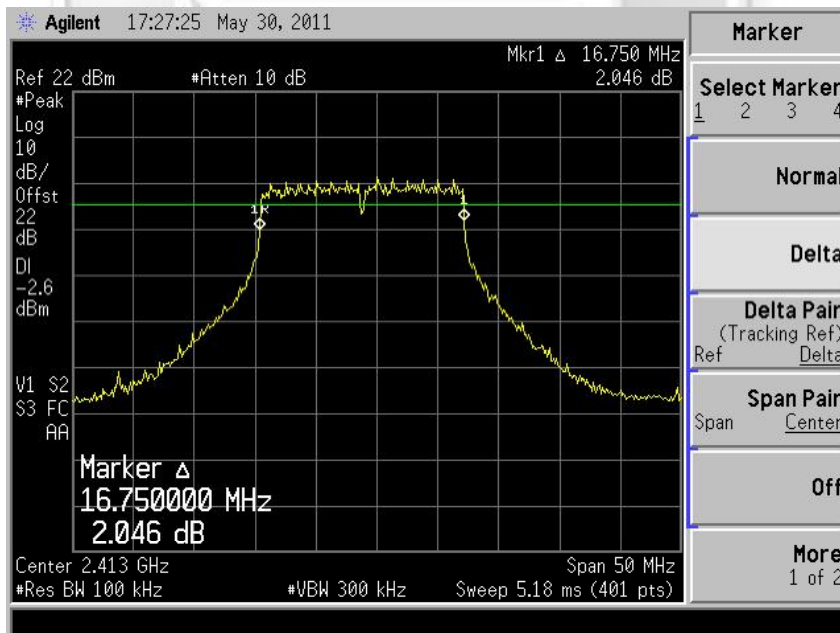


Plot 16 - Channel 1 @ 64QAM 54Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11g

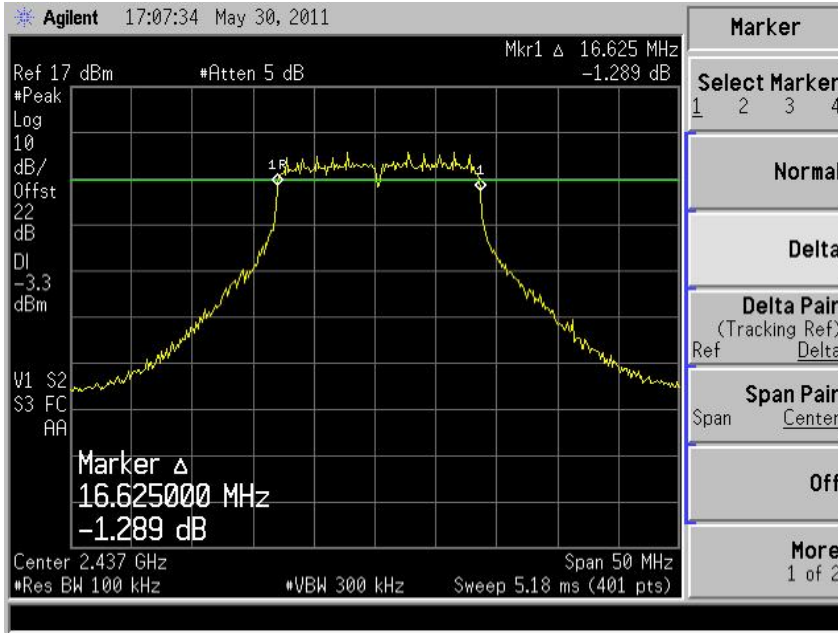

Plot 17 - Channel 6 @ BPSK 9Mbps

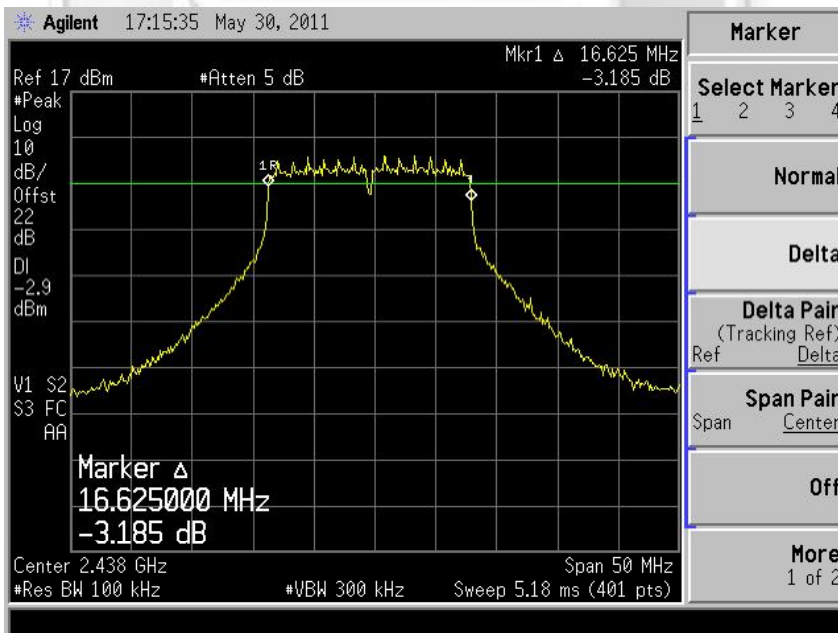


Plot 18 - Channel 6 @ QPSK 18Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11g

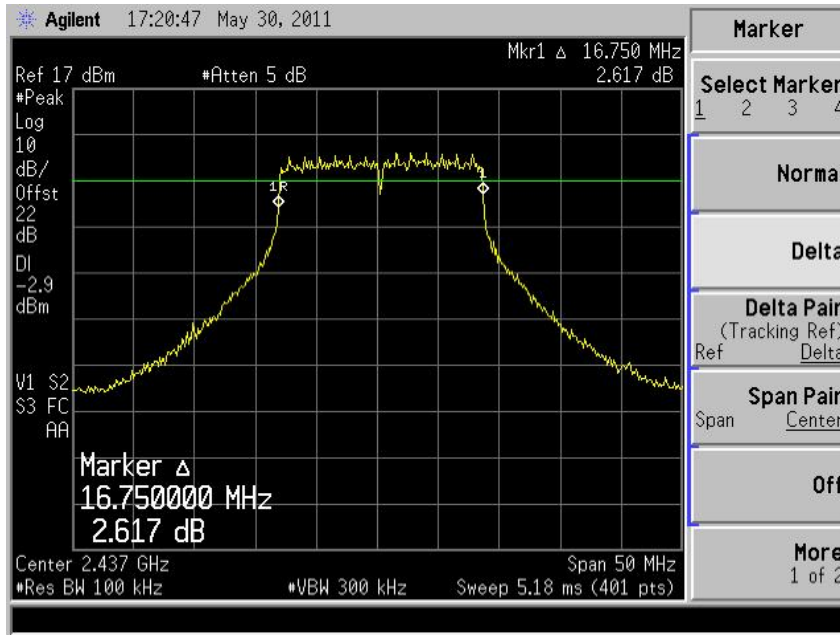

Plot 19 - Channel 6 @ 16QAM 36Mbps

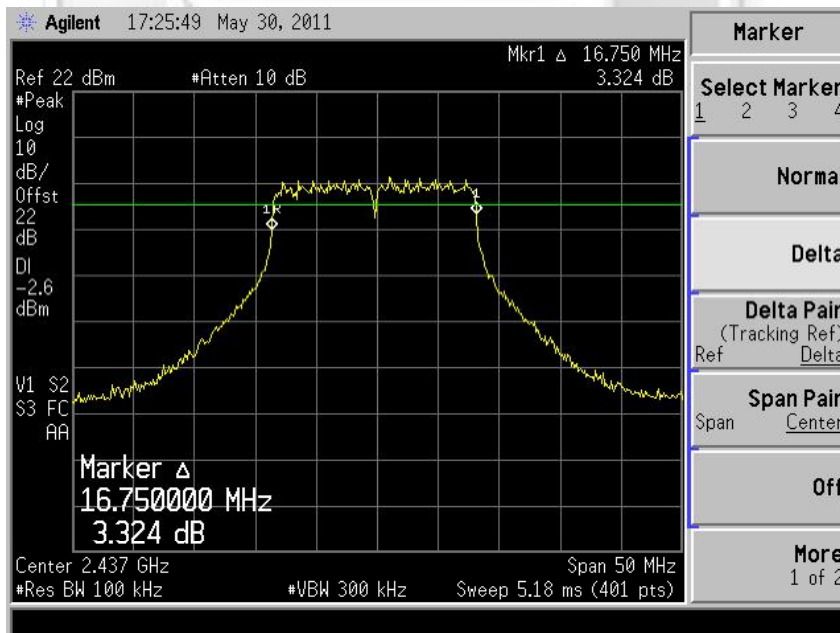


Plot 20 - Channel 6 @ 64QAM 54Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11g

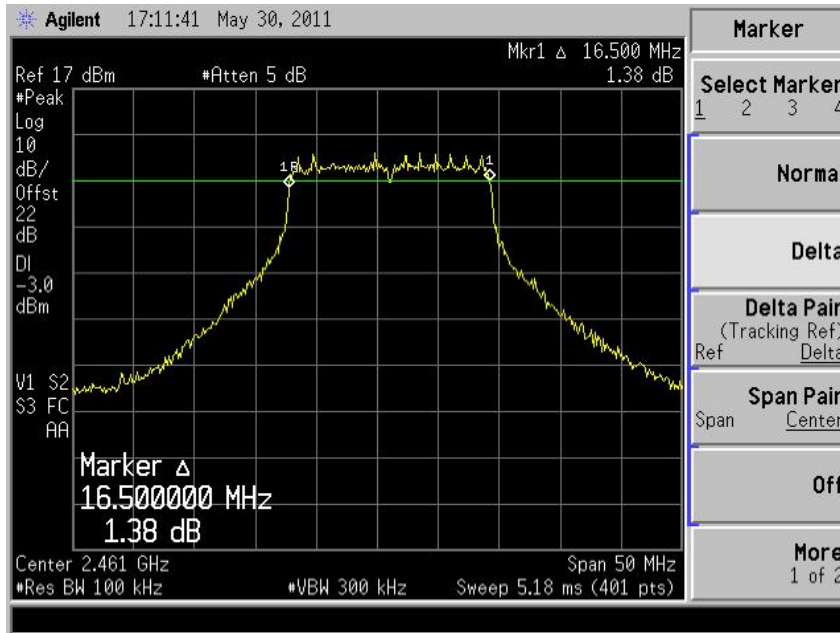

Plot 21 - Channel 11 @ BPSK 9Mbps

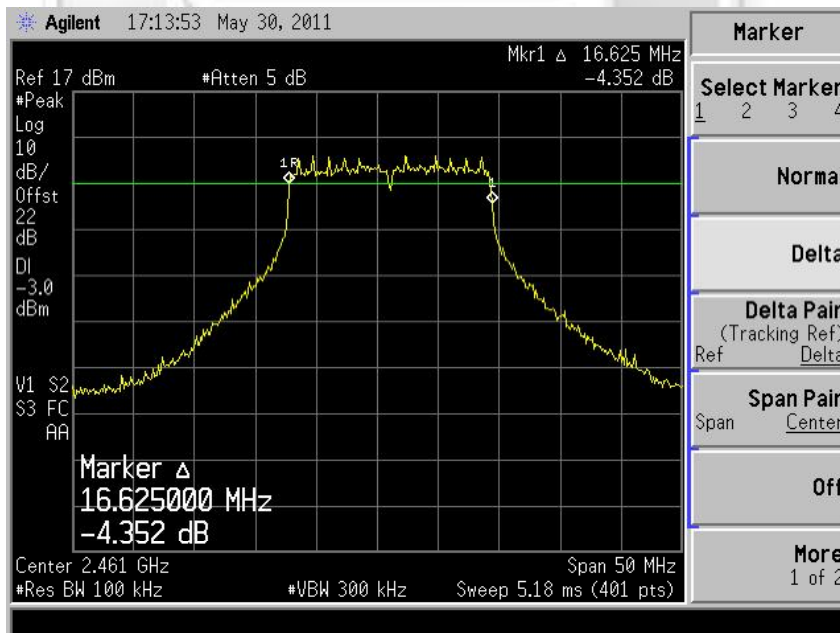


Plot 22 - Channel 11 @ QPSK 18Mbps




SPECTRUM BANDWIDTH (6dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots – 802.11g

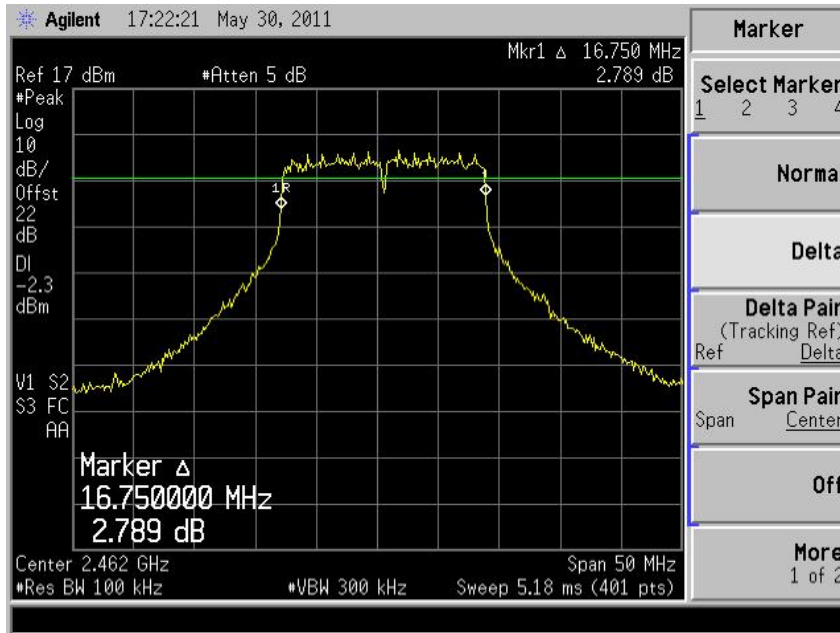

Plot 23 - Channel 11 @ 16QAM 36Mbps

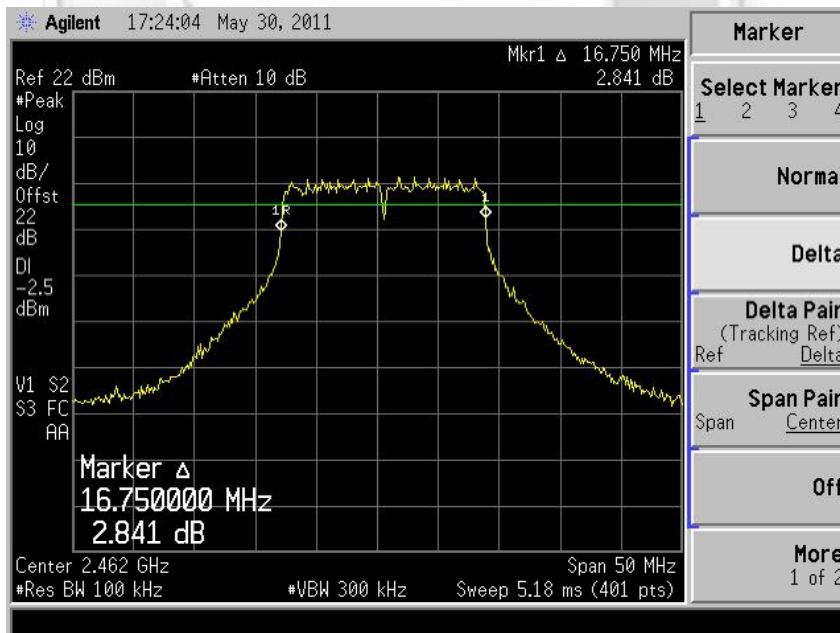

Plot 24 - Channel 11 @ 64QAM 54Mbps

MAXIMUM PEAK POWER TEST

47 CFR FCC Part 15.247(b)(3) Maximum Peak Power Limits

The EUT shows compliance to the requirements of this section, which states the maximum peak power of the EUT employing digital modulation shall not exceed 1W (30dBm).

47 CFR FCC Part 15.247(b)(3) Maximum Peak Power Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Universal Radio Communication Tester	CMU 200	837587/068	24 Mar 2012


47 CFR FCC Part 15.247(b)(3) Maximum Peak Power Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(b)(3) Maximum Peak Power Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at Channel 1 (2.412GHz) with specified modulation and data rate.
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The Equivalent Isotropic Radiated Power (EIRP) of the EUT was computed by adding its antenna gain to the measured maximum peak power.
4. Repeat steps 1 to 3 with all possible modulations and data rates.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 6 (2.437GHz) and Channel 11 (2.462GHz) respectively.

MAXIMUM PEAK POWER TEST

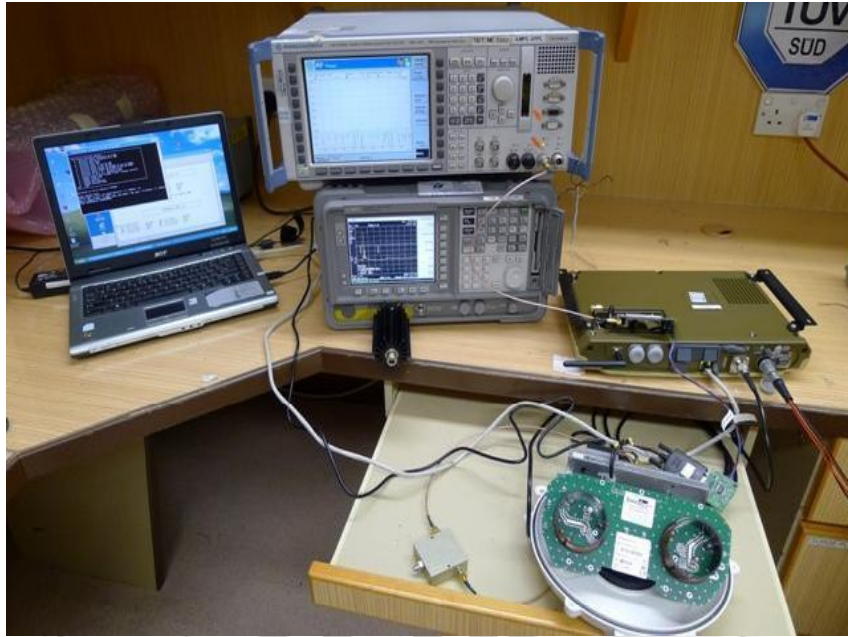

Maximum Peak Power Test Setup



MAXIMUM PEAK POWER TEST

47 CFR FCC Part 15.247(b)(3) Maximum Peak Power Results

Test Input Power	24VDC	Temperature	24°C
Antenna Gain	0.0 dBi	Relative Humidity	54%
		Atmospheric Pressure	1027mbar
		Tested By	Foo Kai Maun

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Maximum EIRP (W)	Limit (W)	802.11b Modulation @ Data Rate
1	2.412	0.0089	0.0089	1.0	DBPSK @ 1Mbps
		0.0093	0.0093	1.0	DQPSK @ 2Mbps
		0.0089	0.0089	1.0	CCK @ 5.5Mbps
		0.0091	0.0091	1.0	CCK @ 11Mbps
6	2.437	0.0083	0.0083	1.0	DBPSK @ 1Mbps
		0.0085	0.0085	1.0	DQPSK @ 2Mbps
		0.0083	0.0083	1.0	CCK @ 5.5Mbps
		0.0085	0.0085	1.0	CCK @ 11Mbps
16	2.462	0.0066	0.0066	1.0	DBPSK @ 1Mbps
		0.0068	0.0068	1.0	DQPSK @ 2Mbps
		0.0068	0.0068	1.0	CCK @ 5.5Mbps
		0.0076	0.0076	1.0	CCK @ 11Mbps

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Maximum EIRP (W)	Limit (W)	802.11g Modulation @ Data Rate
1	2.412	0.0468	0.0468	1.0	BPSK @ 9Mbps
		0.0316	0.0316	1.0	QPSK @ 18Mbps
		0.0437	0.0437	1.0	16QAM @ 36Mbps
		0.0437	0.0437	1.0	64QAM @ 54Mbps
6	2.437	0.0437	0.0437	1.0	BPSK @ 9Mbps
		0.0302	0.0302	1.0	QPSK @ 18Mbps
		0.0380	0.0380	1.0	16QAM @ 36Mbps
		0.0427	0.0427	1.0	64QAM @ 54Mbps
16	2.462	0.0324	0.0324	1.0	BPSK @ 9Mbps
		0.0224	0.0224	1.0	QPSK @ 18Mbps
		0.0302	0.0302	1.0	16QAM @ 36Mbps
		0.0316	0.0316	1.0	64QAM @ 54Mbps

Notes

- Power analyser of Universal Radio Communication Tester was used for power measurement with peak detection as mode of measurement. The power analyser mode supports a wideband power measurement ranging from 100kHz to 2700MHz.

RF CONDUCTED SPURIOUS EMISSIONS TEST

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

47 CFR FCC Part 15.247(d) RF Conducted Spurious Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E7405A	MY45106084	11 Jan 2012
Bird 20dB Attenuator	25-A-MFN-20	0209	25 May 2012

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 1 (2.412GHz) with specified modulation and data rate.
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. Repeat steps 1 to 4 with all possible modulations and data rates.
6. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 6 (2.437GHz) and Channel 11 (2.462GHz) respectively.

RF CONDUCTED SPURIOUS EMISSIONS TEST



RF Conducted Spurious Emissions Test Setup

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Results


Test Input Power	24VDC	Temperature	24°C
Attached Plots	25 - 48 (802.11b) 49 - 72 (802.11g)	Relative Humidity	54%
		Atmospheric Pressure	1027mbar
		Tested By	Foo Kai Maun

All spurious signals found were below the specified limit. Please refer to the attached plots.




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

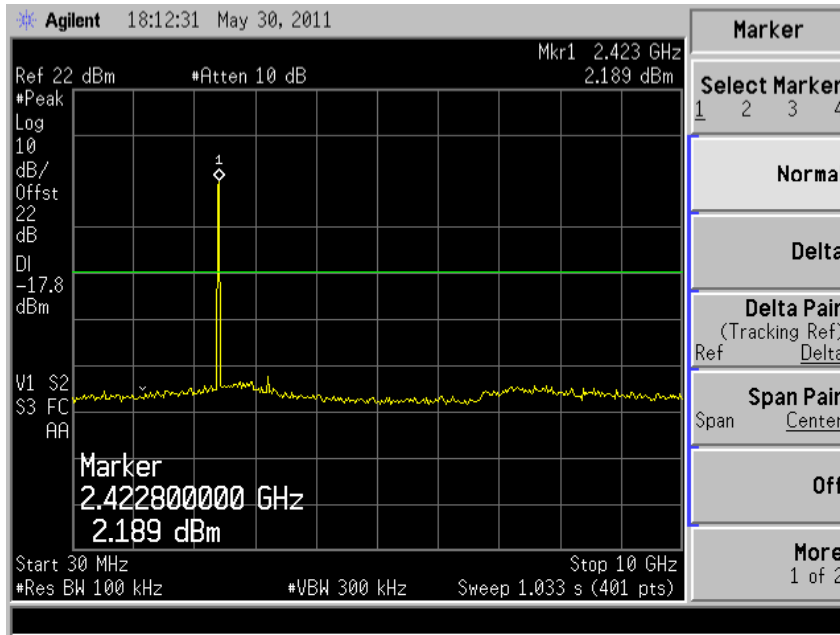

Plot 25 – Channel 1 @ DBPSK 1Mbps

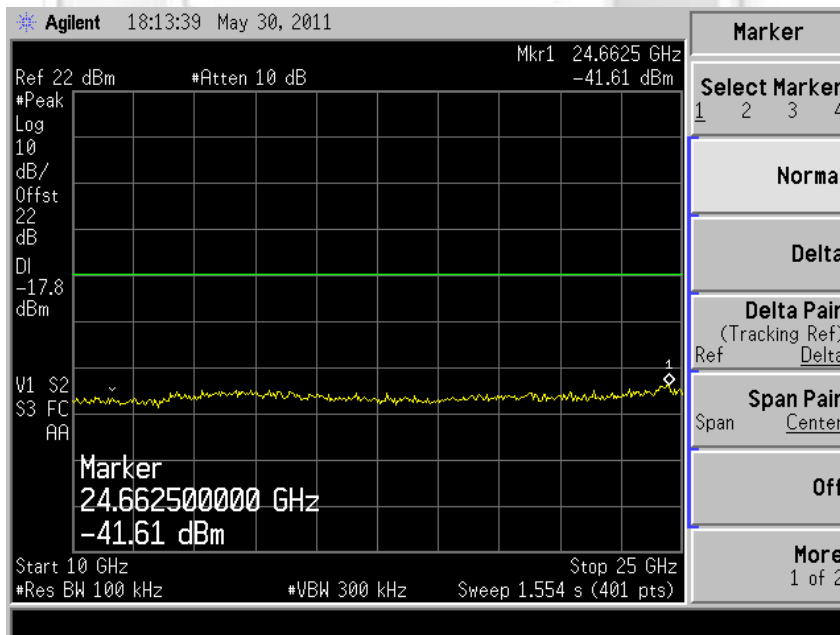


Plot 26 – Channel 1 @ DBPSK 1Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

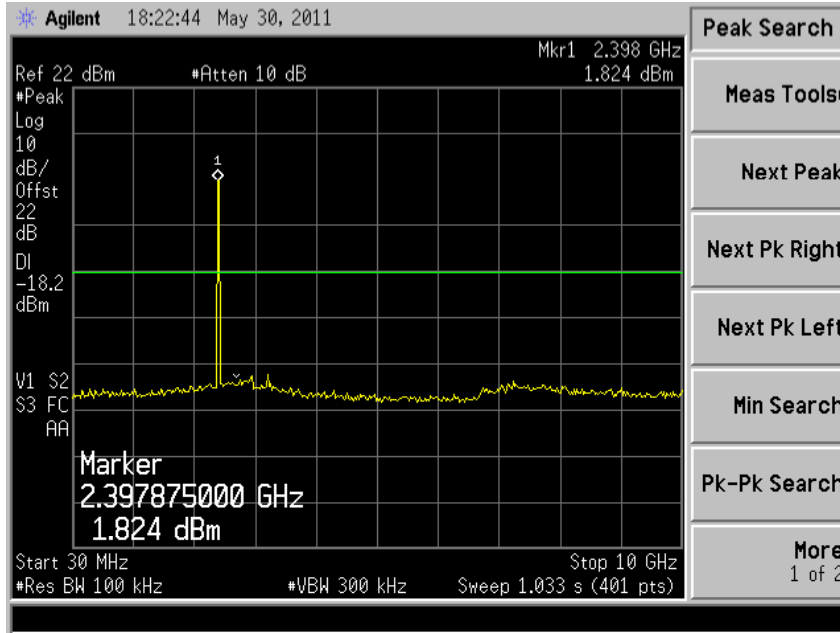

Plot 27 – Channel 1 @ DQPSK 2Mbps

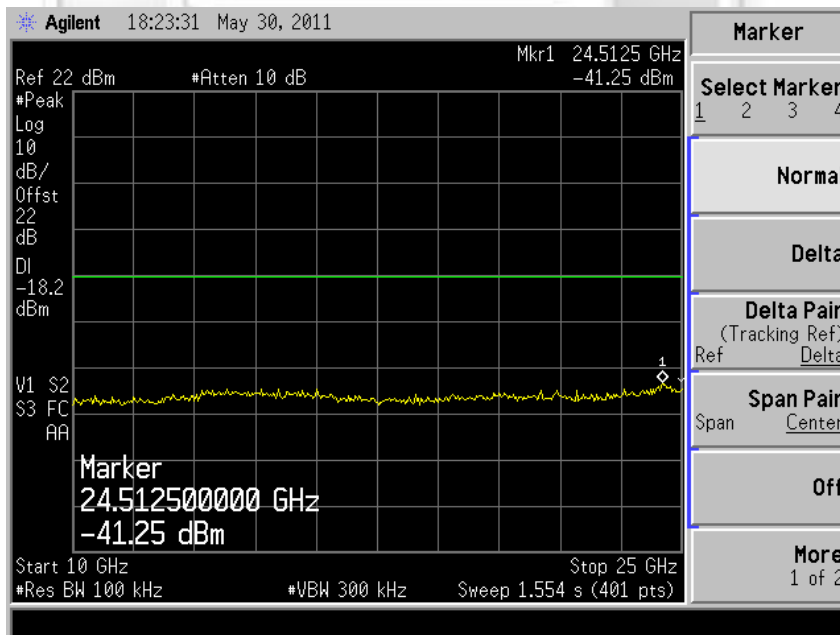


Plot 28 – Channel 1 @ DQPSK 2Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

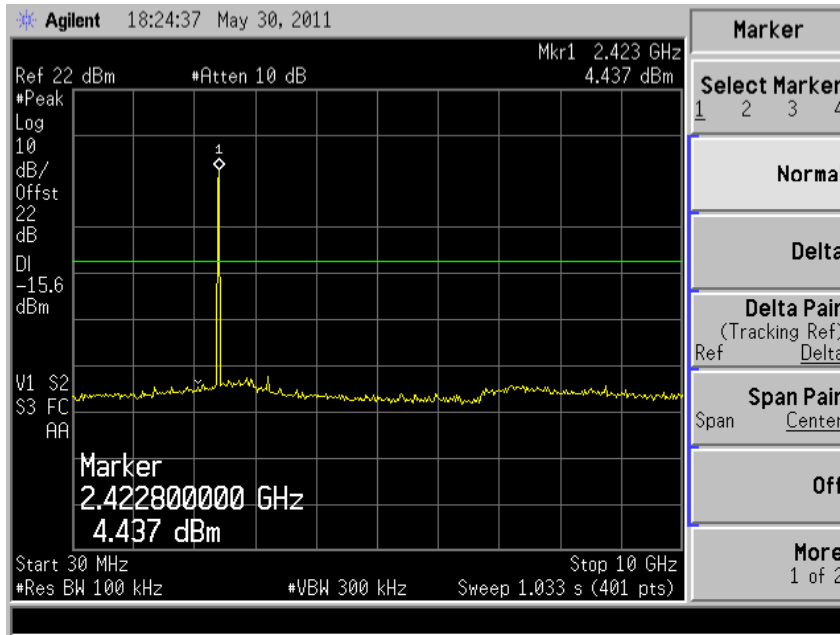

Plot 29 – Channel 1 @ CCK 5.5Mbps

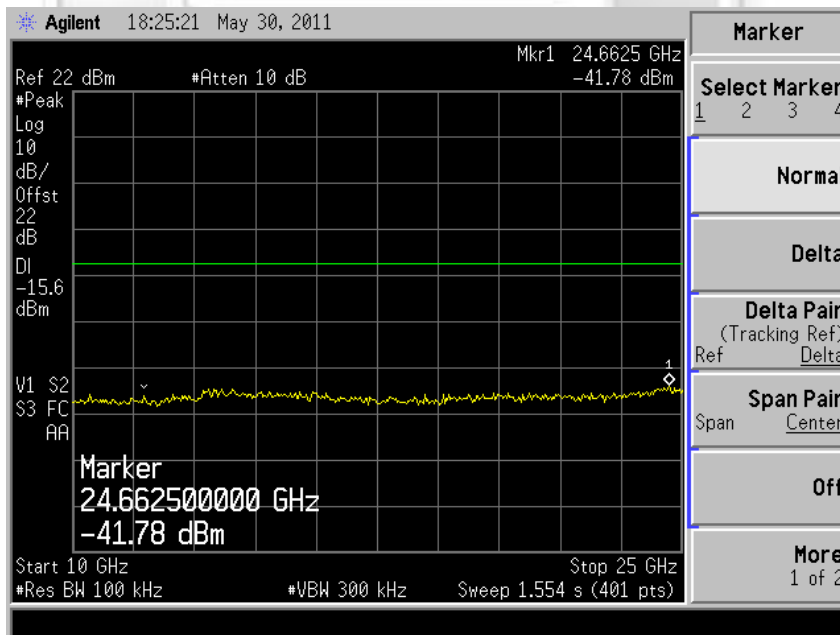


Plot 30 – Channel 1 @ CCK 5.5Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

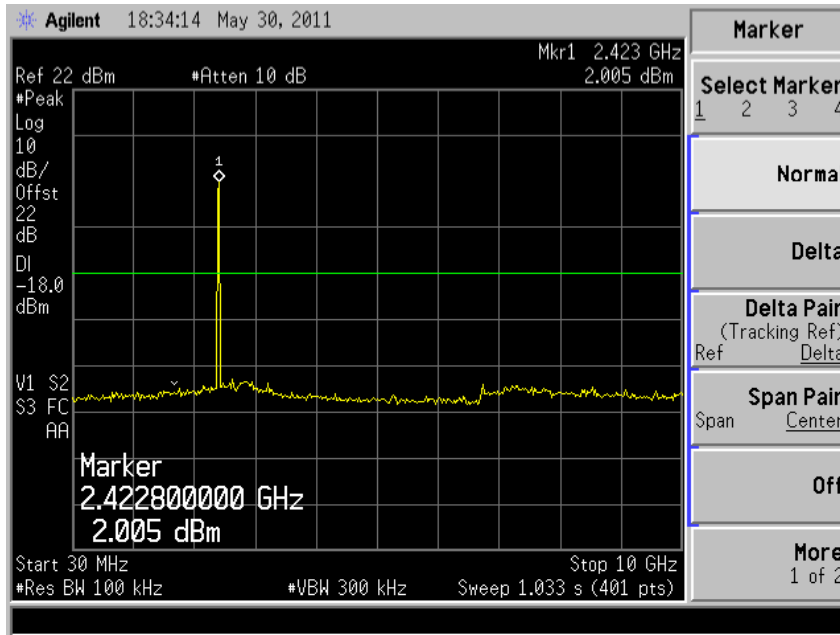

Plot 31 – Channel 1 @ CCK 11Mbps

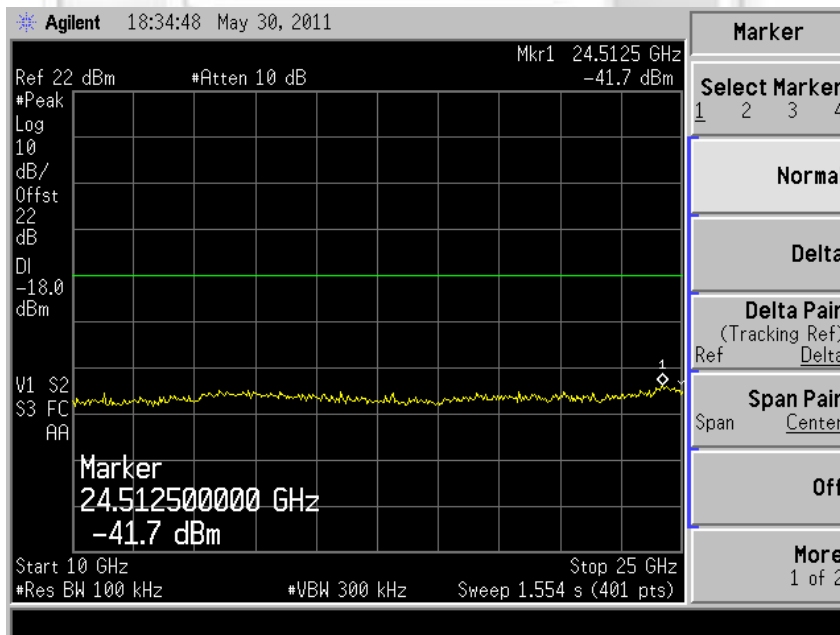


Plot 32 – Channel 1 @ CCK 11Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

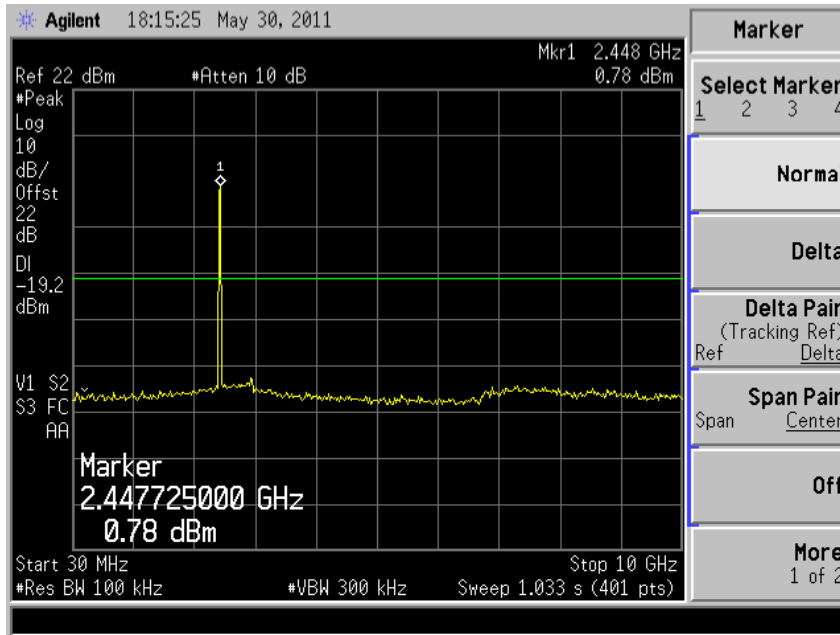

Plot 33 – Channel 6 @ DBPSK 1Mbps

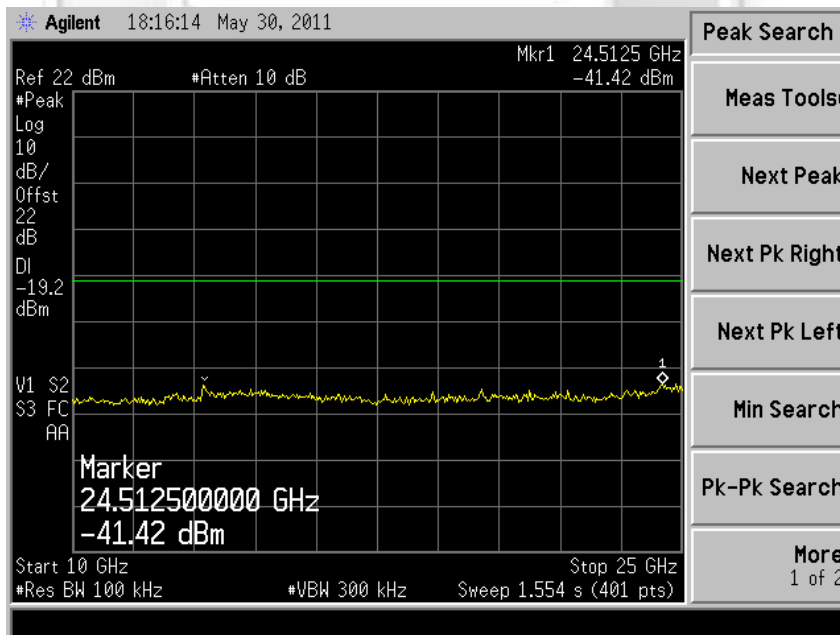


Plot 34 – Channel 6 @ DBPSK 1Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

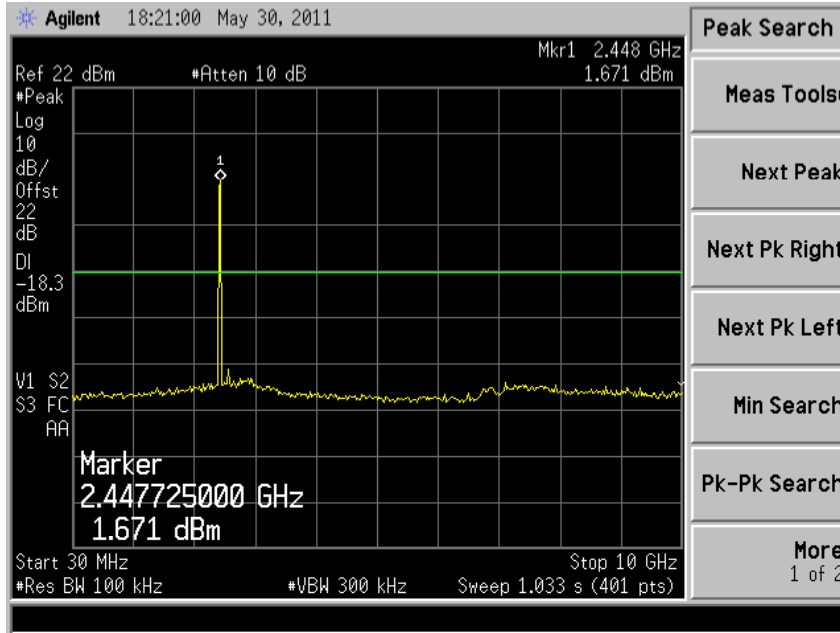

Plot 35 – Channel 6 @ DQPSK 2Mbps

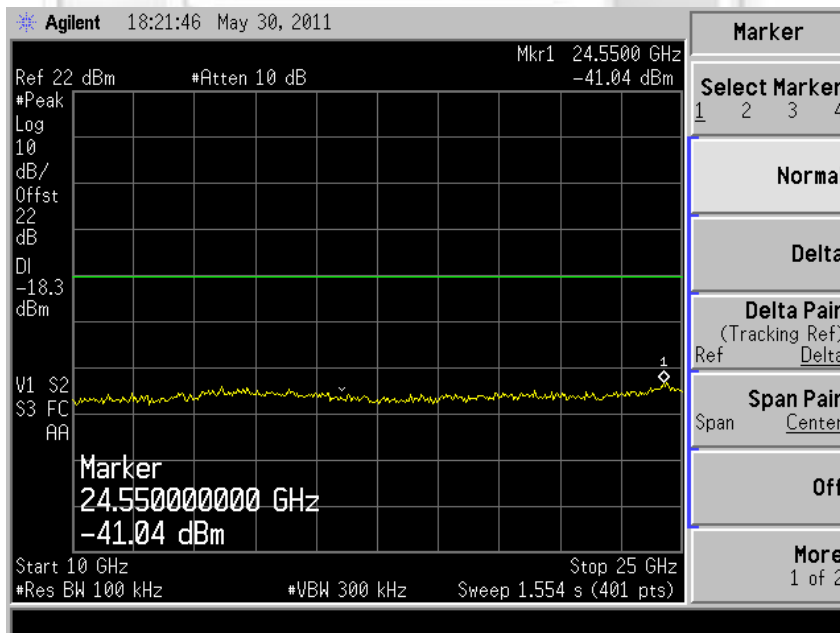


Plot 36 – Channel 6 @ DQPSK 2Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

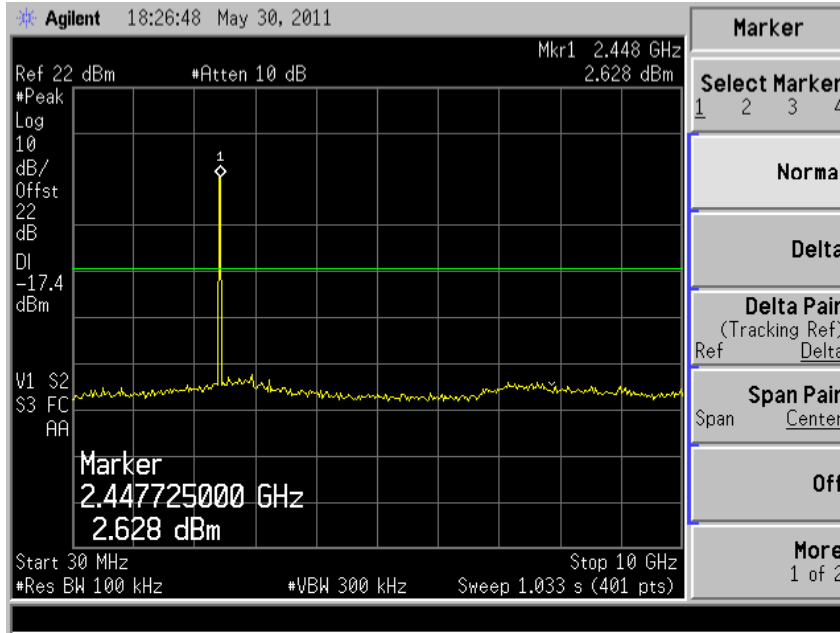

Plot 37 – Channel 6 @ CCK 5.5Mbps

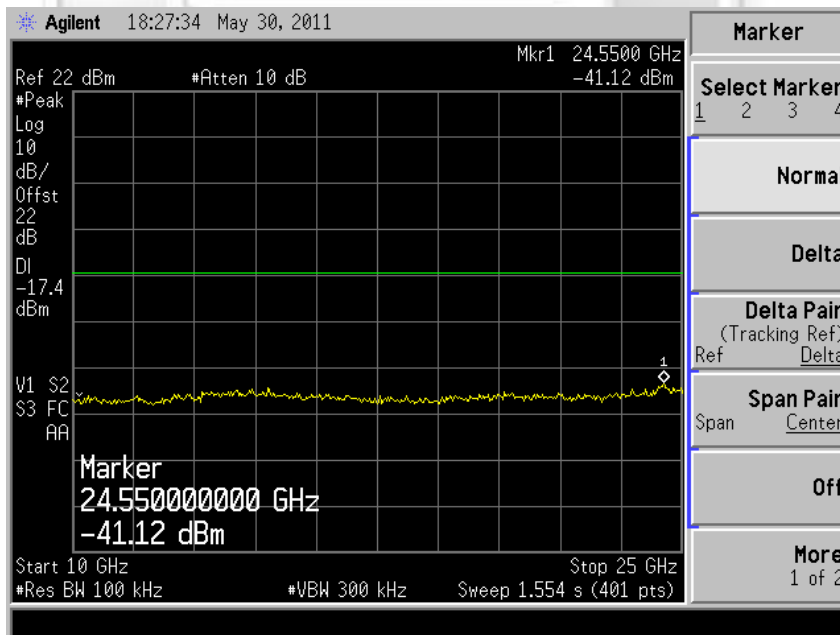


Plot 38 – Channel 6 @ CCK 5.5Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

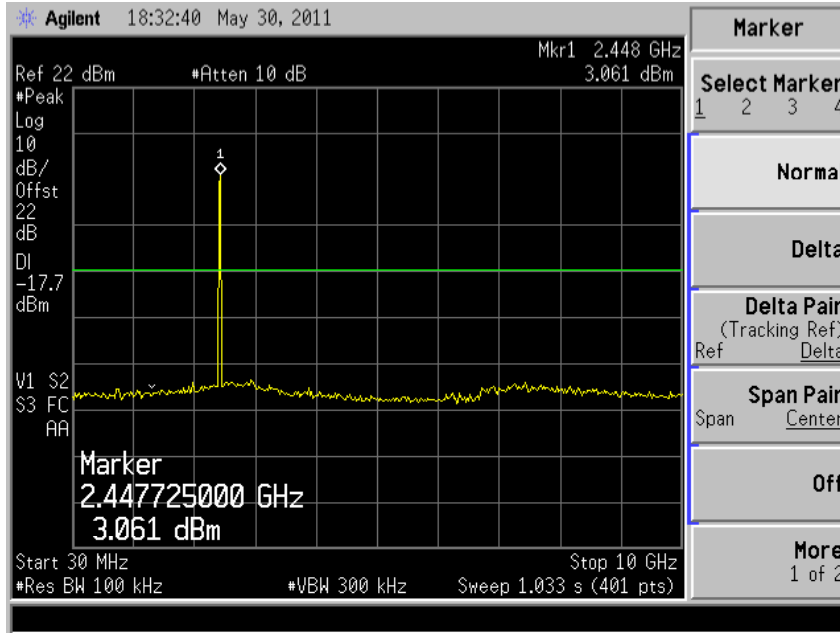

Plot 39 – Channel 6 @ CCK 11Mbps

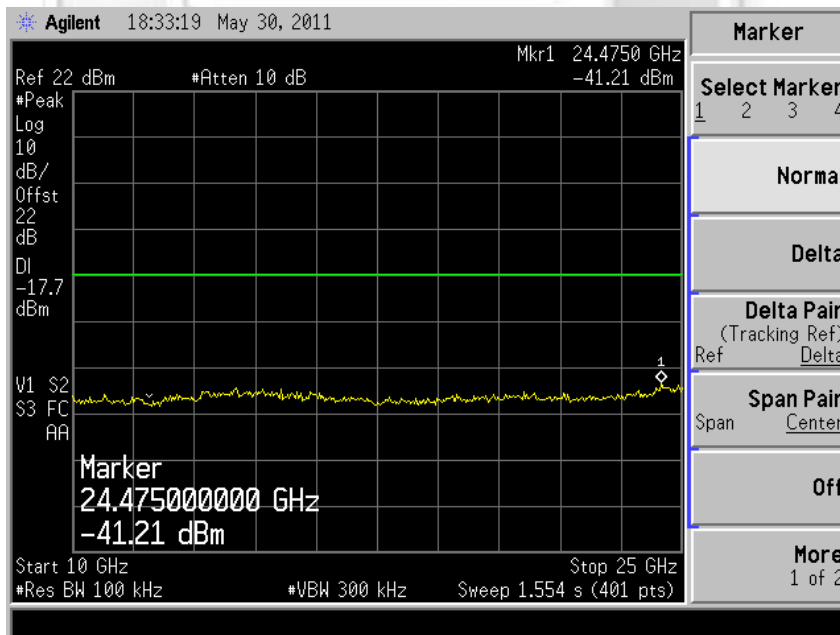


Plot 40 – Channel 6 @ CCK 11Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

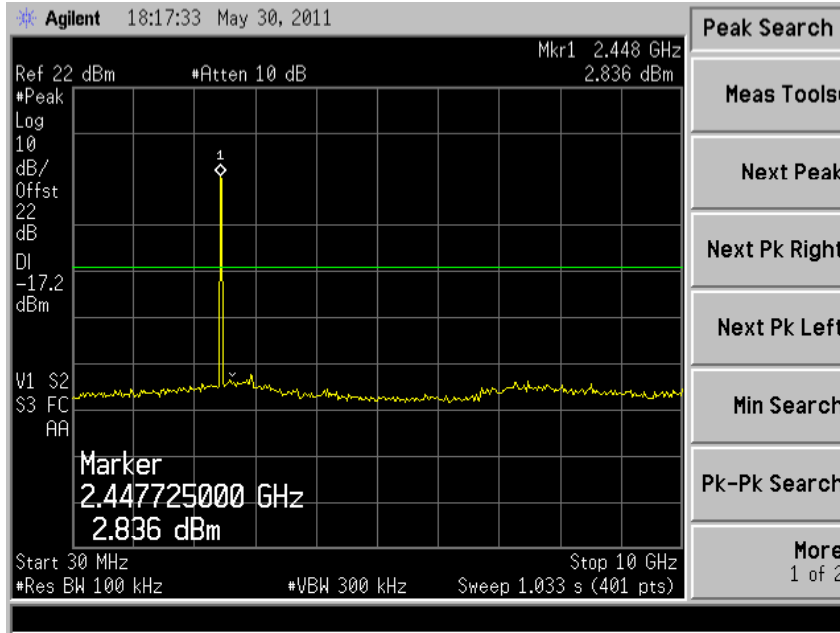

Plot 41 – Channel 11 @ DBPSK 1Mbps

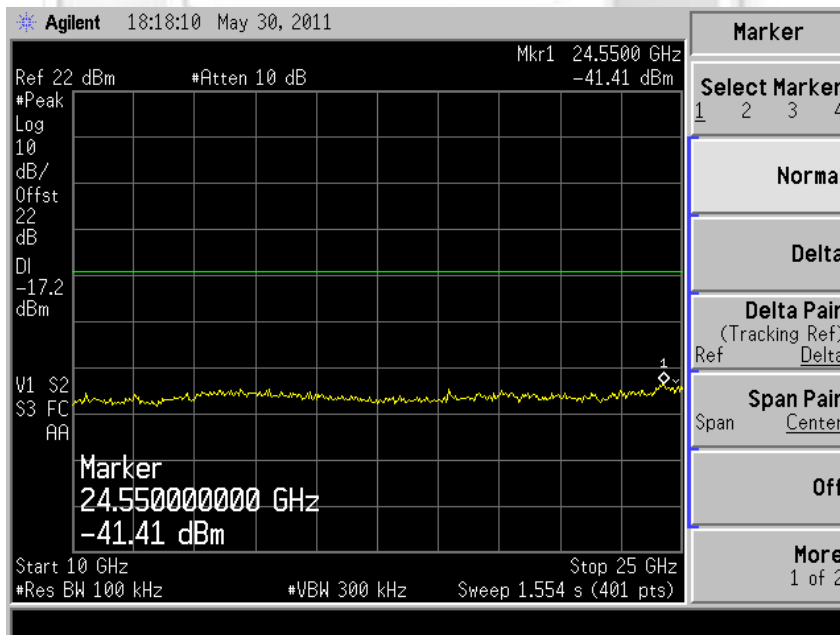


Plot 42 – Channel 11 @ DBPSK 1Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

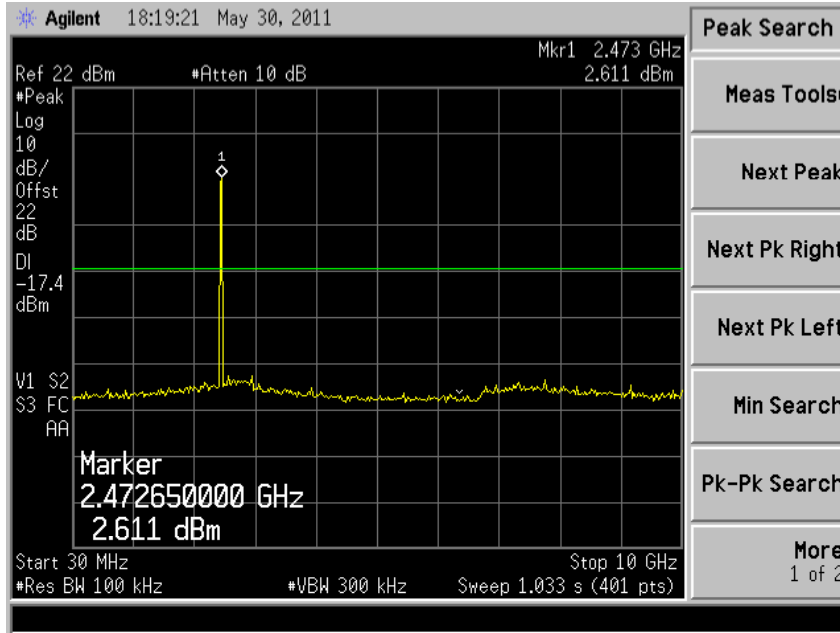

Plot 43 – Channel 11 @ DQPSK 2Mbps

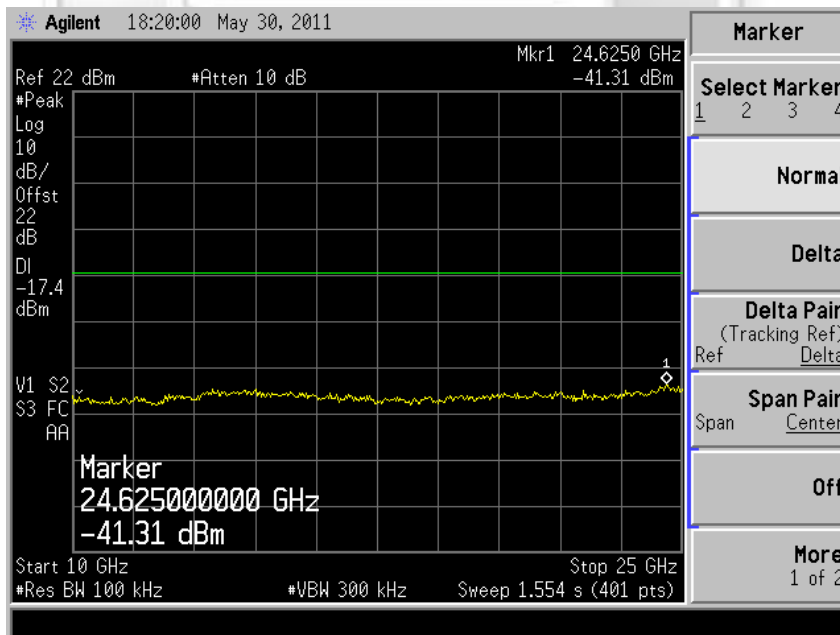


Plot 44 – Channel 11 @ DQPSK 2Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

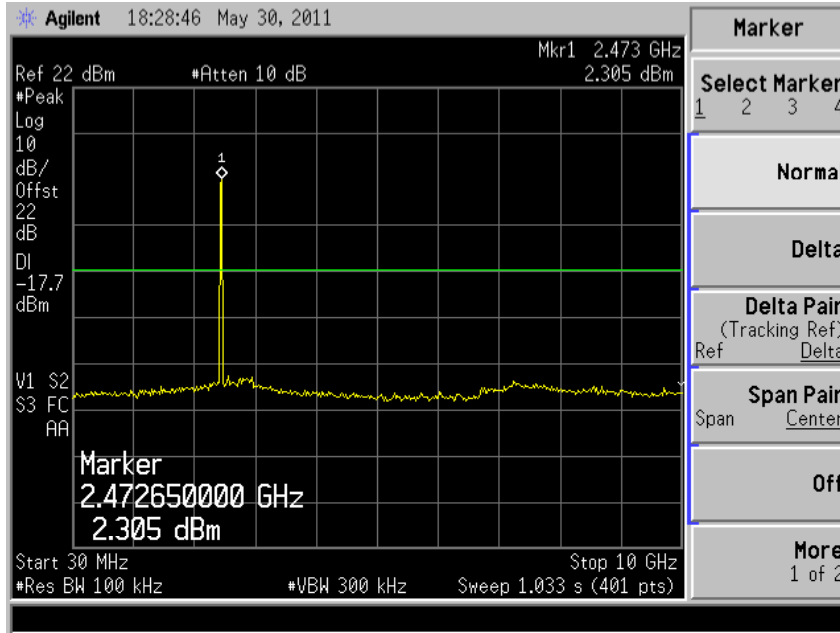

Plot 45 – Channel 11 @ CCK 5.5Mbps

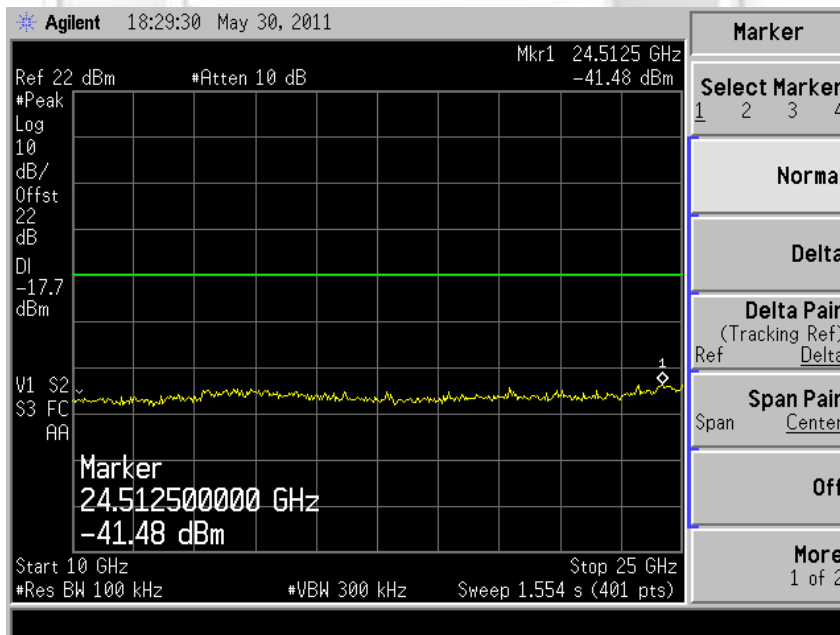


Plot 46 – Channel 11 @ CCK 5.5Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11b

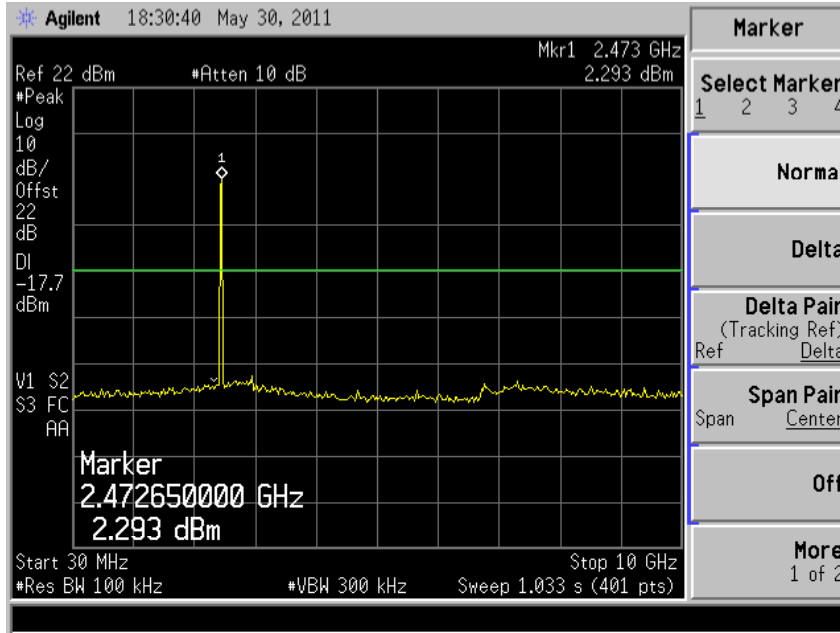

Plot 47 – Channel 11 @ CCK 11Mbps

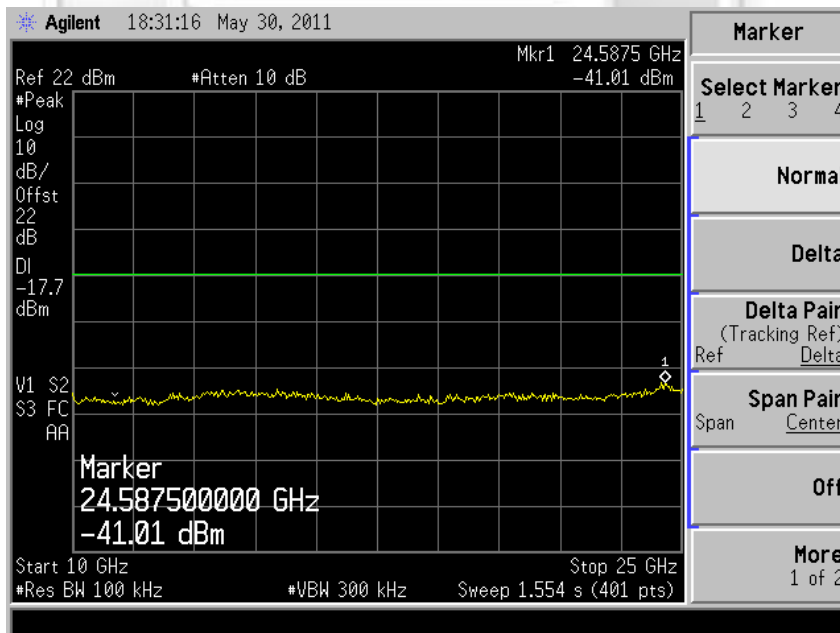


Plot 48 – Channel 11 @ CCK 11Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

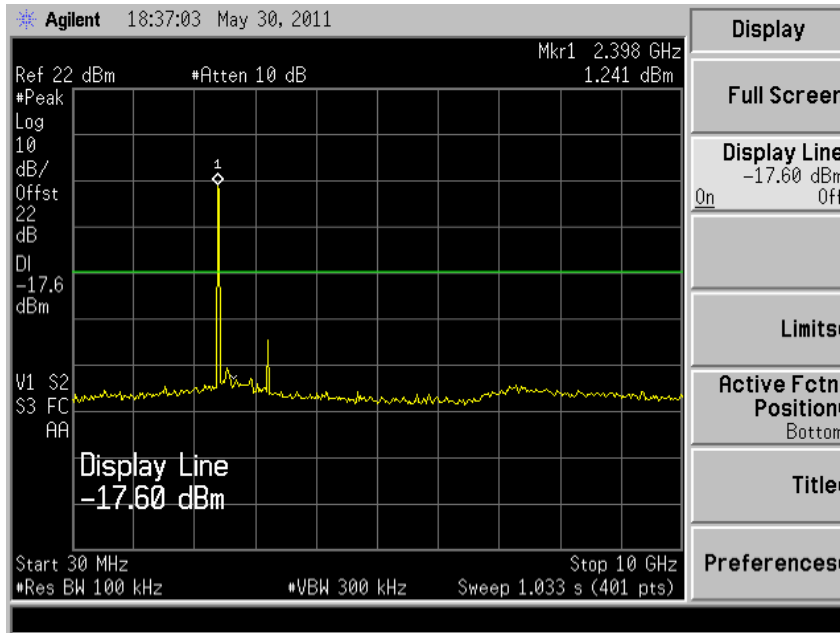

Plot 49 – Channel 1 @ BPSK 9Mbps

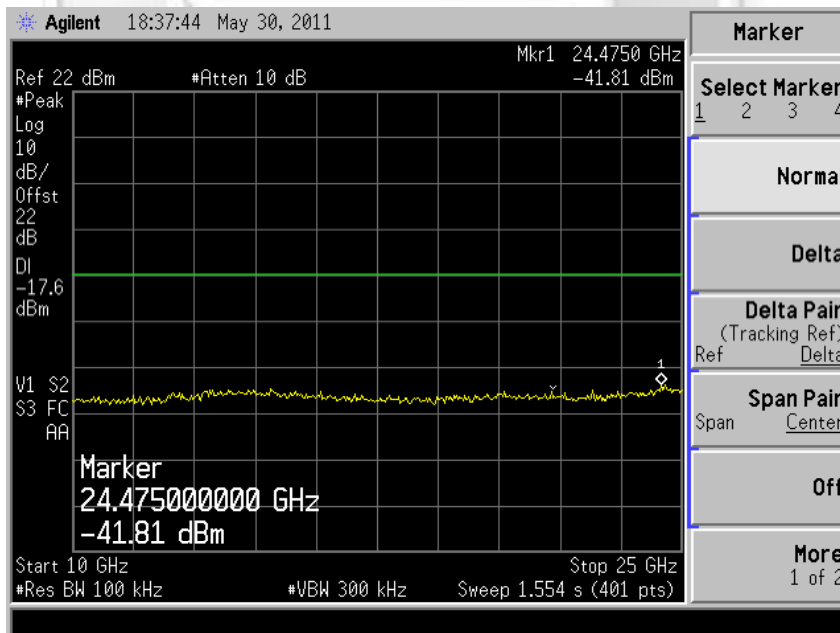


Plot 50 – Channel 1 @ BPSK 9Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

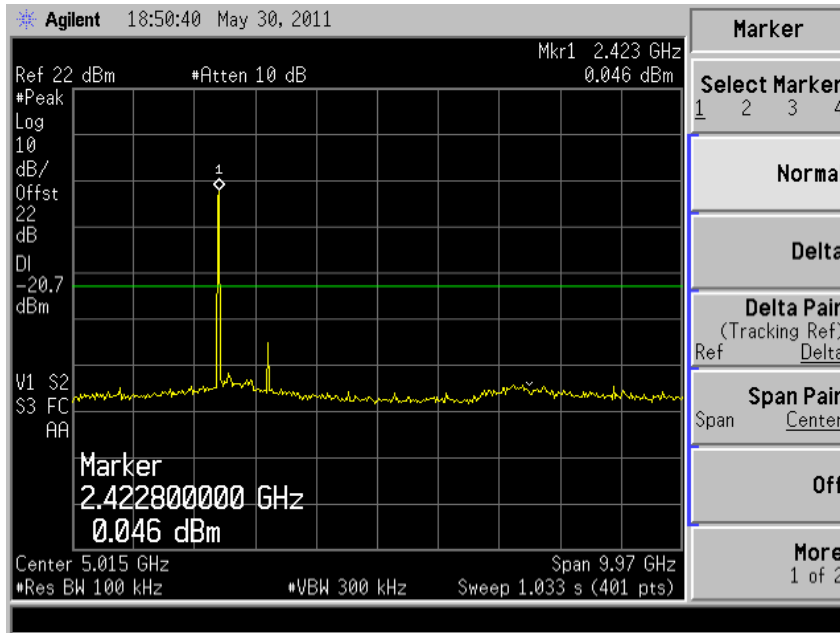

Plot 51 – Channel 1 @ QPSK 18Mbps

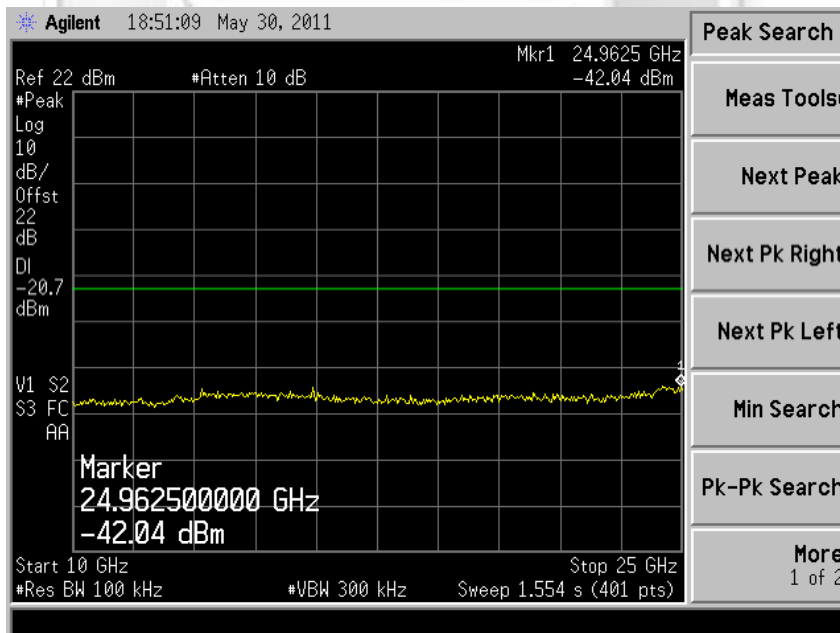


Plot 52 – Channel 1 @ QPSK 18Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

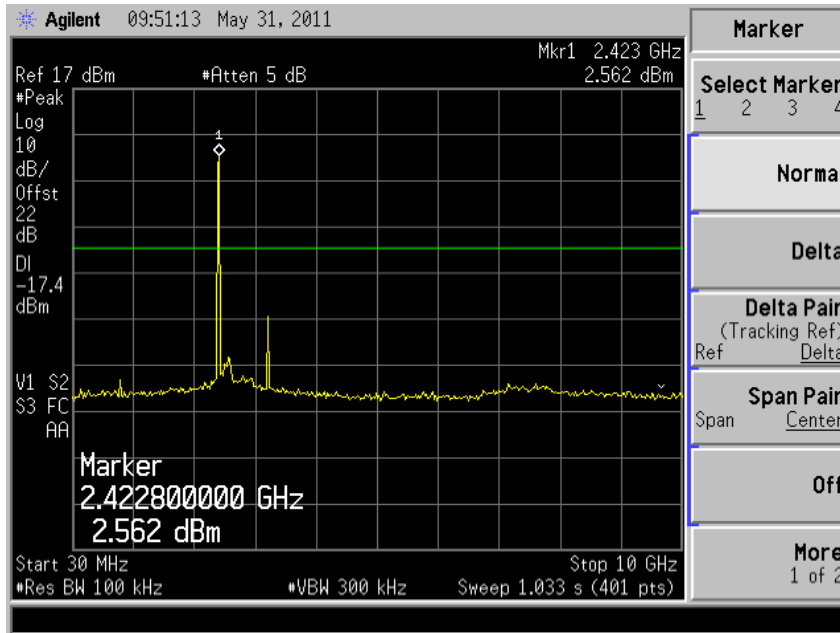

Plot 53 – Channel 1 @ 16QAM 36Mbps


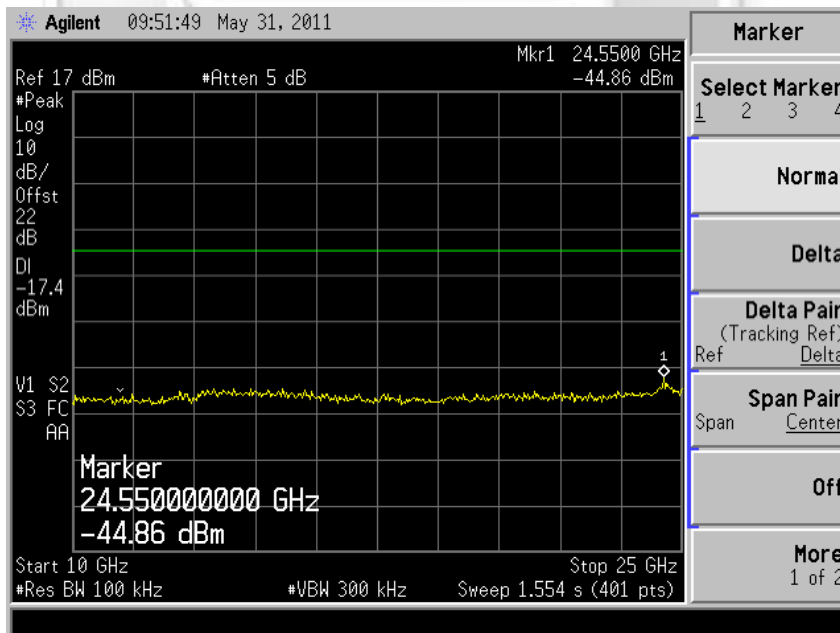


Plot 54 – Channel 1 @ 16QAM 36Mbps



RF CONDUCTED SPURIOUS EMISSIONS TEST


RF Conducted Spurious Emissions Plots – 802.11g

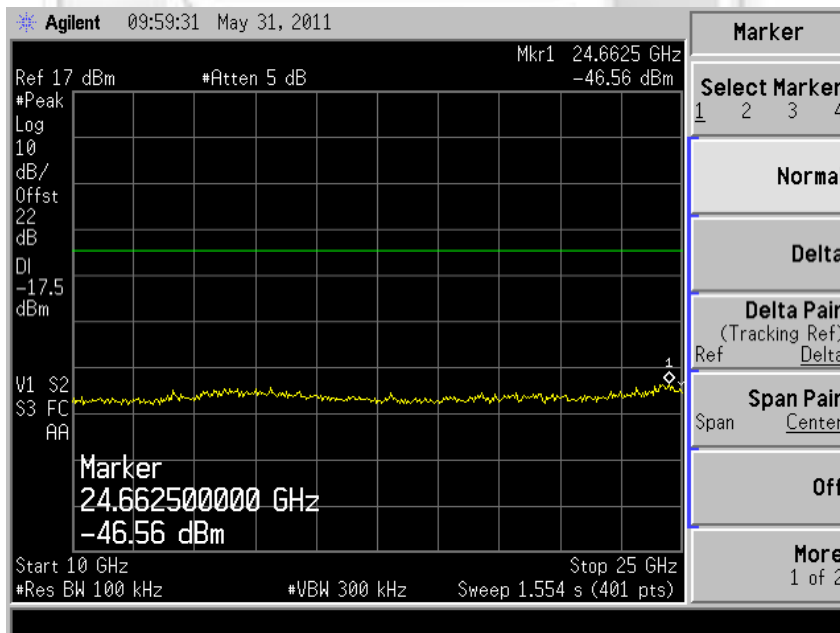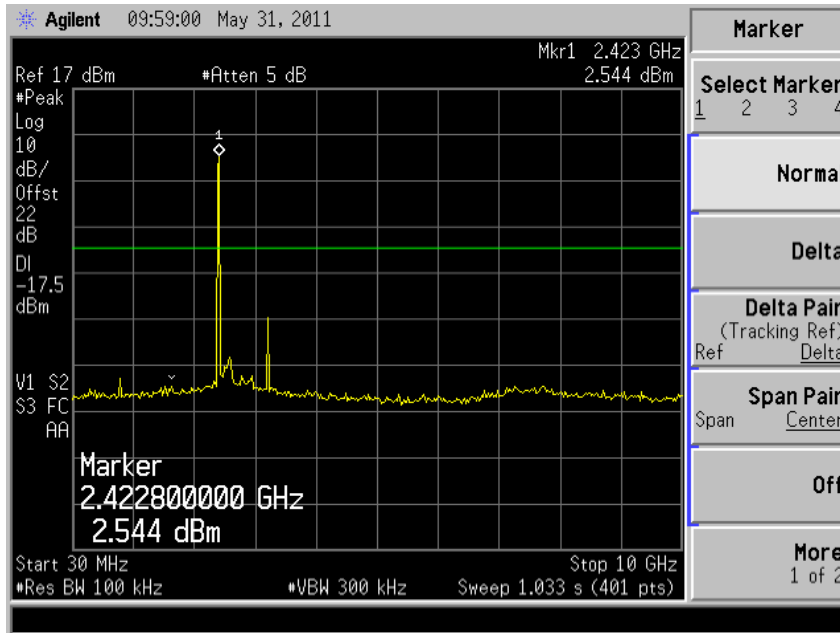




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

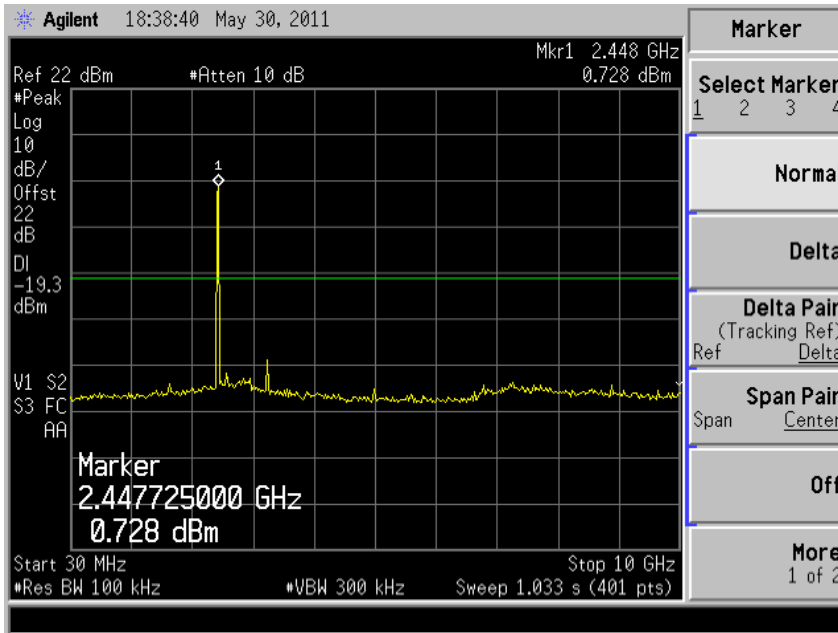

Plot 57 – Channel 6 @ BPSK 9Mbps

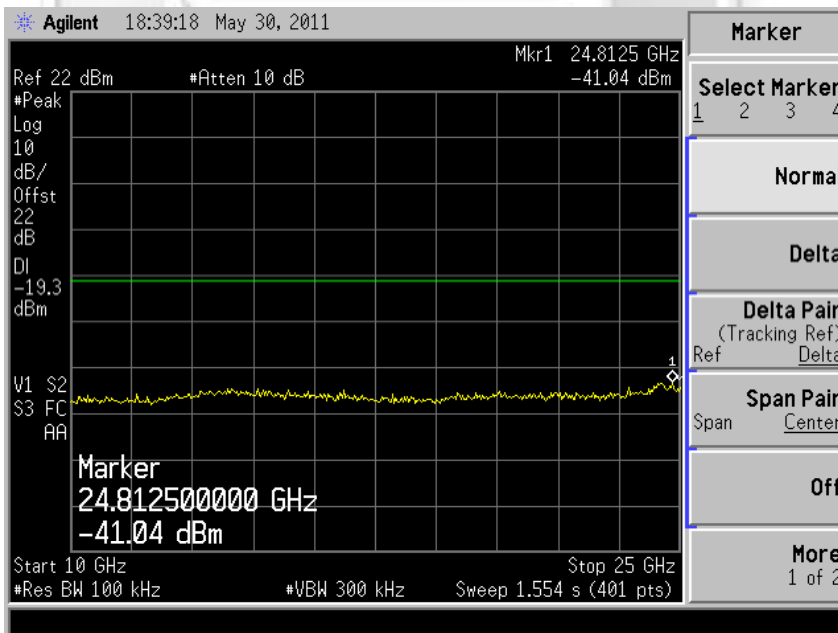


Plot 58 – Channel 6 @ BPSK 9Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

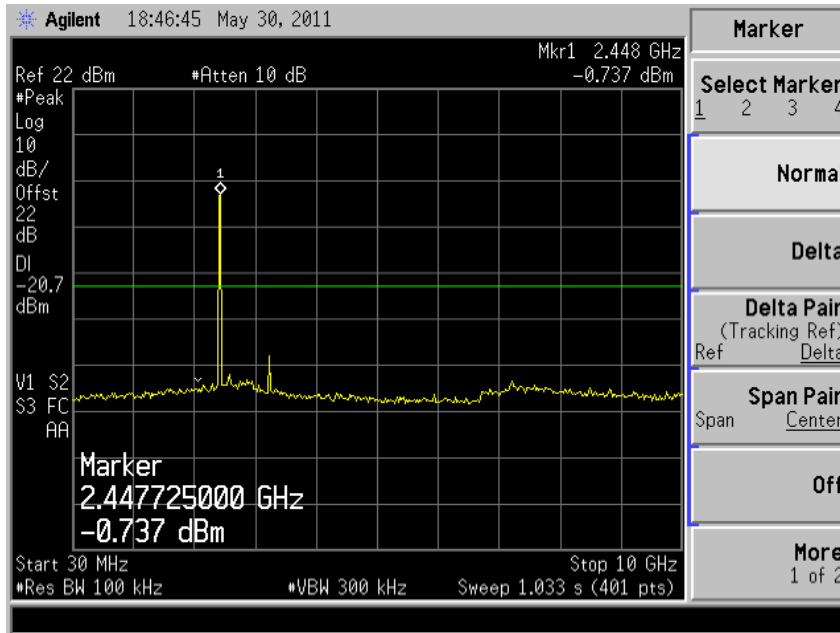

Plot 59 – Channel 6 @ QPSK 18Mbps

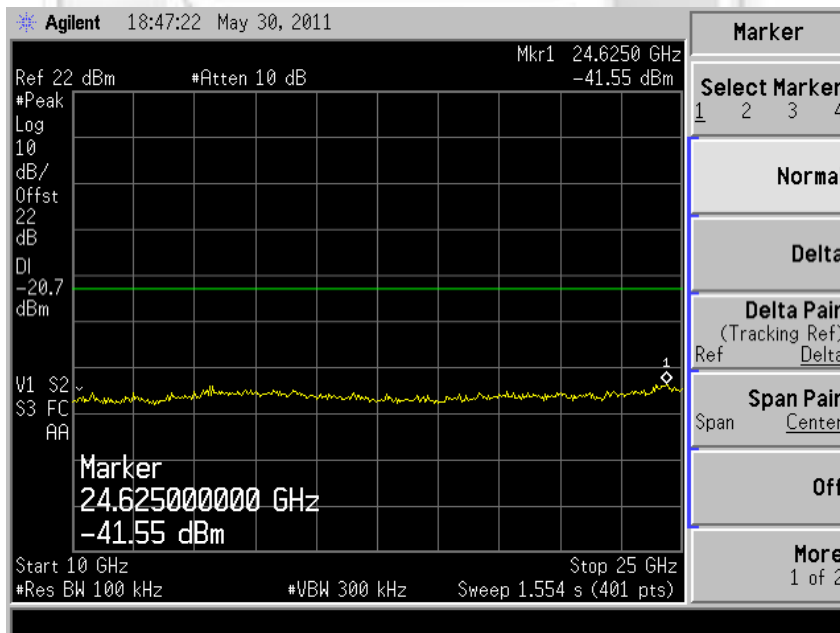


Plot 60 – Channel 6 @ QPSK 18Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

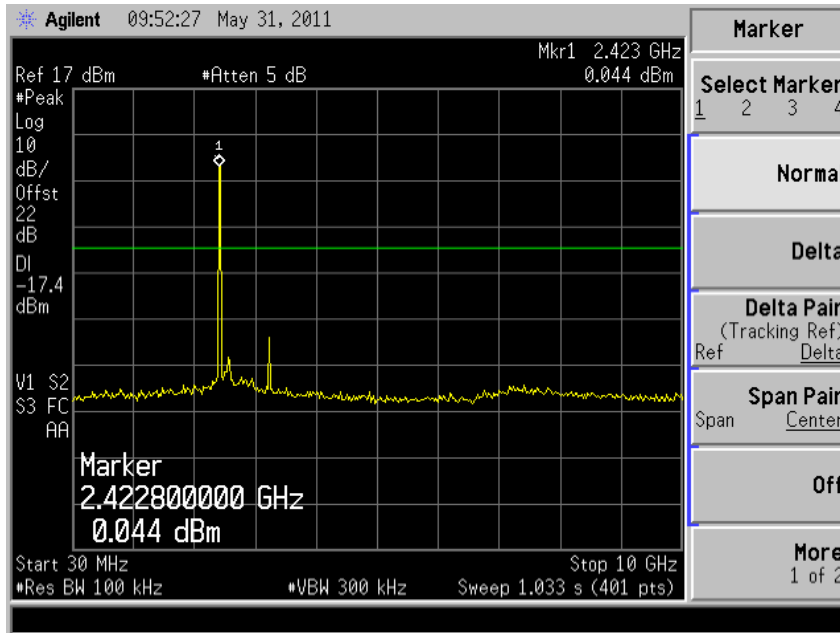

Plot 61 – Channel 6 @ 16QAM 36Mbps

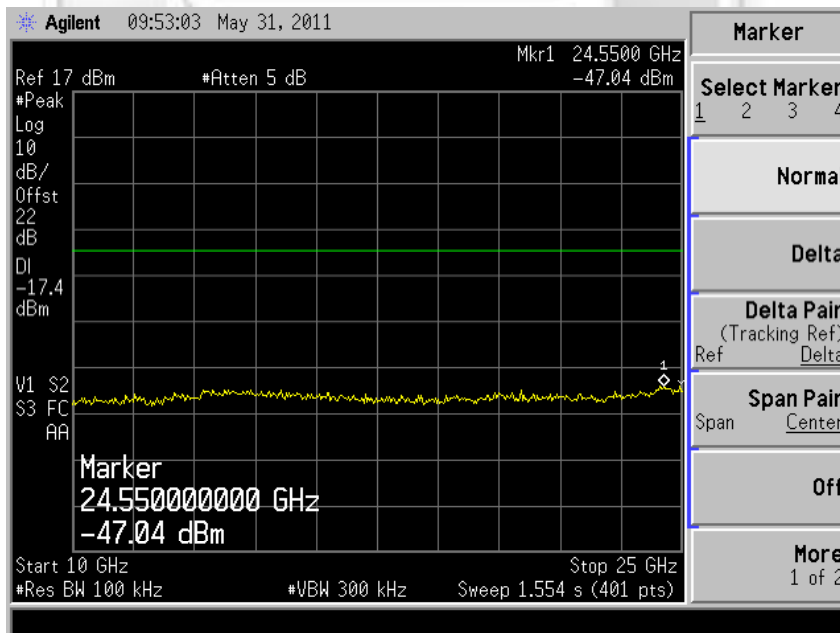


Plot 62 – Channel 6 @ 16QAM 36Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

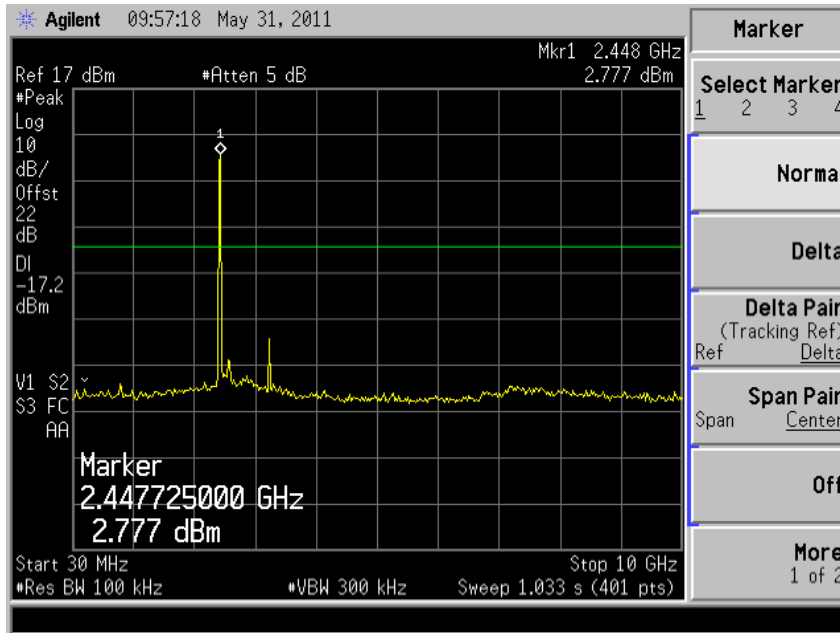

Plot 63 – Channel 6 @ 64QAM 54Mbps

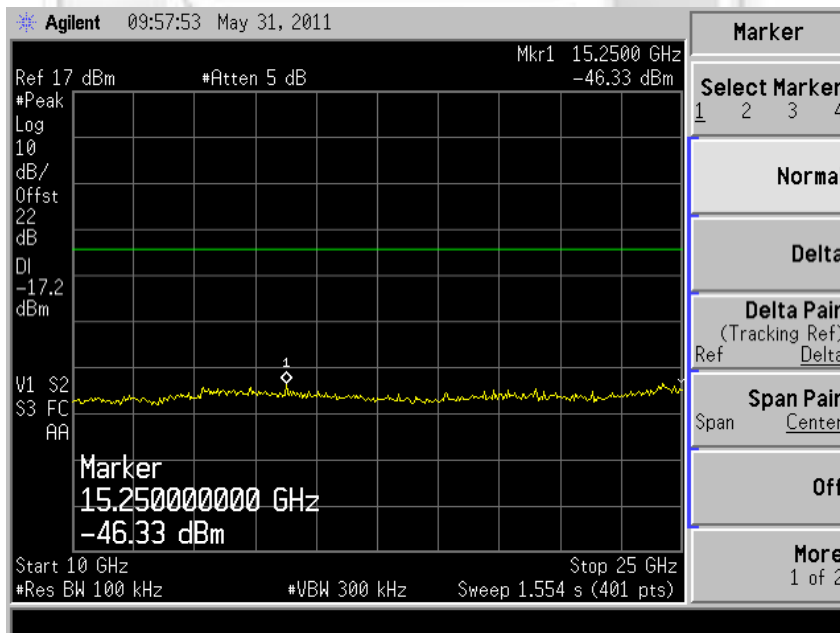


Plot 64 – Channel 6 @ 64QAM 54Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

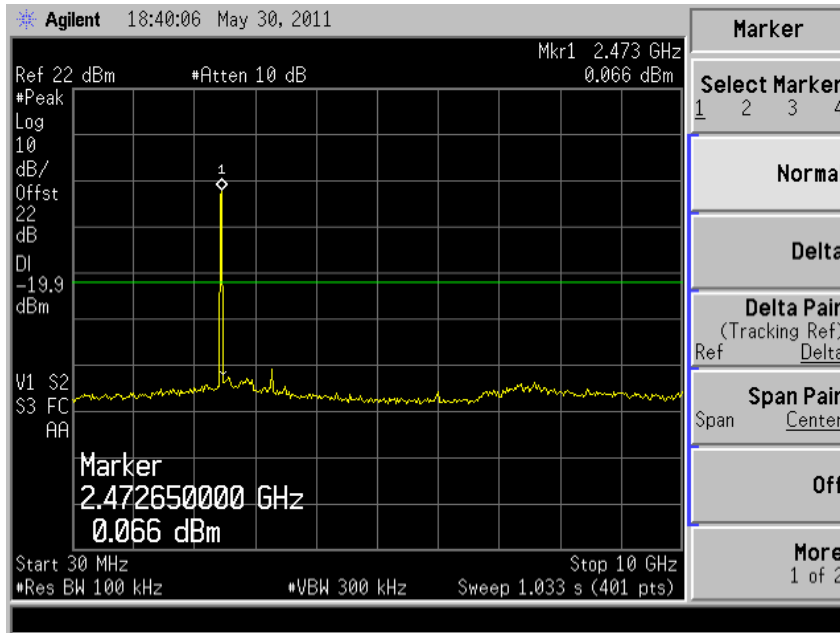

Plot 65 – Channel 11 @ BPSK 9Mbps

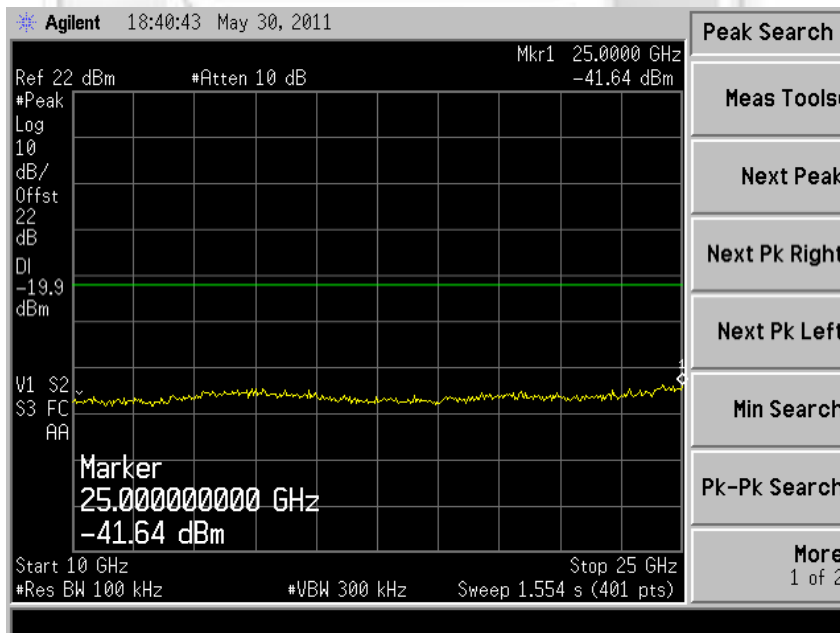


Plot 66 – Channel 11 @ BPSK 9Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

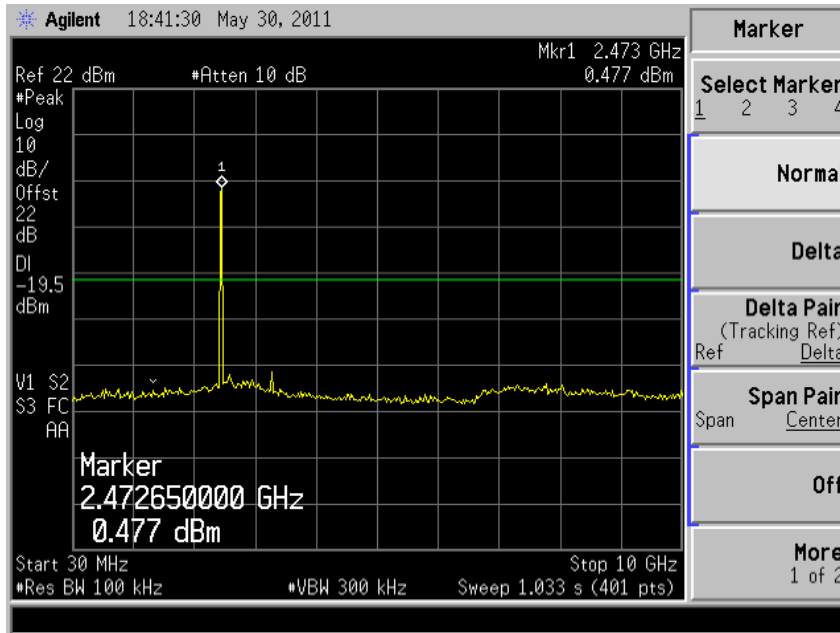

Plot 67 – Channel 11 @ QPSK 18Mbps

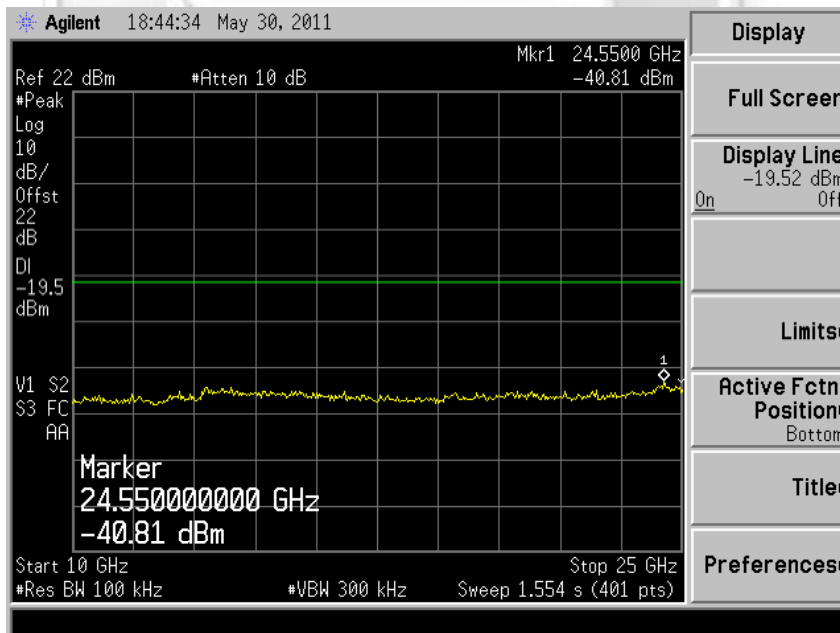


Plot 68 – Channel 11 @ QPSK 18Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

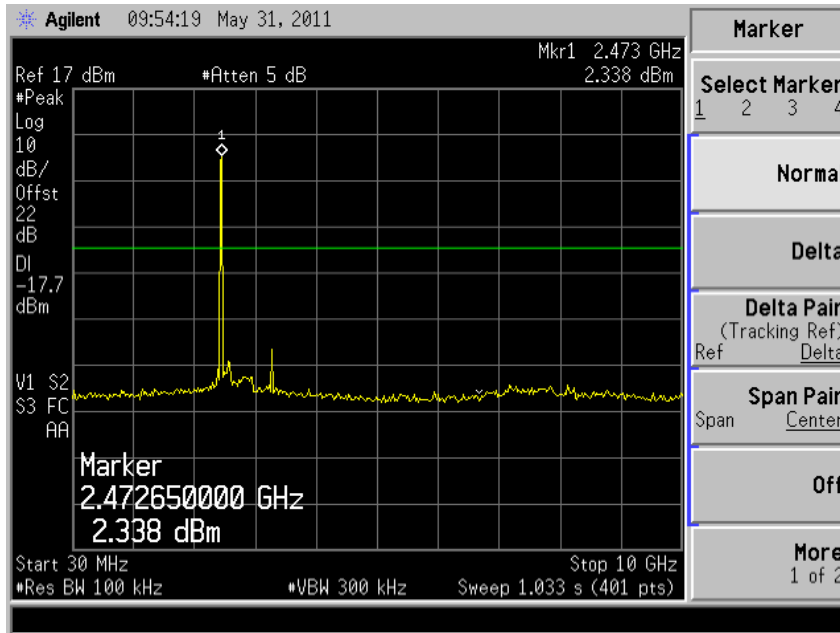

Plot 69 – Channel 11 @ 16QAM 36Mbps

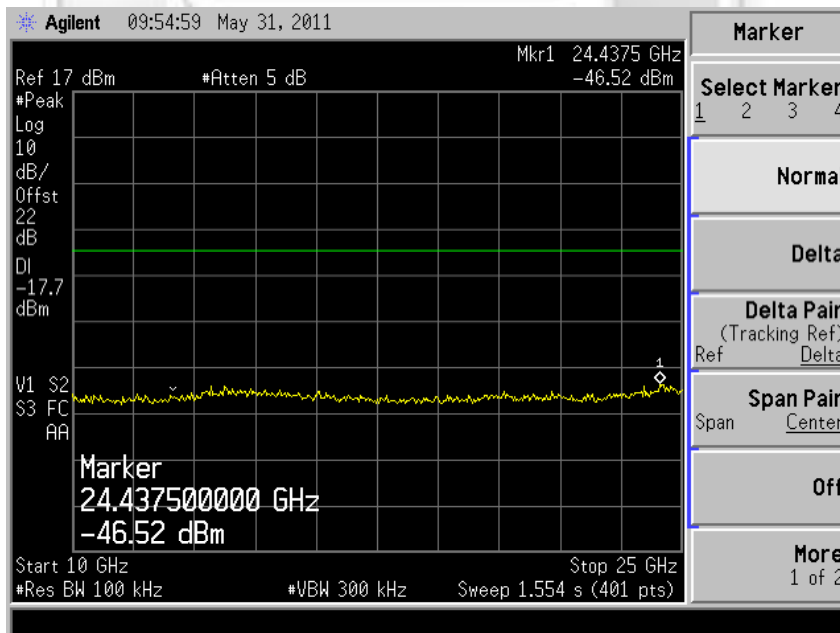


Plot 70 – Channel 11 @ 16QAM 36Mbps




RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots – 802.11g

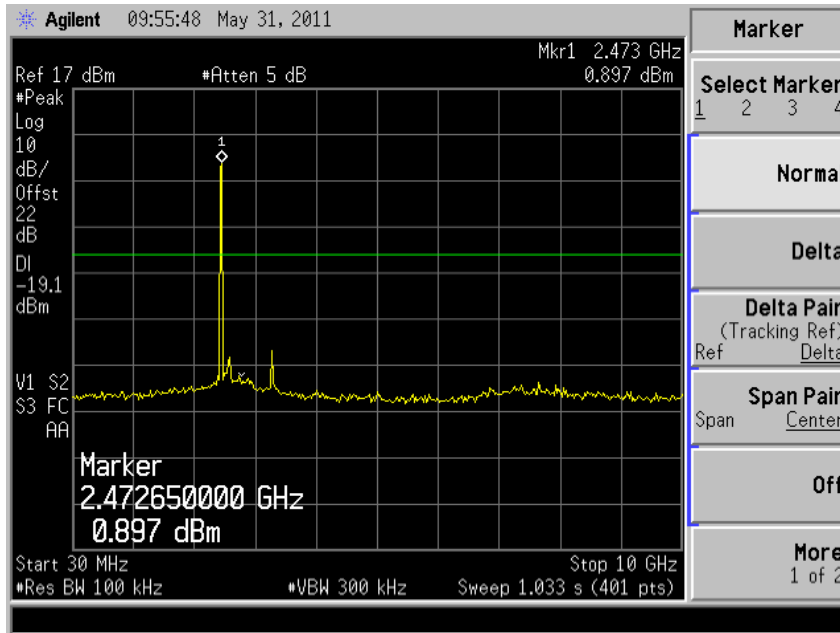

Plot 71 – Channel 11 @ 64QAM 54Mbps

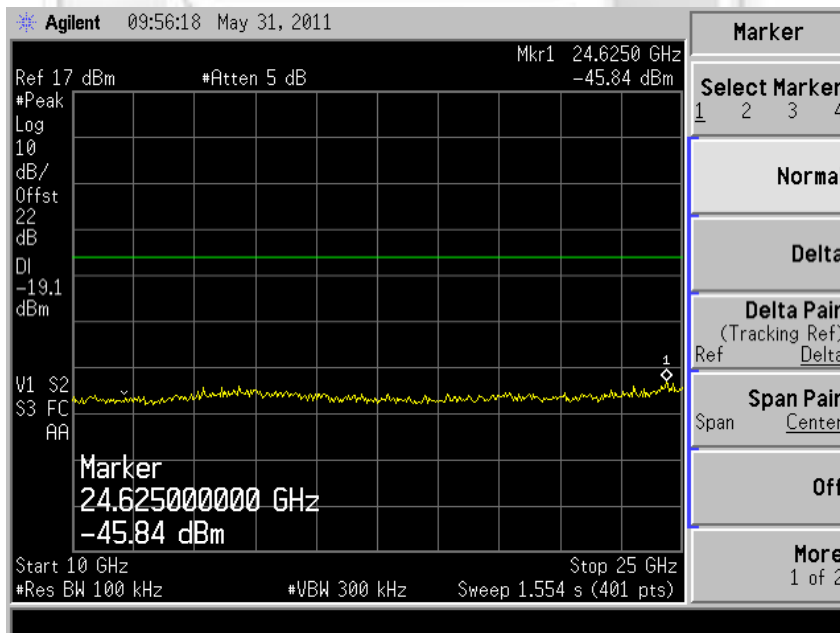

Plot 72 – Channel 11 @ 64QAM 54Mbps

BAND EDGE COMPLIANCE (CONDUCTED) TEST

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E7405A	MY45106084	11 Jan 2012
Bird 20dB Attenuator	25-A-MFN-20	0209	25 May 2012

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with specified modulation and data rate.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. Repeat steps 1 to 3 with all possible modulations and data rates.
5. The steps 2 to 4 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.

BAND EDGE COMPLIANCE (CONDUCTED) TEST



Band Edge Compliance (Conducted) Test Setup

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Results


Test Input Power	24VDC	Temperature	24°C
Attached Plots	73 - 80 (802.11b) 81 - 88 (802.11g)	Relative Humidity	54%
		Atmospheric Pressure	1027mbar
		Tested By	Foo Kai Maun

No significant signal was found and they were below the specified limit.




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – 802.11b

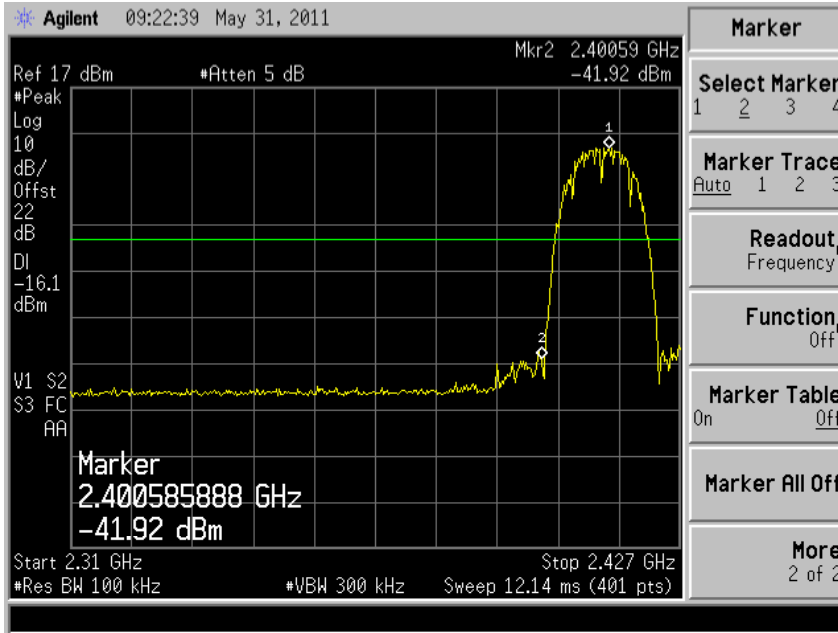

Plot 73 – Lower Band Edge at 2.4000GHz @ DBPSK 1Mbps

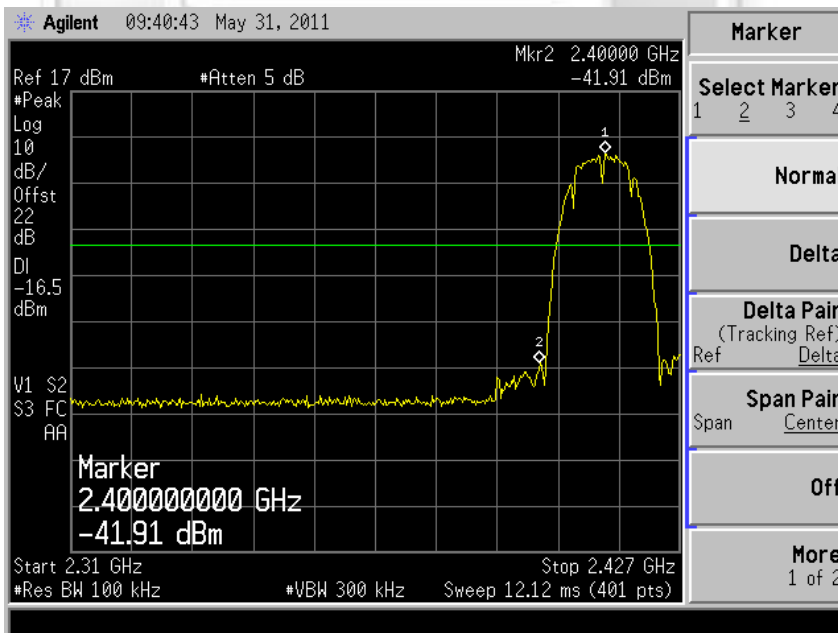


Plot 74 – Lower Band Edge at 2.4000GHz @ DQPSK 2Mbps




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – 802.11b

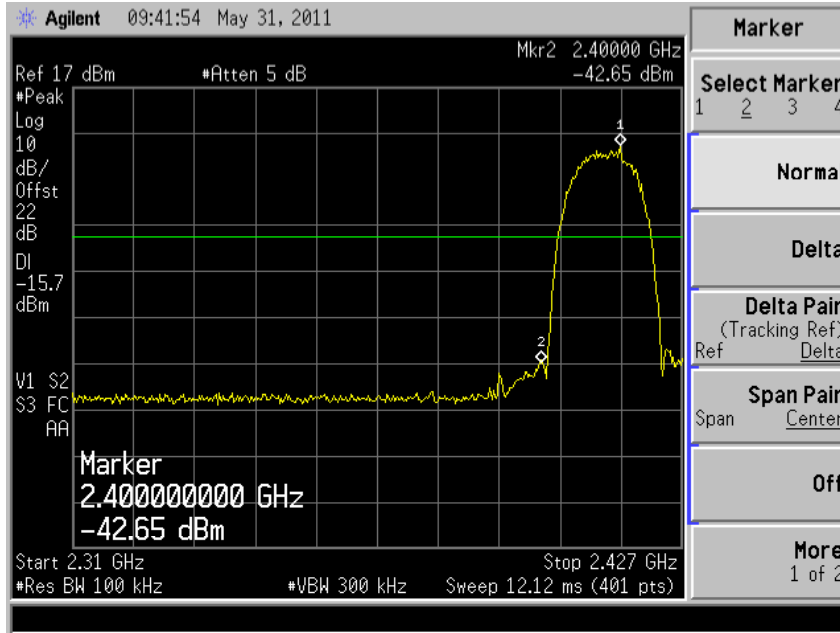


Plot 75 – Lower Band Edge at 2.4000GHz @ CCK 5.5Mbps

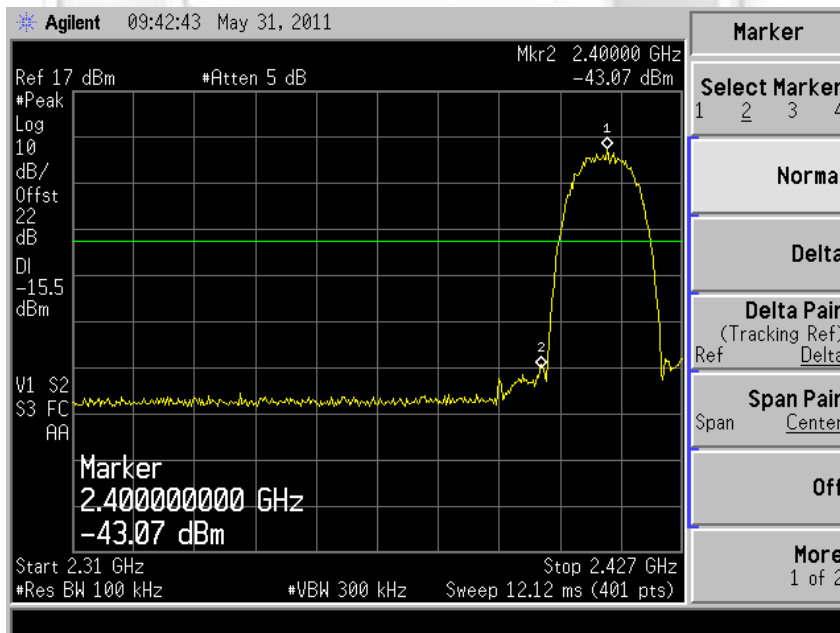


Plot 76 – Lower Band Edge at 2.4000GHz @ CCK 11Mbps

BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – 802.11b

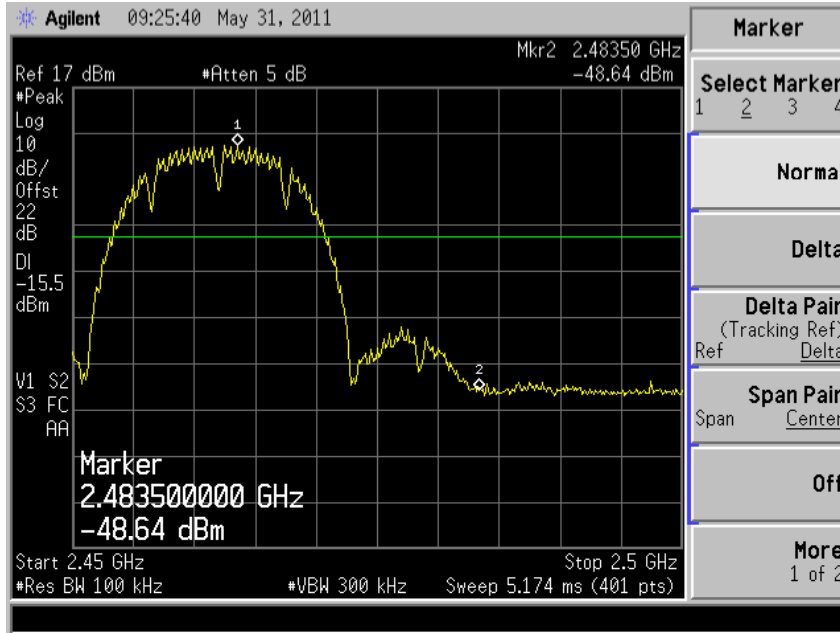

Plot 77 – Upper Band Edge at 2.4835GHz @ DBPSK 1Mbps

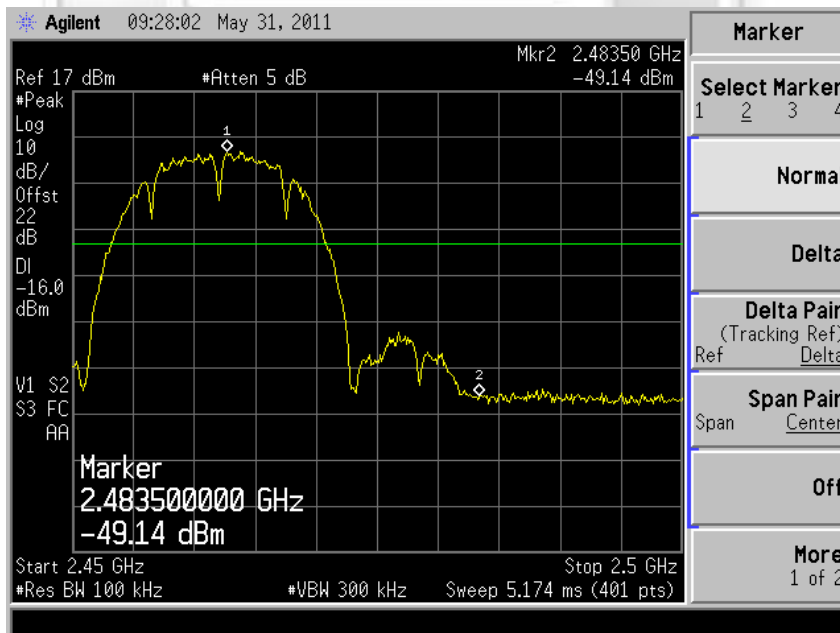


Plot 78 – Upper Band Edge at 2.4835GHz @ DQPSK 2Mbps




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – 802.11b

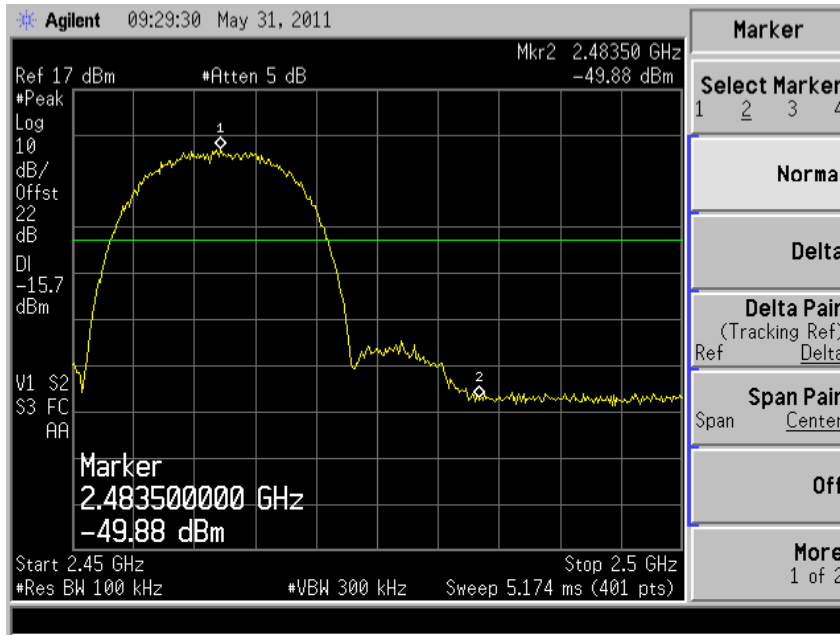

Plot 79 – Upper Band Edge at 2.4835GHz @ CCK 5.5Mbps

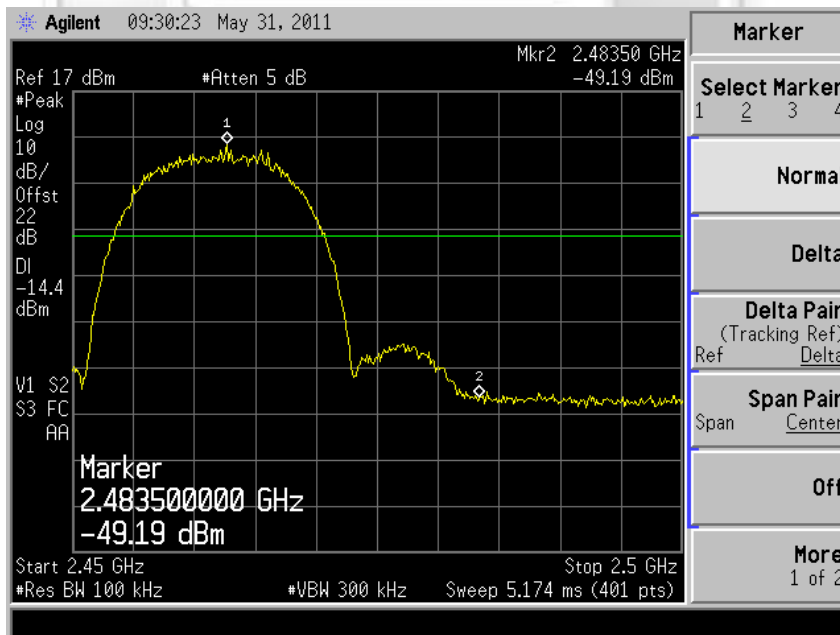


Plot 80 – Upper Band Edge at 2.4835GHz @ CCK 11Mbps




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – 802.11g

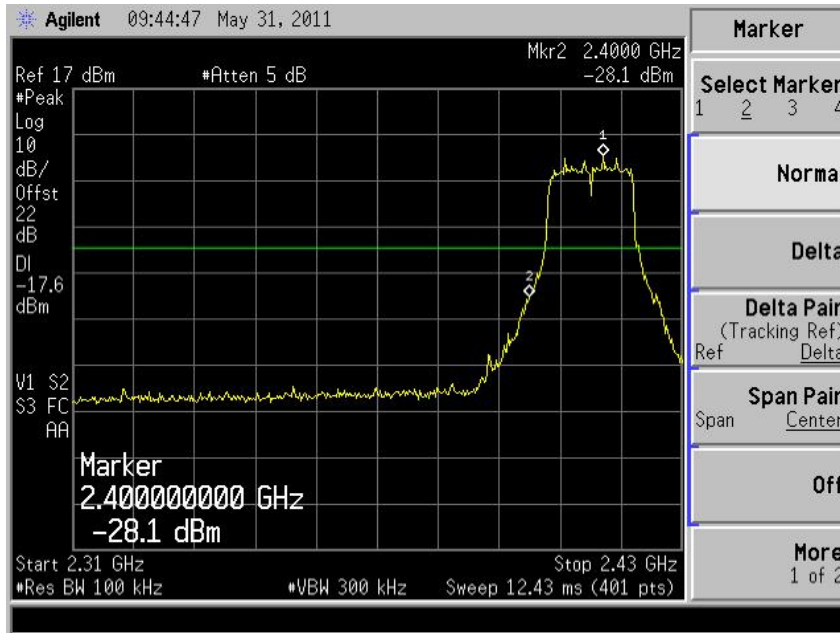

Plot 81 – Lower Band Edge at 2.4000GHz @ BPSK 9Mbps

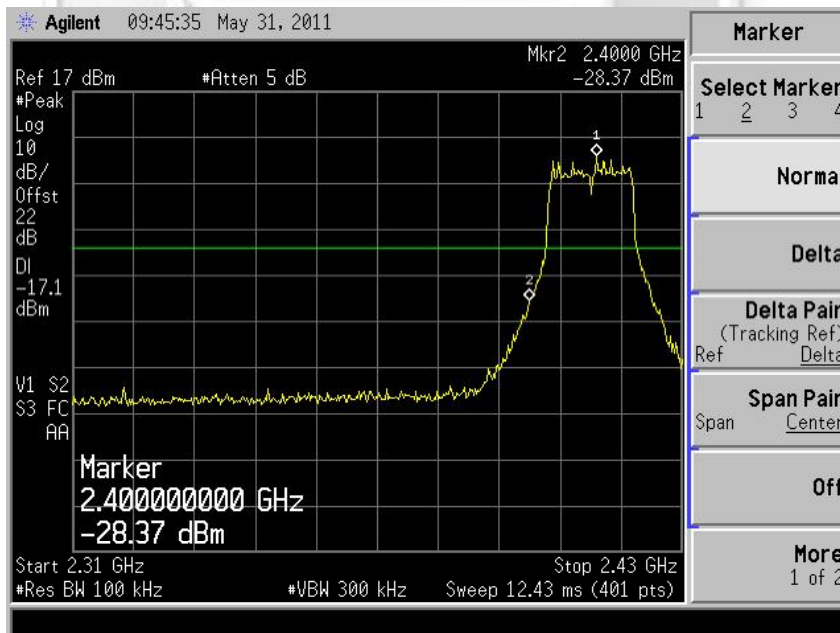


Plot 82 – Lower Band Edge at 2.4000GHz @ QPSK 18Mbps




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – 802.11g

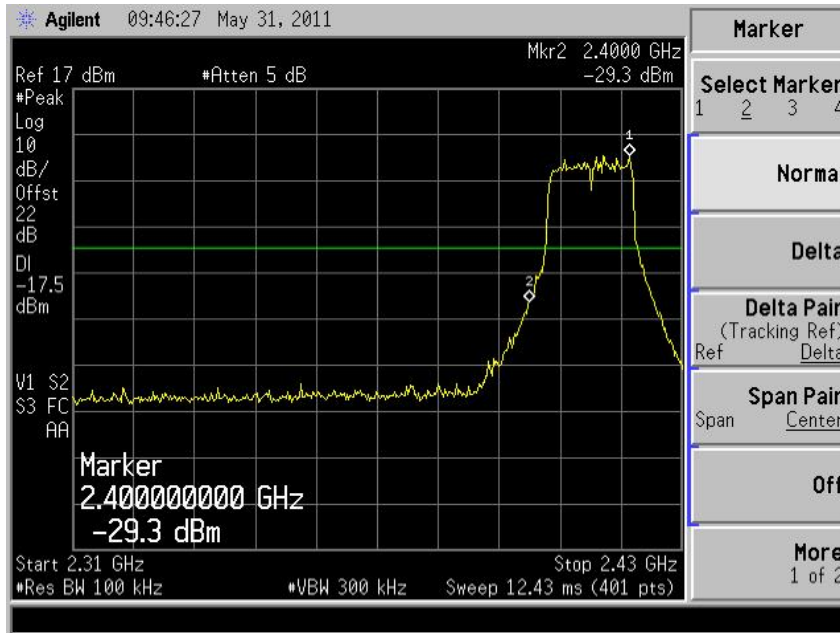

Plot 83 – Lower Band Edge at 2.4000GHz @ 16QAM 36Mbps

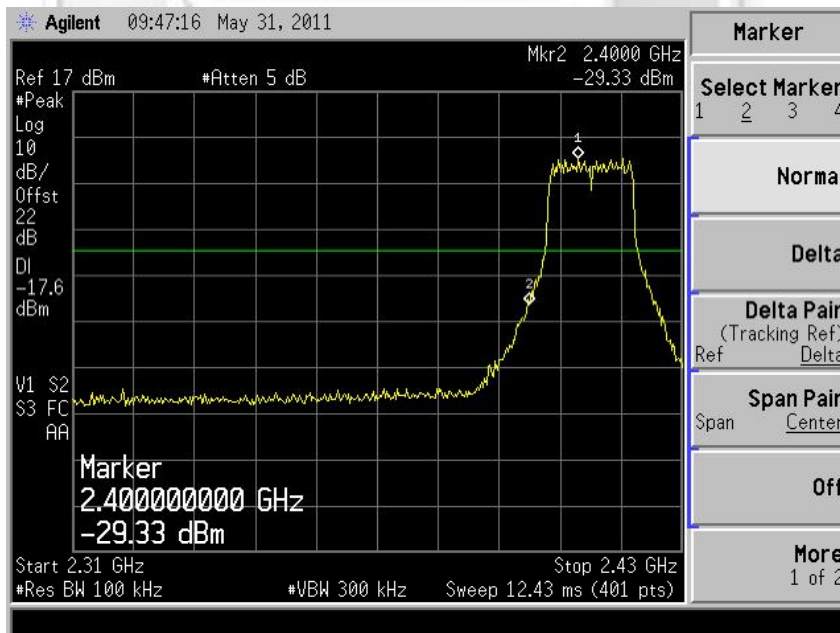


Plot 84 – Lower Band Edge at 2.4000GHz @ 64QAM 54Mbps




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – 802.11g

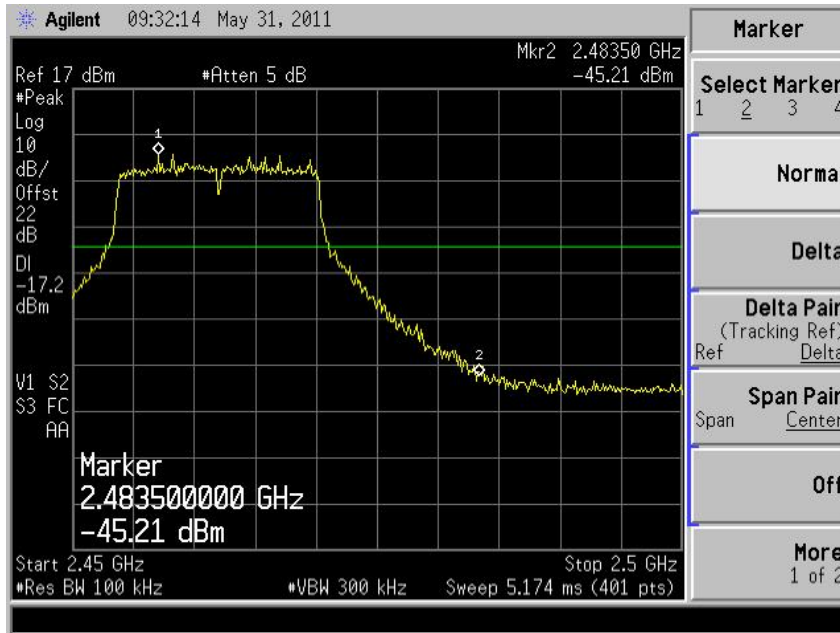

Plot 85 – Upper Band Edge at 2.4835GHz @ BPSK 9Mbps

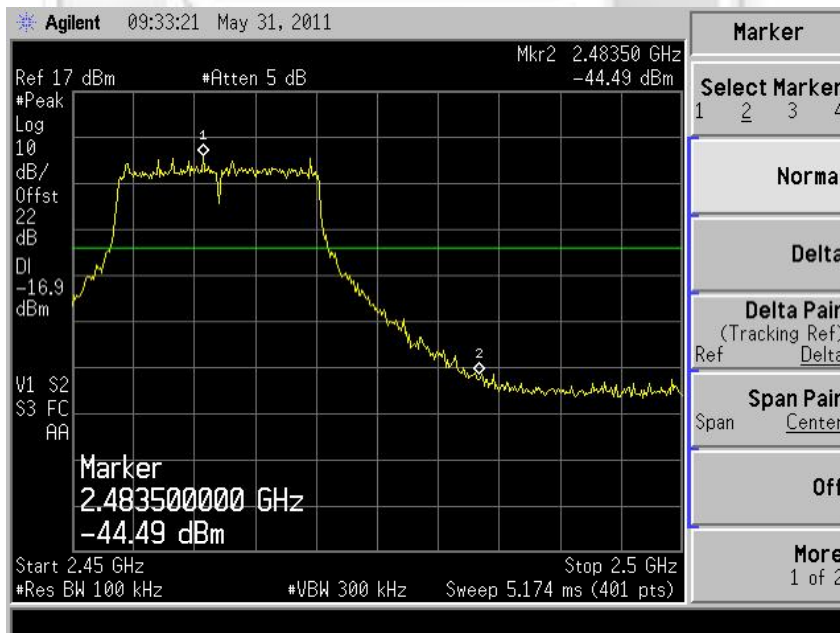


Plot 86 – Upper Band Edge at 2.4835GHz @ QPSK 18Mbps




BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots – 802.11g

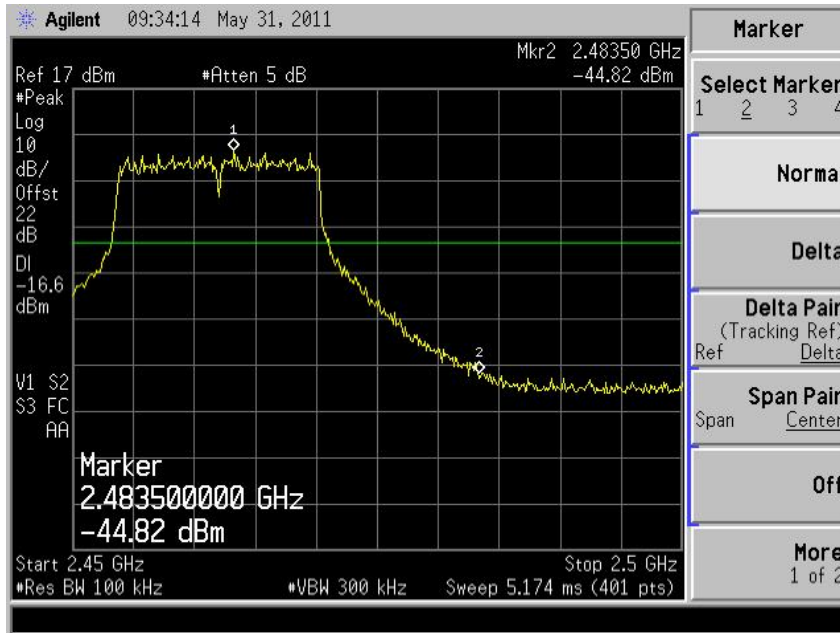

Plot 87 – Upper Band Edge at 2.4835GHz @ 16QAM 36Mbps

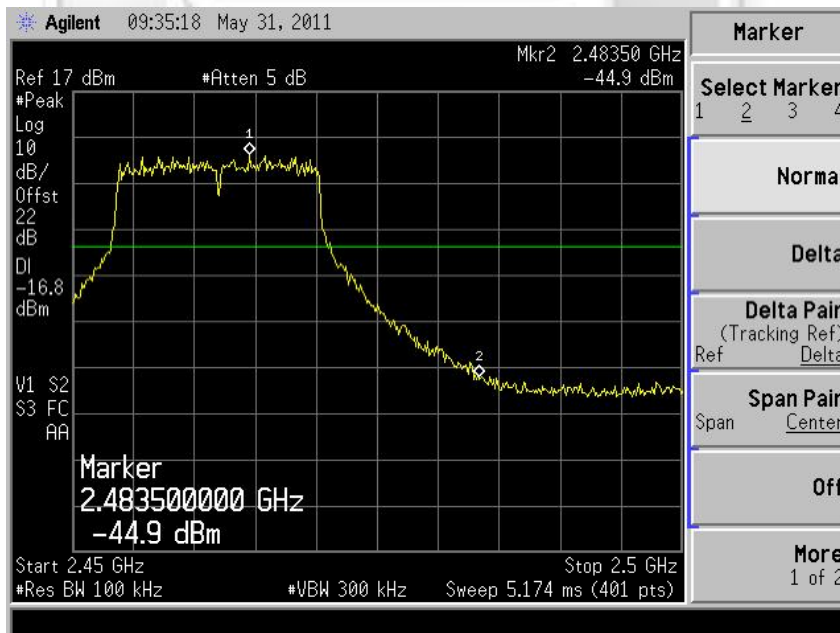

Plot 88 – Upper Band Edge at 2.4835GHz @ 64QAM 54Mbps

BAND EDGE COMPLIANCE (RADIATED) TEST

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent EMC Analyzer	E7403A	US41160165	04 Nov 2011
Bird 20dB Attenuator	25-A-MFN-20	0209	25 May 2012
TDK RF Solution Horn Antenna (1GHz-18GHz)	HRN-0118	130256	15 Mar 2012
Toyo MicroWave Preamplifier (1GHz - 8GHz)	TPA0108-40	0443	02 Feb 2012


47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:
 - a. Peak Plot:
RBW = VBW = 1MHz
 - b. Average Plot
RBW = 1MHz, VBW = 10Hz
4. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with specified modulation and data rate.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. Repeat steps 1 to 3 with all possible modulations and data rates.
5. The steps 2 to 4 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.

BAND EDGE COMPLIANCE (RADIATED) TEST

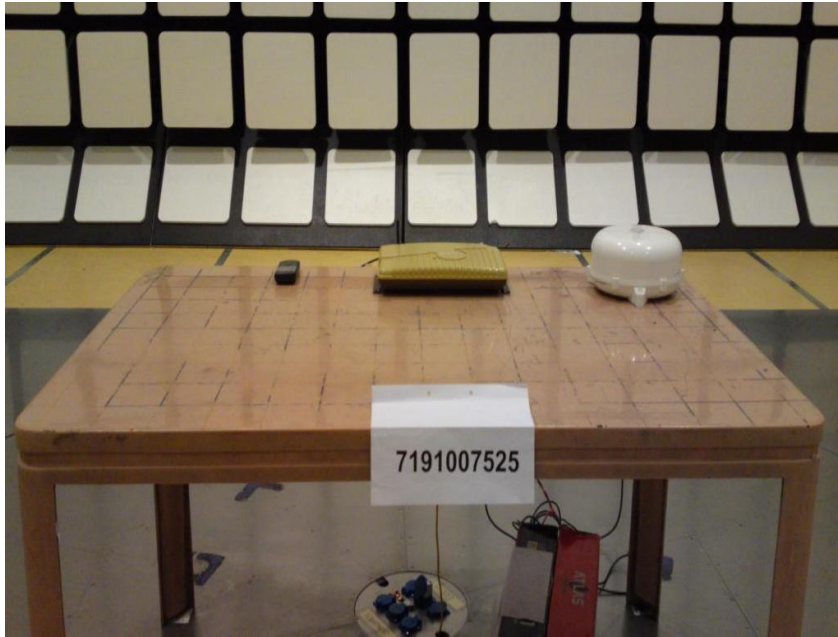

Band Edge Compliance (Radiated) Test Setup


47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Results

Test Input Power	12VDC (Worst Voltage)	Temperature	22°C
Attached Plots	89 - 94	Relative Humidity	52%
		Atmospheric Pressure	1028mbar
		Tested By	Jason Lai


No significant signal was found and they were below the specified limit.

BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge)

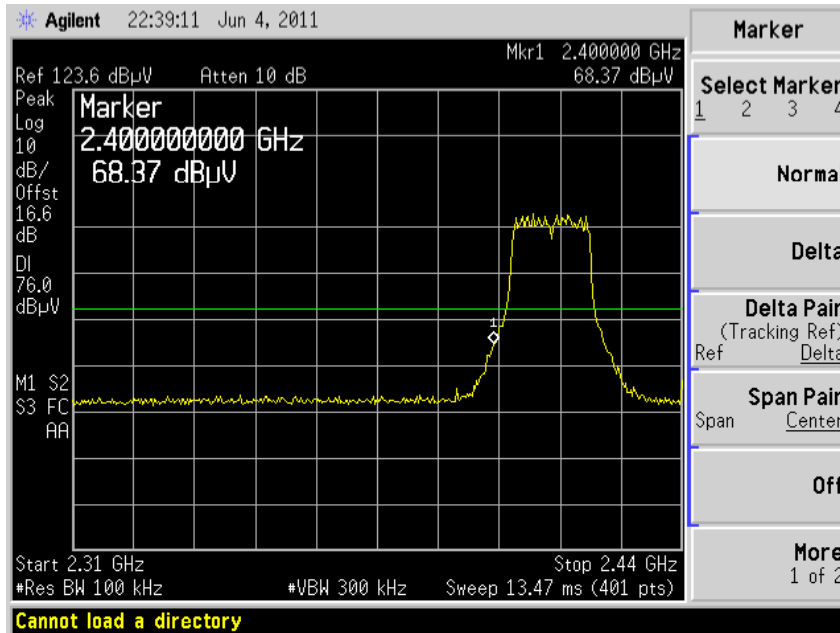


Plot 89 – Lower Band Edge at 2.4000GHz @ 64QAM 54Mbps (Worst Case)

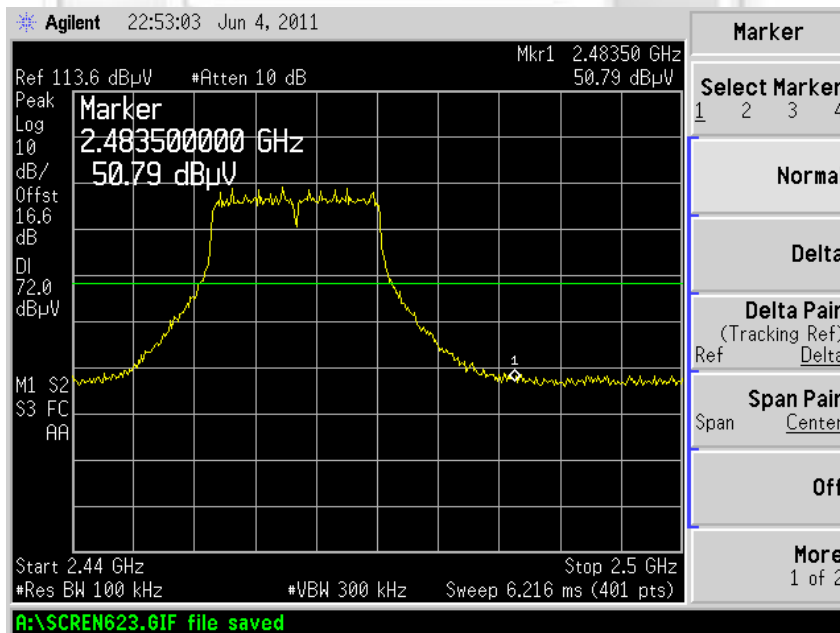


Plot 90 – Upper Band Edge at 2.4835GHz @ 64QAM 54Mbps (Worst Case)

BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (Restricted Band)

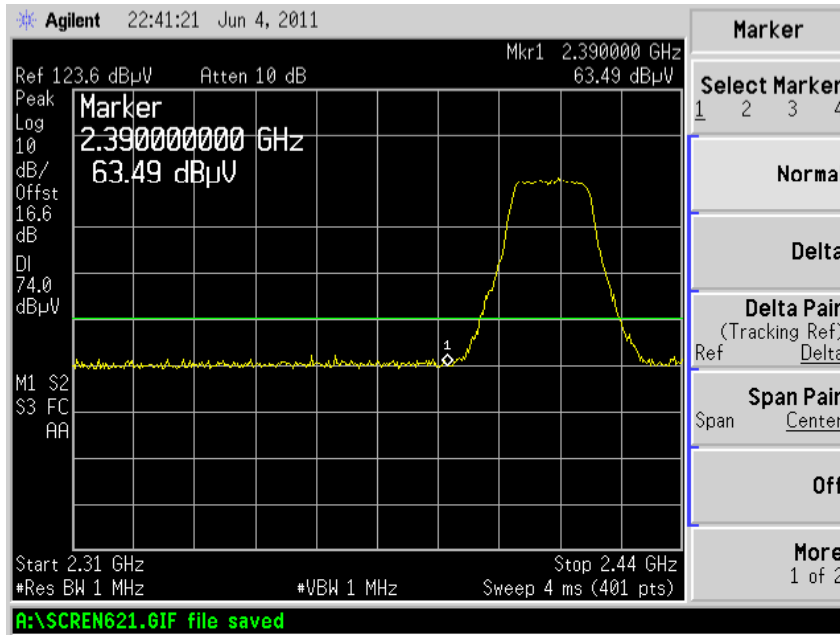

Plot 91 – Peak Plot at Lower Band Edge at 2.4000GHz @ 64QAM 54Mbps (Worst Case)

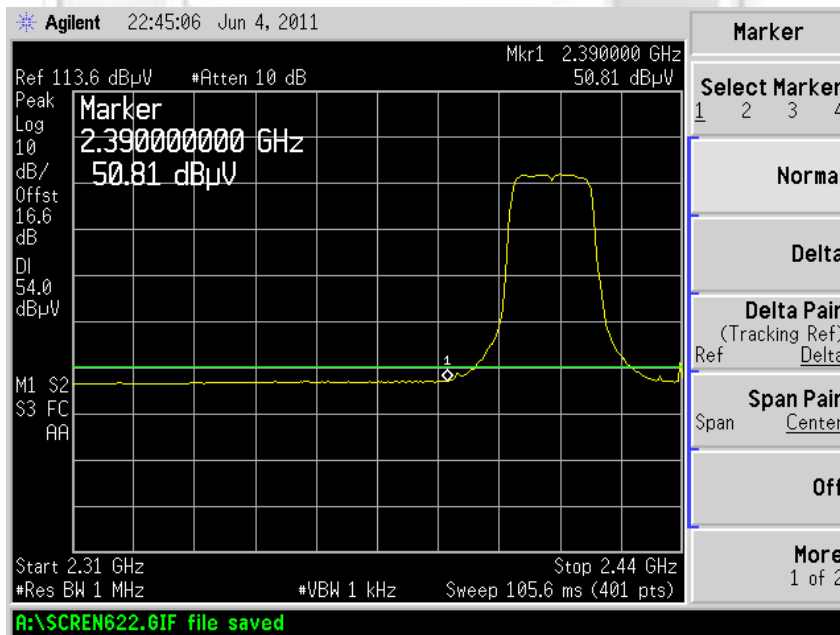


Plot 92 – Average Plot at Lower Band Edge at 2.4000GHz @ 64QAM 54Mbps (Worst Case)




BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (Restricted Band)

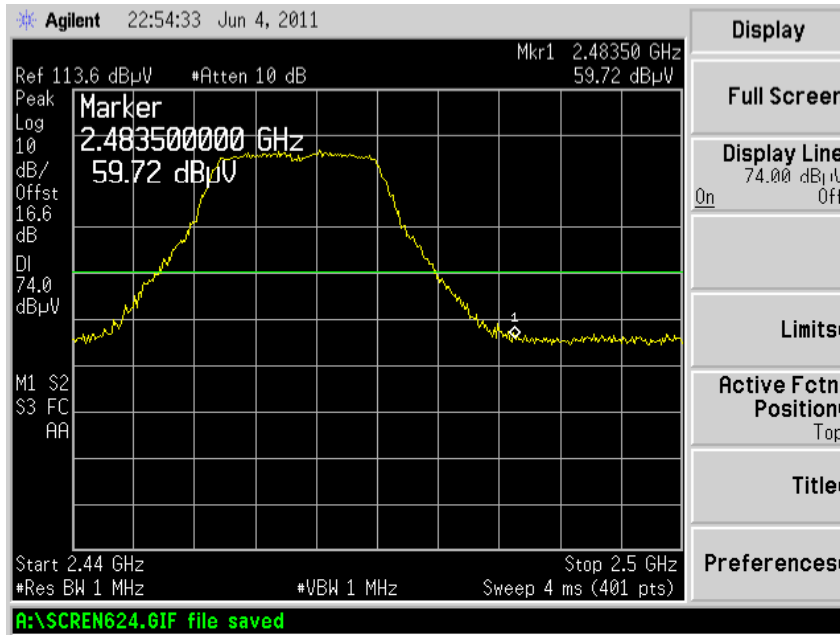

Plot 93 – Peak Plot at Upper Band Edge at 2.4835GHz @ 64QAM 54Mbps (Worst Case)

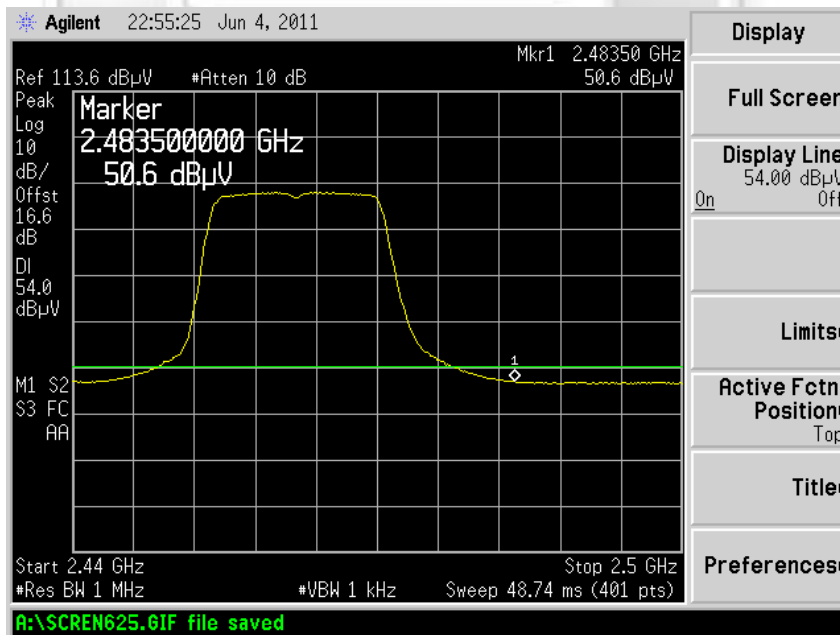

Plot 94 – Average Plot at Upper Band Edge at 2.4835GHz @ 64QAM 54Mbps (Worst Case)

PEAK POWER SPECTRAL DENSITY TEST

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Limits

The EUT shows compliance to the requirements of this section, which states the peak power spectral density conducted from the intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E7405A	MY45106084	11 Jan 2012
Bird 20dB Attenuator	25-A-MFN-20	0209	25 May 2012

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.


47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at Channel 1 (2.412GHz) with specified modulation and data rate.
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. Repeat steps 1 to 3 with all possible modulations and data rates.
5. The steps 3 to 4 were repeated with the transmitting frequency was set to Channel 6 (2.437GHz) and Channel 11 (2.462GHz) respectively.

PEAK POWER SPECTRAL DENSITY TEST



Peak Power Spectral Density Test Setup

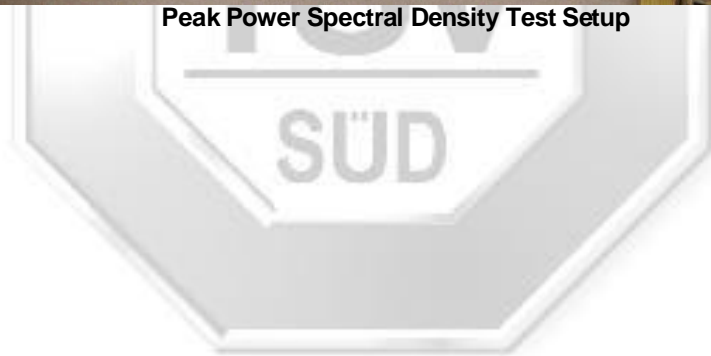



PEAK POWER SPECTRAL DENSITY TEST

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Results

Test Input Power	24VDC	Temperature	24°C
Attached Plots	101 – 112 (802.11b) 113 – 124 (802.11g)	Relative Humidity	54%
		Atmospheric Pressure	1027mbar
		Tested By	Foo Kai Maun


Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)	802.11b Modulation @ Data Rate
1	2.412	0.1119	6.3	DBPSK @ 1Mbps
		0.1157	6.3	DQPSK @ 2Mbps
		0.0881	6.3	CCK @ 5.5Mbps
		0.0982	6.3	CCK @ 11Mbps
6	2.437	0.1223	6.3	DBPSK @ 1Mbps
		0.1129	6.3	DQPSK @ 2Mbps
		0.1060	6.3	CCK @ 5.5Mbps
		0.1226	6.3	CCK @ 11Mbps
11	2.462	0.1406	6.3	DBPSK @ 1Mbps
		0.1240	6.3	DQPSK @ 2Mbps
		0.1127	6.3	CCK @ 5.5Mbps
		0.2396	6.3	CCK @ 11Mbps

Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)	802.11g Modulation @ Data Rate
1	2.412	0.0979	6.3	BPSK @ 9Mbps
		0.0935	6.3	QPSK @ 18Mbps
		0.0955	6.3	16QAM @ 36Mbps
		0.0855	6.3	64QAM @ 54Mbps
6	2.437	0.0977	6.3	BPSK @ 9Mbps
		0.1008	6.3	QPSK @ 18Mbps
		0.1046	6.3	16QAM @ 36Mbps
		0.0855	6.3	64QAM @ 54Mbps
11	2.462	0.1013	6.3	BPSK @ 9Mbps
		0.1020	6.3	QPSK @ 18Mbps
		0.1069	6.3	16QAM @ 36Mbps
		0.0859	6.3	64QAM @ 54Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots - 802.11b

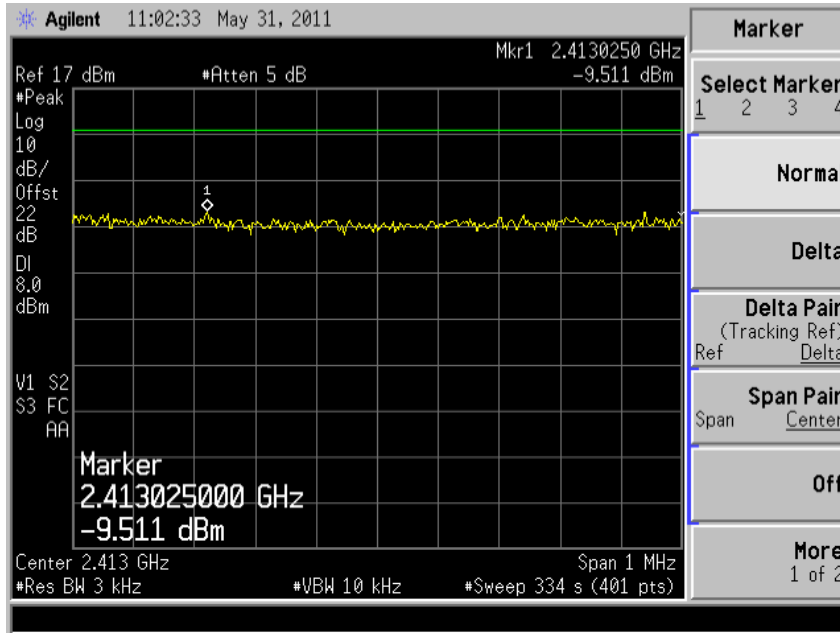

Plot 101 - Channel 1 @ DBPSK 1Mbps

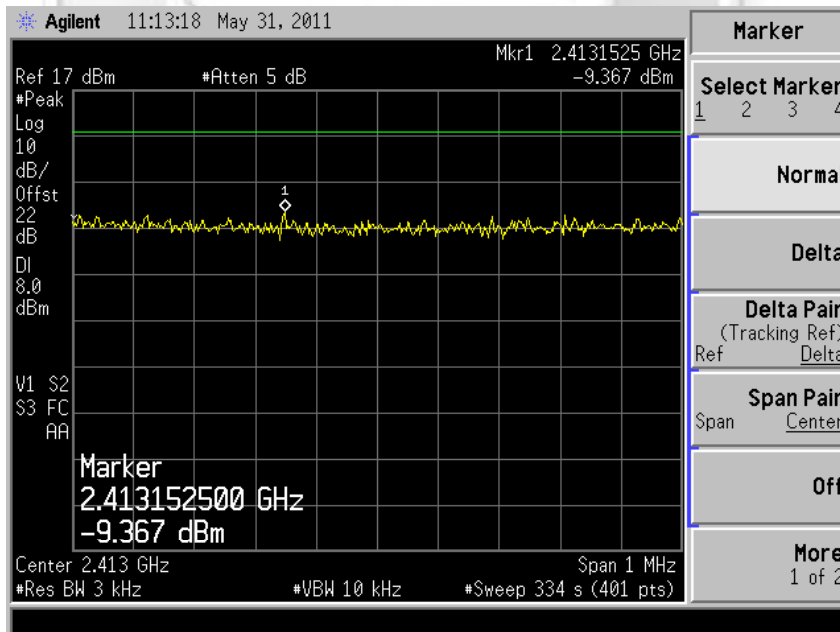


Plot 102 - Channel 1 @ DQPSK 2Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots - 802.11b

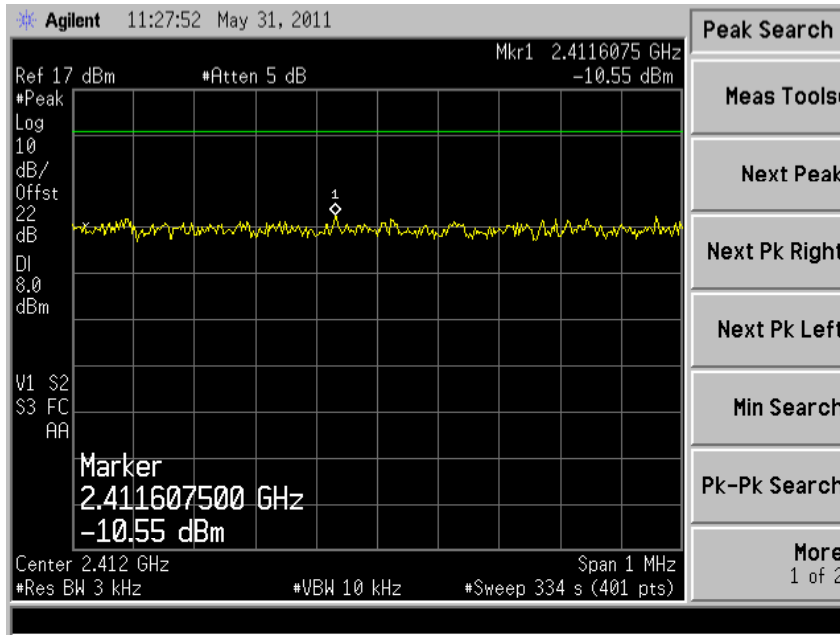

Plot 103 - Channel 1 @ CCK 5.5Mbps

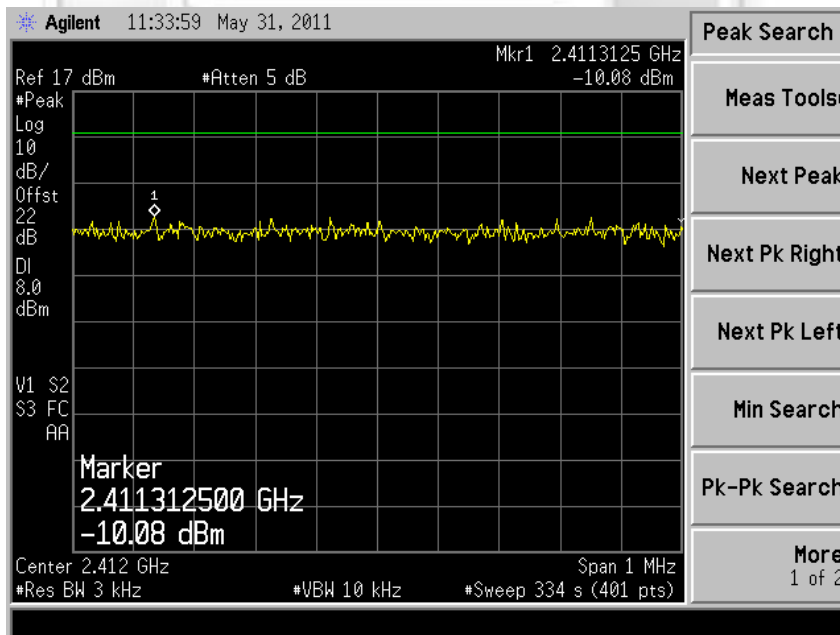


Plot 104 - Channel 1 @ CCK 11Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots - 802.11b

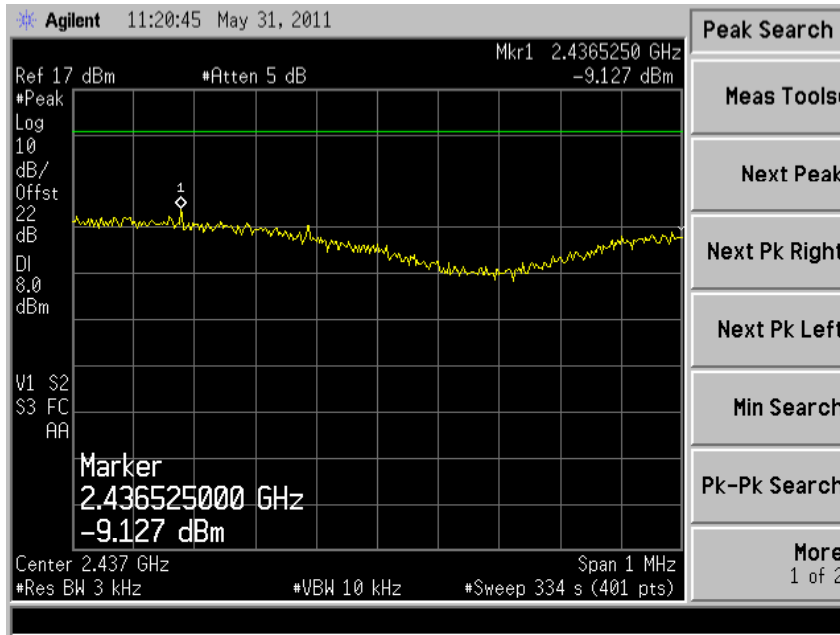

Plot 105 – Channel 6 @ DBPSK 1Mbps

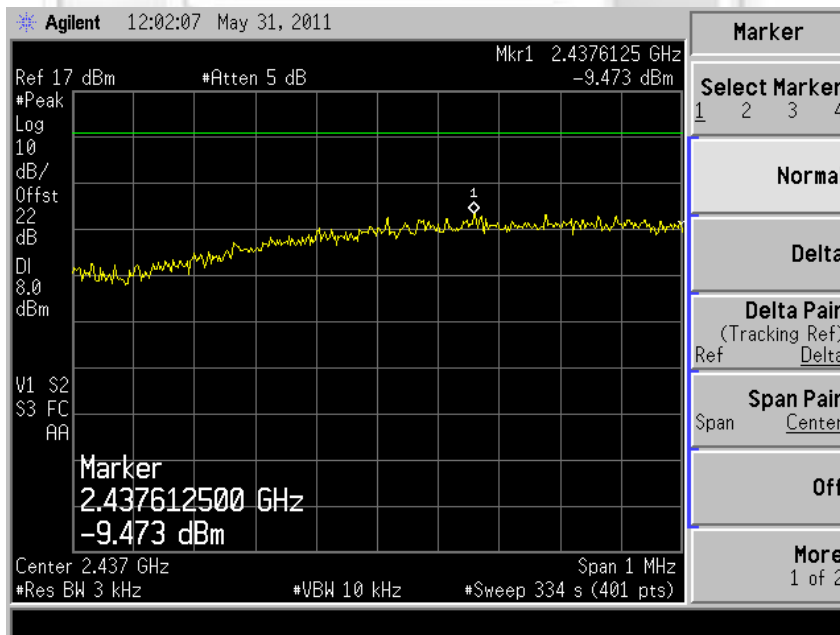


Plot 106 – Channel 6 @ DQPSK 2Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots - 802.11b

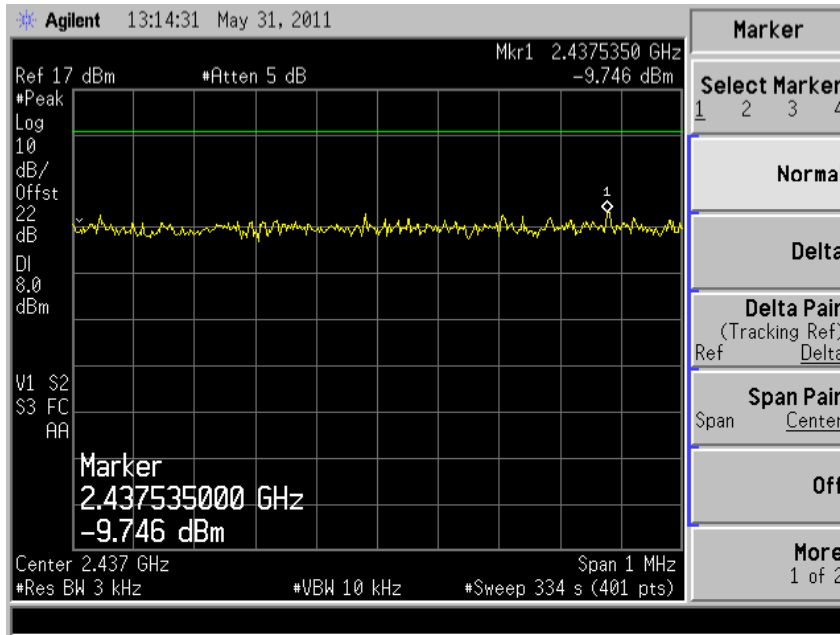

Plot 107 - Channel 6 @ CCK 5.5Mbps


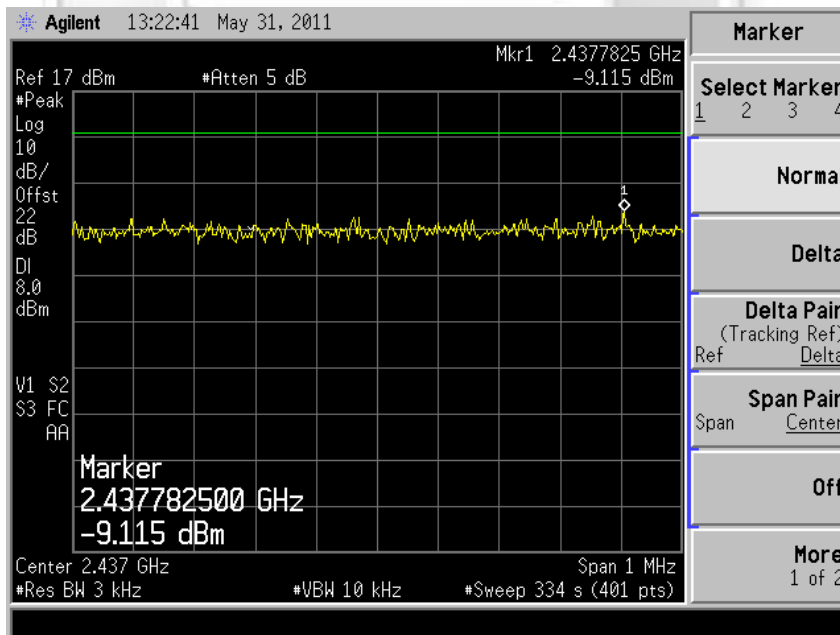


Plot 108 - Channel 6 @ CCK 11Mbps



PEAK POWER SPECTRAL DENSITY TEST


Peak Power Spectral Density Plots - 802.11b

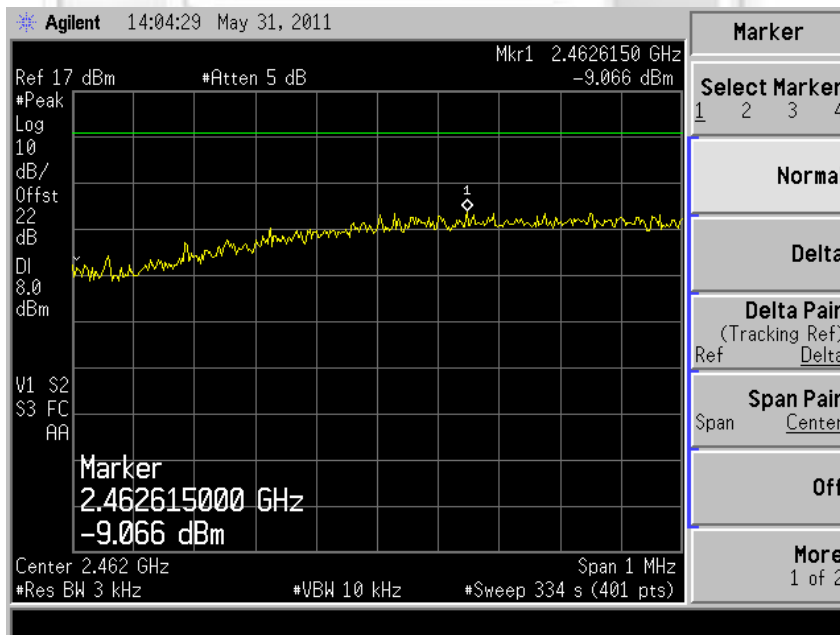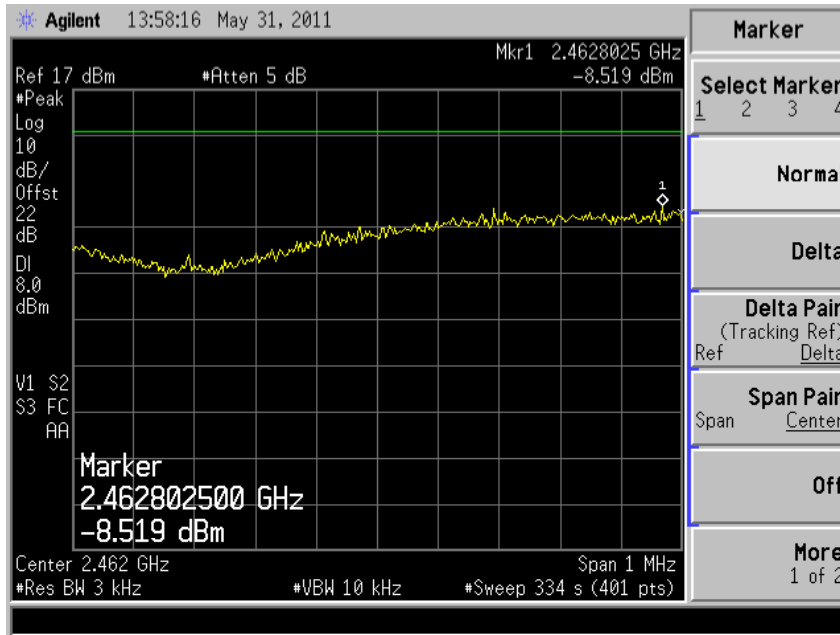




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots - 802.11b

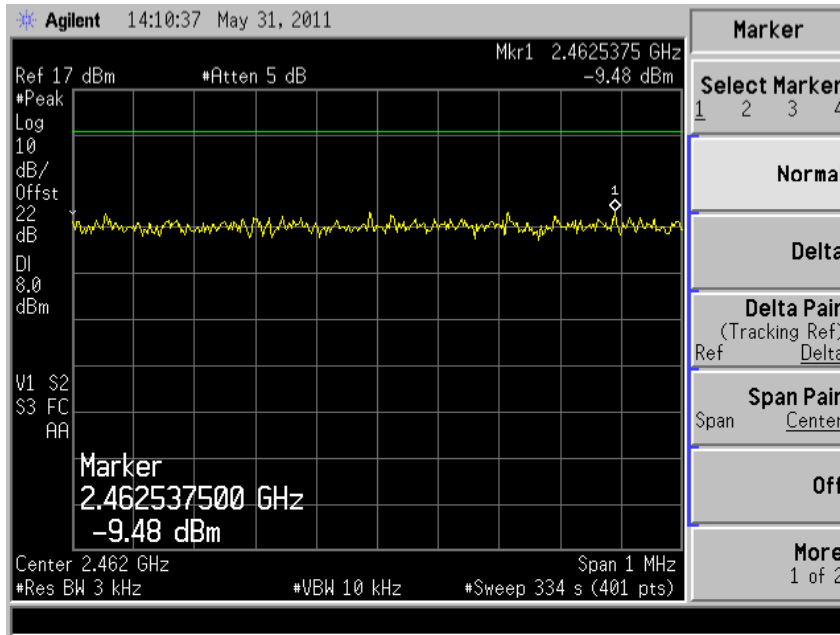

Plot 111 – Channel 11 @ CCK 5.5Mbps

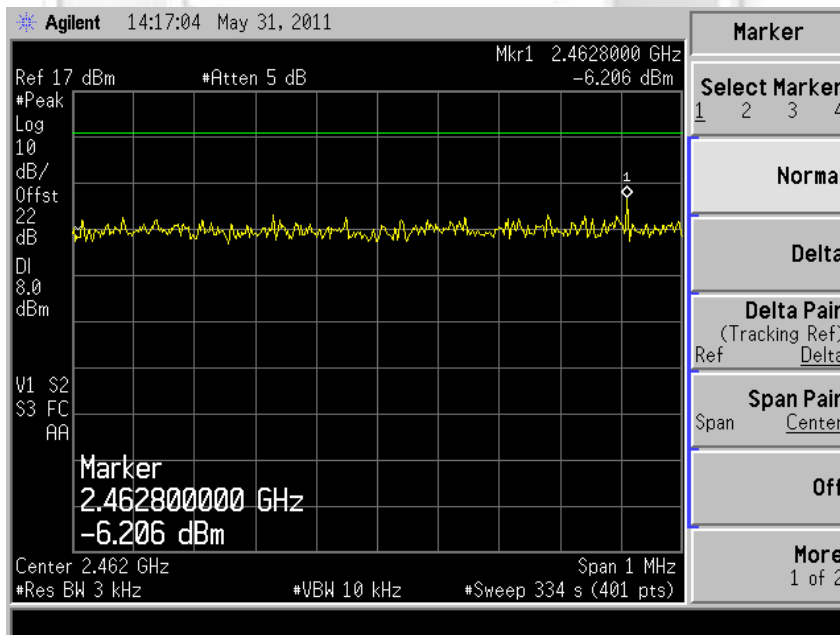


Plot 112 – Channel 11 @ CCK 11Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 802.11g

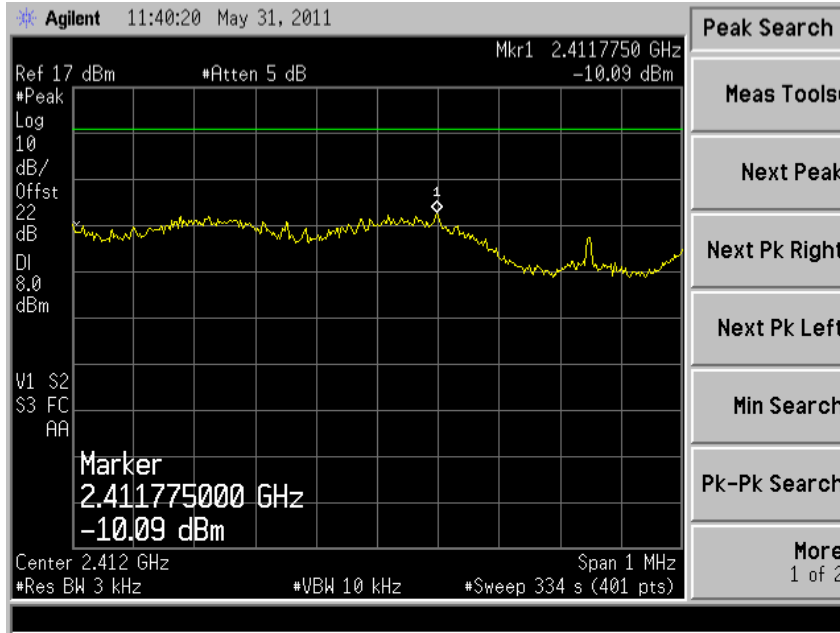

Plot 113 – Channel 1 @ BPSK 9Mbps

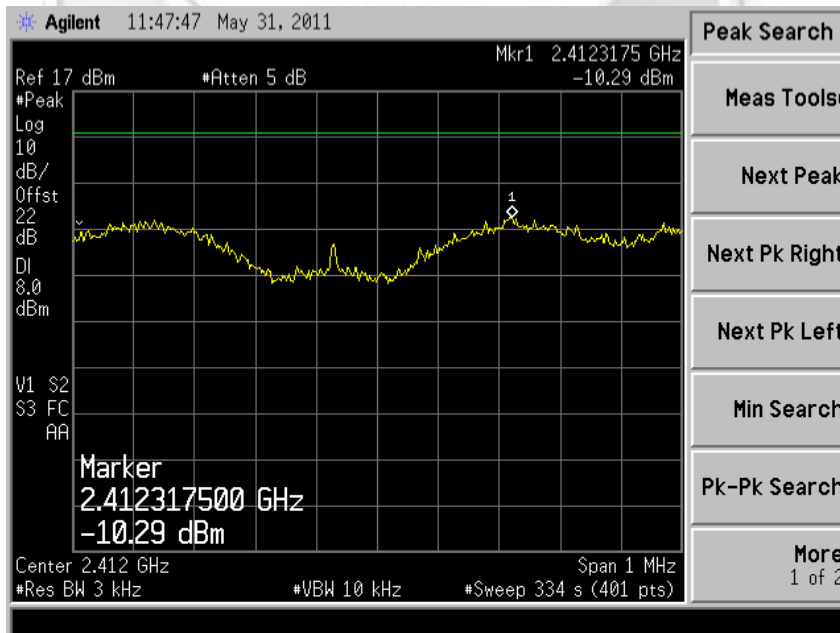


Plot 114 – Channel 1 @ QPSK 18Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 802.11g

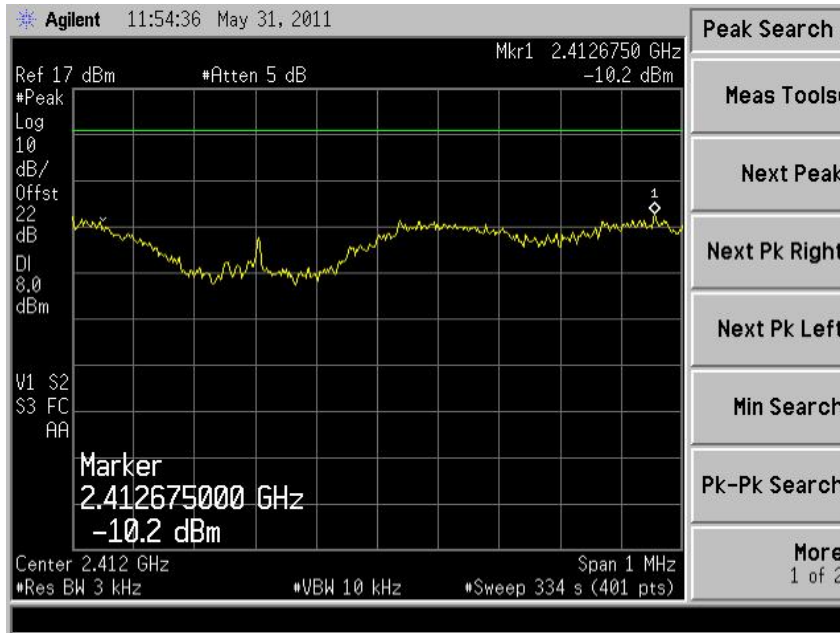

Plot 115 – Channel 1 @ 16QAM 36Mbps

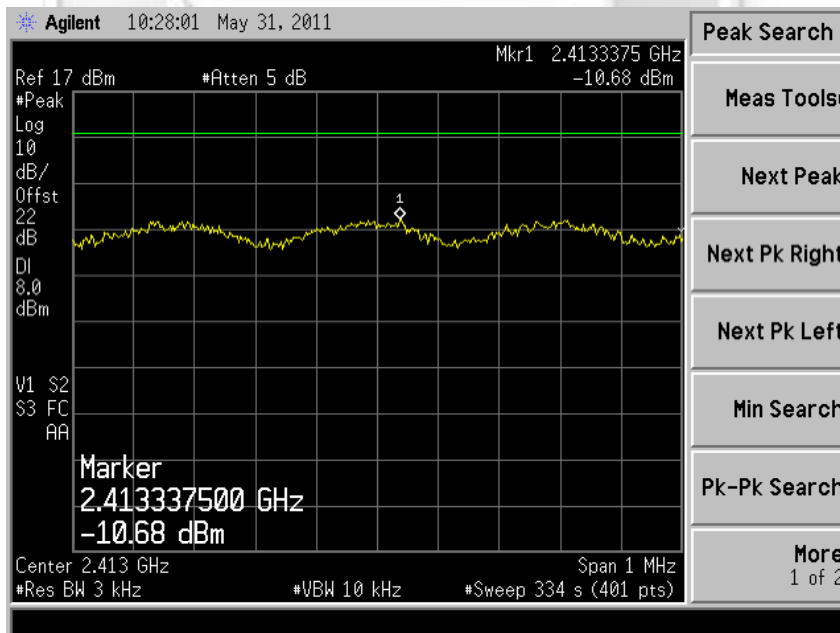


Plot 116 – Channel 1 @ 64QAM 54Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 802.11g

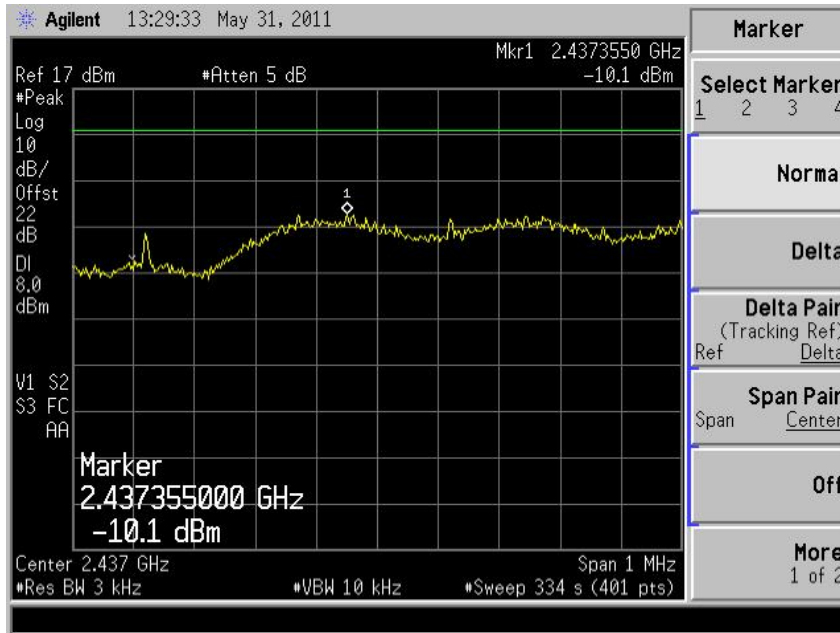

Plot 117 – Channel 6 @ BPSK 9Mbps

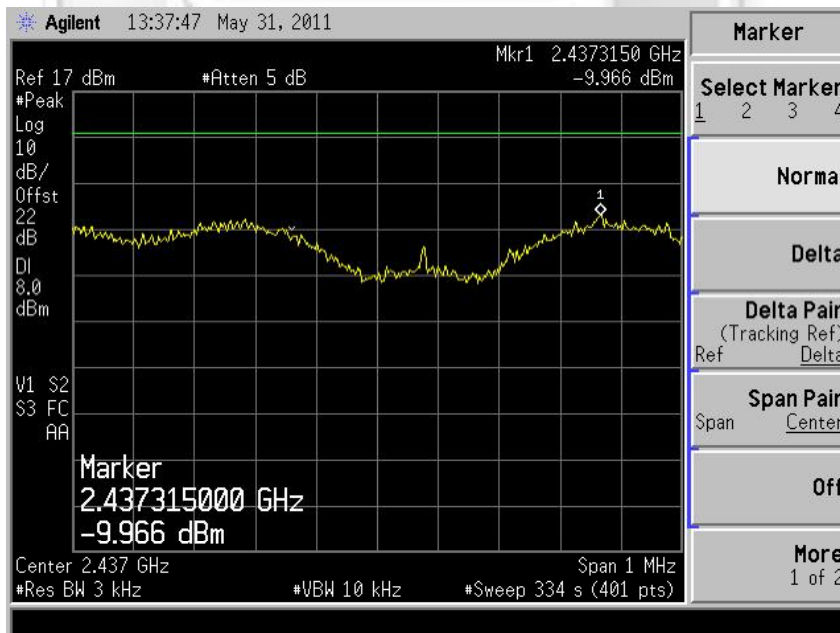


Plot 118 – Channel 6 @ QPSK 18Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 802.11g

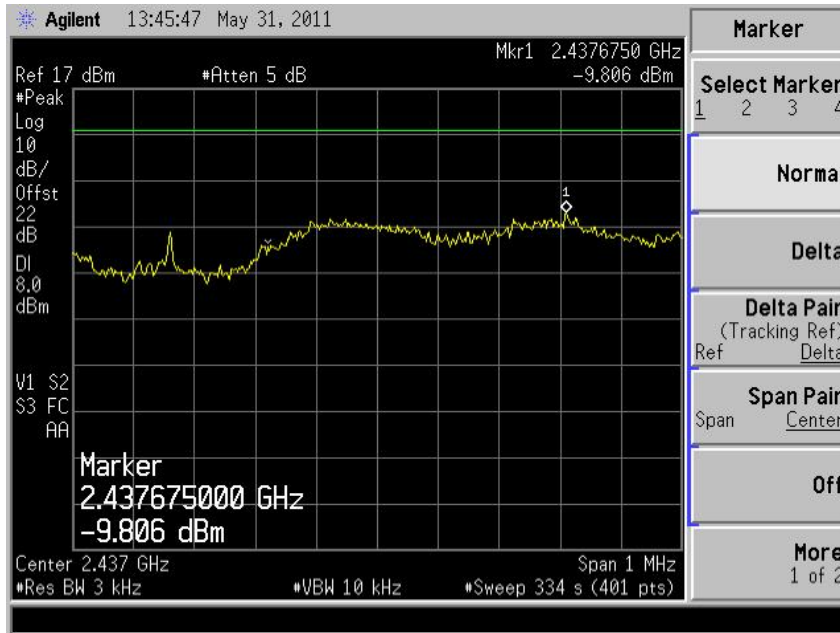

Plot 119 – Channel 6 @ 16QAM 36Mbps

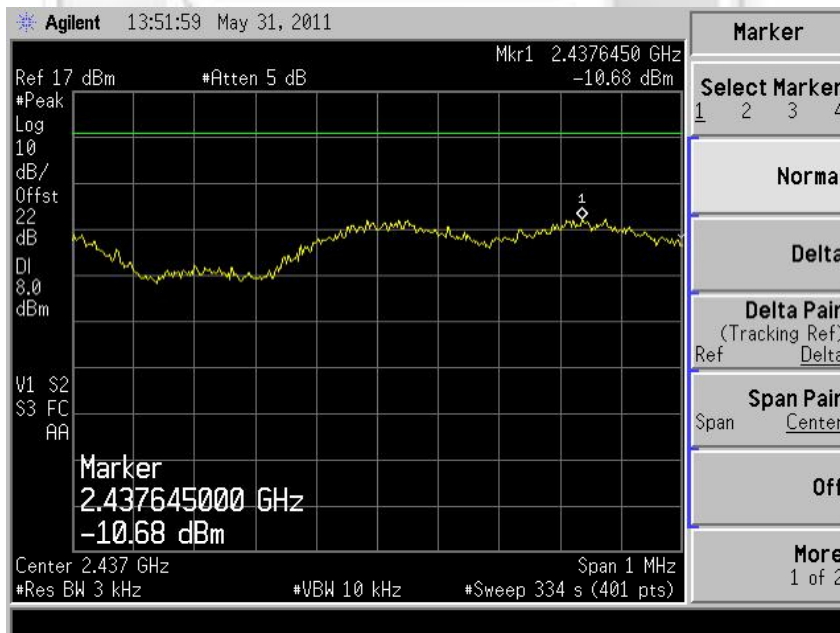


Plot 120 – Channel 6 @ 64QAM 54Mbps




PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 802.11g

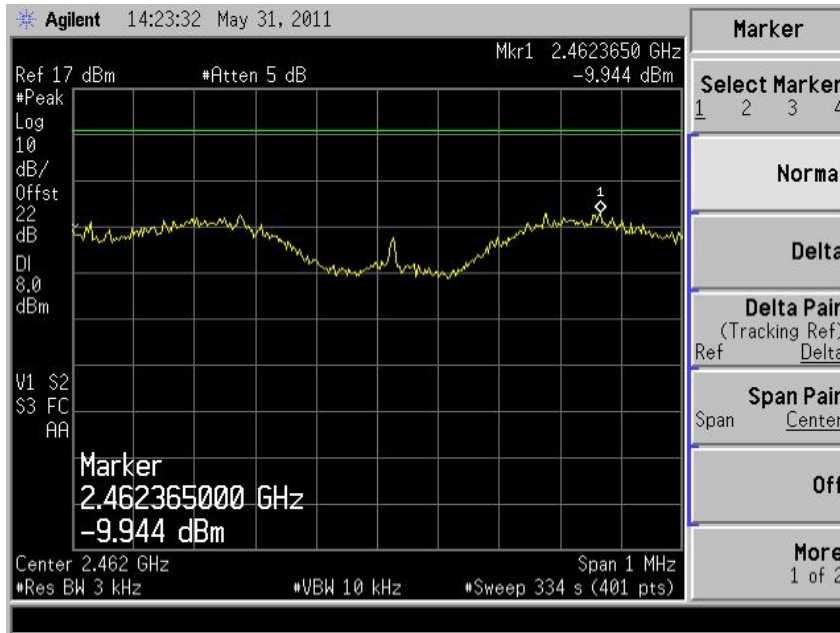

Plot 121 – Channel 11 @ BPSK 9Mbps


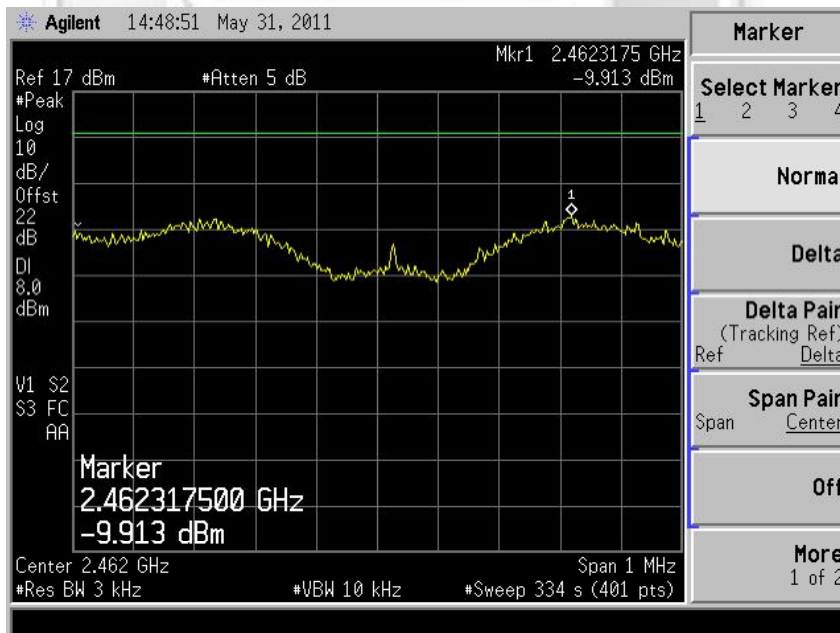


Plot 122 – Channel 11 @ QPSK 18Mbps



PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots – 802.11g

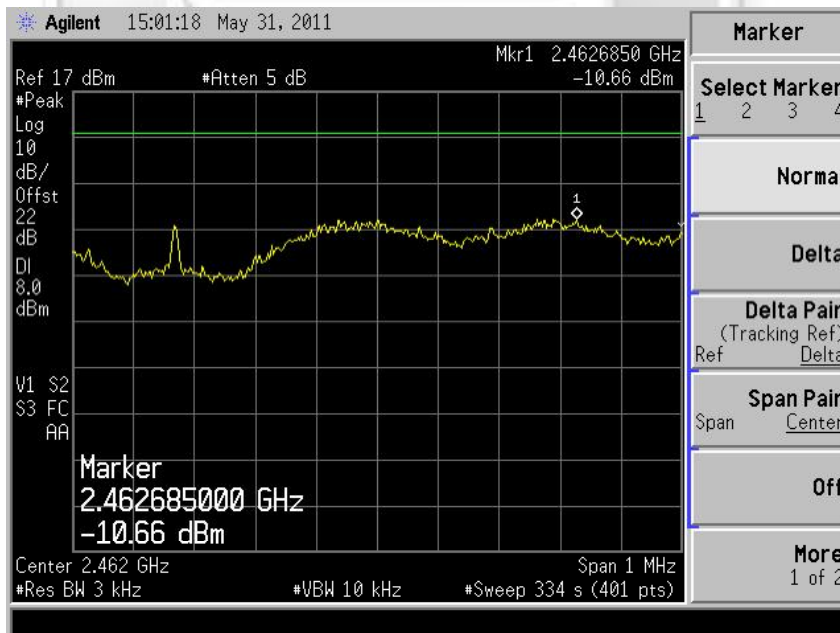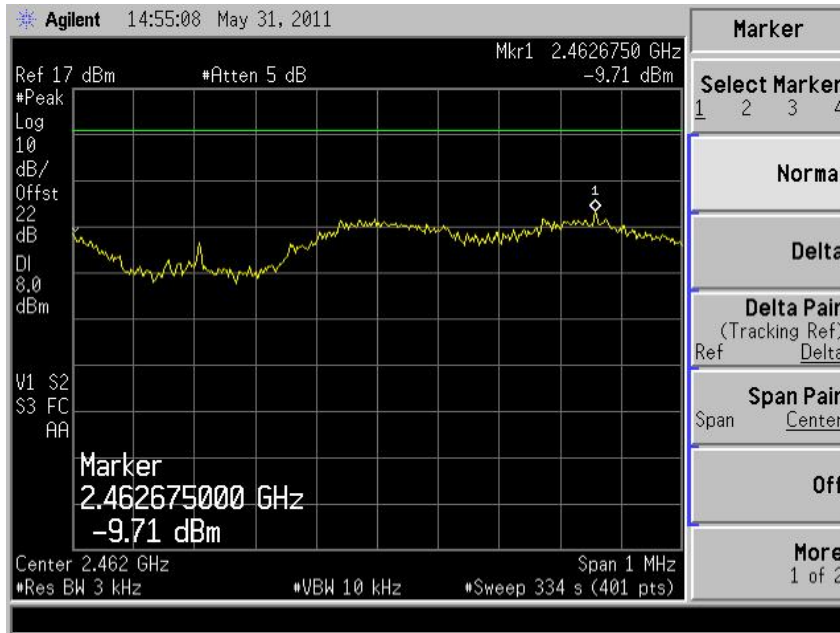

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

47 CFR FCC Part 1.1310 Maximum Permissible Exposure (MPE) Limits

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (min)
0.3 - 1.34	614	1.63	100 ^{Note 2}	30
1.34 - 30	824 / f	2.19 / f	180 / f ² ^{Note 2}	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30
Notes				
1. f = frequency in MHz				
2. Plane wave equivalent power density				

47 CFR FCC Part 1.1310 Maximum Permissible Exposure Computation

The power density at 20cm distance was computed from the following formula:

$$S = (30GP) / (377d^2)$$

where

- S = Power density in W/m²
- P = 0.0468W
- d = Test distance at 0.2m
- G = Numerical isotropic gain, 1.0 (0.0dBi)

Substituting the relevant parameters into the formula:

$$S = [(30GP) / 377d^2]$$

$$= 0.0004W/m^2$$

$$= 0.00004mW/cm^2$$

∴ The power density of the EUT at 20cm distance is 0.00004mW/cm² based on the above computation and found to be lower than the power density limit of 1.0mW/cm².



This Report is issued under the following conditions:

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
2. Unless otherwise requested, this report shall contain only technical results carried out by TÜV SÜD PSB. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.
3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through TÜV SÜD PSB, unless the Client has authorised TÜV SÜD PSB in writing to do so.
6. TÜV SÜD PSB may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.
7. All copyright in the report shall remain with TÜV SÜD PSB and the Client shall, upon payment of TÜV SÜD PSB's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that TÜV SÜD PSB may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
8. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
10. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

March 2010




EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS – MAIN UNIT



Front View

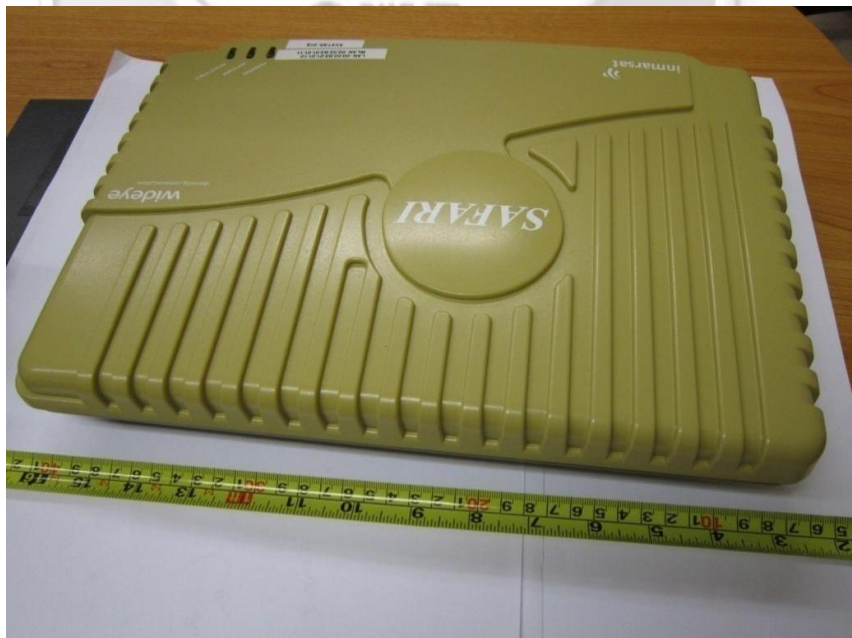

Rear View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS – MAIN UNIT



Left View



Right View


EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS – MAIN UNIT




Bottom View

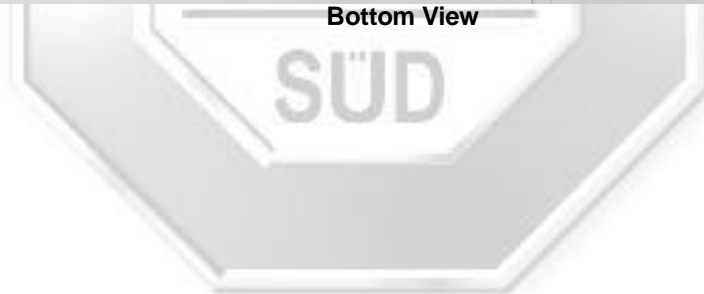

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS – MAIN UNIT

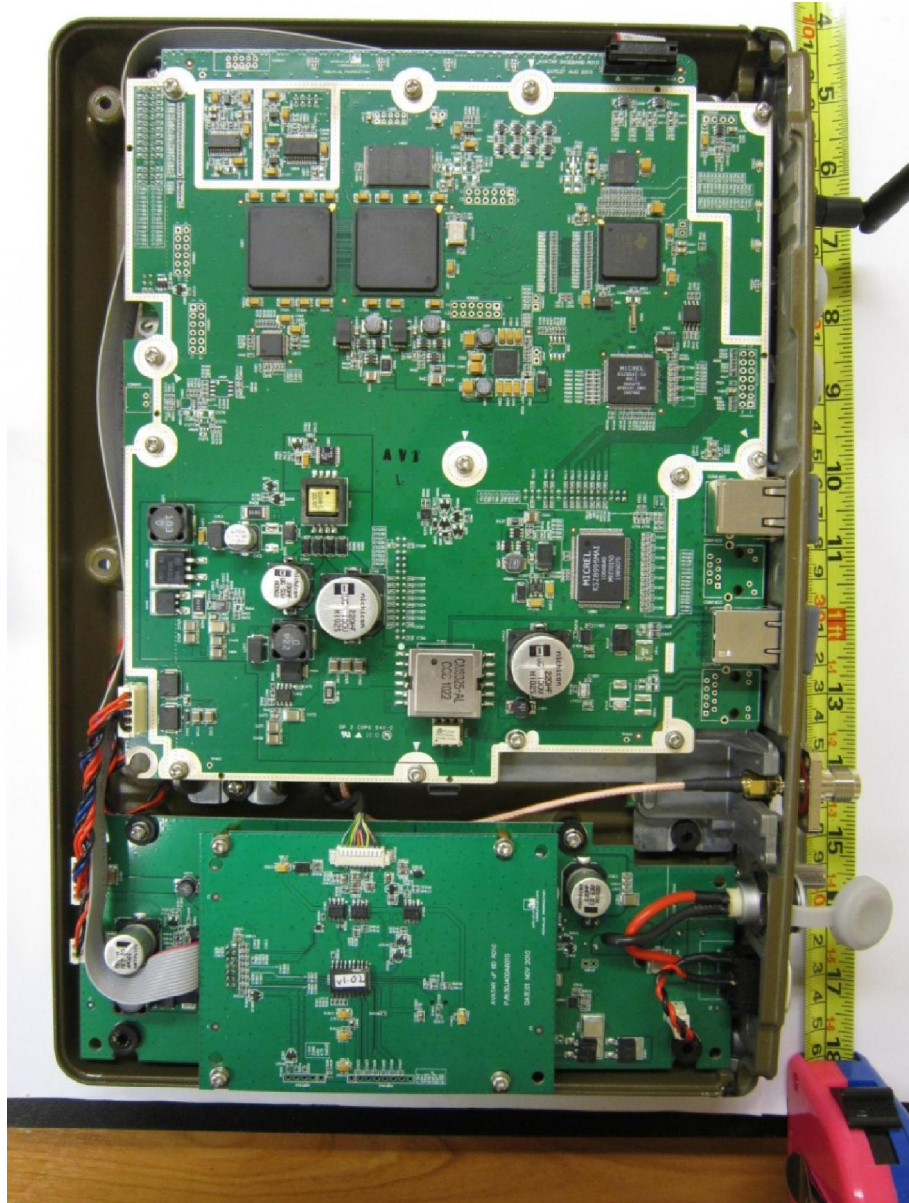


Internal View

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS – MAIN UNIT

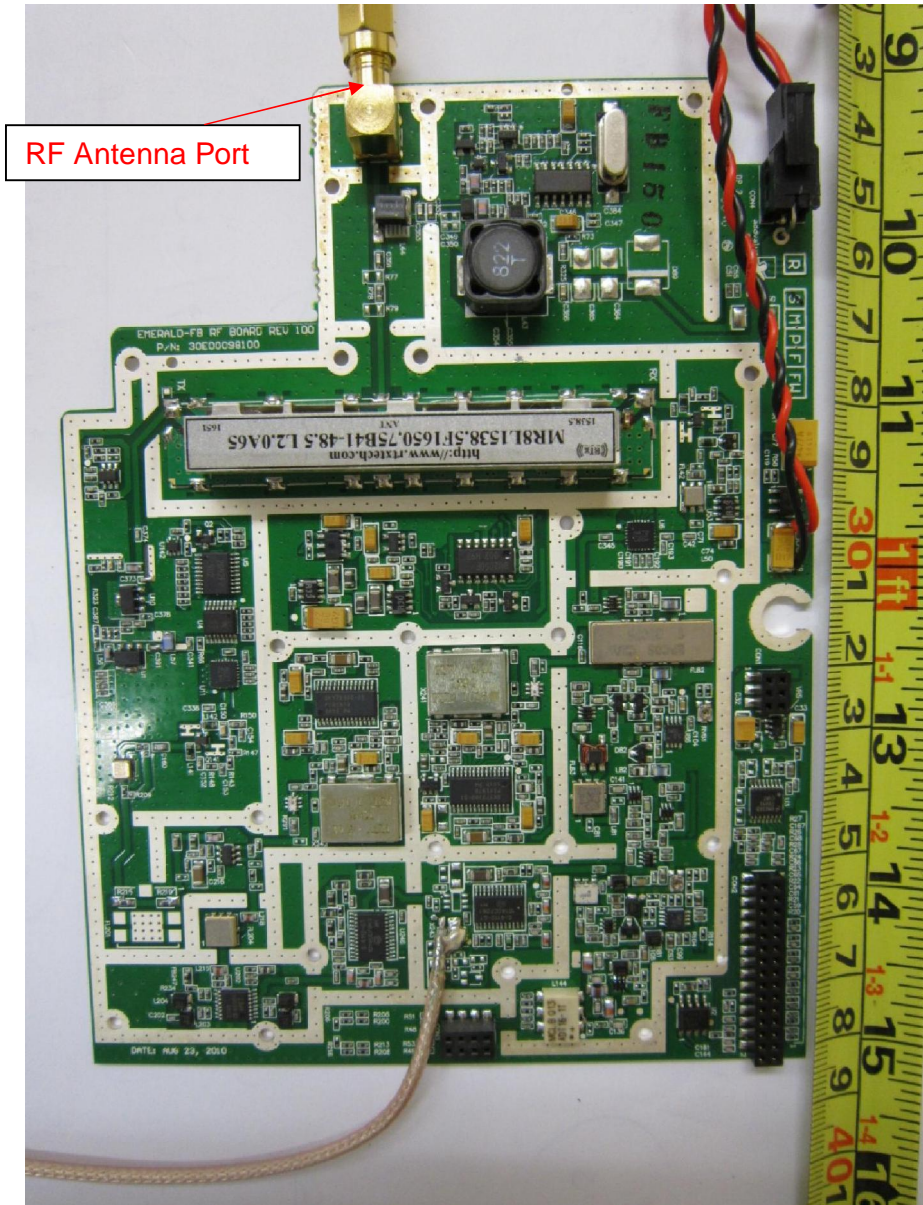


RF PCB Component Side

EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A

EUT PHOTOGRAPHS – MAIN UNIT

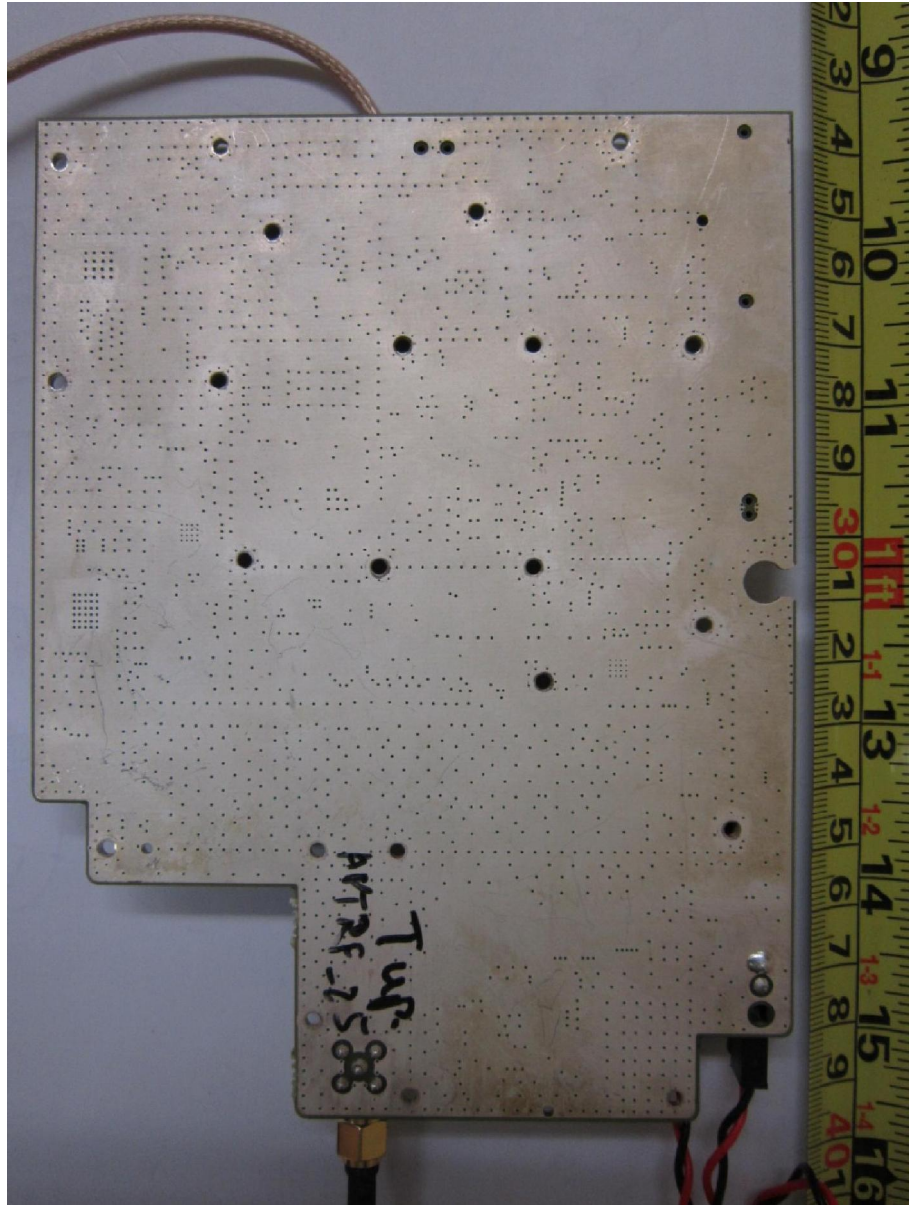

RF PCB Trace Side