

FCC TEST REPORT

REPORT NO.: RF921103R05

MODEL NO.: XC1

RECEIVED: Nov. 3, 2003

TESTED: Nov. 18 ~ Nov. 20, 2003

APPLICANT: Addvalue Communications Pte Ltd.

ADDRESS: 750D, Chai Chee Road #03-03
Technopark@Chai Chee, Singapore
469004

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 24 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0



TABLE OF CONTENTS

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4	TEST PROCEDURES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.2	RADIATED EMISSION MEASUREMENT	9
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	9
4.2.2	TEST INSTRUMENTS	10
4.2.3	TEST PROCEDURES	11
4.2.4	DEVIATION FROM TEST STANDARD	11
4.2.5	TEST SETUP	12
4.2.6	TEST RESULTS	13
4.8	BAND EDGES MEASUREMENT	18
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	18
4.8.2	TEST INSTRUMENTS	18
4.8.3	TEST PROCEDURE	18
4.8.4	DEVIATION FROM TEST STANDARD	18
4.8.5	EUT OPERATING CONDITION	19
4.8.6	TEST RESULTS	19
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	23
6	INFORMATION ON THE TESTING LABORATORIES	24



1 CERTIFICATION

PRODUCT : XBOX 2.4GHz Game Controller
BRAND NAME : Wideye
MODEL NO : XC1
TEST ITEM: Engineering Sample
APPLICANT : Addvalue Communications Pte Ltd.
STANDARDS : 47 CFR Part 15, Subpart C (15.249)
ANSI C63.4-2001

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Nov. 18 ~ Nov. 20, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Rennie Wang, **DATE:** November 21, 2003
APPROVED BY: Ellis Wu, **DATE:** November 21, 2003
Rennie Wang
Ellis Wu, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remark
15.207	Conducted Emission Test	NA	Power supply is 4.5VDC from batteries
15.249	Radiated Emission Test	PASS	Minimum passing margin is -2.00dB at 689.60MHz
15.249	Band Edge Measurement	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	XBOX 2.4GHz Game Controller
MODEL NO.	XC1
POWER SUPPLY	4.5VDC from Batteries
MODULATION TYPE	GFSK
MODULATION TECHNOLOGY	FHSS
CARRIER FREQUENCY OF EACH CHANNEL	2402MHz ~ 2480MHz
BANDWIDTH OF EACH CHANNEL	1MHz
NUMBER OF CHANNEL	79
ANTENNA TYPE	Integral loop antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. For more detailed feature description of the EUT, please refer to user's manual.

3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

NOTE:

1. Below 1 GHz, the channel 0, 39, and 78 were pre-tested in chamber. The channel 78, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 0, 39, and 78 were tested individually.



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a XBOX 2.4GHz Game Controller. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.249)
ANSI C63.4 : 2001

All tests have been performed and recorded as per the above standards.


NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

NA

3.5 CONFIGURATION OF SYSTEM UNDER TEST





4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.249 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
2400 ~ 2483.5	114	94

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8594E	3911A07465	July 07, 2004
* HP Preamplifier	8447D	2432A03504	June 10, 2004
HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 11, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
*Schwarzbeck Antenna	VULB9168	137	Apr. 03, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	June 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
*ADT. Turn Table	TT100	0306	NA
*ADT. Tower	AT100	0306	NA
*Software	ADT_Radiated_V 5.14	NA	NA
*TIMES RF cable	LL142	CABLE-CH6-01	Apr. 30, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Chamber No. 6.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

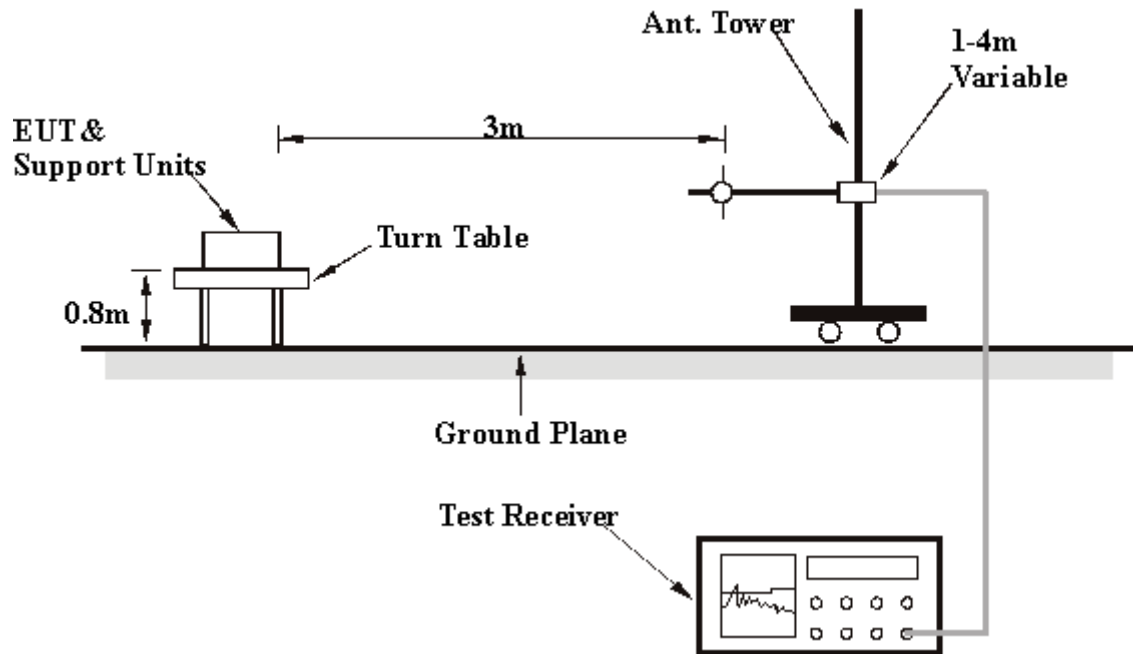

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 TEST RESULTS

EUT	XBOX 2.4GHz Game Controller	MODEL	XC1
MODE	Channel 78	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	4.5VDC from battery	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	593.68	42.47 QP	46.00	-3.53	1.50 H	310	20.06	22.41
2	657.27	43.62 QP	46.00	-2.38	2.00 H	10	20.26	23.36
3	673.43	42.15 QP	46.00	-3.85	1.00 H	346	18.56	23.59
4	689.60	44.00 QP	46.00	-2.00	1.00 H	64	20.17	23.83
5	704.69	41.91 QP	46.00	-4.09	1.00 H	40	17.80	24.11
6	720.86	43.20 QP	46.00	-2.80	1.25 H	55	18.65	24.55
7	737.02	41.57 QP	46.00	-4.43	1.00 H	268	16.58	24.99
8	769.36	41.30 QP	46.00	-4.70	1.00 H	316	15.84	25.45
9	785.52	43.44 QP	46.00	-2.56	1.00 H	298	17.90	25.54
10	816.78	43.16 QP	46.00	-2.84	3.00 H	316	17.37	25.79
11	832.94	43.58 QP	46.00	-2.42	2.50 H	322	17.62	25.96
12	849.11	42.89 QP	46.00	-3.11	1.00 H	346	16.76	26.13
13	865.28	42.42 QP	46.00	-3.58	1.00 H	160	15.97	26.45
14	897.61	42.25 QP	46.00	-3.75	1.25 H	10	15.16	27.09
15	912.70	41.33 QP	46.00	-4.67	1.00 H	268	14.04	27.28
16	945.03	40.93 QP	46.00	-5.07	1.25 H	322	13.28	27.65

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	XBOX 2.4GHz Game Controller	MODEL	XC1
MODE	Channel 78	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	4.5VDC from battery	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 62%RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	481.59	32.54 QP	46.00	-13.46	1.50 V	274	12.80	19.75
2	512.84	35.38 QP	46.00	-10.62	1.00 V	340	15.08	20.30
3	529.01	37.16 QP	46.00	-8.84	1.00 V	316	16.50	20.65
4	593.68	41.08 QP	46.00	-4.92	1.00 V	358	18.66	22.41
5	624.93	38.67 QP	46.00	-7.33	2.00 V	52	15.74	22.92
6	673.43	37.38 QP	46.00	-8.62	2.00 V	316	13.79	23.59
7	688.52	38.31 QP	46.00	-7.69	2.00 V	268	14.50	23.81
8	704.69	39.67 QP	46.00	-6.33	1.00 V	316	15.56	24.11
9	737.02	40.43 QP	46.00	-5.57	1.50 V	352	15.44	24.99
10	753.19	41.69 QP	46.00	-4.31	1.50 V	10	16.33	25.37
11	800.61	39.01 QP	46.00	-6.99	1.50 V	34	13.38	25.63
12	816.78	39.58 QP	46.00	-6.42	2.50 V	10	13.79	25.79
13	849.11	40.07 QP	46.00	-5.93	1.75 V	256	13.94	26.13
14	865.28	39.37 QP	46.00	-6.63	1.50 V	268	12.92	26.45
15	881.44	38.09 QP	46.00	-7.91	1.00 V	10	11.32	26.77
16	897.61	37.04 QP	46.00	-8.96	1.25 V	262	9.95	27.09

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	XBOX 2.4GHz Game Controller	MODEL	XC1
MODE	Channel 0	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	4.5VDC from battery	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1202.00	33.47 PK	74.00	-40.53	1.07 H	1	5.50	27.97
2	*2402.00	98.86 PK	114.00	-15.14	1.78 H	174	65.40	33.46
2	*2402.00	75.27 AV	94.00	-18.73	1.78 H	174	41.81	33.46
3	4802.00	53.53 PK	74.00	-20.47	1.13 H	34	12.30	41.23
3	4802.00	29.94 AV	54.00	-24.06	1.13 H	34	-11.29	41.23
4	7206.00	50.21 PK	74.00	-23.79	1.66 H	242	4.82	45.39
5	9608.00	58.00 PK	74.00	-16.00	1.16 H	227	9.84	48.16
5	9608.00	34.41 AV	54.00	-19.59	1.16 H	227	-13.75	48.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1202.00	32.47 PK	74.00	-41.53	1.12 V	34	4.50	27.97
2	*2402.00	95.16 PK	114.00	-18.84	1.00 V	141	61.70	33.46
2	*2402.00	71.57 AV	94.00	-22.43	1.00 V	141	38.11	33.46
3	4804.00	54.33 PK	74.00	-19.67	1.30 V	24	13.10	41.23
3	4804.00	30.74 AV	54.00	-23.26	1.30 V	24	-10.49	41.23
4	7206.00	49.41 PK	74.00	-24.59	1.24 V	360	4.02	45.39
5	9608.00	58.10 PK	74.00	-15.90	1.29 V	41	9.94	48.16
5	9608.00	34.51 AV	54.00	-19.49	1.29 V	41	-13.65	48.16

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.
6. The corrected factor of duty cycle is: $20\log(1.04/15.72) = -23.59\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$



EUT	XBOX 2.4GHz Game Controller	MODEL	XC1
MODE	Channel 39	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	4.5VDC from battery	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1221.00	32.57 PK	74.00	-41.43	1.30 H	249	4.54	28.03
2	*2441.00	101.12 PK	114.00	-12.88	1.13 H	360	67.51	33.61
2	*2441.00	77.53 AV	94.00	-16.47	1.13 H	360	43.92	33.61
3	4882.00	59.27 PK	74.00	-14.73	1.22 H	242	18.10	41.17
3	4882.00	35.68 AV	54.00	-18.32	1.22 H	242	-5.49	41.17
4	7322.00	55.41 PK	74.00	-18.59	1.42 H	215	9.77	45.64
4	7322.00	31.82 AV	54.00	-22.18	1.42 H	215	-13.82	45.64
5	9764.00	57.38 PK	74.00	-16.62	1.37 H	297	8.91	48.48
5	9764.00	33.79 AV	54.00	-20.21	1.37 H	297	-14.68	48.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1221.00	31.57 PK	74.00	-42.43	1.35 V	204	3.54	28.03
2	*2441.00	97.02 PK	114.00	-16.98	1.44 V	174	63.41	33.61
2	*2441.00	73.43 AV	94.00	-20.57	1.44 V	174	39.82	33.61
3	4881.00	61.87 PK	74.00	-12.13	1.24 V	21	20.70	41.17
3	4881.00	38.28 AV	54.00	-15.72	1.24 V	21	-2.89	41.17
4	7323.00	56.71 PK	74.00	-17.29	1.43 V	327	11.07	45.64
4	7323.00	33.12 AV	54.00	-20.88	1.43 V	327	-12.52	45.64
5	9764.00	60.78 PK	74.00	-13.22	1.44 V	174	12.31	48.48
5	9764.00	37.19 AV	54.00	-16.81	1.44 V	174	-11.28	48.48

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. “ * “ : Fundamental frequency
5. The other emission levels were very low against the limit.
6. The corrected factor of duty cycle is: $20\log(1.04/15.72) = -23.59\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	XBOX 2.4GHz Game Controller	MODEL	XC1
MODE	Channel 78	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	4.5VDC from battery	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1243.00	31.38 PK	74.00	-42.62	1.36 H	17	3.29	28.09
2	*2480.00	101.05 PK	114.00	-12.95	1.03 H	189	67.30	33.75
2	*2480.00	77.46 AV	94.00	-16.54	1.03 H	189	43.71	33.75
3	2483.50	71.56 PK	74.00	-2.44	1.03 H	189	37.79	33.77
3	2483.50	47.97 AV	54.00	-6.03	1.03 H	189	14.20	33.77
4	4960.00	60.72 PK	74.00	-13.28	1.51 H	116	19.50	41.22
4	4960.00	37.13 AV	54.00	-16.87	1.51 H	116	-4.09	41.22
5	7440.00	57.41 PK	74.00	-16.59	1.30 H	241	11.62	45.79
5	7440.00	33.82 AV	54.00	-20.18	1.30 H	241	-11.97	45.79
6	9920.00	56.70 PK	74.00	-17.30	1.41 H	161	7.67	49.03
6	9920.00	33.11 AV	54.00	-20.89	1.41 H	161	-15.92	49.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1240.00	32.66 PK	74.00	-41.34	1.24 V	174	4.58	28.08
2	*2480.00	94.65 PK	114.00	-19.35	1.09 V	122	60.90	33.75
2	*2480.00	71.06 AV	94.00	-22.93	1.09 V	122	37.31	33.75
3	2483.50	65.17 PK	74.00	-8.83	1.09 V	122	31.40	33.77
3	2483.50	41.58 AV	54.00	-12.42	1.09 V	122	7.81	33.77
4	4960.00	63.62 PK	74.00	-10.38	1.64 V	229	22.40	41.22
4	4960.00	40.03 AV	54.00	-13.97	1.64 V	229	-1.19	41.22
5	7440.00	57.11 PK	74.00	-16.89	1.39 V	274	11.32	45.79
5	7440.00	33.52 AV	54.00	-20.48	1.39 V	274	-12.27	45.79
6	9920.00	62.70 PK	74.00	-11.30	1.22 V	262	13.67	49.03
6	9920.00	39.11 AV	54.00	-14.89	1.22 V	262	-9.92	49.03

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. “ * “ : Fundamental frequency
5. The other emission levels were very low against the limit.
6. The corrected factor of duty cycle is: $20\log(1.04/15.72) = -23.59\text{dB}$
7. Average value = peak reading $-20\log(\text{duty cycle})$

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RB).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation





4.8.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 3 pages. All the transmitting emissions locate in 2.4GHz to 2.4835GHz. It shows compliance with the requirement in part 15.249.

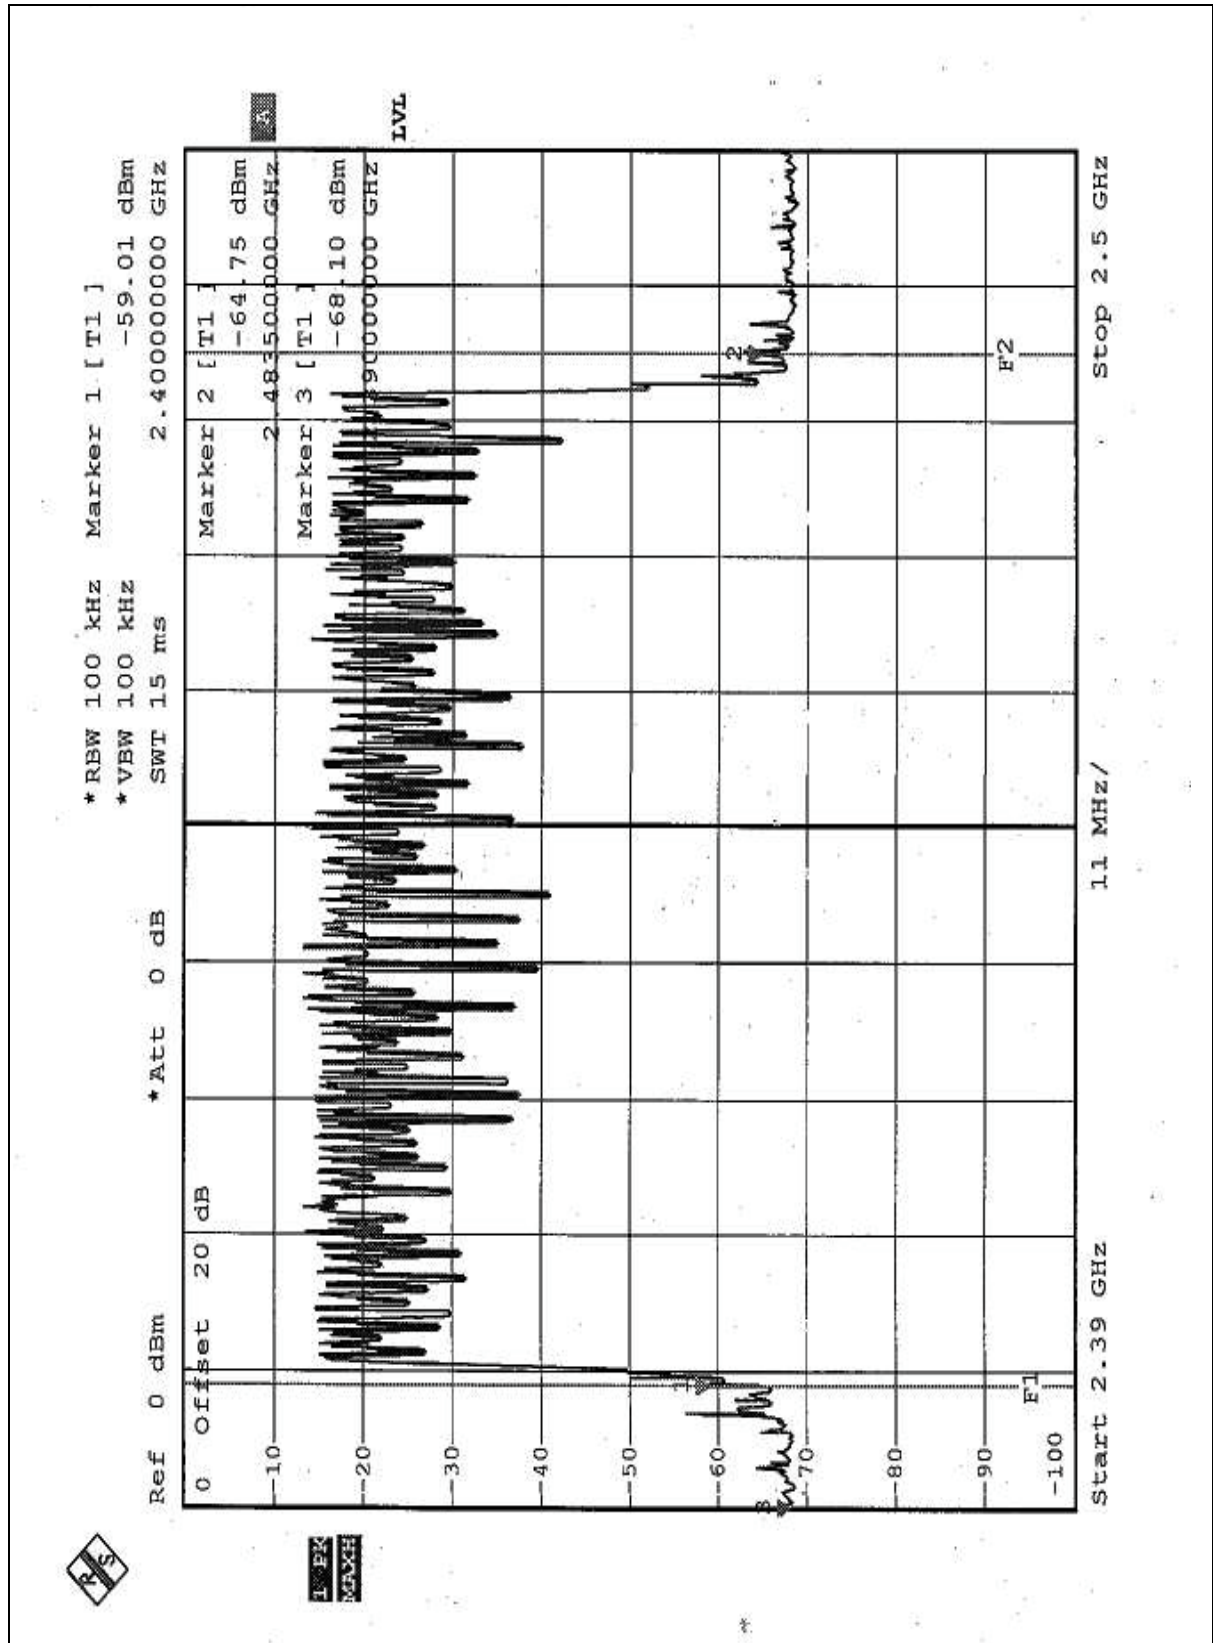

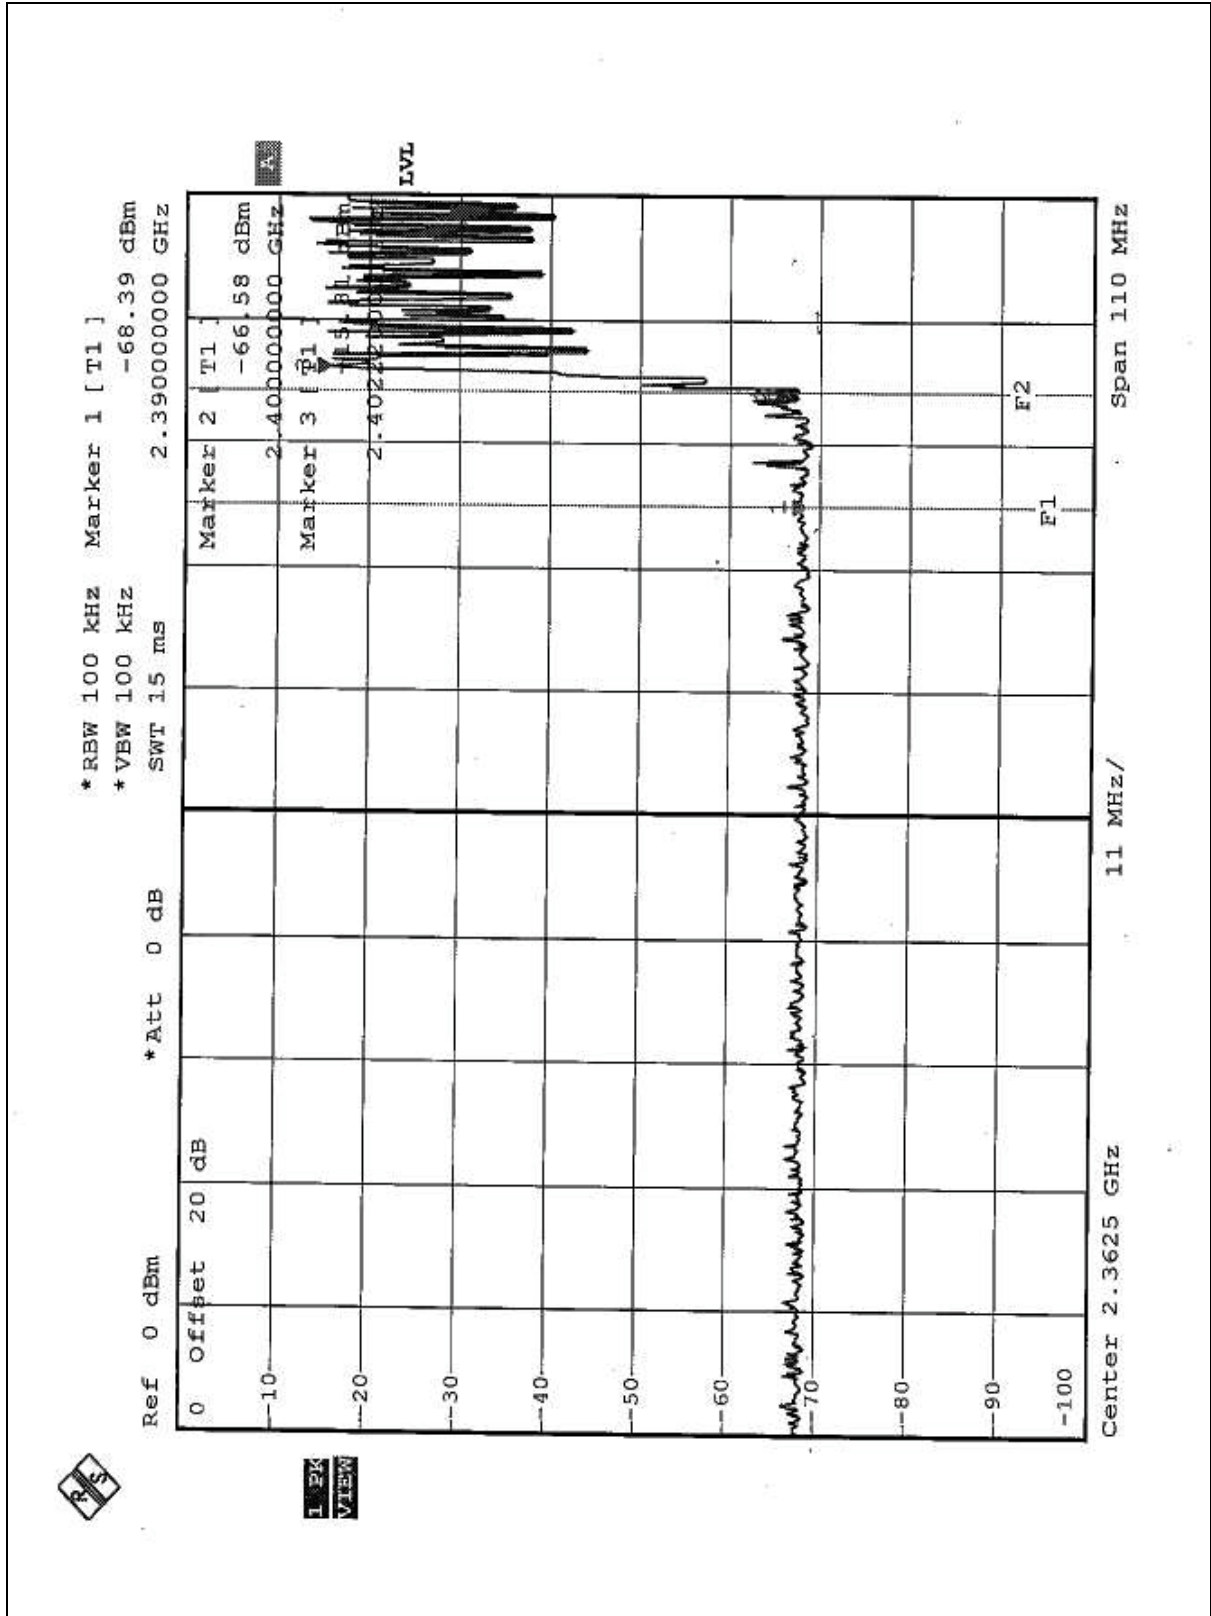

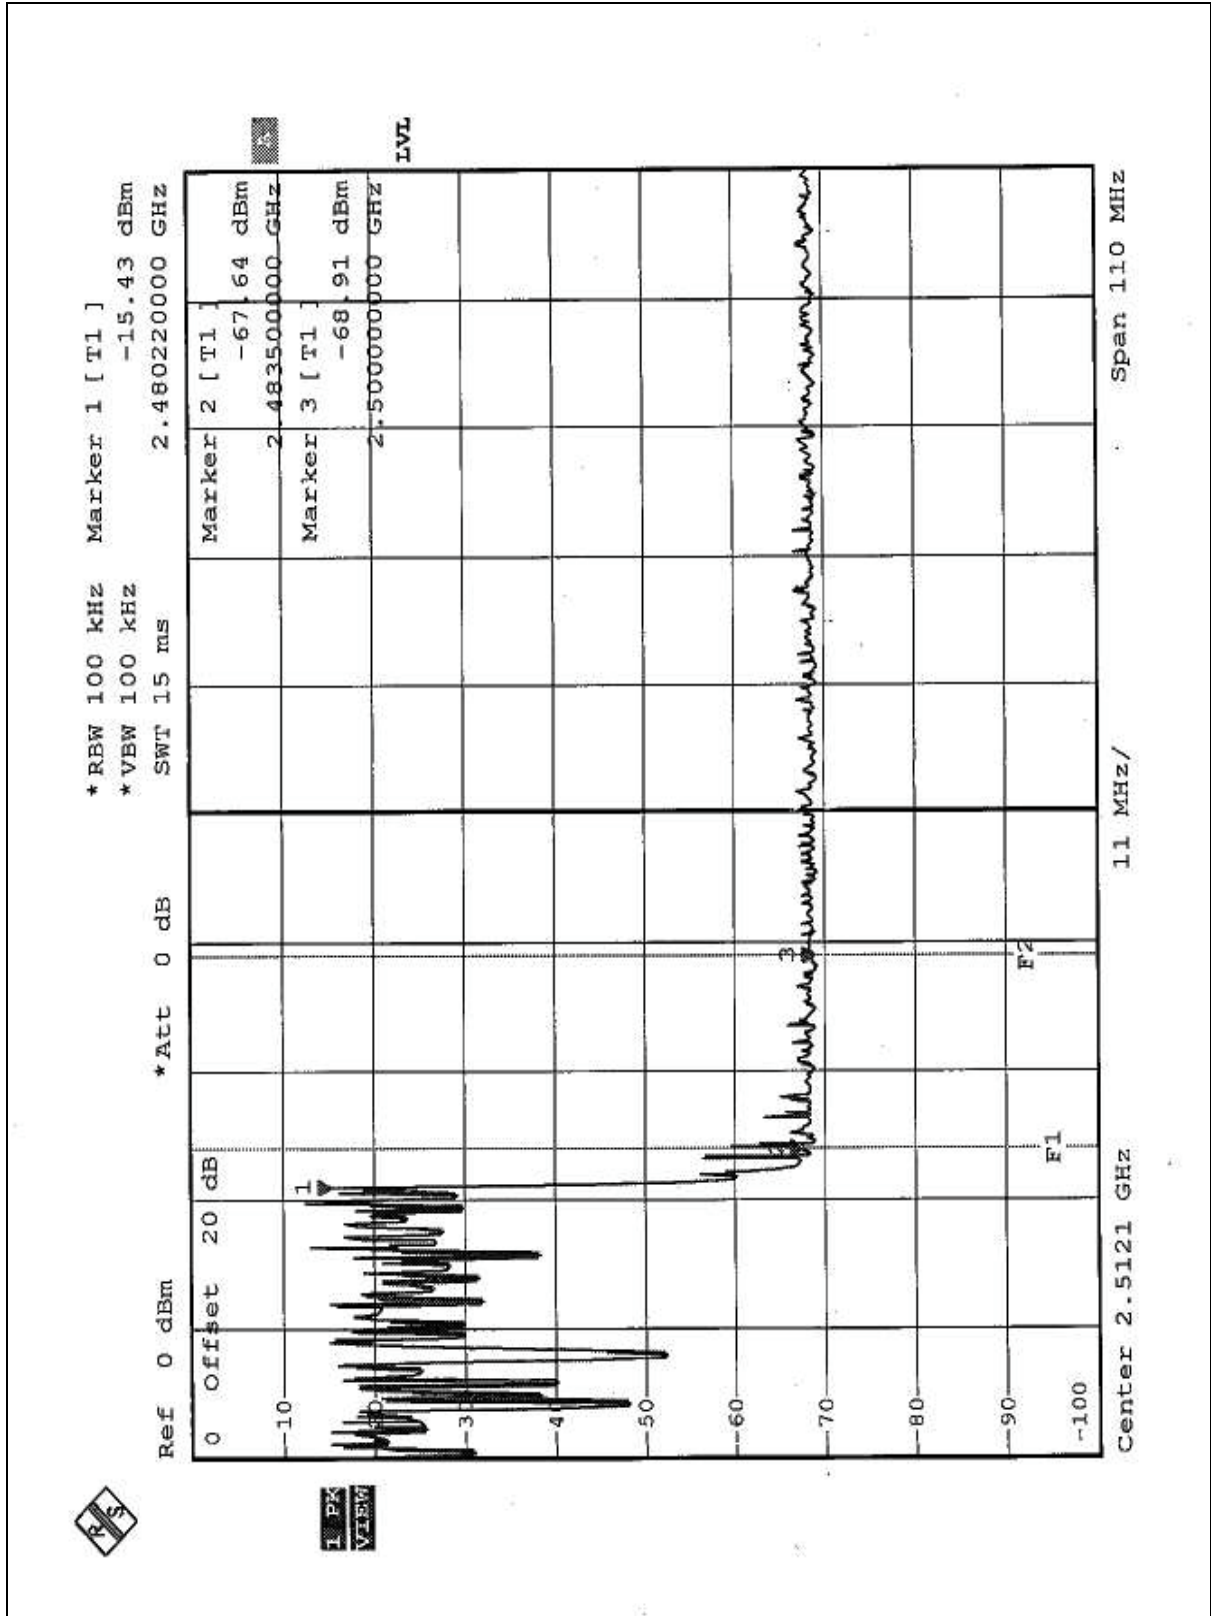

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.