

FCC Test Report

Report No.: RF170428C28

FCC ID: QYL8260GAINB300

Test Model: B300

Received Date: Apr. 28, 2017

Test Date: May 16, 2017 ~ May 23, 2017

Issued Date: Jul. 25, 2017

Applicant: Getac Technology Corporation.

Address: 5F., Building A, No. 209, Sec.1, Nangang Rd.,Nangang Dist., Taipei City 11568, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan, R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards.....	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Set Up	16
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results	17
4.2 Conducted Emission Measurement.....	30
4.2.1 Limits of Conducted Emission Measurement	30
4.2.2 Test Instruments	30
4.2.3 Test Procedures.....	31
4.2.4 Deviation from Test Standard	31
4.2.5 Test Setup.....	31
4.2.6 EUT Operating Conditions.....	31
4.2.7 Test Results	32
4.3 6 dB Bandwidth Measurement.....	34
4.3.1 Limits of 6 dB Bandwidth Measurement.....	34
4.3.2 Test Setup.....	34
4.3.3 Test Instruments	34
4.3.4 Test Procedure	34
4.3.5 Deviation from Test Standard	34
4.3.6 EUT Operating Conditions.....	34
4.3.7 Test Result	35
4.4 Occupied Bandwidth Measurement.....	37
4.4.1 Test Setup.....	37
4.4.2 Test Instruments	37
4.4.3 Test Procedure	37
4.4.4 Deviation From Test Standard	37
4.4.5 EUT Operating Conditions.....	37
4.4.6 Test Results	38
4.5 Conducted Output Power Measurement	40
4.5.1 Limits of Conducted Output Power Measurement.....	40
4.5.2 Test Setup.....	40
4.5.3 Test Instruments	40
4.5.4 Test Procedures.....	40
4.5.5 Deviation from Test Standard	40
4.5.6 EUT Operating Conditions.....	40
4.5.7 Test Results	41

4.6 Power Spectral Density Measurement	42
4.6.1 Limits of Power Spectral Density Measurement.....	42
4.6.2 Test Setup.....	42
4.6.3 Test Instruments	42
4.6.4 Test Procedure	42
4.6.5 Deviation from Test Standard	42
4.6.6 EUT Operating Condition	42
4.6.7 Test Results	43
4.7 Conducted Out of Band Emission Measurement	45
4.7.1 Limits of Conducted Out of Band Emission Measurement.....	45
4.7.2 Test Setup.....	45
4.7.3 Test Instruments	45
4.7.4 Test Procedure	45
4.7.5 Deviation from Test Standard	45
4.7.6 EUT Operating Condition	45
4.7.7 Test Results	46
5 Pictures of Test Arrangements.....	58
Appendix – Information on the Testing Laboratories	59

Release Control Record

Issue No.	Description	Date Issued
RF170428C28	Original Release	Jul. 25, 2017

1 Certificate of Conformity

Product: Industrial Notebook

Brand: Getac

Test Model: B300

Sample Status: Production Unit

Applicant: Getac Technology Corporation.


Test Date: May 16, 2017 ~ May 23, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.


Prepared by :

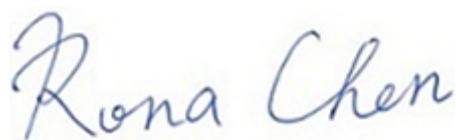

, **Date:** Jul. 25, 2017

Rona Chen / Specialist

Approved by :

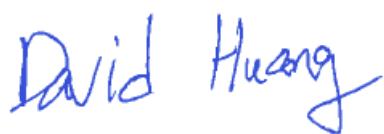

, **Date:** Jul. 25, 2017

David Huang / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)

FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -8.79 dB at 0.15400 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -10.47 dB at 515.97 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Industrial Notebook	
Brand	Getac	
Test Model	B300	
Status of EUT	Production Unit	
Power Supply Rating	19 Vdc (Adapter) 10.8 Vdc (Li-ion battery)	
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM	
Modulation Technology	DSSS, OFDM	
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7	
Operating Frequency	2412 ~ 2462 MHz	
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)	
Output Power	284.446 mW	
Antenna Type	PIFA antenna with	Main: -0.3 dBi gain Aux.: -3.55 dBi gain
Antenna Connector	N/A	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	Chicony	A10-090P3A	I/P: 100-240Vac, 50-60Hz, 1.5A O/P: 19Vdc, 4.74A 1.8m shielded cable with 1 core
Battery	Getac	BP3S3P2900	10.8Vdc

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	SISO
B	√	√	-	√	MIMO

Where RE≥1G: Radiated Emission above 1 GHz
 PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1 GHz
 APCM: Antenna Port Conducted Measurement

NOTE: “-“ means no effects

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
B	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
B	802.11n (HT40)	3 to 9	9	OFDM	BPSK	MCS0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
B	802.11n (HT40)	3 to 9	9	OFDM	BPSK	MCS0

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
B	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	MCS0
	802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	MCS0

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
B	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0

Test Condition:


Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Toby Tian
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Toby Tian
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
APCM	25 deg. C, 65 % RH	10.8 Vdc	Carlos Chen

3.3 Duty Cycle of Test Signal

Mode A

802.11b: Duty cycle of test signal is 100 %, duty factor is not required.


802.11g: Duty cycle = $2.044/2.161 = 0.946$, Duty factor = $10 * \log(1/0.946) = 0.24$

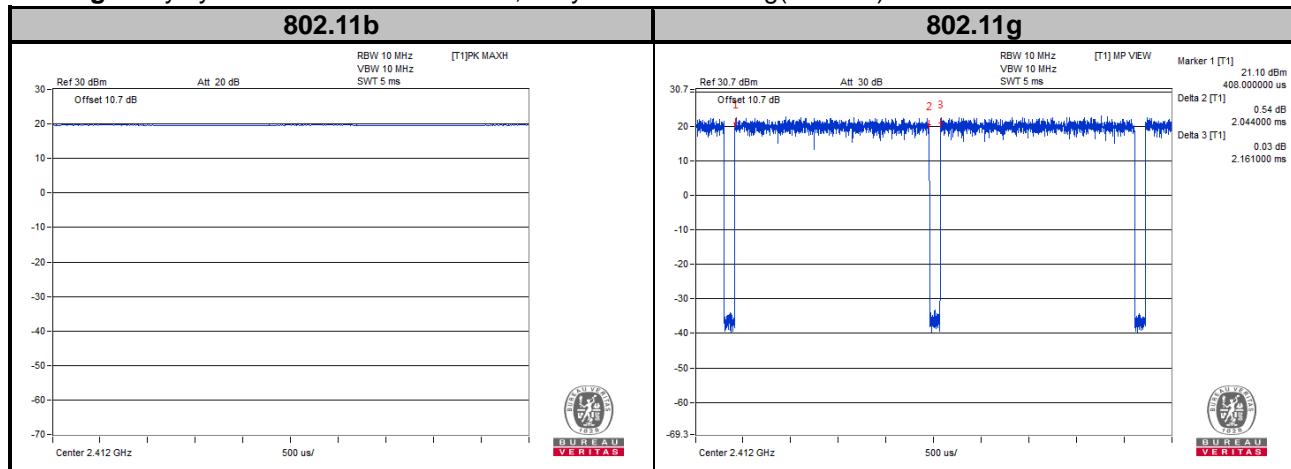

Mode B

802.11n (HT20): Duty cycle = $0.972/1.200 = 0.810$, Duty factor = $10 * \log(1/0.810) = 0.92$


802.11n (HT40): Duty cycle = $0.490/0.589 = 0.832$, Duty factor = $10 * \log(1/0.832) = 0.80$

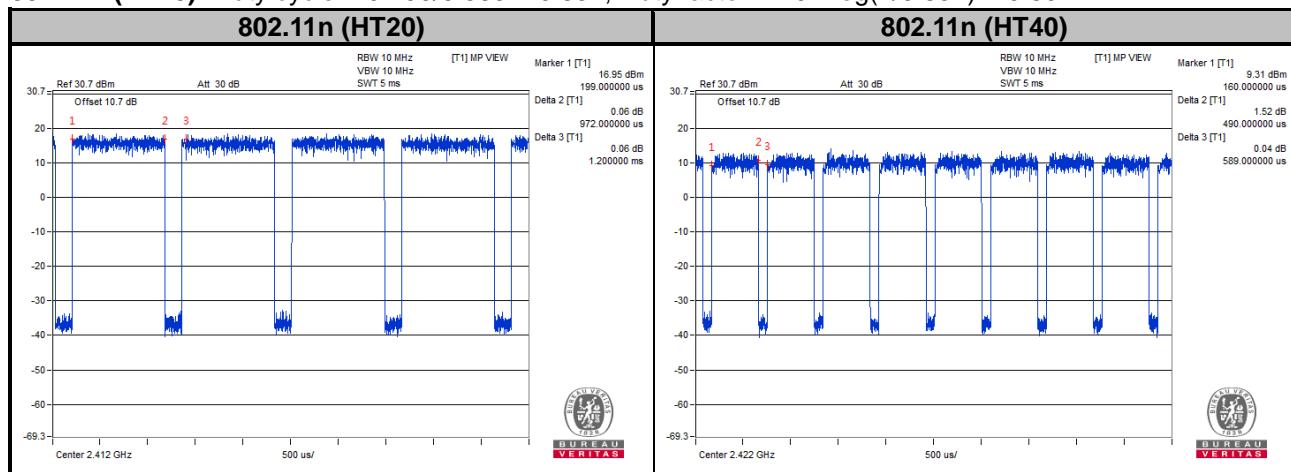

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4.1 Configuration of System under Test

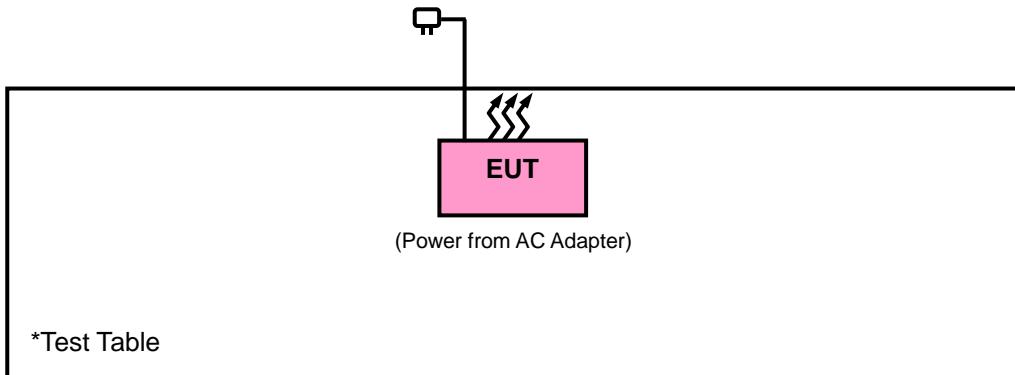

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v04

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).

The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Feb. 17, 2017	Feb. 16, 2018
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 16, 2016	Dec. 15, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 13, 2016	Dec. 12, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 26, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 12, 2016	Dec. 13, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 14, 2016	Dec. 13, 2017
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 08, 2016	Jul. 07, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2016	Aug. 10, 2017
Preamplifier EMCI	EMC 012645	980115	Oct. 21, 2016	Oct. 20, 2017
Preamplifier EMCI	EMC 184045	980116	Oct. 21, 2016	Oct. 20, 2017
Preamplifier EMCI	EMC 330H	980112	Oct. 21, 2016	Oct. 20, 2017
Power Meter Anritsu	ML2495A	1232002	Sep. 08, 2016	Sep. 07, 2017
Power Sensor Anritsu	MA2411B	1207325	Sep. 08, 2016	Sep. 07, 2017
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 21, 2016	Oct. 20, 2017
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 21, 2016	Oct. 20, 2017
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 21, 2016	Oct. 20, 2017
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.
 3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
 4. The FCC Site Registration No. is 690701.
 5. The IC Site Registration No. is IC7450F-10.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 KHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for Average (Duty cycle < 98 %) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1 GHz>

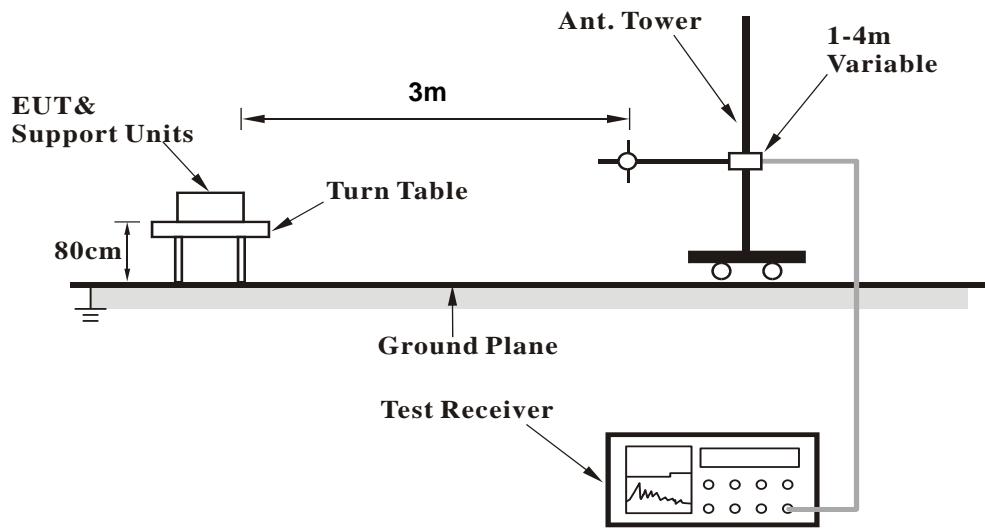

<Frequency Range above 1 GHz>

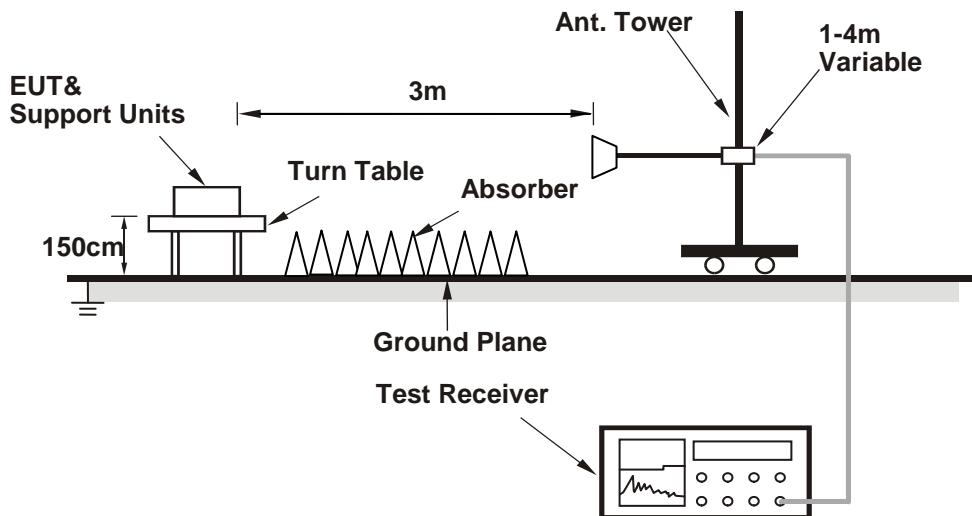

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data :

Mode A

802.11b

EUT Test Condition			Measurement Detail						
Channel		Channel 1	Frequency Range			1 GHz ~ 25 GHz			
Input Power		120 Vac, 60 Hz	Detector Function			Peak (PK) Average (AV)			
Environmental Conditions		25 deg. C, 65 % RH	Tested By			Toby Tian			

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.65	49.2	55.71	74	-24.8	26.91	4.08	37.5	113	13	Peak
2389.92	34.64	41.17	54	-19.36	26.91	4.08	37.52	113	13	Average
2412	90.22	96.69			26.96	4.09	37.52	113	13	Average
2412	97	103.47			26.96	4.09	37.52	113	13	Peak
4824	33.69	48.99	54	-20.31	30.99	6.79	53.08	110	152	Average
4824	43.34	58.64	74	-30.66	30.99	6.79	53.08	110	152	Peak

Antennal Polarity & Test Distance: Vertical at 3 m

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2380.83	47.56	54.12	74	-26.44	26.86	4.08	37.5	120	136	Peak
2388.75	34.46	40.97	54	-19.54	26.91	4.08	37.5	120	136	Average
2412	88.09	94.56			26.96	4.09	37.52	120	136	Average
2412	95.46	101.93			26.96	4.09	37.52	120	136	Peak
4824	37.94	53.24	54	-16.06	30.99	6.79	53.08	171	0	Average
4824	42.29	57.59	74	-31.71	30.99	6.79	53.08	171	0	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

2. 2412 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail					
Channel		Channel 6			Frequency Range		1 GHz ~ 25 GHz	
Input Power		120 Vac, 60 Hz			Detector Function		Peak (PK) Average (AV)	
Environmental Conditions		25 deg. C, 65 % RH			Tested By		Toby Tian	

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2378.94	46.93	53.5	74	-27.07	26.86	4.07	37.5	114	14	Peak
2383.08	34.18	40.74	54	-19.82	26.86	4.08	37.5	114	14	Average
2437	90.29	96.57			27.06	4.12	37.46	114	14	Average
2437	97.33	103.61			27.06	4.12	37.46	114	14	Peak
2485.12	47.7	53.72	74	-26.3	27.15	4.15	37.32	114	14	Peak
2490.44	34.93	40.89	54	-19.07	27.2	4.16	37.32	114	14	Average
4874	33.47	48.61	54	-20.53	31.06	6.85	53.05	111	165	Average
4874	44.55	59.69	74	-29.45	31.06	6.85	53.05	111	165	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2378.31	46.35	52.92	74	-27.65	26.86	4.07	37.5	117	140	Peak
2387.13	34.18	40.69	54	-19.82	26.91	4.08	37.5	117	140	Average
2437	88.54	94.82			27.06	4.12	37.46	117	140	Average
2437	95.82	102.1			27.06	4.12	37.46	117	140	Peak
2490.92	34.84	40.8	54	-19.16	27.2	4.16	37.32	117	140	Average
2493.64	47.48	53.37	74	-26.52	27.2	4.16	37.25	117	140	Peak
4874	38.57	53.71	54	-15.43	31.06	6.85	53.05	169	0	Average
4874	45.19	60.33	74	-28.81	31.06	6.85	53.05	169	0	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail		
Channel		Channel 11		Frequency Range	1 GHz ~ 25 GHz
Input Power		120 Vac, 60 Hz		Detector Function	Peak (PK) Average (AV)
Environmental Conditions		25 deg. C, 65 % RH		Tested By	Toby Tian

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	90.82	96.98			27.1	4.13	37.39	113	14	Average
2462	97.29	103.45			27.1	4.13	37.39	113	14	Peak
2487.12	36.7	42.72	54	-17.3	27.15	4.15	37.32	113	14	Average
2490.52	51.44	57.4	74	-22.56	27.2	4.16	37.32	113	14	Peak
4924	33.71	48.74	54	-20.29	31.12	6.88	53.03	111	166	Average
4924	43.47	58.5	74	-30.53	31.12	6.88	53.03	111	166	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	88.43	94.59			27.1	4.13	37.39	118	140	Average
2462	95.28	101.44			27.1	4.13	37.39	118	140	Peak
2487.12	36.25	42.27	54	-17.75	27.15	4.15	37.32	118	140	Average
2487.56	48.24	54.2	74	-25.76	27.2	4.16	37.32	118	140	Peak
4924	37.41	52.44	54	-16.59	31.12	6.88	53.03	165	0	Average
4924	43.45	58.48	74	-30.55	31.12	6.88	53.03	165	0	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.

802.11g

EUT Test Condition			Measurement Detail						
Channel		Channel 1			Frequency Range		1 GHz ~ 25 GHz		
Input Power		120 Vac, 60 Hz			Detector Function		Peak (PK) Average (AV)		
Environmental Conditions		25 deg. C, 65 % RH			Tested By		Toby Tian		

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2378.94	48.31	54.88	74	-25.69	26.86	4.07	37.5	115	14	Peak
2389.92	36.25	42.78	54	-17.75	26.91	4.08	37.52	115	14	Average
2412	87.17	93.64			26.96	4.09	37.52	115	14	Average
2412	97.66	104.13			26.96	4.09	37.52	115	14	Peak
4824	33.38	48.68	54	-20.62	30.99	6.79	53.08	112	166	Average
4824	42.66	57.96	74	-31.34	30.99	6.79	53.08	112	166	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.47	51.2	57.71	74	-22.8	26.91	4.08	37.5	120	141	Peak
2389.92	35.56	42.09	54	-18.44	26.91	4.08	37.52	120	141	Average
2412	85.45	91.92			26.96	4.09	37.52	120	141	Average
2412	95.3	101.77			26.96	4.09	37.52	120	141	Peak
4824	35.95	51.25	54	-18.05	30.99	6.79	53.08	165	2	Average
4824	44.16	59.46	74	-29.84	30.99	6.79	53.08	165	2	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2412 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail					
Channel		Channel 6			Frequency Range		1 GHz ~ 25 GHz	
Input Power		120 Vac, 60 Hz			Detector Function		Peak (PK) Average (AV)	
Environmental Conditions		25 deg. C, 65 % RH			Tested By		Toby Tian	

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2359.77	47.06	53.69	74	-26.94	26.81	4.05	37.49	113	14	Peak
2386.95	34.38	40.89	54	-19.62	26.91	4.08	37.5	113	14	Average
2437	87.67	93.95			27.06	4.12	37.46	113	14	Average
2437	97.1	103.38			27.06	4.12	37.46	113	14	Peak
2484.32	35.24	41.26	54	-18.76	27.15	4.15	37.32	113	14	Average
2498.48	48.31	54.2	74	-25.69	27.2	4.16	37.25	113	14	Peak
4874	33.24	48.38	54	-20.76	31.06	6.85	53.05	110	166	Average
4874	42.66	57.8	74	-31.34	31.06	6.85	53.05	110	166	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2359.05	34.21	40.84	54	-19.79	26.81	4.05	37.49	117	170	Average
2377.41	47.26	53.83	74	-26.74	26.86	4.07	37.5	117	170	Peak
2437	85.42	91.7			27.06	4.12	37.46	117	170	Average
2437	95.02	101.3			27.06	4.12	37.46	117	170	Peak
2484.08	48.09	54.11	74	-25.91	27.15	4.15	37.32	117	170	Peak
2489.2	35.42	41.38	54	-18.58	27.2	4.16	37.32	117	170	Average
4874	36.2	51.34	54	-17.8	31.06	6.85	53.05	172	1	Average
4874	44.58	59.72	74	-29.42	31.06	6.85	53.05	172	1	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail		
Channel		Channel 11		Frequency Range	1 GHz ~ 25 GHz
Input Power		120 Vac, 60 Hz		Detector Function	Peak (PK) Average (AV)
Environmental Conditions		25 deg. C, 65 % RH		Tested By	Toby Tian

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	85.8	91.96			27.1	4.13	37.39	110	16	Average
2462	97.84	104			27.1	4.13	37.39	110	16	Peak
2483.76	37.31	43.33	54	-16.69	27.15	4.15	37.32	110	16	Average
2496.48	51.22	57.11	74	-22.78	27.2	4.16	37.25	110	16	Peak
4924	33.7	48.73	54	-20.3	31.12	6.88	53.03	113	163	Average
4924	44.15	59.18	74	-29.85	31.12	6.88	53.03	113	163	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	85.56	91.72			27.1	4.13	37.39	117	165	Average
2462	95.09	101.25			27.1	4.13	37.39	117	165	Peak
2483.84	36.01	42.03	54	-17.99	27.15	4.15	37.32	117	165	Average
2494.36	51.52	57.41	74	-22.48	27.2	4.16	37.25	117	165	Peak
4924	36.32	51.35	54	-17.68	31.12	6.88	53.03	164	0	Average
4924	42.87	57.9	74	-31.13	31.12	6.88	53.03	164	0	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.

Mode B
802.11n (HT20)

EUT Test Condition		Measurement Detail							
Channel	Channel 1	Frequency Range				1 GHz ~ 25 GHz			
Input Power	120 Vac, 60 Hz	Detector Function				Peak (PK) Average (AV)			
Environmental Conditions	25 deg. C, 65 % RH	Tested By				Toby Tian			

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.56	57.77	64.28	74	-16.23	26.91	4.08	37.5	242	356	Peak
2389.92	39.07	45.6	54	-14.93	26.91	4.08	37.52	242	356	Average
2412	93.83	100.3			26.96	4.09	37.52	242	356	Average
2412	103.49	109.96			26.96	4.09	37.52	242	356	Peak
4824	33.28	48.58	54	-20.72	30.99	6.79	53.08	162	104	Average
4824	43.88	59.18	74	-30.12	30.99	6.79	53.08	162	104	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2376.06	54.35	60.92	74	-19.65	26.86	4.07	37.5	196	273	Peak
2389.47	38.06	44.57	54	-15.94	26.91	4.08	37.5	196	273	Average
2412	92.24	98.71			26.96	4.09	37.52	196	273	Average
2412	101.7	108.17			26.96	4.09	37.52	196	273	Peak
4824	32.95	48.25	54	-21.05	30.99	6.79	53.08	142	241	Average
4824	44.18	59.48	74	-29.82	30.99	6.79	53.08	142	241	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2412 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail			
Channel		Channel 6			Frequency Range	1 GHz ~ 25 GHz
Input Power		120 Vac, 60 Hz			Detector Function	Peak (PK) Average (AV)
Environmental Conditions		25 deg. C, 65 % RH			Tested By	Toby Tian

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2381.64	48.28	54.84	74	-25.72	26.86	4.08	37.5	242	355	Peak
2389.47	35.93	42.44	54	-18.07	26.91	4.08	37.5	242	355	Average
2437	94.11	100.39			27.06	4.12	37.46	242	355	Average
2437	103.64	109.92			27.06	4.12	37.46	242	355	Peak
2484.04	37.1	43.12	54	-16.9	27.15	4.15	37.32	242	355	Average
2488.84	49.43	55.39	74	-24.57	27.2	4.16	37.32	242	355	Peak
4874	33.62	48.76	54	-20.38	31.06	6.85	53.05	173	92	Average
4874	44.68	59.82	74	-29.32	31.06	6.85	53.05	173	92	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2359.59	48.18	54.81	74	-25.82	26.81	4.05	37.49	193	270	Peak
2364.45	35.54	42.16	54	-18.46	26.81	4.07	37.5	193	270	Average
2437	92.33	98.61			27.06	4.12	37.46	193	270	Average
2437	101.82	108.1			27.06	4.12	37.46	193	270	Peak
2483.96	48.65	54.67	74	-25.35	27.15	4.15	37.32	193	270	Peak
2490.56	36.18	42.14	54	-17.82	27.2	4.16	37.32	193	270	Average
4874	33.16	48.3	54	-20.84	31.06	6.85	53.05	149	246	Average
4874	45.37	60.51	74	-28.63	31.06	6.85	53.05	149	246	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail		
Channel		Channel 11		Frequency Range	1 GHz ~ 25 GHz
Input Power		120 Vac, 60 Hz		Detector Function	Peak (PK) Average (AV)
Environmental Conditions		25 deg. C, 65 % RH		Tested By	Toby Tian

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	93.75	99.91			27.1	4.13	37.39	241	357	Average
2462	103.32	109.48			27.1	4.13	37.39	241	357	Peak
2483.52	38.49	44.51	54	-15.51	27.15	4.15	37.32	241	357	Average
2486.52	59.93	65.95	74	-14.07	27.15	4.15	37.32	241	357	Peak
4924	33.55	48.58	54	-20.45	31.12	6.88	53.03	166	98	Average
4924	44.09	59.12	74	-29.91	31.12	6.88	53.03	166	98	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	92.5	98.66			27.1	4.13	37.39	193	272	Average
2462	101.67	107.83			27.1	4.13	37.39	193	272	Peak
2484.08	37.97	43.99	54	-16.03	27.15	4.15	37.32	193	272	Average
2495.08	55.69	61.58	74	-18.31	27.2	4.16	37.25	193	272	Peak
4924	33.15	48.18	54	-20.85	31.12	6.88	53.03	143	252	Average
4924	44.2	59.23	74	-29.8	31.12	6.88	53.03	143	252	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.

802.11n (HT40)

EUT Test Condition			Measurement Detail						
Channel		Channel 3			Frequency Range		1 GHz ~ 25 GHz		
Input Power		120 Vac, 60 Hz			Detector Function		Peak (PK) Average (AV)		
Environmental Conditions		25 deg. C, 65 % RH			Tested By		Toby Tian		

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.66	40.64	47.15	54	-13.36	26.91	4.08	37.5	245	353	Peak
2389.47	52.81	59.32	74	-21.19	26.91	4.08	37.5	245	353	Peak
2422	92.27	98.61			27.01	4.11	37.46	245	353	Average
2422	101.96	108.3			27.01	4.11	37.46	245	353	Peak
2485.24	37.84	43.86	54	-16.16	27.15	4.15	37.32	245	353	Peak
2492.68	49.91	55.8	74	-24.09	27.2	4.16	37.25	245	353	Peak
4844	33.11	48.34	54	-20.89	31.01	6.82	53.06	159	101	Average
4844	44.17	59.4	74	-29.83	31.01	6.82	53.06	159	101	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.65	40.59	47.1	54	-13.41	26.91	4.08	37.5	197	271	Average
2389.92	53.7	60.23	74	-20.3	26.91	4.08	37.52	197	271	Peak
2422	90.97	97.31			27.01	4.11	37.46	197	271	Average
2422	100.29	106.63			27.01	4.11	37.46	197	271	Peak
2490.56	37.17	43.13	54	-16.83	27.2	4.16	37.32	197	271	Average
2493.2	49.61	55.5	74	-24.39	27.2	4.16	37.25	197	271	Peak
4844	32.97	48.2	54	-21.03	31.01	6.82	53.06	138	253	Average
4844	43.72	58.95	74	-30.28	31.01	6.82	53.06	138	253	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2422 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail			
Channel		Channel 6			Frequency Range	1 GHz ~ 25 GHz
Input Power		120 Vac, 60 Hz			Detector Function	Peak (PK) Average (AV)
Environmental Conditions		25 deg. C, 65 % RH			Tested By	Toby Tian

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.47	50.72	57.23	74	-23.28	26.91	4.08	37.5	246	354	Peak
2389.65	37.96	44.47	54	-16.04	26.91	4.08	37.5	246	354	Average
2437	92.77	99.05			27.06	4.12	37.46	246	354	Average
2437	102.19	108.47			27.06	4.12	37.46	246	354	Peak
2484.88	37.88	43.9	54	-16.12	27.15	4.15	37.32	246	354	Average
2486.8	50.99	57.01	74	-23.01	27.15	4.15	37.32	246	354	Peak
4874	33.24	48.38	54	-20.76	31.06	6.85	53.05	167	90	Average
4874	43.86	59	74	-30.14	31.06	6.85	53.05	167	90	Peak

Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2382.72	49.24	55.8	74	-24.76	26.86	4.08	37.5	197	276	Peak
2389.92	37.16	43.69	54	-16.84	26.91	4.08	37.52	197	276	Average
2437	91.17	97.45			27.06	4.12	37.46	197	276	Average
2437	100.51	106.79			27.06	4.12	37.46	197	276	Peak
2485.08	37.65	43.67	54	-16.35	27.15	4.15	37.32	197	276	Average
2486.8	49.2	55.22	74	-24.8	27.15	4.15	37.32	197	276	Peak
4874	32.91	48.05	54	-21.09	31.06	6.85	53.05	133	243	Average
4874	44.84	59.98	74	-29.16	31.06	6.85	53.05	133	243	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail			
Channel		Channel 9			Frequency Range	1 GHz ~ 25 GHz
Input Power		120 Vac, 60 Hz			Detector Function	Peak (PK) Average (AV)
Environmental Conditions		25 deg. C, 65 % RH			Tested By	Toby Tian

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2362.2	48.59	55.2	74	-25.41	26.81	4.07	37.49	242	351	Peak
2386.23	36.78	43.29	54	-17.22	26.91	4.08	37.5	242	351	Average
2452	92.41	98.61			27.06	4.13	37.39	242	351	Average
2452	101.9	108.1			27.06	4.13	37.39	242	351	Peak
2483.72	42.03	48.05	54	-11.97	27.15	4.15	37.32	242	351	Average
2483.92	53.49	59.51	74	-20.51	27.15	4.15	37.32	242	351	Peak
4904	33.21	48.26	54	-20.79	31.1	6.88	53.03	164	99	Average
4904	44.25	59.3	74	-29.75	31.1	6.88	53.03	164	99	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.47	36.87	43.38	54	-17.13	26.91	4.08	37.5	196	273	Average
2389.92	48.26	54.79	74	-25.74	26.91	4.08	37.52	196	273	Peak
2452	90.86	97.06			27.06	4.13	37.39	196	273	Average
2452	100.27	106.47			27.06	4.13	37.39	196	273	Peak
2483.6	53.52	59.54	74	-20.48	27.15	4.15	37.32	196	273	Peak
2484.08	41.43	47.45	54	-12.57	27.15	4.15	37.32	196	273	Average
4904	33.13	48.18	54	-20.87	31.1	6.88	53.03	139	240	Average
4904	44.93	59.98	74	-29.07	31.1	6.88	53.03	139	240	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2452 MHz: Fundamental frequency.

9 kHz ~ 30 MHz DATA:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz WORST-CASE DATA:

Mode A

802.11n (HT40)

EUT Test Condition		Measurement Detail						
Channel	Channel 9	Frequency Range				30 MHz ~ 1 GHz		
Input Power	120 Vac, 60 Hz	Detector Function				Peak (PK) Quasi-peak (QP)		
Environmental Conditions	25 deg. C, 65 % RH	Tested By				Toby Tian		

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
176.47	32.08	51.61	43.5	-11.42	11.1	1.17	31.8	132	266	Peak
297.72	32.83	50.13	46	-13.17	12.88	1.63	31.81	117	53	Peak
359.8	30.78	46.58	46	-15.22	14.38	1.79	31.97	130	300	Peak
483.96	29.08	41.84	46	-16.92	17	2.06	31.82	129	117	Peak
515.97	35.53	47.31	46	-10.47	17.68	2.12	31.58	105	242	Peak
644.98	28.93	38.49	46	-17.07	20.15	2.35	32.06	131	84	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
167.74	31.96	50.61	43.5	-11.54	11.96	1.15	31.76	100	155	Peak
299.66	21.8	39.07	46	-24.2	12.94	1.63	31.84	124	255	Peak
359.8	22.61	38.41	46	-23.39	14.38	1.79	31.97	104	135	Peak
451.95	28.24	41.86	46	-17.76	16.37	1.99	31.98	138	26	Peak
515.97	33.86	45.64	46	-12.14	17.68	2.12	31.58	109	77	Peak
644.98	29.06	38.62	46	-16.94	20.15	2.35	32.06	112	110	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 21, 2016	Nov. 20, 2017
RF signal cable Woken	5D-FB	Cable-cond1-01	Dec. 22, 2016	Dec. 21, 2017
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 28, 2016	Jul. 27, 2017
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

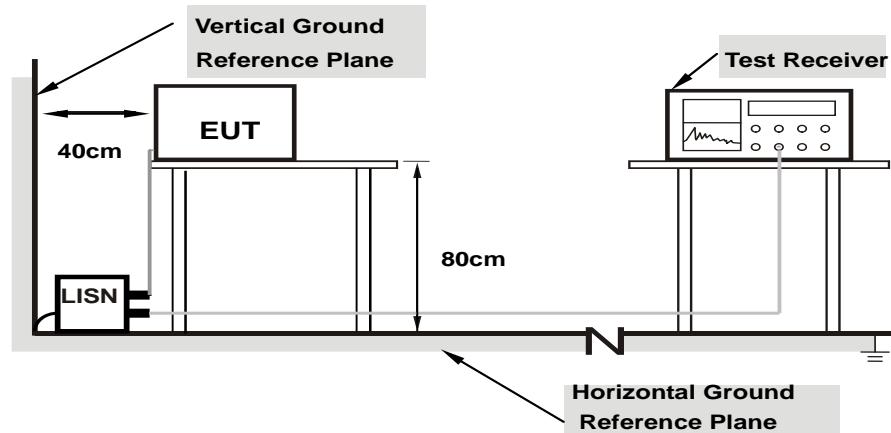

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.


4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Getaz Yang	Test Date	2017/5/23

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16977	10.35	27.67	20.91	38.02	31.26	64.97	54.97	-26.95	-23.71
2	0.24228	10.38	23.87	8.93	34.25	19.31	62.02	52.02	-27.77	-32.71
3	0.60200	10.40	23.10	12.12	33.50	22.52	56.00	46.00	-22.50	-23.48
4	1.91400	10.45	22.49	16.85	32.94	27.30	56.00	46.00	-23.06	-18.70
5	17.25000	11.21	28.31	26.86	39.52	38.07	60.00	50.00	-20.48	-11.93
6	25.49400	11.52	26.75	22.91	38.27	34.43	60.00	50.00	-21.73	-15.57

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

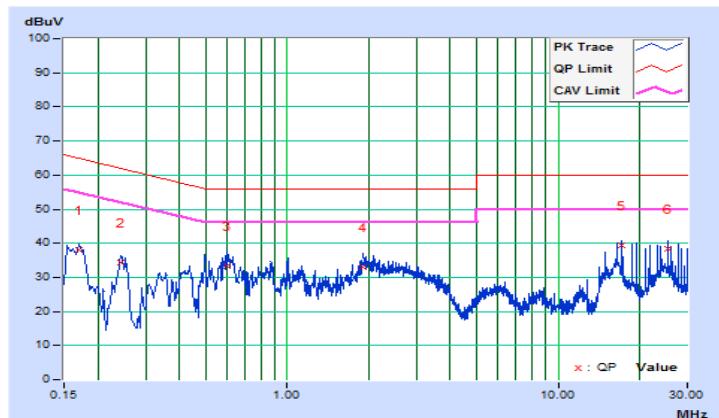


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Getaz Yang	Test Date	2017/5/23

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.11	46.88	24.53	56.99	34.64	65.78	55.78	-8.79	-21.14
2	0.25006	10.15	40.01	18.39	50.16	28.54	61.76	51.76	-11.60	-23.22
3	0.36600	10.16	34.70	12.67	44.86	22.83	58.59	48.59	-13.73	-25.76
4	0.52984	10.16	17.08	10.13	27.24	20.29	56.00	46.00	-28.76	-25.71
5	1.45400	10.20	13.03	6.94	23.23	17.14	56.00	46.00	-32.77	-28.86
6	17.25000	10.85	27.44	25.71	38.29	36.56	60.00	50.00	-21.71	-13.44

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

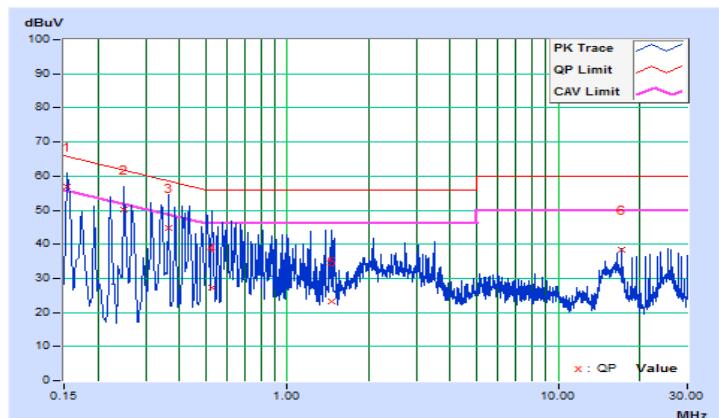


4.3 6 dB Bandwidth Measurement

4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

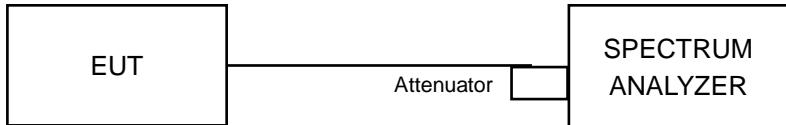

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Mode A

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	9.61	0.5	Pass
6	2437	9.60	0.5	Pass
11	2462	10.07	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.36	0.5	Pass
6	2437	15.41	0.5	Pass
11	2462	13.87	0.5	Pass


Mode B

802.11n (HT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.15	15.72	0.5	Pass
6	2437	15.16	15.14	0.5	Pass
11	2462	15.14	15.68	0.5	Pass


802.11n (HT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.13	32.63	0.5	Pass
6	2437	35.20	35.11	0.5	Pass
9	2452	35.18	31.36	0.5	Pass

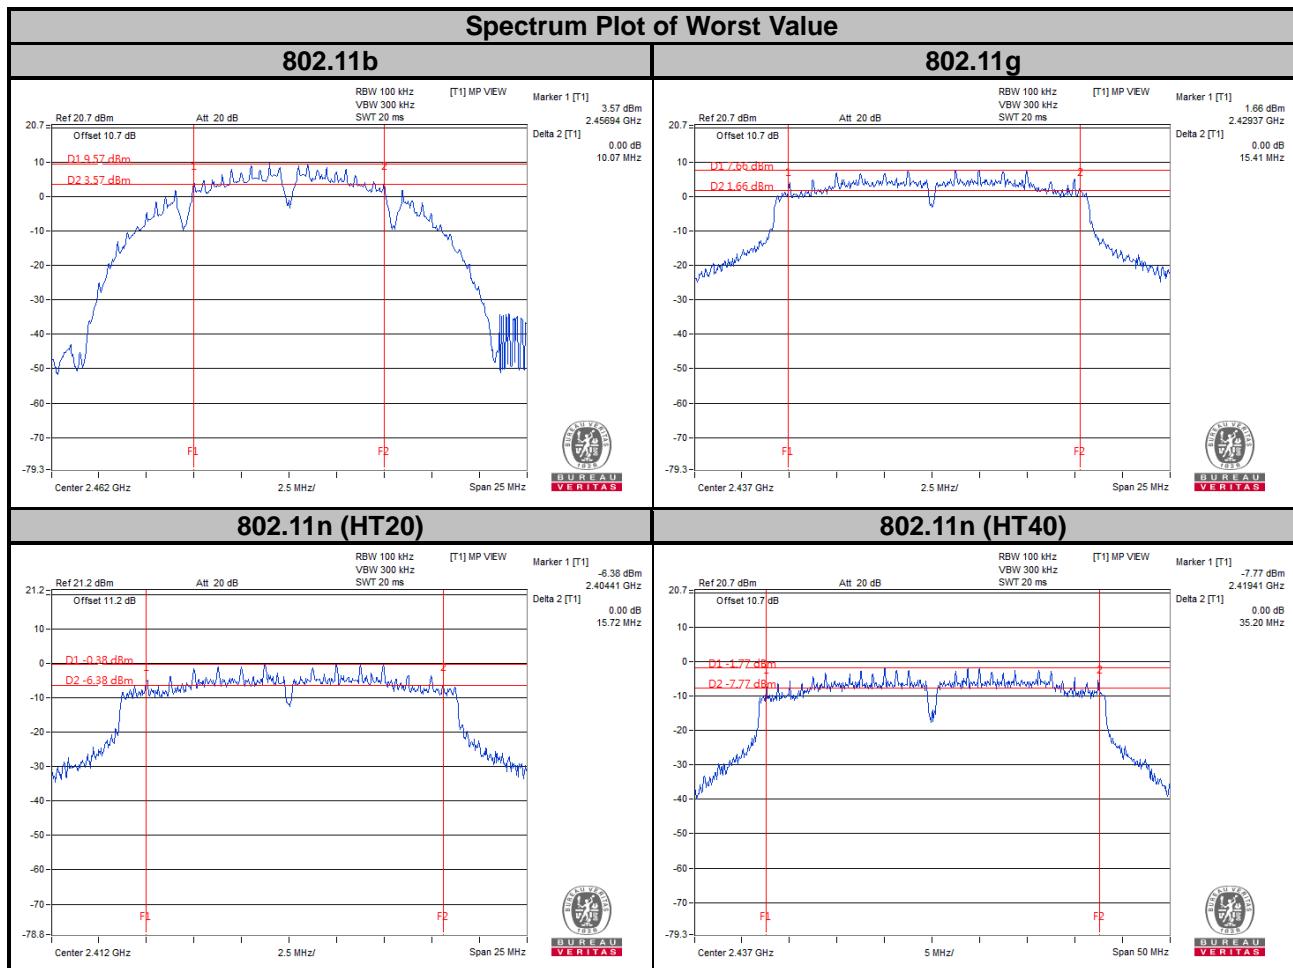

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup

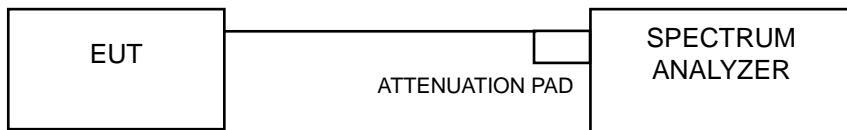

4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.4 Deviation From Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

Mode A

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	15.04	Pass
6	2437	15.00	Pass
11	2462	14.95	Pass

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	16.58	Pass
6	2437	16.65	Pass
11	2462	16.65	Pass


Mode B

802.11n (HT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	17.78	17.74	Pass
6	2437	17.80	17.70	Pass
11	2462	17.80	17.75	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
3	2422	36.21	36.37	Pass
6	2437	36.33	36.33	Pass
9	2452	36.33	36.16	Pass

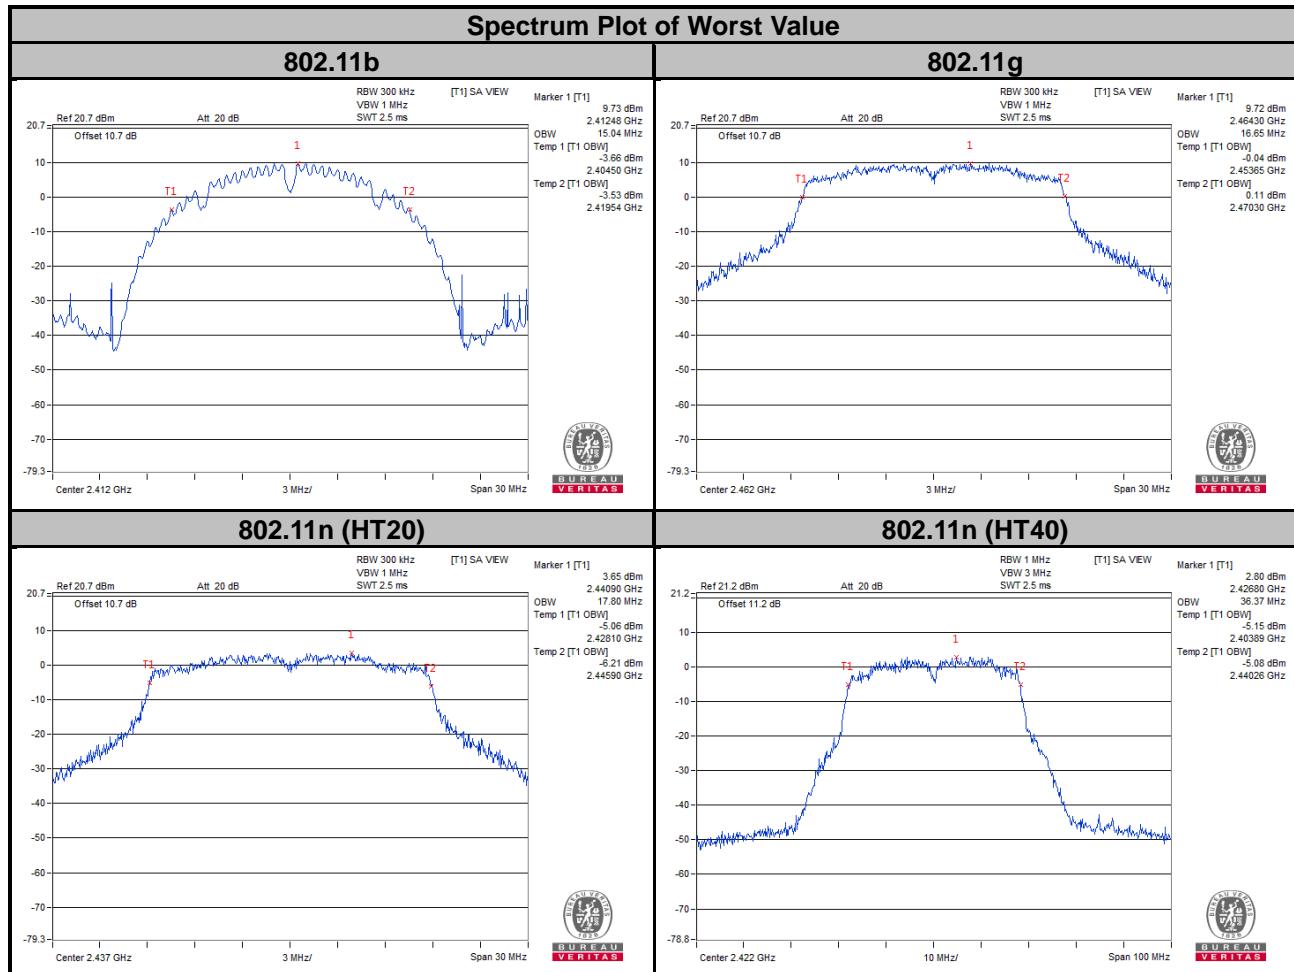

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20 MHz channel widths with NANT ≥ 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.5.2 Test Setup

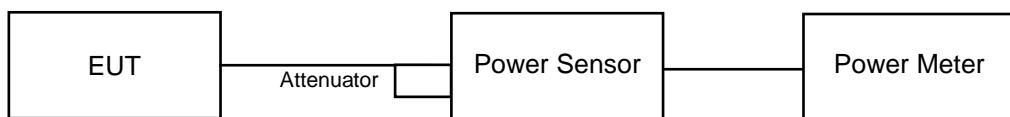

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

Mode A

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	123.595	20.92	30	Pass
6	2437	129.718	21.13	30	Pass
11	2462	125.603	20.99	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	267.301	24.27	30	Pass
6	2437	284.446	24.54	30	Pass
11	2462	271.019	24.33	30	Pass

Mode B

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.83	17.03	146.627	21.66	30	Pass
6	2437	19.96	17.18	151.323	21.80	30	Pass
11	2462	19.92	16.44	142.23	21.53	30	Pass

802.11n (HT40)


Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	19.12	16.14	122.773	20.89	30	Pass
6	2437	19.32	16.26	127.774	21.06	30	Pass
9	2452	19.27	16.22	126.407	21.02	30	Pass

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm.

4.6.2 Test Setup

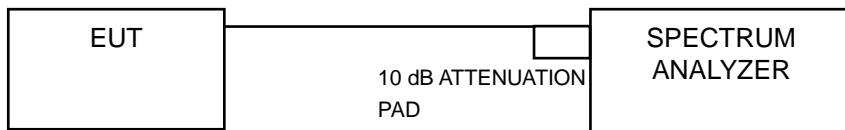

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

Mode A

802.11b

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Pass / Fail
1	2412	-4.91	8	Pass
6	2437	-4.86	8	Pass
11	2462	-4.89	8	Pass

802.11g

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Pass / Fail
1	2412	-7.25	8	Pass
6	2437	-7.32	8	Pass
11	2462	-7.42	8	Pass

Mode B

802.11n (HT20)


TX Chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass / Fail
0	1	2412	-12.21	3.01	-9.20	6.64	Pass
	6	2437	-12.32	3.01	-9.31	6.64	Pass
	11	2462	-12.51	3.01	-9.50	6.64	Pass
1	1	2412	-16.89	3.01	-13.88	6.64	Pass
	6	2437	-16.55	3.01	-13.54	6.64	Pass
	11	2462	-16.40	3.01	-13.39	6.64	Pass

NOTE: Directional gain = 4.35 dBi + 10log(2) = 7.36 dBi > 6 dBi , so the power density limit shall be reduced to 8-(7.36-6) = 6.64 dBm.

802.11n (HT40)

TX Chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass / Fail
0	3	2422	-16.53	3.01	-13.52	6.64	Pass
	6	2437	-16.80	3.01	-13.79	6.64	Pass
	9	2452	-16.44	3.01	-13.43	6.64	Pass
1	3	2422	-20.70	3.01	-17.69	6.64	Pass
	6	2437	-20.10	3.01	-17.09	6.64	Pass
	9	2452	-19.97	3.01	-16.96	6.64	Pass

NOTE: Directional gain = 4.35 dBi + 10log(2) = 7.36 dBi > 6 dBi , so the power density limit shall be reduced to 8-(7.36-6) = 6.64 dBm.

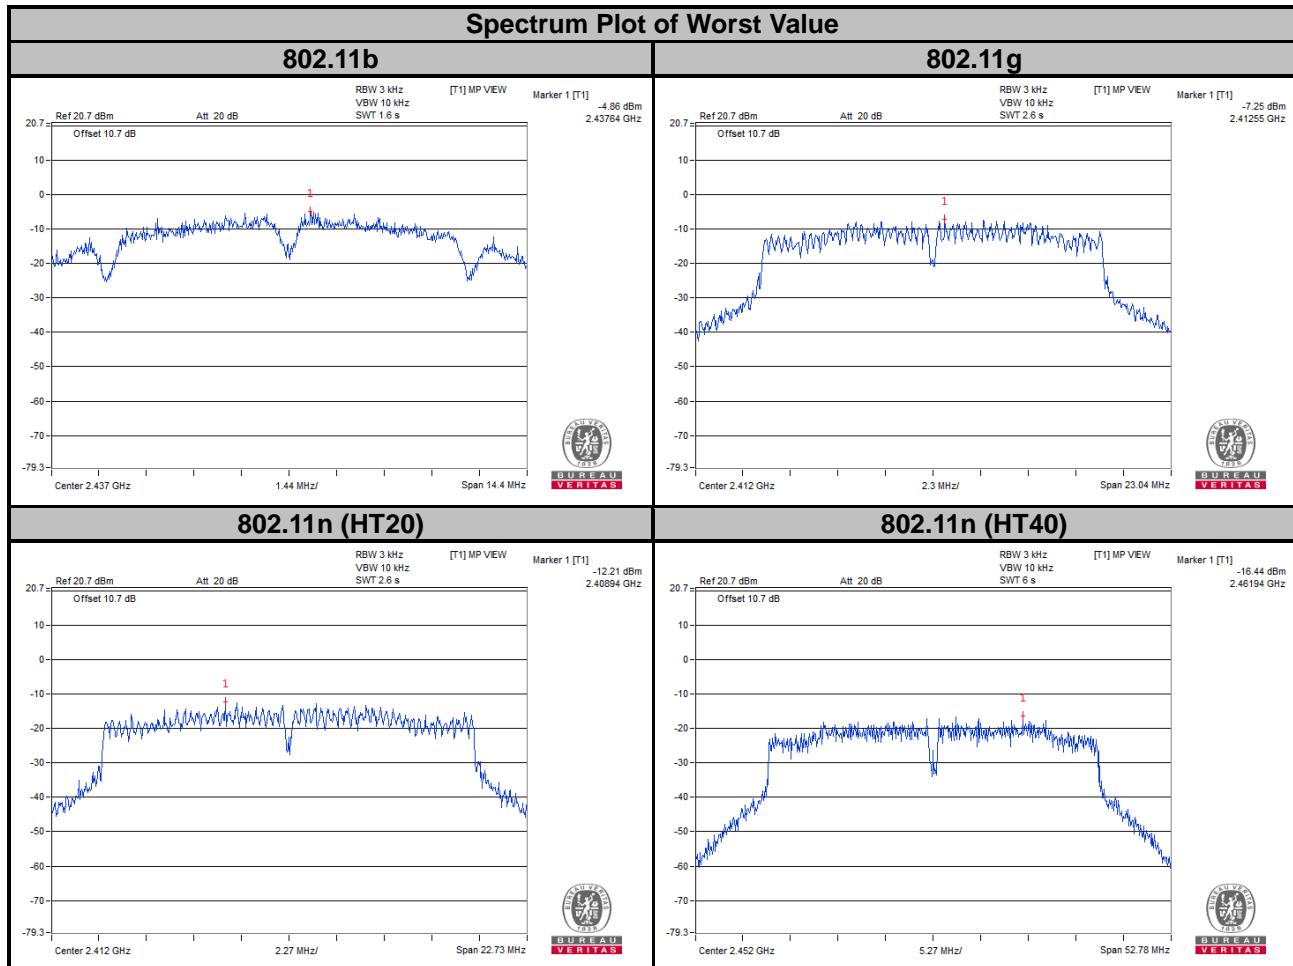


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.7.2 Test Setup

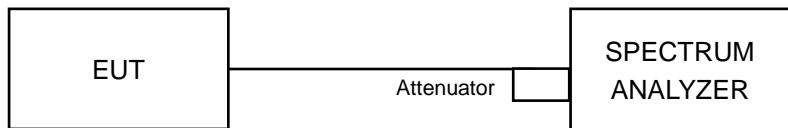

4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.7.7 Test Results


The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.







The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.


Mode A

802.11b

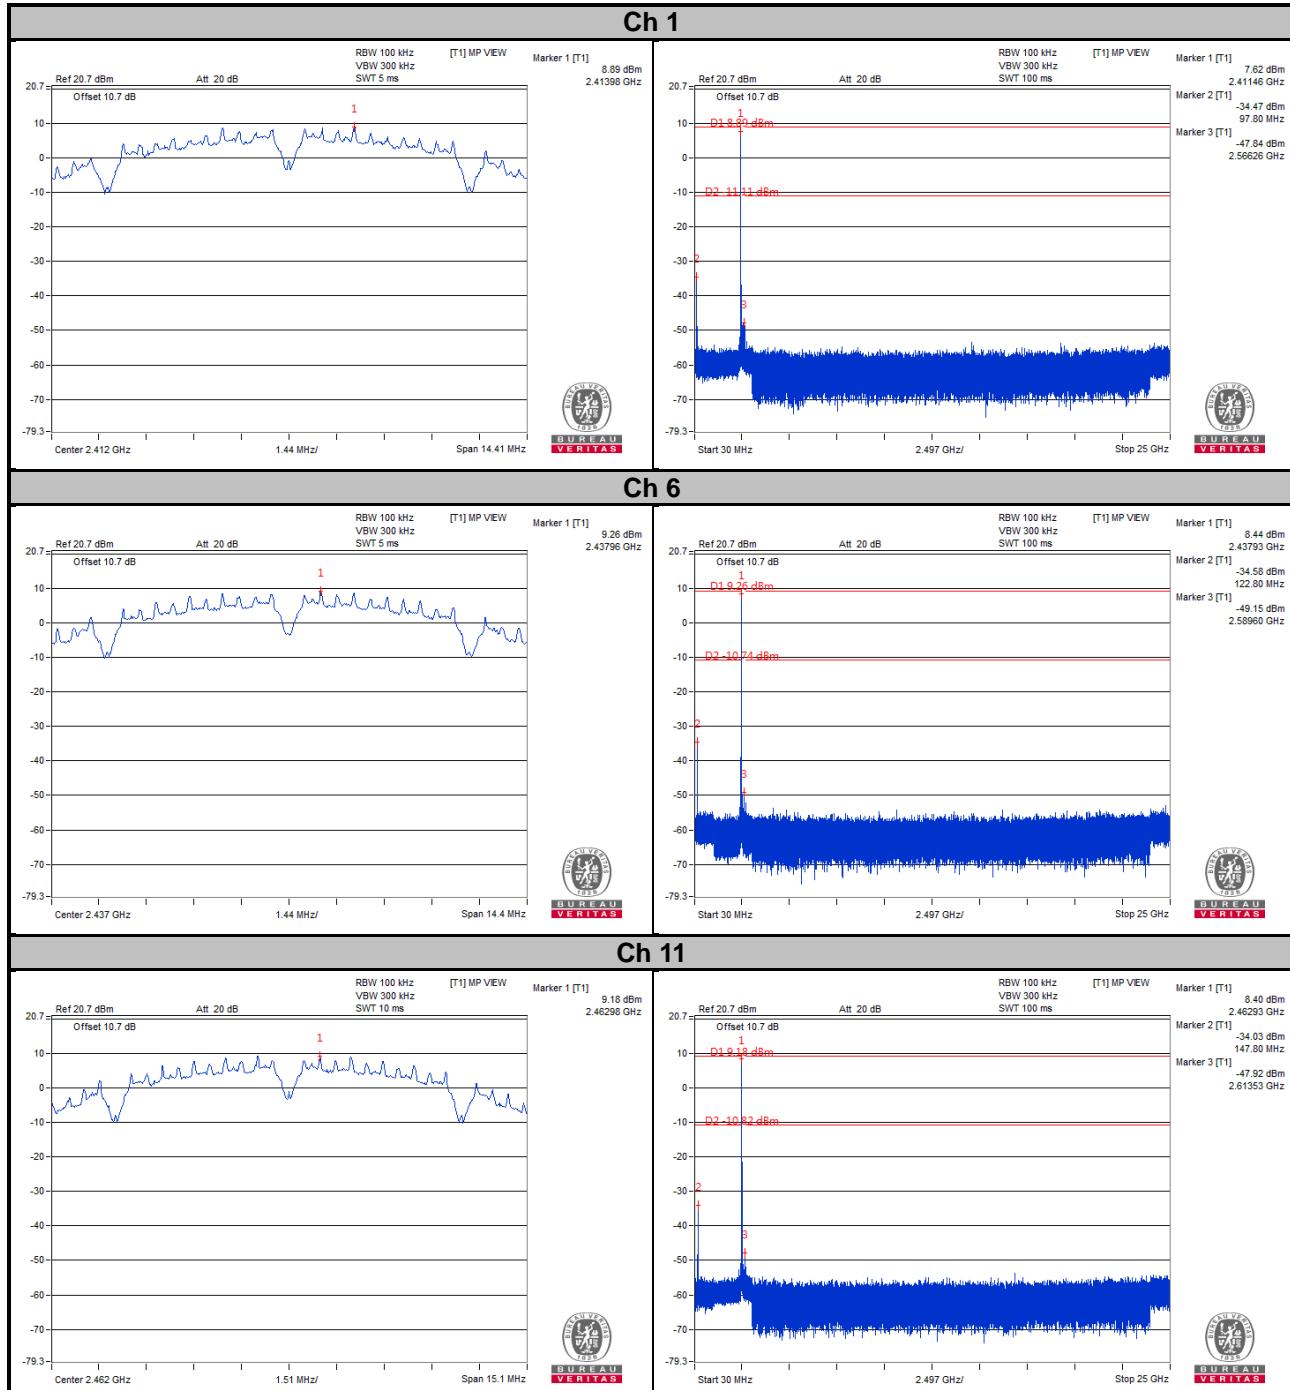


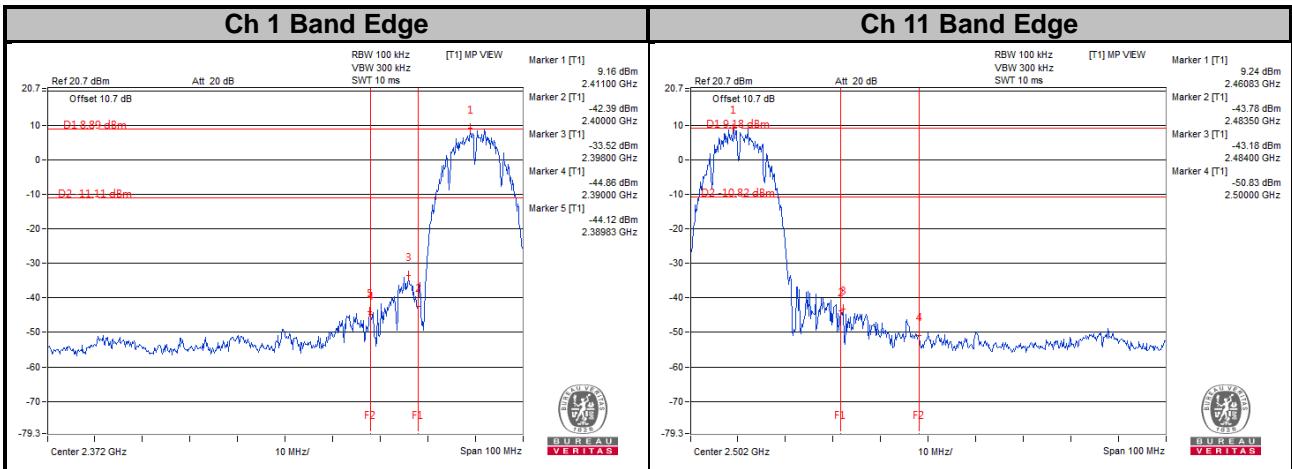


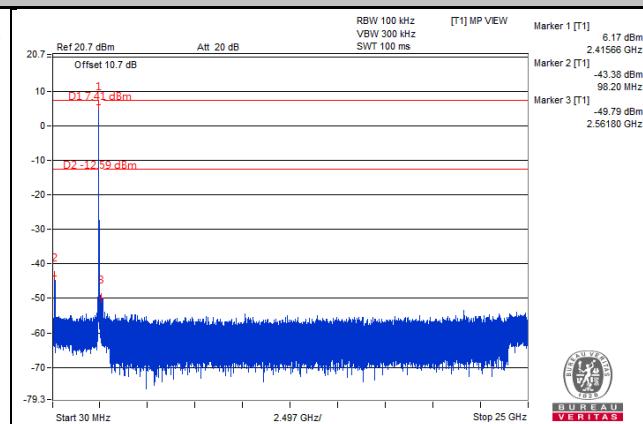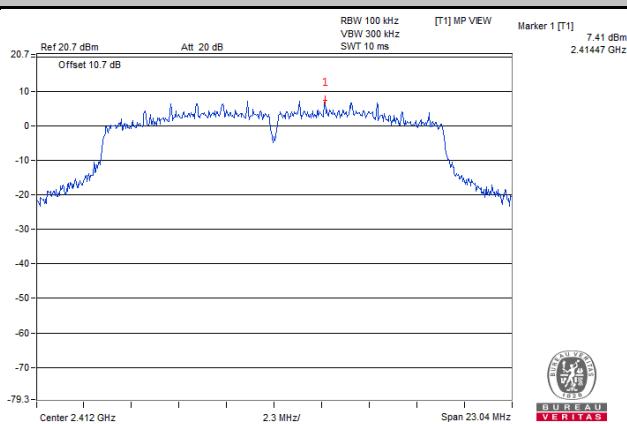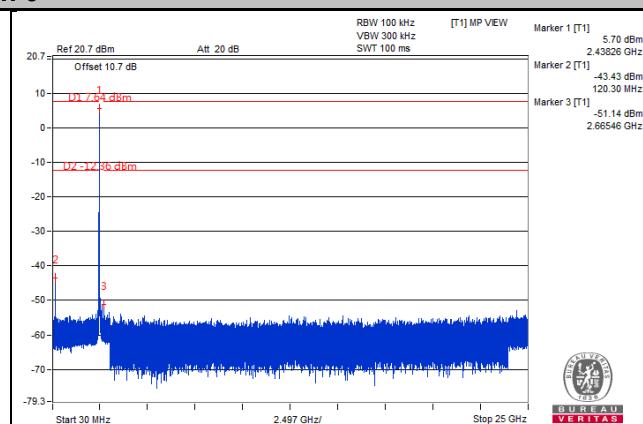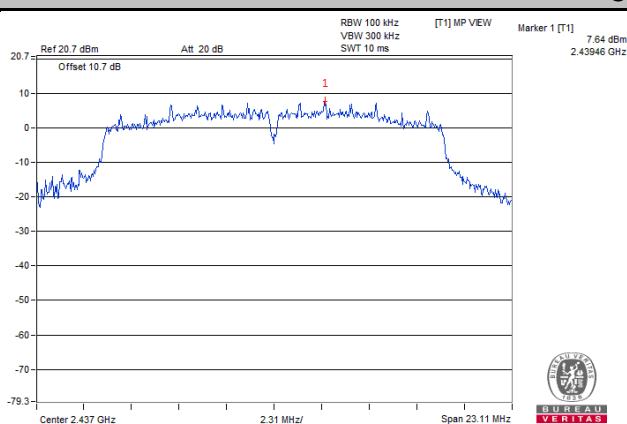
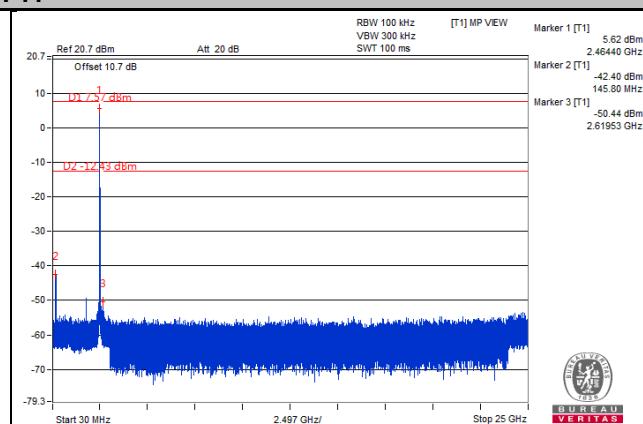
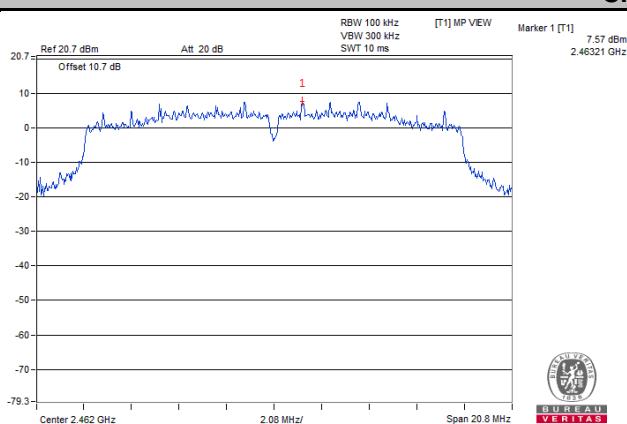
802.11g
Ch 1

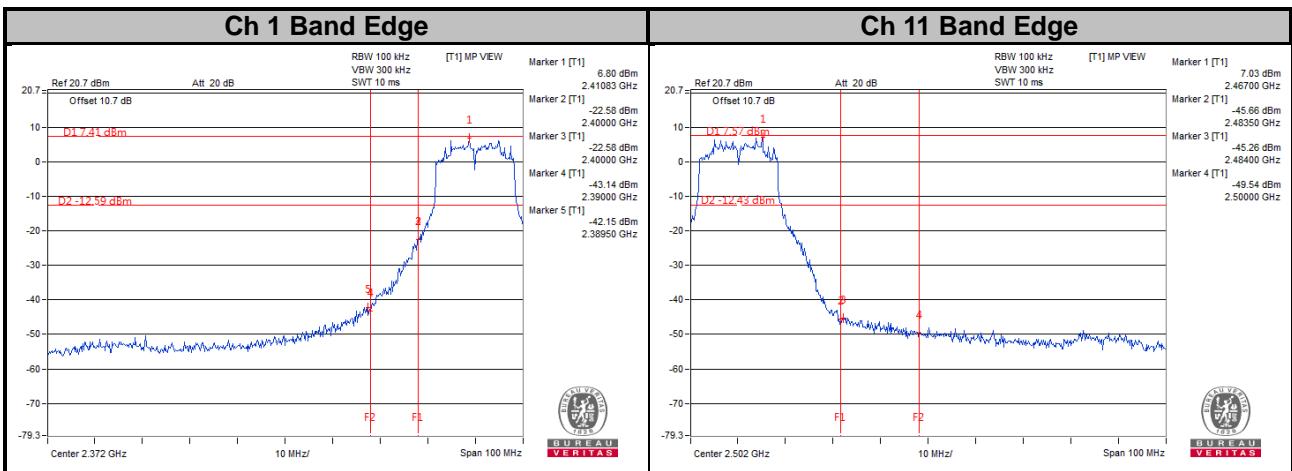Ch 6

Ch 11

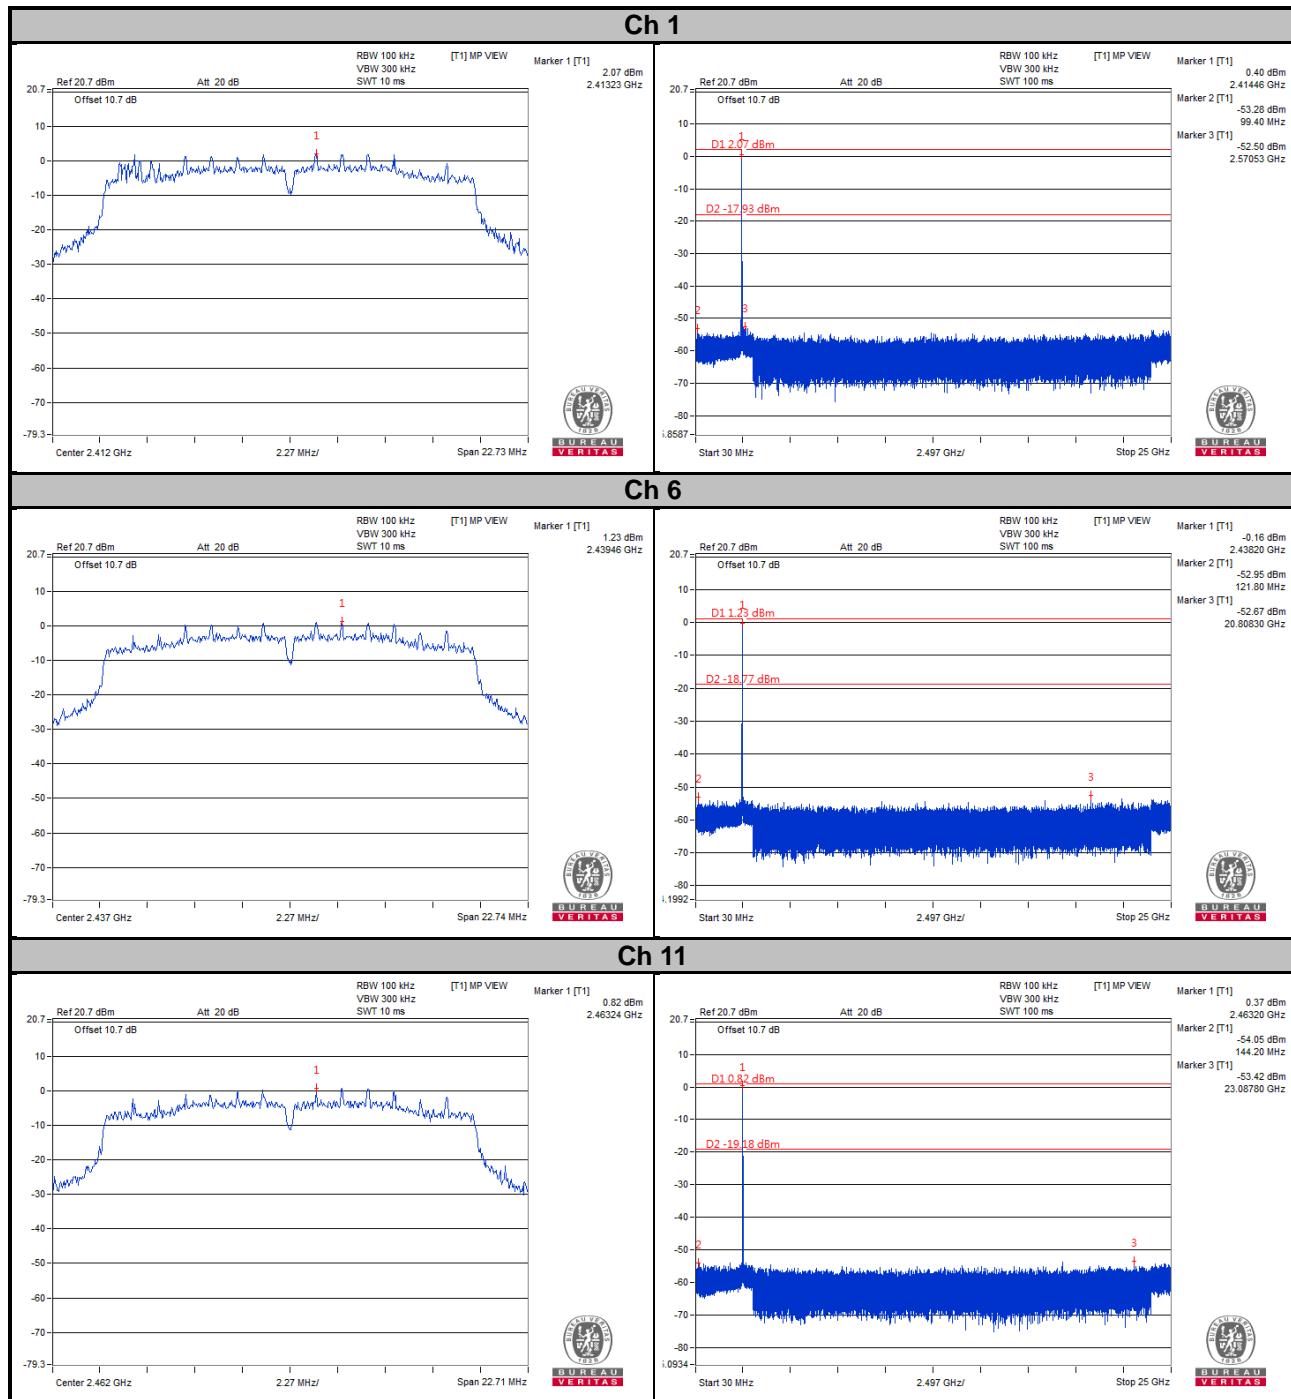
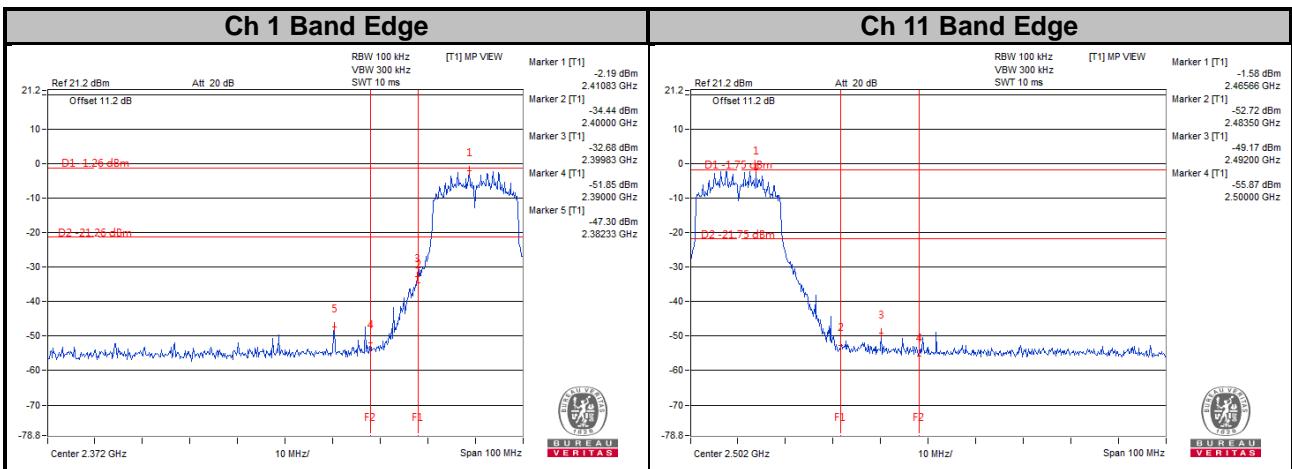


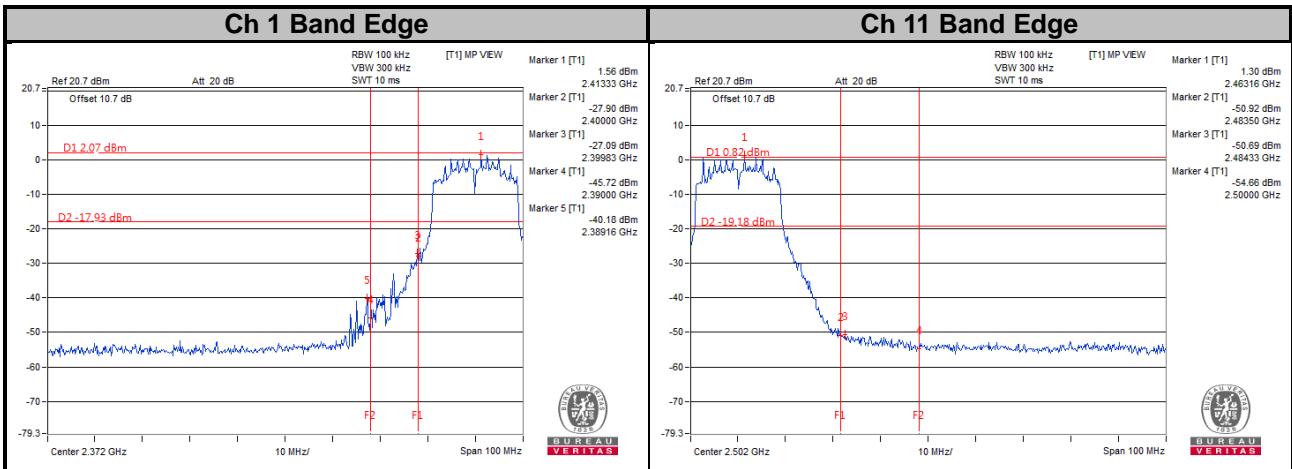Mode B
802.11n (HT20)
CHAIN 0

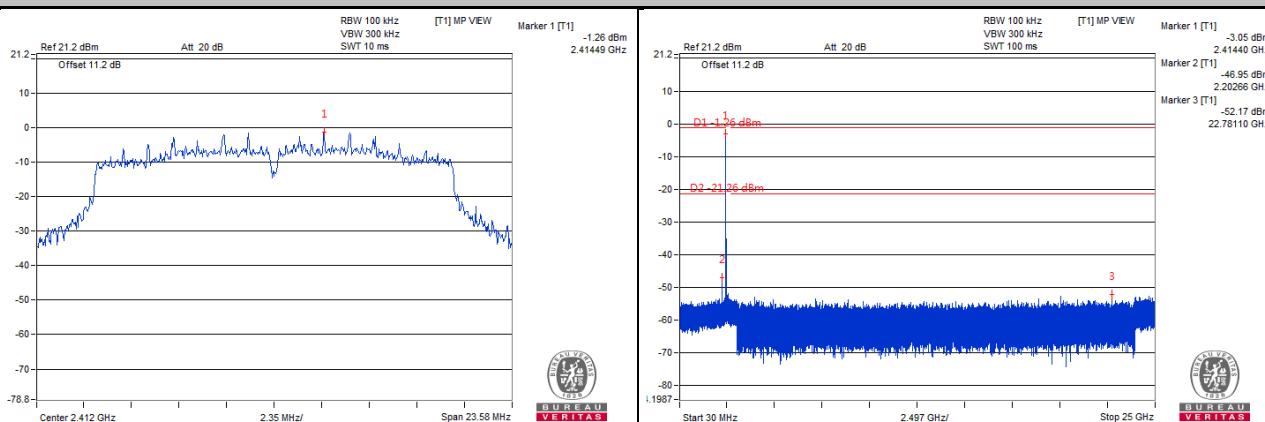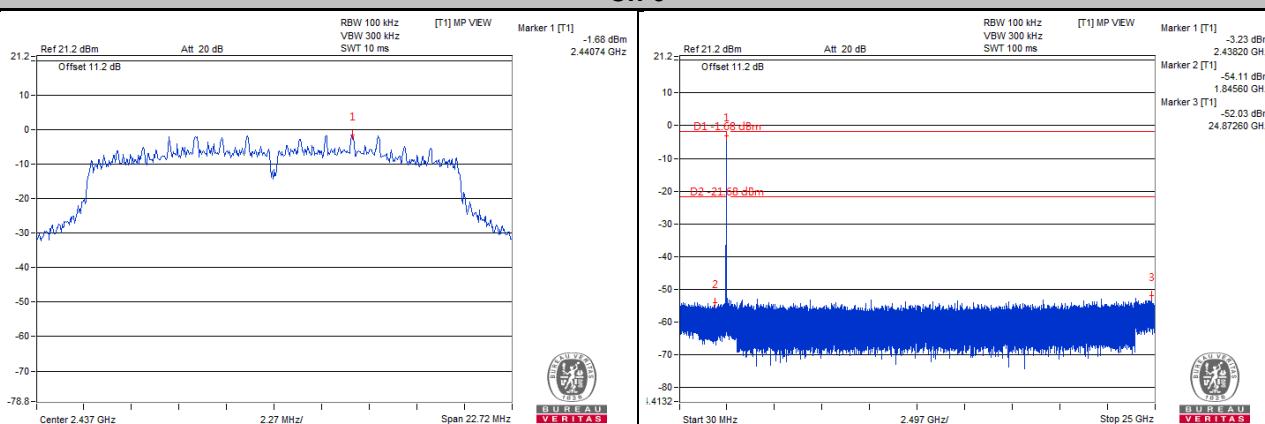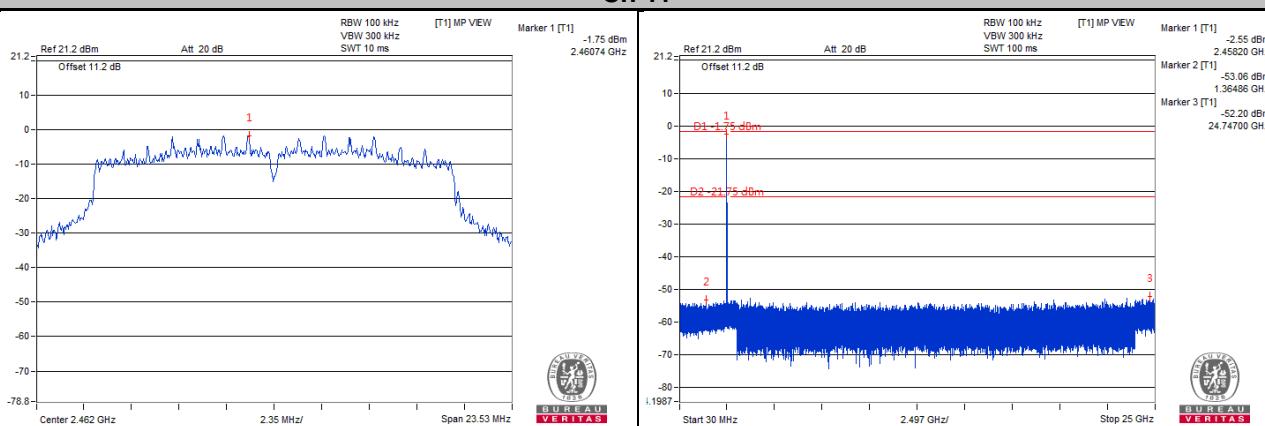




CHAIN 1
Ch 1

Ch 6

Ch 11


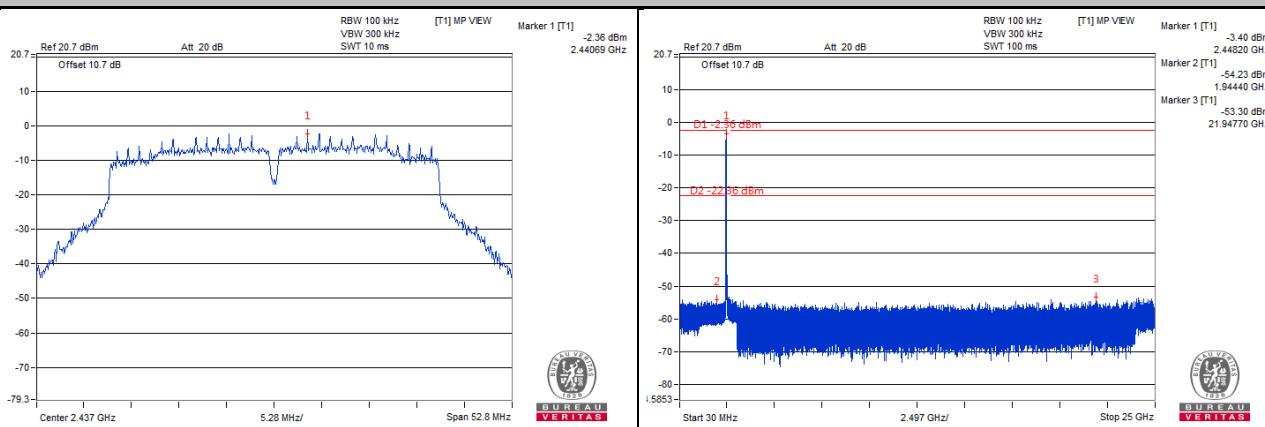


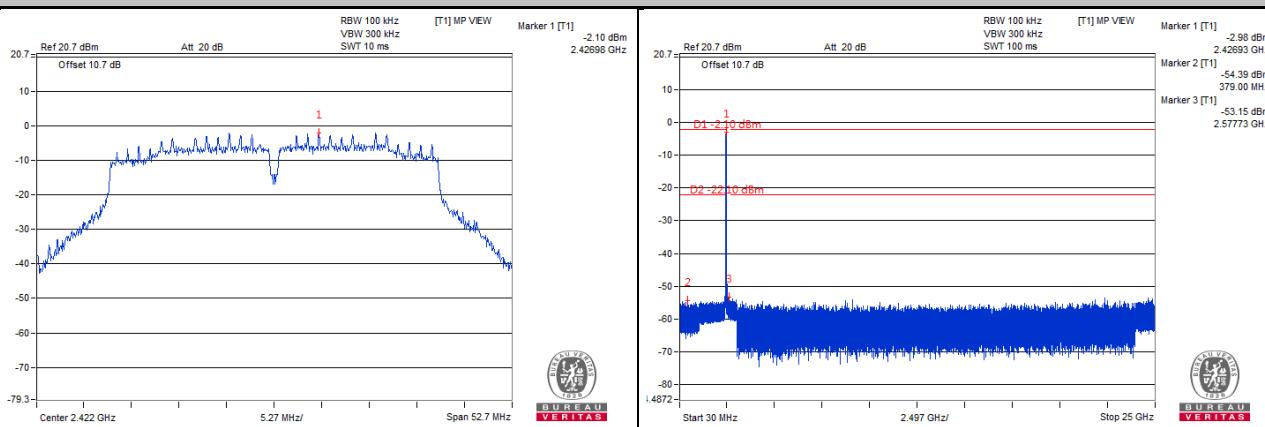802.11n (HT40) CHAIN 0


Ch 3







Ch 6




Ch 9

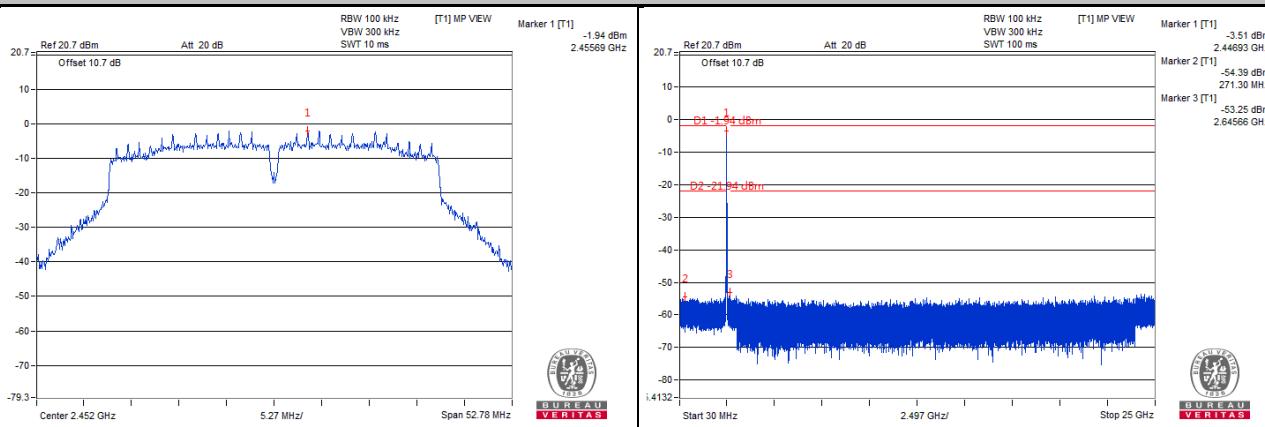

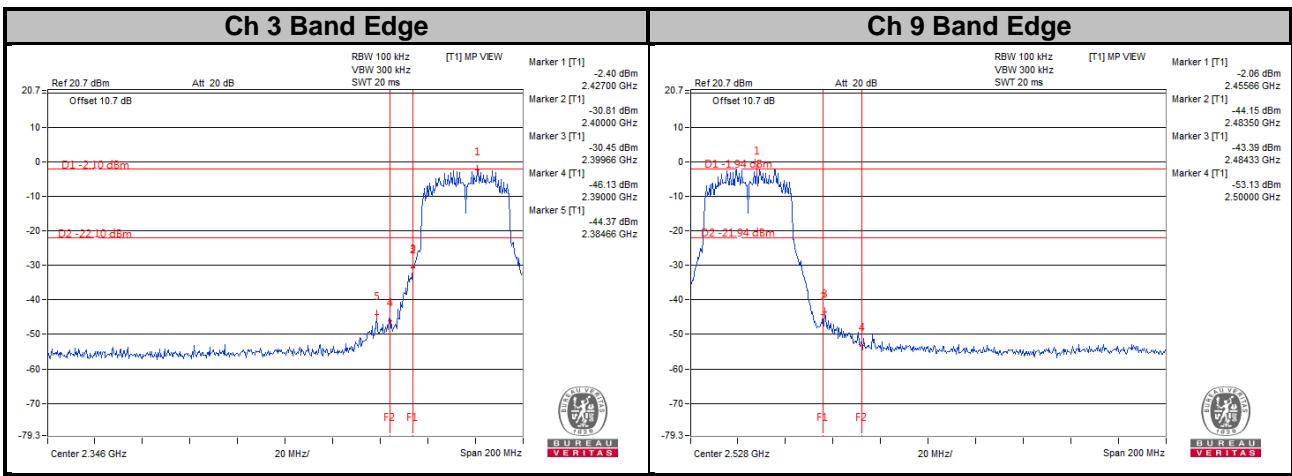

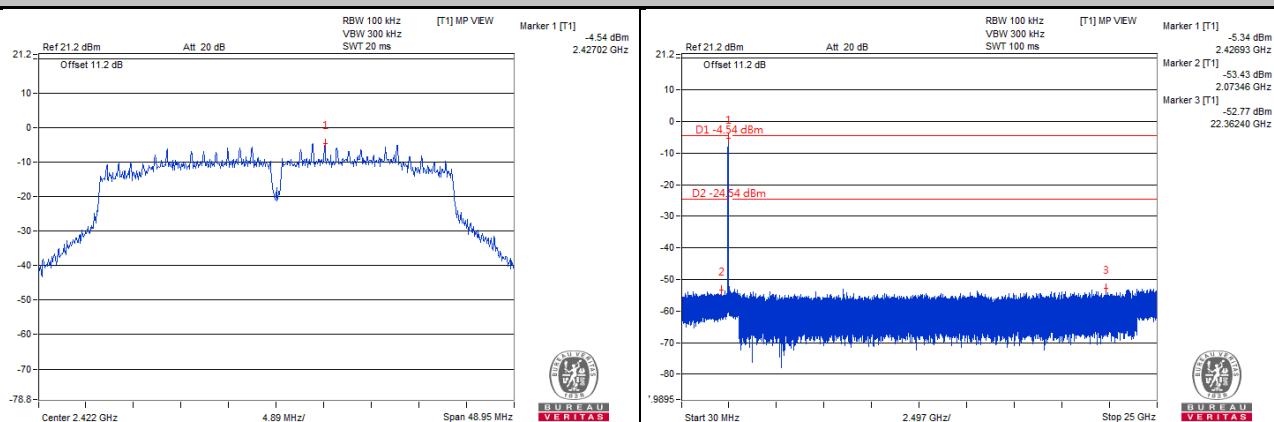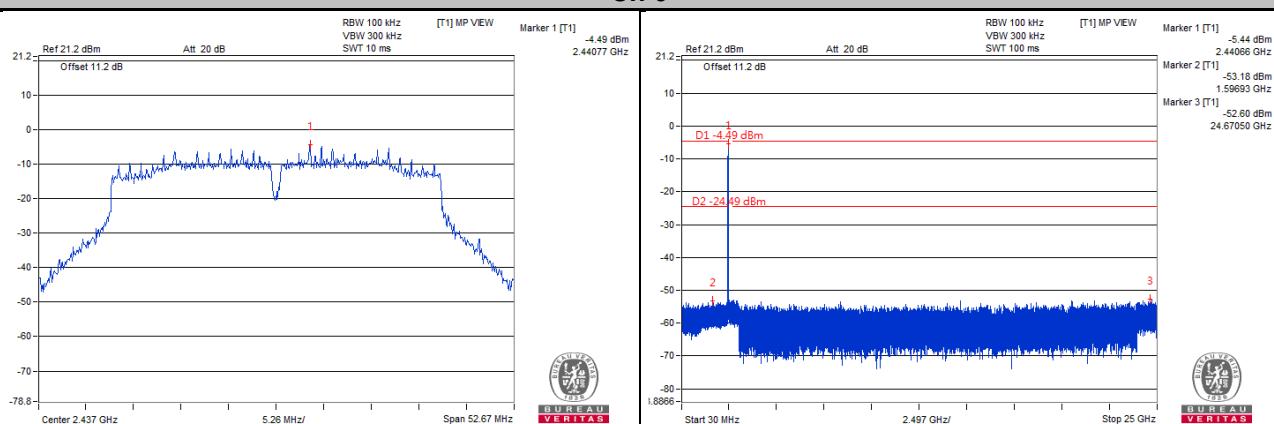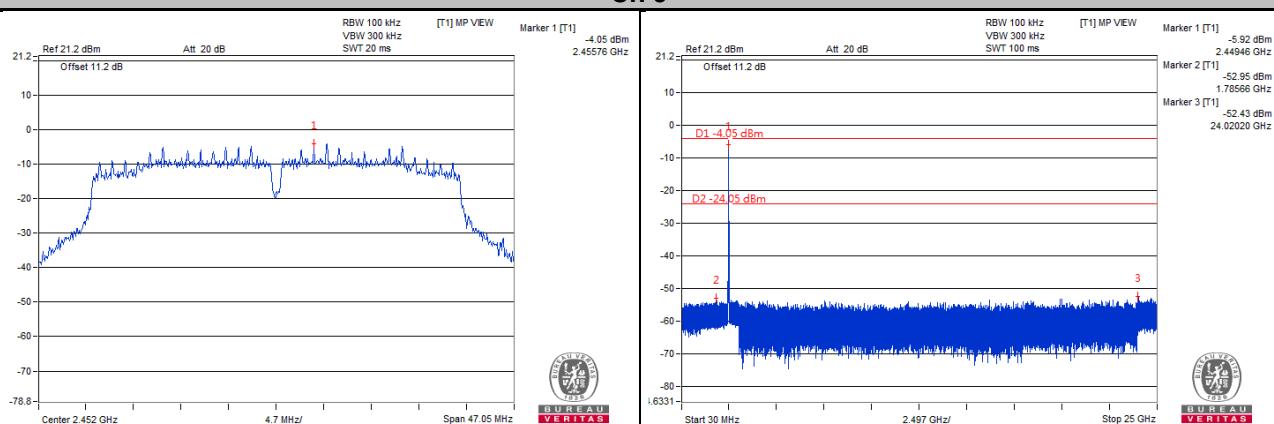CHAIN 1
Ch 3

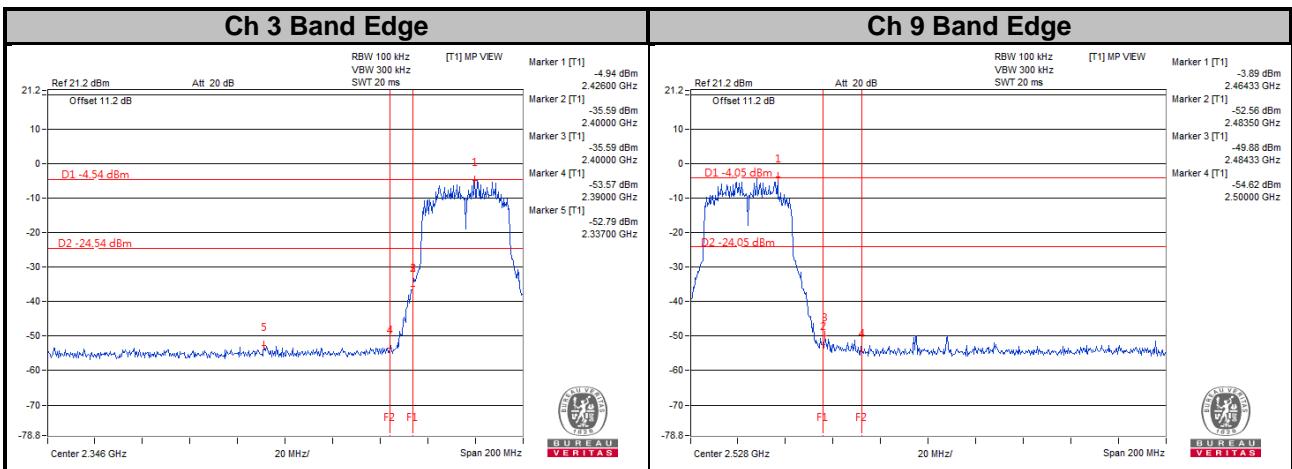Ch 6

Ch 9




5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---